

TEST REPORT

Report No.: BCTC2204427847-3E

Applicant: Shenzhen Viofo Technology Co.,Ltd

Product Name: Car Dash Camera

Model/Type
reference: A119 MINI

Tested Date: 2022-04-15 to 2022-05-11

Issued Date: 2022-05-12

Shenzhen BCTC Testing Co., Ltd.



FCC ID: 2AMBW-A119MINI

Product Name: Car Dash Camera

Trademark: VIOFO

Model/Type reference: A119 MINI
A119 MINI V2, A119 MINI V3

Prepared For: Shenzhen Viofo Technology Co.,Ltd

Address: Room201, Second Floor, Factory Building NO.1, Guanghui Science and Technology Park, Mingqing Rd, Longhua Street, Longhua.District, Shenzhen China

Manufacturer: Shenzhen Viofo Technology Co.,Ltd

Address: Room201, Second Floor, Factory Building NO.1, Guanghui Science and Technology Park, Mingqing Rd, Longhua Street, Longhua.District, Shenzhen China

Prepared By: Shenzhen BCTC Testing Co., Ltd.

Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

Sample Received Date: 2022-04-15

Sample tested Date: 2022-04-15 to 2022-05-11

Issue Date: 2022-05-12

Report No.: BCTC2204427847-3E

Test Standards: FCC Part15 15.407
ANSI C63.10-2013
KDB 662911 D01 v02r01
KDB 789033 D02 v02r01

Test Results: PASS

Remark: This is WIFI-5GHz band radio test report.

Tested by:



Eric Yang/Project Handler

Approved by:



Zero Zhou/Reviewer


The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table Of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information And Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	11
4.6 Table Of Parameters Of Text Software Setting	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	14
7. Radiated Emissions	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	16
7.3 Test procedure	17
7.4 EUT operating Conditions	18
7.5 Test Result	18
8. Power Spectral Density Test	33
8.1 Block Diagram Of Test Setup	33
8.2 Limit	33
8.3 Test procedure	34
8.4 EUT operating Conditions	34
8.5 Test Result	35
9. 26dB & 6dB & 99% Emission Bandwidth	50
9.1 Block Diagram Of Test Setup	50
9.2 Limit	50
9.3 Test procedure	50
9.4 EUT operating Conditions	51
9.5 Test Result	51
10. Maximum Conducted Output Power	81
10.1 Block Diagram Of Test Setup	81
10.2 Limit	81
10.3 Test procedure	81
10.4 EUT operating Conditions	82
10.5 Test Result	83

11. Out Of Band Emissions	84
11.1 Block Diagram Of Test Setup.....	84
11.2 Limit	84
11.3 Test procedure	84
11.4 EUT operating Conditions	84
11.5 Test Result.....	85
12. Spurious RF Conducted Emissions.....	97
12.1 Block Diagram Of Test Setup.....	97
12.2 Limit	97
12.3 Test procedure	97
12.4 Test Result.....	97
13. Frequency Stability Measurement	112
13.1 Block Diagram Of Test Setup.....	112
13.2 Limit	112
13.3 Test procedure	112
13.4 Test Result.....	113
14. Antenna Requirement	119
14.1 Limit	119
14.2 Test Antenna.....	119
15. EUT Photographs.....	120
16. EUT Test Setup Photographs.....	122

(Note: N/A Means Not Applicable)

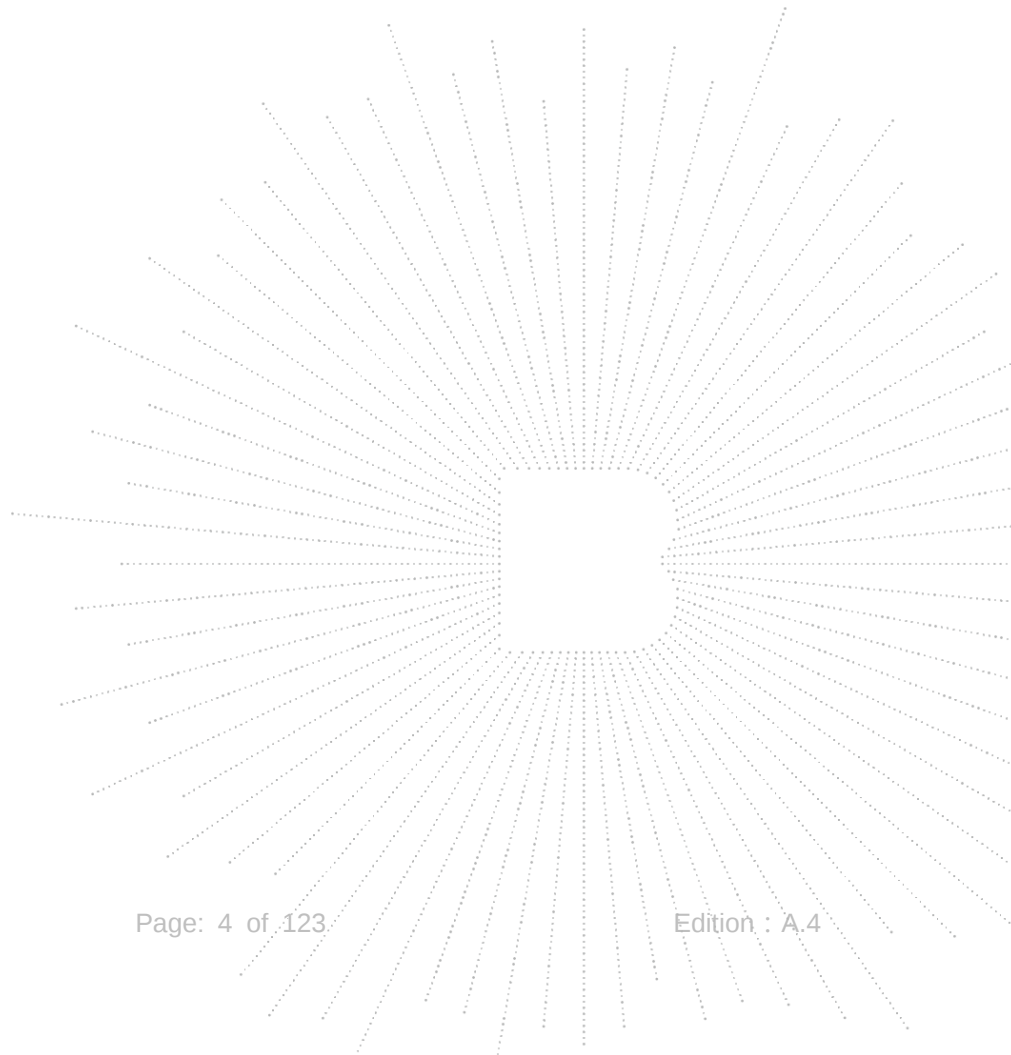

1. Version

Report No.	Issue Date	Description	Approved
BCTC2204427847-3E	2022-05-12	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

1	Test Parameter	Clause No.	Results
1	Spurious Radiated Emissions	15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(8)	PASS
2	Conducted Emission	15.207	N/A
3	26 dB and 99% Emission Bandwidth	15.407 (a)(12) 15.1049	PASS
4	Minimum 6 dB bandwidth	15.407(e)	PASS
5	Maximum Conducted Output Power	15.407 (a)(1) 15.407 (a)(3)	PASS
6	Band Edge	2.1051, 15.407(b)(1) 15.407(b)(4)	PASS
7	Power Spectral Density	15.407 (a)(1) 15.407 (a)(3)	PASS
8	Spurious Emissions at Antenna Terminals	2.1051, 15.407(b)	PASS
9	Antenna Requirement	15.203	PASS

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.3dB
2	3m chamber Radiated spurious emission(9KHz-30MHz)	U=3.7dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=4.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=3.34dB
5	Conducted Emission (150kHz-30MHz)	U=3.20dB
6	Conducted Adjacent channel power	U=1.38dB
7	Conducted output power uncertainty Above 1G	U=1.576dB
8	Conducted output power uncertainty below 1G	U=1.28dB
9	humidity uncertainty	U=5.3%
10	Temperature uncertainty	U=0.59°C

4. Product Information And Test Setup


4.1 Product Information

Model/Type reference:	A119 MINI A119 MINI V2, A119 MINI V3
Model differences:	All the model are the same circuit and RF module, except model names.
Hardware Version:	A119MINI_MMB_V03_PCB
Software Version:	V1
IEEE 802.11 WLAN Mode Supported:	802.11a/n/ac(20MHz channel bandwidth) 802.11n/ac(40MHz channel bandwidth) 802.11ac(80MHz channel bandwidth)
Operation Frequency:	5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; 5210MHz for 802.11 ac80; 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40; 5775MHz for 802.11 ac80;
Data Rate:	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40/VHT80):NSS1, MCS0-MCS
Type of Modulation:	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
Number Of Channel:	4 channels for 802.11a/n20 in the 5180-5240MHz band ; 2 channels for 802.11 n40 in the 5190-5230MHz band ; 1 channels for 802.11 ac80 in the 5210MHz band ; 5 channels for 802.11a/n20 in the 5745-5825MHz band ; 2 channels for 802.11 n40 in the 5755-5795MHz band ; 1 channels for 802.11 ac80 in the 5775MHz band ;
Antenna installation:	FPC antenna
Antenna Gain:	1 dBi
Ratings:	DC 5V From Car charger DC12V

4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Radiated Spurious Emission



4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-2	Car charger	N/A	D3000	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C-1	N/A	N/A	2M	USB cable unshielded

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Frequency and Channel list for 802.11a/n /ac (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	40	5200	48	5240

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n /ac (5745-5825MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

802.11n/ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-	-	-

802.11ac (80MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	-	-	-	-	-	-

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 2	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159
Mode 3	802.11 ac80 CH 42/CH 155
Mode 4	Link Mode

Note: The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Test software Version	CMD		
Parameters	DEF	DEF	DEF

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Tangwei, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

IC Registered No.: 23583


5.2 Test Instrument Used

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Power Meter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022

Radiated Emissions Test (966 Chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Jun. 06. 2020	Jun. 05, 2023
Receiver	R&S	ESR3	102075	May 28, 2021	May 27, 2022
Receiver	R&S	ESRP	101154	May 28, 2021	May 27, 2022
Amplifier	SKET	LAPA_01G18 G-45dB	\	May 28, 2021	May 27, 2022
Amplifier	Schwarzbeck	BBV9744	9744-0037	May 28, 2021	May 27, 2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	942	Jun. 01, 2021	May 31, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	1541	Jun. 02, 2021	Jun. 01, 2022
Horn Antenn (18GHz-40GH z)	Schwarzbeck	BBHA9170	00822	Jun. 15, 2021	Jun. 14, 2022
Amplifier (18GHz-40GH z)	MITEQ	TTA1840-35- HG	2034381	May 28, 2021	May 27, 2022
Loop Antenna (9kHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Jun. 02, 2021	Jun. 01, 2022
RF cables1 (9kHz-30MHz)	Huber+Suhnar	9kHz-30MHz	B1702988-000 8	May 28, 2021	May 27, 2022
RF cables2 (30MHz-1GHz)	Huber+Suhnar	30MHz-1GHz	1486150	May 28, 2021	May 27, 2022
RF cables3 (1GHz-40GHz)	Huber+Suhnar	1GHz-40GHz	1607106	May 28, 2021	May 27, 2022
Power Metter	Keysight	E4419	\	May 28, 2021	May 27, 2022
Power Sensor (AV)	Keysight	E9300A	\	May 28, 2021	May 27, 2022
Signal Analyzer 20kHz-26.5G Hz	Keysight	N9020A	MY49100060	May 28, 2021	May 27, 2022
Spectrum Analyzer 9kHz-40GHz	R&S	FSP 40	\	May 28, 2021	May 27, 2022
Software	Frad	EZ-EMC	FA-03A2 RE	\	\

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

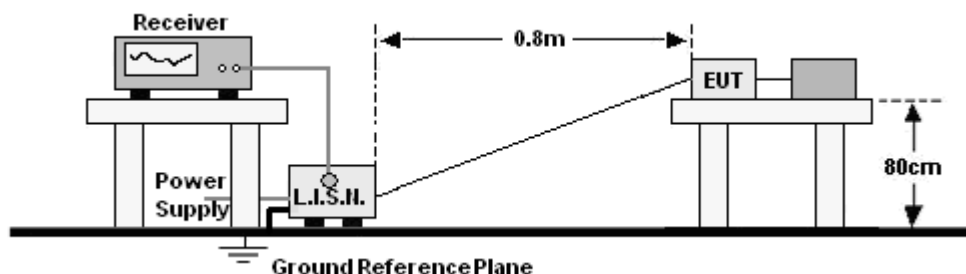

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 240V, the worst voltage was AC 120V and the data recording in the report.


6.5 Test Result

The EUT is powered by the DC only, the test item is not applicable.


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

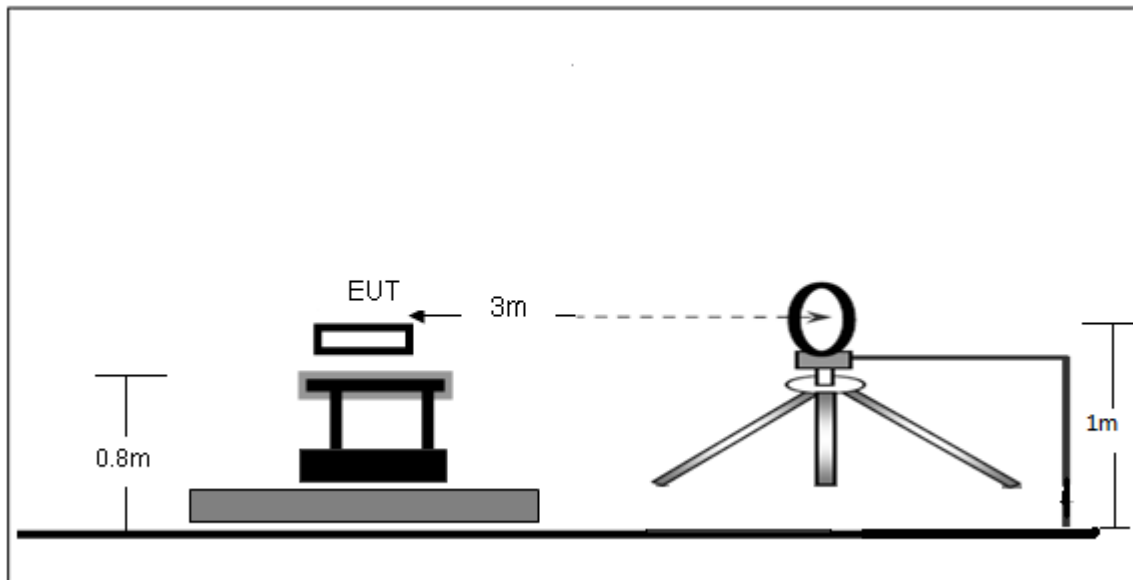

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

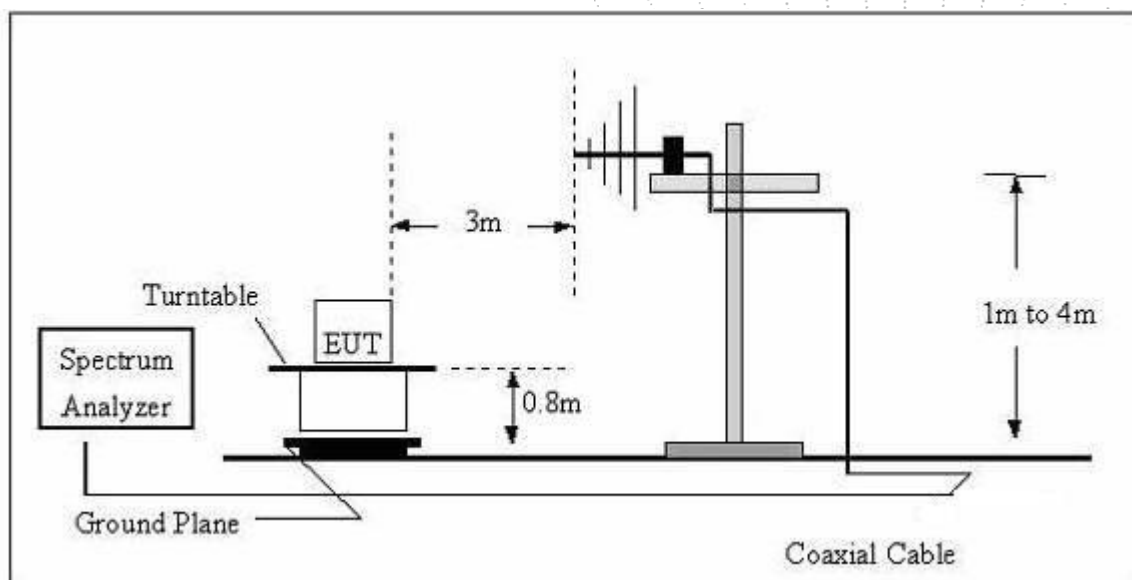

(C) Radiated Emission Test-Up Frequency Above 1GHz

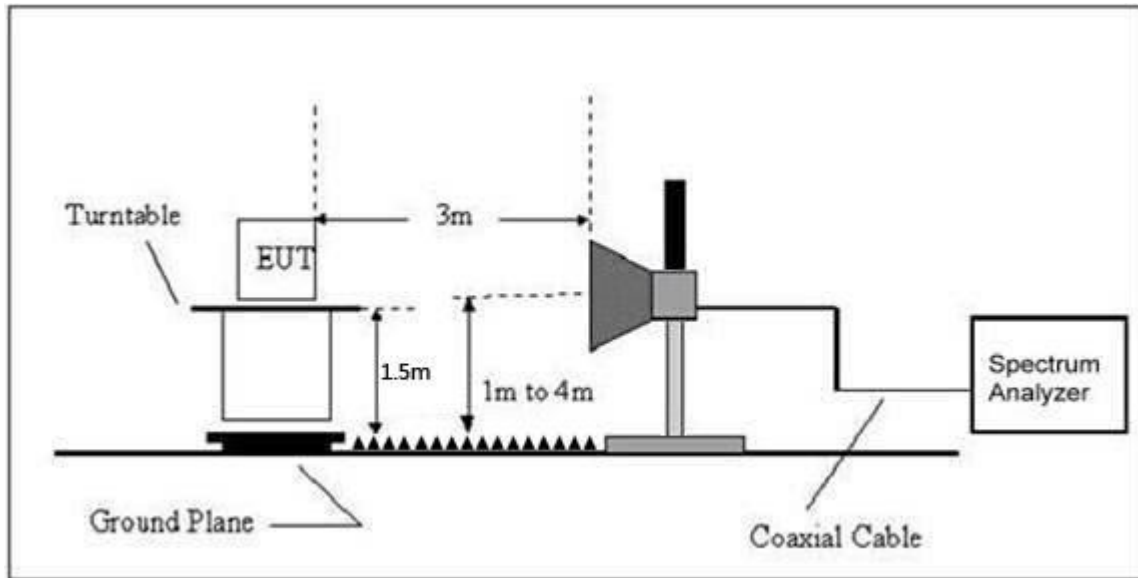

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

7.3 Test procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

7.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage :	DC 12V
Test Mode:	Mode 4	Polarization :	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})(\text{dB})$;

Limit line = specific limits(dBuv) + distance extrapolation factor.

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Horizontal
Test Mode:	Mode 4	Test Voltage:	DC 12V

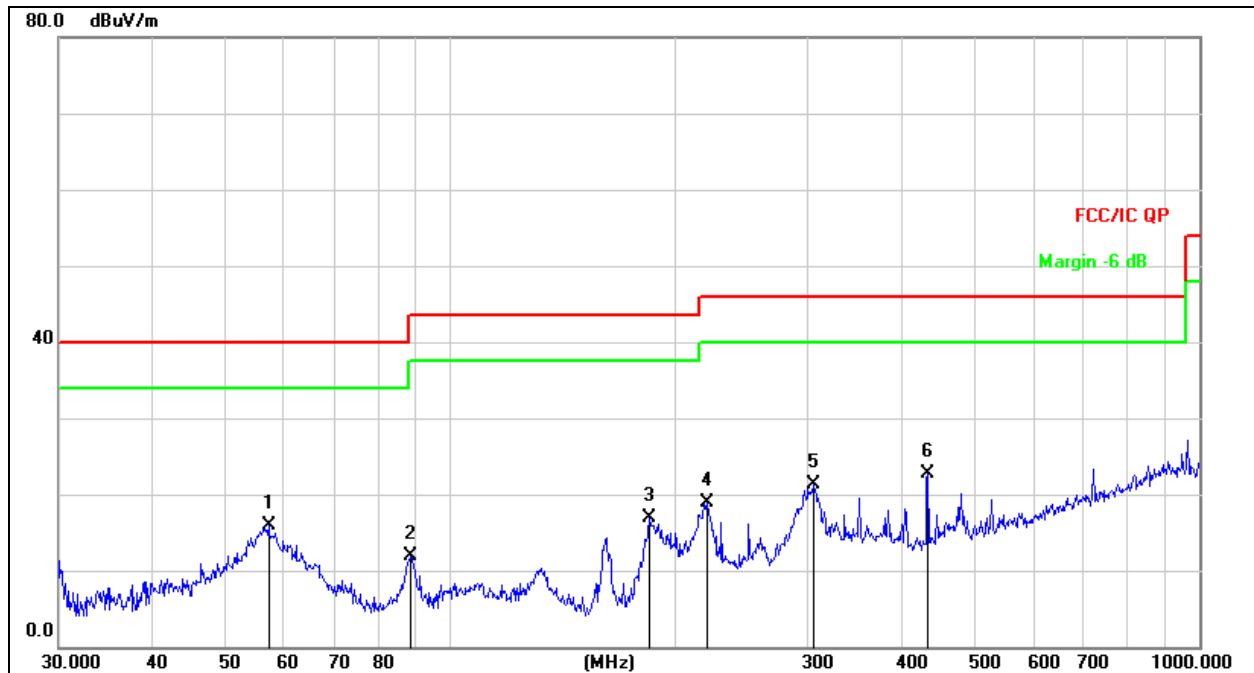


Remark:

- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
- Measurement = Reading Level + Correct Factor
- Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		57.1914	31.81	-15.84	15.97	40.00	-24.03	QP
2		88.6524	30.85	-18.96	11.89	43.50	-31.61	QP
3		184.4898	33.61	-16.70	16.91	43.50	-26.59	QP
4		219.8449	34.01	-15.13	18.88	46.00	-27.12	QP
5		305.6800	34.83	-13.59	21.24	46.00	-24.76	QP
6	*	434.0651	32.71	-9.98	22.73	46.00	-23.27	QP

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Phase :	Vertical
Test Mode:	Mode 4	Test Voltage:	DC 12V

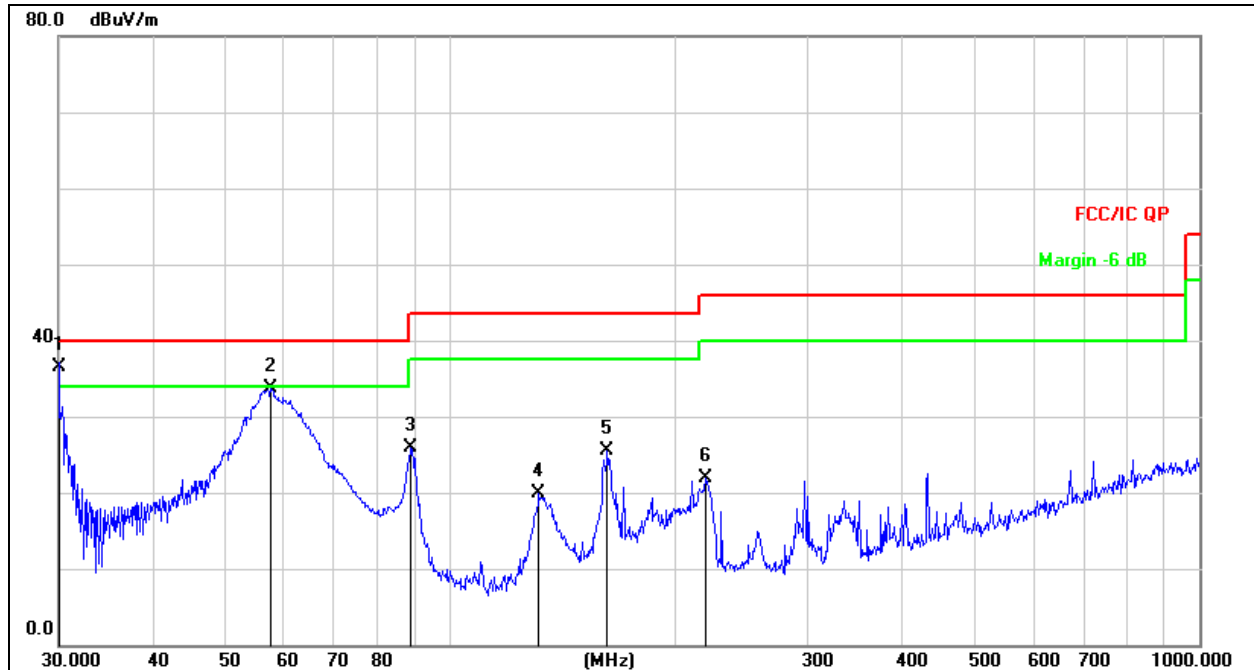

Remark:

1. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
2. Measurement = Reading Level + Correct Factor
3. Over = Measurement - Limit

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1	*	30.0250	55.01	-18.45	36.56	40.00	-3.44	QP
2		57.5939	49.53	-15.86	33.67	40.00	-6.33	QP
3		88.6524	44.78	-18.96	25.82	43.50	-17.68	QP
4		131.2965	38.23	-18.23	20.00	43.50	-23.50	QP
5		162.0414	44.09	-18.52	25.57	43.50	-17.93	QP
6		219.0753	37.08	-15.14	21.94	46.00	-24.06	QP

Test Mode:	TX(5.1G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.064	64.02	5.94	35.40	44.00	61.36	68.2	-6.84	PK
V	4434.064	43.78	5.94	35.40	44.00	41.12	54	-12.88	AV
V	10360.085	61.72	8.46	39.75	44.50	65.43	68.2	-2.77	PK
V	10360.085	43.52	8.46	39.75	44.50	47.23	54	-6.77	AV
V	15540.053	63.55	10.12	38.80	44.10	68.37	74	-5.63	PK
V	15540.053	43.39	10.12	38.80	42.70	49.61	54	-4.39	AV
H	4434.092	63.84	5.94	35.18	44.00	60.96	68.2	-7.24	PK
H	4434.092	43.54	5.94	35.18	44.00	40.66	54	-13.34	AV
H	10360.014	53.96	8.46	38.71	44.50	56.63	68.2	-11.57	PK
H	10360.014	40.28	8.46	38.71	44.50	42.95	54	-11.05	AV
H	15540.045	53.31	10.12	38.38	44.10	57.71	74	-16.29	PK
H	15540.045	44.52	10.12	38.38	44.10	48.92	54	-5.08	AV
Middle Channel (5200 MHz)-Above 1G									
V	4592.081	64.31	6.48	36.35	44.05	63.09	74	-10.91	PK
V	4592.081	43.48	6.48	36.35	44.05	42.26	54	-11.74	AV
V	10400.053	62.30	8.47	37.88	44.51	64.14	68.2	-4.06	PK
V	10400.053	43.26	8.47	37.88	44.51	45.10	54	-8.90	AV
V	15600.097	61.18	10.12	38.80	44.10	66.00	74	-8.00	PK
V	15600.097	43.20	10.12	38.80	42.70	49.42	54	-4.58	AV
H	4592.162	60.68	6.48	36.37	44.05	59.48	74	-14.52	PK
H	4592.162	43.66	6.48	36.37	44.05	42.46	54	-11.54	AV
H	10400.180	51.33	8.47	38.64	44.50	53.94	68.2	-14.26	PK
H	10400.180	42.97	8.47	38.64	44.50	45.58	54	-8.42	AV
H	15600.179	51.54	10.12	38.38	44.10	55.94	74	-18.06	PK
H	15600.179	41.53	10.12	38.38	44.10	45.93	54	-8.07	AV
High Channel (5240 MHz)-Above 1G									
V	4739.085	64.79	7.10	37.24	43.50	65.63	74	-8.37	PK
V	4739.085	43.80	7.10	37.24	43.50	44.64	54	-9.36	AV
V	10480.056	61.86	8.46	37.68	44.50	63.50	68.2	-4.70	PK
V	10480.056	43.76	8.46	37.68	44.50	45.40	54	-8.60	AV
V	15720.078	61.63	10.12	38.80	44.10	66.45	74	-7.55	PK
V	15720.078	43.89	10.12	38.80	42.70	50.11	54	-3.89	AV
H	4739.075	60.90	7.10	37.24	43.50	61.74	74	-12.26	PK
H	4739.075	43.42	7.10	37.24	43.50	44.26	54	-9.74	AV
H	10480.177	50.09	8.46	38.57	44.50	52.62	68.2	-15.58	PK
H	10480.177	41.35	8.46	38.57	44.50	43.88	54	-10.12	AV
H	15720.109	52.24	10.12	38.38	44.10	56.64	74	-17.36	PK
H	15720.109	43.97	10.12	38.38	44.10	48.37	54	-5.63	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.161	60.67	5.94	35.40	44.00	58.01	68.2	-10.19	PK
V	4434.161	43.78	5.94	35.40	44.00	41.12	54	-12.88	AV
V	10360.054	63.51	8.46	39.75	44.50	67.22	68.2	-0.98	PK
V	10360.054	43.92	8.46	39.75	44.50	47.63	54	-6.37	AV
V	15540.106	62.76	10.12	38.80	44.10	67.58	74	-6.42	PK
V	15540.106	43.79	10.12	38.80	42.70	50.01	54	-3.99	AV
H	4434.148	61.41	5.94	35.18	44.00	58.53	68.2	-9.67	PK
H	4434.148	43.54	5.94	35.18	44.00	40.66	54	-13.34	AV
H	10360.018	54.61	8.46	38.71	44.50	57.28	68.2	-10.92	PK
H	10360.018	42.40	8.46	38.71	44.50	45.07	54	-8.93	AV
H	15540.068	52.48	10.12	38.38	44.10	56.88	74	-17.12	PK
H	15540.068	42.96	10.12	38.38	44.10	47.36	54	-6.64	AV
Middle Channel (5200 MHz)-Above 1G									
V	4592.059	61.01	6.48	36.35	44.05	59.79	74	-14.21	PK
V	4592.059	43.36	6.48	36.35	44.05	42.14	54	-11.86	AV
V	10400.017	61.31	8.47	37.88	44.51	63.15	68.2	-5.05	PK
V	10400.017	43.95	8.47	37.88	44.51	45.79	54	-8.21	AV
V	15600.083	60.44	10.12	38.80	44.10	65.26	74	-8.74	PK
V	15600.083	43.78	10.12	38.80	42.70	50.00	54	-4.00	AV
H	4592.004	64.19	6.48	36.37	44.05	62.99	74	-11.01	PK
H	4592.004	43.55	6.48	36.37	44.05	42.35	54	-11.65	AV
H	10400.075	51.76	8.47	38.64	44.50	54.37	68.2	-13.83	PK
H	10400.075	44.92	8.47	38.64	44.50	47.53	54	-6.47	AV
H	15600.112	50.89	10.12	38.38	44.10	55.29	74	-18.71	PK
H	15600.112	44.73	10.12	38.38	44.10	49.13	54	-4.87	AV
High Channel (5240 MHz)-Above 1G									
V	4739.119	61.93	7.10	37.24	43.50	62.77	74	-11.23	PK
V	4739.119	43.69	7.10	37.24	43.50	44.53	54	-9.47	AV
V	10480.009	61.96	8.46	37.68	44.50	63.60	68.2	-4.60	PK
V	10480.009	43.40	8.46	37.68	44.50	45.04	54	-8.96	AV
V	15720.013	63.27	10.12	38.80	44.10	68.09	74	-5.91	PK
V	15720.013	43.36	10.12	38.80	42.70	49.58	54	-4.42	AV
H	4739.074	63.49	7.10	37.24	43.50	64.33	74	-9.67	PK
H	4739.074	43.86	7.10	37.24	43.50	44.70	54	-9.30	AV
H	10480.176	52.75	8.46	38.57	44.50	55.28	68.2	-12.92	PK
H	10480.176	42.06	8.46	38.57	44.50	44.59	54	-9.41	AV
H	15720.157	52.63	10.12	38.38	44.10	57.03	74	-16.97	PK
H	15720.157	42.30	10.12	38.38	44.10	46.70	54	-7.30	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.093	62.20	5.94	35.40	44.00	59.54	68.2	-8.66	PK
V	4434.093	43.31	5.94	35.40	44.00	40.65	54	-13.35	AV
V	10380.038	62.73	8.46	39.75	44.50	66.44	68.2	-1.76	PK
V	10380.038	43.40	8.46	39.75	44.50	47.11	54	-6.89	AV
V	15570.034	63.38	10.12	38.80	44.10	68.20	74	-5.80	PK
V	15570.034	43.97	10.12	38.80	42.70	50.19	54	-3.81	AV
H	4434.074	64.72	5.94	35.18	44.00	61.84	74	-12.16	PK
H	4434.074	43.62	5.94	35.18	44.00	40.74	54	-13.26	AV
H	10380.074	52.44	8.46	38.71	44.50	55.11	68.2	-13.09	PK
H	10380.074	40.82	8.46	38.71	44.50	43.49	54	-10.51	AV
H	15570.108	53.54	10.12	38.38	44.10	57.94	74	-16.06	PK
H	15570.108	44.32	10.12	38.38	44.10	48.72	54	-5.28	AV
High Channel (5230 MHz)-Above 1G									
V	4739.033	62.39	6.48	36.35	44.05	61.17	68.2	-7.03	PK
V	4739.033	43.39	6.48	36.35	44.05	42.17	54	-11.83	AV
V	10460.143	64.51	8.47	37.88	44.51	66.35	68.2	-1.85	PK
V	10460.143	43.71	8.47	37.88	44.51	45.55	54	-8.45	AV
V	15690.127	61.13	10.12	38.80	44.10	65.95	74	-8.05	PK
V	15690.127	43.39	10.12	38.80	42.70	49.61	54	-4.39	AV
H	4739.175	61.98	6.48	36.37	44.05	60.78	68.2	-7.42	PK
H	4739.175	43.13	6.48	36.37	44.05	41.93	54	-12.07	AV
H	10460.048	54.25	8.47	38.64	44.50	56.86	68.2	-11.34	PK
H	10460.048	41.99	8.47	38.64	44.50	44.60	54	-9.40	AV
H	15690.066	53.32	10.12	38.38	44.10	57.72	74	-16.28	PK
H	15690.066	40.17	10.12	38.38	44.10	44.57	54	-9.43	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5180 MHz)-Above 1G									
V	4434.054	60.59	5.94	35.40	44.00	57.93	68.2	-10.27	PK
V	4434.054	43.09	5.94	35.40	44.00	40.43	54	-13.57	AV
V	10360.049	60.18	8.46	39.75	44.50	63.89	68.2	-4.31	PK
V	10360.049	43.97	8.46	39.75	44.50	47.68	54	-6.32	AV
V	15540.163	62.52	10.12	38.80	44.10	67.34	74	-6.66	PK
V	15540.163	43.87	10.12	38.80	42.70	50.09	54	-3.91	AV
H	4434.174	63.73	5.94	35.18	44.00	60.85	68.2	-7.35	PK
H	4434.174	43.07	5.94	35.18	44.00	40.19	54	-13.81	AV
H	10360.046	50.04	8.46	38.71	44.50	52.71	68.2	-15.49	PK
H	10360.046	44.13	8.46	38.71	44.50	46.80	54	-7.20	AV
H	15540.013	54.42	10.12	38.38	44.10	58.82	74	-15.18	PK
H	15540.013	41.44	10.12	38.38	44.10	45.84	54	-8.16	AV
Middle Channel (5200 MHz)-Above 1G									
V	4592.043	63.24	6.48	36.35	44.05	62.02	74	-11.98	PK
V	4592.043	43.32	6.48	36.35	44.05	42.10	54	-11.90	AV
V	10400.060	61.37	8.47	37.88	44.51	63.21	68.2	-4.99	PK
V	10400.060	43.67	8.47	37.88	44.51	45.51	54	-8.49	AV
V	15600.051	64.69	10.12	38.80	44.10	69.51	74	-4.49	PK
V	15600.051	43.45	10.12	38.80	42.70	49.67	54	-4.33	AV
H	4592.117	64.72	6.48	36.37	44.05	63.52	74	-10.48	PK
H	4592.117	43.58	6.48	36.37	44.05	42.38	54	-11.62	AV
H	10400.167	50.01	8.47	38.64	44.50	52.62	68.2	-15.58	PK
H	10400.167	44.64	8.47	38.64	44.50	47.25	54	-6.75	AV
H	15600.160	53.30	10.12	38.38	44.10	57.70	74	-16.30	PK
H	15600.160	41.02	10.12	38.38	44.10	45.42	54	-8.58	AV
High Channel (5240 MHz)-Above 1G									
V	4739.168	63.66	7.10	37.24	43.50	64.50	74	-9.50	PK
V	4739.168	43.45	7.10	37.24	43.50	44.29	54	-9.71	AV
V	10480.085	64.37	8.46	37.68	44.50	66.01	68.2	-2.19	PK
V	10480.085	43.70	8.46	37.68	44.50	45.34	54	-8.66	AV
V	15720.163	63.70	10.12	38.80	44.10	68.52	74	-5.48	PK
V	15720.163	43.23	10.12	38.80	42.70	49.45	54	-4.55	AV
H	4739.018	64.14	7.10	37.24	43.50	64.98	74	-9.02	PK
H	4739.018	43.42	7.10	37.24	43.50	44.26	54	-9.74	AV
H	10480.040	53.98	8.46	38.57	44.50	56.51	68.2	-11.69	PK
H	10480.040	41.63	8.46	38.57	44.50	44.16	54	-9.84	AV
H	15720.021	53.58	10.12	38.38	44.10	57.98	74	-16.02	PK
H	15720.021	41.51	10.12	38.38	44.10	45.91	54	-8.09	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5190 MHz)-Above 1G									
V	4434.188	60.32	5.94	35.40	44.00	57.66	68.2	-10.54	PK
V	4434.188	43.06	5.94	35.40	44.00	40.40	54	-13.60	AV
V	10380.020	60.22	8.46	39.75	44.50	63.93	68.2	-4.27	PK
V	10380.020	43.78	8.46	39.75	44.50	47.49	54	-6.51	AV
V	15570.014	64.61	10.12	38.80	44.10	69.43	74	-4.57	PK
V	15570.014	43.20	10.12	38.80	42.70	49.42	54	-4.58	AV
H	4434.149	63.49	5.94	35.18	44.00	60.61	74	-13.39	PK
H	4434.149	43.75	5.94	35.18	44.00	40.87	54	-13.13	AV
H	10380.167	51.82	8.46	38.71	44.50	54.49	68.2	-13.71	PK
H	10380.167	40.53	8.46	38.71	44.50	43.20	54	-10.80	AV
H	15570.007	52.19	10.12	38.38	44.10	56.59	74	-17.41	PK
H	15570.007	41.31	10.12	38.38	44.10	45.71	54	-8.29	AV
High Channel (5230 MHz)-Above 1G									
V	4739.102	61.97	6.48	36.35	44.05	60.75	68.2	-7.45	PK
V	4739.102	43.52	6.48	36.35	44.05	42.30	54	-11.70	AV
V	10460.116	63.79	8.47	37.88	44.51	65.63	68.2	-2.57	PK
V	10460.116	43.14	8.47	37.88	44.51	44.98	54	-9.02	AV
V	15690.093	60.64	10.12	38.80	44.10	65.46	74	-8.54	PK
V	15690.093	43.27	10.12	38.80	42.70	49.49	54	-4.51	AV
H	4739.098	64.50	6.48	36.37	44.05	63.30	68.2	-4.90	PK
H	4739.098	43.15	6.48	36.37	44.05	41.95	54	-12.05	AV
H	10460.001	54.99	8.47	38.64	44.50	57.60	68.2	-10.60	PK
H	10460.001	41.02	8.47	38.64	44.50	43.63	54	-10.37	AV
H	15690.089	54.17	10.12	38.38	44.10	58.57	74	-15.43	PK
H	15690.089	41.14	10.12	38.38	44.10	45.54	54	-8.46	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.1G) - 802.11ac-HT80
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/ m)	Margin (dB)	Detector Type
(5210 MHz)-Above 1G									
V	4434.177	63.69	5.94	35.40	44.00	61.03	68.2	-7.17	PK
V	4434.177	43.10	5.94	35.40	44.00	40.44	54	-13.56	AV
V	10420.015	63.78	8.46	39.75	44.50	67.49	68.2	-0.71	PK
V	10420.015	43.71	8.46	39.75	44.50	47.42	54	-6.58	AV
V	15630.135	64.05	10.12	38.80	44.10	68.87	74	-5.13	PK
V	15630.135	43.87	10.12	38.80	42.70	50.09	54	-3.91	AV
H	4434.135	60.52	5.94	35.18	44.00	57.64	68.2	-10.56	PK
H	4434.135	43.38	5.94	35.18	44.00	40.50	54	-13.50	AV
H	10420.019	52.52	8.46	38.71	44.50	55.19	68.2	-13.01	PK
H	10420.019	44.90	8.46	38.71	44.50	47.57	54	-6.43	AV
H	15630.167	54.28	10.12	38.38	44.10	58.68	74	-15.32	PK
H	15630.167	44.91	10.12	38.38	44.10	49.31	54	-4.69	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11a
------------	--------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.030	58.53	5.94	35.40	44.00	55.87	74	-18.13	PK
V	4679.030	43.35	5.94	35.40	44.00	40.69	54	-13.31	AV
V	11490.155	57.72	8.46	39.75	44.50	61.43	68.2	-6.77	PK
V	11490.155	43.47	8.46	39.75	44.50	47.18	54	-6.82	AV
V	17235.184	57.19	10.12	38.80	44.10	62.01	68.2	-6.19	PK
V	17235.184	43.14	10.12	38.80	42.70	49.36	54	-4.64	AV
H	4679.114	56.47	5.94	35.18	44.00	53.59	74	-20.41	PK
H	4679.114	43.35	5.94	35.18	44.00	40.47	54	-13.53	AV
H	11490.120	54.17	8.46	38.71	44.50	56.84	68.2	-11.36	PK
H	11490.120	41.09	8.46	38.71	44.50	43.76	54	-10.24	AV
H	17235.056	53.69	10.12	38.38	44.10	58.09	68.2	-10.11	PK
H	17235.056	40.72	10.12	38.38	44.10	45.12	54	-8.88	AV
Middle Channel (5785 MHz)-Above 1G									
V	4592.191	55.76	6.48	36.35	44.05	54.54	74	-19.46	PK
V	4592.191	43.48	6.48	36.35	44.05	42.26	54	-11.74	AV
V	11570.181	57.33	8.47	37.88	44.51	59.17	68.2	-9.03	PK
V	11570.181	43.54	8.47	37.88	44.51	45.38	54	-8.62	AV
V	17355.087	60.49	10.12	38.80	44.10	65.31	68.2	-2.89	PK
V	17355.087	39.53	10.12	38.80	42.70	45.75	54	-8.25	AV
H	4592.097	56.93	6.48	36.37	44.05	55.73	74	-18.27	PK
H	4592.097	43.32	6.48	36.37	44.05	42.12	54	-11.88	AV
H	11570.077	52.81	8.47	38.64	44.50	55.42	68.2	-12.78	PK
H	11570.077	41.80	8.47	38.64	44.50	44.41	54	-9.59	AV
H	17355.101	54.82	10.12	38.38	44.10	59.22	68.2	-8.98	PK
H	17355.101	43.13	10.12	38.38	44.10	47.53	54	-6.47	AV
High Channel (5825 MHz)-Above 1G									
V	6039.178	58.76	7.10	37.24	43.50	59.60	68.2	-8.60	PK
V	6039.178	43.60	7.10	37.24	43.50	44.44	54	-9.56	AV
V	11650.140	58.12	8.46	37.68	44.50	59.76	74	-14.24	PK
V	11650.140	43.76	8.46	37.68	44.50	45.40	54	-8.60	AV
V	17475.132	54.72	10.12	38.80	44.10	59.54	68.2	-8.66	PK
V	17475.132	43.60	10.12	38.80	42.70	49.82	54	-4.18	AV
H	6039.066	57.68	7.10	37.24	43.50	58.52	68.2	-9.68	PK
H	6039.066	43.52	7.10	37.24	43.50	44.36	54	-9.64	AV
H	11650.114	53.93	8.46	38.57	44.50	56.46	74	-17.54	PK
H	11650.114	44.13	8.46	38.57	44.50	46.66	54	-7.34	AV
H	17475.016	51.85	10.12	38.38	44.10	56.25	68.2	-11.95	PK
H	17475.016	41.93	10.12	38.38	44.10	46.33	54	-7.67	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11n-HT20
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.168	59.44	5.94	35.40	44.00	56.78	74	-17.22	PK
V	4679.168	43.60	5.94	35.40	44.00	40.94	54	-13.06	AV
V	11490.055	56.70	8.46	39.75	44.50	60.41	68.2	-7.79	PK
V	11490.055	43.30	8.46	39.75	44.50	47.01	54	-6.99	AV
V	17235.183	59.67	10.12	38.80	44.10	64.49	68.2	-3.71	PK
V	17235.183	43.12	10.12	38.80	42.70	49.34	54	-4.66	AV
H	4679.136	59.30	5.94	35.18	44.00	56.42	74	-17.58	PK
H	4679.136	43.21	5.94	35.18	44.00	40.33	54	-13.67	AV
H	11490.066	48.12	8.46	38.71	44.50	50.79	68.2	-17.41	PK
H	11490.066	43.64	8.46	38.71	44.50	46.31	54	-7.69	AV
H	17235.056	50.50	10.12	38.38	44.10	54.90	68.2	-13.30	PK
H	17235.056	43.90	10.12	38.38	44.10	48.30	54	-5.70	AV
Middle Channel (5785 MHz)-Above 1G									
V	4592.041	61.34	6.48	36.35	44.05	60.12	74	-13.88	PK
V	4592.041	43.45	6.48	36.35	44.05	42.23	54	-11.77	AV
V	11570.002	54.85	8.47	37.88	44.51	56.69	68.2	-11.51	PK
V	11570.002	43.42	8.47	37.88	44.51	45.26	54	-8.74	AV
V	17355.130	58.85	10.12	38.80	44.10	63.67	68.2	-4.53	PK
V	17355.130	43.55	10.12	38.80	42.70	49.77	54	-4.23	AV
H	4592.104	56.15	6.48	36.37	44.05	54.95	74	-19.05	PK
H	4592.104	43.02	6.48	36.37	44.05	41.82	54	-12.18	AV
H	11570.194	50.79	8.47	38.64	44.50	53.40	68.2	-14.80	PK
H	11570.194	40.79	8.47	38.64	44.50	43.40	54	-10.60	AV
H	17355.086	51.62	10.12	38.38	44.10	56.02	68.2	-12.18	PK
H	17355.086	40.73	10.12	38.38	44.10	45.13	54	-8.87	AV
High Channel (5825 MHz)-Above 1G									
V	6039.006	55.95	7.10	37.24	43.50	56.79	68.2	-11.41	PK
V	6039.006	43.65	7.10	37.24	43.50	44.49	54	-9.51	AV
V	11650.161	60.90	8.46	37.68	44.50	62.54	74	-11.46	PK
V	11650.161	43.40	8.46	37.68	44.50	45.04	54	-8.96	AV
V	17475.014	55.65	10.12	38.80	44.10	60.47	68.2	-7.73	PK
V	17475.014	43.98	10.12	38.80	42.70	50.20	54	-3.80	AV
H	6039.034	56.13	7.10	37.24	43.50	56.97	68.2	-11.23	PK
H	6039.034	43.26	7.10	37.24	43.50	44.10	54	-9.90	AV
H	11650.095	53.81	8.46	38.57	44.50	56.34	74	-17.66	PK
H	11650.095	41.37	8.46	38.57	44.50	43.90	54	-10.10	AV
H	17475.083	53.12	10.12	38.38	44.10	57.52	68.2	-10.68	PK
H	17475.083	41.80	10.12	38.38	44.10	46.20	54	-7.80	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11n-HT40
------------	-------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.063	56.76	5.94	35.40	44.00	54.10	74	-19.90	PK
V	4679.063	43.60	5.94	35.40	44.00	40.94	54	-13.06	AV
V	11510.164	56.65	8.46	39.75	44.50	60.36	74	-13.64	PK
V	11510.164	43.69	8.46	39.75	44.50	47.40	54	-6.60	AV
V	17265.141	56.42	10.12	38.80	44.10	61.24	68.2	-6.96	PK
V	17265.141	2.00	10.12	38.80	42.70	8.22	54	-45.78	AV
H	4679.151	56.94	5.94	35.18	44.00	54.06	74	-19.94	PK
H	4679.151	43.09	5.94	35.18	44.00	40.21	54	-13.79	AV
H	11510.155	52.79	8.46	38.71	44.50	55.46	74	-18.54	PK
H	11510.155	44.15	8.46	38.71	44.50	46.82	54	-7.18	AV
H	17265.151	52.35	10.12	38.38	44.10	56.75	68.2	-11.45	PK
H	17265.151	42.97	10.12	38.38	44.10	47.37	54	-6.63	AV
High Channel (5795 MHz)-Above 1G									
V	6039.029	60.89	6.48	36.35	44.05	59.67	68.2	-8.53	PK
V	6039.029	43.51	6.48	36.35	44.05	42.29	54	-11.71	AV
V	11590.166	58.00	8.47	37.88	44.51	59.84	74	-14.16	PK
V	11590.166	43.28	8.47	37.88	44.51	45.12	54	-8.88	AV
V	17385.054	55.09	10.12	38.80	44.10	59.91	68.2	-8.29	PK
V	17385.054	41.51	10.12	38.80	42.70	47.73	54	-6.27	AV
H	6039.135	57.59	6.48	36.37	44.05	56.39	68.2	-11.81	PK
H	6039.135	43.96	6.48	36.37	44.05	42.76	54	-11.24	AV
H	11590.119	52.26	8.47	38.64	44.50	54.87	74	-19.13	PK
H	11590.119	40.01	8.47	38.64	44.50	42.62	54	-11.38	AV
H	17385.194	51.10	10.12	38.38	44.10	55.50	68.2	-12.70	PK
H	17385.194	42.58	10.12	38.38	44.10	46.98	54	-7.02	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11ac-HT20
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5745 MHz)-Above 1G									
V	4679.010	57.32	5.94	35.40	44.00	54.66	74	-19.34	PK
V	4679.010	43.69	5.94	35.40	44.00	41.03	54	-12.97	AV
V	11490.099	56.55	8.46	39.75	44.50	60.26	68.2	-7.94	PK
V	11490.099	43.08	8.46	39.75	44.50	46.79	54	-7.21	AV
V	17235.010	57.35	10.12	38.80	44.10	62.17	68.2	-6.03	PK
V	17235.010	43.92	10.12	38.80	42.70	50.14	54	-3.86	AV
H	4679.155	58.77	5.94	35.18	44.00	55.89	74	-18.11	PK
H	4679.155	43.53	5.94	35.18	44.00	40.65	54	-13.35	AV
H	11490.013	48.48	8.46	38.71	44.50	51.15	68.2	-17.05	PK
H	11490.013	44.85	8.46	38.71	44.50	47.52	54	-6.48	AV
H	17235.079	54.65	10.12	38.38	44.10	59.05	68.2	-9.15	PK
H	17235.079	40.55	10.12	38.38	44.10	44.95	54	-9.05	AV
Middle Channel (5785 MHz)-Above 1G									
V	4592.200	61.89	6.48	36.35	44.05	60.67	74	-13.33	PK
V	4592.200	43.44	6.48	36.35	44.05	42.22	54	-11.78	AV
V	11570.063	54.01	8.47	37.88	44.51	55.85	68.2	-12.35	PK
V	11570.063	43.34	8.47	37.88	44.51	45.18	54	-8.82	AV
V	17355.169	59.07	10.12	38.80	44.10	63.89	68.2	-4.31	PK
V	17355.169	43.93	10.12	38.80	42.70	50.15	54	-3.85	AV
H	4592.048	58.77	6.48	36.37	44.05	57.57	74	-16.43	PK
H	4592.048	43.01	6.48	36.37	44.05	41.81	54	-12.19	AV
H	11570.160	51.18	8.47	38.64	44.50	53.79	68.2	-14.41	PK
H	11570.160	41.64	8.47	38.64	44.50	44.25	54	-9.75	AV
H	17355.156	53.18	10.12	38.38	44.10	57.58	68.2	-10.62	PK
H	17355.156	43.03	10.12	38.38	44.10	47.43	54	-6.57	AV
High Channel (5825 MHz)-Above 1G									
V	6039.120	58.88	7.10	37.24	43.50	59.72	68.2	-8.48	PK
V	6039.120	43.40	7.10	37.24	43.50	44.24	54	-9.76	AV
V	11650.031	57.04	8.46	37.68	44.50	58.68	74	-15.32	PK
V	11650.031	43.33	8.46	37.68	44.50	44.97	54	-9.03	AV
V	17475.027	57.89	10.12	38.80	44.10	62.71	68.2	-5.49	PK
V	17475.027	43.81	10.12	38.80	42.70	50.03	54	-3.97	AV
H	6039.124	56.57	7.10	37.24	43.50	57.41	68.2	-10.79	PK
H	6039.124	43.46	7.10	37.24	43.50	44.30	54	-9.70	AV
H	11650.143	51.51	8.46	38.57	44.50	54.04	74	-19.96	PK
H	11650.143	43.48	8.46	38.57	44.50	46.01	54	-7.99	AV
H	17475.049	50.61	10.12	38.38	44.10	55.01	68.2	-13.19	PK
H	17475.049	43.48	10.12	38.38	44.10	47.88	54	-6.12	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11ac-HT40
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
Low Channel (5755 MHz)-Above 1G									
V	4679.186	58.67	5.94	35.40	44.00	56.01	74	-17.99	PK
V	4679.186	43.45	5.94	35.40	44.00	40.79	54	-13.21	AV
V	11510.186	55.12	8.46	39.75	44.50	58.83	74	-15.17	PK
V	11510.186	43.97	8.46	39.75	44.50	47.68	54	-6.32	AV
V	17265.099	55.71	10.12	38.80	44.10	60.53	68.2	-7.67	PK
V	17265.099	2.00	10.12	38.80	42.70	8.22	54	-45.78	AV
H	4679.001	59.95	5.94	35.18	44.00	57.07	74	-16.93	PK
H	4679.001	43.65	5.94	35.18	44.00	40.77	54	-13.23	AV
H	11510.148	50.97	8.46	38.71	44.50	53.64	74	-20.36	PK
H	11510.148	41.71	8.46	38.71	44.50	44.38	54	-9.62	AV
H	17265.148	52.32	10.12	38.38	44.10	56.72	68.2	-11.48	PK
H	17265.148	40.99	10.12	38.38	44.10	45.39	54	-8.61	AV
High Channel (5795 MHz)-Above 1G									
V	6039.023	60.68	6.48	36.35	44.05	59.46	68.2	-8.74	PK
V	6039.023	43.27	6.48	36.35	44.05	42.05	54	-11.95	AV
V	11590.115	55.27	8.47	37.88	44.51	57.11	74	-16.89	PK
V	11590.115	43.14	8.47	37.88	44.51	44.98	54	-9.02	AV
V	17385.097	55.52	10.12	38.80	44.10	60.34	68.2	-7.86	PK
V	17385.097	41.19	10.12	38.80	42.70	47.41	54	-6.59	AV
H	6039.179	60.26	6.48	36.37	44.05	59.06	68.2	-9.14	PK
H	6039.179	43.90	6.48	36.37	44.05	42.70	54	-11.30	AV
H	11590.175	51.78	8.47	38.64	44.50	54.39	74	-19.61	PK
H	11590.175	42.12	8.47	38.64	44.50	44.73	54	-9.27	AV
H	17385.076	50.12	10.12	38.38	44.10	54.52	68.2	-13.68	PK
H	17385.076	43.67	10.12	38.38	44.10	48.07	54	-5.93	AV

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Test Mode:	TX(5.8G) - 802.11ac-HT80
------------	--------------------------

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Cable loss (dB)	Antenna Factor dB/m	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
(5775 MHz)-Above 1G									
V	4679.028	55.58	5.94	35.40	44.00	52.92	74	-21.08	PK
V	4679.028	43.18	5.94	35.40	44.00	40.52	54	-13.48	AV
V	11550.016	56.45	8.46	39.75	44.50	60.16	74	-13.84	PK
V	11550.016	43.95	8.46	39.75	44.50	47.66	54	-6.34	AV
V	17325.102	57.03	10.12	38.80	44.10	61.85	68.2	-6.35	PK
V	17325.102	41.80	10.12	38.80	42.70	48.02	54	-5.98	AV
H	4679.169	55.98	5.94	35.18	44.00	53.10	74	-20.90	PK
H	4679.169	43.82	5.94	35.18	44.00	40.94	54	-13.06	AV
H	11550.118	54.29	8.46	38.71	44.50	56.96	74	-17.04	PK
H	11550.118	43.89	8.46	38.71	44.50	46.56	54	-7.44	AV
H	17325.016	53.47	10.12	38.38	44.10	57.87	68.2	-10.33	PK
H	17325.016	41.56	10.12	38.38	44.10	45.96	54	-8.04	AV

Note: PK value is lower than the Average value limit, So average didn't record.


The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

8. Power Spectral Density Test

8.1 Block Diagram Of Test Setup

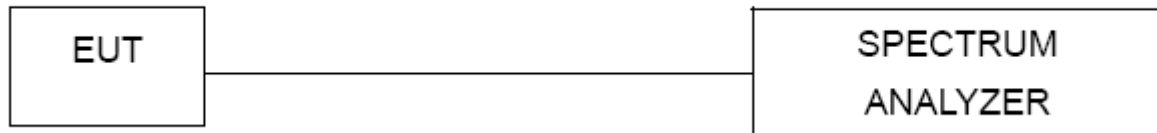

8.2 Limit

For the band 5.15-5.25 GHz,

(i) For an outdoor Wifi Repeater operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor Wifi Repeater operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point Wifi Repeaters operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3 Test procedure


For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since RBW=100 KHz is available on nearly all spectrum analyzers.

8.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

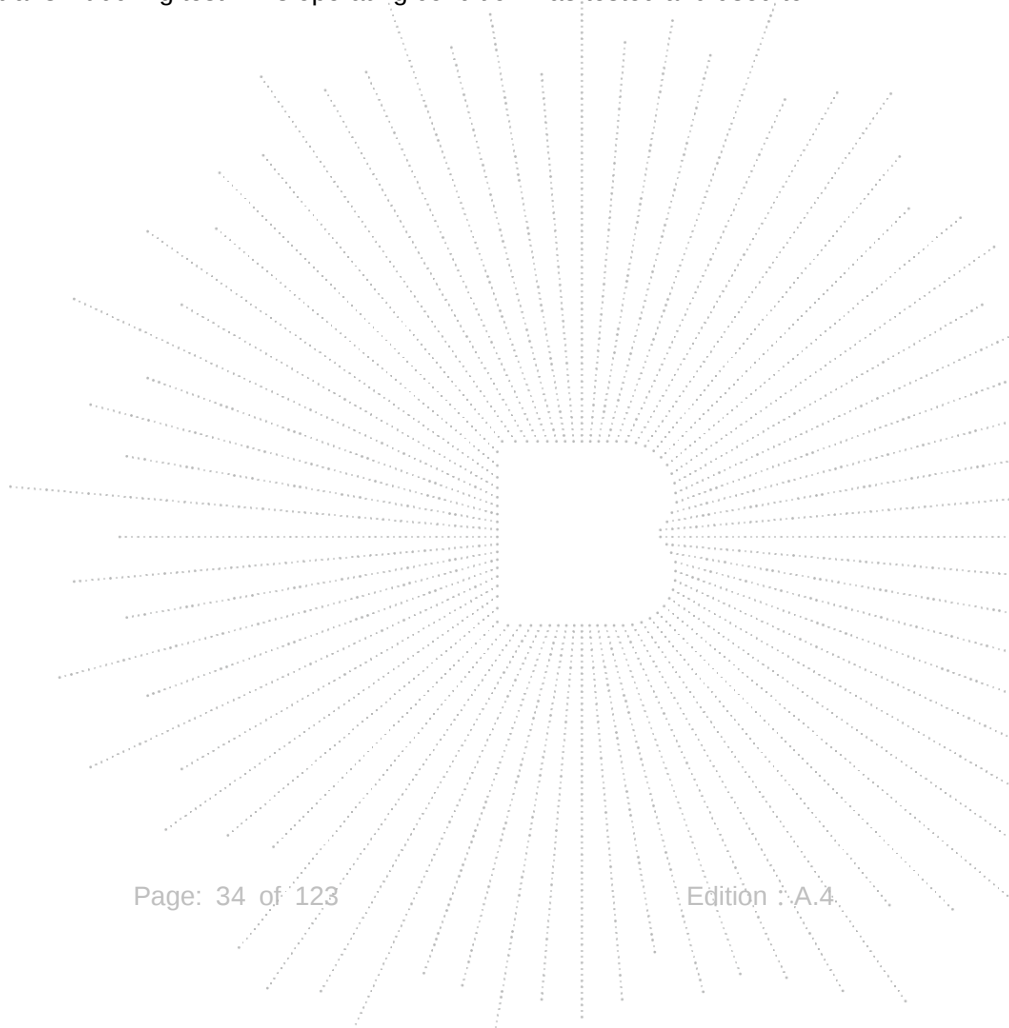




8.5 Test Result



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 12V
Test Mode:	(5180-5240MHz); (5745-5825MHz)		



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	-2.44	11	Pass
NVNT	a	5200	-2.47	11	Pass
NVNT	a	5240	-0.96	11	Pass
NVNT	n20	5180	-3.95	11	Pass
NVNT	n20	5200	-4.11	11	Pass
NVNT	n20	5240	-4.11	11	Pass
NVNT	n40	5190	-10.31	11	Pass
NVNT	n40	5230	-9.17	11	Pass
NVNT	ac20	5180	-4.72	11	Pass
NVNT	ac20	5200	-4.58	11	Pass
NVNT	ac20	5240	-5.32	11	Pass
NVNT	ac40	5190	-9.94	11	Pass
NVNT	ac40	5230	-9.75	11	Pass
NVNT	ac80	5210	-17.74	11	Pass



Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/500kHz)	Limit (dBm/500kHz)	Verdict
NVNT	a	5745	6.72	30	Pass
NVNT	a	5785	5.41	30	Pass
NVNT	a	5825	5.11	30	Pass
NVNT	n20	5745	5.72	30	Pass
NVNT	n20	5785	4.13	30	Pass
NVNT	n20	5825	4.25	30	Pass
NVNT	n40	5755	1.72	30	Pass
NVNT	n40	5795	0.46	30	Pass
NVNT	ac20	5745	5.1	30	Pass
NVNT	ac20	5785	4.42	30	Pass
NVNT	ac20	5825	3.93	30	Pass
NVNT	ac40	5755	2.01	30	Pass
NVNT	ac40	5795	0.67	30	Pass
NVNT	ac80	5775	-1.89	30	Pass


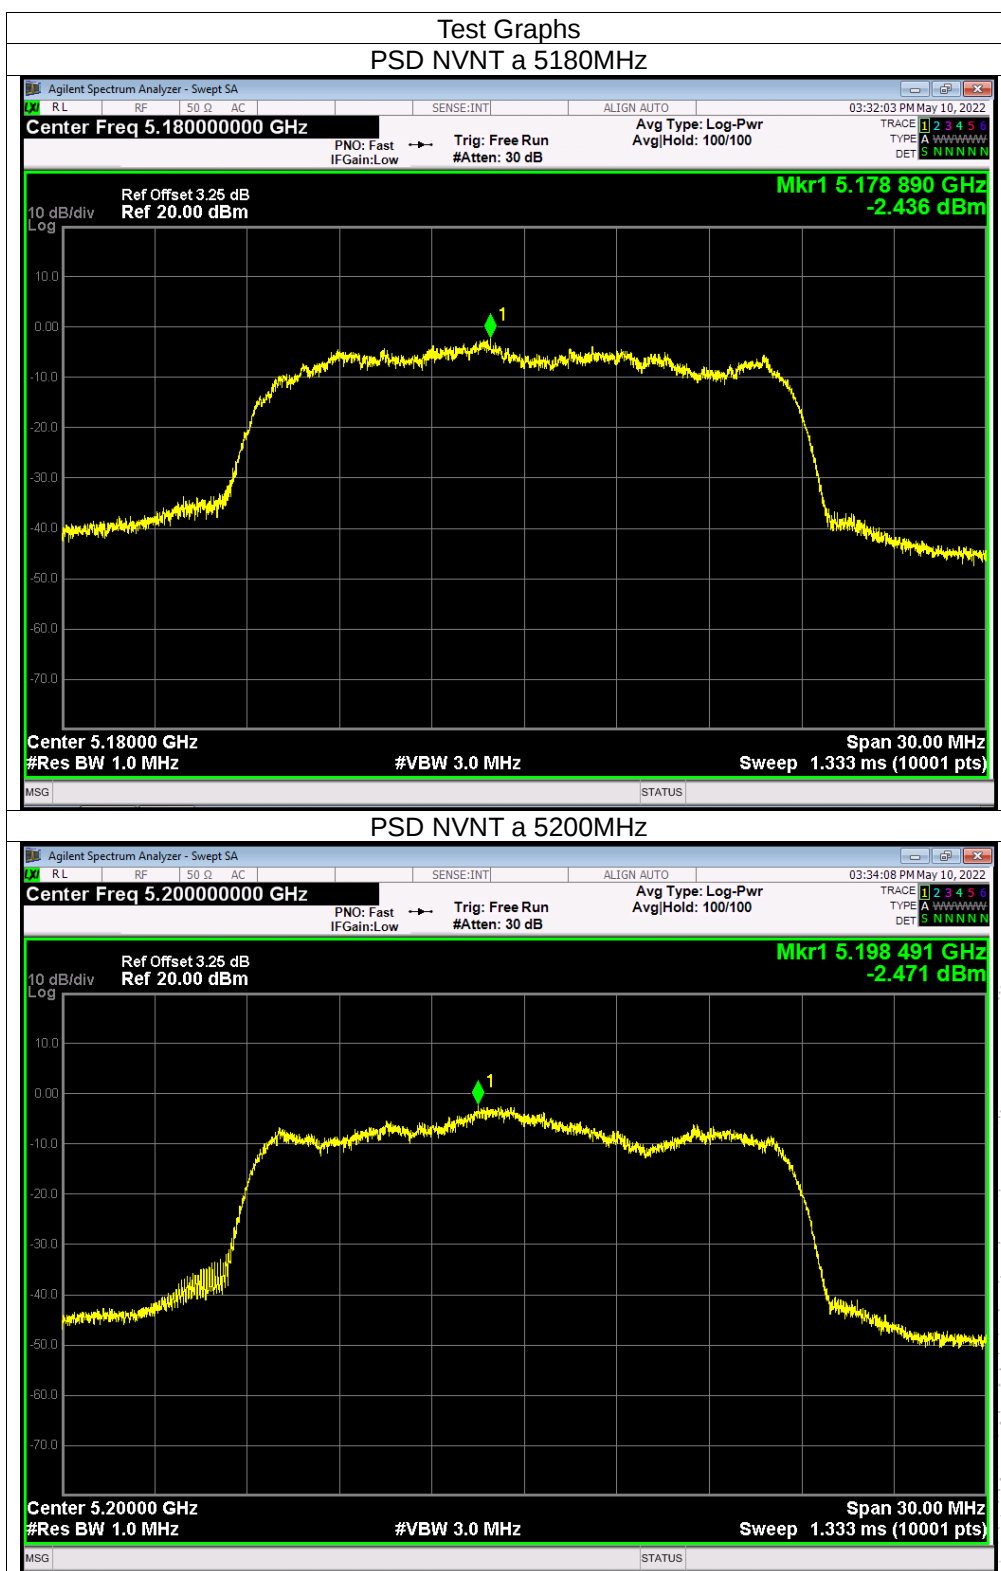


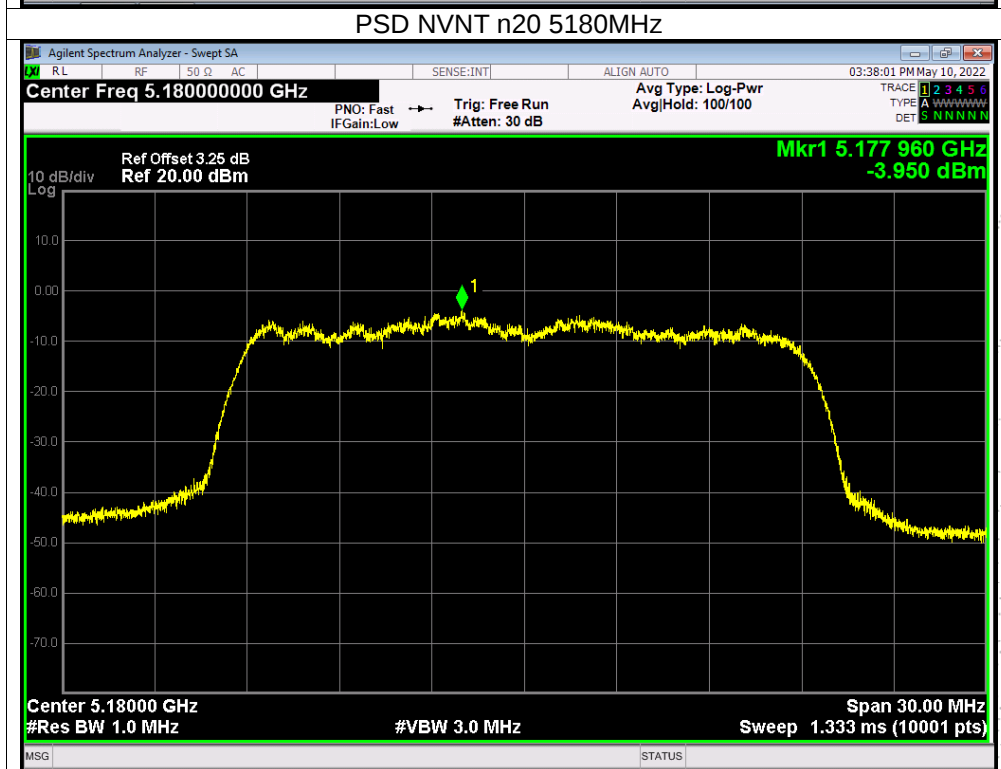
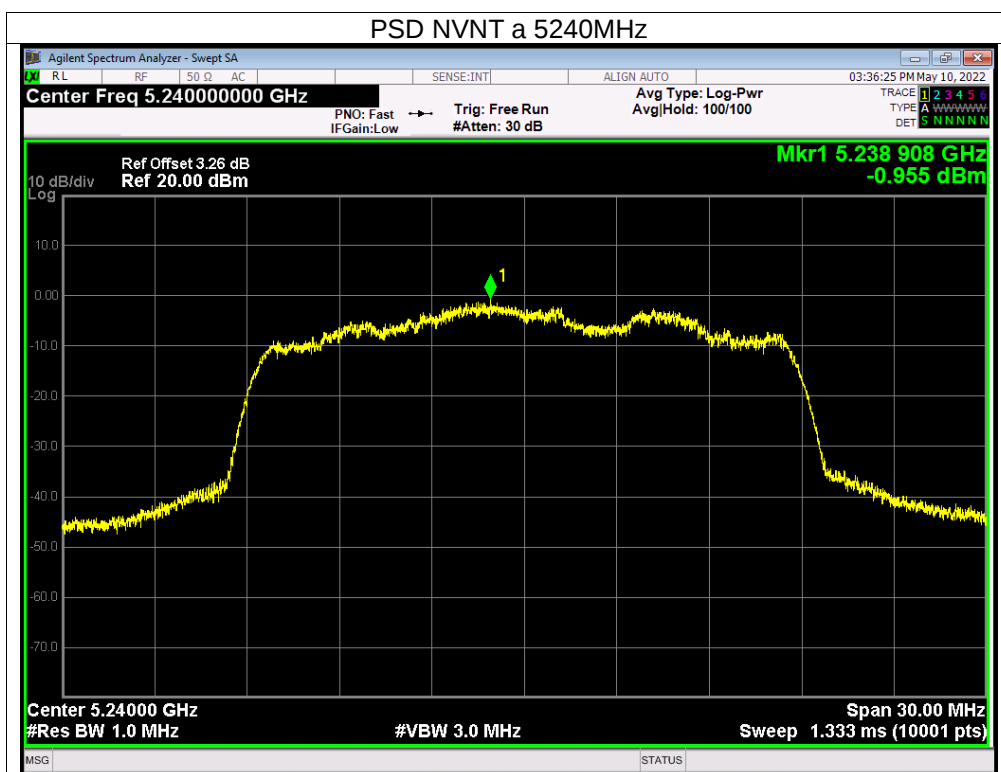


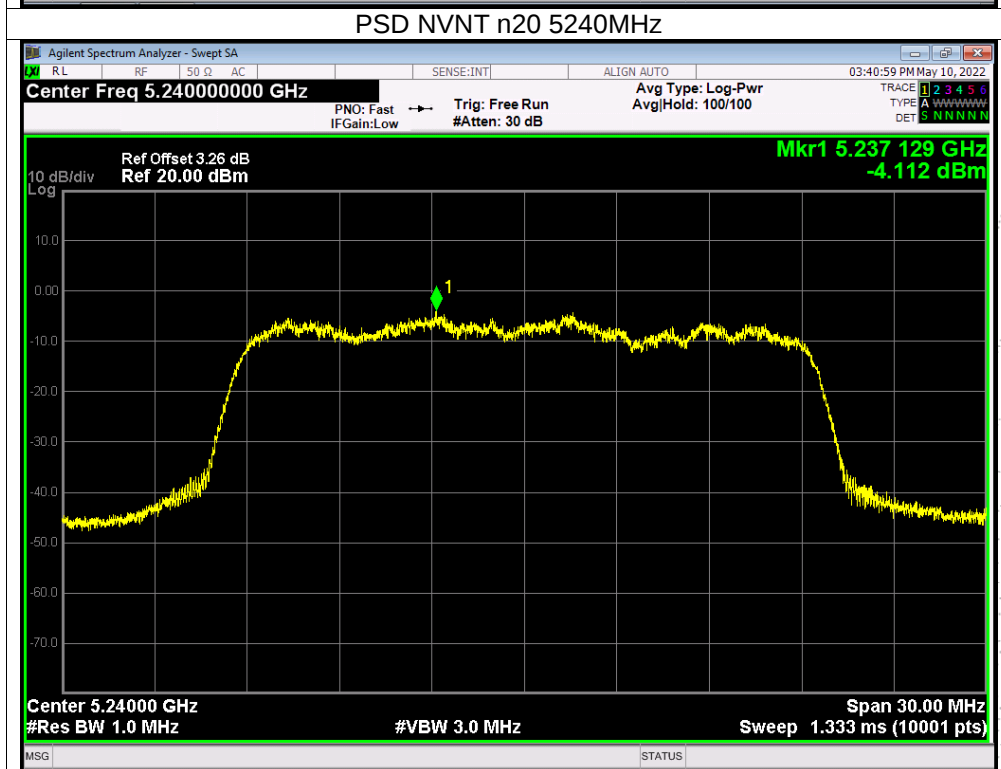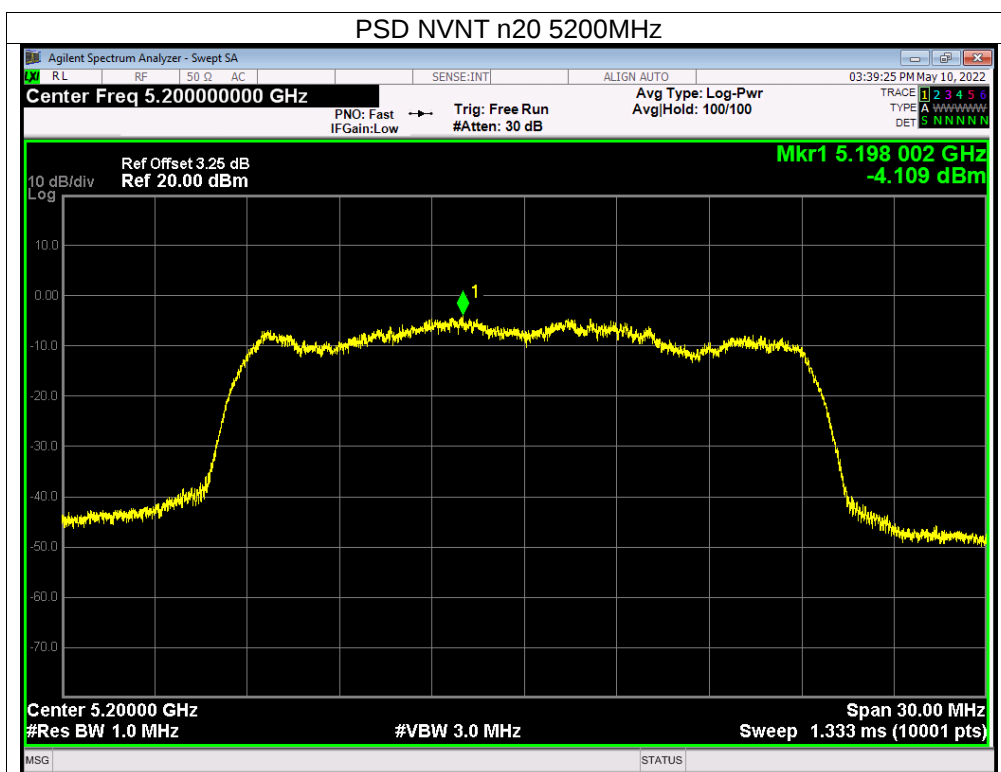


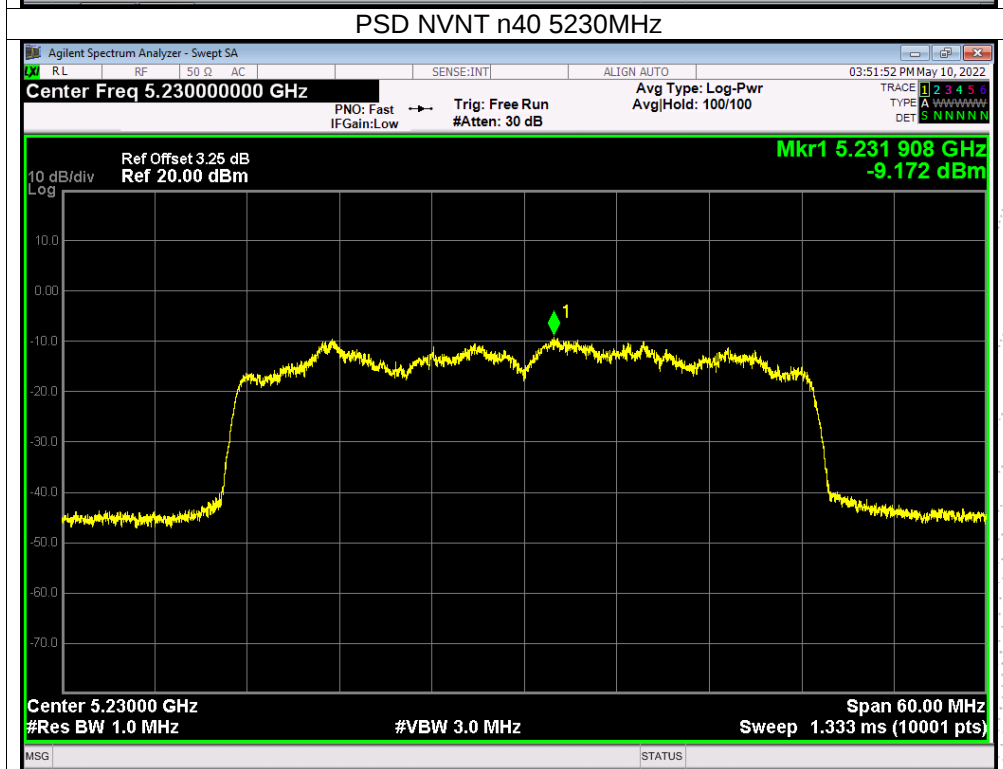
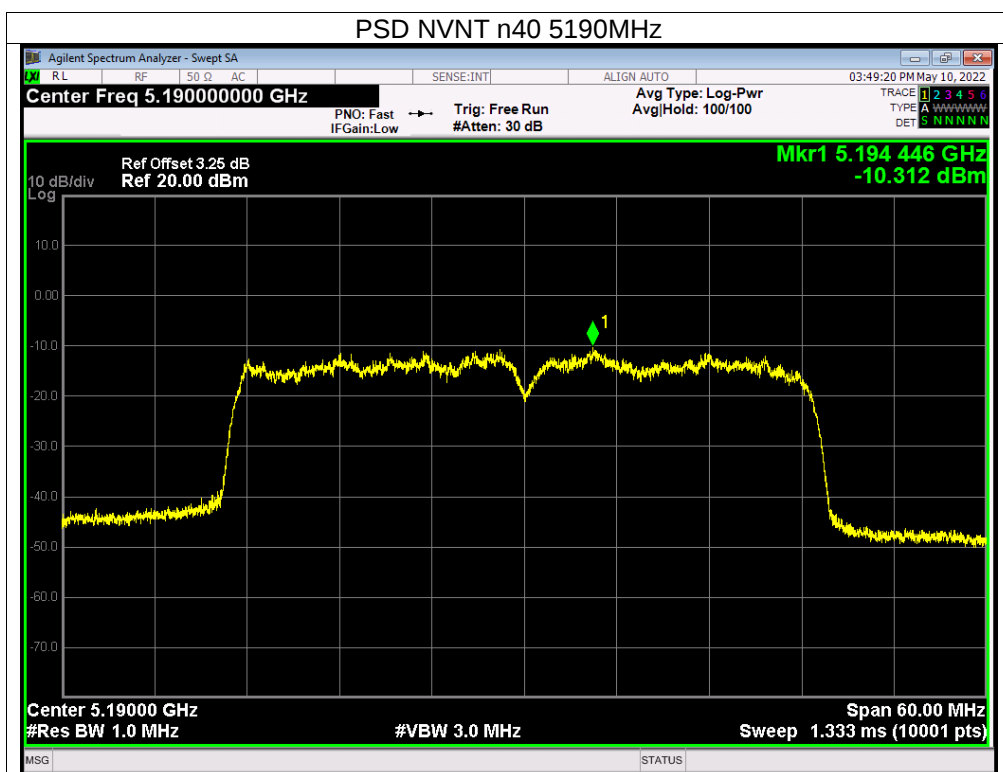


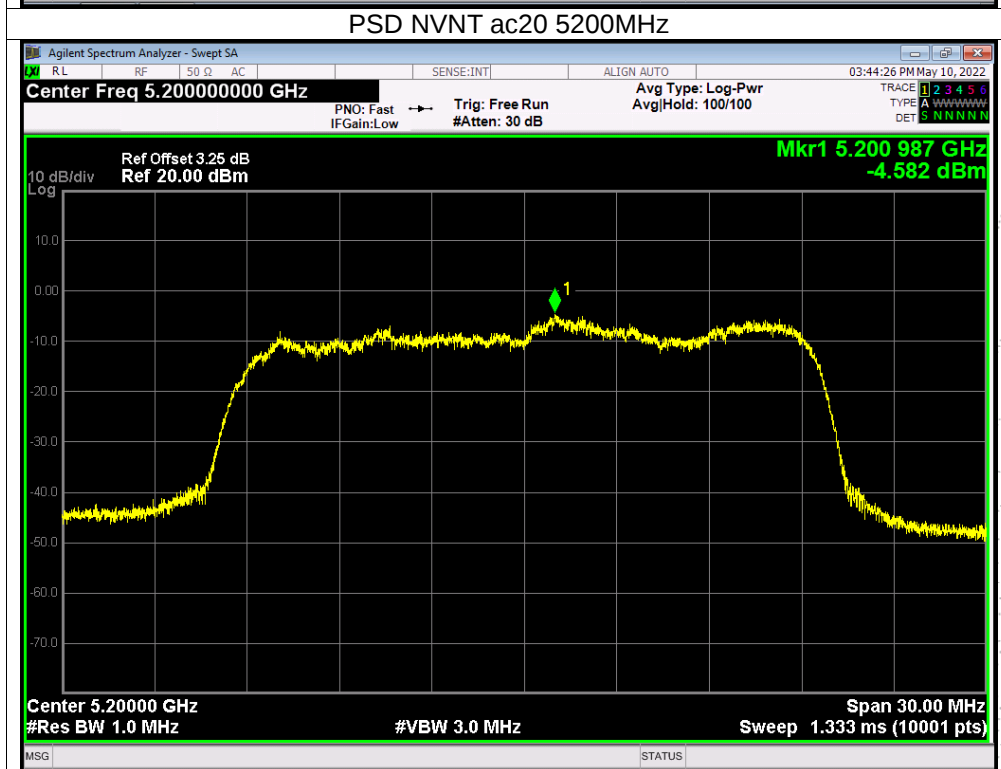
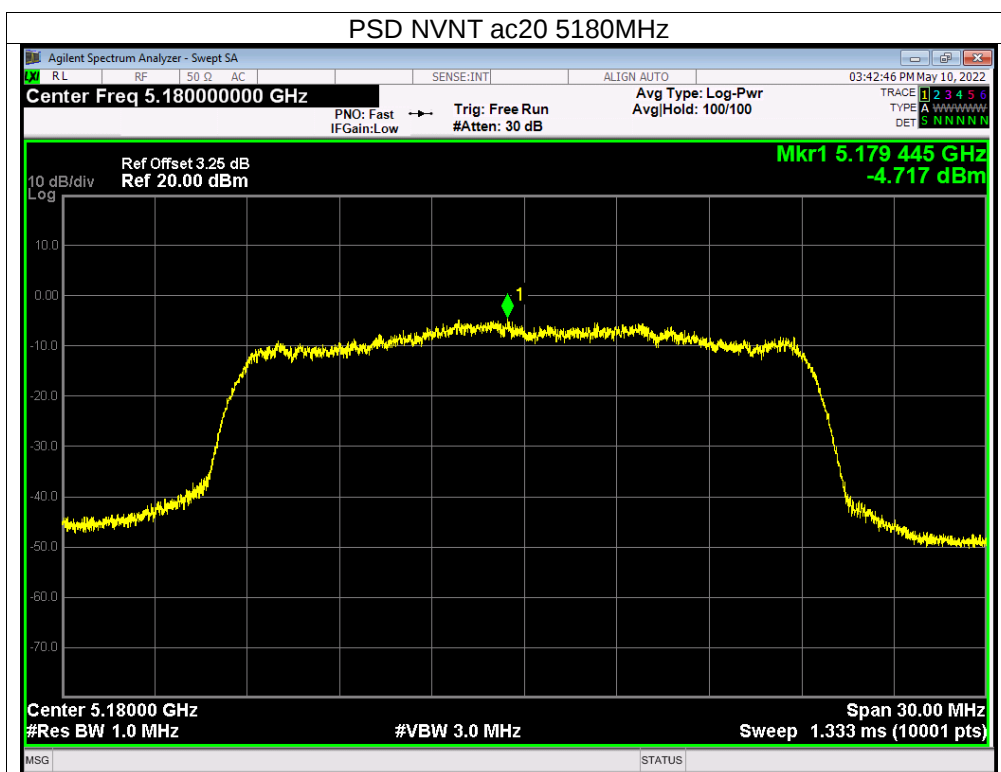


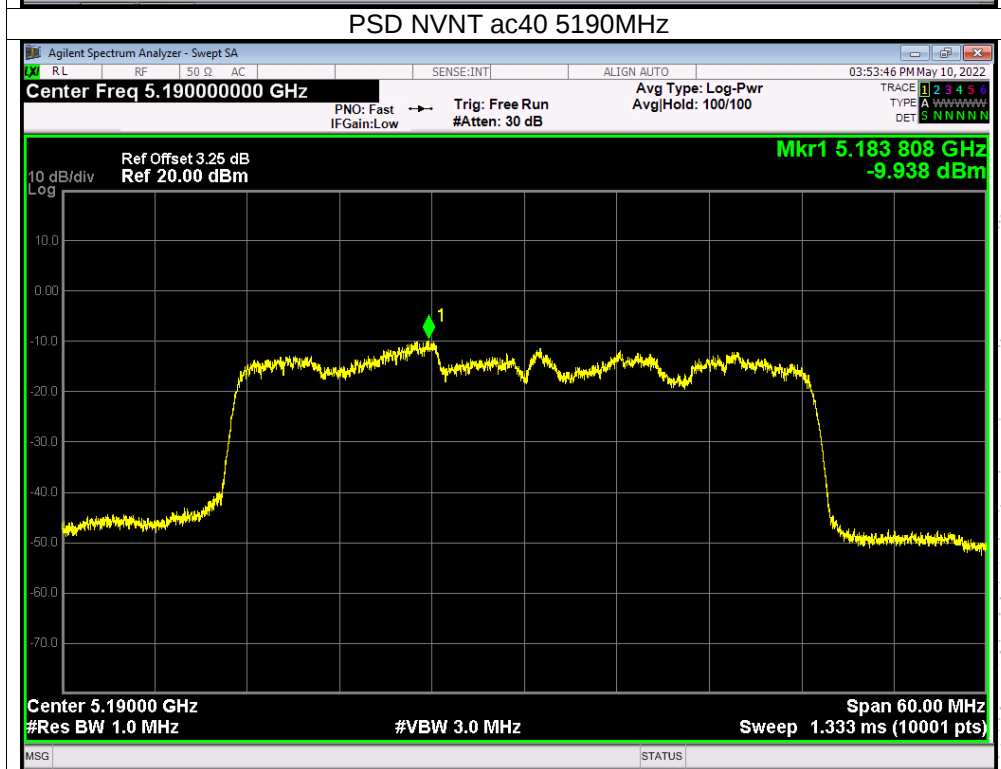
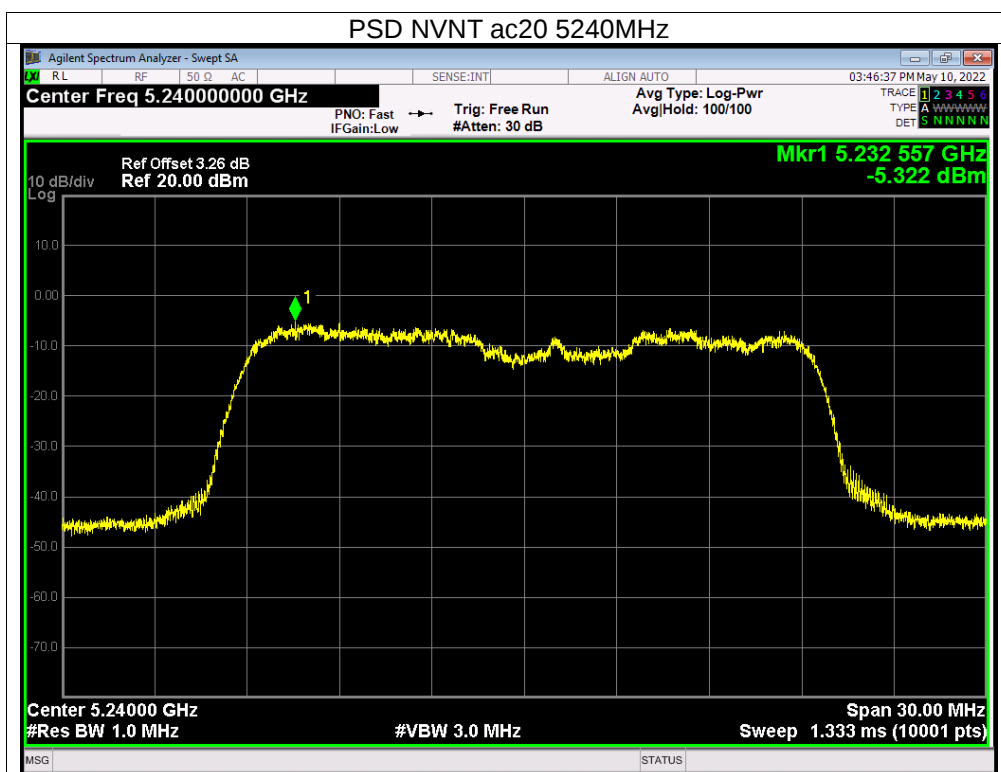


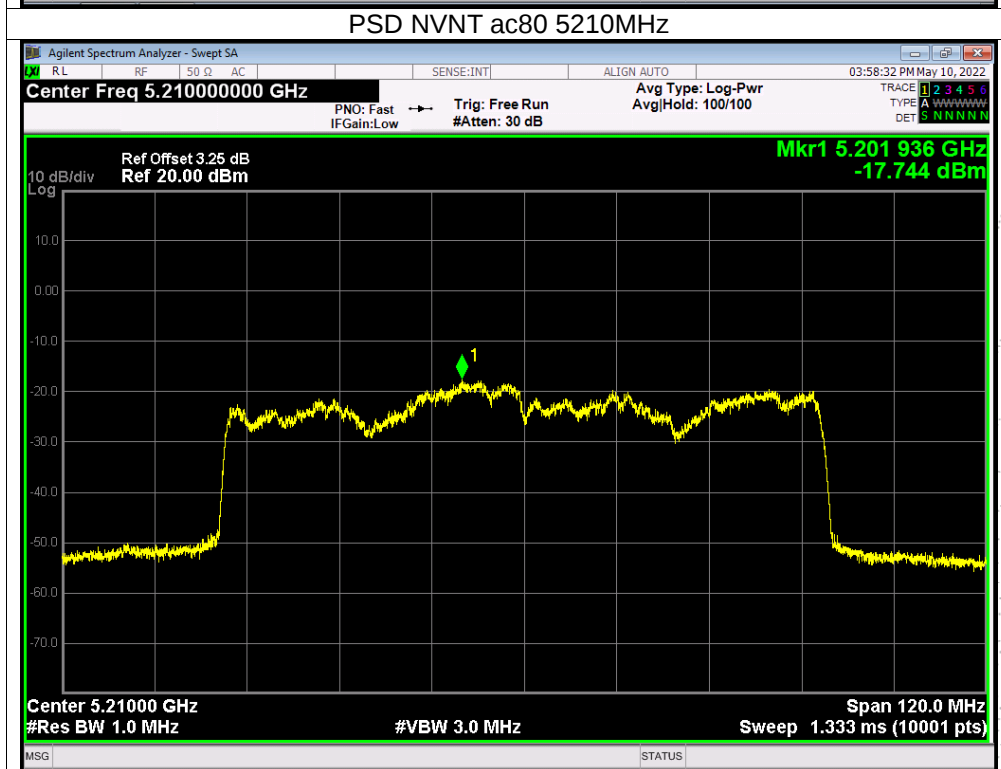
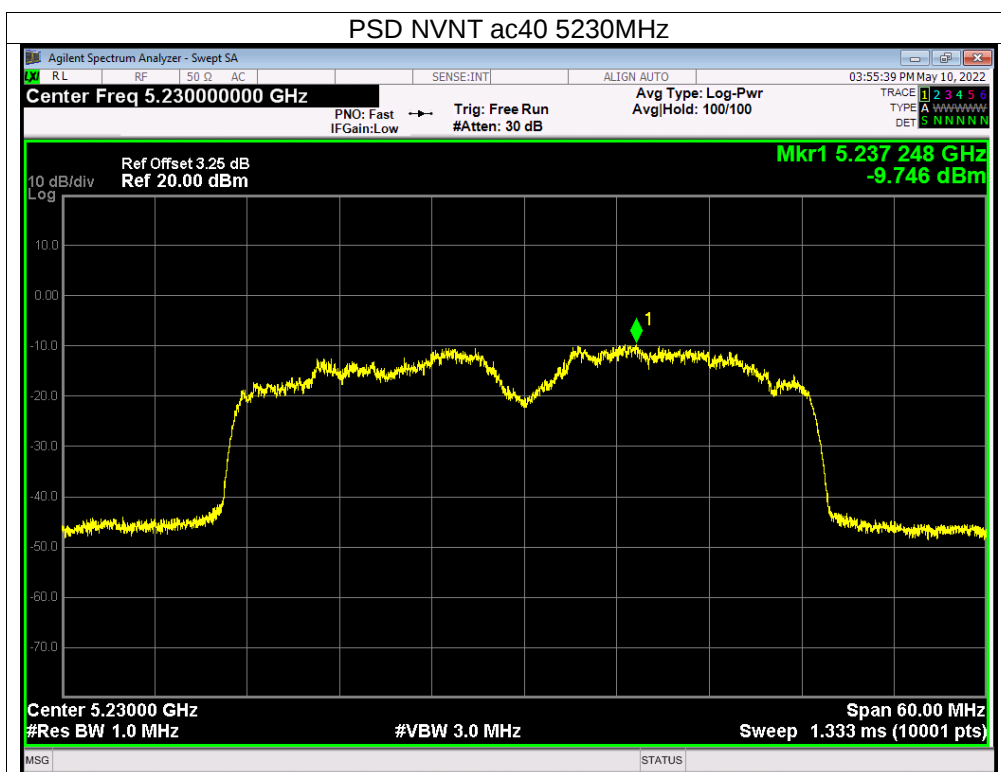



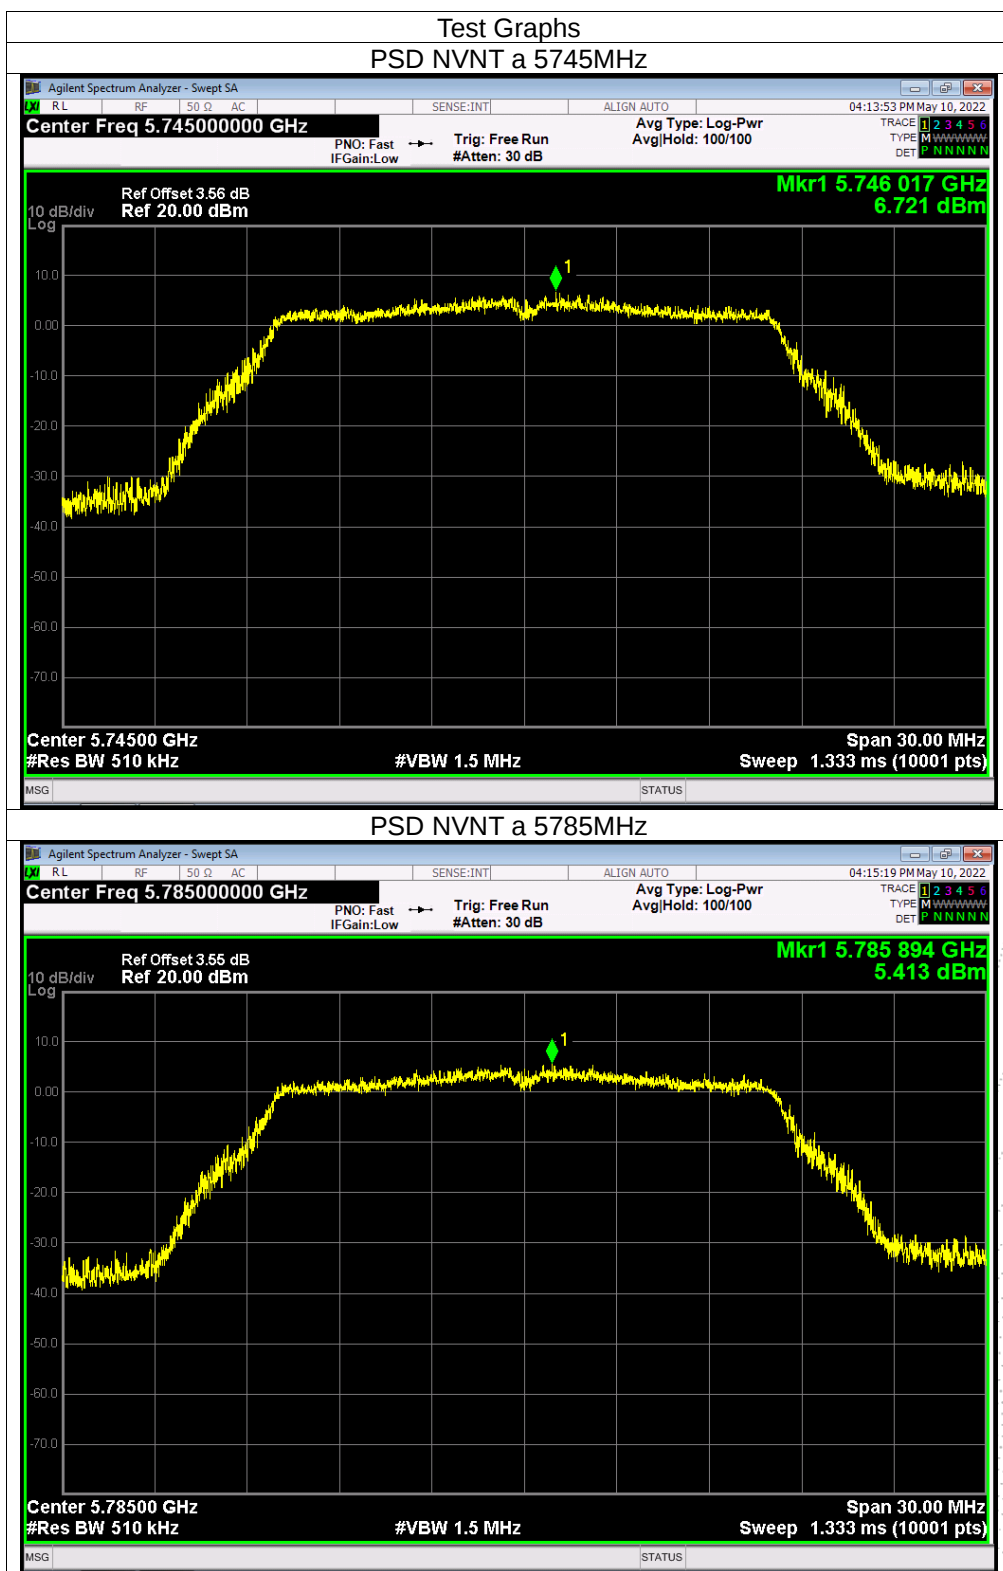


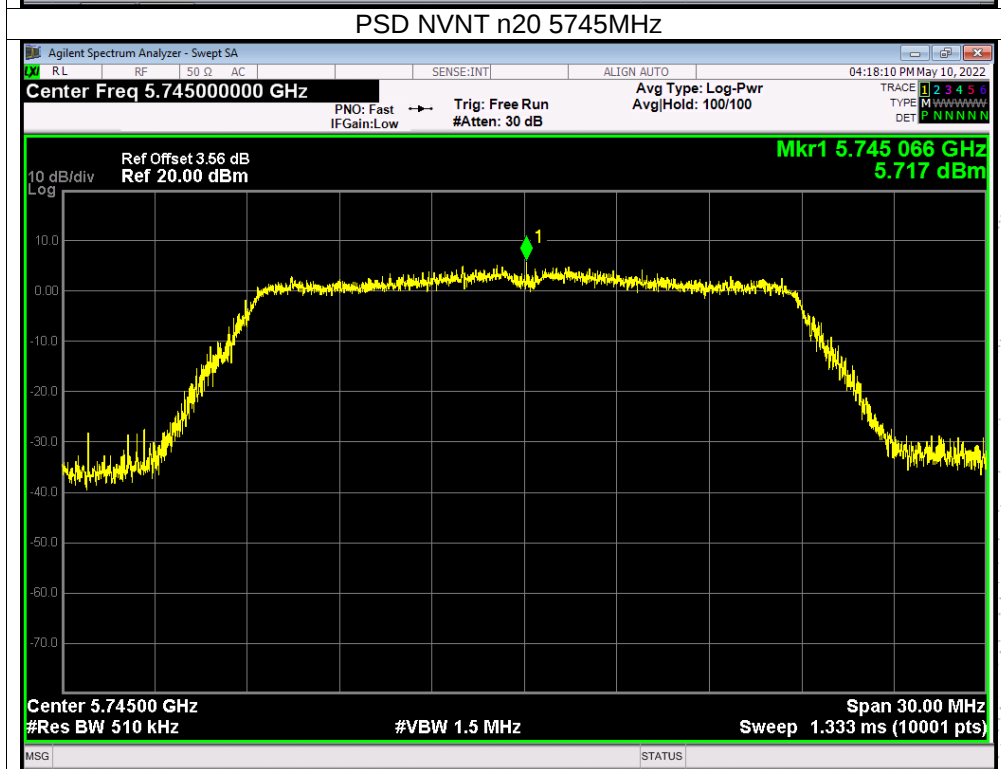
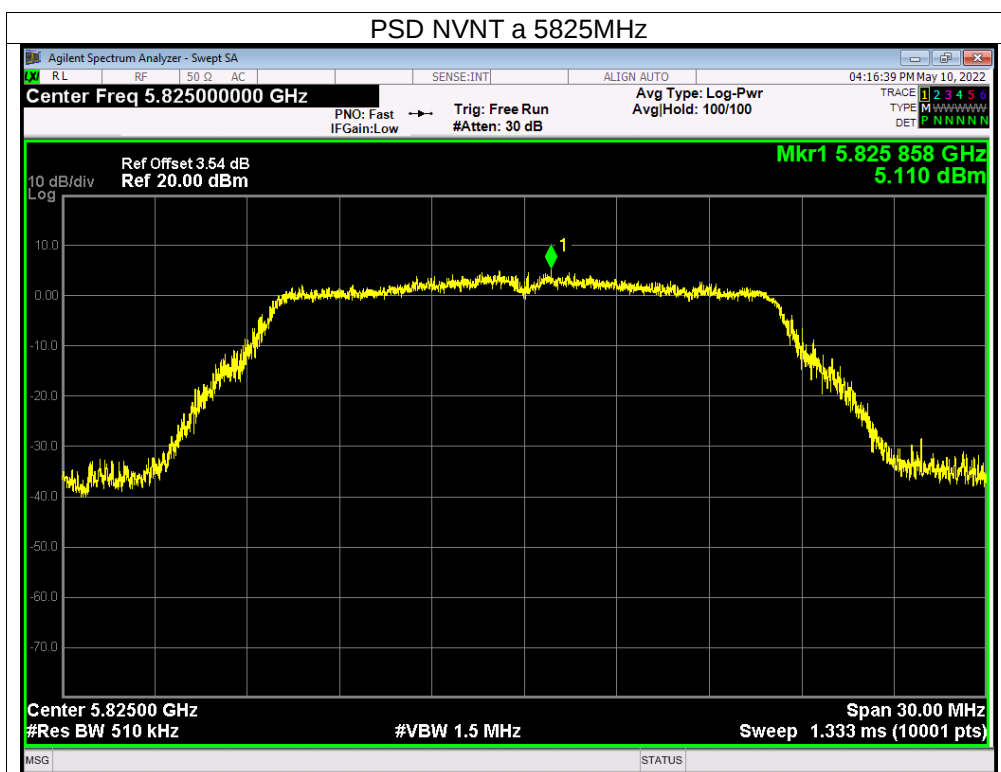


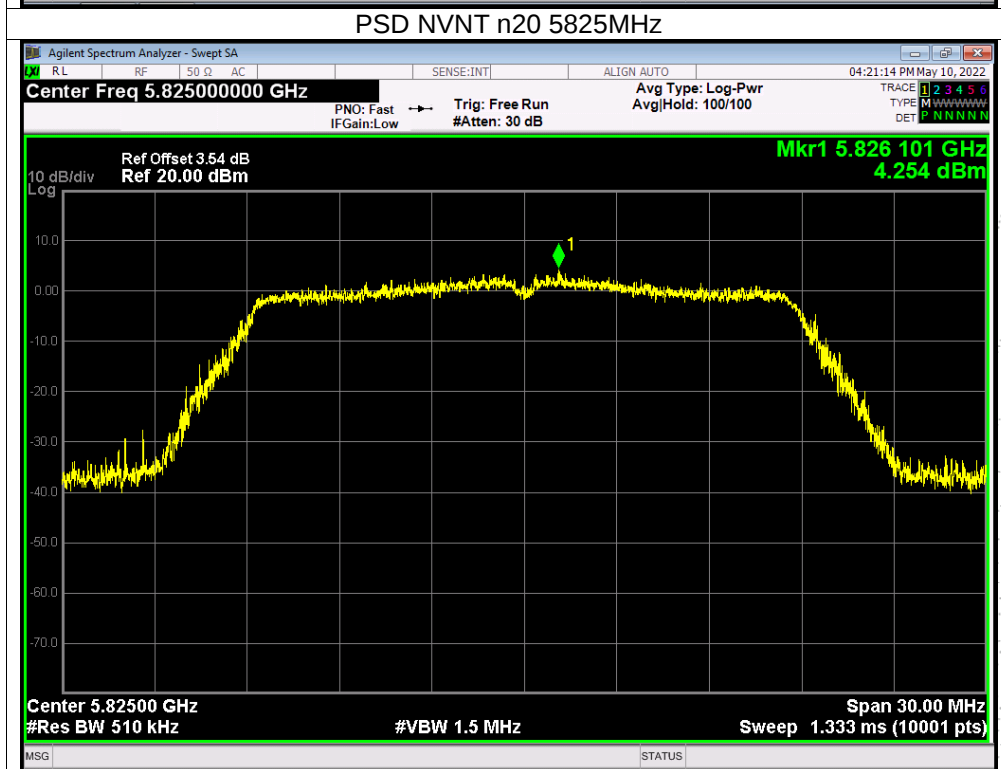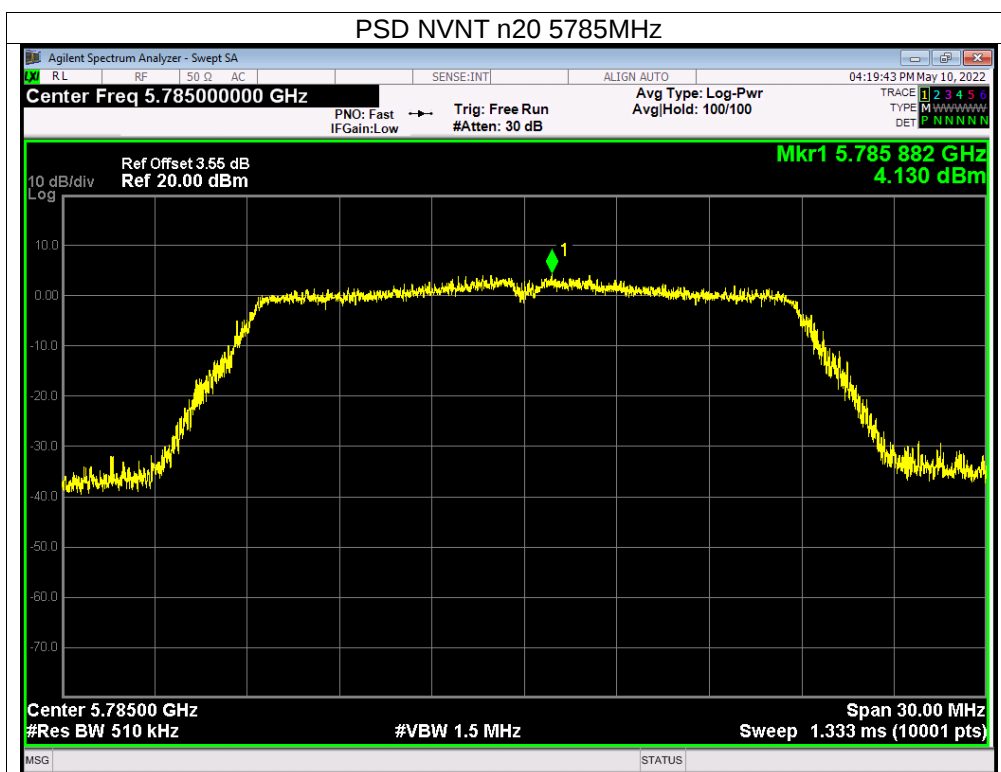

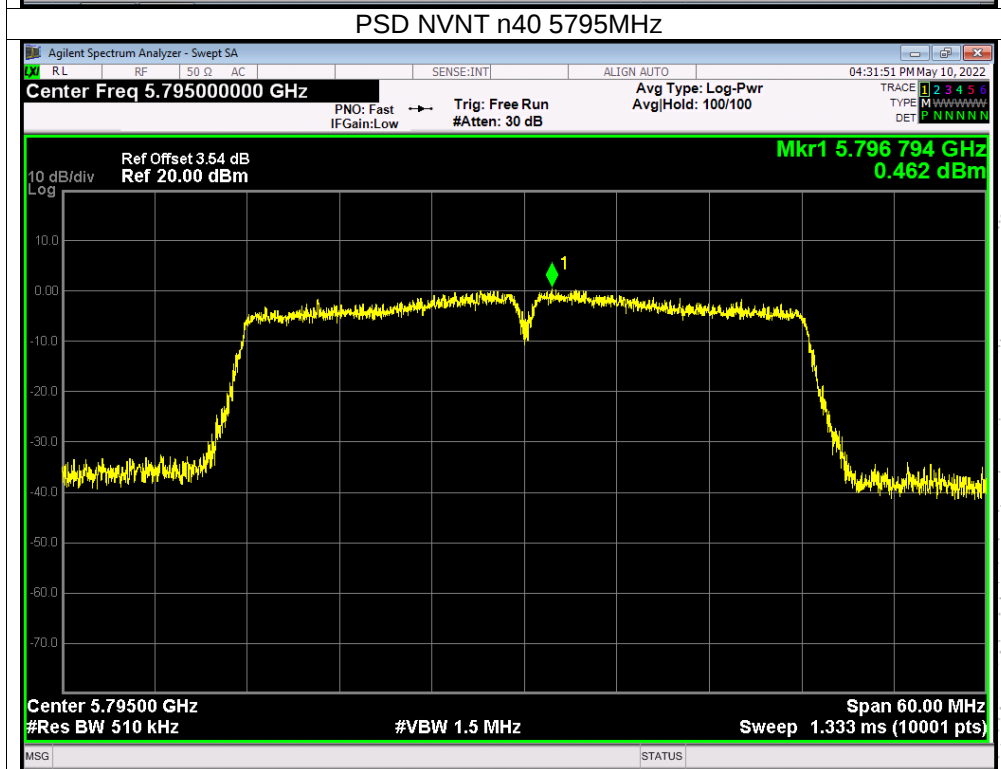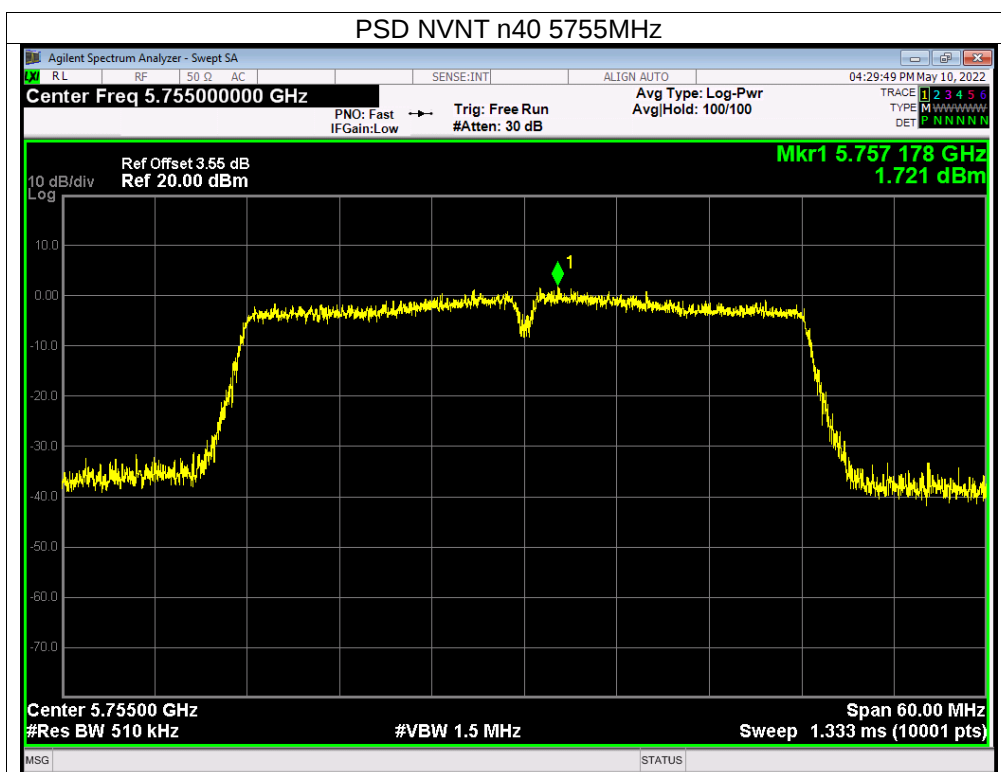

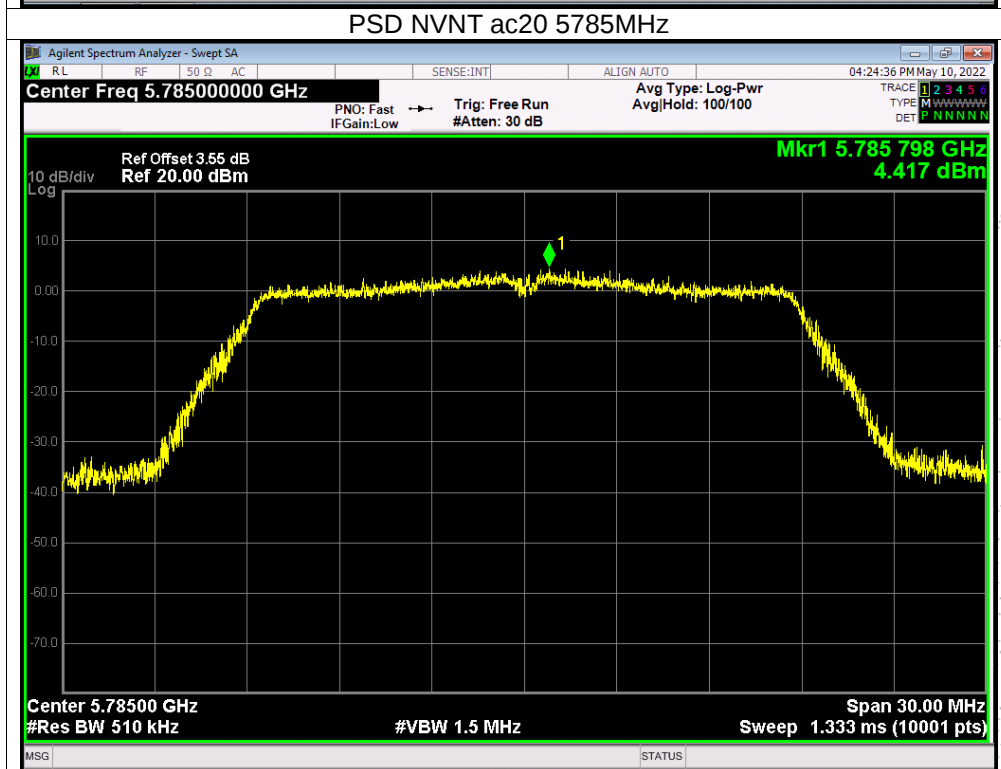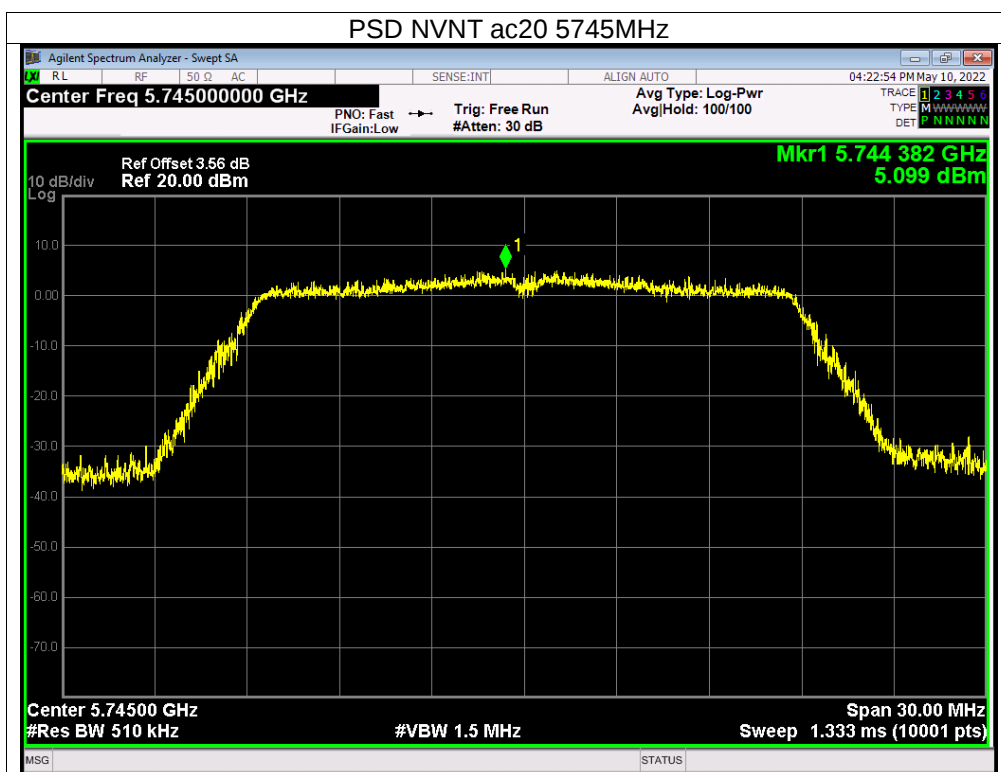


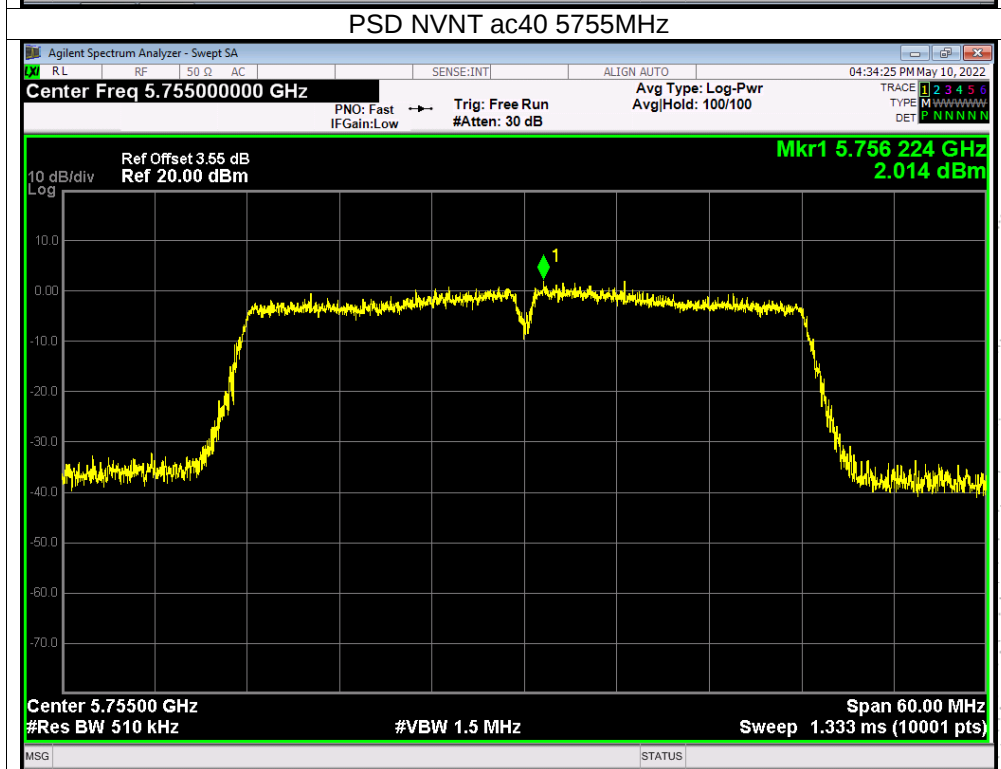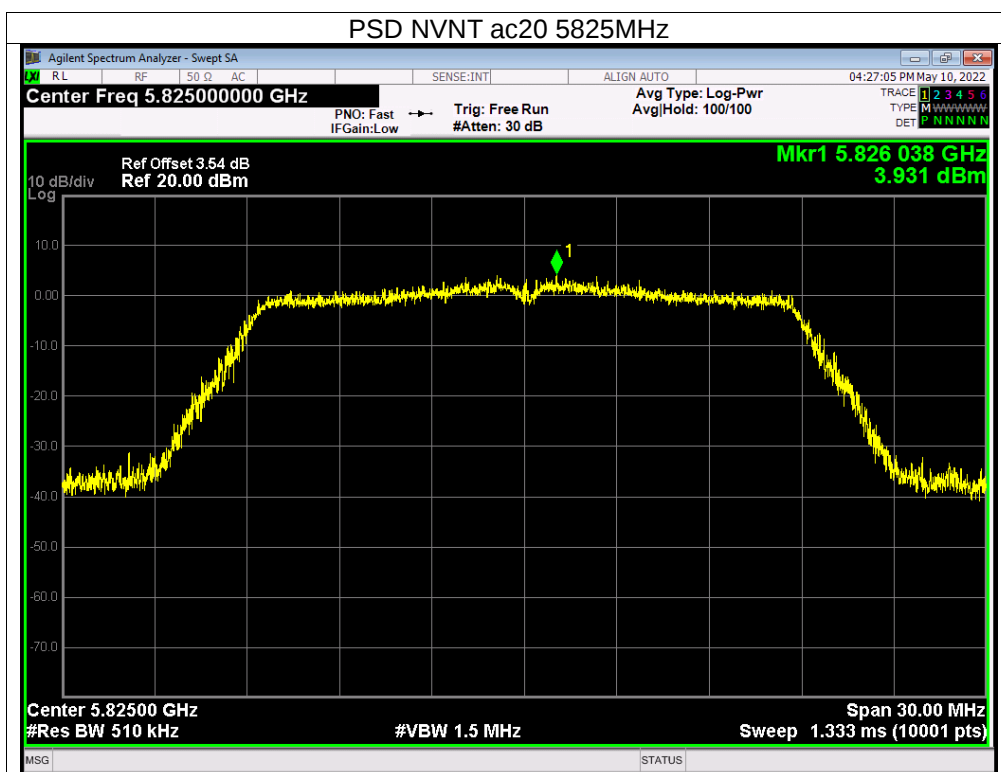

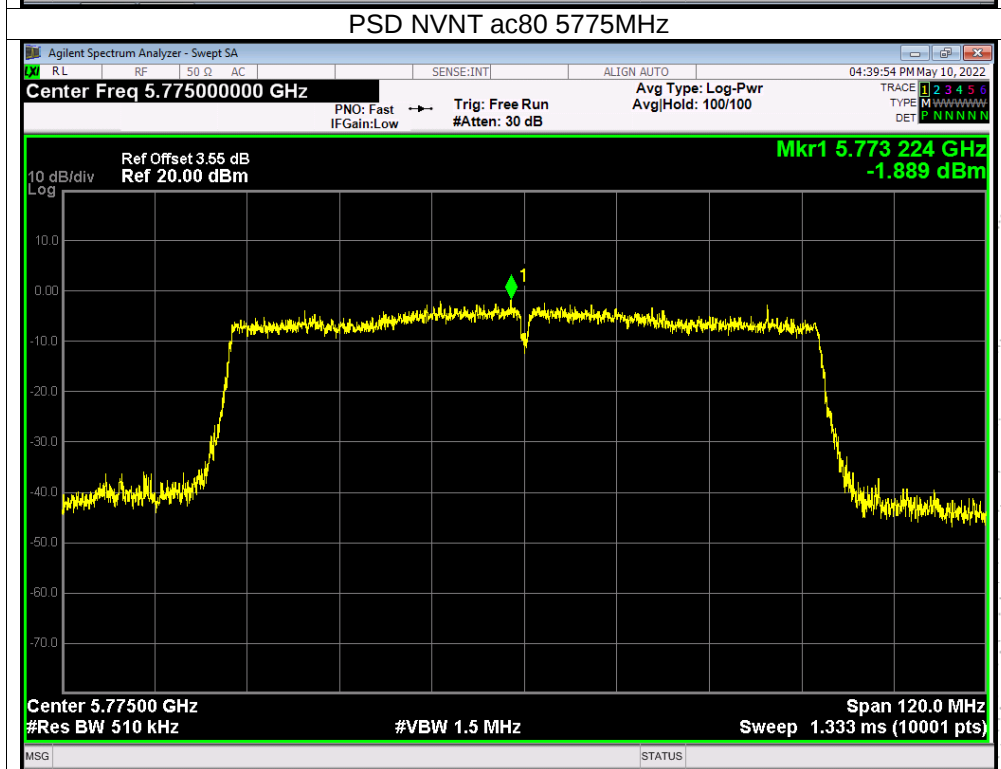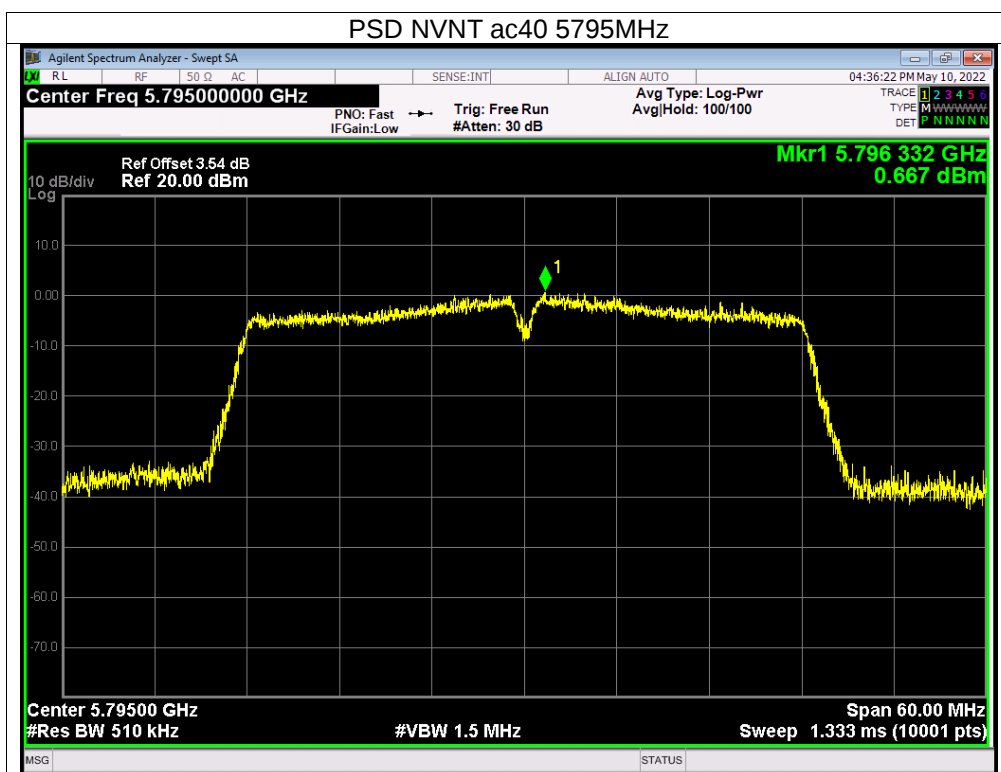

9. 26dB & 6dB & 99% Emission Bandwidth

9.1 Block Diagram Of Test Setup

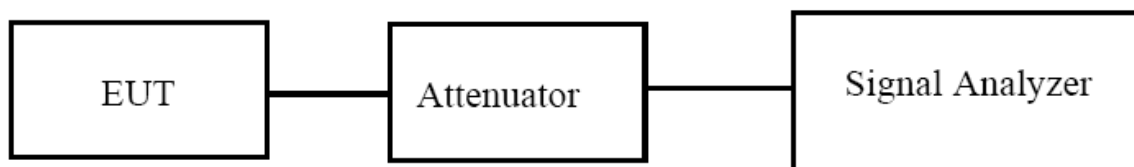

9.2 Limit

The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

9.3 Test procedure

a) Set RBW = approximately 1% of the emission bandwidth.

b) Set the VBW > RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.

2. Set span = 1.5 times to 5.0 times the OBW.

3. Set RBW = 1 % to 5 % of the OBW

4. Set VBW $\geq 3 \cdot$ RBW

5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

6. Use the 99 % power bandwidth function of the instrument (if available).

7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

9.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

9.5 Test Result

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 12V
Test Mode:	(5180-5240MHz)		

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	21.391	\	Pass
NVNT	a	5200	21.328	\	Pass
NVNT	a	5240	21.304	\	Pass
NVNT	n20	5180	21.591	\	Pass
NVNT	n20	5200	21.633	\	Pass
NVNT	n20	5240	21.492	\	Pass
NVNT	n40	5190	40.545	\	Pass
NVNT	n40	5230	40.511	\	Pass
NVNT	ac20	5180	21.518	\	Pass
NVNT	ac20	5200	21.482	\	Pass
NVNT	ac20	5240	21.713	\	Pass
NVNT	ac40	5190	40.497	\	Pass
NVNT	ac40	5230	40.4	\	Pass
NVNT	ac80	5210	81.16	\	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.595
NVNT	a	5200	16.575
NVNT	a	5240	16.576
NVNT	n20	5180	17.714
NVNT	n20	5200	17.778
NVNT	n20	5240	17.726
NVNT	n40	5190	36.183
NVNT	n40	5230	36.213
NVNT	ac20	5180	17.73
NVNT	ac20	5200	17.728
NVNT	ac20	5240	17.737
NVNT	ac40	5190	36.158
NVNT	ac40	5230	36.205
NVNT	ac80	5210	75.558



Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	DC 12V
Test Mode:	(5745-5825MHz)		



Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.314	0.5	Pass
NVNT	a	5785	16.268	0.5	Pass
NVNT	a	5825	16.294	0.5	Pass
NVNT	n20	5745	17.533	0.5	Pass
NVNT	n20	5785	17.529	0.5	Pass
NVNT	n20	5825	16.402	0.5	Pass
NVNT	n40	5755	35.469	0.5	Pass
NVNT	n40	5795	35.13	0.5	Pass
NVNT	ac20	5745	17.57	0.5	Pass
NVNT	ac20	5785	16.654	0.5	Pass
NVNT	ac20	5825	17.527	0.5	Pass
NVNT	ac40	5755	35.355	0.5	Pass
NVNT	ac40	5795	35.09	0.5	Pass
NVNT	ac80	5775	75.174	0.5	Pass



Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5745	16.595
NVNT	a	5785	16.598
NVNT	a	5825	16.526
NVNT	n20	5745	17.759
NVNT	n20	5785	17.7
NVNT	n20	5825	17.696
NVNT	n40	5755	36.14
NVNT	n40	5795	36.066
NVNT	ac20	5745	17.78
NVNT	ac20	5785	17.713
NVNT	ac20	5825	17.7
NVNT	ac40	5755	36.16
NVNT	ac40	5795	36.105
NVNT	ac80	5775	75.568





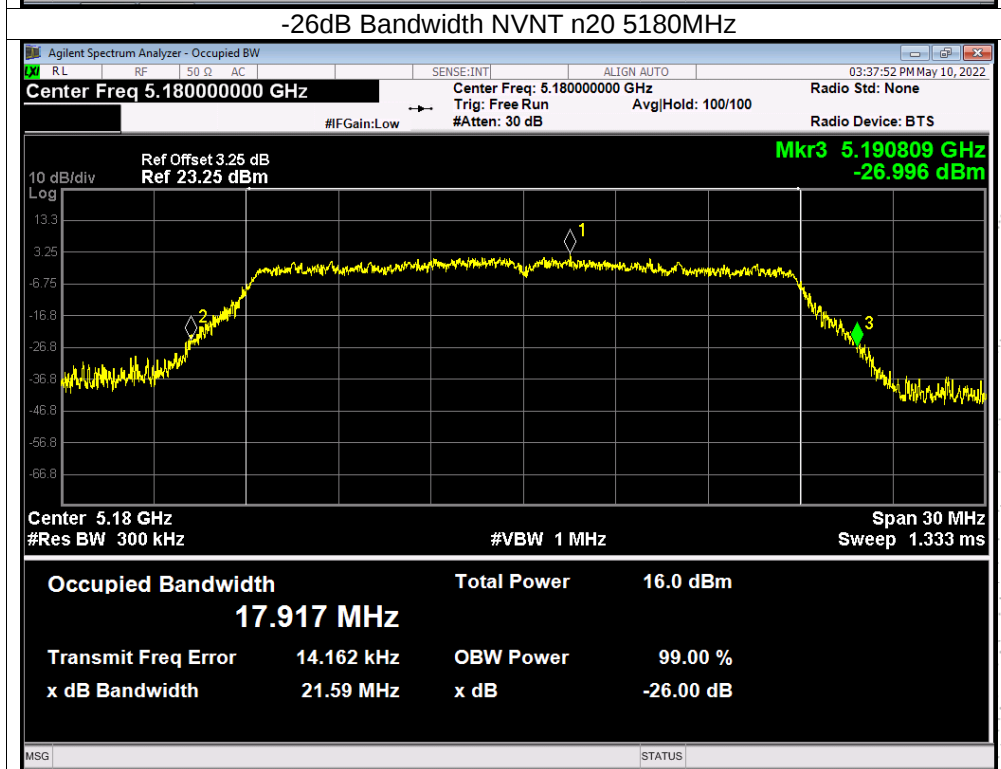
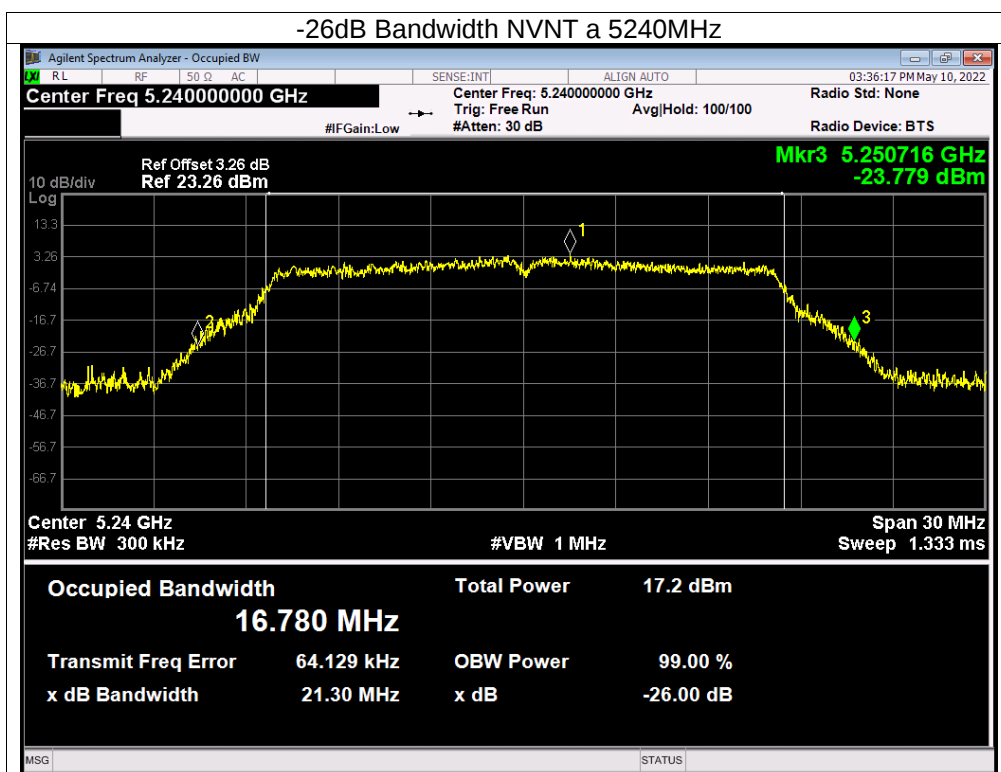


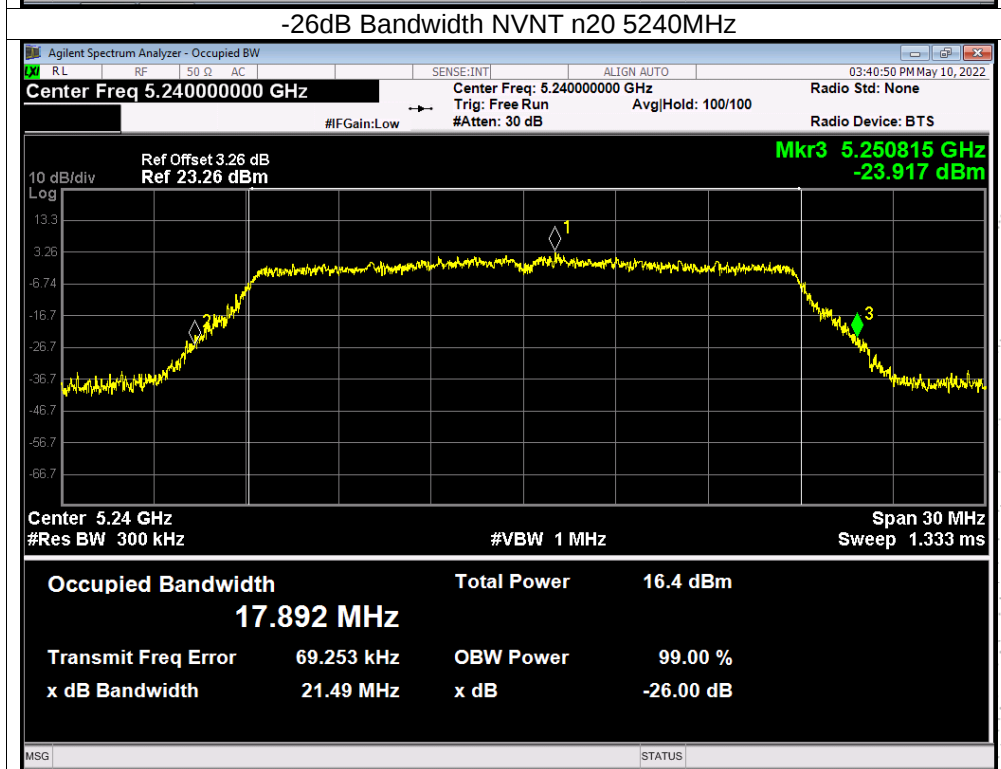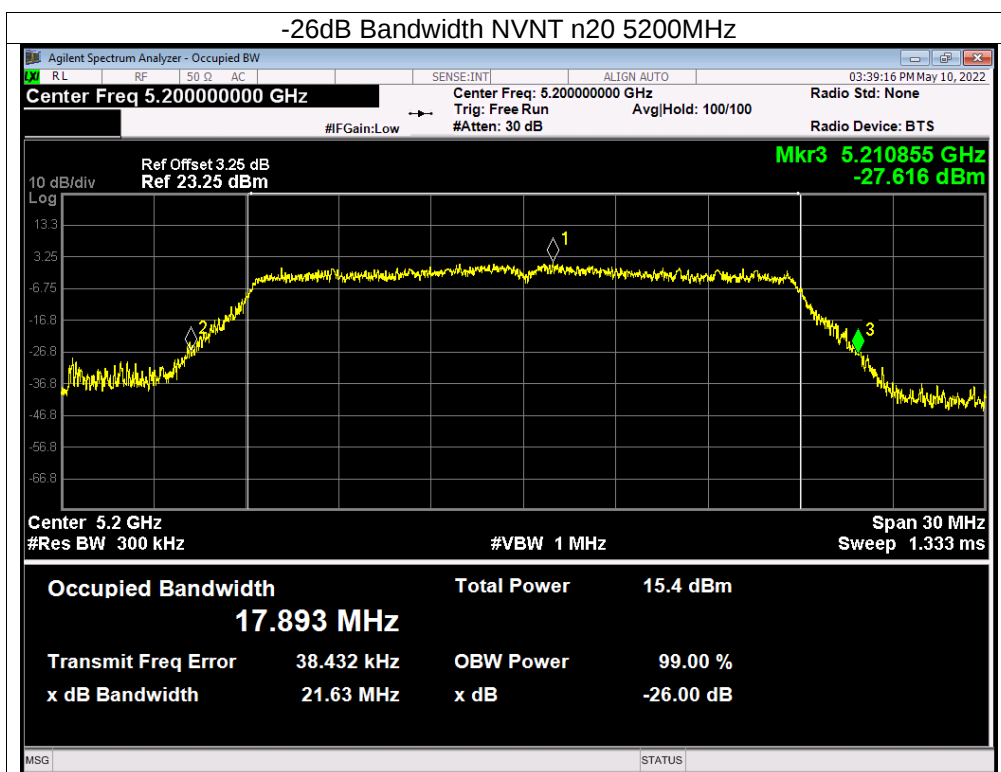

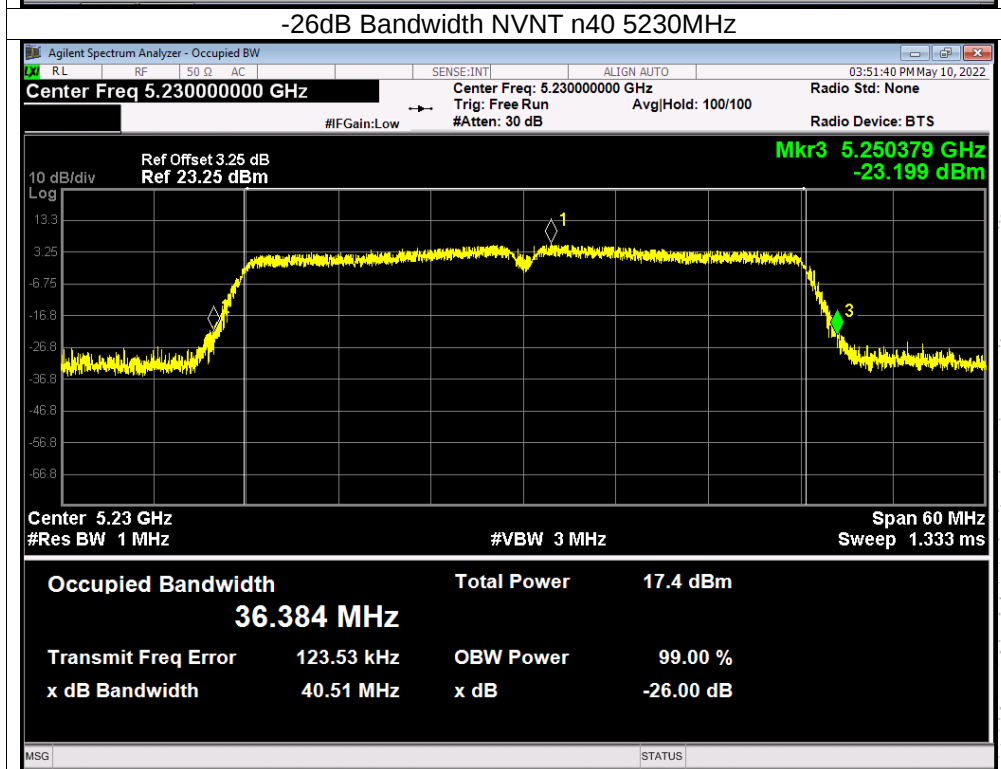
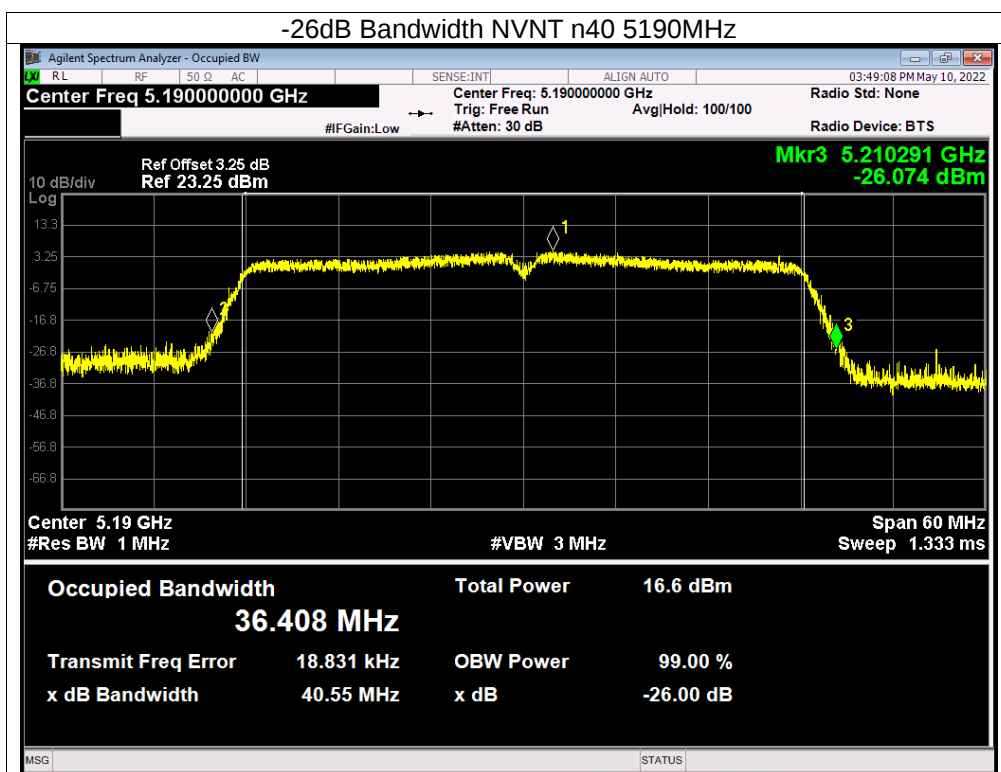


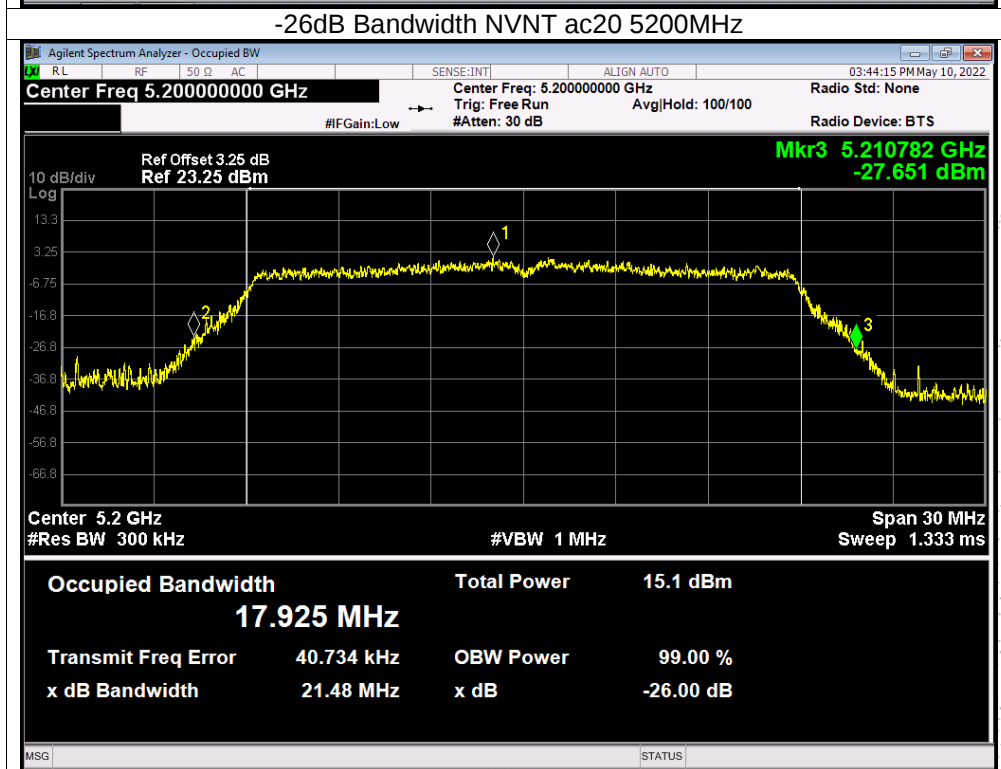
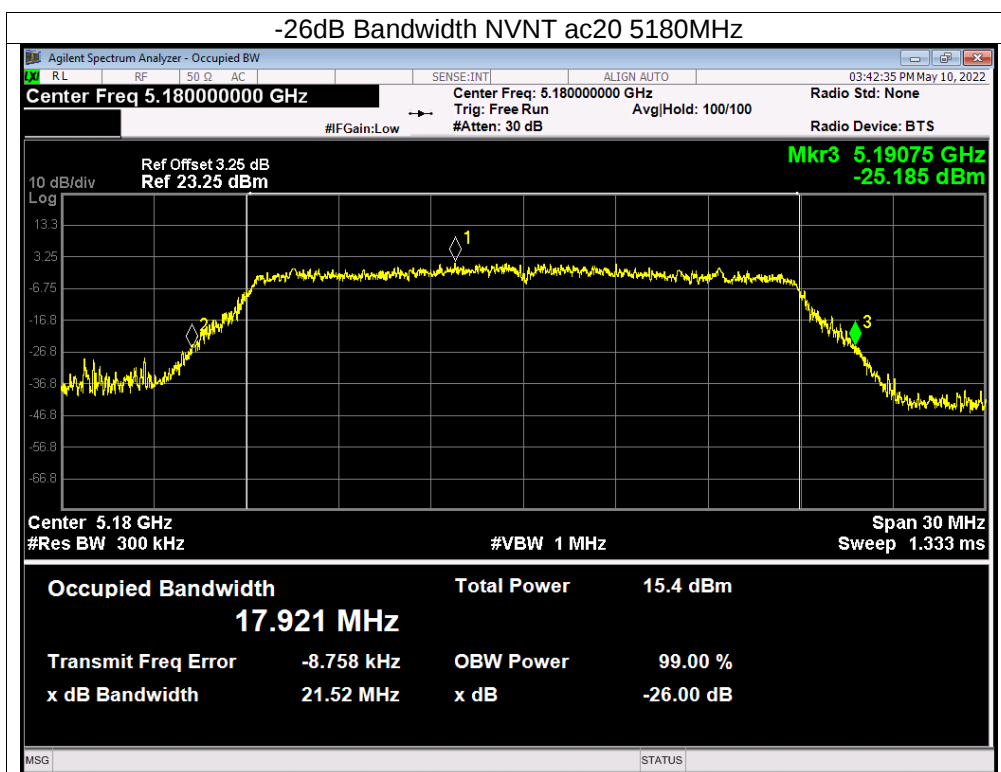


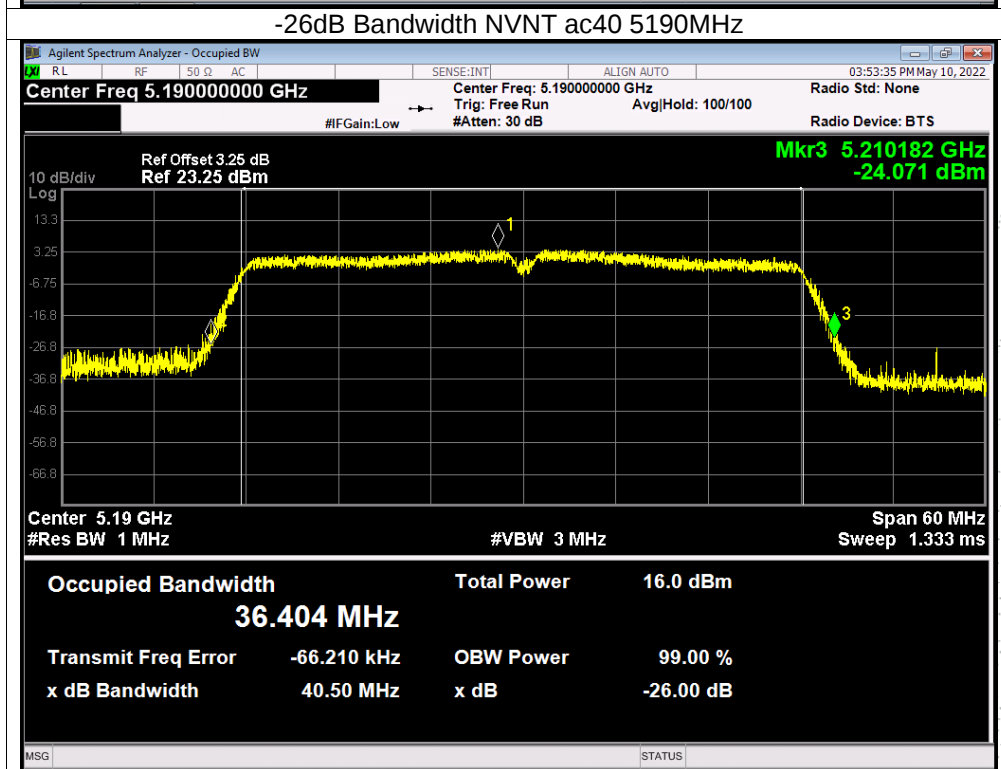
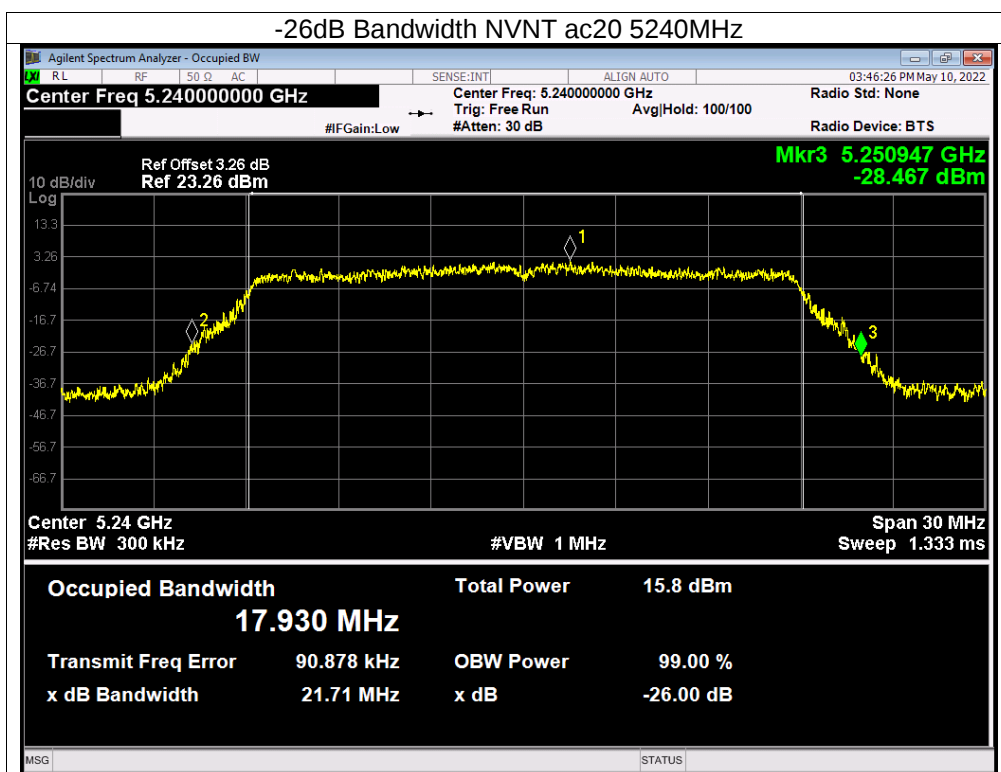


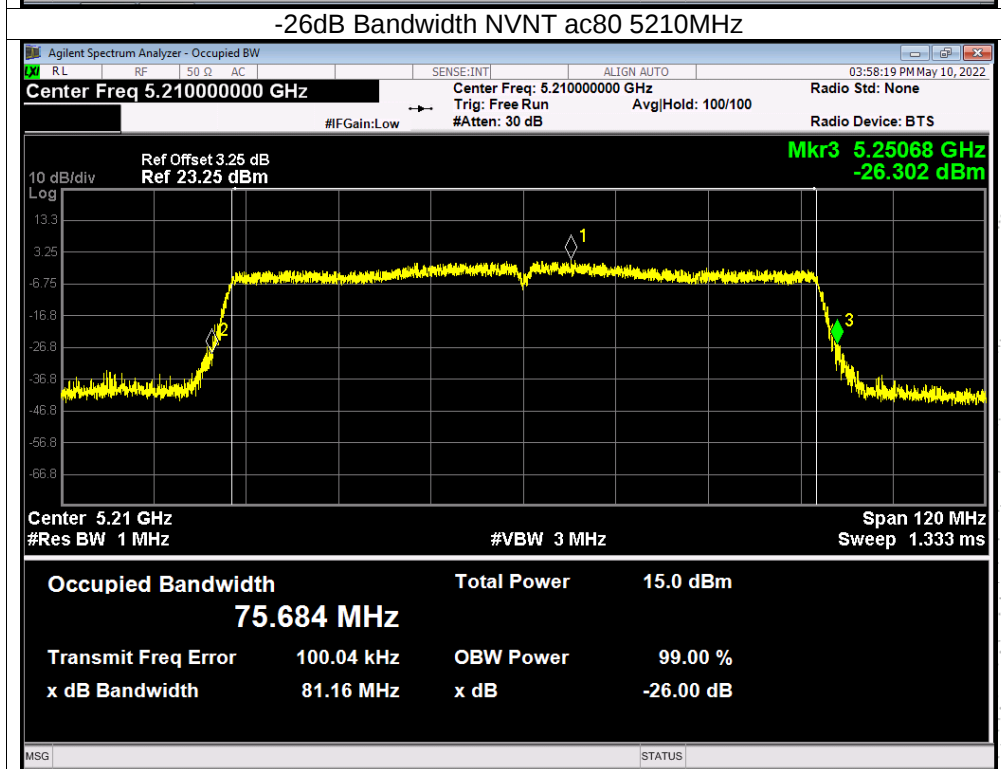
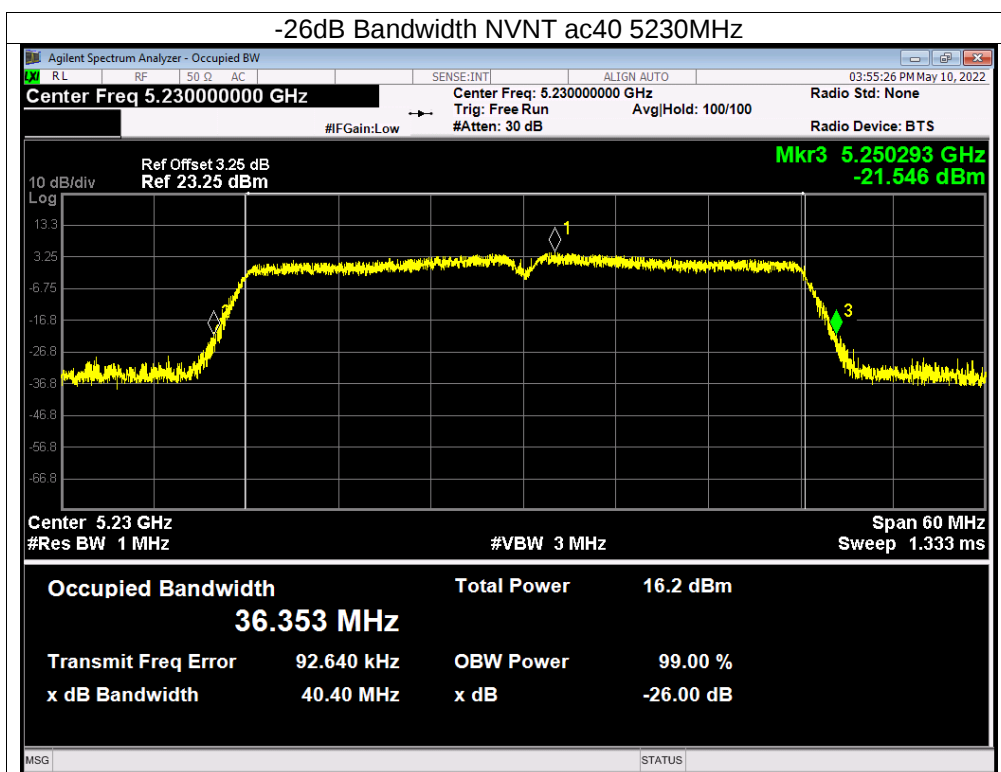






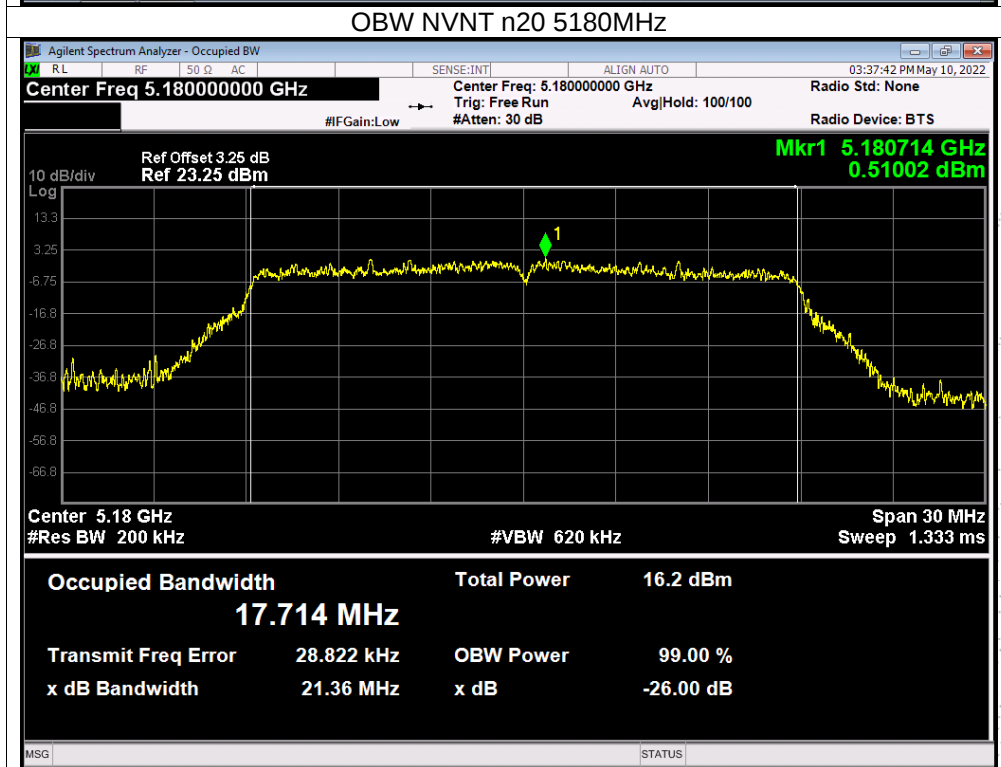
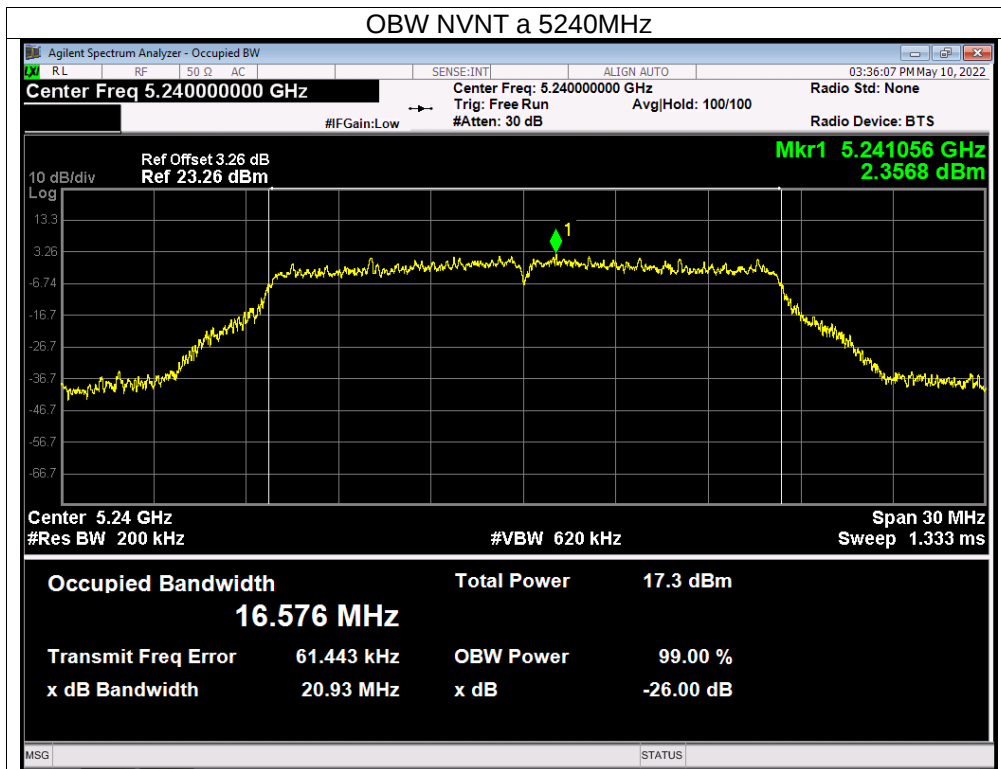


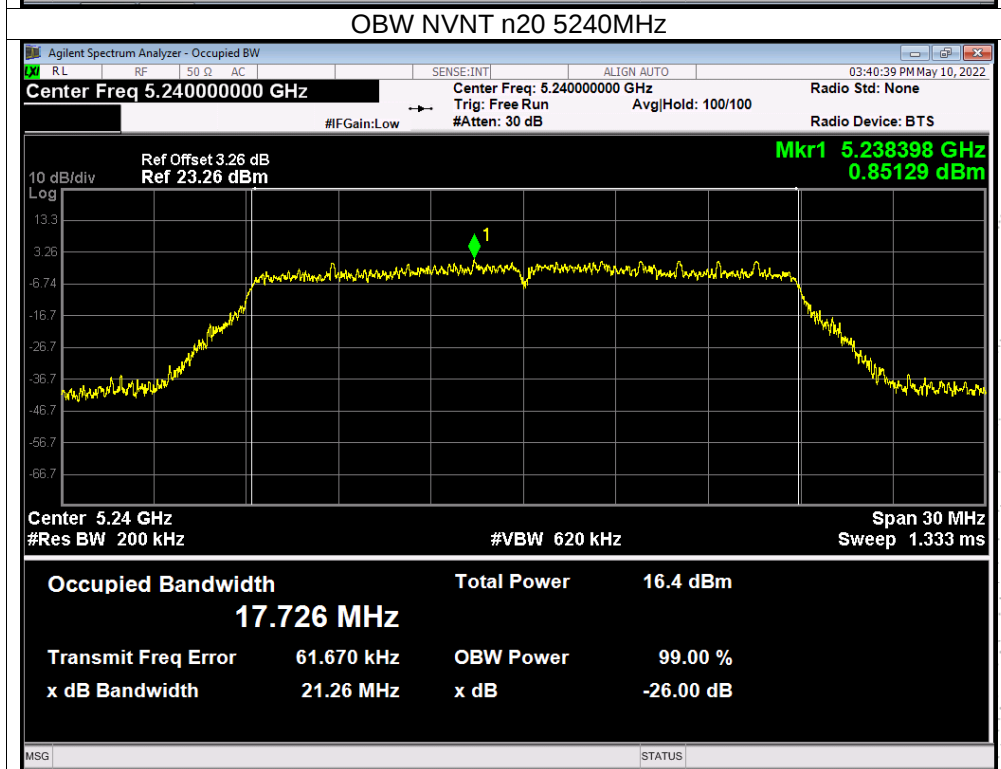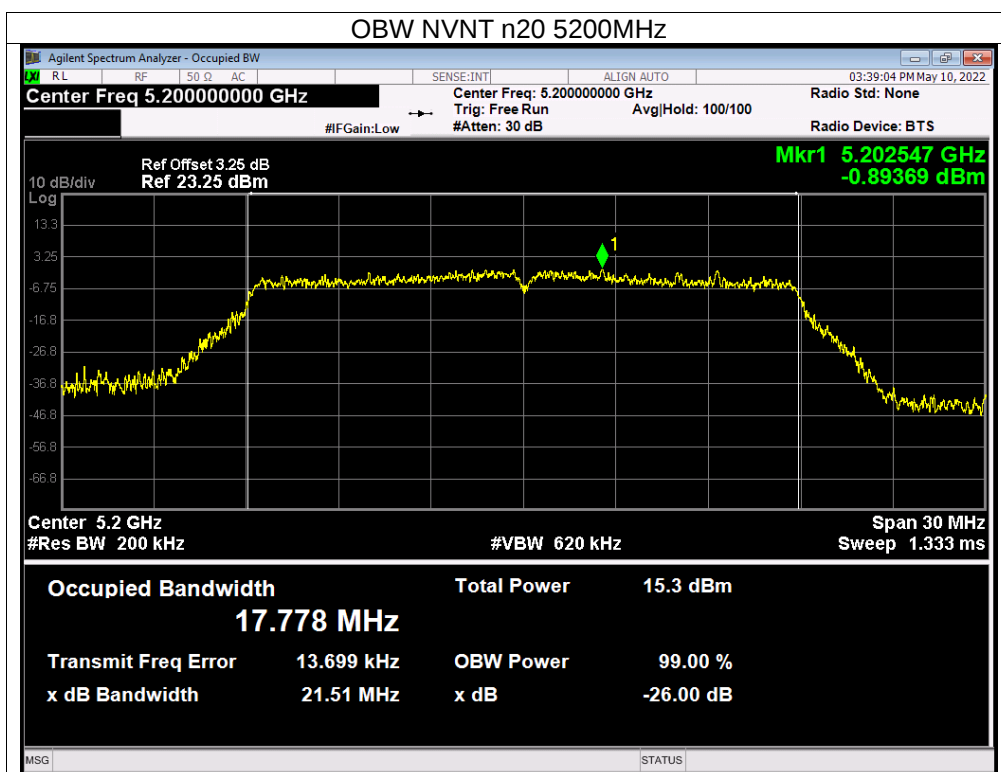


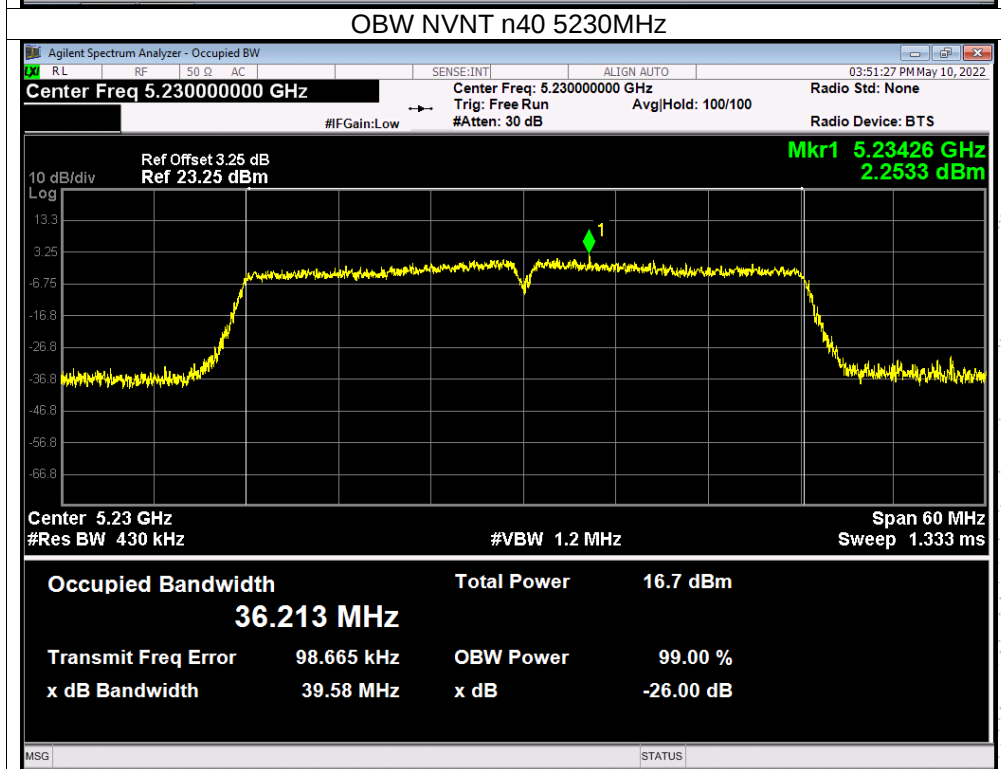
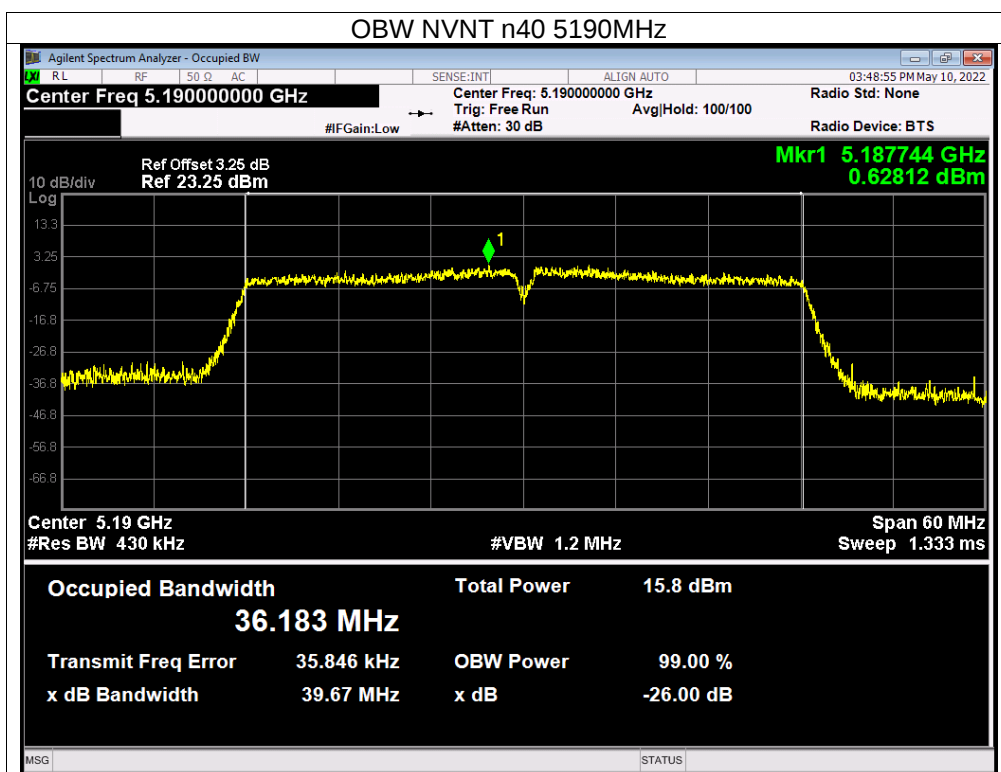


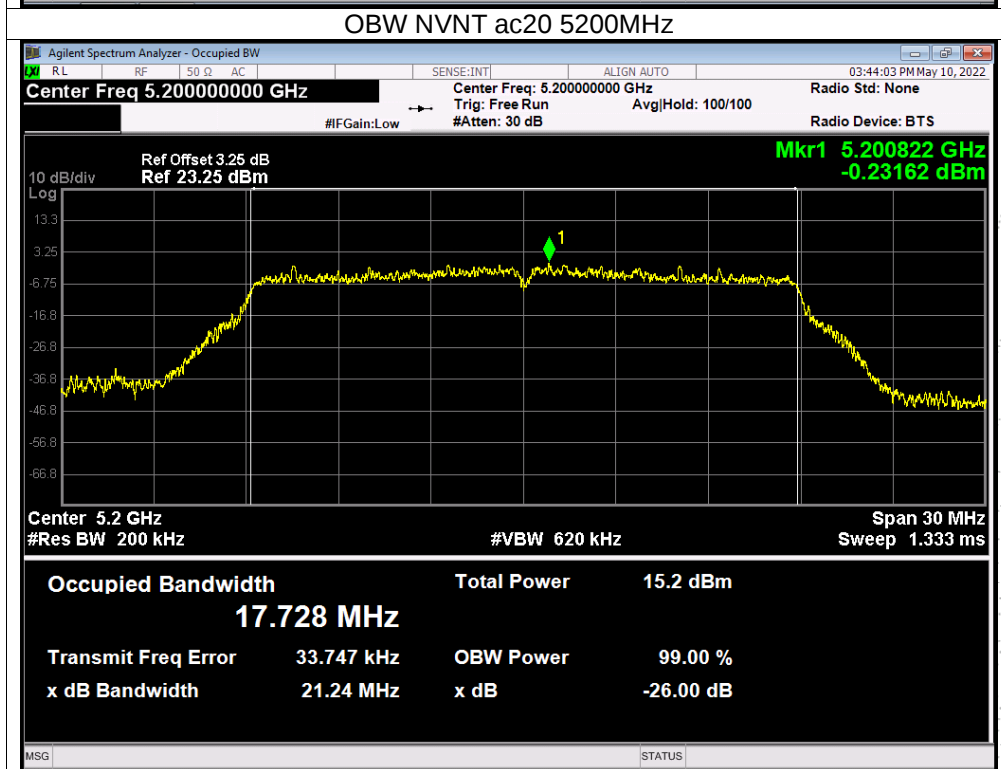
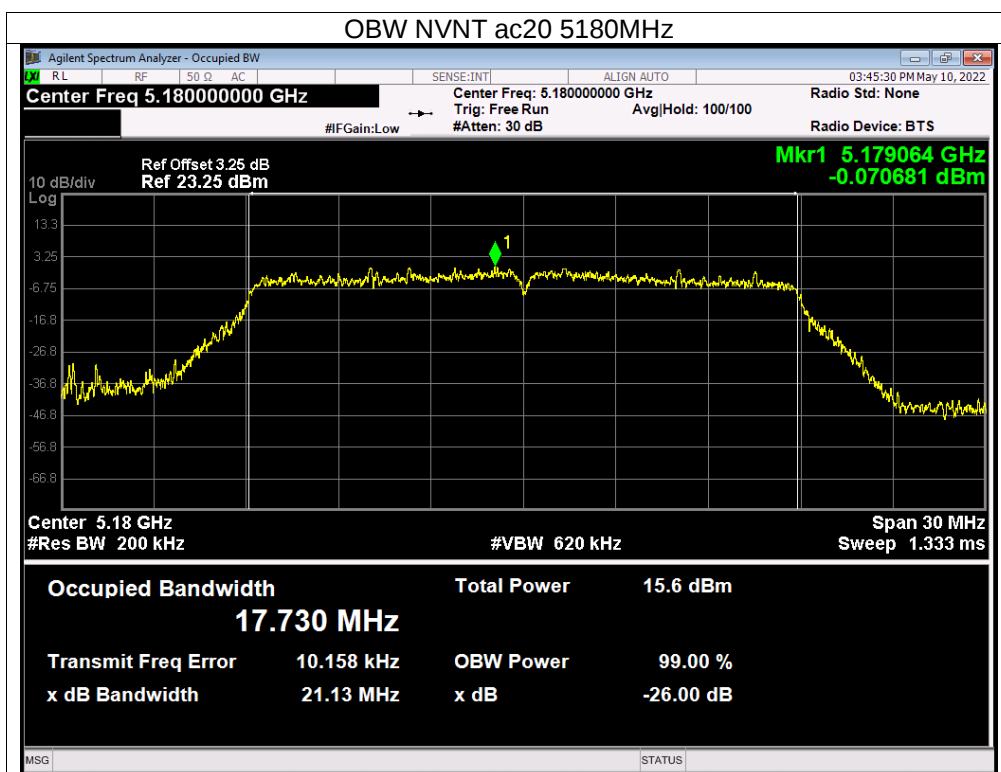


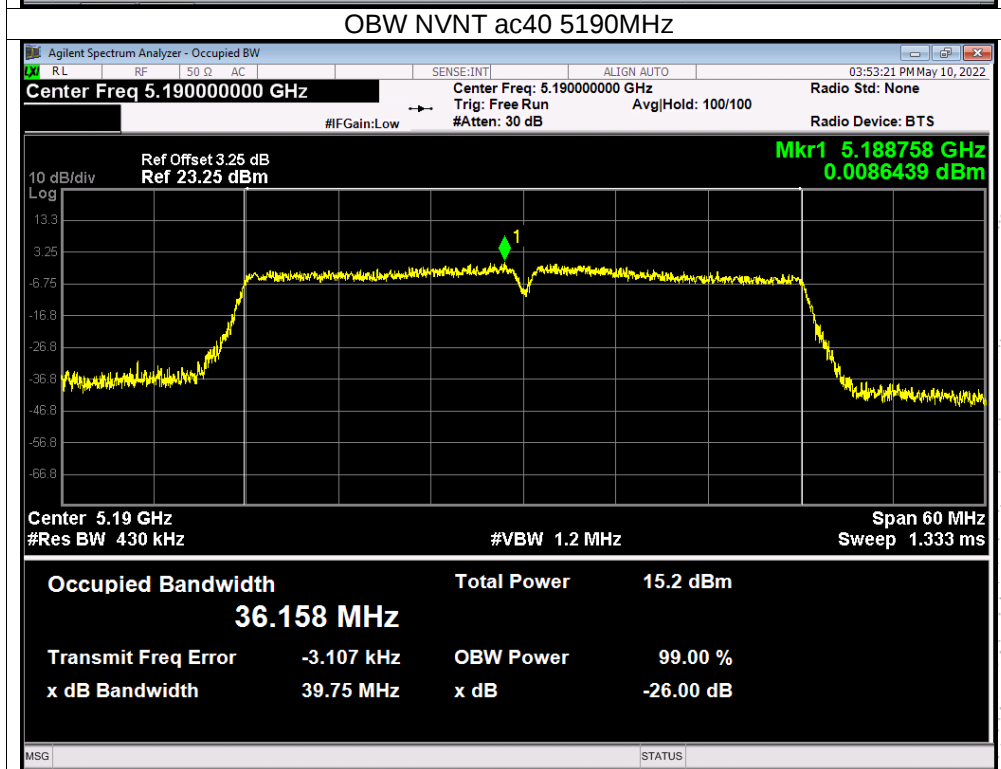
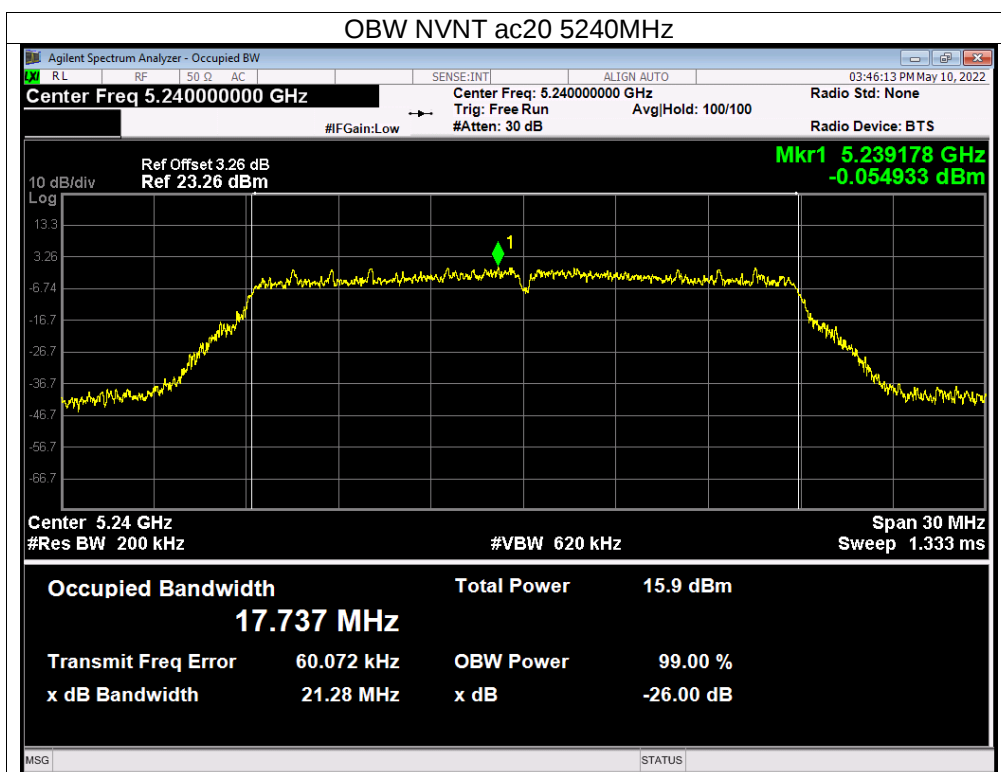


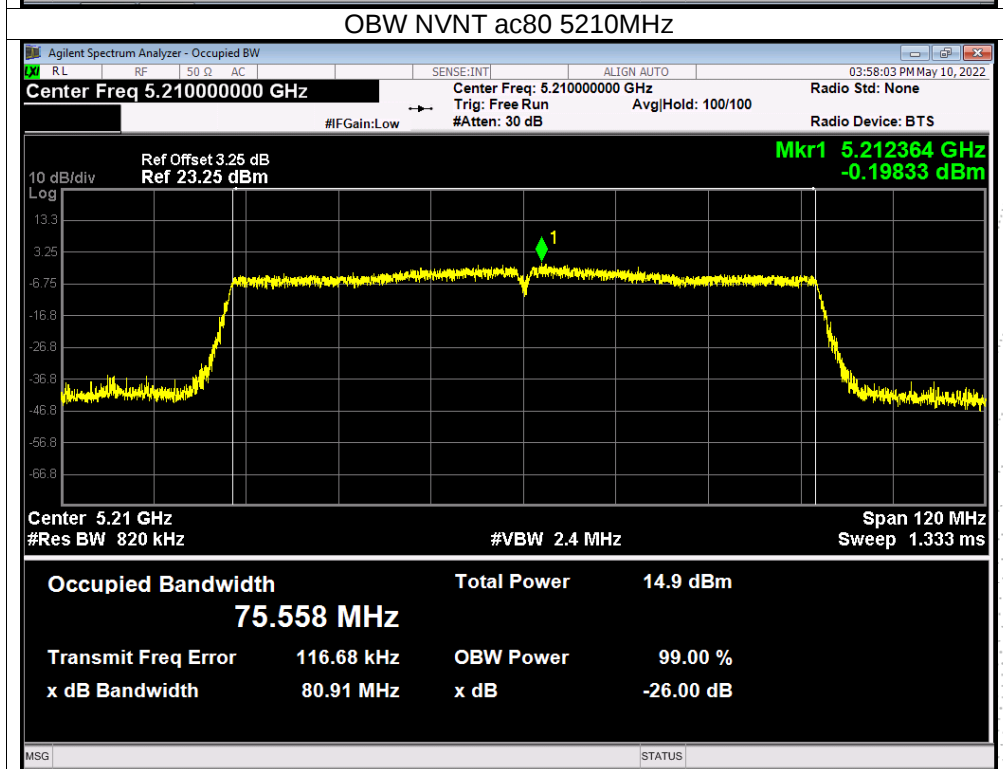
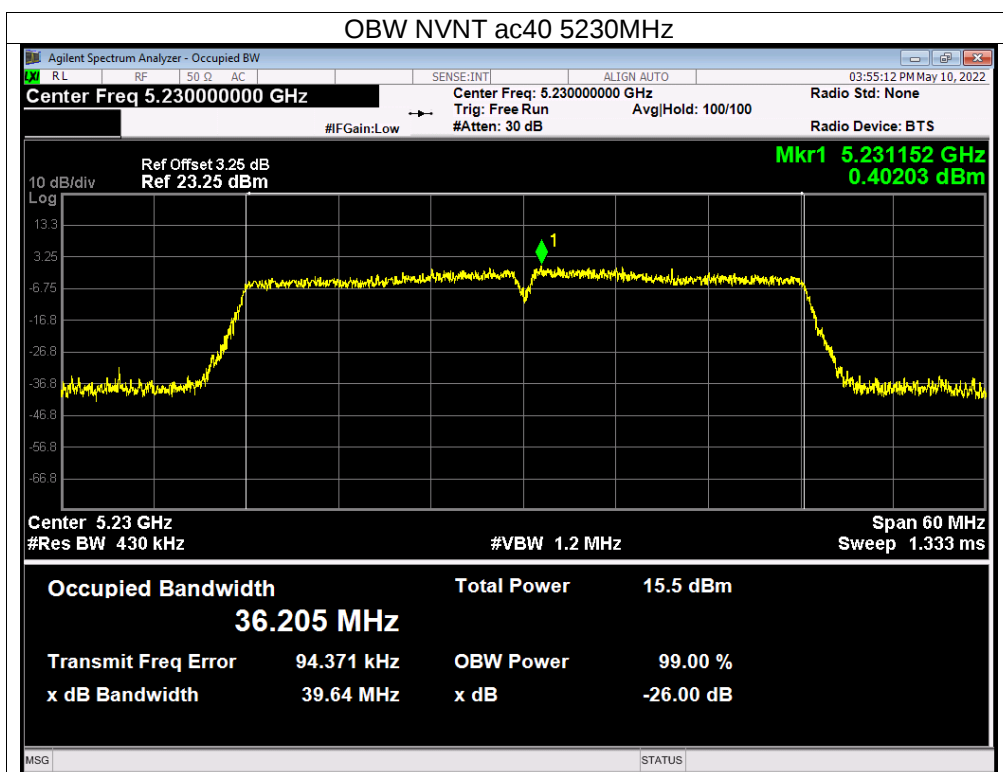



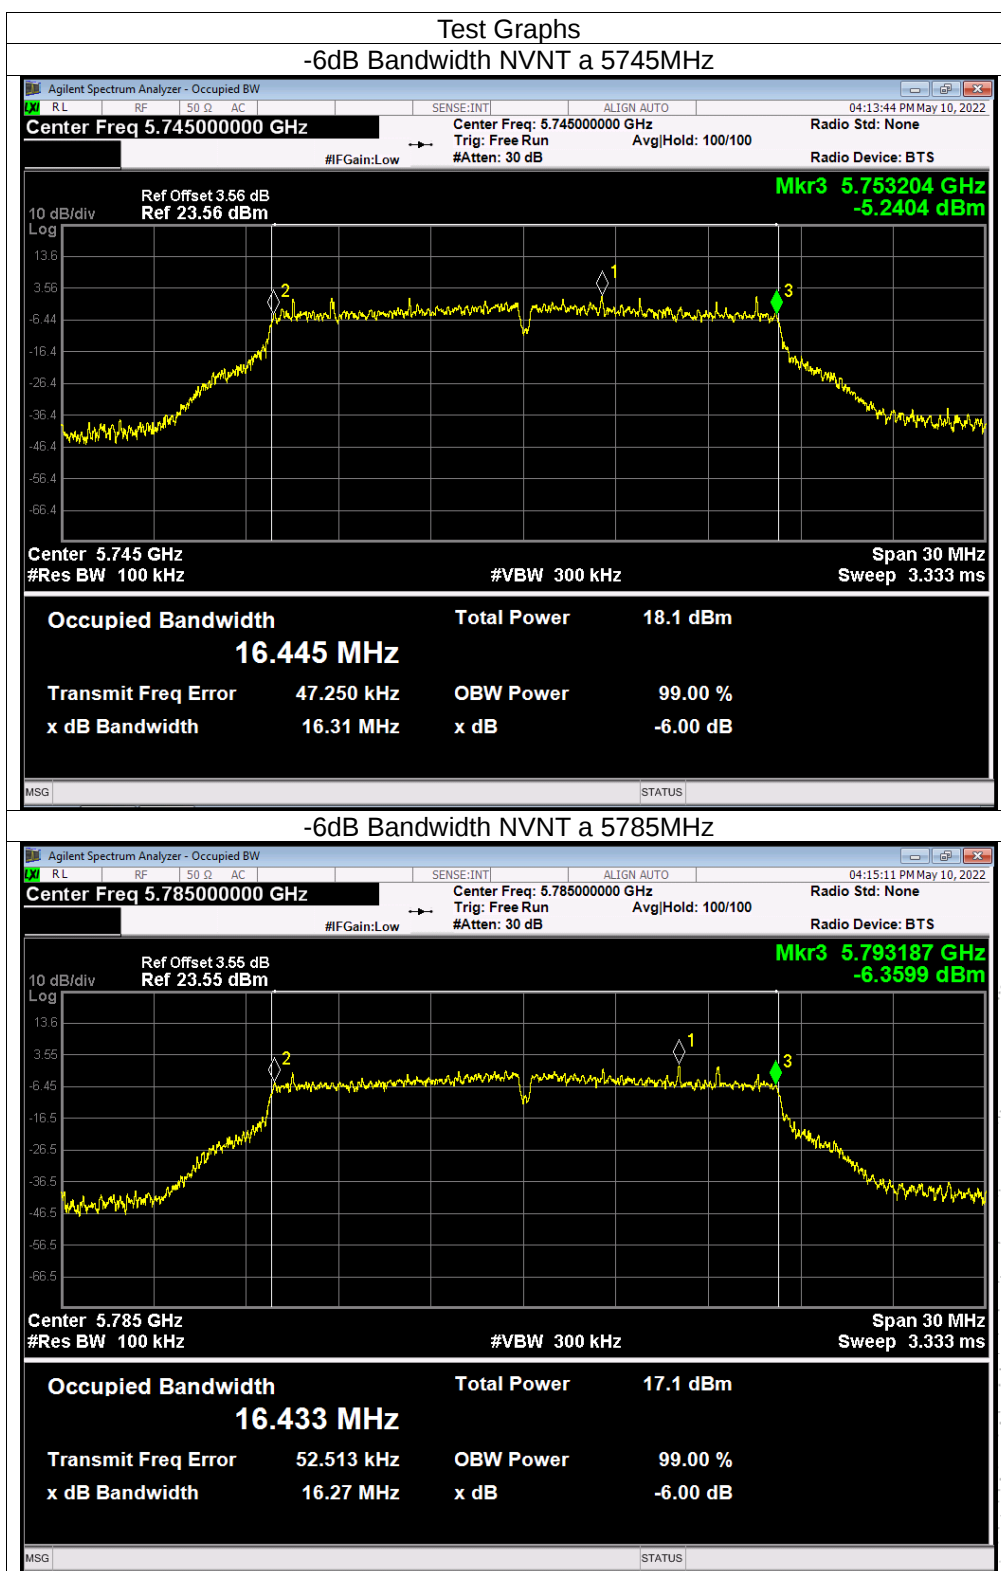


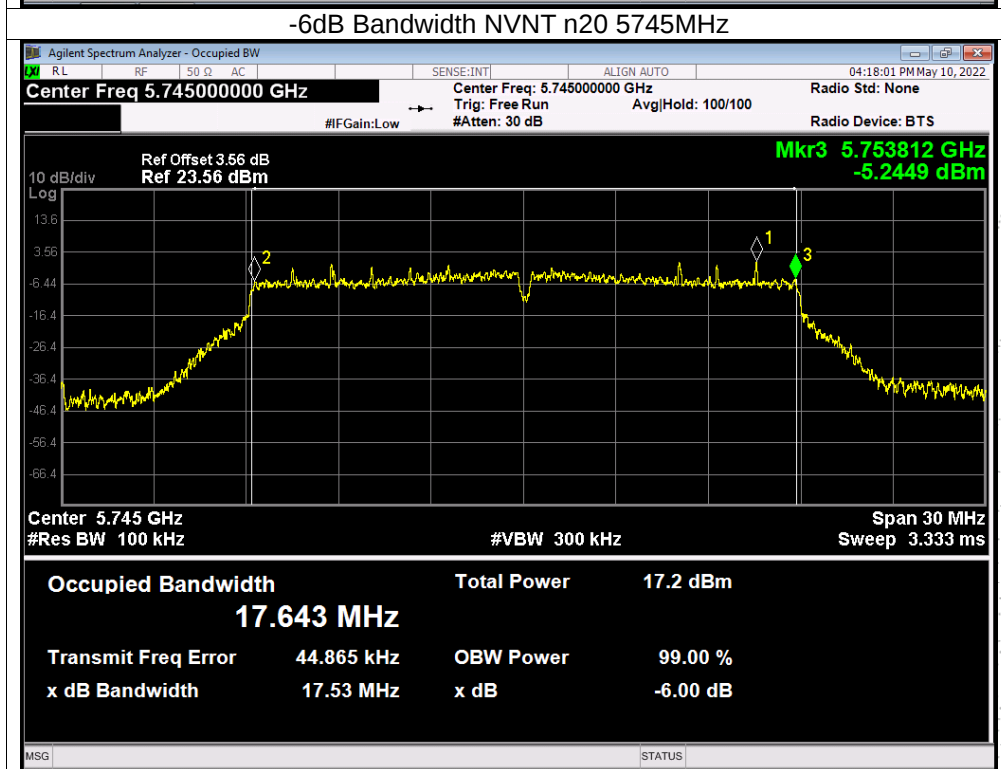
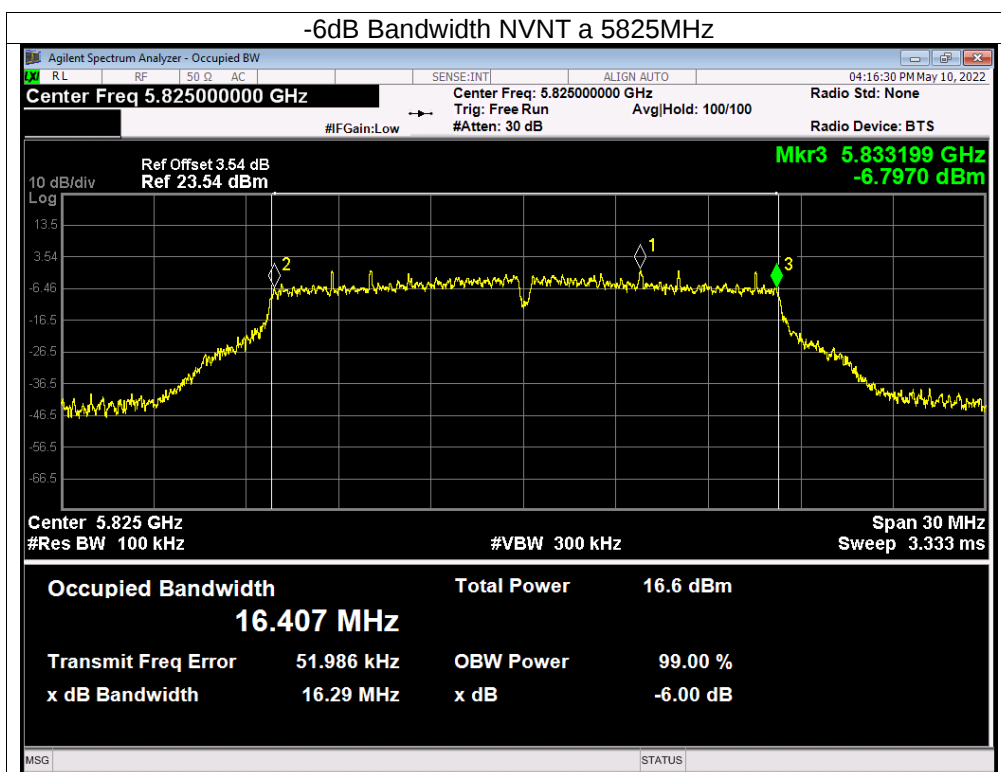


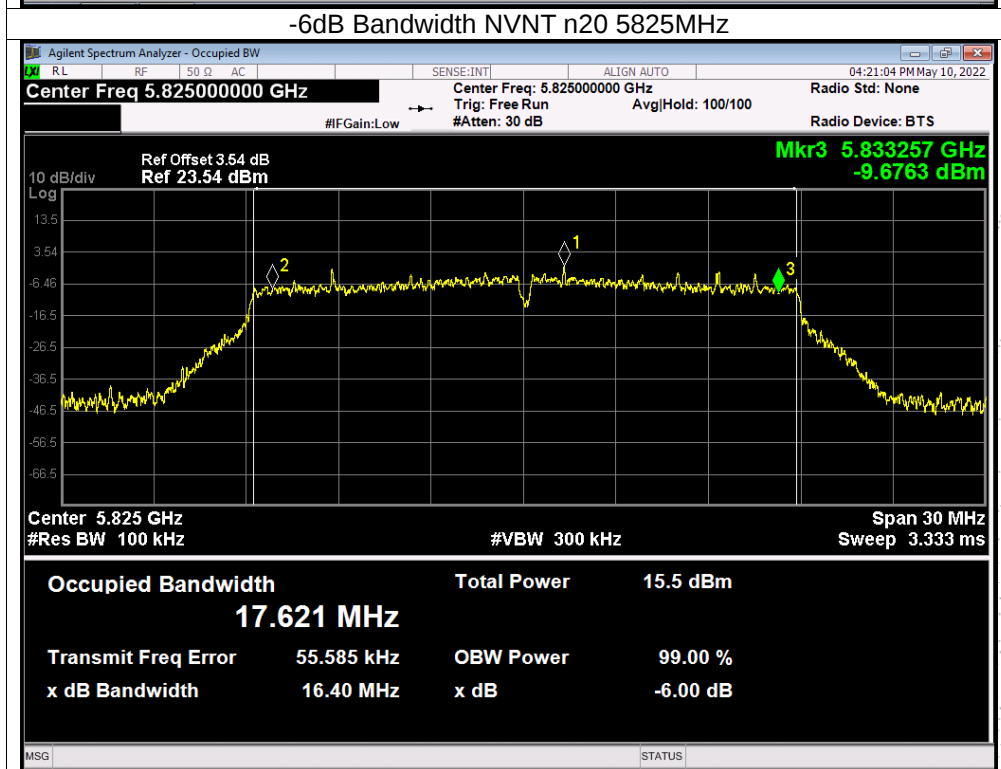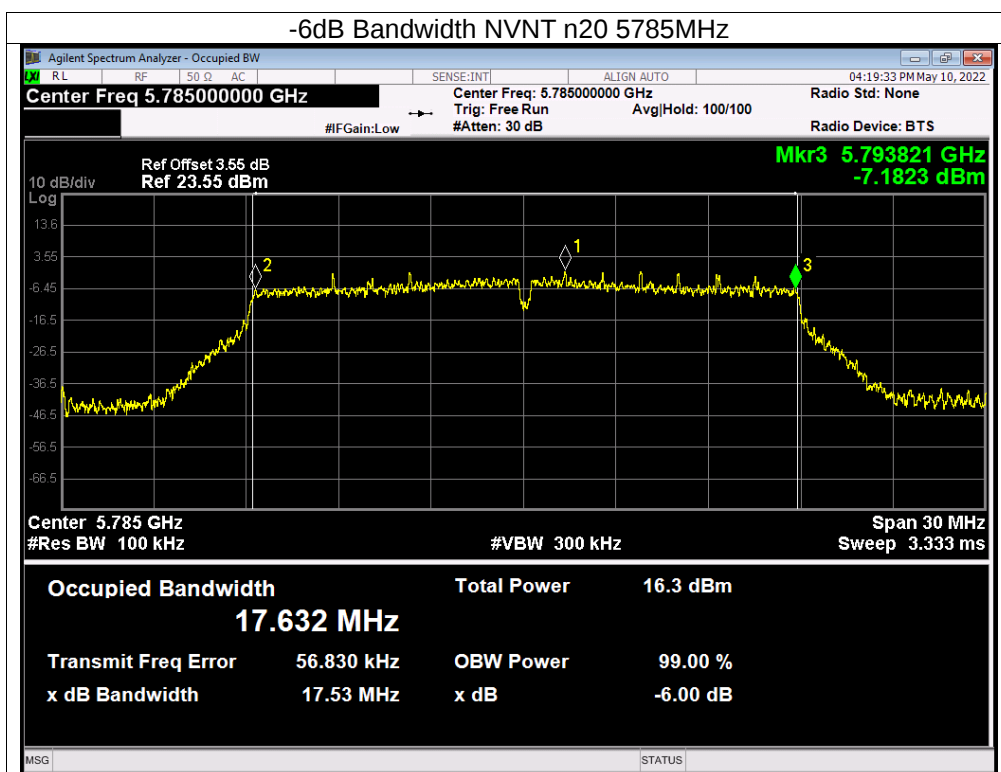


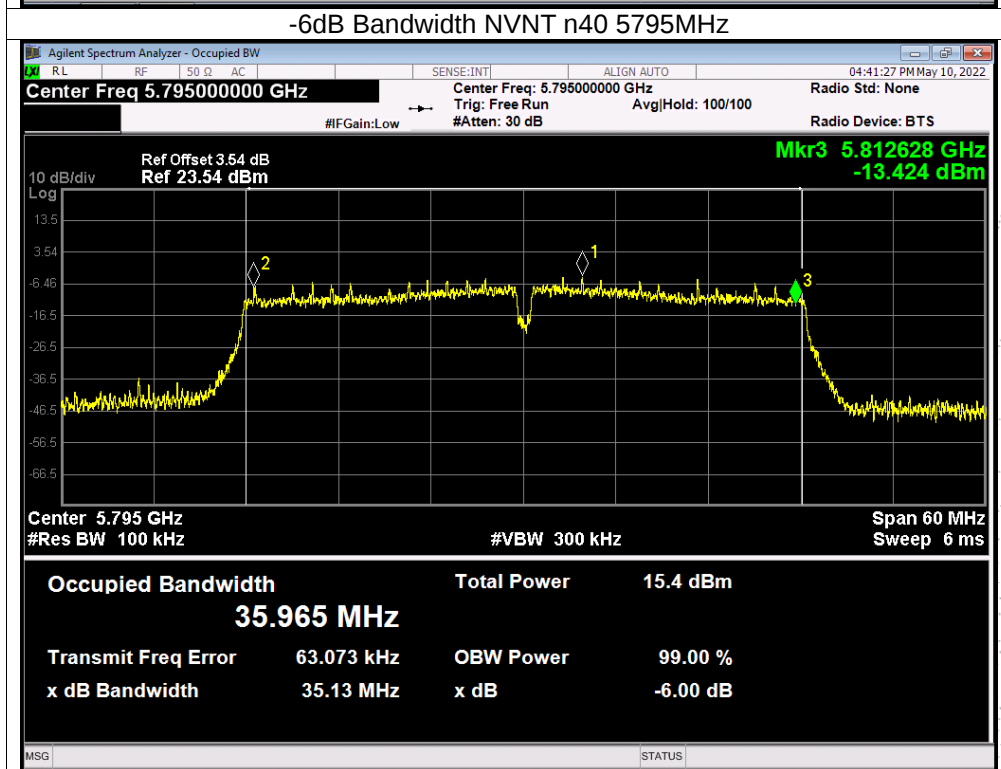
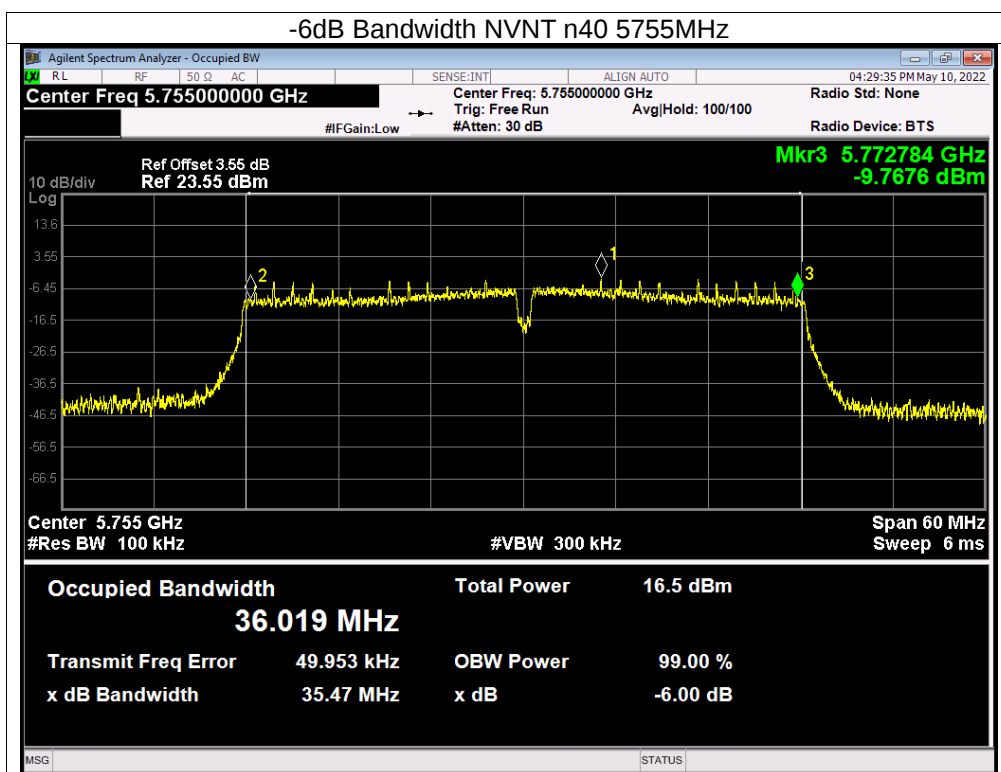


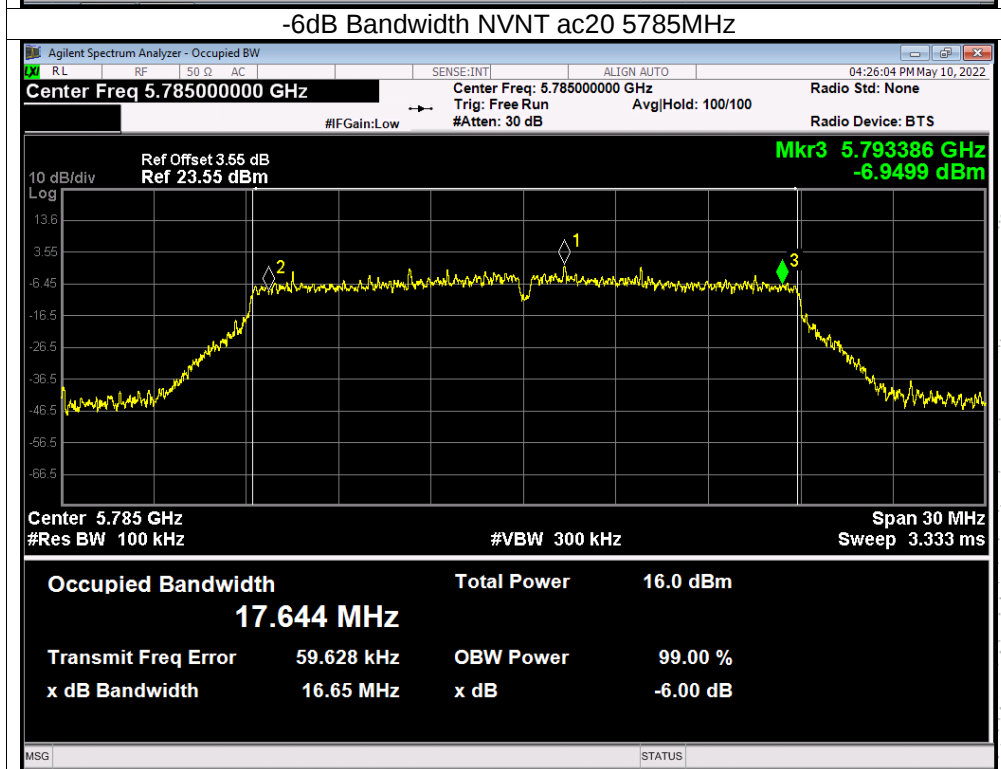
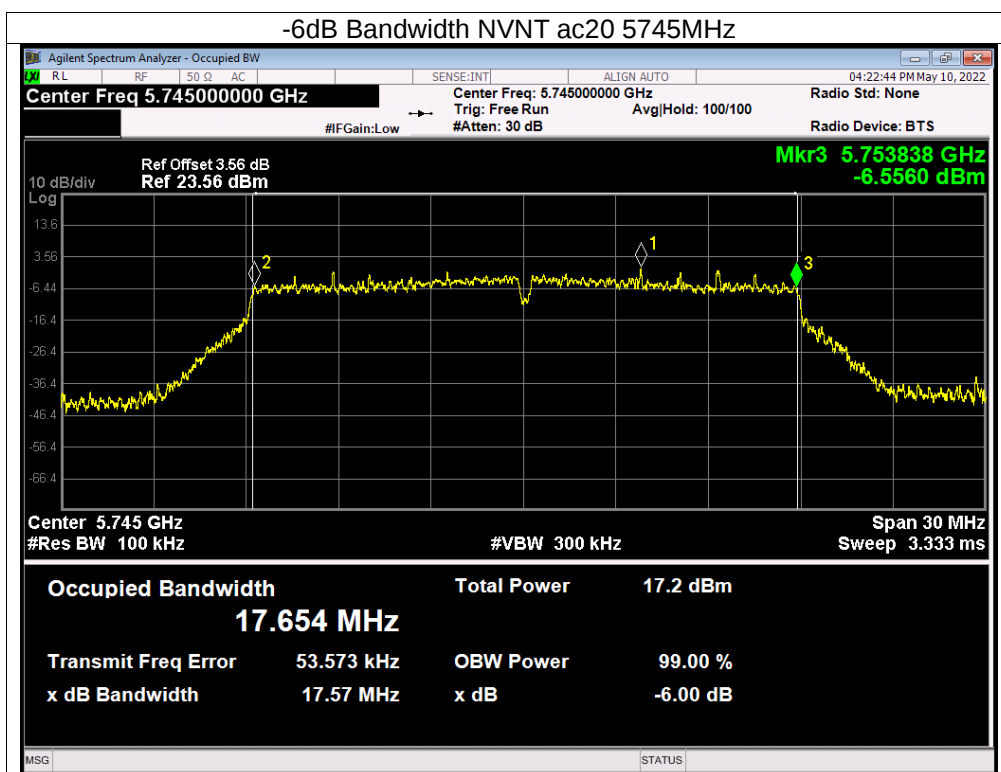


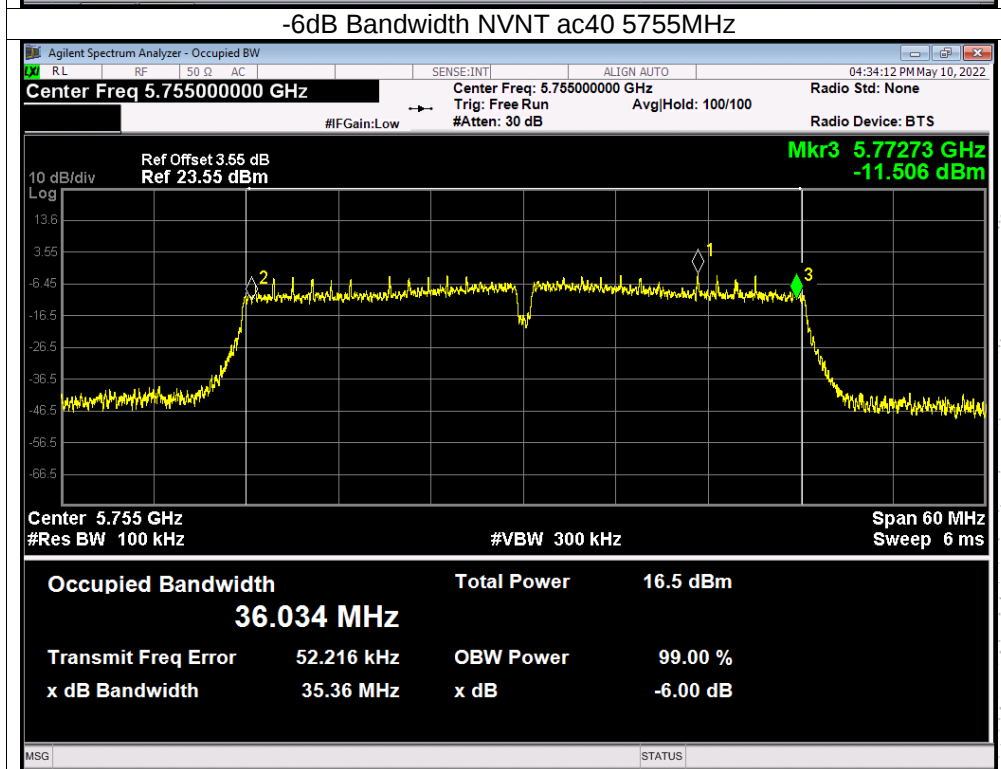
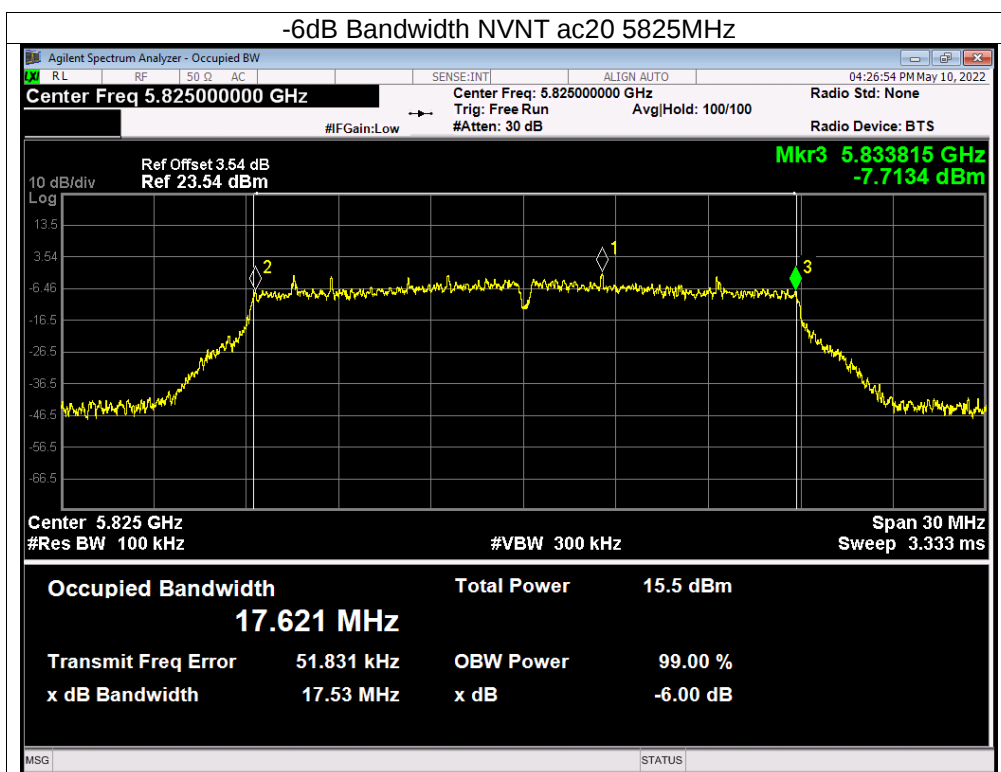


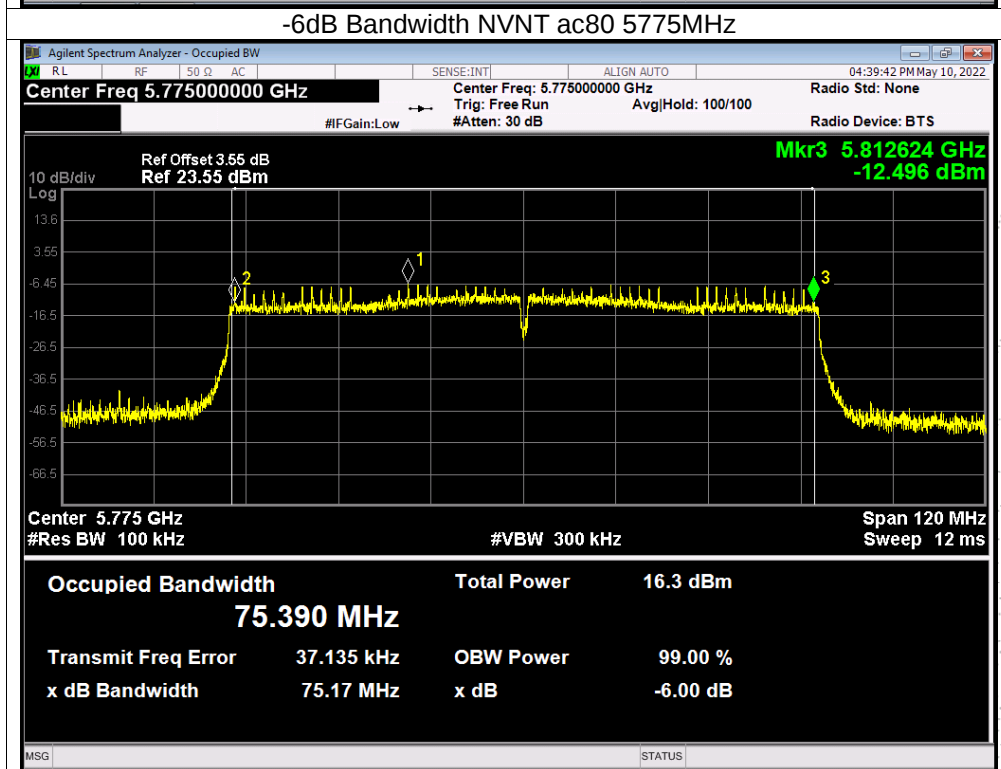
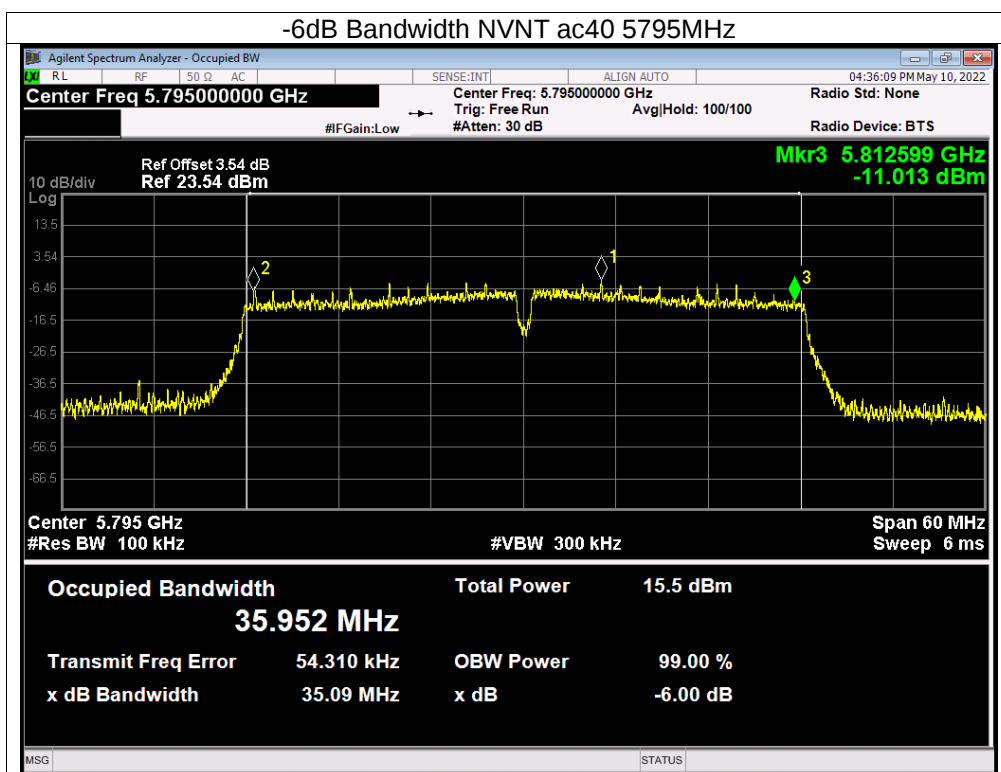



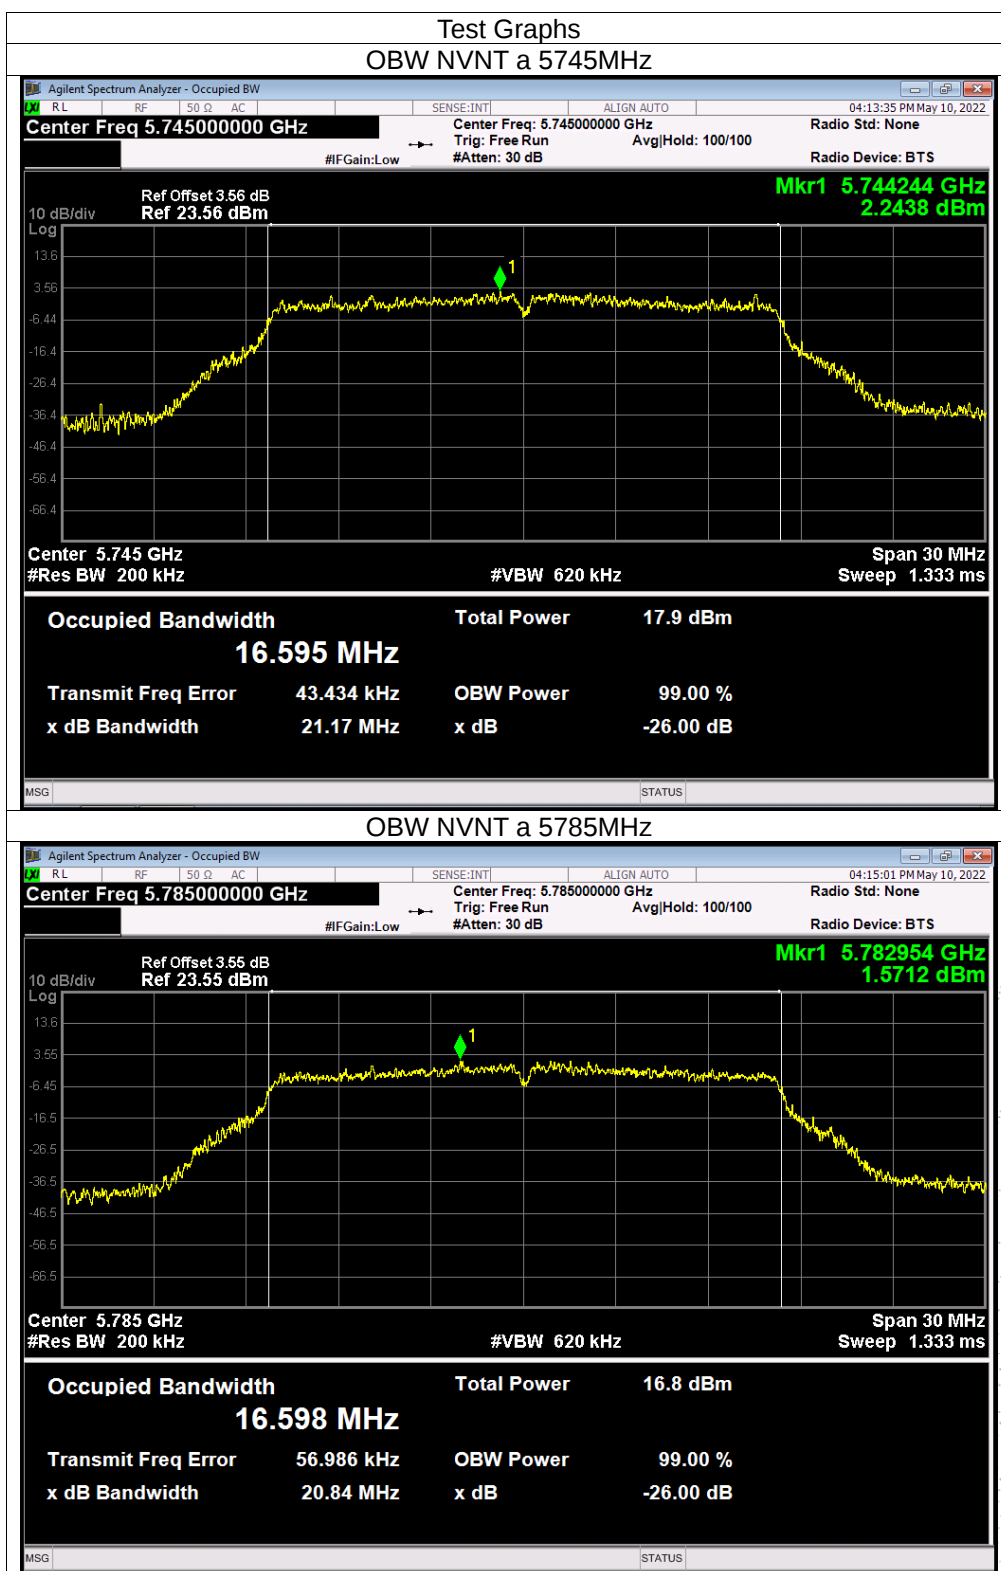


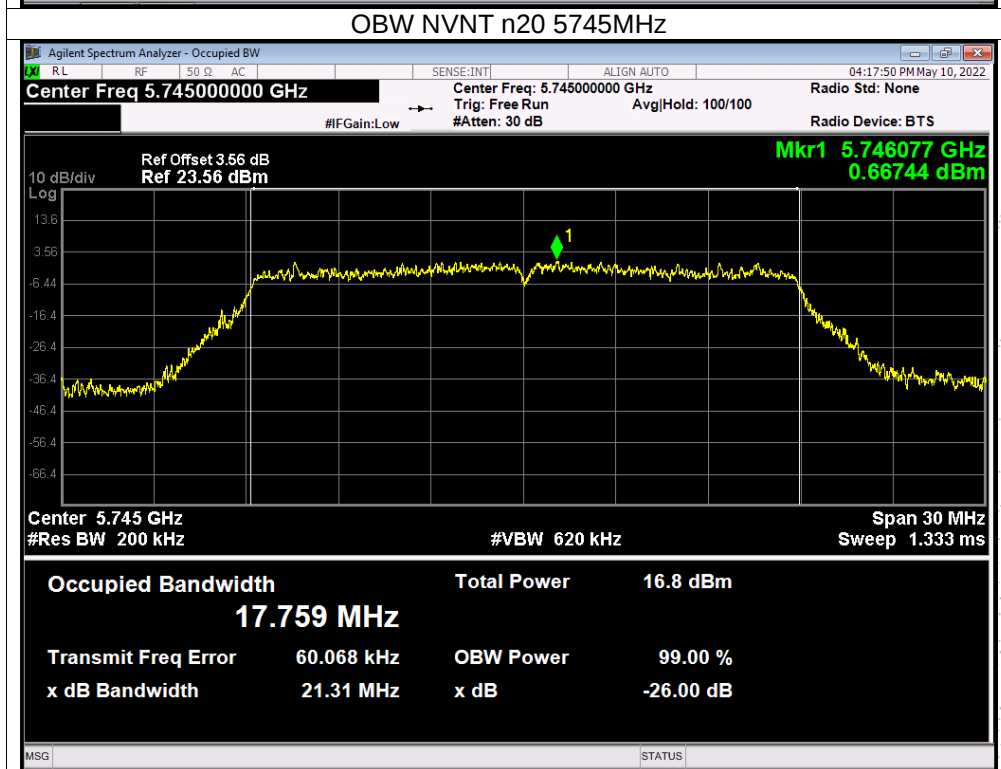
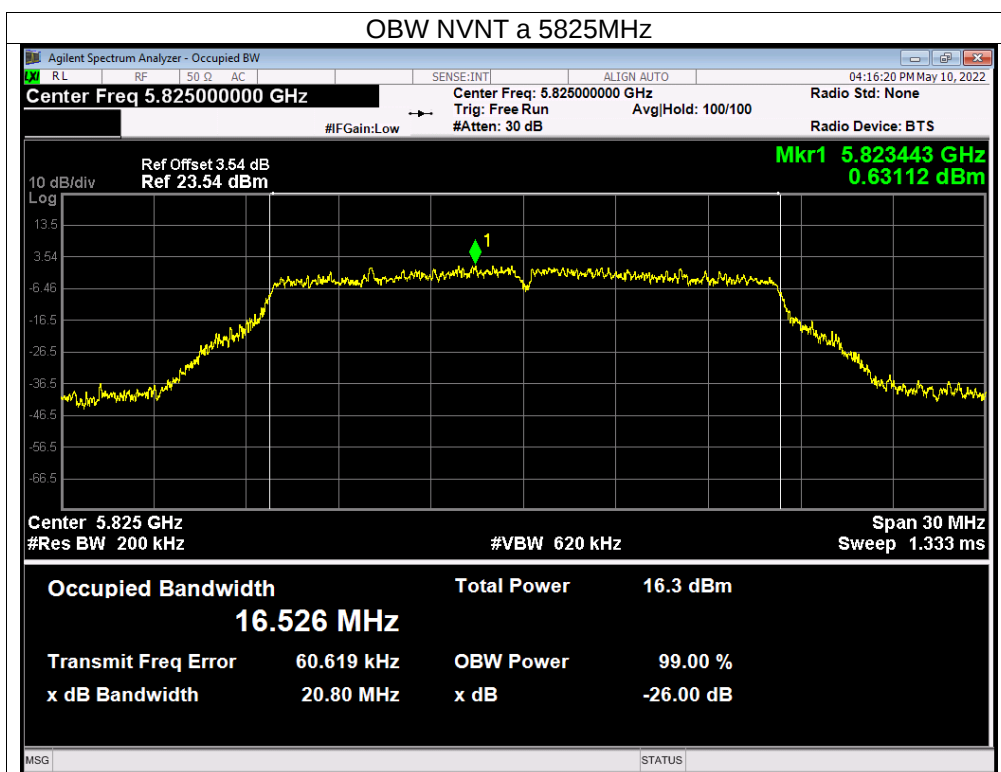


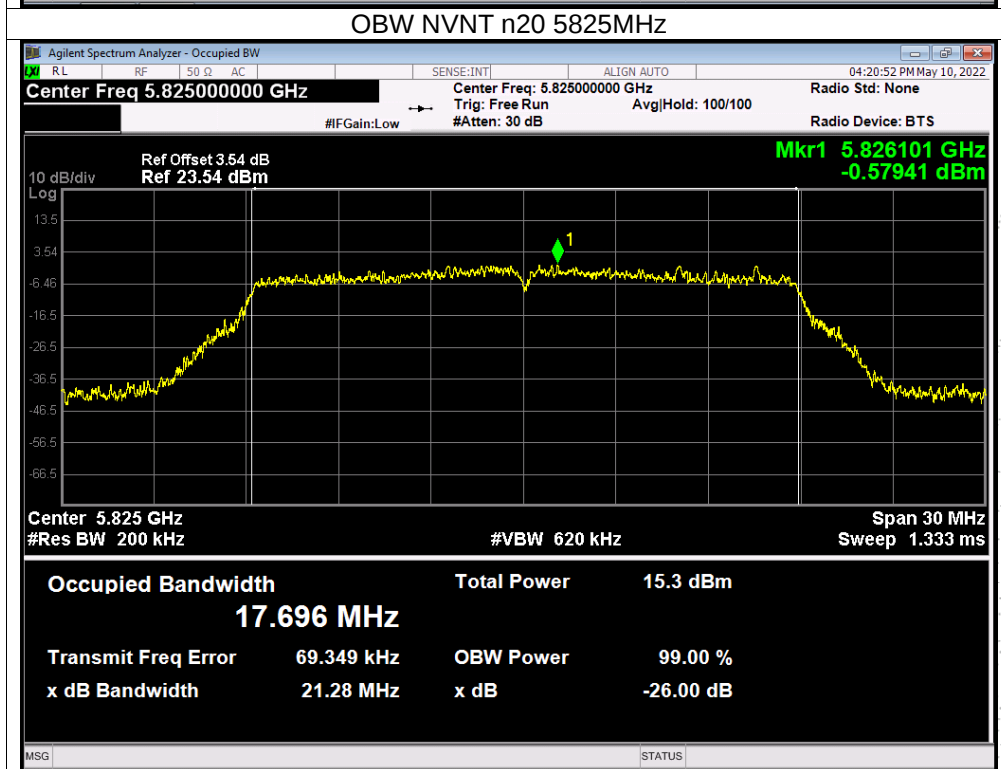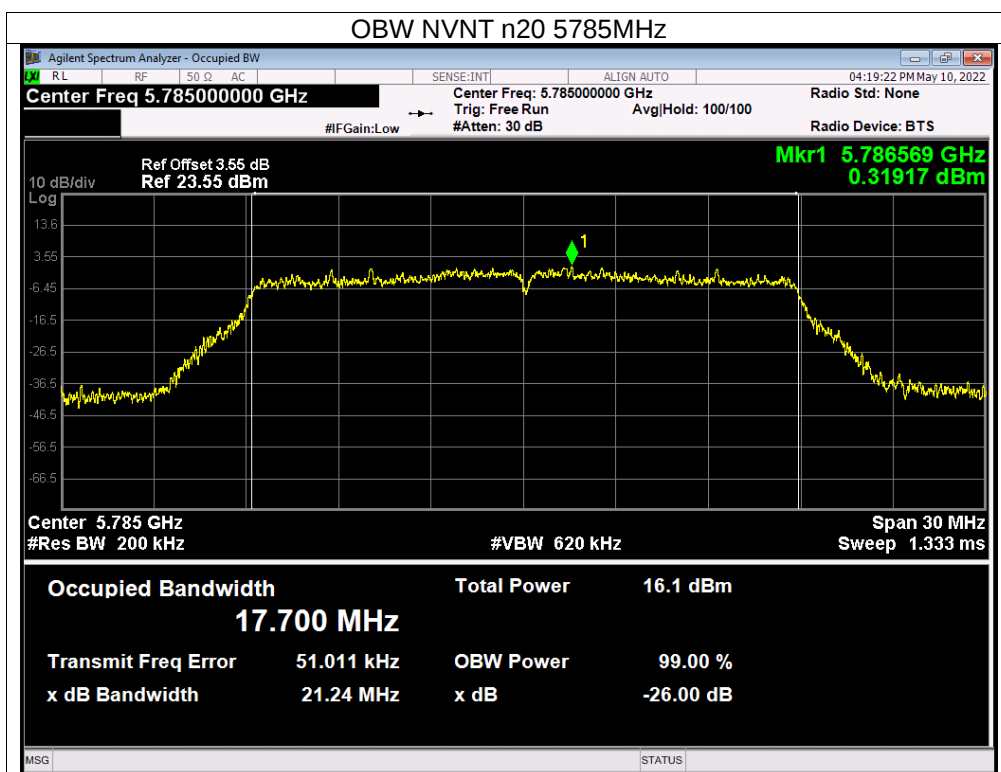

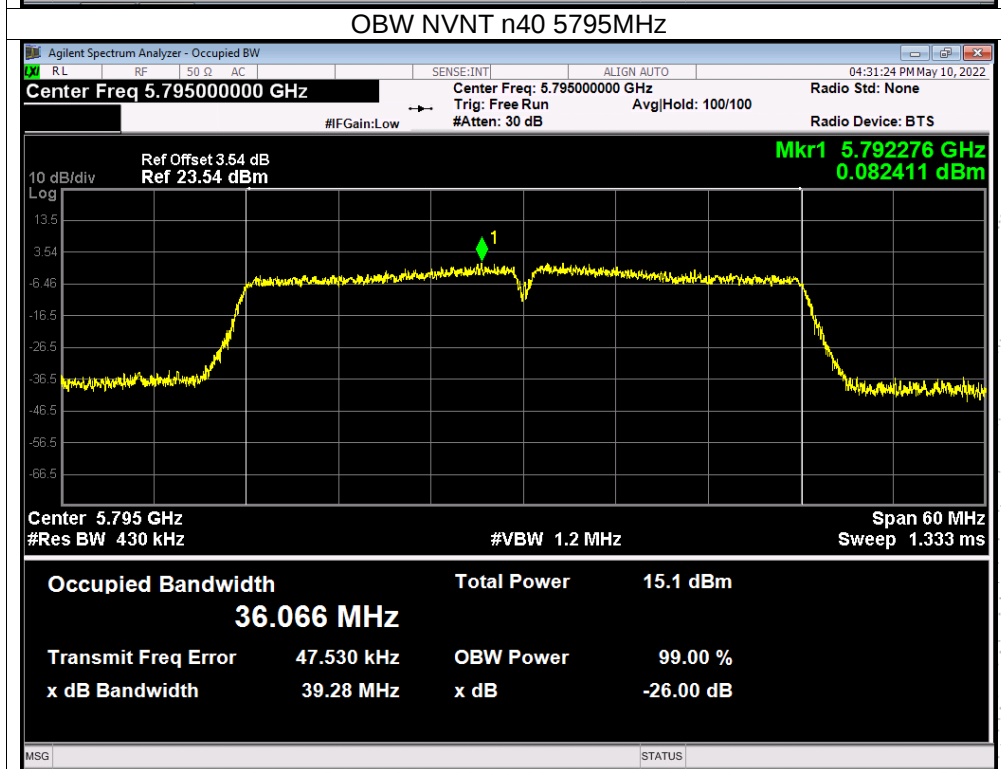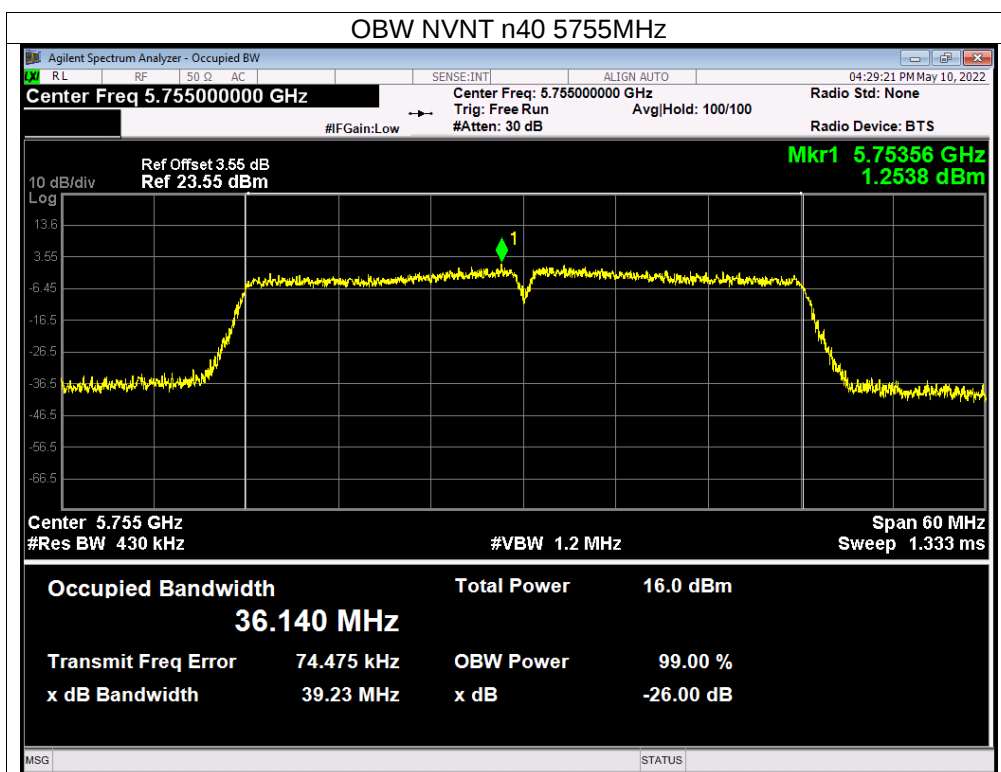

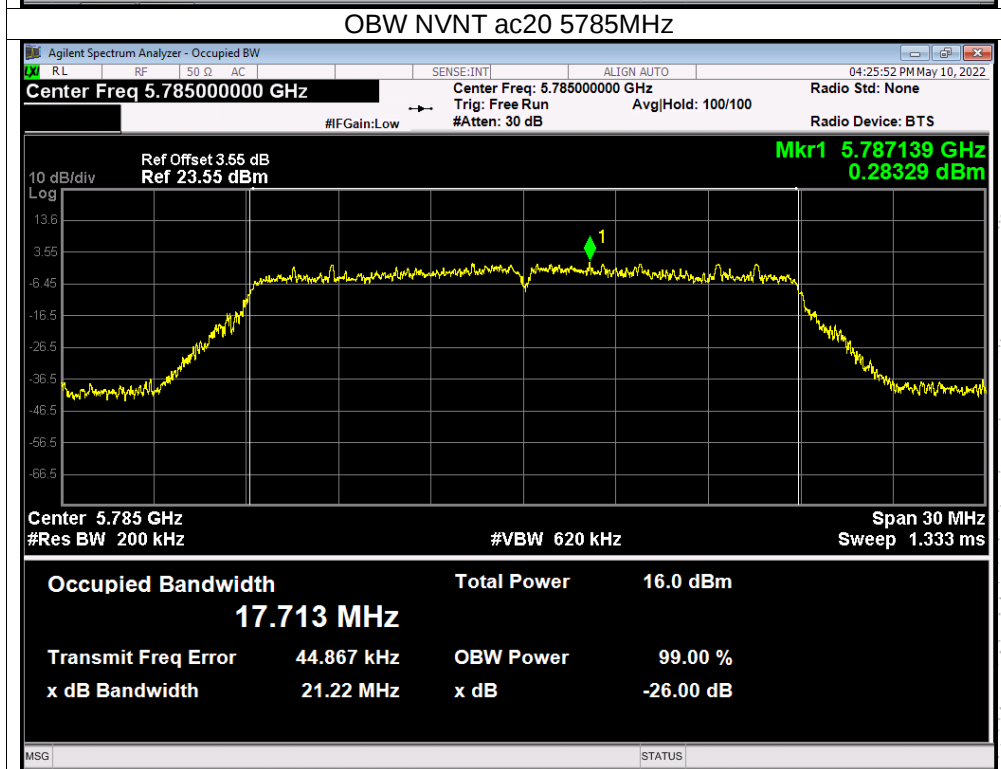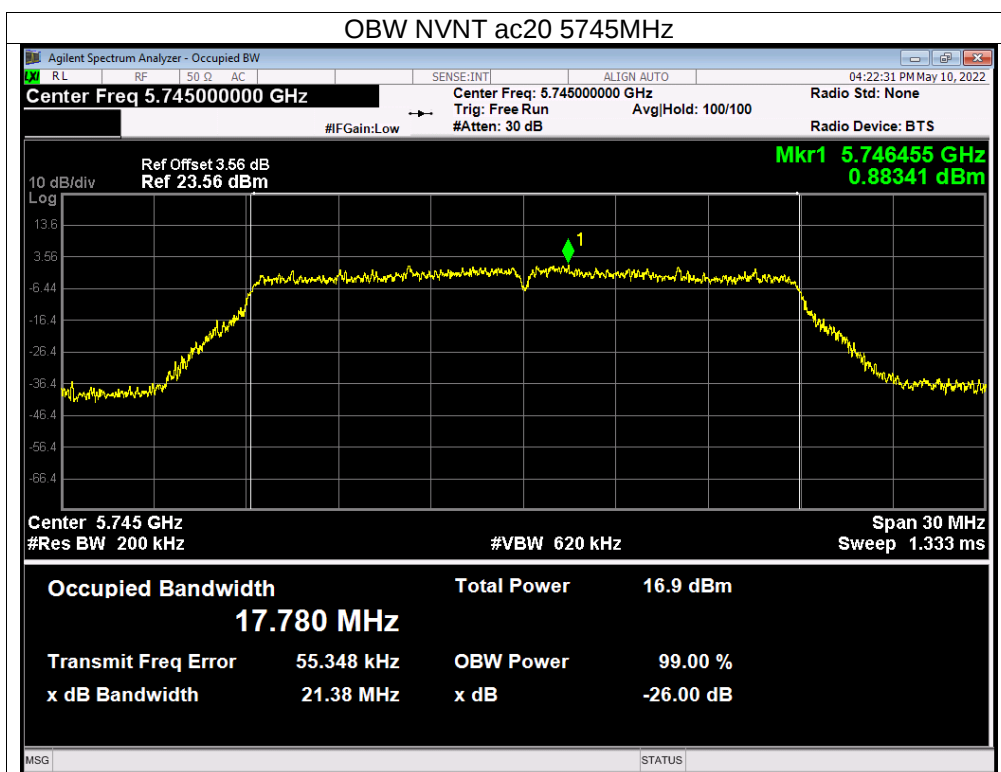

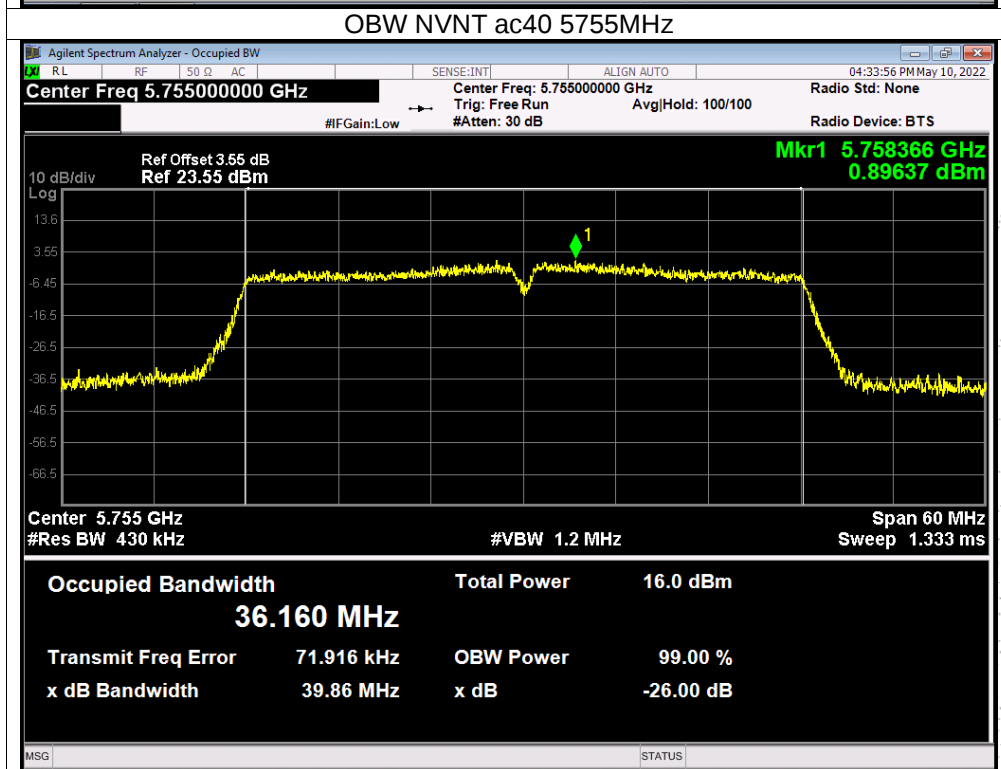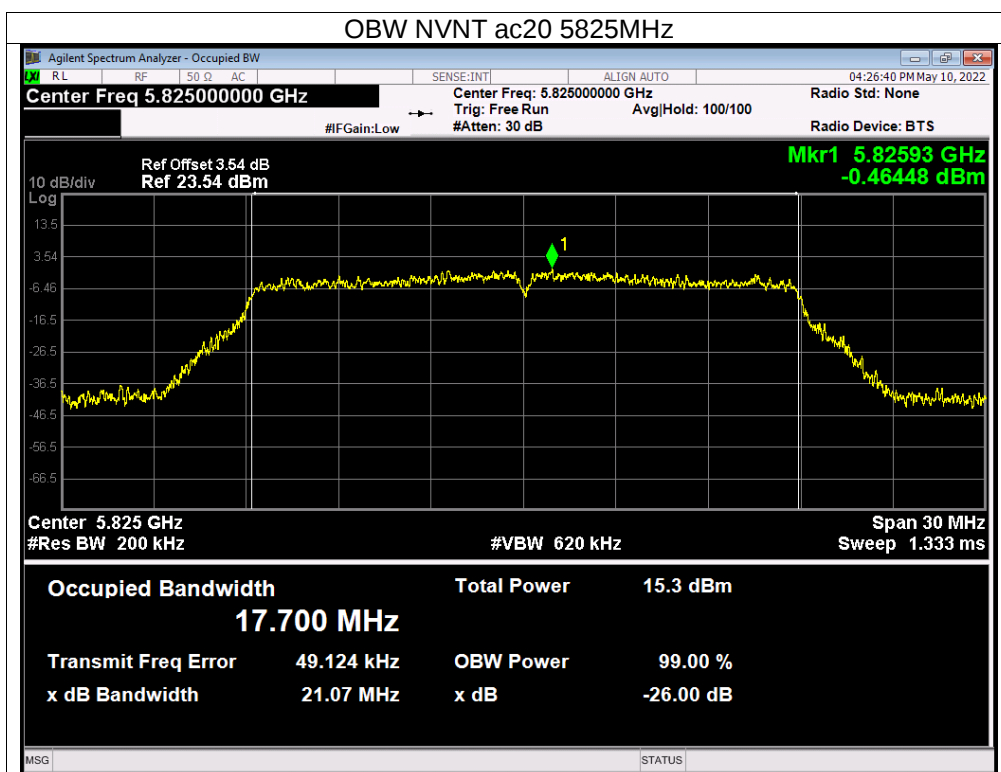

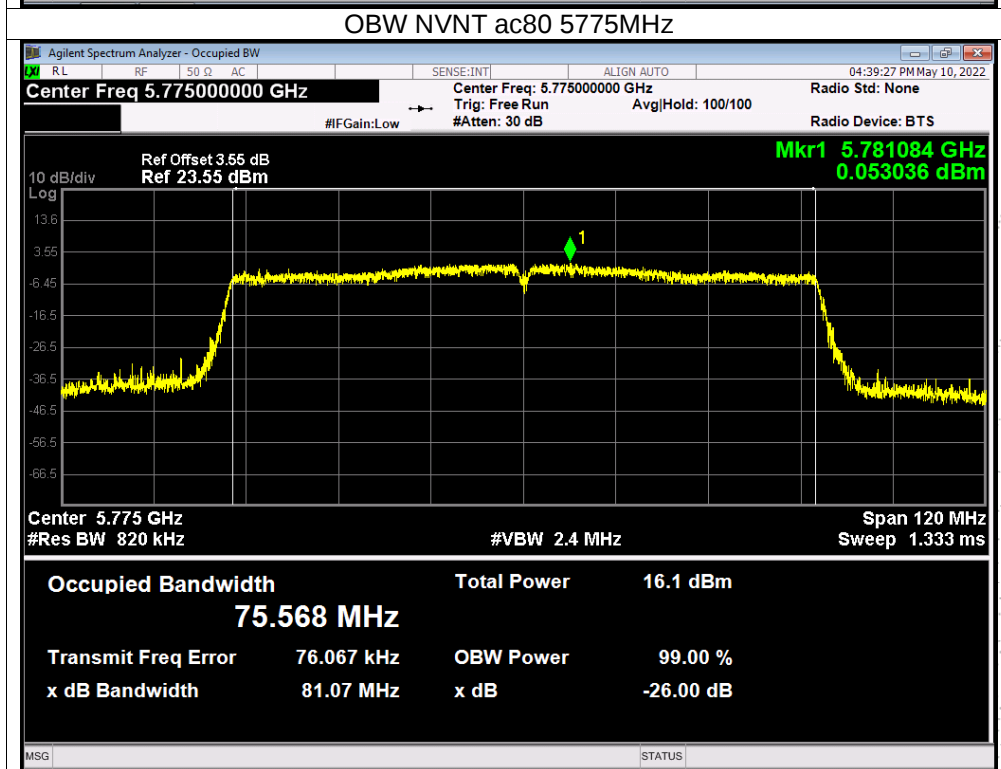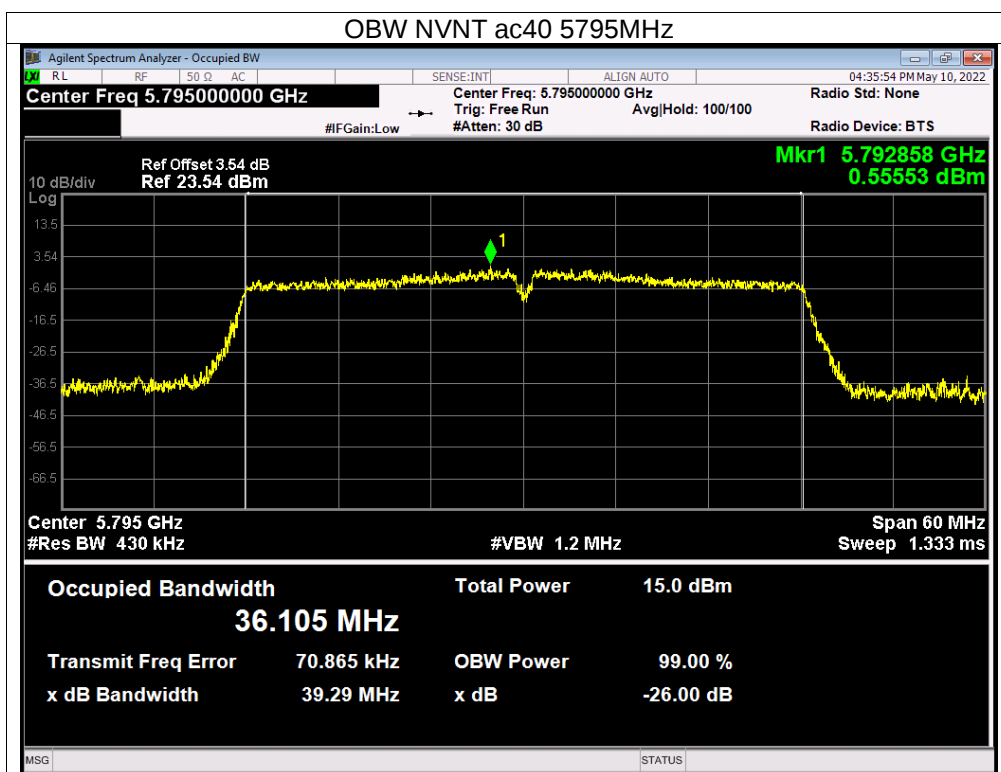

10. Maximum Conducted Output Power

10.1 Block Diagram Of Test Setup



10.2 Limit

According to FCC §15.407

The maximum conducted output power should not exceed:

Frequency Band(MHz)	Limit
5150~5250	1W
5725~5850	1W

10.3 Test procedure

Maximum conducted output power may be measured using a spectrum analyzer/EMI receiver or an RF power meter.

1. Device Configuration

If possible, configure or modify the operation of the EUT so that it transmits continuously at its maximum power control level (see section II.B.).

a) The intent is to test at 100 percent duty cycle; however a small reduction in duty cycle (to no lower than 98 percent) is permitted if required by the EUT for amplitude control purposes. Manufacturers are expected to provide software to the test lab to permit such continuous operation.

b) If continuous transmission (or at least 98 percent duty cycle) cannot be achieved due to hardware limitations (e.g., overheating), the EUT shall be operated at its maximum power control level with the transmit duration as long as possible and the duty cycle as high as possible.

2. Measurement using a Spectrum Analyzer or EMI Receiver (SA)

Measurement of maximum conducted output power using a spectrum analyzer requires integrating the spectrum across a frequency span that encompasses, at a minimum, either the EBW or the 99-percent occupied bandwidth of the signal.¹ However, the EBW must be used to determine bandwidth dependent limits on maximum conducted output power in accordance with § 15.407(a).

a) The test method shall be selected as follows: (i) Method SA-1 or SA-1 Alternative (averaging with the EUT transmitting at full power throughout each sweep) shall be applied if either of the following conditions can be satisfied:

- The EUT transmits continuously (or with a duty cycle $\geq$ 98 percent).
- Sweep triggering or gating can be implemented in a way that the device transmits at the maximum power control level throughout the duration of each of the instrument sweeps to be averaged. This condition can generally be achieved by triggering the instrument's sweep if the duration of the sweep (with the analyzer configured as in Method SA-1, below) is equal to or shorter than the duration T of each transmission from the EUT and if those transmissions exhibit full power throughout their durations.

(ii) Method SA-2 or SA-2 Alternative (averaging across on and off times of the EUT transmissions, followed by duty cycle correction) shall be applied if the conditions of (i) cannot be achieved and the

transmissions exhibit a constant duty cycle during the measurement duration. Duty cycle will be considered to be constant if variations are less than ± 2 percent.

(iii) Method SA-3 (RMS detection with max hold) or SA-3 Alternative (reduced VBW with max hold) shall be applied if the conditions of (i) and (ii) cannot be achieved.

b) Method SA-1 (trace averaging with the EUT transmitting at full power throughout each sweep): (i) Set span to encompass the entire emission bandwidth (EBW) (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(ii) Set RBW = 1 MHz.

(iii) Set VBW ≥ 3 MHz.

(iv) Number of points in sweep ≥ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(v) Sweep time = auto.

(vi) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(vii) If transmit duty cycle < 98 percent, use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 percent, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to "free run".

(viii) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

(ix) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument's band power measurement function with band limits set equal to the EBW (or occupied bandwidth) band edges. If the instrument does not have a band power function, sum the spectrum

10.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

