






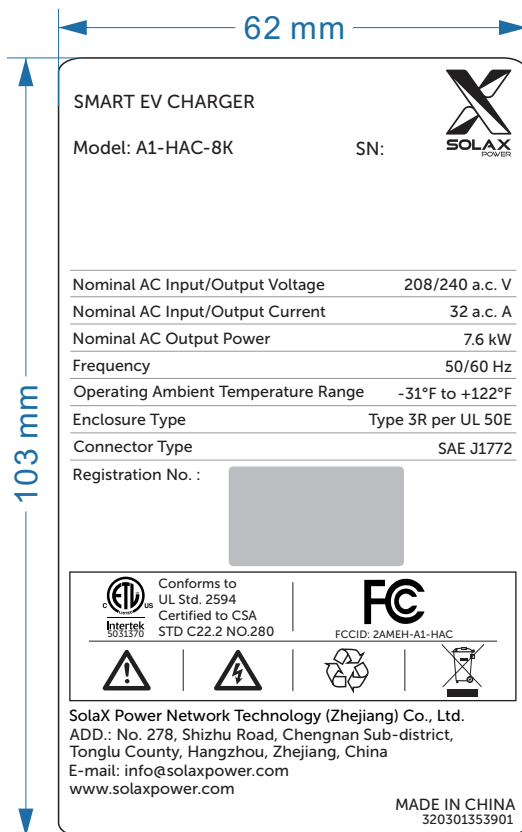


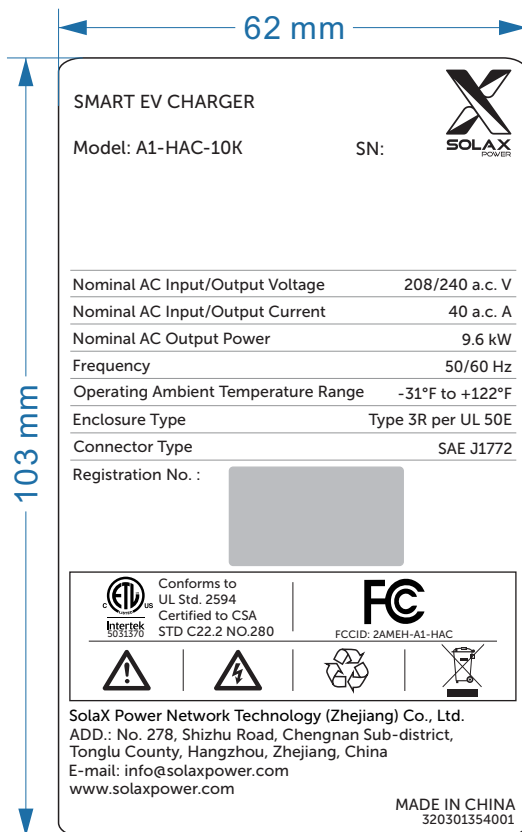


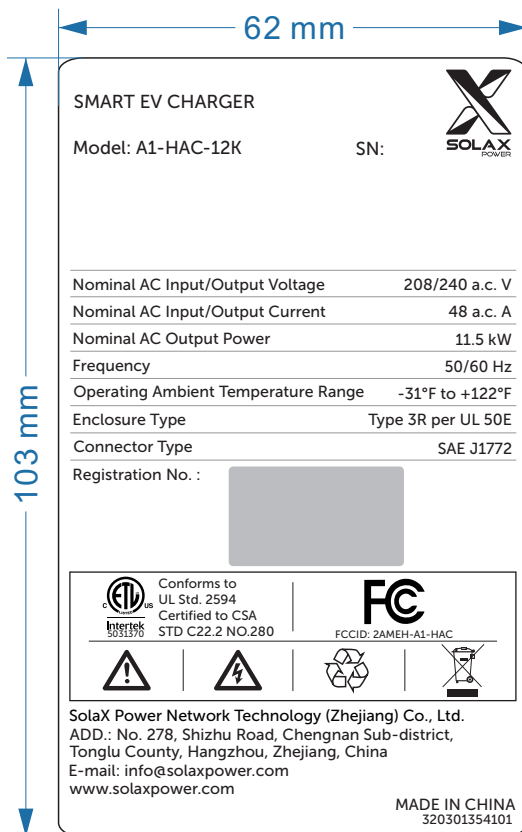


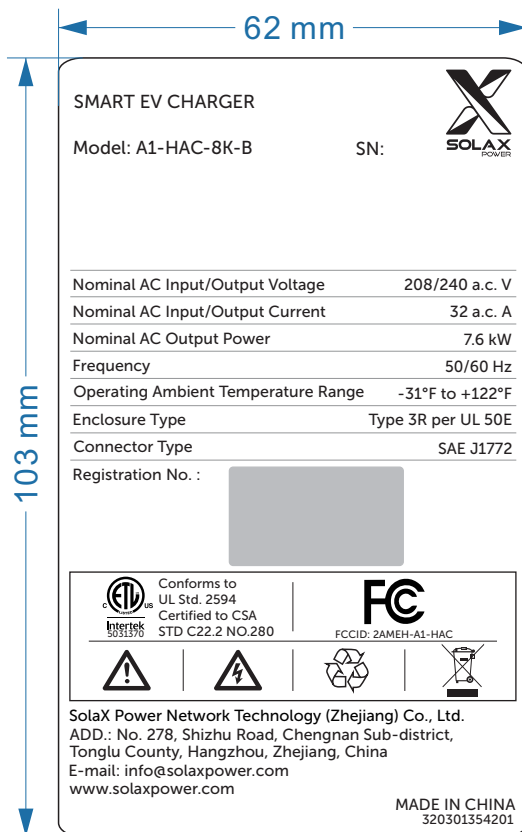


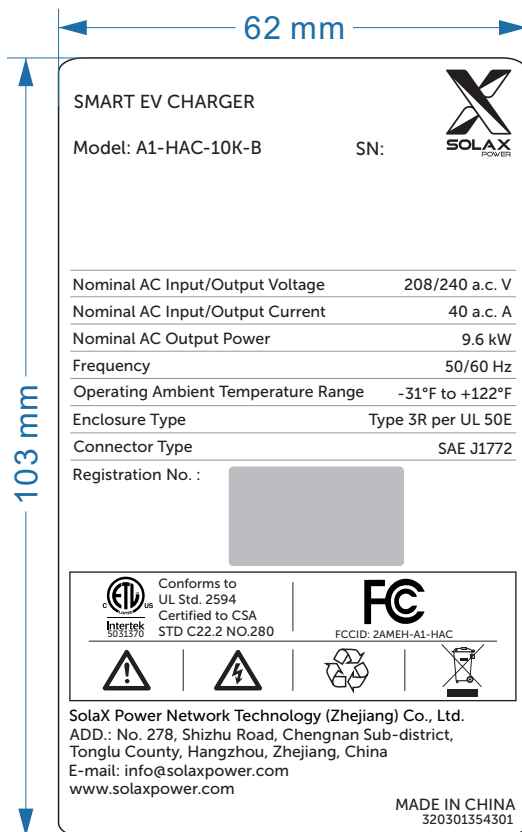


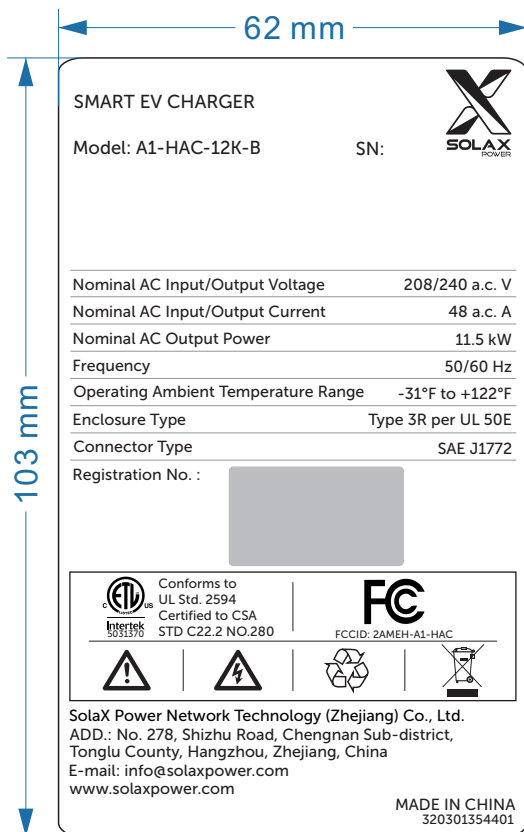


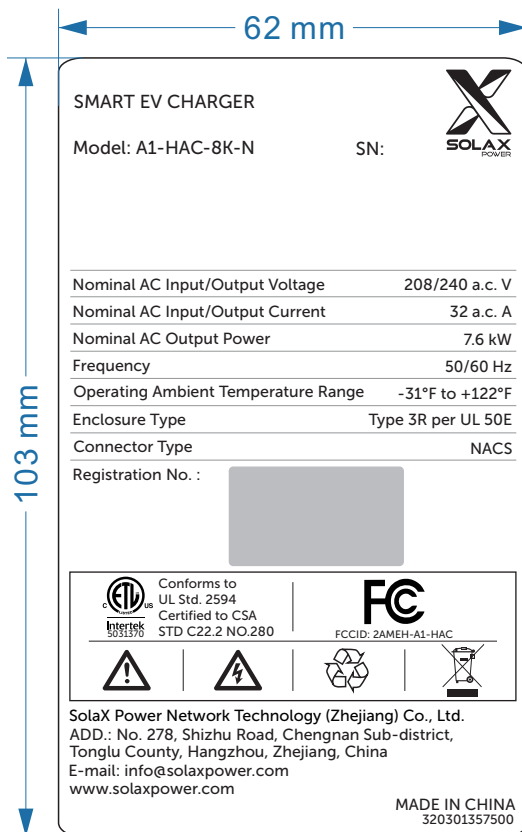


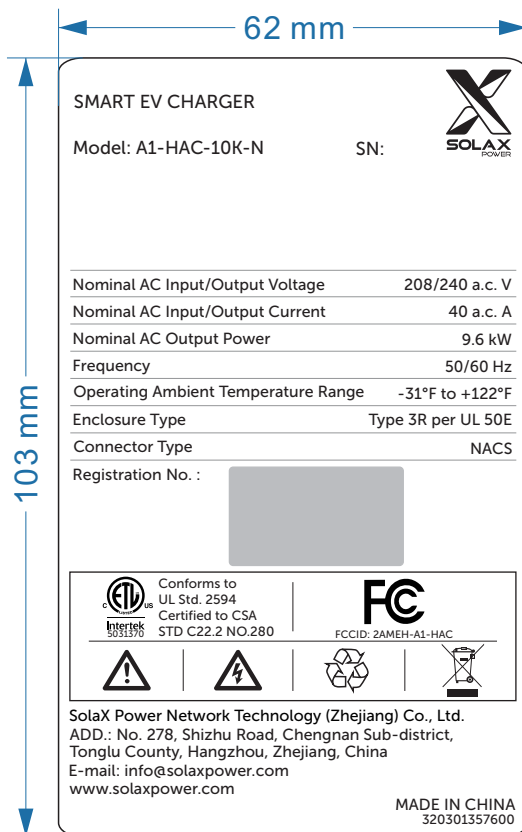

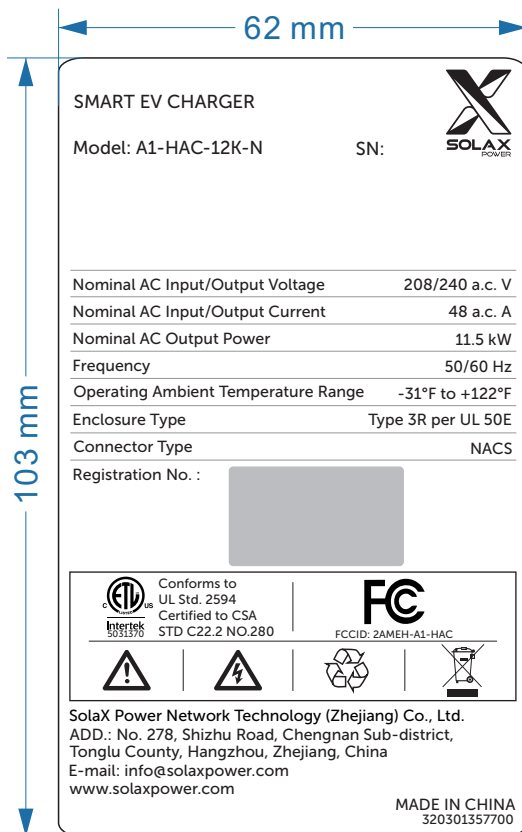

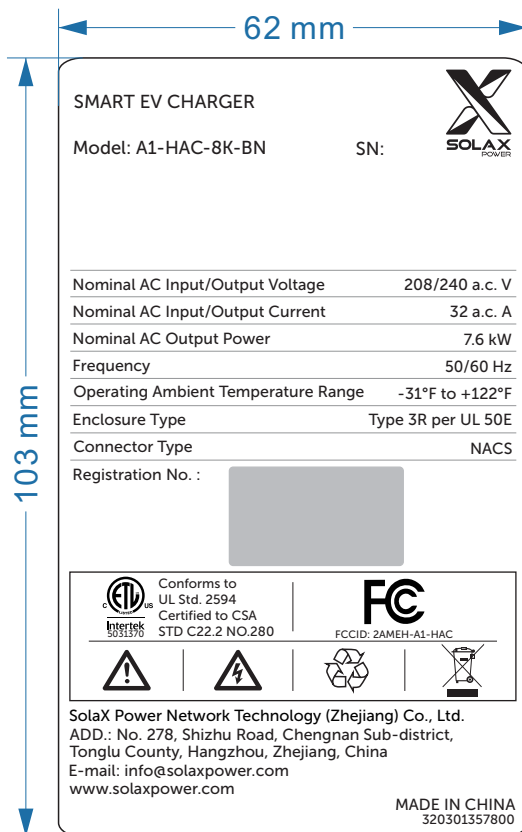

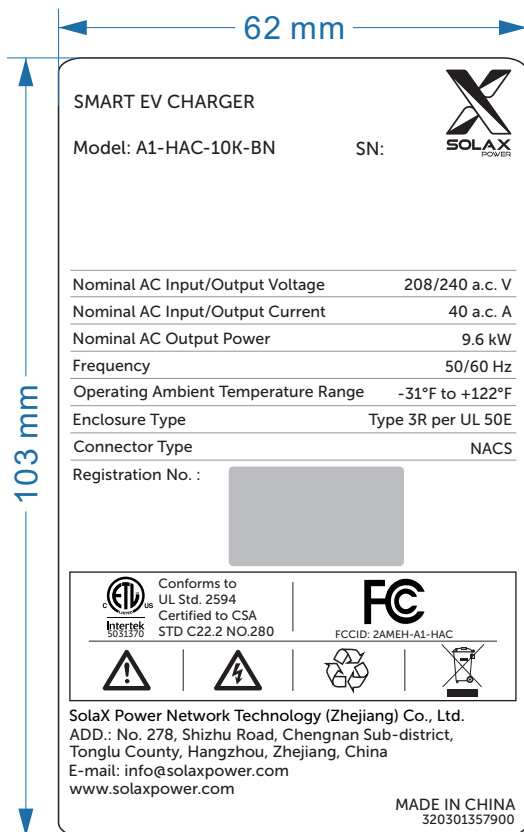

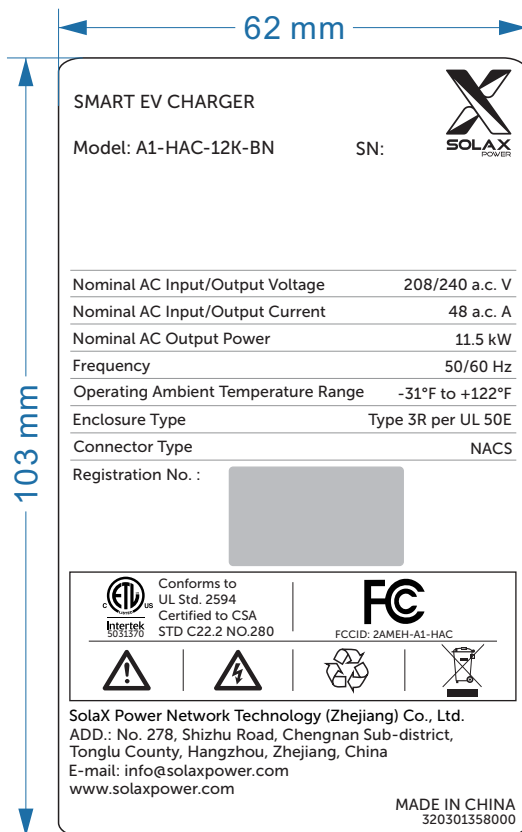

1. Performance label

SMART EV CHARGER

Model: A1-HAC-12K

SN:



Nominal AC Input/Output Voltage	208/240 a.c. V
Nominal AC Input/Output Current	48 a.c. A
Nominal AC Output Power	11.5 kW
Frequency	50/60 Hz
Operating Ambient Temperature Range	-31°F to +122°F
Enclosure Type	Type 3R per UL 50E
Connector Type	SAE J1772
Registration No. :	



Conforms to
UL Std. 2594
Certified to CSA
STD C22.2 NO.280



FCCID: 2AMEH-A1-HAC



SolaX Power Network Technology (Zhejiang) Co., Ltd.
ADD.: No. 278, Shizhu Road, Chengnan Sub-district,
Tonglu County, Hangzhou, Zhejiang, China
E-mail: info@solaxpower.com
www.solaxpower.com

MADE IN CHINA
320301354101

2. QR code label


Establish connection via APP



3. FCC warning label

This device complies with part 15 of the
FCC Rules. Operation is subject to the
following two conditions: (1) This device
may not cause harmful interference, and
(2) this device must accept any interference
received, including interference that may
cause undesired operation.

320304033600

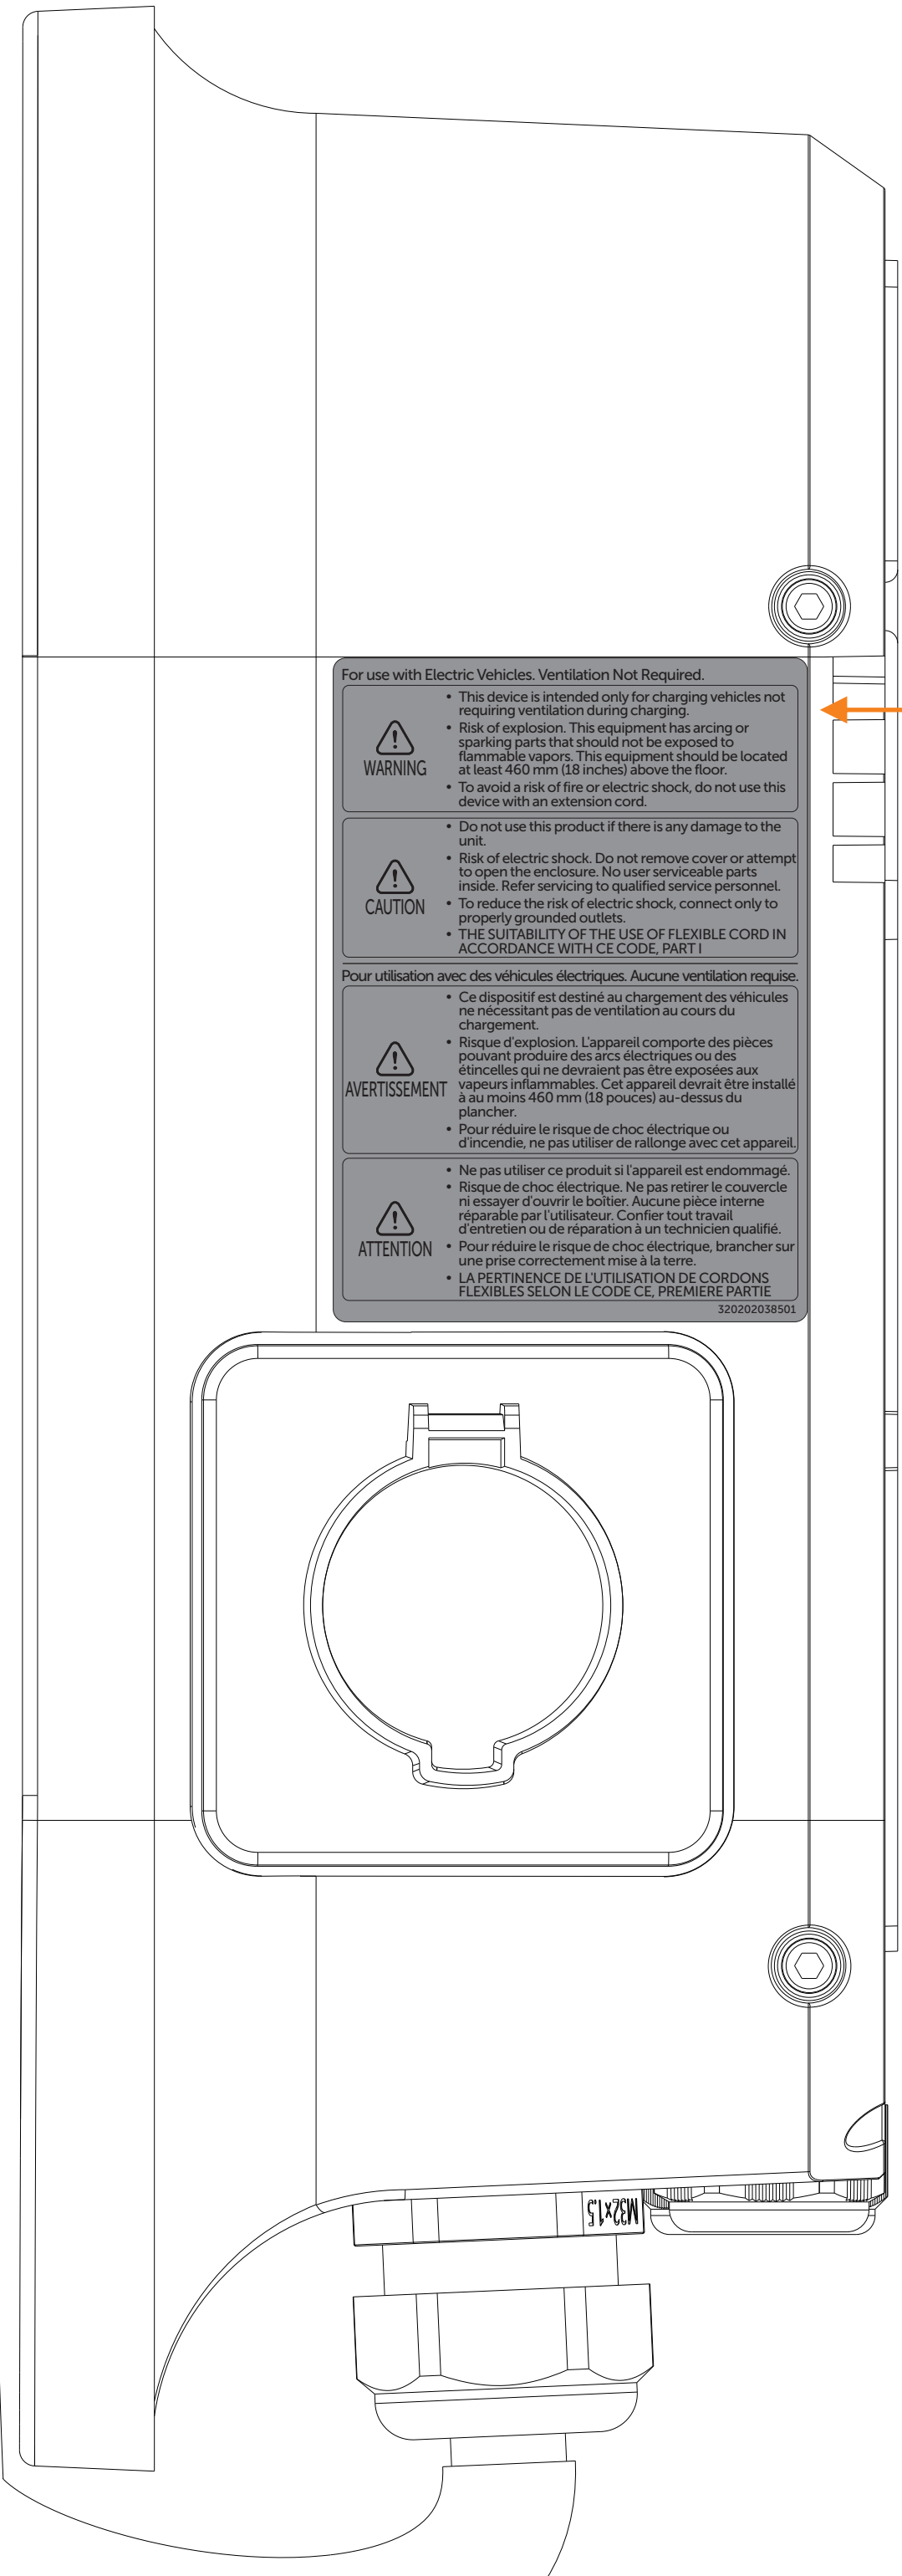

For use with Electric Vehicles. Ventilation Not Required.



WARNING

- This device is intended only for charging vehicles not requiring ventilation during charging.
- Risk of explosion. This equipment has arcing or sparking parts that should not be exposed to flammable vapors. This equipment should be located at least 460 mm (18 inches) above the floor.
- To avoid a risk of fire or electric shock, do not use this device with an extension cord.



CAUTION

- Do not use this product if there is any damage to the unit.
- Risk of electric shock. Do not remove cover or attempt to open the enclosure. No user serviceable parts inside. Refer servicing to qualified service personnel.
- To reduce the risk of electric shock, connect only to properly grounded outlets.
- THE SUITABILITY OF THE USE OF FLEXIBLE CORD IN ACCORDANCE WITH CE CODE, PART I

Pour utilisation avec des véhicules électriques. Aucune ventilation requise.



AVERTISSEMENT

- Ce dispositif est destiné au chargement des véhicules ne nécessitant pas de ventilation au cours du chargement.
- Risque d'explosion. L'appareil comporte des pièces pouvant produire des arcs électriques ou des étincelles qui ne devraient pas être exposées aux vapeurs inflammables. Cet appareil devrait être installé à au moins 460 mm (18 pouces) au-dessus du plancher.
- Pour réduire le risque de choc électrique ou d'incendie, ne pas utiliser de rallonge avec cet appareil.




ATTENTION


- Ne pas utiliser ce produit si l'appareil est endommagé.
- Risque de choc électrique. Ne pas retirer le couvercle ni essayer d'ouvrir le boîtier. Aucune pièce interne réparable par l'utilisateur. Confier tout travail d'entretien ou de réparation à un technicien qualifié.
- Pour réduire le risque de choc électrique, brancher sur une prise correctement mise à la terre.
- LA PERTINENCE DE L'UTILISATION DE CORDONS FLEXIBLES SELON LE CODE CE, PREMIERE PARTIE

320202038501

Warning label EN&FR

Field-wiring terminal marking

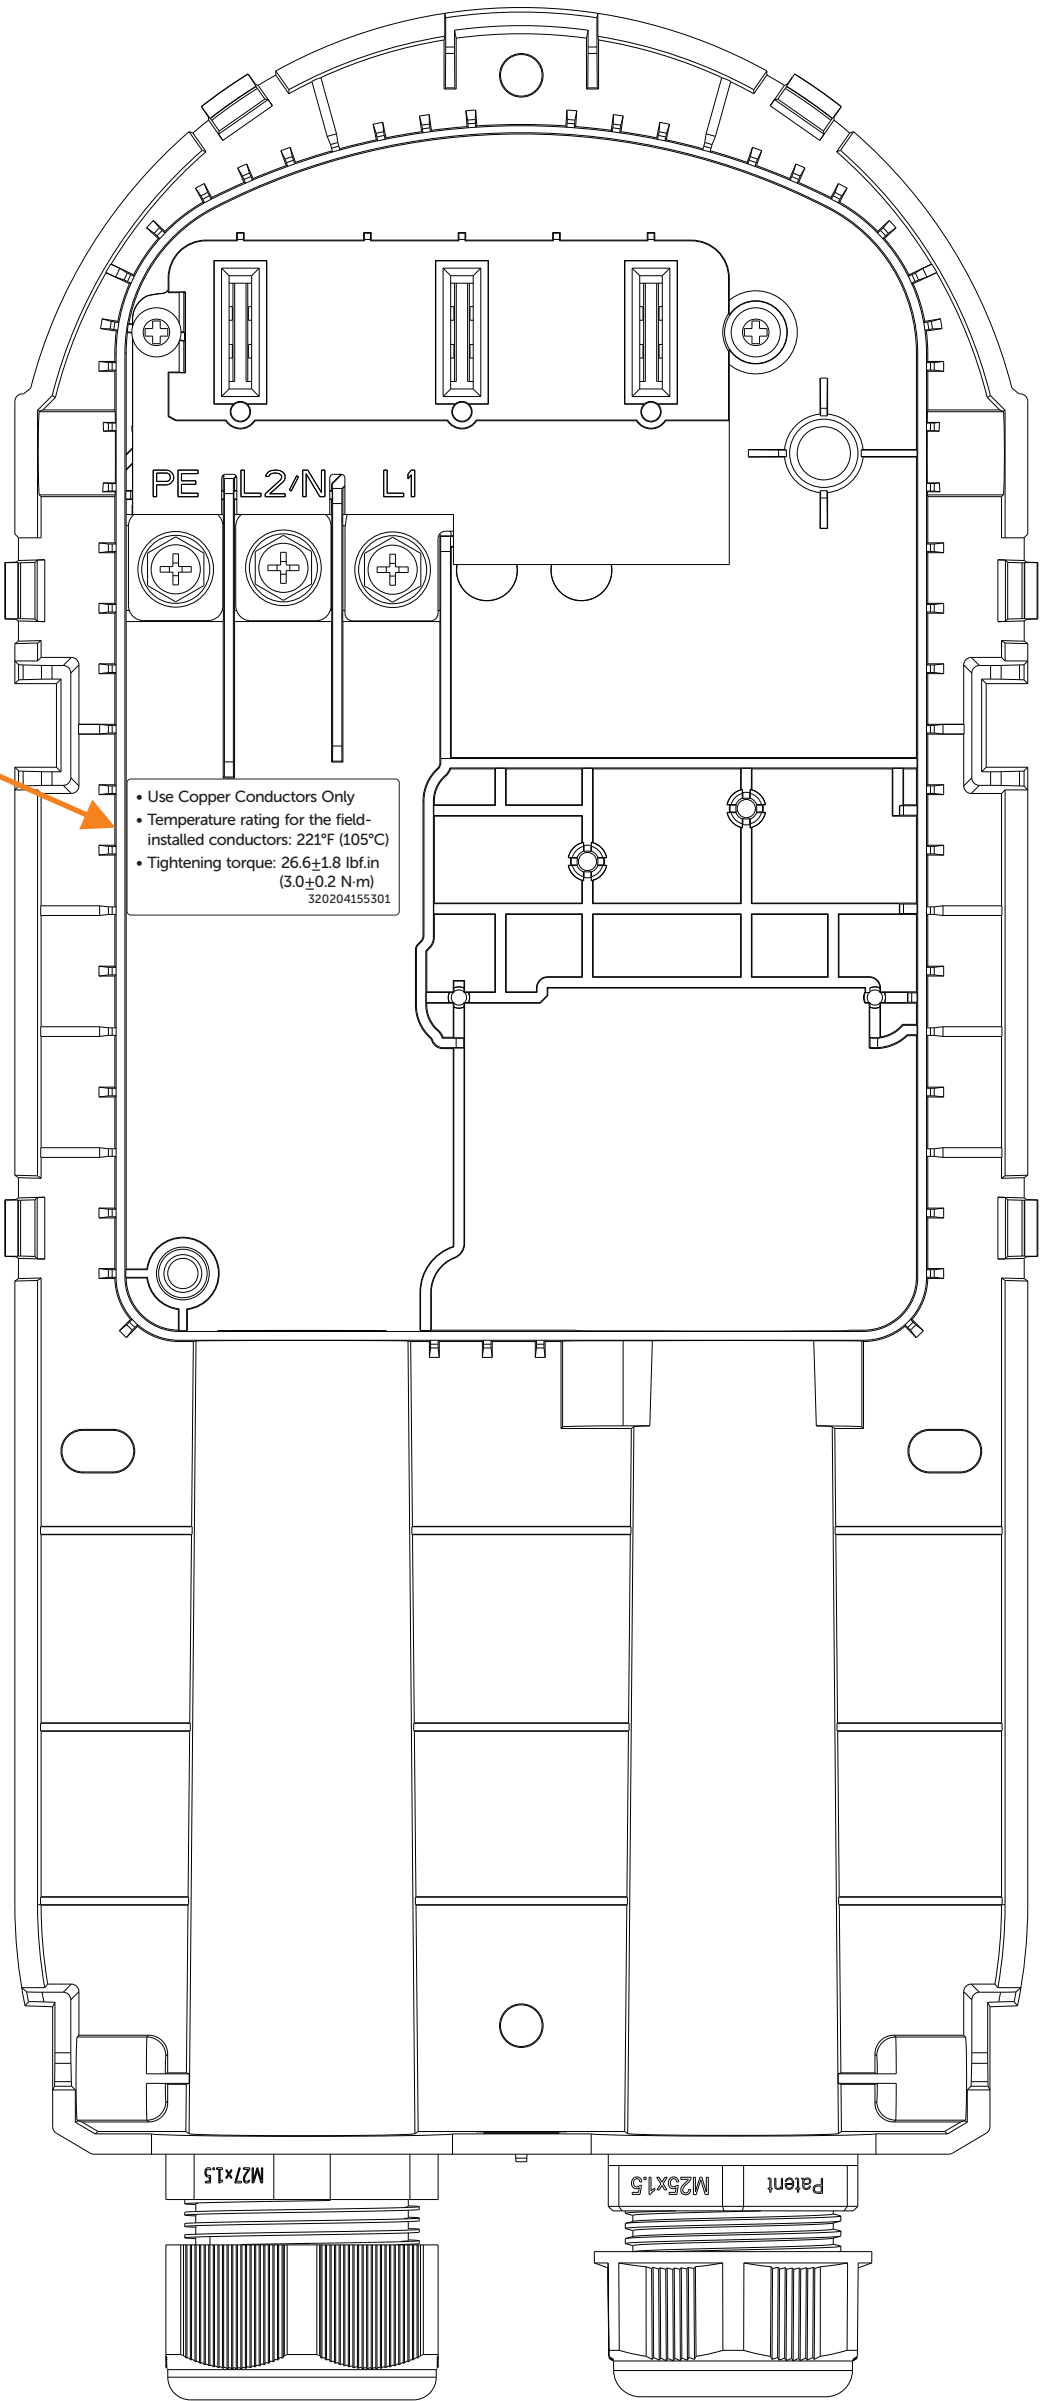

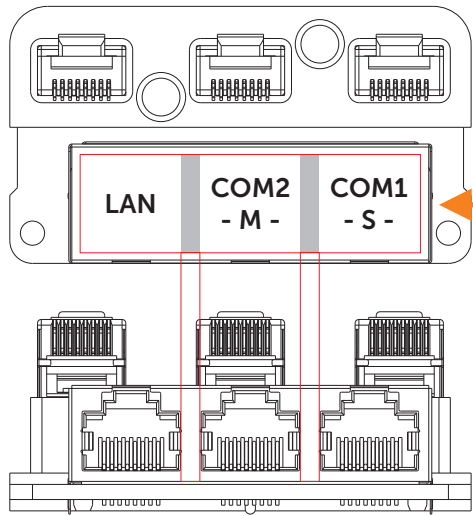

Communication terminal label

