

FCC Radio Test Report

FCC ID: 2AMEITH02-12

**FCC 47 CFR Part 15 Subpart C: 2016
RSS 247 Issue 1:2015**

Product	:	Wireless remote
Trade Name	:	TANHILL
Model No.	:	TH02-12
Serise No.	:	TH02-07

Issued for

Changzhou Tanhill Intelligent Home Furnishing Co.,Ltd

6# East Renmin Road, Wujin District, Changzhou, Jiangsu Province, China

Issued by

Shenzhen ATL Testing Technology Co., Ltd.

F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen,
China

Tel.: +86-0755-26909822 Fax.: +86-0755-61605504

Website: www.atllab.org

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen ATL Testing Technology Co., Ltd.. This document may be altered or revised by Shenzhen ATL Testing Technology Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample

TEST RESULT CERTIFICATION

Product : Wireless remote
Applicant : Changzhou Tanhill Intelligent Home Furnishing Co.,Ltd
Address : 6# East Renmin Road, Wujin District, Changzhou, Jiangsu
Province, China
Manufacturer : SHENZHEN DENORGIN SCIENCE & TECHNOLOGY
COMPANY LIMITED
Address : 3Floor, No.2, A district, ShangXue Science and Technology
Industrial District, Bantian Street, LongGang, Shenzhen ,China
Model No...... : TH02-12
Standards : FCC Part 15 Subpart C (15.247):2016
RSS 247 Issue 1: 2015
Test Method..... : ANSI C63.10: 2013
KDB 558074 D01 DTS Meas Guidance v04

The above equipment has been tested by Shenzhen ATL Testing Technology Co., Ltd. and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Test..... :

Date of receipt of test item 2017-06-06

Date(s) of performance of test 2017-06-07 to 2017-06-14

Test Result..... : **Pass**

Testing by

:

Si fei fei

(Si feifei)

Date

:

2017-06-08

Check by

:

Xie Lingling

(Xie Lingling)

Date

:

2017-06-13

Approved by

:

Xu Peng

(Xu Peng)

Date

:

2017-06-14

Table of Contents	Page
1 . TEST SUMMARY	5
1.1 TEST FACILITY	6
1.2 MEASUREMENT UNCERTAINTY	6
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	9
2.3 DESCRIPTION OF TEST SETUP	10
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	11
2.5 EUT EXERCISE SOFTWARE	11
3 . CONDUCTED EMISSION TEST	12
3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)	12
3.2 TEST PROCEDURE	12
3.3 TEST SETUP	13
3.4 TEST INSTRUMENTS	13
3.5 EUT OPERATING CONDITIONS	13
3.6 TEST RESULTS	13
4. RADIATED EMISSION MEASUREMENT	14
4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)	14
4.2 TEST PROCEDURE	14
4.3 TEST SETUP	15
4.4 TEST INSTRUMENTS	16
4.5 EUT OPERATING CONDITIONS	16
4.6 TEST RESULTS	17
5. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT	22
5.1 LIMITS	22
5.2 TEST PROCEDURE	22
5.3 TEST SETUP	22
5.4 TEST INSTRUMENTS	22
5.5 EUT OPERATING CONDITIONS	22
5.6 TEST RESULTS	22
6. OCCUPIED BANDWIDTH MEASUREMENT	25
6.1 LIMITS	25
6.2 TEST PROCEDURE	25

Table of Contents	Page
6.3 TEST SETUP	25
6.4 TEST INSTRUMENTS	25
6.5 EUT OPERATING CONDITIONS	25
6.6 TEST RESULTS	25
7. POWER SPECTRAL DENSITY	28
7.1 LIMITS	28
7.2 TEST PROCEDURE	28
7.3 TEST SETUP	28
7.4 TEST INSTRUMENTS	28
7.5 EUT OPERATING CONDITIONS	28
7.6 TEST RESULTS	28
8. BAND EDGE AND OUT-OF-BAND EMISSION	31
8.1 LIMITS	31
8.2 TEST PROCEDURE	31
8.3 TEST SETUP	31
8.4 TEST INSTRUMENTS	32
8.5 EUT OPERATING CONDITIONS	32
8.6 TEST RESULTS	32
9. ANTENNA REQUIREMENT	36
9.1 REQUIREMENT	36
9.2 ANTENNA CONNECTOR CONSTRUCTION	36

1. TEST SUMMARY

Test procedures according to the technical standards:

FCC Part 15 Subpart C (15.247)/RSS 247 Issue 1				
Standard Section		Test Item	Judgment	Remark
FCC	IC			
15.203	/	Antenna Requirement	PASS	
15.207	RSS-GEN 7.2.4	Conducted Emission	N/A	N/A
15.205/ 15.209	RSS-GEN 7.2.2	Restricted Bands	PASS	
15.247(a)(2)	RSS 247 5.2 (1)	6dB Bandwidth	PASS	
15.247(b)	RSS 247 5.4 (4)	Peak Output Power	PASS	
15.247(e)	RSS 247 5.2 (2)	Power Spectral Density	PASS	
15.247(d)	RSS 247 5.5	Band Edge/Out-of-band Emission	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) The test results of this report relate only to the tested sample(s) identified in this report.

1.1 TEST FACILITY

Shenzhen ATL Testing Technology Co., Ltd.

Add. : F/4, Building 10, Dayuan Industrial Zone, Xili Town, Nanshan District, Shenzhen, China

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

A. Conducted Emission :

The measurement uncertainty is evaluated as ± 3.2 dB.

B. Radiated Measurement :

The measurement uncertainty is evaluated as ± 3.7 dB.

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Wireless remote
Model Name	TH02-12
Additional Model Number(s)	TH02-07
Model Difference	All these models are identical in the same PCB layout and electrical circuit, the only difference is model name for commercial.
Frequency Range	2.4G: 2402~2480 MHz
Number of Channel	79 Channels
Modulation Type	GFSK
RF Output Power	1.056 dBm
Antenna Type	PCB Antenna (Gain: 0dBi)
Power Source	DC power by AAA Battery.
Power Rating	DC 3*1.5V by AAA Battery.
Remark	More details EUT technical specifications, please refer to the User's Manual.

Note:

(1) This Test Report is FCC Part 15 Subpart C, 15.247 for 2.4G. And the Test procedure follows the FCC KDB 558074 D01 DTS Meas Guidance v04.

(2) Transmitting mode with antennas

Mode	TX Antenna (s)
TX Mode	1

(3) Channel List.

2.4G					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Test	
Final Test Mode	Description
Mode 1	TX Mode


For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode

Note:

- (1) Software used to control the EUT for staying in continuous transmitting mode was programmed. After verification, all tests were carried out with the worst case test modes as shown below.
- (2) 2.4G(GFSK) Mode:
Channel (2402/2441/2480 MHz) with 1Mbps data rate were chosen for full testing.
- (3) By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2.3 DESCRIPTION OF TEST SETUP

Radiated Emission

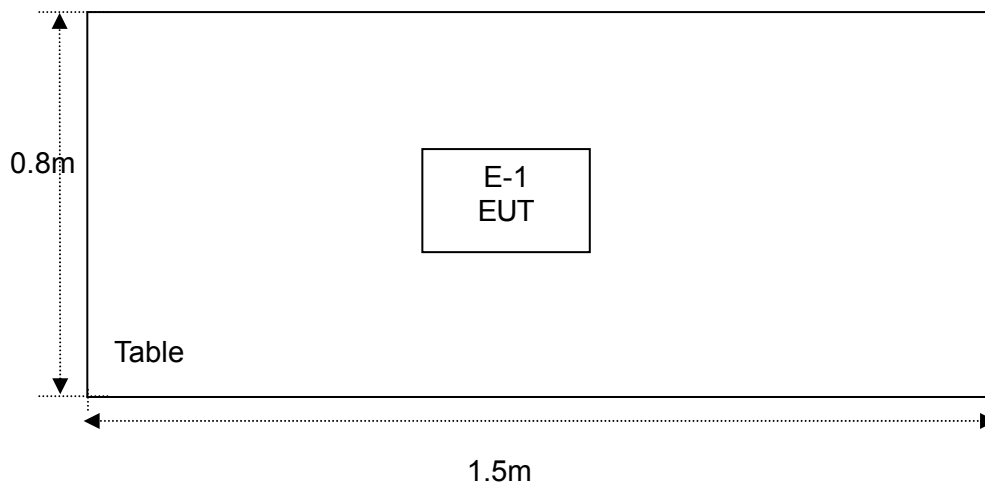

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	VOC/DOC	Note
E-1	Wireless remote	N/A	TH02-12	/	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Verification of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” means “shielded” “with core”; “NO” means “unshielded” “without core”.

2.5 EUT EXERCISE SOFTWARE

Power Parameters for Testing			
Test Software Version	SmartRF Studio 7		
Mode	Frequency/ Parameters		
GFSK	2402 MHz	2441 MHz	2480 MHz
	DEF	DEF	DEF

3. CONDUCTED EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Quasi-peak	Average
	dBuV	dBuV
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.3 TEST SETUP

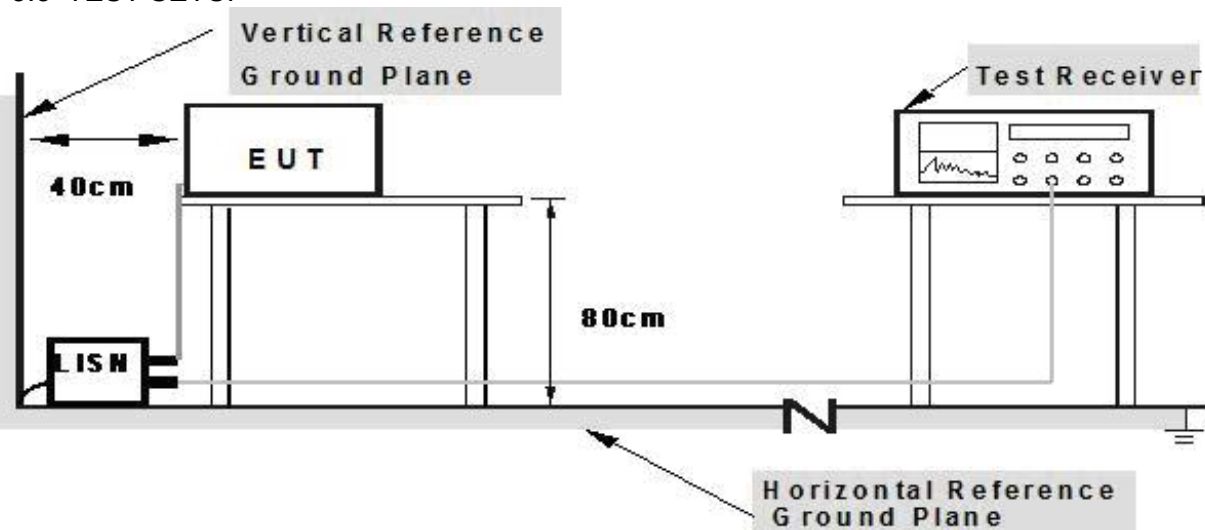

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
LISN	R&S	NSLK81	8126466	Jul. 04, 2016	Jul. 03. 2017	1 year
LISN	R&S	NSLK81	8126487	Jul. 04, 2016	Jul. 03. 2017	1 year
50Ω Switch	ANRITSU CORP	MP59B	6200983704	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	C03	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	1166.595	Jul. 04, 2016	Jul. 03. 2017	1 year
Passive Voltage Probe	ESH2-Z3	R&S	100196	Jul. 04, 2016	Jul. 03. 2017	1 year

3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.6 TEST RESULTS

The EUT is powered by battery, so no requirement for this test item.

4. RADIATED EMISSION MEASUREMENT

4.1 RADIATED EMISSION LIMIT (Frequency Range 9KHz-1000MHz)

20 dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a) and RSS-210 Section 2.2&A8.5, then the 15.209(a) and RSS-General limit in the table below has to be followed.

FREQUENCY (MHz)	Field Strength (uV/m at meter)	Measurement Distance (meters)
0.009 -0.490	2400/F(KHz)	300
0.490 -1.705	24000/F(KHz)	30
1.705 -30.0	30	30
30 -88	100	3
88 -216	150	3
216~960	200	3
Above 960	500	3

RADIATED EMISSION LIMITS (Above 1000MHz)

FREQUENCY (MHz)	Distance of 3m (dBuV/m)	
	Peak	Average
Above 1000	74	54

Note:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (2) Emission Level(dBuV/m)=20log Emission Level(uV/m)

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency~ Stop Frequency	9kHz~150kHz/ RB 200Hz for QP
Start Frequency~ Stop Frequency	150kHz~30MHz/ RB 9kHz for QP
Start Frequency~ Stop Frequency	30MHz~1000MHz/ RB120kHz for QP

The following table is the setting of the spectrum

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB/ VB (emission in restricted band)	1MHz/ 3 MHz for Peak, 1MHz/ 10Hz for Average

4.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.

- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.


Note:

Both horizontal and vertical antenna polarities were tested.


And performed pretest to three orthogonal axis. The worst case emissions were reported.

4.3 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 30MHz

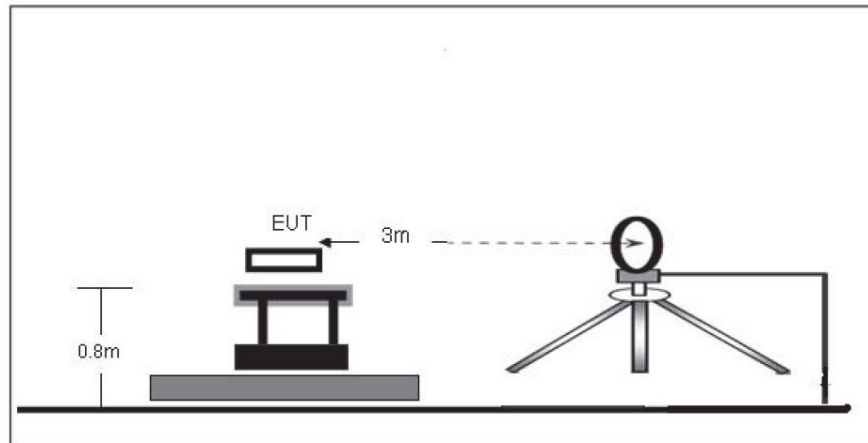

(B) Radiated Emission Test Set-Up Frequency Below 1 GHz

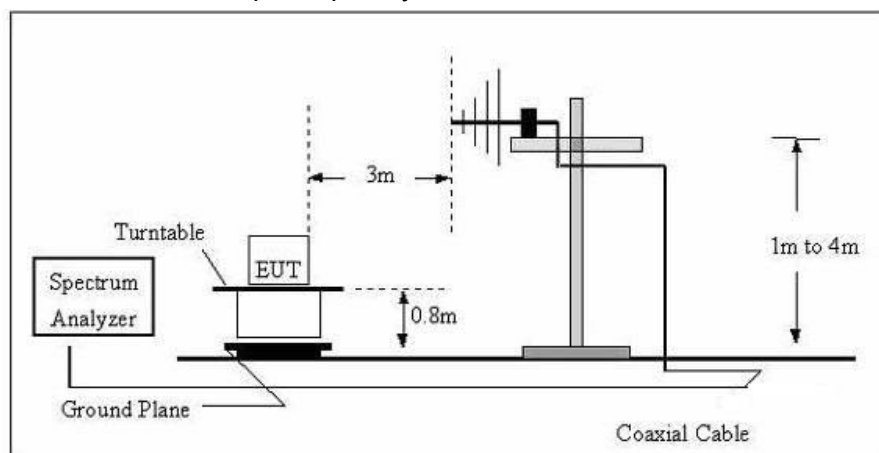

(C) Radiated Emission Test Set-Up Frequency Above 1GHz

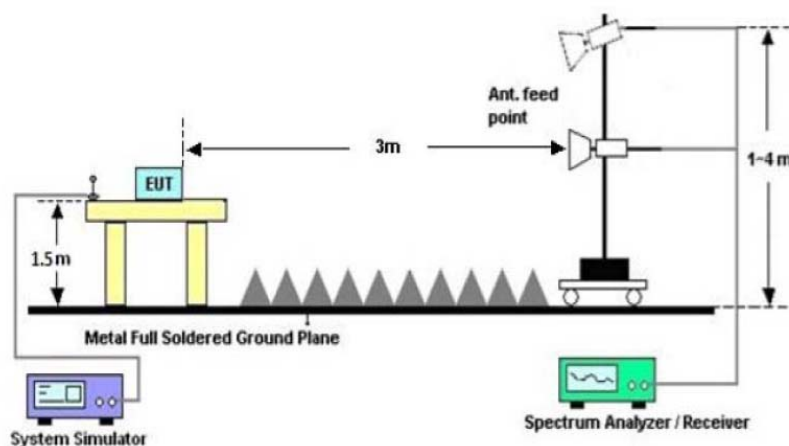

4.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 04, 2016	Jul. 03. 2017	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Horn Antenna	R&S	HF906	10029	Jul. 04, 2016	Jul. 03. 2017	1 year
Broadband Antenna	Schwarz beck	VULB9163	9163-333	Jul. 04, 2016	Jul. 03. 2017	1 year
Loop Antenna	Schwarz beck	FMZB 1516	9773	Jul. 04, 2016	Jul. 03. 2017	1 year
Amplifier	EM	EM-30180	060538	Jul. 04, 2016	Jul. 03. 2017	1 year

4.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.


4.6 TEST RESULTS

3.6.1 TEST RESULTS (9KHz~ 30MHz)

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.6.2 TEST RESULTS (Bellow 1GHz)

EUT :	Wireless remote	Model Name. :	TH02-12
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2017-06-09
Test Mode :	TX Mode (2402MHz)	Polarization :	Horizontal
Test Power :	DC 4.5V		
Remark :	Only show the worse case.		

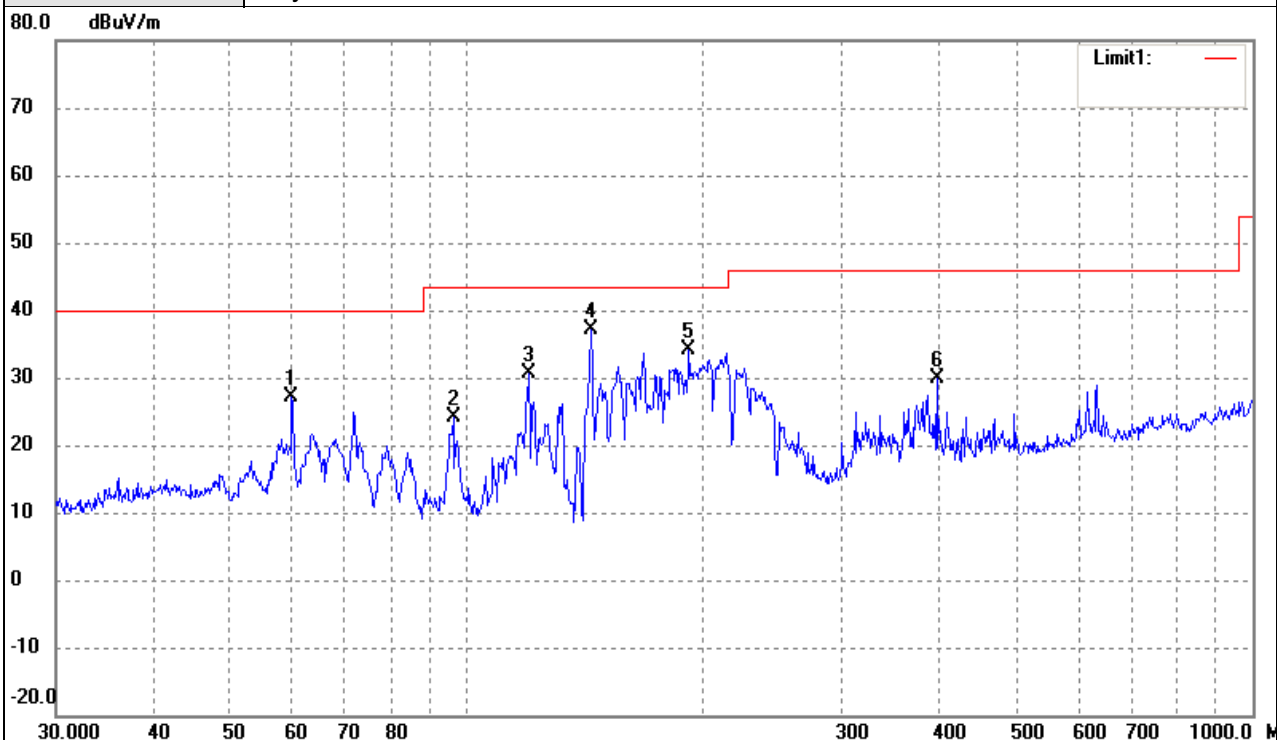


No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	59.8588	36.64	-9.56	27.08	40.00	-12.92	QP
2	96.0986	35.73	-11.70	24.03	43.50	-19.47	QP
3	119.8556	42.11	-11.42	30.69	43.50	-12.81	QP
4	143.8295	49.62	-12.51	37.11	43.50	-6.39	QP
5	191.7450	44.01	-9.77	34.24	43.50	-9.26	QP
6	396.2415	32.90	-2.95	29.95	46.00	-16.05	QP

Remark:

Factor = Antenna Factor + Cable Loss.

EUT :	Wireless remote	Model Name. :	TH02-12
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010 hPa	Test Date :	2017-06-09
Test Mode :	TX Mode (2402MHz)	Polarization :	Vertical
Test Power :	DC 4.5V		
Remark :	Only show the worse case.		

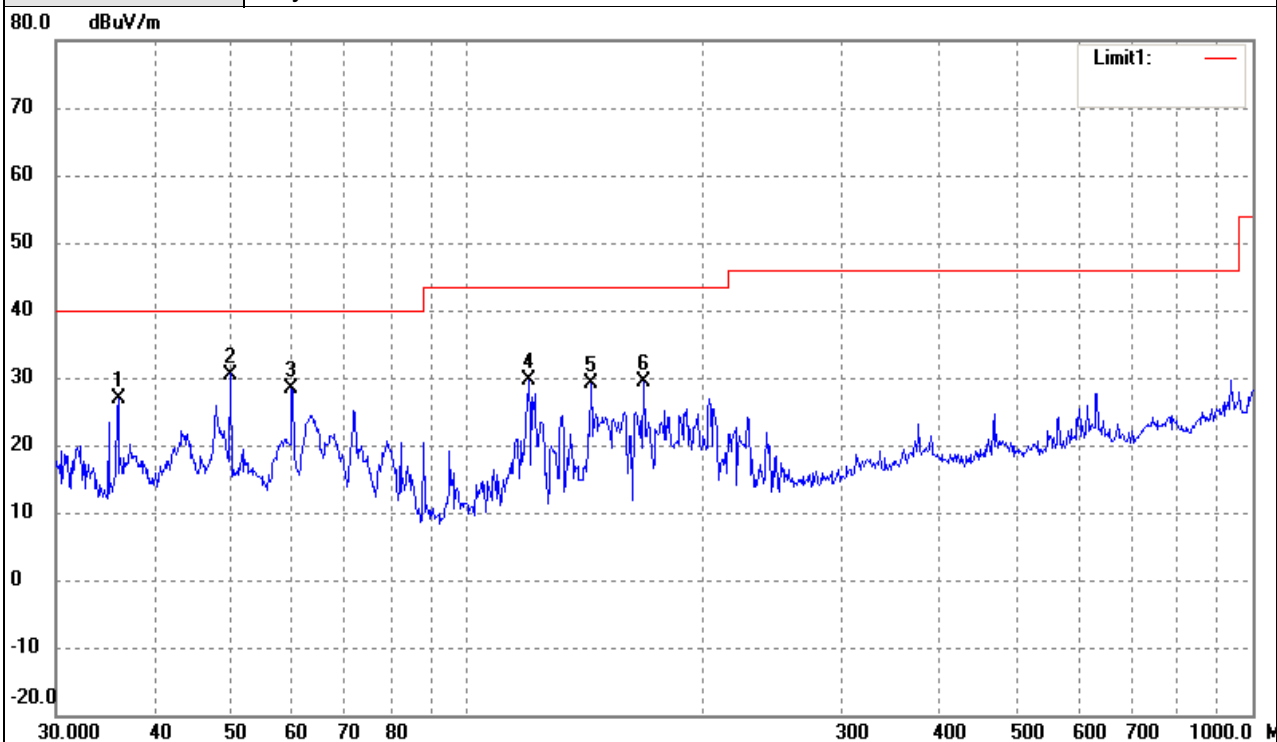

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.0007	35.57	-8.76	26.81	40.00	-13.19	QP
2	50.0566	38.83	-8.33	30.50	40.00	-9.50	QP
3	59.8588	37.92	-9.56	28.36	40.00	-11.64	QP
4	119.8556	41.08	-11.42	29.66	43.50	-13.84	QP
5	143.8295	41.64	-12.51	29.13	43.50	-14.37	QP
6	167.8243	41.30	-11.91	29.39	43.50	-14.11	QP

Remark:

Factor = Antenna Factor + Cable Loss.

3.6.3 TEST RESULTS (Above 1GHz)

EUT :	Wireless remote			Model Name. :	TH02-12		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 4.5V			Pressure :	1010 hPa		
Test Mode :	TX 2402MHz			Test Date :	2017-06-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4804	63.96	Peak	H	-3.59	60.37	74	-13.63
4804	50.76	Avg	H	-3.59	47.17	54	-6.83
7206	57.68	Peak	H	-0.52	57.16	74	-16.84
7206	45.16	Avg	H	-0.52	44.64	54	-9.36
---	---	Peak	H			74	
---	---	Avg	H			54	
4804	63.24	Peak	V	-3.59	59.65	74	-14.35
4804	50.36	Avg	V	-3.59	46.77	54	-7.23
7206	56.31	Peak	V	-0.52	55.79	74	-18.21
7206	44.39	Avg	V	-0.52	43.87	54	-10.13
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

EUT :	Wireless remote			Model Name. :	TH02-12		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 4.5V			Pressure :	1010 hPa		
Test Mode :	TX 2441MHz			Test Date :	2017-06-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4882	63.46	Peak	H	-3.49	59.97	74	-14.03
4882	50.60	Avg	H	-3.49	47.11	54	-6.89
7323	56.13	Peak	H	-0.47	55.66	74	-18.34
7323	45.24	Avg	H	-0.47	44.77	54	-9.23
---	---	Peak	H			74	
---	---	Avg	H			54	
4882	63.95	Peak	V	-3.49	60.46	74	-13.54
4882	50.34	Avg	V	-3.49	46.85	54	-7.15
7323	56.61	Peak	V	-0.47	56.14	74	-17.86
7323	45.52	Avg	V	-0.47	45.05	54	-8.95
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

EUT :	Wireless remote			Model Name. :	TH02-12		
Temperature :	26 °C			Relative Humidity :	56%		
Test Power :	DC 4.5V			Pressure :	1010 hPa		
Test Mode :	TX 2480MHz			Test Date :	2017-06-10		
Freq.	Deceiver Reading	Detector	Polar	Corrected Factor	Emission Level	Limit	Margin
MHz	dBuV	Peak/Avg	H/V	dB	dBuV /m	dBuV /m	dB
4960	63.98	Peak	H	-3.41	60.57	74	-13.43
4960	50.37	Avg	H	-3.41	46.96	54	-7.04
7440	56.48	Peak	H	-0.42	56.06	74	-17.94
7440	45.21	Avg	H	-0.42	44.79	54	-9.21
---	---	Peak	H			74	
---	---	Avg	H			54	
4960	63.09	Peak	V	-3.41	59.68	74	-14.32
4960	50.54	Avg	V	-3.41	47.13	54	-6.87
7440	57.20	Peak	V	-0.42	56.78	74	-17.22
7440	45.50	Avg	V	-0.42	45.08	54	-8.92
---	---	Peak	V			74	
---	---	Avg	V			54	

Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

The testing has been conformed to 10th harmonics(1G~25G)

Other harmonics emission are lower then 20dB below the allowable Limit

5. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

5.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.4(4)	
Frequency Range (MHz)	2400~2483.5
Limits	30

5.2 TEST PROCEDURE

The measurement is according to section 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v04.

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.

5.3 TEST SETUP

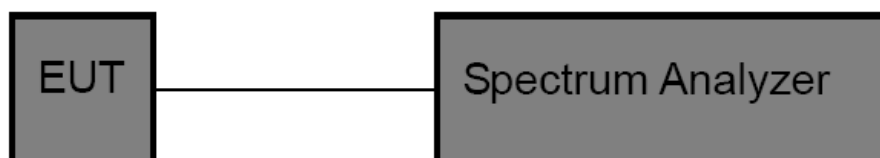

5.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


5.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


5.6 TEST RESULTS

GFSK TX Mode		
Frequency (MHz)	Peak Output Power (dBm)	Limit (dBm)
2402	1.056	<30
2441	0.787	
2480	0.866	


2402 MHz

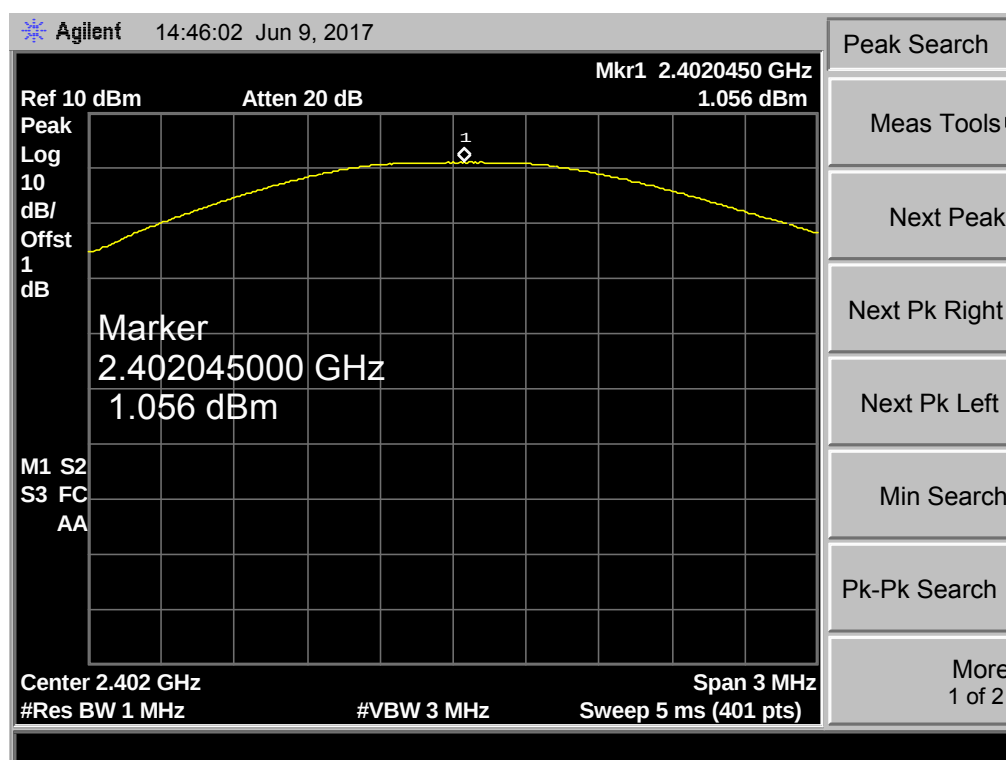

2441 MHz

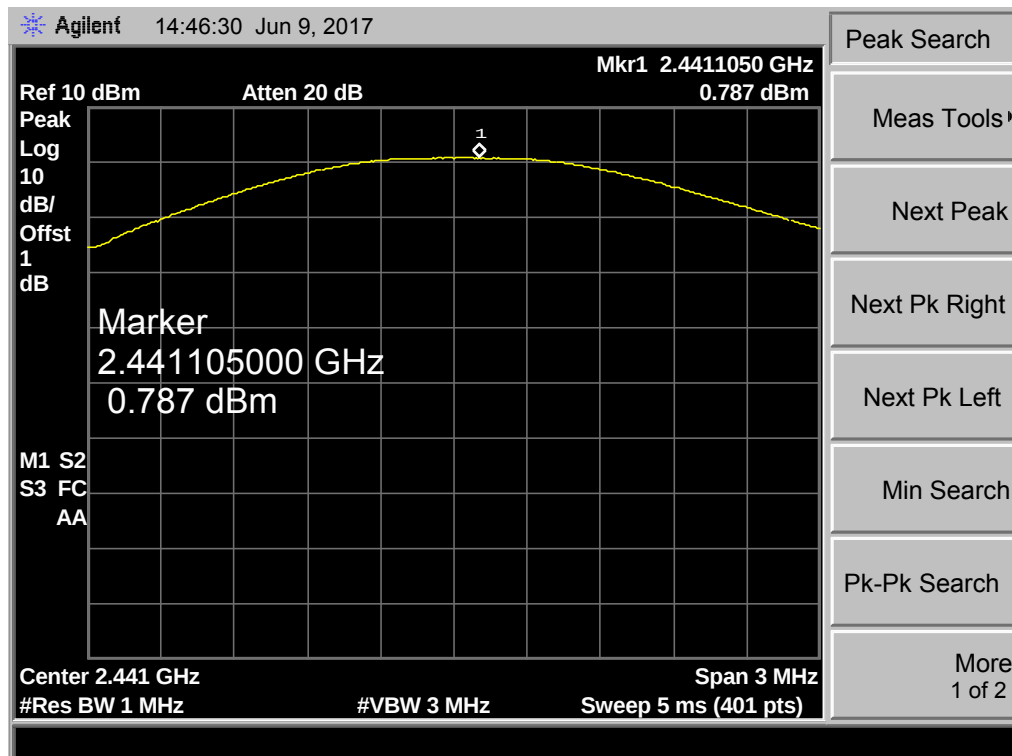

2480 MHz

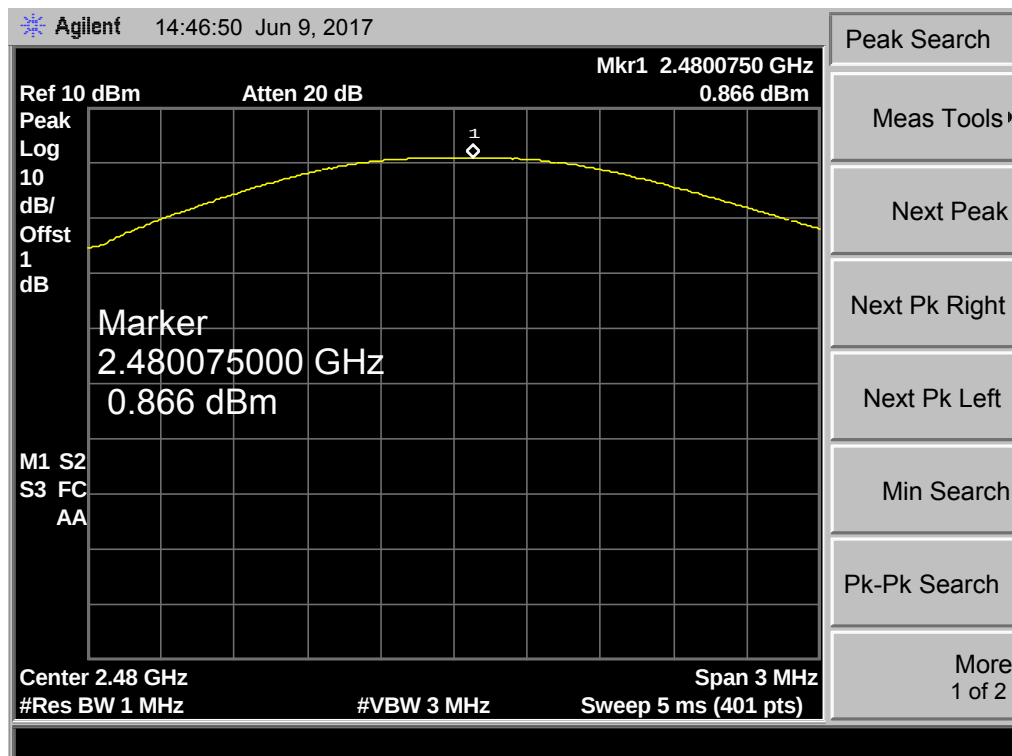

6. OCCUPIED BANDWIDTH MEASUREMENT

6.1 LIMITS


FCC Part 15.247, subpart C/ RSS 247 Section 5.2(1)	
Frequency Range (MHz)	2400~2483.5
Limits	6 dB Bandwidth>500 KHz

6.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	>6 dB Bandwidth
RBW	100 kHz
VBW	$\geq 3\text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 TEST SETUP

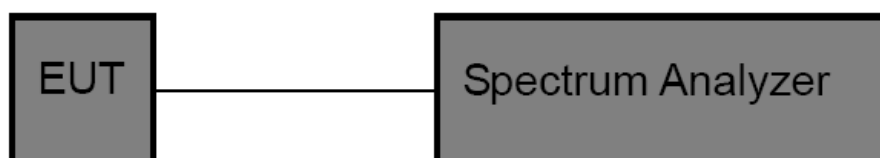

6.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


6.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


6.6 TEST RESULTS

GFSK TX Mode			
Frequency (MHz)	6dB Bandwidth (KHz)	99% OBW (MHz)	Limit
2402	742.603	1.0635	>=500 kHz
2441	737.921	1.0615	
2480	739.013	1.0628	


2402 MHz

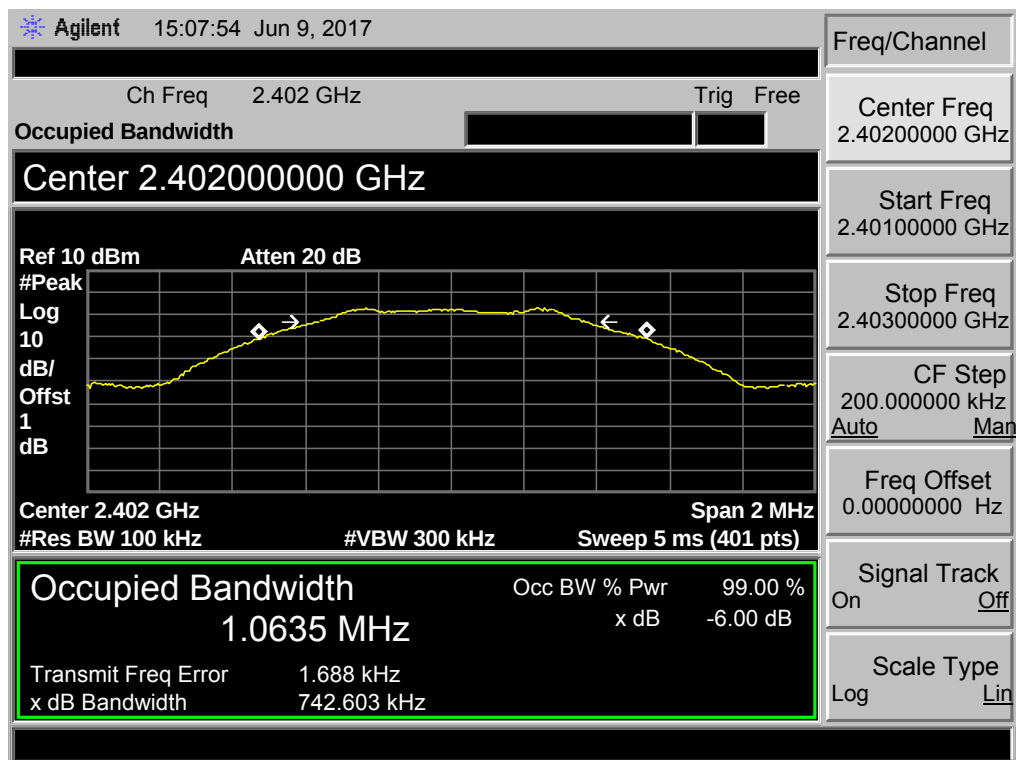

2441 MHz

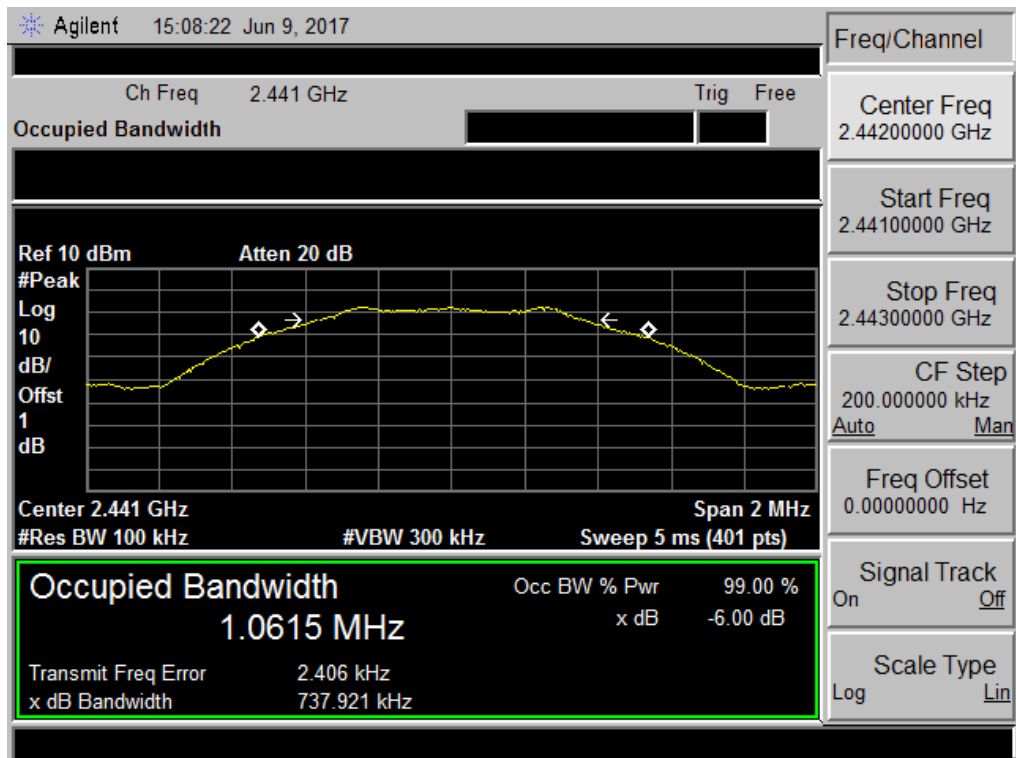

2480 MHz

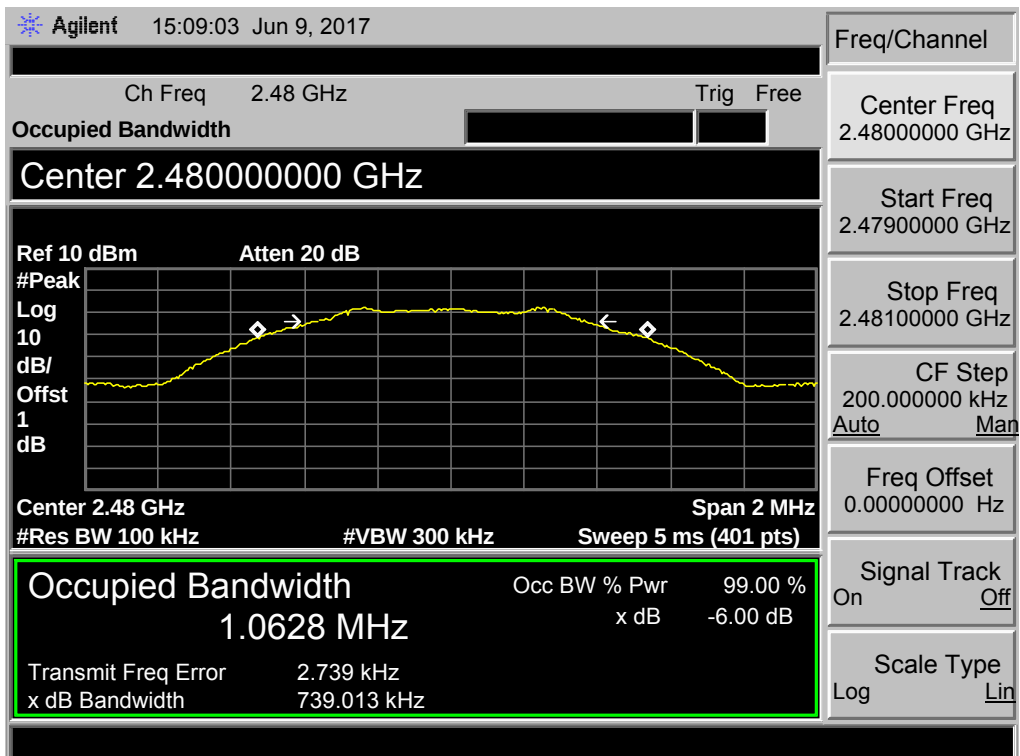

7. POWER SPECTRAL DENSITY

7.1 LIMITS


FCC Part 15.247, Subpart C/ RSS 247 Section 5.2(2)	
Frequency Range (MHz)	2400~2483.5
99% Occupied Bandwidth	8 dBm in any 3 kHz

7.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as below.

Spectrum Parameters	Setting
Attenuation	Auto
Span	Set the span to 1.5 times the DTS channel bandwidth
RBW	3 kHz
VBW	$\geq 3\text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 TEST SETUP

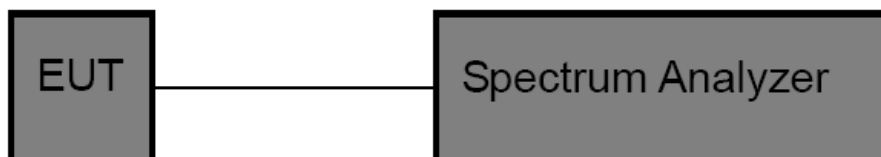

7.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2015	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year


7.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.


7.6 TEST RESULTS

GFSK TX Mode			
Frequency (MHz)	Power Density (3 kHz/dBm)	Limit (dBm/3KHz)	Result
2402	-12.35	8	Pass
2441	-12.67		
2480	-12.39		


2402 MHz

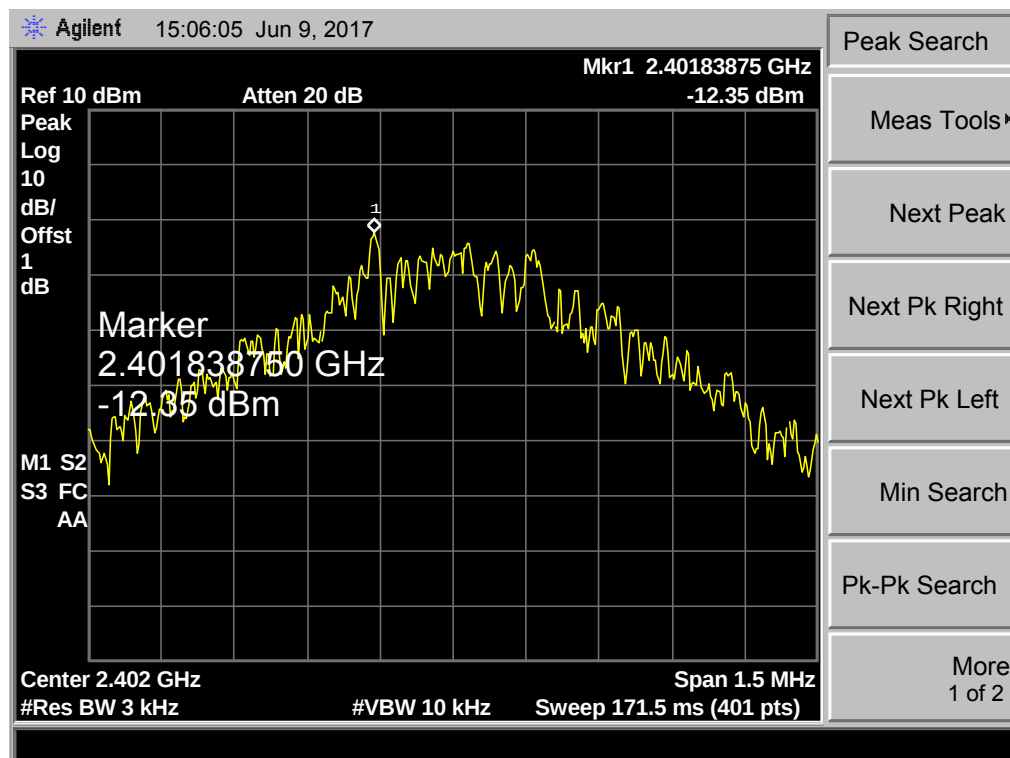

2441 MHz

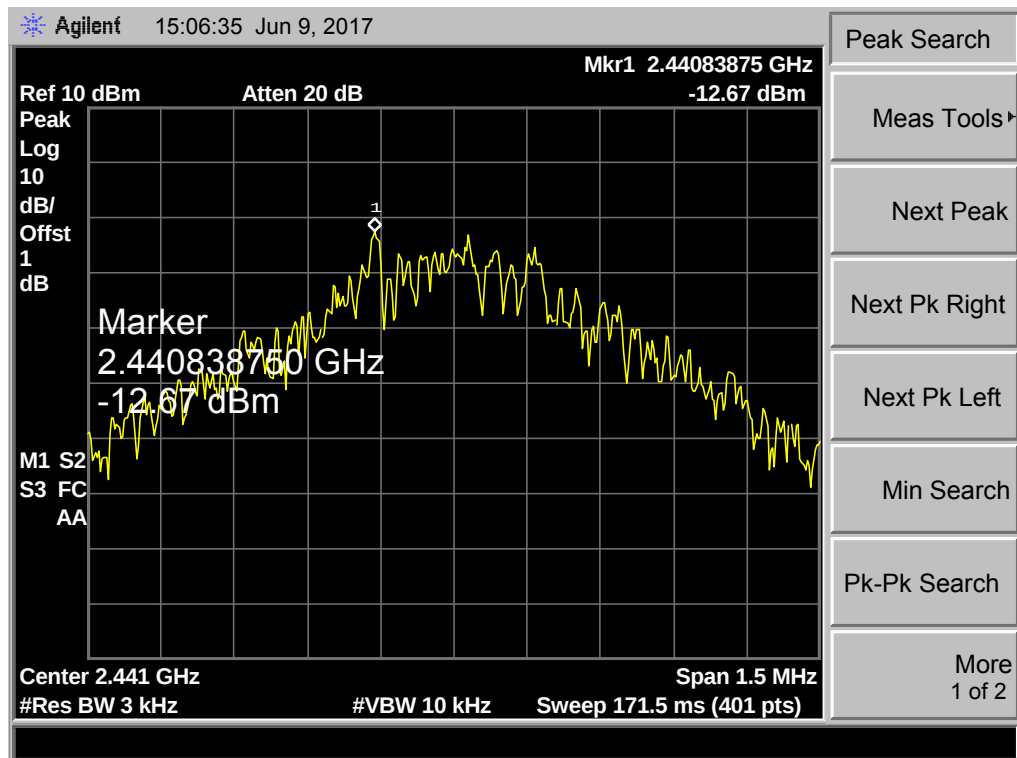

2480 MHz

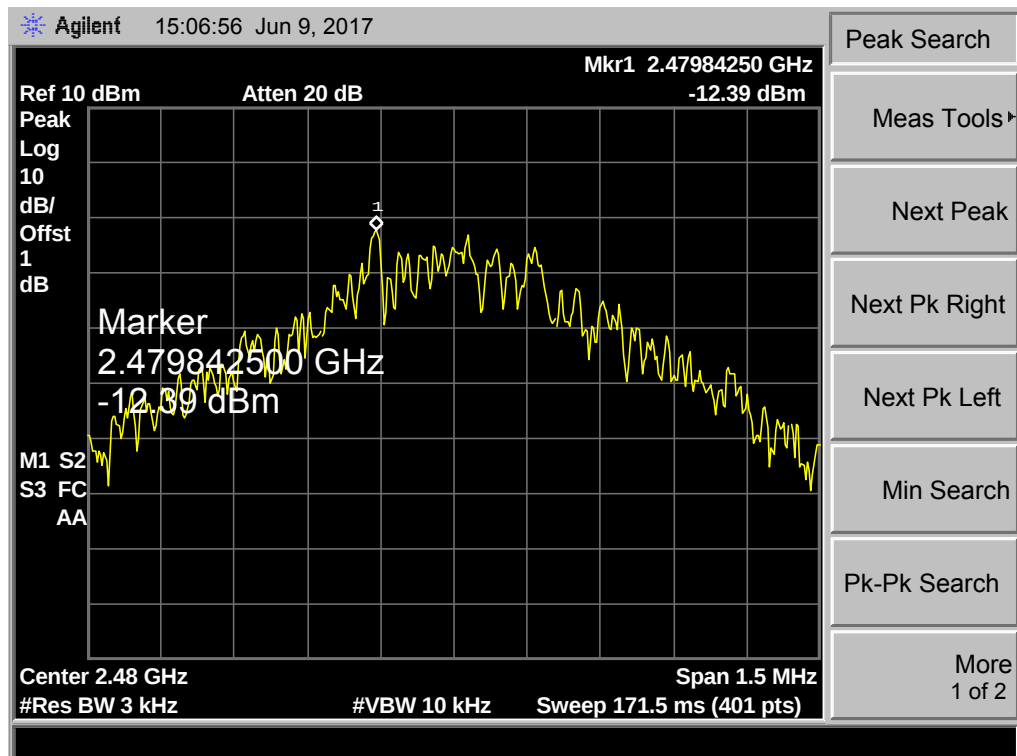

8. BAND EDGE AND OUT-OF-BAND EMISSION

8.1 LIMITS

FCC Part 15.247, Subpart C/ RSS 247 Section 5.5	
Frequency Range (MHz)	2400~2483.5
Limit	In any 100 kHz bandwidth outside the intentional radiation frequency band, the radio frequency power shall be at least 20 dB below the highest level of the desired power, based on either an RF conducted measurement, provide the transmitter demonstrates compliance with the peak conducted power limits.


8.2 TEST PROCEDURE

The EUT was directly connected to the power meter and antenna output port as show in the block diagram as bellow.


- Set frequency range to capture low band-edge from 2310 MHz up to 2390 MHz, and for up band-edge from 2483.5 MHz up to 2500 MHz
- For low band-edge set the equipment transmit at the lowest channel, and for up band-edge set the equipment transmit at the highest channel
- Set the VBW ≥ 3 RBW (100kHz/ 300kHz) for conducted measurement
- For radiated measurements the RBW set to 1 MHz, and the VBW set to 1 MHz for peak measurements and 10 Hz for average measurement

8.3 TEST SETUP

(A) Radiated Emission Test Set-Up

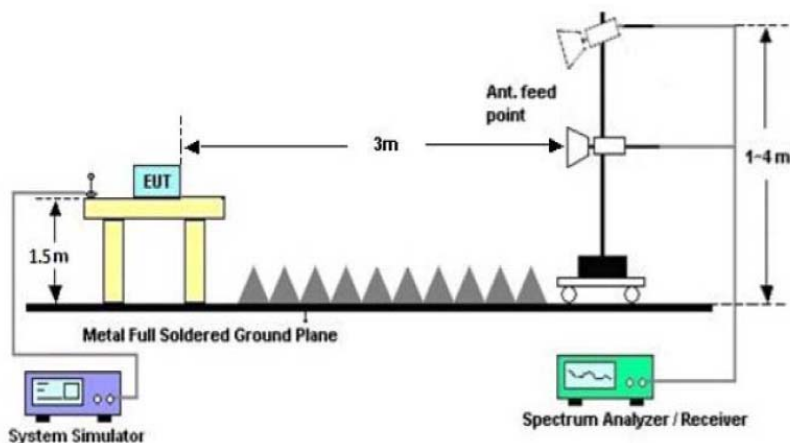

(B) Conducted Emission Test Setup

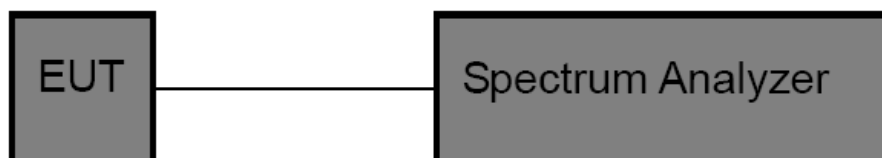

8.4 TEST INSTRUMENTS

Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
Broadband Antenna	R&S	VULB 9168	VULB 9168-456	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-01	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
Test Cable	N/A	R-02	N/A	Jul. 04, 2016	Jul. 03. 2017	1 year
EMI Test Receiver	R&S	ESCI	101324	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	Agilent	E4407B	MY41440432	Jul. 04, 2016	Jul. 03. 2017	1 year
Antenna Mast	EM	SC100_1	N/A	N/A	N/A	N/A
Turn Table	EM	SC100	060531	N/A	N/A	N/A
50Ω Switch	Anritsu Corp	MP59B	6200983705	Jul. 04, 2016	Jul. 03. 2017	1 year
Spectrum Analyzer	R&S	FSP40	100154	Jul. 04, 2016	Jul. 03. 2017	1 year
Horn Antenna	R&S	HF906	10029	Jul. 04, 2016	Jul. 03. 2017	1 year
Amplifier	EM	EM-30180	060538	Jul. 04, 2016	Jul. 03. 2017	1 year


8.5 EUT OPERATING CONDITIONS

The EUT was set to continuously transmitting in the maximum power during the test.

8.6 TEST RESULTS

Bandedge(Radiated Emission)

EUT :	Wireless remote	Model Name. :	TH02-12
Temperature :	26 °C	Relative Humidity :	56%
Test Power :	DC 4.5V	Pressure :	1010 hPa
Test Mode :	TX Mode 2402MHz	Test Date :	2017-06-10
Polarity :	Horizontal		
Remark :	Only show the worst polarity		

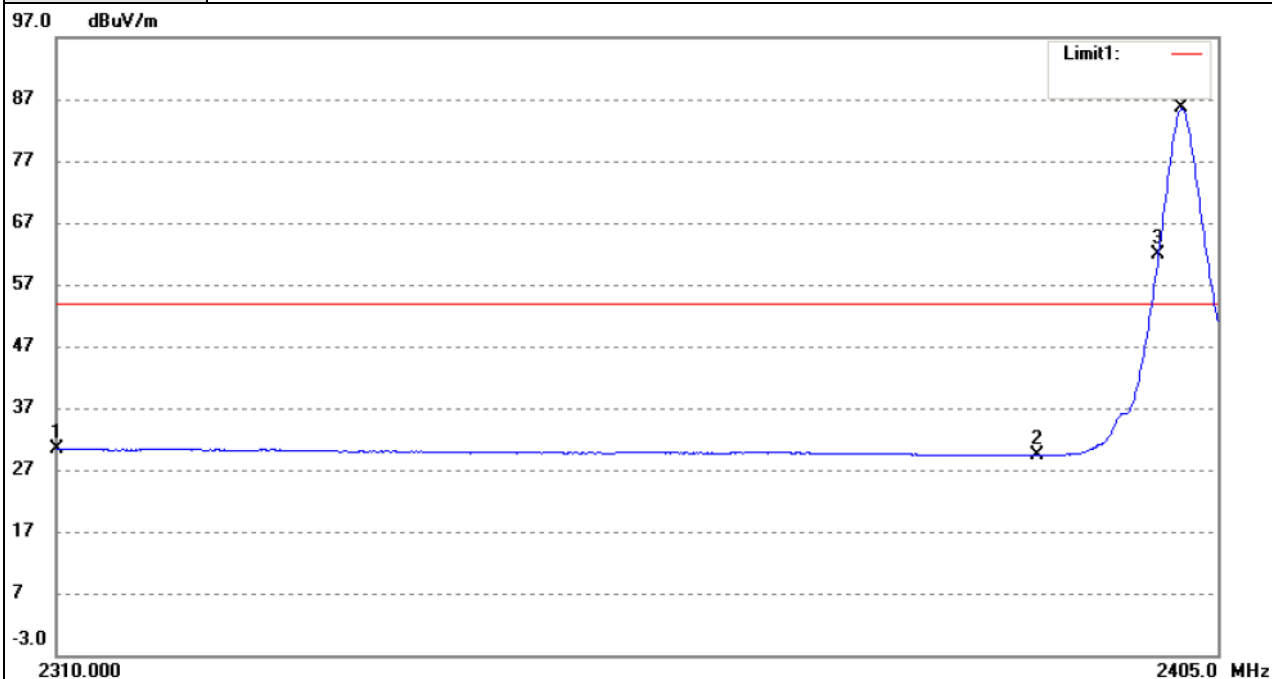

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	33.64	-3.35	30.29	54.00	-23.71	Average Detector
	2310.000	44.79	-3.35	41.44	74.00	-32.56	Peak Detector
2	2390.000	33.58	-4.29	29.29	54.00	-24.71	Average Detector
	2390.000	46.10	-4.29	41.81	74.00	-32.19	Peak Detector
3	2400.000	66.38	-4.40	61.98	/	/	Average Detector
4	2401.997	90.01	-4.42	85.59	/	/	Average Detector


Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

No report for the emission which more than 10 dB below the prescribed limit.

EUT :	Wireless remote	Model Name. :	TH02-12
Temperature :	26 °C	Relative Humidity :	56%
Test Power :	DC 4.5V	Pressure :	1010 hPa
Test Mode :	TX Mode 2480MHz	Test Date :	2017-06-10
Polarity :	Horizontal		
Remark :	Only show the worst polarity		

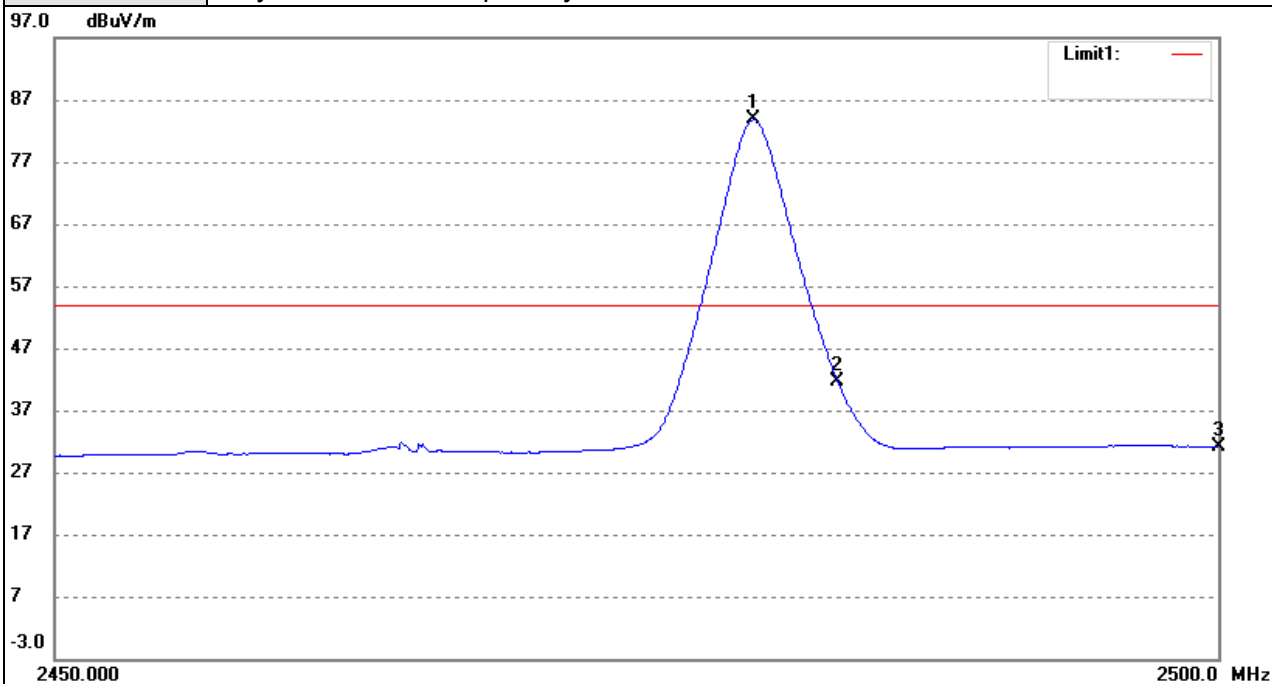

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.93	87.15	-3.36	83.79	/	/	Average Detector
	2480.03	87.79	-3.36	84.43	/	/	Peak Detector
2	2483.50	45.03	-3.30	41.73	54.00	-12.27	Average Detector
	2483.50	52.54	-3.30	49.24	74.00	-24.76	Peak Detector
3	2500.00	34.13	-3.00	31.13	54.00	-22.87	Average Detector
	2500.00	46.28	-3.00	43.28	74.00	-30.72	Peak Detector



Remark:

Emission Level= Read Level+ Correct Factor

Margin= Emission Level-Limit

No report for the emission which more than 10 dB below the prescribed limit.

Bandedge(Conducted Emission)

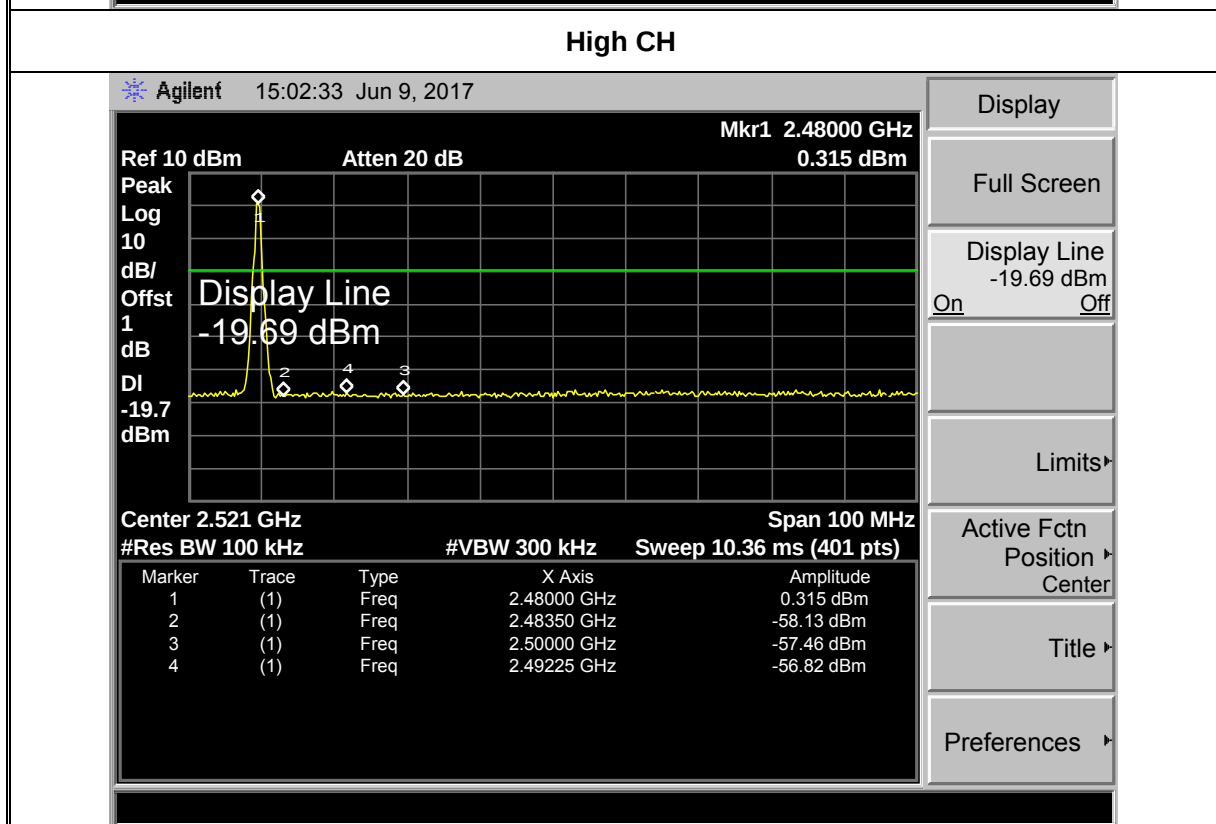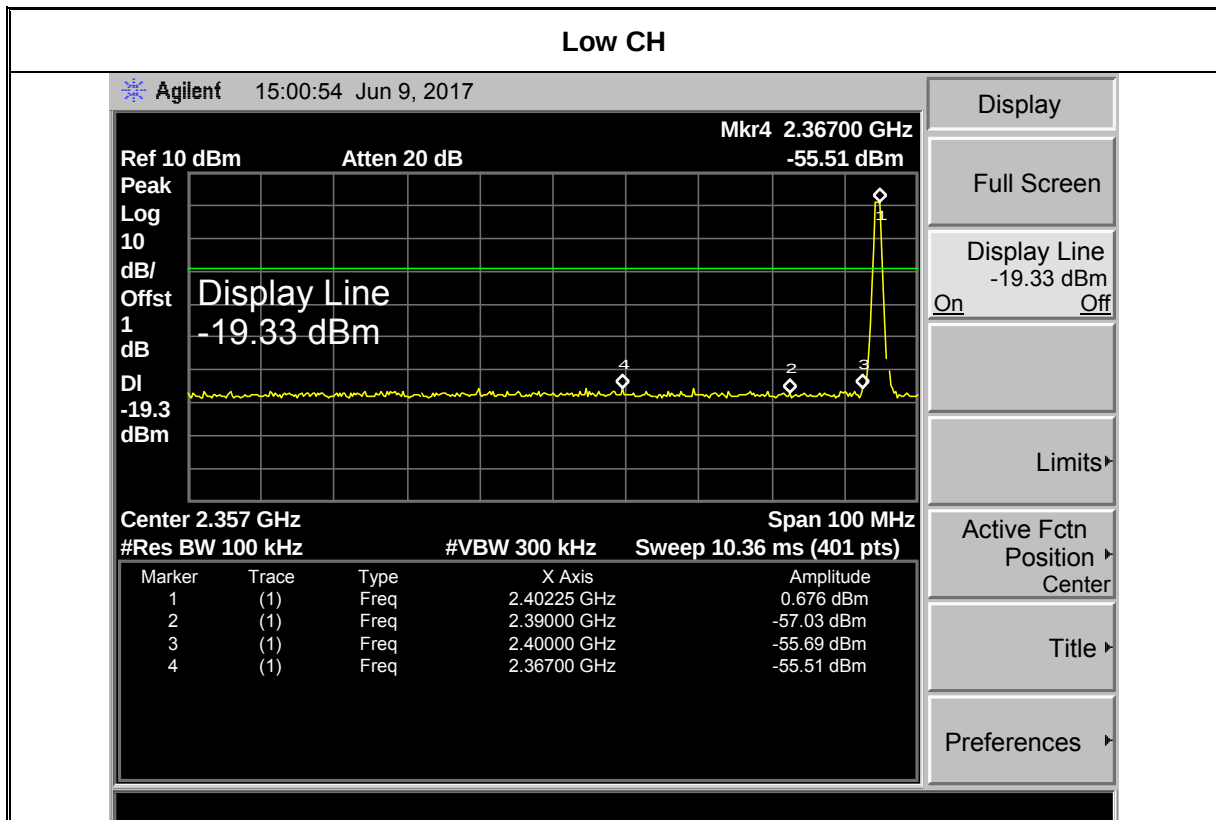

9. ANTENNA REQUIREMENT

9.1 REQUIREMENT

Antenna Requirement (15.203)	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.
Antenna Requirement (15.247)	If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

9.2 ANTENNA CONNECTOR CONSTRUCTION

The EUT antenna is a PCB Antenna. And the maximum gain of this antenna is 0dBi.
It complies with the standard requirement.

-----END OF REPORT-----