

RF Test Report:

Senceive “FM3Nano” to 47CFR15.247

FCC ID: 2AMFBFM3NT

SC_TR_263_B

Contents

1	Revision History	4
2	Purpose	4
3	Reference Documents	4
4	Test Information	5
4.1	Client	5
4.2	Test personnel	5
4.2.1	Antenna port tests	5
4.2.2	Radiated Emissions	5
4.3	Test sample	5
5	Product Description	5
6	Test Configuration	6
6.1	Test sample	6
6.2	Support equipment	6
6.3	Equipment set-up	7
6.4	Supported Antennas	7
7	Summary of tests performed	8
8	DTS Bandwidth	9
8.1	Measurement method	9
8.2	Test results	9
9	Maximum Peak Conducted Output Power	11
9.1	Measurement method	11
9.2	Test results	11
10	Maximum Power Spectral Density	13
10.1	Measurement method	13
10.2	Test results	13
11	Emissions in non-restricted frequency bands	15
11.1	Measurement method	15
11.2	Test results	15
12	Maximum Emissions in Restricted Band	20
12.1	Conducted Antenna port	20
12.1.1	Measurement method	20
12.1.2	Test results	21
12.2	Radiated test results	25
12.2.1	Measurement method	25
12.2.2	Results	25
	Channel 11	27
	Channel 18	28
	Channel 25	29
13	Occupied bandwidth	31
14	Test equipment	32

Figures

Figure 1: Test Configuration	7
Figure 2: DTS Bandwidth plots	10
Figure 3: Peak Conducted Power plots	12
Figure 4: Spectral Density plots	14
Figure 5: Emissions in non-restricted frequency bands	19
Figure 6: Emissions in restricted frequency bands	24
Figure 7: Radiated Spurious Emissions; Channel 11	28
Figure 8: Radiated Spurious Emissions; Channel 18	29
Figure 9: Radiated Spurious Emissions; Channel 25	30
Figure 10: Occupied Bandwidth	31

Tables

Table 1: Test frequencies	5
Table 2: Equipment under test	6
Table 3: Support Equipment	6
Table 4: EUT Antenna configurations	7
Table 5: Summary of test results	8
Table 6: DTS Bandwidth	9
Table 7: Channel Power	11
Table 8: Spectral Density results	13
Table 9: Emissions in non-restricted bands	15
Table 10: Restricted band limits at antenna port	20
Table 11: Emissions in restricted bands	21
Table 12: 30-1000 MHz Restricted Band RSE results with antenna connected	25
Table 13: 1-25 GHz Restricted Band RSE results with antenna terminated	26
Table 14: Occupied Bandwidth	31
Table 15: Test Equipment	32

1 Revision History

Revision	Originator	Date	Comment
A	C Blackham	04 July 2017	1 st issue
B	C Blackham	11 July 2017	Calibration data added and table corrected

2 Purpose

This report details testing performed on the Senceive FM3Nano against FCC requirements.

3 Reference Documents

- [1] Title 47 CFR15 Federal Communications Commission Title 47 Code of Federal Regulations Part 15
- [2] ANSI C63.10-2013 IEEE American National Standard for Testing Unlicensed Wireless Devices Committee 63 standard 63-10. 27 June 2013.
- [3] KDB 558074 D01 DTS Meas Guidance v04¹ Federal Communications Commission Office of Engineering and Technology Laboratory Division: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247. April 5, 2017

¹ Reference herein as “KDB 558074”

4 Test Information

4.1 Client

Senceive Ltd
Hurlingham Studios
Ranelagh Gardens
London
SW6 3PA

4.2 Test personnel

4.2.1 Antenna port tests

Testing was performed by Charlie Blackham of Sulis Consultants Ltd at their offices between 21st and 25th June 2017.

4.2.2 Radiated Emissions

Testing was performed by Hursley EMC Services Ltd test engineers at their FCC Registered test facility, UK designation number UK0006, between 26th and 29th June 2017 under job number 17R321.

4.3 Test sample

The results herein only refer to sample detailed in section 6.

5 Product Description

The device operates inside the 2400 – 2483.5 MHz band with a single bandwidth and single modulation.

The following test frequencies were used to cover the full band of operation of the device:

Test Channel	Centre Frequency (MHz)
Bottom, channel 11	2405.0
Middle, channel 18	2440.0
Top, channel 25	2475.0

Table 1: Test frequencies

6 Test Configuration

6.1 Test sample

The equipment under test (EUT) was:

Manufacturer	Model	Serial Number
Senceive	FM3NT-30	164870111

Table 2: Equipment under test

Note: three samples were used for testing, each one pre-programmed to operate on the required channel

6.2 Support equipment

The support equipment was:

Description	Manufacturer	Name	Serial Number
DC power supply	Kenwood	PD35-10D	2080014

Table 3: Support Equipment

6.3 Equipment set-up

Equipment was configured as per figure 1:

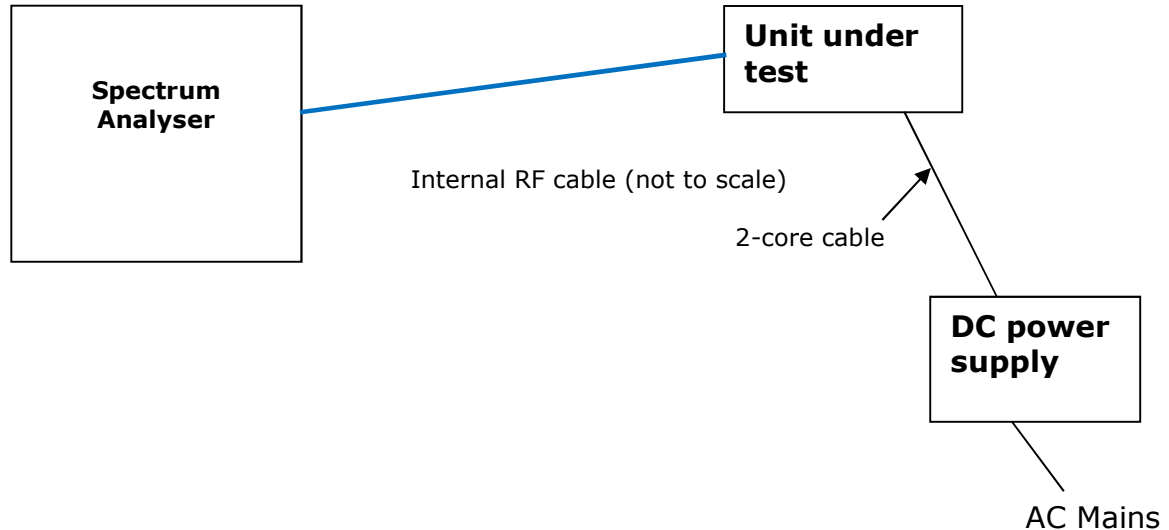


Figure 1: Test Configuration

For the purposes of testing, the EUT was configured with test firmware that transmitted continuously with a 100% duty cycle.
A DC power supply was used instead of the battery normally installed in the product.
The RF test cable loss was programmed into the Spectrum Analyser as a transducer factor.

6.4 Supported Antennas

The EUT supports operation with the following antennas:

Antenna type	Type	Gain
Internal	PCB mount	2.2 dBi

Table 4: EUT Antenna configurations

Note: The antenna is integral to the unit, but is connected to the main PCB via a short UFL to UFL cable. For the purposes of testing, the RF test cable was connected direct to the UFL port using a SMA-UFL adapter.

7 Summary of tests performed

Test	Clause	Limit / Requirement	Result
6dB bandwidth	15.247(a)(2)	> 500 kHz	Pass
Occupied bandwidth		None	Noted
Max peak conducted TX power	15.247(b)(3)	1 W	Pass
Power Spectral Density	15.247(e)	8dBm / 3 kHz	Pass
Out of Band Emissions Non-restricted bands	15.247(d)	-20 dBc (peak power)	Pass
Out of Band Emissions Restricted-band: Conducted	15.247(d) / 15.205(a) and 15.209(a)	15.209(a) table	Pass
Max antenna gain	15.247(b)(4)(11)	≤ 6dBi	Pass

Table 5: Summary of test results

8 DTS Bandwidth

8.1 Measurement method

Test was conducted in accordance with KDB 558074 section 8.1 Option 1:

- a) Set resolution bandwidth to 100 kHz
- b) Set the video bandwidth to $\geq 3 \times \text{RBW}$
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

8.2 Test results

Channel	6dB DTS Bandwidth (MHz)	Requirement	Result
11	1.5917	> 500 kHz	Pass
18	1.5688	> 500 kHz	Pass
25	1.5705	> 500 kHz	Pass

Table 6: DTS Bandwidth



Figure 2: DTS Bandwidth plots

9 Maximum Peak Conducted Output Power

9.1 Measurement method

As the analyser could be set $RBW \geq DTS$ bandwidth, the test was conducted in accordance with KDB 558074 section 9.1.1:

- a) Set the $RBW \geq DTS$ bandwidth.
- b) Set $VBW \geq 3 \times RBW$.
- c) Set $span \geq 3 \times RBW$
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

9.2 Test results

Channel	Channel Power (dBm)	Limit (dBm)	Result
11	6.42	30.0	Pass
18	6.76	30.0	Pass
25	6.69	30.0	Pass

Table 7: Channel Power

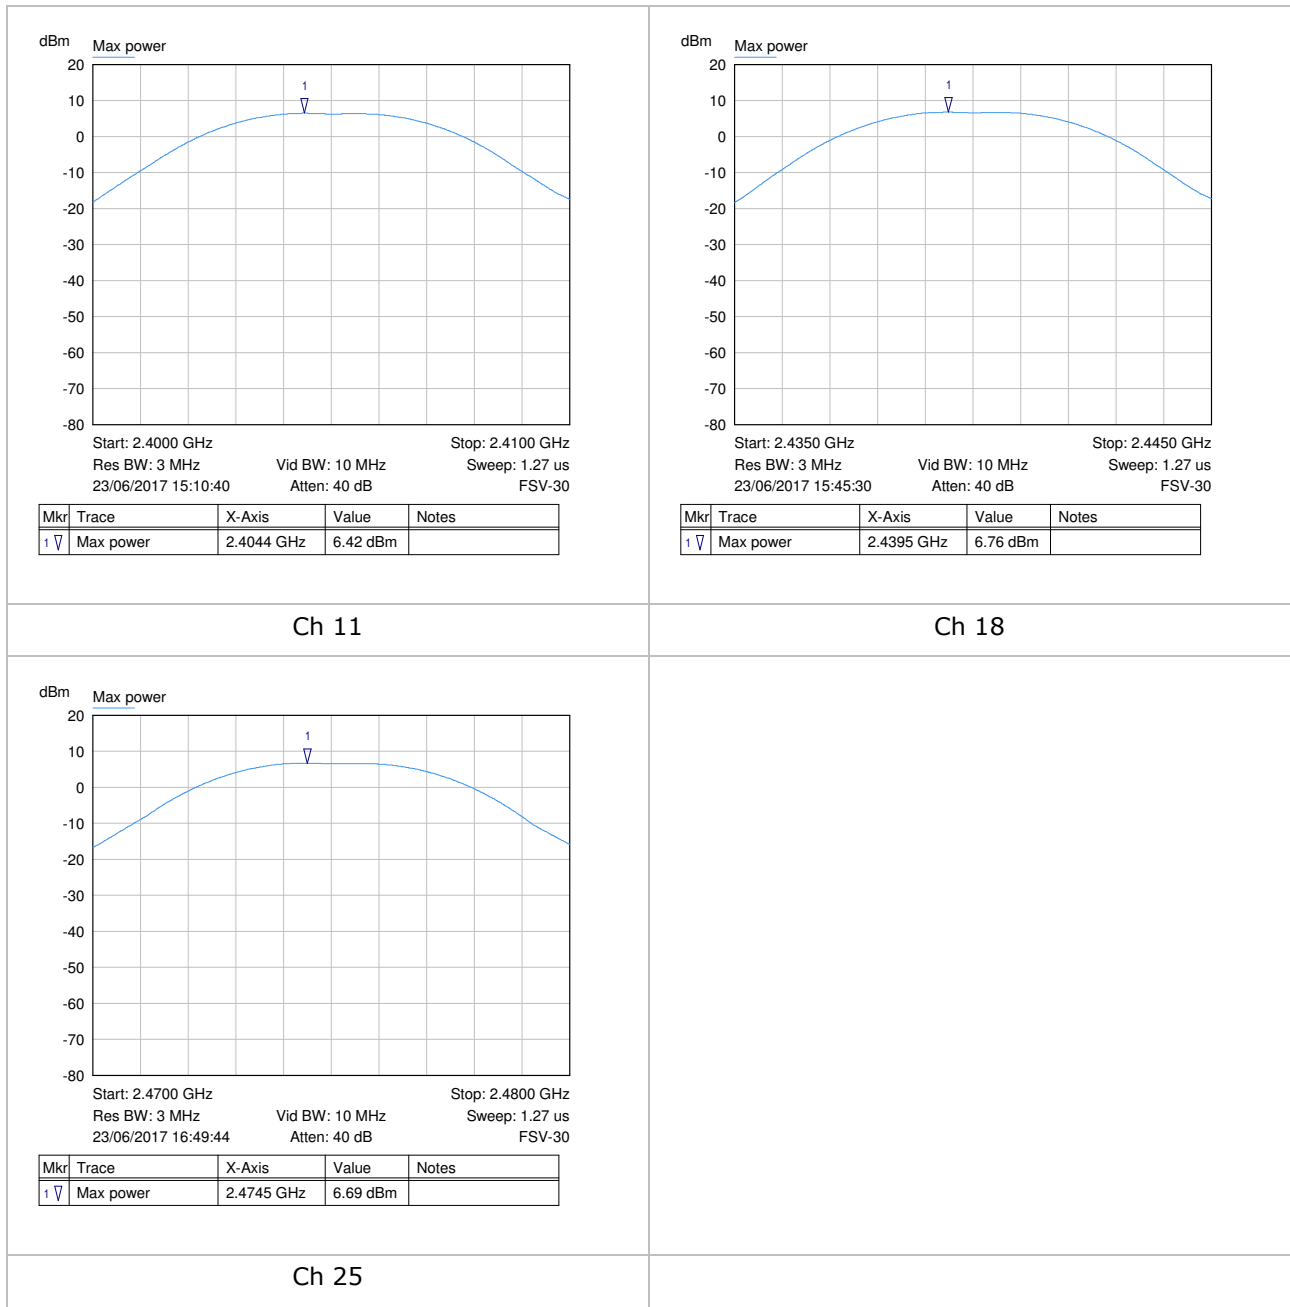


Figure 3: Peak Conducted Power plots

10 Maximum Power Spectral Density

10.1 Measurement method

As conducted power was measured as Maximum Peak Conducted Power, measurement was performed in accordance with KDB 558074 section 10.2:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to $1.5 \times \text{DTS bandwidth}$.
- c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq 3 \times \text{RBW}$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.2 Test results

Channel	Peak Marker reading (dBm)	Limit (dBm/3kHz)	Result
11	3.68	8.0	Pass
18	3.76	8.0	Pass
25	3.96	8.0	Pass

Table 8: Spectral Density results

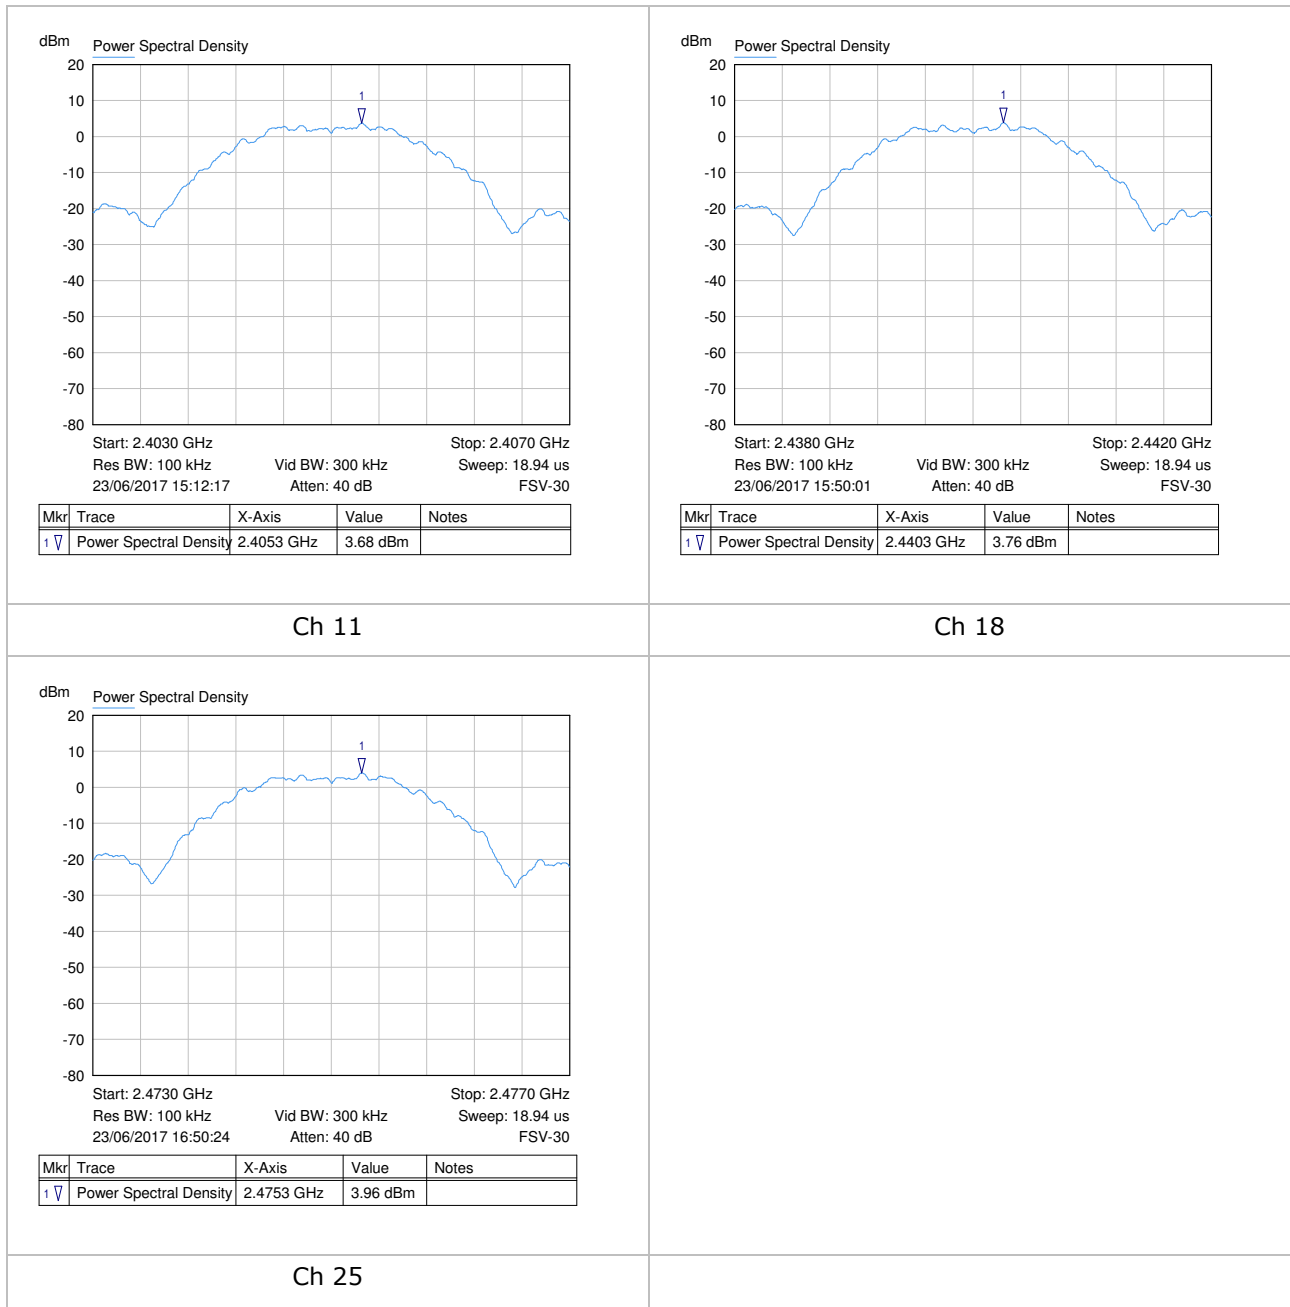


Figure 4: Spectral Density plots

11 Emissions in non-restricted frequency bands

11.1 Measurement method

Since peak power measurements were made using a peak detector, the same detector will be used for unwanted emissions. The unwanted emissions shall be at least 20dB lower than the wanted emission.

First, establish a reference level in accordance with KDB 558074 section 11.2:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to $\geq 1.5 \times$ DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW $\geq 3 \times$ RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

Then measure the emission levels in accordance with KDB 558074 section 11.3

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq 3 \times$ RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.


11.2 Test results


The reference trace was taken from the Power Spectral Density Measurement which used the same settings.


For ease of measurement, maximum values are reported anywhere in the frequency band of investigation, whether or not it is outside a restricted band. Further measurements in restricted bands are in the next section.

Channel	Maximum Peak level in 100 kHz RBW (dBm)	-20 dBc (dBm)	Maximum emission (dBm)	Result
11	3.68	-16.32	-37.73	Pass
18	3.76	-16.24	-40.12	Pass
25	3.96	-16.04	-39.38	Pass

Table 9: Emissions in non-restricted bands

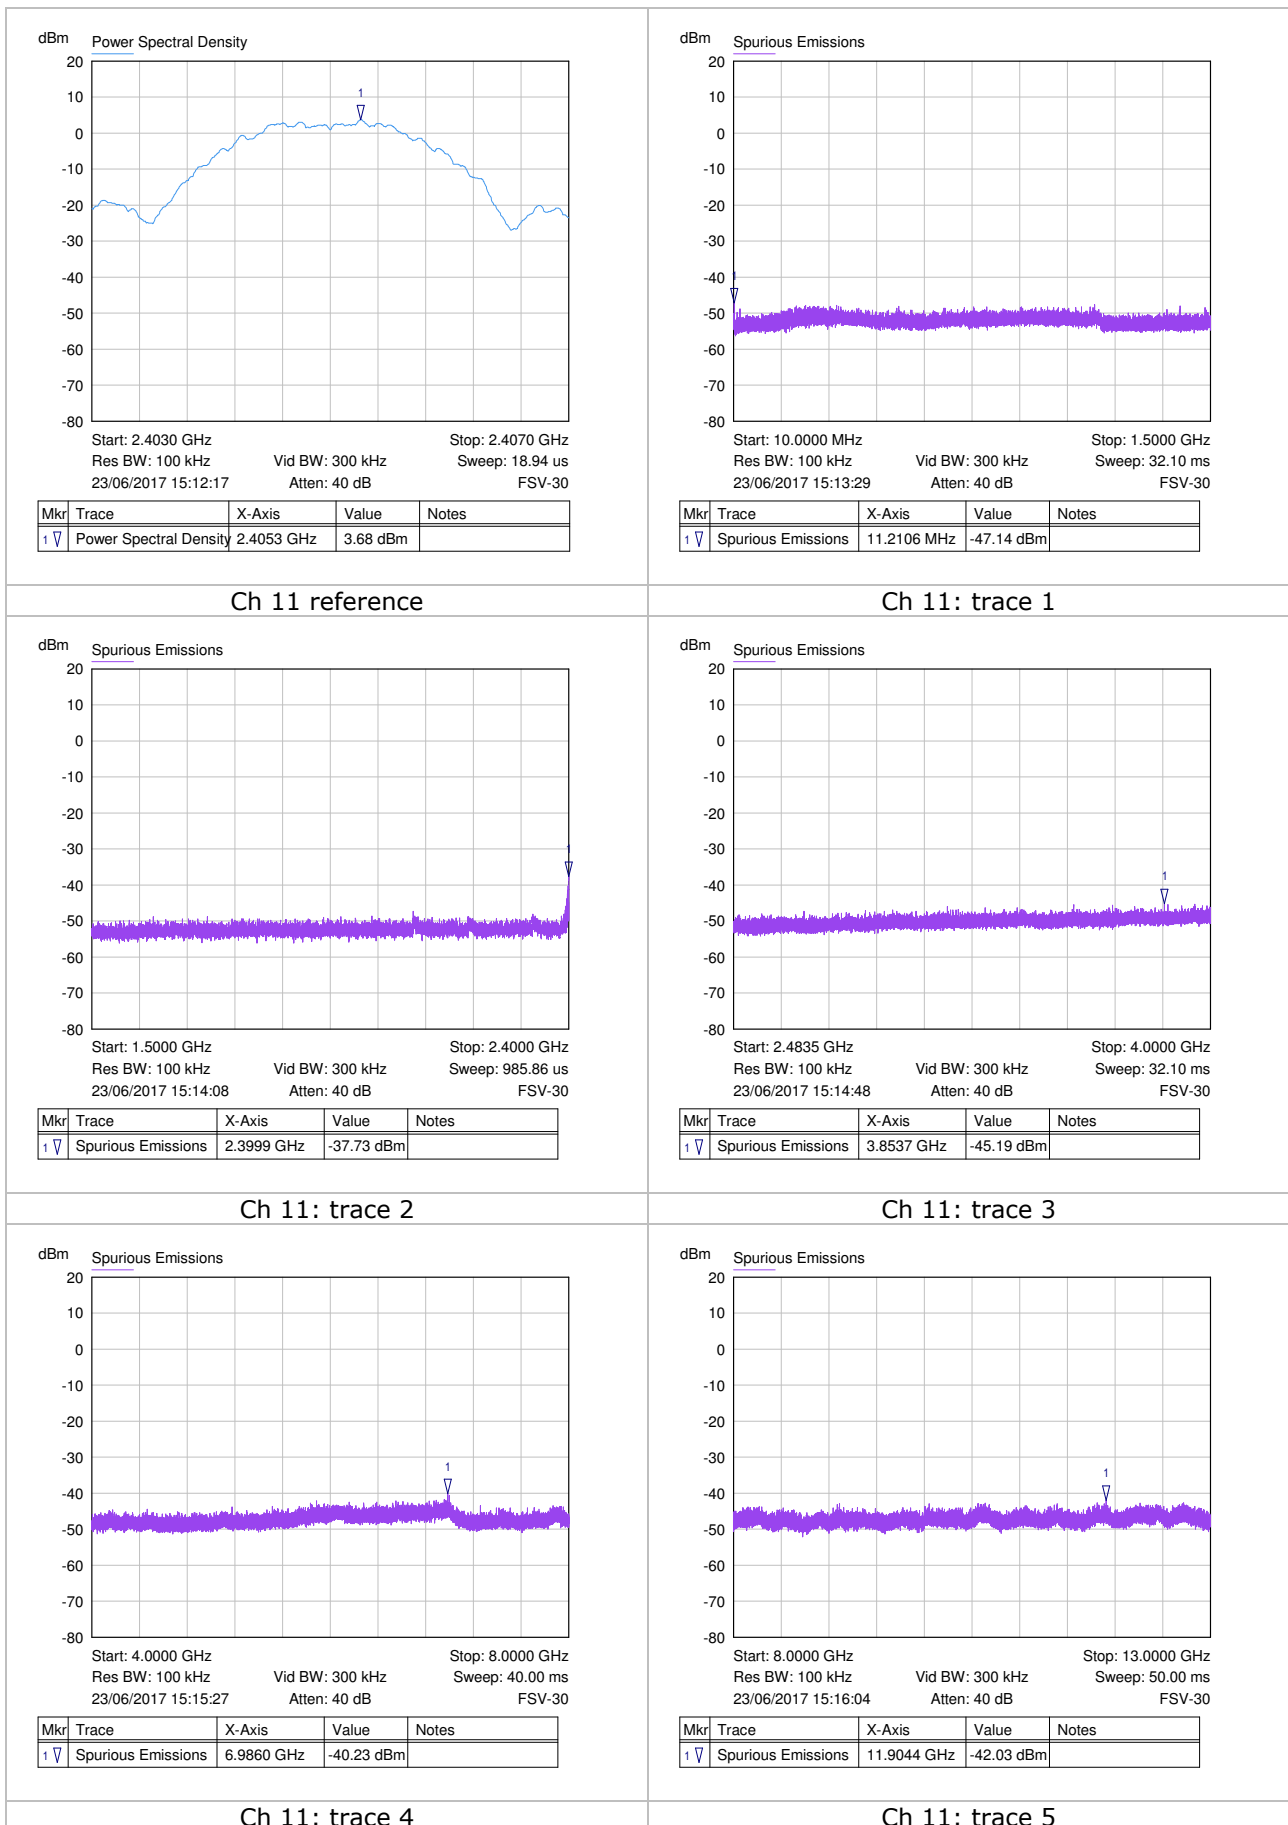

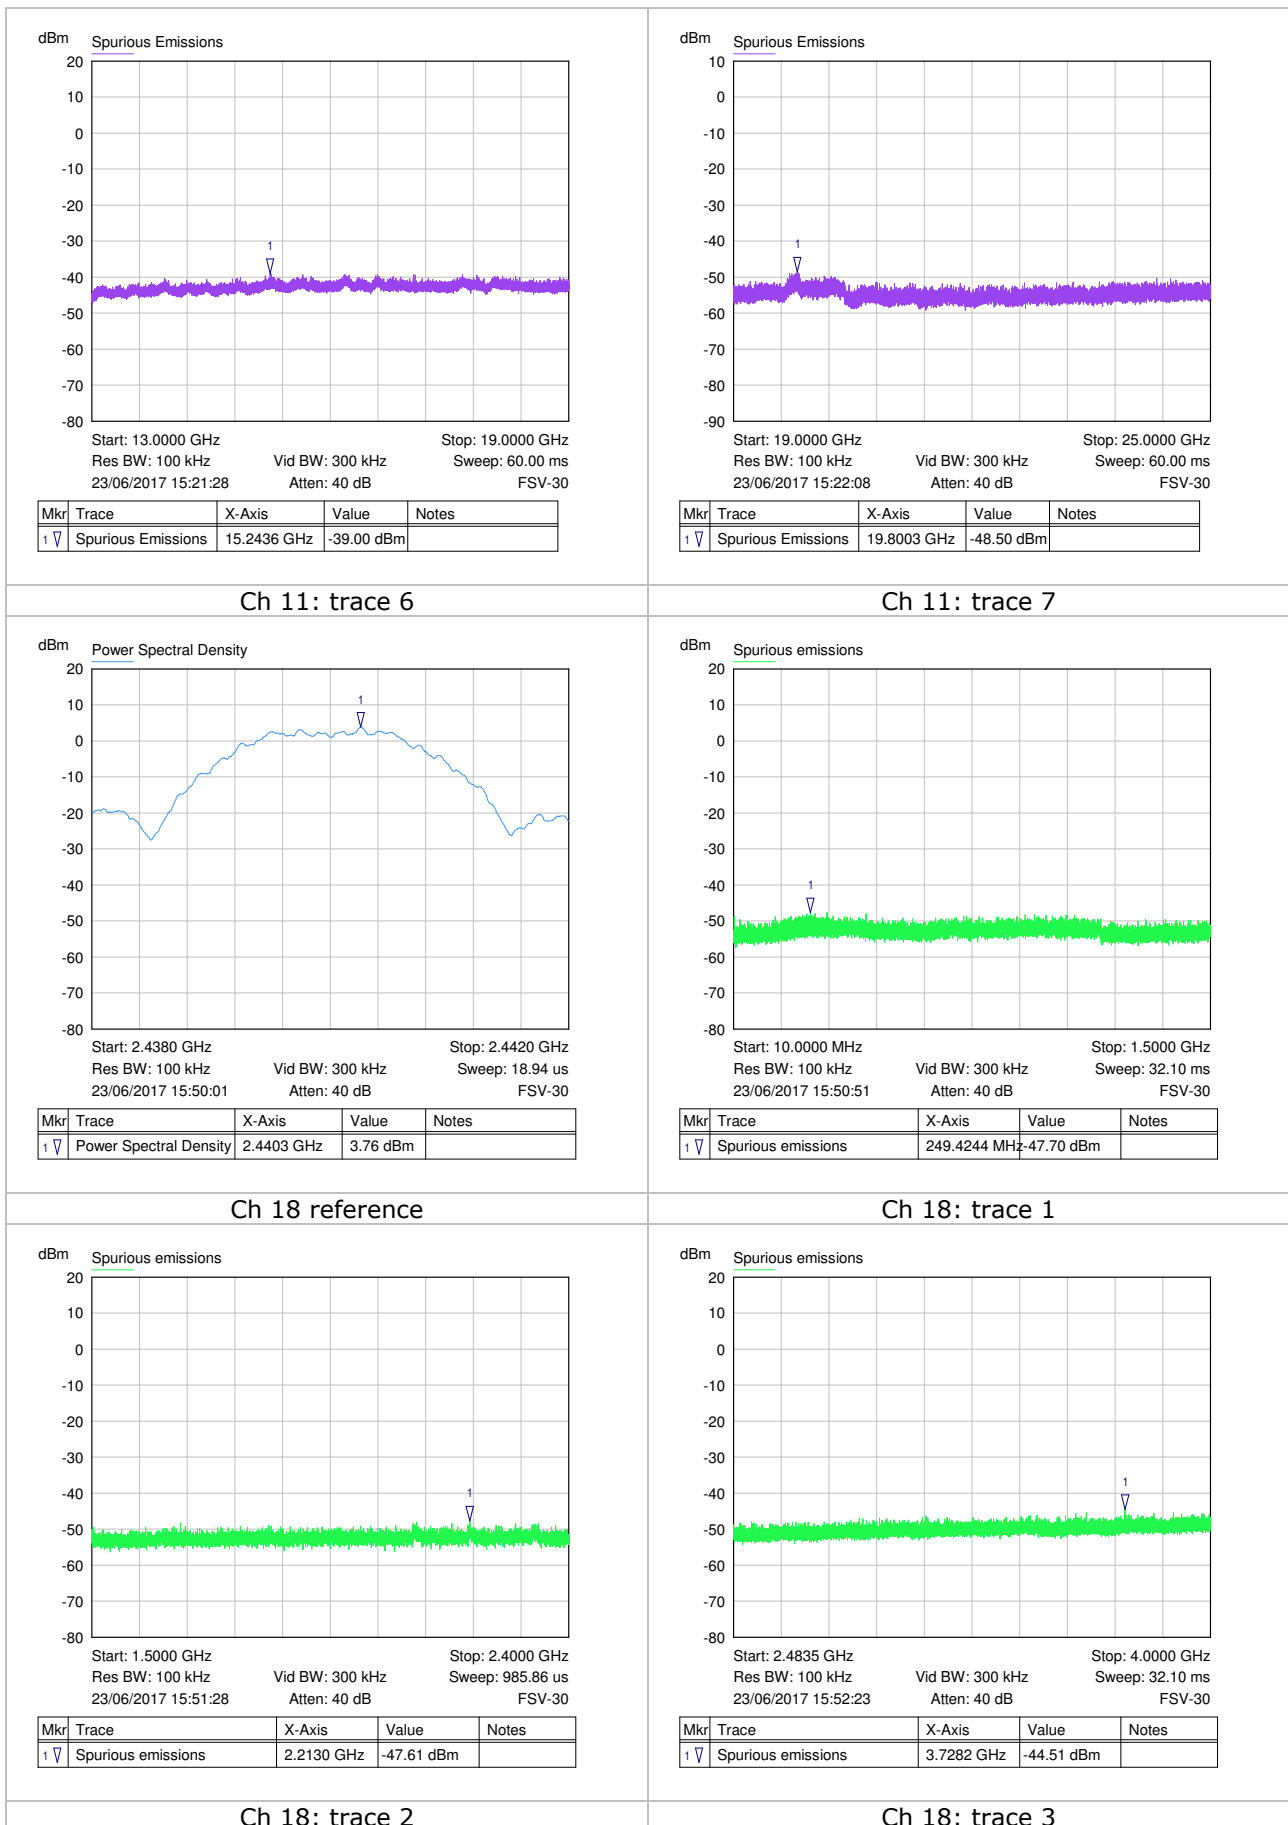

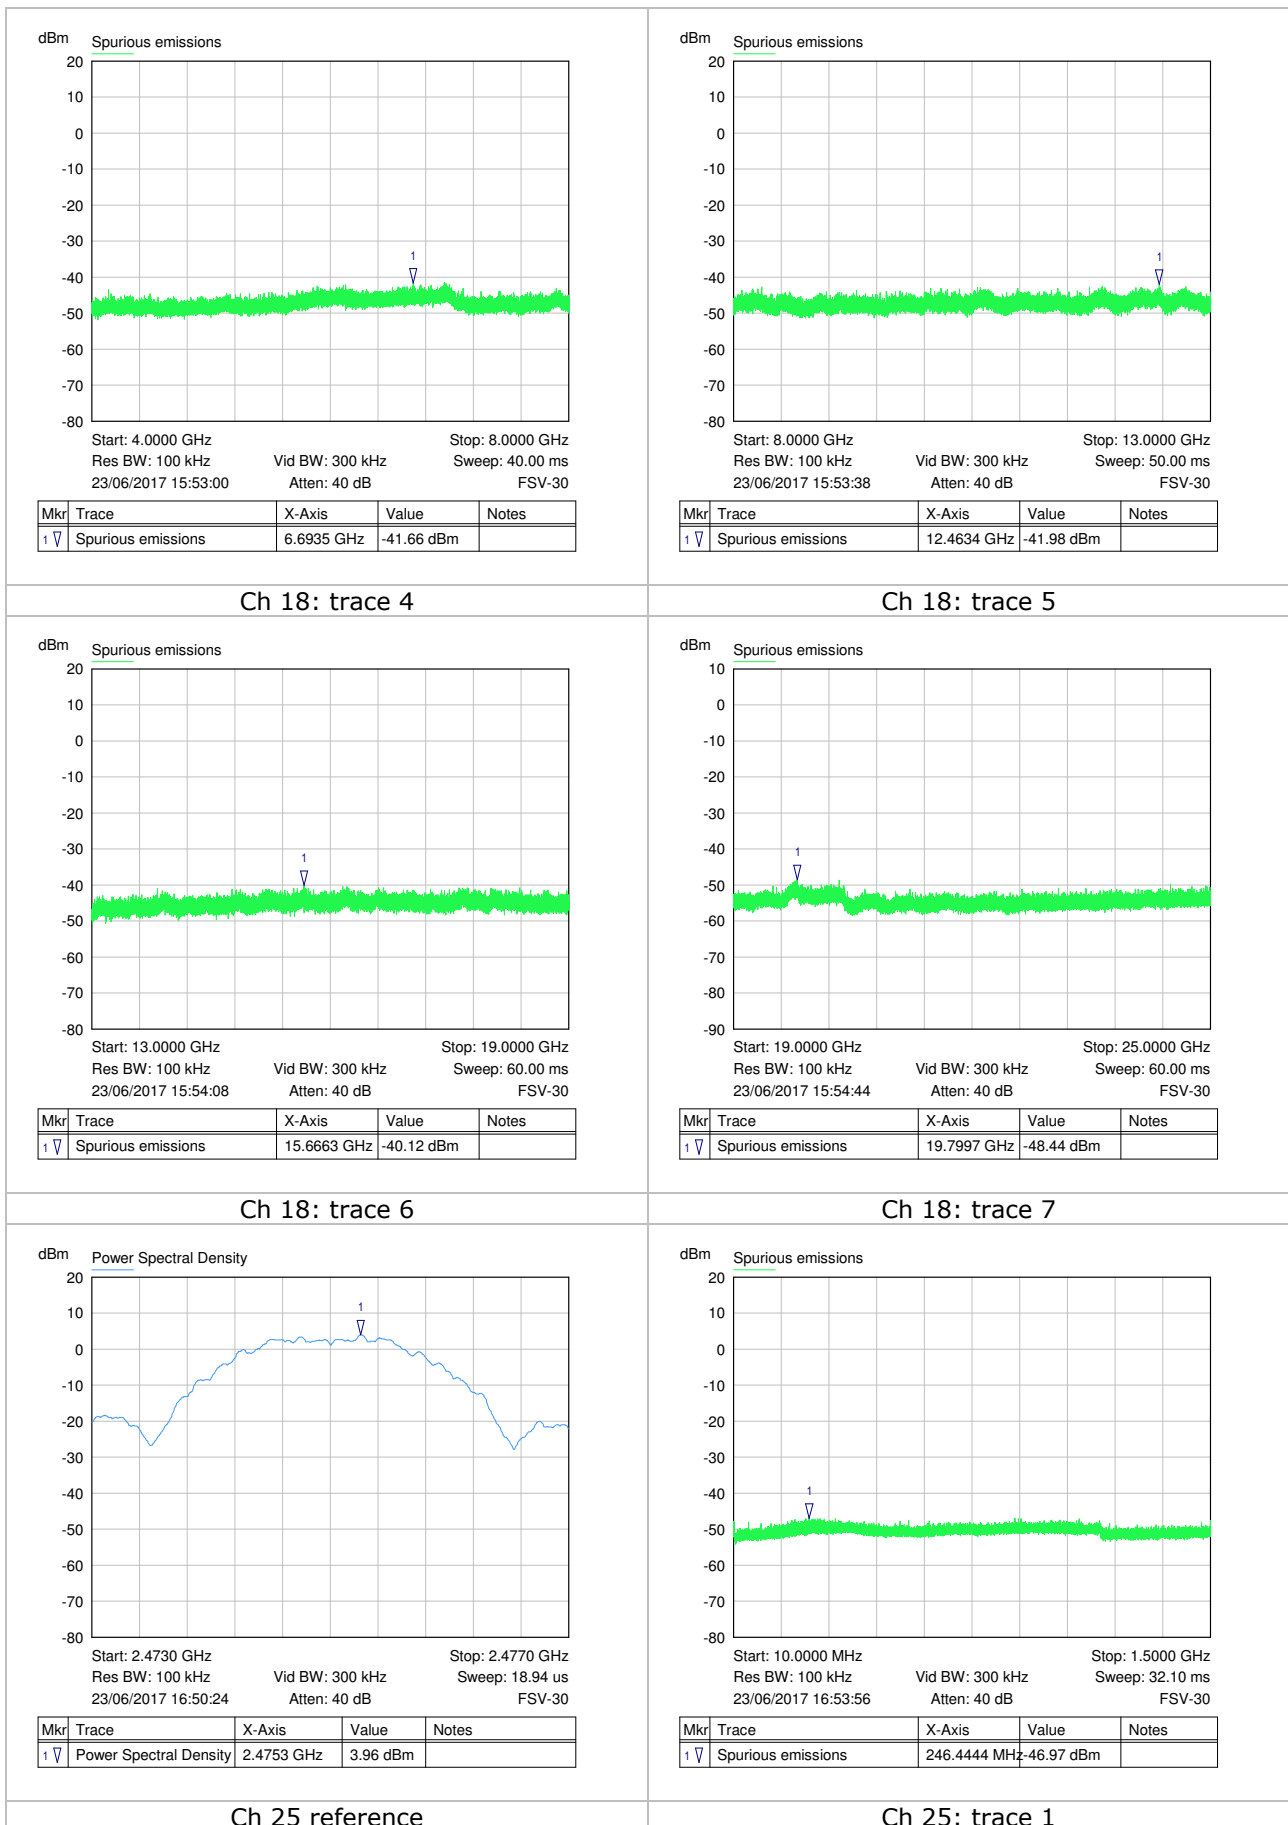

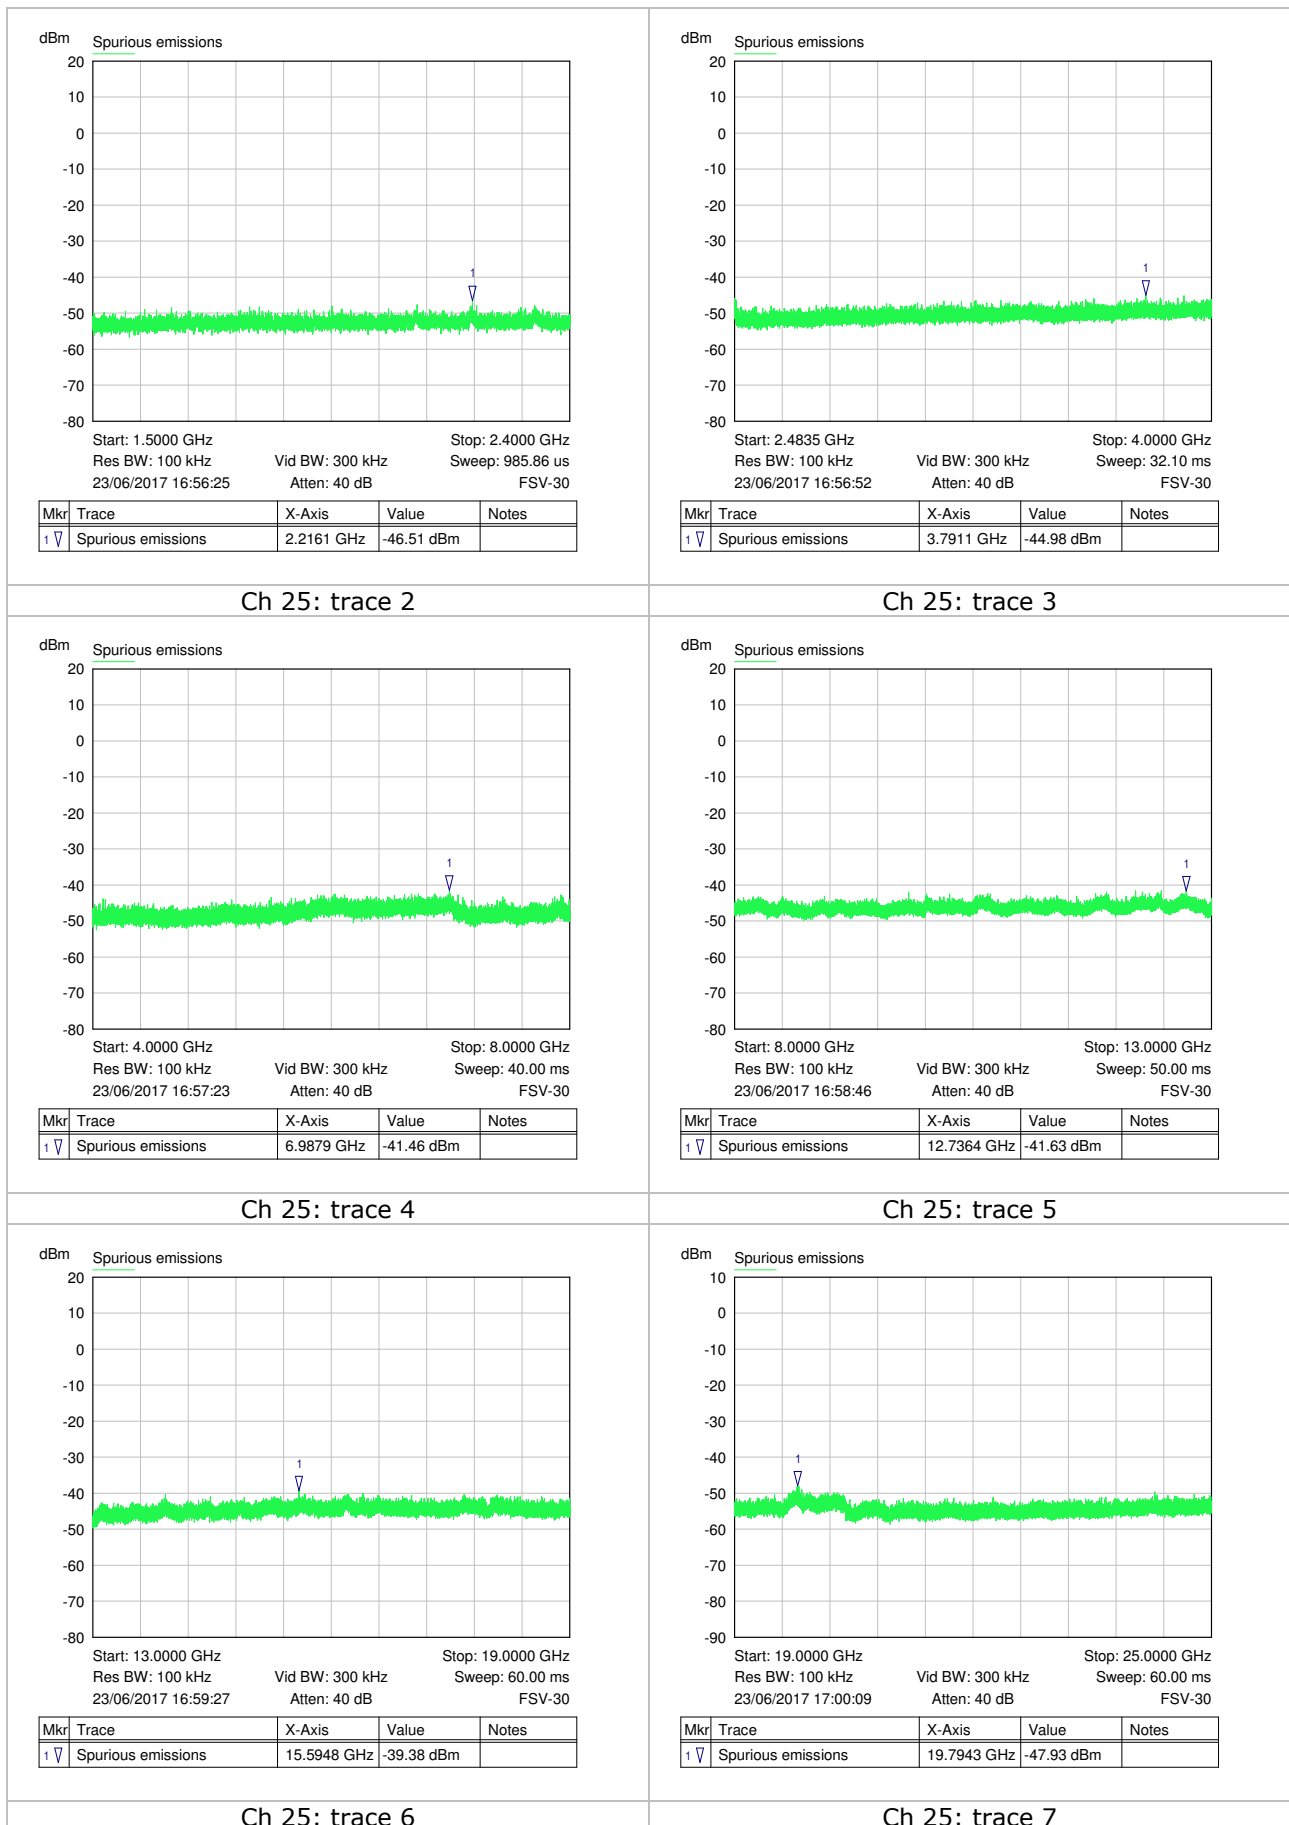


Figure 5: Emissions in non-restricted frequency bands

12 Maximum Emissions in Restricted Band

This testing is done in two parts:

- Antenna port conducted measurement for emissions > 1 GHz
- Radiated measurement:
 - With antenna fitted for emissions < 1 GHz
 - With antenna port terminated for emissions > 1 GHz

12.1 Conducted Antenna port

12.1.1 Measurement method

The conducted antenna port power is converted to a radiated emissions field strength limit specified in 15.209(a) as per KDB 558074 12.2.2:

Electric field strength, $E = \text{EIRP} - 20\log D + 104.8$

Which can be re-written as $\text{EIRP} = E + 20\log D - 104.8$

Since $\text{EIRP} = \text{conducted power} + \text{antenna gain} + \text{ground reflection}$
 This can be re-written:

Max. conducted power = $E + 20\log D - 104.8 - \text{antenna gain} - \text{ground reflection}$

If “E” is the limit, and the measurement distance taken as 3 m, the maximum conducted power can be determined as shown in the table:

Frequency range	Limit	Field strength ($\mu\text{V/m}$)	Field Strength ($\text{dB}\mu\text{V/m}$)	$20\log D$	Antenna gain (dBi)	Ground reflection	Limit
> 1 GHz	Average	500	54.0	9.54	2.2	0	-43.48
> 1 GHz	Peak	Average + 20dB	74.0	9.54	2.2	0	-23.46

Table 10: Restricted band limits at antenna port

Initial measurement of antenna port emissions was performed with a peak detector as per KDB 558074 section 12.2.4:

- a) RBW = as specified in Table 1.
- b) VBW $\geq 3 \times \text{RBW}$.
- c) Detector = Peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be longer for low duty cycle applications).

Where emissions above 1 GHz were close to the limit, these were re-measured using trace-averaging and RMS detector as per section 12.2.5.1:

- a) RBW = 1 MHz (unless otherwise specified).
- b) VBW $\geq 3 \times \text{RBW}$.


- c) Detector = RMS, if $\text{span}/(\# \text{ of points in sweep}) \leq (\text{RBW}/2)$. Satisfying this condition may require increasing the number of points in the sweep or reducing the span. If this condition cannot be satisfied, then the detector mode shall be set to peak. (Note: 32001 measurement points used)
- d) Averaging type = power (i.e., RMS).
 - 1) As an alternative, the detector and averaging type may be set for linear voltage averaging.
 - 2) Some instruments require linear display mode in order to use linear voltage averaging. Log or dB averaging shall not be used.
- e) Sweep time = auto.
- f) Perform a trace average of at least 100 traces.

12.1.2 Test results


Maximum values for each frequency range are shown on the plots, and the worst case emissions for each channel were re-measured using RMS detector and are detailed in the table below:

Channel	Frequency (MHz)	Detector	Level (dBm)	Maximum emission relative to peak limit (dB)	Maximum emission relative to average limit (dB)	Result
11	2389.3	Peak	-47.92	-24.44	-4.44	Pass
11	All other peak detector emissions > 10 dB below average limit in restricted bands					Pass
18	All peak detector emissions > 8.8 dB below average limit in restricted bands					Pass
25	2483.6	Peak	-39.99	-16.51	N/A	Pass
		RMS	-48.84	N/A	-5.36	Pass
25	All other peak detector emissions > 7.8 dB below average limit in restricted bands					Pass

Table 11: Emissions in restricted bands

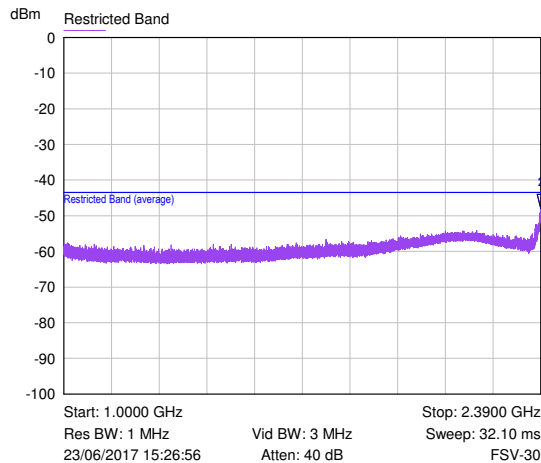


Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	2.3893 GHz	-47.92 dBm	
2	Restricted Band	2.3893 GHz	-4.44 dBm	Relative to limit

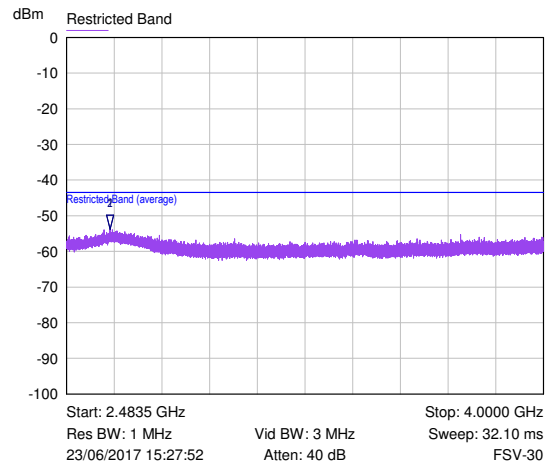


Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	2.6212 GHz	-53.86 dBm	
2	Restricted Band	2.6212 GHz	-10.38 dBm	Relative to limit

Ch 11: trace 2; 1000 - 2390 MHz (Peak)

Ch 11: trace 3; 2483.5 - 4000 MHz (Peak)

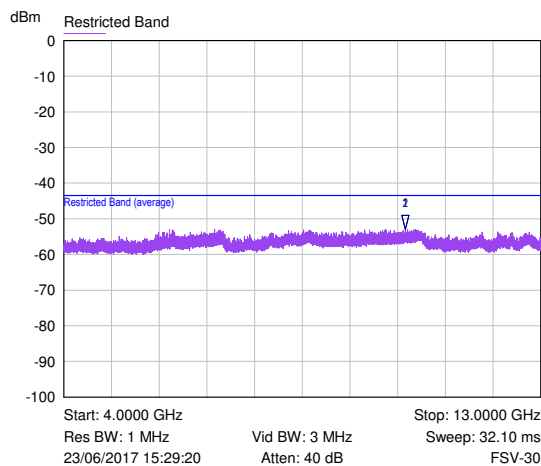


Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	10.4499 GHz	-52.93 dBm	
2	Restricted Band	10.4499 GHz	-9.45 dBm	Relative to limit

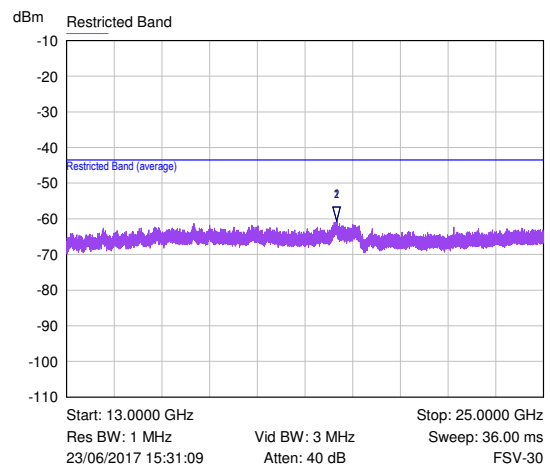


Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	19.7928 GHz	-60.70 dBm	
2	Restricted Band	19.7928 GHz	-17.22 dBm	Relative to limit

Ch 11: trace 4; 4000 - 13000 MHz (Peak)

Ch 11: trace 6; 13 - 25 GHz (peak)

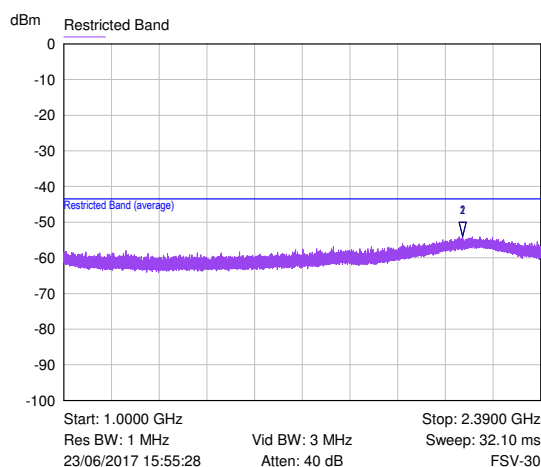


Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	2.1617 GHz	-54.06 dBm	
2	Restricted Band	2.1617 GHz	-10.58 dBm	Relative to limit

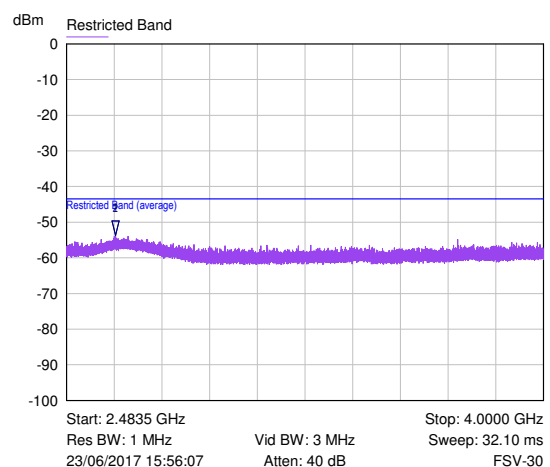

Mkr	Trace	X-Axis	Value	Notes
1	Restricted Band	2.6398 GHz	-53.74 dBm	
2	Restricted Band	2.6398 GHz	-10.26 dBm	Relative to limit

Ch 18: trace 2; 1000 - 2390 MHz (peak)

Ch 18: trace 3; 2483.5 - 4000 MHz

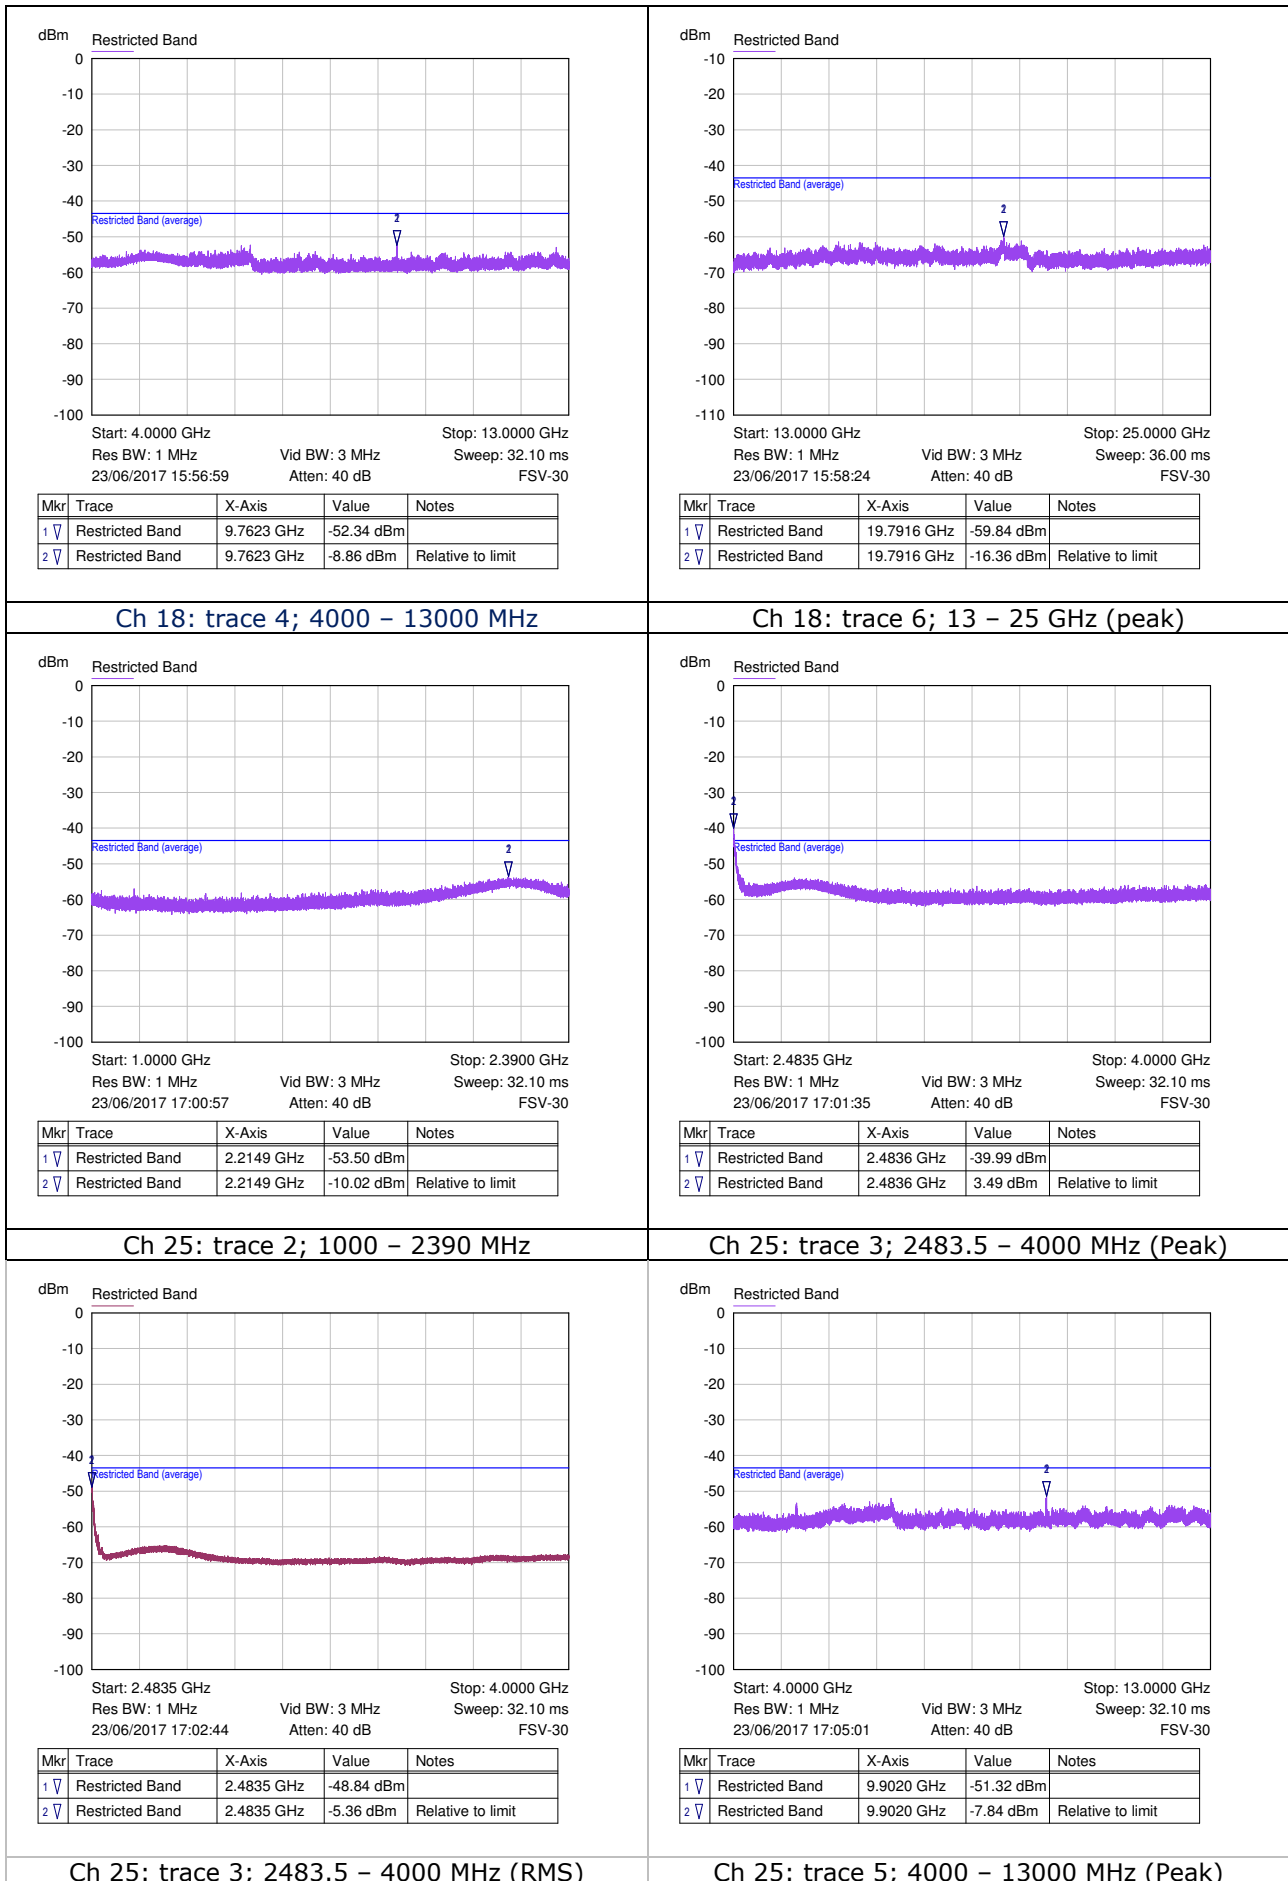

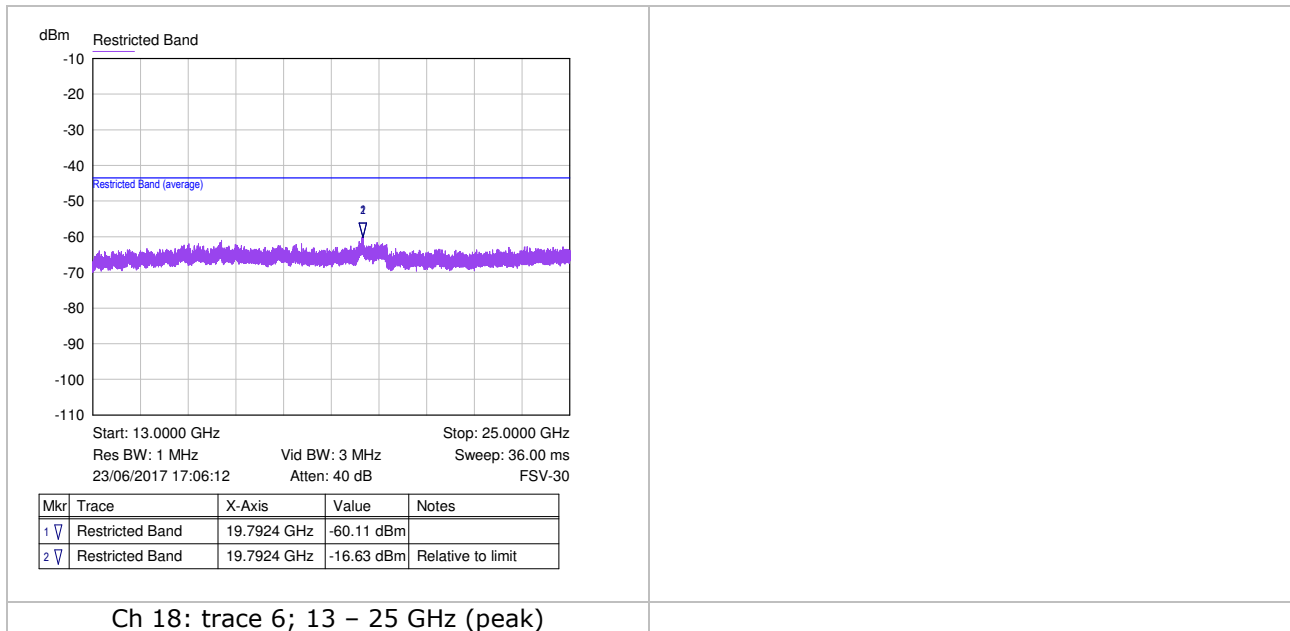


Figure 6: Emissions in restricted frequency bands

12.2 Radiated test results

12.2.1 Measurement method

Measurements were made in a semi-anechoic chamber and the EUT was positioned:

- On a 0.8m polystyrene table for emissions below 1 GHz
- On a 1.5m polystyrene support for emissions above 1 GHz

12.2.2 Results


Channel	Frequency (MHz)	EUT orientation	Detector	Level (dBm)	Maximum emission relative to peak limit (dBμV/m)	Maximum emission relative to Quasi-peak (dBμV/m)	Result
11	30-1000 MHz	Horizontal and Vertical	Peak	No emissions within 20 dB of limit			Pass
18	30-1000 MHz	Horizontal and Vertical	Peak	No emissions within 20 dB of limit			Pass
25	30-1000 MHz	Horizontal and Vertical	Peak	No emissions within 20 dB of limit			Pass

Table 12: 30-1000 MHz Restricted Band RSE results with antenna connected

Channel	Frequency (MHz)	EUT orientation	Detector	Level (dBµV/m)	Peak limit (dBµV/m)	Average limit (dBµV/m)	Result
11	2483.5	Vertical and Horizontal	No emissions to measure				Pass
18	2483.5	Vertical and Horizontal	No emissions to measure				Pass
25	2483.5	Vertical	Peak	40.16	74.0	-	Pass
			RMS	27.88	-	54.0	Pass
25	2483.5	Horizontal	Peak	4040	74.0	-	Pass
			RMS	27.92	-	54.0	Pass
11	4809.0	Vertical	Peak	50.28	74.0	-	Pass
			RMS	41.87	-	54.0	Pass
	4809.0	Horizontal	Peak	50.90	74.0	-	Pass
			RMS	43.05	-	54.0	Pass
	7215.0	Not applicable – not in a restricted band					
	18	4880.8	Vertical	Peak	51.05	74.0	-
RMS				43.09	-	54.0	Pass
4880.8		Horizontal	Peak	50.09	74.0	-	Pass
			RMS	41.21	-	54.0	Pass
7318.6		Vertical	Peak	52.92	74.0	-	Pass
			RMS	42.37	-	54.0	Pass
7318.6		Horizontal	Peak	54.72	74.0	-	Pass
			RMS	44.00	-	54.0	Pass
25	4949.2	Vertical	Peak	49.90	74.0	-	Pass
			RMS	41.00	-	54.0	Pass
	4949.2	Horizontal	Peak	49.22	74.0	-	Pass
			RMS	41.66	-	54.0	Pass
	7423.6	Vertical	Peak	52.76	74.0	-	Pass
			RMS	43.29	-	54.0	Pass
	7423.6	Horizontal	Peak	53.33	74.0	-	Pass
			RMS	43	-	54.0	Pass

Table 13: 1-25 GHz Restricted Band RSE results with antenna terminated

Channel 11

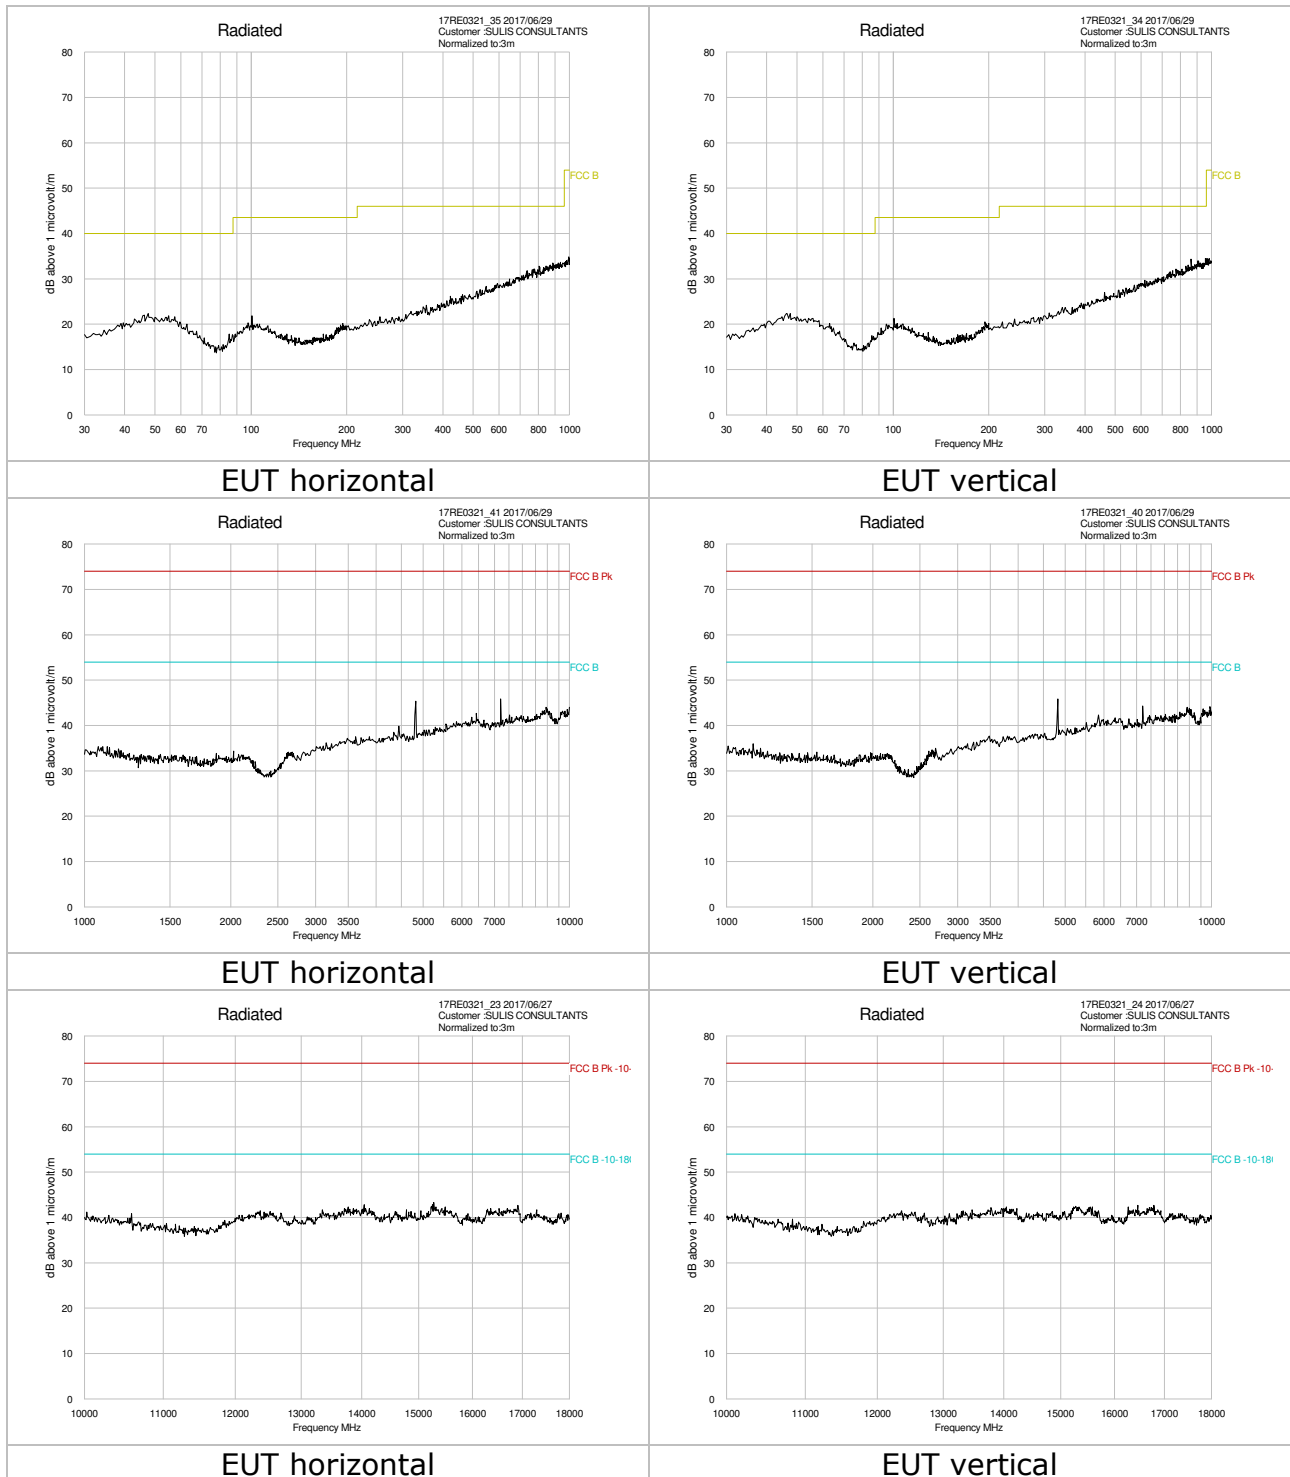

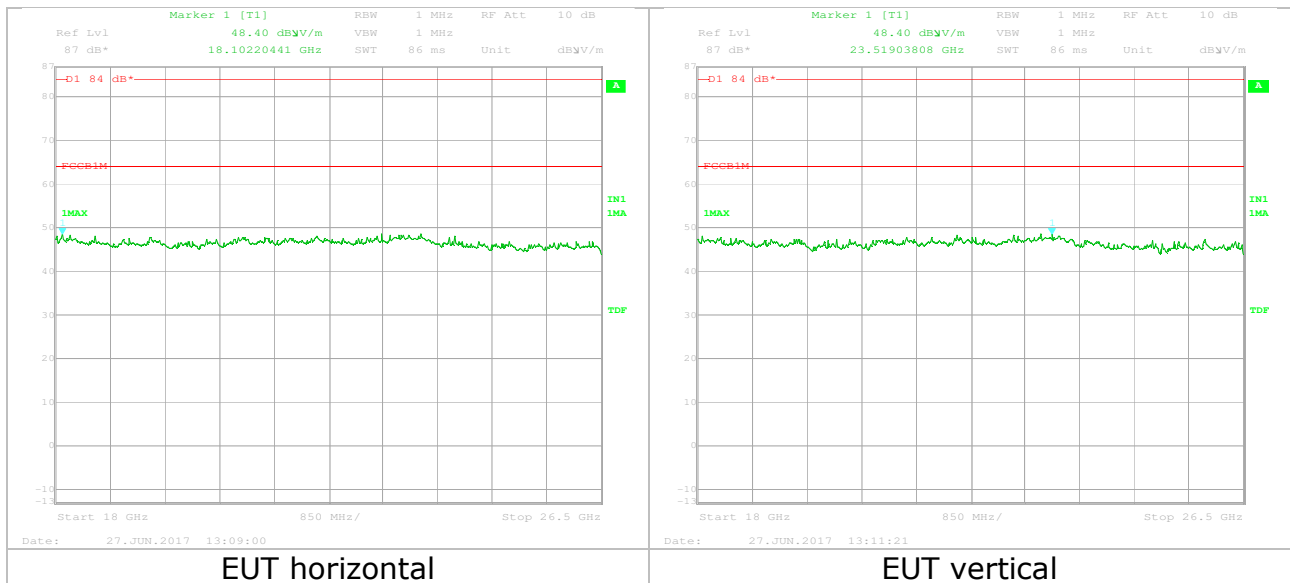
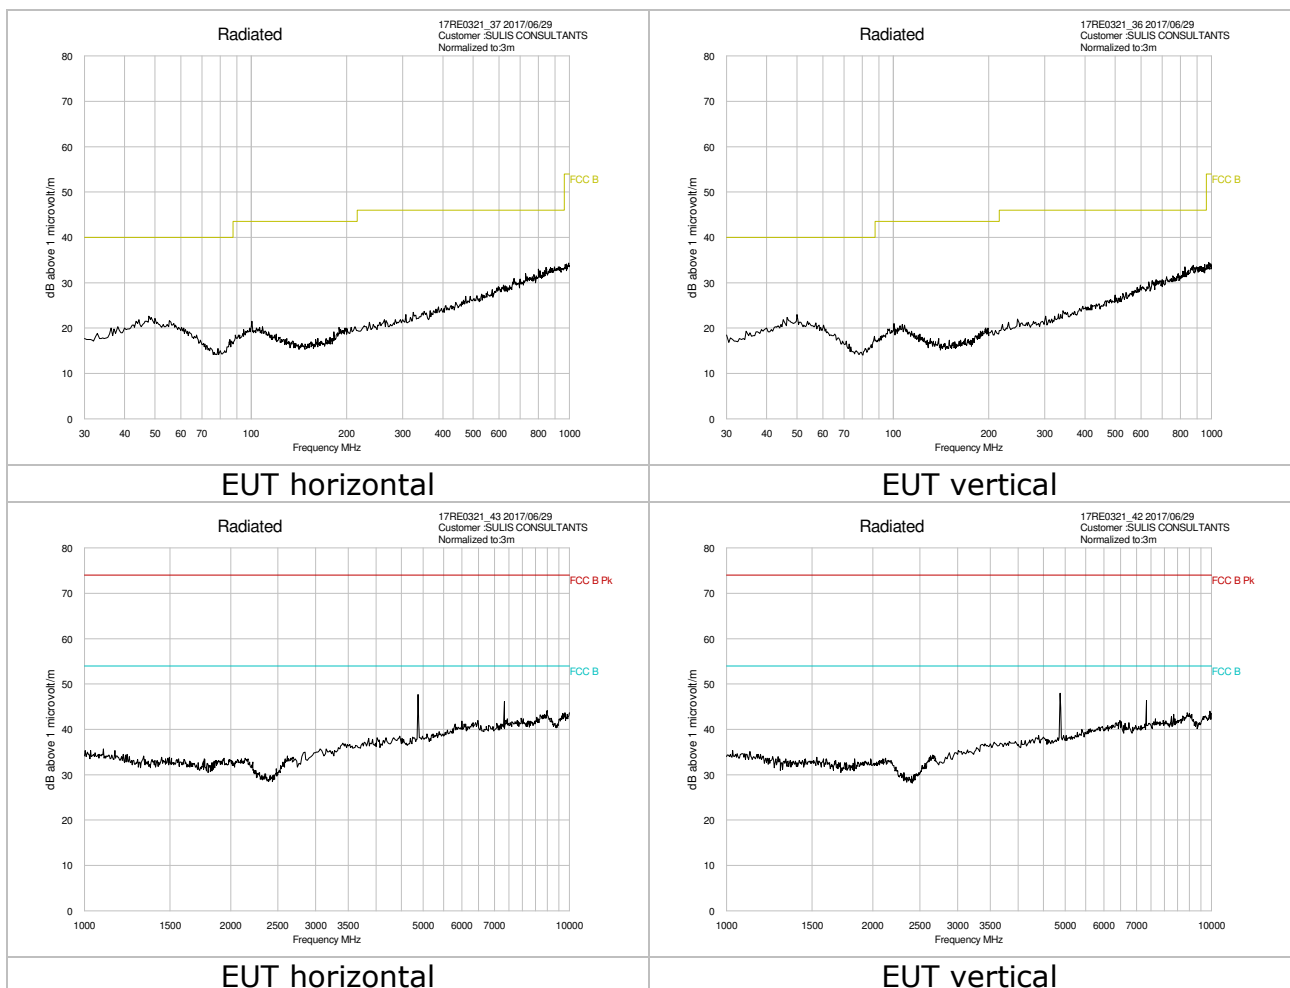


Figure 7: Radiated Spurious Emissions; Channel 11

Channel 18



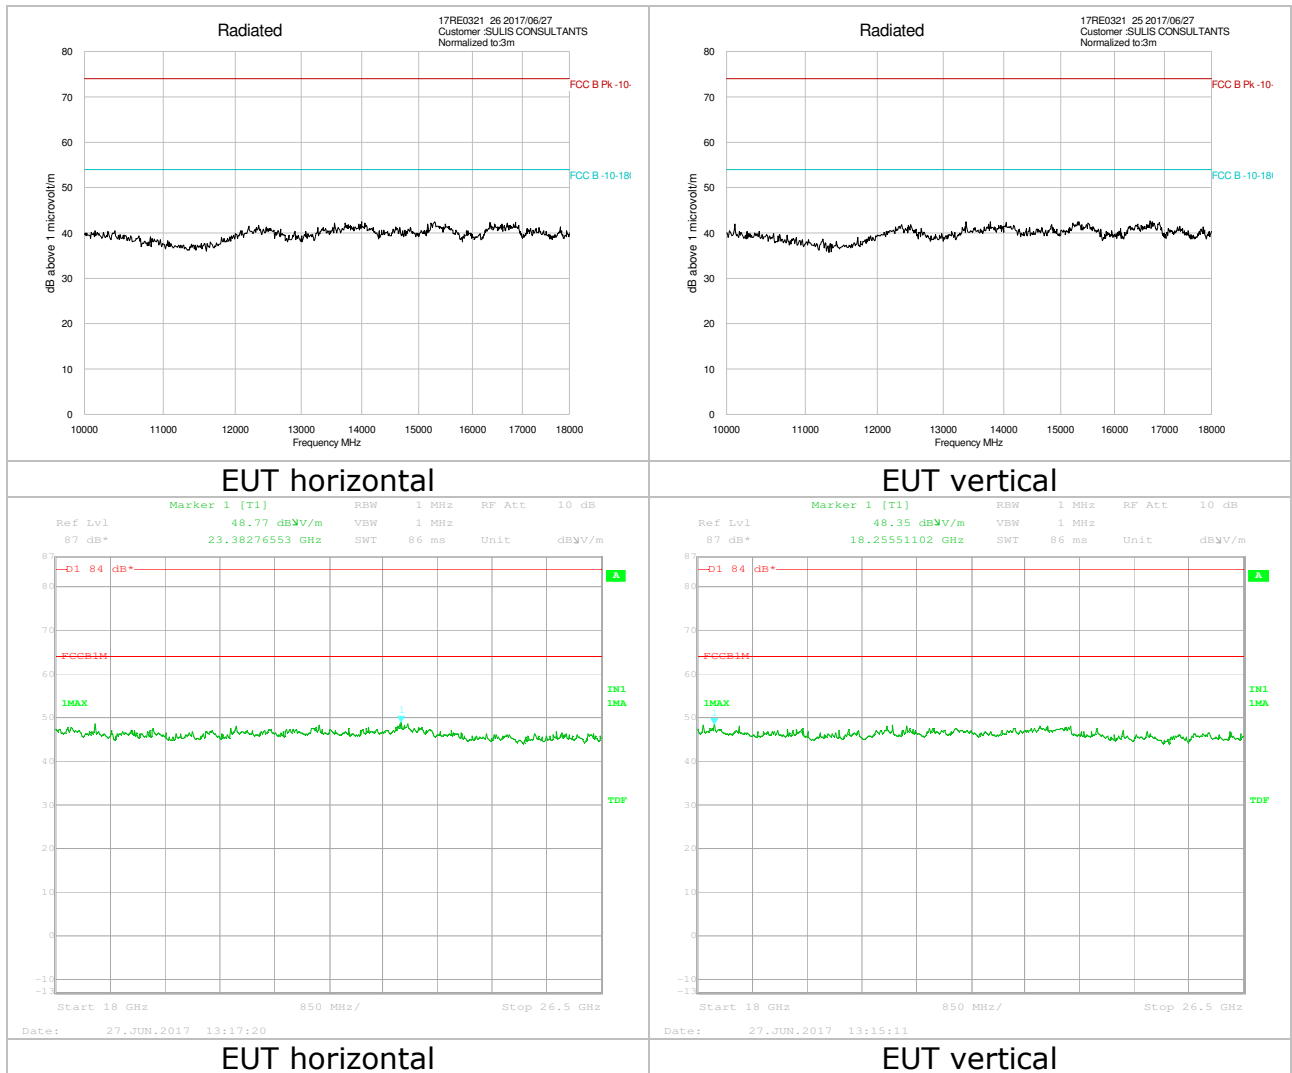
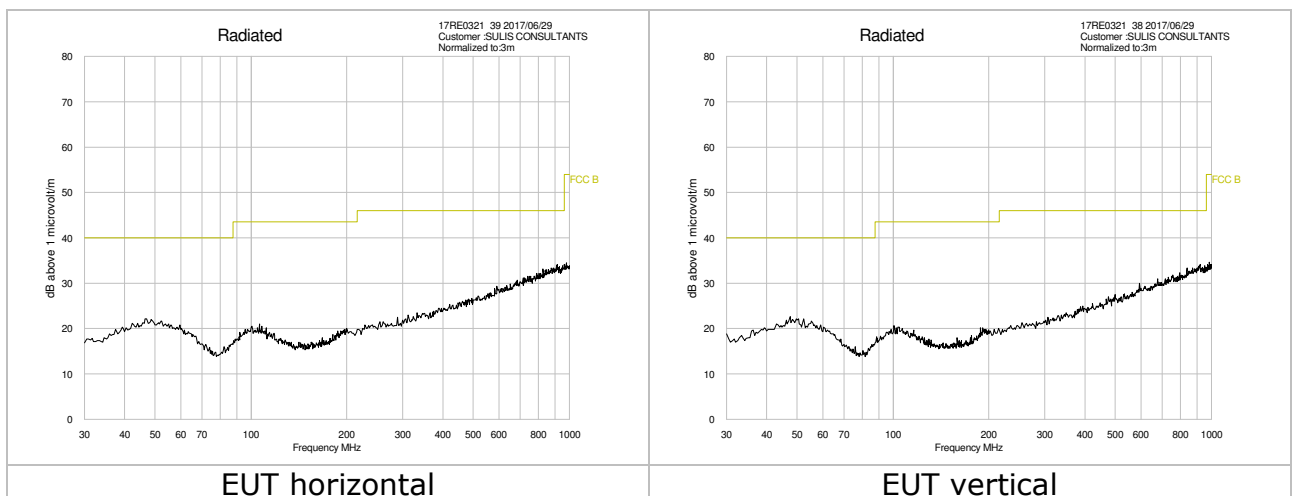


Figure 8: Radiated Spurious Emissions; Channel 18

Channel 25



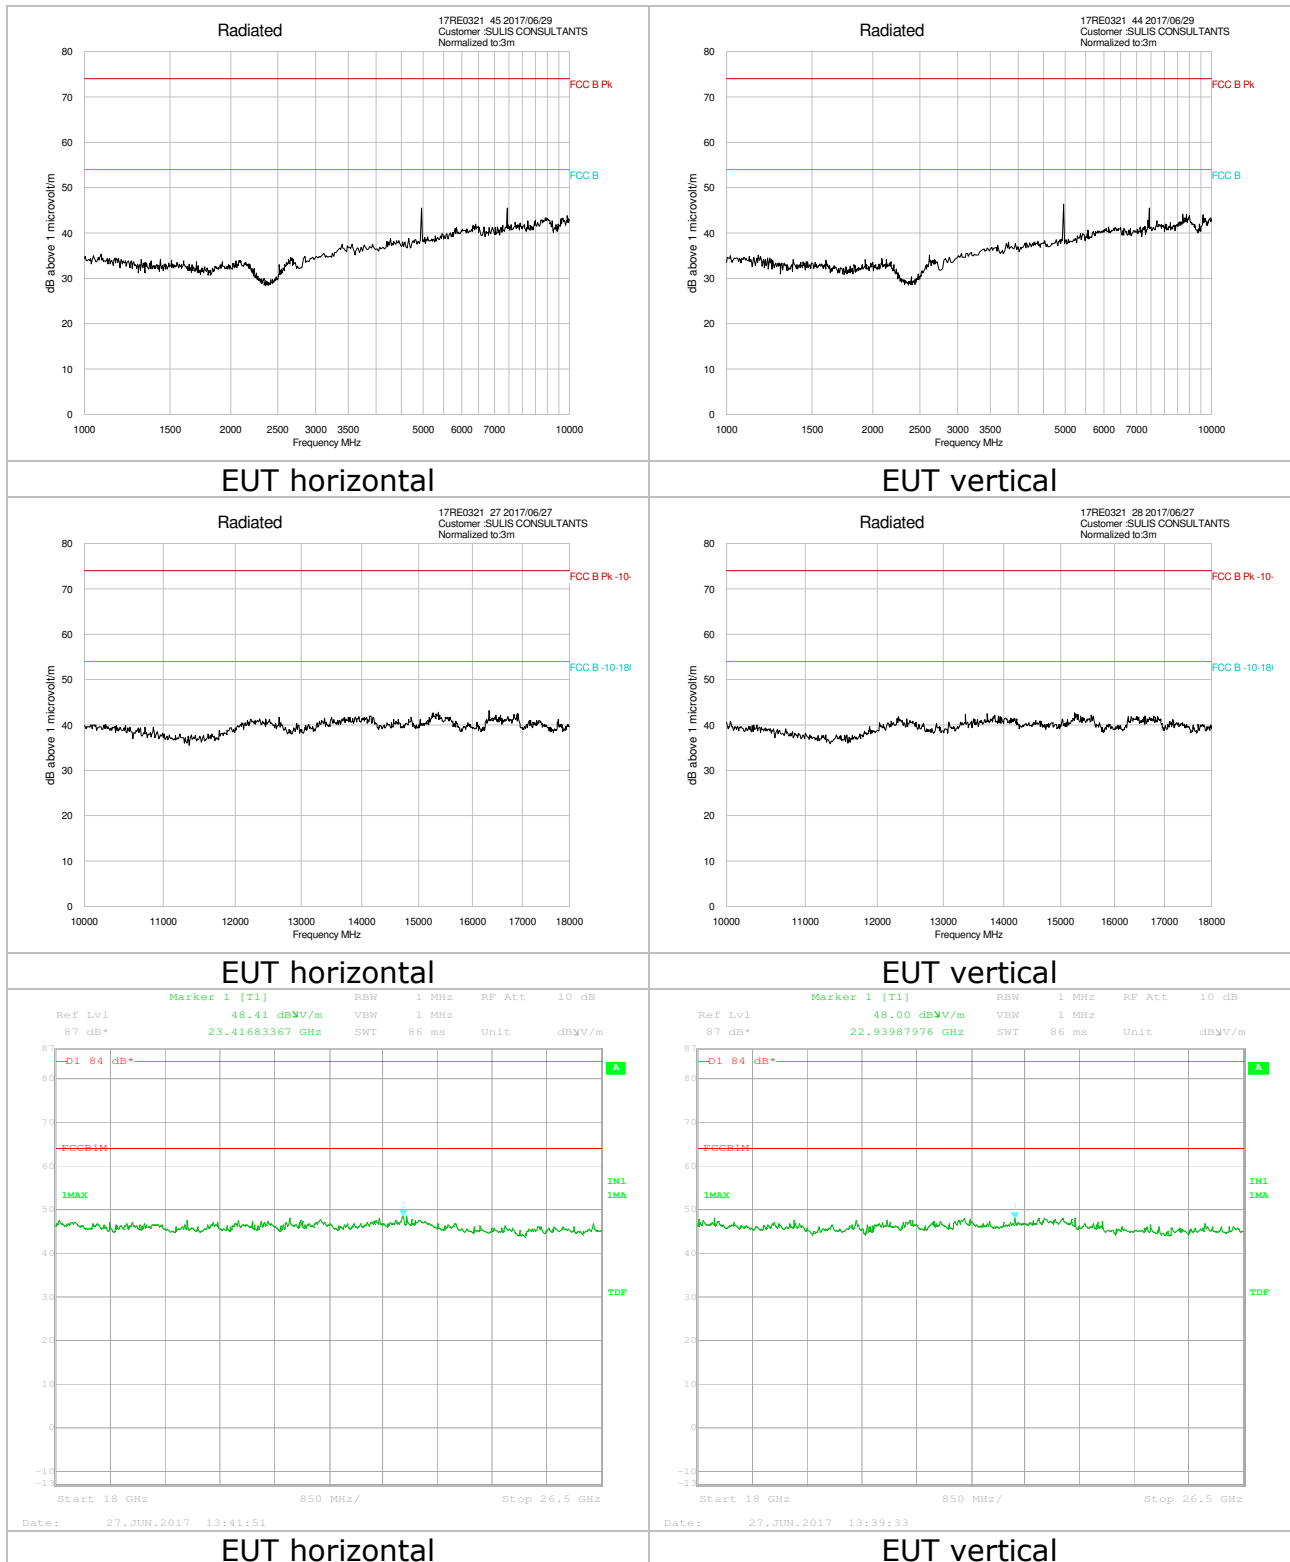


Figure 9: Radiated Spurious Emissions; Channel 25

13 Occupied bandwidth

99% occupied bandwidth measured using the inbuilt function in the spectrum analyser

Channel	Occupied Bandwidth (MHz)	Requirement	Result
11	2.39	None	For information
18	2.35	None	For information
25	2.42	None	For information

Table 14: Occupied Bandwidth

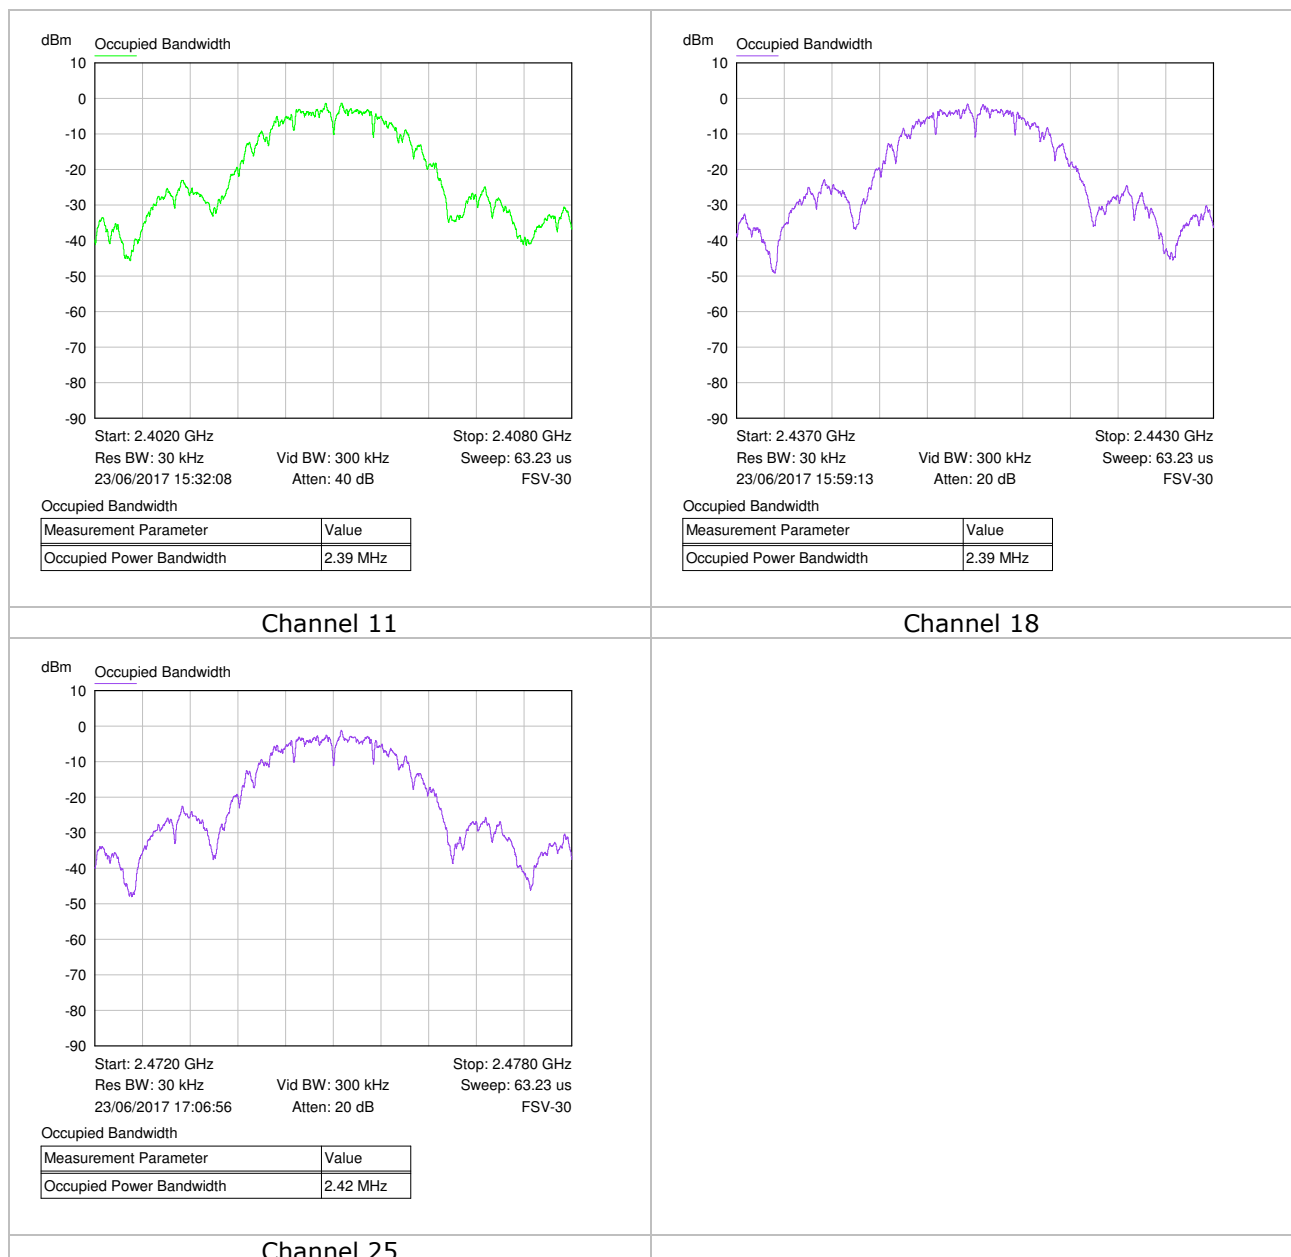


Figure 10: Occupied Bandwidth

14 Test equipment

Description	Manufacturer	Name	Serial Number	Calibration certificate Or Calibration due
Receiver	Rohde & Schwarz	FSV30	101389	R&S 1400-59078 Cal date: 07 June 2017
RF test cable	Utiflex	BUA01G	FA210A0009M30309	ABEX UK. Ref: green bua01g Due 08 Oct 17
Antenna	Schwarzbeck	VULB9162	129	Due 07/04/2019
Spectrum analyser	HP	8593EM	3726U00203	Due 11/10/2017
7GHz Receiver	Rohde & Schwarz	ESCI7	1166595007	Due 30/05/2018
Pre-amplifier (30-1000MHz)	HP	8447D	1937A02341	Due 14/09/2017
1-10GHz Horn	Schwarzbeck	BBHA 9120 571	571	Due 24/02/2019
Pre-amp, 1-18GHz 55dB	HEMCS	PA XVIII	001	Internal
Horn antenna (2-18GHz)	Q-par Angus	WBH218HN	5367	Due 22/06/2019
18 to 40GHz Horn	Q-par Angus	WBH18-40k	10300	Due 23/01/2019
40GHz receiver	Rohde & Schwarz	ESIB 40 no.2	100262	Due 11/03/2018
Pre-amp, 1-26.5 GHz	HP	8449B	3008A01077	Due 13/07/2017

Table 15: Test Equipment

Note: Where only a calibration due date is listed, the calibration certificate is held by Hursley EMC Services Ltd under their UKAS accreditation, no. 1871