




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 12:31:27

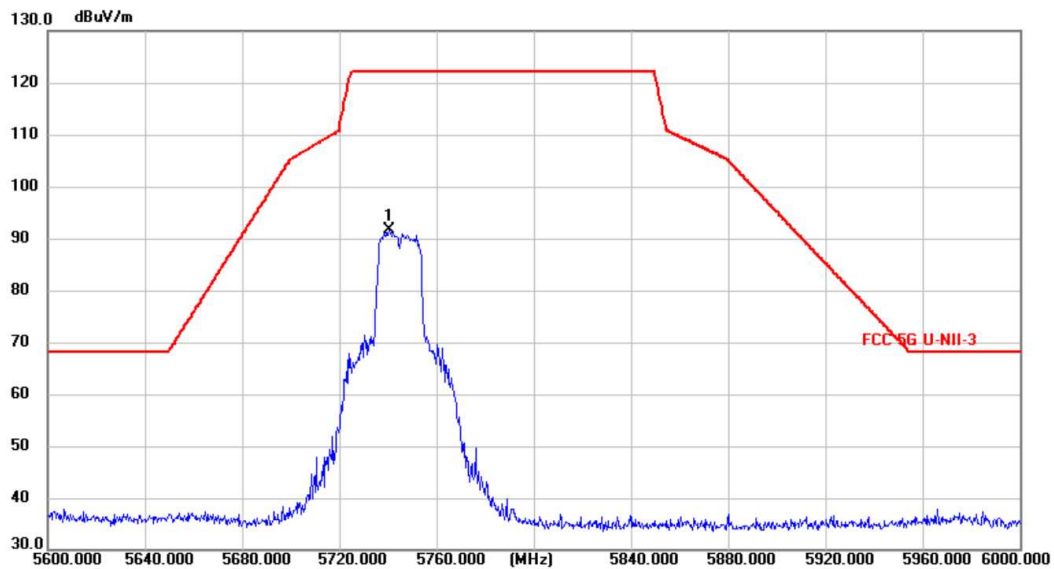

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5740.700	108.84	-17.33	91.51	122.20	-30.69	peak	150	170	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 12:38:14

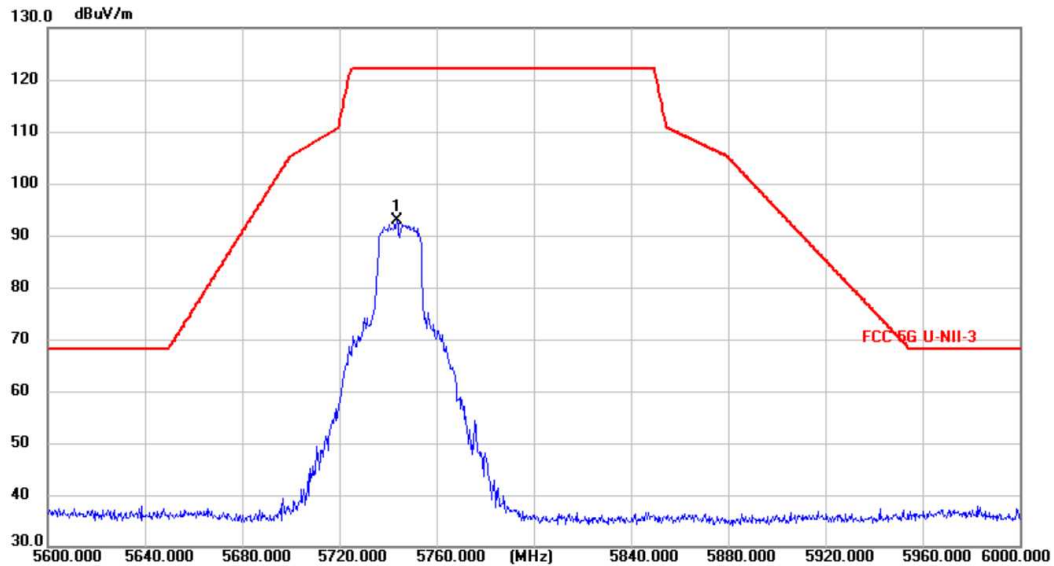

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5743.750	110.43	-17.58	92.85	122.20	-29.35	peak	150	136	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 12:44:08

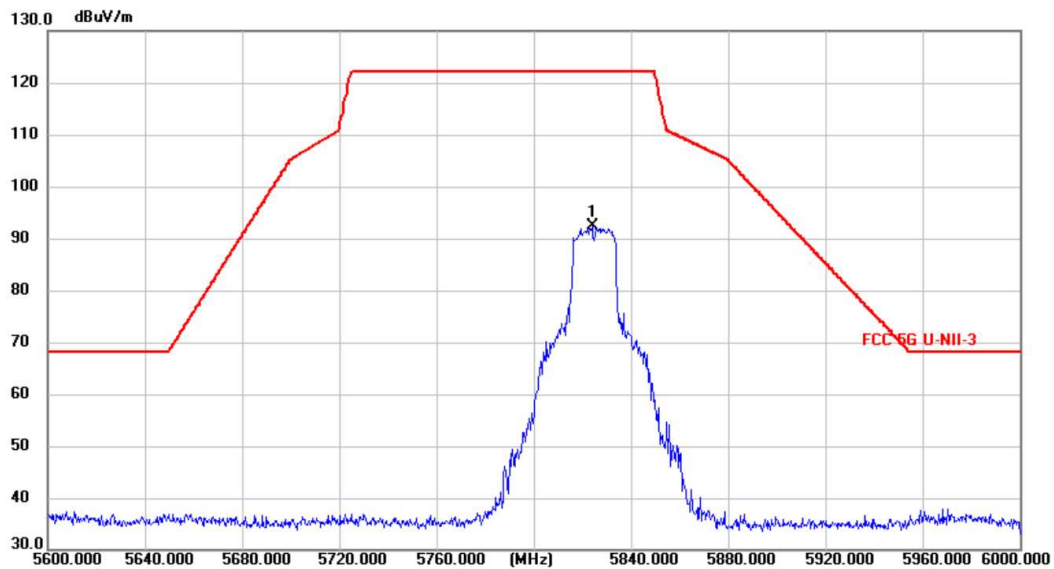

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5824.150	109.66	-17.36	92.30	122.20	-29.90	peak	150	78	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 12:53:04

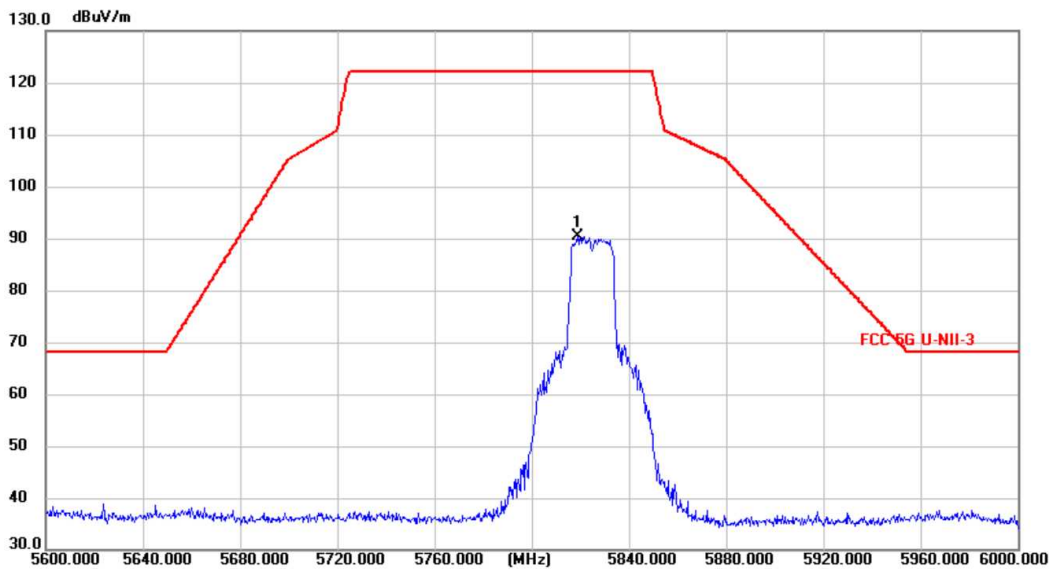

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5818.850	107.59	-17.19	90.40	122.20	-31.80	peak	150	331	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ac20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 12:58:57

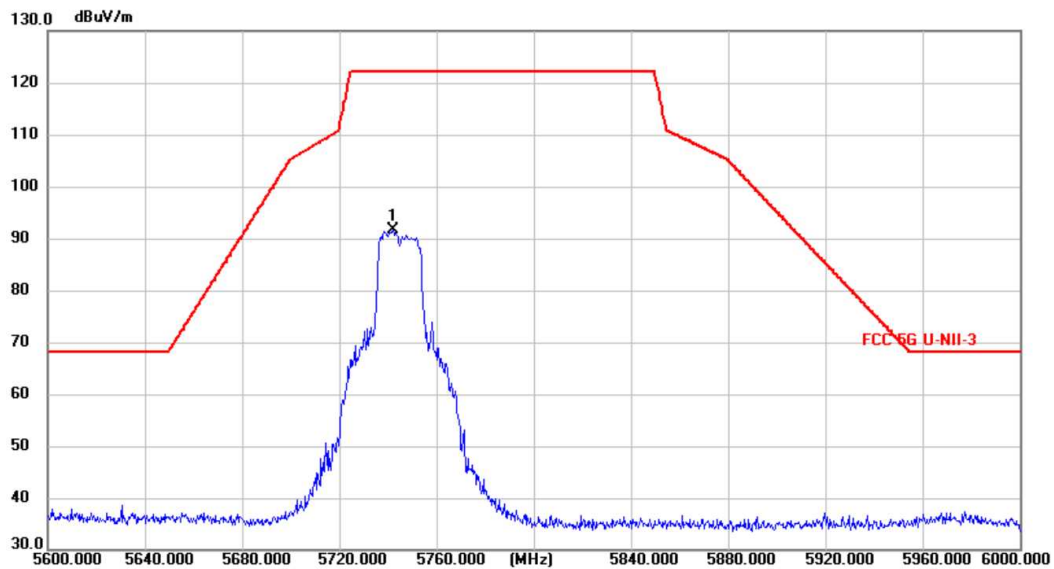

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5742.050	108.88	-17.32	91.56	122.20	-30.64	peak	150	236	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ac20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:02:47

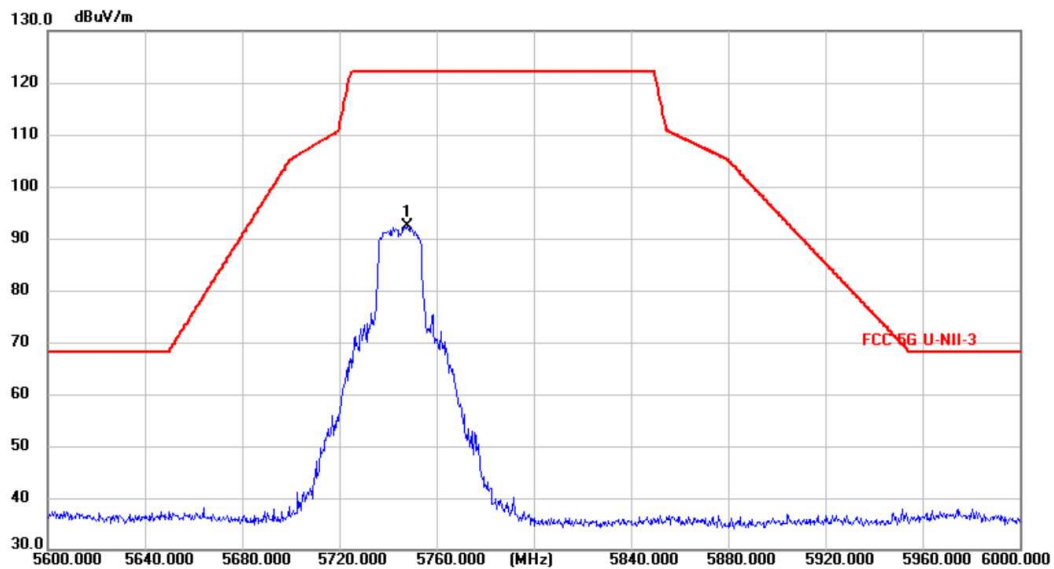

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5748.000	109.96	-17.57	92.39	122.20	-29.81	peak	150	201	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ac20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:14:01

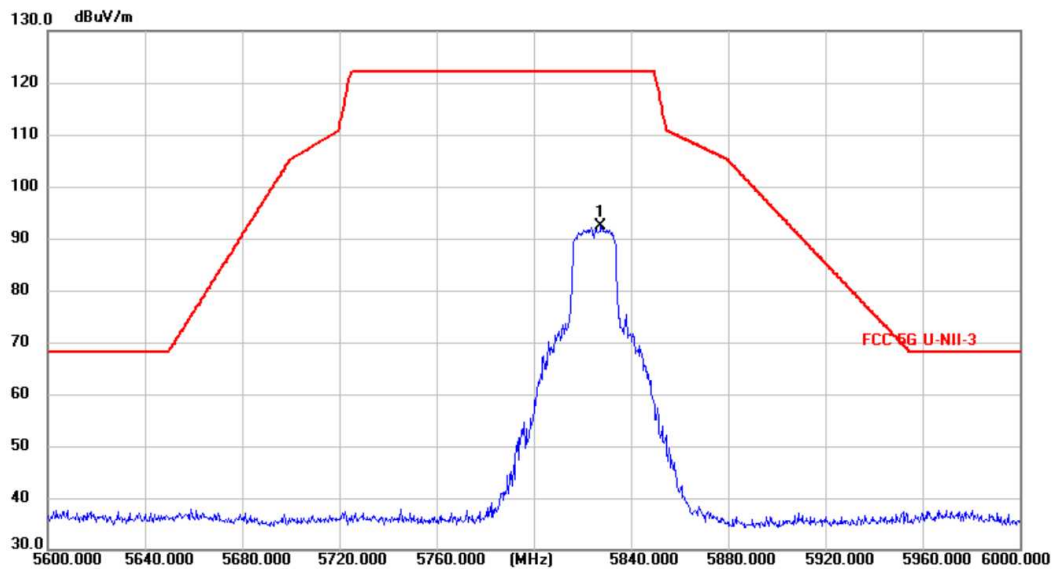

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5827.750	109.82	-17.35	92.47	122.20	-29.73	peak	150	112	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ac20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:19:47

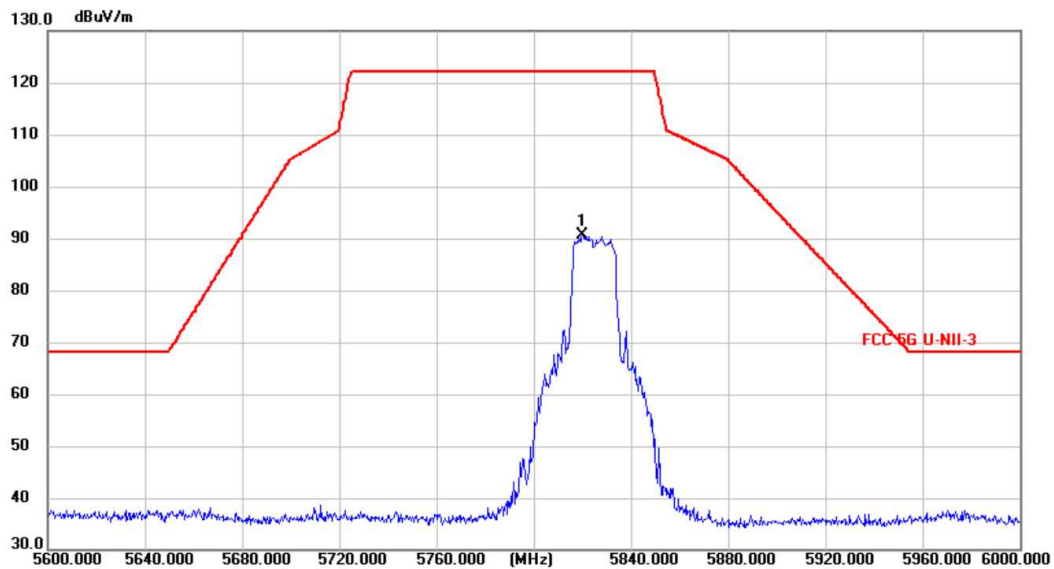

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5820.200	107.85	-17.19	90.66	122.20	-31.54	peak	150	13	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:24:35

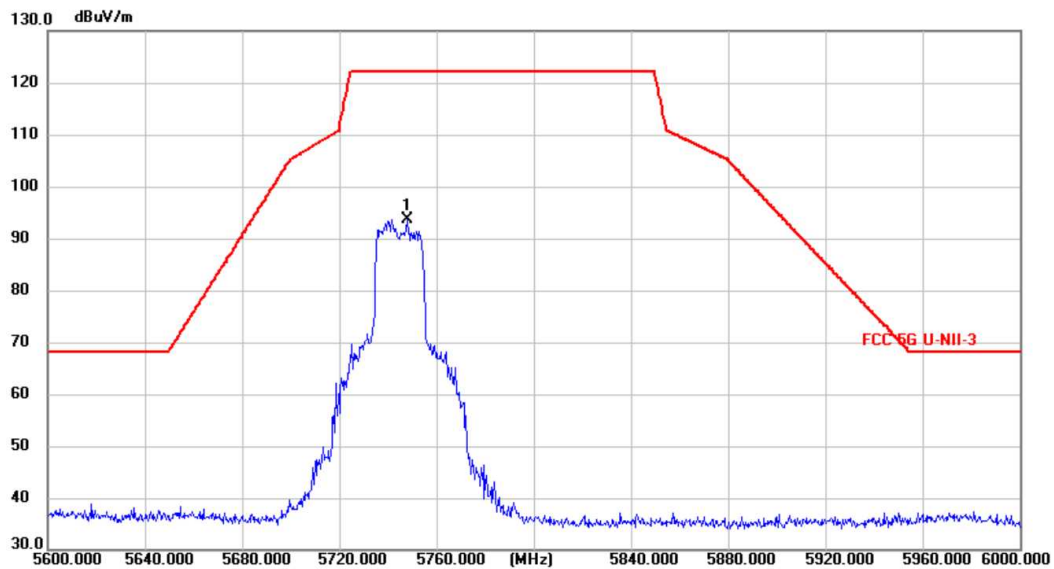

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5748.200	110.96	-17.32	93.64	122.20	-28.56	peak	150	152	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax20 5745MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:29:42

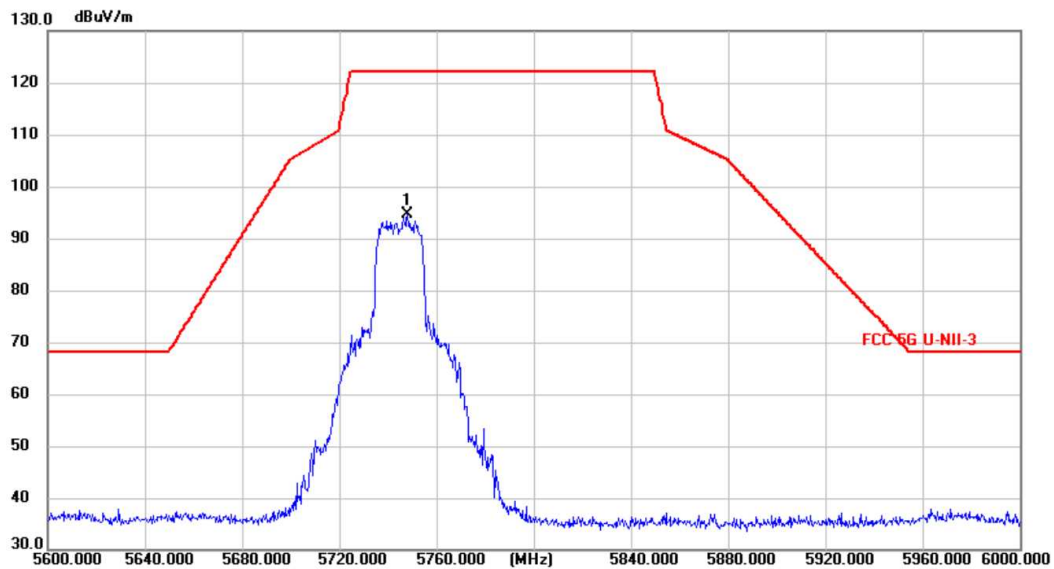

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5748.150	112.26	-17.57	94.69	122.20	-27.51	peak	150	282	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:37:10

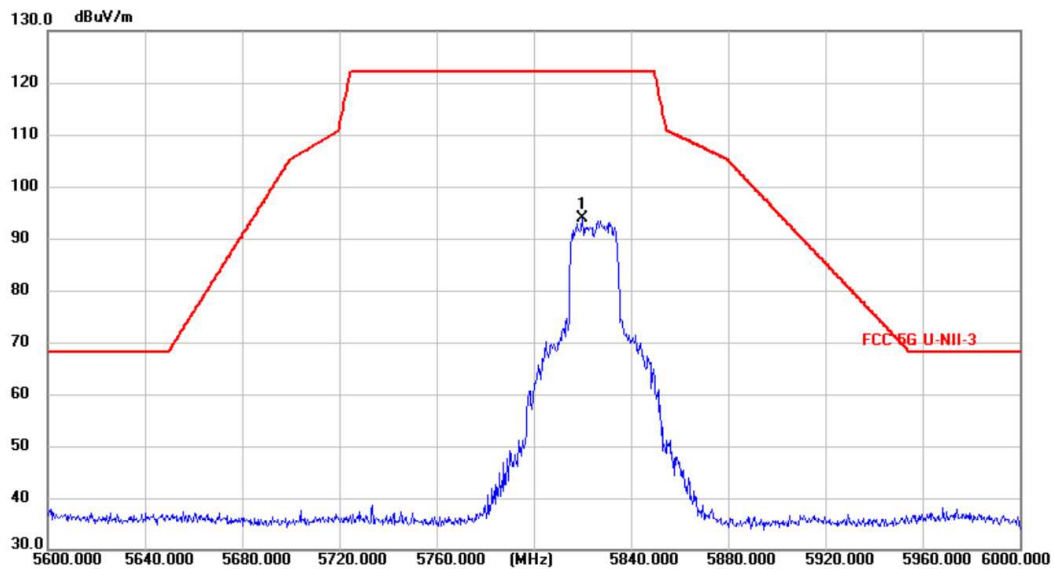

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5820.000	111.22	-17.37	93.85	122.20	-28.35	peak	150	203	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax20 5825MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:45:24

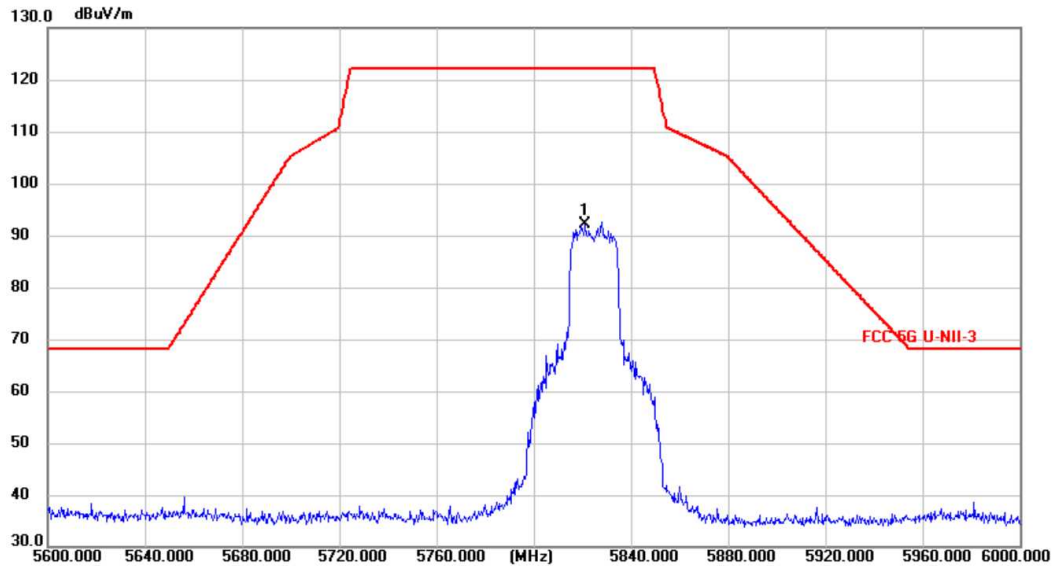

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5821.350	109.30	-17.19	92.11	122.20	-30.09	peak	150	301	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n40 5755MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:52:04

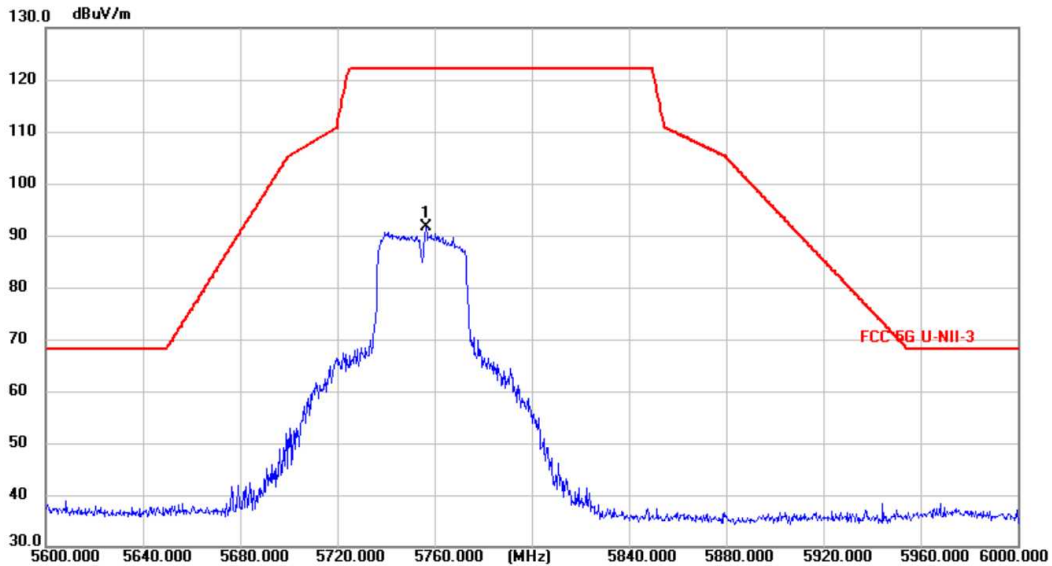

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5756.450	108.84	-17.30	91.54	122.20	-30.66	peak	150	352	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n40 5755MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 13:57:42

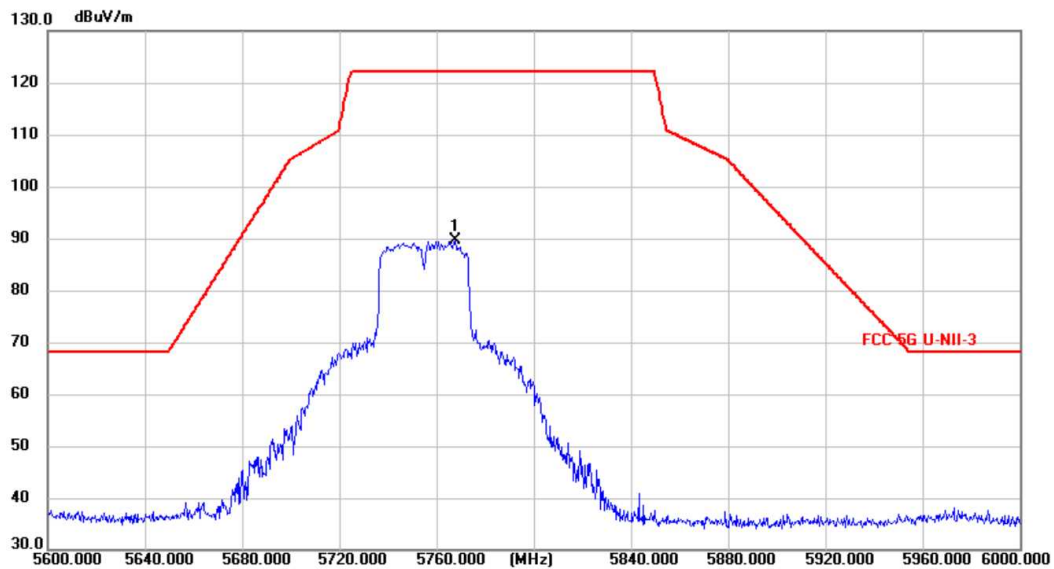

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5767.750	107.03	-17.51	89.52	122.20	-32.68	peak	150	95	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n40 5795MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:02:20

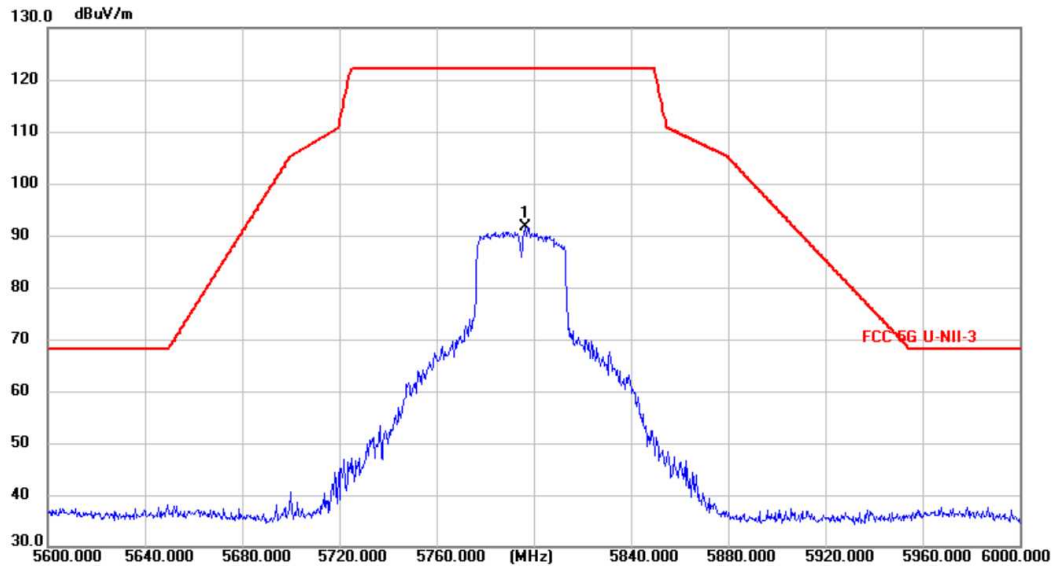

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5796.400	109.08	-17.44	91.64	122.20	-30.56	peak	150	74	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11n40 5795MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:12:21

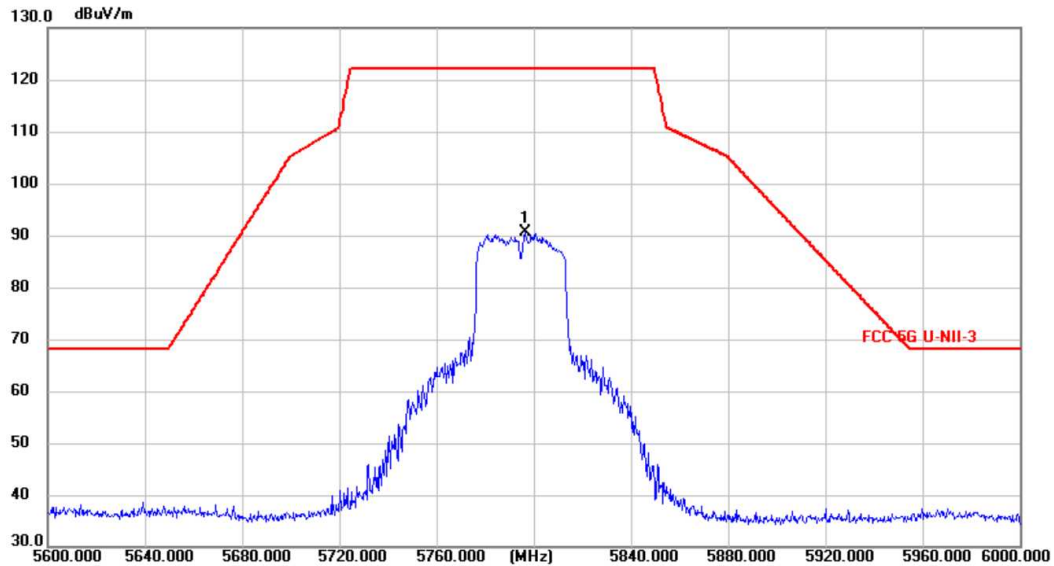

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5796.450	107.79	-17.23	90.56	122.20	-31.64	peak	150	218	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax40 5755MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:17:21

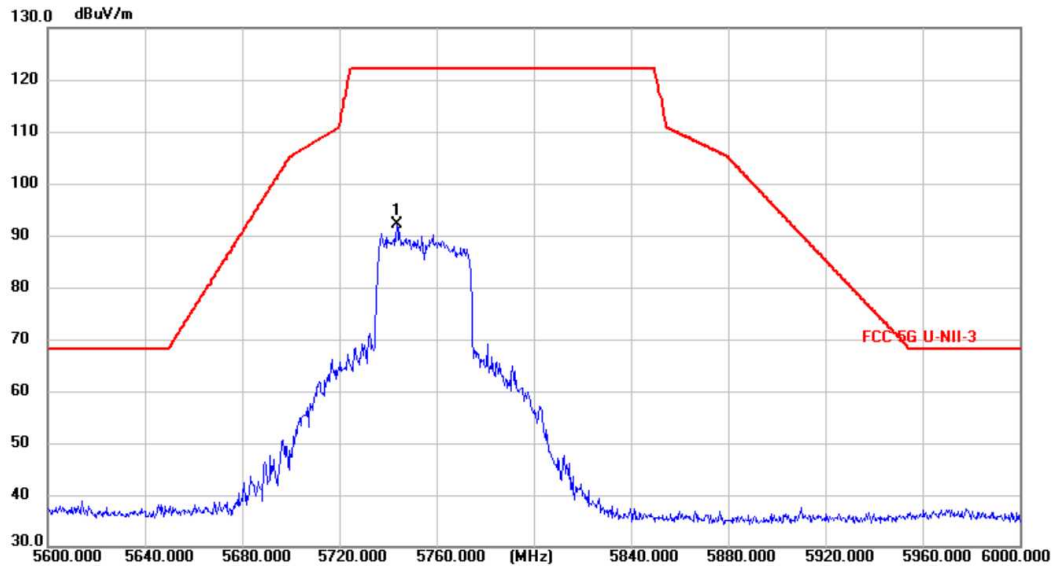

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5743.750	109.44	-17.32	92.12	122.20	-30.08	peak	150	169	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax40 5755MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:24:04

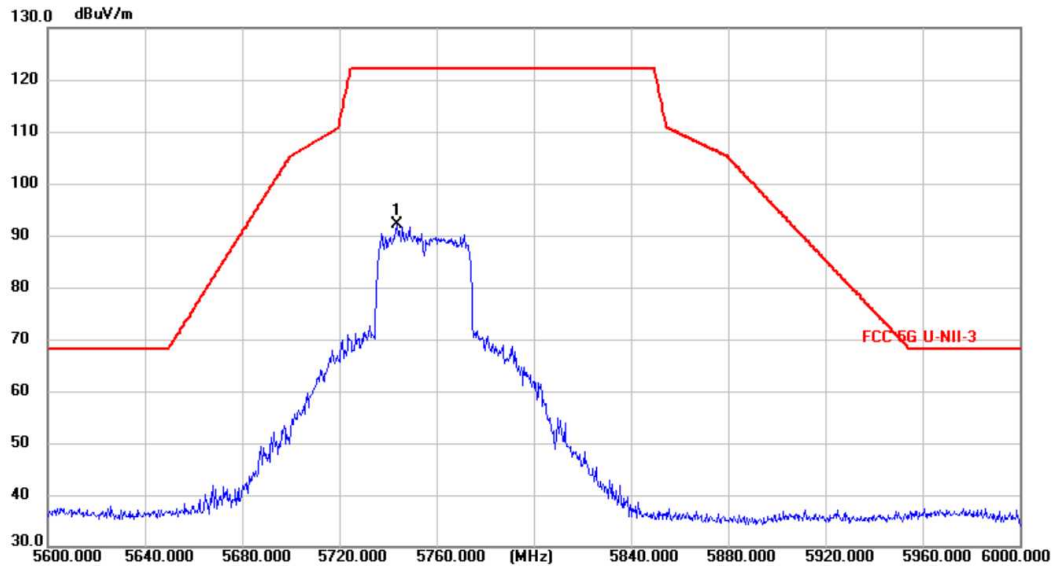

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5743.700	109.81	-17.58	92.23	122.20	-29.97	peak	150	207	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax40 5795MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:27:04

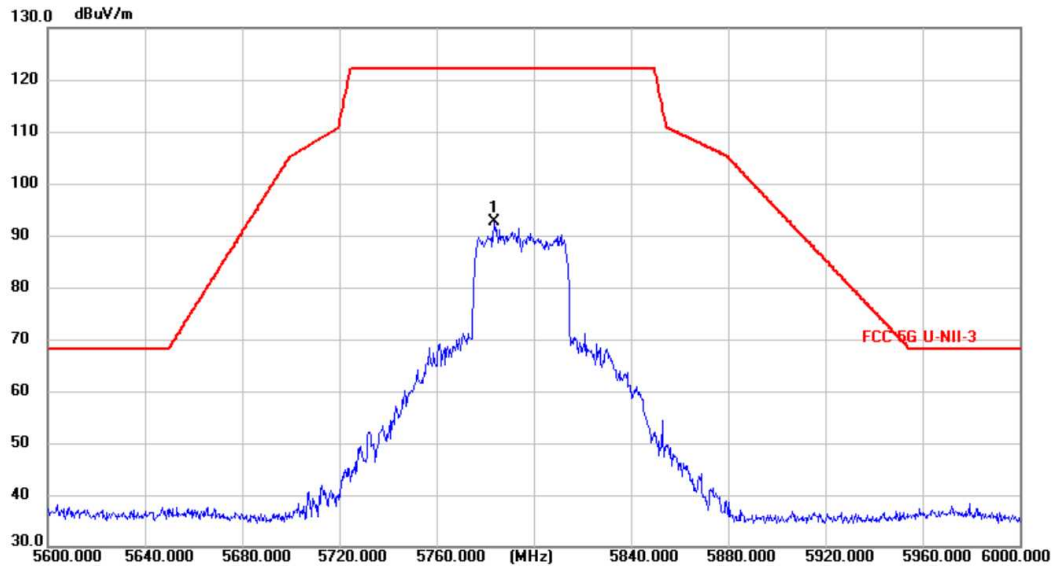

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5783.700	110.04	-17.46	92.58	122.20	-29.62	peak	150	331	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax40 5795MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:42:21

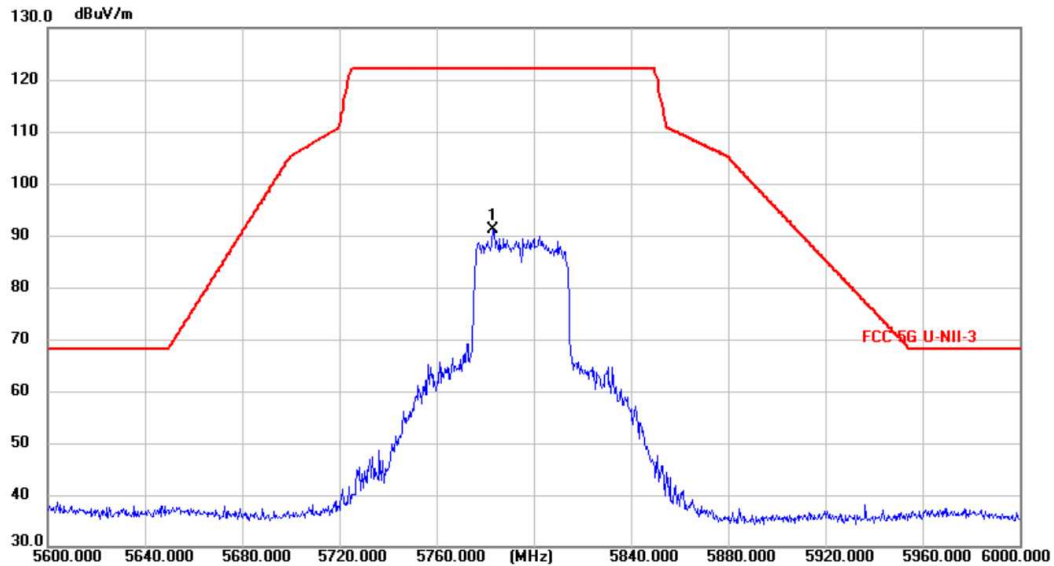

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5783.500	108.29	-17.25	91.04	122.20	-31.16	peak	150	229	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Horizontal** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax80 5775MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:48:54

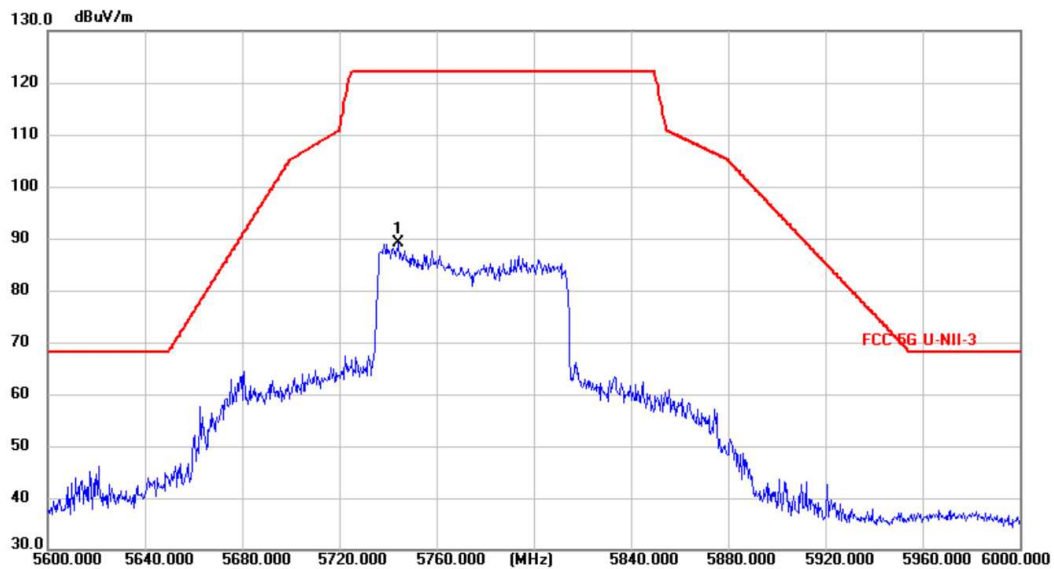

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5744.500	106.36	-17.32	89.04	122.20	-33.16	peak	150	347	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-3m Chamber Polarization: **Vertical** Temperature: 26 °C
EUT: 3D Scanner Distance: 3m Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: 11ax80 5775MHz
Test Voltage: DC 14.4V
Note:

Radiated Emission Measurement

Test Date: 2024/9/21 14:52:45

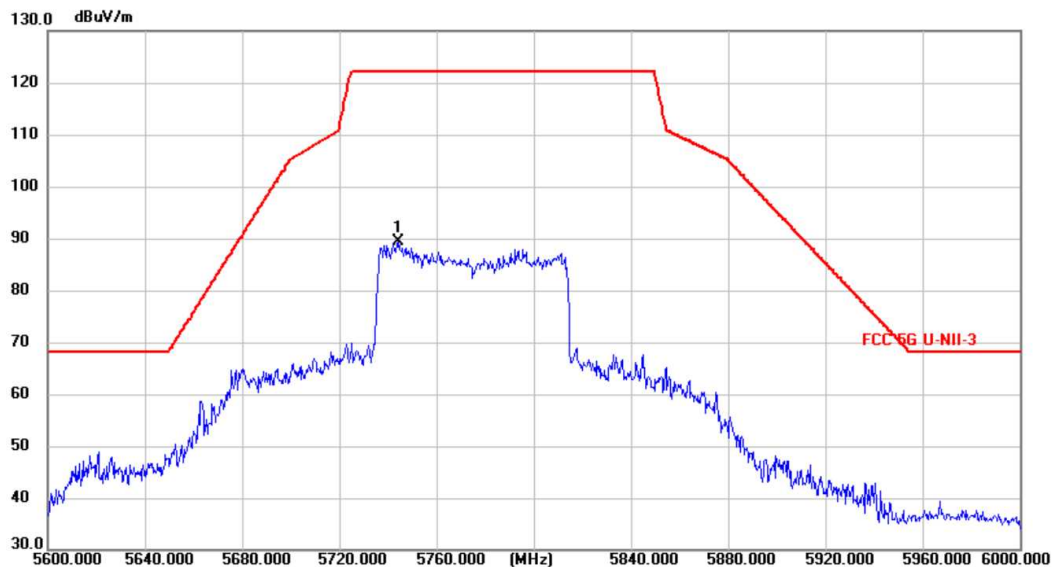

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F	Remark
1 *	5744.600	107.08	-17.58	89.50	122.20	-32.70	peak	150	171	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit

3. Test Results of AC Conducted Emissions




Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room Phase: **L1** Temperature: 26 °C
EUT: 3D Scanner Humidity: 54 %RH
M/N: EinScan Libre Test Engineer: Felix Pang
Test Mode: n20 5180MHz
Test Voltage: AC 120V/60Hz
Note:

Conducted Emission Measurement

Test Date: 2024/9/13 10:35:51

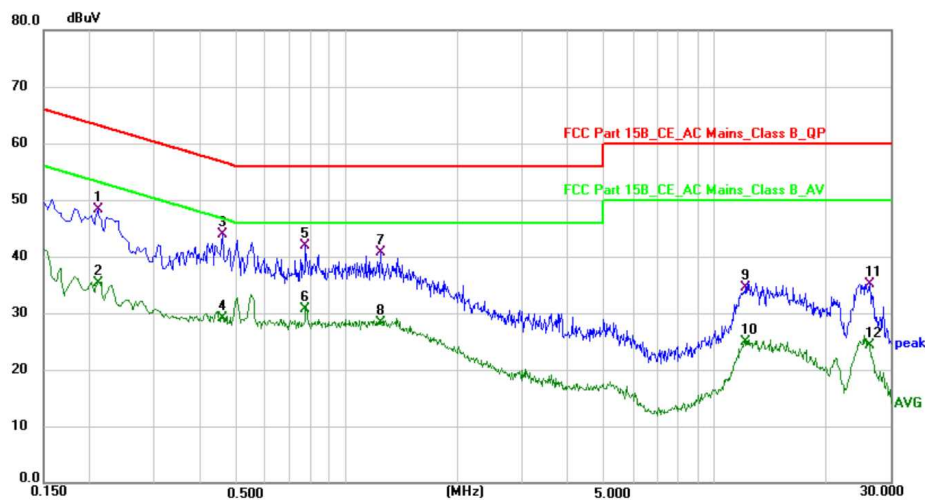

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2100	38.21	10.02	48.23	63.21	-14.98	QP	P	
2	0.2100	25.22	10.02	35.24	53.21	-17.97	AVG	P	
3 *	0.4580	34.18	9.68	43.86	56.73	-12.87	QP	P	
4	0.4580	19.41	9.68	29.09	46.73	-17.64	AVG	P	
5	0.7740	32.13	9.71	41.84	56.00	-14.16	QP	P	
6	0.7740	20.90	9.71	30.61	46.00	-15.39	AVG	P	
7	1.2420	31.26	9.45	40.71	56.00	-15.29	QP	P	
8	1.2420	18.94	9.45	28.39	46.00	-17.61	AVG	P	
9	12.1300	24.99	9.60	34.59	60.00	-25.41	QP	P	
10	12.1300	15.27	9.60	24.87	50.00	-25.13	AVG	P	
11	26.3940	24.64	10.54	35.18	60.00	-24.82	QP	P	
12	26.3940	13.86	10.54	24.40	50.00	-25.60	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit



Shenzhen PSI Testing Co., Ltd.
1-2F, Building 5, Yudafu Industrial Park, No. 10, Xingye West Road,
Shajing Street, Bao'an District, Shenzhen, Guangdong, China 518104

Test Site: PSI EMC Lab-Shielded Room

Phase: **N**

Temperature: 26 °C

EUT: 3D Scanner

Humidity: 54 %RH

M/N: EinScan Libre

Test Engineer: Felix Pang


Test Mode: n20 5180MHz

Test Voltage: AC 120V/60Hz

Note:

Conducted Emission Measurement

Test Date: 2024/9/13 9:44:29

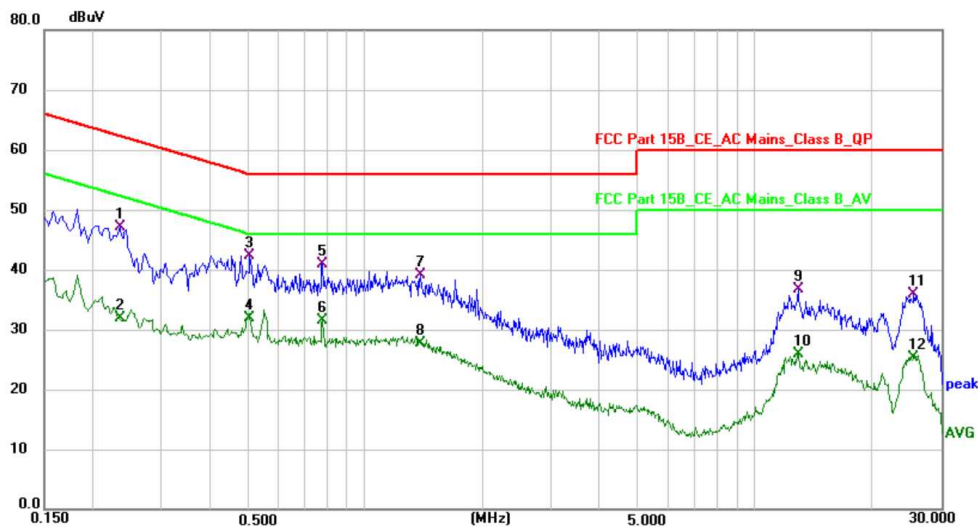

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2340	37.07	9.96	47.03	62.31	-15.28	QP	P	
2	0.2340	21.86	9.96	31.82	52.31	-20.49	AVG	P	
3 *	0.5060	32.44	9.78	42.22	56.00	-13.78	QP	P	
4	0.5060	22.13	9.78	31.91	46.00	-14.09	AVG	P	
5	0.7780	31.23	9.71	40.94	56.00	-15.06	QP	P	
6	0.7780	21.73	9.71	31.44	46.00	-14.56	AVG	P	
7	1.3860	29.79	9.41	39.20	56.00	-16.80	QP	P	
8	1.3860	18.38	9.41	27.79	46.00	-18.21	AVG	P	
9	12.8540	26.95	9.68	36.63	60.00	-23.37	QP	P	
10	12.8540	16.28	9.68	25.96	50.00	-24.04	AVG	P	
11	25.5260	25.34	10.59	35.93	60.00	-24.07	QP	P	
12	25.5260	14.77	10.59	25.36	50.00	-24.64	AVG	P	

Note: *:Maximum data x:Over limit !:over margin Level = Reading + Factor Margin = Level - Limit