





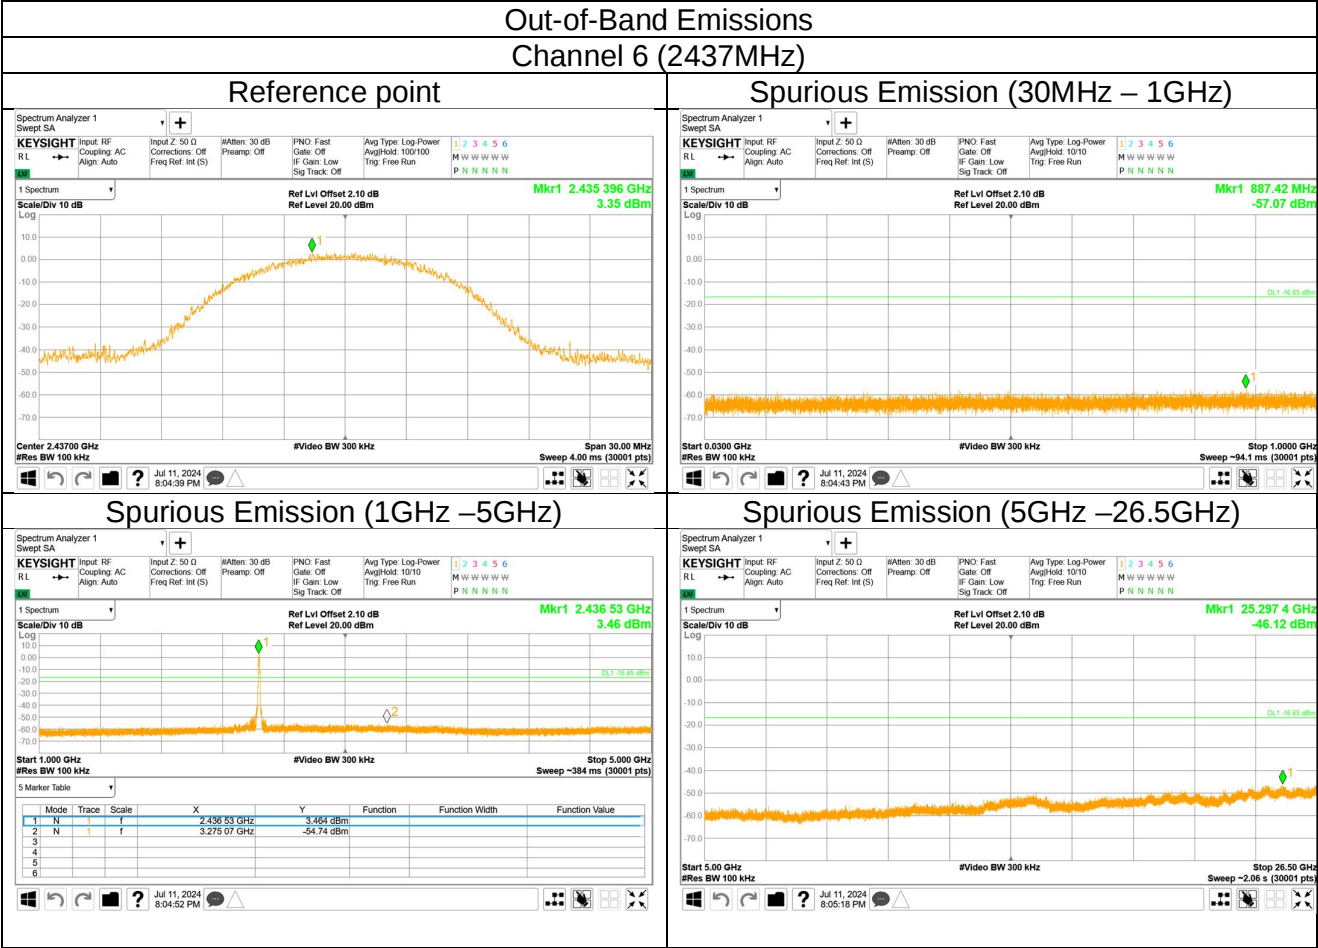

Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point

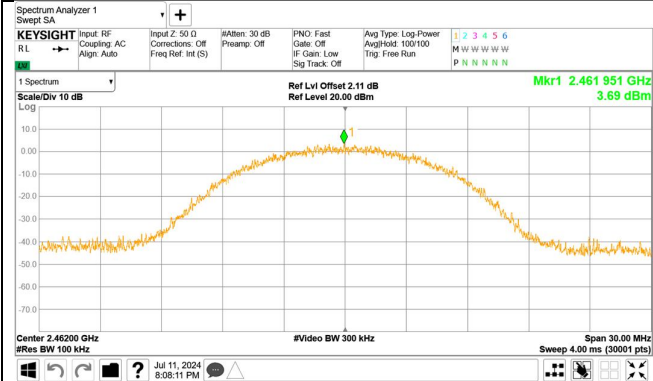


Spurious Emission (30MHz – 1GHz)



Spurious Emission (1GHz –5GHz)

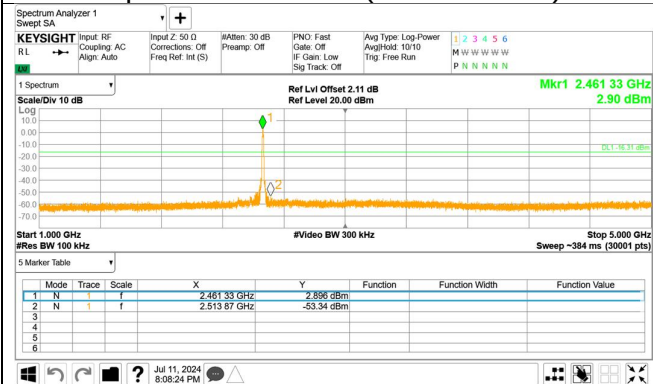

Spurious Emission (5GHz –26.5GHz)

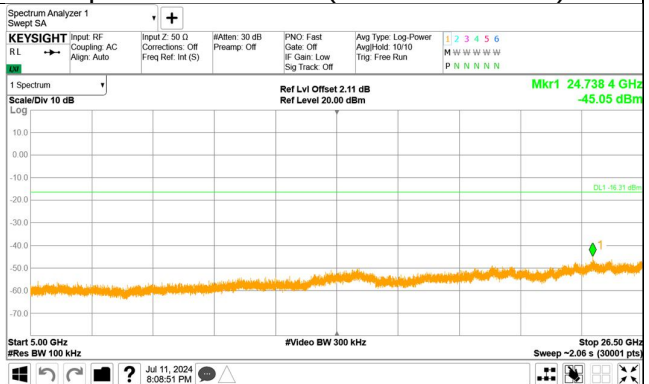




802.11 G ANT2

Out-of-Band Emissions
Channel 1 (2412MHz)

Reference point

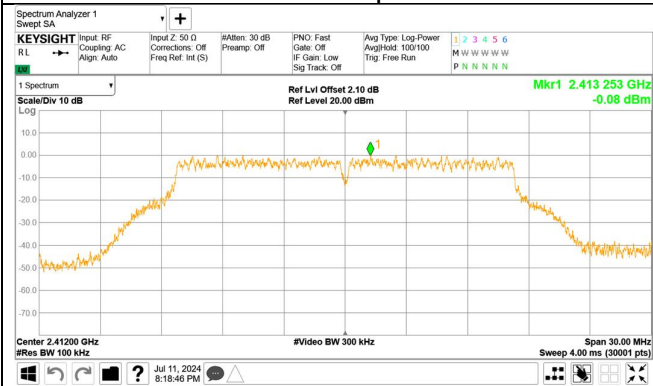


Spurious Emission (30MHz – 1GHz)




Spurious Emission (1GHz –5GHz)



Spurious Emission (5GHz –26.5GHz)

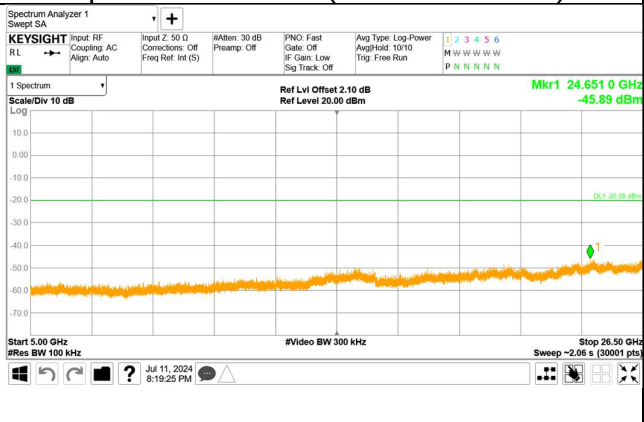


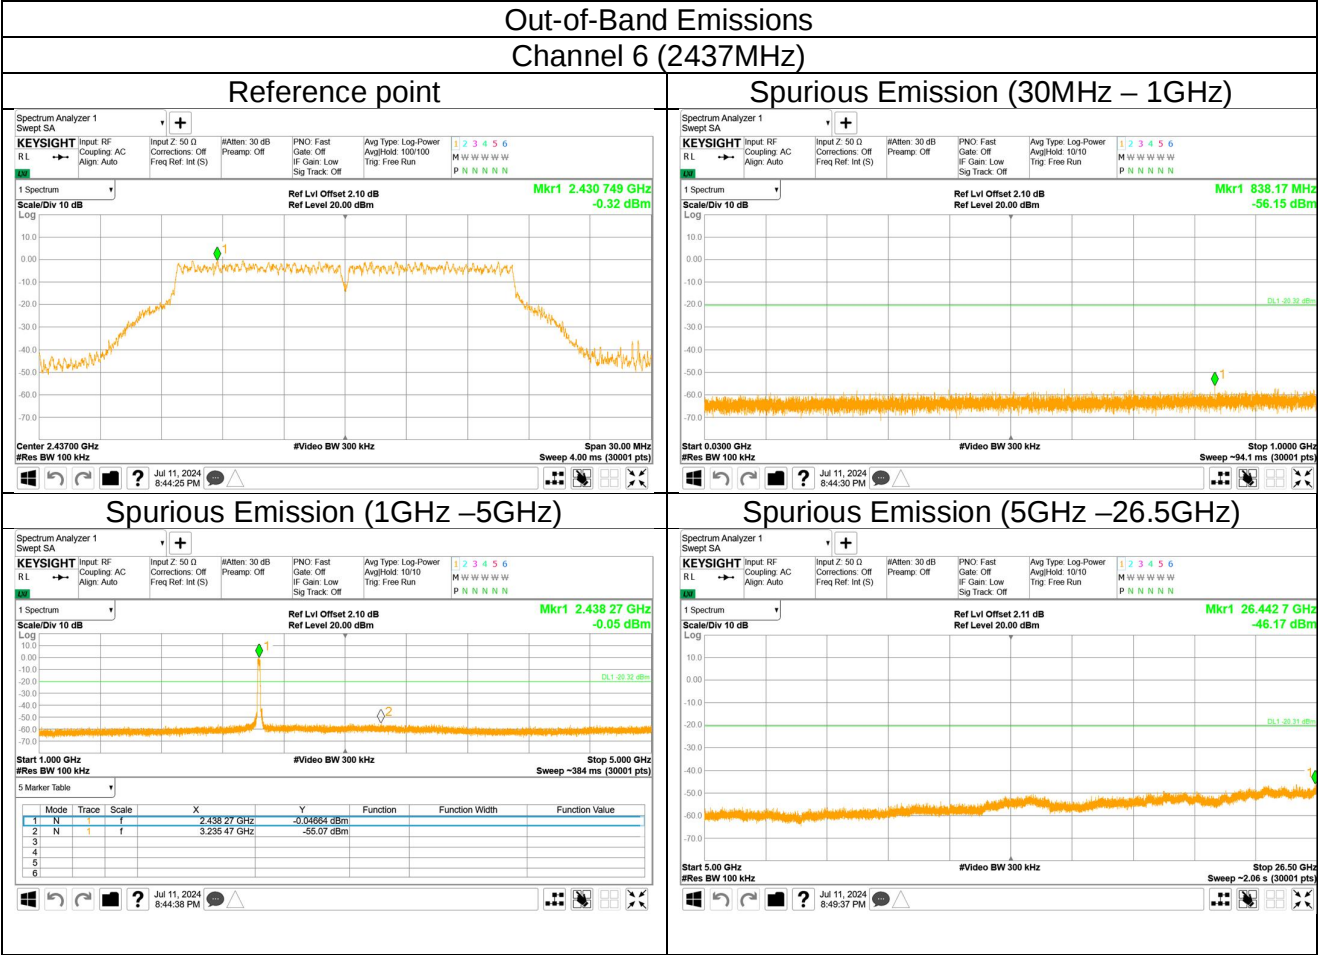



Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point

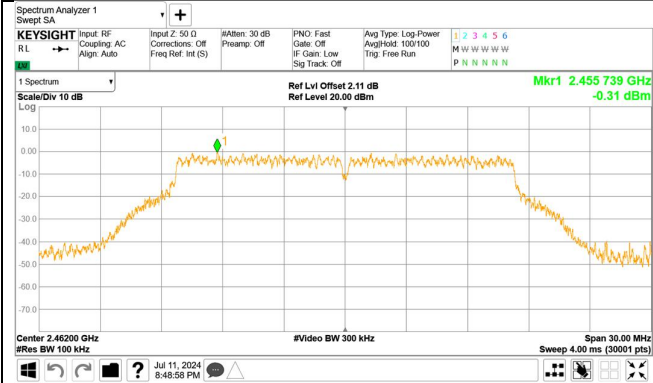


Spurious Emission (30MHz – 1GHz)



Spurious Emission (1GHz –5GHz)

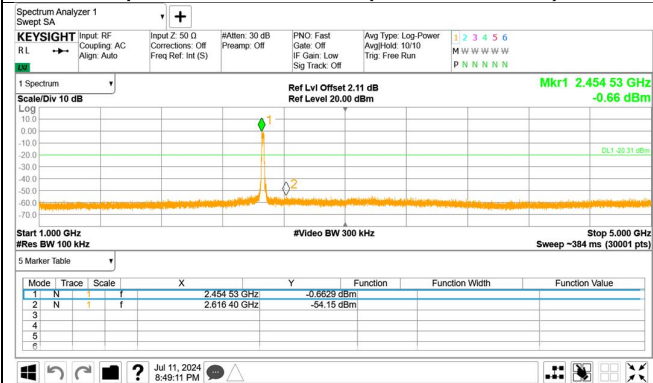


Spurious Emission (5GHz –26.5GHz)

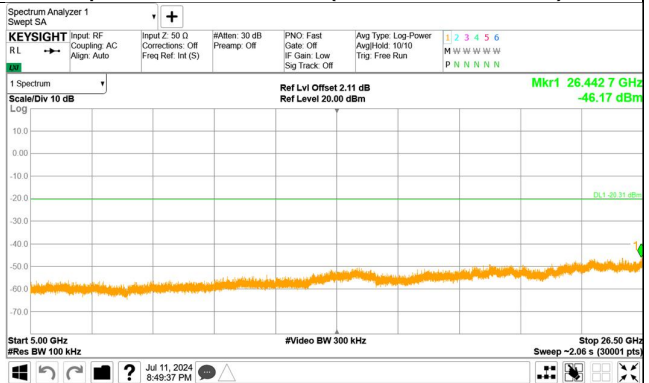



802.11 N HT20 ANT 2
Out-of-Band Emissions
Channel 1 (2412MHz)


Reference point

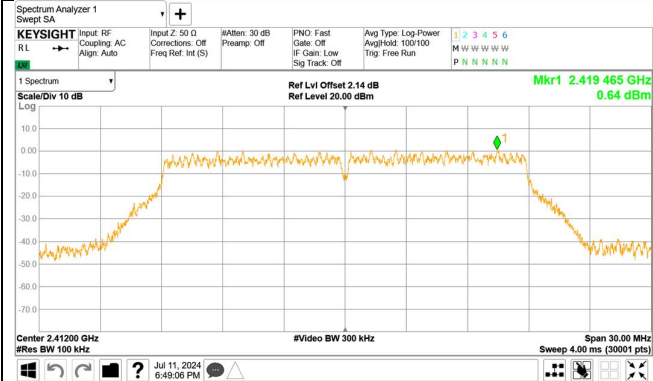


Spurious Emission (30MHz – 1GHz)





Spurious Emission (1GHz –5GHz)

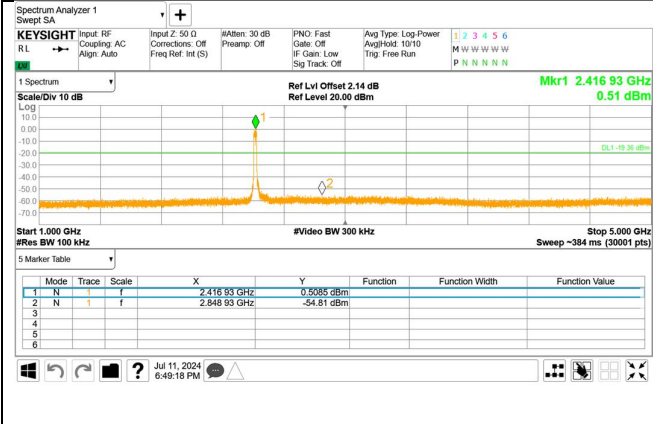

Spurious Emission (5GHz –26.5GHz)

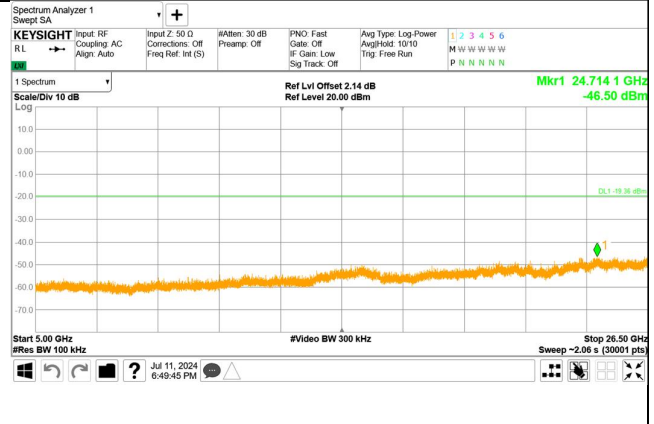

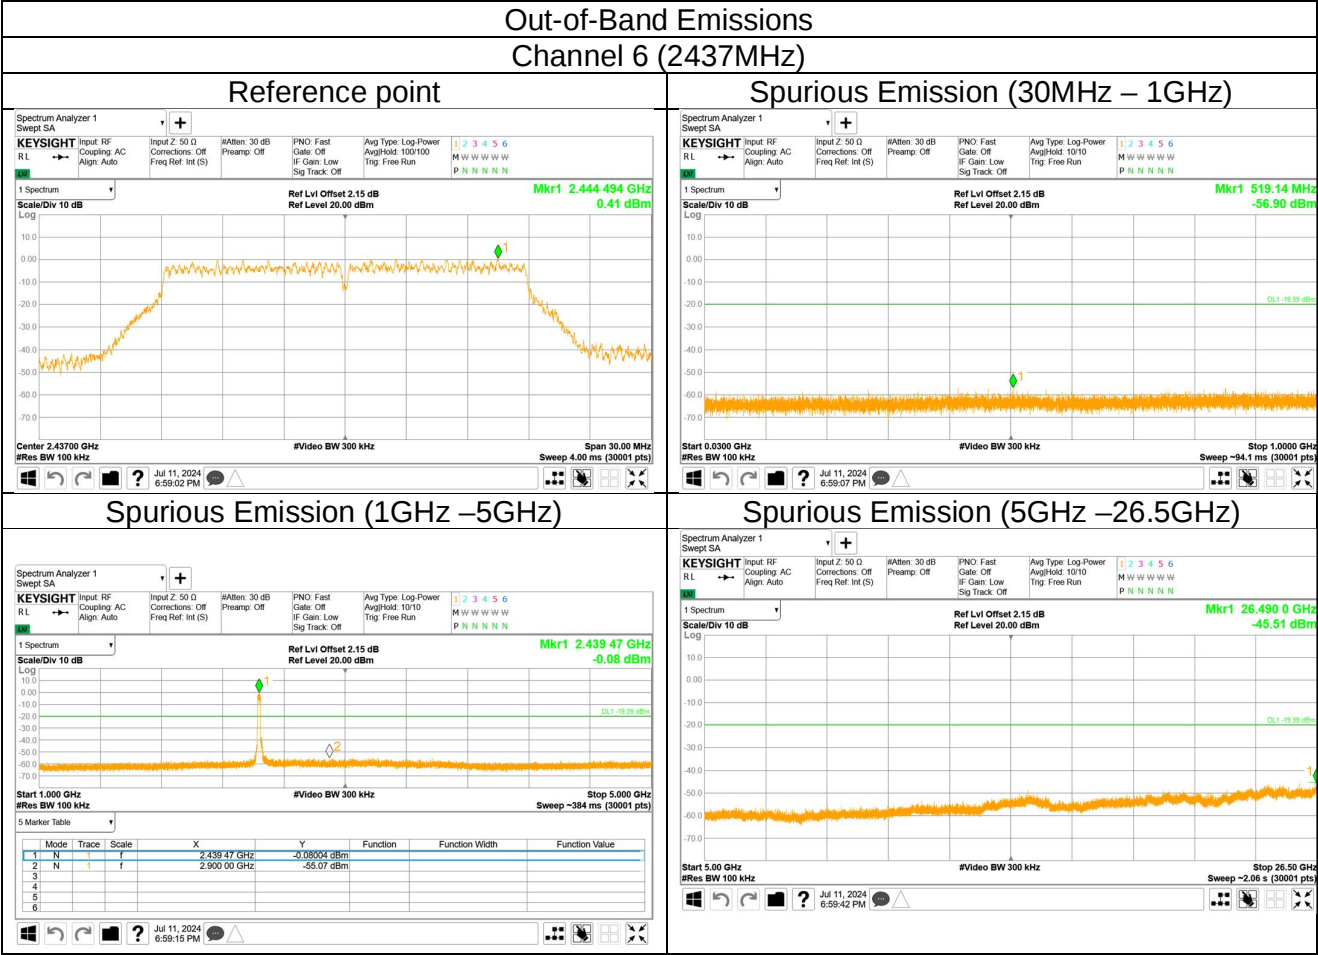

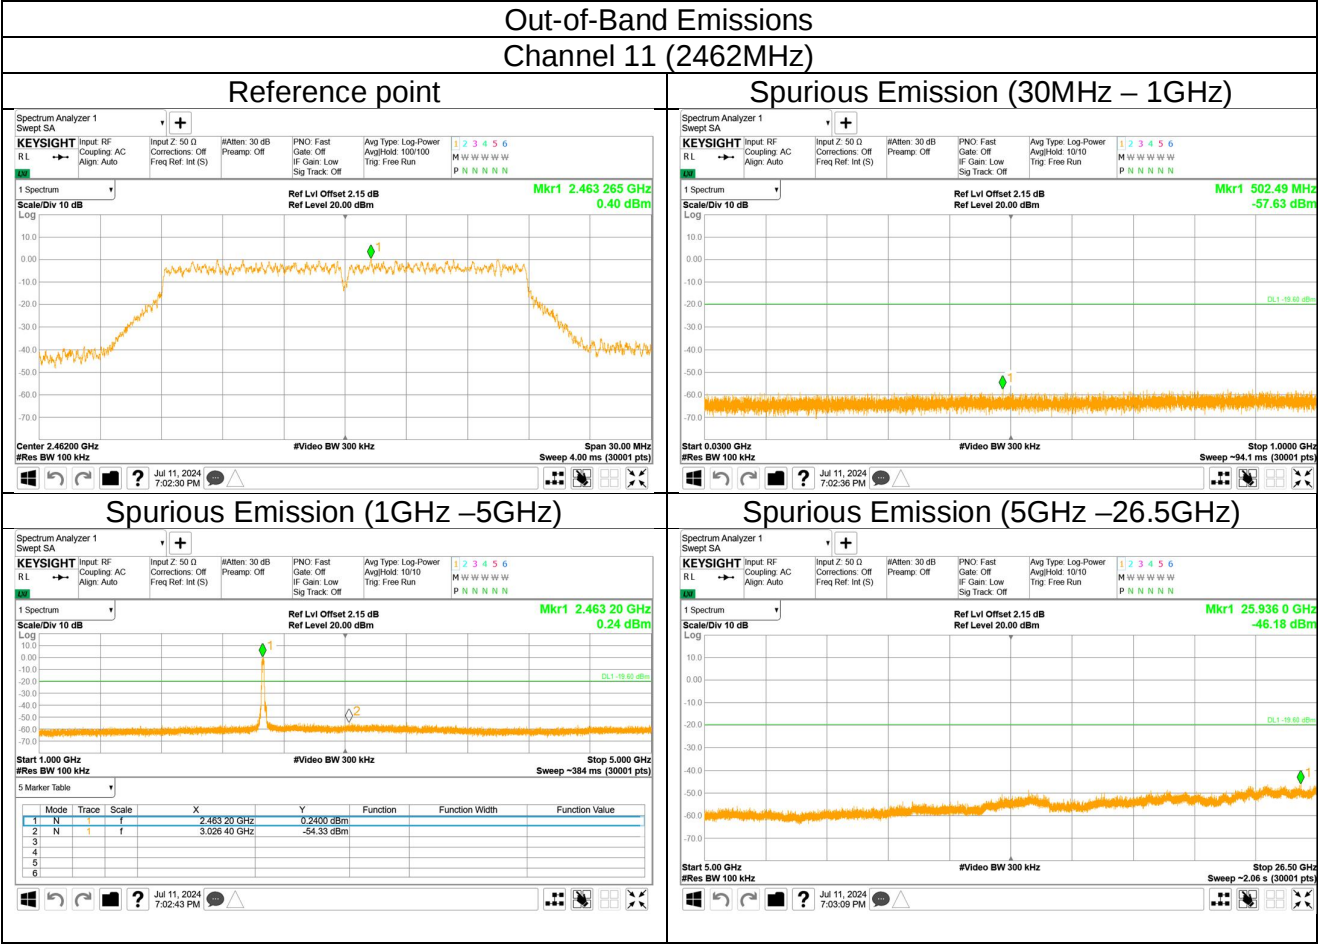




802.11 ax HE20 ANT 2

Out-of-Band Emissions
Channel 1 (2412MHz)


Reference point




Spurious Emission (30MHz – 1GHz)

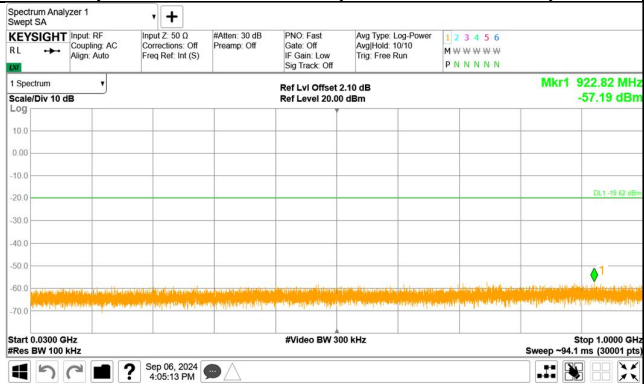


Spurious Emission (1GHz –5GHz)

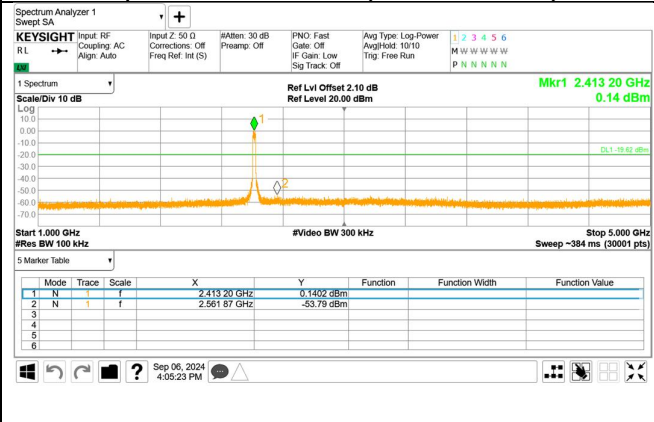

Spurious Emission (5GHz –26.5GHz)

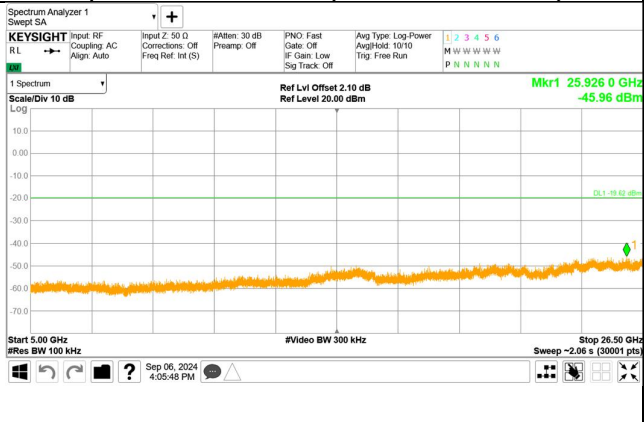

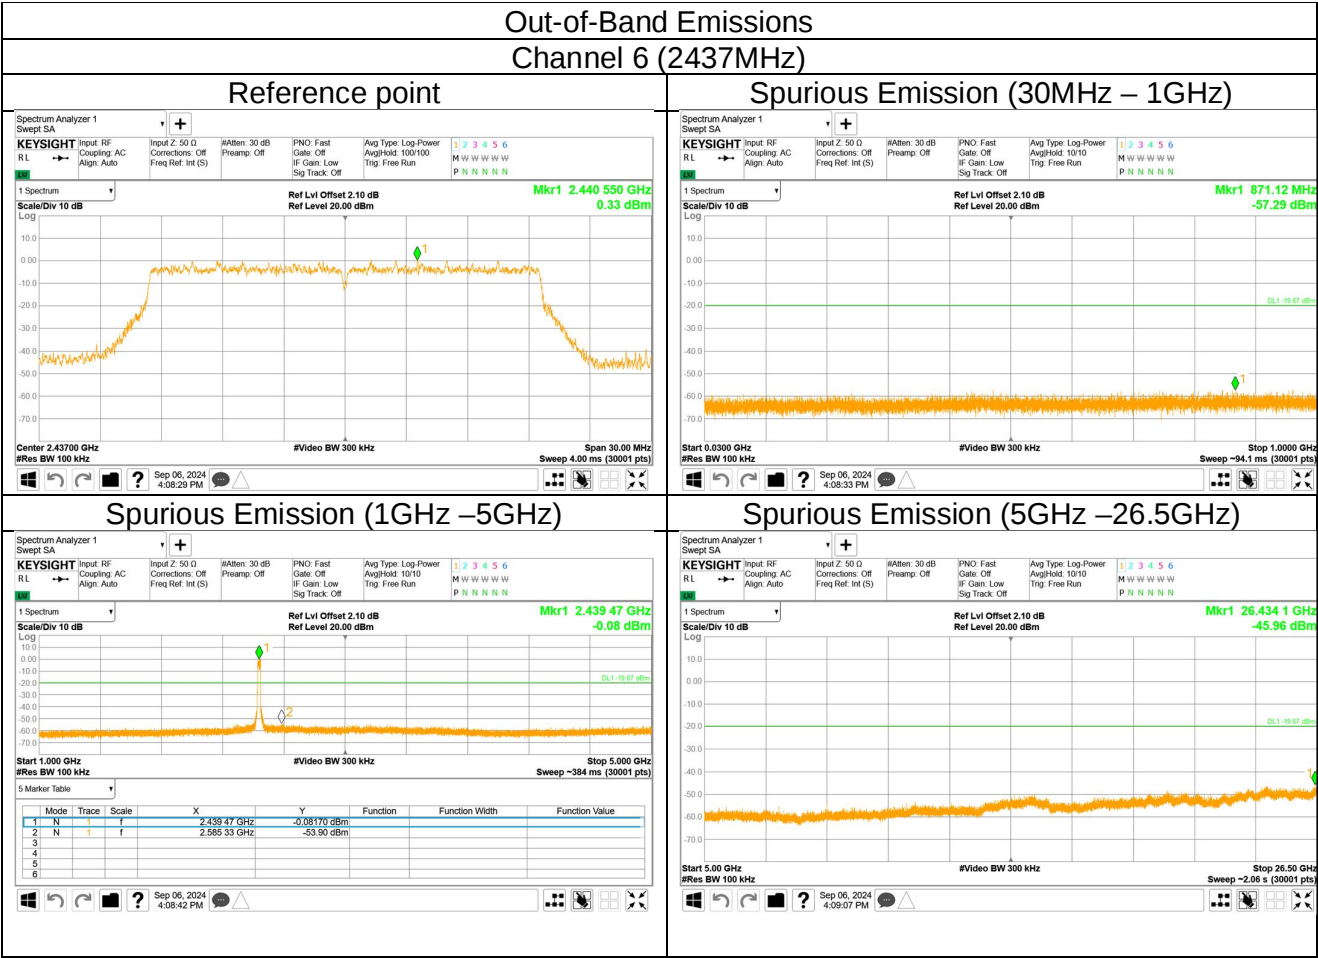




Out-of-Band Emissions
Channel 11 (2462MHz)


Reference point




Spurious Emission (30MHz – 1GHz)

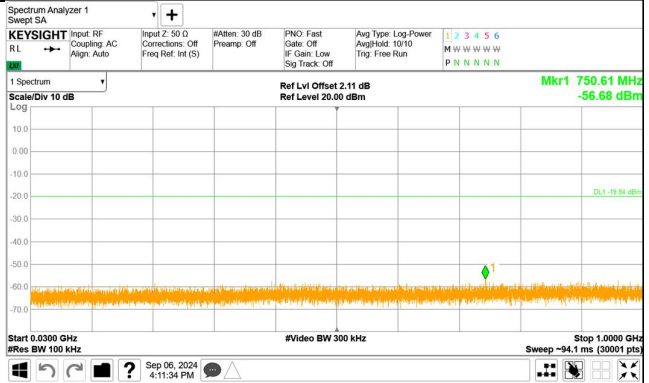

Spurious Emission (1GHz –5GHz)

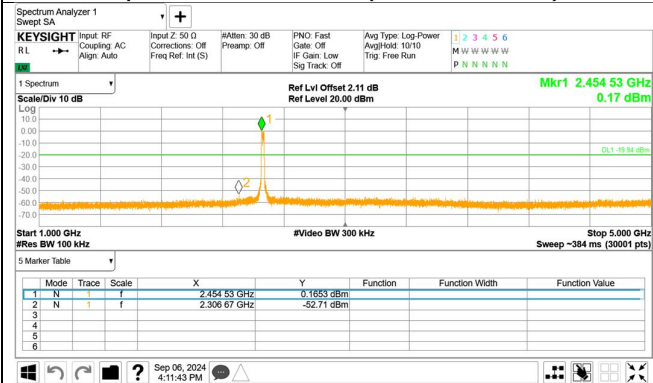

Spurious Emission (5GHz –26.5GHz)

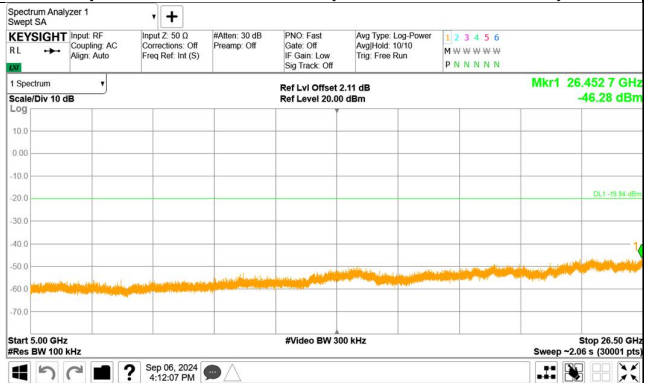

10.6 Band edge

Test Method

1. The RF output of EUT was connected to the spectrum analyzer by RF cable. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting, the instrument center frequency is set to the nominal EUT channel center frequency enable the EUT transmit continuously.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the in-band emission and all spurious
RBW = 100 kHz, VBW $\geq$ 3RBW, Sweep = auto, Detector function = peak, Trace = max hold
4. Allow the trace to stabilize, use the peak and delta measurement to record the result.
5. The level displayed must comply with the limit specified in this Section.
6. Repeat above procedures until all frequencies measured were complete and submit all the plots.

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under § 15.247(b)(3) and RSS-247 section 5.4(d), the attenuation required shall be 30 dB instead of 20 dB.

Frequency Range MHz	Limit (dBc)
30-25000	-20



Test result

