



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 15.247

TEST REPORT

For

MPOW TECHNOLOGY CO.,LIMITED

FLAT/RM 605 6/F FA YUEN COMMERCIAL BUILDING 75-77 FA YUEN STREET MONGKOK KL
HONG KONG

FCC ID: 2AMH2-BH099C

Report Type: Original Report	Product Name: Bluetooth Headset
Report Number:	<u>RDG190923001-00B</u>
Report Date:	<u>2019-10-12</u>
Reviewed By:	Jerry Zhang EMC Manager <i>Jerry Zhang</i>
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	4
OBJECTIVE.....	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY.....	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY.....	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION.....	6
EUT EXERCISE SOFTWARE.....	6
EQUIPMENT MODIFICATIONS.....	6
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS.....	6
SUPPORT CABLE LIST AND DETAILS.....	6
BLOCK DIAGRAM OF TEST SETUP.....	7
SUMMARY OF TEST RESULTS	8
FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD.....	9
FCC §15.203 - ANTENNA REQUIREMENT	10
APPLICABLE STANDARD.....	10
ANTENNA CONNECTOR CONSTRUCTION.....	10
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	11
APPLICABLE STANDARD.....	11
EUT SETUP.....	11
EMI TEST RECEIVER SETUP.....	11
TEST PROCEDURE.....	11
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	12
TEST EQUIPMENT LIST AND DETAILS.....	12
TEST DATA.....	12
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS	15
APPLICABLE STANDARD.....	15
EUT SETUP.....	15
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP.....	16
TEST PROCEDURE.....	16
TEST EQUIPMENT LIST AND DETAILS.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION.....	17
TEST DATA.....	17
FCC §15.247(a) (1) - CHANNEL SEPARATION TEST	25
APPLICABLE STANDARD.....	25
TEST EQUIPMENT LIST AND DETAILS.....	25
TEST PROCEDURE.....	25
TEST DATA.....	25
FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING	31
APPLICABLE STANDARD.....	31
TEST PROCEDURE.....	31

TEST EQUIPMENT LIST AND DETAILS.....31
 TEST DATA31

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST37
 APPLICABLE STANDARD37
 TEST PROCEDURE37
 TEST EQUIPMENT LIST AND DETAILS.....37
 TEST DATA37

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....40
 APPLICABLE STANDARD40
 TEST PROCEDURE40
 TEST EQUIPMENT LIST AND DETAILS.....40
 TEST DATA40

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT46
 APPLICABLE STANDARD46
 TEST PROCEDURE46
 TEST EQUIPMENT LIST AND DETAILS.....46
 TEST DATA46

FCC §15.247(d) - BAND EDGES TESTING48
 APPLICABLE STANDARD48
 TEST PROCEDURE48
 TEST EQUIPMENT LIST AND DETAILS.....48
 TEST DATA49

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Bluetooth Headset
EUT Model:	BH099C
Operation Frequency:	2402-2480MHz
Maximum Output Power (Conducted):	6.86dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	3.7V DC from battery or 5V DC from charger
External Dimension:	26mm(L)*24mm(W)*15 mm(H)
Serial Number:	190923001
EUT Received Date:	2019.09.26
EUT Status:	The test samples were in good condition.

Objective

This report is prepared on behalf of *MPOW TECHNOLOGY CO., LIMITED* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules

The tests were performed in order to determine the Bluetooth BDR and EDR mode of EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AMH2-BH099C.

Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in engineering mode.

EUT Exercise Software

The software: 'Blue Test 3' was used during test, which was provided by manufacturer. The maximum power level was configured by the software as below table:

Test Software Version	Blue Test 3		
Test Frequency	2402MHz	2441MHz	2480MHz
GFSK	50	50	50
$\pi/4$ -DQPSK	50	50	50
8DPSK	50	50	50

Equipment Modifications

No modification was made to the EUT.

Local Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Lenovo	Laptop	G510	CB30920865

Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
DC Cable	Yes	No	1.2	Adapter	Laptop

Block Diagram of Test Setup

AC line conducted emissions:

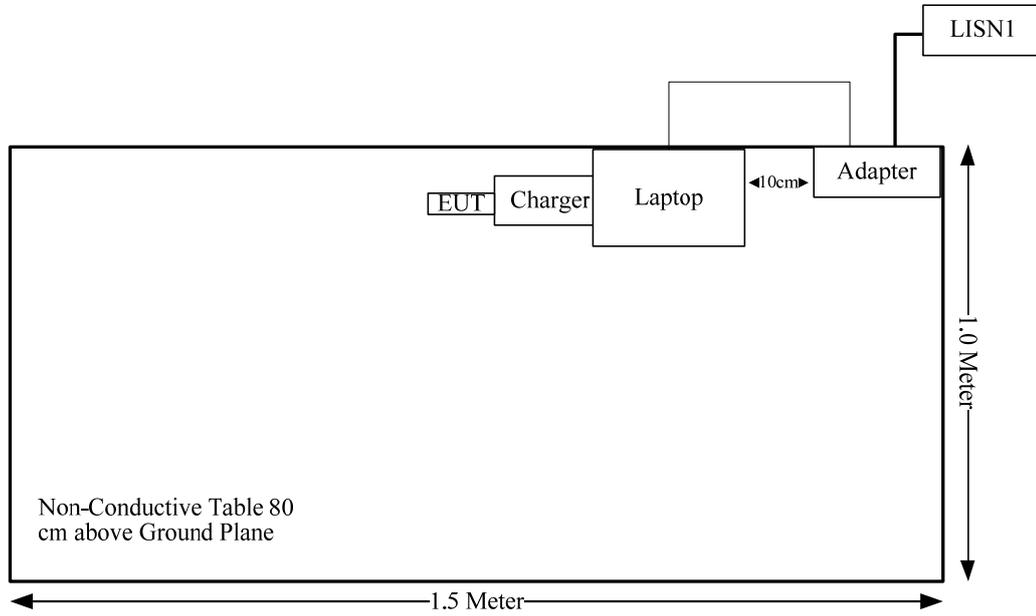

Radiated Emissions:

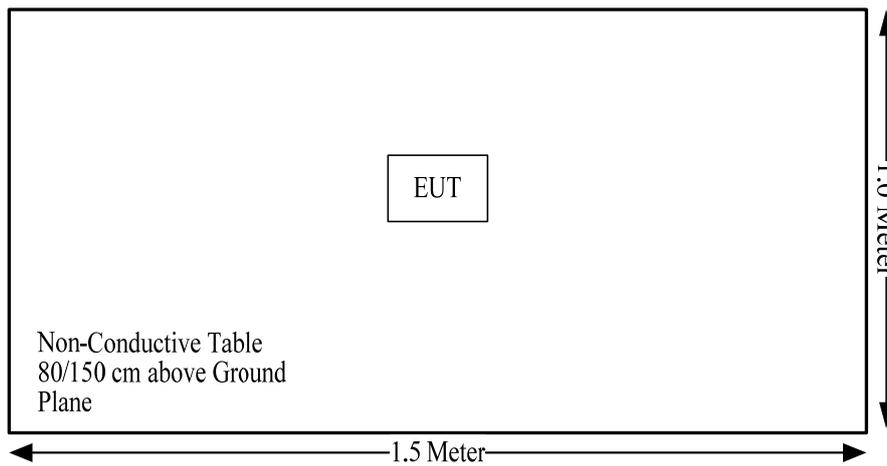

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC§15.247 (i) & §1.1310 & §2.1093	RF Exposure	Compliance
FCC §15.203	Antenna requirement	Compliance
FCC §15.207(a)	AC line conducted emissions	Compliance
FCC §15.205, §15.209, §15.247(d)	Spurious emissions	Compliance
FCC §15.247(a)(1)	Channel separation	Compliance
FCC §15.247(a)(1)	20 dB bandwidth	Compliance
FCC §15.247(a)(1)(iii)	Quantity of hopping channel test	Compliance
FCC §15.247(a)(1)(iii)	Time of occupancy (dwell time)	Compliance
FCC §15.247(b)(1)	Peak output power measurement	Compliance
FCC §15.247(d)	Band edges	Compliance

FCC §15.247 (i) & §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

According to §15.247(i) and §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]$
 ≤ 3.0 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

- $f(\text{GHz})$ is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is ≤ 50 mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is < 5 mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

Measurement Result

The max conducted power including tune-up tolerance is 7.0 dBm (5.0 mW).

$[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$
 $= 5.0/5 \cdot (\sqrt{2.480}) = 1.6 < 3.0$

So the stand-alone SAR evaluation is not necessary.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement for BT, and the antenna gain is 2.81 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207(a)

EUT Setup

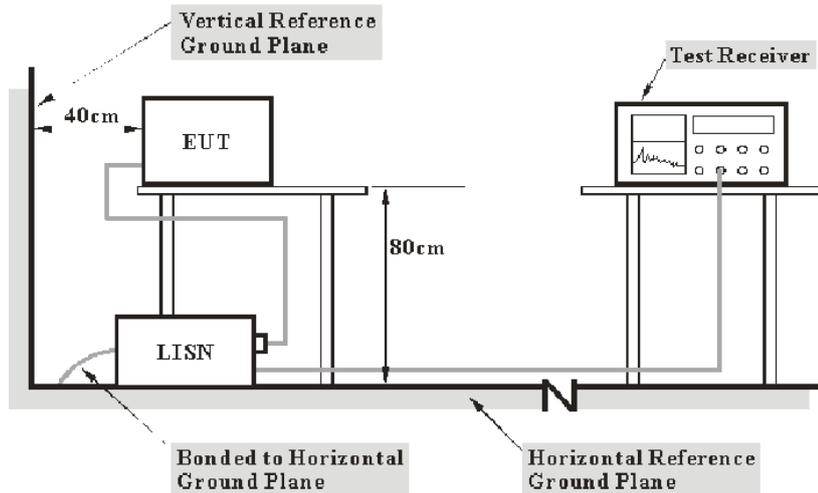

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

V_C : corrected voltage amplitude

V_R : reading voltage amplitude

A_C : attenuation caused by cable loss

VDF : voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2019-09-05	2020-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESCI	101121	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	27.3°C
Relative Humidity:	62%
ATM Pressure:	100.8kPa
Test by:	Sem Xing
Test Date:	2019-09-29

Test Result: Compliance

Test Mode: Charging


AC120V, 60 Hz, Line:

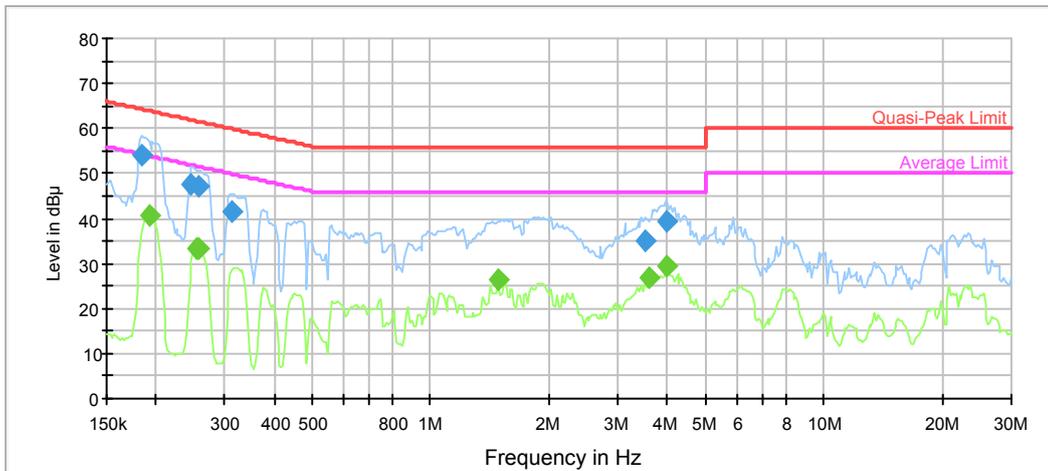

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.184859	54.2	9.000	L1	10.8	10.1	64.3
0.246695	47.5	9.000	L1	10.3	14.4	61.9
0.256712	47.1	9.000	L1	10.3	14.4	61.5
0.313237	41.6	9.000	L1	10.1	18.3	59.9
3.515338	35.0	9.000	L1	9.8	21.0	56.0
4.000782	39.2	9.000	L1	9.8	16.8	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.192365	40.7	9.000	L1	10.7	13.2	53.9
0.254170	33.4	9.000	L1	10.3	18.2	51.6
0.256712	33.1	9.000	L1	10.3	18.4	51.5
1.479134	26.5	9.000	L1	9.8	19.5	46.0
3.585996	26.7	9.000	L1	9.8	19.3	46.0
4.000782	29.4	9.000	L1	9.8	16.6	46.0

AC120V, 60 Hz, Neutral:

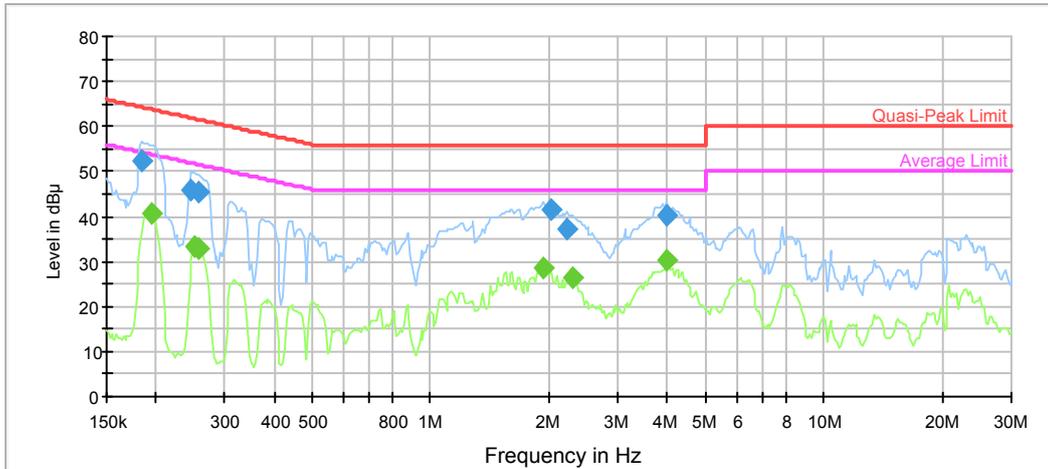

Frequency (MHz)	QuasiPeak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.184859	52.5	9.000	N	10.7	11.8	64.3
0.246695	46.0	9.000	N	10.3	15.9	61.9
0.256712	45.3	9.000	N	10.3	16.2	61.5
2.033721	41.3	9.000	N	9.8	14.7	56.0
2.224251	37.0	9.000	N	9.8	19.0	56.0
4.000782	40.1	9.000	N	9.8	15.9	56.0

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.194289	40.5	9.000	N	10.7	13.4	53.9
0.251654	33.5	9.000	N	10.3	18.2	51.7
0.256712	32.8	9.000	N	10.3	18.7	51.5
1.935016	28.6	9.000	N	9.8	17.4	46.0
2.291648	26.5	9.000	N	9.8	19.5	46.0
4.000782	30.5	9.000	N	9.8	15.5	46.0


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1GHz:

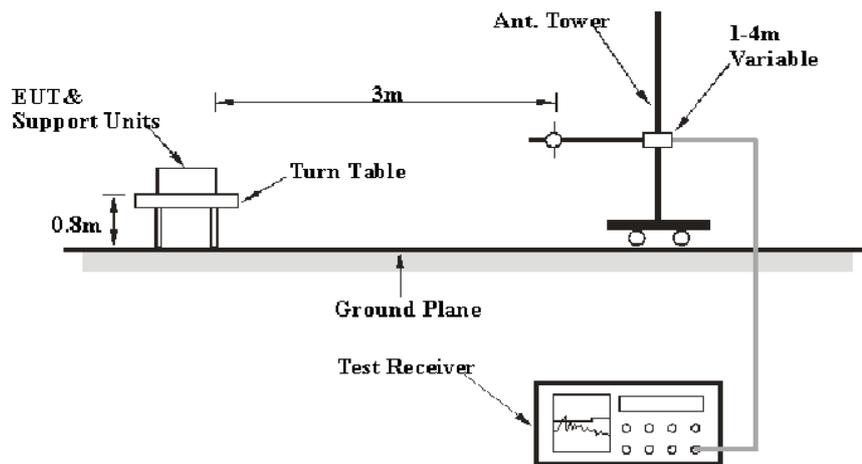

Above 1GHz:

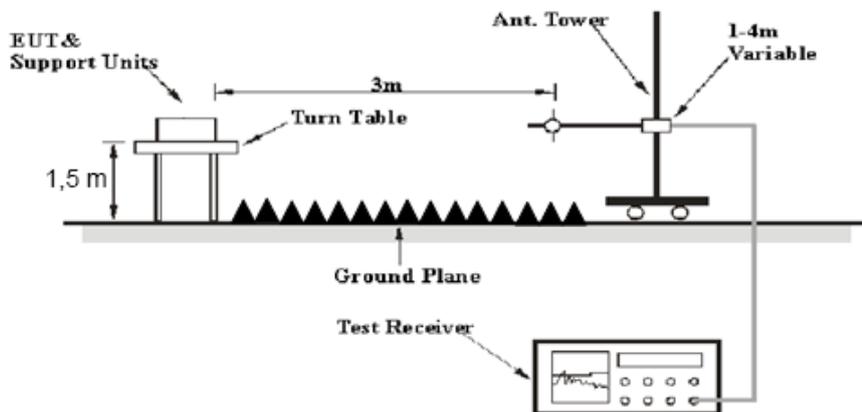

The radiated emission below 1GHz tests were performed in the 10 meters chamber, above 1GHz tests were performed in the 3 meters chamber B, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

According to FCC public notice: DA-00-705, during the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2019-08-03	2020-08-03
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-3	2017-07-21	2020-07-21
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2019-09-05	2020-09-05
Sonoma	Amplifier	310N	185914	2018-10-13	2019-10-13
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-05-09	2020-05-09
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2019-09-05	2020-09-05
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
MITEQ	Amplifier	AFS42-00101800- 25-S-42	2001271	2019-09-05	2020-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
E-Microwave	Band-stop Filters	OBSF-2400-2483.5- S	OE01601525	2019-06-16	2020-06-16
Micro-tronics	High Pass Filter	HPM50111	S/N-G217	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	26.5°C	26.8°C
Relative Humidity:	53%	57%
ATM Pressure:	101 kPa	101.2kPa
Tester:	Jakson Zhang	Tyler pan
Test Date:	2019-09-28	2019-10-09

Test Mode: Transmitting


1) 30MHz-1GHz (BDR High channel was the worst)

Horizontal:

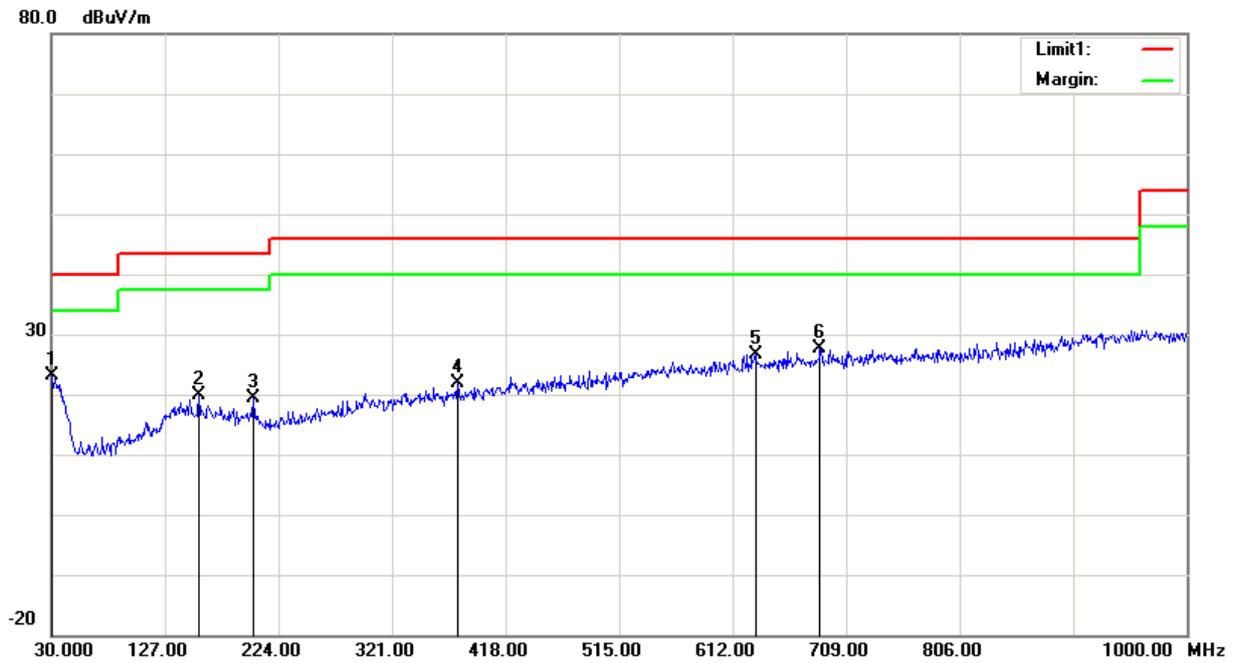

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.9700	28.07	peak	-4.88	23.19	40.00	16.81
156.1000	29.28	peak	-9.52	19.76	43.50	23.74
202.6600	29.26	peak	-9.85	19.41	43.50	24.09
377.2600	27.85	peak	-5.92	21.93	46.00	24.07
631.4000	27.44	peak	-0.80	26.64	46.00	19.36
686.6900	27.26	peak	0.26	27.52	46.00	18.48

Vertical:

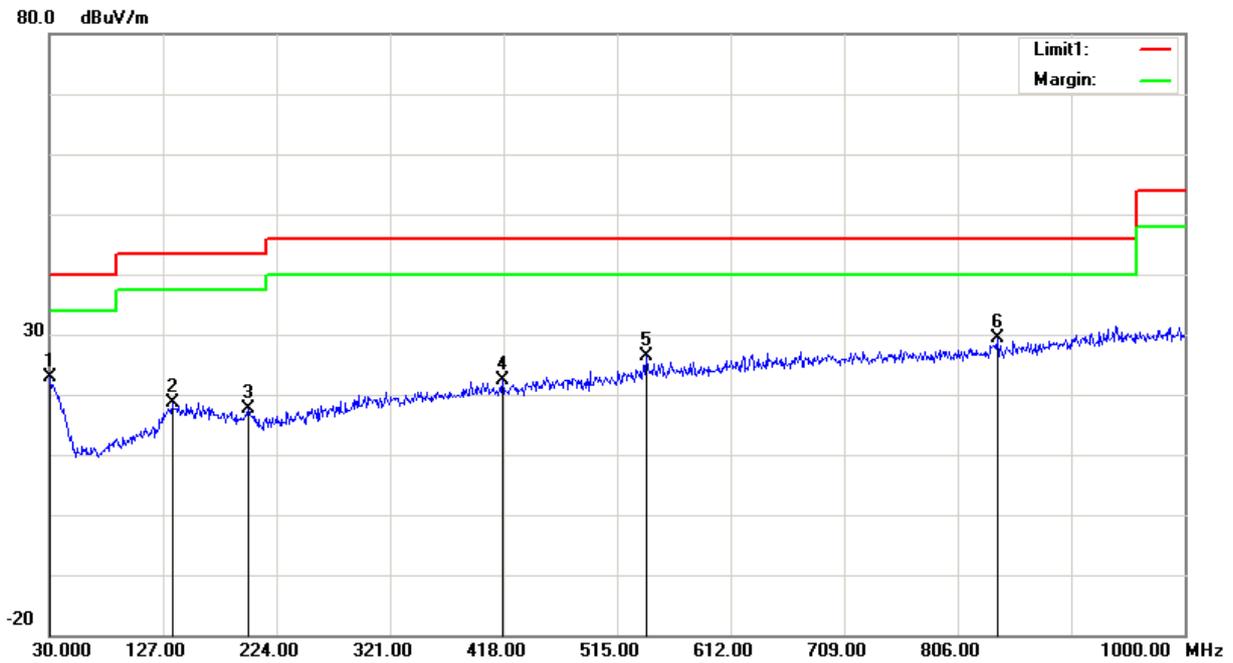

Frequency (MHz)	Receiver Reading (dBμV)	Remark	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	27.24	peak	-4.33	22.91	40.00	17.09
134.7600	28.32	peak	-9.65	18.67	43.50	24.83
199.7500	27.01	peak	-9.39	17.62	43.50	25.88
417.0300	27.26	peak	-4.78	22.48	46.00	23.52
540.2200	28.31	peak	-2.02	26.29	46.00	19.71
839.9500	27.32	peak	1.99	29.31	46.00	16.69

2)1GHz-25GHz:

BDR Mode(GFSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	68.49	PK	H	28.10	1.80	0.00	98.39	N/A	N/A
2402.00	58.27	AV	H	28.10	1.80	0.00	88.17	N/A	N/A
2402.00	70.93	PK	V	28.10	1.80	0.00	100.83	N/A	N/A
2402.00	60.85	AV	V	28.10	1.80	0.00	90.75	N/A	N/A
2390.00	26.63	PK	V	28.08	1.80	0.00	56.51	74.00	17.49
2390.00	13.31	AV	V	28.08	1.80	0.00	43.19	54.00	10.81
4804.00	57.69	PK	V	32.91	3.17	37.20	56.57	74.00	17.43
4804.00	46.88	AV	V	32.91	3.17	37.20	45.76	54.00	8.24
7206.00	60.67	PK	V	35.74	4.82	37.23	64.00	74.00	10.00
7206.00	49.10	AV	V	35.74	4.82	37.23	52.43	54.00	1.57
9608.00	48.60	PK	V	37.94	5.81	36.64	55.71	74.00	18.29
9608.00	36.27	AV	V	37.94	5.81	36.64	43.38	54.00	10.62
3603.00	60.28	PK	V	31.53	2.40	37.12	57.09	74.00	16.91
3603.00	49.35	AV	V	31.53	2.40	37.12	46.16	54.00	7.84
Middle Channel: 2441 MHz									
2441.00	68.41	PK	H	28.18	1.82	0.00	98.41	N/A	N/A
2441.00	58.23	AV	H	28.18	1.82	0.00	88.23	N/A	N/A
2441.00	69.93	PK	V	28.18	1.82	0.00	99.93	N/A	N/A
2441.00	59.74	AV	V	28.18	1.82	0.00	89.74	N/A	N/A
4882.00	57.82	PK	V	33.06	3.27	37.21	56.94	74.00	17.06
4882.00	46.47	AV	V	33.06	3.27	37.21	45.59	54.00	8.41
7323.00	60.29	PK	V	36.04	4.62	37.38	63.57	74.00	10.43
7323.00	48.76	AV	V	36.04	4.62	37.38	52.04	54.00	1.96
9764.00	48.44	PK	V	38.01	5.91	36.69	55.67	74.00	18.33
9764.00	36.07	AV	V	38.01	5.91	36.69	43.30	54.00	10.70
3661.20	60.47	PK	V	31.65	2.51	37.06	57.57	74.00	16.43
3661.20	49.50	AV	V	31.65	2.51	37.06	46.60	54.00	7.40
High Channel: 2480 MHz									
2480.00	68.55	PK	H	28.26	1.84	0.00	98.65	N/A	N/A
2480.00	58.62	AV	H	28.26	1.84	0.00	88.72	N/A	N/A
2480.00	70.06	PK	V	28.26	1.84	0.00	100.16	N/A	N/A
2480.00	59.89	AV	V	28.26	1.84	0.00	89.99	N/A	N/A
2483.50	26.77	PK	V	28.27	1.84	0.00	56.88	74.00	17.12
2483.50	13.57	AV	V	28.27	1.84	0.00	43.68	54.00	10.32
4960.00	57.68	PK	V	33.22	3.23	37.25	56.88	74.00	17.12
4960.00	46.21	AV	V	33.22	3.23	37.25	45.41	54.00	8.59
7440.00	59.99	PK	V	36.34	4.41	37.52	63.22	74.00	10.78
7440.00	48.70	AV	V	36.34	4.41	37.52	51.93	54.00	2.07
9920.00	48.30	PK	V	38.07	6.02	36.74	55.65	74.00	18.35
9920.00	35.86	AV	V	38.07	6.02	36.74	43.21	54.00	10.79
3720.00	60.10	PK	V	31.78	2.56	37.02	57.42	74.00	16.58
3720.00	48.85	AV	V	31.78	2.56	37.02	46.17	54.00	7.83

EDR Mode($\pi/4$ -DQPSK):




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	67.77	PK	H	28.10	1.80	0.00	97.67	N/A	N/A
2402.00	56.47	AV	H	28.10	1.80	0.00	86.37	N/A	N/A
2402.00	69.90	PK	V	28.10	1.80	0.00	99.80	N/A	N/A
2402.00	58.74	AV	V	28.10	1.80	0.00	88.64	N/A	N/A
2390.00	26.83	PK	V	28.08	1.80	0.00	56.71	74.00	17.29
2390.00	13.42	AV	V	28.08	1.80	0.00	43.30	54.00	10.70
4804.00	57.86	PK	V	32.91	3.17	37.20	56.74	74.00	17.26
4804.00	45.54	AV	V	32.91	3.17	37.20	44.42	54.00	9.58
7206.00	60.22	PK	V	35.74	4.82	37.23	63.55	74.00	10.45
7206.00	48.57	AV	V	35.74	4.82	37.23	51.90	54.00	2.10
9608.00	48.25	PK	V	37.94	5.81	36.64	55.36	74.00	18.64
9608.00	35.85	AV	V	37.94	5.81	36.64	42.96	54.00	11.04
3603.00	59.85	PK	V	31.53	2.40	37.12	56.66	74.00	17.34
3603.00	48.36	AV	V	31.53	2.40	37.12	45.17	54.00	8.83
Middle Channel: 2441 MHz									
2441.00	68.15	PK	H	28.18	1.82	0.00	98.15	N/A	N/A
2441.00	56.68	AV	H	28.18	1.82	0.00	86.68	N/A	N/A
2441.00	70.13	PK	V	28.18	1.82	0.00	100.13	N/A	N/A
2441.00	58.89	AV	V	28.18	1.82	0.00	88.89	N/A	N/A
4882.00	57.40	PK	V	33.06	3.27	37.21	56.52	74.00	17.48
4882.00	45.62	AV	V	33.06	3.27	37.21	44.74	54.00	9.26
7323.00	60.87	PK	V	36.04	4.62	37.38	64.15	74.00	9.85
7323.00	48.77	AV	V	36.04	4.62	37.38	52.05	54.00	1.95
9764.00	48.87	PK	V	38.01	5.91	36.69	56.10	74.00	17.90
9764.00	36.54	AV	V	38.01	5.91	36.69	43.77	54.00	10.23
3661.20	60.31	PK	V	31.65	2.51	37.06	57.41	74.00	16.59
3661.20	48.96	AV	V	31.65	2.51	37.06	46.06	54.00	7.94
High Channel: 2480 MHz									
2480.00	68.05	PK	H	28.26	1.84	0.00	98.15	N/A	N/A
2480.00	56.98	AV	H	28.26	1.84	0.00	87.08	N/A	N/A
2480.00	69.67	PK	V	28.26	1.84	0.00	99.77	N/A	N/A
2480.00	58.22	AV	V	28.26	1.84	0.00	88.32	N/A	N/A
2483.50	26.71	PK	V	28.27	1.84	0.00	56.82	74.00	17.18
2483.50	14.10	AV	V	28.27	1.84	0.00	44.21	54.00	9.79
4960.00	57.56	PK	V	33.22	3.23	37.25	56.76	74.00	17.24
4960.00	45.86	AV	V	33.22	3.23	37.25	45.06	54.00	8.94
7440.00	59.87	PK	V	36.34	4.41	37.52	63.10	74.00	10.90
7440.00	48.26	AV	V	36.34	4.41	37.52	51.49	54.00	2.51
9920.00	47.80	PK	V	38.07	6.02	36.74	55.15	74.00	18.85
9920.00	35.71	AV	V	38.07	6.02	36.74	43.06	54.00	10.94
3720.00	59.70	PK	V	31.78	2.56	37.02	57.02	74.00	16.98
3720.00	48.24	AV	V	31.78	2.56	37.02	45.56	54.00	8.44

EDR Mode(8DPSK):

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBµV/m)	Limit (dBµV/m)	Margin (dB)
	Reading (dBµV)	Remark	Polar (H/V)	Factor (dB/m)					
Low Channel: 2402 MHz									
2402.00	67.95	PK	H	28.10	1.80	0.00	97.85	N/A	N/A
2402.00	56.69	AV	H	28.10	1.80	0.00	86.59	N/A	N/A
2402.00	70.25	PK	V	28.10	1.80	0.00	100.15	N/A	N/A
2402.00	58.99	AV	V	28.10	1.80	0.00	88.89	N/A	N/A
2390.00	26.77	PK	V	28.08	1.80	0.00	56.65	74.00	17.35
2390.00	13.54	AV	V	28.08	1.80	0.00	43.42	54.00	10.58
4804.00	57.10	PK	V	32.91	3.17	37.20	55.98	74.00	18.02
4804.00	45.66	AV	V	32.91	3.17	37.20	44.54	54.00	9.46
7206.00	59.82	PK	V	35.74	4.82	37.23	63.15	74.00	10.85
7206.00	48.10	AV	V	35.74	4.82	37.23	51.43	54.00	2.57
9608.00	47.82	PK	V	37.94	5.81	36.64	54.93	74.00	19.07
9608.00	35.57	AV	V	37.94	5.81	36.64	42.68	54.00	11.32
3603.00	60.98	PK	V	31.53	2.40	37.12	57.79	74.00	16.21
3603.00	49.77	AV	V	31.53	2.40	37.12	46.58	54.00	7.42
Middle Channel: 2441 MHz									
2441.00	68.30	PK	H	28.18	1.82	0.00	98.30	N/A	N/A
2441.00	56.84	AV	H	28.18	1.82	0.00	86.84	N/A	N/A
2441.00	69.83	PK	V	28.18	1.82	0.00	99.83	N/A	N/A
2441.00	58.27	AV	V	28.18	1.82	0.00	88.27	N/A	N/A
4882.00	56.99	PK	V	33.06	3.27	37.21	56.11	74.00	17.89
4882.00	45.82	AV	V	33.06	3.27	37.21	44.94	54.00	9.06
7323.00	60.04	PK	V	36.04	4.62	37.38	63.32	74.00	10.68
7323.00	48.43	AV	V	36.04	4.62	37.38	51.71	54.00	2.29
9764.00	48.59	PK	V	38.01	5.91	36.69	55.82	74.00	18.18
9764.00	36.28	AV	V	38.01	5.91	36.69	43.51	54.00	10.49
3661.20	59.87	PK	V	31.65	2.51	37.06	56.97	74.00	17.03
3661.20	48.37	AV	V	31.65	2.51	37.06	45.47	54.00	8.53
High Channel: 2480 MHz									
2480.00	67.95	PK	H	28.26	1.84	0.00	98.05	N/A	N/A
2480.00	46.80	AV	H	28.26	1.84	0.00	76.90	N/A	N/A
2480.00	69.90	PK	V	28.26	1.84	0.00	100.00	N/A	N/A
2480.00	58.87	AV	V	28.26	1.84	0.00	88.97	N/A	N/A
2483.50	26.80	PK	V	28.27	1.84	0.00	56.91	74.00	17.09
2483.50	13.75	AV	V	28.27	1.84	0.00	43.86	54.00	10.14
4960.00	57.88	PK	V	33.22	3.23	37.25	57.08	74.00	16.92
4960.00	46.39	AV	V	33.22	3.23	37.25	45.59	54.00	8.41
7440.00	60.14	PK	V	36.34	4.41	37.52	63.37	74.00	10.63
7440.00	48.67	AV	V	36.34	4.41	37.52	51.90	54.00	2.10
9920.00	48.37	PK	V	38.07	6.02	36.74	55.72	74.00	18.28
9920.00	35.87	AV	V	38.07	6.02	36.74	43.22	54.00	10.78
3720.00	60.83	PK	V	31.78	2.56	37.02	58.15	74.00	15.85
3720.00	49.65	AV	V	31.78	2.56	37.02	46.97	54.00	7.03




Worst plots (GFSK low channel was the worst)
Horizontal

Fundamental
Test with Band
Rejection Filter

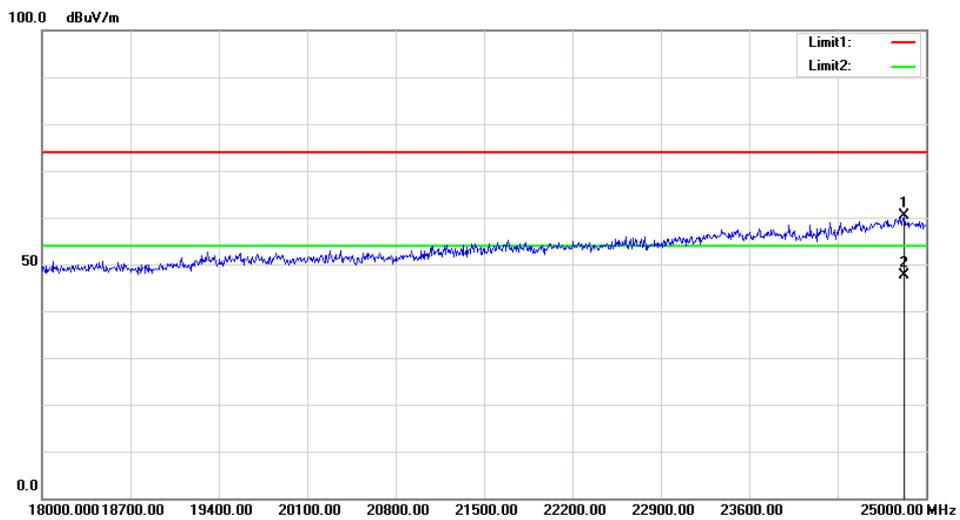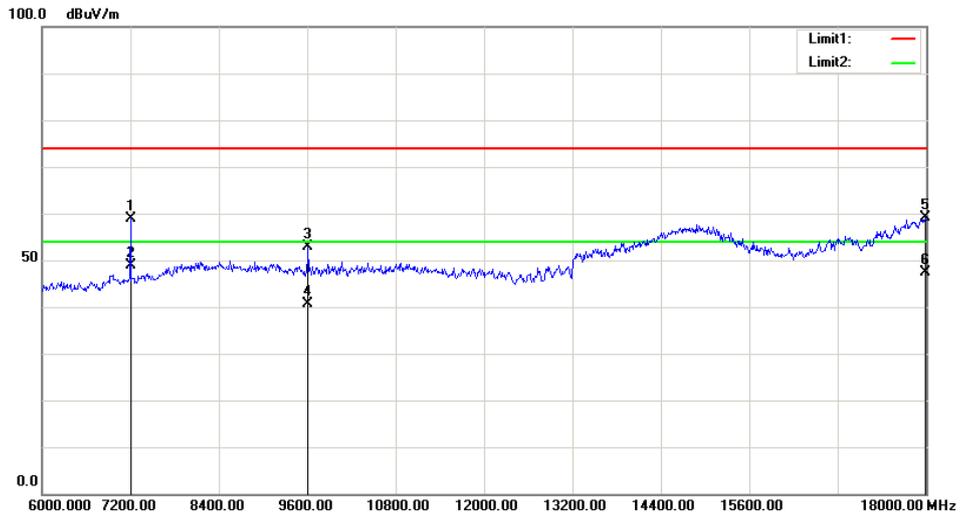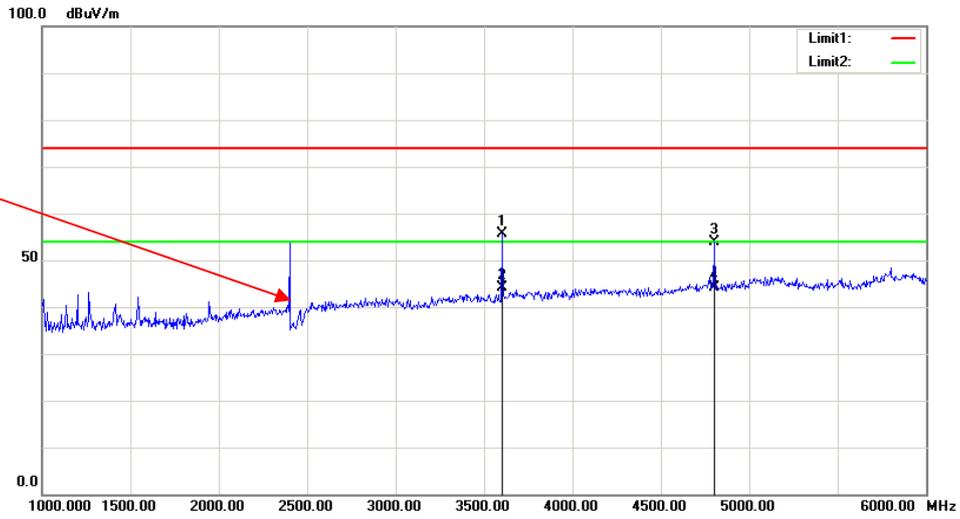

Vertical

Fundamental Test with Band Rejection Filter

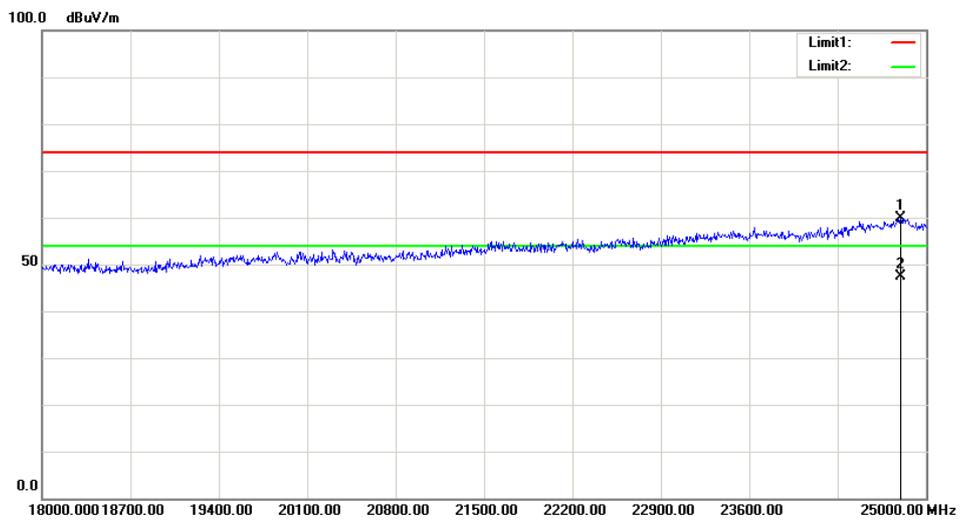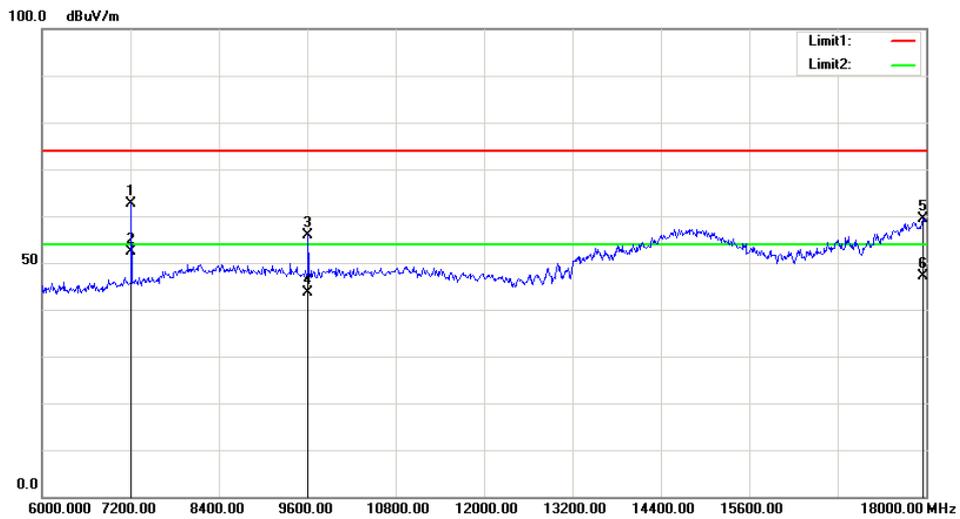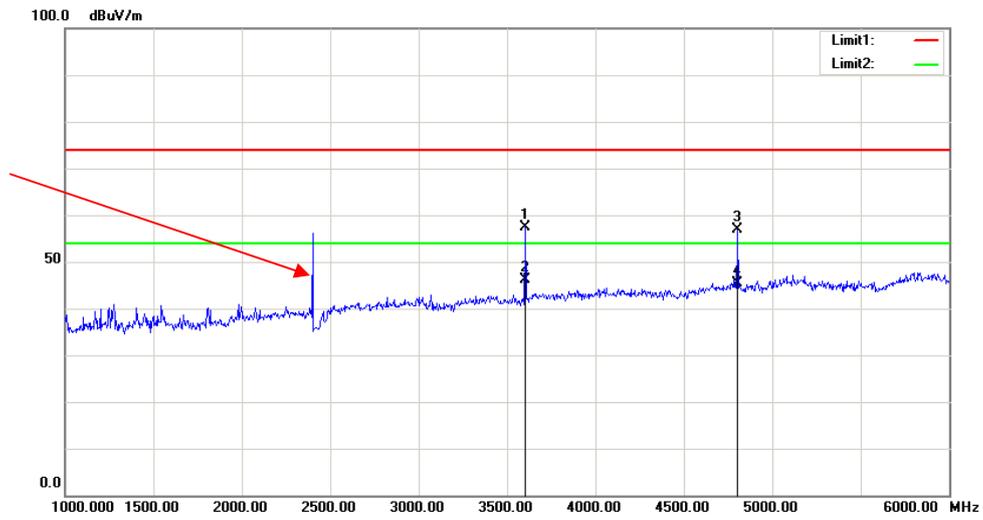

FCC §15.247(a) (1) - CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.50 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 30 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions

Temperature:	26.4~26.8°C
Relative Humidity:	59~61 %
ATM Pressure:	100.4~101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09~2019-10-11

Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)
BDR (GFSK)	Low	2402	0.999	0.62
	Middle	2441	0.999	0.62
	High	2480	1.000	0.62
EDR ($\pi/4$ -DQPSK)	Low	2402	0.999	0.88
	Middle	2441	1.000	0.88
	High	2480	1.003	0.88
EDR (8DPSK)	Low	2402	1.000	0.86
	Middle	2441	0.994	0.85
	High	2480	0.994	0.85

Note: Limit = $(2/3) \times 20\text{dB bandwidth}$


BDR Mode (GFSK):

Low Channel




Date: 9.OCT.2019 13:29:21

Middle Channel

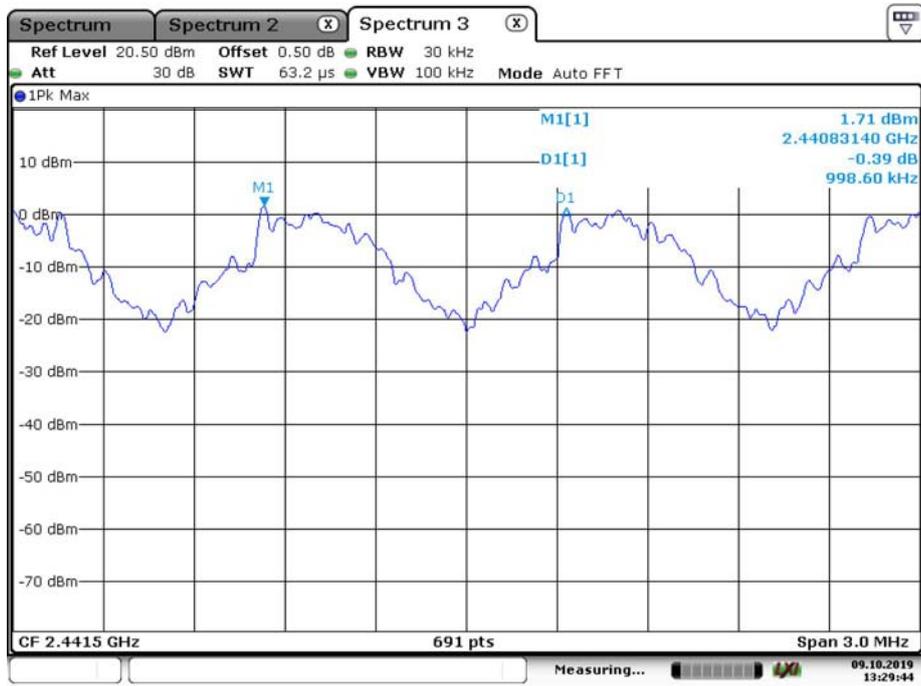

Date: 9.OCT.2019 13:29:45


High Channel

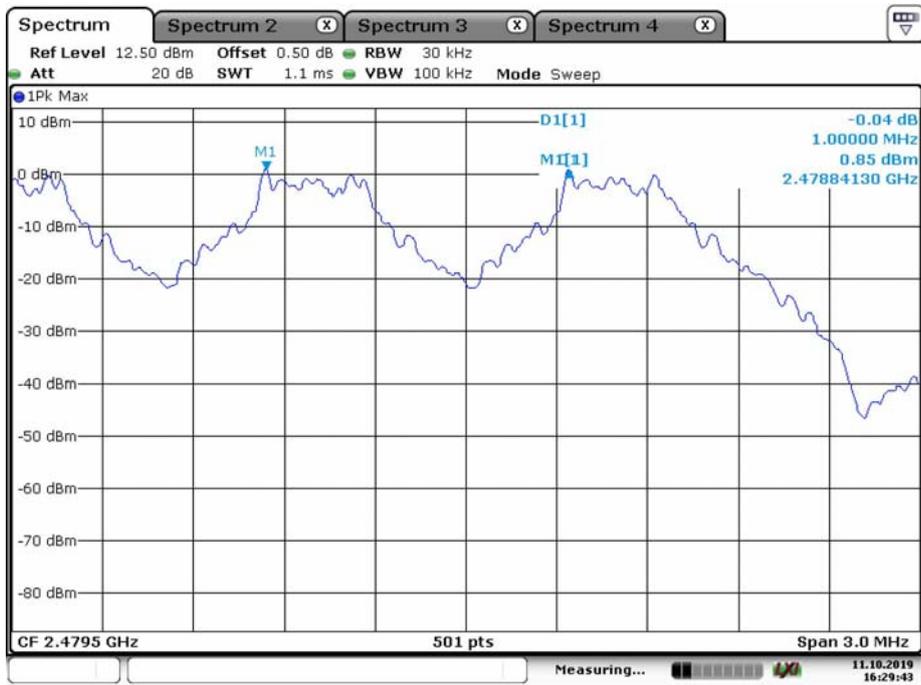

Date: 11.OCT.2019 16:29:44


EDR Mode ($\pi/4$ -DQPSK):

Low Channel

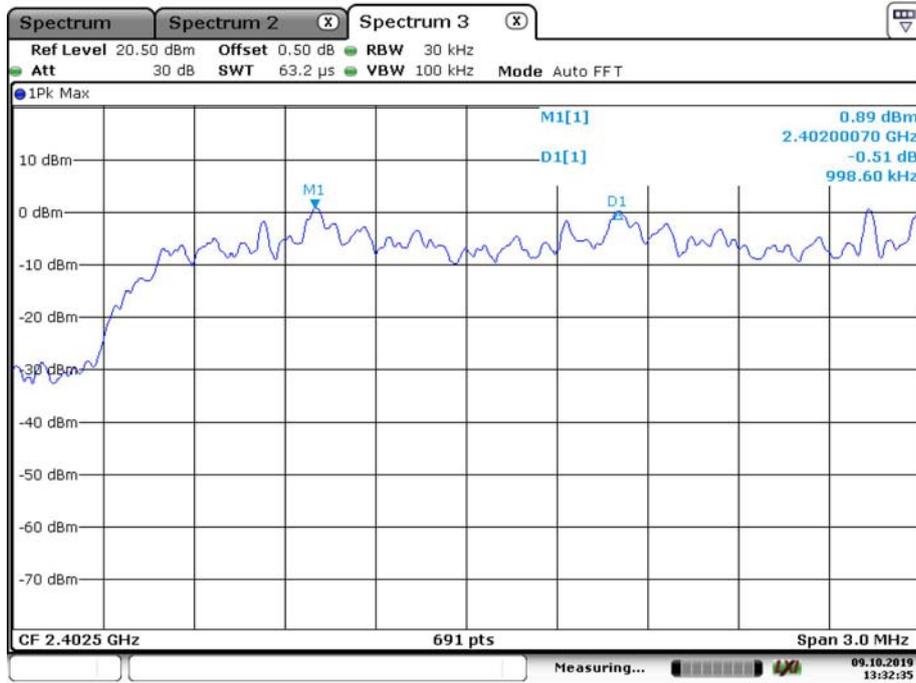


Date: 9.OCT.2019 13:32:36

Middle Channel

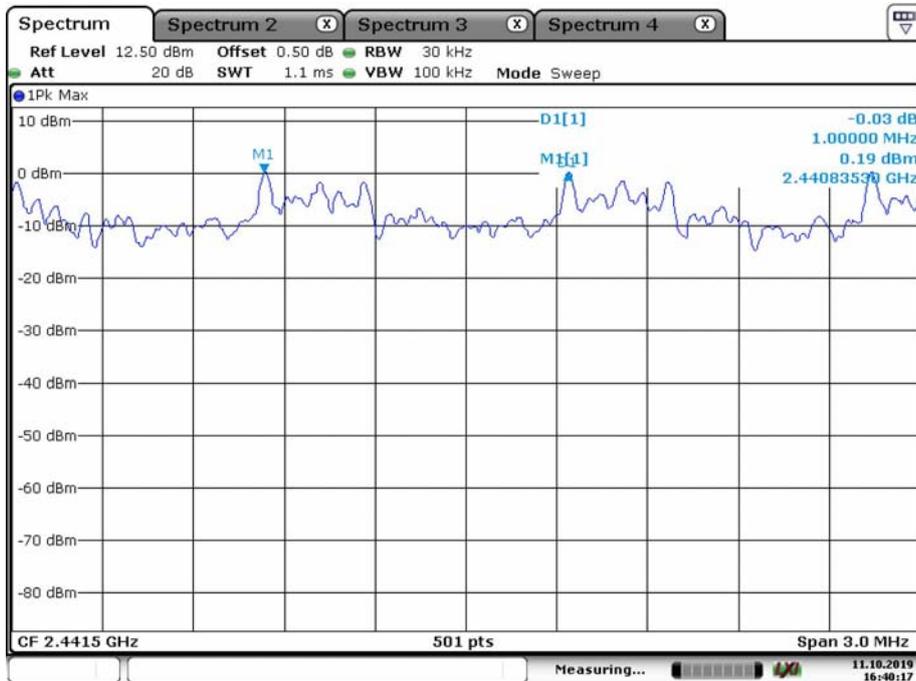

Date: 11.OCT.2019 16:40:18


High Channel

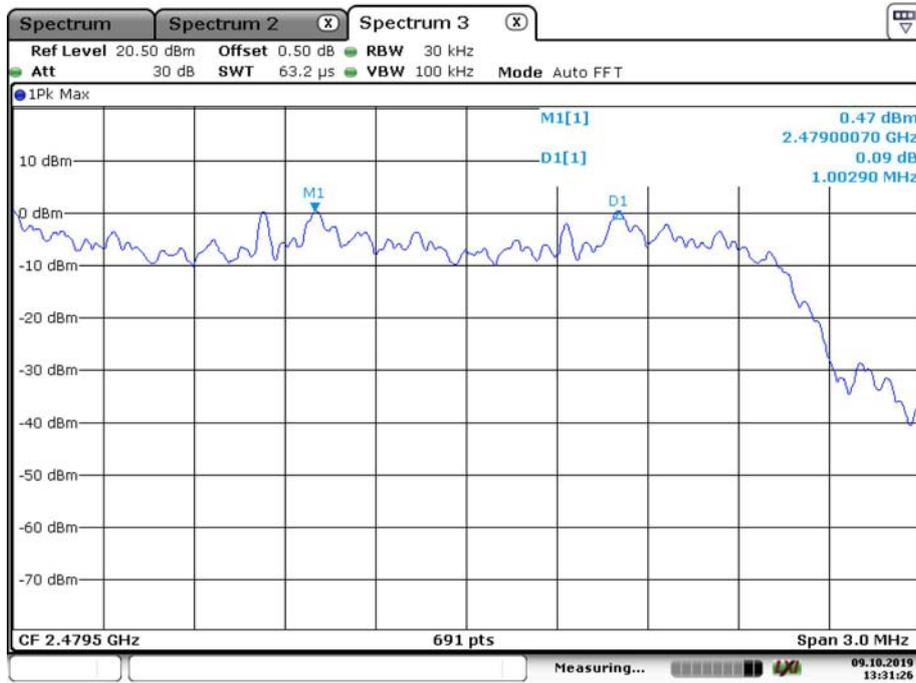

Date: 9.OCT.2019 13:31:27


EDR Mode (8DPSK):

Low Channel

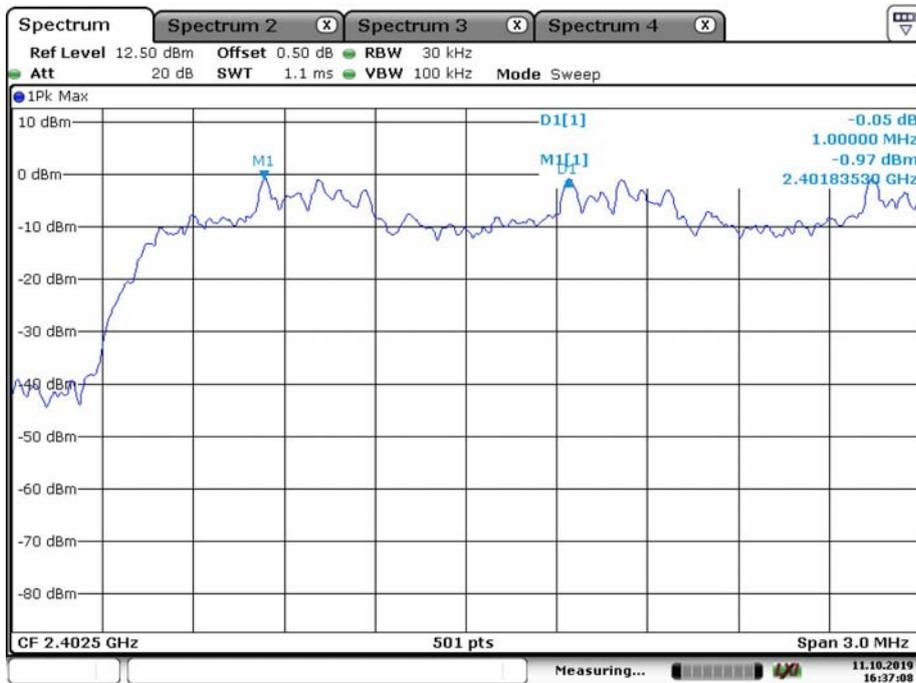


Date: 11.OCT.2019 16:37:08

Middle Channel

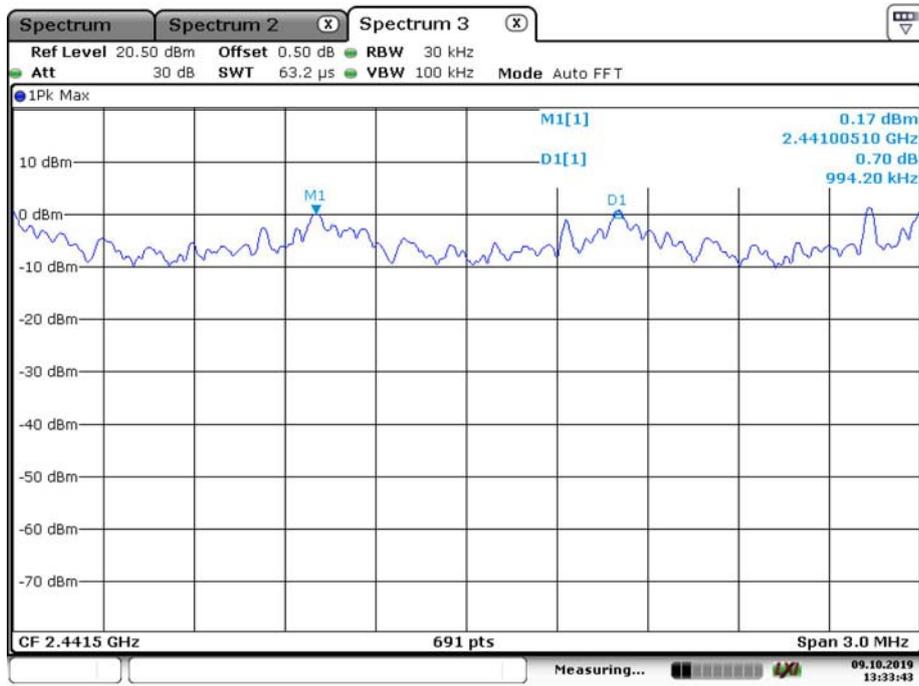

Date: 9.OCT.2019 13:33:44

High Channel

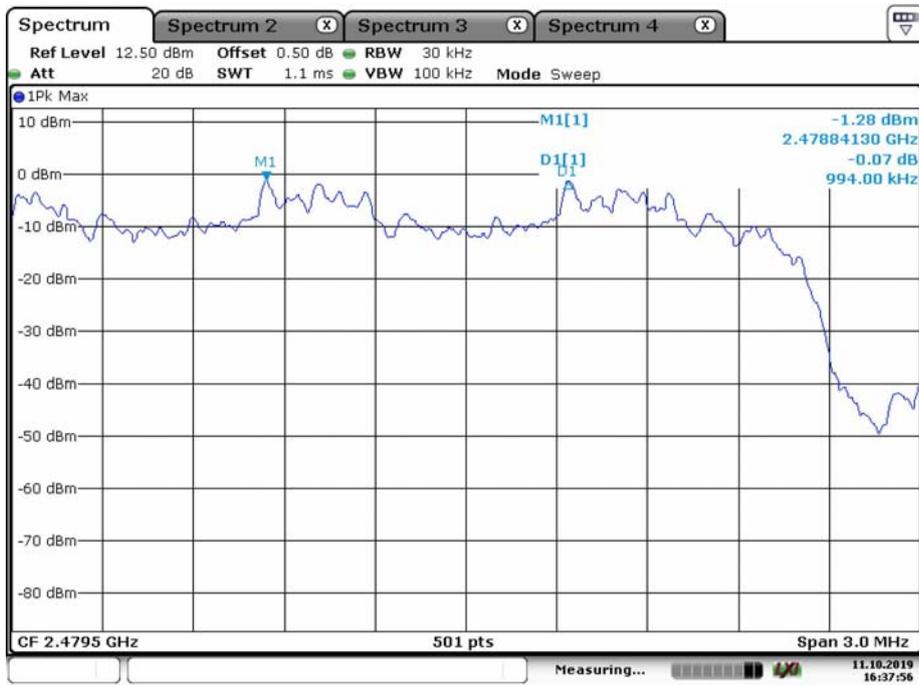

Date: 11.OCT.2019 16:37:57

FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4~26.8°C
Relative Humidity:	59~61 %
ATM Pressure:	100.4~101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09~2019-10-11

Test Result: Compliance.


Please refer to following tables and plots

Test Mode: Transmitting

Mode	Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Low	2402	0.931
	Middle	2441	0.924
	High	2480	0.926
EDR Mode ($\pi/4$ -DQPSK)	Low	2402	1.324
	Middle	2441	1.320
	High	2480	1.320
EDR Mode (8DPSK)	Low	2402	1.296
	Middle	2441	1.276
	High	2480	1.276


BDR Mode (GFSK):

Low Channel

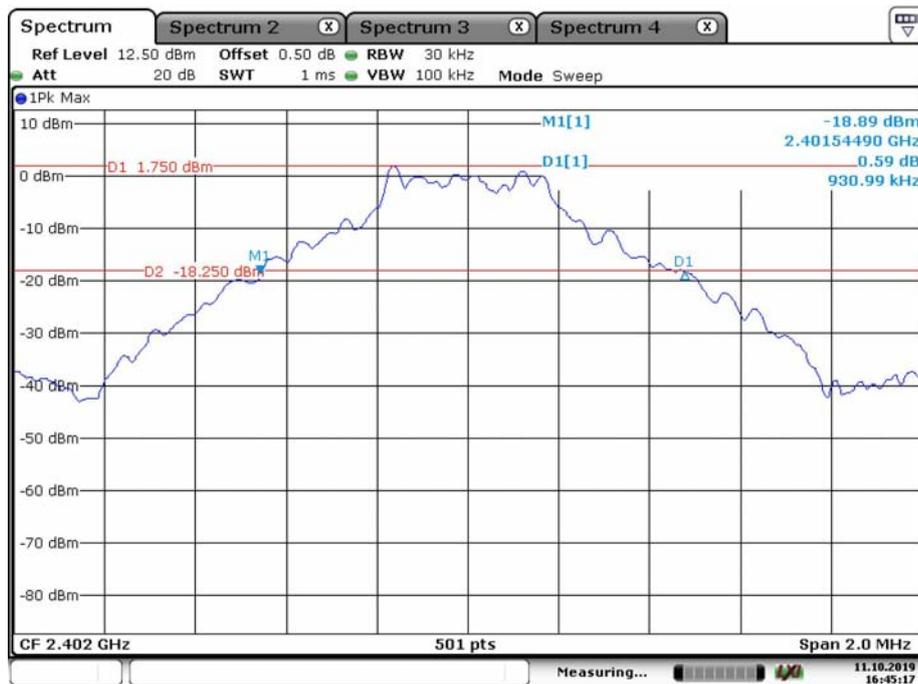

Date: 11.OCT.2019 16:45:17

Middle Channel

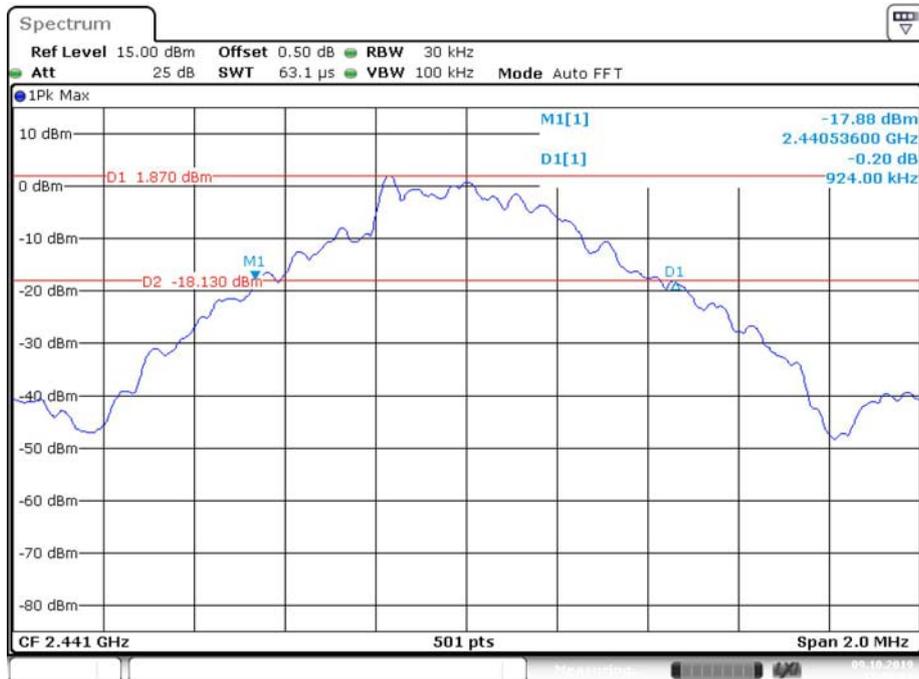

Date: 9.OCT.2019 11:06:02


High Channel



Date: 11.OCT.2019 16:43:54

EDR Mode ($\pi/4$ -DQPSK):

Low Channel

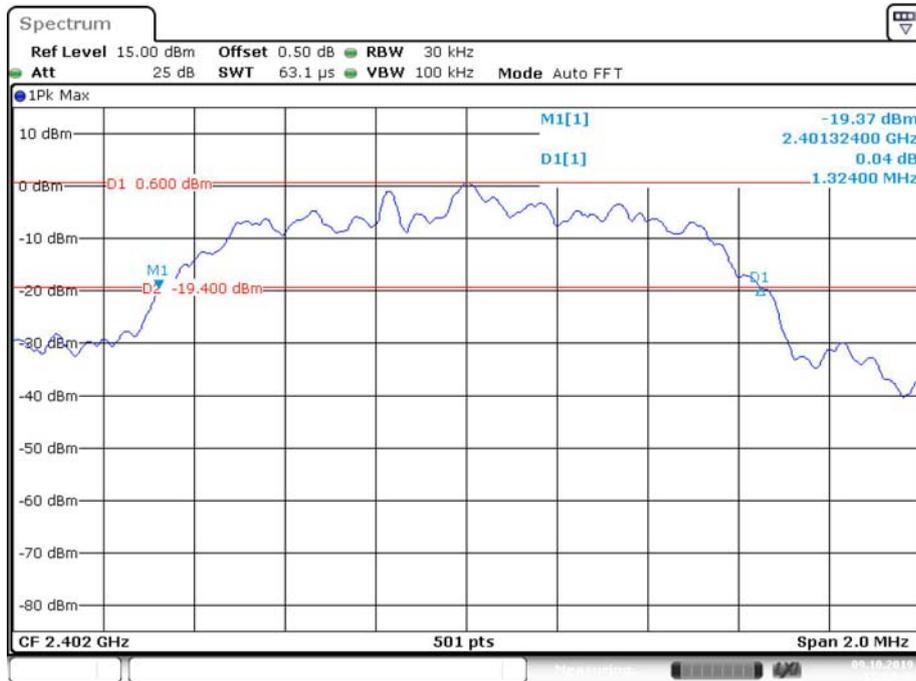


Date: 9.OCT.2019 11:17:45

Middle Channel



Date: 9.OCT.2019 11:13:30

High Channel

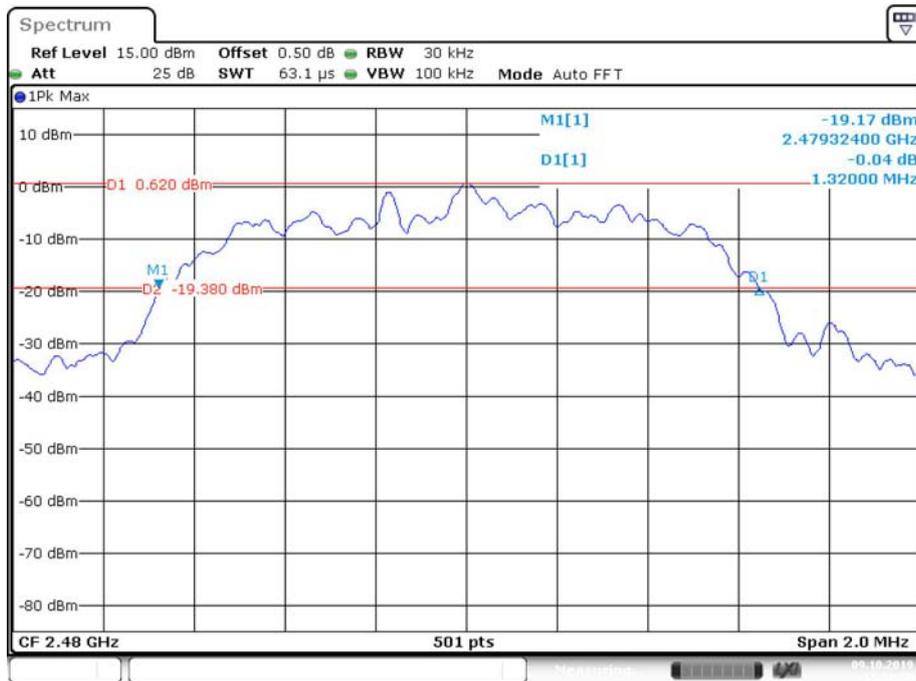


EDR Mode (8DPSK):

Low Channel




Middle Channel

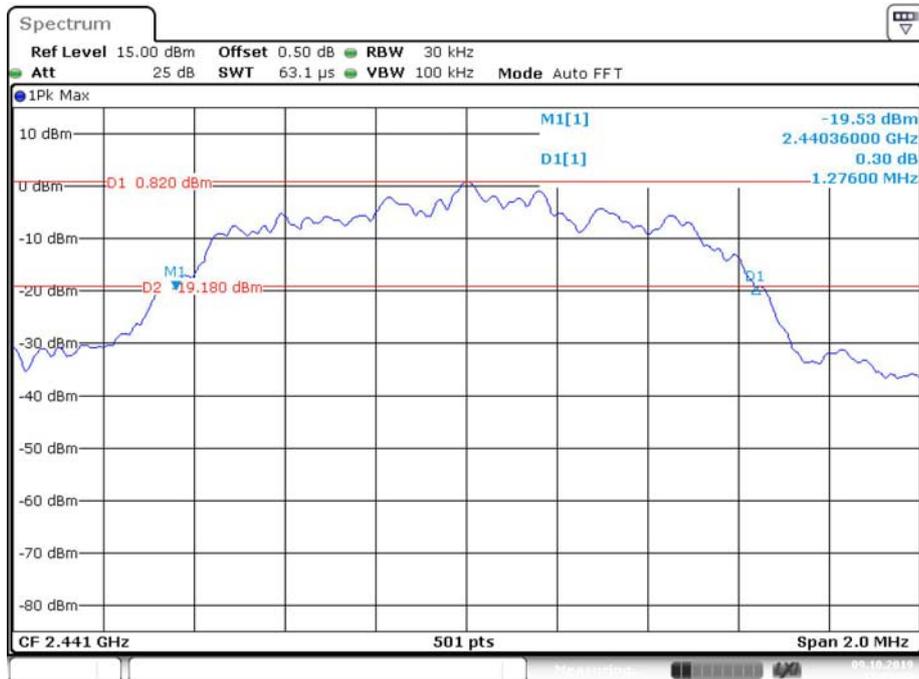

Date: 9.OCT.2019 11:21:08

High Channel

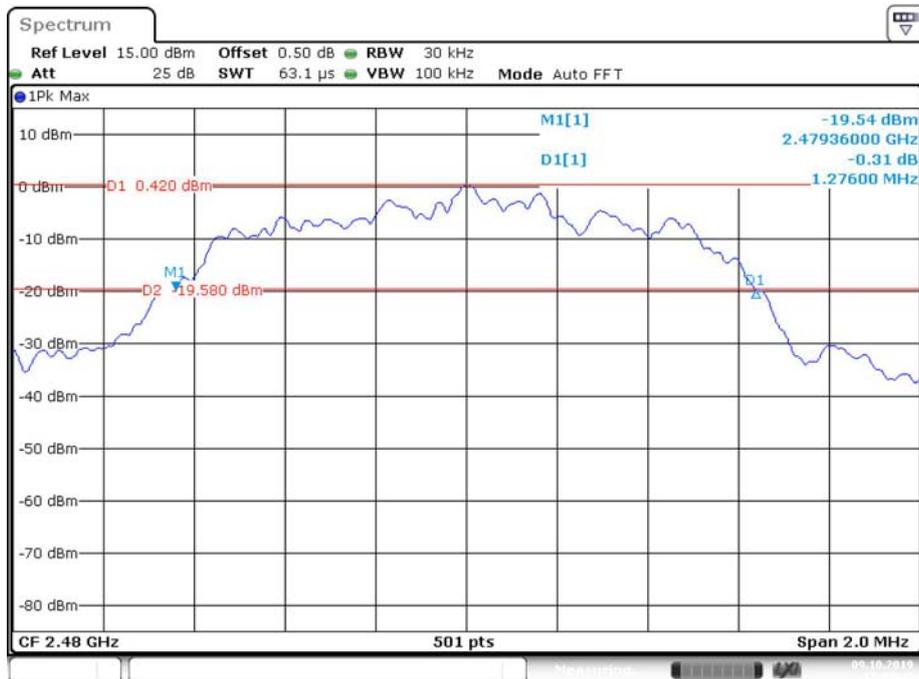

Date: 9.OCT.2019 11:25:43

FCC §15.247(a) (1) (iii) - QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4°C
Relative Humidity:	61 %
ATM Pressure:	101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09


Test Result: Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


Test mode	Frequency Range (MHz)	Number of Hopping Channel	Limit
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15

BDR Mode (GFSK)

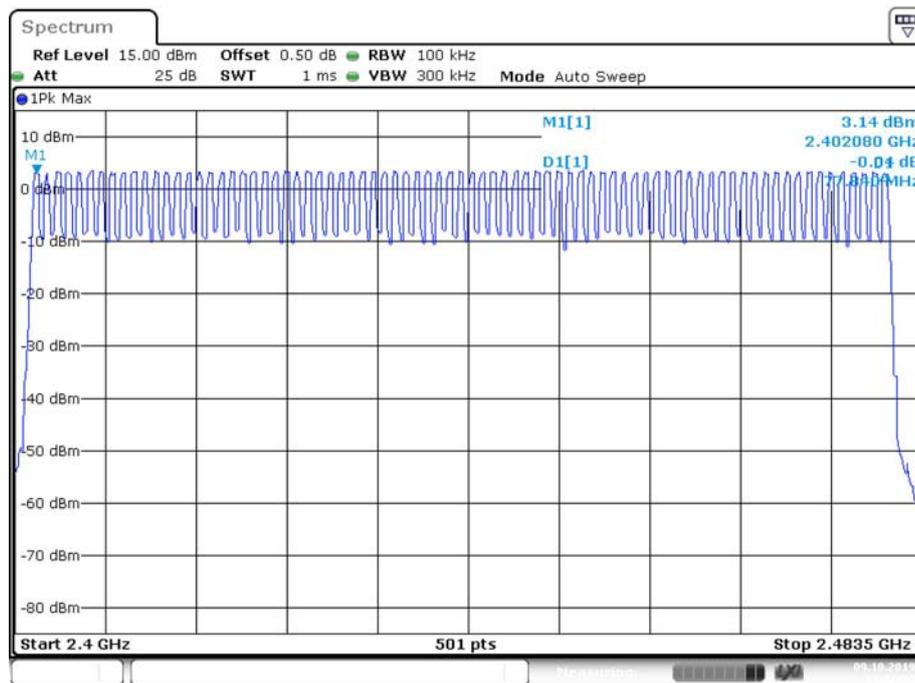


Date: 9.OCT.2019 11:31:43

EDR Mode ($\pi/4$ -DQPSK)

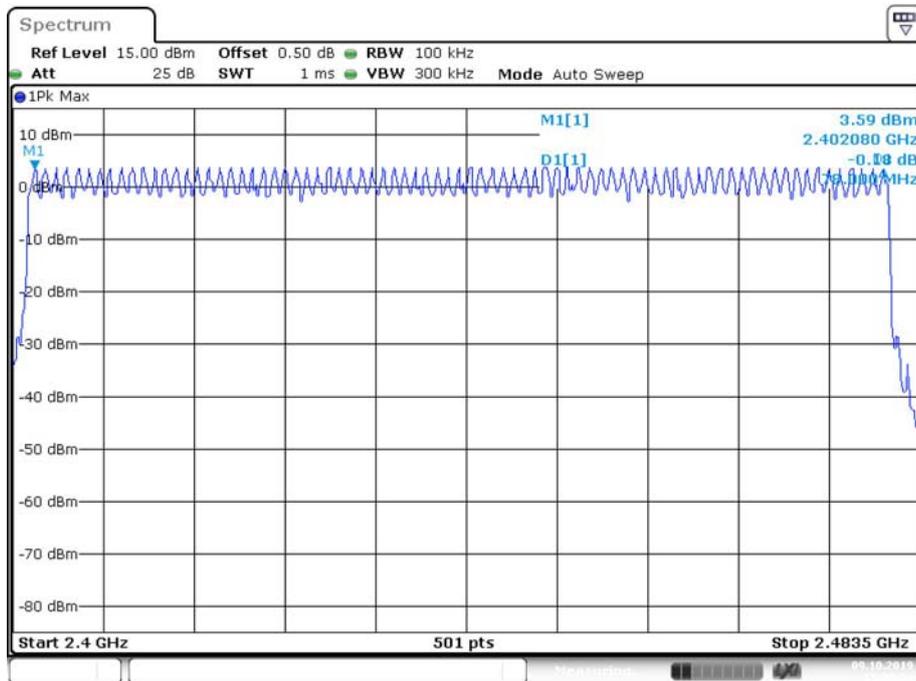

Date: 9.OCT.2019 11:30:30

EDR Mode (8DPSK)

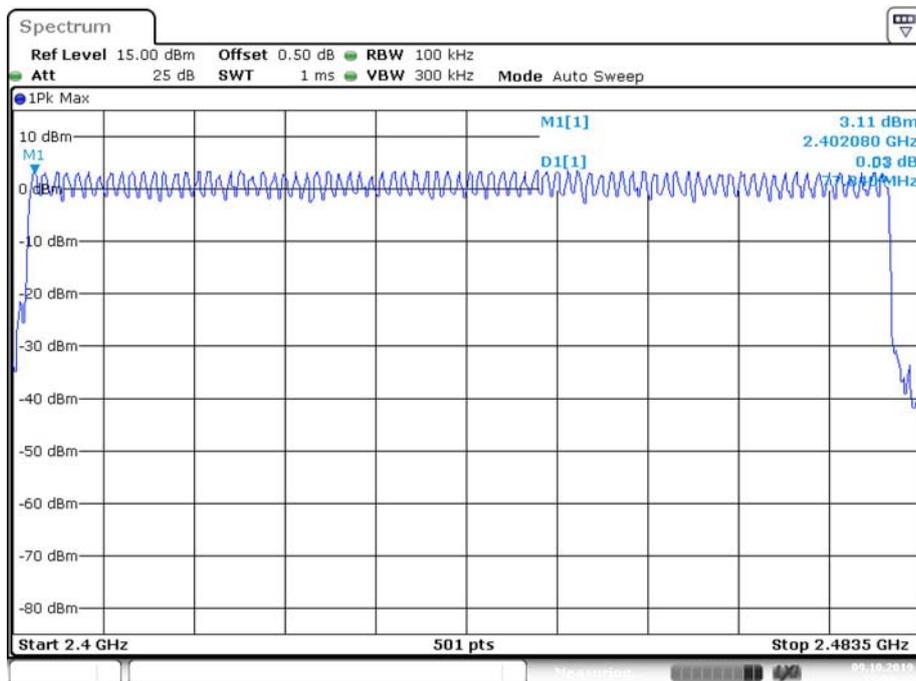

Date: 9.OCT.2019 11:28:43

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT was worked in channel hopping; the time of single pulses was tested.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4°C
Relative Humidity:	61 %
ATM Pressure:	101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09

Test Result: Compliance.

Please refer to following tables and plots


Test Mode: Transmitting

Mode	Packet type	Channel	Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
GFSK	DH1	Middle	2441	0.399	0.128	0.4
	DH3	Middle	2441	1.658	0.265	
	DH5	Middle	2441	2.927	0.312	
$\pi/4$ -DQPSK	2DH1	Middle	2441	0.407	0.13	
	2DH3	Middle	2441	1.671	0.267	
	2DH5	Middle	2441	2.923	0.312	
8DPSK	3DH1	Middle	2441	0.406	0.130	
	3DH3	Middle	2441	1.664	0.266	
	3DH5	Middle	2441	2.926	0.312	

Note:
 DH1:Dwell time=Pulse time (ms) × (1600/2/79) ×31.6 s
 DH3:Dwell time=Pulse time (ms) × (1600/4/79) ×31.6 s
 DH5:Dwell time=Pulse time (ms) × (1600/6/79) ×31.6 s


BDR Mode (GFSK):

DH1: Middle Channel

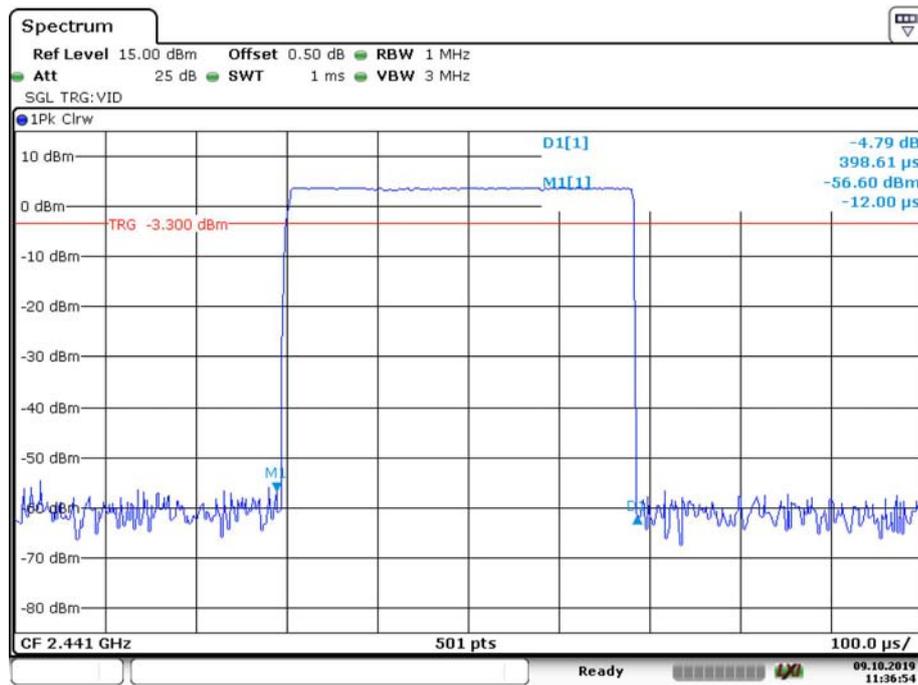


Date: 9.OCT.2019 11:36:55

DH3: Middle Channel

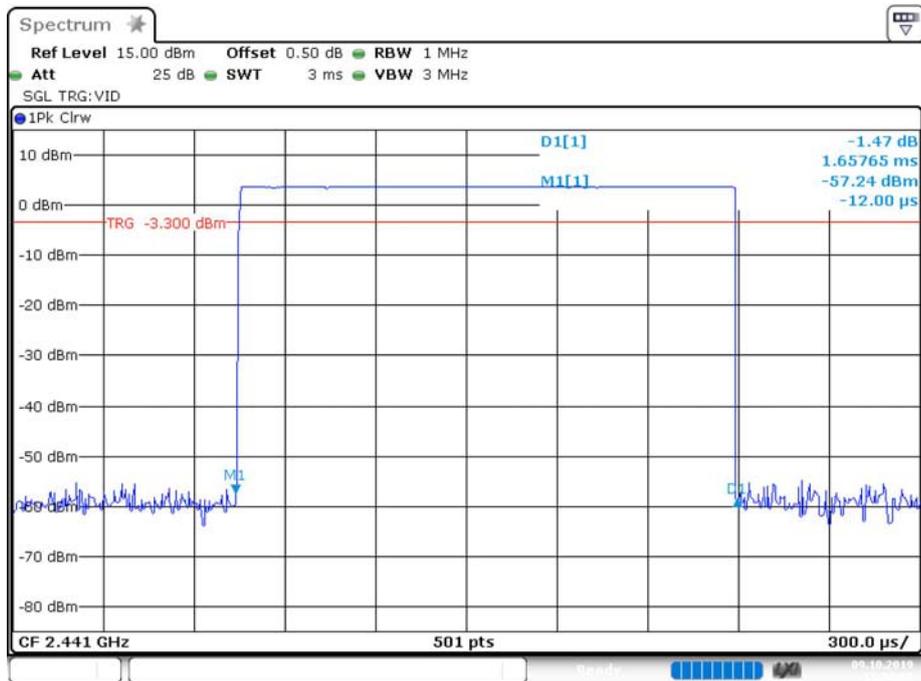


DH5: Middle Channel

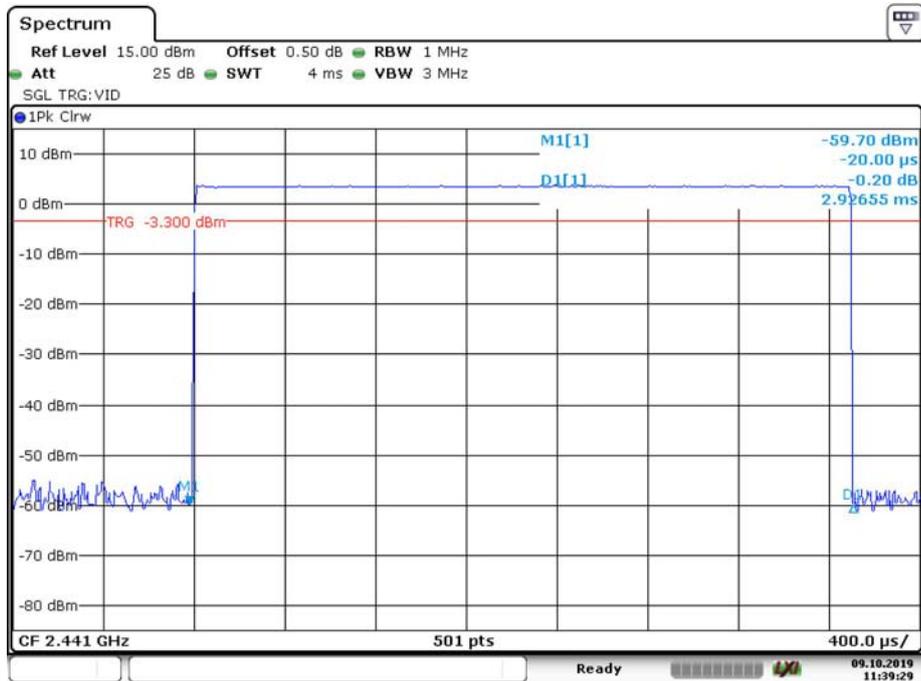


EDR Mode ($\pi/4$ -DQPSK):

2DH1: Middle Channel

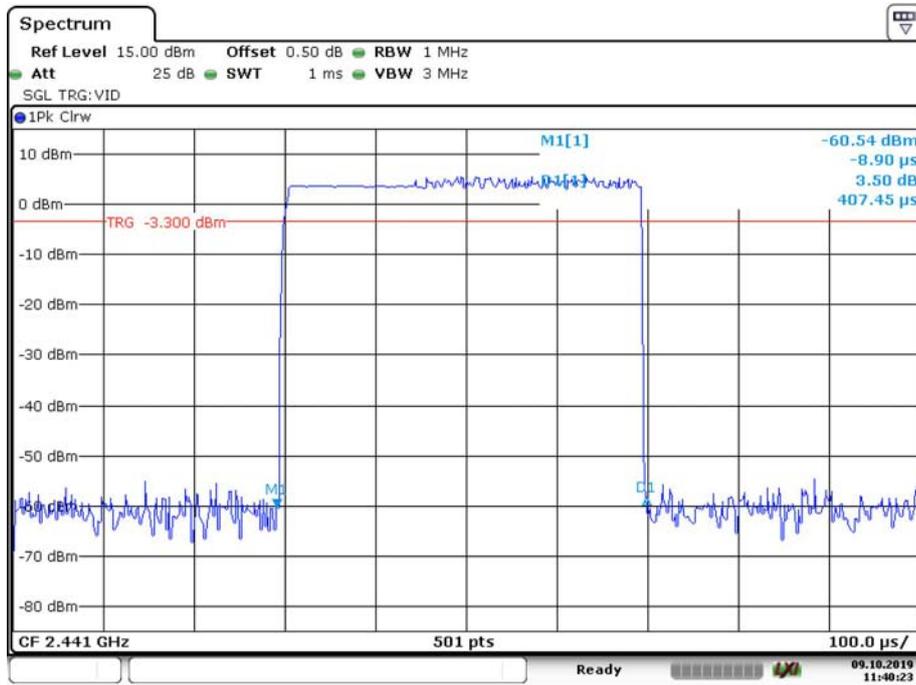


Date: 9.OCT.2019 11:40:23

2DH3: Middle Channel

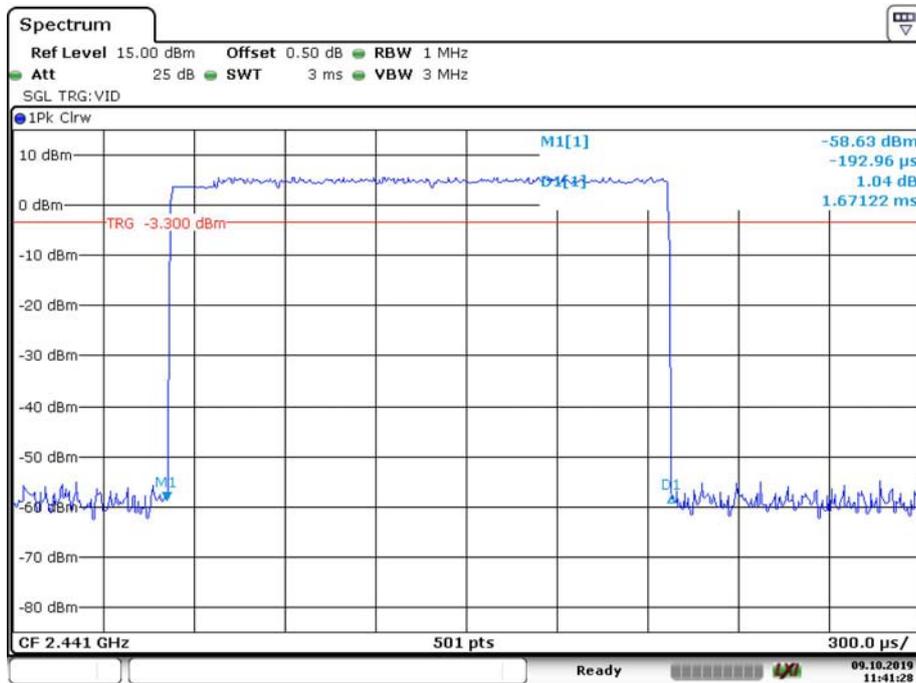

Date: 9.OCT.2019 11:41:28


2DH5: Middle Channel

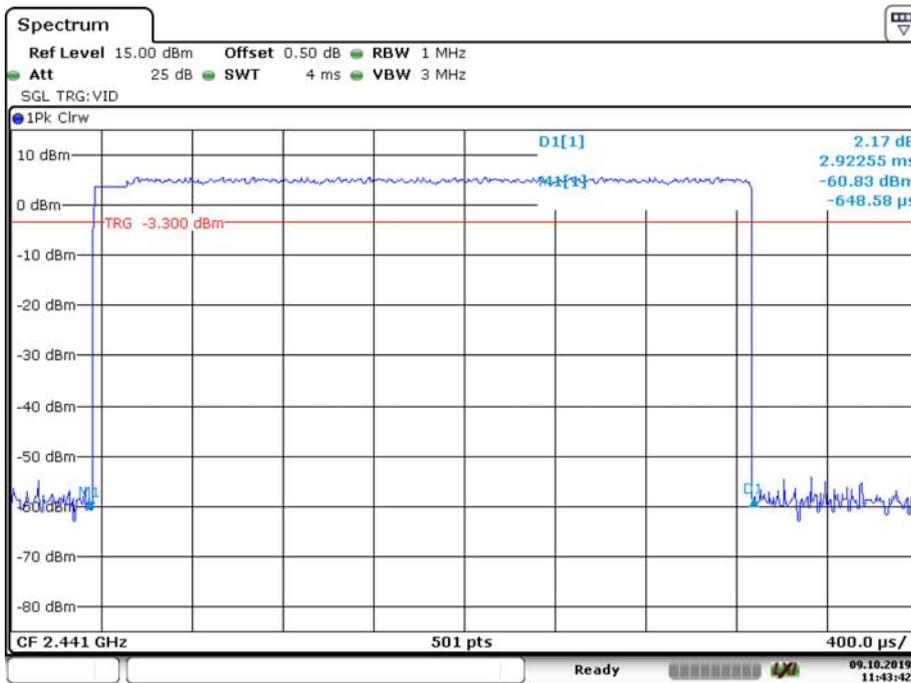

Date: 9.OCT.2019 11:43:43


EDR Mode (8DPSK):

3DH1: Middle Channel

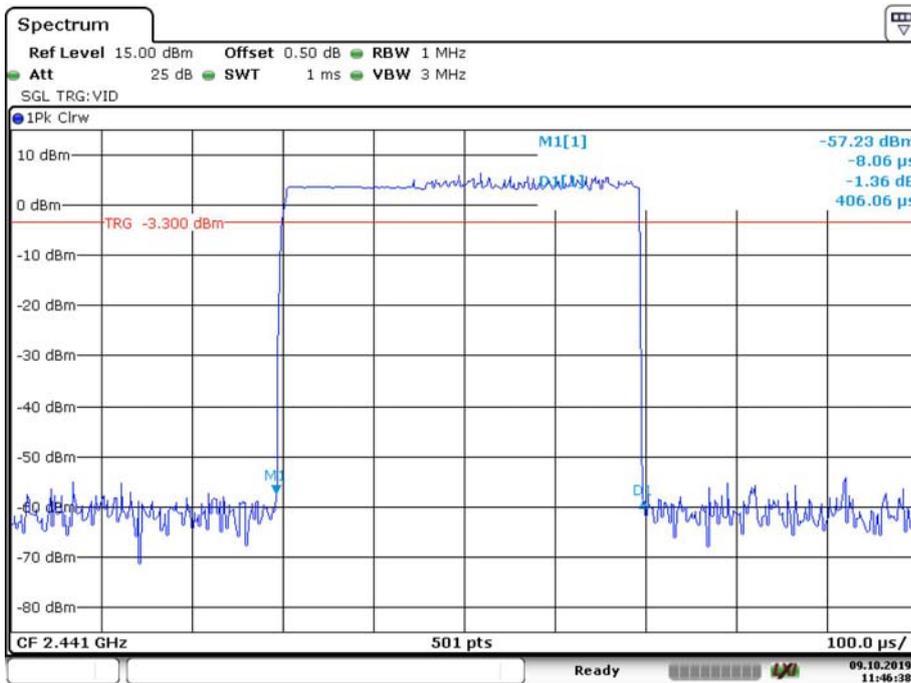


Date: 9.OCT.2019 11:46:39

3DH3: Middle Channel

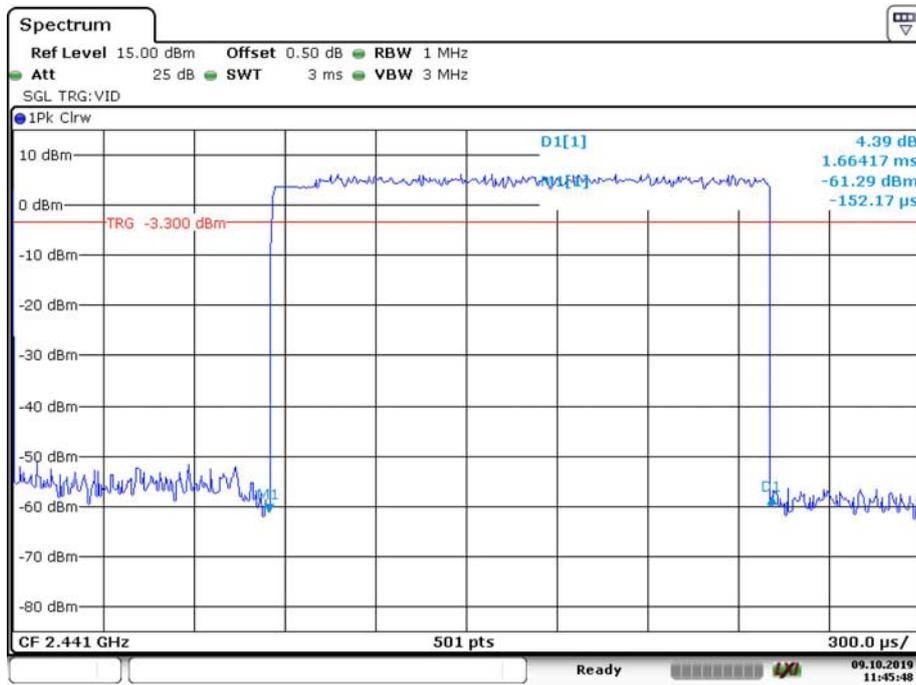

3DH5: Middle Channel

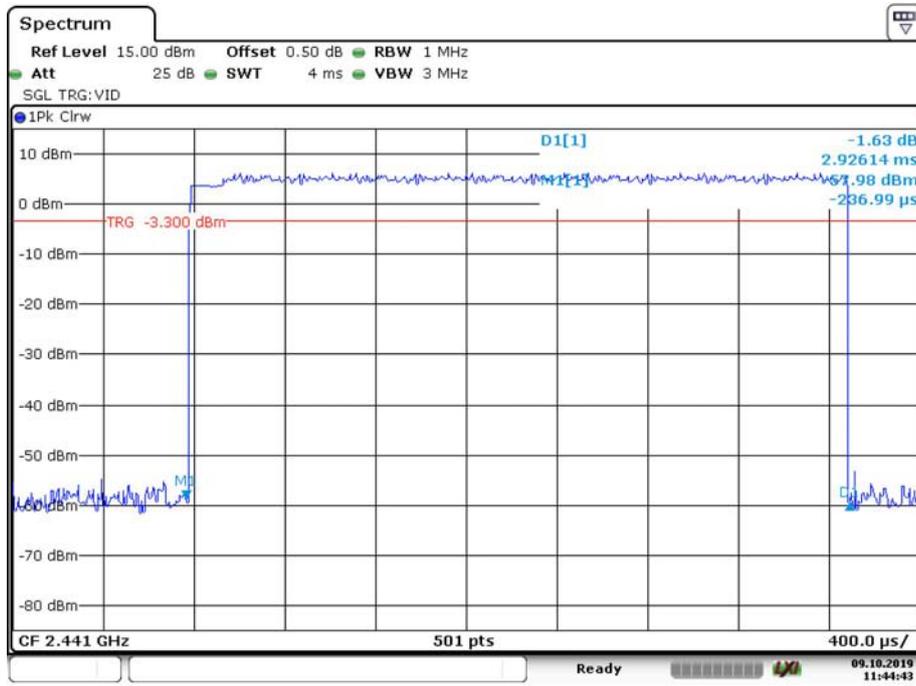

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	26.4°C
Relative Humidity:	61 %
ATM Pressure:	101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09

Test Result: Compliance.

Test Mode: Transmitting

Mode	Frequency (MHz)	Peak Conducted Output power (dBm)	Limit (dBm)
BDR Mode (GFSK)	2402	3.55	21
	2441	3.66	21
	2480	3.92	21
EDR Mode ($\pi/4$ -DQPSK)	2402	5.89	21
	2441	6.04	21
	2480	6.06	21
EDR Mode (8DPSK)	2402	6.67	21
	2441	6.86	21
	2480	6.62	21

Note: The data above was tested in conducted mode.

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101474	2019-01-09	2020-01-09
Unknown	Coaxial Cable	C-SJ00-0010	C0010/02	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data


Environmental Conditions

Temperature:	26.4°C
Relative Humidity:	61 %
ATM Pressure:	101.2 kPa
Test by:	Lily Xie
Test Date:	2019-10-09

Test Result: Compliance


Single Channel Mode,
BDR Mode (GFSK):

Band Edge, Left Side

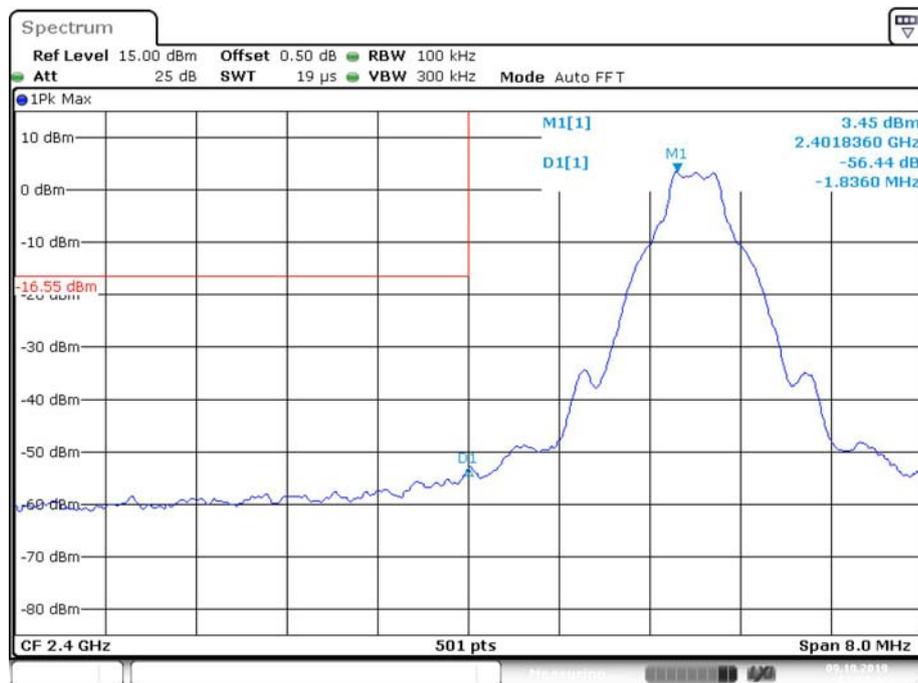

Date: 9.OCT.2019 11:04:13


Band Edge, Right Side

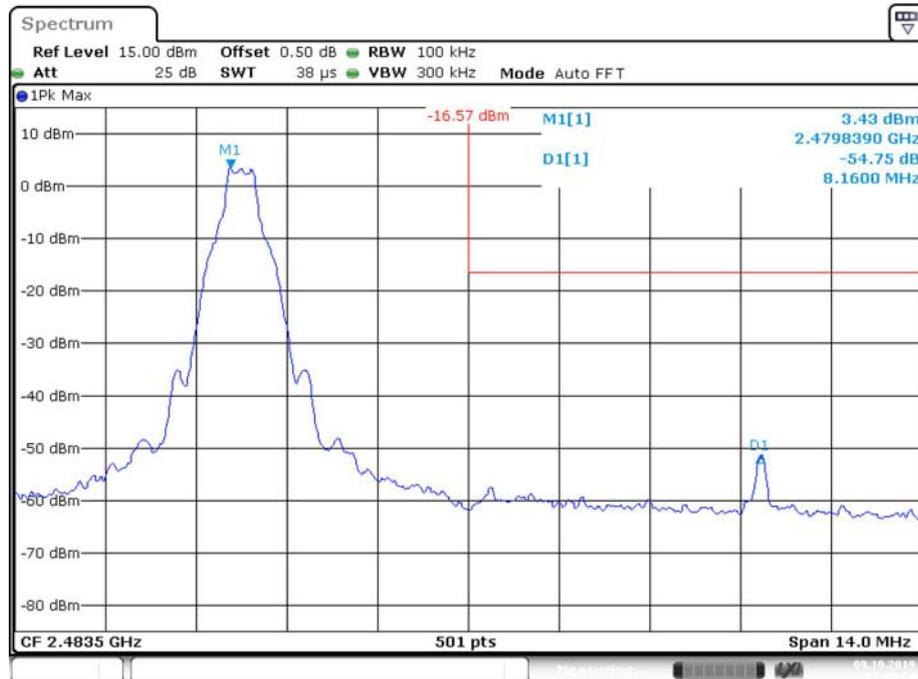

Date: 9.OCT.2019 11:10:14


EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side

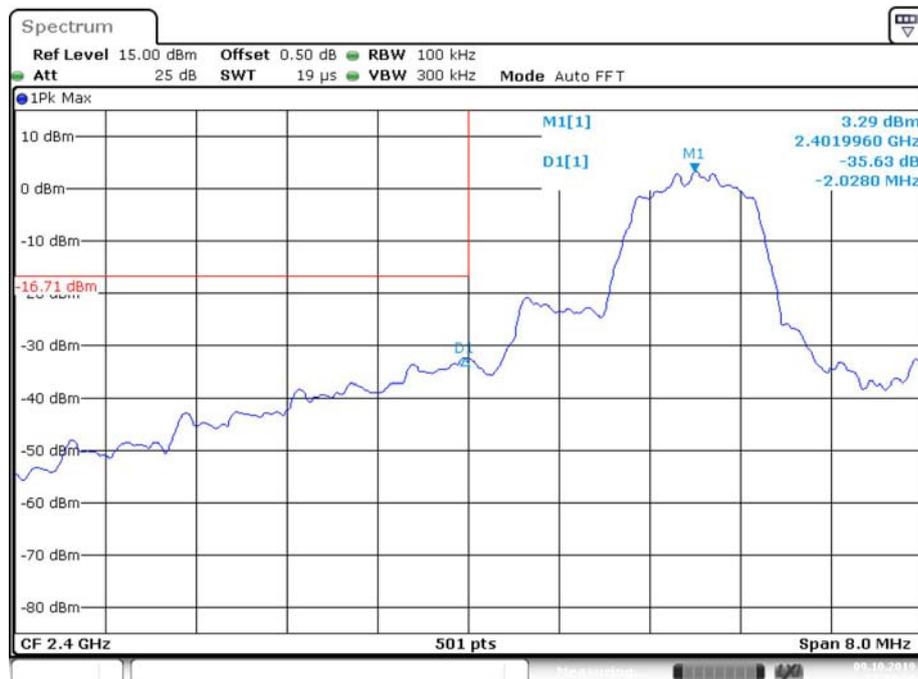

Date: 9.OCT.2019 11:18:20


Band Edge, Right Side

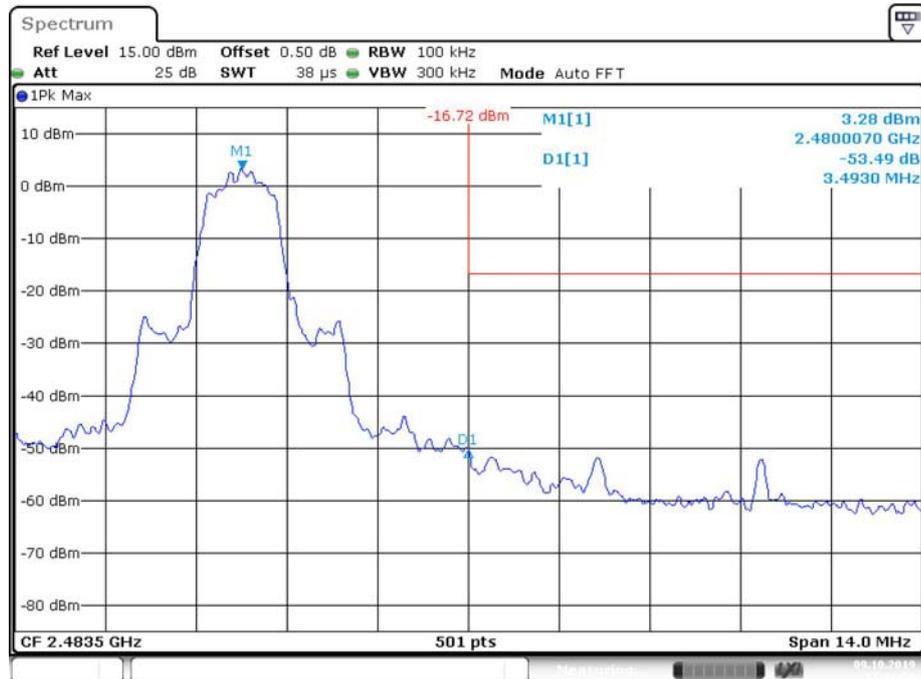

Date: 9.OCT.2019 11:11:37


EDR Mode (8DPSK):

Band Edge, Left Side

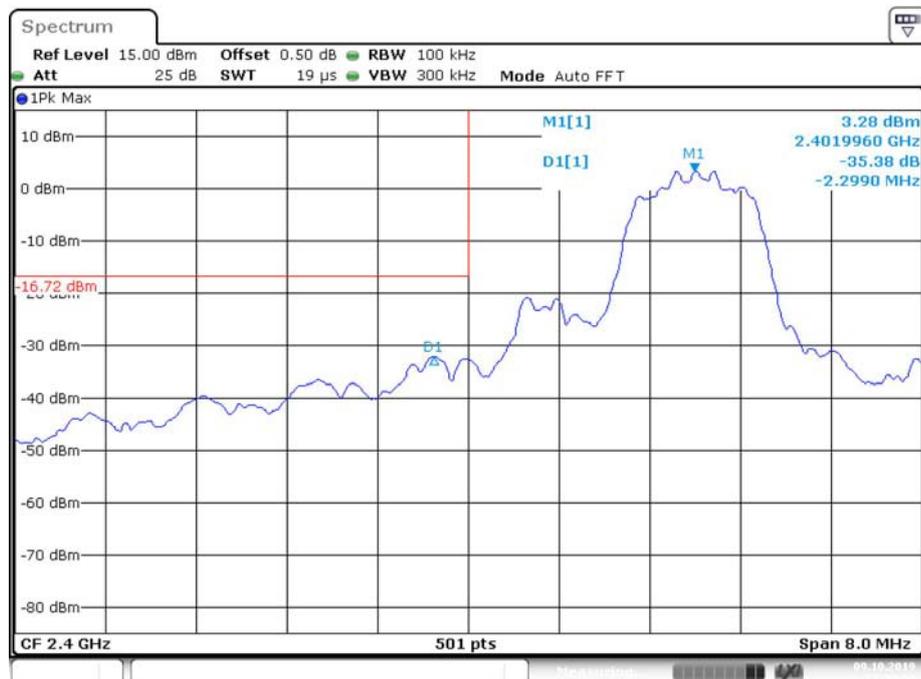

Date: 9.OCT.2019 11:20:29


Band Edge, Right Side

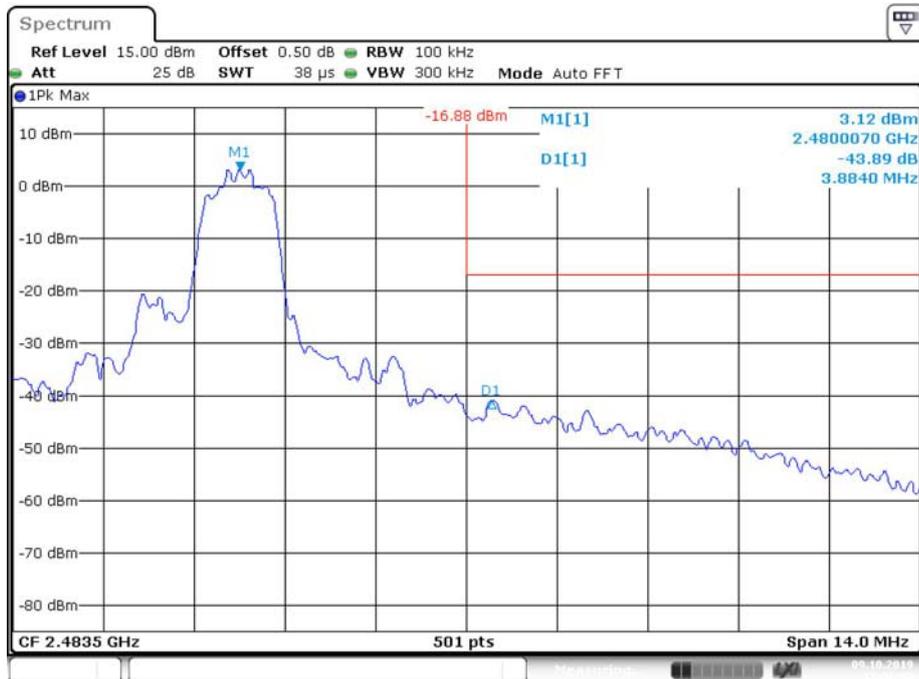

Date: 9.OCT.2019 11:26:18


*Hopping Mode,
BDR Mode (GFSK):*

Band Edge, Left Side

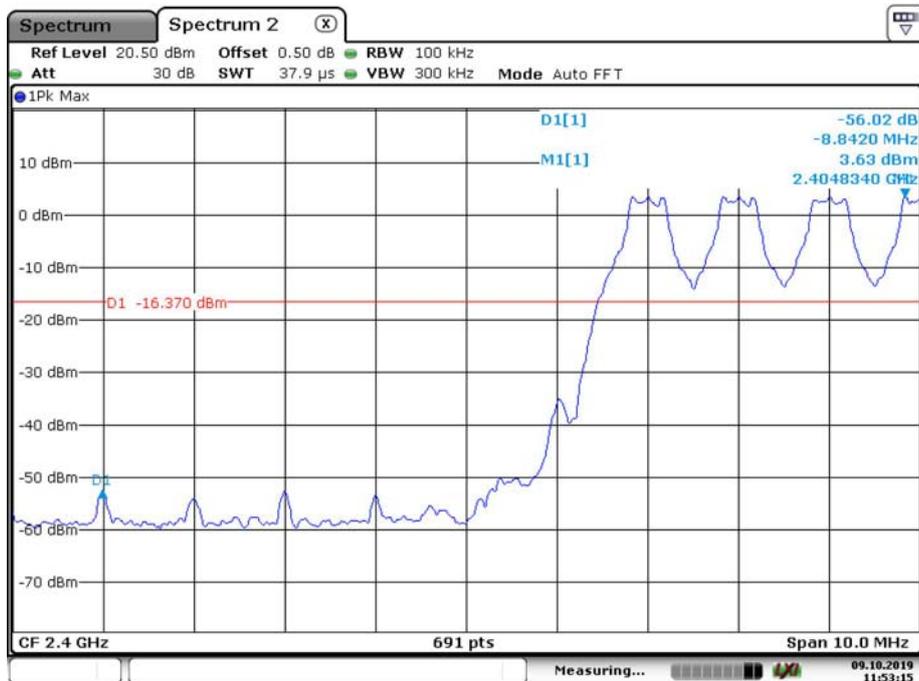

Date: 9.OCT.2019 11:53:16

Band Edge, Right Side

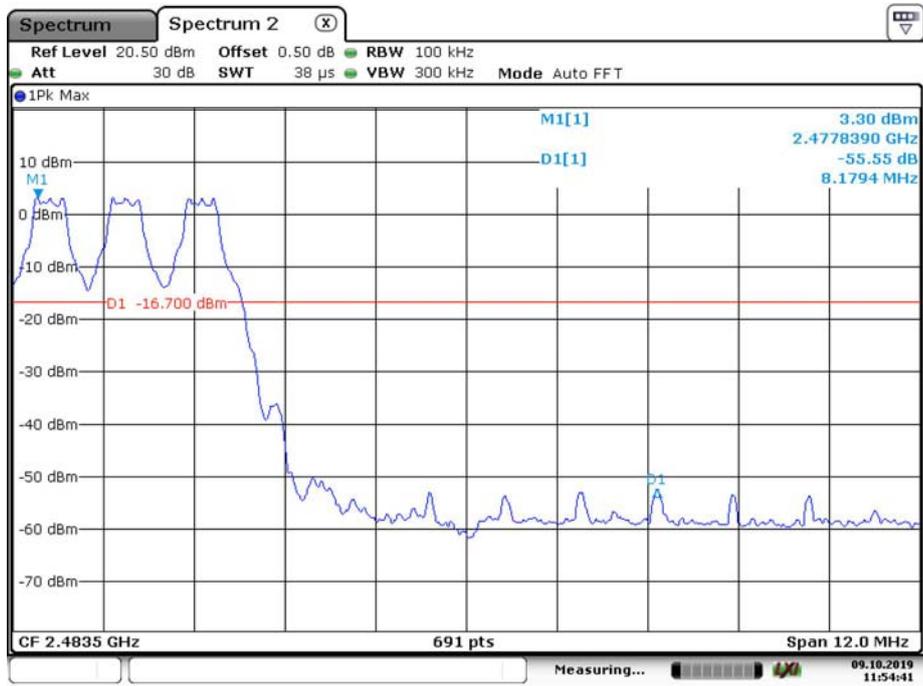

Date: 9.OCT.2019 11:54:42

EDR Mode ($\pi/4$ -DQPSK):

Band Edge, Left Side



Date: 9.OCT.2019 13:00:51


Band Edge, Right Side



Date: 9.OCT.2019 11:59:04


EDR Mode (8DPSK):

Band Edge, Left Side

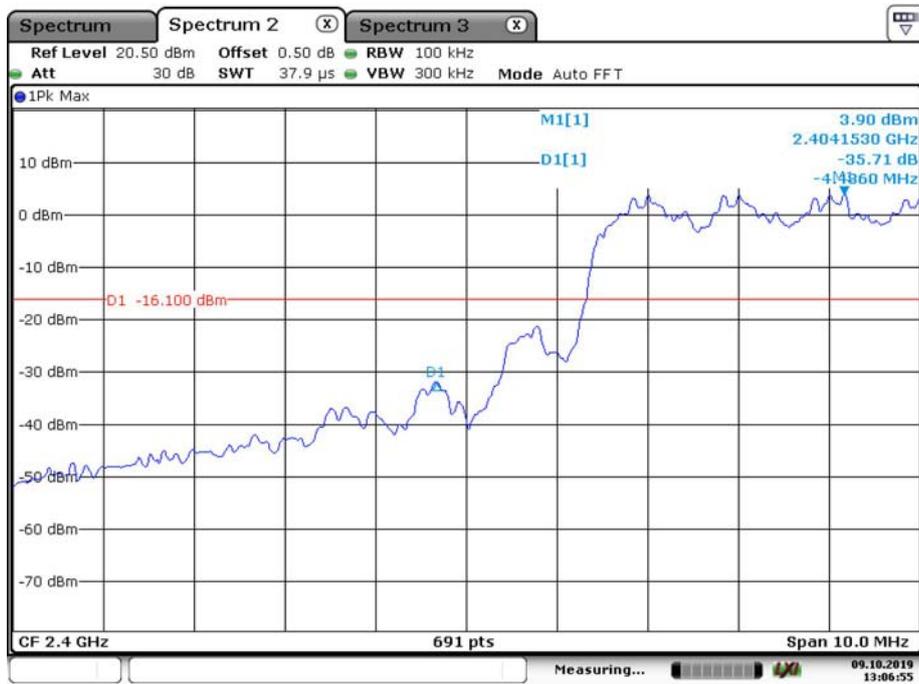

Date: 9.OCT.2019 13:06:55

Band Edge, Right Side

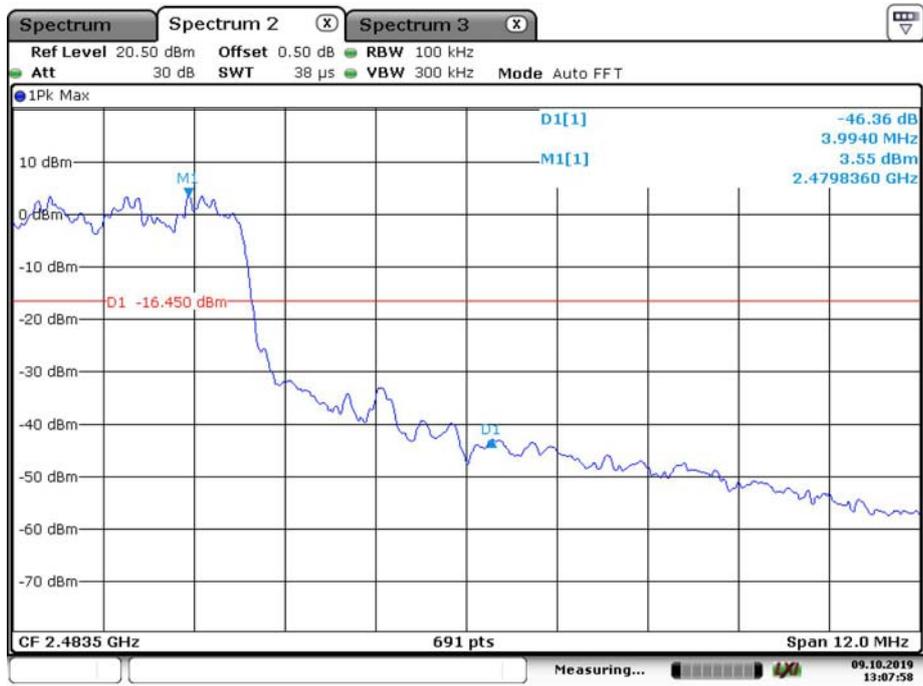

Date: 9.OCT.2019 13:07:58

Directions

1. BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
2. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
3. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
4. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
5. This [report](#) cannot be reproduced except in full, without prior written approval of the Company.
6. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.
7. This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★” .
8. This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the U.S. Government.

******* END OF REPORT *******