

FCC Radio Test Report

FCC ID: 2AMHM-AD00A10055

Report No. : BTL-FCCP-5-1911T165
Equipment : iTraMS Gen2A
Model Name : CU-303-0403
Brand Name : Bosch
Applicant : Robert Bosch Engineering & Business Solution Pvt. Ltd.
Address : 123, Industrial Layout, Hosur Road, Koramangala, Bengaluru,
560095 Bengaluru India

Radio Function : WCDMA Band V, LTE Band 5

FCC Rule Part(s) : 47 CFR FCC Part 22 Subpart H
47 CFR FCC Part 2
ANSI/TIA/EIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

Measurement Procedure(s) : ANSI C63.10-2013

Date of Receipt : 2019/11/27
Date of Test : 2019/11/27 ~ 2020/1/7
Issued Date : 2020/3/16


The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :


Peter Chen, Engineer



Approved by :

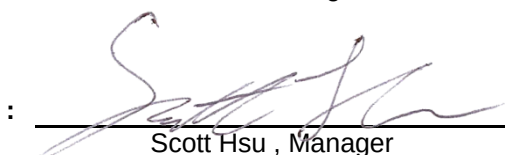
Scott Hsu, Manager

BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299

Fax: +886-2-2657-3331

Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	9
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
3 . TEST RESULT	12
3.1 RADIATED POWER MEASUREMENT	12
3.1.1 LIMIT	12
3.1.2 TEST PROCEDURES	12
3.1.3 TEST SETUP LAYOUT	12
3.1.4 TEST DEVIATION	12
3.1.5 TEST RESULTS	12
3.2 OCCUPIED BANDWIDTH MEASUREMENT	13
3.2.1 TEST PROCEDURES	13
3.2.2 TEST SETUP LAYOUT	13
3.2.3 TEST DEVIATION	13
3.2.4 TEST RESULTS	13
3.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	14
3.3.1 LIMIT	14
3.3.2 TEST PROCEDURES	14
3.3.3 TEST SETUP LAYOUT	14
3.3.4 TEST DEVIATION	14
3.3.5 TEST RESULTS	14
3.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT	15
3.4.1 LIMIT	15
3.4.2 TEST PROCEDURES	15
3.4.3 TEST SETUP LAYOUT	15
3.4.4 TEST DEVIATION	16
3.4.5 TEST RESULTS (30MHZ TO 1000MHZ)	16
3.4.6 TEST RESULTS (ABOVE 1000MHZ)	16
3.5 BAND EDGE MEASUREMENT	17
3.5.1 LIMIT	17
3.5.2 TEST PROCEDURES	17

Table of Contents	Page
3.5.3 TEST SETUP LAYOUT	17
3.5.4 TEST DEVIATION	17
3.5.5 TEST RESULTS	17
3.6 PEAK TO AVERAGE RATIO MEASUREMENT	18
3.6.1 LIMIT	18
3.6.2 TEST PROCEDURES	18
3.6.3 TEST SETUP LAYOUT	18
3.6.4 TEST DEVIATION	18
3.6.5 TEST RESULTS	18
3.7 FREQUENCY STABILITY MEASUREMENT	19
3.7.1 LIMIT	19
3.7.2 TEST PROCEDURES	19
3.7.3 TEST SETUP LAYOUT	19
3.7.4 TEST DEVIATION	19
3.7.5 TEST RESULTS	19
4. LIST OF MEASUREMENT EQUIPMENTS	20
5. EUT TEST PHOTOS	21
6. EUT PHOTOS	21
APPENDIX A - RADIATED POWER	22
APPENDIX B - OCCUPIED BANDWIDTH	50
APPENDIX C - CONDUCTED SPURIOUS EMISSIONS	60
APPENDIX D - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)	66
APPENDIX E - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)	75
APPENDIX F - BAND EDGE	84
APPENDIX G - PEAK TO AVERAGE RATIO	90
APPENDIX H - FREQUENCY STABILITY	96

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	2020/3/3
R01	Revised report to address TCB's comments.	2020/3/16

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part 22 Subpart H & Part 2			
Standard(s) Section	Test Item	Judgment	Remark
2.1046 22.913(a)(5)	Effective Radiated Power	PASS	-----
2.1049	Occupied Bandwidth	PASS	-----
2.1051 22.917(a)	Conducted Spurious Emissions	PASS	-----
2.1053 22.917(a)	Radiated Spurious Emissions	PASS	-----
22.917(a)	Band Edge Measurements	PASS	-----
-	Peak To Average Ratio	PASS	Record Only
2.1055 22.355	Frequency Stability	PASS	-----

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 355421 and DN: TW1099.

- ☐ C05 ☐ CB08 ☐ CB11 ☐ CB15 ☐ CB16
☒ SR06

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

The test sites and facilities are covered under FCC RN: 325517 and DN: TW1115.

- ☐ C03 ☒ CB18 ☐ CB19

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{CISPR} requirement.

A. Radiated emissions test :

Test Site	Measurement Frequency Range	U,(dB)
CB18	0.03 GHz ~ 0.2 GHz	4.17
	0.2 GHz ~ 1 GHz	4.72
	1 GHz ~ 6 GHz	5.21
	6 GHz ~ 18 GHz	5.51
	18 GHz ~ 26 GHz	3.69
	26 GHz ~ 40 GHz	4.23

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested By
Output Power & ERP	24.6 °C, 54.3 %	DC 32V	Eric Lee
Occupied Bandwidth	24.6 °C, 54.3 %	DC 32V	Eric Lee
Conducted Spurious Emissions	24.6 °C, 54.3 %	DC 32V	Eric Lee
Radiated Spurious Emissions	23 °C, 65 %	DC 32V	Hunter Chiang
Band Edge	24.6 °C, 54.3 %	DC 32V	Eric Lee
Peak to Average Ratio	24.6 °C, 54.3 %	DC 32V	Eric Lee
Frequency Stability	Normal and Extreme		Eric Lee

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	iTraMS Gen2A		
Brand Name	Bosch		
Test Model	CU-303-0403		
Series Model	N/A		
Model Difference(s)	N/A		
Hardware Version	B2		
Software Version	MS8		
Power Source	Supplied from Battery.		
Power Rating	DC 9-32V		
Modulation Type	WCDMA/HSDPA/HSUPA	UL: QPSK DL: QPSK	
	LTE	UL: QPSK,16QAM DL: QPSK,16QAM	

Note:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

WCDMA Band V				
Test Frequency ID	UARFCN	Frequency of Uplink (MHz)	UARFCN	Frequency of Downlink (MHz)
Low Range	4132	826.4	4357	871.4
Mid Range	4182	836.4	4407	881.4
High Range	4233	846.6	4458	891.6

LTE Band 5					
Test Frequency ID	Bandwidth (MHz)	N _{UL}	Frequency of Uplink (MHz)	N _{DL}	Frequency of Downlink (MHz)
Low Range	1.4	20407	824.7	2407	869.7
	3	20415	825.5	2415	870.5
	5	20425	826.5	2425	871.5
	10	20450	829	2450	874
Mid Range	1.4/3/5/10	20525	836.5	2525	881.5
High Range	1.4	20643	848.3	2643	893.3
	3	20635	847.5	2635	892.5
	5	20625	846.5	2625	891.5
	10	20600	844	2600	889

3. Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
CH0	 BOSCH	N/A	PCB	N/A	2.57	-

2.2 DESCRIPTION OF TEST MODES

Following mode(s) is (were) found to be the worst case(s) and selected for the final test.


WCDMA BAND V MODE			
Test Item	Available Channel	Tested Channel	Mode
Output Power	4132 to 4233	4132, 4182, 4233	WCDMA, HSDPA, HSUPA
ERP	4132 to 4233	4132, 4182, 4233	WCDMA
Occupied Bandwidth	4132 to 4233	4132, 4182, 4233	WCDMA
Conducted Spurious Emissions	4132 to 4233	4182	WCDMA
Radiated Spurious Emissions	4132 to 4233	4182	WCDMA
Band Edge	4132 to 4233	4132, 4233	WCDMA
Peak to Average Ratio	4132 to 4233	4132, 4182, 4233	WCDMA
Frequency Stability	4132 to 4233	4182	WCDMA

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (Y axis) is recorded.

LTE BAND 5 MODE					
Test Item	Available Channel	Tested Channel	Channel Bandwidth	Modulation	Mode
Output Power	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM	1RB/3RB/6RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM	1RB/8RB/15RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM	1RB/12RB/25RB
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM	1RB/25RB/50RB
ERP	20450 to 20600	20450, 20525, 20600	10MHz	QPSK	1RB/25RB/50RB
Occupied Bandwidth	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM	6RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM	15RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM	25RB
	20450 to 20600	20450, 20525, 20600	10MHz	QPSK, 16QAM	50RB
Conducted Spurious Emissions	20407 to 20643	20525	1.4MHz	QPSK	1RB
	20415 to 20635	20525	3MHz	QPSK	1RB
	20425 to 20625	20525	5MHz	QPSK	1RB
	20450 to 20600	20525	10MHz	QPSK	1RB
Radiated Spurious Emissions	20450 to 20600	20525	10MHz	QPSK	1RB
Band Edge	20407 to 20643	20407, 20643	1.4MHz	QPSK	1RB
					6RB
	20415 to 20635	20415, 20635	3MHz	QPSK	1RB
					15RB
	20425 to 20625	20425, 20625	5MHz	QPSK	1RB
					25RB
Peak To Average Ratio	20407 to 20643	20407, 20525, 20643	1.4MHz	QPSK, 16QAM	1RB
					1RB
	20415 to 20635	20415, 20525, 20635	3MHz	QPSK, 16QAM	1RB
					1RB
	20425 to 20625	20425, 20525, 20625	5MHz	QPSK, 16QAM	1RB
					1RB
Frequency Stability	20407 to 20643	20525	1.4MHz	QPSK	1RB
	20415 to 20635	20525	3MHz	QPSK	1RB
	20425 to 20625	20525	5MHz	QPSK	1RB
	20450 to 20600	20525	10MHz	QPSK	1RB

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATIONOFSYSTEMTESTED

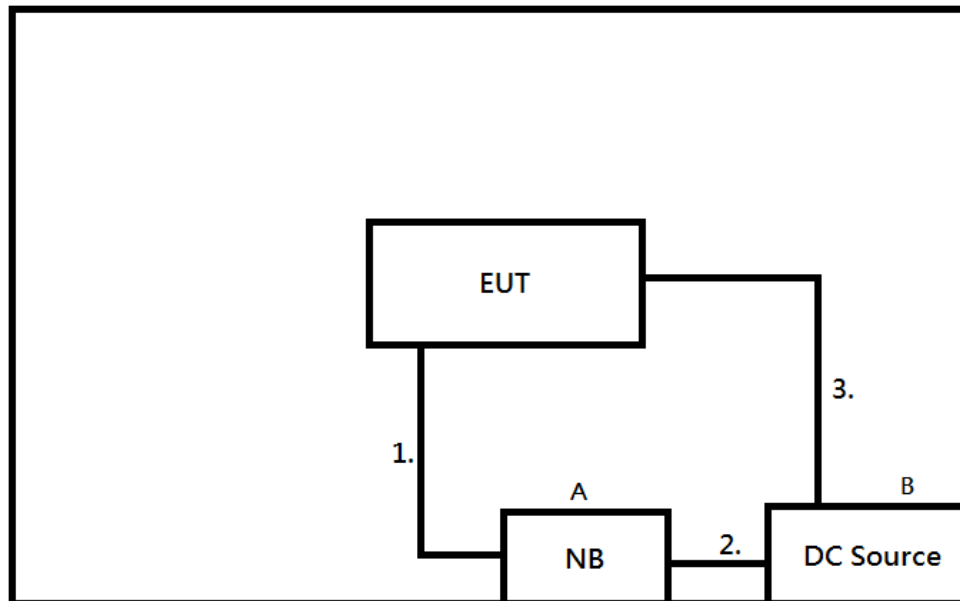

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	notebook	hp	TPN-1119	NA	-
B	DC Source	twintex	TP-6010	1616AP051502100	-
-	2*LTE MIMO & GNSS Antenna	TAOGLAS	MA250.A.LBI.001	-	External Antenna Supplied by test requester. For evaluation only.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	NO	NO	1m	Lan to USB	-
2	YES	NO	0.5m	RS232 to USB	-
3	NO	NO	1.5m	Power cable	-

3. TEST RESULT

3.1 RADIATED POWER MEASUREMENT

3.1.1 LIMIT


Mobile / Portable station are limited to 7 watts e.r.p.

3.1.2 TEST PROCEDURES

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
4. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.R.P \text{ power} - 2.15\text{dBi}.$
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.1.3 TEST SETUP LAYOUT

Radiated Power Measurement

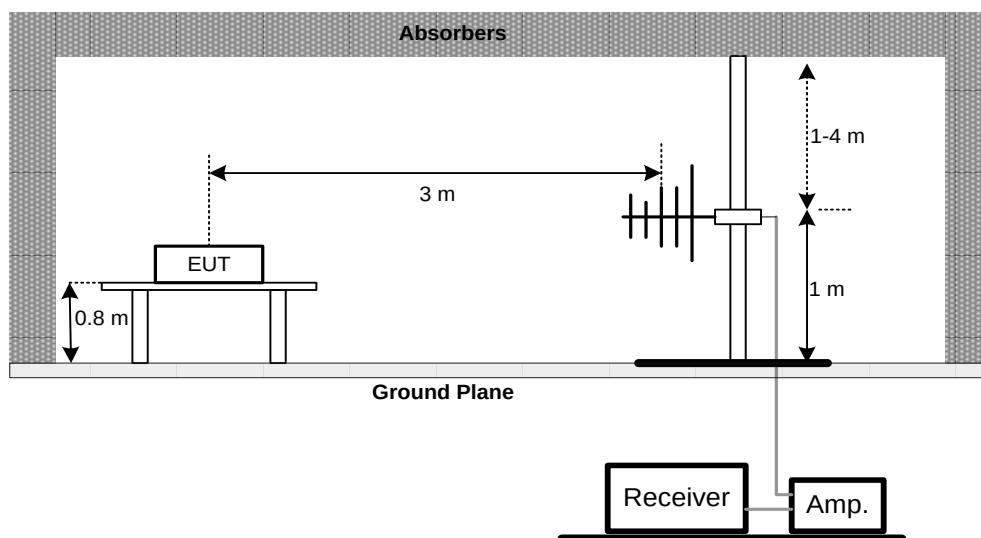

3.1.4 TEST DEVIATION

No deviation

3.1.5 TEST RESULTS

Please refer to the APPENDIX A.


3.2 OCCUPIED BANDWIDTH MEASUREMENT

3.2.1 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 4.

1. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth and 26dB bandwidth.
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. $RBW = (1\% \sim 5\%) \cdot EBW$
 $VBW \geq 3 \cdot RBW$
4. Set spectrum analyzer with Peak detector.

3.2.2 TEST SETUP LAYOUT

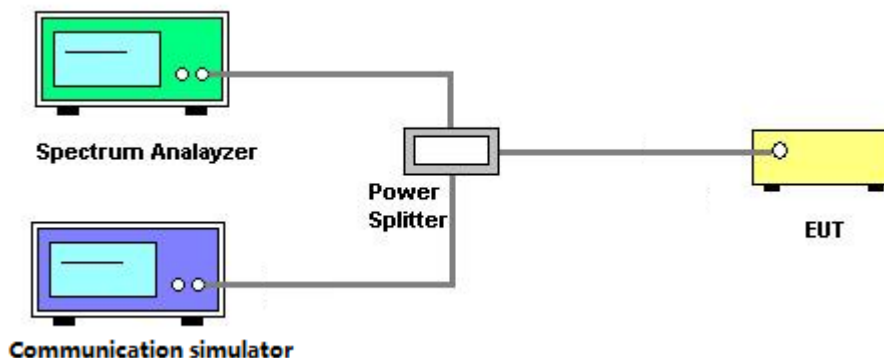

3.2.3 TEST DEVIATION

No deviation

3.2.4 TEST RESULTS

Please refer to the APPENDIX B.

3.3 CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

3.3.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

3.3.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with Peak detector.
4. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.3.3 TEST SETUP LAYOUT

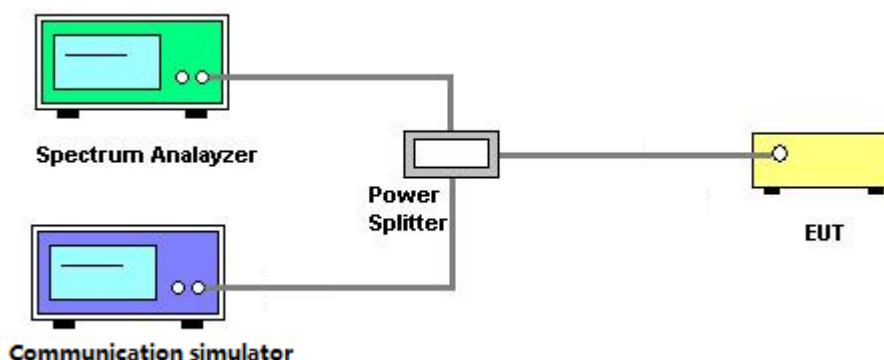

3.3.4 TEST DEVIATION

No deviation

3.3.5 TEST RESULTS

Please refer to the APPENDIX C.

3.4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

3.4.1 LIMIT


The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.


3.4.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.2.

1. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
2. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
3. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}.$
4. ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}.$
5. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.4.3 TEST SETUP LAYOUT

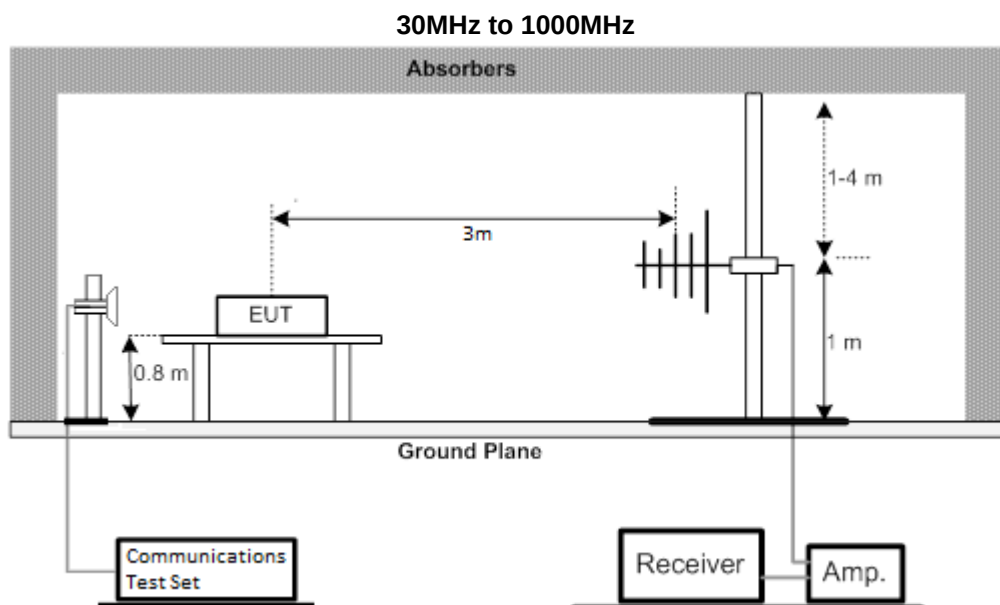

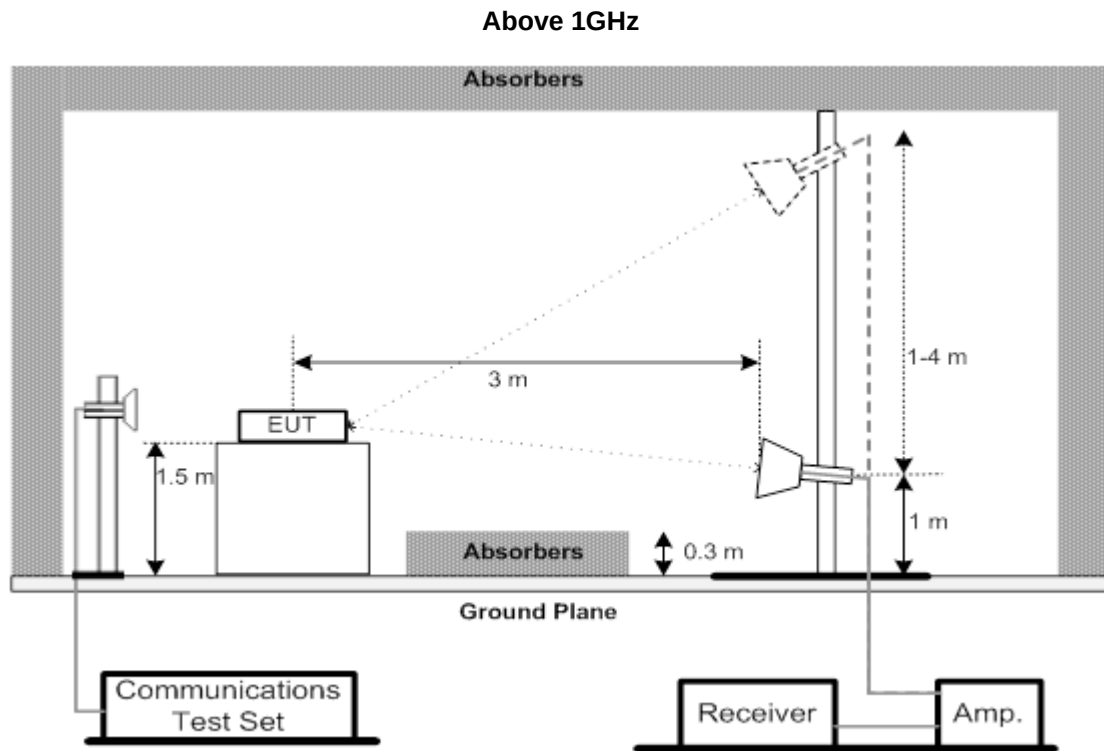

3.4.4 TEST DEVIATION

No deviation

3.4.5 TEST RESULTS (30MHZ TO 1000MHZ)

Please refer to the APPENDIX D.

3.4.6 TEST RESULTS (ABOVE 1000MHZ)

Please refer to the APPENDIX E.

3.5 BAND EDGE MEASUREMENT

3.5.1 LIMIT


A Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

3.5.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 6.

1. All measurements were done at low and high operational frequency range.
2. Record the max trace plot into the test report.

3.5.3 TEST SETUP LAYOUT

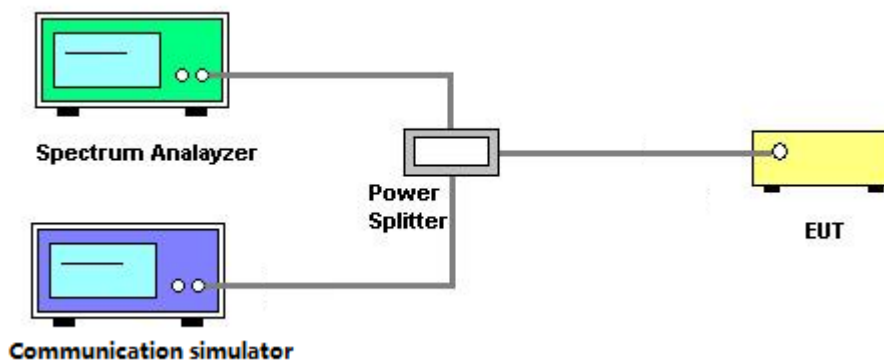

3.5.4 TEST DEVIATION

No deviation

3.5.5 TEST RESULTS

Please refer to the APPENDIX F.

3.6 PEAK TO AVERAGE RATIO MEASUREMENT

3.6.1 LIMIT


In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.6.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 5.7.

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.6.3 TEST SETUP LAYOUT

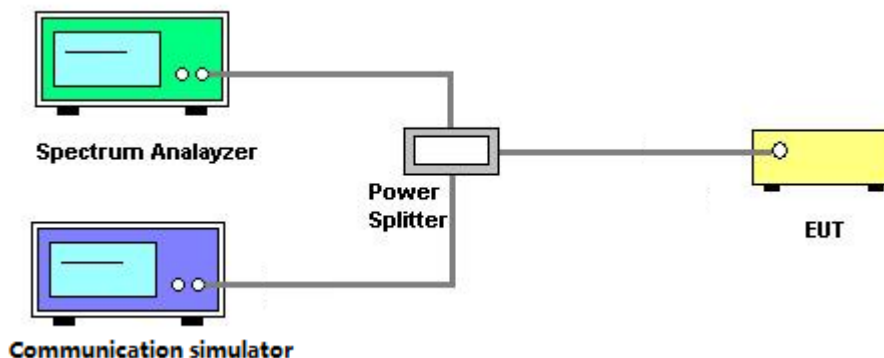

3.6.4 TEST DEVIATION

No deviation

3.6.5 TEST RESULTS

Please refer to the APPENDIX G.

3.7 FREQUENCY STABILITY MEASUREMENT

3.7.1 LIMIT


± 1.5 ppm is for base and fixed station. ± 2.5 ppm is for mobile station.

3.7.2 TEST PROCEDURES

The testing follows FCC KDB 971168 v03r01 Section 9.

1. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
2. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
3. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
4. The frequency error was recorded frequency error from the communication simulator.

3.7.3 TEST SETUP LAYOUT

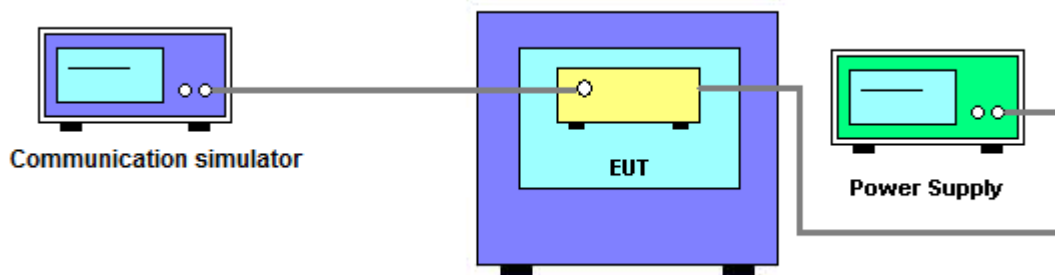

3.7.4 TEST DEVIATION

No deviation

3.7.5 TEST RESULTS

Please refer to the APPENDIX H.

4. LIST OF MEASUREMENT EQUIPMENTS

Radiated Emissions Measurement & ERP Power Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC02325B	980217	2019/4/12	2020/4/11
2	Preamplifier	EMCI	EMC012645B	980267	2019/4/12	2020/4/11
3	Test Cable	EMCI	EMC104-SM-SM-800	150207	2019/4/12	2020/4/11
4	Test Cable	EMCI	EMC104-SM-SM-3000	151205	2019/4/12	2020/4/11
5	Test Cable	EMCI	EMC-SM-SM-7000	180408	2019/4/12	2020/4/11
6	MXE EMI Receiver	Agilent	N9038A	MY55420127	2019/3/26	2020/3/25
7	Signal Analyzer	Agilent	N9010A	MY56480554	2019/6/6	2020/6/5
8	Horn Ant	SCHWARZBECK	BBHA 9120D	9120D-1342	2019/6/10	2020/6/9
9	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	000992	2019/5/29	2020/5/28
10	5dB Attenuator	EMCI	EMCI-N-6-05	AT-N0508	2019/5/29	2020/5/28
11	8960 Series 10 Wireless Com Test Set	Agilent	E5515C	GB47390193	2019/7/5	2020/7/4
12	Radio Communication Analyzer (LTE)	Anritsu	MT8820C	6201525878	2019/6/5	2020/6/4

Frequency Stability Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP40	100129	2019/5/23	2020/5/22

Others Conducted Measurement						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP40	100129	2019/5/23	2020/5/22

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

5. EUT TEST PHOTOS

Please refer to document Appendix No.: TP-1911T165-FCCP-1 (APPENDIX-TEST PHOTOS).

6. EUT PHOTOS

Please refer to document Appendix No.: EP-1911T165-1 (APPENDIX-EUT PHOTOS).

APPENDIX A - RADIATED POWER

Output Power (dBm):

Modulation	Band	WCDMA Band V		
	Tx Channel	4132CH	4182CH	4233CH
	Frequency	826.4MHz	836.4MHz	846.6MHz
QPSK	RMC 12.2K	23.7	23.7	23.6
	HSDPA Subtest-1	23.7	23.7	23.6
	HSDPA Subtest-2	23.3	23.4	23.2
	HSDPA Subtest-3	22.9	22.8	22.8
	HSDPA Subtest-4	22.9	22.9	22.7
	HSUPA Subtest-1	23.7	23.7	23.6
	HSUPA Subtest-2	21.9	21.9	21.8
	HSUPA Subtest-3	22.9	22.8	22.7
	HSUPA Subtest-4	21.8	21.9	21.7
	HSUPA Subtest-5	23.7	23.7	23.6

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20407CH	20525CH	20643CH
				824.7MHz	836.5MHz	848.2MHz
5 / 1.4M	QPSK	1	0	24.6	24.7	24.7
		1	2	24.6	24.7	24.7
		1	5	24.5	24.6	24.6
		3	0	24.6	24.7	24.7
		3	1	24.6	24.7	24.7
		3	2	24.5	24.6	24.6
		6	0	23.6	23.8	23.7
	16QAM	1	0	23.8	23.8	23.9
		1	2	23.8	23.8	23.8
		1	5	23.6	23.8	23.8
		3	0	23.8	23.8	23.9
		3	1	23.8	23.8	23.8
		3	2	23.6	23.8	23.8
		6	0	22.6	20.5	20.6


LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20415CH	20525CH	20635CH
				825.5MHz	836.5MHz	847.4MHz
5 / 3M	QPSK	1	0	24.6	24.7	24.7
		1	7	24.6	24.7	24.7
		1	14	24.5	24.6	24.6
		8	0	23.7	23.8	23.9
		8	4	23.7	23.9	23.9
		8	7	23.7	23.8	23.7
		15	0	23.6	23.8	23.7
	16QAM	1	0	23.8	23.8	23.9
		1	7	23.8	23.8	23.8
		1	14	23.6	23.8	23.8
		8	0	22.8	22.8	22.8
		8	4	22.8	22.8	22.8
		8	7	22.6	22.8	22.7
		15	0	22.6	22.7	22.8

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20425CH	20525CH	20625CH
				826.5MHz	836.5MHz	846.5MHz
5 / 5M	QPSK	1	0	24.7	24.8	24.8
		1	12	24.7	24.8	24.8
		1	24	24.6	24.7	24.7
		12	0	23.8	23.9	24.0
		12	6	23.8	24.0	24.0
		12	11	23.8	23.9	23.8
		25	0	23.7	23.9	23.8
	16QAM	1	0	23.9	23.9	24.0
		1	12	23.9	23.9	23.9
		1	24	23.7	23.9	23.9
		12	0	22.9	22.9	22.9
		12	6	22.9	22.9	22.9
		12	11	22.7	22.9	22.8
		25	0	22.7	22.8	22.9

LTE Band / BW	Modulation	RB Size	RB Offset	Low CH	Mid CH	High CH
				20450CH	20525CH	20600CH
				829.0MHz	836.5MHz	844.0MHz
5 / 10M	QPSK	1	0	24.7	24.8	24.8
		1	24	24.7	24.8	24.8
		1	49	24.6	24.7	24.7
		25	0	23.8	23.9	24.0
		25	12	23.8	24.0	24.0
		25	24	23.8	23.9	23.8
		50	0	23.7	23.9	23.8
	16QAM	1	0	23.9	23.9	24.0
		1	24	23.9	23.9	23.9
		1	49	23.7	23.9	23.9
		25	0	22.9	22.9	22.9
		25	12	22.9	22.9	22.9
		25	24	22.7	22.9	22.8
		50	0	22.7	22.8	22.9

ERP (dBm):

Test Mode	WCDMA Band V_Link CH4357_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

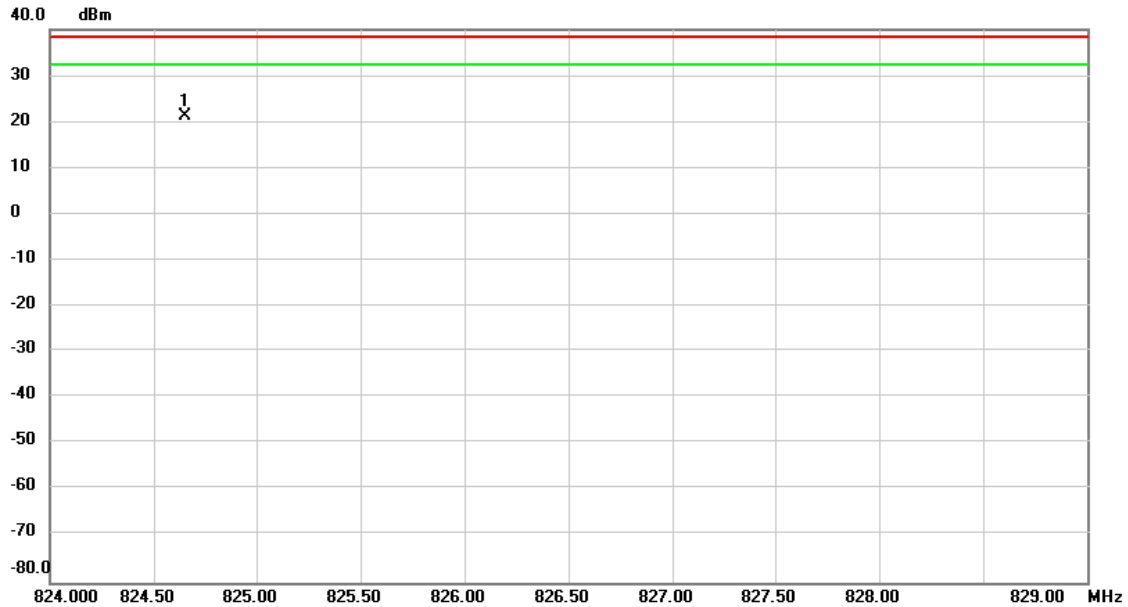


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6500	4.03	17.29	21.32	38.45	-17.13	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4357_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

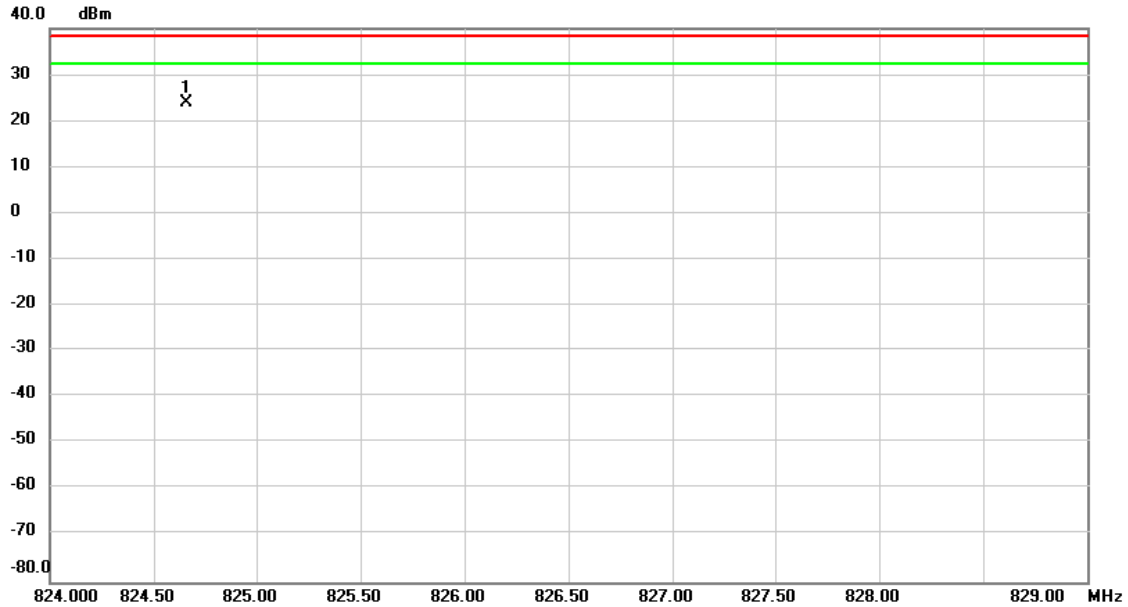


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6600	6.59	17.29	23.88	38.45	-14.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4458_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

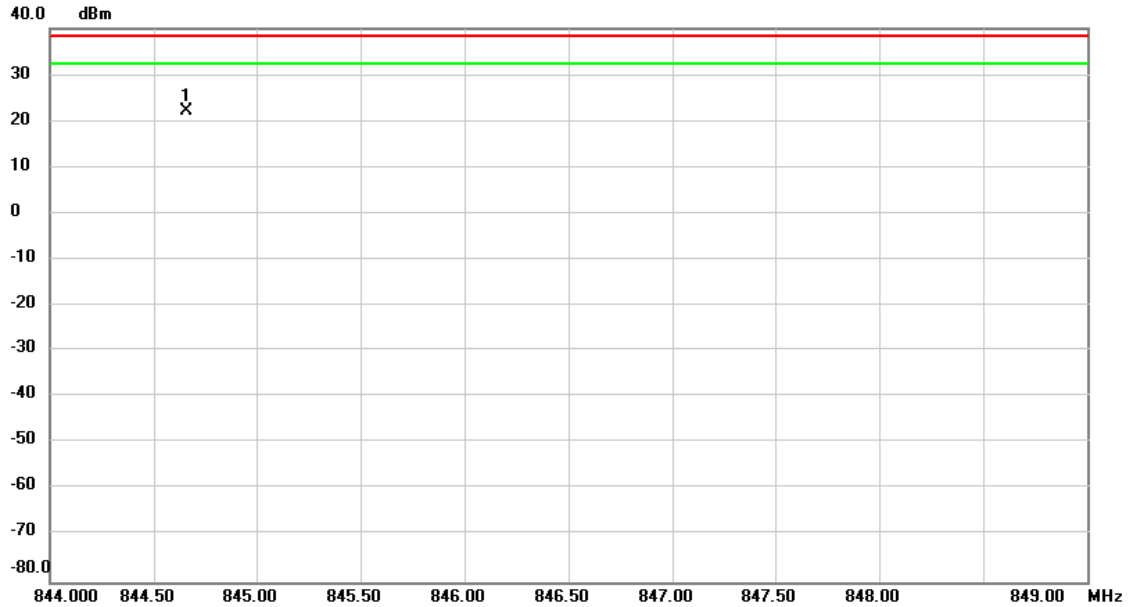


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	844.6550	4.11	18.18	22.29	38.45	-16.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4458_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

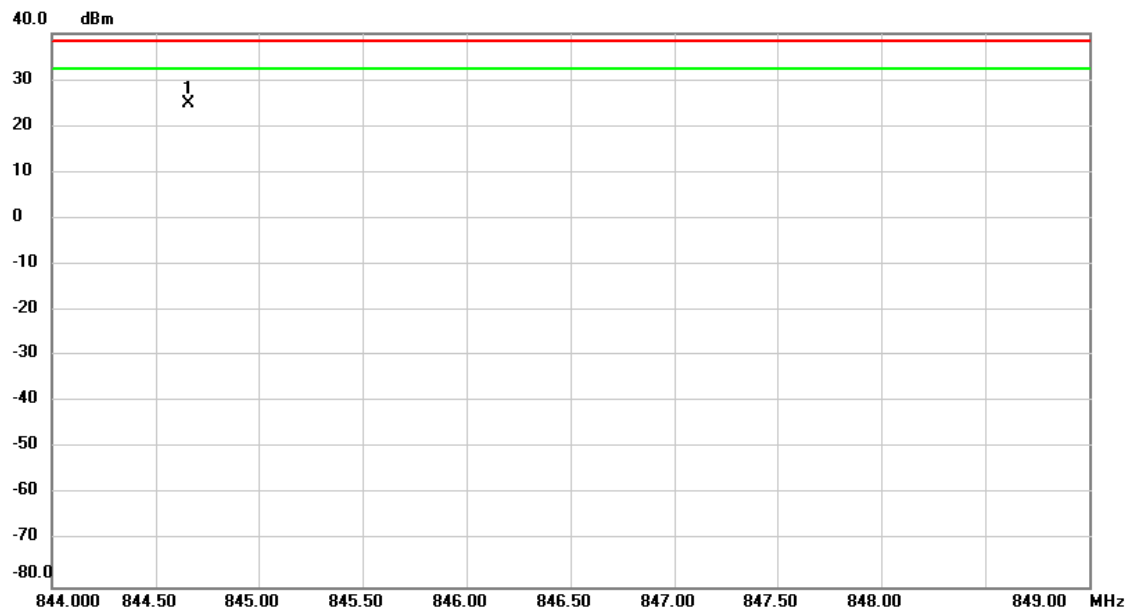


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	844.6600	6.62	18.18	24.80	38.45	-13.65	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4408_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

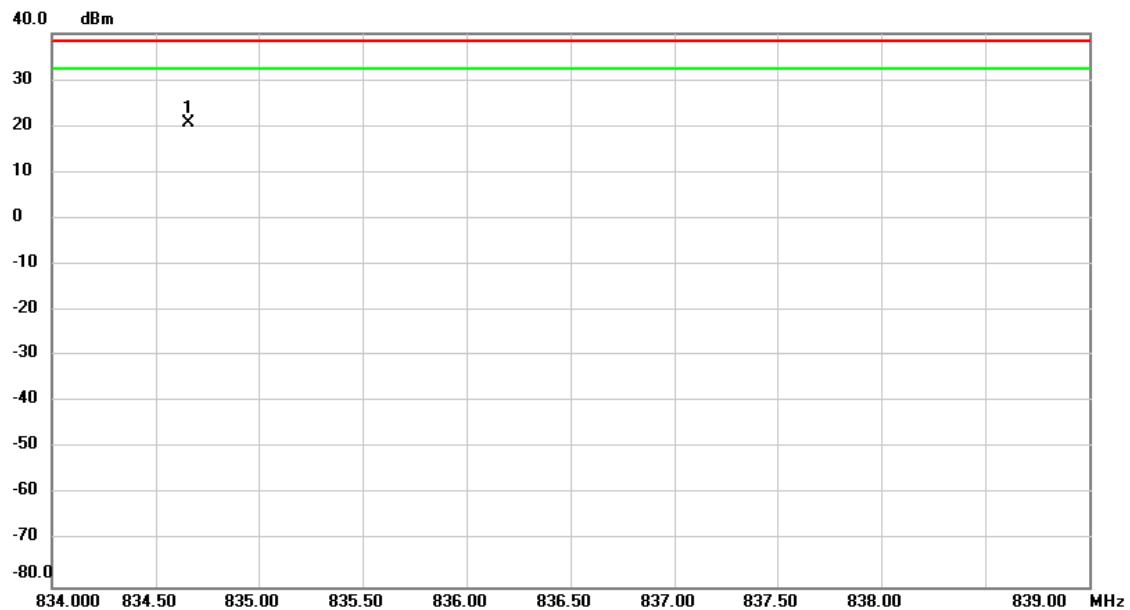


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	834.6600	2.77	17.74	20.51	38.45	-17.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4408_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

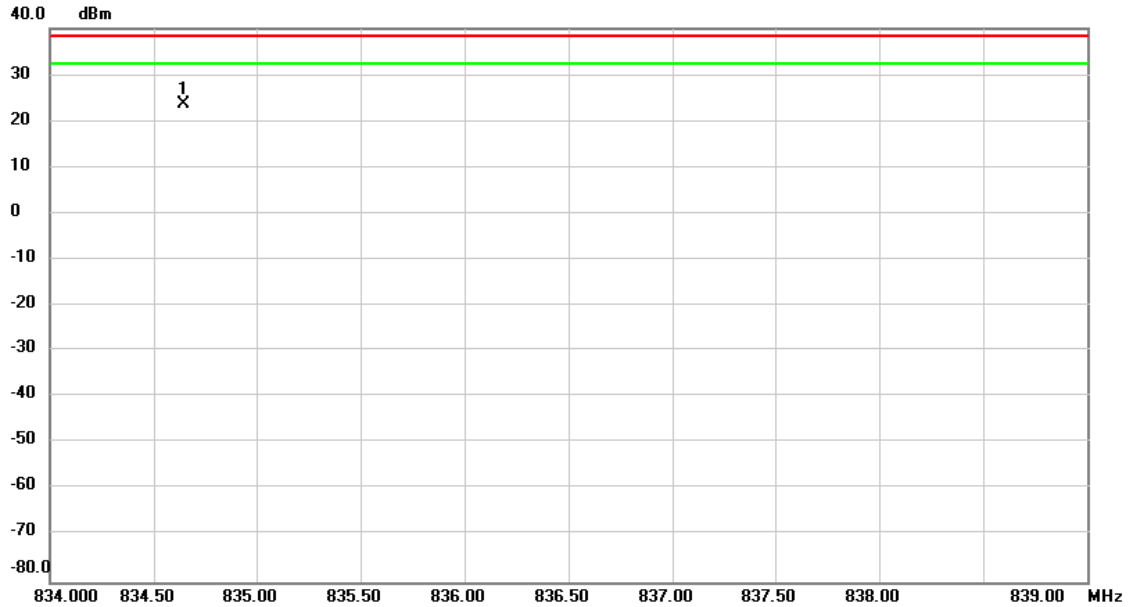


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	834.6450	5.83	17.74	23.57	38.45	-14.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20450_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

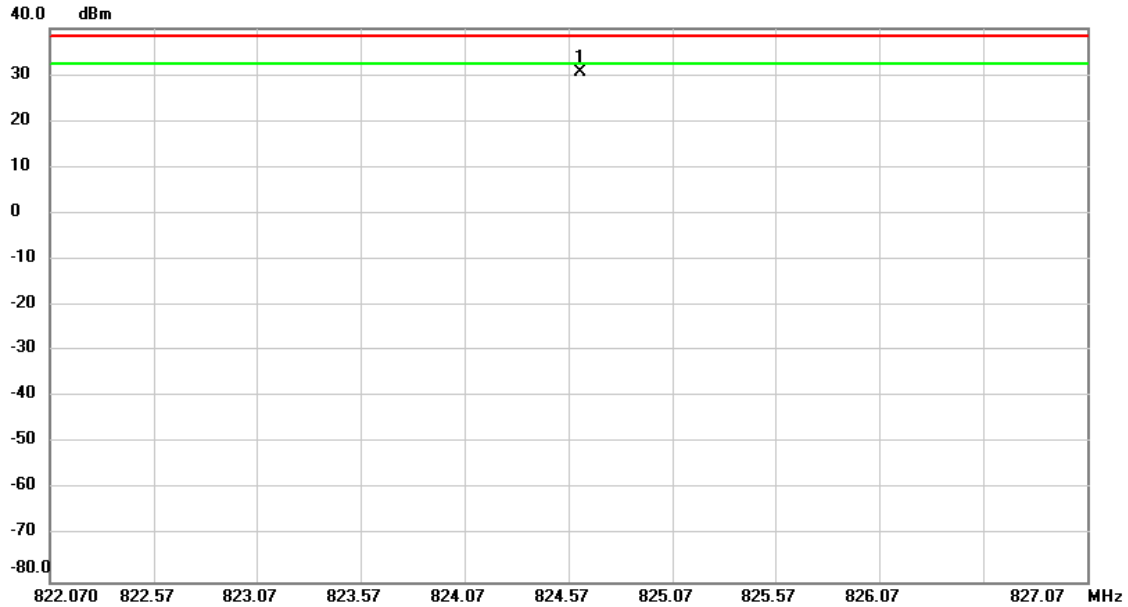


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6300	13.35	17.29	30.64	38.45	-7.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20450_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

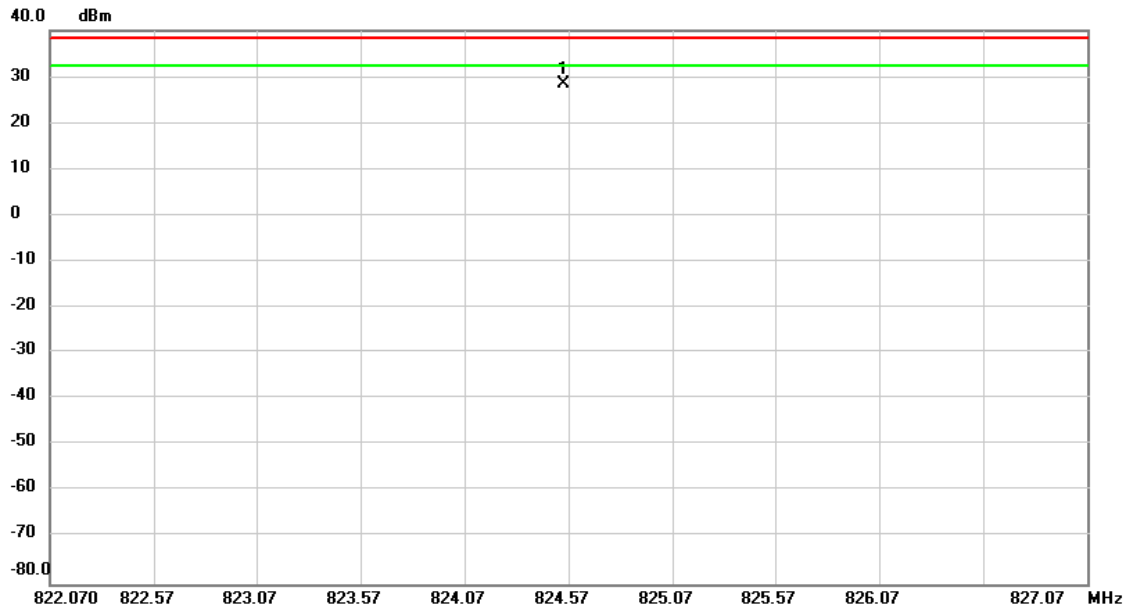


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.5450	11.29	17.28	28.57	38.45	-9.88	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20525_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

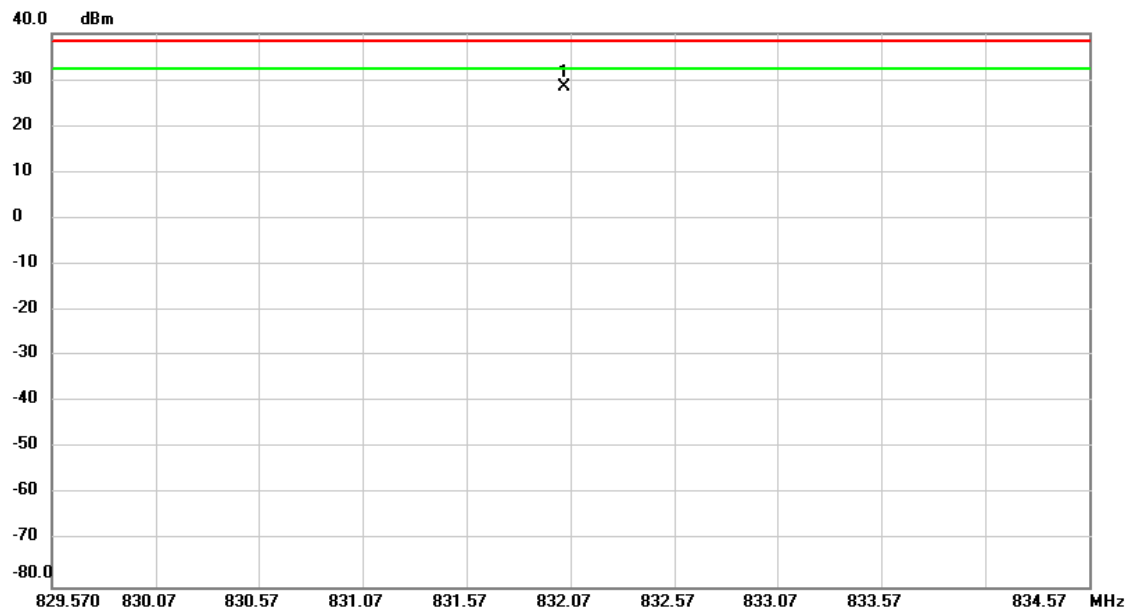


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	832.0400	10.75	17.62	28.37	38.45	-10.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20525_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

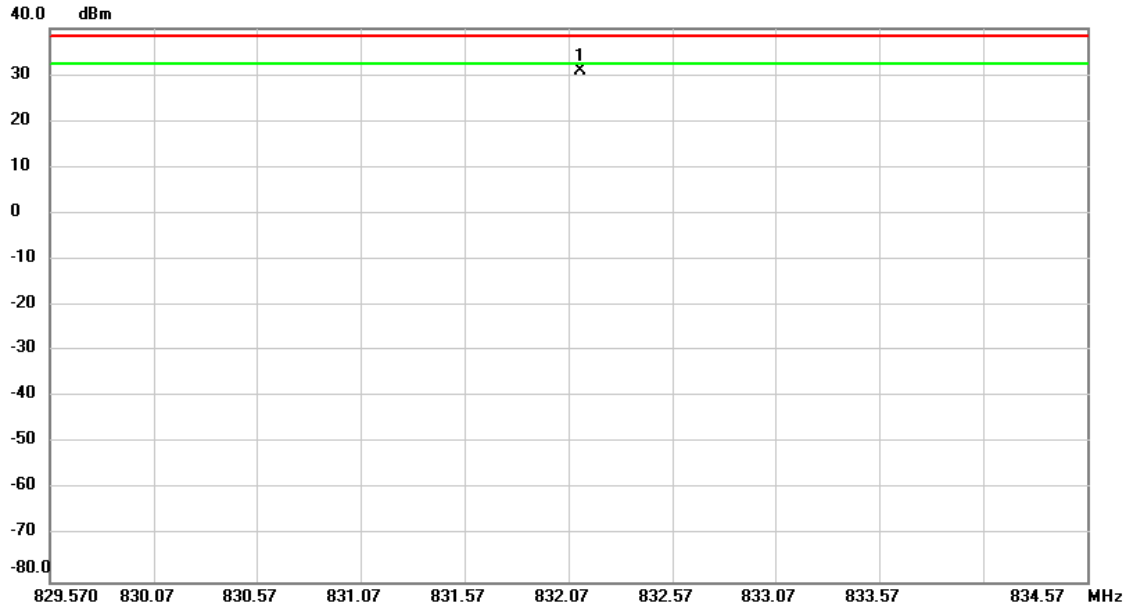


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	832.1300	13.33	17.62	30.95	38.45	-7.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20600_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

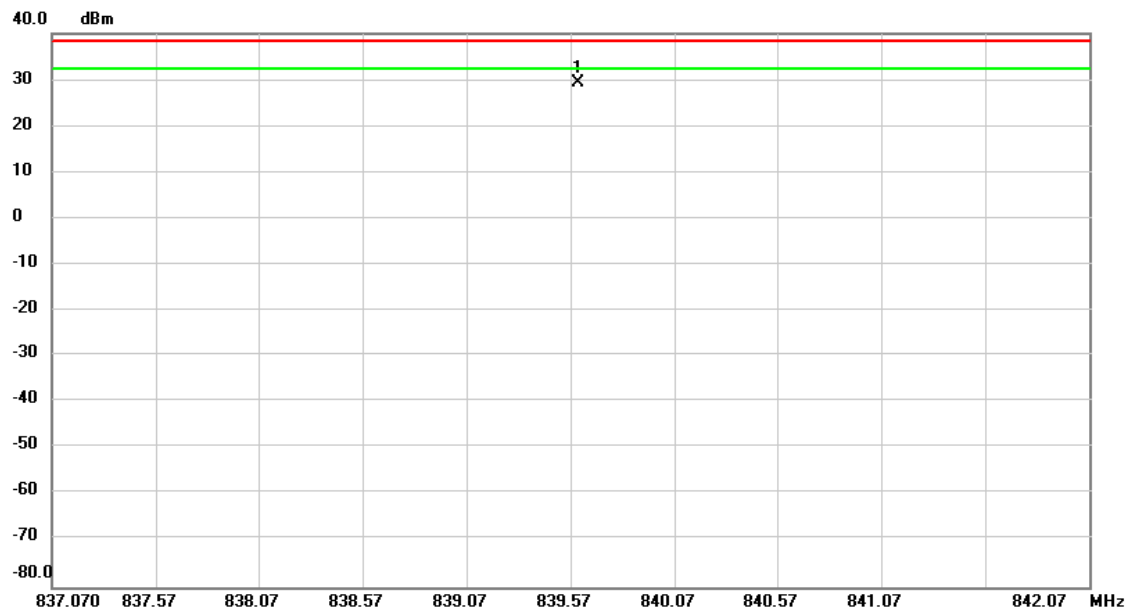


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	839.6100	11.27	17.96	29.23	38.45	-9.22	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20600_ Internal Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

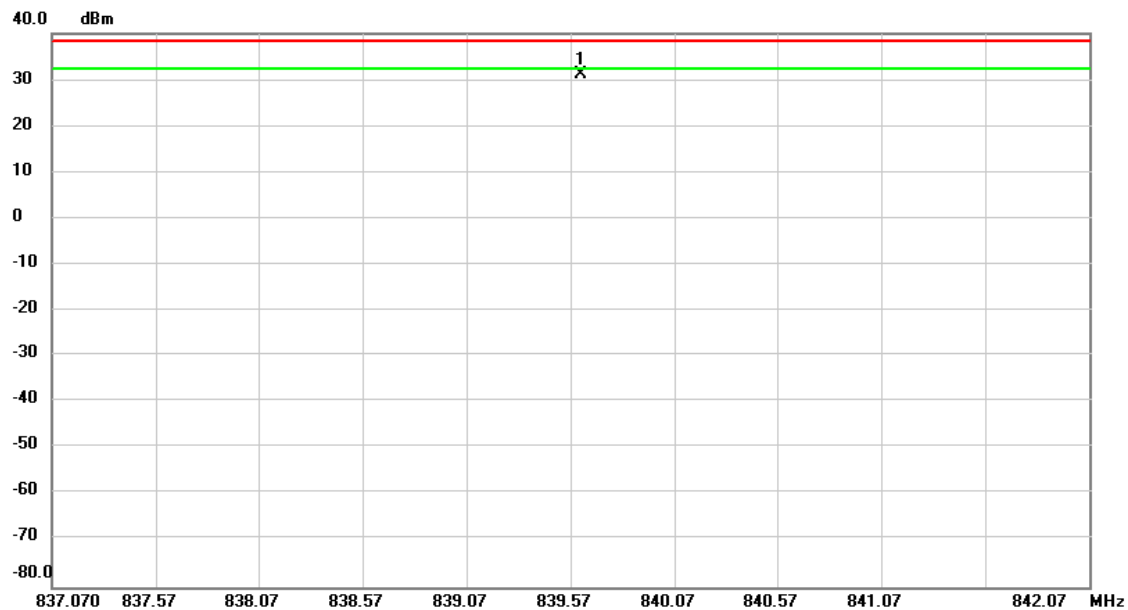


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	839.6200	13.19	17.96	31.15	38.45	-7.30	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4357_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

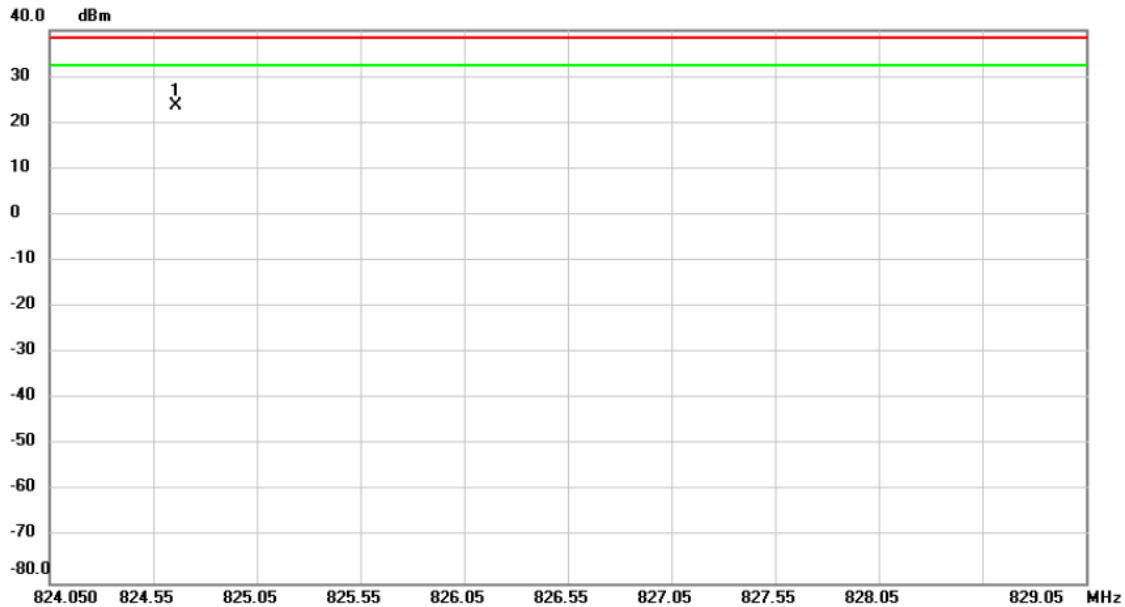


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6600	6.33	17.29	23.62	38.45	-14.83	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4357_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

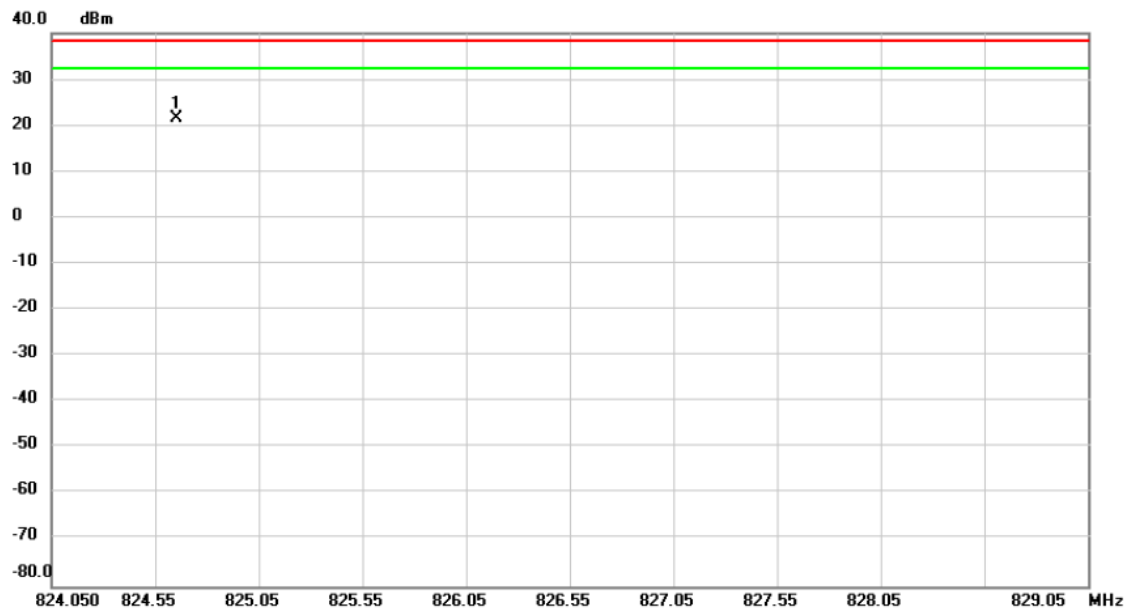


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6500	4.20	17.29	21.49	38.45	-16.96	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4458_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

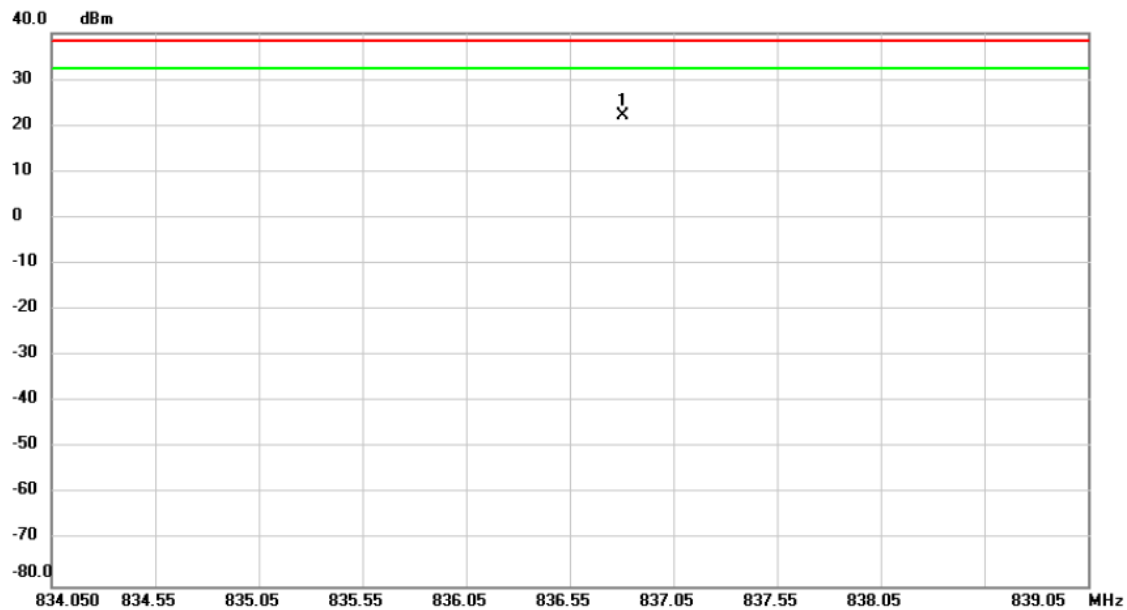


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	836.8100	4.20	17.83	22.03	38.45	-16.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4458_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

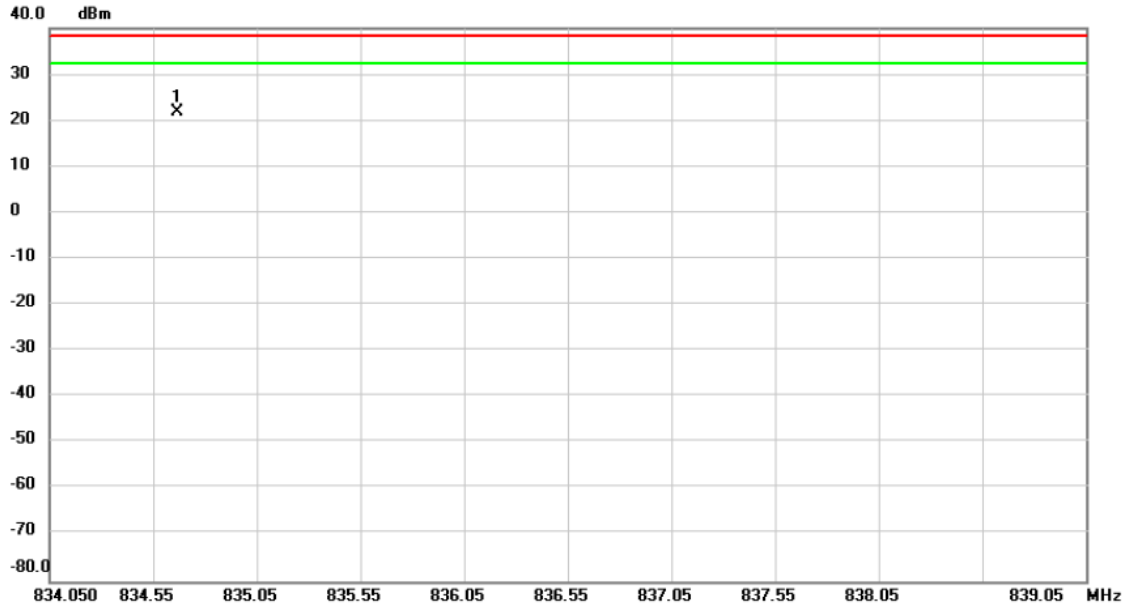


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	834.6650	4.01	17.74	21.75	38.45	-16.70	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4408_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

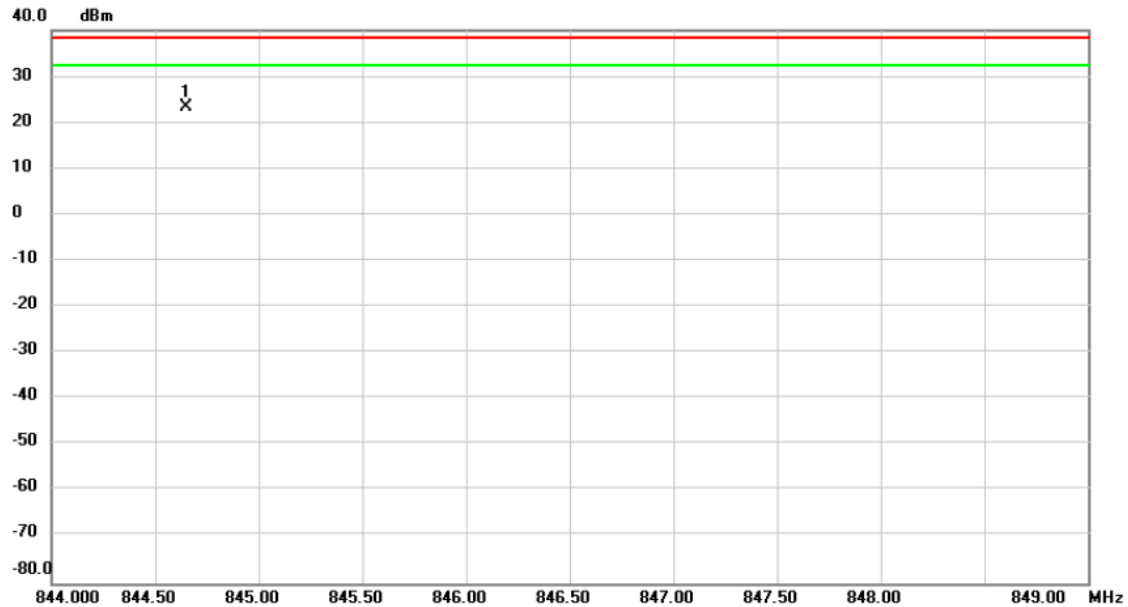


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	844.6500	5.04	18.18	23.22	38.45	-15.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_Link CH4408_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

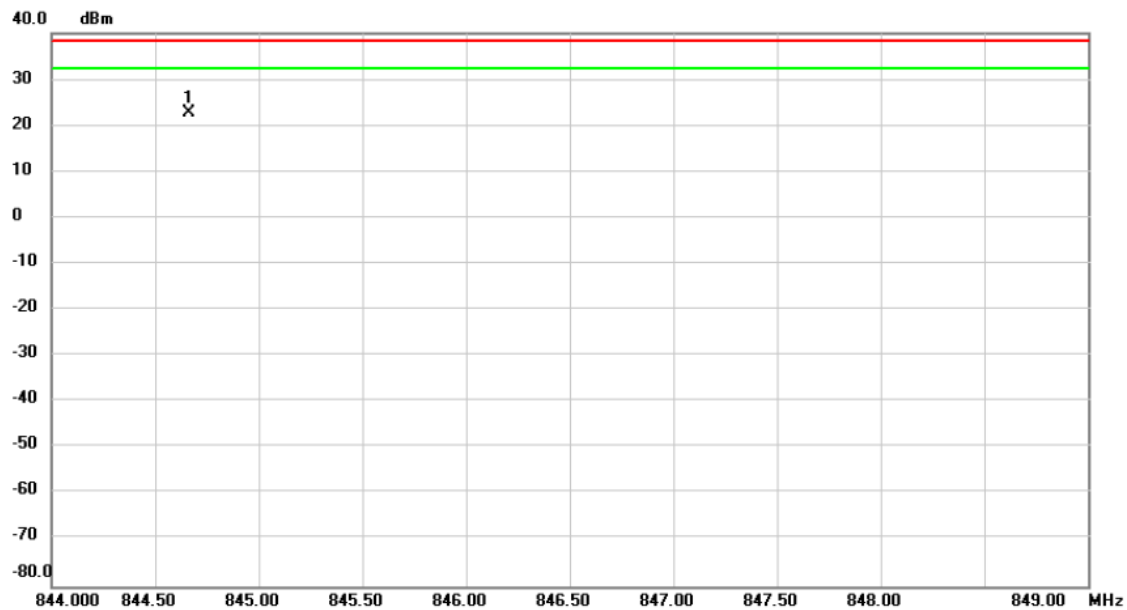


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	844.6650	4.45	18.18	22.63	38.45	-15.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20450_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

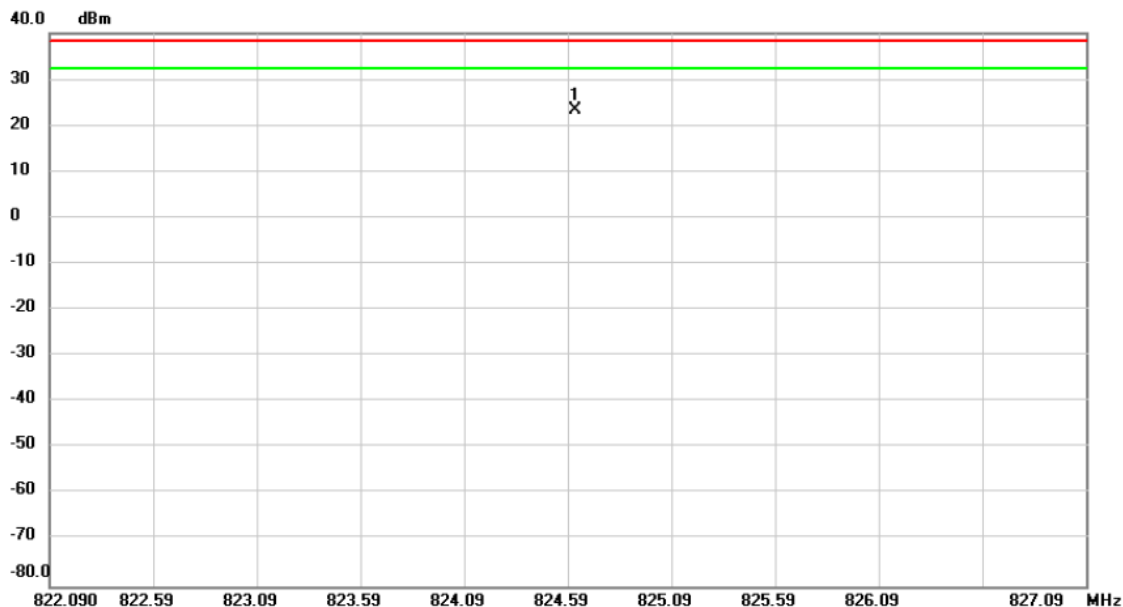


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6250	12.87	10.47	23.34	38.45	-15.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20450_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

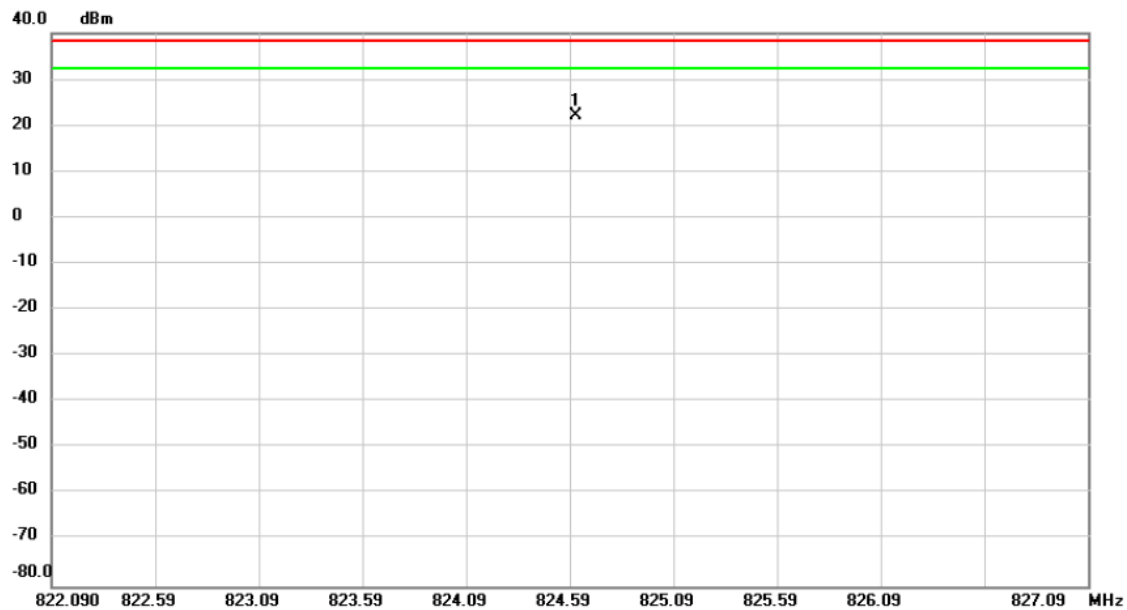


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	824.6200	11.76	10.47	22.23	38.45	-16.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20525_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

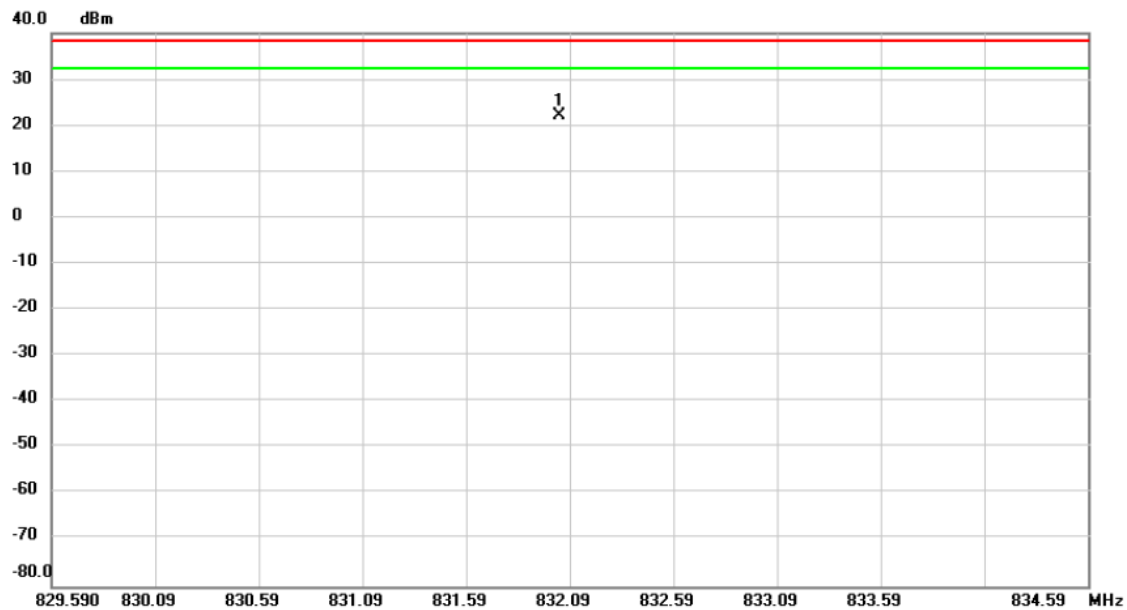


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	832.0400	11.58	10.56	22.14	38.45	-16.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20525_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

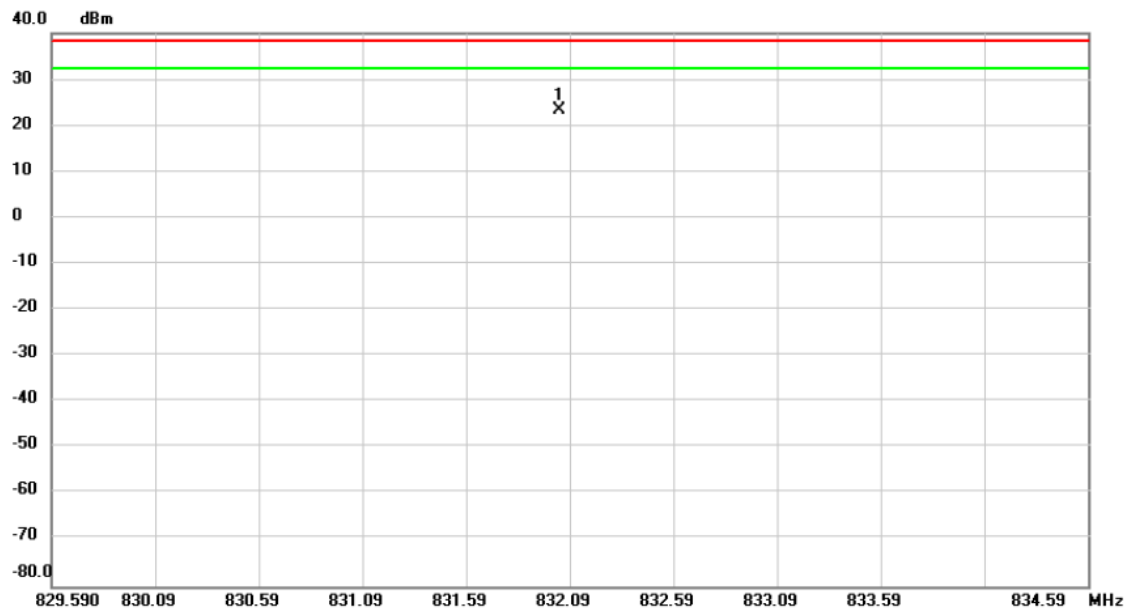


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	832.0400	12.73	10.56	23.29	38.45	-15.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20600_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Vertical

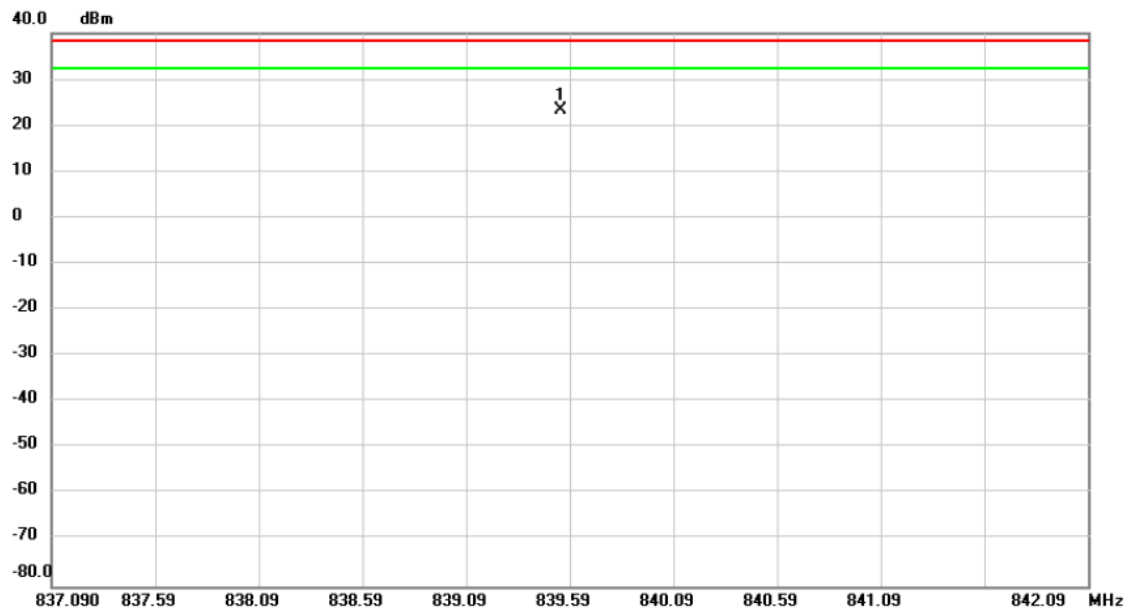


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	839.5450	12.80	10.66	23.46	38.45	-14.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_Link CH20600_External Antenna	Tested Date	2019/12/22~25
Test Voltage	DC 32V	Polarization	Horizontal

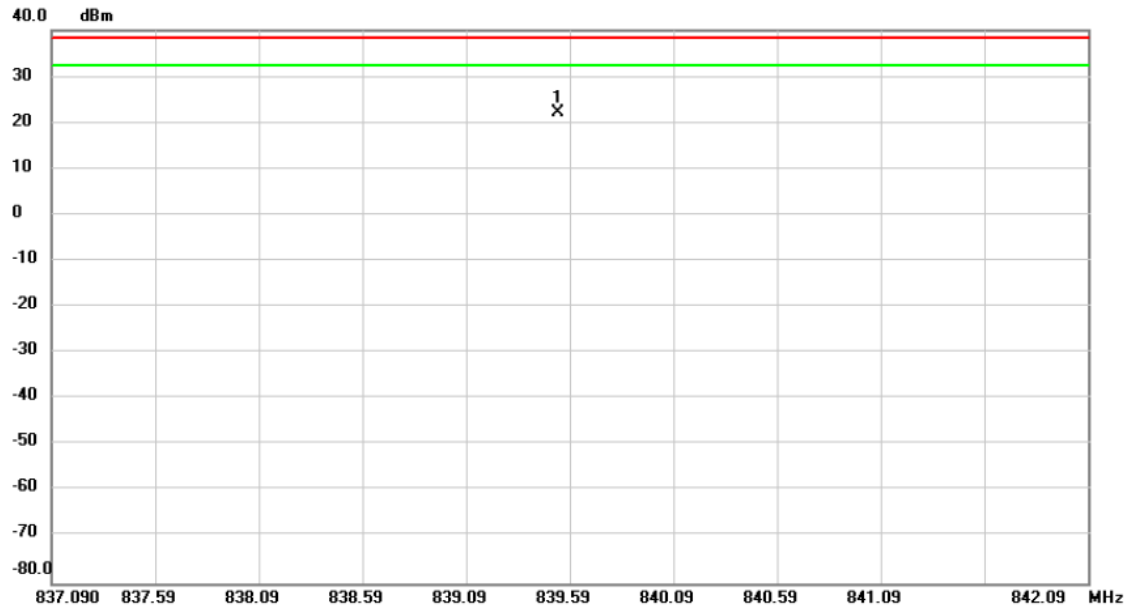

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	839.5350	11.64	10.66	22.30	38.45	-16.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - OCCUPIED BANDWIDTH

WCDMA Band V_WCDMA

QPSK

Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
4132	826.4	4.0767	4132	826.4	4.665
4182	836.4	4.0738	4182	836.4	4.642
4233	846.6	4.0873	4233	846.6	4.690

Spectrum Plot




LTE Band 5_1.4M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20407	824.7	1.0980	20407	824.7	1.338
20525	836.5	1.0991	20525	836.5	1.330
20643	848.3	1.0987	20643	848.3	1.331
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20407	824.7	1.1008	20407	824.7	1.340
20525	836.5	1.1000	20525	836.5	1.350
20643	848.3	1.1009	20643	848.3	1.352

Spectrum Plot

QPSK-20407




QPSK-20525

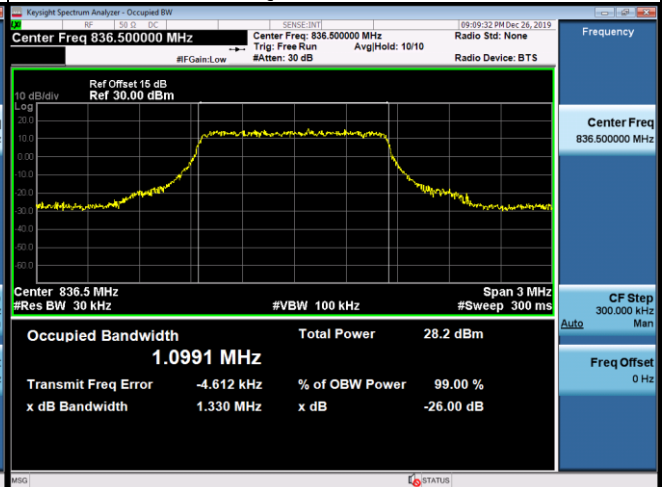

QPSK-20643




16QAM-20407

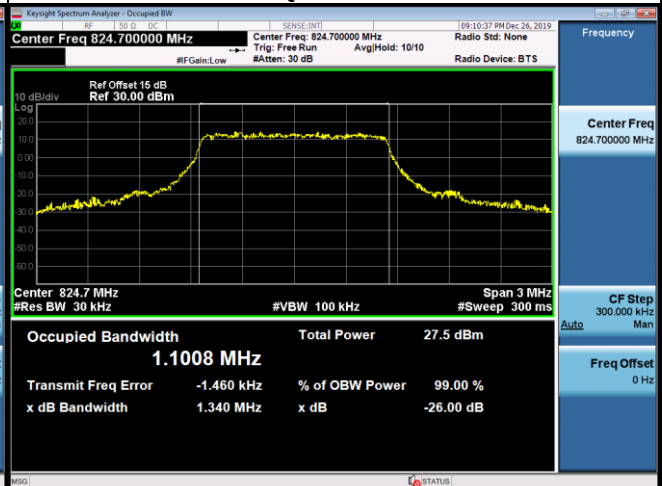

16QAM-20525



16QAM-20643

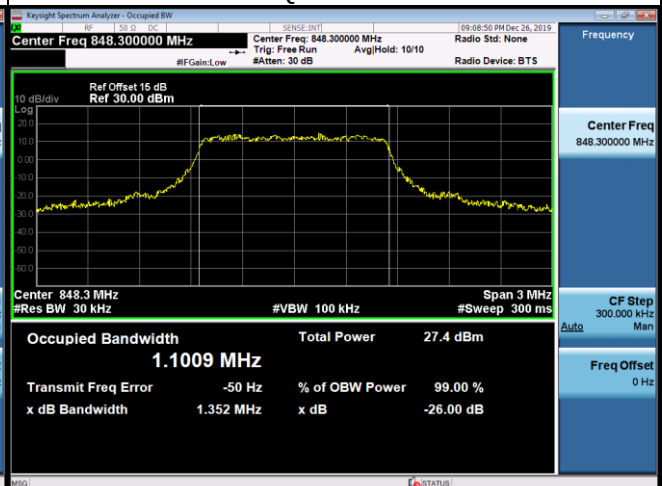


LTE Band 5_3M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20415	825.5	2.6860	20415	825.5	2.936
20525	836.5	2.6858	20525	836.5	2.944
20635	847.5	2.6860	20635	847.5	2.958
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20415	825.5	2.6840	20415	825.5	2.972
20525	836.5	2.6890	20525	836.5	2.986
20635	847.5	2.6862	20635	847.5	2.988

Spectrum Plot


QPSK-20415




QPSK-20525

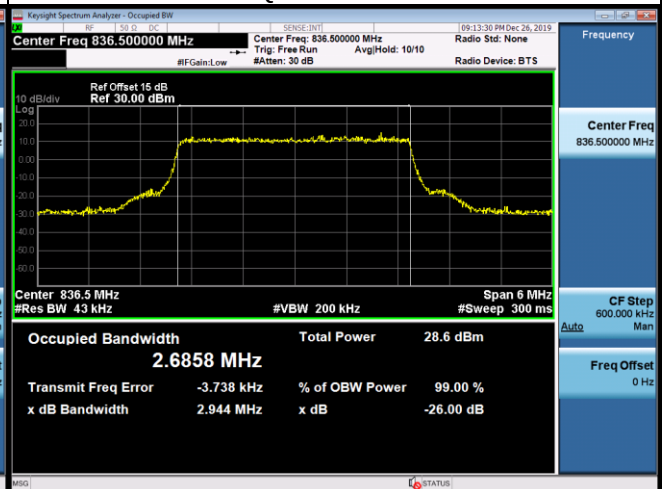

QPSK-20635

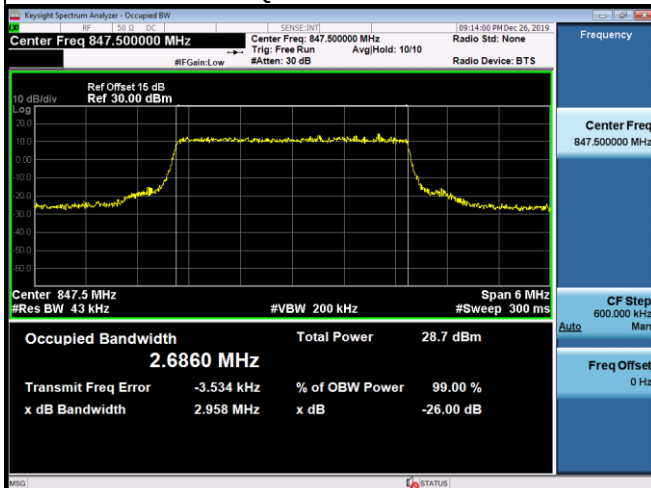


16QAM-20415

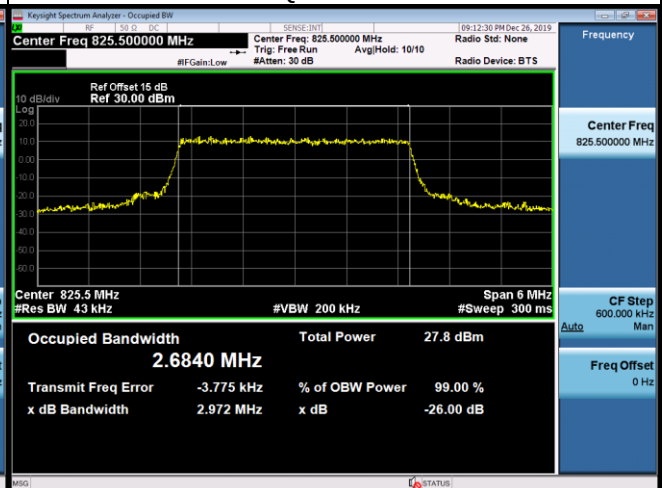

16QAM-20525




16QAM-20635

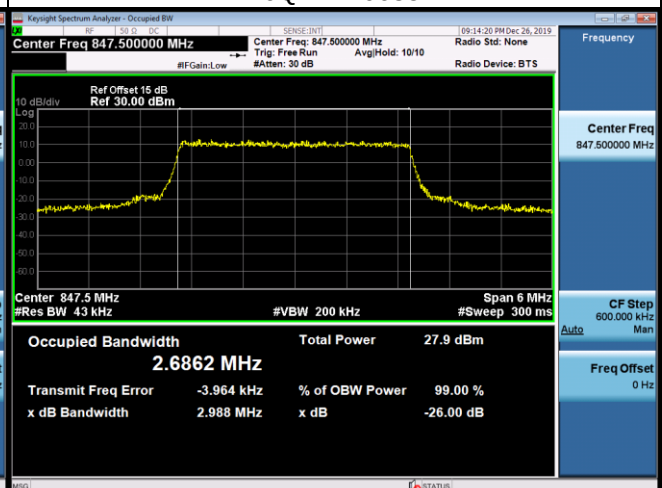


LTE Band 5_5M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20425	826.5	4.4917	20425	826.5	5.093
20525	836.5	4.4921	20525	836.5	5.078
20625	846.5	4.4924	20625	846.5	5.096
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20425	826.5	4.4903	20425	826.5	5.079
20525	836.5	4.4896	20525	836.5	5.107
20625	846.5	4.4889	20625	846.5	5.083

Spectrum Plot


QPSK-20425

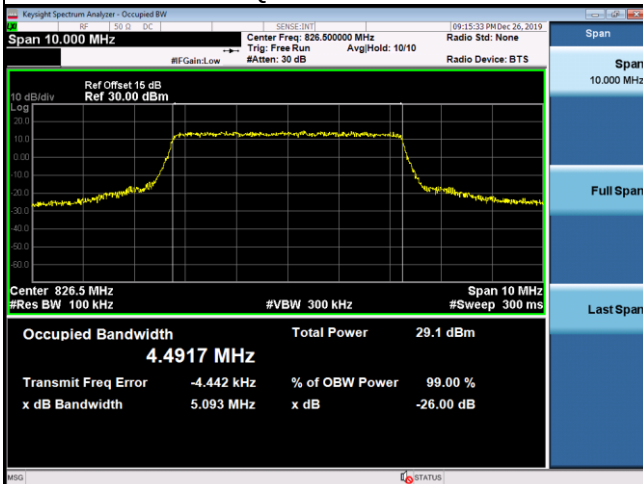

QPSK-20525

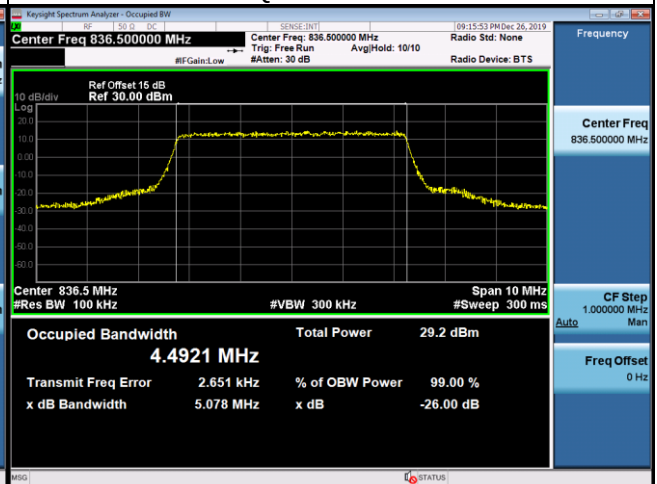


QPSK-20625

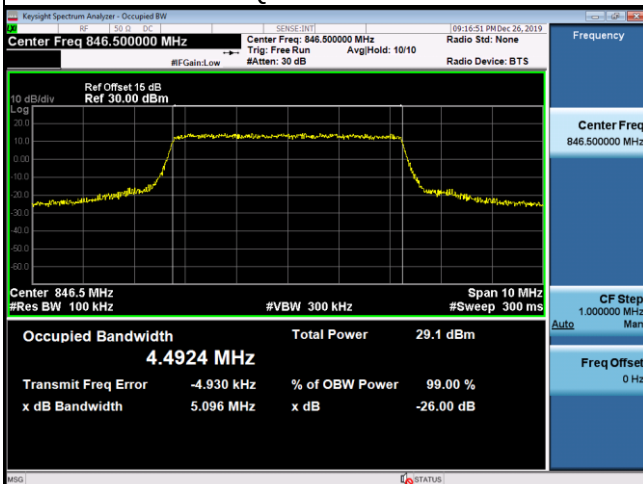


16QAM-20425



16QAM-20525

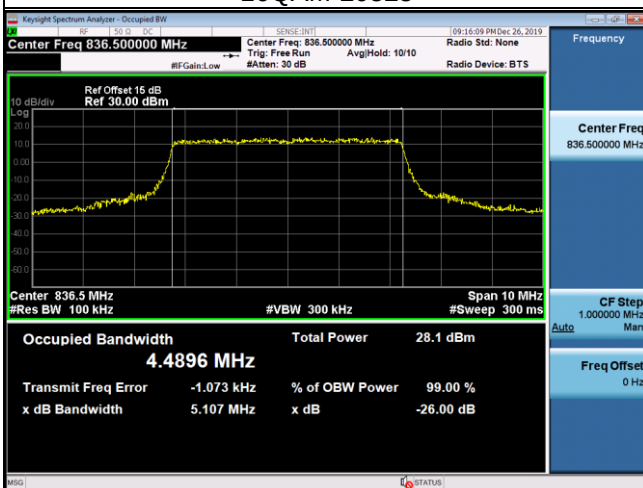

16QAM-20625

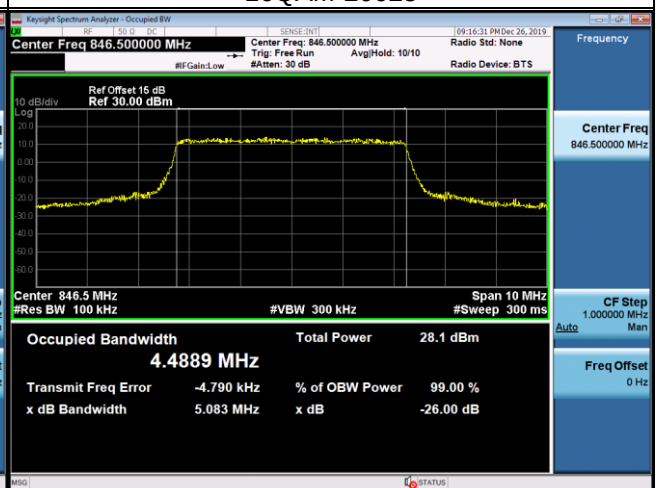

LTE Band 5_10M					
QPSK					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20450	829.0	9.0072	20450	829.0	10.38
20525	836.5	8.9949	20525	836.5	10.40
20600	844.0	9.0018	20600	844.0	10.32
16QAM					
Channel	Frequency (MHz)	99% Occupied Bandwidth (MHz)	Channel	Frequency (MHz)	26dB Bandwidth (MHz)
20450	829.0	8.9780	20450	829.0	10.21
20525	836.5	8.9762	20525	836.5	10.13
20600	844.0	8.9668	20600	844.0	10.23

Spectrum Plot

QPSK-20450



QPSK-20525



QPSK-20600



16QAM-20450




16QAM-20525



16QAM-20600



APPENDIX C - CONDUCTED SPURIOUS EMISSIONS

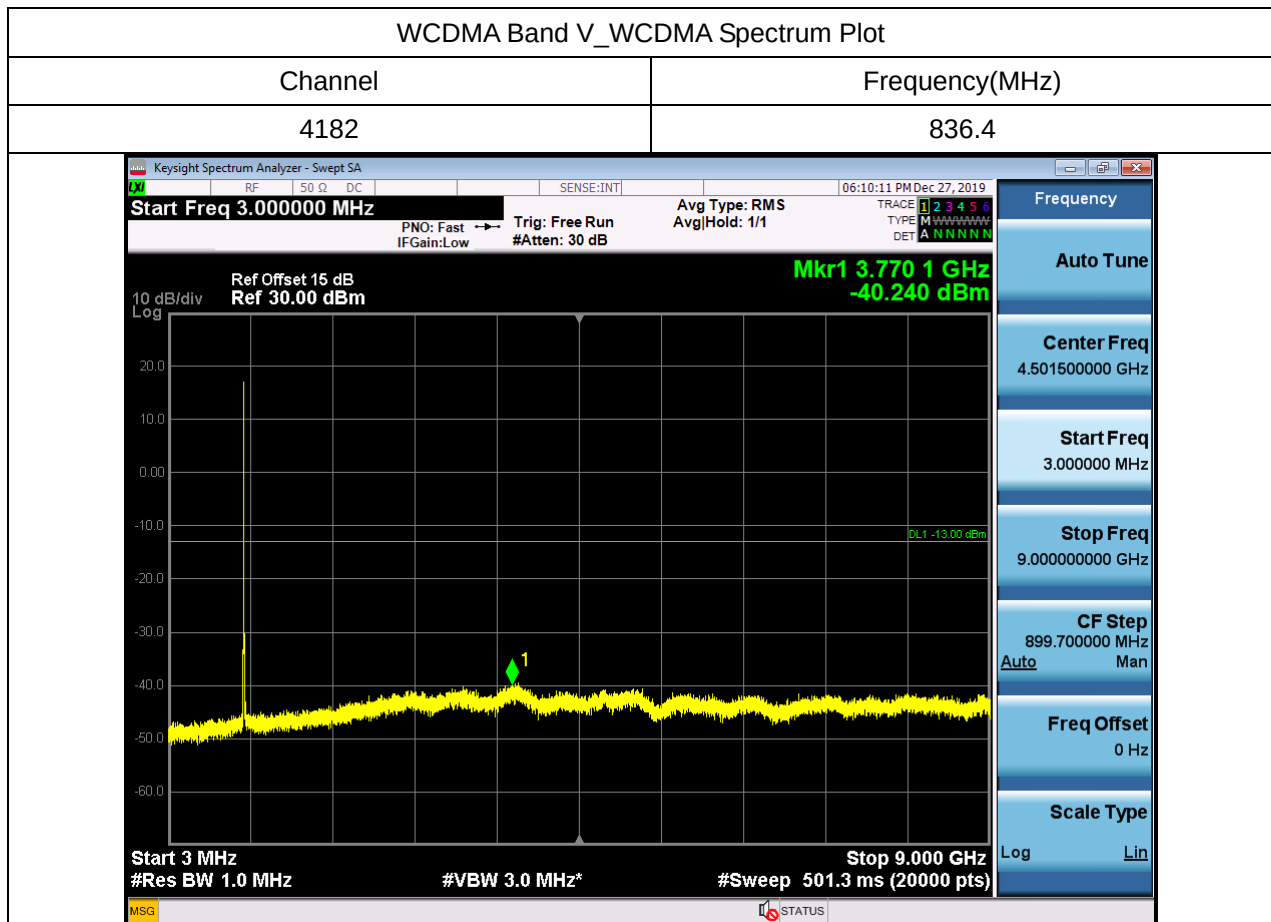


LTE Band 5_1.4M Spectrum Plot

Channel

Frequency(MHz)

20525

836.5

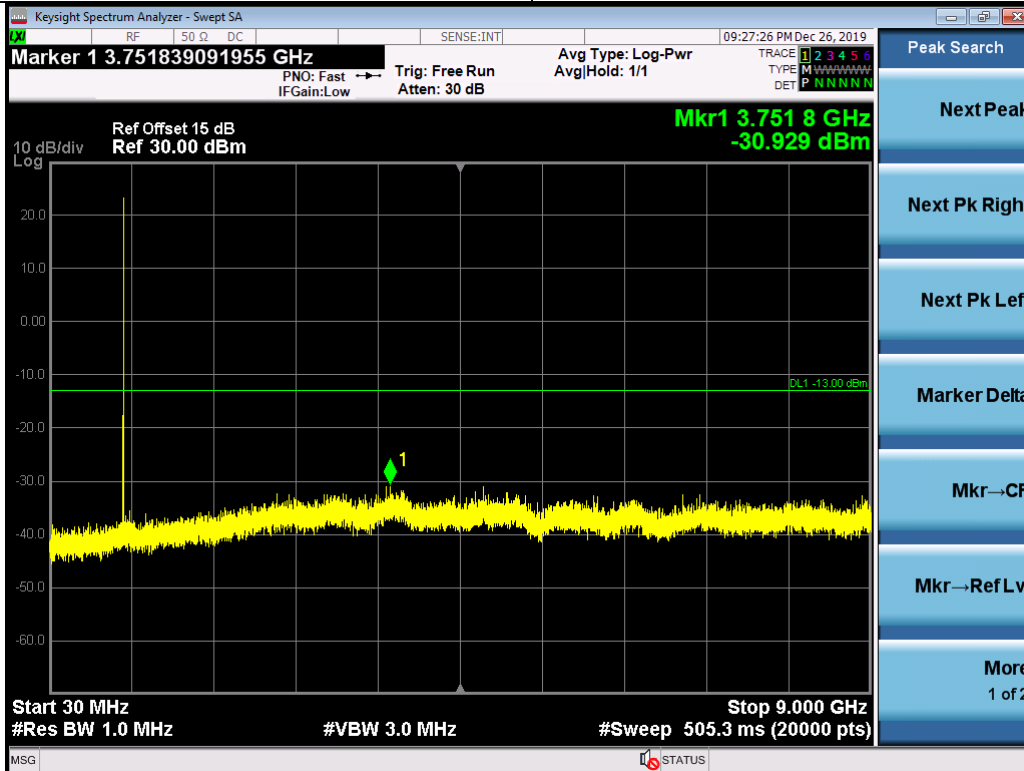


LTE Band 5_3M Spectrum Plot

Channel

Frequency(MHz)

20525

836.5

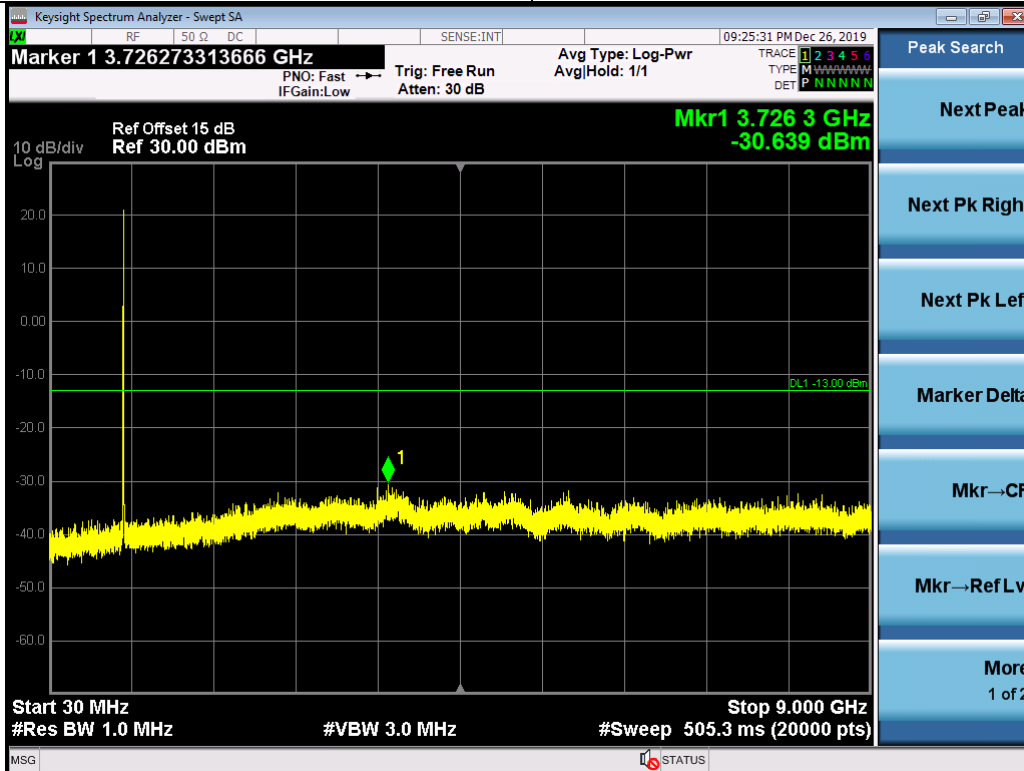


LTE Band 5_5M Spectrum Plot

Channel

Frequency(MHz)

20525

836.5

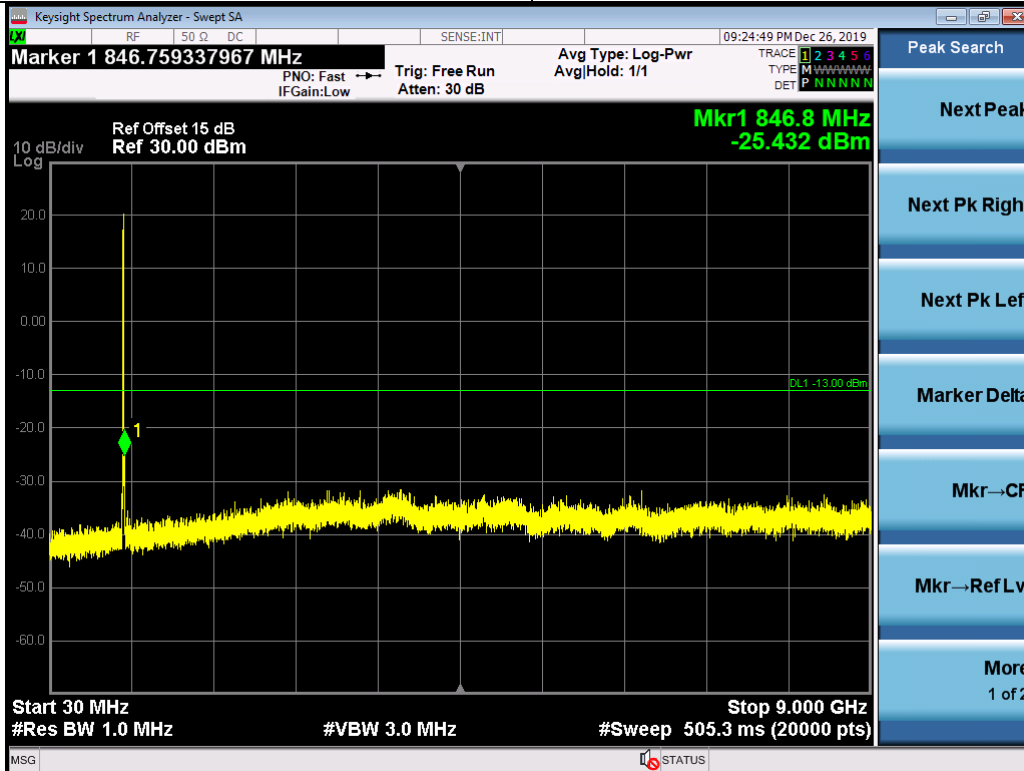


LTE Band 5_10M Spectrum Plot

Channel

Frequency(MHz)


20525

836.5

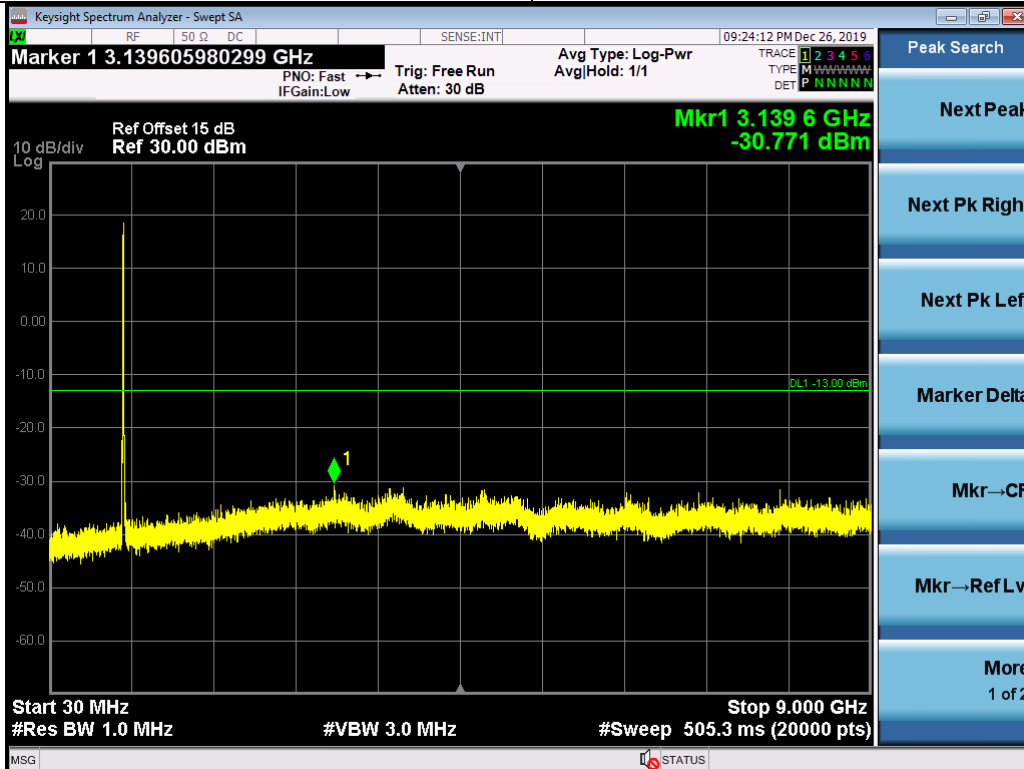

APPENDIX D - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1000MHZ)

Test Mode	WCDMA Band V_TX CH4408_ Internal Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Vertical

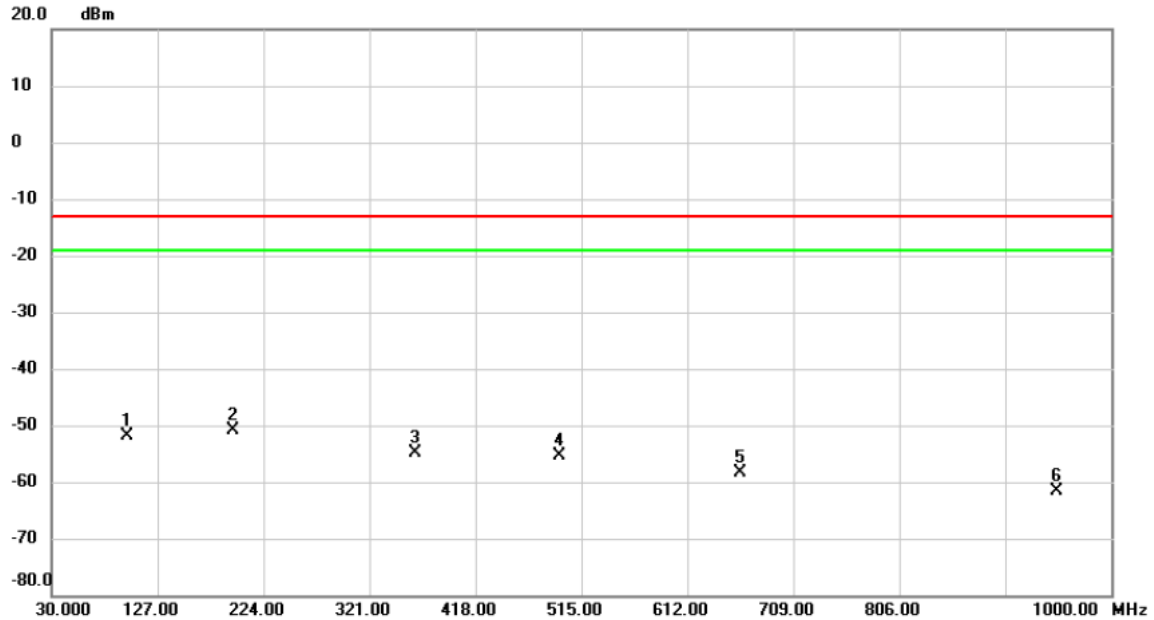


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		98.9390	-52.43	0.54	-51.89	-13.00	-38.89	peak	
2	*	196.0360	-53.99	3.14	-50.85	-13.00	-37.85	peak	
3		363.0430	-61.20	6.32	-54.88	-13.00	-41.88	peak	
4		495.0951	-62.32	6.89	-55.43	-13.00	-42.43	peak	
5		660.1602	-73.12	14.69	-58.43	-13.00	-45.43	peak	
6		950.4805	-76.16	14.61	-61.55	-13.00	-48.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_ Internal Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Horizontal

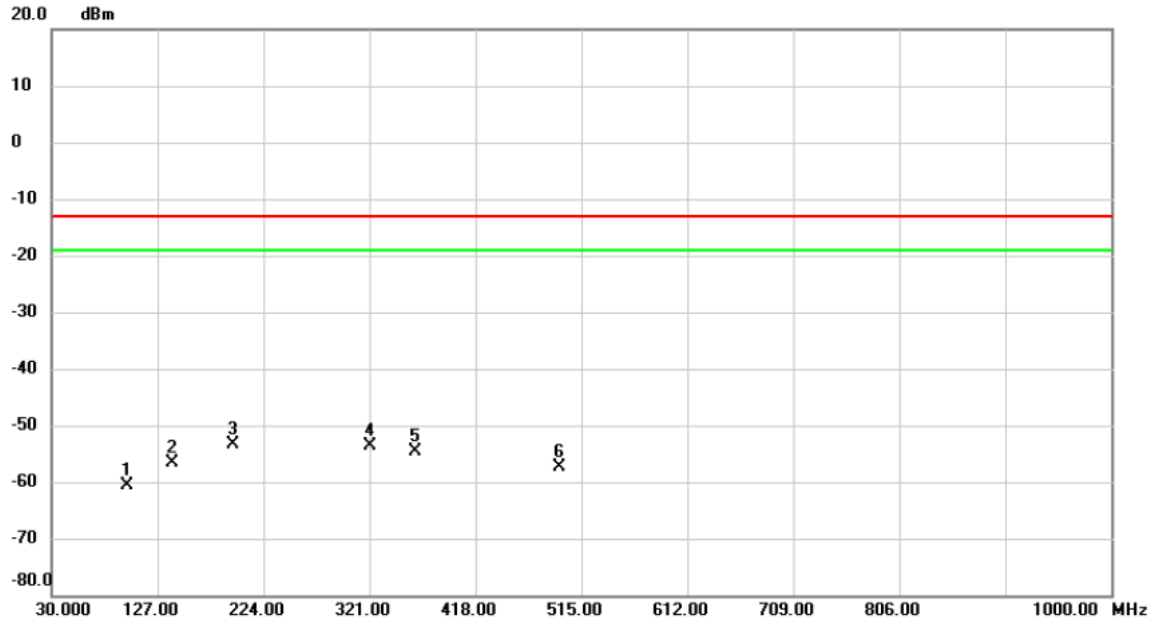


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		98.8700	-61.15	0.52	-60.63	-13.00	-47.63	peak	
2		140.5800	-59.45	2.78	-56.67	-13.00	-43.67	peak	
3	*	195.8700	-56.51	3.16	-53.35	-13.00	-40.35	peak	
4		321.0000	-60.78	7.20	-53.58	-13.00	-40.58	peak	
5		362.7100	-61.02	6.33	-54.69	-13.00	-41.69	peak	
6		494.6300	-64.16	6.88	-57.28	-13.00	-44.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_ Internal Antenna	Tested Date	2019/12/24
Test Voltage	DC 32V	Polarization	Vertical

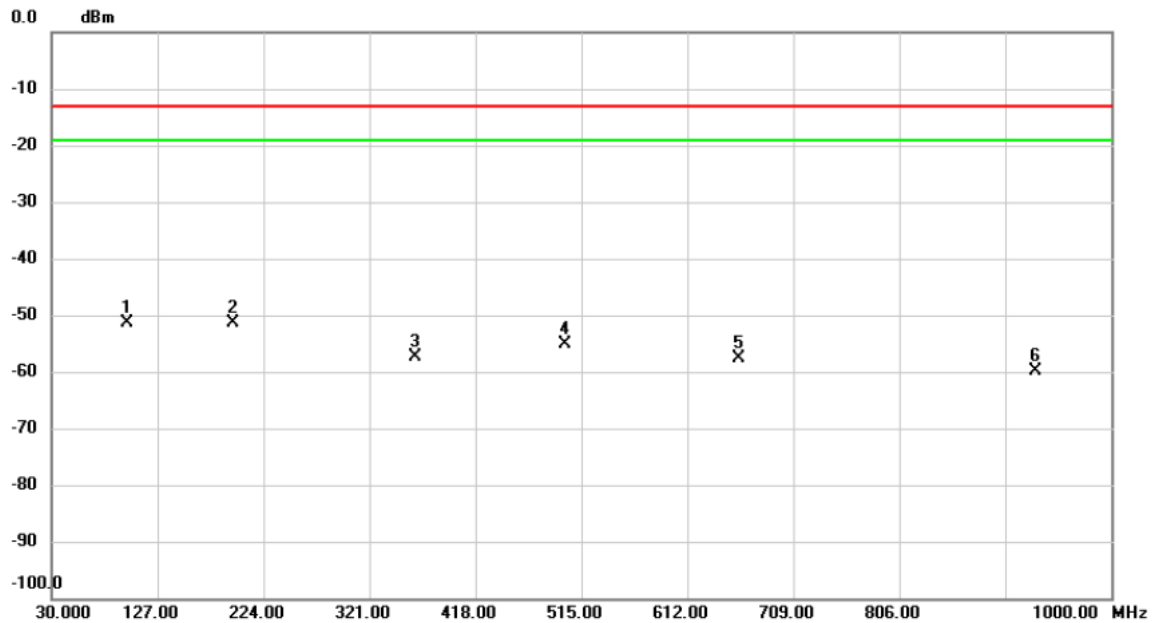


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		98.8700	-51.84	0.52	-51.32	-13.00	-38.32	peak	
2	*	195.8700	-54.45	3.16	-51.29	-13.00	-38.29	peak	
3		362.7100	-63.82	6.33	-57.49	-13.00	-44.49	peak	
4		500.4500	-62.27	7.05	-55.22	-13.00	-42.22	peak	
5		659.5300	-72.25	14.69	-57.56	-13.00	-44.56	peak	
6		930.1600	-73.46	13.61	-59.85	-13.00	-46.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_ Internal Antenna	Tested Date	2019/12/24
Test Voltage	DC 32V	Polarization	Horizontal

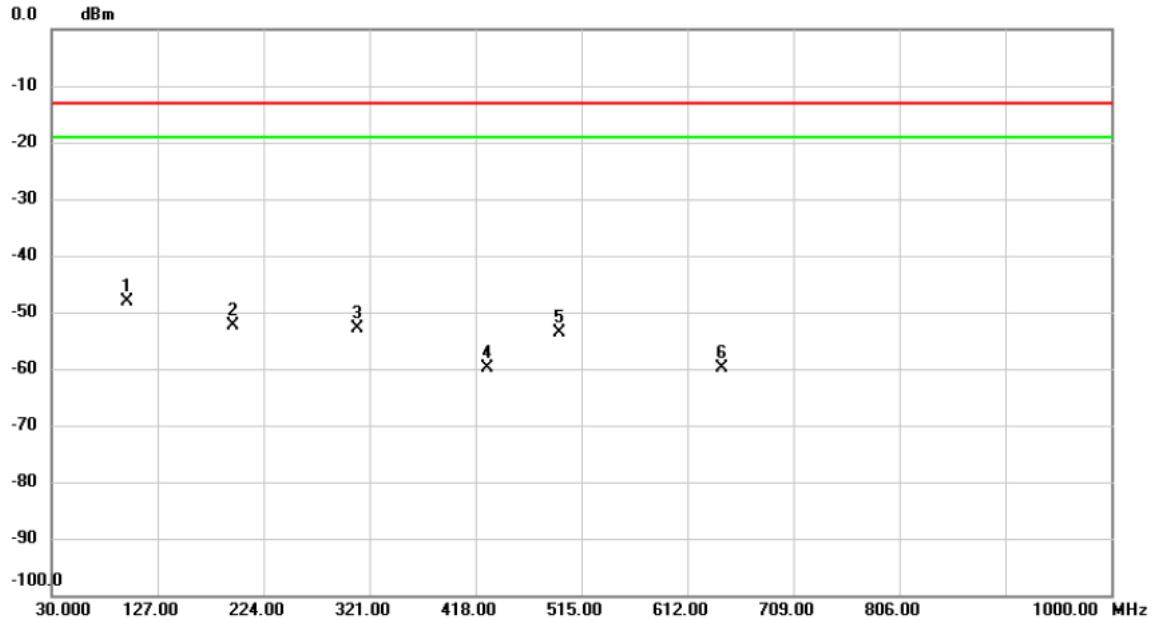


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1	*	98.8700	-48.72	0.52	-48.20	-13.00	-35.20	peak	
2		195.8700	-55.59	3.16	-52.43	-13.00	-39.43	peak	
3		310.3300	-60.38	7.41	-52.97	-13.00	-39.97	peak	
4		428.6700	-65.32	5.54	-59.78	-13.00	-46.78	peak	
5		494.6300	-60.50	6.88	-53.62	-13.00	-40.62	peak	
6		644.0100	-74.21	14.39	-59.82	-13.00	-46.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Vertical

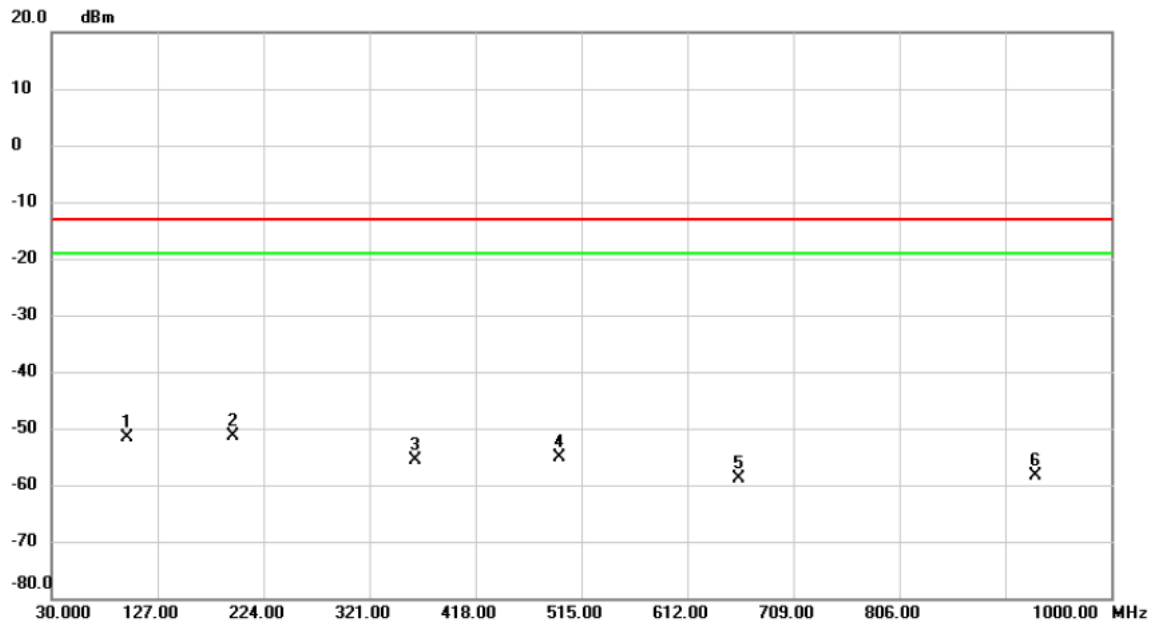


No.	Mk.	Freq. MHz	Reading Level dBm	Correct Factor dB	Measure- ment dBm	Limit dBm	Margin dB	Detector	Comment
1		98.8700	-52.20	0.52	-51.68	-13.00	-38.68	peak	
2	*	195.8700	-54.54	3.16	-51.38	-13.00	-38.38	peak	
3		362.7100	-61.84	6.33	-55.51	-13.00	-42.51	peak	
4		494.6300	-61.88	6.88	-55.00	-13.00	-42.00	peak	
5		659.5300	-73.55	14.69	-58.86	-13.00	-45.86	peak	
6		930.1600	-71.87	13.61	-58.26	-13.00	-45.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Horizontal

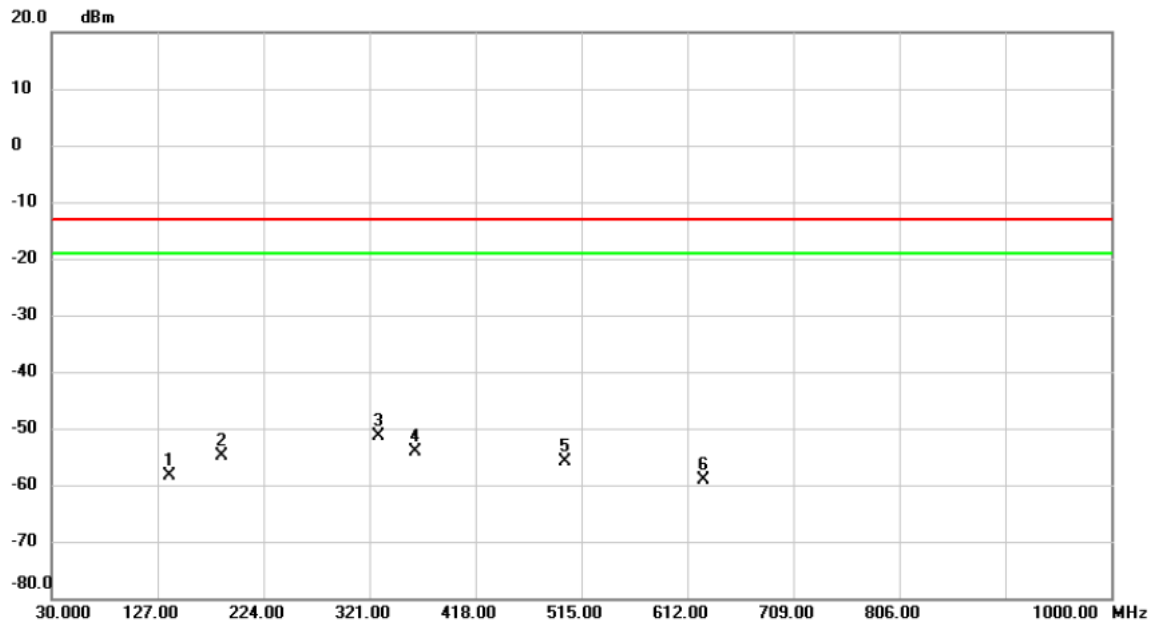


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		137.6700	-60.63	2.22	-58.41	-13.00	-45.41	peak	
2		186.1700	-58.76	3.96	-54.80	-13.00	-41.80	peak	
3	*	329.7300	-58.32	7.03	-51.29	-13.00	-38.29	peak	
4		362.7100	-60.33	6.33	-54.00	-13.00	-41.00	peak	
5		499.4800	-62.89	7.02	-55.87	-13.00	-42.87	peak	
6		626.5500	-72.50	13.50	-59.00	-13.00	-46.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Vertical

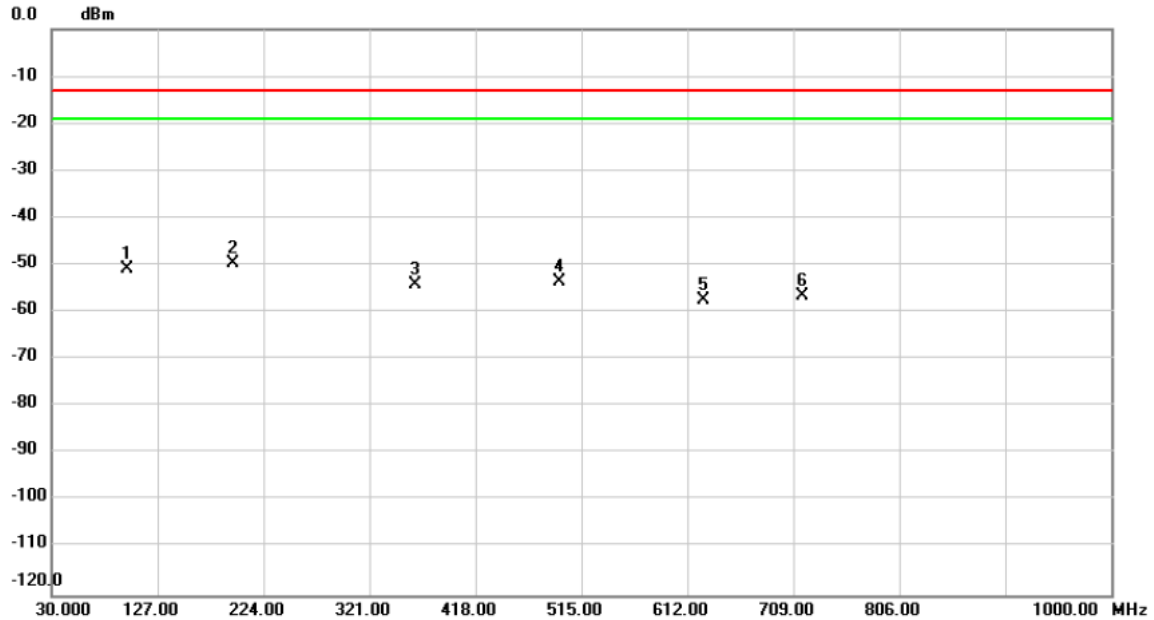

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		98.8700	-52.10	1.26	-50.84	-13.00	-37.84	peak	
2	*	195.8700	-53.97	4.20	-49.77	-13.00	-36.77	peak	
3		362.7100	-61.85	7.73	-54.12	-13.00	-41.12	peak	
4		494.6300	-62.05	8.54	-53.51	-13.00	-40.51	peak	
5		626.5500	-72.74	15.38	-57.36	-13.00	-44.36	peak	
6		717.7300	-72.61	16.03	-56.58	-13.00	-43.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		140.5800	-61.52	3.58	-57.94	-13.00	-44.94	peak	
2		195.8700	-55.54	-0.65	-56.19	-13.00	-43.19	peak	
3		329.7300	-58.01	4.12	-53.89	-13.00	-40.89	peak	
4		383.0800	-59.81	8.88	-50.93	-13.00	-37.93	peak	
5	*	499.4800	-62.99	14.09	-48.90	-13.00	-35.90	peak	
6		626.5500	-72.43	9.08	-63.35	-13.00	-50.35	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - RADIATED SPURIOUS EMISSIONS (ABOVE 1000MHZ)

Test Mode	WCDMA Band V_TX CH4408_ Internal Antenna	Tested Date	2019/12/26
Test Voltage	DC 32V	Polarization	Vertical

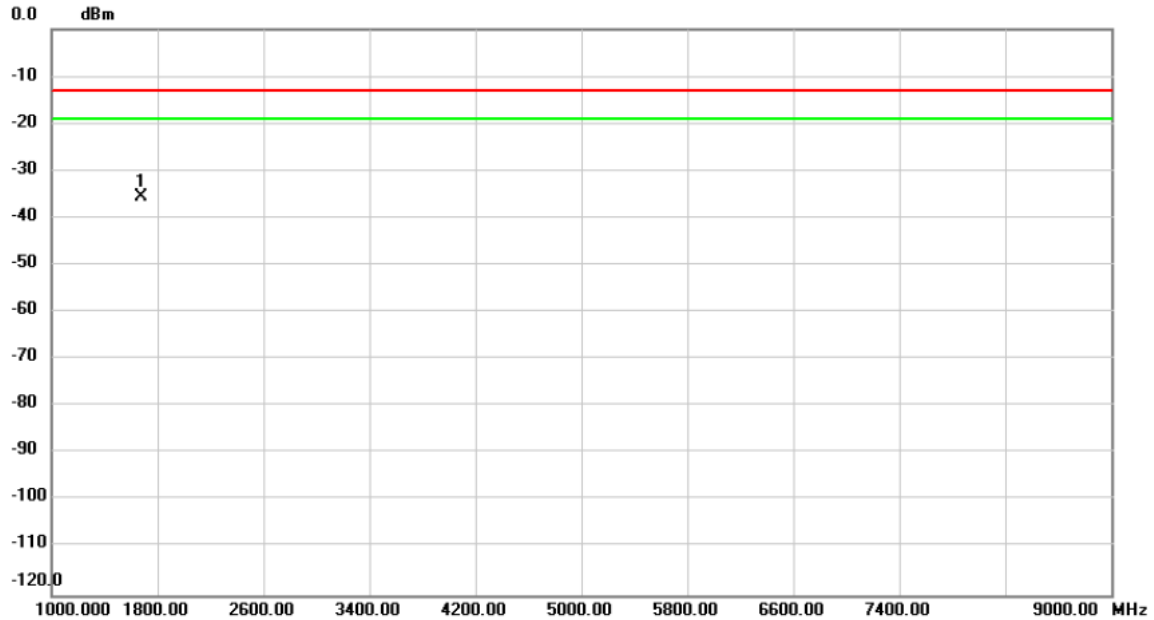


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1672.920	-28.54	-6.97	-35.51	-13.00	-22.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_ Internal Antenna	Tested Date	2019/12/26
Test Voltage	DC 32V	Polarization	Horizontal

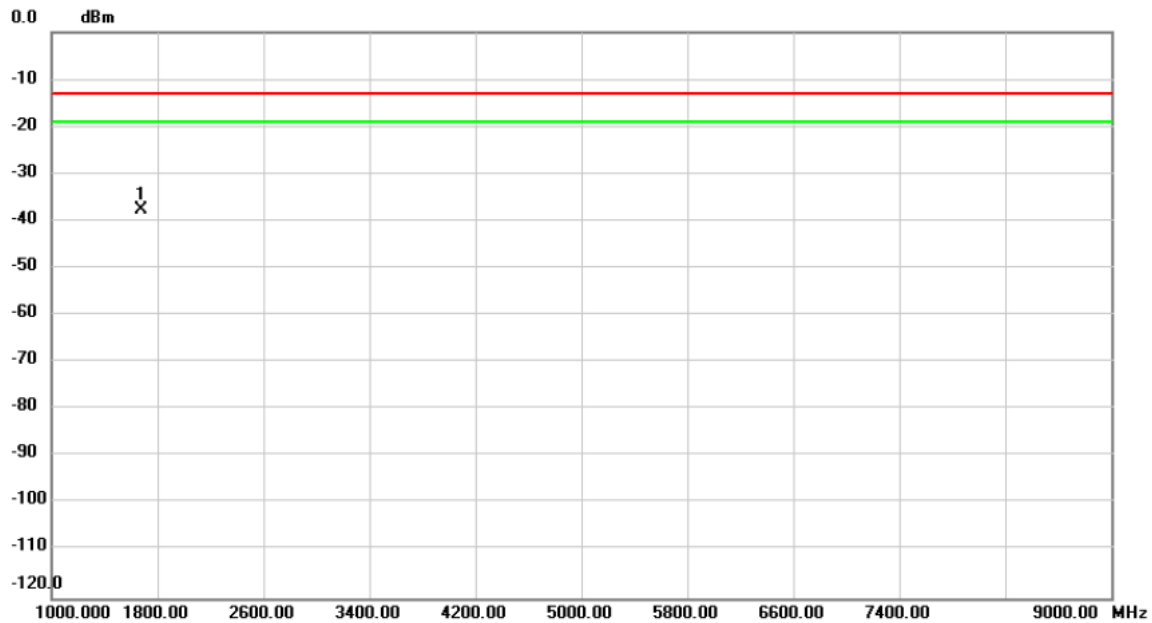


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1673.040	-30.55	-7.09	-37.64	-13.00	-24.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_ Internal Antenna	Tested Date	2019/12/24
Test Voltage	DC 32V	Polarization	Vertical

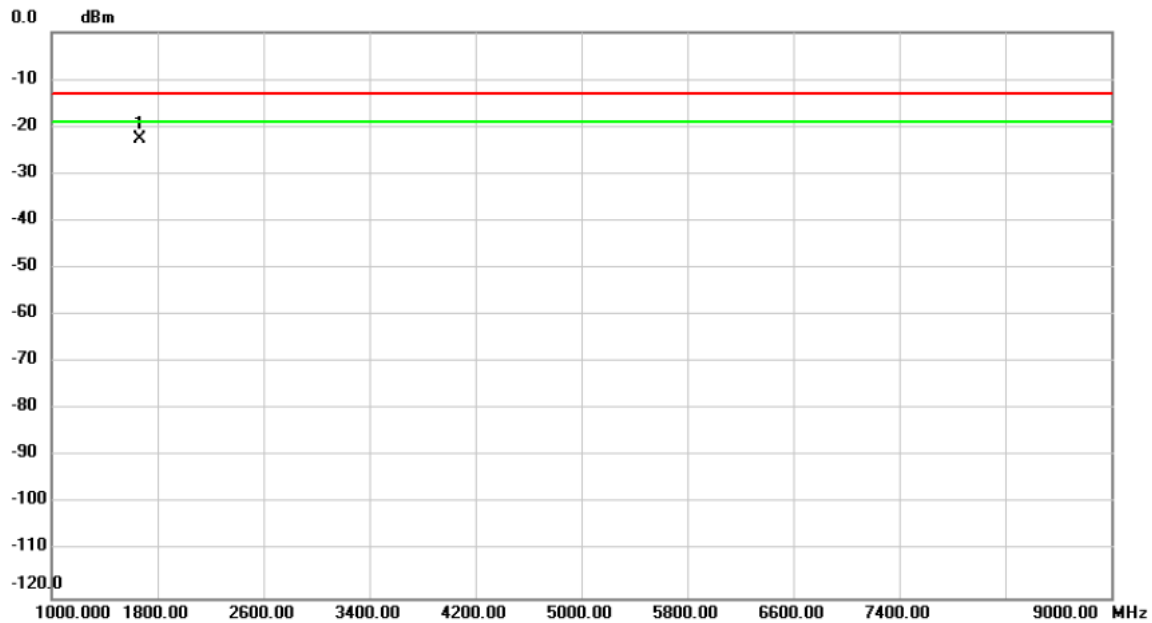


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1664.280	-15.76	-6.90	-22.66	-13.00	-9.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_ Internal Antenna	Tested Date	2019/12/24
Test Voltage	DC 32V	Polarization	Horizontal

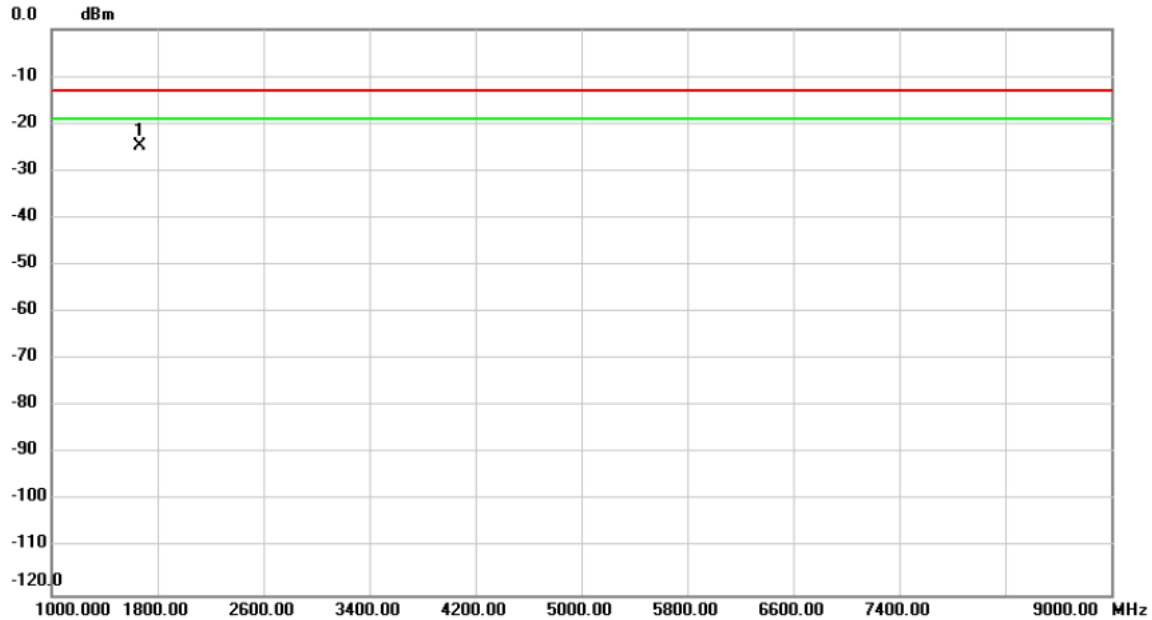


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1664.190	-17.58	-7.06	-24.64	-13.00	-11.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Vertical

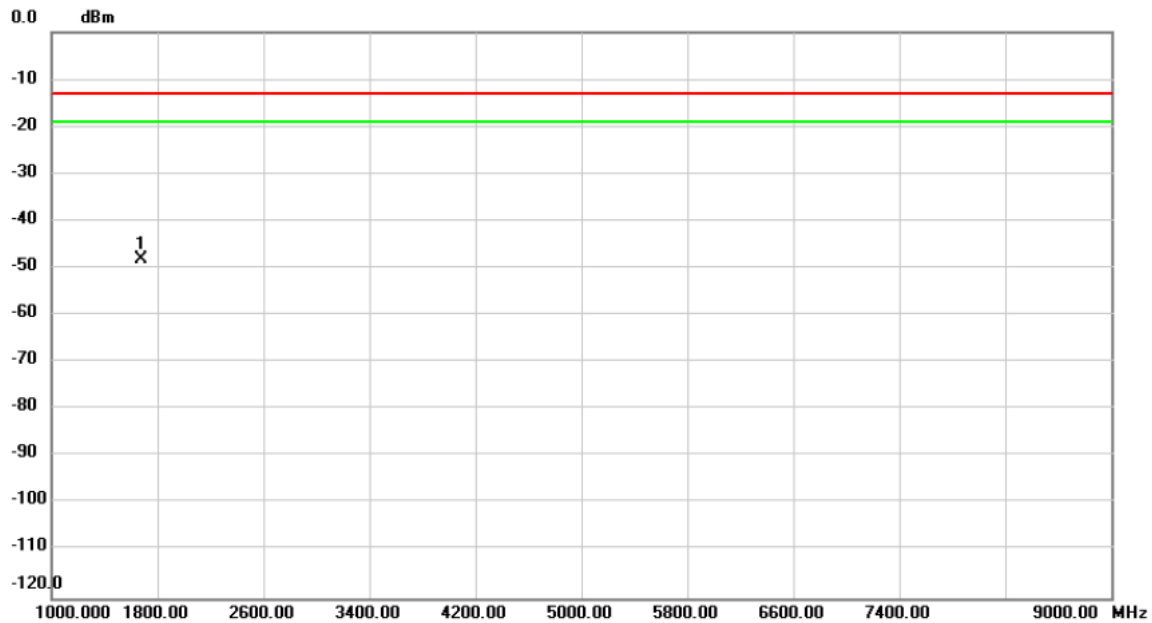


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1676.520	-41.00	-7.00	-48.00	-13.00	-35.00	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	WCDMA Band V_TX CH4408_External Antenna	Tested Date	2019/12/26
Test Voltage	DC 32V	Polarization	Horizontal

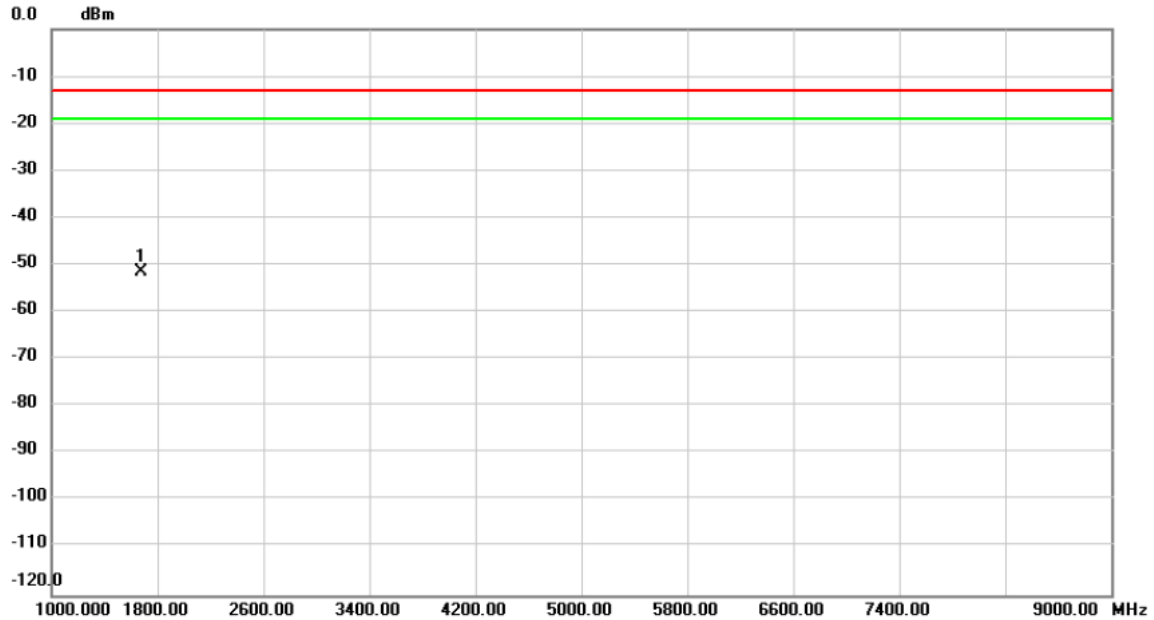


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1676.620	-44.47	-7.10	-51.57	-13.00	-38.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Vertical

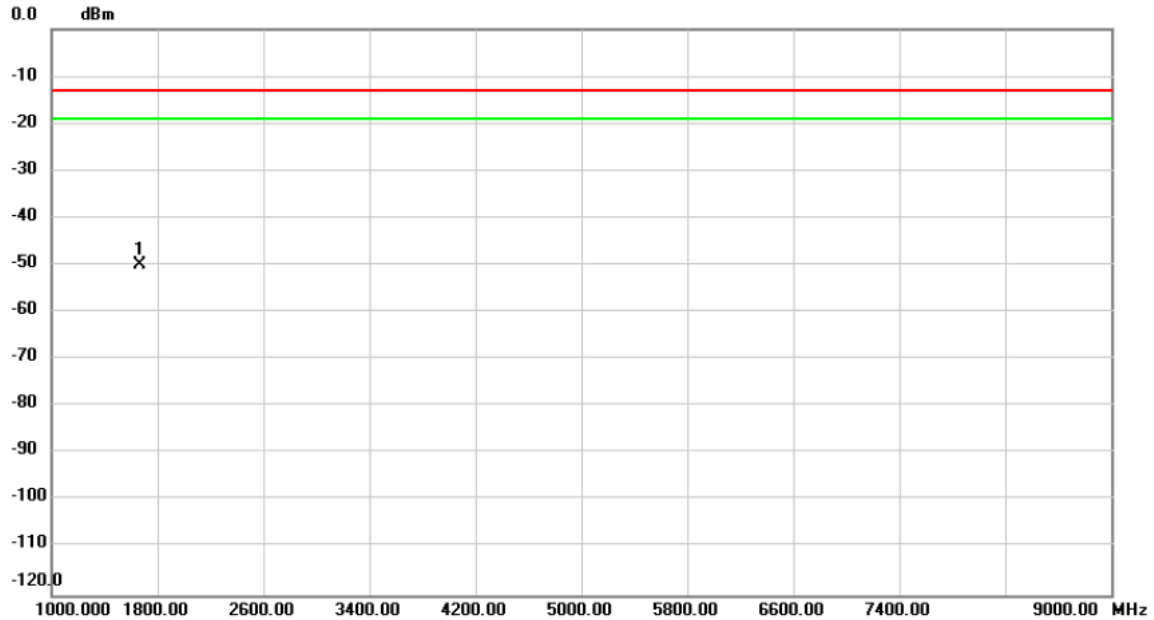


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1664.185	-42.94	-6.89	-49.83	-13.00	-36.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	LTE Band 5_TX CH20525_External Antenna	Tested Date	2019/12/25
Test Voltage	DC 32V	Polarization	Horizontal

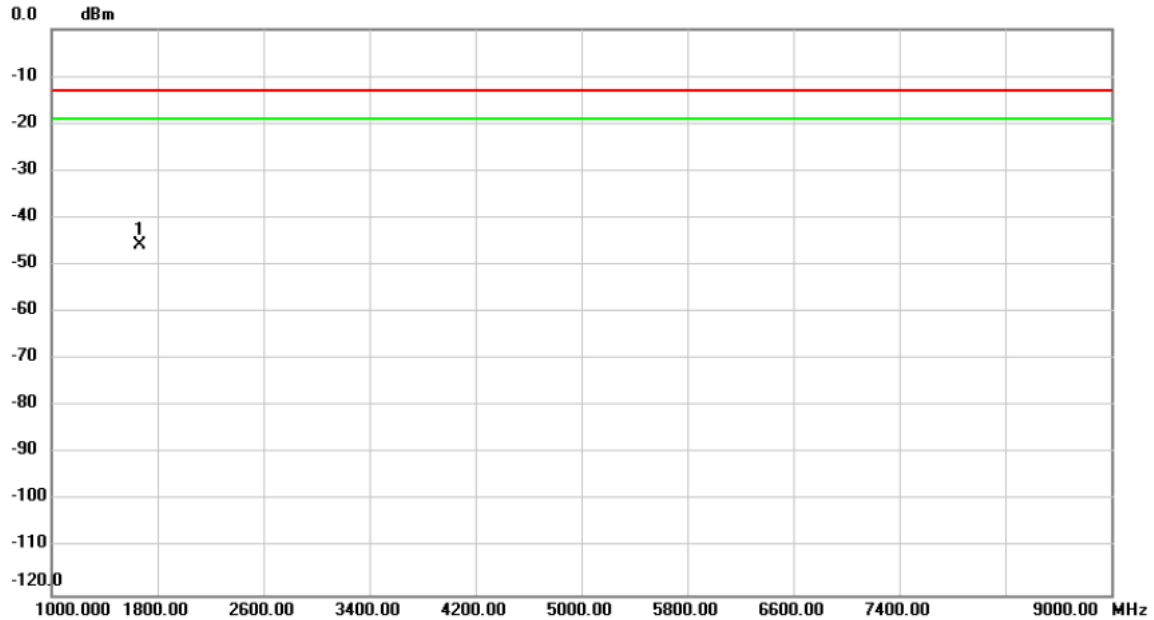


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1664.160	-38.80	-7.06	-45.86	-13.00	-32.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX F - BAND EDGE

WCDMA Band V_WCDMA Spectrum Plot

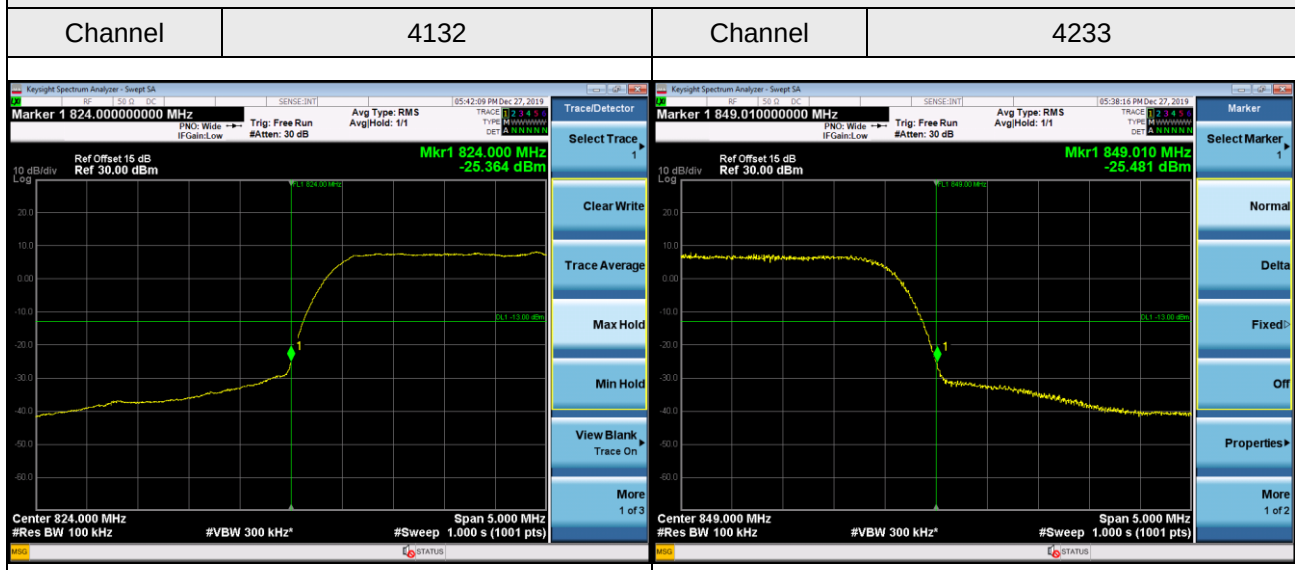

LTE Band 5_1.4M Spectrum Plot

1RB#0

1RB#5

Channel

20407

Channel

20643




6RB#0

Channel

20407

Channel

20643

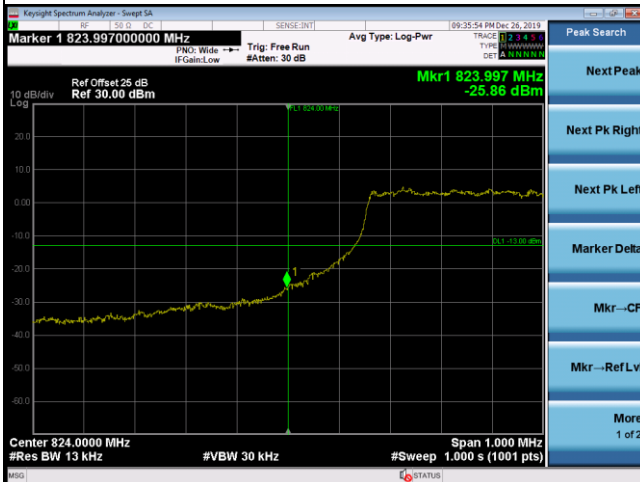

LTE Band 5_3M Spectrum Plot

1RB#0


1RB#14

Channel

20415

Channel

20635

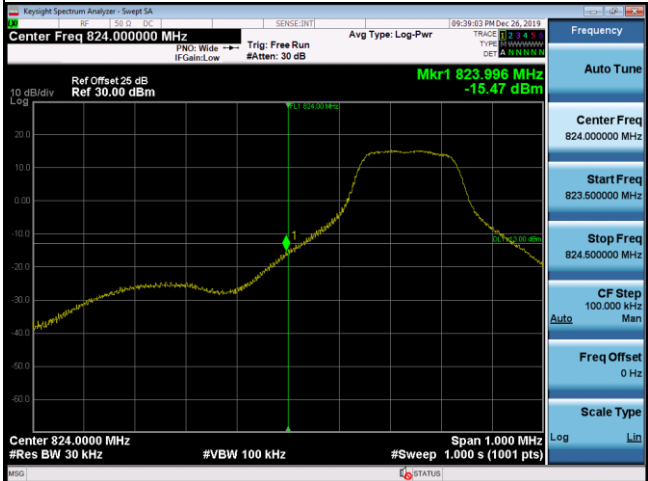

15RB#0

Channel

20415

Channel

20635

