


RADIO TEST REPORT

The device described below is tested by Dongguan Nore Testing Center Co., Ltd. to determine the maximum emission levels emanating from the device, the severe levels which the device can endure and E.U.T.'s performance criterion. The test results, data evaluation, test procedures, and equipment of configurations shown in this report were made in accordance with the procedures in ANSI C63.10(2013).

Applicant : Shenzhen Micro Nature Innovation Technology Co., Ltd.
Address : Room 211, Building B, No. 168, Bao Yuan Rd., Bao An Dist., Shenzhen City, China
Manufacturer /Factory : Shenzhen Micro Nature Innovation Technology Co., Ltd.
Address : Room 211, Building B, No. 168, Bao Yuan Rd., Bao An Dist., Shenzhen City, China
E.U.T. : MindAI
Brand Name : MicroNature
Model No. : MNA168
FCC ID : 2AMIQ-MNA168
Measurement Standard : FCC PART 15.247
Date of Receiver : May 31, 2017
Date of Test : June 05, 2017 to July 06, 2017
Date of Report : July 06, 2017

This Test Report is Issued Under the Authority of :

Prepared by



Alina Guo / Engineer

Approved & Authorized Signer



Iori Fan / Authorized Signatory

This test report is for the customer shown above and their specific product only. This report applies to above tested sample only and shall not be reproduced in part without written approval of Dongguan Nore Testing Center Co., Ltd.

Table of Contents

1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	5
1.2 RELATED SUBMITTAL(S) / GRANT (S).....	8
1.3 TEST METHODOLOGY	8
1.4 EQUIPMENT MODIFICATIONS	8
1.5 SUPPORT DEVICE	8
1.6 TEST FACILITY AND LOCATION.....	9
1.7 SUMMARY OF TEST RESULTS	10
2. SYSTEM TEST CONFIGURATION.....	11
2.1 EUT CONFIGURATION	11
2.2 SPECIAL ACCESSORIES.....	11
2.3 DESCRIPTION OF TEST MODES	11
2.4 EUT EXERCISE	11
3. CONDUCTED EMISSIONS TEST	12
3.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	12
3.2 TEST CONDITION	12
3.3 MEASUREMENT RESULTS.....	12
4. MAX. CONDUCTED OUTPUT POWER.....	17
4.1 MEASUREMENT PROCEDURE	17
4.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	17
4.3 MEASUREMENT RESULTS.....	17
5. 6DB BANDWIDTH.....	19
5.1 MEASUREMENT PROCEDURE	19
5.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	19
5.3 MEASUREMENT RESULTS.....	19
6. POWER SPECTRAL DENSITY.....	27
6.1 MEASUREMENT PROCEDURE	27
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	27
6.3 MEASUREMENT RESULTS.....	27
7. BAND EDGE AND CONDUCTED SPURIOUS EMISSIONS	35
7.1 REQUIREMENT AND MEASUREMENT PROCEDURE.....	35
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	35
7.3 MEASUREMENT RESULTS.....	35



8. RADIATED SPURIOUS EMISSIONS AND RESTRICTED BANDS..... 47

8.1 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....47

8.2 MEASUREMENT PROCEDURE48

8.3 LIMIT.....49

8.4 MEASUREMENT RESULTS49

9. ANTENNA APPLICATION 60

9.1 ANTENNA REQUIREMENT60

9.2 MEASUREMENT RESULTS.....60

10. TEST EQUIPMENT LIST..... 61

Revision History of This Test Report

Report Number	Description	Issued Date
NTC1706042FV00	Initial Issue	2017-07-06

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test

Power Supply	: DC 5V From external adapter DC 3.7V From internal battery
Adapter	: M/N: BS-12W0501000G7 Input: AC 100-240V 50/60Hz 0.3A Output: DC 5V, 1000mA
Test voltage	: AC 120V 60Hz, AC 240V 50Hz Adapter input DC 3.7V From internal battery Only the worst case was recorded in this report.
Model name	: MNA168
Model difference	: None
Hardware version	: V1.0
Software version	: V1.0
Serial number	: N/A

Technical parameters For WIFI Function

Frequency Range	: 2412-2462MHz for 802.11b/g/n(HT20)
Modulation	: DSSS for 802.11b OFDM for 802.11g/n(HT20)
Modulation Type	: DSSS(DBPSK, DQPSK, CCK) OFDM(BPSK, QPSK)
Number of Channel	: 11
Channel space	: 5MHz
Date Rate	: 802.11b:1~11Mbps, 802.11g:6~54Mbps 802.11n: 6.5~135Mbps
Antenna Type	: FPC Antenna
Antenna Gain	: -0.466 dBi

For Zigbee Function

Frequency Range	: 2405-2480MHz
Modulation	: 802.15.4
Modulation Type	: O-QPSK
Number of Channel	: 16
Channel space	: 5MHz
Antenna Type	: FPC Antenna
Antenna Gain	: -0.466 dBi

Channel List

802.11 b/g/n(HT20)		802.15.4	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	11	2405
2	2417	12	2410
3	2422	13	2415
4	2427	14	2420
5	2432	15	2425
6	2437	16	2430
7	2442	17	2435
8	2447	18	2440
9	2452	19	2445
10	2457	20	2450
11	2462	21	2455
---	---	22	2460
---	---	23	2465
---	---	24	2470
---	---	25	2475
---	---	26	2480

Note: According to section 15.31(m), regards to the operating frequency range over 10MHz, the Lowest, Middle, and the Highest frequency of channel were selected to perform the test. The selected frequency see below:

802.11b/g/n(HT20)		802.15.4	
Channel	Frequency MHz	Channel	Frequency MHz
1	2412	11	2405
6	2437	18	2440
11	2462	26	2480

Test SW version	CC3100/CC3200 Radio Tool V1.2 5942.19689 For WIFI
	Smart RF Studio 7 For Zigbee

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: 2AMIQ-MNA168 filing to comply with Section 15.247 of the FCC Part 15(2016), Subpart C Rule.

1.3 Test Methodology

The radiated emission measurement was performed according to the procedures in ANSI C63.10 (2013). Radiated emission measurement was performed in semi-anechoic chamber. For radiated emission measurement, preliminary scans were performed in the semi-anechoic chamber only to determine the worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters. All other measurements were made in accordance with the procedures in 47 CFR part 2.

1.4 Equipment Modifications

Not available for this EUT intended for grant.

1.5 Support Device

Notebook PC	: Manufacturer: IBM Model: 1834 P/N: 13N5615. CE, FCC: DOC
Adapter (For PC)	: Manufacturer: LITEON Model: PA-1900-05 I/P: AC 100-240V 50-60Hz, 1.5A O/P: DC 19V 4.74A

1.6 Test Facility and Location

Listed by FCC, July 03, 2014
The Certificate Registration Number is 665078.
Listed by Industry Canada, June 18, 2014
The Certificate Registration Number is 9743A.

Dongguan NTC Co., Ltd.
(Full Name: Dongguan Nore Testing Center Co., Ltd.)

Building D, Gaosheng Science and Technology Park, Hongtu Road,
Nancheng District, Dongguan City, Guangdong, China
(Full Name: Building D, Gaosheng Science & Technology Park,
Zhouxi Longxi Road, Nancheng District, Dongguan, Guangdong, China.

1.7 Summary of Test Results

FCC Rules	Description Of Test	Uncertainty	Result
§15.207 (a)	AC Power Conducted Emission	±1.06dB	Compliant
§15.247(b)(3)	Max. Conducted Output Power	±1.06dB	Compliant
§15.247(a)(2)	6dB Bandwidth	±1.42 x10 ⁻⁴ %	Compliant
§15.247(e)	Power Spectral Density	±1.06dB	Compliance
§15.247(d)	Band Edge and Conducted Spurious Emissions	±1.70dB & ±2.51dB	Compliance
§15.247(d),§15.209, §15.205	Radiated Spurious Emissions and Restricted Bands	±3.70dB	Compliance
§15.203	Antenna Requirement	-----	Compliance

2. System Test Configuration

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 Special Accessories

Not available for this EUT intended for grant.

2.3 Description of test modes


The EUT has been tested under continuous operating condition (The duty cycle >98%). Test program used to control the EUT staying in continuous transmitting mode. The Lowest, Middle and highest channel were chosen for testing, and modulation types DBPSK, DQPSK, CCK, BPSK, QPSK, O-QPSK tested, but only the worst case data is shown in this report.

2.4 EUT Exercise

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements.

3. Conducted Emissions Test

3.1 Test SET-UP (Block Diagram of Configuration)

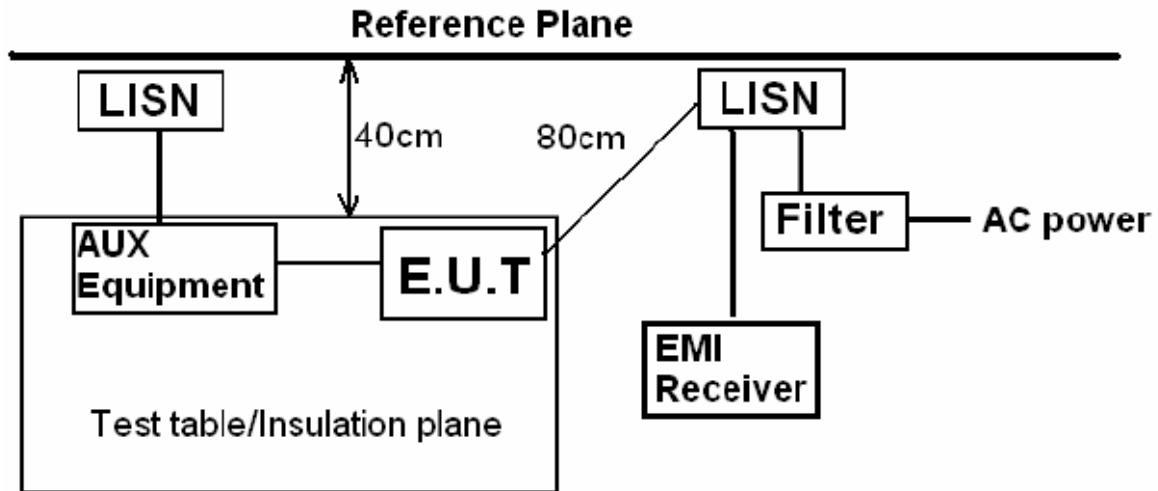

3.2 Test Condition

Test Requirement: FCC Part 15.207

Frequency Range: 150KHz ~ 30MHz

Detector: RBW 9KHz, VBW 30KHz

Operation Mode: Charging+Wi-Fi Link, Charging+Zigbee mode

3.3 Measurement Results

For Wi-Fi Function:

Please refer to following plots of the worst case: 802.11b Middle channel.

For Zigbee Function:


Please refer to following plots of the worst case: 802.15.4 Low channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-7-2 11:24:44

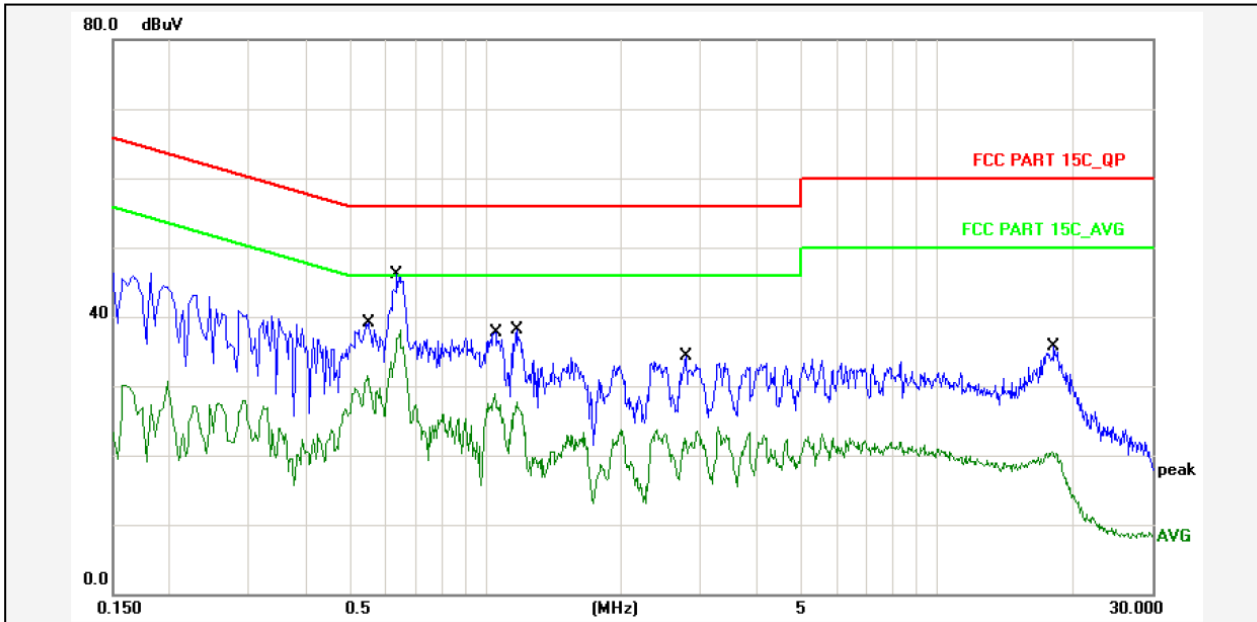

Report No.: MNA168

Test Standard: FCC PART 15C_QP

Test item: Conducted Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Phase: L1

Temp.()/Hum.(%): 26(C) / 45 %

Power Rating: AC 120V/60Hz

Test Engineer: Lay

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5522	10.80	26.30	37.10	56.00	-18.90	QP	P	
2	0.5522	10.80	16.70	27.50	46.00	-18.50	AVG	P	
3	0.6371	10.80	33.20	44.00	56.00	-12.00	QP	P	
4	0.6371	10.80	25.30	36.10	46.00	-9.90	AVG	P	
5	1.0540	10.80	25.00	35.80	56.00	-20.20	QP	P	
6	1.0540	10.80	16.20	27.00	46.00	-19.00	AVG	P	
7	1.1719	10.80	25.30	36.10	56.00	-19.90	QP	P	
8	1.1719	10.80	14.90	25.70	46.00	-20.30	AVG	P	
9	2.7794	10.80	21.60	32.40	56.00	-23.60	QP	P	
10	2.7794	10.80	10.70	21.50	46.00	-24.50	AVG	P	
11	18.1352	10.80	22.90	33.70	60.00	-26.30	QP	P	
12	18.1352	10.80	7.70	18.50	50.00	-31.50	AVG	P	



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-7-2 11:17:54

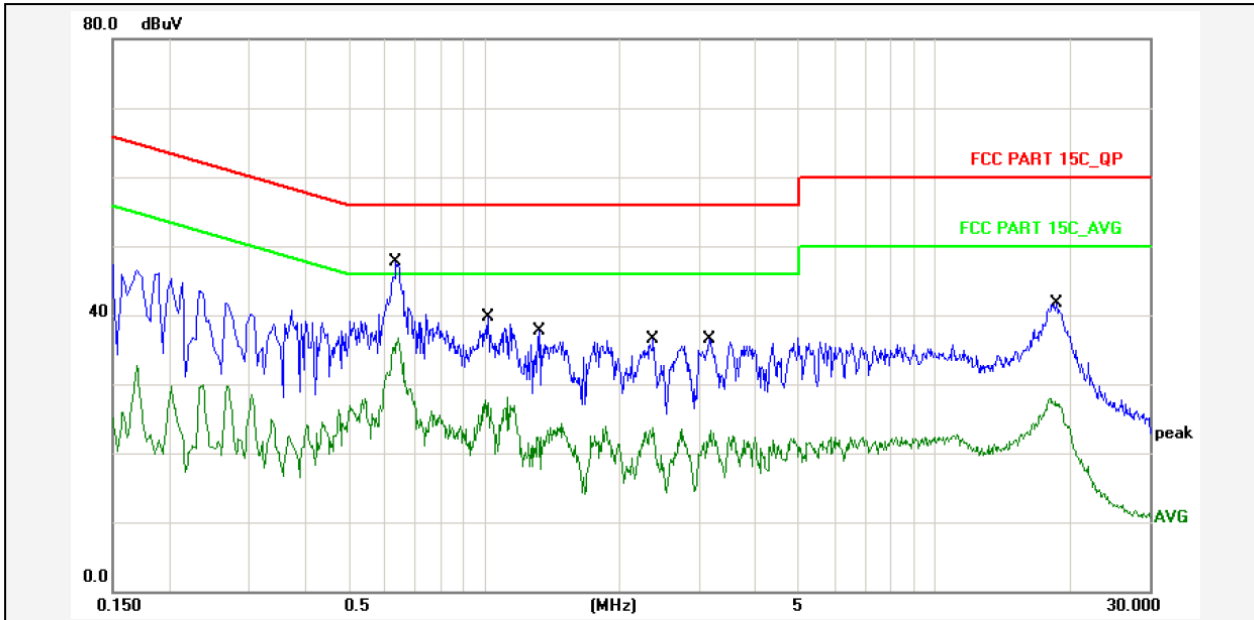

Report No.: MNA168

Test Standard: FCC PART 15C_QP

Test item: Conducted Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Phase: N

Temp.()/Hum.(%): 26(C) / 45 %

Power Rating: AC 120V/60Hz

Test Engineer: Lay

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.6371	10.80	34.80	45.60	56.00	-10.40	QP	P	
2	0.6371	10.80	23.90	34.70	46.00	-11.30	AVG	P	
3	1.0210	10.80	26.90	37.70	56.00	-18.30	QP	P	
4	1.0210	10.80	15.10	25.90	46.00	-20.10	AVG	P	
5	1.3237	10.80	24.90	35.70	56.00	-20.30	QP	P	
6	1.3237	10.80	14.00	24.80	46.00	-21.20	AVG	P	
7	2.3709	10.80	23.70	34.50	56.00	-21.50	QP	P	
8	2.3709	10.80	10.90	21.70	46.00	-24.30	AVG	P	
9	3.1563	10.80	23.70	34.50	56.00	-21.50	QP	P	
10	3.1563	10.80	10.60	21.40	46.00	-24.60	AVG	P	
11	18.6220	10.80	28.60	39.40	60.00	-20.60	QP	P	
12	18.6220	10.80	14.80	25.60	50.00	-24.40	AVG	P	



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-7-2 11:30:44

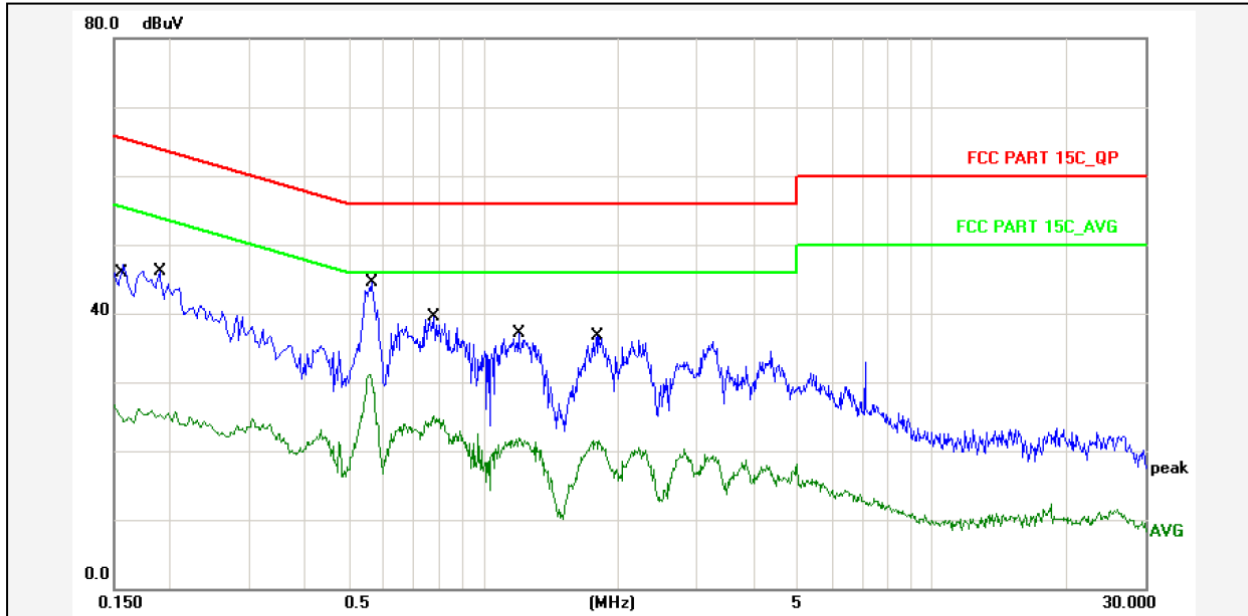

Report No.: MNA168

Test Standard: FCC PART 15C_QP

Test item: Conducted Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Phase: L1

Temp.()/Hum.(%): 26(C) / 45 %

Power Rating: AC 120V/60Hz

Test Engineer: Lay

Test Mode: Charging+Zigbee

Remark: 802.15.4 Low Channel


No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1539	10.80	34.80	45.60	65.78	-20.18	QP	P	
2	0.1539	10.80	12.40	23.20	55.78	-32.58	AVG	P	
3	0.1900	10.80	33.20	44.00	64.03	-20.03	QP	P	
4	0.1900	10.80	12.60	23.40	54.03	-30.63	AVG	P	
5	0.5660	10.80	31.70	42.50	56.00	-13.50	QP	P	
6	0.5660	10.80	18.70	29.50	46.00	-16.50	AVG	P	
7	0.7780	10.80	26.60	37.40	56.00	-18.60	QP	P	
8	0.7780	10.80	12.20	23.00	46.00	-23.00	AVG	P	
9	1.2020	10.80	24.50	35.30	56.00	-20.70	QP	P	
10	1.2020	10.80	9.00	19.80	46.00	-26.20	AVG	P	
11	1.7980	10.80	24.00	34.80	56.00	-21.20	QP	P	
12	1.7980	10.80	8.70	19.50	46.00	-26.50	AVG	P	



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Conduction

Test Time: 2017-7-2 11:38:44

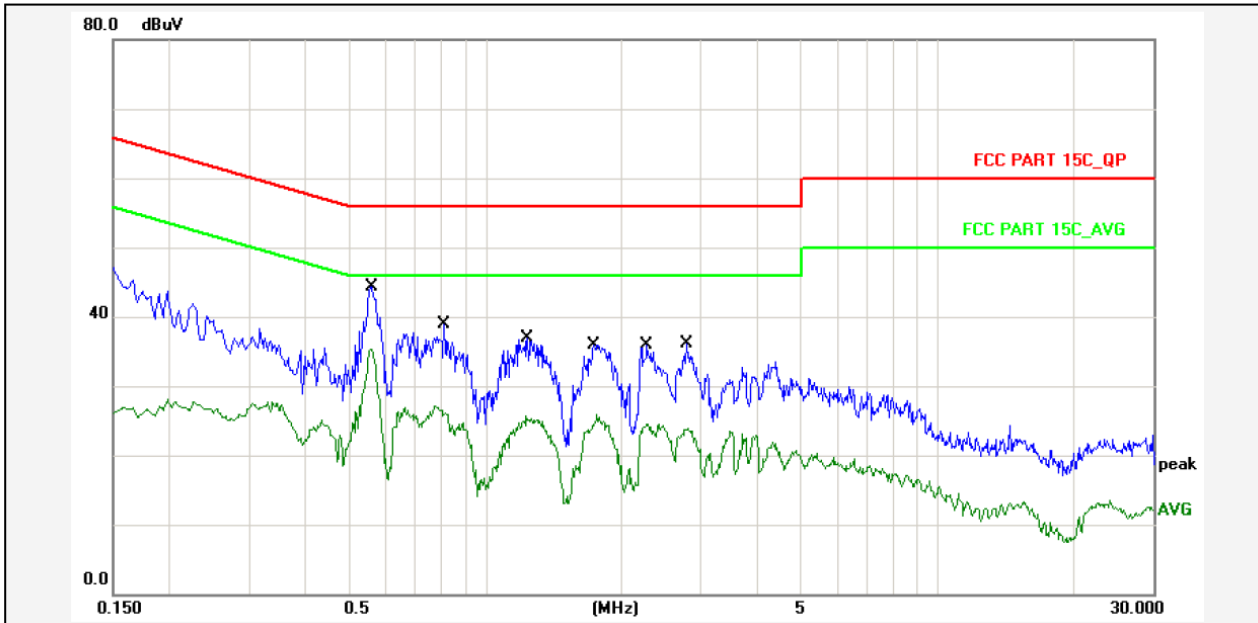

Report No.: MNA168

Test Standard: FCC PART 15C_QP

Test item: Conducted Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Phase: N

Temp.()/Hum.(%): 26(C) / 45 %

Power Rating: AC 120V/60Hz

Test Engineer: Lay

Test Mode: Charging+Zigbee

Remark: 802.15.4 Low Channel

No.	Frequency (MHz)	Factor (dBuV)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.5620	10.80	31.50	42.30	56.00	-13.70	QP	P	
2	0.5620	10.80	22.40	33.20	46.00	-12.80	AVG	P	
3	0.8100	10.80	26.00	36.80	56.00	-19.20	QP	P	
4	0.8100	10.80	13.70	24.50	46.00	-21.50	AVG	P	
5	1.2379	10.80	24.00	34.80	56.00	-21.20	QP	P	
6	1.2379	10.80	12.80	23.60	46.00	-22.40	AVG	P	
7	1.7419	10.80	23.10	33.90	56.00	-22.10	QP	P	
8	1.7419	10.80	13.00	23.80	46.00	-22.20	AVG	P	
9	2.2820	10.80	23.00	33.80	56.00	-22.20	QP	P	
10	2.2820	10.80	11.70	22.50	46.00	-23.50	AVG	P	
11	2.7900	10.80	23.20	34.00	56.00	-22.00	QP	P	
12	2.7900	10.80	11.10	21.90	46.00	-24.10	AVG	P	

4. Max. Conducted Output Power


4.1 Measurement Procedure

Maximum Conducted Output power at Antenna Terminals, FCC Rules 15.247(b)(3):

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

4.2 Test SET-UP (Block Diagram of Configuration)



4.3 Measurement Results

Please refer to following table.

Temperature :	24 °C	Humidity :	50%
Test By:	Sance	Test Date :	June 05, 2017
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	Peak Output Power dBm	Limit dBm
IEEE 802.11b Mode (CCK, Antenna Gain=-0.466dBi)			
Low Channel: 2412	1	15.30	30
Middle Channel: 2437	1	16.38	30
High Channel: 2462	1	15.35	30
IEEE 802.11g Mode (OFDM, Antenna Gain=-0.466dBi)			
Low Channel: 2412	6	11.09	30
Middle Channel: 2437	6	13.02	30
High Channel: 2462	6	10.94	30
IEEE 802.11n(HT20) Mode (OFDM, Antenna Gain=-0.466dBi)			
Low Channel: 2412	6.5	11.38	30
Middle Channel: 2437	6.5	14.09	30
High Channel: 2462	6.5	10.87	30
IEEE 802.15.4 Mode (Antenna Gain=-0.466dBi)			
Low Channel: 2405	1	15.27	30
Middle Channel: 2440	1	15.00	30
High Channel: 2480	1	14.81	30

5. 6dB Bandwidth


5.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below:

1. For 6dB bandwidth, Set the RBW = 100KHz.
2. Set the VBW $\geq 3 \times$ RBW
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.2 Test SET-UP (Block Diagram of Configuration)




5.3 Measurement Results

Please refer to following table and plots.


Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	June 05, 2017
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	6dB Bandwidth MHz	Limit
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	10.50	>500KHz
Middle Channel: 2437	1	9.78	>500KHz
High Channel: 2462	1	10.53	>500KHz
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	16.51	>500KHz
Middle Channel: 2437	6	16.56	>500KHz
High Channel: 2462	6	16.56	>500KHz
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	17.81	>500KHz
Middle Channel: 2437	6.5	17.81	>500KHz
High Channel: 2462	6.5	17.86	>500KHz
IEEE 802.15.4 Mode			
Low Channel: 2405	1	1.65	>500KHz
Middle Channel: 2440	1	1.67	>500KHz
High Channel: 2480	1	1.63	>500KHz

802.11b Low Channel

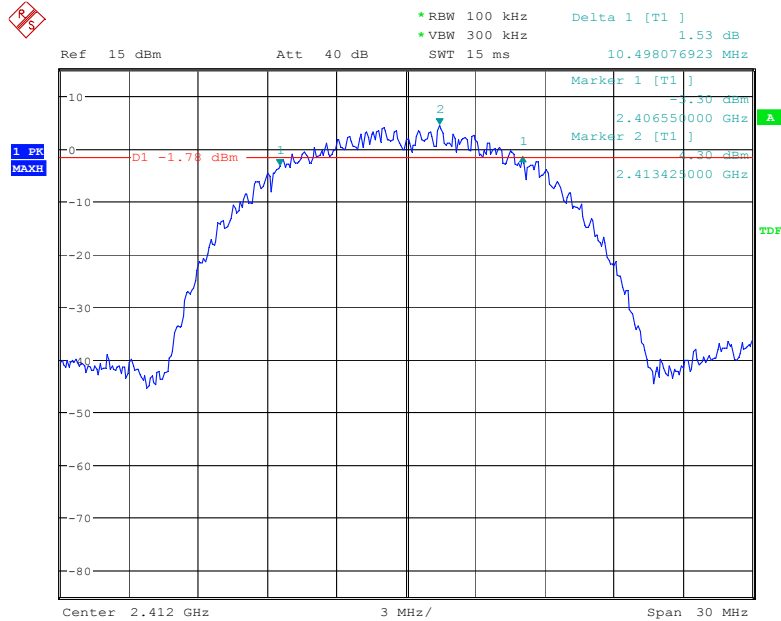


Date: 5.JUN.2017 18:47:46

802.11b Middle Channel

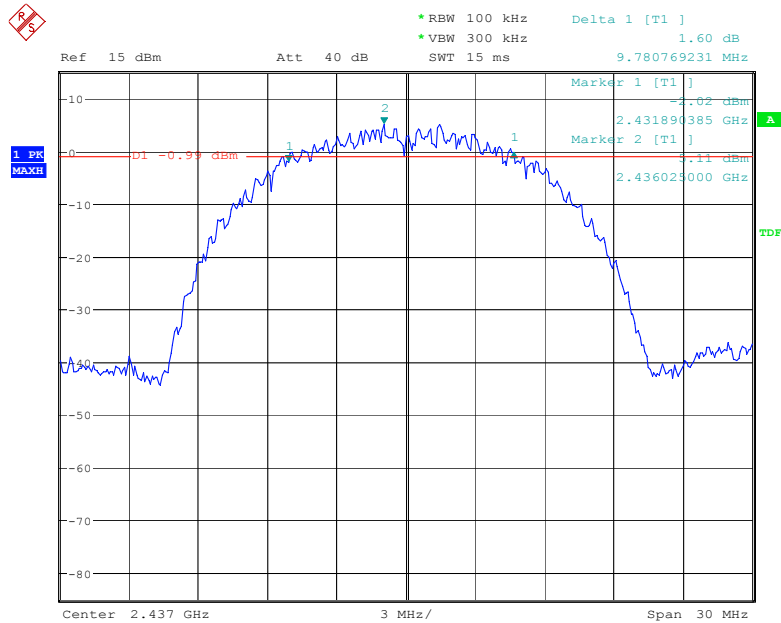


Date: 5.JUN.2017 18:45:59

802.11b High Channel

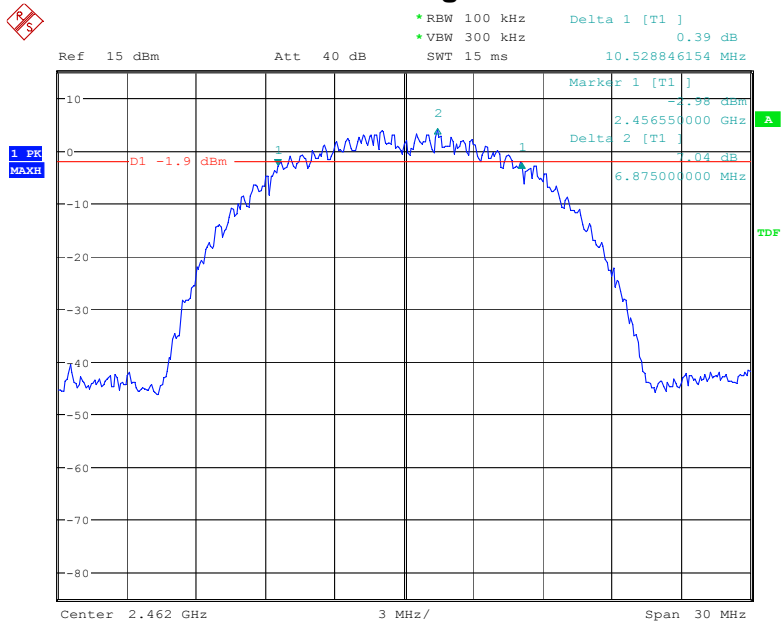


Date: 5.JUN.2017 18:49:07

802.11g Low Channel

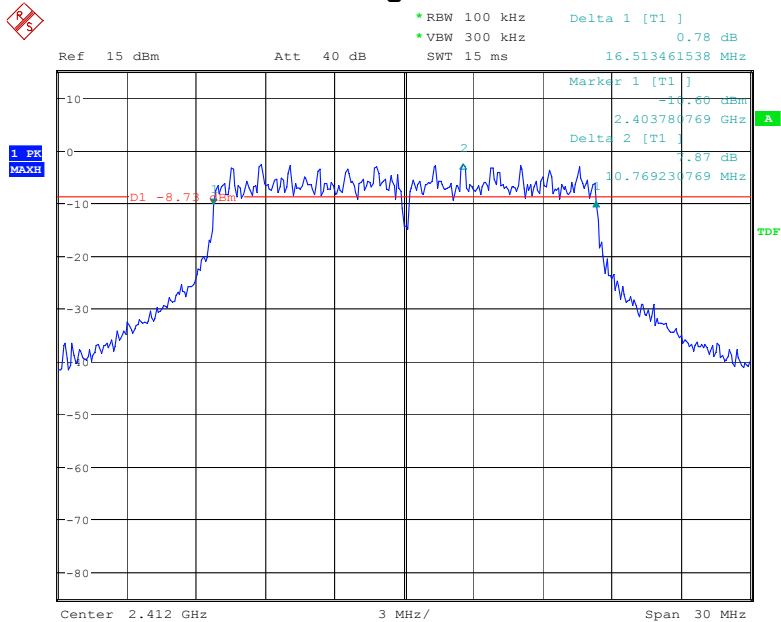


Date: 5.JUN.2017 18:50:51

802.11g Middle Channel

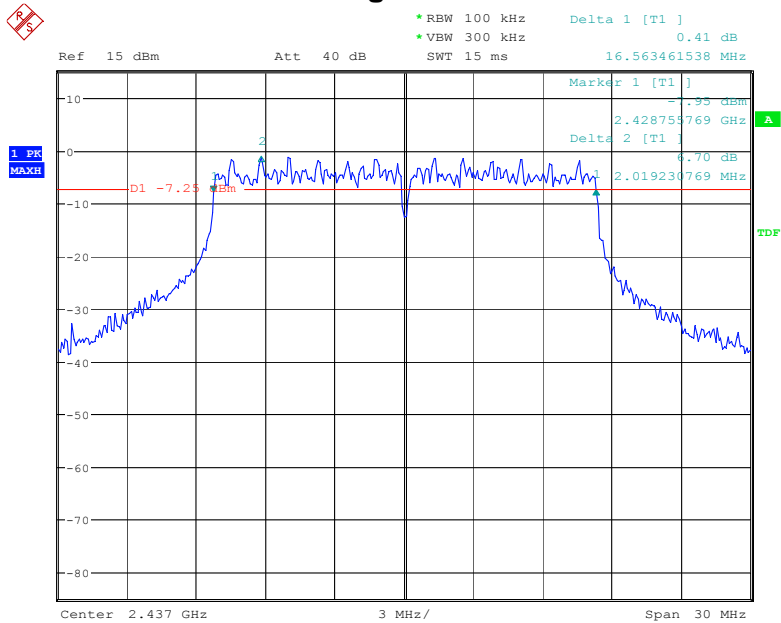


Date: 5.JUN.2017 18:52:36

802.11g High Channel

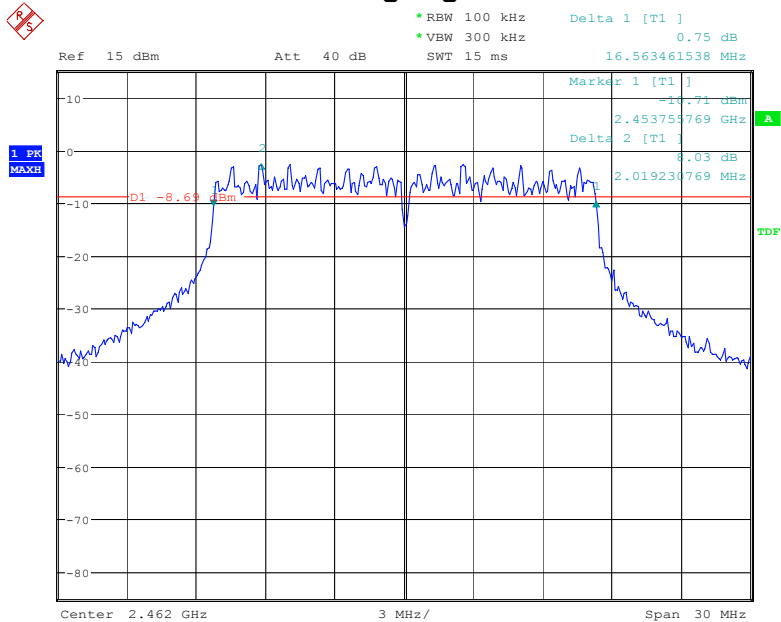


Date: 5.JUN.2017 18:54:13

802.11n(HT20) Low Channel

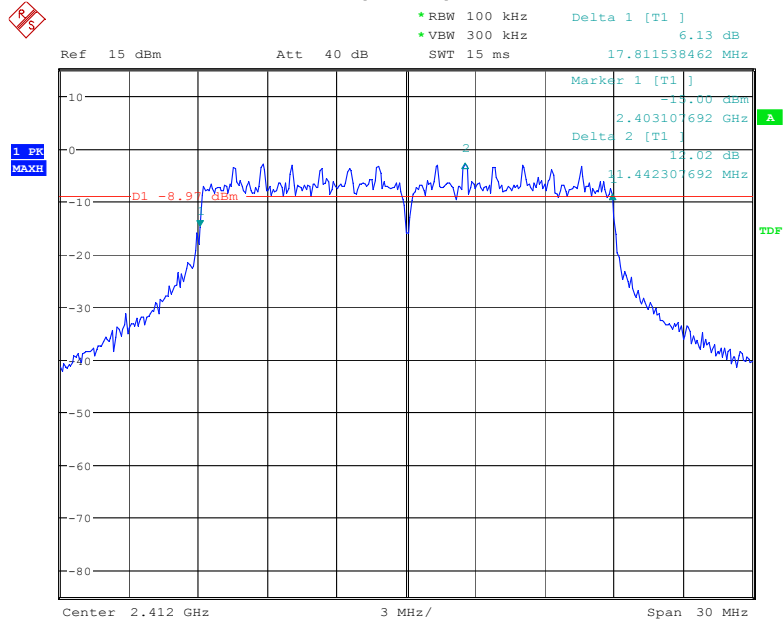


Date: 5.JUN.2017 18:57:35

802.11n(HT20) Middle Channel

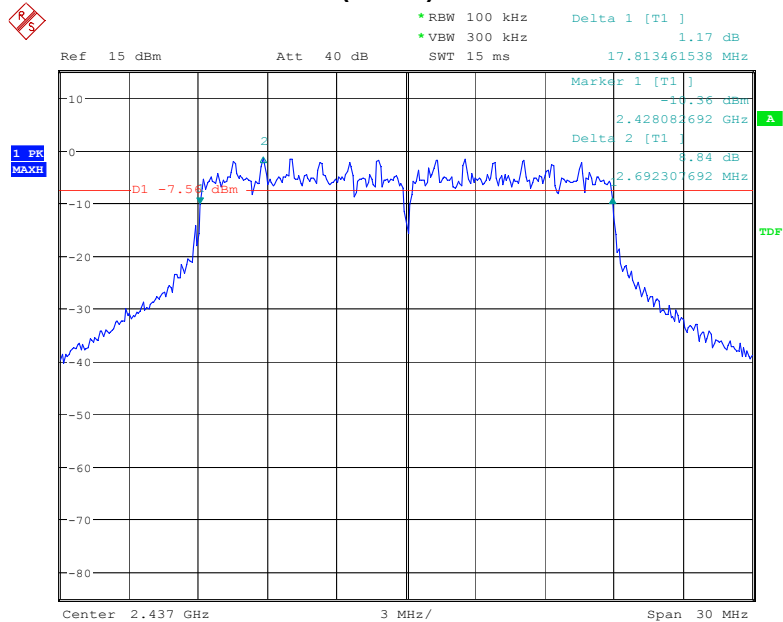


Date: 5.JUN.2017 18:58:51

802.11n(HT20) High Channel

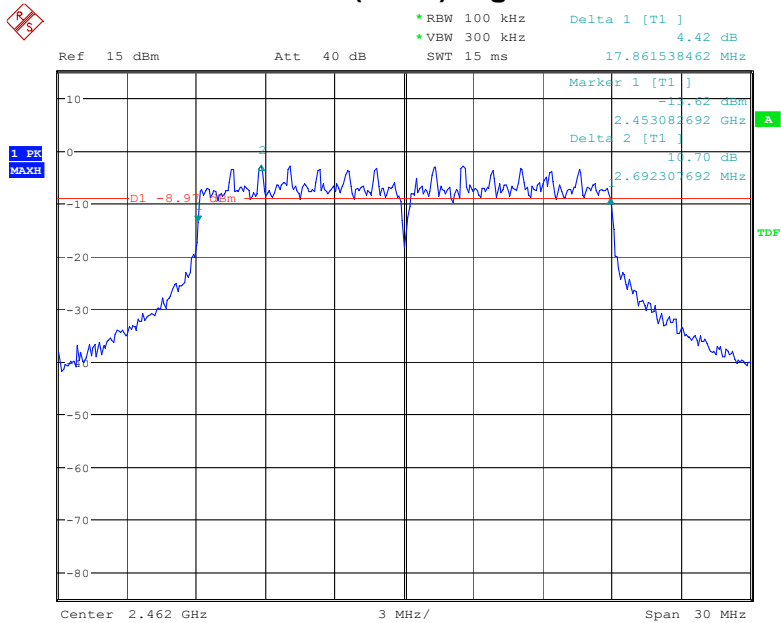


Date: 5.JUN.2017 19:00:15

802.15.4 Low Channel

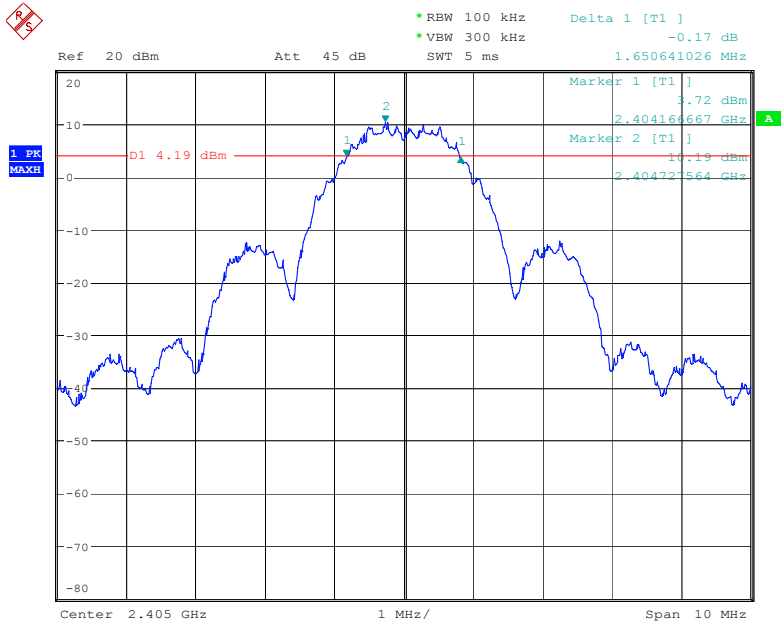


Date: 5.JUN.2017 12:07:53

802.15.4 Middle Channel

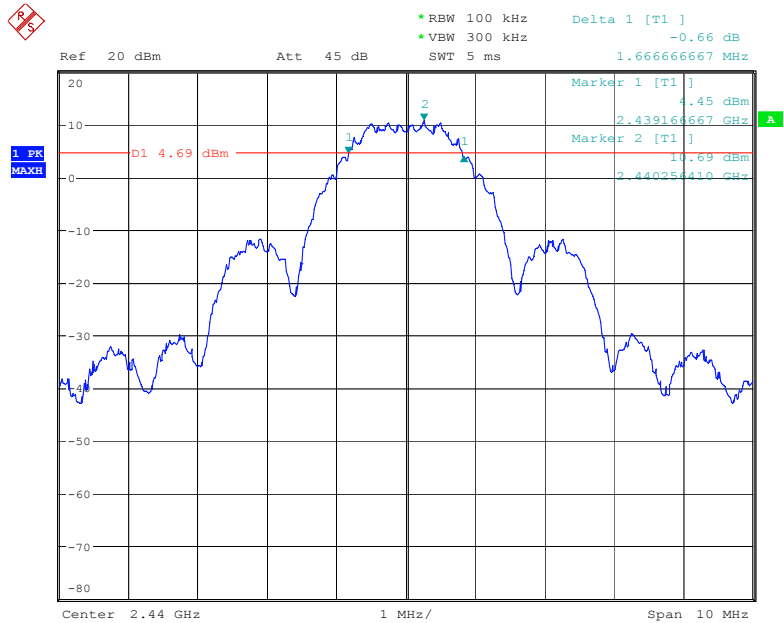

Date: 5.JUN.2017 12:09:46

802.15.4 High Channel

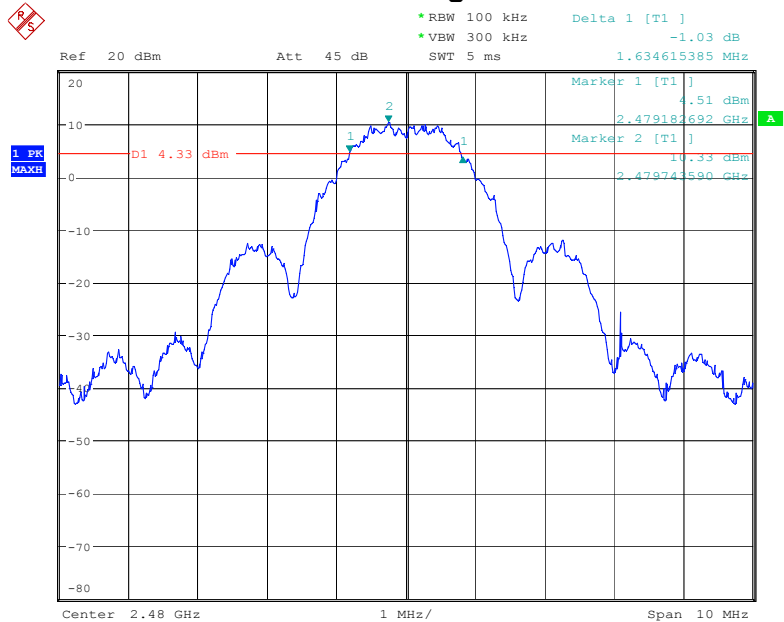

Date: 5.JUN.2017 12:15:32

6. Power Spectral Density


6.1 Measurement Procedure

DTS 6dB Channel Bandwidth, FCC Rule 15.247(a)(2):

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below:

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ KHz}$
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

6.2 Test SET-UP (Block Diagram of Configuration)




6.3 Measurement Results

Please refer to following table and plots.


Temperature :	24 °C	Humidity :	50 %
Test By:	Sance	Test Date :	June 05, 2017
Test Result:	PASS		
Frequency MHz	Data Rate Mbps	PSD dBm/3kHz	Limit dBm/3kHz
IEEE 802.11b Mode (CCK)			
Low Channel: 2412	1	-11.10	8
Middle Channel: 2437	1	-9.79	8
High Channel: 2462	1	-10.90	8
IEEE 802.11g Mode (OFDM)			
Low Channel: 2412	6	-21.34	8
Middle Channel: 2437	6	-19.73	8
High Channel: 2462	6	-21.23	8
IEEE 802.11n(HT20) Mode (OFDM)			
Low Channel: 2412	6.5	-20.88	8
Middle Channel: 2437	6.5	-19.74	8
High Channel: 2462	6.5	-20.97	8
IEEE 802.15.4 Mode			
Low Channel: 2405	1	-1.82	8
Middle Channel: 2440	1	-1.22	8
High Channel: 2480	1	-1.25	8

802.11b Low Channel

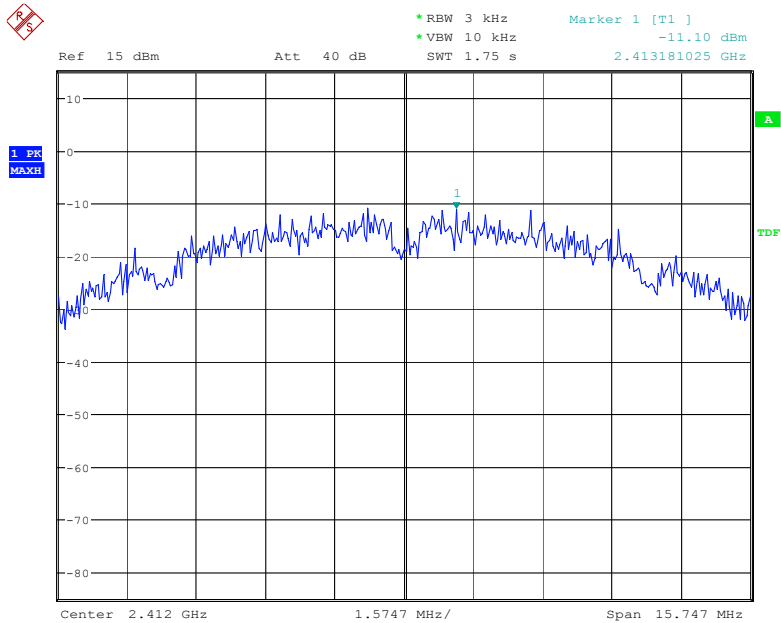


Date: 5.JUN.2017 19:05:50

802.11b Middle Channel

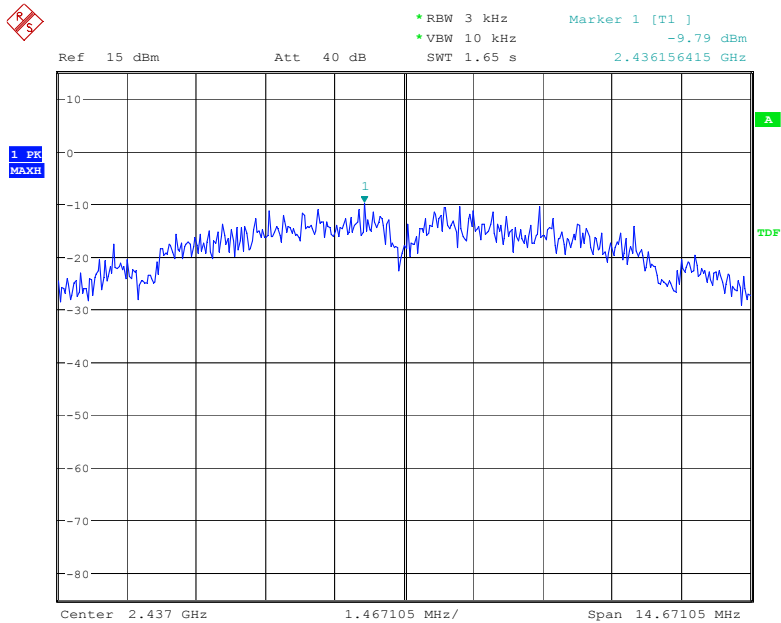


Date: 5.JUN.2017 19:07:18

802.11b High Channel

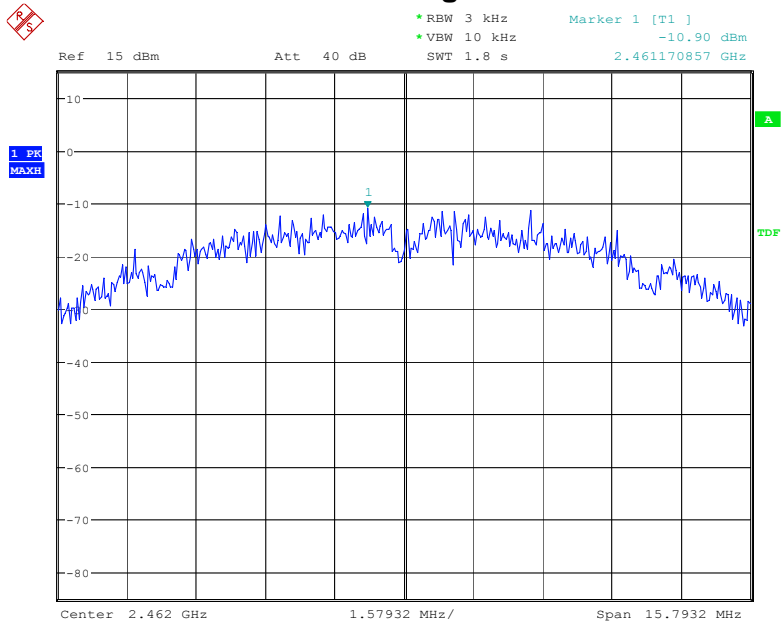


Date: 5.JUN.2017 19:09:06

802.11g Low Channel

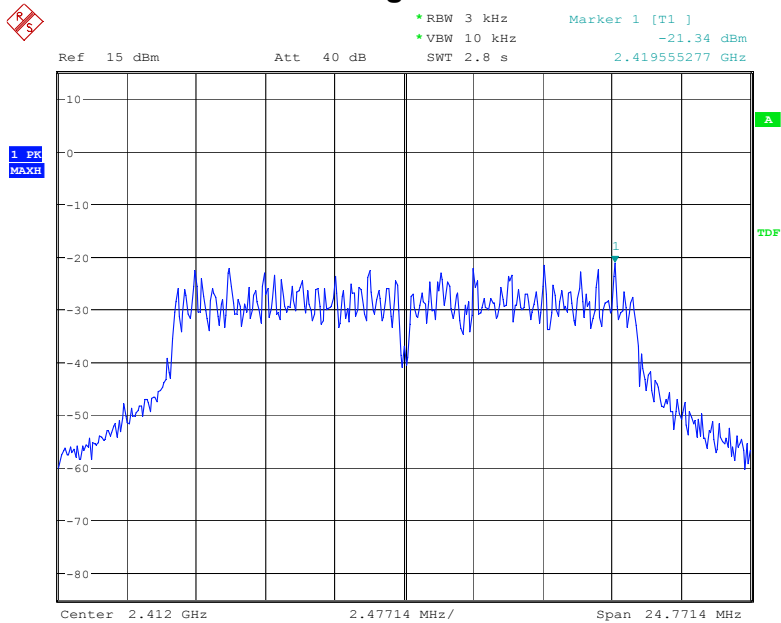


Date: 5.JUN.2017 19:11:20

802.11g Middle Channel

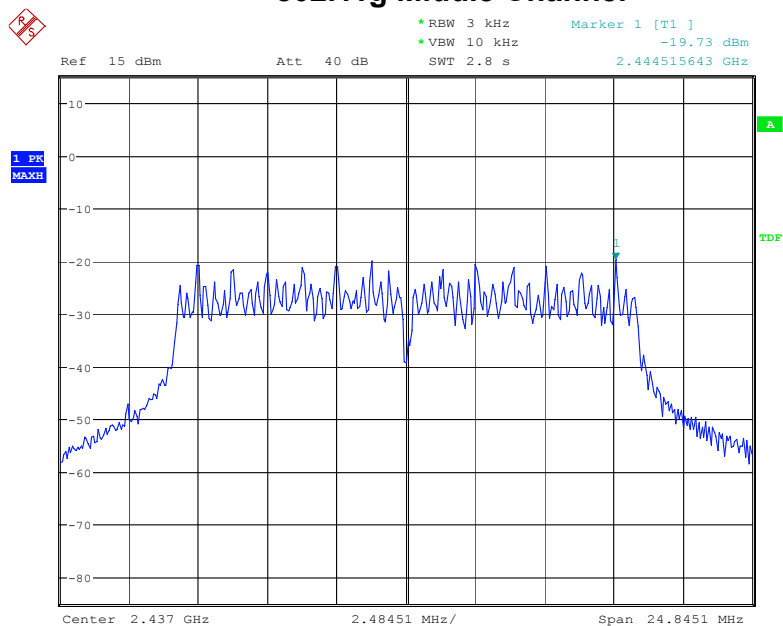


Date: 5.JUN.2017 19:12:42

802.11g High Channel

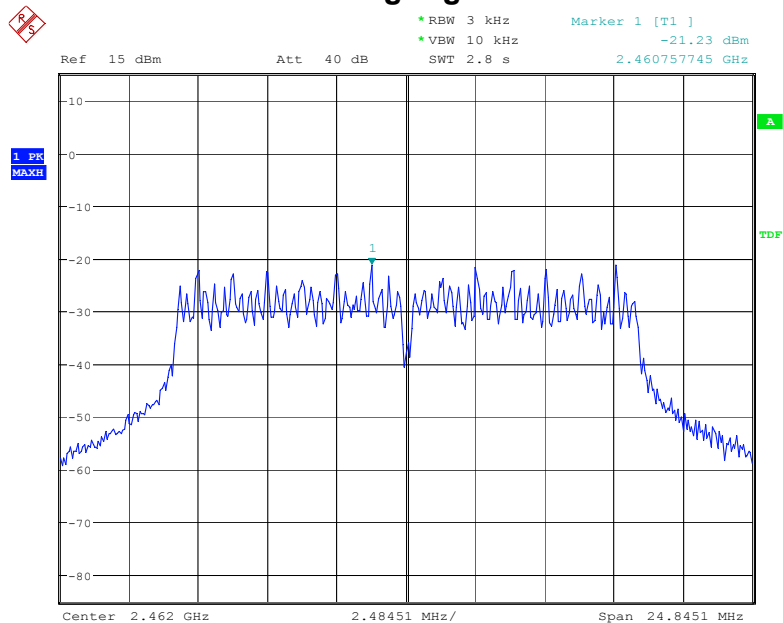


Date: 5.JUN.2017 19:13:49

802.11n(HT20) Low Channel

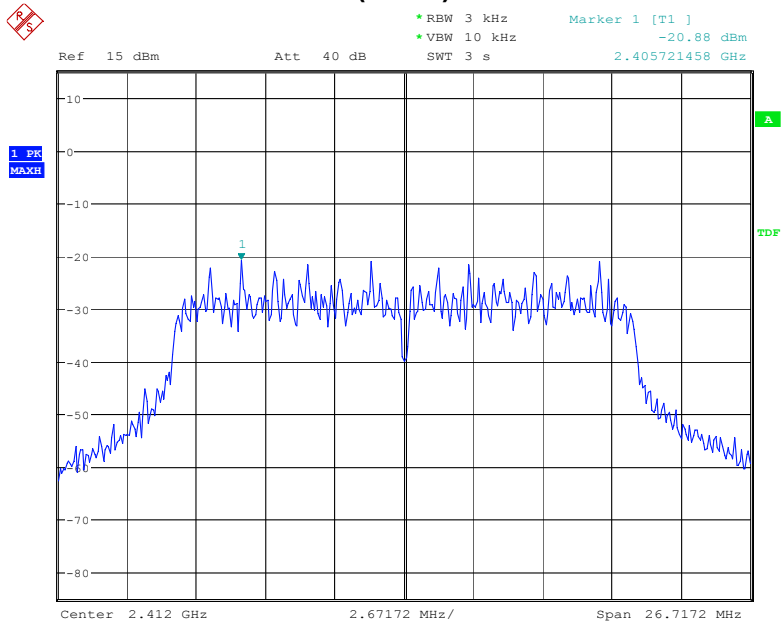


Date: 5.JUN.2017 19:15:40

802.11n(HT20) Middle Channel

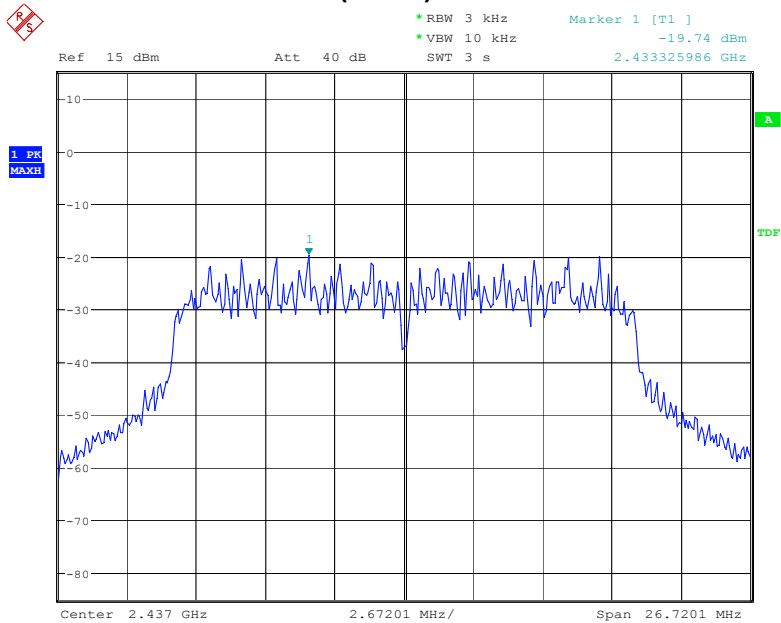


Date: 5.JUN.2017 19:17:22

802.11n(HT20) High Channel

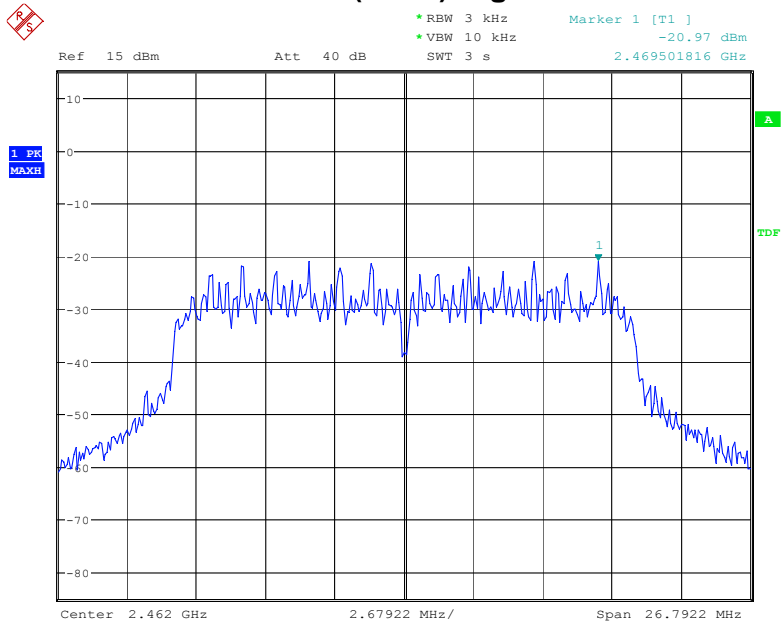


Date: 5.JUN.2017 19:18:48

802.15.4 Low Channel

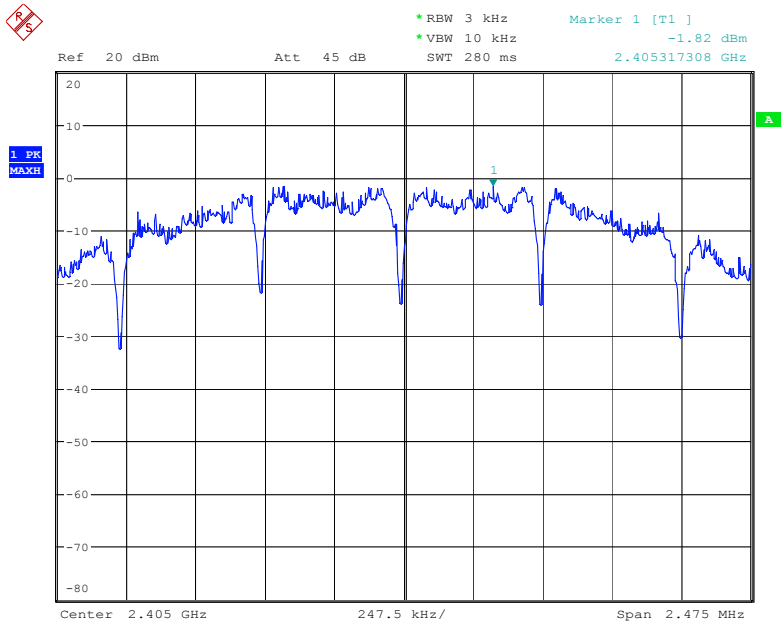


Date: 5.JUN.2017 12:16:48

802.15.4 Middle Channel

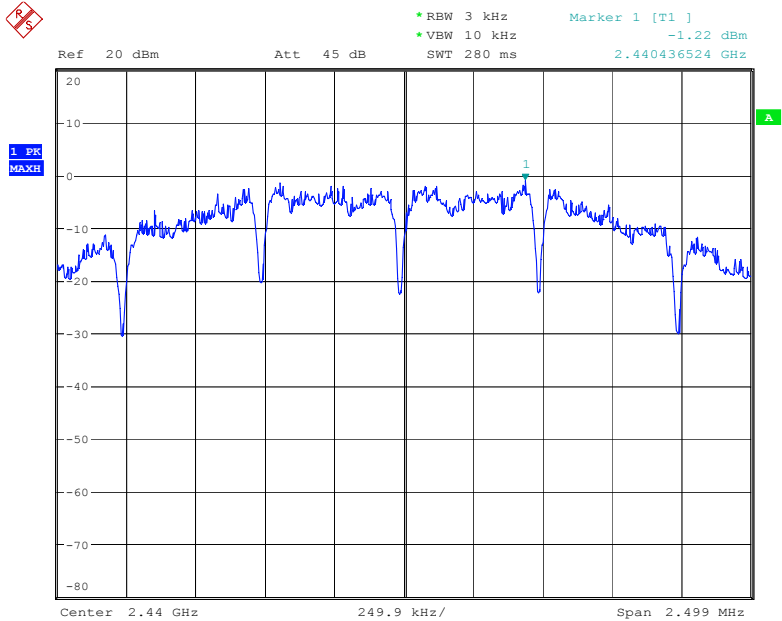

Date: 5.JUN.2017 12:17:37

802.15.4 High Channel

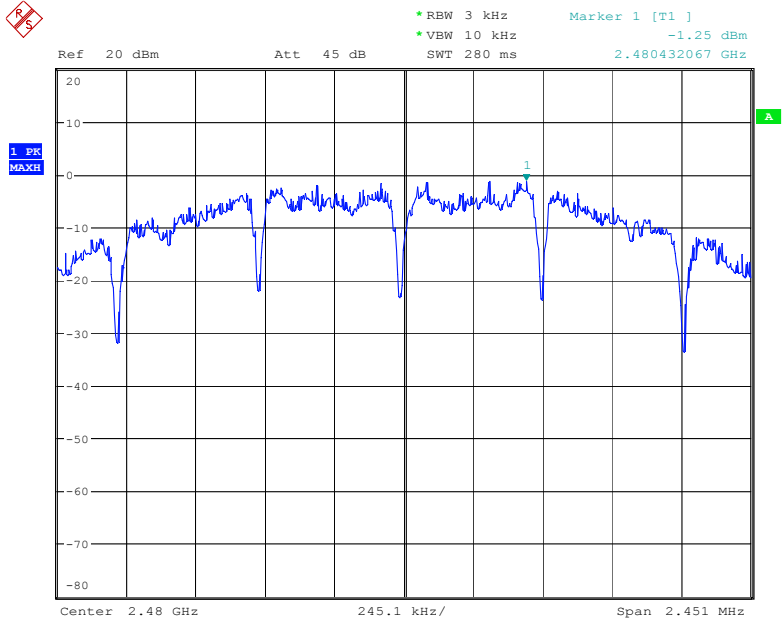

Date: 5.JUN.2017 12:18:13

7. Band Edge and Conducted Spurious Emissions

7.1 Requirement and Measurement Procedure

In any 100KHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer was set as below.

A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

7.2 Test SET-UP (Block Diagram of Configuration)



7.3 Measurement Results

The test plots and table showed all spurious emission and up to the tenth harmonic was measured and they were found to be at least 20dB below the highest level of the desired power in the passband. Please refer to below plots.

For WI-FI Function:

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	51.47	37.29	0.09	51.56	37.38	74.00	54.00	-22.44	-16.62
2390.000	V	54.18	40.03	0.09	54.27	40.12	74.00	54.00	-19.73	-13.88
2483.500	H	51.23	37.14	0.35	51.58	37.49	74.00	54.00	-22.42	-16.51
2483.500	V	53.14	39.23	0.35	53.49	39.58	74.00	54.00	-20.51	-14.42


- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : ± 3.7 dB

For Zigbee Function:

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
2390.000	H	51.59	37.26	0.09	51.68	37.35	74.00	54.00	-22.32	-16.65
2390.000	V	53.57	39.29	0.09	53.66	39.38	74.00	54.00	-20.34	-14.62
2483.500	H	59.30	44.76	0.35	59.65	45.11	74.00	54.00	-14.35	-8.89
2483.500	V	60.33	46.00	0.35	60.68	46.35	74.00	54.00	-13.32	-7.65


- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level+Probe Factor +Cable Loss
 - (3) Measurement uncertainty : ± 3.7 dB

Band Edge 802.11b Low Channel

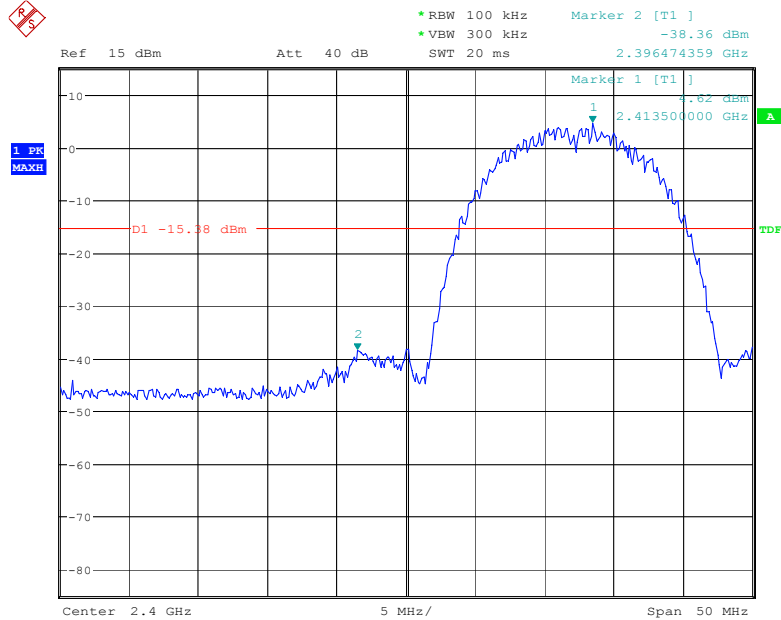


Date: 5.JUN.2017 19:26:40

802.11b High Channel

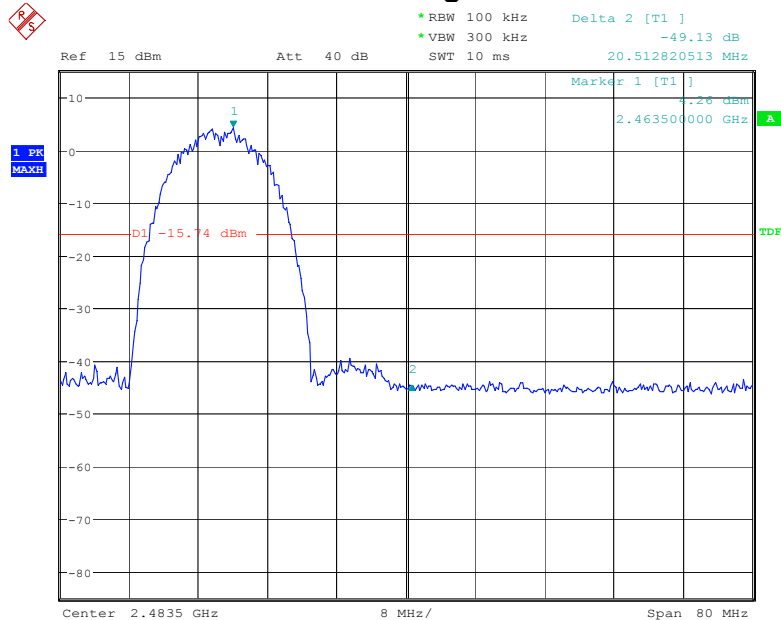


Date: 5.JUN.2017 19:34:48

802.11g Low Channel

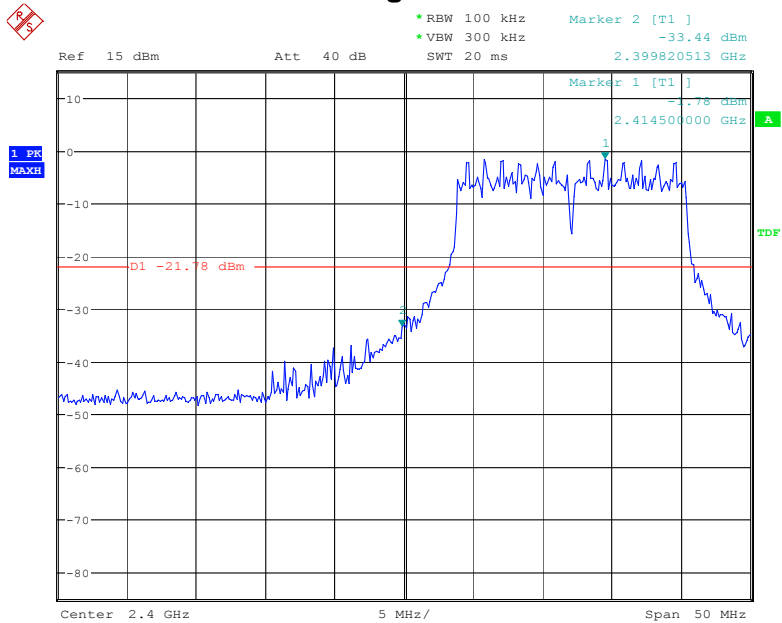


Date: 5.JUN.2017 19:27:37

802.11g High Channel

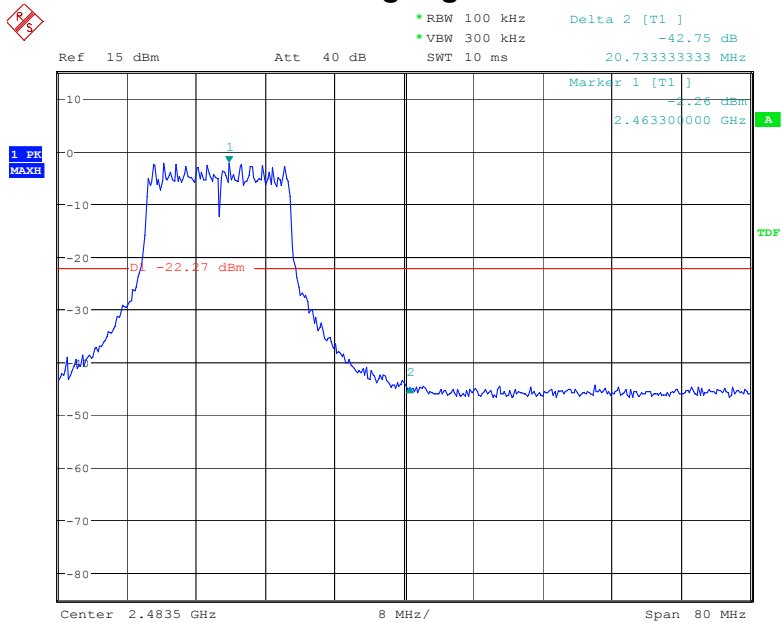


Date: 5.JUN.2017 19:32:55

802.11n(HT20) Low Channel

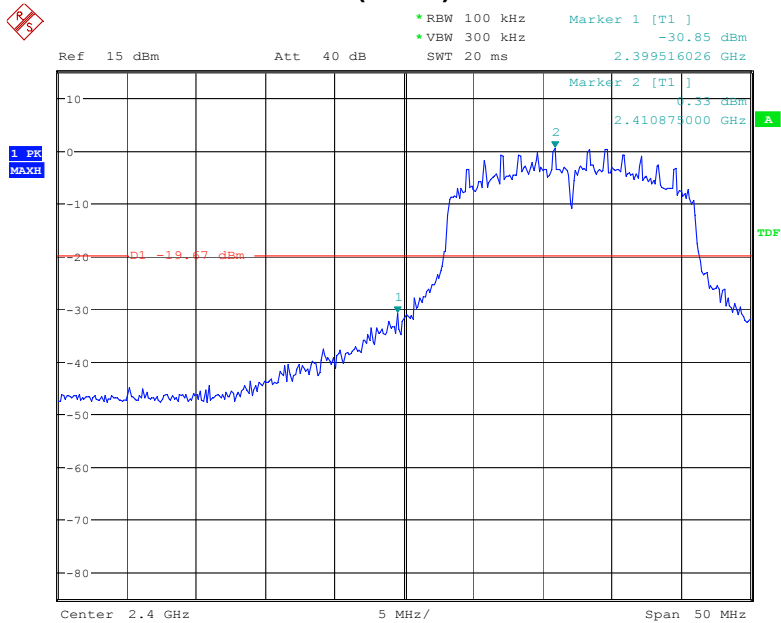


Date: 5.JUN.2017 19:28:47

802.11n(HT20) High Channel

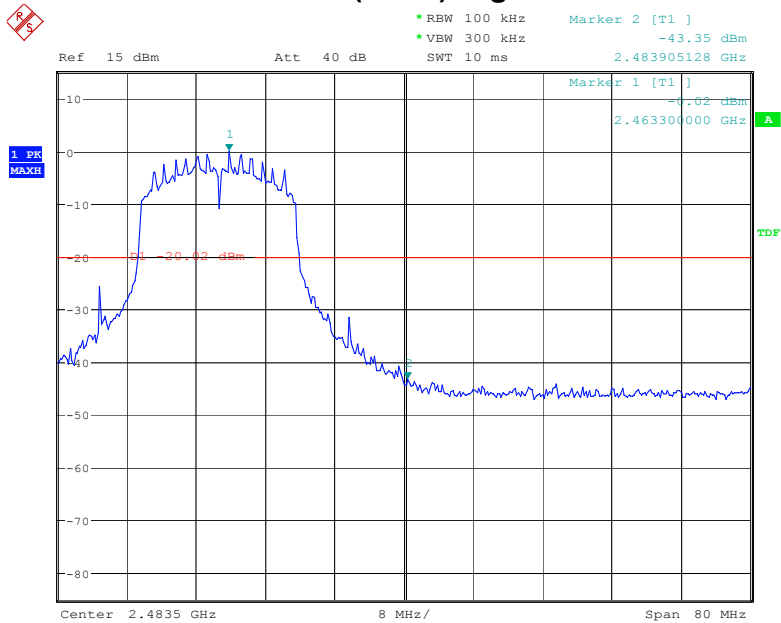


Date: 5.JUN.2017 19:30:22

802.15.4 Low Channel

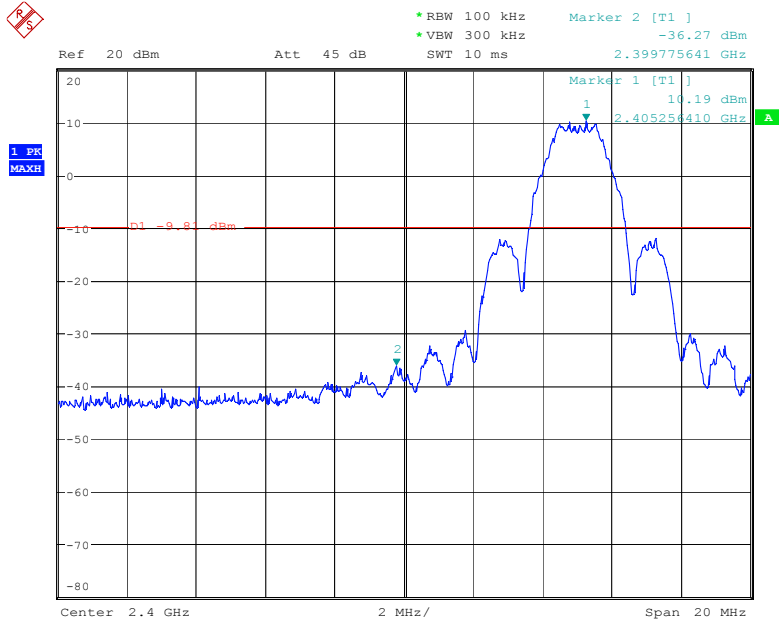


Date: 5.JUN.2017 11:12:39

802.15.4 High Channel

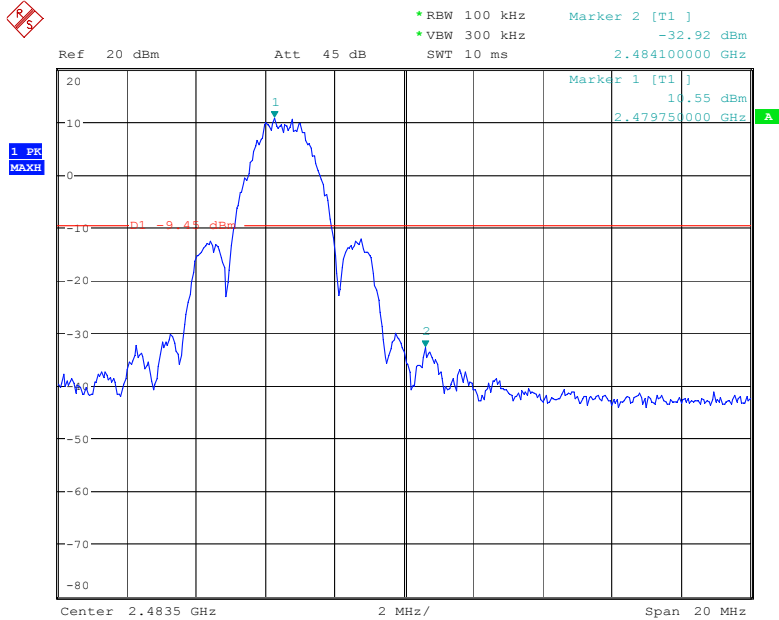


Date: 5.JUN.2017 11:39:34

Conducted Spurious Emissions 802.11b Low Channel

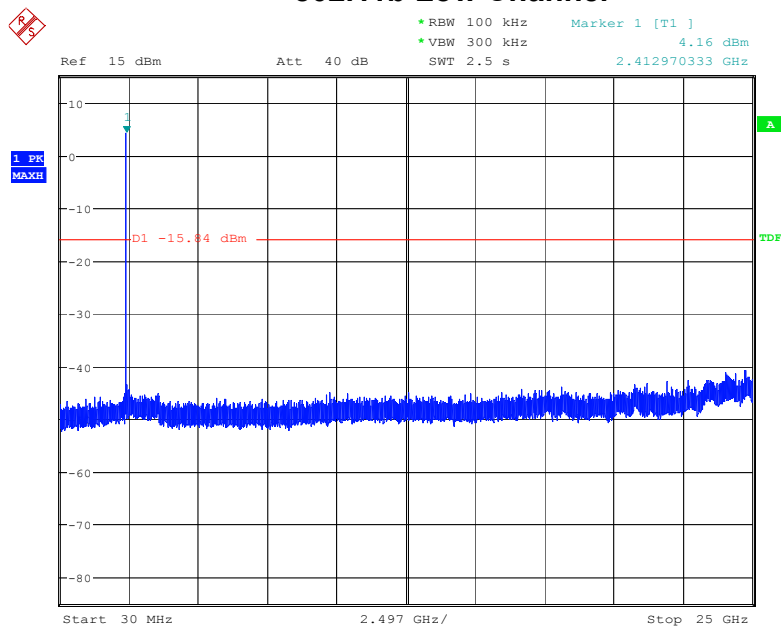


Date: 5.JUN.2017 19:36:31

802.11b Middle Channel

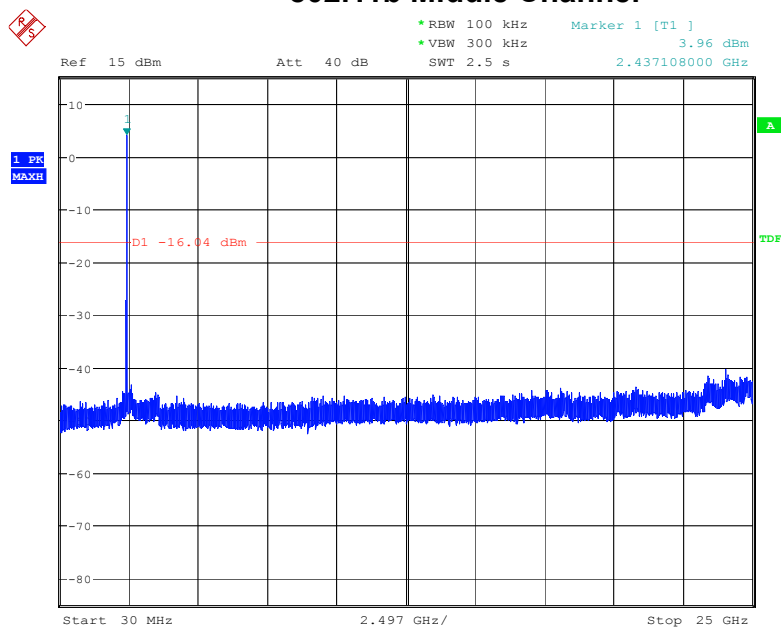


Date: 5.JUN.2017 19:37:46

802.11b High Channel

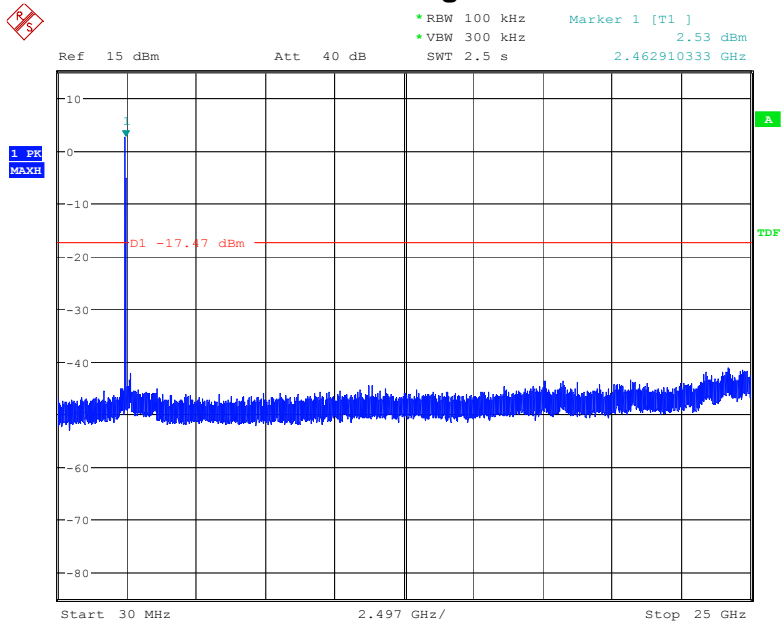


Date: 5.JUN.2017 19:38:51

802.11g Low Channel

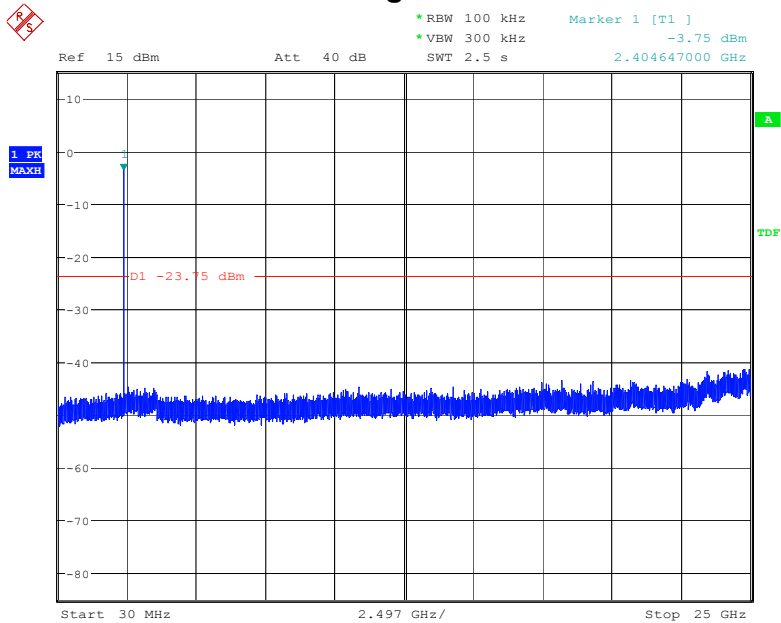


Date: 5.JUN.2017 19:40:56

802.11g Middle Channel

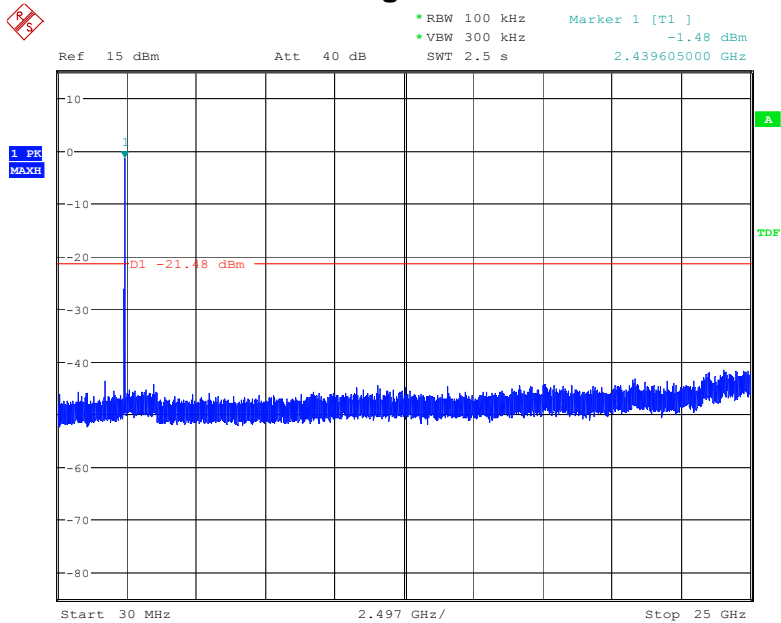


Date: 5.JUN.2017 19:42:00

802.11g High Channel

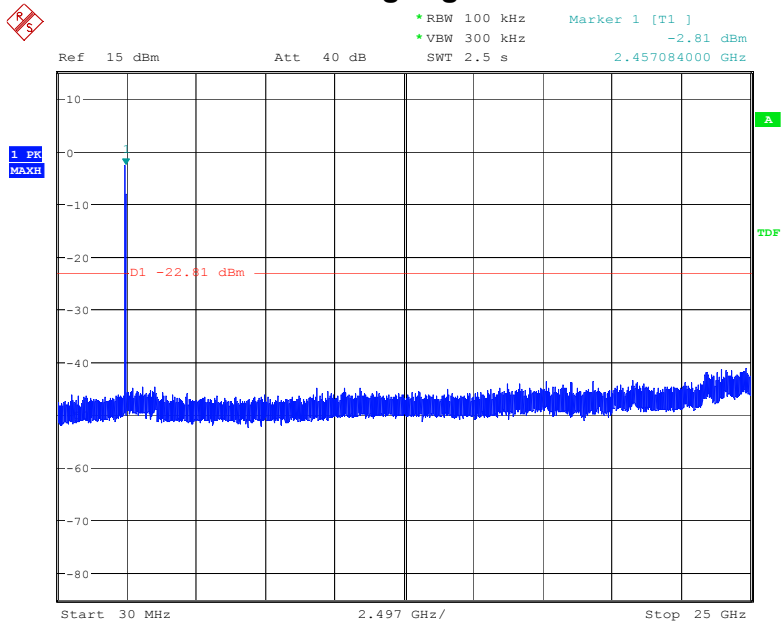


Date: 5.JUN.2017 19:43:20

802.11n(HT20) Low Channel

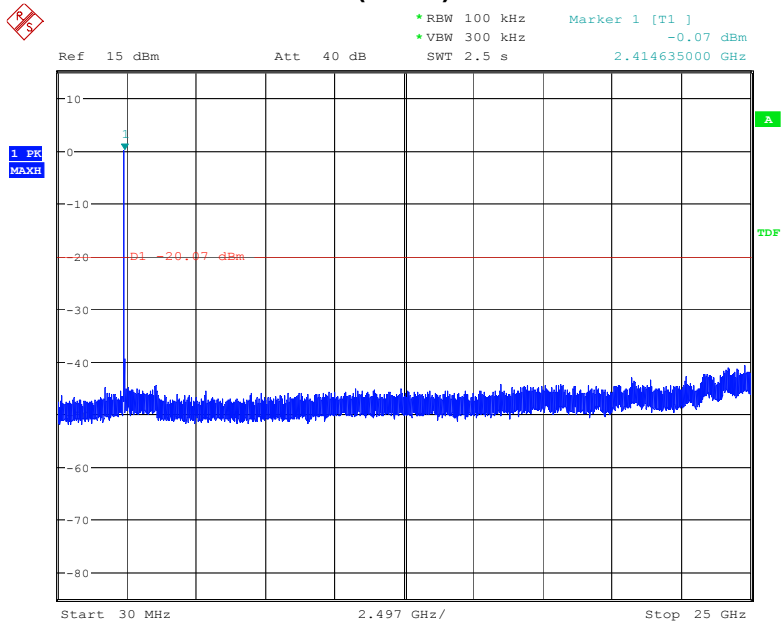


Date: 6.JUN.2017 09:37:02

802.11n(HT20) Middle Channel

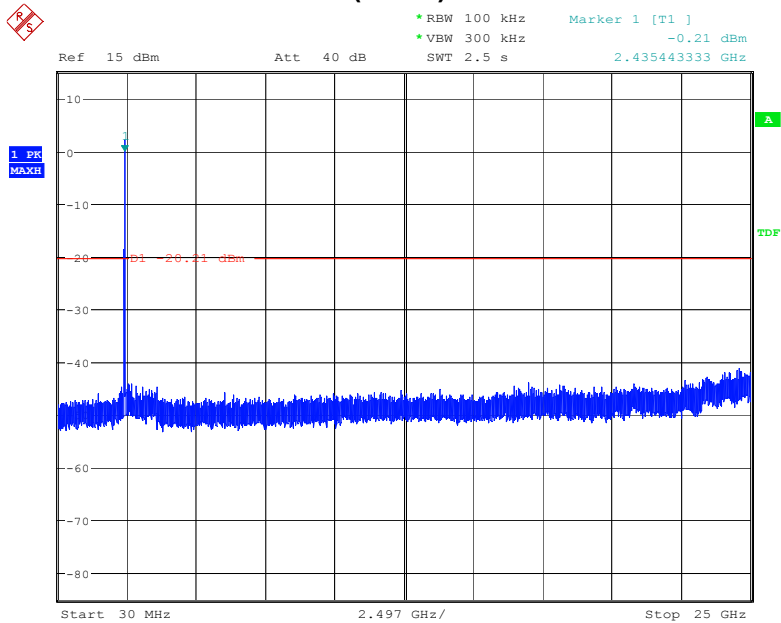


Date: 6.JUN.2017 09:37:57

802.11n(HT20) High Channel

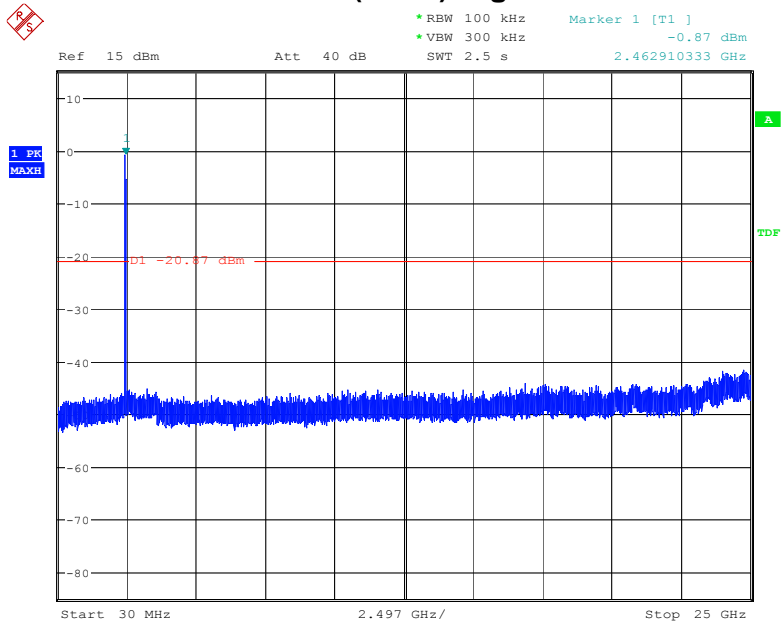


Date: 6.JUN.2017 09:38:50

802.15.4 Low Channel

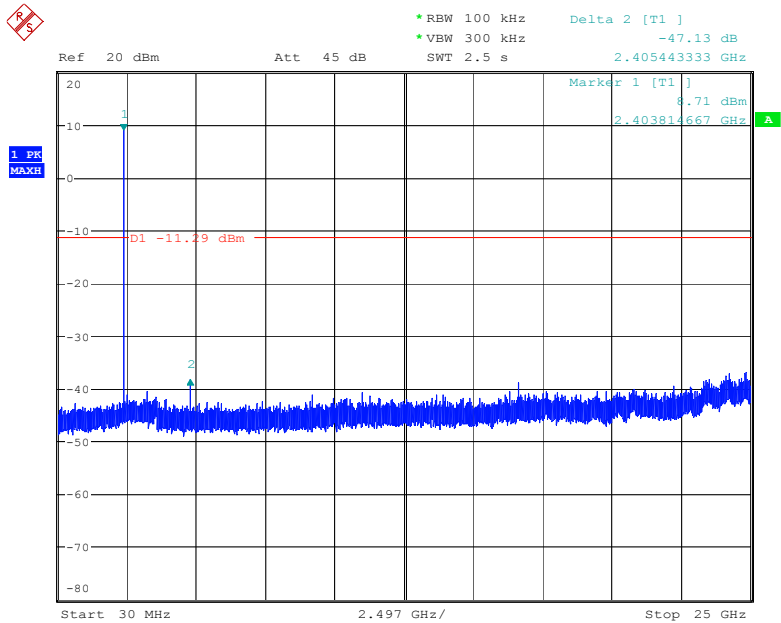


Date: 5.JUN.2017 11:15:37

802.15.4 Middle Channel

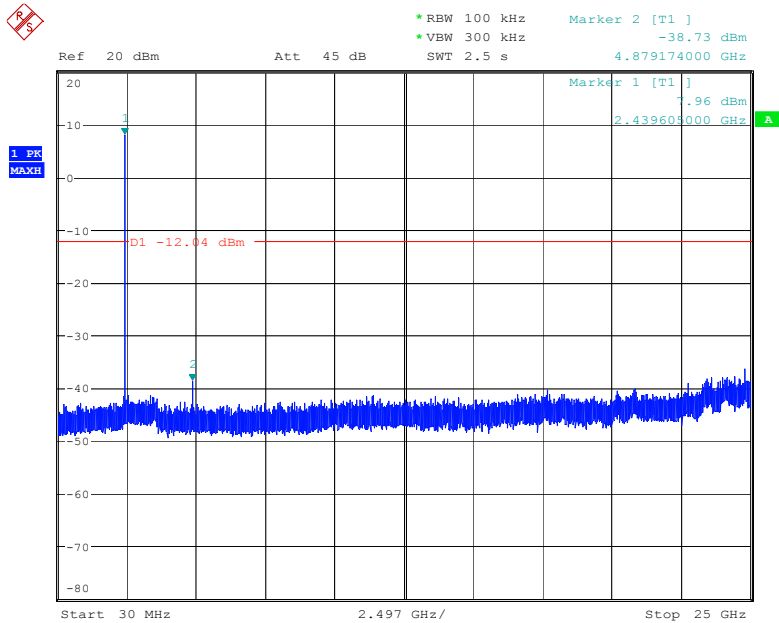

Date: 5.JUN.2017 11:17:54

802.15.4 High Channel

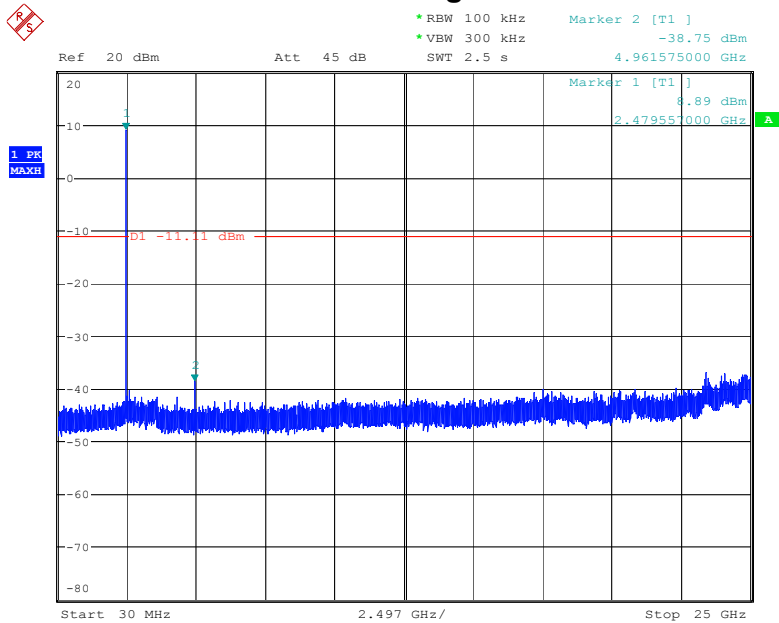


Date: 5.JUN.2017 11:18:55

Note: Sweep points=30001pts


8. Radiated Spurious Emissions and Restricted Bands

8.1 Test SET-UP (Block Diagram of Configuration)

8.1.1 Radiated Emission Test Set-Up, Frequency Below 30MHz

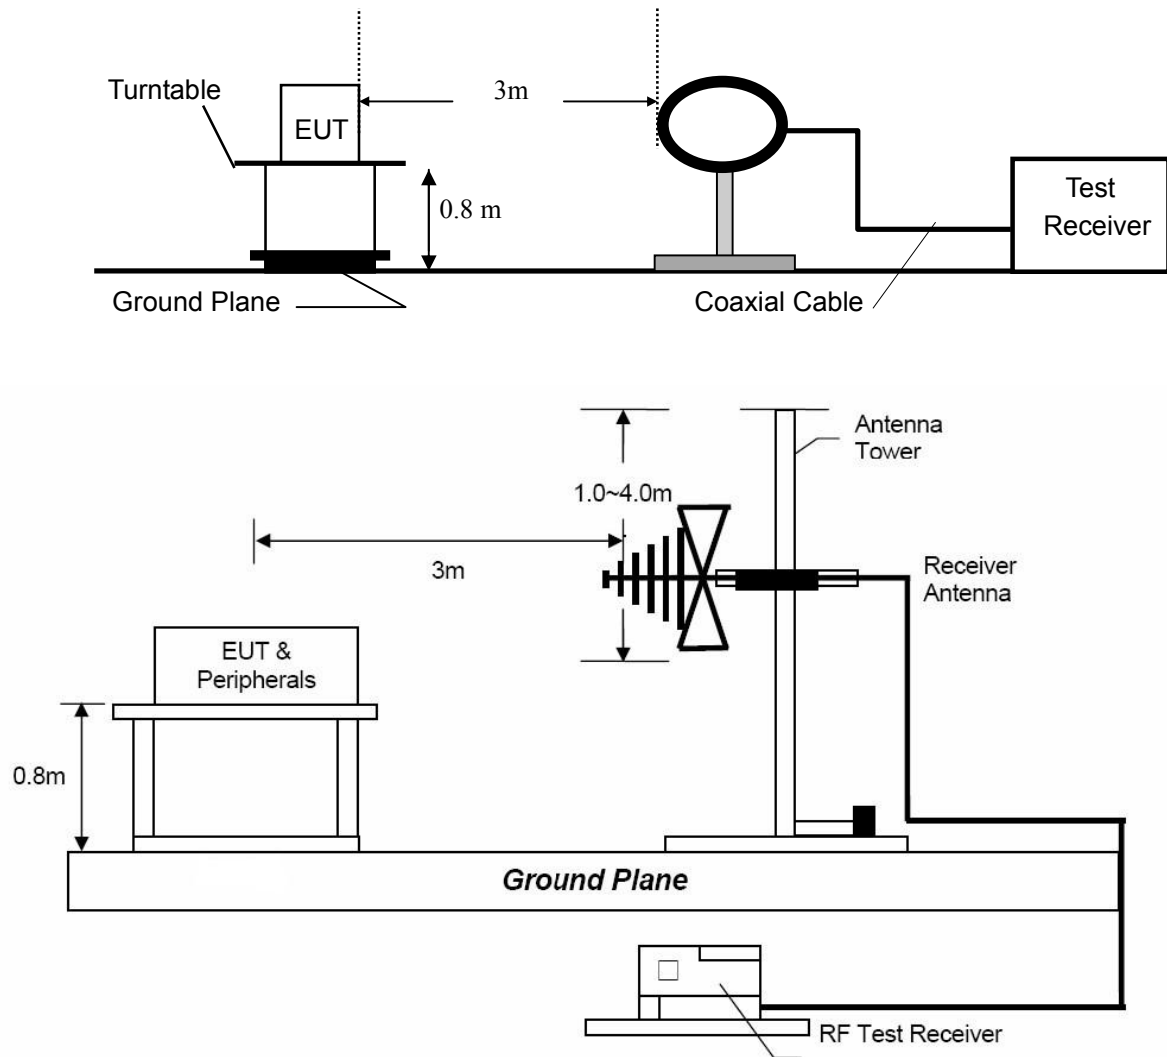

8.1.2 Radiated Emission Test Set-Up, Frequency above 1GHz

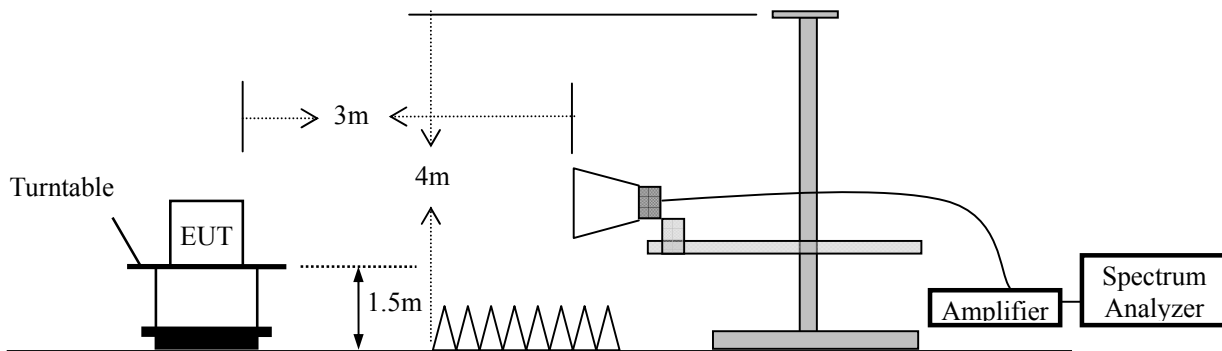

8.2 Measurement Procedure

- Blow 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic chamber room.
- For the radiated emission test above 1GHz:
The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter full anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to peak detect function and specified bandwidth with maximum hold mode.
- A Quasi-peak measurement was then made for that frequency point for below 1GHz test. PK and AV for above 1GHz emission test.

During the radiated emission test, the spectrum analyzer was set with the following configurations:

Frequency Band (MHz)	Level	Resolution Bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	3 MHz
	Average	1 MHz	10 Hz

8.3 Limit

Frequency range MHz	Distance Meters	Field Strengths Limit (15.209)
		$\mu\text{V/m}$
0.009 ~ 0.490	300	$2400/F(\text{kHz})$
0.490 ~ 1.705	30	$24000/F(\text{kHz})$
1.705 ~ 30	30	30
30 ~ 88	3	100
88 ~ 216	3	150
216 ~ 960	3	200
Above 960	3	500

- Remark : (1) Emission level (dB) μV = 20 log Emission level $\mu\text{V/m}$
 (2) The smaller limit shall apply at the cross point between two frequency bands.
 (3) As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.
 (4) The frequency range scanned is from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or 40 GHz, whichever is lower.
 (5) §15.247(d) specifies that emissions which fall in the restricted bands, as defined in §15.205 comply with radiated emission limits specified in §15.209.

8.4 Measurement Results

For Wi-Fi Function:

Please refer to following plots of the worst case: 802.11b Middle channel.

For Zigbee Function:


Please refer to following plots of the worst case: 802.15.4 Low channel.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2017-7-3 11:02:48

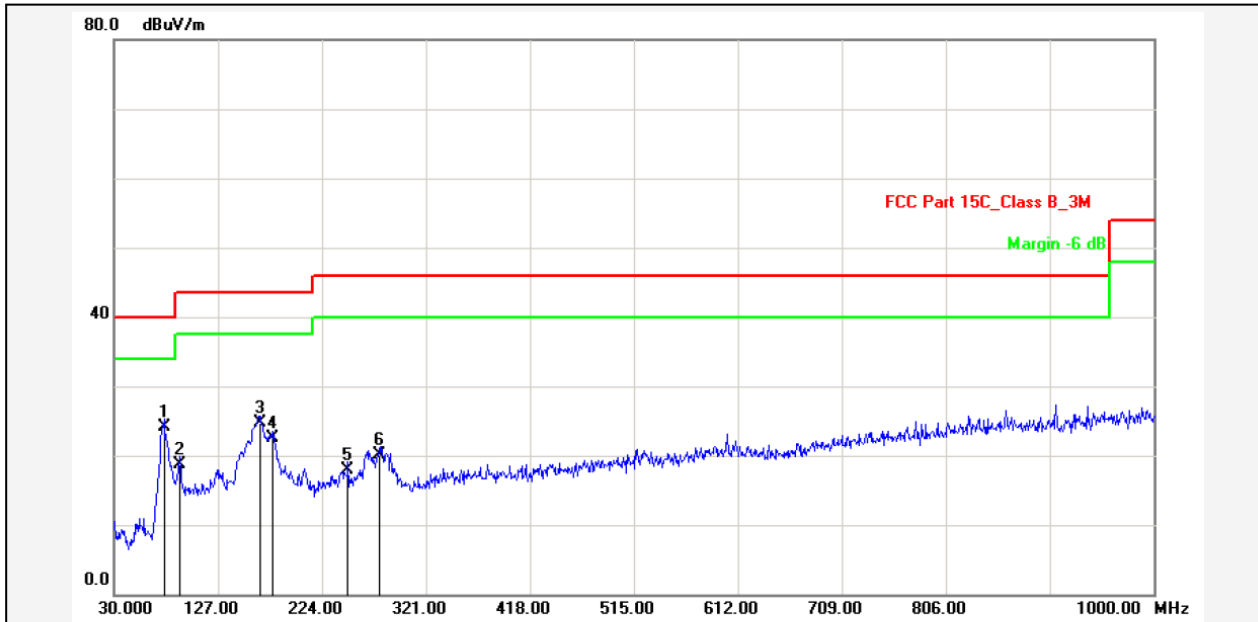

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 120V/60Hz

Test Engineer: Ivan

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	76.5600	-19.49	43.69	24.20	40.00	-15.80	QP			P	
2	91.1099	-13.66	32.46	18.80	43.50	-24.70	QP			P	
3	165.8000	-14.95	39.75	24.80	43.50	-18.70	QP			P	
4	178.4099	-14.25	36.75	22.50	43.50	-21.00	QP			P	
5	248.2500	-11.76	29.76	18.00	46.00	-28.00	QP			P	
6	278.3199	-11.02	31.22	20.20	46.00	-25.80	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:10:43

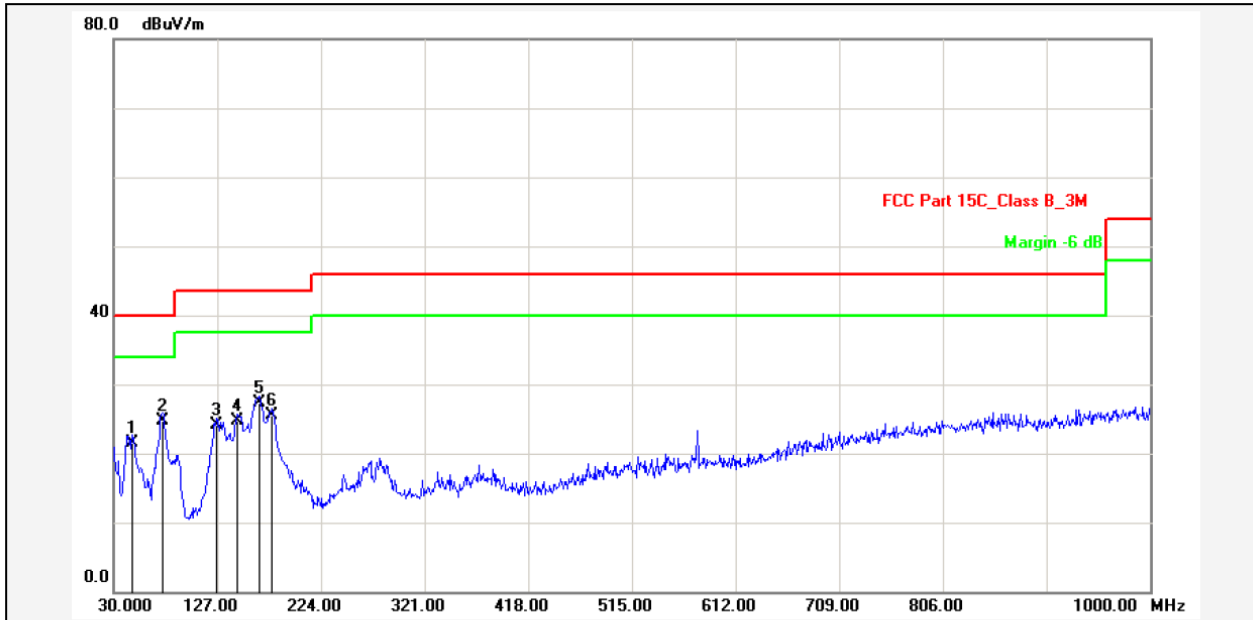

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 120V/60Hz

Test Engineer: Ivan

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		P/F	Remark
1	47.4600	-13.50	35.10	21.60	40.00	-18.40	QP		P	
2	75.5899	-19.03	43.83	24.80	40.00	-15.20	QP		P	
3	126.0300	-17.73	41.93	24.20	43.50	-19.30	QP		P	
4	145.4299	-18.59	43.29	24.70	43.50	-18.80	QP		P	
5	165.8000	-17.95	45.25	27.30	43.50	-16.20	QP		P	
6	178.4099	-17.25	42.75	25.50	43.50	-18.00	QP		P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:31:36

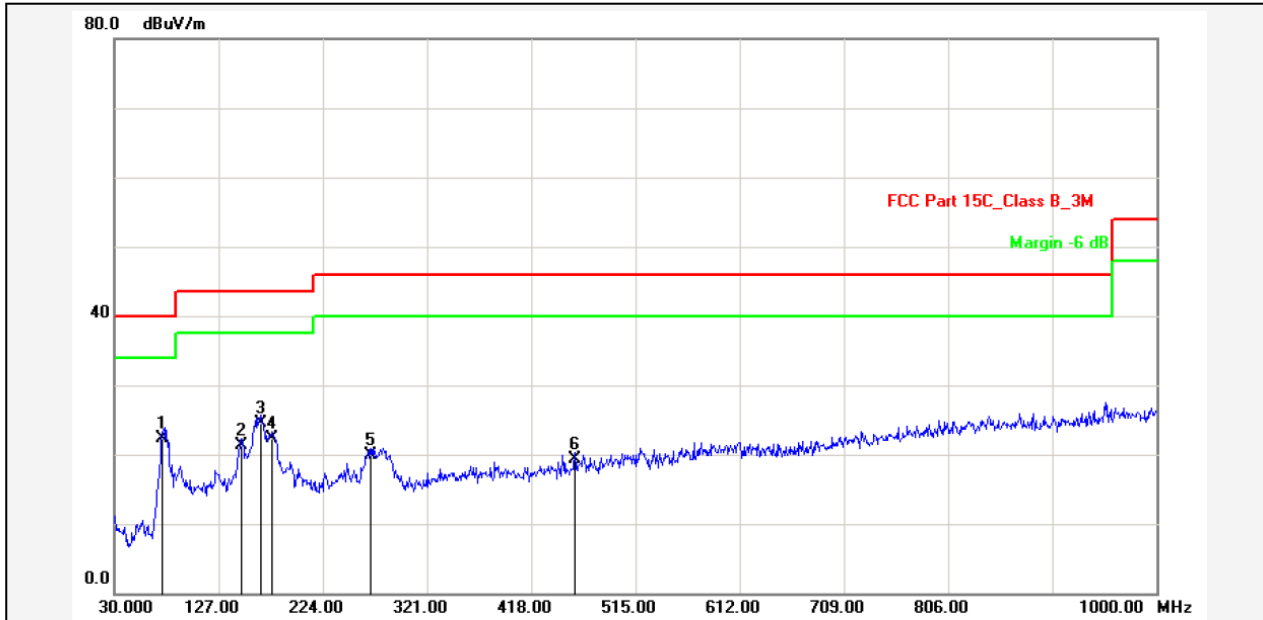

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 240V/50Hz

Test Engineer: Ivan

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	74.6200	-20.97	43.37	22.40	40.00	-17.60	QP			P	
2	148.3400	-15.54	36.84	21.30	43.50	-22.20	QP			P	
3	165.8000	-14.95	39.55	24.60	43.50	-18.90	QP			P	
4	176.4698	-14.40	36.70	22.30	43.50	-21.20	QP			P	
5	268.6200	-11.22	31.12	19.90	46.00	-26.10	QP			P	
6	458.7400	-7.76	27.06	19.30	46.00	-26.70	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:39:09

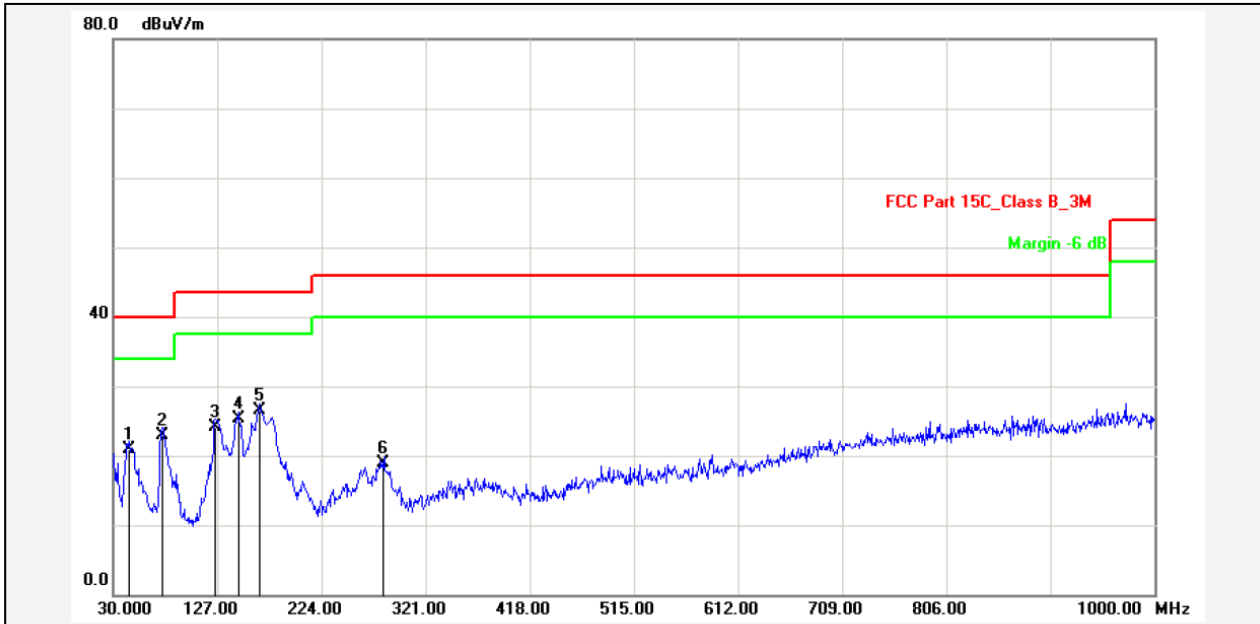

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 240V/50Hz

Test Engineer: Ivan

Test Mode: Charging+Wi-Fi Link

Remark: 802.11b Middle Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	44.5499	-13.87	34.87	21.00	40.00	-19.00	QP			P	
2	75.5899	-19.03	42.03	23.00	40.00	-17.00	QP			P	
3	125.0600	-17.62	41.82	24.20	43.50	-19.30	QP			P	
4	146.4000	-18.58	43.98	25.40	43.50	-18.10	QP			P	
5	166.7700	-17.92	44.42	26.50	43.50	-17.00	QP			P	
6	282.1999	-12.92	31.82	18.90	46.00	-27.10	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:24:29

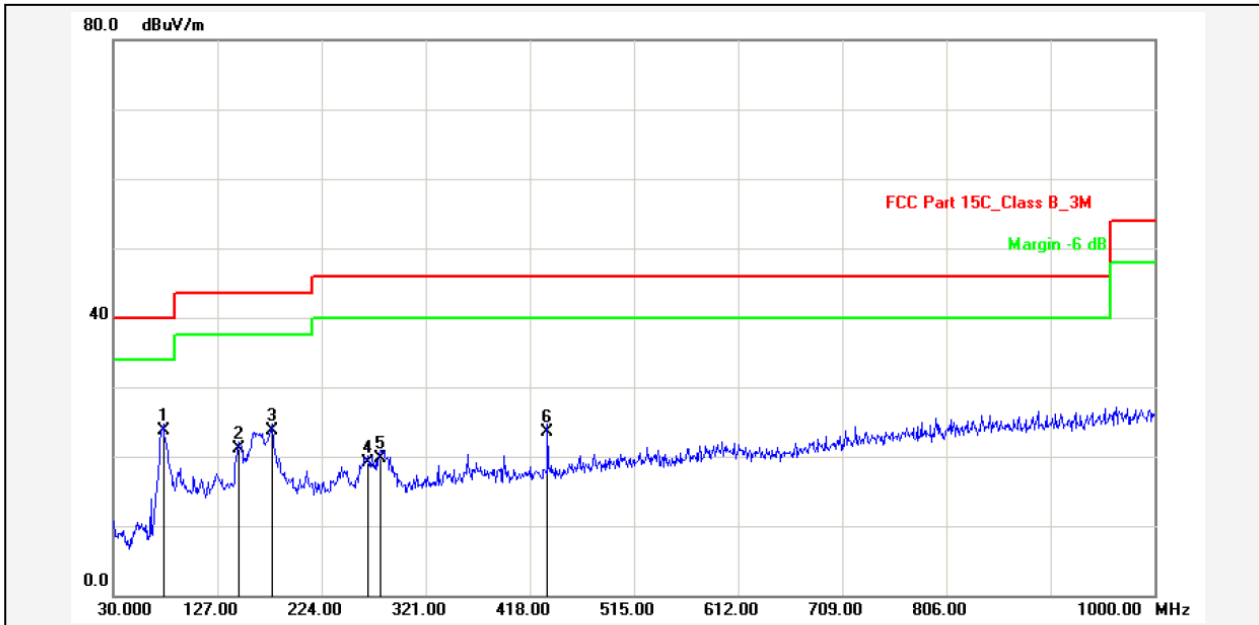

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 120V/60Hz

Test Engineer: Ivan

Test Mode: Charging+ZigBee mode

Remark: 802.15.4 Low Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	76.5600	-19.49	43.29	23.80	40.00	-16.20	QP			P	
2	147.3700	-15.55	36.75	21.20	43.50	-22.30	QP			P	
3	178.4099	-14.25	37.95	23.70	43.50	-19.80	QP			P	
4	267.6499	-11.24	30.34	19.10	46.00	-26.90	QP			P	
5	279.2900	-10.99	30.79	19.80	46.00	-26.20	QP			P	
6	434.4900	-8.33	31.93	23.60	46.00	-22.40	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: [Http://www.ntc-c.com](http://www.ntc-c.com)

Site: Radiation

Test Time: 2017-7-3 11:17:15

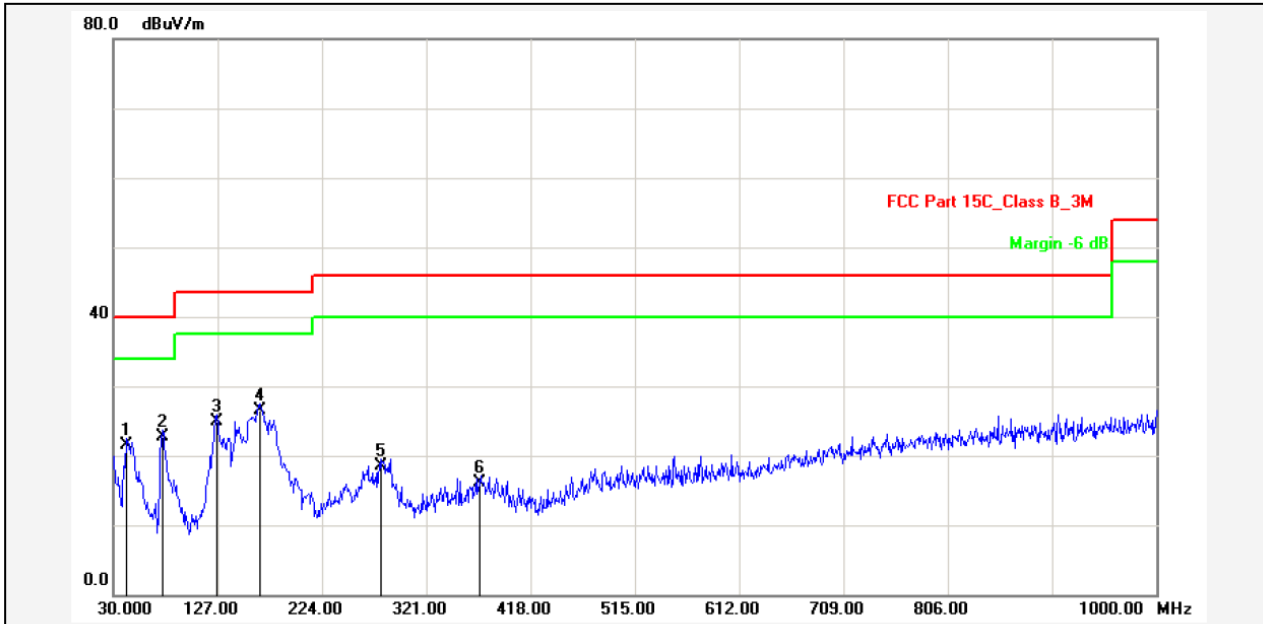

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 120V/60Hz

Test Engineer: Ivan

Test Mode: Charging+ZigBee mode

Remark: 802.15.4 Low Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	41.6400	-14.69	36.29	21.60	40.00	-18.40	QP			P	
2	75.5899	-19.03	41.73	22.70	40.00	-17.30	QP			P	
3	126.0300	-17.73	42.73	25.00	43.50	-18.50	QP			P	
4	165.8000	-17.95	44.55	26.60	43.50	-16.90	QP			P	
5	279.2900	-12.99	31.49	18.50	46.00	-27.50	QP			P	
6	371.4399	-11.17	27.27	16.10	46.00	-29.90	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:46:41

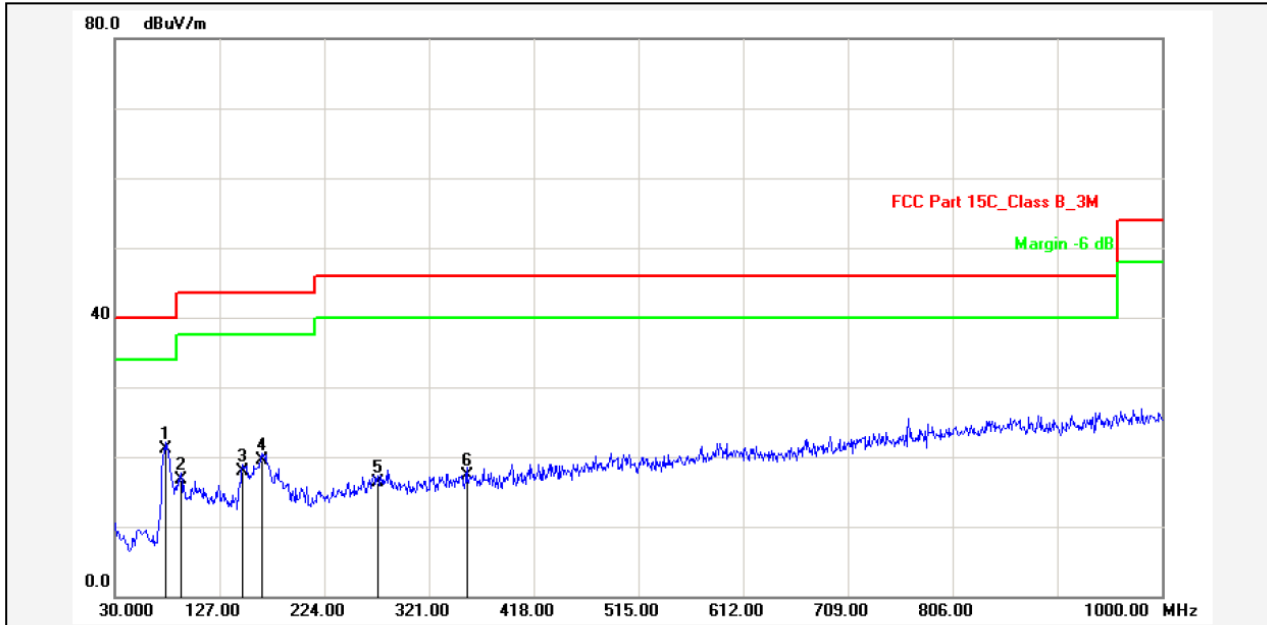

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test Item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Horizontal

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 240V/50Hz

Test Engineer: Ivan

Test Mode: Charging+ZigBee mode

Remark: 802.15.4 Low Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector			P/F	Remark
1	76.5600	-19.49	40.69	21.20	40.00	-18.80	QP			P	
2	91.1099	-13.66	30.46	16.80	43.50	-26.70	QP			P	
3	148.3400	-15.54	33.54	18.00	43.50	-25.50	QP			P	
4	165.8000	-14.95	34.45	19.50	43.50	-24.00	QP			P	
5	273.4700	-11.12	27.52	16.40	46.00	-29.60	QP			P	
6	355.9200	-9.14	26.54	17.40	46.00	-28.60	QP			P	


Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.



Dongguan NTC Co., Ltd.
Tel: +86-769-22022444 Fax: +86-769-22022799
Web: <http://www.ntc-c.com>

Site: Radiation

Test Time: 2017-7-3 11:53:49

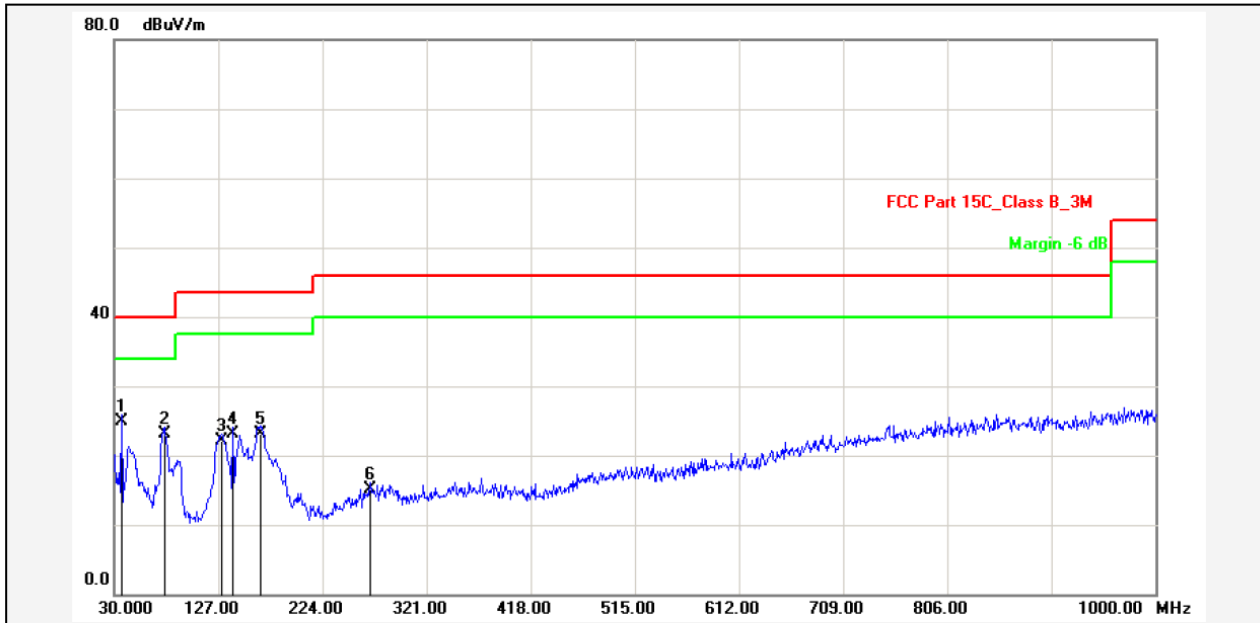

Report No.: MNA168

Test Standard: FCC Part 15C_Class B_3M

Test item: Radiation Emission

Applicant: Micro Nature

Product: MindAI

Model No.: MNA168

Test Distance: 3m

Ant. Polarization: Vertical

Temp.(C)/Hum.(%): 24(C) / 47 %

Power Rating: AC 240V/50Hz

Test Engineer: Ivan

Test Mode: Charging+ZigBee mode

Remark: 802.15.4 Low Channel

No.	Frequency (MHz)	Factor (dB/m)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector		P/F	Remark
1	36.7899	-16.75	41.65	24.90	40.00	-15.10	QP		P	
2	76.5600	-19.05	42.25	23.20	40.00	-16.80	QP		P	
3	129.9098	-18.15	40.25	22.10	43.50	-21.40	QP		P	
4	140.5800	-18.60	41.80	23.20	43.50	-20.30	QP		P	
5	165.8000	-17.95	41.15	23.20	43.50	-20.30	QP		P	
6	268.6200	-13.22	28.32	15.10	46.00	-30.90	QP		P	

Note: Below 30MHz, the emissions are lower than 20dB below the allowable limit.

For Wi-Fi Function:

Modulation: 802.11b (the worst case)
Frequency Range: 1-25GHz Test Date : July 03, 2017
Test Result: PASS Temperature : 22 °C
Measured Distance: 3m Humidity : 54 %
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4824	V	46.73	33.14	6.38	53.11	39.52	74.00	54.00	-20.89	-14.48
7236	V	44.10	29.88	10.48	54.58	40.36	74.00	54.00	-19.42	-13.64

4824	H	46.05	31.78	6.38	52.43	38.16	74.00	54.00	-21.57	-15.84
7236	H	45.22	31.10	10.48	55.70	41.58	74.00	54.00	-18.30	-12.42

Operation Mode: TX Mode (Mid)										
4874	V	46.13	31.72	6.56	52.69	38.28	74.00	54.00	-21.31	-15.72
7311	V	45.19	31.13	10.53	55.72	41.66	74.00	54.00	-18.28	-12.34

4874	H	46.11	31.79	6.56	52.67	38.35	74.00	54.00	-21.33	-15.65
7311	H	45.96	32.01	10.53	56.49	42.54	74.00	54.00	-17.51	-11.46

Operation Mode: TX Mode (High)										
4924	V	46.07	31.73	6.76	52.83	38.49	74.00	54.00	-21.17	-15.51
7386	V	35.18	32.05	10.57	45.75	42.62	74.00	54.00	-28.25	-11.38

4924	H	45.91	31.40	6.76	52.67	38.16	74.00	54.00	-21.33	-15.84
7386	H	46.91	32.85	10.57	57.48	43.42	74.00	54.00	-16.52	-10.58

Other harmonics emissions are lower than 10dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : ± 3.7 dB.
 - (6) Horn antenna used for the emission over 1000MHz.

For Zigbee Function:

Modulation: 802.15.4 (the worst case)
Frequency Range: 1-25GHz Test Date : July 03, 2017
Test Result: PASS Temperature : 22 °C
Measured Distance: 3m Humidity : 54 %
Test By: Sance

Freq. (MHz)	Ant.Pol. (H/V)	Reading Level(dBuV)		Factor (dB/m)	Emission Level (dBuV)		Limit 3m (dBuV/m)		Margin (dB)	
		PK	AV		PK	AV	PK	AV	PK	AV
Operation Mode: TX Mode (Low)										
4810	V	46.13	31.92	6.33	52.46	38.25	74.00	54.00	-21.54	-15.75
7215	V	36.16	22.24	10.46	46.62	32.70	74.00	54.00	-27.38	-21.30

4810	H	46.16	31.75	6.33	52.49	38.08	74.00	54.00	-21.51	-15.92
7215	H	45.87	31.90	10.46	56.33	42.36	74.00	54.00	-17.67	-11.64

Operation Mode: TX Mode (Mid)										
4880	V	45.75	31.82	6.60	52.35	38.42	74.00	54.00	-21.65	-15.58
7320	V	45.84	32.26	10.55	56.39	42.81	74.00	54.00	-17.61	-11.19

4880	H	45.66	31.61	6.60	52.26	38.21	74.00	54.00	-21.74	-15.79
7320	H	46.08	31.53	10.55	56.63	42.08	74.00	54.00	-17.37	-11.92

Operation Mode: TX Mode (High)										
4960	V	45.59	31.37	6.89	52.48	38.26	74.00	54.00	-21.52	-15.74
7440	V	46.11	31.75	10.60	56.71	42.35	74.00	54.00	-17.29	-11.65

4960	H	46.53	31.35	6.89	53.42	38.24	74.00	54.00	-20.58	-15.76
7440	H	45.48	31.91	10.60	56.08	42.51	74.00	54.00	-17.92	-11.49

Other harmonics emissions are lower than 10dB below the allowable limit.

- Note:**
- (1) All Readings are Peak Value and AV.
 - (2) Emission Level= Reading Level + Factor
 - (3) Factor= Antenna Gain + Cable Loss – Amplifier Gain
 - (4) Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 10dB below the permissible limits.
 - (5) Measurement uncertainty : $\pm 3.7\text{dB}$.
 - (6) Horn antenna used for the emission over 1000MHz.

9. Antenna Application

9.1 Antenna requirement

According to of FCC part 15C section 15.203 and 15.240:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Systems operating in the 2400-2483.5MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum peak output power of the intentional radiator is reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

9.2 Measurement Results

The antenna is FPC antenna and no consideration of replacement, and the best case gain of the antenna is -0.466 dBi. So, the antenna is consider meet the requirement.

10. Test Equipment List

Description	Manufacturer	Model Number	Serial Number	Characteristics	Calibration Date	Calibration Due Date
Test Receiver	Rohde & Schwarz	ESCI7	100837	9KHz~7GHz	Nov. 22, 2016	Nov. 21, 2017
Antenna	Schwarzbeck	VULB9162	9162-010	30MHz~7GHz	Nov. 25, 2016	Nov. 24, 2017
Cable	Huber+Suhner	CBL2-NN-1M	22390001	9KHz~7GHz	Nov. 06, 2016	Nov. 05, 2017
Cable	Huber+Suhner	CIL02	N/A	9KHz~7GHz	Nov. 06, 2016	Nov. 05, 2017
RF Cable	Huber+Suhner	SF-104	MY16559/4	9KHz~25GHz	Mar. 05, 2017	Mar. 04, 2018
Power Amplifier	HP	HP 8447D	1145A00203	100KHz~1.3GHz	Nov. 06, 2016	Nov. 05, 2017
Horn Antenna	Schwarzbeck	BBHA9170	9170-242	15GHz~40GHz	Feb.23, 2017	Feb.22, 2018
Horn Antenna	Com-Power	AH-118	071078	1GHz~18GHz	Nov. 04, 2016	Nov. 03, 2017
RF Cable	Huber+Suhner	SF-106	N/A	9KHz~40GHz	April. 06, 2017	April. 04, 2018
Loop antenna	Daze	ZA30900A	0708	9KHz~30MHz	Oct.09, 2016	Oct.08, 2017
Spectrum Analyzer	Rohde & Schwarz	FSU26	200409/026	20Hz~26.5GHz	Aug. 31, 2016	Aug. 30, 2017
Spectrum Analyzer	Rohde & Schwarz	FSV40	101003	10Hz~40GHz	April. 06, 2017	April. 05, 2018
Pre-Amplifier	EMCI	EMC 184045	980102	18GHz~40GHz	Nov. 04, 2016	Nov. 03, 2017
Pre-Amplifier	Agilent	8449B	3008A02964	1GHz~26.5GHz	Nov. 02, 2016	Nov. 01, 2017
L.I.S.N.	Rohde & Schwarz	ENV 216	101317	9KHz~30MHz	Nov. 06, 2016	Nov. 07, 2017
Temporary antenna connector	TESCOM	SS402	N/A	9KHz-25GHz	N/A	N/A
Power Meter	Anritsu	ML2495A	1139001	100k-65GHz	Nov. 04, 2016	Nov. 03, 2017
Power Sensor	Anritsu	MA2411B	100345	300M-40GHz	Nov. 04, 2016	Nov. 03, 2017

Note: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

---End---