

LTE RADIO TEST REPORT

Report No: STS1707114W05

Issued for

Beijing ULINK Technology Co., Ltd.

East Area of 5F, No.16 Wangjing North Rd., Chaoyang
District, Beijing, China

Product Name:	4G LTE Mobile Router
Brand Name:	macaroon
Model Name:	macaroon M1
Series Model:	N/A
FCC ID:	2AMIWM1
Test Standard:	47 CFR Part 2, 24(E), 27

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from BZT, All Test Data Presented in this report is only applicable to presented Test sample.

BZT Testing Technology Co., Ltd

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,
Baoan District, Shenzhen, Guangdong, China
TEL: +86-755 3307 1680 FAX: +86-755 27341758 E-mail:bruce@bzt.Cn

TEST RESULT CERTIFICATION

Applicant's name..... : Beijing ULINK Technology Co., Ltd.
Address..... : East Area of 5F, No.16 Wangjing North Rd., Chaoyang District,
Beijing, China
Manufacture's Name..... : Beijing ULINK Technology Co., Ltd.
Address..... : East Area of 5F, No.16 Wangjing North Rd., Chaoyang District,
Beijing, China
Product name..... : 4G LTE Mobile Router
Brand name : macaroon
Model and/or type reference.. : macaroon M1
Standards..... : 47 CFR Part 2, 24(E), 27

Test procedure.....: ANSI / TIA 603-D-2010

This device described above has been tested by BZT the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of BZT, this document may be altered or revised by BZT, personal only, and shall be noted in the revision of the document

Date of Test.....

Date of performance of tests..... 13 July. 2017 ~ 24 July. 2017

Date of Issue..... 27 July. 2017

Test Result **Pass**

Testing Engineer :



(Sean she)

Technical Manager :



(Hakim.hou)

Authorized Signatory :



(Vita Li)

TABLE OF CONTENTS	Page
1. SUMMARY OF TEST RESULTS	5
2. GENERAL INFORMATION	7
3. CONDUCTED OUTPUT POWER	17
4. PEAK-TO-AVERAGE RATIO	33
5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER	35
6. OCCUPIED BANDWIDTH	53
7. CONDUCTED BAND EDGE	57
8. CONDUCTED SPURIOUS EMISSION	59
9. RADIATED SPURIOUS EMISSION	60
10. FREQUENCY STABILITY	92

Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	27 July. 2017	STS1707114W05	ALL	Initial Issue

1. SUMMARY OF TEST RESULTS

1.1 TEST RESULTS DESCRIPTION AND LABORATORY INFORMATION

Setion	FCC Rule	Description	Limit	Result
	§2.1046	Conducted Output Power	Reporting Only	PASS
	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS
	§2.1049 §24.238(b) §27.53(h)(3) §27.53(m)(6)	Occupied Bandwidth	Reporting Only	PASS
	§2.1051) §24.238(a) §27.53(g) §27.53(h)	Conducted Band Edge Measurement (Band 2)(Band 4) (Band 17)	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)	(Band 7)	<43+10log10(P[Watts])	PASS
	§2.1051 §24.238(a) §27.53(g) §27.53(h)	Conducted Spurious Emission (Band 2)(Band 4) (Band 17)	<43+10log10(P[Watts])	PASS
	§27.53(m)(4)	Conducted Spurious Emission (Band 7)	< 55+10log10(P[Watts])	PASS
	§2.1055 §24.235 §27.54	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22 Within Authorized Band	PASS
	§27.50(c)(10)	Effective Radiated Power (Band 17)	ERP < 3 Watt	PASS
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (Band 2)((Band 7)	EIRP < 2Watt	PASS
	§27.50(d)(4)	Equivalent Isotropic Radiated Power (Band 4)	EIRP < 1Watt	PASS
	§2.1053 §24.238(a) §27.53(g) §27.53(h)	Radiated Spurious Emission (Band 2)(Band 4) (Band 17)	< 43+10log10(P[Watts])	PASS
	§2.1053 §27.53(m)(4)	Radiated Spurious Emission (Band 7)	< 55+10log10(P[Watts])	PASS

1.1.1 TEST FACTORY

BZT Testing Technology Co., Ltd.

Add. : Buliding 17, Xinghua Road Xingwei industrial Park Fuyong,
Baoan District, Shenzhen, Guangdong, China

FCC Registration No.: 701733

1.1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$ · where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$ · providing a level of confidence of approximately **95** % °

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$

2. GENERAL INFORMATION

2.1 TECHNICAL SPECIFICATIONS AND REGULATIONS

2.1.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	4G LTE Mobile Router
Brand Name	macaroon
Model Name	macaroon M1
Hardware version:	1.0
Software version:	V100
FCC ID:	2AMIWM1
Frequency Bands:	U.S. Bands: ☒ LTE FDD Band 2 ☒ LTE FDD Band 4 ☒ LTE FDD Band 5 ☒ LTE FDD Band 7 ☒ LTE FDD Band 12 ☒ LTE FDD Band 17 ☒ LTE TDD Band 41
SIM CARD:	Only support single SIM
Antenna:	PIFA Antenna
Antenna gain:	LTE Band 2:1dBi LTE Band 4:0.8dBi LTE Band 5:0.5dBi LTE Band 7: 0.5dBi LTE Band 12: 0.7dBi LTE Band 17: 0.5dBi LTE Band 41:1.2dBi
Power Supply:	DC 3.8V by battery or DC 5V supplied by adapter
Battery parameter:	Capacitance: 3000mA, Rated Voltage: 3.8V
Adapter Input:	AC100-240V, 50-60Hz, 200mA
Adapter Output:	DC 5.0V, 1000mA

2.1.2 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Product Specification Subjective To This Standard	
Tx Frequency	LTE Band 2:1850~1910MHz LTE Band 4:1710~1755MHz LTE Band 5:824~849MHz LTE Band 7:2500~2570MHz LTE Band 12:699~716MHz LTE Band 17:704~716MHz LTE Band 41:2496~2690MHz
Rx Frequency	LTE Band 2:1930~1990MHz LTE Band 4:2110~2155MHz LTE Band 5:869~894MHz LTE Band 7:2620~2690MHz LTE Band 12:729~746MHz LTE Band 17:734~746MHz LTE Band 41:2496~2690MHz
Bandwidth	LTE Band 2 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 4 : 1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz LTE Band 5 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 7 : 5MHz / 10MHz / 15MHz / 20MHz LTE Band 12 : 1.4MHz / 3MHz / 5MHz / 10MHz LTE Band 17 : 5MHz / 10MHz LTE Band 41 : 5MHz / 10MHz / 15MHz / 20MHz
Maximum Output Power	LTE Band 2 : 23.98dBm LTE Band 4 : 24.03dBm LTE Band 5 : 23.98dBm LTE Band 7 : 23.96dBm LTE Band 12 : 23.89dBm LTE Band 17 : 23.08dBm LTE Band 41 : 23.97dBm
Type of Modulation	QPSK / 16QAM

2.1.3 EMISSION DESIGNATOR

LTE Band 2 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M33G7D	1M33W7D
3	2M96G7D	2M96W7D
5	5M06G7D	5M04W7D
10	9M76G7D	9M81W7D
15	14M7G7D	14M7W7D
20	19M4G7D	19M4W7D

LTE Band 4 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M31G7D	1M33W7D
3	2M95G7D	2M95W7D
5	5M04G7D	5M05W7D
10	9M76G7D	9M69W7D
15	14M7G7D	14M7W7D
20	19M3G7D	19M4W7D

LTE Band 5 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M30G7D	1M32W7D
3	2M94G7D	2M94W7D
5	5M01G7D	5M02W7D
10	9M69G7D	9M66W7D

LTE Band 7 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
5	5M06G7D	5M04W7D
10	9M72G7D	9M74W7D
15	14M8G7D	14M7W7D
20	19M4G7D	19M5W7D

LTE Band 12 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
1.4	1M31G7D	1M31W7D
3	2M94G7D	2M95W7D
5	5M01G7D	6M59W7D
10	9M76G7D	9M69W7D

LTE Band 17 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
5	5M01G7D	5M03W7D
10	9M75G7D	9M79W7D

LTE Band 41 BW(MHz)	Emission Designator (26dBc)QPSK	Emission Designator (26dBc)16QAM
5	5M88G7D	6M00W7D
10	10M4G7D	10M0W7D
15	18M3G7D	17M8W7D
20	21M0G7D	20M9W7D

2.1.4 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D02 Power Meas. License Digital Systems with maximum output power. Radiated measurements are performed by rotating the EUT in three different orthogonal test planes to find the maximum emission.

Remark:

1. The mark "v" means that this configuration is chosen for testing
2. The mark "-" means that this bandwidth is not supported.
3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	5	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	7	-	-	v	v	v	v	v	v	v	v	v	v	v	v
	12	v	v	v	v	-	-	v	v	v	v	v	v	v	v
	17	-	-	v	v	-	-	v	v	v	v	v	v	v	v
	41	-	-	v	v	v	v	v	v	v	v	v	v	v	v
Peak&Avera Ratio	2						v	v	v	v		v	v	v	v
	4						v	v	v	v		v	v	v	v
	5	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	7	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	12	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	17	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	41	-	-	-	-	-	-	-	-	-	-	-	-	-	-
26dB&99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	v
	4	v	v	v	v	v	v	v	v			v	v	v	v
	5	v	v	v	v	-	-	v	v			v	v	v	v
	7	-	-	v	v	v	v	v	v			v	v	v	v
	12	v	v	v	v	-	-	v	v			v	v	v	v
	17	-	-	v	v	-	-	v	v			v	v	v	v
	41	-	-	v	v	v	v	v	v			v	v	v	v
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v	v	v
	4	v	v	v	v	v	v	v	v	v		v	v	v	v
	5	v	v	v	v	-	-	v	v	v		v	v	v	v
	7	-	-	v	v	v	v	v	v	v		v	v	v	v
	12	v	v	v	v	-	-	v	v	v		v	v	v	v
	17	-	-	v	v	-	-	v	v	v		v	v	v	v
	41	-	-	v	v	v	v	v	v	v		v	v	v	v

ITEMS	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Conducted Spurious Emission	2	V	V	V	V	V	V	V	V	V			V	V	V
	4	V	V	V	V	V	V	V	V	V			V	V	V
	5	V	V	V	V	-	-	V	V	V			V	V	V
	7	-	-	V	V	V	V	V	V	V			V	V	V
	12	V	V	V	V	-	-	V	V	V			V	V	V
	17	-	-	V	V	-	-	V	V	V			V	V	V
	41	-	-	V	V	V	V	V	V	V			V	V	V
Frequency Stability	2	-	-	-	V	-	-	V				V		V	
	4	-	-	-	V	-	-	V				V		V	
	5	-	-	-	V	-	-	V				V		V	
	7	-	-	-	V	-	-	V				V		V	
	12	-	-	-	V	-	-	V				V		V	
	17	-	-	-	V	-	-	V				V		V	
	41	-	-	-	V	-	-	V				V		V	
E.R.P.& E.I.R.P.	2	V	V	V	V	V	V	V	V	V			V	V	V
	4	V	V	V	V	V	V	V	V	V			V	V	V
	5	V	V	V	V	-	-	V	V	V			V	V	V
	7	-	-	V	V	V	V	V	V	V			V	V	V
	12	V	V	V	V	-	-	V	V	V			V	V	V
	17	-	-	V	V	-	-	V	V	V			V	V	V
	41	-	-	V	V	V	V	V	V	V			V	V	V
Radiated Spurious Emission	2	V	V	V	V	V	V	V		V			V	V	V
	4	V	V	V	V	V	V	V		V			V	V	V
	5	V	V	V	V	-	-	V		V			V	V	V
	7	-	-	V	V	V	V	V		V			V	V	V
	12	V	V	V	V	-	-	V		V			V	V	V
	17	-	-	V	V	-	-	V		V			V	V	V
	41	-	-	V	V	V	V	V		V			V	V	V

2.1.5 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for filing to comply with the 47 CFR Part 2, 24(E), 27

2.1.6 SPECIAL ACCESSORIES

The battery and the charger, earphone supplied by the applicant were used as accessories and being tested with eut intended for fcc grant together.

2.1.7 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.1.8 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

2.1.9 CONFIGURATION OF EUT SYSTEM

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

E-1
EUT

Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	Serial No.	Note
E-1	4G LTE Mobile Router	macaroon	N/A	N/A

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.1.10 MEASUREMENT INSTRUMENTS

The radiated emission testing was performed according to the procedures of ansi ANSI / TIA 603-D-2010 and FCC CFR 47 rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2016.10.23	2017.10.22
Signal Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	101427	2016.10.23	2017.10.22
Communication Tester	Agilent	8960	MY48360751	2016.10.23	2017.10.22
Wireless Communications Test Set	R&S	CMW 500	133884	2016.10.23	2017.10.22
Test Receiver	R&S	ESCI	102086	2016.10.23	2017.10.22
Bilog Antenna	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Bilog Antenna (Calibration antenna)	TESEQ	CBL6111D	34678	2014.11.24	2017.11.23
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
Horn Antenna (Calibration antenna)	Schwarzbeck	BBHA 9120D	9120D-1343	2015.03.05	2018.03.04
MXA SIGNAL Analyzer	Agilent	N9020A	MY49100060	2016.10.23	2017.10.22
Double Ridge Horn Antenna	COM-POWER CORPORATION	AH-840	AHA-840	2016.03.06	2017.03.05
Low frequency cable	N/A	R01	N/A	NCR	NCR
High frequency cable	SCHWARZBECK	AK9515H	SN-96286/96287	NCR	NCR
Vector signal generator	Agilent	E8257D-521	MY45141029	2016.10.23	2017.10.22
Power amplifier	DESAY	ZHL-42W	9638	2016.10.23	2017.10.22
Band Reject filter(1920-1980MHz)	COM-MW	ZBSF-1920-1980	0092	2016.10.23	2017.10.22
Band Reject filter(880-915MHz)	COM-MW	ZBSF-C897.5-35	707	2016.10.23	2017.10.22
Band Reject filter(1710-1785MHz)	COM-MW	ZBSF-C1747.5-75	708	2016.10.23	2017.10.22
Band Reject filter(1850-1910MHz)	COM-MW	ZBSF-C1880-60	709	2016.10.23	2017.10.22
Band Reject filter(2500-2570MHz)	COM-MW	ZBSF-C2535-70	710	2016.10.23	2017.10.22
Highpass Filter	WHKX7.0/18G-8SS	Wainwright	18	2016.10.23	2017.10.22

2. 1.11 MEASUREMENT RESULTS EXPLANATION EXAMPLE

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF Cable Loss + Attenuator Factor.


3. CONDUCTED OUTPUT POWER

3.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

3.1.1 MEASUREMENT METHOD

A System Simulator Was Used To Establish Communication With The EUT. Its Parameters Were Set To Force The EUT Transmitting At Maximum Output Power. The Measured Power In The Radio Frequency On The Transmitter Output Terminals Shall Be Reported. configuration follows KDB 971168 D01.

3.1.2 TEST SETUP



3.1.3 TEST PROCEDURES

1. The Transmitter Output Port Was Connected To The System Simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.38	23.59	23.62
1.4	1	2		23.15	23.36	23.41
1.4	1	5		22.94	23.12	23.12
1.4	3	0		22.67	22.88	22.91
1.4	3	1		22.43	22.68	22.62
1.4	3	2		22.22	22.42	22.39
1.4	6	0		22.00	22.14	22.18
1.4	1	0	16-QAM	23.15	23.32	23.35
1.4	1	2		22.89	23.06	23.08
1.4	1	5		22.69	22.82	22.84
1.4	3	0		22.46	22.61	22.62
1.4	3	1		22.19	22.36	22.39
1.4	3	2		21.96	22.16	22.18
1.4	6	0		21.67	21.92	21.96
3	1	0	QPSK	23.12	23.32	23.41
3	1	7		22.89	23.08	23.17
3	1	14		22.59	22.79	22.93
3	8	0		22.38	22.58	22.68
3	8	4		22.11	22.32	22.43
3	8	7		21.86	22.06	22.23
3	15	0		21.62	21.84	21.96
3	1	0	16-QAM	22.88	23.07	23.15
3	1	7		22.61	22.85	22.88
3	1	14		22.37	22.56	22.58
3	8	0		22.12	22.34	22.34
3	8	4		21.82	22.10	22.07
3	8	7		21.57	21.89	21.78
3	15	0		21.35	21.60	21.53

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.19	23.12	23.16
5	1	12		22.98	22.87	22.96
5	1	24		22.68	22.57	22.71
5	12	0		22.41	22.35	22.49
5	12	6		22.19	22.10	22.22
5	12	11		21.96	21.81	21.97
5	25	0		21.68	21.51	21.73
5	1	0	16-QAM	22.93	22.84	22.90
5	1	12		22.70	22.64	22.60
5	1	24		22.42	22.41	22.40
5	12	0		22.19	22.16	22.13
5	12	6		21.92	21.94	21.93
5	12	11		21.68	21.66	21.65
5	25	0		21.42	21.36	21.37
10	1	0	QPSK	23.05	23.06	23.04
10	1	24		22.82	22.84	22.80
10	1	49		22.53	22.54	22.51
10	25	0		22.25	22.34	22.21
10	25	12		21.99	22.07	21.95
10	25	24		21.72	21.77	21.74
10	50	0		21.49	21.57	21.45
10	1	0	16-QAM	22.76	22.81	22.75
10	1	24		22.52	22.60	22.46
10	1	49		22.27	22.38	22.20
10	25	0		22.07	22.14	21.93
10	25	12		21.82	21.94	21.71
10	25	24		21.58	21.67	21.47
10	50	0		21.35	21.43	21.18

LTE BAND 2

LTE Band 2 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.23	23.26	23.32
15	1	37		23.02	23.05	23.02
15	1	74		22.81	22.78	22.79
15	36	0		22.51	22.49	22.53
15	36	18		22.29	22.26	22.26
15	36	39		22.00	22.03	22.05
15	75	0		21.75	21.77	21.83
15	1	0	16-QAM	23.02	23.06	23.07
15	1	38		22.81	22.84	22.86
15	1	75		22.53	22.62	22.60
15	36	0		22.27	22.37	22.31
15	36	18		22.06	22.14	22.04
15	36	39		21.85	21.93	21.77
15	75	0		21.59	21.71	21.52
20	1	0	QPSK	23.89	23.95	23.98
20	1	49		23.64	23.73	23.76
20	1	99		23.42	23.48	23.49
20	50	0		23.17	23.19	23.27
20	50	24		22.97	22.94	23.06
20	50	49		22.72	22.65	22.83
20	100	0		22.46	22.44	22.57
20	1	0	16-QAM	23.62	23.72	23.71
20	1	49		23.36	23.45	23.48
20	1	99		23.07	23.23	23.26
20	50	0		22.80	22.99	23.01
20	50	24		22.53	22.74	22.72
20	50	49		22.25	22.46	22.44
20	100	0		22.01	22.25	22.23

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.76	23.79	23.82
1.4	1	2		23.55	23.59	23.54
1.4	1	5		23.29	23.32	23.25
1.4	3	0		23.03	23.03	23
1.4	3	1		22.77	22.81	22.78
1.4	3	2		22.55	22.52	22.49
1.4	6	0		22.31	22.3	22.24
1.4	1	0	16-QAM	23.53	23.53	23.52
1.4	1	2		23.31	23.26	23.27
1.4	1	5		23.05	22.99	22.98
1.4	3	0		22.81	22.75	22.77
1.4	3	1		22.54	22.54	22.5
1.4	3	2		22.29	22.27	22.22
1.4	6	0		22.09	22	21.94
3	1	0	QPSK	23.53	23.58	23.62
3	1	7		23.31	23.28	23.34
3	1	14		23.03	23.01	23.11
3	8	0		22.81	22.8	22.86
3	8	4		22.59	22.5	22.62
3	8	7		22.38	22.22	22.38
3	15	0		22.16	21.93	22.16
3	1	0	16-QAM	23.3	23.36	23.34
3	1	7		23.05	23.13	23.08
3	1	14		22.76	22.87	22.8
3	8	0		22.52	22.61	22.57
3	8	4		22.23	22.32	22.3
3	8	7		21.96	22.04	22.07
3	15	0		21.74	21.8	21.79

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.65	23.68	23.72
5	1	12		23.35	23.44	23.46
5	1	24		23.09	23.24	23.23
5	12	0		22.86	23.02	22.94
5	12	6		22.58	22.76	22.66
5	12	11		22.38	22.53	22.43
5	25	0		22.16	22.31	22.18
5	1	0	16-QAM	23.41	23.45	23.48
5	1	12		23.14	23.2	23.22
5	1	24		22.88	22.93	22.96
5	12	0		22.66	22.71	22.69
5	12	6		22.38	22.46	22.47
5	12	11		22.11	22.19	22.27
5	25	0		21.82	21.98	21.97
10	1	0	QPSK	23.48	23.53	23.59
10	1	24		23.2	23.25	23.32
10	1	49		22.97	23.01	23.09
10	25	0		22.74	22.71	22.87
10	25	12		22.45	22.5	22.64
10	25	24		22.16	22.21	22.36
10	50	0		21.87	21.94	22.08
10	1	0	16-QAM	23.24	23.32	23.35
10	1	24		23	23.12	23.06
10	1	49		22.75	22.89	22.77
10	25	0		22.53	22.65	22.53
10	25	12		22.29	22.43	22.32
10	25	24		22.03	22.17	22.04
10	50	0		21.81	21.9	21.79

LTE BAND 4

LTE Band 4 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.73	23.76	23.79
15	1	37		23.53	23.55	23.52
15	1	74		23.24	23.26	23.25
15	36	0		23.01	23.01	23
15	36	18		22.81	22.72	22.75
15	36	39		22.52	22.44	22.51
15	75	0		22.23	22.18	22.27
15	1	0	16-QAM	23.51	23.56	23.52
15	1	38		23.28	23.26	23.26
15	1	75		23.08	22.97	22.98
15	36	0		22.86	22.76	22.68
15	36	18		22.57	22.52	22.46
15	36	39		22.29	22.23	22.2
15	75	0		22.07	21.97	21.97
20	1	0	QPSK	23.99	24.02	24.03
20	1	49		23.77	23.75	23.74
20	1	99		23.51	23.49	23.52
20	50	0		23.25	23.28	23.25
20	50	24		23.04	23	22.96
20	50	49		22.8	22.8	22.73
20	100	0		22.54	22.54	22.43
20	1	0	16-QAM	23.77	23.74	23.78
20	1	49		23.48	23.53	23.52
20	1	99		23.24	23.29	23.31
20	50	0		22.98	23.05	23.04
20	50	24		22.68	22.75	22.83
20	50	49		22.46	22.52	22.59
20	100	0		22.17	22.31	22.35

LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.39	23.43	23.45
1.4	1	2		23.19	23.22	23.24
1.4	1	5		22.99	22.96	22.97
1.4	3	0		22.75	22.74	22.73
1.4	3	1		22.53	22.44	22.45
1.4	3	2		22.32	22.21	22.17
1.4	6	0		22.05	21.97	21.9
1.4	1	0	16-QAM	23.14	23.18	23.21
1.4	1	2		22.87	22.9	23
1.4	1	5		22.64	22.66	22.79
1.4	3	0		22.42	22.4	22.5
1.4	3	1		22.19	22.2	22.22
1.4	3	2		21.9	21.99	21.97
1.4	6	0		21.64	21.76	21.75
3	1	0	QPSK	23.21	23.26	23.27
3	1	7		22.95	23.01	22.98
3	1	14		22.66	22.76	22.73
3	8	0		22.44	22.55	22.52
3	8	4		22.22	22.35	22.31
3	8	7		21.94	22.11	22.03
3	15	0		21.65	21.85	21.78
3	1	0	16-QAM	22.99	23.05	22.98
3	1	7		22.77	22.8	22.76
3	1	14		22.5	22.53	22.49
3	8	0		22.25	22.29	22.25
3	8	4		22.03	22.09	22
3	8	7		21.73	21.88	21.76
3	15	0		21.48	21.59	21.56

LTE BAND 5

LTE Band 5 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.38	23.35	23.42
5	1	12		23.1	23.08	23.15
5	1	24		22.82	22.81	22.92
5	12	0		22.62	22.6	22.63
5	12	6		22.37	22.4	22.42
5	12	11		22.11	22.17	22.19
5	25	0		21.87	21.9	21.92
5	1	0	16-QAM	23.12	23.13	23.18
5	1	12		22.88	22.86	22.97
5	1	24		22.6	22.65	22.71
5	12	0		22.32	22.41	22.46
5	12	6		22.09	22.12	22.23
5	12	11		21.84	21.91	21.99
5	25	0		21.57	21.64	21.7
10	1	0	QPSK	23.95	23.96	23.98
10	1	24		23.68	23.71	23.71
10	1	49		23.47	23.5	23.48
10	25	0		23.24	23.29	23.2
10	25	12		22.99	23.01	22.97
10	25	24		22.71	22.76	22.77
10	50	0		22.45	22.53	22.49
10	1	0	16-QAM	23.67	23.67	23.72
10	1	24		23.43	23.37	23.45
10	1	49		23.16	23.13	23.19
10	25	0		22.92	22.92	22.99
10	25	12		22.67	22.63	22.72
10	25	24		22.45	22.42	22.45
10	50	0		22.18	22.19	22.22

LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.68	23.65	23.59
5	1	12		23.48	23.37	23.37
5	1	24		23.19	23.11	23.16
5	12	0		22.93	22.88	22.93
5	12	6		22.67	22.61	22.65
5	12	11		22.47	22.35	22.36
5	25	0		22.27	22.11	22.13
5	1	0	16-QAM	23.45	23.37	23.31
5	1	12		23.25	23.11	23.09
5	1	24		22.96	22.88	22.85
5	12	0		22.7	22.64	22.59
5	12	6		22.47	22.34	22.33
5	12	11		22.22	22.05	22.06
5	25	0		21.97	21.79	21.82
10	1	0	QPSK	23.49	23.47	23.42
10	1	24		23.21	23.25	23.17
10	1	49		22.96	23.05	22.97
10	25	0		22.66	22.83	22.73
10	25	12		22.39	22.57	22.53
10	25	24		22.16	22.32	22.32
10	50	0		21.92	22.1	22.03
10	1	0	16-QAM	23.22	23.22	23.15
10	1	24		22.99	22.93	22.93
10	1	49		22.7	22.68	22.68
10	25	0		22.48	22.42	22.48
10	25	12		22.18	22.16	22.28
10	25	24		21.9	21.96	22.01
10	50	0		21.66	21.73	21.72

LTE BAND 7

LTE Band 7 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.67	23.72	23.71
15	1	37		23.39	23.44	23.48
15	1	74		23.13	23.17	23.24
15	36	0		22.84	22.95	22.97
15	36	18		22.55	22.68	22.71
15	36	39		22.27	22.46	22.42
15	75	0		22.01	22.22	22.16
15	1	0	16-QAM	23.37	23.46	23.42
15	1	38		23.16	23.24	23.21
15	1	75		22.9	22.97	22.99
15	36	0		22.62	22.69	22.71
15	36	18		22.42	22.39	22.43
15	36	39		22.13	22.12	22.21
15	75	0		21.87	21.84	21.97
20	1	0	QPSK	23.92	23.95	23.96
20	1	49		23.67	23.75	23.69
20	1	99		23.42	23.51	23.4
20	50	0		23.18	23.29	23.2
20	50	24		22.93	23.01	22.98
20	50	49		22.68	22.75	22.75
20	100	0		22.44	22.49	22.52
20	1	0	16-QAM	23.7	23.72	23.76
20	1	49		23.45	23.46	23.52
20	1	99		23.16	23.17	23.32
20	50	0		22.91	22.93	23.02
20	50	24		22.63	22.64	22.77
20	50	49		22.34	22.38	22.56
20	100	0		22.07	22.11	22.32

LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
1.4	1	0	QPSK	23.43	23.52	23.59
1.4	1	2		23.18	23.22	23.35
1.4	1	5		22.93	23.01	23.09
1.4	3	0		22.63	22.78	22.85
1.4	3	1		22.42	22.56	22.61
1.4	3	2		22.17	22.27	22.38
1.4	6	0		21.9	22.03	22.13
1.4	1	0	16-QAM	23.21	23.26	23.33
1.4	1	2		22.99	23.03	23.12
1.4	1	5		22.69	22.81	22.88
1.4	3	0		22.46	22.56	22.67
1.4	3	1		22.18	22.36	22.45
1.4	3	2		21.93	22.15	22.18
1.4	6	0		21.65	21.88	21.91
3	1	0	QPSK	23.35	23.38	23.41
3	1	7		23.08	23.09	23.14
3	1	14		22.88	22.87	22.93
3	8	0		22.6	22.57	22.64
3	8	4		22.35	22.37	22.34
3	8	7		22.1	22.13	22.12
3	15	0		21.89	21.93	21.83
3	1	0	16-QAM	23.09	23.11	23.14
3	1	7		22.81	22.84	22.88
3	1	14		22.59	22.62	22.64
3	8	0		22.36	22.34	22.38
3	8	4		22.09	22.09	22.12
3	8	7		21.88	21.8	21.91
3	15	0		21.61	21.55	21.68

LTE BAND 12

LTE Band 12 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.45	23.49	23.56
5	1	12		23.24	23.21	23.32
5	1	24		23	22.91	23.1
5	12	0		22.74	22.61	22.85
5	12	6		22.49	22.41	22.62
5	12	11		22.22	22.14	22.32
5	25	0		21.96	21.89	22.02
5	1	0	16-QAM	23.23	23.2	23.34
5	1	12		22.97	22.97	23.1
5	1	24		22.73	22.74	22.8
5	12	0		22.45	22.48	22.55
5	12	6		22.25	22.26	22.26
5	12	11		22.04	22.01	21.98
5	25	0		21.84	21.72	21.7
10	1	0	QPSK	23.79	23.85	23.89
10	1	24		23.49	23.59	23.67
10	1	49		23.22	23.36	23.45
10	25	0		22.94	23.12	23.25
10	25	12		22.73	22.9	23
10	25	24		22.49	22.69	22.73
10	50	0		22.26	22.45	22.44
10	1	0	16-QAM	23.52	23.6	23.68
10	1	24		23.28	23.31	23.4
10	1	49		23.05	23.09	23.12
10	25	0		22.77	22.82	22.87
10	25	12		22.5	22.58	22.65
10	25	24		22.21	22.32	22.41
10	50	0		21.98	22.09	22.16

LTE BAND 17

LTE Band 17 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	22.89	22.95	22.96
5	1	12		22.61	22.72	22.72
5	1	24		22.39	22.48	22.51
5	12	0		22.16	22.19	22.21
5	12	6		21.87	21.91	21.97
5	12	11		21.57	21.64	21.71
5	25	0		21.28	21.34	21.49
5	1	0	16-QAM	22.68	22.74	22.75
5	1	12		22.42	22.5	22.49
5	1	24		22.17	22.24	22.2
5	12	0		21.96	21.97	21.98
5	12	6		21.71	21.71	21.76
5	12	11		21.47	21.46	21.55
5	25	0		21.18	21.22	21.33
10	1	0	QPSK	23.03	23.05	23.08
10	1	24		22.73	22.77	22.82
10	1	49		22.49	22.49	22.59
10	25	0		22.23	22.22	22.32
10	25	12		22	22.02	22.1
10	25	24		21.78	21.73	21.84
10	50	0		21.52	21.44	21.56
10	1	0	16-QAM	22.75	22.83	22.82
10	1	24		22.5	22.6	22.6
10	1	49		22.24	22.33	22.36
10	25	0		21.96	22.07	22.11
10	25	12		21.75	21.78	21.87
10	25	24		21.5	21.54	21.63
10	50	0		21.22	21.29	21.41

LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
5	1	0	QPSK	23.43	23.21	23.26
5	1	12		23.18	22.92	22.98
5	1	24		22.94	22.7	22.71
5	12	0		22.74	22.49	22.48
5	12	6		22.51	22.21	22.2
5	12	11		22.28	21.95	21.96
5	25	0		22.07	21.73	21.71
5	1	0	16-QAM	23.21	22.97	23.01
5	1	12		22.99	22.72	22.76
5	1	24		22.72	22.45	22.49
5	12	0		22.44	22.22	22.21
5	12	6		22.15	21.94	21.97
5	12	11		21.87	21.72	21.73
5	25	0		21.59	21.5	21.51
10	1	0	QPSK	23.21	23.12	23.09
10	1	24		23	22.89	22.89
10	1	49		22.71	22.61	22.63
10	25	0		22.47	22.39	22.41
10	25	12		22.21	22.17	22.13
10	25	24		21.93	21.93	21.88
10	50	0		21.72	21.65	21.65
10	1	0	16-QAM	22.95	22.91	22.8
10	1	24		22.71	22.63	22.58
10	1	49		22.43	22.42	22.36
10	25	0		22.17	22.19	22.12
10	25	12		21.9	21.92	21.91
10	25	24		21.7	21.63	21.68
10	50	0		21.43	21.36	21.47

LTE BAND 41

LTE Band 41 Maximum Average Power [dBm]						
BW [MHz]	RB Size	RB Offset	Mod	Lowest	Middle	Highest
15	1	0	QPSK	23.38	23.42	23.16
15	1	37		23.12	23.16	22.9
15	1	74		22.84	22.91	22.66
15	36	0		22.6	22.62	22.43
15	36	18		22.31	22.42	22.22
15	36	39		22.04	22.17	21.93
15	75	0		21.83	21.91	21.64
15	1	0	16-QAM	23.13	23.18	22.93
15	1	38		22.92	22.94	22.65
15	1	75		22.7	22.73	22.36
15	36	0		22.41	22.44	22.15
15	36	18		22.16	22.17	21.9
15	36	39		21.88	21.92	21.66
15	75	0		21.62	21.72	21.42
20	1	0	QPSK	23.89	23.92	23.97
20	1	49		23.63	23.72	23.67
20	1	99		23.41	23.42	23.38
20	50	0		23.18	23.19	23.12
20	50	24		22.89	22.93	22.83
20	50	49		22.66	22.71	22.54
20	100	0		22.46	22.5	22.3
20	1	0	16-QAM	23.61	23.72	23.68
20	1	49		23.39	23.44	23.45
20	1	99		23.12	23.17	23.15
20	50	0		22.83	22.92	22.91
20	50	24		22.57	22.67	22.69
20	50	49		22.37	22.39	22.43
20	100	0		22.09	22.1	22.14


4. PEAK-TO-AVERAGE RATIO

4.1 DESCRIPTION OF THE CONDUCTED OUTPUT POWER MEASUREMENT

4.1.1 MEASUREMENT METHOD

Use one of the procedures presented in 4.1 to measure the total peak power and record as P_{Pk}. Use one of the applicable procedures presented 4.2 to measure the total average power and record as P_{Avg}. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:
 $PAPR (dB) = P_{Pk} (dBm) - P_{Avg} (dBm)$.

4.1.2 TEST SETUP

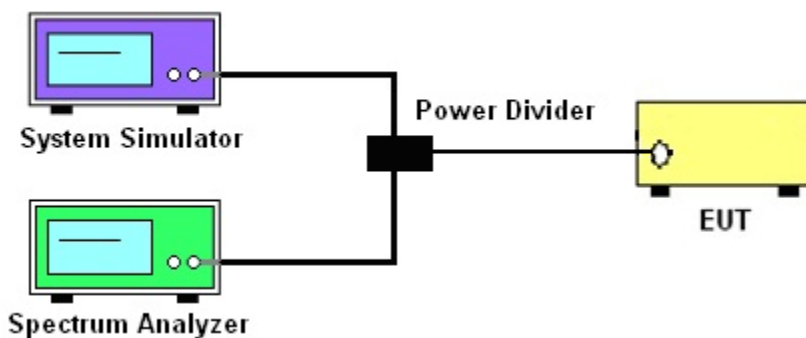

4.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 5.7.2..
2. The EUT was connected to spectrum and system simulator via a power divider
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the peak and average power of the spectrum analyzer
5. Record the deviation as Peak to Average Ratio.

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	PK/AVG	PK/AVG	PK/AVG	PK/AVG	PK/AVG	PK/AVG
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto

4.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 PAR [dBm]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
20	1	QPSK	26.12	23.89	2.23	26.23	23.95	2.28	26.27	23.98	2.29
20	100		24.95	22.46	2.49	24.98	22.44	2.54	25.05	22.57	2.48
20	1	16-QAM	26.03	23.62	2.41	26.12	23.72	2.4	26.11	23.71	2.4
20	100		24.52	22.01	2.51	24.76	22.25	2.51	24.72	22.23	2.49
Limit			≤13dBm								

LTE BAND 4

LTE Band 4 PAR [dBm]											
BW [MHz]	RB Size	Modulation	Lowest			Middle			Highest		
			PEAK	AVG	P-A	PEAK	AVG	P-A	PEAK	AVG	P-A
20	1	QPSK	26.45	23.99	2.46	26.51	24.02	2.49	26.52	24.03	2.49
20	100		25.02	22.54	2.48	25.03	22.54	2.49	24.93	22.43	2.5
20	1	16-QAM	26.56	23.77	2.79	26.53	23.74	2.79	26.29	23.78	2.51
20	100		24.67	22.17	2.5	24.82	22.31	2.51	24.84	22.35	2.49
Limit			≤13dBm								

5. RADIATED POWER AND EFFECTIVE ISOTROPIC RADIATED POWER

5.1 DESCRIPTION OF THE ERP/EIRP MEASUREMENT


5.1.1 MEASUREMENT METHOD

Effective radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas. License Digital Systems. Mobile and portable (hand-held) stations operating are limited to average ERP, Equivalent isotropic radiated power output measurements by substitution method according to ANSI / TIA / EIA-603-D, and the spectrum analyzer configuration follows KDB 971168 D01 Power Meas, Mobile and portable (hand-held) stations operating are limited to average EIRP.


5.1.2 TEST SETUP

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = R_x(\text{dBuV}) + CL(\text{dB}) + SA(\text{dB}) + \text{Gain}(\text{dBi}) - 107(\text{dBuV to dBm})$ The SA is calibrated using following setup.

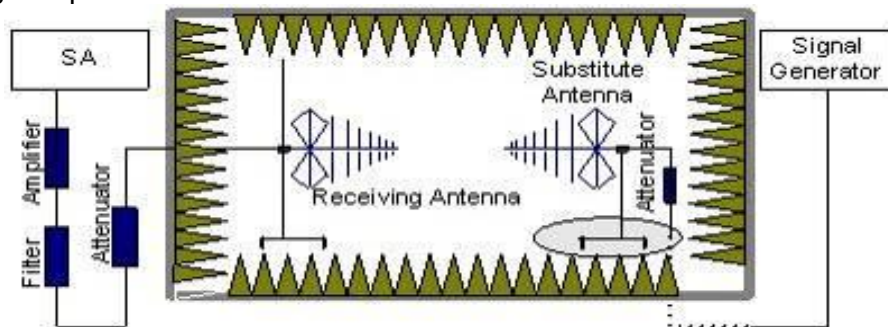

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

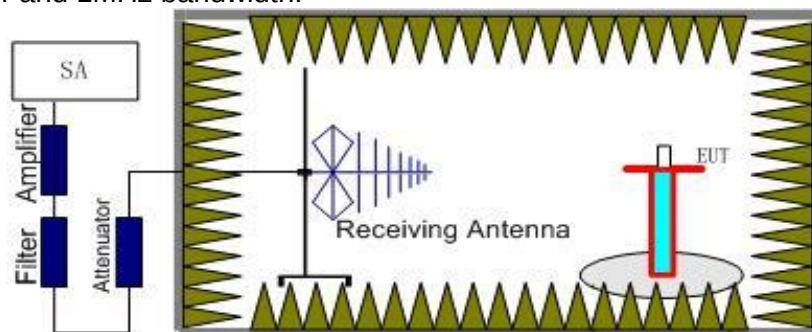

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: Pow-

er=PMea+ARpl

5.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 5.6. and ANSI / TIA-603-D-2010 Section 2.2.17.
2. The EUT was placed on a non-conductive rotating platform 1.5 meters high in a semi-anechoic chamber. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and a spectrum analyzer with Peak detector.
3. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power. The maximum emission was recorded from analyzer power level (LVL) from the 360 degrees rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. Effective Isotropic Radiated Power (EIRP) was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by dipole antenna (substitution antenna) at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP was calculated with the correction factor, $EIRP = LVL + \text{Correction factor}$ and $ERP = EIRP - 2.15$.
5. RB Set greater than bandwidth, Vb Set spectrum analyzer Maximum support.

LTE Band 2

Radiated Power (EIRP) for LTE Band 2 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	12.87	2.37	10.40	20.90	Horizontal	Pass
	1	0	Middle	14.82	2.39	10.42	22.85	Vertical	Pass
	1	0	Highest	13.25	2.40	10.44	21.29	Horizontal	Pass
	1	0	Lowest	15	2.37	10.40	23.03	Vertical	Pass
	1	0	Middle	13.17	2.39	10.42	21.20	Horizontal	Pass
	1	0	Highest	15.05	2.40	10.44	23.09	Vertical	Pass
16QAM	1	0	Lowest	12.87	2.37	10.40	20.90	Horizontal	Pass
	1	0	Middle	14.63	2.39	10.42	22.66	Vertical	Pass
	1	0	Highest	13.07	2.40	10.44	21.11	Horizontal	Pass
	1	0	Lowest	14.92	2.37	10.40	22.95	Vertical	Pass
	1	0	Middle	13.08	2.39	10.42	21.11	Horizontal	Pass
	1	0	Highest	14.9	2.40	10.44	22.94	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	12.79	2.37	10.40	20.82	Horizontal	Pass
	1	0	Middle	14.56	2.39	10.42	22.59	Vertical	Pass
	1	0	Highest	12.98	2.40	10.44	21.02	Horizontal	Pass
	1	0	Lowest	14.69	2.37	10.40	22.72	Vertical	Pass
	1	0	Middle	12.96	2.39	10.42	20.99	Horizontal	Pass
	1	0	Highest	14.85	2.40	10.44	22.89	Vertical	Pass
16QAM	1	0	Lowest	12.79	2.37	10.40	20.82	Horizontal	Pass
	1	0	Middle	14.47	2.39	10.42	22.50	Vertical	Pass
	1	0	Highest	12.84	2.40	10.44	20.88	Horizontal	Pass
	1	0	Lowest	14.58	2.37	10.40	22.61	Vertical	Pass
	1	0	Middle	12.98	2.39	10.42	21.01	Horizontal	Pass
	1	0	Highest	14.85	2.40	10.44	22.89	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	12.69	2.37	10.40	20.72	Horizontal	Pass
	1	0	Middle	14.65	2.39	10.42	22.68	Vertical	Pass
	1	0	Highest	12.68	2.40	10.44	20.72	Horizontal	Pass
	1	0	Lowest	14.53	2.37	10.40	22.56	Vertical	Pass
	1	0	Middle	12.58	2.39	10.42	20.61	Horizontal	Pass
	1	0	Highest	14.47	2.40	10.44	22.51	Vertical	Pass
16QAM	1	0	Lowest	12.75	2.37	10.40	20.78	Horizontal	Pass
	1	0	Middle	14.46	2.39	10.42	22.49	Vertical	Pass
	1	0	Highest	12.57	2.40	10.44	20.61	Horizontal	Pass
	1	0	Lowest	14.46	2.37	10.40	22.49	Vertical	Pass
	1	0	Middle	12.56	2.39	10.42	20.59	Horizontal	Pass
	1	0	Highest	14.4	2.40	10.44	22.44	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 2 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	13.51	2.37	10.40	21.54	Horizontal	Pass
	1	0	Middle	15.35	2.39	10.42	23.38	Vertical	Pass
	1	0	Highest	13.43	2.40	10.44	21.47	Horizontal	Pass
	1	0	Lowest	15.4	2.37	10.40	23.43	Vertical	Pass
	1	0	Middle	13.52	2.39	10.42	21.55	Horizontal	Pass
	1	0	Highest	15.42	2.40	10.44	23.46	Vertical	Pass
16QAM	1	0	Lowest	13.42	2.37	10.40	21.45	Horizontal	Pass
	1	0	Middle	15.15	2.39	10.42	23.18	Vertical	Pass
	1	0	Highest	13.44	2.40	10.44	21.48	Horizontal	Pass
	1	0	Lowest	15.2	2.37	10.40	23.23	Vertical	Pass
	1	0	Middle	13.49	2.39	10.42	21.52	Horizontal	Pass
	1	0	Highest	15.2	2.40	10.44	23.24	Vertical	Pass
Limit	EIRP<2W=33dBm								

LTE Band 4

Radiated Power (EIRP) for LTE Band 4 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	13.52	2.35	10.13	21.30	Horizontal	Pass
	1	0	Middle	15.45	2.36	10.16	23.25	Vertical	Pass
	1	0	Highest	13.48	2.37	10.22	21.33	Horizontal	Pass
	1	0	Lowest	15.5	2.35	10.13	23.28	Vertical	Pass
	1	0	Middle	13.72	2.36	10.16	21.52	Horizontal	Pass
	1	0	Highest	15.46	2.37	10.22	23.31	Vertical	Pass
16QAM	1	0	Lowest	13.48	2.35	10.13	21.26	Horizontal	Pass
	1	0	Middle	15.21	2.36	10.16	23.01	Vertical	Pass
	1	0	Highest	13.53	2.37	10.22	21.38	Horizontal	Pass
	1	0	Lowest	15.36	2.35	10.13	23.14	Vertical	Pass
	1	0	Middle	13.78	2.36	10.16	21.58	Horizontal	Pass
	1	0	Highest	15.36	2.37	10.22	23.21	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	13.38	2.35	10.13	21.16	Horizontal	Pass
	1	0	Middle	15.22	2.36	10.16	23.02	Vertical	Pass
	1	0	Highest	13.33	2.37	10.22	21.18	Horizontal	Pass
	1	0	Lowest	15.29	2.35	10.13	23.07	Vertical	Pass
	1	0	Middle	13.43	2.36	10.16	21.23	Horizontal	Pass
	1	0	Highest	15.25	2.37	10.22	23.10	Vertical	Pass
16QAM	1	0	Lowest	13.24	2.35	10.13	21.02	Horizontal	Pass
	1	0	Middle	15.16	2.36	10.16	22.96	Vertical	Pass
	1	0	Highest	13.45	2.37	10.22	21.30	Horizontal	Pass
	1	0	Lowest	15.19	2.35	10.13	22.97	Vertical	Pass
	1	0	Middle	13.42	2.36	10.16	21.22	Horizontal	Pass
	1	0	Highest	14.99	2.37	10.22	22.84	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	13.66	2.35	10.13	21.44	Horizontal	Pass
	1	0	Middle	15.34	2.36	10.16	23.14	Vertical	Pass
	1	0	Highest	13.6	2.37	10.22	21.45	Horizontal	Pass
	1	0	Lowest	15.39	2.35	10.13	23.17	Vertical	Pass
	1	0	Middle	13.63	2.36	10.16	21.43	Horizontal	Pass
	1	0	Highest	15.36	2.37	10.22	23.21	Vertical	Pass
16QAM	1	0	Lowest	13.47	2.35	10.13	21.25	Horizontal	Pass
	1	0	Middle	15.07	2.36	10.16	22.87	Vertical	Pass
	1	0	Highest	13.58	2.37	10.22	21.43	Horizontal	Pass
	1	0	Lowest	15.17	2.35	10.13	22.95	Vertical	Pass
	1	0	Middle	13.43	2.36	10.16	21.23	Horizontal	Pass
	1	0	Highest	15.13	2.37	10.22	22.98	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	13.22	2.35	10.13	21.00	Horizontal	Pass
	1	0	Middle	15.17	2.36	10.16	22.97	Vertical	Pass
	1	0	Highest	13.29	2.37	10.22	21.14	Horizontal	Pass
	1	0	Lowest	15.24	2.35	10.13	23.02	Vertical	Pass
	1	0	Middle	13.36	2.36	10.16	21.16	Horizontal	Pass
	1	0	Highest	15.23	2.37	10.22	23.08	Vertical	Pass
16QAM	1	0	Lowest	13.36	2.35	10.13	21.14	Horizontal	Pass
	1	0	Middle	14.91	2.36	10.16	22.71	Vertical	Pass
	1	0	Highest	13.25	2.37	10.22	21.10	Horizontal	Pass
	1	0	Lowest	15	2.35	10.13	22.78	Vertical	Pass
	1	0	Middle	13.36	2.36	10.16	21.16	Horizontal	Pass
	1	0	Highest	15.02	2.37	10.22	22.87	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	13.65	2.35	10.13	21.43	Horizontal	Pass
	1	0	Middle	15.42	2.36	10.16	23.22	Vertical	Pass
	1	0	Highest	13.55	2.37	10.22	21.40	Horizontal	Pass
	1	0	Lowest	15.47	2.35	10.13	23.25	Vertical	Pass
	1	0	Middle	13.57	2.36	10.16	21.37	Horizontal	Pass
	1	0	Highest	15.43	2.37	10.22	23.28	Vertical	Pass
16QAM	1	0	Lowest	13.5	2.35	10.13	21.28	Horizontal	Pass
	1	0	Middle	15.32	2.36	10.16	23.12	Vertical	Pass
	1	0	Highest	13.41	2.37	10.22	21.26	Horizontal	Pass
	1	0	Lowest	15.31	2.35	10.13	23.09	Vertical	Pass
	1	0	Middle	13.51	2.36	10.16	21.31	Horizontal	Pass
	1	0	Highest	15.2	2.37	10.22	23.05	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 4 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	13.83	2.35	10.13	21.61	Horizontal	Pass
	1	0	Middle	15.68	2.36	10.16	23.48	Vertical	Pass
	1	0	Highest	13.76	2.37	10.22	21.61	Horizontal	Pass
	1	0	Lowest	15.73	2.35	10.13	23.51	Vertical	Pass
	1	0	Middle	13.86	2.36	10.16	21.66	Horizontal	Pass
	1	0	Highest	15.67	2.37	10.22	23.52	Vertical	Pass
16QAM	1	0	Lowest	13.98	2.35	10.13	21.76	Horizontal	Pass
	1	0	Middle	15.43	2.36	10.16	23.23	Vertical	Pass
	1	0	Highest	13.93	2.37	10.22	21.78	Horizontal	Pass
	1	0	Lowest	15.53	2.35	10.13	23.31	Vertical	Pass
	1	0	Middle	13.83	2.36	10.16	21.63	Horizontal	Pass
	1	0	Highest	15.46	2.37	10.22	23.31	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 5 / 1.4M

Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	15.68	1.27	6.70	21.11	Horizontal	Pass
	1	0	Middle	17.44	1.28	6.70	22.86	Vertical	Pass
	1	0	Highest	15.56	1.29	6.70	20.97	Horizontal	Pass
	1	0	Lowest	17.51	1.27	6.70	22.94	Vertical	Pass
	1	0	Middle	15.74	1.28	6.70	21.16	Horizontal	Pass
	1	0	Highest	17.54	1.29	6.70	22.95	Vertical	Pass
16QAM	1	0	Lowest	15.69	1.27	6.70	21.12	Horizontal	Pass
	1	0	Middle	17.32	1.28	6.70	22.74	Vertical	Pass
	1	0	Highest	15.69	1.29	6.70	21.10	Horizontal	Pass
	1	0	Lowest	17.28	1.27	6.70	22.71	Vertical	Pass
	1	0	Middle	15.6	1.28	6.70	21.02	Horizontal	Pass
	1	0	Highest	17.39	1.29	6.70	22.80	Vertical	Pass
Limit	EIRP<1W=30dBm								

Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	15.36	1.27	6.70	20.79	Horizontal	Pass
	1	0	Middle	17.27	1.28	6.70	22.69	Vertical	Pass
	1	0	Highest	15.63	1.29	6.70	21.04	Horizontal	Pass
	1	0	Lowest	17.31	1.27	6.70	22.74	Vertical	Pass
	1	0	Middle	15.45	1.28	6.70	20.87	Horizontal	Pass
	1	0	Highest	17.34	1.29	6.70	22.75	Vertical	Pass
16QAM	1	0	Lowest	15.56	1.27	6.70	20.99	Horizontal	Pass
	1	0	Middle	17.04	1.28	6.70	22.46	Vertical	Pass
	1	0	Highest	15.63	1.29	6.70	21.04	Horizontal	Pass
	1	0	Lowest	17.06	1.27	6.70	22.49	Vertical	Pass
	1	0	Middle	15.48	1.28	6.70	20.90	Horizontal	Pass
	1	0	Highest	17.07	1.29	6.70	22.48	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 5 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	15.67	1.27	6.70	21.10	Horizontal	Pass
	1	0	Middle	17.47	1.28	6.70	22.89	Vertical	Pass
	1	0	Highest	15.58	1.29	6.70	20.99	Horizontal	Pass
	1	0	Lowest	17.43	1.27	6.70	22.86	Vertical	Pass
	1	0	Middle	15.69	1.28	6.70	21.11	Horizontal	Pass
	1	0	Highest	17.58	1.29	6.70	22.99	Vertical	Pass
16QAM	1	0	Lowest	15.74	1.27	6.70	21.17	Horizontal	Pass
	1	0	Middle	17.44	1.28	6.70	22.86	Vertical	Pass
	1	0	Highest	15.52	1.29	6.70	20.93	Horizontal	Pass
	1	0	Lowest	17.27	1.27	6.70	22.70	Vertical	Pass
	1	0	Middle	15.67	1.28	6.70	21.09	Horizontal	Pass
	1	0	Highest	17.36	1.29	6.70	22.77	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 5 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	16.23	1.27	6.70	21.66	Horizontal	Pass
	1	0	Middle	18.03	1.28	6.70	23.45	Vertical	Pass
	1	0	Highest	16.07	1.29	6.70	21.48	Horizontal	Pass
	1	0	Lowest	18.03	1.27	6.70	23.46	Vertical	Pass
	1	0	Middle	16.19	1.28	6.70	21.61	Horizontal	Pass
	1	0	Highest	18.06	1.29	6.70	23.47	Vertical	Pass
16QAM	1	0	Lowest	16.09	1.27	6.70	21.52	Horizontal	Pass
	1	0	Middle	18.02	1.28	6.70	23.44	Vertical	Pass
	1	0	Highest	16.16	1.29	6.70	21.57	Horizontal	Pass
	1	0	Lowest	17.78	1.27	6.70	23.21	Vertical	Pass
	1	0	Middle	16.33	1.28	6.70	21.75	Horizontal	Pass
	1	0	Highest	17.79	1.29	6.70	23.20	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 7 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	13.41	2.56	10.60	21.45	Horizontal	Pass
	1	0	Middle	15.19	2.67	10.65	23.17	Vertical	Pass
	1	0	Highest	13.24	2.72	10.70	21.22	Horizontal	Pass
	1	0	Lowest	15.1	2.56	10.60	23.14	Vertical	Pass
	1	0	Middle	13.13	2.67	10.65	21.11	Horizontal	Pass
	1	0	Highest	15.1	2.72	10.70	23.08	Vertical	Pass
16QAM	1	0	Lowest	13.39	2.56	10.60	21.43	Horizontal	Pass
	1	0	Middle	14.9	2.67	10.65	22.88	Vertical	Pass
	1	0	Highest	13.24	2.72	10.70	21.22	Horizontal	Pass
	1	0	Lowest	15.09	2.56	10.60	23.13	Vertical	Pass
	1	0	Middle	13.29	2.67	10.65	21.27	Horizontal	Pass
	1	0	Highest	15.04	2.72	10.70	23.02	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 7 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	13.07	2.56	10.60	21.11	Horizontal	Pass
	1	0	Middle	15	2.67	10.65	22.98	Vertical	Pass
	1	0	Highest	13.01	2.72	10.70	20.99	Horizontal	Pass
	1	0	Lowest	14.91	2.56	10.60	22.95	Vertical	Pass
	1	0	Middle	13.06	2.67	10.65	21.04	Horizontal	Pass
	1	0	Highest	14.95	2.72	10.70	22.93	Vertical	Pass
16QAM	1	0	Lowest	13.04	2.56	10.60	21.08	Horizontal	Pass
	1	0	Middle	14.72	2.67	10.65	22.70	Vertical	Pass
	1	0	Highest	13.18	2.72	10.70	21.16	Horizontal	Pass
	1	0	Lowest	14.74	2.56	10.60	22.78	Vertical	Pass
	1	0	Middle	13.23	2.67	10.65	21.21	Horizontal	Pass
	1	0	Highest	14.83	2.72	10.70	22.81	Vertical	Pass
Limit	EIRP<2W=33dBm								

LTE Band 12

Radiated Power (EIRP) for LTE Band 12 / 1.4M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	15.76	1.21	6.40	20.95	Horizontal	Pass
	1	0	Middle	17.73	1.22	6.40	22.91	Vertical	Pass
	1	0	Highest	16	1.23	6.40	21.17	Horizontal	Pass
	1	0	Lowest	17.82	1.21	6.40	23.01	Vertical	Pass
	1	0	Middle	16.17	1.22	6.40	21.35	Horizontal	Pass
	1	0	Highest	17.9	1.23	6.40	23.07	Vertical	Pass
16QAM	1	0	Lowest	15.81	1.21	6.40	21.00	Horizontal	Pass
	1	0	Middle	17.7	1.22	6.40	22.88	Vertical	Pass
	1	0	Highest	16.11	1.23	6.40	21.28	Horizontal	Pass
	1	0	Lowest	17.56	1.21	6.40	22.75	Vertical	Pass
	1	0	Middle	16.08	1.22	6.40	21.26	Horizontal	Pass
	1	0	Highest	17.84	1.23	6.40	23.01	Vertical	Pass
Limit	EIRP<1W=30dBm								

Radiated Power (EIRP) for LTE Band 12 / 3M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	15.69	1.21	6.40	20.88	Horizontal	Pass
	1	0	Middle	17.65	1.22	6.40	22.83	Vertical	Pass
	1	0	Highest	15.71	1.23	6.40	20.88	Horizontal	Pass
	1	0	Lowest	17.66	1.21	6.40	22.85	Vertical	Pass
	1	0	Middle	15.78	1.22	6.40	20.96	Horizontal	Pass
	1	0	Highest	17.72	1.23	6.40	22.89	Vertical	Pass
16QAM	1	0	Lowest	15.66	1.21	6.40	20.85	Horizontal	Pass
	1	0	Middle	17.39	1.22	6.40	22.57	Vertical	Pass
	1	0	Highest	15.77	1.23	6.40	20.94	Horizontal	Pass
	1	0	Lowest	17.52	1.21	6.40	22.71	Vertical	Pass
	1	0	Middle	15.75	1.22	6.40	20.93	Horizontal	Pass
	1	0	Highest	17.53	1.23	6.40	22.70	Vertical	Pass
Limit	EIRP<1W=30dBm								

LTE Band 41

Radiated Power (EIRP) for LTE Band 41 / 5M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	12.94	2.56	10.60	20.98	Horizontal	Pass
	1	0	Middle	14.91	2.67	10.65	22.89	Vertical	Pass
	1	0	Highest	12.75	2.72	10.70	20.73	Horizontal	Pass
	1	0	Lowest	14.64	2.56	10.60	22.68	Vertical	Pass
	1	0	Middle	12.86	2.67	10.65	20.84	Horizontal	Pass
	1	0	Highest	14.75	2.72	10.70	22.73	Vertical	Pass
16QAM	1	0	Lowest	13	2.56	10.60	21.04	Horizontal	Pass
	1	0	Middle	14.69	2.67	10.65	22.67	Vertical	Pass
	1	0	Highest	12.86	2.72	10.70	20.84	Horizontal	Pass
	1	0	Lowest	14.6	2.56	10.60	22.64	Vertical	Pass
	1	0	Middle	13.02	2.67	10.65	21.00	Horizontal	Pass
	1	0	Highest	14.55	2.72	10.70	22.53	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 41 / 10M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	12.86	2.56	10.60	20.90	Horizontal	Pass
	1	0	Middle	14.7	2.67	10.65	22.68	Vertical	Pass
	1	0	Highest	12.9	2.72	10.70	20.88	Horizontal	Pass
	1	0	Lowest	14.55	2.56	10.60	22.59	Vertical	Pass
	1	0	Middle	12.81	2.67	10.65	20.79	Horizontal	Pass
	1	0	Highest	14.55	2.72	10.70	22.53	Vertical	Pass
16QAM	1	0	Lowest	12.7	2.56	10.60	20.74	Horizontal	Pass
	1	0	Middle	14.58	2.67	10.65	22.56	Vertical	Pass
	1	0	Highest	12.65	2.72	10.70	20.63	Horizontal	Pass
	1	0	Lowest	14.46	2.56	10.60	22.50	Vertical	Pass
	1	0	Middle	12.79	2.67	10.65	20.77	Horizontal	Pass
	1	0	Highest	14.26	2.72	10.70	22.24	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 41 / 15M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization Of Max. ERP	
QPSK	1	0	Lowest	12.81	2.56	10.60	20.85	Horizontal	Pass
	1	0	Middle	14.83	2.67	10.65	22.81	Vertical	Pass
	1	0	Highest	13.1	2.72	10.70	21.08	Horizontal	Pass
	1	0	Lowest	14.82	2.56	10.60	22.86	Vertical	Pass
	1	0	Middle	12.81	2.67	10.65	20.79	Horizontal	Pass
	1	0	Highest	14.64	2.72	10.70	22.62	Vertical	Pass
16QAM	1	0	Lowest	12.87	2.56	10.60	20.91	Horizontal	Pass
	1	0	Middle	14.58	2.67	10.65	22.56	Vertical	Pass
	1	0	Highest	12.89	2.72	10.70	20.87	Horizontal	Pass
	1	0	Lowest	14.79	2.56	10.60	22.83	Vertical	Pass
	1	0	Middle	12.86	2.67	10.65	20.84	Horizontal	Pass
	1	0	Highest	14.55	2.72	10.70	22.53	Vertical	Pass
Limit	EIRP<2W=33dBm								

Radiated Power (EIRP) for LTE Band 41 / 20M									
Modulation	RB		Channel	Result					Conclusion
	Size	Offset		S G.Level (dBm)	Cable loss	Gain (dBi)	PMeas E.R.P(dBm)	Polarization	
								Of Max. ERP	
QPSK	1	0	Lowest	13.41	2.56	10.60	21.45	Horizontal	Pass
	1	0	Middle	15.37	2.67	10.65	23.35	Vertical	Pass
	1	0	Highest	13.57	2.72	10.70	21.55	Horizontal	Pass
	1	0	Lowest	15.37	2.56	10.60	23.41	Vertical	Pass
	1	0	Middle	13.62	2.67	10.65	21.60	Horizontal	Pass
	1	0	Highest	15.47	2.72	10.70	23.45	Vertical	Pass
16QAM	1	0	Lowest	13.53	2.56	10.60	21.57	Horizontal	Pass
	1	0	Middle	15.16	2.67	10.65	23.14	Vertical	Pass
	1	0	Highest	13.46	2.72	10.70	21.44	Horizontal	Pass
	1	0	Lowest	15.32	2.56	10.60	23.36	Vertical	Pass
	1	0	Middle	13.67	2.67	10.65	21.65	Horizontal	Pass
	1	0	Highest	15.4	2.72	10.70	23.38	Vertical	Pass
Limit	EIRP<2W=33dBm								

6. OCCUPIED BANDWIDTH


6.1 DESCRIPTION OF OCCUPIED BANDWIDTH MEASUREMENT

6.1.1 MEASUREMENT METHOD

1.The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

2.The 26 db emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 db below the maximum in-band spectral density of the modulated signal. spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

6.1.2 TEST SETUP

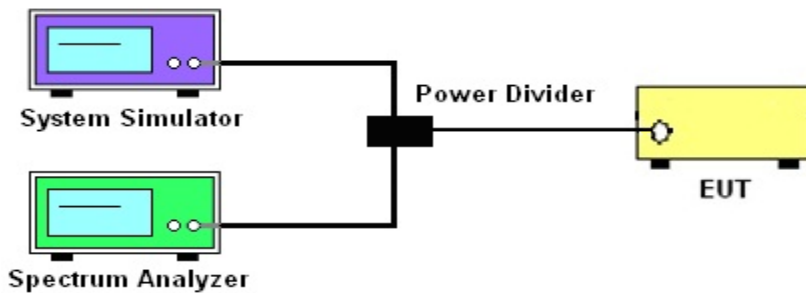

6.1.3 TEST PROCEDURES

1. The testing follows FCC KDB 971168 v02r02 Section 4.1.and 4.2
2. The EUT was connected to spectrum and system simulator via a power divider
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Set the test probe and measure the Occupied Bandwidth of the spectrum analyzer
5. Measure and record the Occupied Bandwidth from the Spectrum Analyzer.

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	3MHz	6MHz	10MHz	20MHz	30MHz	40MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	PK	PK	PK	PK	PK	PK
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto

6.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.334	1.1027	1.316	1.0991	1.312	1.0990
1.4	16-QAM	1.327	1.0999	1.303	1.0966	1.306	1.1007
3	QPSK	2.937	2.6898	2.960	2.6880	2.929	2.6816
3	16-QAM	2.956	2.6937	2.924	2.6862	2.933	2.6928
5	QPSK	5.061	4.5273	5.012	4.5218	5.000	4.5034
5	16-QAM	5.041	4.5244	5.015	4.5211	5.008	4.5126
10	QPSK	9.763	8.9297	9.651	8.9184	9.675	8.9264
10	16-QAM	9.805	8.9432	9.805	8.9359	9.609	8.9159
15	QPSK	14.68	13.482	14.61	13.458	14.65	13.442
15	16-QAM	14.63	13.459	14.72	13.454	14.73	13.452
20	QPSK	19.32	17.886	19.33	17.871	19.39	17.906
20	16-QAM	19.41	17.909	19.28	17.846	19.32	17.874

LTE BAND 4

LTE Band 4 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.298	1.0960	1.307	1.0966	1.309	1.1002
1.4	16-QAM	1.294	1.0968	1.313	1.1029	1.331	1.1041
3	QPSK	2.942	2.6828	2.932	2.6854	2.945	2.6907
3	16-QAM	2.938	2.6894	2.930	2.6875	2.949	2.6846
5	QPSK	5.040	4.5189	5.020	4.5265	5.040	4.5215
5	16-QAM	5.008	4.5064	5.026	4.5302	5.051	4.5213
10	QPSK	9.674	8.9230	9.712	8.9316	9.759	8.9411
10	16-QAM	9.685	8.9298	9.665	8.9336	9.607	8.9126
15	QPSK	14.66	13.448	14.66	13.444	14.74	13.433
15	16-QAM	14.66	13.440	14.64	13.461	14.62	13.432
20	QPSK	19.20	17.845	19.26	17.862	19.19	17.890
20	16-QAM	19.30	17.830	19.35	17.899	19.25	17.872

LTE BAND 5

LTE Band 5 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.301	1.0956	1.300	1.0946	1.287	1.0980
1.4	16-QAM	1.315	1.0984	1.292	1.0965	1.300	1.1036
3	QPSK	2.934	2.6901	2.930	2.6824	2.936	2.6854
3	16-QAM	2.933	2.6861	2.929	2.6865	2.940	2.6844
5	QPSK	3.058	2.7362	5.013	4.5170	4.982	4.5106
5	16-QAM	4.978	4.5091	5.022	4.5058	4.994	4.5085
10	QPSK	9.605	8.9127	9.693	8.9276	9.552	8.9013
10	16-QAM	9.660	8.9188	9.633	8.9369	9.602	8.9033

LTE BAND 7

LTE Band 7 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	4.999	4.5163	5.027	4.5146	5.057	4.5271
5	16-QAM	5.038	4.5113	5.033	4.5128	5.023	4.5174
10	QPSK	9.671	8.9301	9.716	8.9318	9.690	8.9216
10	16-QAM	9.744	8.9296	9.705	8.9301	9.699	8.9368
15	QPSK	14.79	13.468	14.72	13.471	14.77	13.465
15	16-QAM	14.68	13.465	14.73	13.490	14.70	13.465
20	QPSK	19.25	17.851	19.37	17.882	19.27	17.877
20	16-QAM	19.46	17.883	19.16	17.884	19.34	17.861

LTE BAND 12

LTE Band 12 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
1.4	QPSK	1.293	1.0946	1.303	1.0994	1.307	1.1006
1.4	16-QAM	1.314	1.0971	1.300	1.0982	1.289	1.0957
3	QPSK	2.915	2.6843	2.938	2.6856	2.927	2.6834
3	16-QAM	2.949	2.6836	2.927	2.6824	2.934	2.6888
5	QPSK	4.992	4.5200	5.006	4.5111	4.988	4.5053
5	16-QAM	6.587	4.5202	5.013	4.5183	4.958	4.5011
10	QPSK	9.611	8.9221	9.720	8.9356	9.759	8.9323
10	16-QAM	9.666	8.9146	9.690	8.9391	9.671	8.9171

LTE BAND 17

LTE Band XVII Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	5.004	4.5232	5.000	4.5134	5.010	4.5227
5	16-QAM	5.010	4.5167	5.034	4.5213	5.026	4.5125
10	QPSK	9.750	8.9253	9.738	8.9422	9.650	8.9311
10	16-QAM	9.788	8.9508	9.724	8.9349	9.706	8.9264

LTE BAND 41

LTE Band 41 Bandwidth [MHz]							
BW [MHz]	Mod	Lowest		Middle		Highest	
		26dB BW	99% BW	26dB BW	99% BW	26dB BW	99% BW
5	QPSK	5.222	4.5279	5.882	4.5174	5.385	4.5132
5	16-QAM	5.306	4.5178	5.995	4.5270	5.259	4.5155
10	QPSK	9.724	8.9322	10.41	8.9366	9.618	8.9255
10	16-QAM	9.578	8.5259	10.00	8.9267	9.670	8.9212
15	QPSK	14.57	13.433	18.28	13.501	14.91	13.445
15	16-QAM	14.77	13.457	17.81	13.495	14.63	13.449
20	QPSK	19.53	17.873	20.95	17.927	19.77	17.910
20	16-QAM	19.39	17.873	20.89	17.927	19.87	17.909

NOTE:Test chart See Appendix A

7. CONDUCTED BAND EDGE

7.1 DESCRIPTION OF CONDUCTED BAND EDGE MEASUREMENT

7.1.1 MEASUREMENT METHOD

1. §22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

2. §24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed

3. §27.53 (h)

For operations in the 1710 – 1755 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 1 MHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


4. §27.53(m)(4)

For operations in the 2500 MHz ~ 2570 MHz band this section, the attenuation factor shall be not less than $40 + 10 \log (P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log (P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log (P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log (P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

5. §27.53 (g)

For operations in the 698 -746 MHz band, the FCC limit is $43 + 10\log_{10}(P[\text{Watts}])$ dB below the transmitter power $P(\text{Watts})$ in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

7.1.2 TEST SETUP

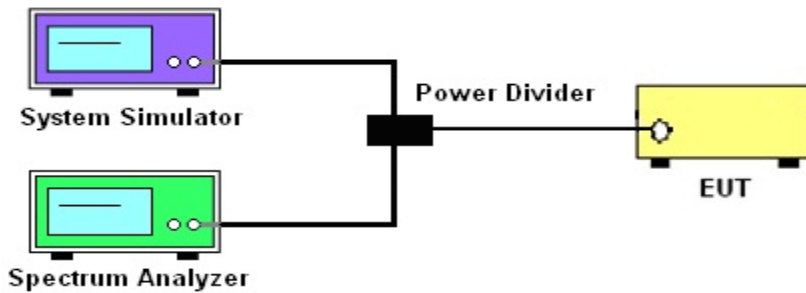

7.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Set spectrum analyzer with RMS/AVG detector
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)]$ (dB)
 $= [30 + 10\log(P)]$ (dBm) - $[43 + 10\log(P)]$ (dB)
 $= -13\text{dBm}$.

Band 7:

$$\begin{aligned}
 &= P(W) - [55 + 10\log(P)] \text{ (dB)} \\
 &= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)} \\
 &= -25\text{dBm}.
 \end{aligned}$$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	12MHz	13MHz	15MHz	20MHz	25MHz	30MHz
RBW	30kHz	30kHz	100kHz	100kHz	300kHz	300kHz
VBW	100kHz	100kHz	300kHz	300kHz	1000kHz	1000kHz
Detector	RMS	RMS	RMS	RMS	RMS	RMS
Trace	Max	Max	Max	Max	Max	Max
Sweep Count	Auto	Auto	Auto	Auto	Auto	Auto

7.1.4 MEASUREMENT RESULT

NOTE: Test chart See Appendix B

8. CONDUCTED SPURIOUS EMISSION

8.1 DESCRIPTION OF CONDUCTED SPURIOUS EMISSION MEASUREMENT

8.1.1 MEASUREMENT METHOD


The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB.

For Band 7:

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

8.1.2 TEST SETUP

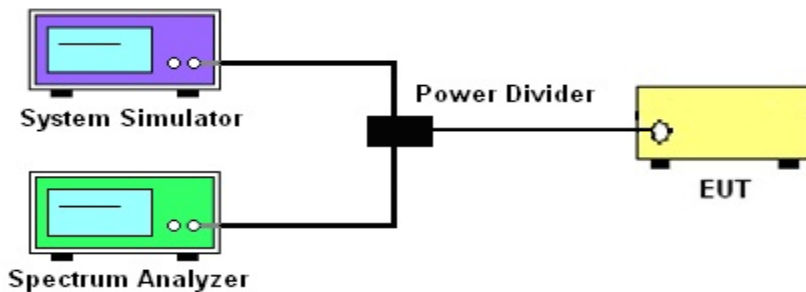

8.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 v02r02 Section 6.0. and ANSI/TIA-603-D-2010-Section 2.2.13.2(d)
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement
4. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
5. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
6. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)
 $= P(W) - [43 + 10\log(P)] \text{ (dB)} = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$
 $= -13\text{dBm}.$
 For Band 7: $P(W) - [43 + 10\log(P)] \text{ (dB)} = -25\text{dBm}$

	LTE					
LTE BW	1.4M	3M	5M	10M	15M	20M
Span	Auto	Auto	Auto	Auto	Auto	Auto
RBW	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz	1000kHz
VBW	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz	3000kHz
Detector	PK	PK	PK	PK	PK	PK
Trace	Max	Max	Max	Max	Max	Max

8.1.4 TEST RESULTS

NOTE: Test chart See Appendix C

9. RADIATED SPURIOUS EMISSION

9.1 DESCRIPTION OF RADIATED SPURIOUS EMISSION


9.1.1 MEASUREMENT METHOD

The radiated spurious emission was measured by substitution method according to ANSI / TIA / EIA-603-D-2010. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. For Band 7 The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $55 + 10 \log (P)$ dB. For Band. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.


5.1.2 Test Setup

The procedure of radiated spurious emissions is as follows:

a) Pre-calibration With pre-calibration method, the Radiated Spurious Emissions(RSE) is calculated as, $RSE = Rx \text{ (dBuV)} + CL \text{ (dB)} + SA \text{ (dB)} + Gain \text{ (dBi)} - 107 \text{ (dBuV to dBm)}$ The SA is calibrated using following setup.

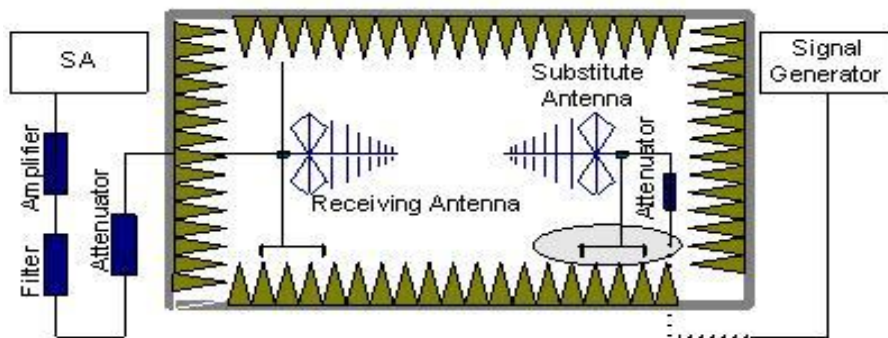

b) EUT was placed on a 1.5 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the test item for emission measurements. The height of receiving antenna is 0.8m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the test item and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector and 1MHz bandwidth.

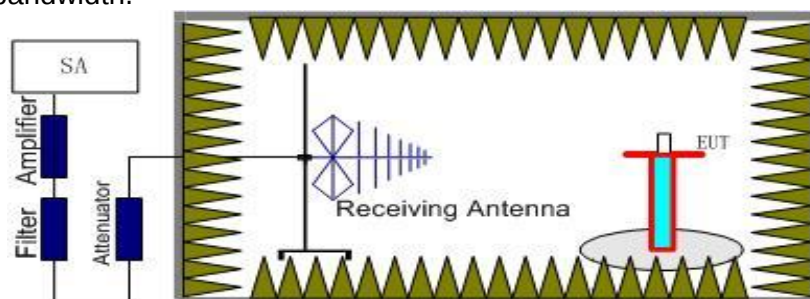

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of any band into any of the other blocks.

The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established and the ARpl is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss and the air loss. The measurement results are obtained as described below: $Power = P_{Mea} + AR_{pl}$

9.1.3 TEST PROCEDURES

1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI/TIA-603-D-2010-Section 2.2.12.2(b)
2. The EUT was placed on a rotatable wooden table with 0.8 meter above ground.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
9. Taking the record of output power at antenna port.
10. Repeat step 7 to step 8 for another polarization.
11. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$$

$$= -13\text{dBm}$$

.

For Band 7:

The limit line is derived from $55 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= [30 + 10\log(P)] \text{ (dBm)} - [55 + 10\log(P)] \text{ (dB)}$$

$$= -25\text{dBm}$$

$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$

$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$

9.1.4 TEST RESULTS

LTE BAND 2

LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3701.30	-33.78	12.60	12.93	-34.11	-13.00	-21.11	H
5551.95	-34.88	13.10	17.11	-38.89	-13.00	-25.89	H
7402.95	-33.21	11.50	22.20	-43.91	-13.00	-30.91	H
3701.30	-35.30	12.60	12.93	-35.63	-13.00	-22.63	V
5551.95	-34.41	13.10	17.11	-38.42	-13.00	-25.42	V
7402.95	-32.23	11.50	22.20	-42.93	-13.00	-29.93	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3759.87	-34.28	12.60	12.93	-34.61	-13.00	-21.61	H
5639.82	-34.44	13.10	17.11	-38.45	-13.00	-25.45	H
7520.12	-32.38	11.50	22.20	-43.08	-13.00	-30.08	H
3759.87	-34.70	12.60	12.93	-35.03	-13.00	-22.03	V
5639.82	-34.18	13.10	17.11	-38.19	-13.00	-25.19	V
7520.12	-32.25	11.50	22.20	-42.95	-13.00	-29.95	V
LTE Band 2 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea (dBm)	Limit (dBm)	Margin (dBm)	Polarity
3818.59	-34.26	12.60	12.93	-34.59	-13.00	-21.59	H
5727.58	-34.57	13.10	17.11	-38.58	-13.00	-25.58	H
7636.80	-32.60	11.50	22.20	-43.30	-13.00	-30.30	H
3818.59	-34.61	12.60	12.93	-34.94	-13.00	-21.94	V
5727.58	-34.40	13.10	17.11	-38.41	-13.00	-25.41	V
7636.80	-32.85	11.50	22.20	-43.55	-13.00	-30.55	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line..

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3703.22	-33.95	12.60	12.93	-34.28	-13.00	-21.28	H
5554.34	-35.41	13.10	17.11	-39.42	-13.00	-26.42	H
7406.86	-33.41	11.50	22.20	-44.11	-13.00	-31.11	H
3703.22	-34.54	12.60	12.93	-34.87	-13.00	-21.87	V
5554.34	-34.68	13.10	17.11	-38.69	-13.00	-25.69	V
7406.86	-32.68	11.50	22.20	-43.38	-13.00	-30.38	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3760.10	-34.19	12.60	12.93	-34.52	-13.00	-21.52	H
5640.20	-35.45	13.10	17.11	-39.46	-13.00	-26.46	H
7520.15	-32.96	11.50	22.20	-43.66	-13.00	-30.66	H
3760.10	-35.03	12.60	12.93	-35.36	-13.00	-22.36	V
5640.20	-34.06	13.10	17.11	-38.07	-13.00	-25.07	V
7520.15	-32.86	11.50	22.20	-43.56	-13.00	-30.56	V
LTE Band 2 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3816.62	-34.82	12.60	12.93	-35.15	-13.00	-22.15	H
5724.78	-35.30	13.10	17.11	-39.31	-13.00	-26.31	H
7633.19	-32.86	11.50	22.20	-43.56	-13.00	-30.56	H
3816.62	-34.91	12.60	12.93	-35.24	-13.00	-22.24	V
5724.78	-34.66	13.10	17.11	-38.67	-13.00	-25.67	V
7633.19	-31.77	11.50	22.20	-42.47	-13.00	-29.47	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3705.09	-34.52	12.60	12.93	-34.85	-13.00	-21.85	H
5557.91	-34.18	13.10	17.11	-38.19	-13.00	-25.19	H
7410.77	-33.43	11.50	22.20	-44.13	-13.00	-31.13	H
3705.09	-35.91	12.60	12.93	-36.24	-13.00	-23.24	V
5557.91	-34.07	13.10	17.11	-38.08	-13.00	-25.08	V
7410.77	-32.48	11.50	22.20	-43.18	-13.00	-30.18	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3760.02	-34.11	12.60	12.93	-34.44	-13.00	-21.44	H
5640.26	-35.22	13.10	17.11	-39.23	-13.00	-26.23	H
7520.23	-32.25	11.50	22.20	-42.95	-13.00	-29.95	H
3760.02	-34.86	12.60	12.93	-35.19	-13.00	-22.19	V
5640.26	-34.08	13.10	17.11	-38.09	-13.00	-25.09	V
7520.23	-32.42	11.50	22.20	-43.12	-13.00	-30.12	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3814.31	-33.63	12.60	12.93	-33.96	-13.00	-20.96	H
5721.20	-34.97	13.10	17.11	-38.98	-13.00	-25.98	H
7628.40	-32.17	11.50	22.20	-42.87	-13.00	-29.87	H
3814.31	-34.86	12.60	12.93	-35.19	-13.00	-22.19	V
5721.20	-34.35	13.10	17.11	-38.36	-13.00	-25.36	V
7628.40	-32.05	11.50	22.20	-42.75	-13.00	-29.75	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3710.52	-34.34	12.60	12.93	-34.67	-13.00	-21.67	H
5565.83	-35.49	13.10	17.11	-39.50	-13.00	-26.50	H
7421.12	-32.93	11.50	22.20	-43.63	-13.00	-30.63	H
3710.52	-35.49	12.60	12.93	-35.82	-13.00	-22.82	V
5565.83	-34.12	13.10	17.11	-38.13	-13.00	-25.13	V
7421.12	-33.08	11.50	22.20	-43.78	-13.00	-30.78	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3760.26	-33.99	12.60	12.93	-34.32	-13.00	-21.32	H
5639.91	-34.92	13.10	17.11	-38.93	-13.00	-25.93	H
7519.84	-32.35	11.50	22.20	-43.05	-13.00	-30.05	H
3760.26	-35.48	12.60	12.93	-35.81	-13.00	-22.81	V
5639.91	-35.24	13.10	17.11	-39.25	-13.00	-26.25	V
7519.84	-32.18	11.50	22.20	-42.88	-13.00	-29.88	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S G.Lev (dBm)	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
				(dBm)	(dBm)	(dBm)	
3809.39	-34.75	12.60	12.93	-35.08	-13.00	-22.08	H
5713.83	-34.91	13.10	17.11	-38.92	-13.00	-25.92	H
7618.00	-32.79	11.50	22.20	-43.49	-13.00	-30.49	H
3809.39	-35.02	12.60	12.93	-35.35	-13.00	-22.35	V
5713.83	-34.61	13.10	17.11	-38.62	-13.00	-25.62	V
7618.00	-32.05	11.50	22.20	-42.75	-13.00	-29.75	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3715.93	-34.92	12.60	12.93	-35.25	-13.00	-22.25	H
5573.89	-34.82	13.10	17.11	-38.83	-13.00	-25.83	H
7618.39	-33.63	11.50	22.20	-44.33	-13.00	-31.33	H
3715.93	-35.67	12.60	12.93	-36.00	-13.00	-23.00	V
5573.89	-34.29	13.10	17.11	-38.30	-13.00	-25.30	V
7618.39	-32.94	11.50	22.20	-43.64	-13.00	-30.64	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3760.00	-34.60	12.60	12.93	-34.93	-13.00	-21.93	H
5639.94	-34.21	13.10	17.11	-38.22	-13.00	-25.22	H
7520.13	-32.78	11.50	22.20	-43.48	-13.00	-30.48	H
3760.00	-35.60	12.60	12.93	-35.93	-13.00	-22.93	V
5639.94	-34.80	13.10	17.11	-38.81	-13.00	-25.81	V
7520.13	-31.98	11.50	22.20	-42.68	-13.00	-29.68	V
LTE Band 2 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3803.45	-34.64	12.60	12.93	-34.97	-13.00	-21.97	H
5705.65	-35.15	13.10	17.11	-39.16	-13.00	-26.16	H
7607.53	-33.25	11.50	22.20	-43.95	-13.00	-30.95	H
3803.45	-34.57	12.60	12.93	-34.90	-13.00	-21.90	V
5705.65	-34.62	13.10	17.11	-38.63	-13.00	-25.63	V
7607.53	-32.30	11.50	22.20	-43.00	-13.00	-30.00	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 2

LTE Band 2 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3721.04	-33.99	12.60	12.93	-34.32	-13.00	-21.32	H
5581.25	-34.98	13.10	17.11	-38.99	-13.00	-25.99	H
7442.09	-32.77	11.50	22.20	-43.47	-13.00	-30.47	H
3721.04	-35.98	12.60	12.93	-36.31	-13.00	-23.31	V
5581.25	-35.22	13.10	17.11	-39.23	-13.00	-26.23	V
7442.09	-33.10	11.50	22.20	-43.80	-13.00	-30.80	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3759.90	-33.92	12.60	12.93	-34.25	-13.00	-21.25	H
5639.93	-34.72	13.10	17.11	-38.73	-13.00	-25.73	H
7520.24	-33.47	11.50	22.20	-44.17	-13.00	-31.17	H
3759.90	-34.74	12.60	12.93	-35.07	-13.00	-22.07	V
5639.93	-34.49	13.10	17.11	-38.50	-13.00	-25.50	V
7520.24	-32.19	11.50	22.20	-42.89	-13.00	-29.89	V
LTE Band 2 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3798.48	-34.37	12.60	12.93	-34.70	-13.00	-21.70	H
5697.34	-34.75	13.10	17.11	-38.76	-13.00	-25.76	H
7596.95	-32.20	11.50	22.20	-42.90	-13.00	-29.90	H
3798.48	-35.27	12.60	12.93	-35.60	-13.00	-22.60	V
5697.34	-34.91	13.10	17.11	-38.92	-13.00	-25.92	V
7596.95	-32.16	11.50	22.20	-42.86	-13.00	-29.86	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

BAND 4

LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3422.16	-34.29	12.90	12.56	-33.95	-13.00	-20.95	H
5133.56	-34.58	13.10	12.46	-33.94	-13.00	-20.94	H
6844.69	-33.49	12.33	21.13	-42.29	-13.00	-29.29	H
3422.16	-35.99	12.90	12.76	-35.85	-13.00	-22.85	V
5133.56	-34.23	13.10	16.32	-37.45	-13.00	-24.45	V
6844.69	-32.85	12.33	21.13	-41.65	-13.00	-28.65	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3466.16	-33.84	12.80	12.56	-33.60	-13.00	-20.60	H
5199.10	-35.45	13.10	12.46	-34.81	-13.00	-21.81	H
6931.90	-32.53	12.33	21.13	-41.33	-13.00	-28.33	H
3466.16	-35.53	12.80	12.76	-35.49	-13.00	-22.49	V
5199.10	-34.64	13.10	16.32	-37.86	-13.00	-24.86	V
6931.90	-32.22	12.33	21.13	-41.02	-13.00	-28.02	V
LTE Band 4 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3508.55	-34.19	12.61	12.56	-34.14	-13.00	-21.14	H
5262.08	-34.53	13.12	12.46	-33.87	-13.00	-20.87	H
7016.19	-32.41	12.32	21.13	-41.22	-13.00	-28.22	H
3508.55	-35.81	12.61	12.76	-35.96	-13.00	-22.96	V
5262.08	-35.21	13.12	16.32	-38.41	-13.00	-25.41	V
7016.19	-32.61	12.32	21.13	-41.42	-13.00	-28.42	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

BAND 4

LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3424.06	-33.64	12.90	12.56	-33.30	-13.00	-20.30	H
5136.18	-34.13	13.10	12.46	-33.49	-13.00	-20.49	H
6848.80	-33.13	12.33	21.13	-41.93	-13.00	-28.93	H
3424.06	-35.45	12.90	12.76	-35.31	-13.00	-22.31	V
5136.18	-34.12	13.10	16.32	-37.34	-13.00	-24.34	V
6848.80	-32.99	12.33	21.13	-41.79	-13.00	-28.79	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3466.03	-34.17	12.80	12.56	-33.93	-13.00	-20.93	H
5198.88	-35.21	13.10	12.46	-34.57	-13.00	-21.57	H
6932.12	-32.75	12.33	21.13	-41.55	-13.00	-28.55	H
3466.03	-34.96	12.80	12.76	-34.92	-13.00	-21.92	V
5198.88	-34.08	13.10	16.32	-37.30	-13.00	-24.30	V
6932.12	-32.02	12.33	21.13	-40.82	-13.00	-27.82	V
LTE Band 4 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3506.53	-33.63	12.61	12.56	-33.58	-13.00	-20.58	H
5262.16	-34.38	13.12	12.46	-33.72	-13.00	-20.72	H
7013.17	-32.41	12.32	21.13	-41.22	-13.00	-28.22	H
3506.53	-35.21	12.61	12.76	-35.36	-13.00	-22.36	V
5262.16	-35.02	13.12	16.32	-38.22	-13.00	-25.22	V
7013.17	-32.27	12.32	21.13	-41.08	-13.00	-28.08	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3426.39	-34.51	12.90	12.56	-34.17	-13.00	-21.17	H
5139.36	-34.65	13.10	12.46	-34.01	-13.00	-21.01	H
6852.49	-33.42	12.33	21.13	-42.22	-13.00	-29.22	H
3426.39	-35.96	12.90	12.76	-35.82	-13.00	-22.82	V
5139.36	-34.36	13.10	16.32	-37.58	-13.00	-24.58	V
6852.49	-31.99	12.33	21.13	-40.79	-13.00	-27.79	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3465.87	-33.97	12.80	12.56	-33.73	-13.00	-20.73	H
5199.28	-34.29	13.10	12.46	-33.65	-13.00	-20.65	H
6932.23	-32.60	12.33	21.13	-41.40	-13.00	-28.40	H
3465.87	-35.07	12.80	12.76	-35.03	-13.00	-22.03	V
5199.28	-34.61	13.10	16.32	-37.83	-13.00	-24.83	V
6932.23	-32.60	12.33	21.13	-41.40	-13.00	-28.40	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3506.82	-34.52	12.61	12.56	-34.47	-13.00	-21.47	H
5262.36	-34.44	13.12	12.46	-33.78	-13.00	-20.78	H
7013.29	-32.21	12.32	21.13	-41.02	-13.00	-28.02	H
3506.82	-35.04	12.61	12.76	-35.19	-13.00	-22.19	V
5262.36	-35.06	13.12	16.32	-38.26	-13.00	-25.26	V
7013.29	-32.12	12.32	21.13	-40.93	-13.00	-27.93	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3436.47	-34.55	12.90	12.56	-34.21	-13.00	-21.21	H
5154.34	-34.81	13.10	12.46	-34.17	-13.00	-21.17	H
6872.63	-32.80	12.33	21.13	-41.60	-13.00	-28.60	H
3436.47	-35.40	12.90	12.76	-35.26	-13.00	-22.26	V
5154.34	-34.24	13.10	16.32	-37.46	-13.00	-24.46	V
6872.63	-32.03	12.33	21.13	-40.83	-13.00	-27.83	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3465.91	-33.65	12.80	12.56	-33.41	-13.00	-20.41	H
5199.24	-34.19	13.10	12.46	-33.55	-13.00	-20.55	H
6931.92	-33.25	12.33	21.13	-42.05	-13.00	-29.05	H
3465.91	-34.65	12.80	12.76	-34.61	-13.00	-21.61	V
5199.24	-34.84	13.10	16.32	-38.06	-13.00	-25.06	V
6931.92	-32.86	12.33	21.13	-41.66	-13.00	-28.66	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3494.59	-33.90	12.61	12.56	-33.85	-13.00	-20.85	H
5241.41	-35.01	13.12	12.46	-34.35	-13.00	-21.35	H
6988.10	-33.54	12.32	21.13	-42.35	-13.00	-29.35	H
3494.59	-35.00	12.61	12.76	-35.15	-13.00	-22.15	V
5241.41	-34.99	13.12	16.32	-38.19	-13.00	-25.19	V
6988.10	-32.85	12.32	21.13	-41.66	-13.00	-28.66	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

BAND 4

LTE Band 4 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3436.30	-34.22	12.90	12.56	-33.88	-13.00	-20.88	H
5154.26	-34.23	13.10	12.46	-33.59	-13.00	-20.59	H
6872.48	-32.29	12.33	21.13	-41.09	-13.00	-28.09	H
3436.30	-34.64	12.90	12.76	-34.50	-13.00	-21.50	V
5154.26	-34.46	13.10	16.32	-37.68	-13.00	-24.68	V
6872.48	-32.13	12.33	21.13	-40.93	-13.00	-27.93	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3466.18	-34.64	12.80	12.56	-34.40	-13.00	-21.40	H
5199.27	-35.01	13.10	12.46	-34.37	-13.00	-21.37	H
6931.93	-33.24	12.33	21.13	-42.04	-13.00	-29.04	H
3466.18	-35.37	12.80	12.76	-35.33	-13.00	-22.33	V
5199.27	-34.00	13.10	16.32	-37.22	-13.00	-24.22	V
6931.93	-31.88	12.33	21.13	-40.68	-13.00	-27.68	V
LTE Band 4 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3494.43	-34.49	12.61	12.56	-34.44	-13.00	-21.44	H
5242.11	-34.93	13.12	12.46	-34.27	-13.00	-21.27	H
6989.62	-32.47	12.32	21.13	-41.28	-13.00	-28.28	H
3494.43	-34.95	12.61	12.76	-35.10	-13.00	-22.10	V
5242.11	-34.44	13.12	16.32	-37.64	-13.00	-24.64	V
6989.62	-32.10	12.32	21.13	-40.91	-13.00	-27.91	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 4

LTE Band 4 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3440.11	-34.61	12.90	12.56	-34.27	-13.00	-21.27	H
5160.26	-35.29	13.10	12.46	-34.65	-13.00	-21.65	H
6880.71	-33.24	12.33	21.13	-42.04	-13.00	-29.04	H
3440.11	-34.81	12.90	12.76	-34.67	-13.00	-21.67	V
5160.26	-33.89	13.10	16.32	-37.11	-13.00	-24.11	V
6880.71	-32.24	12.33	21.13	-41.04	-13.00	-28.04	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3466.03	-33.96	12.80	12.56	-33.72	-13.00	-20.72	H
5199.14	-34.59	13.10	12.46	-33.95	-13.00	-20.95	H
6931.82	-33.52	12.33	21.13	-42.32	-13.00	-29.32	H
3466.03	-34.89	12.80	12.76	-34.85	-13.00	-21.85	V
5199.14	-35.21	13.10	16.32	-38.43	-13.00	-25.43	V
6931.82	-32.02	12.33	21.13	-40.82	-13.00	-27.82	V
LTE Band 4 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
3490.46	-34.47	12.61	12.56	-34.42	-13.00	-21.42	H
5235.30	-34.93	13.12	12.46	-34.27	-13.00	-21.27	H
6980.25	-33.39	12.32	21.13	-42.20	-13.00	-29.20	H
3490.46	-35.38	12.61	12.76	-35.53	-13.00	-22.53	V
5235.30	-33.83	13.12	16.32	-37.03	-13.00	-24.03	V
6980.25	-32.24	12.32	21.13	-41.05	-13.00	-28.05	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1649.05	-33.65	9.56	9.72	-33.81	-13.00	-20.81	H
2473.77	-35.26	10.50	10.86	-35.62	-13.00	-22.62	H
3298.78	-32.54	12.78	11.57	-31.33	-13.00	-18.33	H
1649.05	-35.40	9.56	9.34	-35.18	-13.00	-22.18	V
2473.77	-34.60	10.50	10.42	-34.52	-13.00	-21.52	V
3298.78	-32.02	12.78	11.12	-30.36	-13.00	-17.36	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1672.62	-34.69	9.56	9.72	-34.85	-13.00	-21.85	H
2509.21	-35.10	10.50	10.86	-35.46	-13.00	-22.46	H
3345.96	-32.67	12.78	11.57	-31.46	-13.00	-18.46	H
1672.62	-34.95	9.56	9.34	-34.73	-13.00	-21.73	V
2509.21	-33.93	10.50	10.42	-33.85	-13.00	-20.85	V
3345.96	-32.20	12.78	11.12	-30.54	-13.00	-17.54	V
LTE Band 5 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1696.16	-34.21	9.56	9.72	-34.37	-13.00	-21.37	H
2544.48	-34.33	10.50	10.86	-34.69	-13.00	-21.69	H
3392.81	-32.50	12.78	11.57	-31.29	-13.00	-18.29	H
1696.16	-35.99	9.56	9.34	-35.77	-13.00	-22.77	V
2544.48	-34.92	10.50	10.42	-34.84	-13.00	-21.84	V
3392.81	-32.82	12.78	11.12	-31.16	-13.00	-18.16	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1650.71	-34.34	9.56	9.72	-34.50	-13.00	-21.50	H
2476.42	-34.45	10.50	10.86	-34.81	-13.00	-21.81	H
3301.79	-33.55	12.78	11.57	-32.34	-13.00	-19.34	H
1650.71	-34.93	9.56	9.34	-34.71	-13.00	-21.71	V
2476.42	-34.42	10.50	10.42	-34.34	-13.00	-21.34	V
3301.79	-31.86	12.78	11.12	-30.20	-13.00	-17.20	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1672.99	-34.56	9.56	9.72	-34.72	-13.00	-21.72	H
2509.29	-34.99	10.50	10.86	-35.35	-13.00	-22.35	H
3345.99	-32.72	12.78	11.57	-31.51	-13.00	-18.51	H
1672.99	-35.72	9.56	9.34	-35.50	-13.00	-22.50	V
2509.29	-35.11	10.50	10.42	-35.03	-13.00	-22.03	V
3345.99	-32.24	12.78	11.12	-30.58	-13.00	-17.58	V
LTE Band 5 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1694.91	-34.80	9.56	9.72	-34.96	-13.00	-21.96	H
2542.33	-34.50	10.50	10.86	-34.86	-13.00	-21.86	H
3389.84	-33.10	12.78	11.57	-31.89	-13.00	-18.89	H
1694.91	-35.80	9.56	9.34	-35.58	-13.00	-22.58	V
2542.33	-35.04	10.50	10.42	-34.96	-13.00	-21.96	V
3389.84	-32.44	12.78	11.12	-30.78	-13.00	-17.78	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1652.50	-34.94	9.56	9.72	-35.10	-13.00	-22.10	H
2479.21	-35.02	10.50	10.86	-35.38	-13.00	-22.38	H
3305.69	-32.63	12.78	11.57	-31.42	-13.00	-18.42	H
1652.50	-35.31	9.56	9.34	-35.09	-13.00	-22.09	V
2479.21	-33.75	10.50	10.42	-33.67	-13.00	-20.67	V
3305.69	-32.23	12.78	11.12	-30.57	-13.00	-17.57	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1672.62	-33.96	9.56	9.72	-34.12	-13.00	-21.12	H
2509.13	-34.39	10.50	10.86	-34.75	-13.00	-21.75	H
3345.64	-32.94	12.78	11.57	-31.73	-13.00	-18.73	H
1672.62	-35.97	9.56	9.34	-35.75	-13.00	-22.75	V
2509.13	-34.58	10.50	10.42	-34.50	-13.00	-21.50	V
3345.64	-31.86	12.78	11.12	-30.20	-13.00	-17.20	V
LTE Band 5 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1692.55	-33.87	9.56	9.72	-34.03	-13.00	-21.03	H
2539.15	-34.82	10.50	10.86	-35.18	-13.00	-22.18	H
3385.52	-32.90	12.78	11.57	-31.69	-13.00	-18.69	H
1692.55	-34.90	9.56	9.34	-34.68	-13.00	-21.68	V
2539.15	-34.60	10.50	10.42	-34.52	-13.00	-21.52	V
3385.52	-32.26	12.78	11.12	-30.60	-13.00	-17.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 5

LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1657.83	-33.61	9.56	9.72	-33.77	-13.00	-20.77	H
2486.55	-35.09	10.50	10.86	-35.45	-13.00	-22.45	H
3315.80	-33.00	12.78	11.57	-31.79	-13.00	-18.79	H
1657.83	-35.00	9.56	9.34	-34.78	-13.00	-21.78	V
2486.55	-34.99	10.50	10.42	-34.91	-13.00	-21.91	V
3315.80	-32.39	12.78	11.12	-30.73	-13.00	-17.73	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1672.90	-33.52	9.56	9.72	-33.68	-13.00	-20.68	H
2509.49	-34.60	10.50	10.86	-34.96	-13.00	-21.96	H
3345.53	-33.44	12.78	11.57	-32.23	-13.00	-19.23	H
1672.90	-34.53	9.56	9.34	-34.31	-13.00	-21.31	V
2509.49	-34.14	10.50	10.42	-34.06	-13.00	-21.06	V
3345.53	-32.35	12.78	11.12	-30.69	-13.00	-17.69	V
LTE Band 5 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1687.98	-33.49	9.56	9.72	-33.65	-13.00	-20.65	H
2531.86	-34.58	10.50	10.86	-34.94	-13.00	-21.94	H
3375.64	-32.19	12.78	11.57	-30.98	-13.00	-17.98	H
1687.98	-35.46	9.56	9.34	-35.24	-13.00	-22.24	V
2531.86	-34.25	10.50	10.42	-34.17	-13.00	-21.17	V
3375.64	-31.87	12.78	11.12	-30.21	-13.00	-17.21	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

BAND 7

LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5005.34	-34.56	12.66	12.54	-34.44	-13.00	-21.44	H
7508.09	-35.20	11.46	12.57	-36.31	-13.00	-23.31	H
10010.71	-32.45	12.79	21.23	-40.89	-13.00	-27.89	H
5005.34	-34.96	12.66	12.54	-34.84	-13.00	-21.84	V
7508.09	-34.32	11.46	12.57	-35.43	-13.00	-22.43	V
10010.71	-33.15	12.79	21.23	-41.59	-13.00	-28.59	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5069.90	-34.85	12.72	12.55	-34.68	-13.00	-21.68	H
7604.94	-35.30	11.46	12.57	-36.41	-13.00	-23.41	H
10139.96	-32.77	12.09	21.25	-41.93	-13.00	-28.93	H
5069.90	-35.48	12.80	12.55	-35.23	-13.00	-22.23	V
7604.94	-34.93	13.10	12.57	-34.40	-13.00	-21.40	V
10139.96	-32.55	12.33	21.25	-41.47	-13.00	-28.47	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5134.42	-34.16	12.76	12.57	-33.97	-13.00	-20.97	H
7701.22	-34.85	11.45	12.58	-35.98	-13.00	-22.98	H
10268.55	-33.45	12.28	21.27	-42.44	-13.00	-29.44	H
5134.42	-35.94	12.76	12.57	-35.75	-13.00	-22.75	V
7701.22	-34.96	11.45	12.58	-36.09	-13.00	-23.09	V
10268.55	-32.41	12.28	21.27	-41.40	-13.00	-28.40	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5010.22	-34.31	12.66	12.54	-34.19	-13.00	-21.19	H
7515.64	-35.15	11.46	12.57	-36.26	-13.00	-23.26	H
10021.19	-32.63	12.79	21.23	-41.07	-13.00	-28.07	H
5010.22	-34.88	12.66	12.54	-34.76	-13.00	-21.76	V
7515.64	-34.72	11.46	12.57	-35.83	-13.00	-22.83	V
10021.19	-31.84	12.79	21.23	-40.28	-13.00	-27.28	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5070.22	-34.59	12.72	12.55	-34.42	-13.00	-21.42	H
7604.95	-34.27	11.46	12.57	-35.38	-13.00	-22.38	H
10140.24	-32.61	12.09	21.25	-41.77	-13.00	-28.77	H
5070.22	-35.35	12.80	12.55	-35.10	-13.00	-22.10	V
7604.95	-35.10	13.10	12.57	-34.57	-13.00	-21.57	V
10140.24	-32.16	12.33	21.25	-41.08	-13.00	-28.08	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5129.15	-34.77	12.76	12.57	-34.58	-13.00	-21.58	H
7694.33	-34.83	11.45	12.58	-35.96	-13.00	-22.96	H
10259.09	-33.14	12.28	21.27	-42.13	-13.00	-29.13	H
5129.15	-35.68	12.76	12.57	-35.49	-13.00	-22.49	V
7694.33	-35.15	11.45	12.58	-36.28	-13.00	-23.28	V
10259.09	-31.92	12.28	21.27	-40.91	-13.00	-27.91	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5015.98	-33.45	12.66	12.54	-33.33	-13.00	-20.33	H
7524.10	-34.50	11.46	12.57	-35.61	-13.00	-22.61	H
10032.06	-32.56	12.79	21.23	-41.00	-13.00	-28.00	H
5015.98	-35.43	12.66	12.54	-35.31	-13.00	-22.31	V
7524.10	-34.21	11.46	12.57	-35.32	-13.00	-22.32	V
10032.06	-32.60	12.79	21.23	-41.04	-13.00	-28.04	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5070.09	-33.69	12.72	12.55	-33.52	-13.00	-20.52	H
7604.80	-34.38	11.46	12.57	-35.49	-13.00	-22.49	H
10140.04	-33.27	12.09	21.25	-42.43	-13.00	-29.43	H
5070.09	-35.81	12.80	12.55	-35.56	-13.00	-22.56	V
7604.80	-33.89	13.10	12.57	-33.36	-13.00	-20.36	V
10140.04	-31.79	12.33	21.25	-40.71	-13.00	-27.71	V
LTE Band 7 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5123.67	-33.63	12.76	12.57	-33.44	-13.00	-20.44	H
7523.94	-35.14	11.45	12.58	-36.27	-13.00	-23.27	H
10031.96	-33.59	12.28	21.27	-42.58	-13.00	-29.58	H
5123.67	-34.90	12.76	12.57	-34.71	-13.00	-21.71	V
7523.94	-34.86	11.45	12.58	-35.99	-13.00	-22.99	V
10031.96	-32.47	12.28	21.27	-41.46	-13.00	-28.46	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 7

LTE Band 7 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5021.47	-34.49	12.66	12.54	-34.37	-13.00	-21.37	H
7531.55	-35.15	11.46	12.57	-36.26	-13.00	-23.26	H
7524.19	-33.23	12.79	21.23	-41.67	-13.00	-28.67	H
5021.47	-35.31	12.66	12.54	-35.19	-13.00	-22.19	V
7531.55	-34.97	11.46	12.57	-36.08	-13.00	-23.08	V
7524.19	-31.96	12.79	21.23	-40.40	-13.00	-27.40	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5069.95	-33.93	12.72	12.55	-33.76	-13.00	-20.76	H
7604.98	-34.60	11.46	12.57	-35.71	-13.00	-22.71	H
10140.13	-33.39	12.09	21.25	-42.55	-13.00	-29.55	H
5069.95	-34.85	12.80	12.55	-34.60	-13.00	-21.60	V
7604.98	-34.16	13.10	12.57	-33.63	-13.00	-20.63	V
10140.13	-32.20	12.33	21.25	-41.12	-13.00	-28.12	V
LTE Band 7 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5118.89	-34.78	12.76	12.57	-34.59	-13.00	-21.59	H
7678.45	-34.46	11.45	12.58	-35.59	-13.00	-22.59	H
10238.15	-33.18	12.28	21.27	-42.17	-13.00	-29.17	H
5118.89	-35.23	12.76	12.57	-35.04	-13.00	-22.04	V
7678.45	-34.09	11.45	12.58	-35.22	-13.00	-22.22	V
10238.15	-32.24	12.28	21.27	-41.23	-13.00	-28.23	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 12

LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1399.11	-34.66	8.17	9.34	-35.83	-13.00	-22.83	H
2099.05	-34.58	9.53	10.42	-35.47	-13.00	-22.47	H
2798.72	-33.44	11.27	11.12	-33.29	-13.00	-20.29	H
1399.11	-34.69	8.17	9.34	-35.86	-13.00	-22.86	V
2099.05	-34.38	9.53	10.42	-35.27	-13.00	-22.27	V
2798.72	-33.19	11.27	11.12	-33.04	-13.00	-20.04	V
LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1414.92	-33.94	8.17	9.34	-35.11	-13.00	-22.11	H
2122.41	-35.44	9.53	10.42	-36.33	-13.00	-23.33	H
2830.00	-32.52	11.27	11.12	-32.37	-13.00	-19.37	H
1414.92	-35.58	8.17	9.34	-36.75	-13.00	-23.75	V
2122.41	-34.92	9.53	10.42	-35.81	-13.00	-22.81	V
2830.00	-33.14	11.27	11.12	-32.99	-13.00	-19.99	V
LTE Band 12 / 1.4MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1430.14	-34.37	8.17	9.34	-35.54	-13.00	-22.54	H
2145.48	-34.96	9.53	10.42	-35.85	-13.00	-22.85	H
2860.85	-32.36	11.27	11.12	-32.21	-13.00	-19.21	H
1430.14	-35.55	8.17	9.34	-36.72	-13.00	-23.72	V
2145.48	-34.17	9.53	10.42	-35.06	-13.00	-22.06	V
2860.85	-31.75	11.27	11.12	-31.60	-13.00	-18.60	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 12

BAND 12

LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1400.58	-34.81	8.17	9.34	-35.98	-13.00	-22.98	H
2101.50	-34.22	9.53	10.42	-35.11	-13.00	-22.11	H
2801.75	-33.02	11.27	11.12	-32.87	-13.00	-19.87	H
1400.58	-35.96	8.17	9.34	-37.13	-13.00	-24.13	V
2101.50	-35.19	9.53	10.42	-36.08	-13.00	-23.08	V
2801.75	-32.27	11.27	11.12	-32.12	-13.00	-19.12	V
LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1414.90	-33.80	8.17	9.34	-34.97	-13.00	-21.97	H
2122.08	-34.28	9.53	10.42	-35.17	-13.00	-22.17	H
2829.52	-32.70	11.27	11.12	-32.55	-13.00	-19.55	H
1414.90	-35.12	8.17	9.34	-36.29	-13.00	-23.29	V
2122.08	-35.09	9.53	10.42	-35.98	-13.00	-22.98	V
2829.52	-32.22	11.27	11.12	-32.07	-13.00	-19.07	V
LTE Band 12 / 3MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1428.82	-33.59	8.17	9.34	-34.76	-13.00	-21.76	H
2143.08	-35.07	9.53	10.42	-35.96	-13.00	-22.96	H
2857.67	-33.05	11.27	11.12	-32.90	-13.00	-19.90	H
1428.82	-34.97	8.17	9.34	-36.14	-13.00	-23.14	V
2143.08	-34.22	9.53	10.42	-35.11	-13.00	-22.11	V
2857.67	-33.13	11.27	11.12	-32.98	-13.00	-19.98	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 12

BAND 12

LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1402.52	-34.39	8.17	9.34	-35.56	-13.00	-22.56	H
2104.38	-34.21	9.53	10.42	-35.10	-13.00	-22.10	H
2805.92	-33.24	11.27	11.12	-33.09	-13.00	-20.09	H
1402.52	-35.23	8.17	9.34	-36.40	-13.00	-23.40	V
2104.38	-34.36	9.53	10.42	-35.25	-13.00	-22.25	V
2805.92	-33.20	11.27	11.12	-33.05	-13.00	-20.05	V
LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1414.86	-33.53	8.17	9.34	-34.70	-13.00	-21.70	H
2122.46	-35.25	9.53	10.42	-36.14	-13.00	-23.14	H
2829.55	-33.28	11.27	11.12	-33.13	-13.00	-20.13	H
1414.86	-34.67	8.17	9.34	-35.84	-13.00	-22.84	V
2122.46	-34.95	9.53	10.42	-35.84	-13.00	-22.84	V
2829.55	-32.18	11.27	11.12	-32.03	-13.00	-19.03	V
LTE Band 12 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1426.61	-33.99	8.17	9.34	-35.16	-13.00	-22.16	H
2140.49	-34.13	9.53	10.42	-35.02	-13.00	-22.02	H
2853.53	-32.43	11.27	11.12	-32.28	-13.00	-19.28	H
1426.61	-35.55	8.17	9.34	-36.72	-13.00	-23.72	V
2140.49	-34.02	9.53	10.42	-34.91	-13.00	-21.91	V
2853.53	-33.08	11.27	11.12	-32.93	-13.00	-19.93	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 12

LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1407.76	-33.86	8.17	9.34	-35.03	-13.00	-22.03	H
2111.69	-34.93	9.53	10.42	-35.82	-13.00	-22.82	H
2815.60	-32.97	11.27	11.12	-32.82	-13.00	-19.82	H
1407.76	-35.84	8.17	9.34	-37.01	-13.00	-24.01	V
2111.69	-34.08	9.53	10.42	-34.97	-13.00	-21.97	V
2815.60	-31.99	11.27	11.12	-31.84	-13.00	-18.84	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1414.86	-34.55	8.17	9.34	-35.72	-13.00	-22.72	H
2122.15	-35.01	9.53	10.42	-35.90	-13.00	-22.90	H
2829.75	-33.62	11.27	11.12	-33.47	-13.00	-20.47	H
1414.86	-35.95	8.17	9.34	-37.12	-13.00	-24.12	V
2122.15	-34.13	9.53	10.42	-35.02	-13.00	-22.02	V
2829.75	-32.01	11.27	11.12	-31.86	-13.00	-18.86	V
LTE Band 12 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1421.85	-33.66	8.17	9.34	-34.83	-13.00	-21.83	H
2132.61	-34.67	9.53	10.42	-35.56	-13.00	-22.56	H
2843.57	-33.56	11.27	11.12	-33.41	-13.00	-20.41	H
1421.85	-34.62	8.17	9.34	-35.79	-13.00	-22.79	V
2132.61	-35.23	9.53	10.42	-36.12	-13.00	-23.12	V
2843.57	-32.18	11.27	11.12	-32.03	-13.00	-19.03	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 17

LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1413.42	-34.42	8.17	9.34	-35.59	-13.00	-22.59	H
2120.57	-34.23	9.53	10.42	-35.12	-13.00	-22.12	H
2826.67	-33.62	11.27	11.12	-33.47	-13.00	-20.47	H
1413.42	-35.80	8.17	9.34	-36.97	-13.00	-23.97	V
2120.57	-34.42	9.53	10.42	-35.31	-13.00	-22.31	V
2826.67	-32.72	11.27	11.12	-32.57	-13.00	-19.57	V
LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1419.80	-34.57	8.17	9.34	-35.74	-13.00	-22.74	H
2130.16	-34.89	9.53	10.42	-35.78	-13.00	-22.78	H
2840.21	-33.61	11.27	11.12	-33.46	-13.00	-20.46	H
1419.80	-34.82	8.17	9.34	-35.99	-13.00	-22.99	V
2130.16	-34.03	9.53	10.42	-34.92	-13.00	-21.92	V
2840.21	-32.19	11.27	11.12	-32.04	-13.00	-19.04	V
LTE Band 17 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1426.40	-34.76	8.17	9.34	-35.93	-13.00	-22.93	H
2139.20	-35.20	9.53	10.42	-36.09	-13.00	-23.09	H
2852.38	-33.53	11.27	11.12	-33.38	-13.00	-20.38	H
1426.40	-34.85	8.17	9.34	-36.02	-13.00	-23.02	V
2139.20	-34.43	9.53	10.42	-35.32	-13.00	-22.32	V
2852.38	-31.74	11.27	11.12	-31.59	-13.00	-18.59	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 17

LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1418.16	-34.90	8.17	9.34	-36.07	-13.00	-23.07	H
2127.44	-35.26	9.53	10.42	-36.15	-13.00	-23.15	H
2836.66	-32.54	11.27	11.12	-32.39	-13.00	-19.39	H
1418.16	-35.19	8.17	9.34	-36.36	-13.00	-23.36	V
2127.44	-33.93	9.53	10.42	-34.82	-13.00	-21.82	V
2836.66	-32.23	11.27	11.12	-32.08	-13.00	-19.08	V
LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1419.93	-34.56	8.17	9.34	-35.73	-13.00	-22.73	H
2130.29	-34.49	9.53	10.42	-35.38	-13.00	-22.38	H
2840.09	-33.55	11.27	11.12	-33.40	-13.00	-20.40	H
1419.93	-35.94	8.17	9.34	-37.11	-13.00	-24.11	V
2130.29	-34.38	9.53	10.42	-35.27	-13.00	-22.27	V
2840.09	-31.82	11.27	11.12	-31.67	-13.00	-18.67	V
LTE Band 17 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
1421.19	-34.92	8.17	9.34	-36.09	-13.00	-23.09	H
2131.93	-35.35	9.53	10.42	-36.24	-13.00	-23.24	H
2842.68	-33.45	11.27	11.12	-33.30	-13.00	-20.30	H
1421.19	-35.02	8.17	9.34	-36.19	-13.00	-23.19	V
2131.93	-34.68	9.53	10.42	-35.57	-13.00	-22.57	V
2842.68	-32.67	11.27	11.12	-32.52	-13.00	-19.52	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 41

LTE Band 41 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
4997.10	-34.90	12.66	12.54	-34.78	-13.00	-21.78	H
7495.58	-34.45	11.46	12.57	-35.56	-13.00	-22.56	H
9994.10	-32.72	12.79	21.23	-41.16	-13.00	-28.16	H
4997.07	-35.44	12.66	12.54	-35.32	-13.00	-22.32	V
7495.63	-34.80	11.46	12.57	-35.91	-13.00	-22.91	V
9994.14	-32.95	12.79	21.23	-41.39	-13.00	-28.39	V
LTE Band41/ 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5186.43	-34.65	12.72	12.55	-34.48	-13.00	-21.48	H
7779.35	-34.55	11.46	12.57	-35.66	-13.00	-22.66	H
10372.01	-32.46	12.09	21.25	-41.62	-13.00	-28.62	H
5186.43	-35.30	12.80	12.55	-35.05	-13.00	-22.05	V
7779.35	-34.49	13.10	12.57	-33.96	-13.00	-20.96	V
10372.01	-32.88	12.33	21.25	-41.80	-13.00	-28.80	V
LTE Band 41 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5734.89	-34.74	12.76	12.57	-34.55	-13.00	-21.55	H
8062.62	-34.22	11.45	12.58	-35.35	-13.00	-22.35	H
10749.93	-33.38	12.28	21.27	-42.37	-13.00	-29.37	H
5734.89	-34.99	12.76	12.57	-34.80	-13.00	-21.80	V
8062.62	-34.33	11.45	12.58	-35.46	-13.00	-22.46	V
10749.93	-33.07	12.28	21.27	-42.06	-13.00	-29.06	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 41

LTE Band 41 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5002.38	-34.89	12.66	12.54	-34.77	-13.00	-21.77	H
7503.13	-34.32	11.46	12.57	-35.43	-13.00	-22.43	H
10004.46	-32.57	12.79	21.23	-41.01	-13.00	-28.01	H
5002.38	-35.33	12.66	12.54	-35.21	-13.00	-22.21	V
7503.13	-35.21	11.46	12.57	-36.32	-13.00	-23.32	V
10004.46	-33.12	12.79	21.23	-41.56	-13.00	-28.56	V
LTE Band 41 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5186.70	-34.58	12.72	12.55	-34.41	-13.00	-21.41	H
7779.45	-34.18	11.46	12.57	-35.29	-13.00	-22.29	H
10370.94	-33.45	12.09	21.25	-42.61	-13.00	-29.61	H
5186.70	-34.55	12.80	12.55	-34.30	-13.00	-21.30	V
7779.45	-34.50	13.10	12.57	-33.97	-13.00	-20.97	V
10370.94	-32.02	12.33	21.25	-40.94	-13.00	-27.94	V
LTE Band 41 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
2625.30	-33.49	12.76	12.57	-33.30	-13.00	-20.30	H
8055.59	-35.24	11.45	12.58	-36.37	-13.00	-23.37	H
10739.83	-32.76	12.28	21.27	-41.75	-13.00	-28.75	H
2625.30	-35.71	12.76	12.57	-35.52	-13.00	-22.52	V
8055.59	-34.49	11.45	12.58	-35.62	-13.00	-22.62	V
10739.83	-32.92	12.28	21.27	-41.91	-13.00	-28.91	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 41

LTE Band 41 / 15MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5007.17	-33.96	12.66	12.54	-33.84	-13.00	-20.84	H
7510.14	-35.18	11.46	12.57	-36.29	-13.00	-23.29	H
10014.68	-32.25	12.79	21.23	-40.69	-13.00	-27.69	H
5007.17	-34.99	12.66	12.54	-34.87	-13.00	-21.87	V
7510.14	-34.72	11.46	12.57	-35.83	-13.00	-22.83	V
10014.68	-32.87	12.79	21.23	-41.31	-13.00	-28.31	V
LTE Band 41 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5185.76	-33.99	12.72	12.55	-33.82	-13.00	-20.82	H
7779.00	-34.85	11.46	12.57	-35.96	-13.00	-22.96	H
10372.59	-33.33	12.09	21.25	-42.49	-13.00	-29.49	H
5185.76	-34.57	12.80	12.55	-34.32	-13.00	-21.32	V
7779.00	-34.05	13.10	12.57	-33.52	-13.00	-20.52	V
10372.59	-33.13	12.33	21.25	-42.05	-13.00	-29.05	V
LTE Band 41 / 5MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5365.50	-34.90	12.76	12.57	-34.71	-13.00	-21.71	H
8046.94	-34.87	11.45	12.58	-36.00	-13.00	-23.00	H
10730.32	-32.53	12.28	21.27	-41.52	-13.00	-28.52	H
5365.50	-34.84	12.76	12.57	-34.65	-13.00	-21.65	V
8046.94	-34.96	11.45	12.58	-36.09	-13.00	-23.09	V
10730.32	-31.85	12.28	21.27	-40.84	-13.00	-27.84	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.

LTE BAND 41

BAND 41

LTE Band 41 / 20MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Lowest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5012.13	-33.61	12.66	12.54	-33.49	-13.00	-20.49	H
7518.19	-34.72	11.46	12.57	-35.83	-13.00	-22.83	H
10024.36	-33.35	12.79	21.23	-41.79	-13.00	-28.79	H
5012.13	-34.81	12.66	12.54	-34.69	-13.00	-21.69	V
7518.19	-34.94	11.46	12.57	-36.05	-13.00	-23.05	V
10024.36	-32.32	12.79	21.23	-40.76	-13.00	-27.76	V
LTE Band 41 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Middle							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5185.95	-33.52	12.72	12.55	-33.35	-13.00	-20.35	H
7778.84	-34.59	11.46	12.57	-35.70	-13.00	-22.70	H
10372.03	-33.60	12.09	21.25	-42.76	-13.00	-29.76	H
5185.95	-35.36	12.80	12.55	-35.11	-13.00	-22.11	V
7778.84	-33.83	13.10	12.57	-33.30	-13.00	-20.30	V
10372.03	-32.25	12.33	21.25	-41.17	-13.00	-28.17	V
LTE Band 41 / 10MHz / QPSK / RB Size 1 Offset 0/ The Worst Test Results for Highest							
Frequency(MHz)	S	Antenna(dBi)	Loss	PMea	Limit	Margin	Polarity
	G.Lev (dBm)			(dBm)	(dBm)	(dBm)	
5359.97	-34.15	12.76	12.57	-33.96	-13.00	-20.96	H
8040.26	-34.64	11.45	12.58	-35.77	-13.00	-22.77	H
10719.92	-32.49	12.28	21.27	-41.48	-13.00	-28.48	H
5359.97	-35.78	12.76	12.57	-35.59	-13.00	-22.59	V
8040.26	-34.62	11.45	12.58	-35.75	-13.00	-22.75	V
10719.92	-32.16	12.28	21.27	-41.15	-13.00	-28.15	V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Test is divided into three directions, X/Y/Z. X pattern for the worst.


10. FREQUENCY STABILITY

10.1 DESCRIPTION OF FREQUENCY STABILITY MEASUREMENT

10.1.1 MEASUREMENT METHOD

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within $\pm 0.00025\%$ ($\pm 2.5\text{ppm}$) of the center frequency.

10.1.2 Test Setup

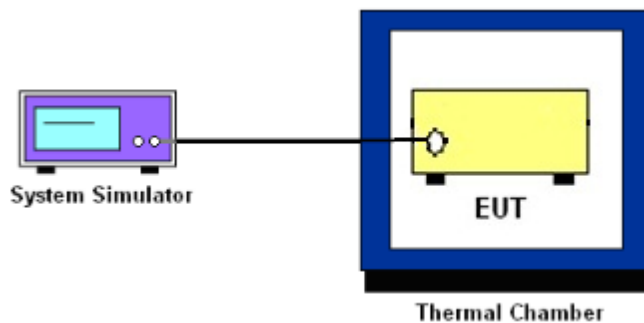

10.1.3 TEST PROCEDURES FOR TEMPERATURE VARIATION

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

10.1.4 TEST PROCEDURES FOR VOLTAGE VARIATION

1. The testing follows FCC KDB 971168 v02r02 Section 9.0.
2. The EUT was placed in a temperature chamber at $25 \pm 5^{\circ}\text{C}$ and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
4. The variation in frequency was measured for the worst case.

10.1.4 MEASUREMENT RESULT

LTE BAND 2

LTE Band 2 (QPSK) / 1880MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	20.71	0.011	2.5ppm	PASS
40		20.34	0.011		
30		30.10	0.016		
20		23.56	0.013		
10		16.30	0.009		
0		13.38	0.007		
-10		24.91	0.013		
-20		23.28	0.012		
-30		19.83	0.011		
25	Maximum Voltage	25.86	0.014	2.5ppm	PASS
25	BEP	16.15	0.009		

LTE Band 2 (QPSK) / 1880MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	25.42	0.014	2.5ppm	PASS
40		27.86	0.015		
30		27.32	0.015		
20		19.87	0.011		
10		27.27	0.015		
0		20.53	0.011		
-10		11.84	0.006		
-20		31.79	0.017		
-30		17.20	0.009		
25	Maximum Voltage	17.17	0.009	2.5ppm	PASS
25	BEP	26.05	0.014		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 4

LTE Band 4 (QPSK) / 1733MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	35.30	0.020	2.5ppm	PASS
40		24.59	0.014		
30		15.05	0.009		
20		22.95	0.013		
10		32.31	0.019		
0		12.77	0.007		
-10		17.75	0.010		
-20		12.86	0.007		
-30		34.10	0.020		
25	Maximum Voltage	16.36	0.009		
25	BEP	29.57	0.017		

LTE Band 4 (QPSK) / 1733MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	17.07	0.010	2.5ppm	PASS
40		18.82	0.011		
30		23.51	0.014		
20		33.03	0.019		
10		27.05	0.016		
0		26.16	0.015		
-10		21.08	0.012		
-20		24.68	0.014		
-30		21.17	0.012		
25	Maximum Voltage	17.89	0.010		
25	BEP	13.11	0.008		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 5

LTE Band 5 (QPSK) / 836.5MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	27.65	0.039	2.5ppm	PASS
40		27.59	0.039		
30		31.64	0.045		
20		26.06	0.037		
10		22.94	0.032		
0		15.86	0.022		
-10		28.21	0.004		
-20		28.41	0.040		
-30		15.69	0.022		
25	Maximum Voltage	29.18	0.041		
25	BEP	19.43	0.027		

LTE Band 5 (QPSK) / 836.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	32.65	0.046	2.5ppm	PASS
40		17.57	0.025		
30		35.00	0.049		
20		33.54	0.047		
10		35.90	0.051		
0		33.74	0.048		
-10		19.18	0.003		
-20		20.49	0.029		
-30		11.69	0.016		
25	Maximum Voltage	30.02	0.042		
25	BEP	32.63	0.046		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 7

LTE Band 4 (QPSK) / 2535MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	24.06	0.009	2.5ppm	PASS
40		14.06	0.006		
30		30.56	0.012		
20		18.97	0.007		
10		18.75	0.007		
0		22.91	0.009		
-10		19.41	0.008		
-20		35.96	0.014		
-30		28.80	0.011		
25	Maximum Voltage	26.77	0.011		
25	BEP	11.69	0.005		

LTE Band 4 (QPSK) / 2535MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	18.01	0.007	2.5ppm	PASS
40		29.53	0.012		
30		11.86	0.005		
20		15.56	0.006		
10		27.26	0.011		
0		21.13	0.008		
-10		16.20	0.006		
-20		36.27	0.014		
-30		21.75	0.009		
25	Maximum Voltage	17.18	0.007		
25	BEP	20.19	0.008		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 12

LTE Band 12 (QPSK) / 707.5MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	13.80	0.019	2.5ppm	PASS
40		15.93	0.022		
30		31.57	0.044		
20		29.28	0.041		
10		28.40	0.040		
0		29.04	0.041		
-10		25.01	0.004		
-20		19.51	0.027		
-30		11.77	0.017		
25	Maximum Voltage	11.85	0.017		
25	BEP	11.58	0.016		

LTE Band 12 (QPSK) / 707.5MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	26.41	0.037	2.5ppm	PASS
40		18.36	0.026		
30		17.84	0.025		
20		21.95	0.031		
10		33.99	0.048		
0		15.09	0.021		
-10		33.84	0.005		
-20		24.29	0.034		
-30		16.22	0.023		
25	Maximum Voltage	21.47	0.030		
25	BEP	21.99	0.031		

Note: 1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V

2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 17

LTE Band 17 (QPSK) / 710MHz / BW5M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	19.36	0.027	2.5ppm	PASS
40		32.49	0.046		
30		21.35	0.030		
20		23.62	0.033		
10		22.96	0.032		
0		13.74	0.019		
-10		32.98	0.005		
-20		33.58	0.047		
-30		36.24	0.051		
25	Maximum Voltage	34.69	0.049		
25	BEP	12.42	0.017		

LTE Band 17 (QPSK) / 710MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Voltage	21.98	0.031	2.5ppm	PASS
40		18.85	0.027		
30		29.77	0.042		
20		32.53	0.046		
10		12.47	0.018		
0		17.98	0.025		
-10		20.69	0.003		
-20		24.48	0.034		
-30		20.45	0.029		
25	Maximum Voltage	23.21	0.033		
25	BEP	12.70	0.018		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

LTE BAND 41

LTE Band 41 (QPSK) /2593MHz / BW10M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Vol- tage	23.74	0.009	2.5ppm	PASS
40		26.72	0.011		
30		33.74	0.013		
20		15.24	0.006		
10		25.08	0.010		
0		30.57	0.012		
-10		32.59	0.013		
-20		14.08	0.006		
-30		20.87	0.008		
25	Maximum Voltage	34.81	0.014	2.5ppm	PASS
25	BEP	30.15	0.012		

LTE Band 41 (QPSK) / 2593MHz / BW20M					
Temperature (°C)	Voltage	Freq. Dev.	Freq. Dev.	Limit	Result
	(Volt)	(Hz)	(ppm)		
50	Normal Vol- tage	22.00	0.009	2.5ppm	PASS
40		29.08	0.011		
30		17.92	0.007		
20		12.25	0.005		
10		20.85	0.008		
0		29.30	0.012		
-10		36.36	0.014		
-20		27.08	0.011		
-30		17.34	0.007		
25	Maximum Voltage	17.64	0.007	2.5ppm	PASS
25	BEP	18.78	0.007		

Note:

1. Normal Voltage = 3.8V. ; Battery End Point (BEP) = 3.4 V. ; Maximum Voltage = 4.2 V
2. Note: The frequency fundamental emissions stay within the authorized frequency block based on the frequency deviation measured is small.

*****END OF THE REPORT*****