

# FCC Radio Test Report

## FCC ID: 2AMJV-1

### Original Grant

**Report No.** : TB-FCC155398  
**Applicant** : California Labs Inc.  
**Equipment Under Test (EUT)**  
**EUT Name** : Loop  
**Model No.** : Loop-1  
**Series Model No.** : P9701NYR00001  
**Brand Name** : Loop  
**Receipt Date** : 2017-06-23  
**Test Date** : 2017-06-24 to 2017-07-05  
**Issue Date** : 2017-07-06  
**Standards** : FCC Part 15: 2016, Subpart C(15.247)  
**Test Method** : ANSI C63.10: 2013  
**Conclusions** : **PASS**

In the configuration tested, the EUT complied with the standards specified above,  
The EUT technically complies with the FCC requirements

**Test/Witness Engineer** :

IVAN SU

**Approved& Authorized** :

Ray Lai



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in the report.



---

---

## Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>CONTENTS.....</b>                                              | <b>2</b>  |
| <b>1. GENERAL INFORMATION ABOUT EUT .....</b>                     | <b>4</b>  |
| 1.1 Client Information.....                                       | 4         |
| 1.2 General Description of EUT (Equipment Under Test) .....       | 4         |
| 1.3 Block Diagram Showing the Configuration of System Tested..... | 5         |
| 1.4 Description of Support Units .....                            | 6         |
| 1.5 Description of Test Mode.....                                 | 6         |
| 1.6 Description of Test Software Setting .....                    | 7         |
| 1.7 Measurement Uncertainty .....                                 | 7         |
| 1.8 Test Facility.....                                            | 8         |
| <b>2. TEST SUMMARY .....</b>                                      | <b>9</b>  |
| <b>3. TEST EQUIPMENT .....</b>                                    | <b>10</b> |
| <b>4. CONDUCTED EMISSION TEST .....</b>                           | <b>11</b> |
| 4.1 Test Standard and Limit.....                                  | 11        |
| 4.2 Test Setup.....                                               | 11        |
| 4.3 Test Procedure.....                                           | 11        |
| 4.4 EUT Operating Mode .....                                      | 12        |
| 4.5 Test Data.....                                                | 12        |
| <b>5. RADIATED EMISSION TEST .....</b>                            | <b>17</b> |
| 5.1 Test Standard and Limit.....                                  | 17        |
| 5.2 Test Setup.....                                               | 18        |
| 5.3 Test Procedure.....                                           | 19        |
| 5.4 EUT Operating Condition .....                                 | 19        |
| 5.5 Test Data.....                                                | 19        |
| <b>6. RESTRICTED BANDS REQUIREMENT .....</b>                      | <b>40</b> |
| 6.1 Test Standard and Limit.....                                  | 40        |
| 6.2 Test Setup.....                                               | 40        |
| 6.3 Test Procedure.....                                           | 40        |
| 6.4 EUT Operating Condition .....                                 | 41        |
| 6.5 Test Data.....                                                | 41        |
| <b>7. NUMBER OF HOPPING CHANNEL .....</b>                         | <b>60</b> |
| 7.1 Test Standard and Limit.....                                  | 60        |
| 7.2 Test Setup.....                                               | 60        |
| 7.3 Test Procedure.....                                           | 60        |
| 7.4 EUT Operating Condition .....                                 | 60        |
| 7.5 Test Data.....                                                | 60        |
| <b>8. AVERAGE TIME OF OCCUPANCY.....</b>                          | <b>63</b> |
| 8.1 Test Standard and Limit.....                                  | 63        |
| 8.2 Test Setup.....                                               | 63        |



---

|                                                       |           |
|-------------------------------------------------------|-----------|
| 8.3 Test Procedure.....                               | 63        |
| 8.4 EUT Operating Condition .....                     | 63        |
| 8.5 Test Data.....                                    | 64        |
| <b>9. CHANNEL SEPARATION AND BANDWIDTH TEST .....</b> | <b>70</b> |
| 9.1 Test Standard and Limit.....                      | 70        |
| 9.2 Test Setup.....                                   | 70        |
| 9.3 Test Procedure.....                               | 70        |
| 9.4 EUT Operating Condition .....                     | 70        |
| 9.5 Test Data.....                                    | 71        |
| <b>10. PEAK OUTPUT POWER TEST.....</b>                | <b>83</b> |
| 10.1 Test Standard and Limit .....                    | 83        |
| 10.2 Test Setup.....                                  | 83        |
| 10.3 Test Procedure.....                              | 83        |
| 10.4 EUT Operating Condition .....                    | 83        |
| 10.5 Test Data.....                                   | 84        |
| <b>11. ANTENNA REQUIREMENT.....</b>                   | <b>90</b> |
| 11.1 Standard Requirement.....                        | 90        |
| 11.2 Antenna Connected Construction .....             | 90        |
| 11.3 Result.....                                      | 90        |



# 1. General Information about EUT

## 1.1 Client Information

**Applicant** : California Labs Inc.

**Address** : 1540 Market St., Ste. 100, San Francisco, CA 94102

**Manufacturer** : Shenzhen Zowee Technology Co.,Ltd

**Address** : Floor 6, Block 5, Science&Technology Industrial Park of Privately Owned Enterprises, Pingshan, Xili, Nanshan District, Shenzhen, P.R.C

## 1.2 General Description of EUT (Equipment Under Test)

|                        |   |                                                                                                                                   |                                                             |
|------------------------|---|-----------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|
| EUT Name               | : | Loop                                                                                                                              |                                                             |
| Models No.             | : | Loop-1, P9701NYR00001                                                                                                             |                                                             |
| Model Difference       | : | All these models are identical in the same PCB layout and electrical circuit, the only difference is model name for commercial.   |                                                             |
| Product Description    | : | Operation Frequency:                                                                                                              | Bluetooth 2.1+EDR: 2402~2480 MHz                            |
|                        |   | Number of Channel:                                                                                                                | Bluetooth: 79 Channels See Note 2                           |
|                        |   | Max Peak Output Power:                                                                                                            | Bluetooth: 1.164 dBm(GFSK)                                  |
|                        |   | Antenna Gain:                                                                                                                     | 5.5 dBi Integral Antenna                                    |
|                        |   | Modulation Type:                                                                                                                  | GFSK (1 Mbps)<br>$\pi$ /4-DQPSK (2 Mbps)<br>8-DPSK (3 Mbps) |
| Power Supply           | : | DC Voltage Supplied by Adapter.<br>DC Supply by the Battery.                                                                      |                                                             |
| Power Rating           | : | Adapter(10FA3-05200U):<br>Input: AC 100-240, 50/60Hz, 0.5-0.3A.<br>Output: DC 5.0V, 2.0A.<br>DC 3.7 V by 4500mAh Li-Lion Battery. |                                                             |
| Connecting I/O Port(S) | : | Please refer to the User's Manual                                                                                                 |                                                             |

### Note:

- (1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- (2) Channel List:


| Bluetooth Channel List |                 |         |                 |         |                 |
|------------------------|-----------------|---------|-----------------|---------|-----------------|
| Channel                | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 00                     | 2402            | 27      | 2429            | 54      | 2456            |
| 01                     | 2403            | 28      | 2430            | 55      | 2457            |

|    |      |           |             |           |             |
|----|------|-----------|-------------|-----------|-------------|
| 02 | 2404 | 29        | 2431        | 56        | 2458        |
| 03 | 2405 | 30        | 2432        | 57        | 2459        |
| 04 | 2406 | 31        | 2433        | 58        | 2460        |
| 05 | 2407 | 32        | 2434        | 59        | 2461        |
| 06 | 2408 | 33        | 2435        | 60        | 2462        |
| 07 | 2409 | 34        | 2436        | 61        | 2463        |
| 08 | 2410 | 35        | 2437        | 62        | 2464        |
| 09 | 2411 | 36        | 2438        | 63        | 2465        |
| 10 | 2412 | 37        | 2439        | 64        | 2466        |
| 11 | 2413 | 38        | 2440        | 65        | 2467        |
| 12 | 2414 | <b>39</b> | <b>2441</b> | 66        | 2468        |
| 13 | 2415 | 40        | 2442        | 67        | 2469        |
| 14 | 2416 | 41        | 2443        | 68        | 2470        |
| 15 | 2417 | 42        | 2444        | 69        | 2471        |
| 16 | 2418 | 43        | 2445        | 70        | 2472        |
| 17 | 2419 | 44        | 2446        | 71        | 2473        |
| 18 | 2420 | 45        | 2447        | 72        | 2474        |
| 19 | 2421 | 46        | 2448        | 73        | 2475        |
| 20 | 2422 | 47        | 2449        | 74        | 2476        |
| 21 | 2423 | 48        | 2450        | 75        | 2477        |
| 22 | 2424 | 49        | 2451        | 76        | 2478        |
| 23 | 2425 | 50        | 2452        | 77        | 2479        |
| 24 | 2426 | 51        | 2453        | <b>78</b> | <b>2480</b> |
| 25 | 2427 | 52        | 2454        |           |             |
| 26 | 2428 | 53        | 2455        |           |             |


(3) The Antenna information about the equipment is provided by the applicant.

### 1.3 Block Diagram Showing the Configuration of System Tested

#### Charging + TX Mode

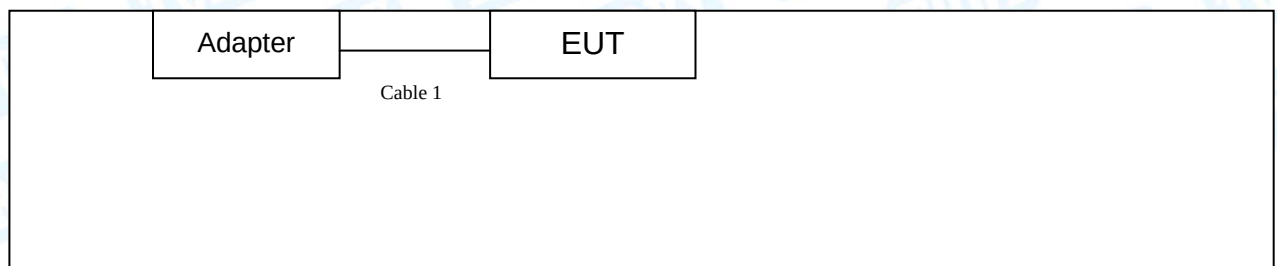

#### TX Mode

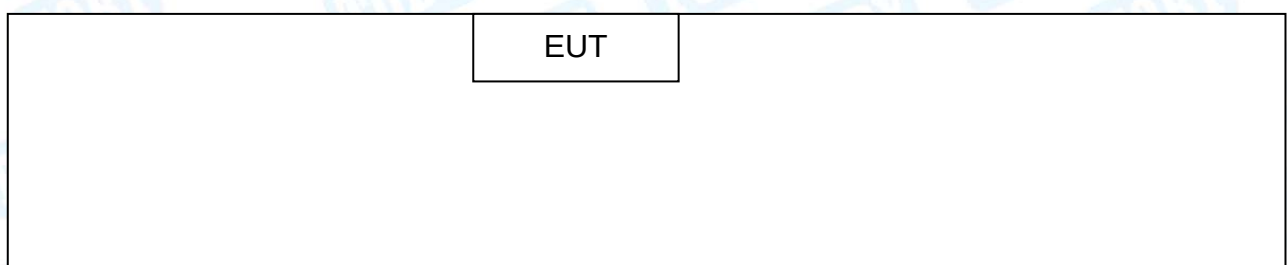



## 1.4 Description of Support Units

The EUT has been test as an independent unit.

## 1.5 Description of Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned follow was evaluated respectively.

| For Conducted Test |                    |
|--------------------|--------------------|
| Final Test Mode    | Description        |
| Mode 1             | Charging + TX Mode |

| For Radiated Test |                                           |
|-------------------|-------------------------------------------|
| Final Test Mode   | Description                               |
| Mode 1            | TX GFSK Mode                              |
| Mode 2            | TX Mode(GFSK) Channel 00/39/78            |
| Mode 3            | TX Mode( $\pi/4$ -DQPSK) Channel 00/39/78 |
| Mode 4            | TX Mode(8-DPSK) Channel 00/39/78          |
| Mode 5            | Hopping Mode(GFSK)                        |
| Mode 6            | Hopping Mode( $\pi/4$ -DQPSK)             |
| Mode 7            | Hopping Mode(8-DPSK)                      |

### Note:

- (1) For all test, we have verified the construction and function in typical operation. And all the test modes were carried out with the EUT in transmitting operation in maximum power with all kinds of data rate. We have pretested all the test modes above.

According to ANSI C63.10 standards, the measurements are performed at the highest, middle, lowest available channels, and the worst case data rate as follows:

TX Mode: GFSK (1 Mbps)  
 TX Mode:  $\pi/4$ -DQPSK (2 Mbps)  
 TX Mode: 8-DPSK (3 Mbps)

- (2) The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis, X-plane, Y-plane and Z-plane. The worst case was found positioned on X-plane as the normal use. Therefore only the test data of this X-plane was used for radiated emission measurement test.



## 1.6 Description of Test Software Setting

During testing channel power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of Bluetooth mode.

| Test Software Version | Ampak RF Test Tool |         |          |
|-----------------------|--------------------|---------|----------|
| Frequency             | 2402 MHz           | 2441MHz | 2480 MHz |
| GFSK                  | DEF                | DEF     | DEF      |
| $\pi/4$ -DQPSK        | DEF                | DEF     | DEF      |
| 8-DPSK                | DEF                | DEF     | DEF      |

## 1.7 Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

| Test Item          | Parameters                                        | Expanded Uncertainty ( $U_{Lab}$ ) |
|--------------------|---------------------------------------------------|------------------------------------|
| Conducted Emission | Level Accuracy:<br>9kHz~150kHz<br>150kHz to 30MHz | $\pm 3.42$ dB<br>$\pm 3.42$ dB     |
| Radiated Emission  | Level Accuracy:<br>9kHz to 30 MHz                 | $\pm 4.60$ dB                      |
| Radiated Emission  | Level Accuracy:<br>30MHz to 1000 MHz              | $\pm 4.40$ dB                      |
| Radiated Emission  | Level Accuracy:<br>Above 1000MHz                  | $\pm 4.20$ dB                      |

## 1.8 Test Facility

The testing report were performed by the Shenzhen Toby Technology Co., Ltd., in their facilities located at 1A/F., Bldg.6, Yusheng Industrial Zone, The National Road No.107 Xixiang Section 467, Xixiang, Bao'an, Shenzhen, Guangdong, China. At the time of testing, the following bodies accredited the Laboratory:

### **CNAS (L5813)**

The Laboratory has been accredited by CNAS to ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories for the competence in the field of testing. And the Registration No.: CNAS L5813.

### **FCC List No.: (811562)**

The Laboratory is listed in the United States of American Federal Communications Commission (FCC), and the registration number is 811562.

### **IC Registration No.: (11950A-1)**

The Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing. The site registration: Site# 11950A-1.



## 2. Test Summary

| FCC Part 15 Subpart C(15.247)/ RSS 247 Issue 1          |                    |                                            |          |                                                                                      |
|---------------------------------------------------------|--------------------|--------------------------------------------|----------|--------------------------------------------------------------------------------------|
| Standard Section                                        |                    | Test Item                                  | Judgment | Remark                                                                               |
| FCC                                                     | IC                 |                                            |          |                                                                                      |
| 15.203                                                  |                    | Antenna Requirement                        | PASS     | N/A                                                                                  |
| 15.207                                                  | RSS-GEN<br>7.2.2   | Conducted Emission                         | PASS     | N/A                                                                                  |
| 15.205                                                  | RSS-Gen<br>7.2.3   | Restricted Bands                           | PASS     | N/A                                                                                  |
| 15.247(a)(1)                                            | RSS 247<br>5.1 (2) | Hopping Channel Separation                 | PASS     | N/A                                                                                  |
| 15.247(a)(1)                                            | RSS 247<br>5.1 (4) | Dwell Time                                 | PASS     | N/A                                                                                  |
| 15.247(b)(1)                                            | RSS 247<br>5.4 (2) | Peak Output Power                          | PASS     | N/A                                                                                  |
| 15.247(b)(1)                                            | RSS 247<br>5.1 (4) | Number of Hopping<br>Frequency             | PASS     | N/A                                                                                  |
| 15.247(d)                                               | RSS 247<br>5.5     | Band Edge                                  | PASS     | N/A                                                                                  |
| 15.247(c)&<br>15.209                                    | RSS 247<br>5.5     | Radiated Spurious Emission                 | PASS     | N/A                                                                                  |
| 15.247(a)                                               | RSS 247<br>5.1 (1) | 99% Occupied Bandwidth & 20dB<br>Bandwidth | PASS     | 99%OBW<br>GFSK:947.3241kHz<br>$\pi$ /4-DQPSK:<br>1193.80kHz<br>8-DPSK:<br>1212.70kHz |
| <b>Note:</b> N/A is an abbreviation for Not Applicable. |                    |                                            |          |                                                                                      |



### 3. Test Equipment

#### AC Main Conducted Emission

| Description       | Manufacturer                     | Model No.   | Serial No. | Cal. Date     | Cal. Due Date |
|-------------------|----------------------------------|-------------|------------|---------------|---------------|
| EMI Test Receiver | ROHDE& SCHWARZ                   | ESCI        | 100321     | Jul. 22, 2016 | Jul. 21, 2017 |
| RF Switching Unit | Compliance Direction Systems Inc | RSU-A4      | 34403      | Jul. 22, 2016 | Jul. 21, 2017 |
| L.I.S.N           | Rohde & Schwarz                  | ENV216      | 101131     | Jul. 22, 2016 | Jul. 21, 2017 |
| L.I.S.N           | SCHWARZBECK                      | NNBL 8226-2 | 8226-2/164 | Jul. 22, 2016 | Jul. 21, 2017 |

#### Radiation Spurious Emission

| Description            | Manufacturer    | Model No. | Serial No.    | Cal. Date     | Cal. Due Date |
|------------------------|-----------------|-----------|---------------|---------------|---------------|
| Spectrum Analyzer      | Agilent         | E4407B    | MY45106456    | Jul. 22, 2016 | Jul. 21, 2017 |
| EMI Test Receiver      | Rohde & Schwarz | ESPI      | 10Loop-10/007 | Jul. 22, 2016 | Jul. 21, 2017 |
| Bilog Antenna          | ETS-LINDGREN    | 3142E     | Loop-117537   | Mar.25, 2017  | Mar. 24, 2018 |
| Horn Antenna           | ETS-LINDGREN    | 3117      | Loop-143207   | Mar.24, 2017  | Mar. 23, 2018 |
| Pre-amplifier          | Sonoma          | 310N      | 185903        | Mar.24, 2017  | Mar. 23, 2018 |
| Pre-amplifier          | HP              | 8449B     | 3008A00849    | Mar.24, 2017  | Mar. 23, 2018 |
| Cable                  | HUBER+SUHNER    | 100       | SUCOFLEX      | Mar.24, 2017  | Mar. 23, 2018 |
| Positioning Controller | ETS-LINDGREN    | 2090      | N/A           | N/A           | N/A           |

#### Antenna Conducted Emission

| Description       | Manufacturer    | Model No. | Serial No. | Cal. Date     | Cal. Due Date |
|-------------------|-----------------|-----------|------------|---------------|---------------|
| Spectrum Analyzer | Agilent         | E4407B    | MY45106456 | Jul. 22, 2016 | Jul. 21, 2017 |
| Spectrum Analyzer | Rohde & Schwarz | ESPI      | 100321     | Jul. 22, 2016 | Jul. 21, 2017 |



## 4. Conducted Emission Test

### 4.1 Test Standard and Limit

4.1.1 Test Standard  
FCC Part 15.207

4.1.2 Test Limit


**Conducted Emission Test Limit**

| Frequency     | Maximum RF Line Voltage (dB $\mu$ V) |               |
|---------------|--------------------------------------|---------------|
|               | Quasi-peak Level                     | Average Level |
| 150kHz~500kHz | 66 ~ 56 *                            | 56 ~ 46 *     |
| 500kHz~5MHz   | 56                                   | 46            |
| 5MHz~30MHz    | 60                                   | 50            |

Notes:

- (1) \*Decreasing linearly with logarithm of the frequency.
- (2) The lower limit shall apply at the transition frequencies.
- (3) The limit decrease in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

### 4.2 Test Setup

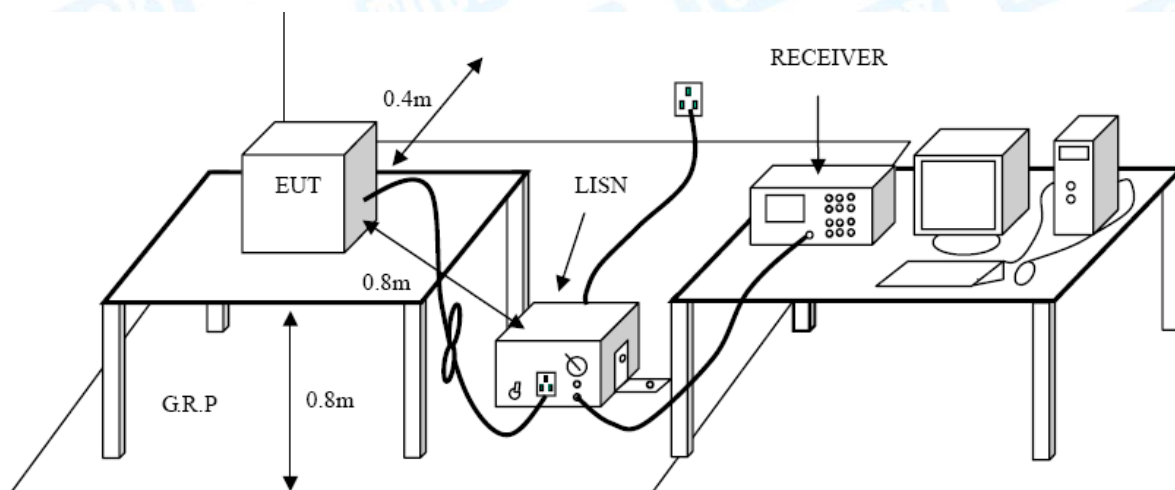

### 4.3 Test Procedure

The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

LISN at least 80 cm from nearest part of EUT chassis

The bandwidth of EMI test receiver is set at 9kHz, and the test frequency band is from 0.15MHz to 30MHz.

#### 4.4 EUT Operating Mode


Please refer to the description of test mode.

#### 4.5 Test Data

Test data please refer the following pages.




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | AC 120V/60 Hz               |                           |        |
| <b>Terminal:</b>     | Line                        |                           |        |
| <b>Test Mode:</b>    | Charging +TX Mode           |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

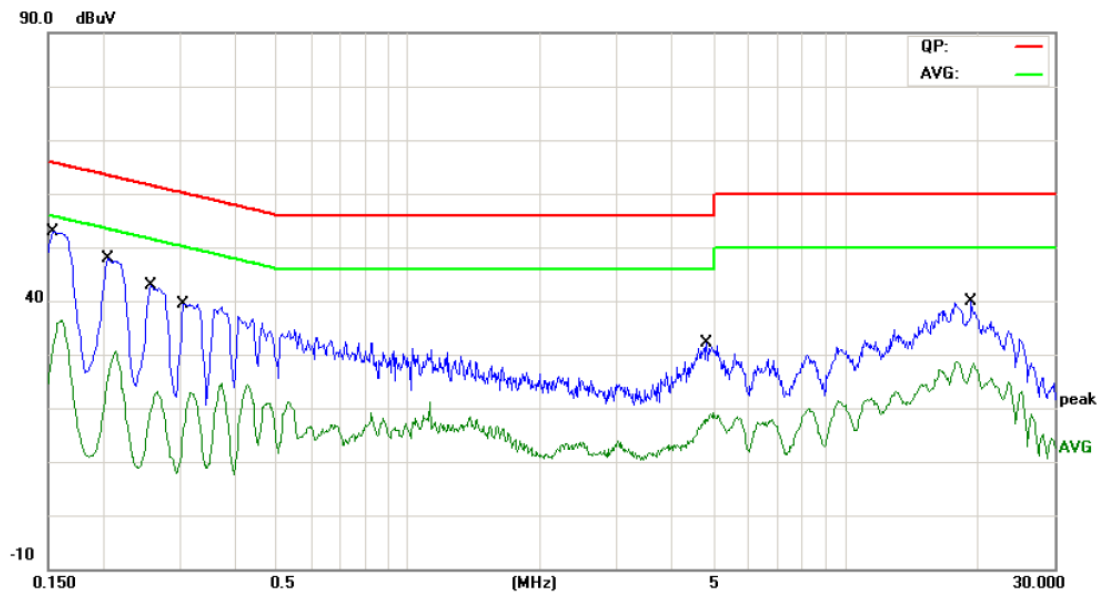

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   | *   | 0.1539       | 40.21                    | 9.58                    | 49.79                    | 65.78         | -15.99     | QP       |
| 2   |     | 0.1539       | 21.75                    | 9.58                    | 31.33                    | 55.78         | -24.45     | AVG      |
| 3   |     | 0.2060       | 34.23                    | 9.58                    | 43.81                    | 63.36         | -19.55     | QP       |
| 4   |     | 0.2060       | 15.98                    | 9.58                    | 25.56                    | 53.36         | -27.80     | AVG      |
| 5   |     | 0.2580       | 28.87                    | 9.59                    | 38.46                    | 61.49         | -23.03     | QP       |
| 6   |     | 0.2580       | 9.77                     | 9.59                    | 19.36                    | 51.49         | -32.13     | AVG      |
| 7   |     | 0.3060       | 23.57                    | 9.59                    | 33.16                    | 60.08         | -26.92     | QP       |
| 8   |     | 0.3060       | 6.03                     | 9.59                    | 15.62                    | 50.08         | -34.46     | AVG      |
| 9   |     | 4.8060       | 15.63                    | 9.73                    | 25.36                    | 56.00         | -30.64     | QP       |
| 10  |     | 4.8060       | 8.04                     | 9.73                    | 17.77                    | 46.00         | -28.23     | AVG      |
| 11  |     | 19.3700      | 22.52                    | 10.51                   | 33.03                    | 60.00         | -26.97     | QP       |
| 12  |     | 19.3700      | 16.29                    | 10.51                   | 26.80                    | 50.00         | -23.20     | AVG      |

Emission Level= Read Level+ Correct Factor

|               |                             |                    |        |
|---------------|-----------------------------|--------------------|--------|
| EUT:          | Loop                        | Model Name :       | Loop-1 |
| Temperature:  | 25°C                        | Relative Humidity: | 55%    |
| Test Voltage: | AC 120V/60 Hz               |                    |        |
| Terminal:     | Neutral                     |                    |        |
| Test Mode:    | Charging +TX Mode           |                    |        |
| Remark:       | Only worse case is reported |                    |        |

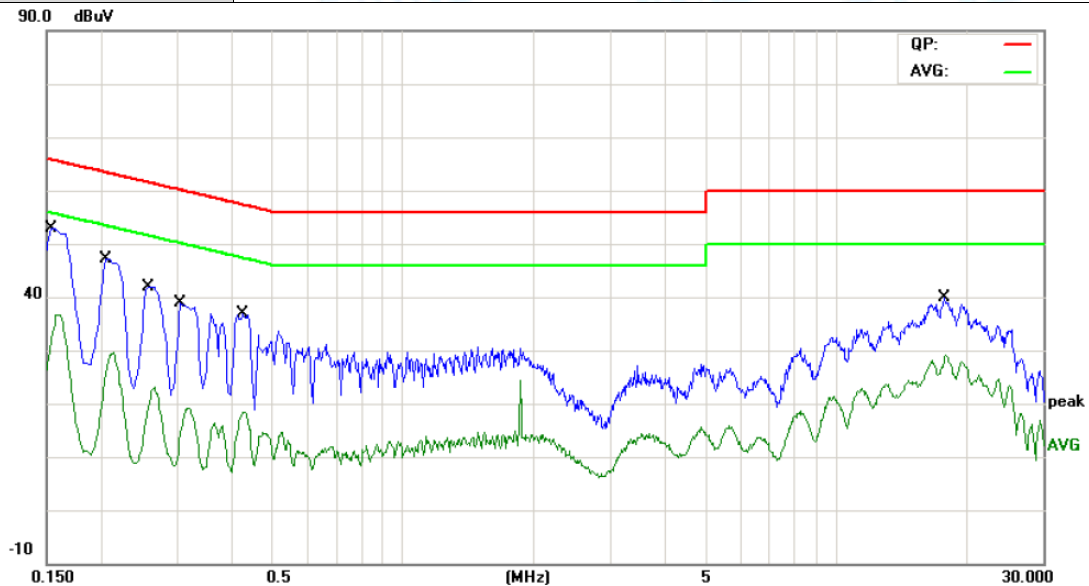


| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   | *   | 0.1539  | 40.06         | 9.58           | 49.64       | 65.78 | -16.14 | QP       |
| 2   |     | 0.1539  | 22.53         | 9.58           | 32.11       | 55.78 | -23.67 | AVG      |
| 3   |     | 0.2060  | 34.04         | 9.58           | 43.62       | 63.36 | -19.74 | QP       |
| 4   |     | 0.2060  | 15.45         | 9.58           | 25.03       | 53.36 | -28.33 | AVG      |
| 5   |     | 0.2580  | 28.28         | 9.59           | 37.87       | 61.49 | -23.62 | QP       |
| 6   |     | 0.2580  | 9.53          | 9.59           | 19.12       | 51.49 | -32.37 | AVG      |
| 7   |     | 0.3060  | 23.07         | 9.59           | 32.66       | 60.08 | -27.42 | QP       |
| 8   |     | 0.3060  | 4.02          | 9.59           | 13.61       | 50.08 | -36.47 | AVG      |
| 9   |     | 0.4260  | 22.92         | 9.60           | 32.52       | 57.33 | -24.81 | QP       |
| 10  |     | 0.4260  | 8.38          | 9.60           | 17.98       | 47.33 | -29.35 | AVG      |
| 11  |     | 17.6860 | 22.68         | 10.50          | 33.18       | 60.00 | -26.82 | QP       |
| 12  |     | 17.6860 | 16.43         | 10.50          | 26.93       | 50.00 | -23.07 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | AC 240V/60 Hz               |                           |        |
| <b>Terminal:</b>     | Line                        |                           |        |
| <b>Test Mode:</b>    | Charging +TX Mode           |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

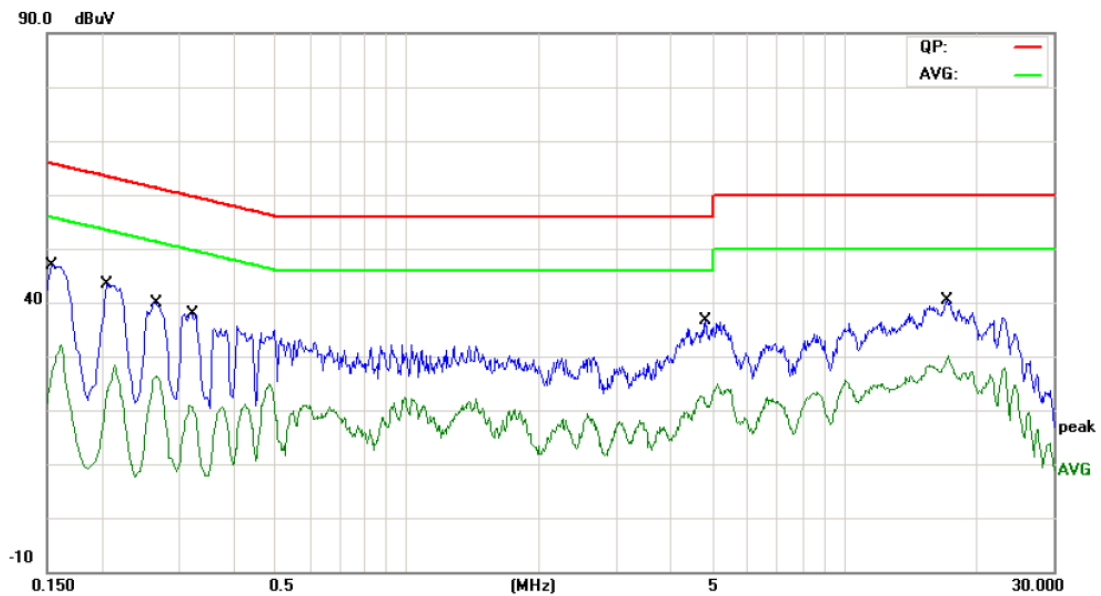

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.1539       | 33.51                    | 9.58                    | 43.09                    | 65.78         | -22.69     | QP       |
| 2   |     | 0.1539       | 16.27                    | 9.58                    | 25.85                    | 55.78         | -29.93     | AVG      |
| 3   |     | 0.2060       | 29.38                    | 9.58                    | 38.96                    | 63.36         | -24.40     | QP       |
| 4   |     | 0.2060       | 13.36                    | 9.58                    | 22.94                    | 53.36         | -30.42     | AVG      |
| 5   |     | 0.2660       | 26.69                    | 9.59                    | 36.28                    | 61.24         | -24.96     | QP       |
| 6   |     | 0.2660       | 16.30                    | 9.59                    | 25.89                    | 51.24         | -25.35     | AVG      |
| 7   |     | 0.3220       | 23.76                    | 9.59                    | 33.35                    | 59.65         | -26.30     | QP       |
| 8   |     | 0.3220       | 10.25                    | 9.59                    | 19.84                    | 49.65         | -29.81     | AVG      |
| 9   |     | 4.8140       | 19.99                    | 9.73                    | 29.72                    | 56.00         | -26.28     | QP       |
| 10  |     | 4.8140       | 11.25                    | 9.73                    | 20.98                    | 46.00         | -25.02     | AVG      |
| 11  |     | 17.1580      | 24.54                    | 10.49                   | 35.03                    | 60.00         | -24.97     | QP       |
| 12  | *   | 17.1580      | 17.94                    | 10.49                   | 28.43                    | 50.00         | -21.57     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | AC 240V/60 Hz               |                           |        |
| <b>Terminal:</b>     | Neutral                     |                           |        |
| <b>Test Mode:</b>    | Charging +TX Mode           |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

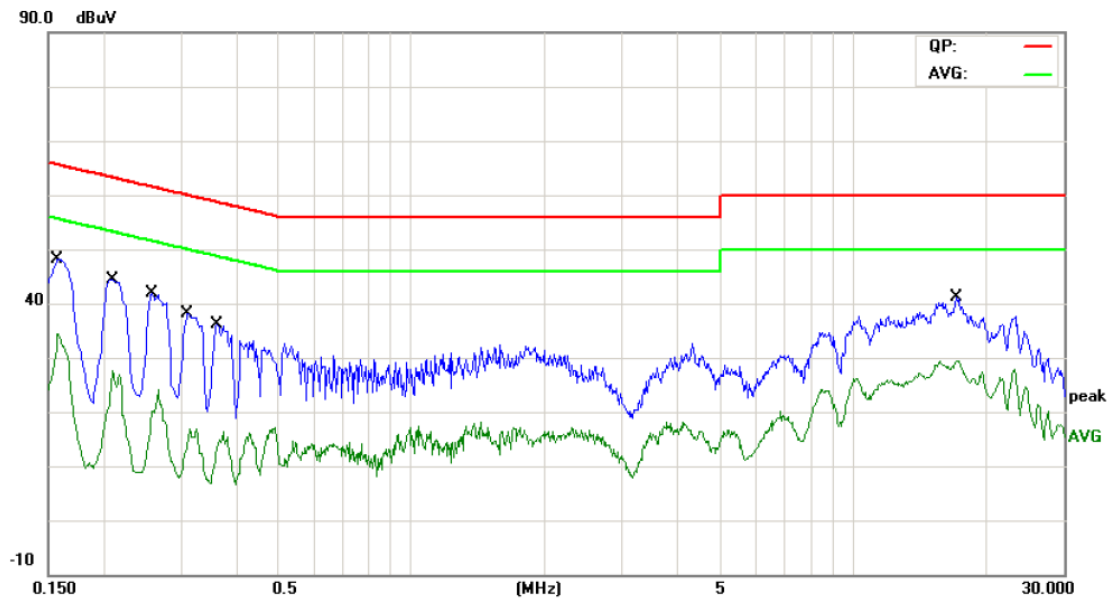

| No. | Mk. | Freq.   | Reading Level | Correct Factor | Measurement | Limit | Over   |          |
|-----|-----|---------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz     | dBuV          | dB             | dBuV        | dBuV  | dB     | Detector |
| 1   | *   | 0.1580  | 35.31         | 9.64           | 44.95       | 65.56 | -20.61 | QP       |
| 2   |     | 0.1580  | 23.36         | 9.64           | 33.00       | 55.56 | -22.56 | AVG      |
| 3   |     | 0.2100  | 30.91         | 9.64           | 40.55       | 63.20 | -22.65 | QP       |
| 4   |     | 0.2100  | 15.94         | 9.64           | 25.58       | 53.20 | -27.62 | AVG      |
| 5   |     | 0.2580  | 26.71         | 9.60           | 36.31       | 61.49 | -25.18 | QP       |
| 6   |     | 0.2580  | 9.30          | 9.60           | 18.90       | 51.49 | -32.59 | AVG      |
| 7   |     | 0.3100  | 23.34         | 9.57           | 32.91       | 59.97 | -27.06 | QP       |
| 8   |     | 0.3100  | 3.93          | 9.57           | 13.50       | 49.97 | -36.47 | AVG      |
| 9   |     | 0.3620  | 20.80         | 9.58           | 30.38       | 58.68 | -28.30 | QP       |
| 10  |     | 0.3620  | 2.96          | 9.58           | 12.54       | 48.68 | -36.14 | AVG      |
| 11  |     | 17.1420 | 24.40         | 10.63          | 35.03       | 60.00 | -24.97 | QP       |
| 12  |     | 17.1420 | 17.93         | 10.63          | 28.56       | 50.00 | -21.44 | AVG      |

Emission Level= Read Level+ Correct Factor



## 5. Radiated Emission Test

### 5.1 Test Standard and Limit

#### 5.1.1 Test Standard

FCC Part 15.209

#### 5.1.2 Test Limit

#### Radiated Emission Limit (9 kHz~1000MHz)

| Frequency<br>(MHz) | Field Strength<br>(microvolt/meter) | Measurement Distance<br>(meters) |
|--------------------|-------------------------------------|----------------------------------|
| 0.009~0.490        | 2400/F(KHz)                         | 300                              |
| 0.490~1.705        | 24000/F(KHz)                        | 30                               |
| 1.705~30.0         | 30                                  | 30                               |
| 30~88              | 100                                 | 3                                |
| 88~216             | 150                                 | 3                                |
| 216~960            | 200                                 | 3                                |
| Above 960          | 500                                 | 3                                |


#### Radiated Emission Limit (Above 1000MHz)

| Frequency<br>(MHz) | Class B (dBuV/m)(at 3m) |         |
|--------------------|-------------------------|---------|
|                    | Peak                    | Average |
| Above 1000         | 74                      | 54      |


**Note:**

- (1) The tighter limit applies at the band edges.
- (2) Emission Level (dBuV/m)=20log Emission Level (uV/m)

## 5.2 Test Setup

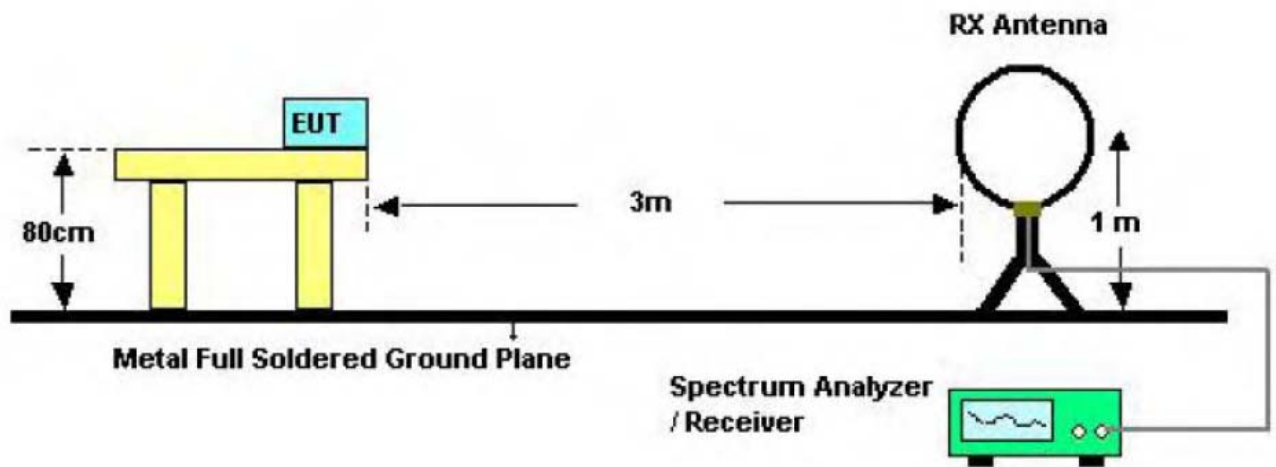


Below 30MHz Test Setup

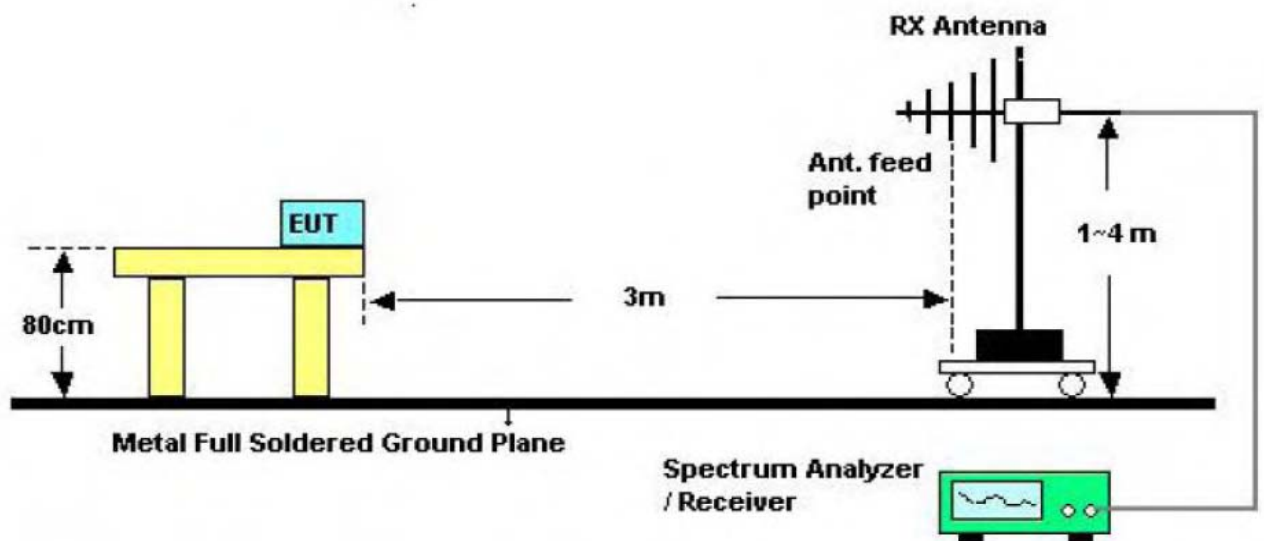

Below 1000MHz Test Setup



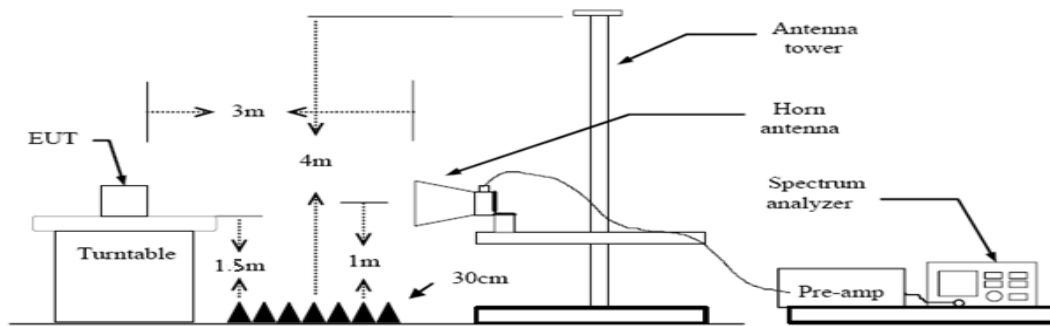

**Above 1GHz Test Setup**

### 5.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
- (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
- (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
- (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.
- (8) For the actual test configuration, please see the test setup photo.

### 5.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power in TX mode.

### 5.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

Test data please refer the following pages.


### 9KHz~30MHz

From 9KHz to 30MHz: Conclusion: PASS

Note: The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

### 30MHz~1GHz

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25℃                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | AC 120V/60Hz                |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2402MHz        |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

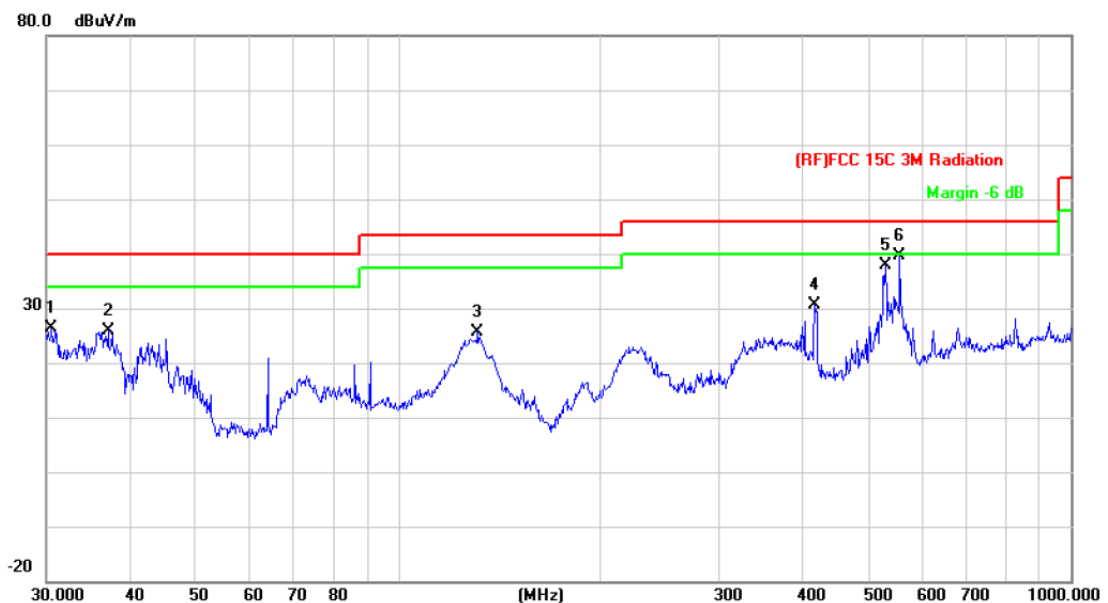


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 30.5306  | 40.38         | -14.10         | 26.28       | 40.00  | -13.72 | peak     |
| 2   |     | 37.0248  | 43.93         | -18.08         | 25.85       | 40.00  | -14.15 | peak     |
| 3   |     | 131.2965 | 47.46         | -21.71         | 25.75       | 43.50  | -17.75 | peak     |
| 4   |     | 416.1791 | 42.70         | -12.07         | 30.63       | 46.00  | -15.37 | peak     |
| 5   |     | 530.1014 | 47.08         | -9.30          | 37.78       | 46.00  | -8.22  | peak     |
| 6   | *   | 556.7744 | 48.90         | -9.25          | 39.65       | 46.00  | -6.35  | peak     |

\*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor



|               |                             |                    |        |
|---------------|-----------------------------|--------------------|--------|
| EUT:          | Loop                        | Model Name :       | Loop-1 |
| Temperature:  | 25°C                        | Relative Humidity: | 55%    |
| Test Voltage: | AC 120V/60Hz                |                    |        |
| Ant. Pol.     | Vertical                    |                    |        |
| Test Mode:    | TX GFSK Mode 2402MHz        |                    |        |
| Remark:       | Only worse case is reported |                    |        |

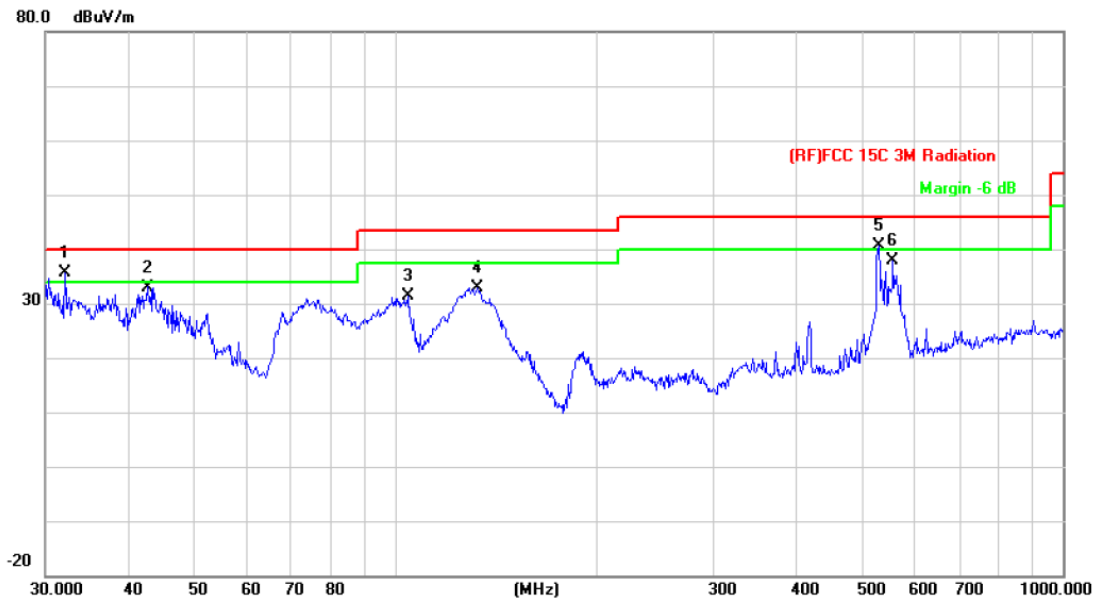


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   | *   | 32.0667      | 50.69                    | -15.04                    | 35.65                      | 40.00           | -4.35      | peak     |
| 2   |     | 42.6000      | 53.99                    | -20.99                    | 33.00                      | 40.00           | -7.00      | peak     |
| 3   |     | 104.9033     | 52.81                    | -21.39                    | 31.42                      | 43.50           | -12.08     | peak     |
| 4   |     | 133.1511     | 54.65                    | -21.68                    | 32.97                      | 43.50           | -10.53     | peak     |
| 5   | !   | 530.1014     | 49.86                    | -9.30                     | 40.56                      | 46.00           | -5.44      | peak     |
| 6   |     | 556.7744     | 47.25                    | -9.25                     | 38.00                      | 46.00           | -8.00      | peak     |

\*:Maximum data x:Over limit !:over margin

Emission Level= Read Level+ Correct Factor

**Above 1GHz(Only worse case is reported)**

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2402MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

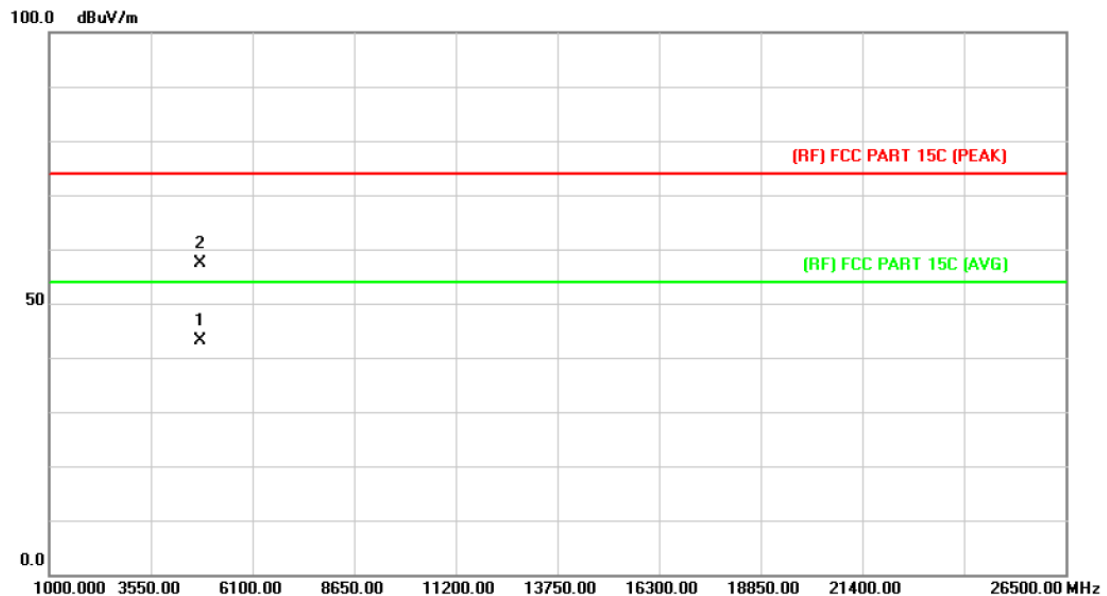


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 4804.595 | 29.72         | 13.44          | 43.16        | 54.00  | -10.84 | AVG      |
| 2   |     | 4804.785 | 43.84         | 13.44          | 57.28        | 74.00  | -16.72 | peak     |

**Emission Level= Read Level+ Correct Factor**




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2402MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

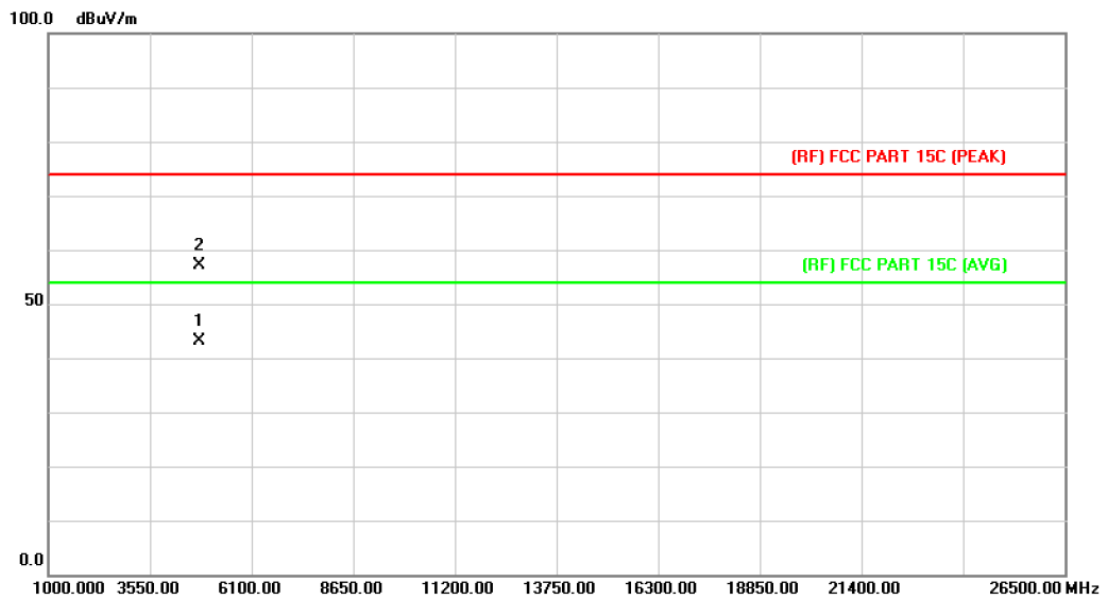

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4803.096 | 29.73         | 13.44          | 43.17       | 54.00  | -10.83 | AVG      |
| 2   |     | 4803.210 | 43.81         | 13.44          | 57.25       | 74.00  | -16.75 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2441MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

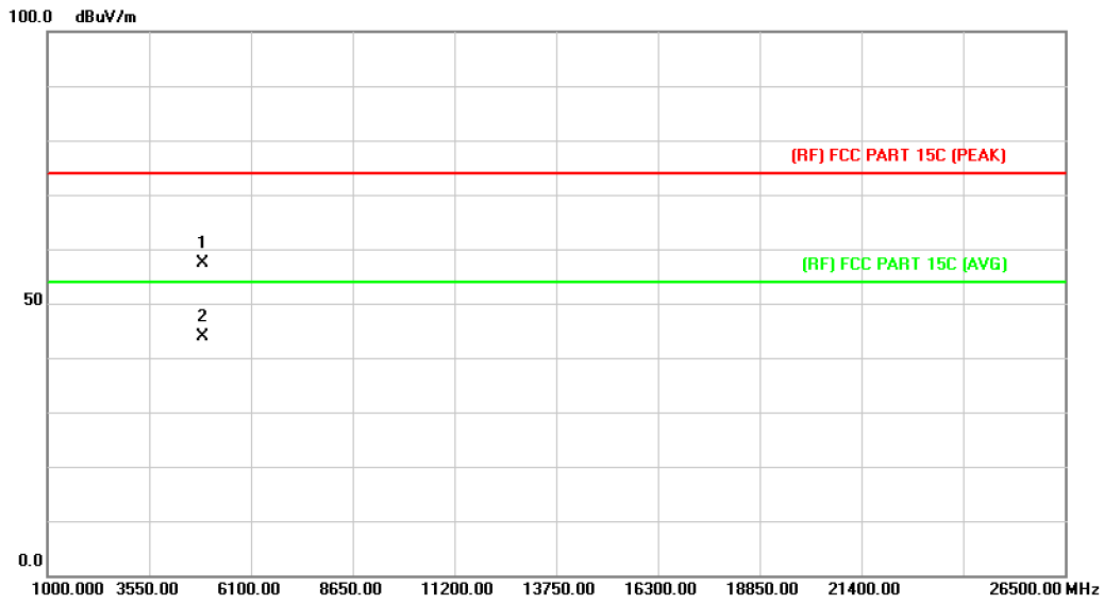


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4883.116 | 43.53         | 13.91          | 57.44        | 74.00  | -16.56 | peak     |
| 2   | *   | 4884.754 | 29.92         | 13.92          | 43.84        | 54.00  | -10.16 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2441MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

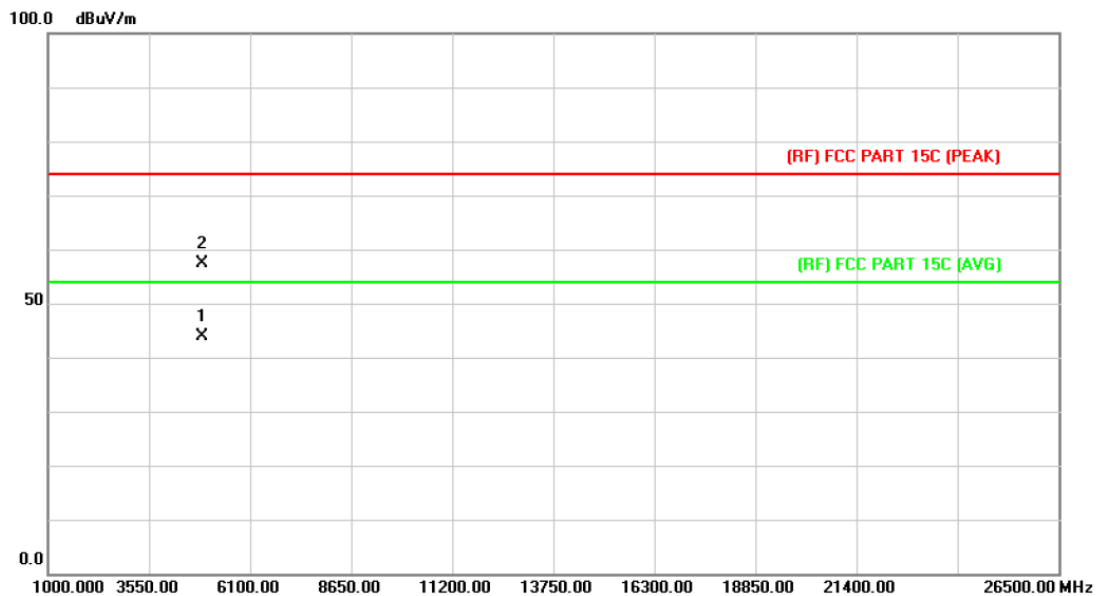

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 4883.376 | 29.99         | 13.92          | 43.91        | 54.00  | -10.09 | AVG      |
| 2   |     | 4883.774 | 43.41         | 13.92          | 57.33        | 74.00  | -16.67 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2480MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

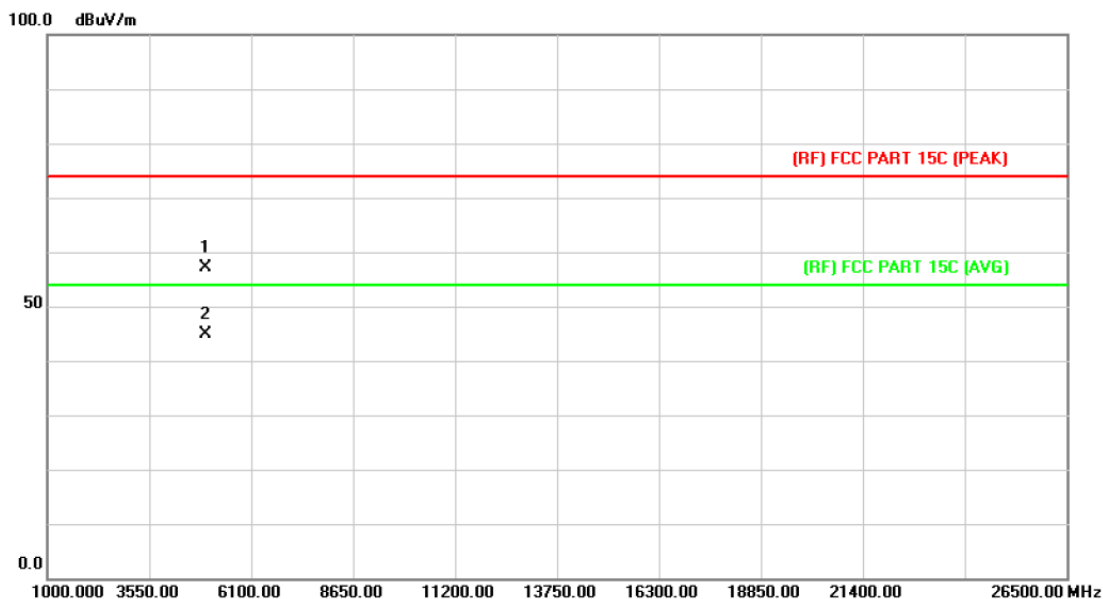


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 4959.871     | 42.86                    | 14.36                     | 57.22                      | 74.00           | -16.78     | peak     |
| 2   | *   | 4960.059     | 30.41                    | 14.36                     | 44.77                      | 54.00           | -9.23      | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2480MHz                                                         |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

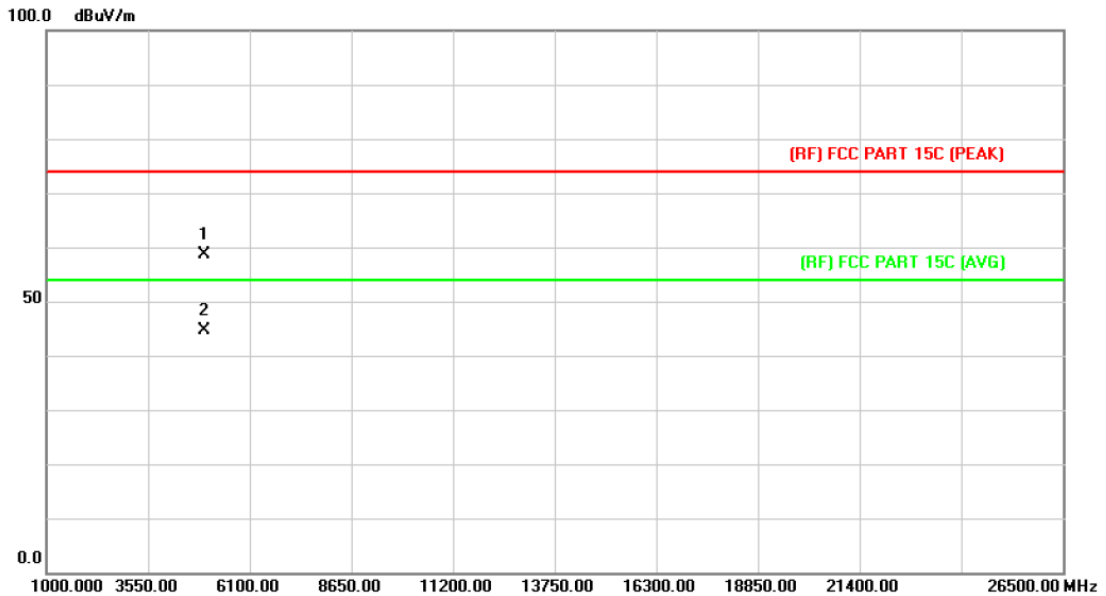

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4959.691 | 44.35         | 14.36          | 58.71        | 74.00  | -15.29 | peak     |
| 2   | *   | 4960.064 | 30.31         | 14.36          | 44.67        | 54.00  | -9.33  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2402MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

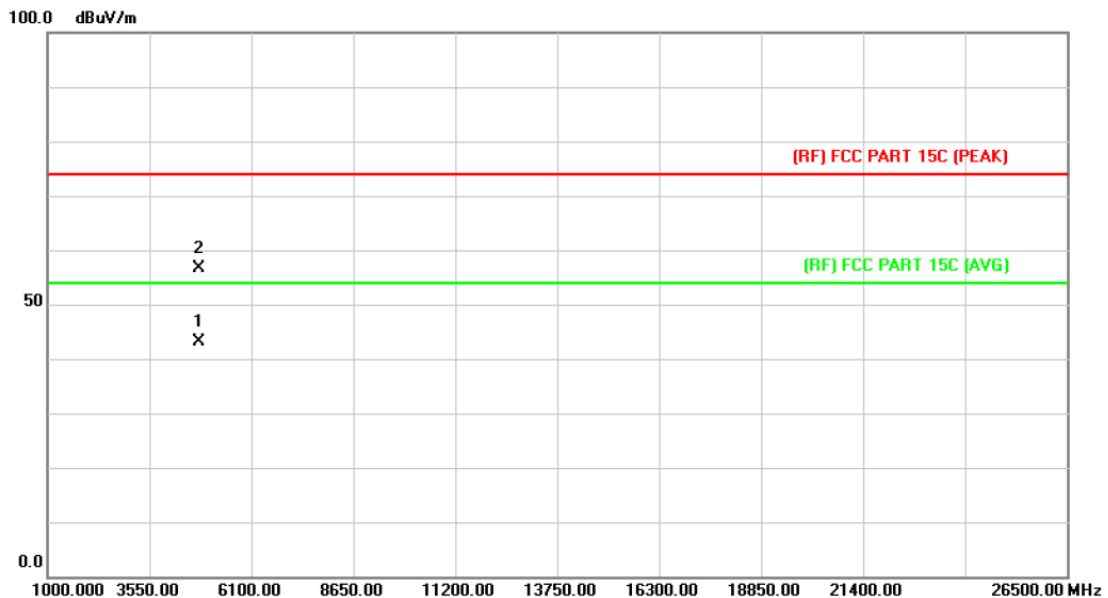


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   | *   | 4804.114 | 29.62         | 13.44          | 43.06        | 54.00  | -10.94 | AVG      |
| 2   |     | 4804.455 | 43.07         | 13.44          | 56.51        | 74.00  | -17.49 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2402MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

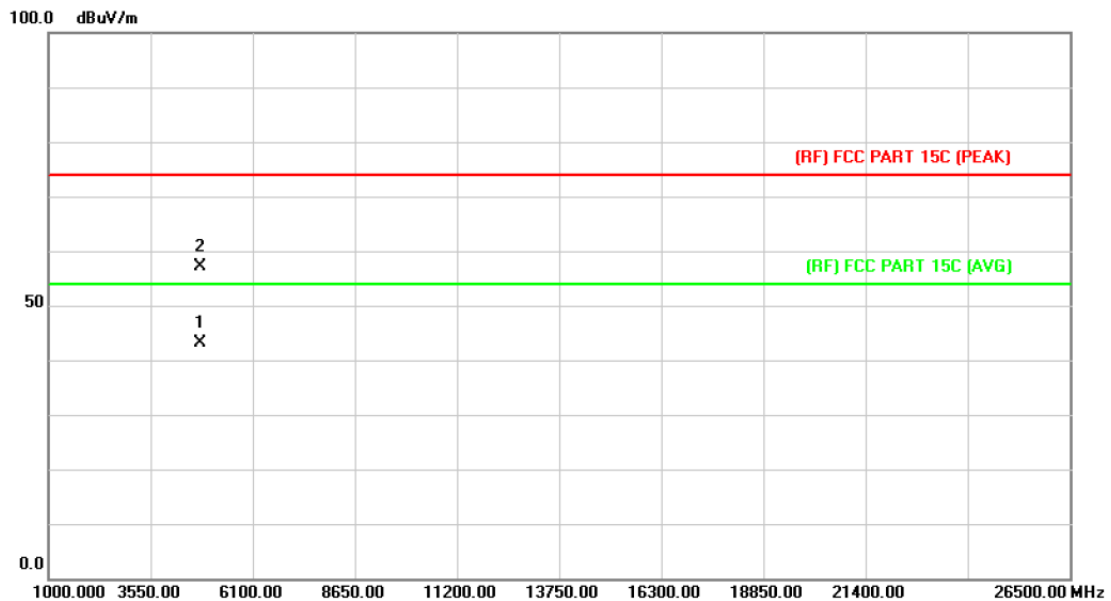

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4804.021 | 29.75         | 13.44          | 43.19       | 54.00  | -10.81 | AVG      |
| 2   |     | 4804.112 | 43.78         | 13.44          | 57.22       | 74.00  | -16.78 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2441MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

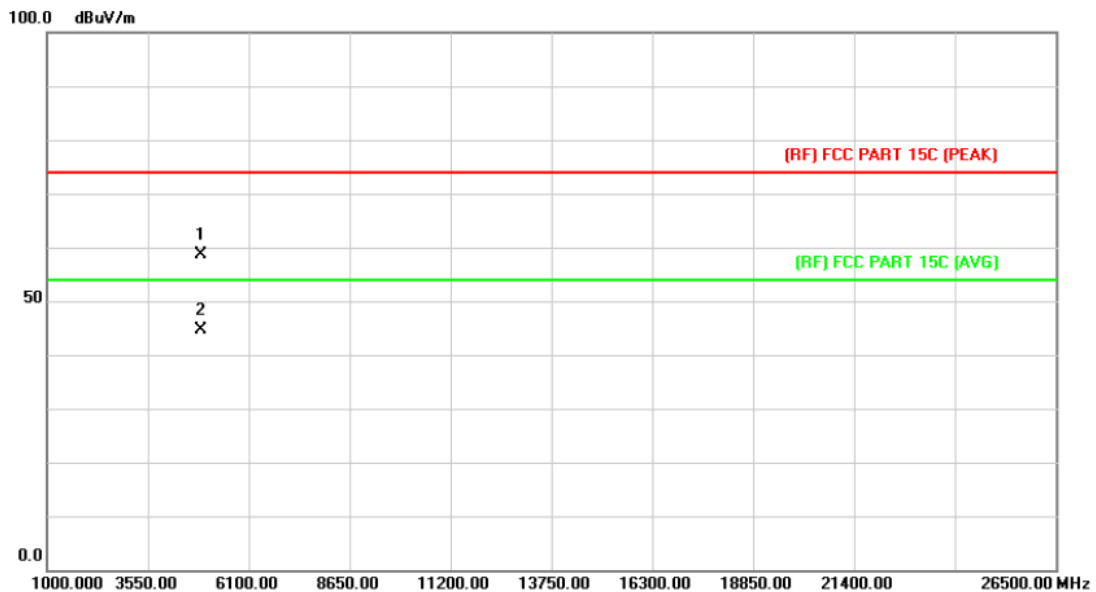


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4882.228 | 44.73         | 13.92          | 58.65       | 74.00  | -15.35 | peak     |
| 2   | *   | 4882.987 | 30.68         | 13.92          | 44.60       | 54.00  | -9.40  | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2441MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

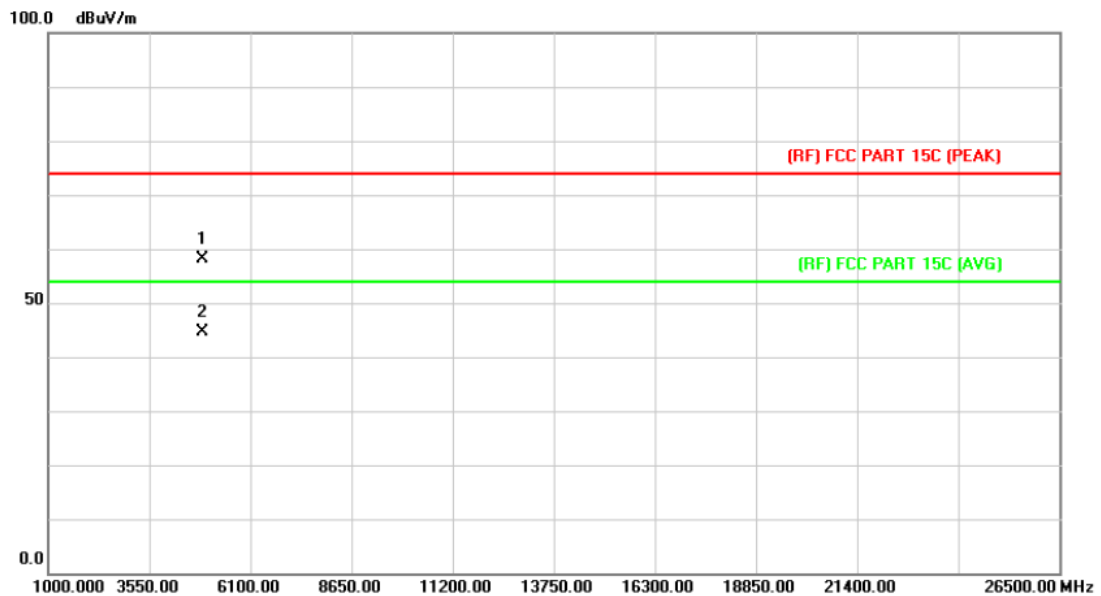

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4882.095 | 44.27         | 13.92          | 58.19       | 74.00  | -15.81 | peak     |
| 2   | *   | 4882.249 | 30.72         | 13.92          | 44.64       | 54.00  | -9.36  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2480MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

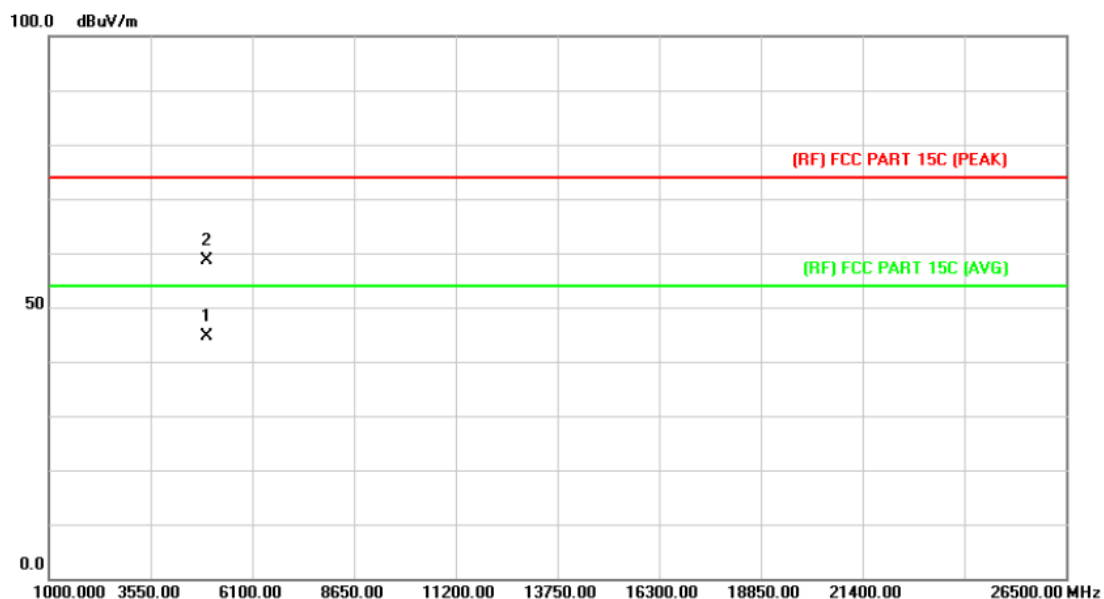


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4959.891 | 30.32         | 14.36          | 44.68       | 54.00  | -9.32  | AVG      |
| 2   |     | 4960.138 | 44.29         | 14.36          | 58.65       | 74.00  | -15.35 | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2480MHz                                               |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

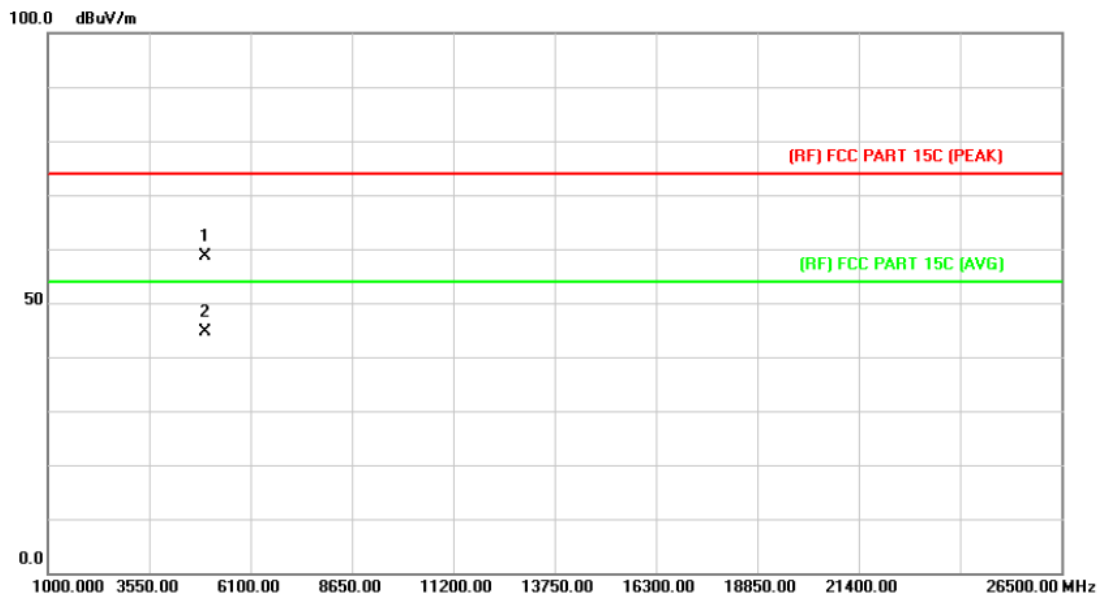

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   |     | 4960.065 | 44.16         | 14.36          | 58.52       | 74.00  | -15.48 | peak     |
| 2   | *   | 4960.181 | 30.32         | 14.36          | 44.68       | 54.00  | -9.32  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2402MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

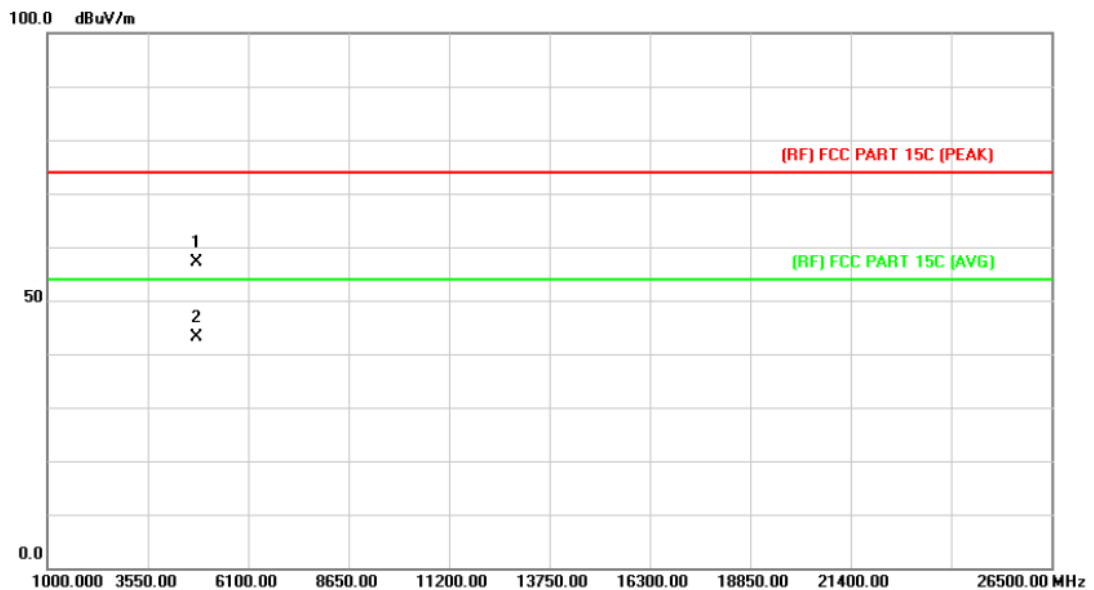


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|--------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB     | Detector |
| 1   |     | 4803.654 | 43.77         | 13.44          | 57.21        | 74.00  | -16.79 | peak     |
| 2   | *   | 4804.427 | 29.68         | 13.44          | 43.12        | 54.00  | -10.88 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2402MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

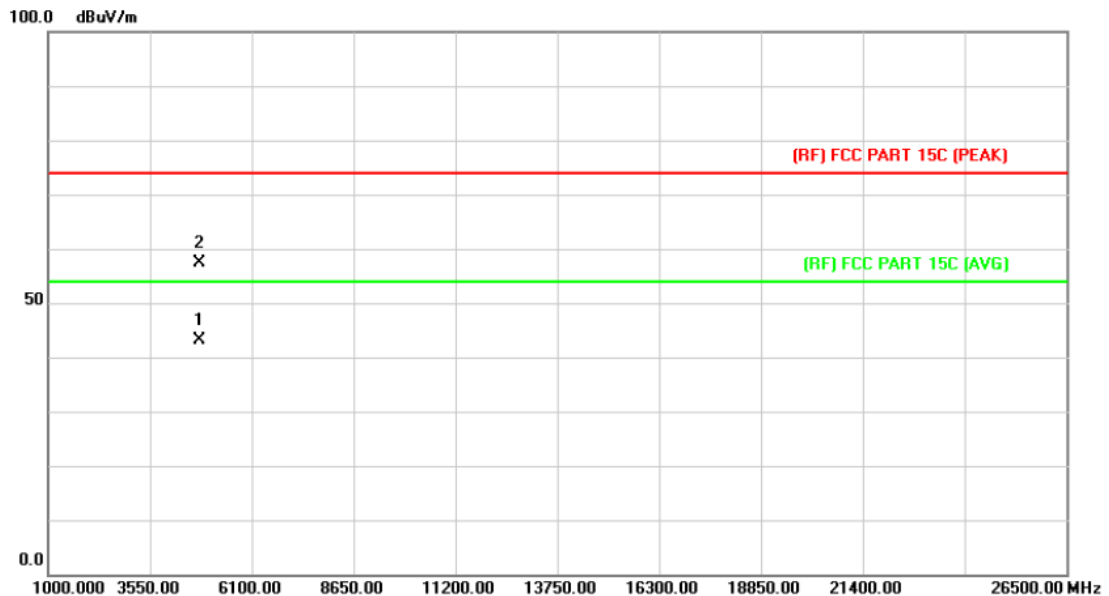

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4803.610 | 29.77         | 13.44          | 43.21       | 54.00  | -10.79 | AVG      |
| 2   |     | 4803.718 | 43.91         | 13.44          | 57.35       | 74.00  | -16.65 | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2441MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

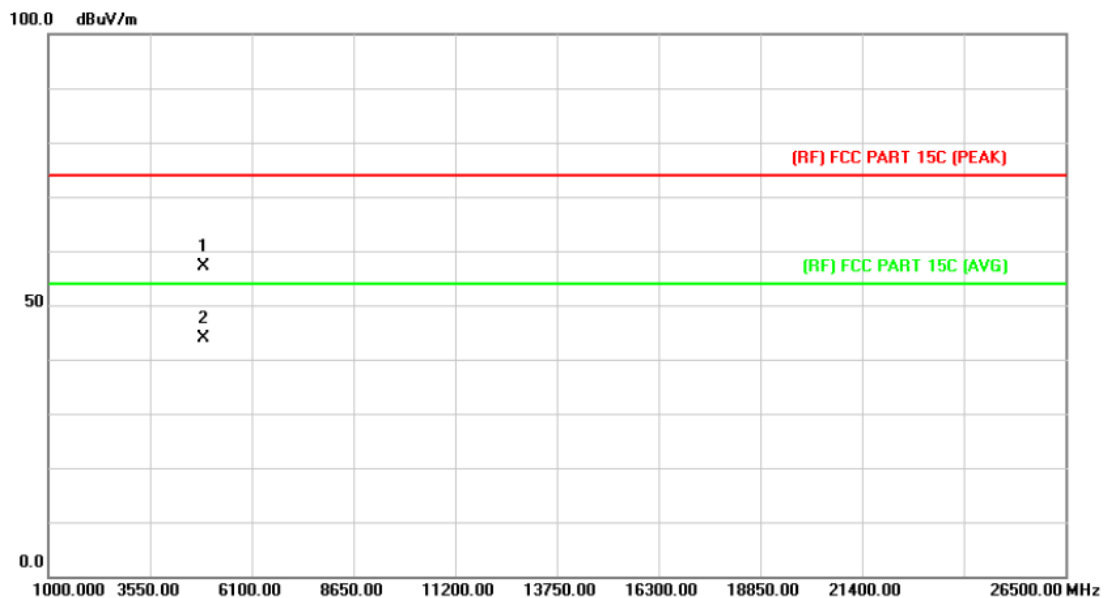


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------|------------|----------|
| 1   |     | 4881.732     | 43.19                    | 13.92                     | 57.11                      | 74.00           | -16.89     | peak     |
| 2   | *   | 4882.270     | 29.94                    | 13.92                     | 43.86                      | 54.00           | -10.14     | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2441MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

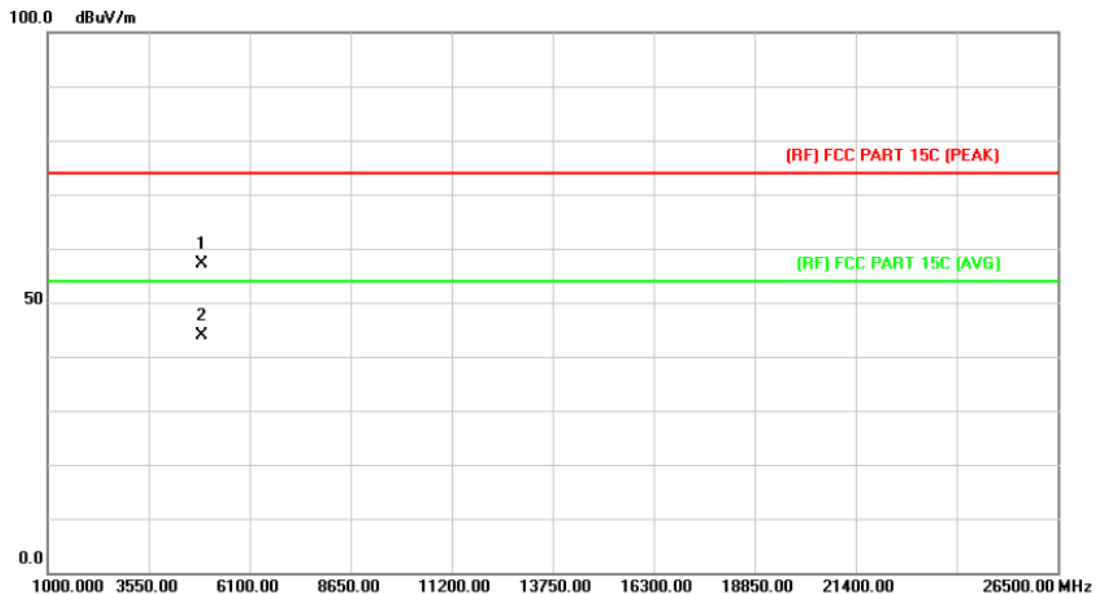

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measure-ment | Limit  | Over        |
|-----|-----|----------|---------------|----------------|--------------|--------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m       | dBuV/m | dB Detector |
| 1   |     | 4881.727 | 43.20         | 13.92          | 57.12        | 74.00  | -16.88 peak |
| 2   | *   | 4882.425 | 29.90         | 13.92          | 43.82        | 54.00  | -10.18 AVG  |

Emission Level= Read Level+ Correct Factor

|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                                                                   |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2480MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

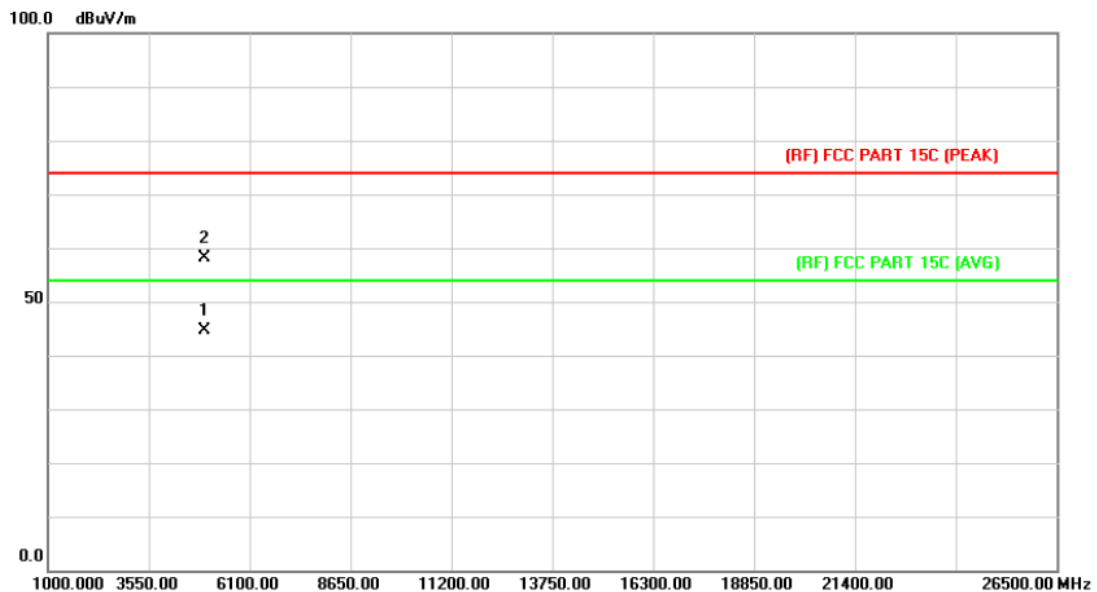


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4959.618 | 30.33         | 14.36          | 44.69       | 54.00  | -9.31  | AVG      |
| 2   |     | 4960.160 | 43.79         | 14.36          | 58.15       | 74.00  | -15.85 | peak     |

Emission Level= Read Level+ Correct Factor



|                      |                                                                              |                           |        |
|----------------------|------------------------------------------------------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                                                                         | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                                                                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                                                                      |                           |        |
| <b>Ant. Pol.</b>     | Vertical                                                                     |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2480MHz                                                       |                           |        |
| <b>Remark:</b>       | No report for the emission which more than 10 dB below the prescribed limit. |                           |        |

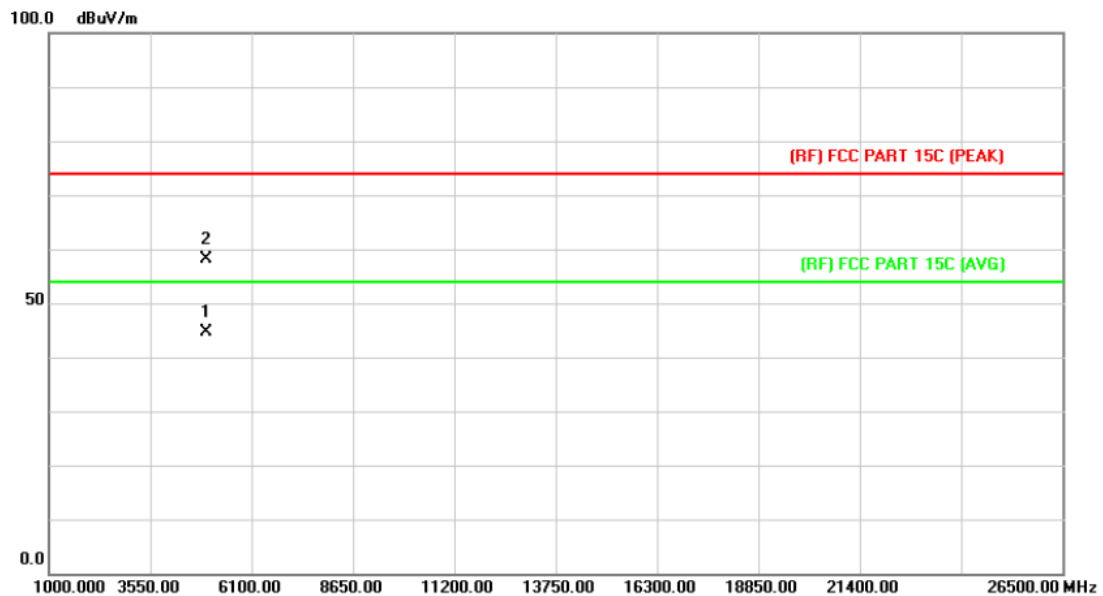

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m | dB     | Detector |
| 1   | *   | 4959.738 | 30.21         | 14.36          | 44.57       | 54.00  | -9.43  | AVG      |
| 2   |     | 4960.390 | 43.89         | 14.36          | 58.25       | 74.00  | -15.75 | peak     |

Emission Level= Read Level+ Correct Factor

## 6. Restricted Bands Requirement

### 6.1 Test Standard and Limit

#### 6.1.1 Test Standard

FCC Part 15.209


FCC Part 15.205

#### 6.1.2 Test Limit

| Restricted Frequency<br>Band<br>(MHz) | Class B (dBUV/m)(at 3m) |         |
|---------------------------------------|-------------------------|---------|
|                                       | Peak                    | Average |
| 2310 ~2390                            | 74                      | 54      |
| 2483.5 ~2500                          | 74                      | 54      |

**Note: All restriction bands have been tested, only the worst case is reported.**

### 6.2 Test Setup

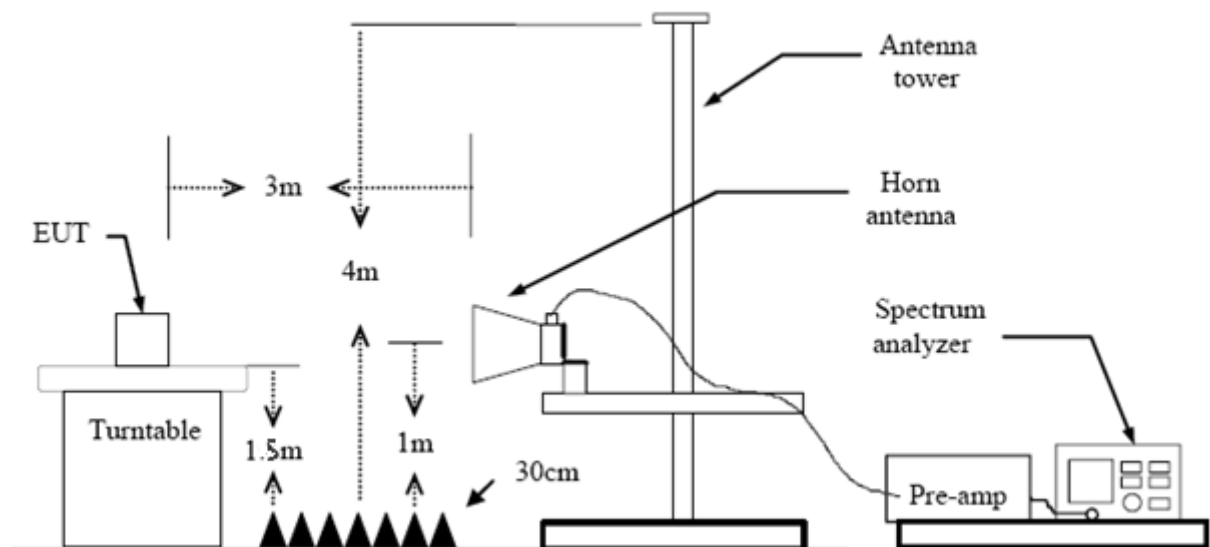

### 6.3 Test Procedure

- (1) The measuring distance of 3m shall be used for measurements at frequency up to 1GHz and above 1 GHz. The EUT was placed on a rotating 0.8m high above ground, the table was rotated 360 degrees to determine the position of the highest radiation.
- (2) Measurements at frequency above 1GHz. The EUT was placed on a rotating 1.5m high above the ground. RF absorbers covered the ground plane with a minimum area of 3.0m by 3.0m between the EUT and measurement receiver antenna. The RF absorber shall not exceed 30cm in high above the conducting floor. The table was rotated 360 degrees to determine the position of the highest radiation.



- 
- (3) The Test antenna shall vary between 1m and 4m, Both Horizontal and Vertical antenna are set to make measurement.
  - (4) The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
  - (5) If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit Bellow 1 GHz, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed. But the Peak Value and average value both need to comply with applicable limit above 1 GHz.
  - (6) Testing frequency range below 1GHz the measuring instrument use VBW=120 kHz with Quasi-peak detection.
  - (7) Testing frequency range above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with AVG Detector for Average Values.
  - (8) For the actual test configuration, please see the test setup photo.

#### 6.4 EUT Operating Condition

The Equipment Under Test was set to Continual Transmitting in maximum power.


#### 6.5 Test Data

Remark: During testing above 1GHz the measuring instrument use RBW=1 MHz and VBW=3 MHz with Peak Detector for Peak Values, and use RBW=1 MHz and VBW=10 Hz with Peak Detector for Average Values.

All restriction bands have been tested, only the worst case is reported.

**(1) Radiation Test**

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25℃                         | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2402MHz        |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

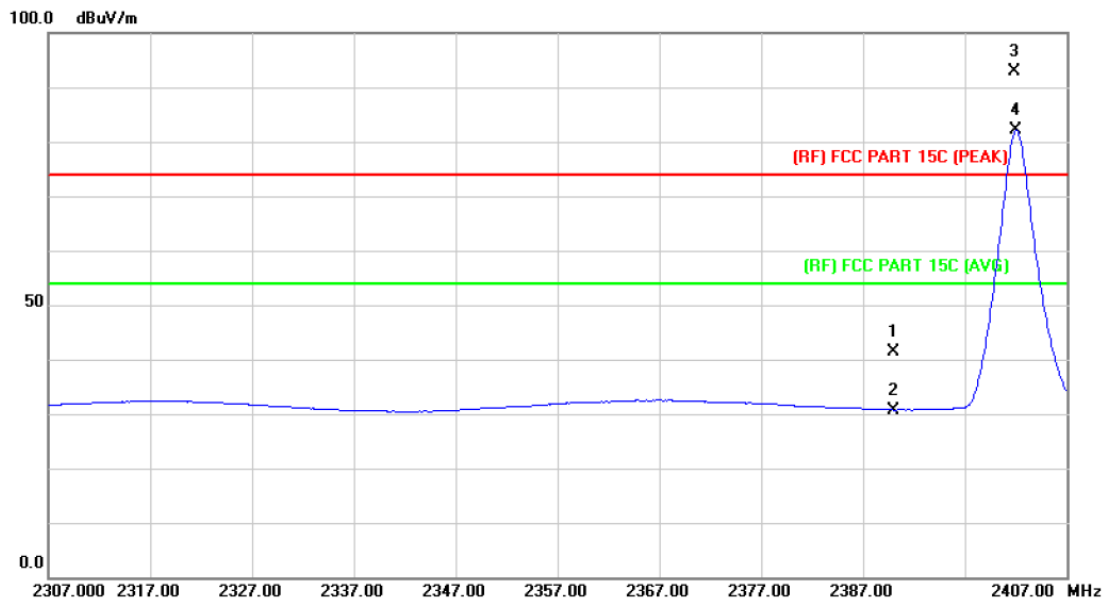


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 40.68                    | 0.77                      | 41.45                      | 74.00                 | -32.55     | peak     |
| 2   |     | 2390.000     | 29.97                    | 0.77                      | 30.74                      | 54.00                 | -23.26     | AVG      |
| 3   | X   | 2401.900     | 91.98                    | 0.82                      | 92.80                      | Fundamental Frequency |            | peak     |
| 4   | *   | 2402.000     | 81.32                    | 0.82                      | 82.14                      | Fundamental Frequency |            | AVG      |

**Emission Level= Read Level+ Correct Factor**




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Vertical                    |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2402MHz        |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

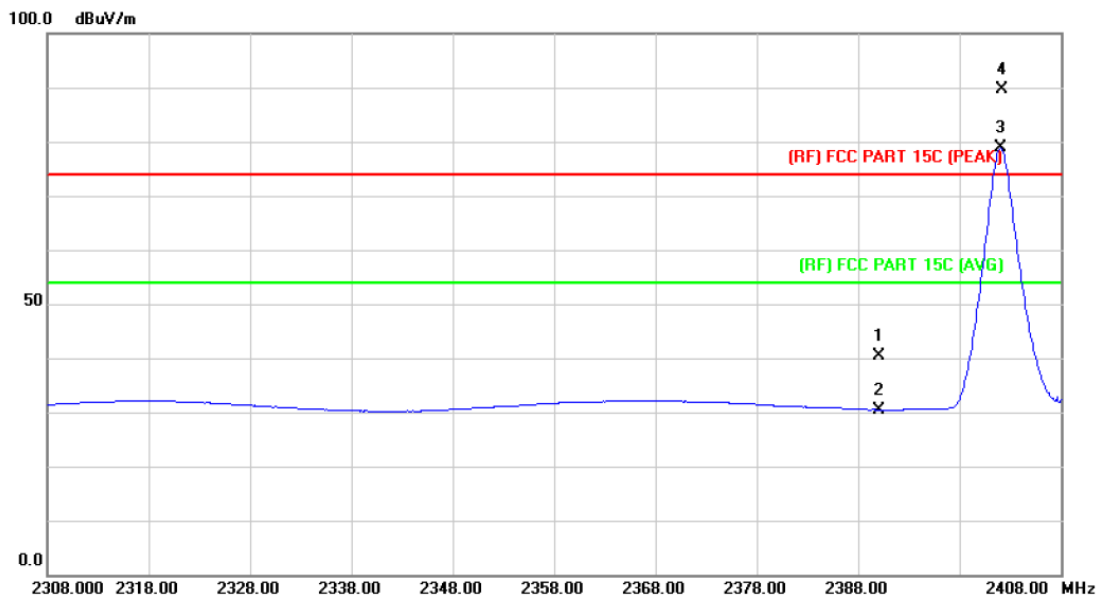

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 39.68                    | 0.77                      | 40.45                      | 74.00                 | -33.55     | peak     |
| 2   |     | 2390.000     | 29.67                    | 0.77                      | 30.44                      | 54.00                 | -23.56     | AVG      |
| 3   | *   | 2402.000     | 78.08                    | 0.82                      | 78.90                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2402.200     | 88.86                    | 0.82                      | 89.68                      | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2480 MHz       |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

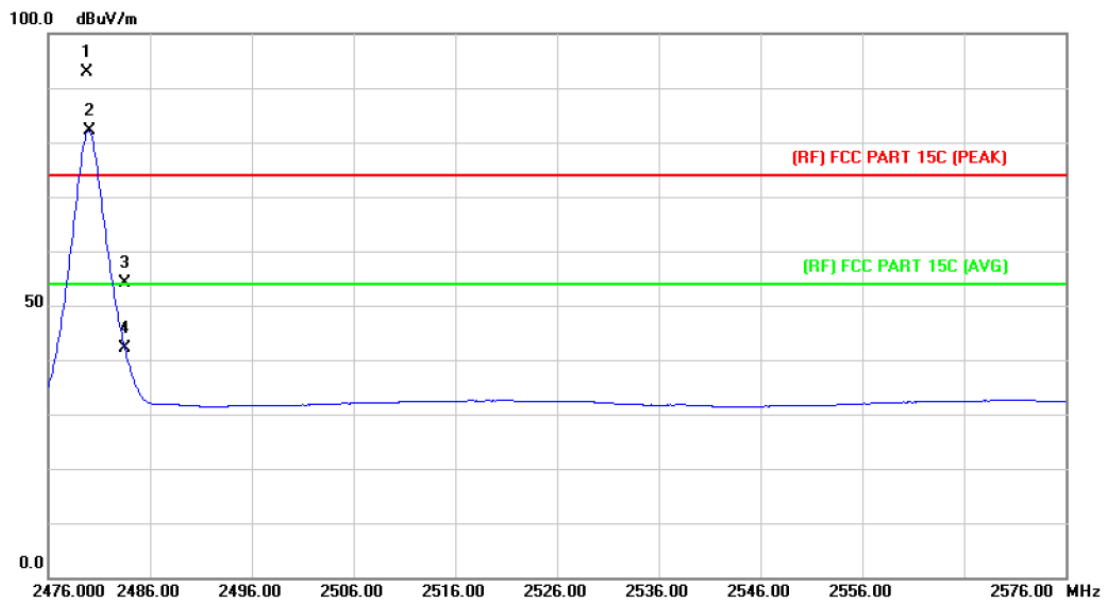


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 2479.800     | 91.73                    | 1.15                      | 92.88                      | Fundamental Frequency |            | peak     |
| 2   | *   | 2480.000     | 81.02                    | 1.15                      | 82.17                      | Fundamental Frequency |            | AVG      |
| 3   |     | 2483.500     | 52.94                    | 1.17                      | 54.11                      | 74.00                 | -19.89     | peak     |
| 4   |     | 2483.500     | 41.06                    | 1.17                      | 42.23                      | 54.00                 | -11.77     | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Vertical                    |                           |        |
| <b>Test Mode:</b>    | TX GFSK Mode 2480 MHz       |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

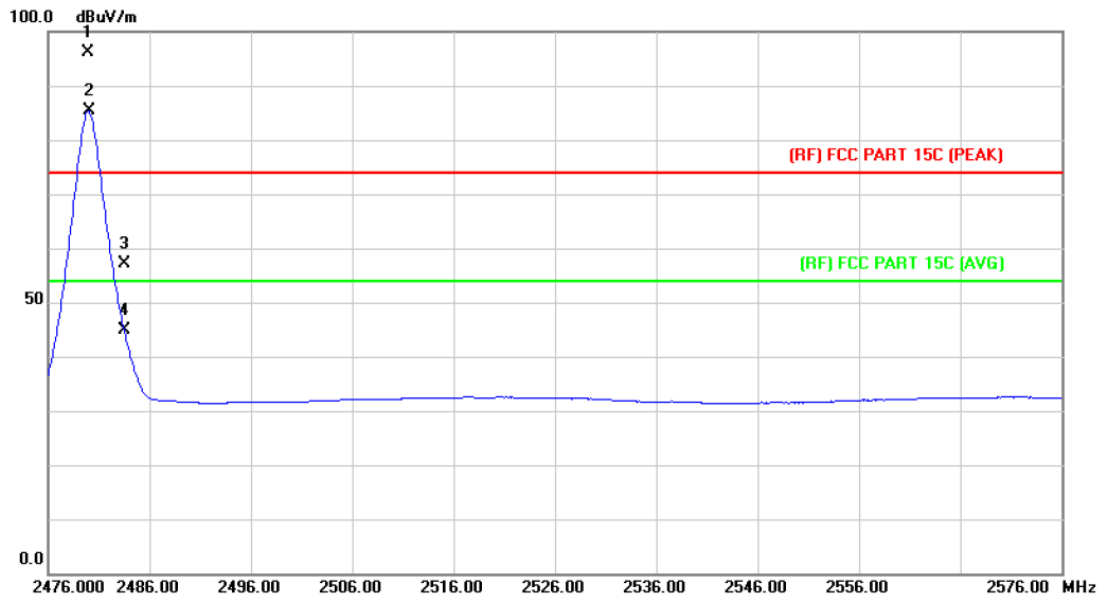

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | X   | 2479.900 | 94.97         | 1.15           | 96.12       | Fundamental Frequency |        | peak     |
| 2   | *   | 2480.000 | 84.22         | 1.15           | 85.37       | Fundamental Frequency |        | AVG      |
| 3   |     | 2483.500 | 55.93         | 1.17           | 57.10       | 74.00                 | -16.90 | peak     |
| 4   |     | 2483.500 | 43.63         | 1.17           | 44.80       | 54.00                 | -9.20  | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                                |                           |        |
|----------------------|--------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                           | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                           | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                        |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                     |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2402MHz |                           |        |
| <b>Remark:</b>       | Only worse case is reported    |                           |        |

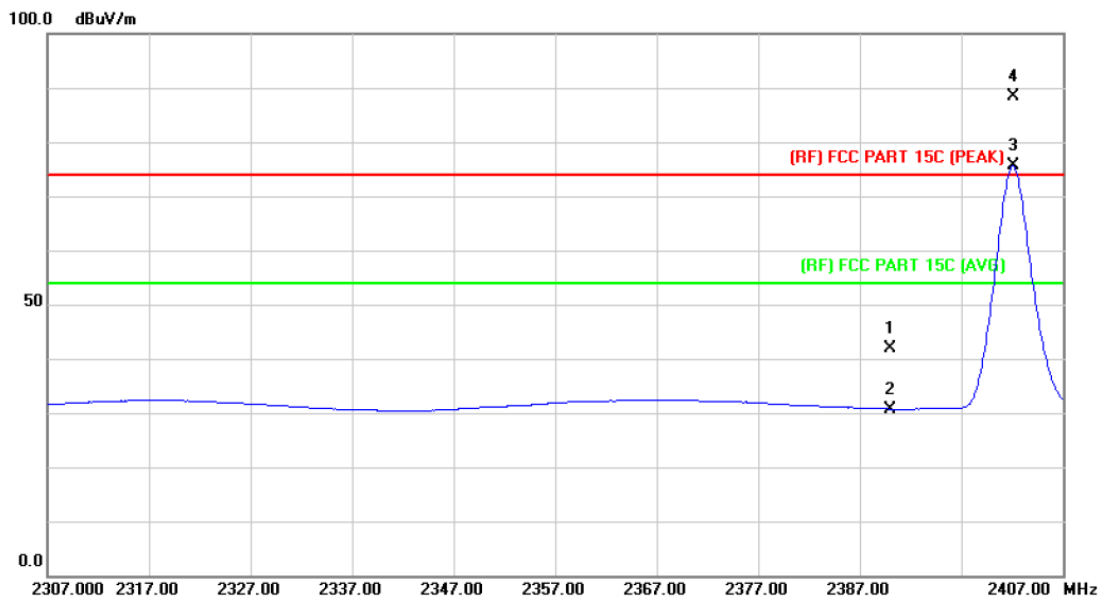


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 41.22                    | 0.77                      | 41.99                      | 74.00                 | -32.01     | peak     |
| 2   |     | 2390.000     | 29.96                    | 0.77                      | 30.73                      | 54.00                 | -23.27     | AVG      |
| 3   | *   | 2402.100     | 74.72                    | 0.82                      | 75.54                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2402.200     | 87.68                    | 0.82                      | 88.50                      | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                                |                           |        |
|----------------------|--------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                           | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                           | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                        |                           |        |
| <b>Ant. Pol.</b>     | Vertical                       |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2402MHz |                           |        |
| <b>Remark:</b>       | Only worse case is reported    |                           |        |

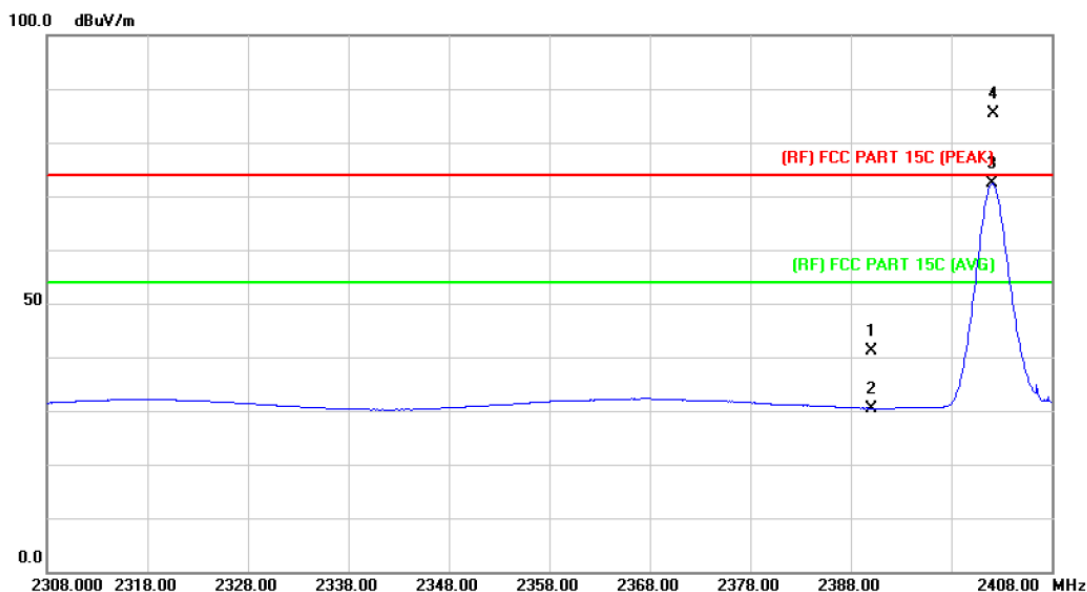

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 40.47                    | 0.77                      | 41.24                      | 74.00                 | -32.76     | peak     |
| 2   |     | 2390.000     | 29.68                    | 0.77                      | 30.45                      | 54.00                 | -23.55     | AVG      |
| 3   | *   | 2402.100     | 71.62                    | 0.82                      | 72.44                      | Fundamental Frequency |            | AVG      |
| 4   | X   | 2402.200     | 84.61                    | 0.82                      | 85.43                      | Fundamental Frequency |            | peak     |

Emission Level= Read Level+ Correct Factor

|                      |                                |                           |        |
|----------------------|--------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                           | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                           | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                        |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                     |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2480MHz |                           |        |
| <b>Remark:</b>       | Only worse case is reported    |                           |        |

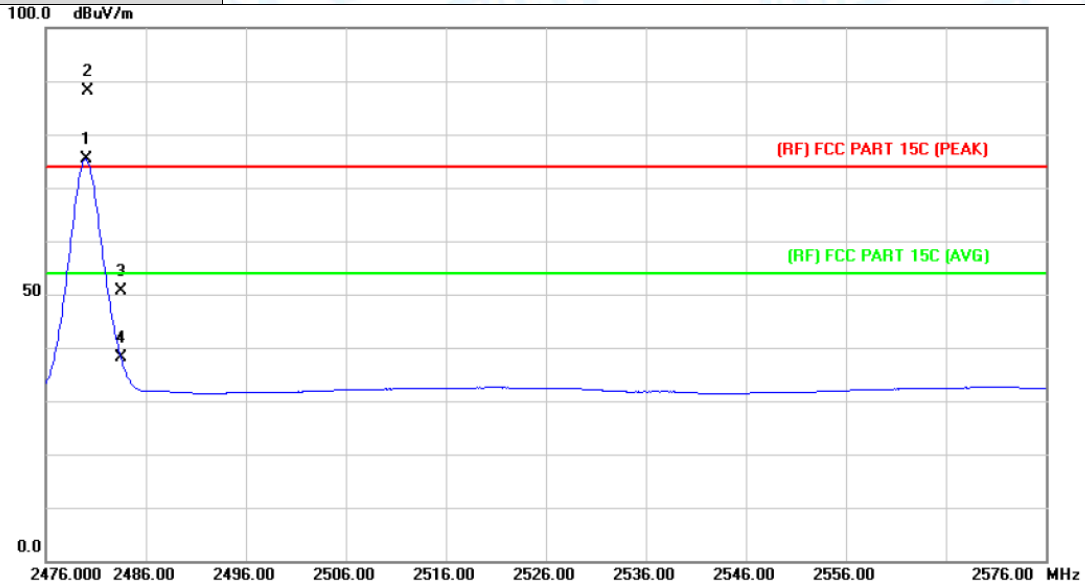


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   | *   | 2480.000 | 74.16         | 1.15           | 75.31       | Fundamental Frequency |        | AVG      |
| 2   | X   | 2480.200 | 86.88         | 1.15           | 88.03       | Fundamental Frequency |        | peak     |
| 3   |     | 2483.500 | 49.58         | 1.17           | 50.75       | 74.00                 | -23.25 | peak     |
| 4   |     | 2483.500 | 37.04         | 1.17           | 38.21       | 54.00                 | -15.79 | AVG      |

Emission Level= Read Level+ Correct Factor




|                      |                                |                           |        |
|----------------------|--------------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                           | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                           | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                        |                           |        |
| <b>Ant. Pol.</b>     | Vertical                       |                           |        |
| <b>Test Mode:</b>    | TX $\pi$ /4-DQPSK Mode 2480MHz |                           |        |
| <b>Remark:</b>       | Only worse case is reported    |                           |        |

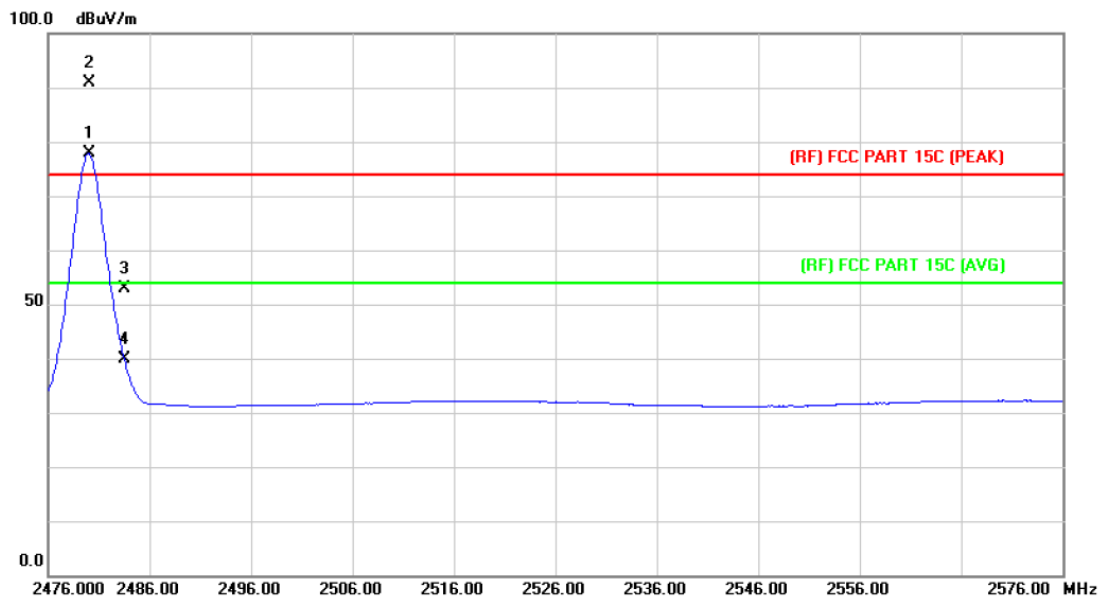

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | *   | 2480.000     | 76.69                    | 1.15                      | 77.84                      | Fundamental Frequency |            | AVG      |
| 2   | X   | 2480.100     | 89.63                    | 1.15                      | 90.78                      | Fundamental Frequency |            | peak     |
| 3   |     | 2483.500     | 51.64                    | 1.17                      | 52.81                      | 74.00                 | -21.19     | peak     |
| 4   |     | 2483.500     | 38.66                    | 1.17                      | 39.83                      | 54.00                 | -14.17     | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2402MHz      |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

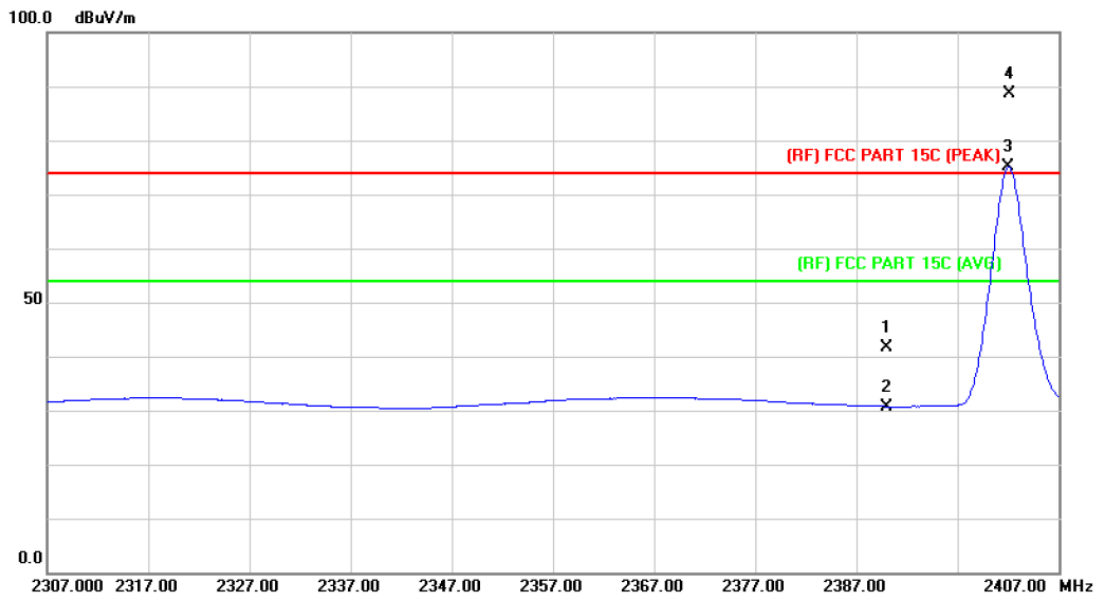


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over   |          |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|--------|----------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB     | Detector |
| 1   |     | 2390.000 | 40.92         | 0.77           | 41.69       | 74.00                 | -32.31 | peak     |
| 2   |     | 2390.000 | 29.94         | 0.77           | 30.71       | 54.00                 | -23.29 | AVG      |
| 3   | *   | 2402.000 | 74.35         | 0.82           | 75.17       | Fundamental Frequency |        | AVG      |
| 4   | X   | 2402.100 | 87.83         | 0.82           | 88.65       | Fundamental Frequency |        | peak     |

Emission Level= Read Level+ Correct Factor




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Vertical                    |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2402MHz      |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

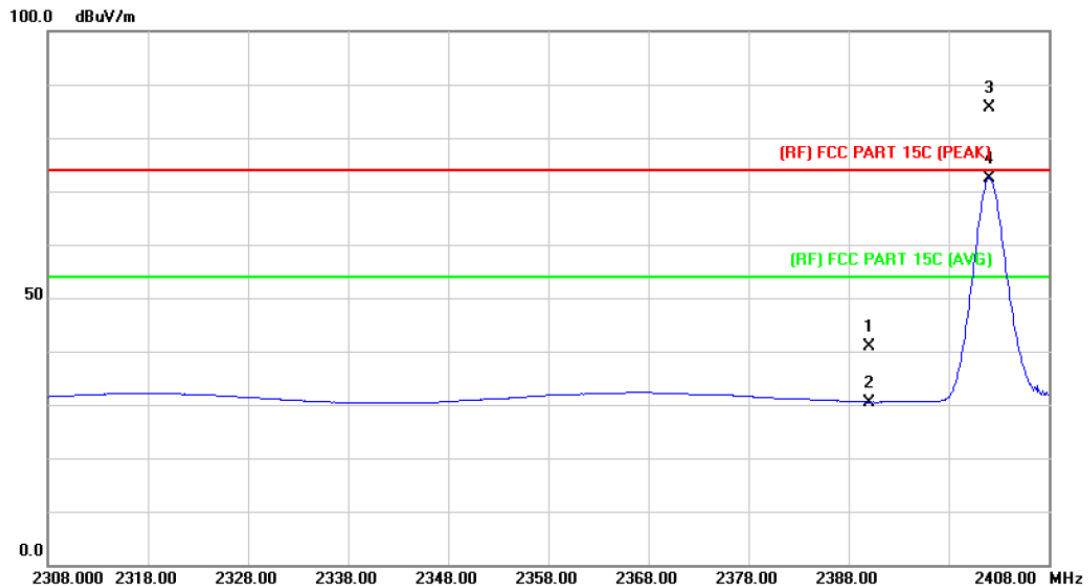

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   |     | 2390.000     | 40.06                    | 0.77                      | 40.83                      | 74.00                 | -33.17     | peak     |
| 2   |     | 2390.000     | 29.72                    | 0.77                      | 30.49                      | 54.00                 | -23.51     | AVG      |
| 3   | X   | 2402.100     | 84.83                    | 0.82                      | 85.65                      | Fundamental Frequency |            | peak     |
| 4   | *   | 2402.100     | 71.68                    | 0.82                      | 72.50                      | Fundamental Frequency |            | AVG      |

Emission Level= Read Level+ Correct Factor

|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Horizontal                  |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2480MHz      |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

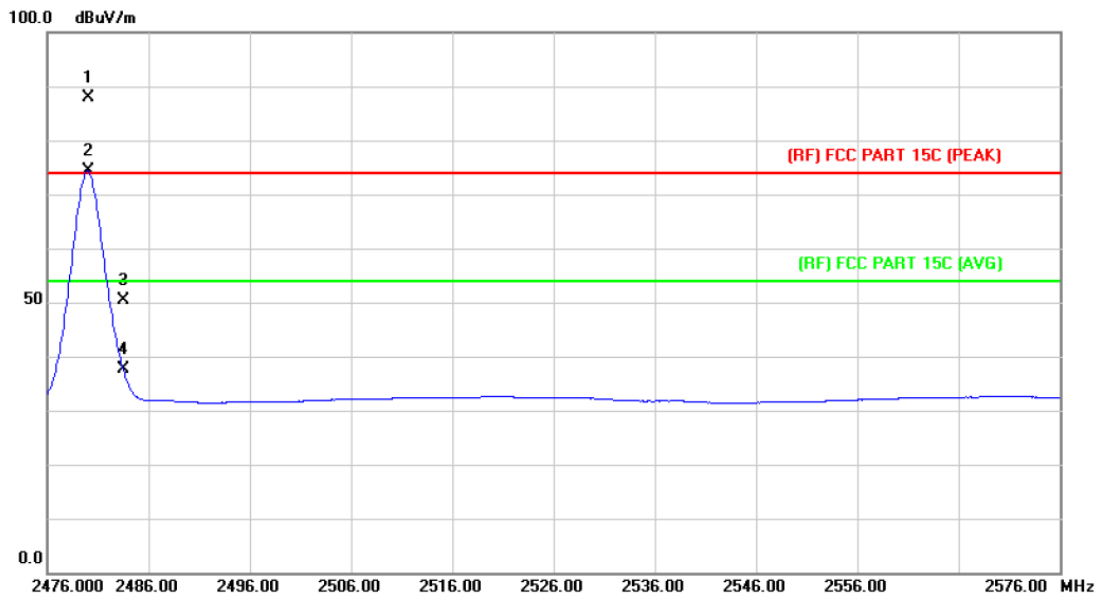


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit                 | Over        |
|-----|-----|----------|---------------|----------------|-------------|-----------------------|-------------|
|     |     | MHz      | dBuV          | dB/m           | dBuV/m      | dBuV/m                | dB Detector |
| 1   | X   | 2480.000 | 86.61         | 1.15           | 87.76       | Fundamental Frequency | peak        |
| 2   | *   | 2480.000 | 73.21         | 1.15           | 74.36       | Fundamental Frequency | AVG         |
| 3   |     | 2483.500 | 49.20         | 1.17           | 50.37       | 74.00                 | -23.63 peak |
| 4   |     | 2483.500 | 36.39         | 1.17           | 37.56       | 54.00                 | -16.44 AVG  |

Emission Level= Read Level+ Correct Factor



|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Ant. Pol.</b>     | Vertical                    |                           |        |
| <b>Test Mode:</b>    | TX 8-DPSK Mode 2480MHz      |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |


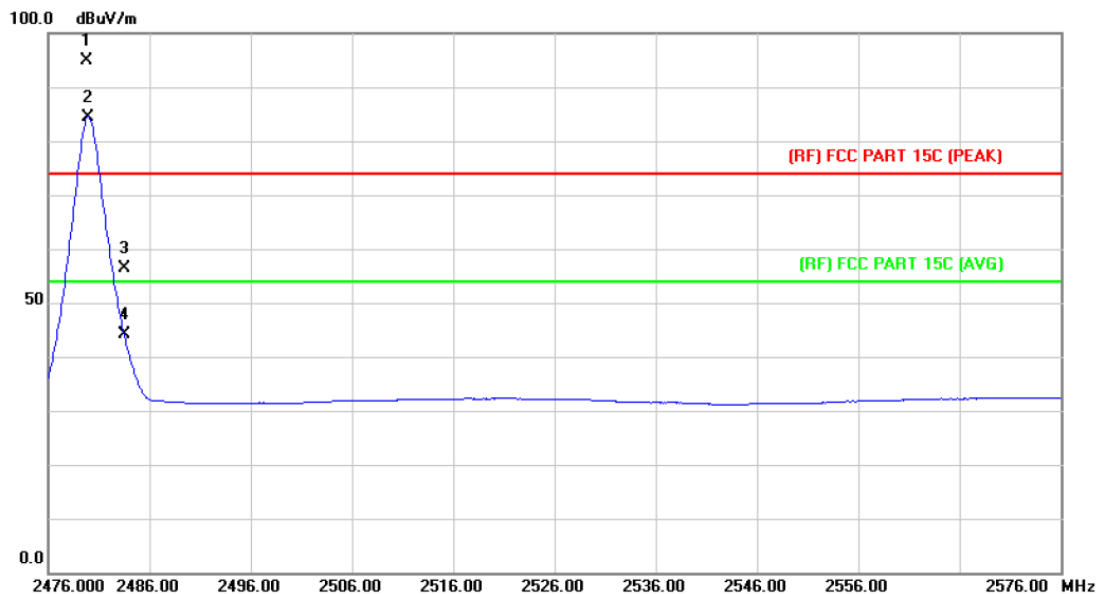


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB/m | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m       | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|---------------------------|----------------------------|-----------------------|------------|----------|
| 1   | X   | 2479.800     | 93.72                    | 1.15                      | 94.87                      | Fundamental Frequency |            | peak     |
| 2   | *   | 2479.900     | 83.35                    | 1.15                      | 84.50                      | Fundamental Frequency |            | AVG      |
| 3   |     | 2483.500     | 55.28                    | 1.17                      | 56.45                      | 74.00                 | -17.55     | peak     |
| 4   |     | 2483.500     | 42.85                    | 1.17                      | 44.02                      | 54.00                 | -9.98      | AVG      |

Emission Level= Read Level+ Correct Factor



## (2) Conducted Test

|               |                               |                    |        |
|---------------|-------------------------------|--------------------|--------|
| EUT:          | Loop                          | Model Name :       | Loop-1 |
| Temperature:  | 25°C                          | Relative Humidity: | 55%    |
| Test Voltage: | DC 3.7V                       |                    |        |
| Test Mode:    | TX GFSK Mode 2402MHz/2480 MHz |                    |        |
| Remark:       | Only worse case is reported   |                    |        |

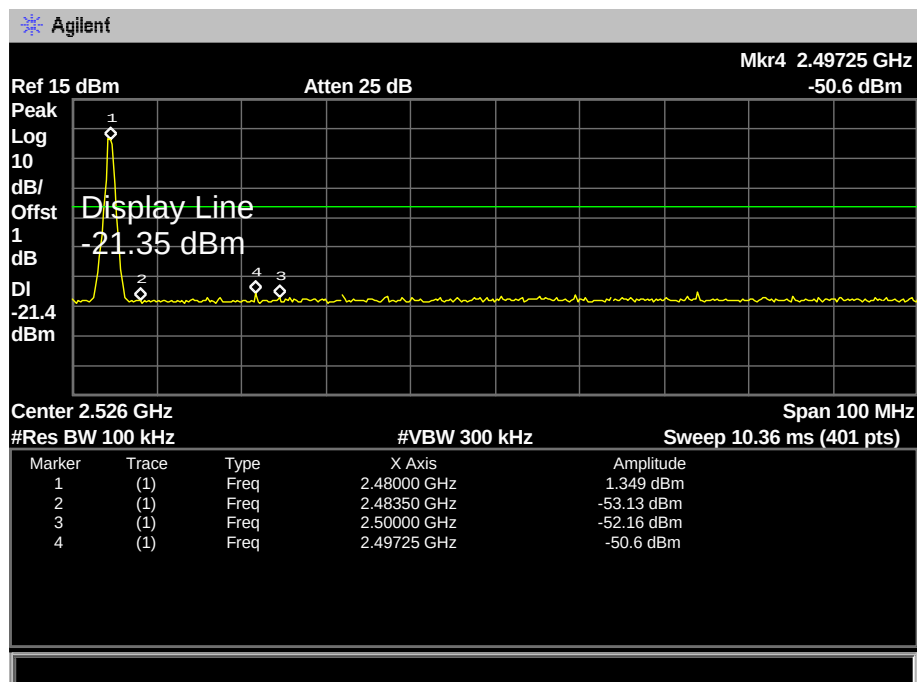
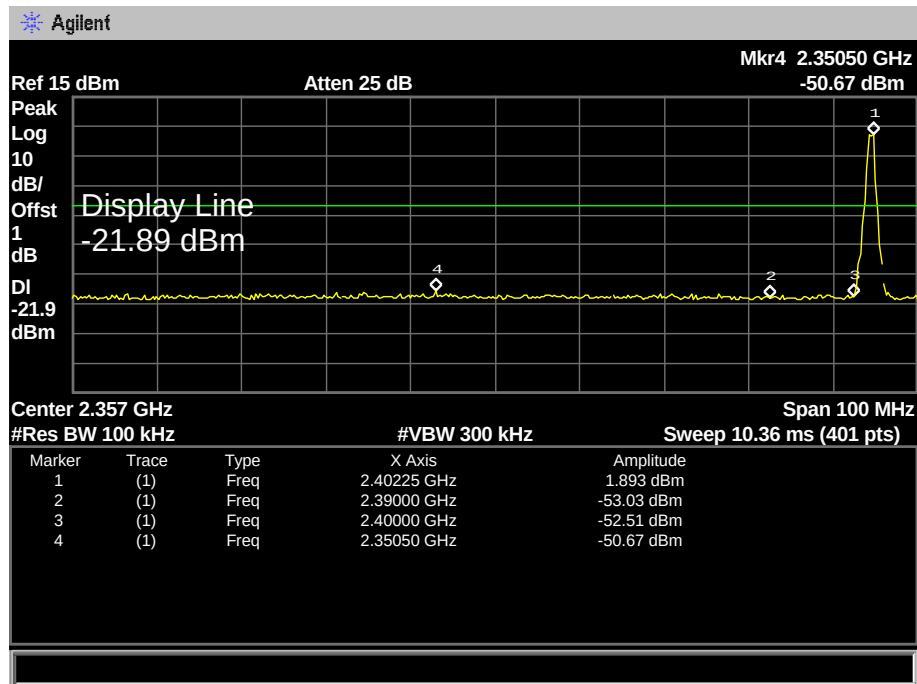




|                      |                             |                           |        |
|----------------------|-----------------------------|---------------------------|--------|
| <b>EUT:</b>          | Loop                        | <b>Model Name :</b>       | Loop-1 |
| <b>Temperature:</b>  | 25°C                        | <b>Relative Humidity:</b> | 55%    |
| <b>Test Voltage:</b> | DC 3.7V                     |                           |        |
| <b>Test Mode:</b>    | GFSK Hopping Mode           |                           |        |
| <b>Remark:</b>       | Only worse case is reported |                           |        |

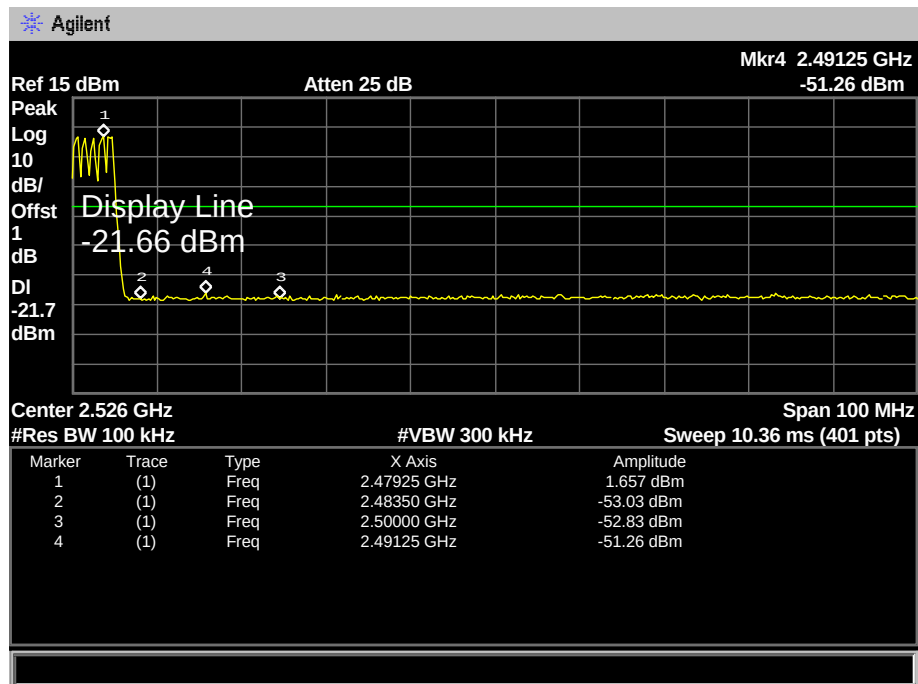
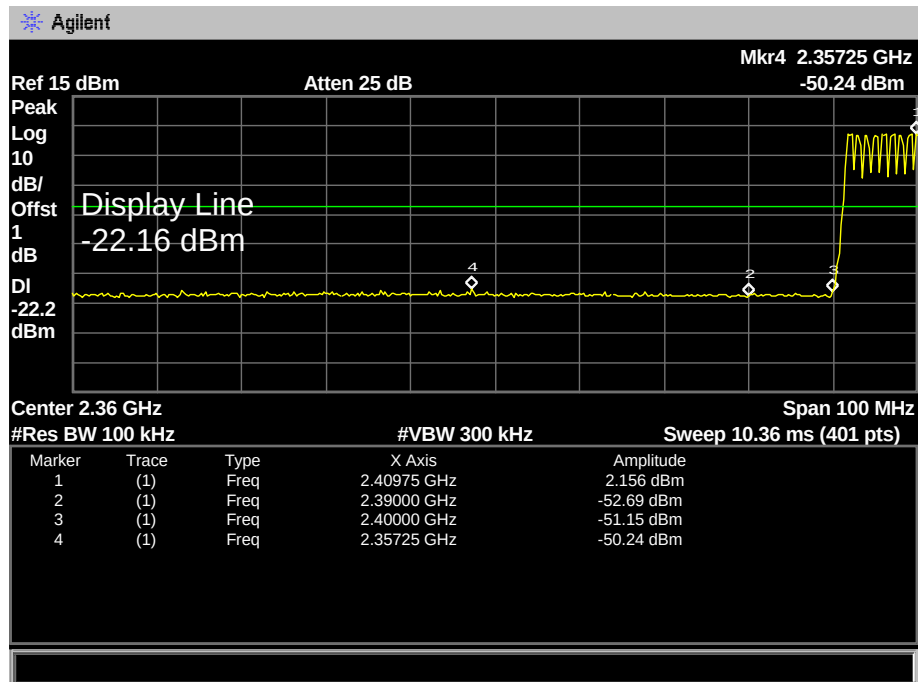


|               |                                         |                    |        |
|---------------|-----------------------------------------|--------------------|--------|
| EUT:          | Loop                                    | Model Name :       | Loop-1 |
| Temperature:  | 25°C                                    | Relative Humidity: | 55%    |
| Test Voltage: | DC 3.7V                                 |                    |        |
| Test Mode:    | TX $\pi$ /4-DQPSK Mode 2402MHz/2480 MHz |                    |        |
| Remark:       | Only worse case is reported             |                    |        |

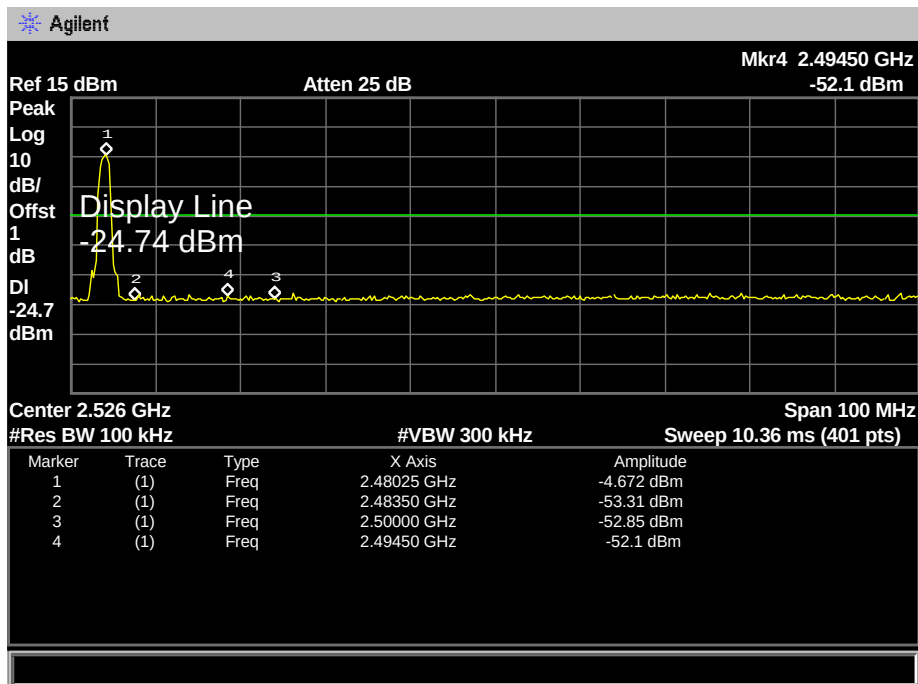
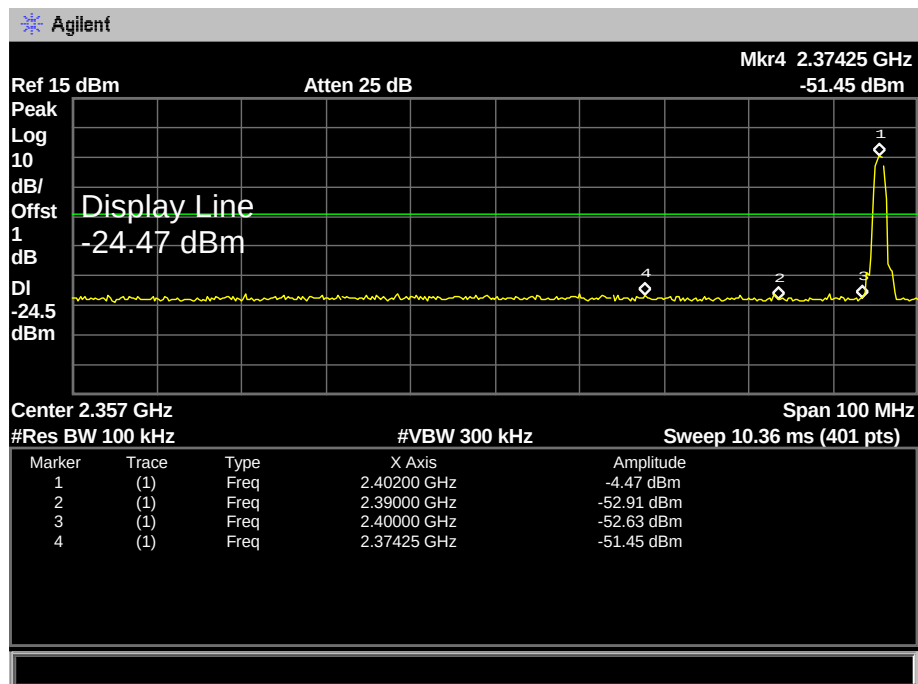




|               |                             |                    |        |
|---------------|-----------------------------|--------------------|--------|
| EUT:          | Loop                        | Model Name :       | Loop-1 |
| Temperature:  | 25°C                        | Relative Humidity: | 55%    |
| Test Voltage: | DC 3.7V                     |                    |        |
| Test Mode:    | $\pi$ /4-DQPSK Hopping Mode |                    |        |
| Remark:       | Only worse case is reported |                    |        |

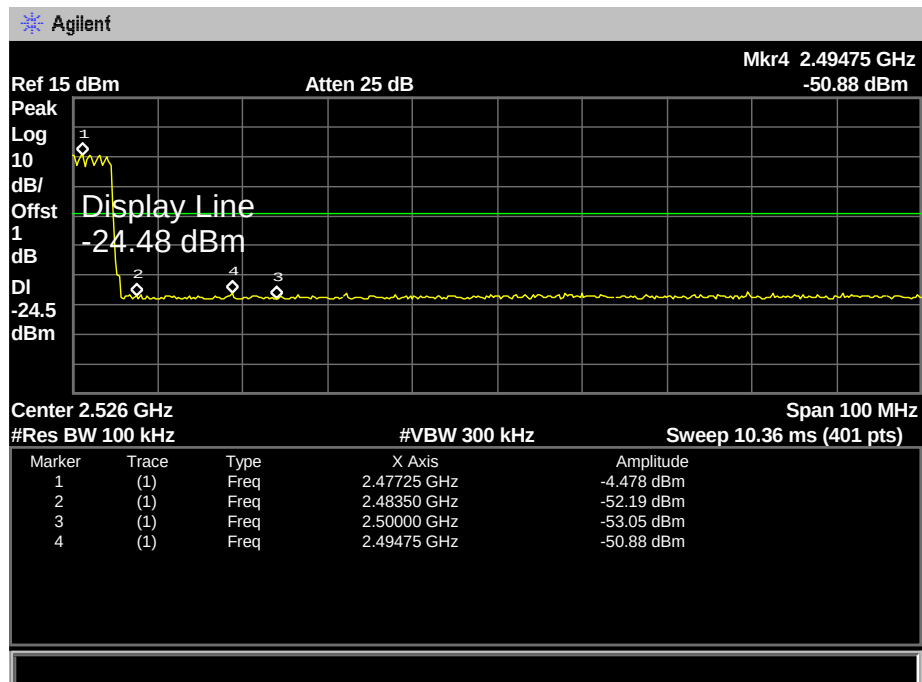
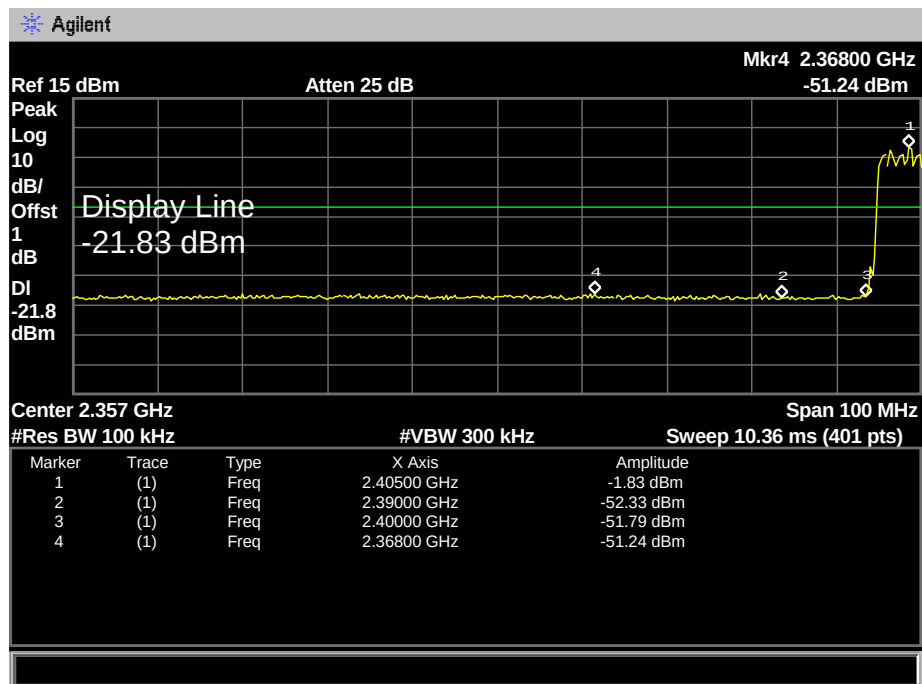


|               |                                 |                    |        |
|---------------|---------------------------------|--------------------|--------|
| EUT:          | Loop                            | Model Name :       | Loop-1 |
| Temperature:  | 25°C                            | Relative Humidity: | 55%    |
| Test Voltage: | DC 3.7V                         |                    |        |
| Test Mode:    | TX 8-DPSK Mode 2402MHz/2480 MHz |                    |        |
| Remark:       | Only worse case is reported     |                    |        |

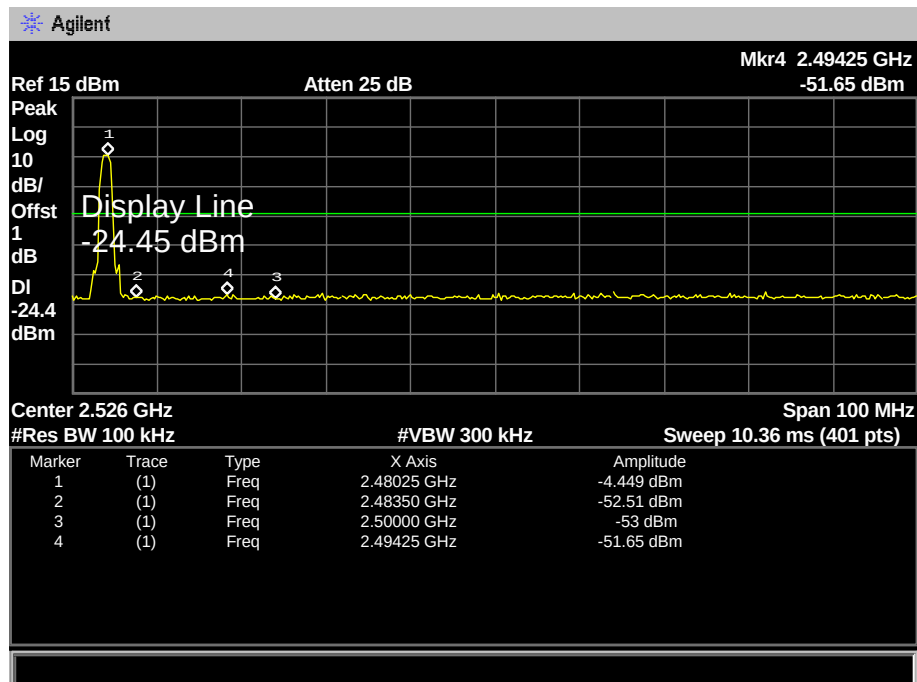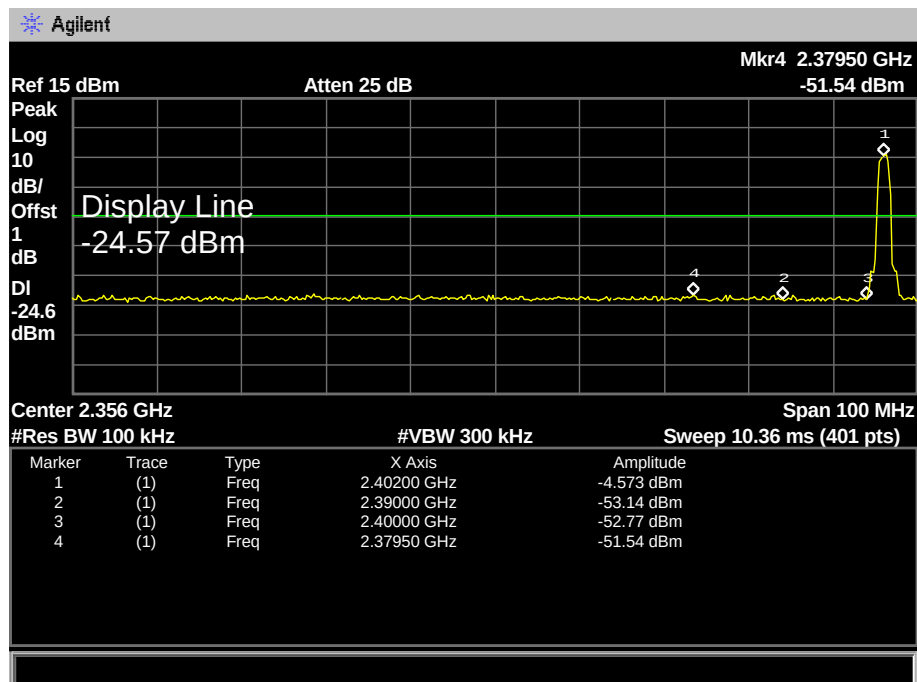



|               |                             |                    |        |
|---------------|-----------------------------|--------------------|--------|
| EUT:          | Loop                        | Model Name :       | Loop-1 |
| Temperature:  | 25°C                        | Relative Humidity: | 55%    |
| Test Voltage: | DC 3.7V                     |                    |        |
| Test Mode:    | 8-DPSK Hopping Mode         |                    |        |
| Remark:       | Only worse case is reported |                    |        |

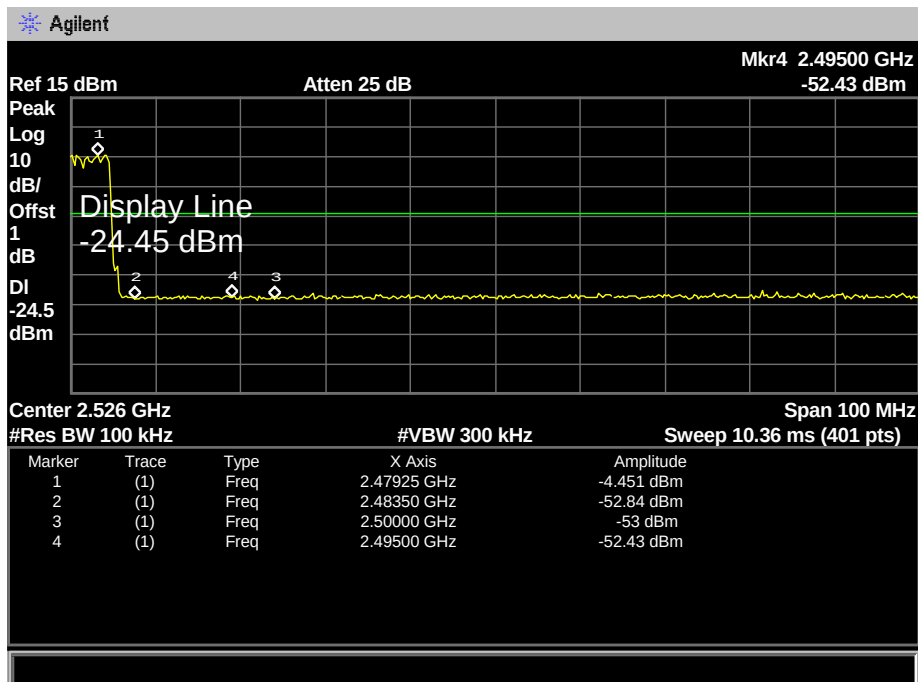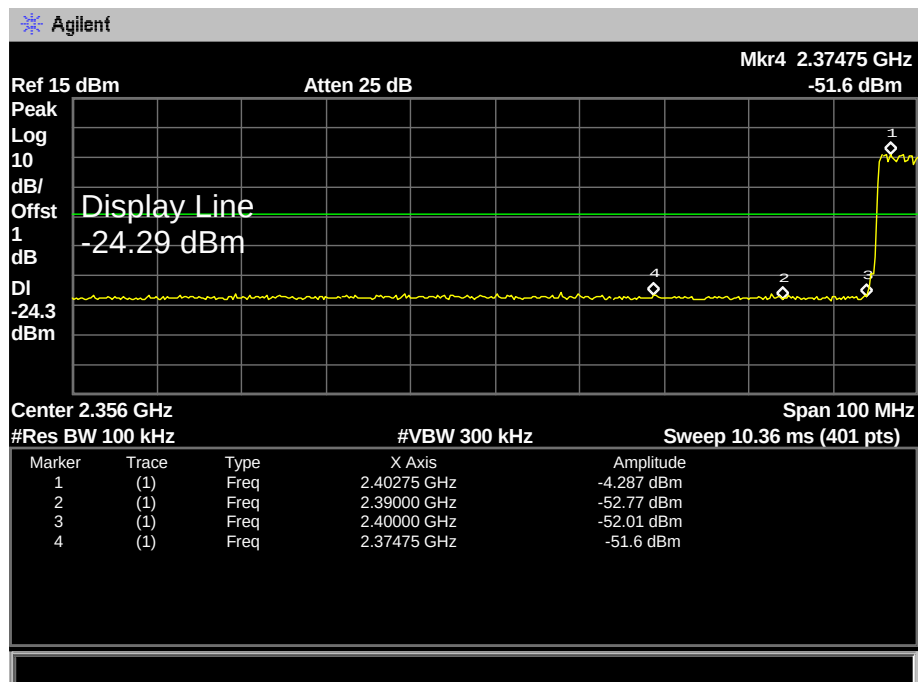

## 7. Number of Hopping Channel

### 7.1 Test Standard and Limit


#### 6.1.1 Test Standard

FCC Part 15.247 (a)(1)

#### 6.1.2 Test Limit

| Section | Test Item                 | Limit |
|---------|---------------------------|-------|
| 15.247  | Number of Hopping Channel | >15   |

### 7.2 Test Setup



### 7.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=100 KHz, VBW=100 KHz, Sweep time= Auto.

### 7.4 EUT Operating Condition



The EUT was set to the Hopping Mode by the Customer.


### 7.5 Test Data



| EUT:            | Loop           | Model Name :                | Loop-1 |
|-----------------|----------------|-----------------------------|--------|
| Temperature:    | 25°C           | Relative Humidity:          | 55%    |
| Test Voltage:   | DC 3.7V        |                             |        |
| Test Mode:      | Hopping Mode   |                             |        |
| Frequency Range | Test Mode      | Quantity of Hopping Channel | Limit  |
| 2402MHz~2480MHz | GFSK           | 79                          | >15    |
|                 | $\pi$ /4-DQPSK | 79                          |        |
|                 | 8-DPSK         | 79                          |        |

## GFSK Mode

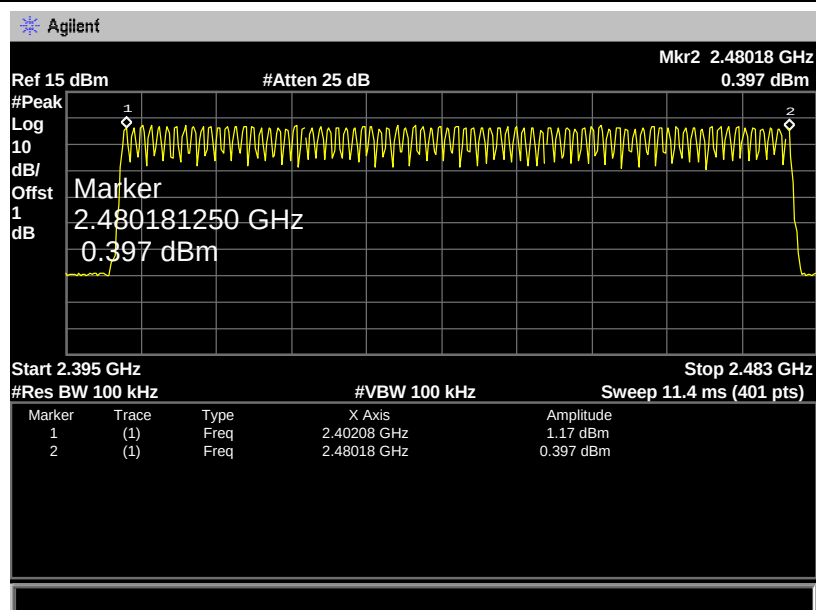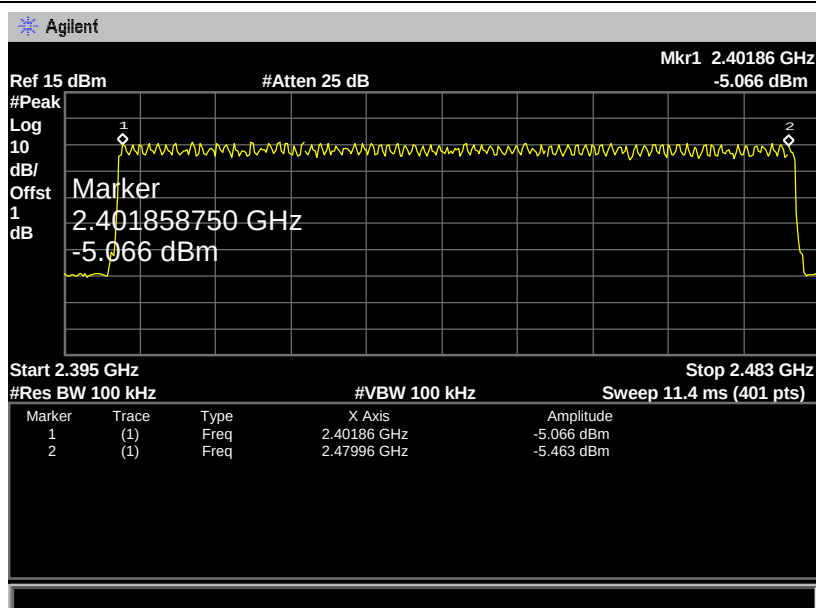 $\pi$  /4-DQPSK Mode

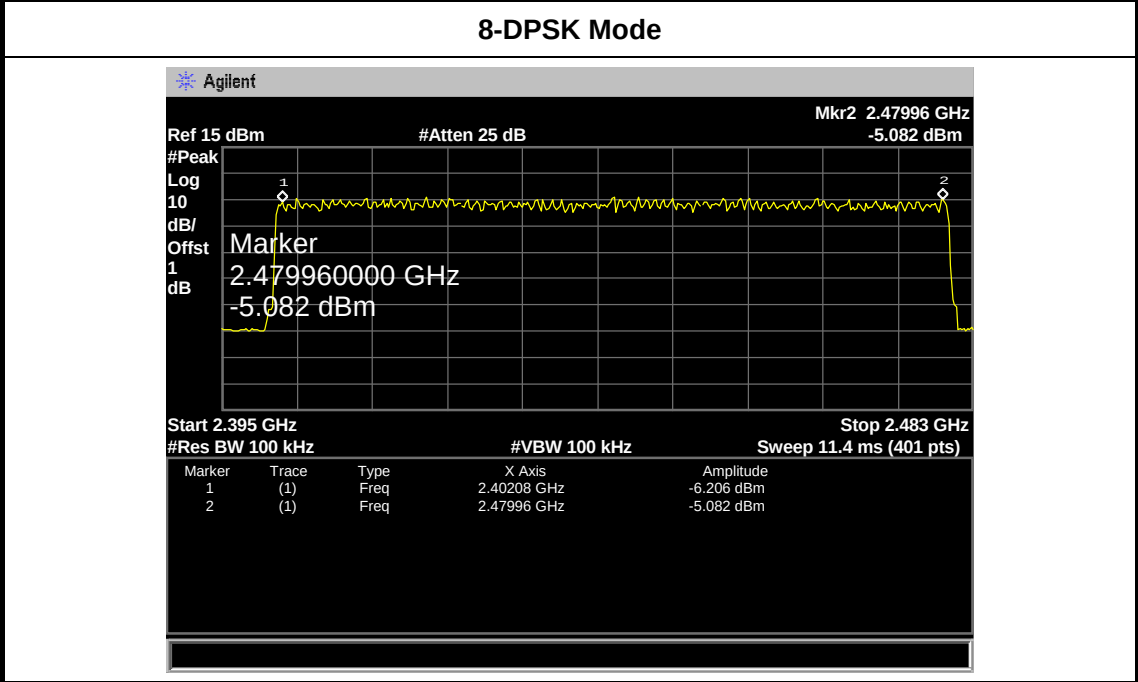




## 8. Average Time of Occupancy

### 8.1 Test Standard and Limit

- 8.1.1 Test Standard  
FCC Part 15.247 (a)(1)
- 8.1.2 Test Limit

| Section                                 | Test Item                    | Limit   |
|-----------------------------------------|------------------------------|---------|
| 15.247(a)(1)/ RSS-210<br>Annex 8(A8.1d) | Average Time of<br>Occupancy | 0.4 sec |

### 8.2 Test Setup



### 8.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting: RBW=1MHz, VBW=1MHz.
- (3) Use video trigger with the trigger level set to enable triggering only on full pulses.
- (4) Sweep Time is more than once pulse time.
- (5) Set the center frequency on any frequency would be measure and set the frequency span to zero.
- (6) Measure the maximum time duration of one single pulse.
- (7) Set the EUT for packet transmitting.
- (8) Measure the maximum time duration of one single pulse.

### 8.4 EUT Operating Condition

The average time of occupancy on any channel within the Period can be calculated with formulas:

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * (1600 / X) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\}$$
$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

Note: X=2 or 4 or 6 (1DH1=2, 1DH3=4, 1DH5=6. 2DH1=2, 2DH3=4, 2DH5=6. 3DH1=2,3DH3=4, 3DH5=6)

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

The EUT was set to the Hopping Mode by the Customer.


## 8.5 Test Data

|                                                                                                                                                                                                                                                                                                                                                                       |               |                     |                     |                    |            |        |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|---------------------|---------------------|--------------------|------------|--------|--|
| EUT:                                                                                                                                                                                                                                                                                                                                                                  |               | Loop                |                     | Model Name :       |            | Loop-1 |  |
| Temperature:                                                                                                                                                                                                                                                                                                                                                          |               | 25°C                |                     | Relative Humidity: |            | 55%    |  |
| Test Voltage:                                                                                                                                                                                                                                                                                                                                                         |               | DC 3.7V             |                     |                    |            |        |  |
| Test Mode:                                                                                                                                                                                                                                                                                                                                                            |               | Hopping Mode (GFSK) |                     |                    |            |        |  |
| Test Mode                                                                                                                                                                                                                                                                                                                                                             | Channel (MHz) | Pulse Time (ms)     | Total of Dwell (ms) | Period Time (s)    | Limit (ms) | Result |  |
| 1DH1                                                                                                                                                                                                                                                                                                                                                                  | 2441          | 0.450               | 144.00              | 31.60              | 400        | PASS   |  |
| 1DH3                                                                                                                                                                                                                                                                                                                                                                  | 2441          | 1.720               | 275.20              | 31.60              | 400        | PASS   |  |
| 1DH5                                                                                                                                                                                                                                                                                                                                                                  | 2441          | 3.000               | 320.00              | 31.60              | 400        | PASS   |  |
| 1DH1 Total of Dwell= Pulse Time*(1600/2)*31.6/79                                                                                                                                                                                                                                                                                                                      |               |                     |                     |                    |            |        |  |
| 1DH3 Total of Dwell= Pulse Time*(1600/4)*31.6/79                                                                                                                                                                                                                                                                                                                      |               |                     |                     |                    |            |        |  |
| 1DH5 Total of Dwell= Pulse Time*(1600/6)*31.6/79                                                                                                                                                                                                                                                                                                                      |               |                     |                     |                    |            |        |  |
| GFSK Hopping Mode 1DH1                                                                                                                                                                                                                                                                                                                                                |               |                     |                     |                    |            |        |  |
| 2441 MHz                                                                                                                                                                                                                                                                                                                                                              |               |                     |                     |                    |            |        |  |
| <div><div>Agilent</div><div><div>Ref 15 dBm</div><div>Atten 25 dB</div><div>Mkr1 Δ 450 μs<br/>1.382 dB</div><div>Peak Log 10 dB/Offst 1 dB</div><div>Marker Δ 450.000000 μs<br/>1.382 dB</div><div>W1 S2<br/>S3 FS<br/>AA</div><div>Center 2.441 GHz</div><div>Res BW 1 MHz</div><div>#VBW 1 MHz</div><div>Span 0 Hz</div><div>Sweep 4 ms (401 pts)</div></div></div> |               |                     |                     |                    |            |        |  |




**GFSK Hopping Mode 1DH3**


**2441 MHz**

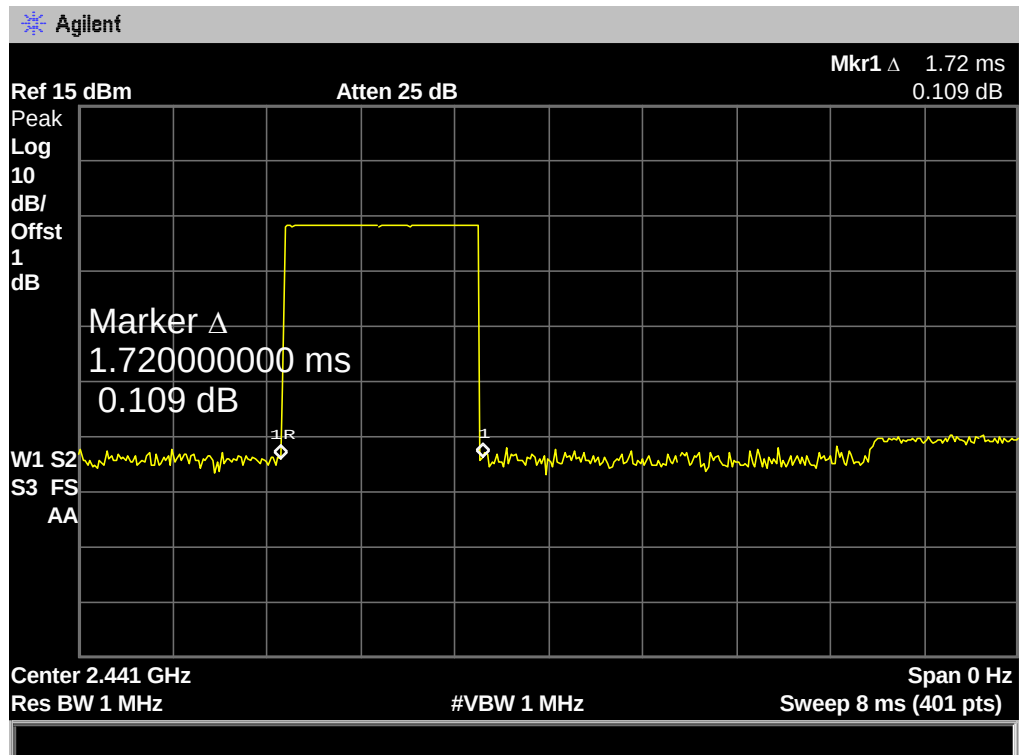



**GFSK Hopping Mode 1DH5**

**2441 MHz**

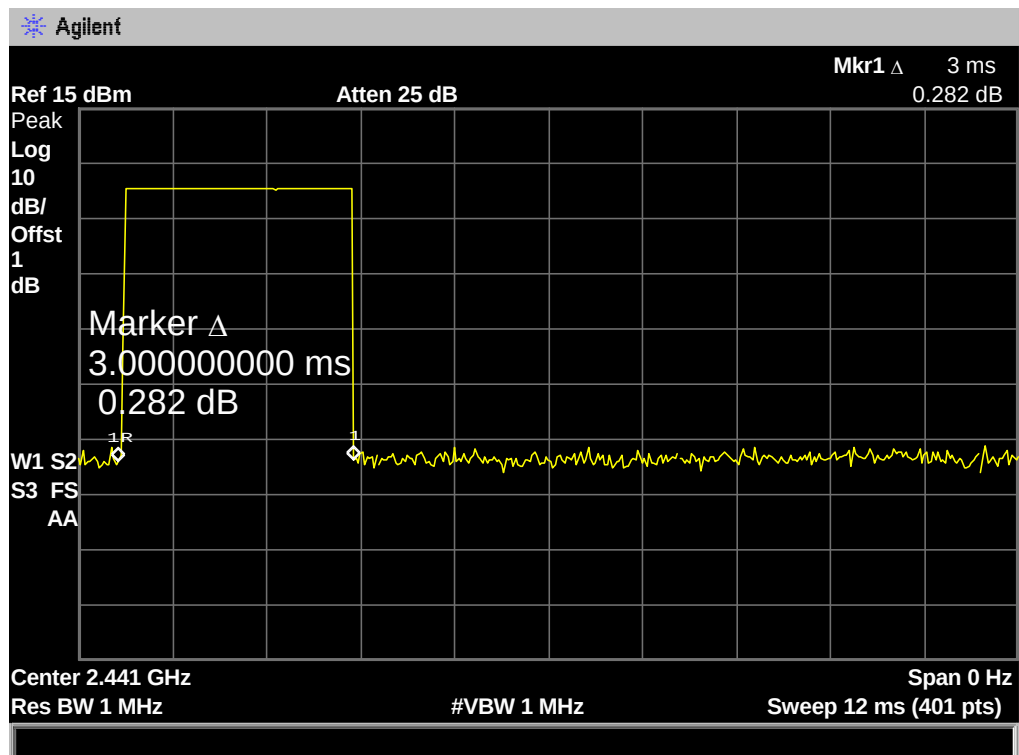

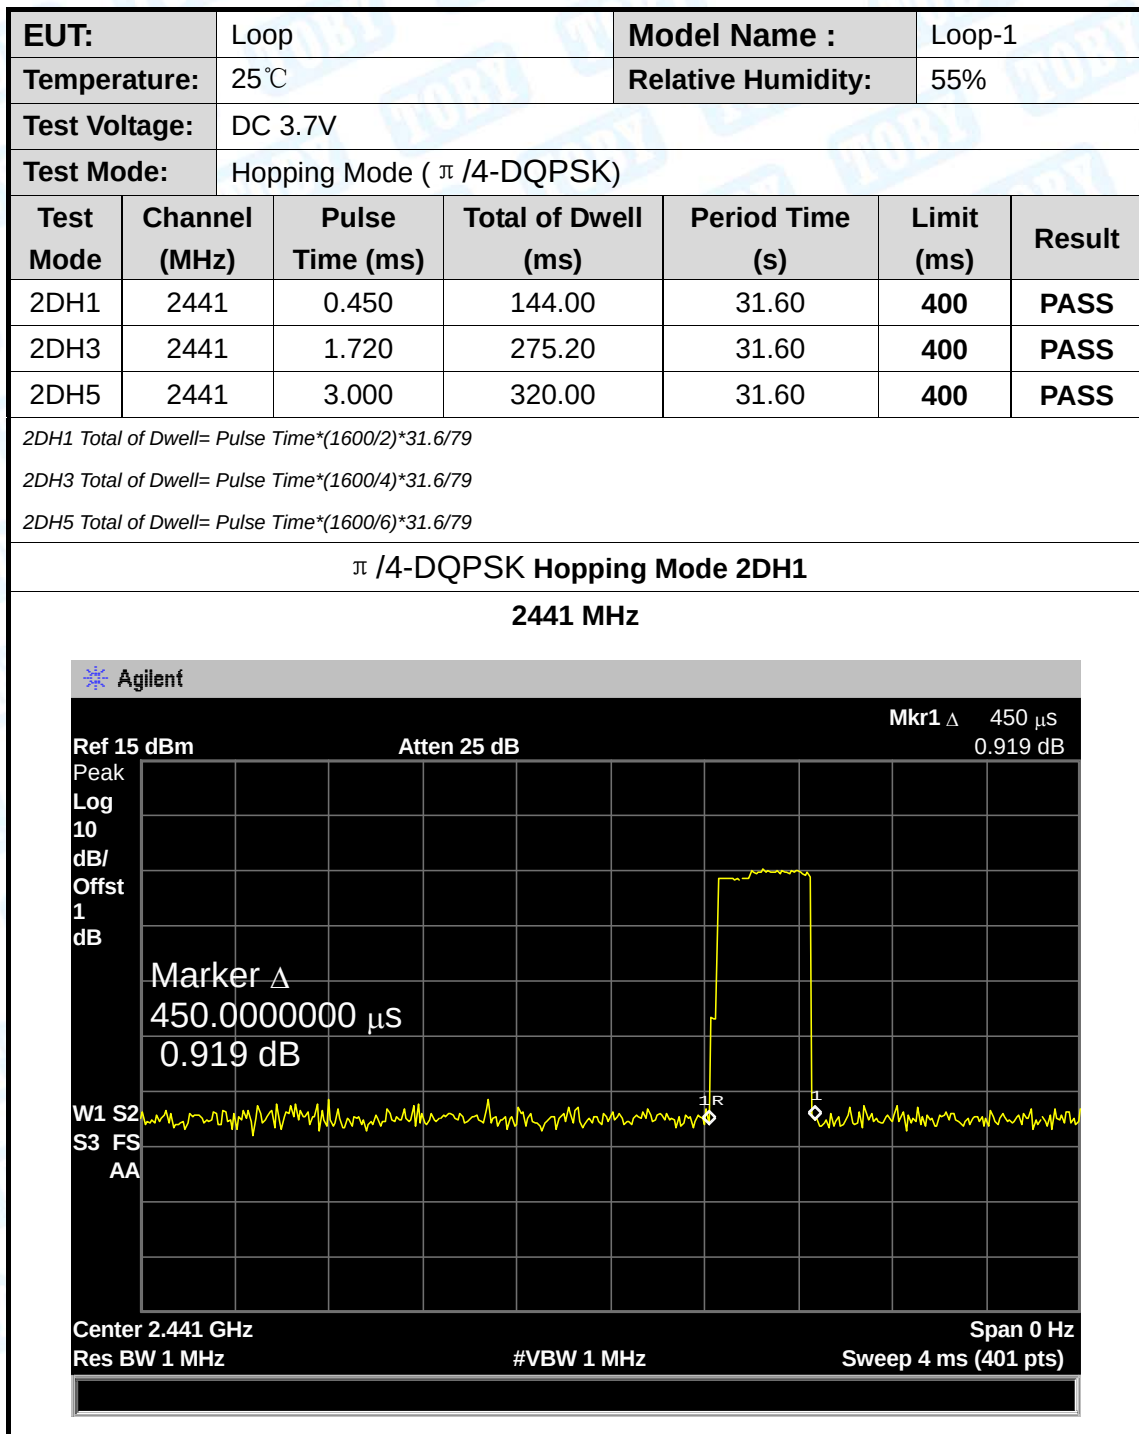



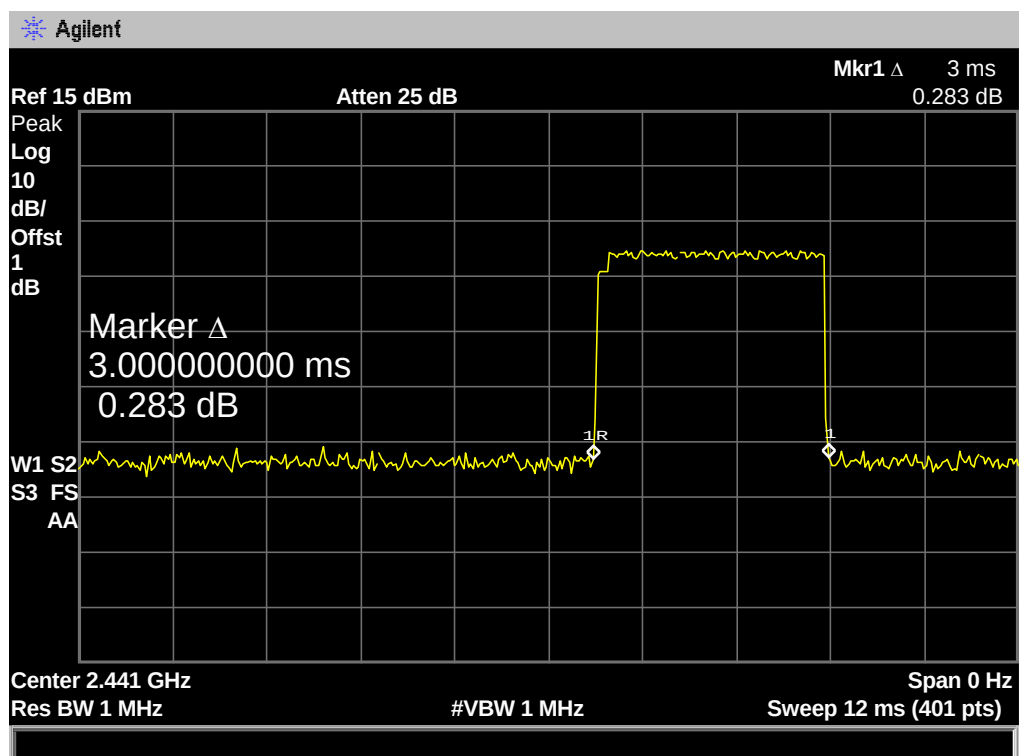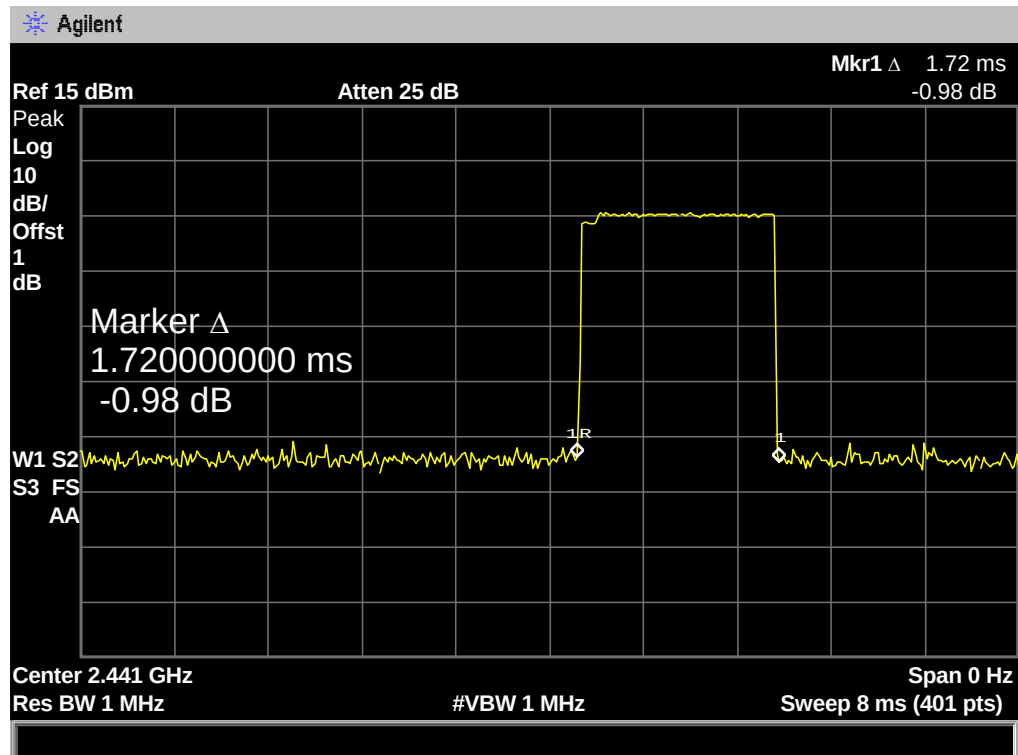

|                      |                      |                        |                            |                           |                   |               |  |
|----------------------|----------------------|------------------------|----------------------------|---------------------------|-------------------|---------------|--|
| <b>EUT:</b>          |                      | Loop                   |                            | <b>Model Name :</b>       |                   | Loop-1        |  |
| <b>Temperature:</b>  |                      | 25°C                   |                            | <b>Relative Humidity:</b> |                   | 55%           |  |
| <b>Test Voltage:</b> |                      | DC 3.7V                |                            |                           |                   |               |  |
| <b>Test Mode:</b>    |                      | Hopping Mode (8-DPSK)  |                            |                           |                   |               |  |
| <b>Test Mode</b>     | <b>Channel (MHz)</b> | <b>Pulse Time (ms)</b> | <b>Total of Dwell (ms)</b> | <b>Period Time (s)</b>    | <b>Limit (ms)</b> | <b>Result</b> |  |
| 3DH1                 | 2441                 | 0.450                  | 144.00                     | 31.60                     | 400               | PASS          |  |
| 3DH3                 | 2441                 | 1.720                  | 275.20                     | 31.60                     | 400               | PASS          |  |
| 3DH5                 | 2441                 | 3.000                  | 320.00                     | 31.60                     | 400               | PASS          |  |


2DH1 Total of Dwell= Pulse Time\*(1600/2)\*31.6/79

2DH3 Total of Dwell= Pulse Time\*(1600/4)\*31.6/79



2DH5 Total of Dwell= Pulse Time\*(1600/6)\*31.6/79

### 8-DPSK Hopping Mode 3DH1

2441 MHz

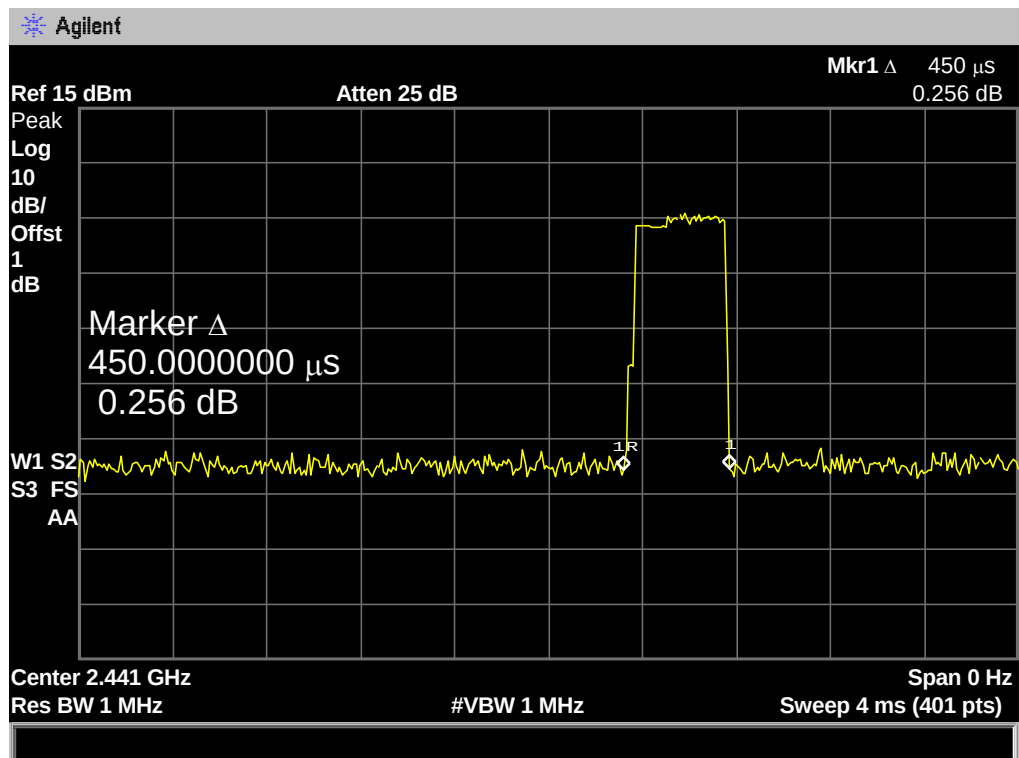



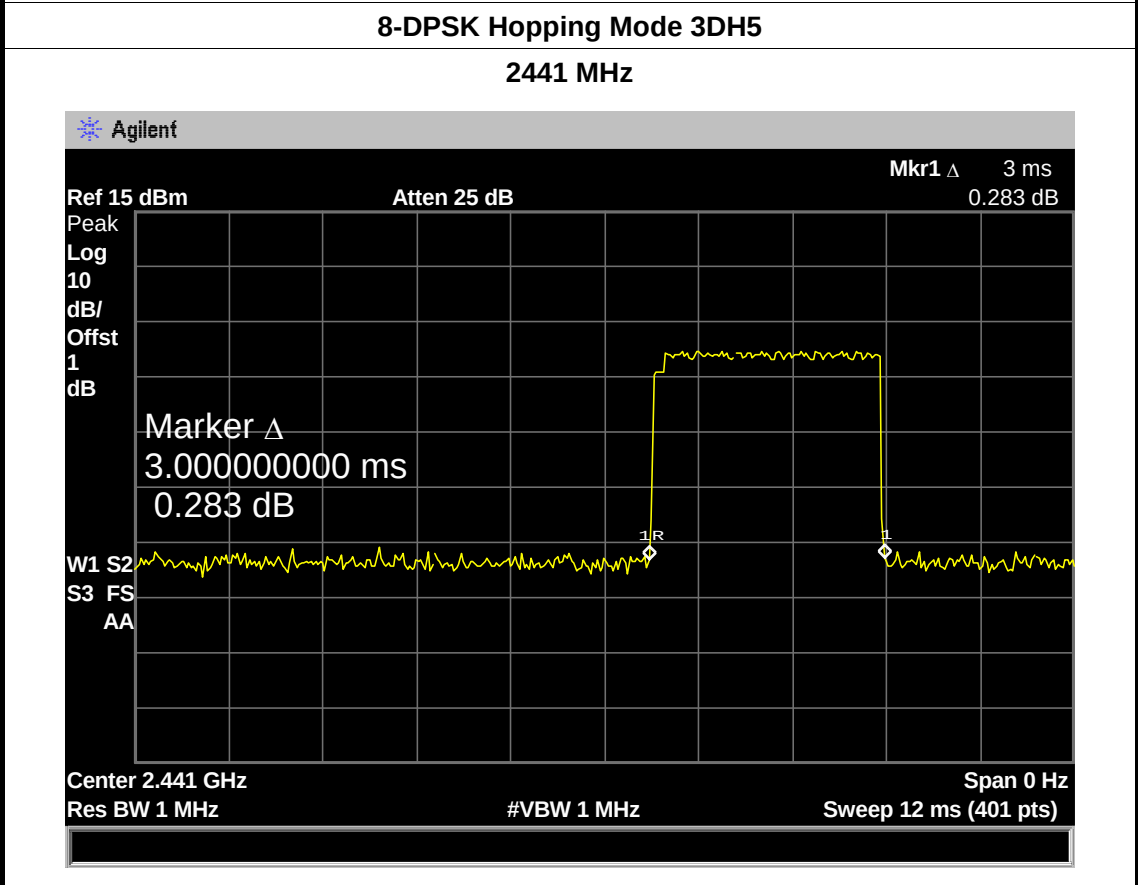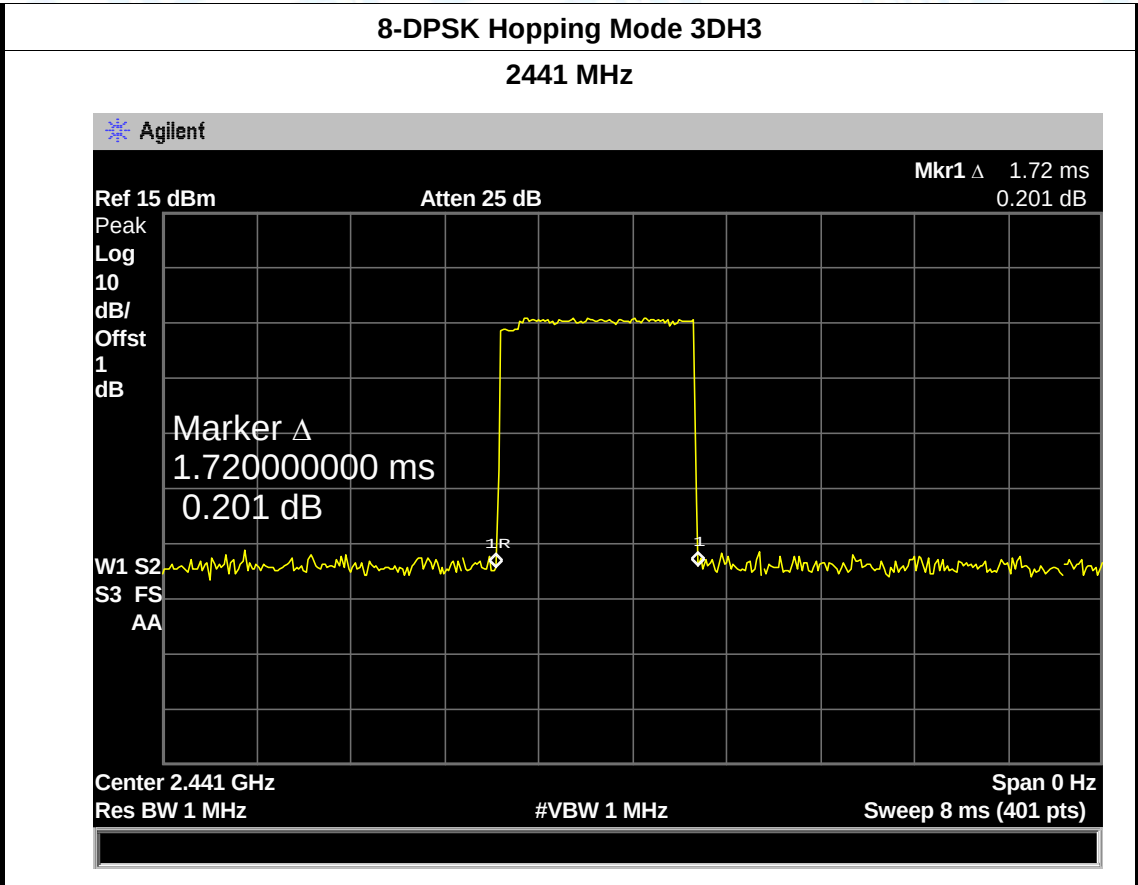

## 9. Channel Separation and Bandwidth Test


### 9.1 Test Standard and Limit

9.1.1 Test Standard  
FCC Part 15.247

9.1.2 Test Limit

| Test Item          | Limit                                                                      | Frequency Range(MHz) |
|--------------------|----------------------------------------------------------------------------|----------------------|
| Bandwidth          | $\leq 1$ MHz<br>(20dB bandwidth)                                           | 2400~2483.5          |
| Channel Separation | $> 25$ KHz or $>$ two-thirds of<br>the 20 dB bandwidth<br>Which is greater | 2400~2483.5          |

### 9.2 Test Setup



### 9.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Channel Separation: RBW=30 kHz, VBW=100 kHz.  
Bandwidth: RBW=30 kHz, VBW=100 kHz.
- (3) The bandwidth is measured at an amplitude level reduced 20dB from the reference level. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst –case (i.e the widest) bandwidth.
- (4) Measure the channel separation the spectrum analyzer was set to Resolution Bandwidth:30 kHz, and Video Bandwidth:100 kHz. Sweep Time set auto.

### 9.4 EUT Operating Condition


The EUT was set to the Hopping Mode for Channel Separation Test and continuously transmitting for the Bandwidth Test.



## 9.5 Test Data


| <b>EUT:</b>             | Loop           | <b>Model Name :</b>       | Loop-1                    |
|-------------------------|----------------|---------------------------|---------------------------|
| <b>Temperature:</b>     | 25°C           | <b>Relative Humidity:</b> | 55%                       |
| <b>Test Voltage:</b>    | DC 3.7V        |                           |                           |
| <b>Test Mode:</b>       | TX Mode (GFSK) |                           |                           |
| Channel frequency (MHz) | 99% OBW (kHz)  | 20dB Bandwidth (kHz)      | 20dB Bandwidth *2/3 (kHz) |
| 2402                    | 940.1731       | 1052.00                   | 701.33                    |
| 2441                    | 941.8376       | 1053.00                   | 702.00                    |
| 2480                    | 947.3241       | 1045.00                   | 696.67                    |

| GFSK TX Mode                                                                                                                                                                                                                                                                                                                                                                                                                           |  |  |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| 2402 MHz                                                                                                                                                                                                                                                                                                                                                                                                                               |  |  |  |
|  <p>Agilent</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 2.402000000 GHz</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 5 ms (401 pts)</p> <p>Occupied Bandwidth 940.1731 kHz</p> <p>Occ BW % Pwr 99.00 % x dB -20.00 dB</p> <p>Transmit Freq Error -5.313 kHz x dB Bandwidth 1.052 MHz</p> |  |  |  |

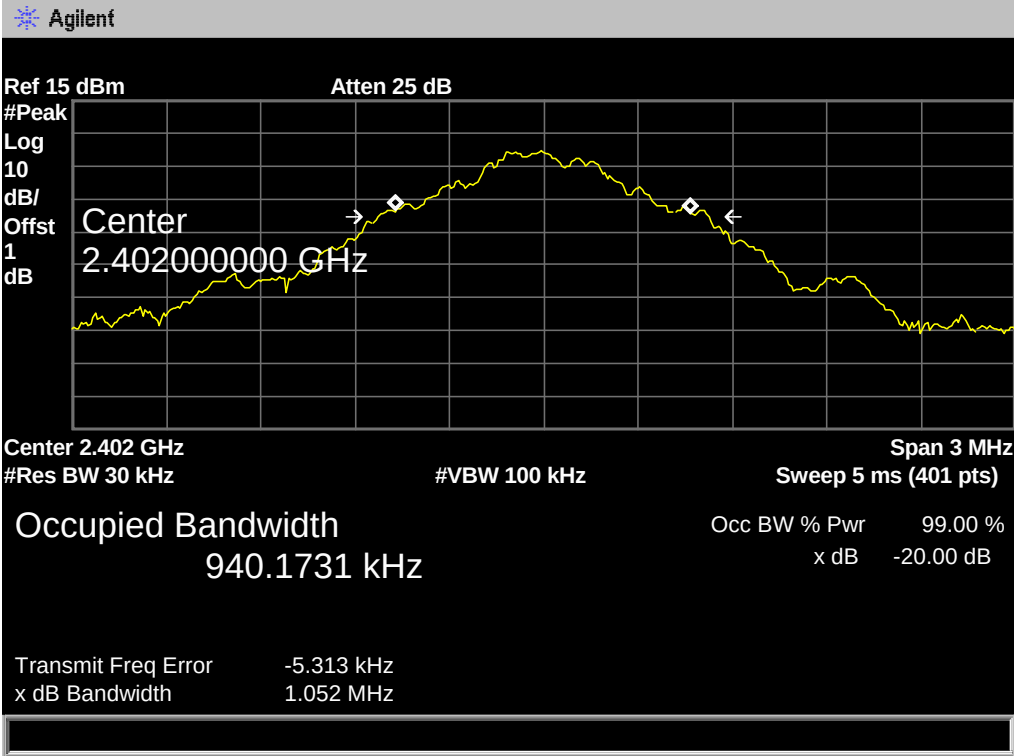
GFSK TX Mode

2441 MHz

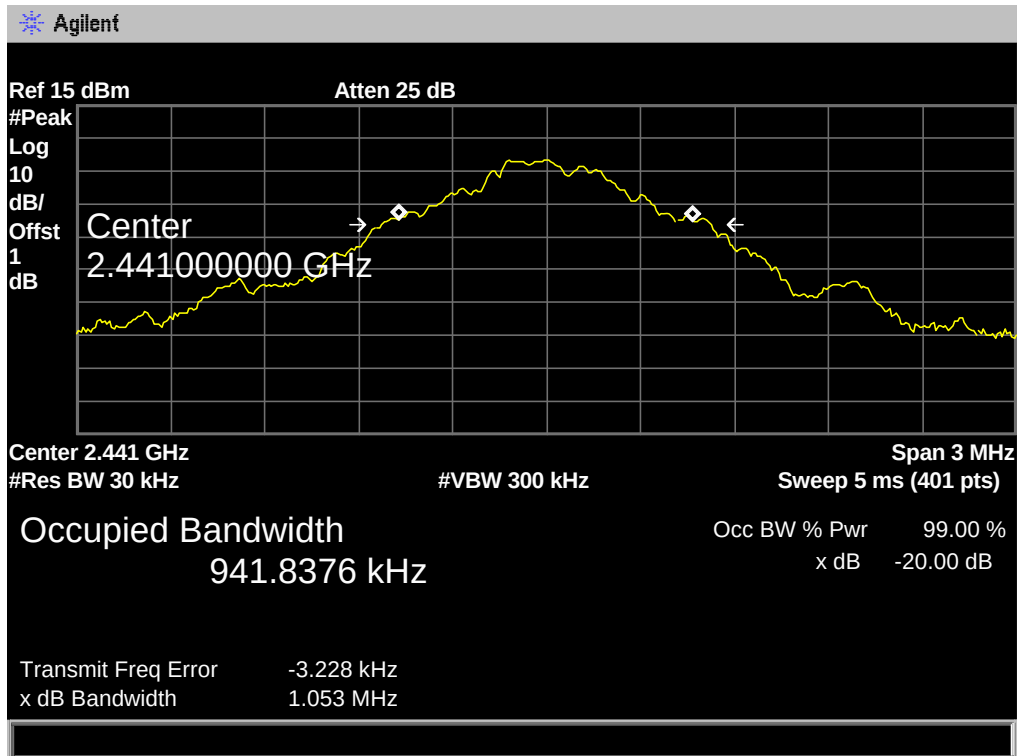


GFSK TX Mode

2480 MHz

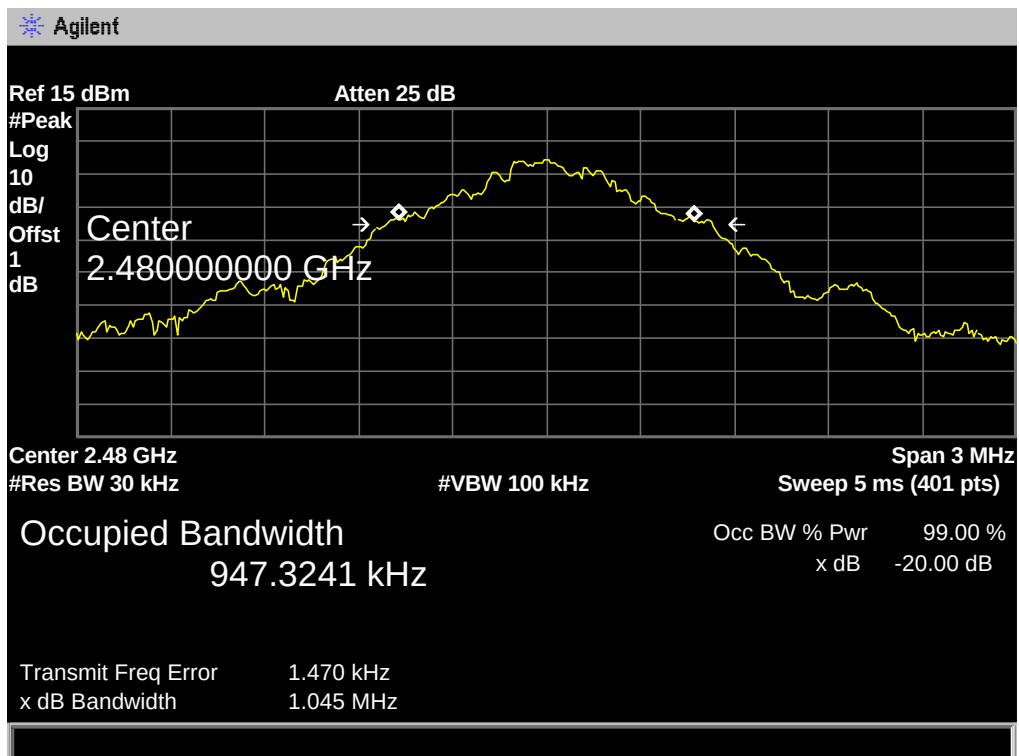




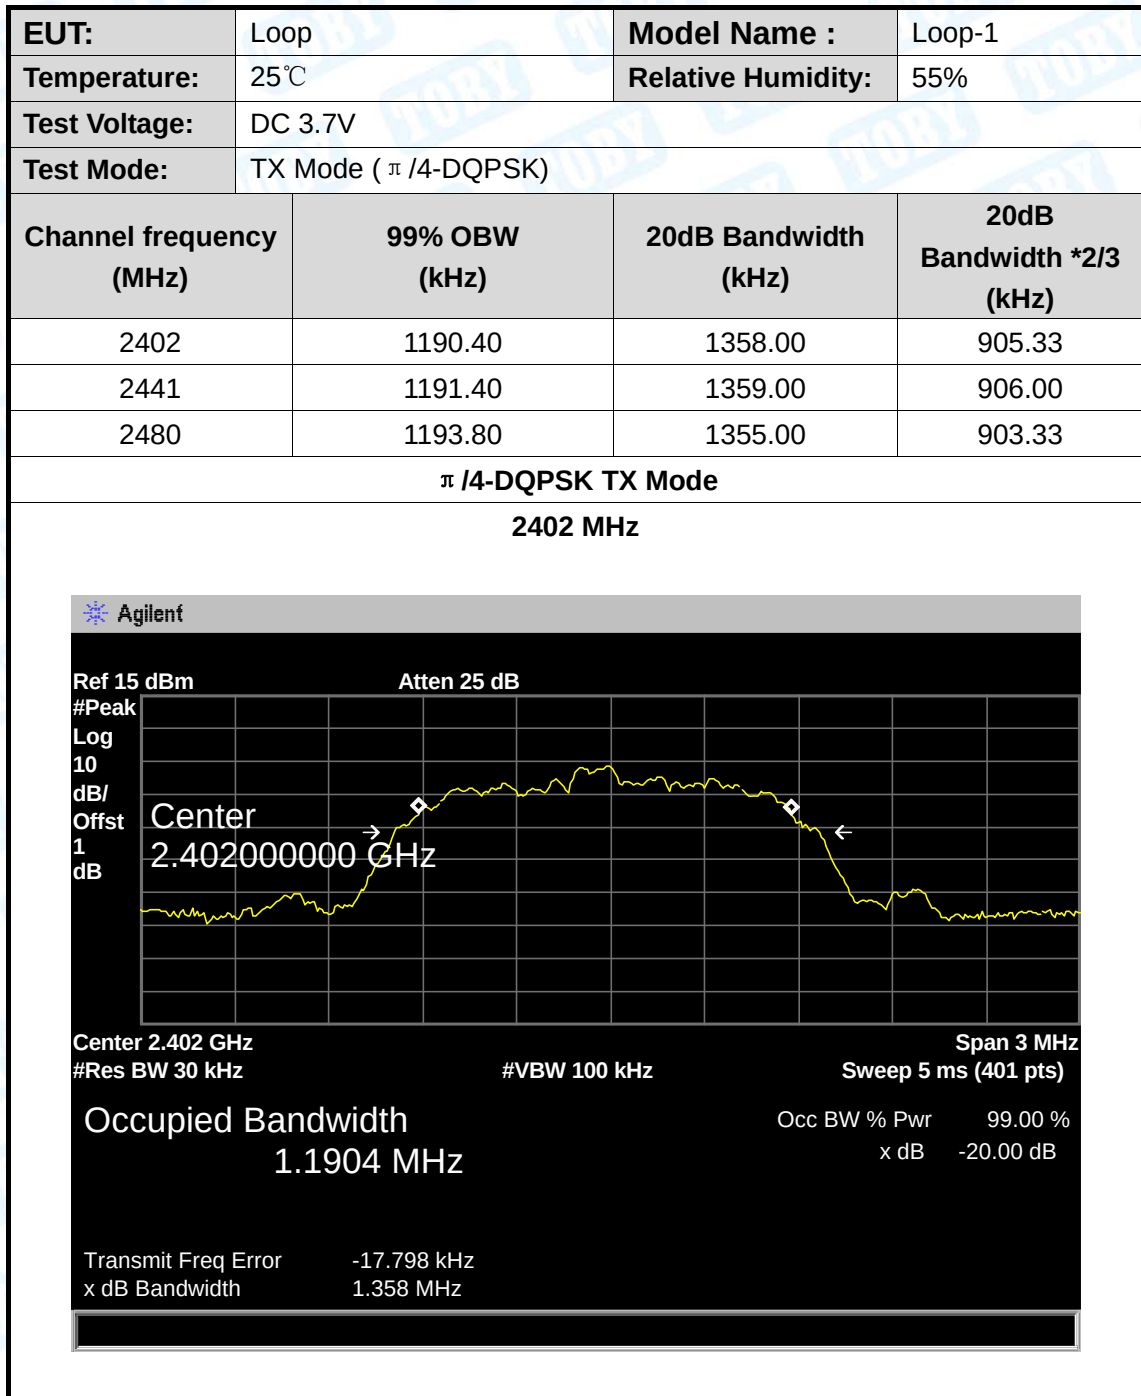


$\pi$  /4-DQPSK TX Mode

2441 MHz

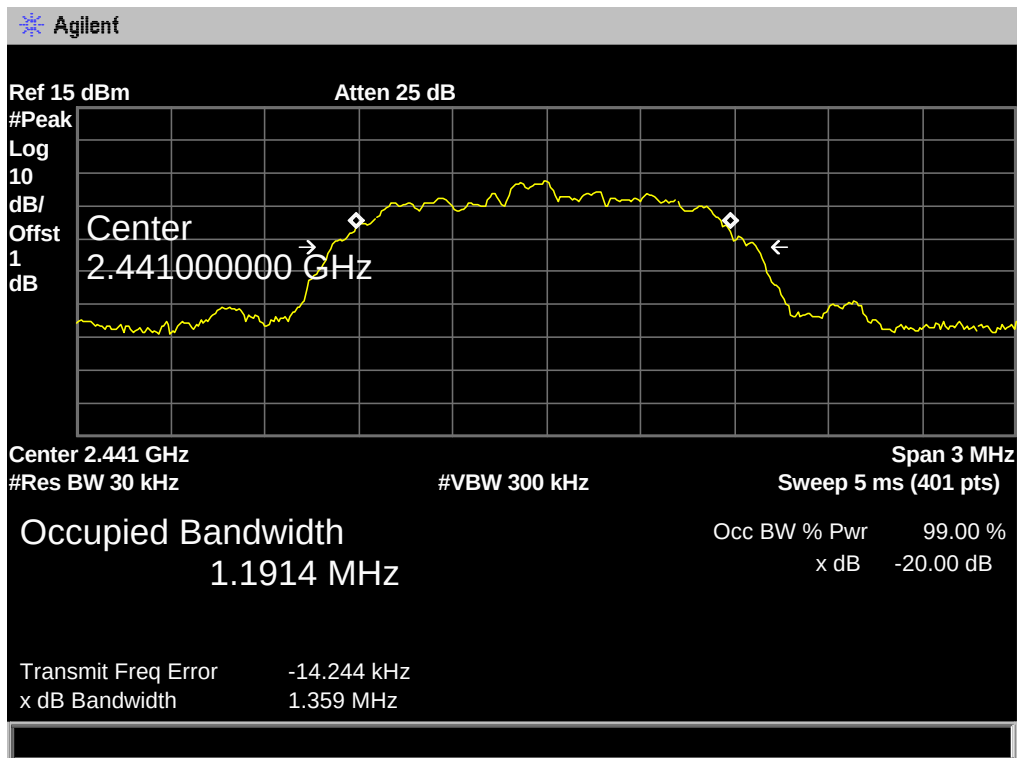

$\pi$  /4-DQPSK TX Mode

2480 MHz

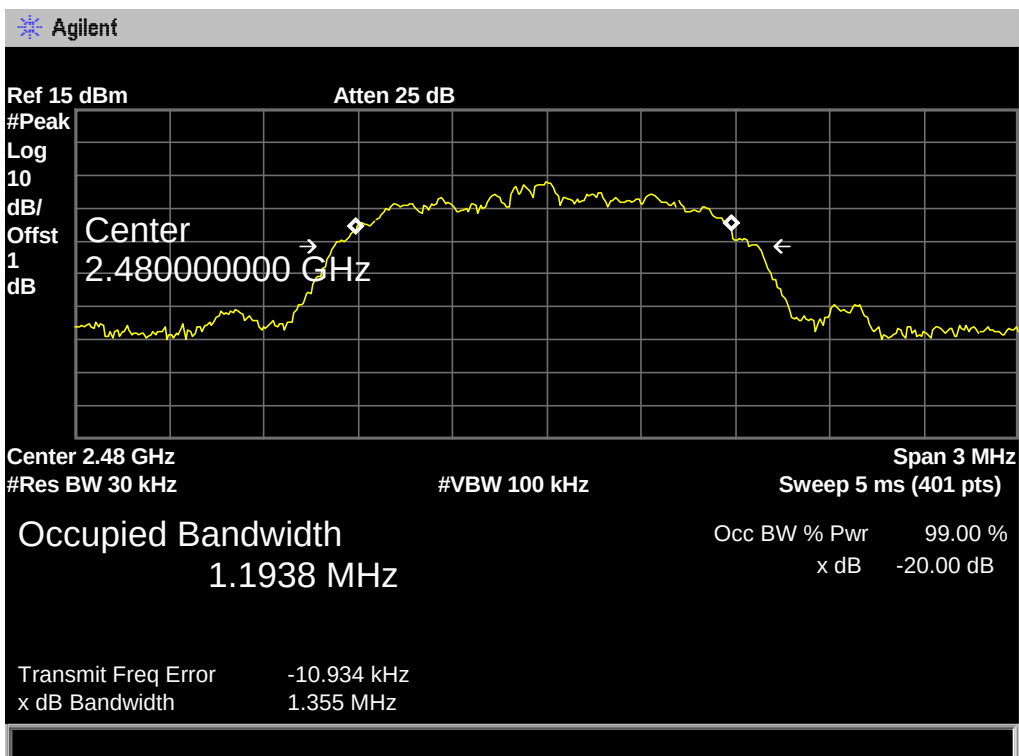




TB-RF-074-1.0


8-DPSK TX Mode

2441 MHz

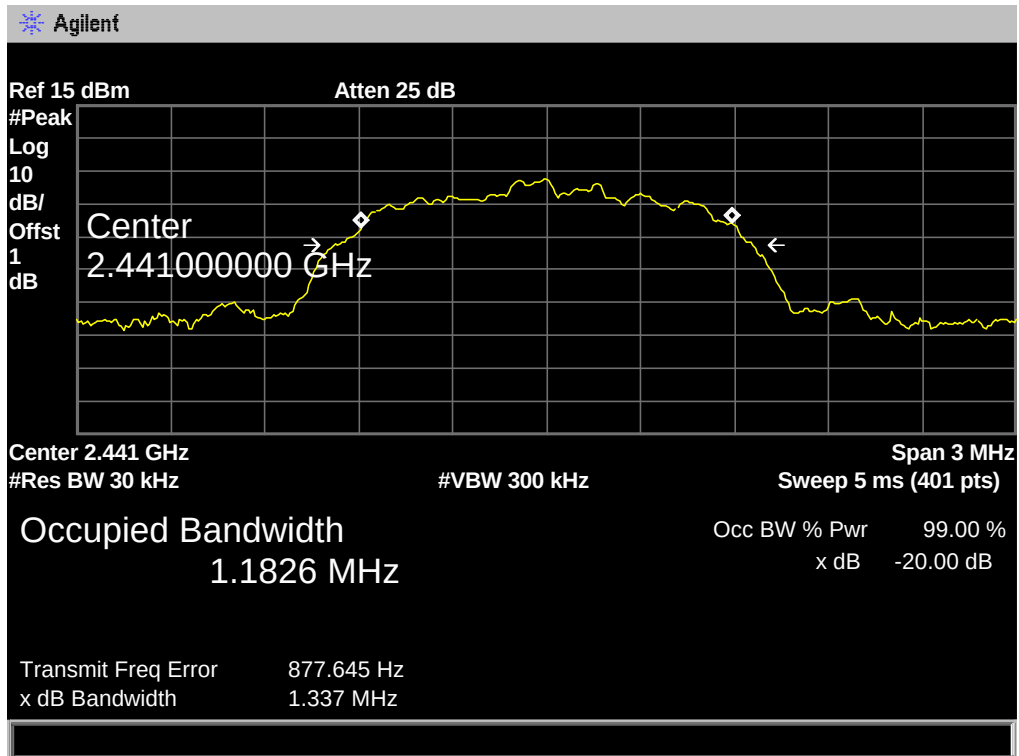


8-DPSK TX Mode

2480 MHz

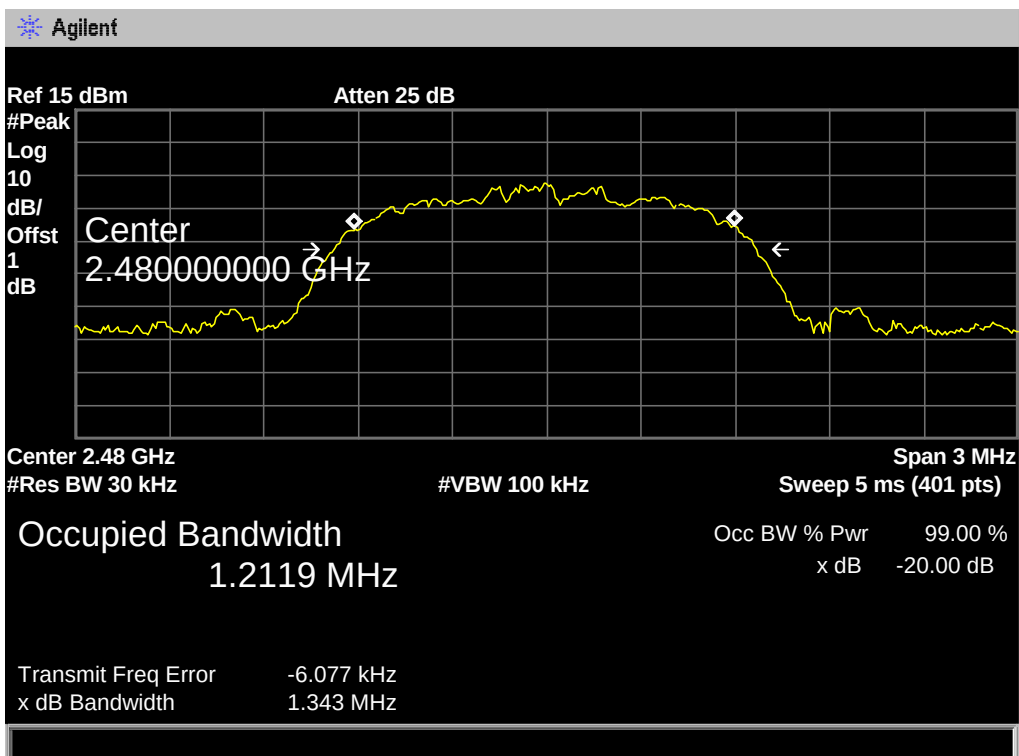




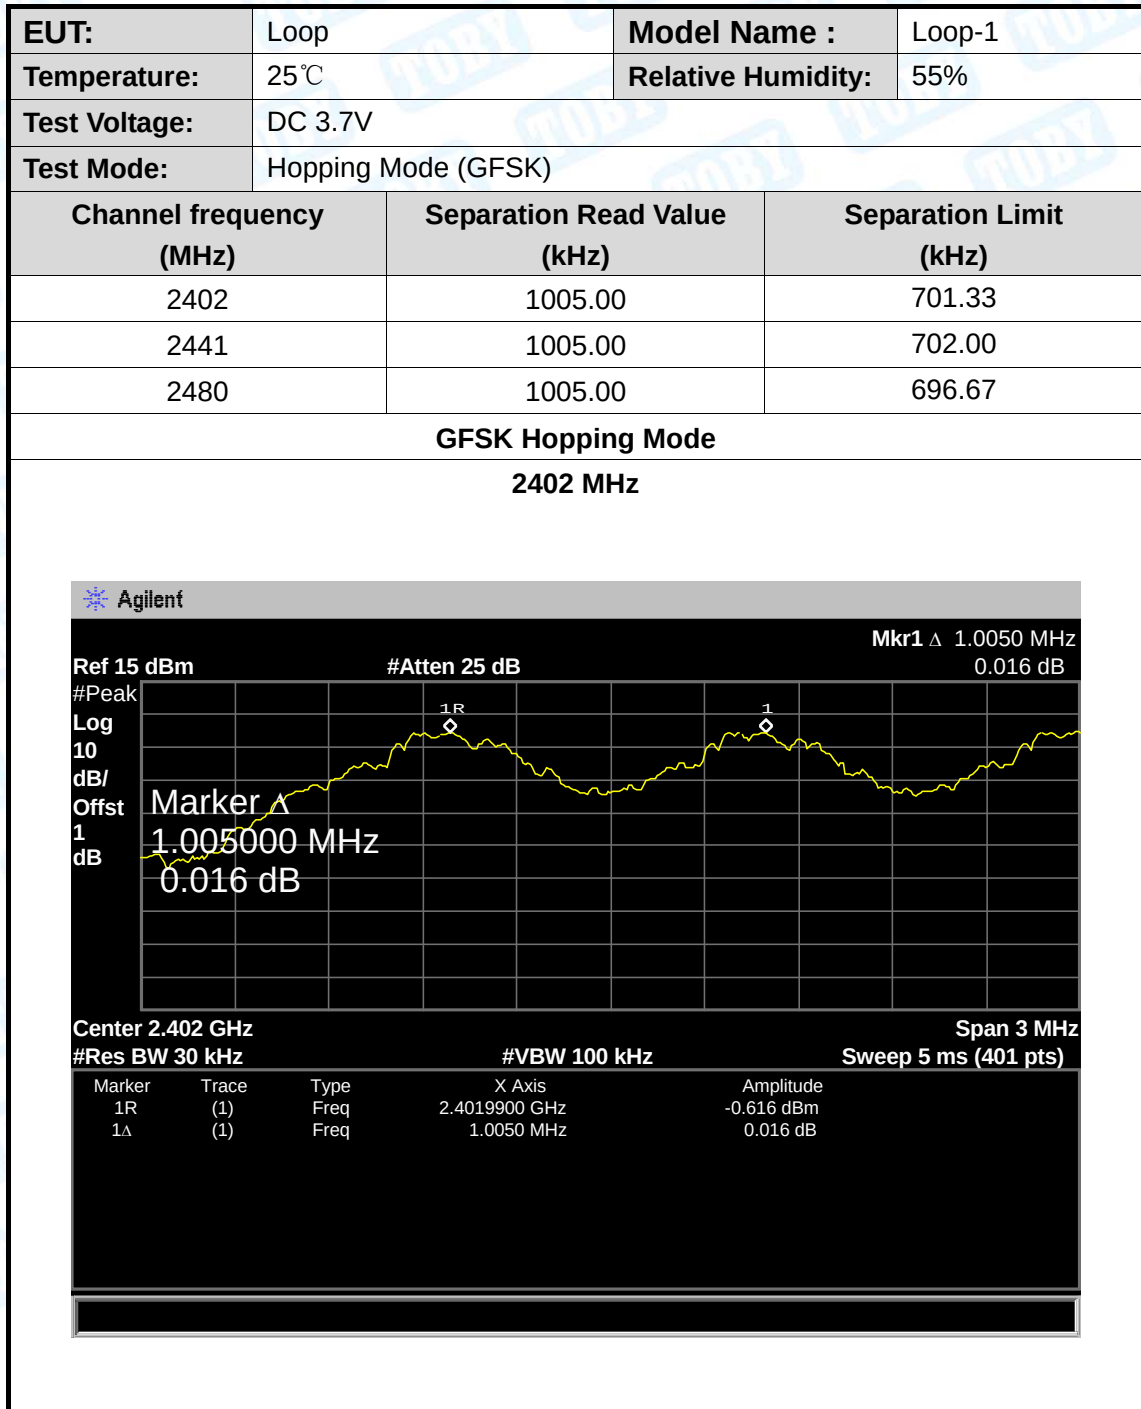


GFSK Hopping Mode

2441 MHz

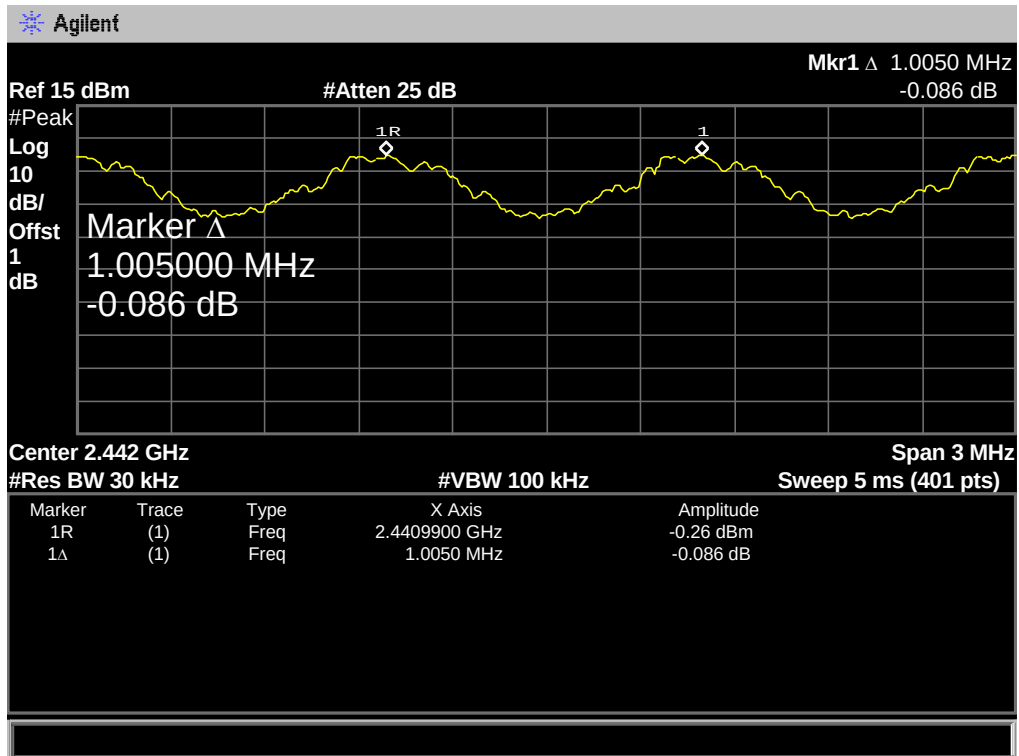


GFSK Hopping Mode


2480 MHz

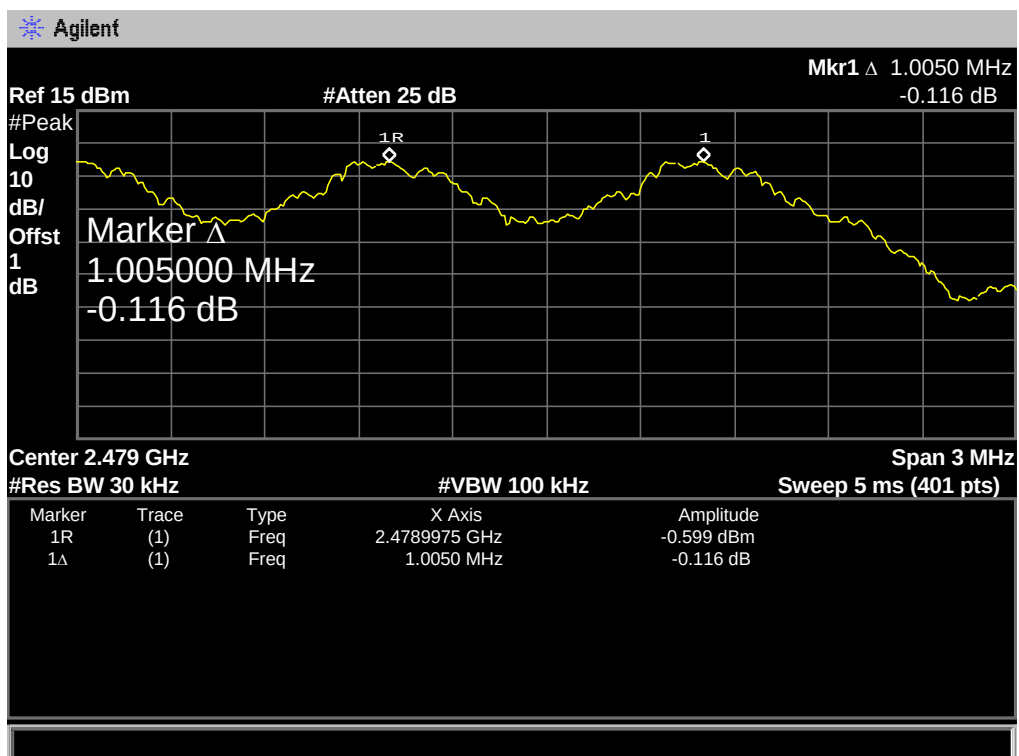




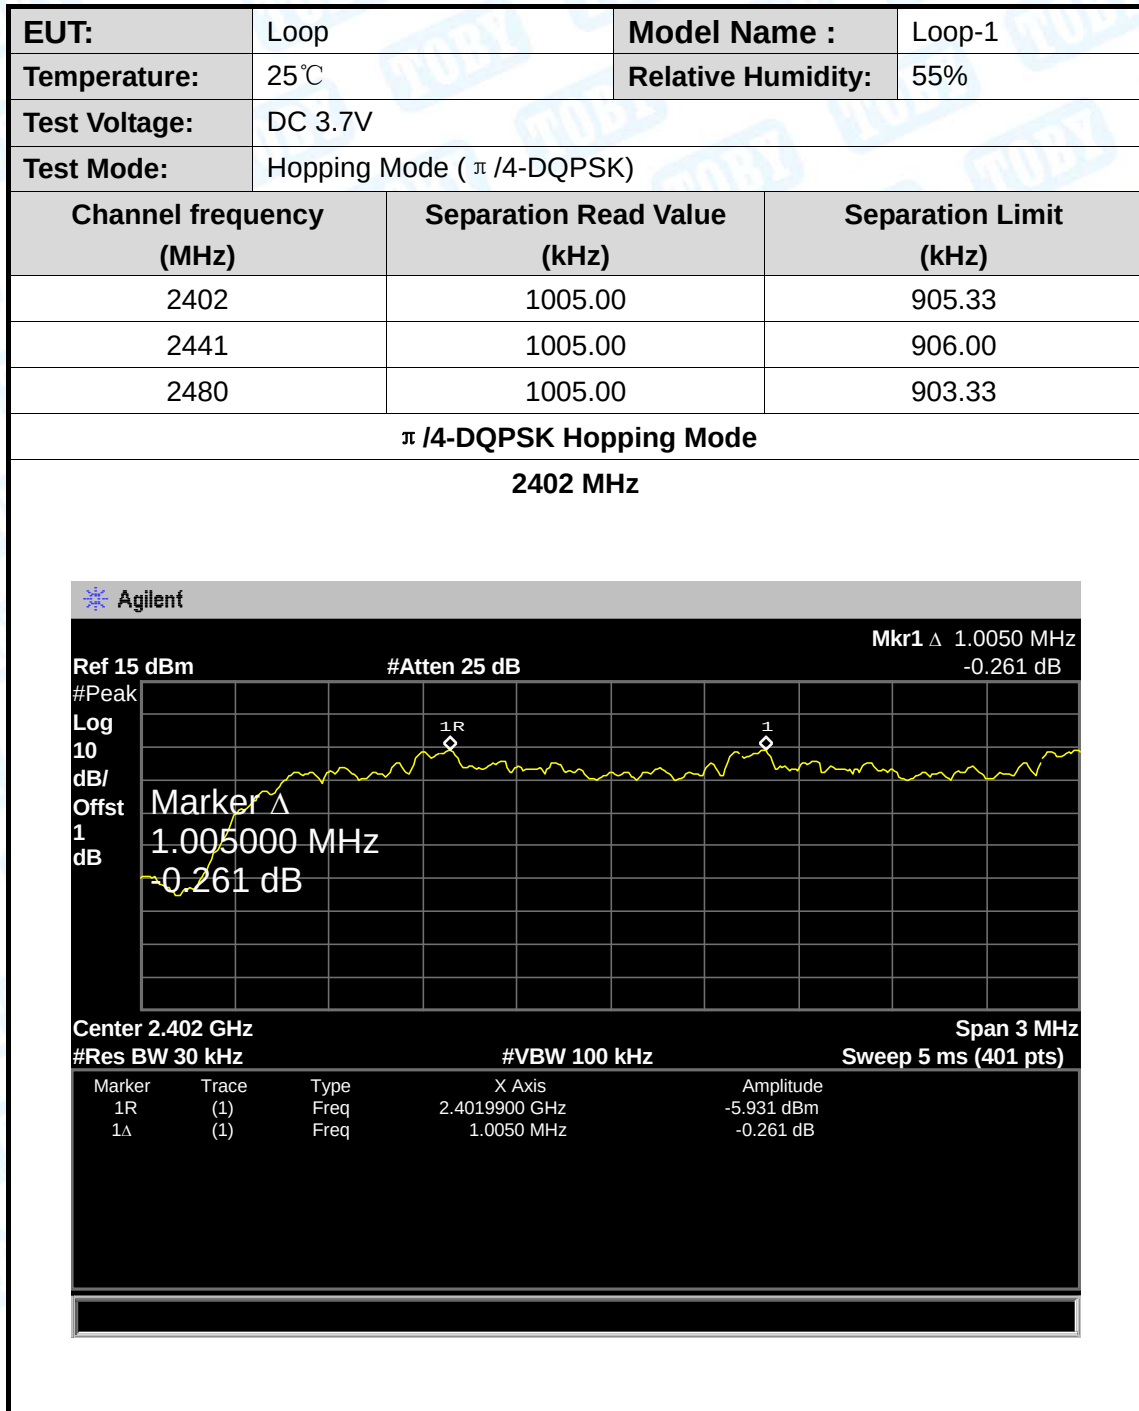


2441 MHz

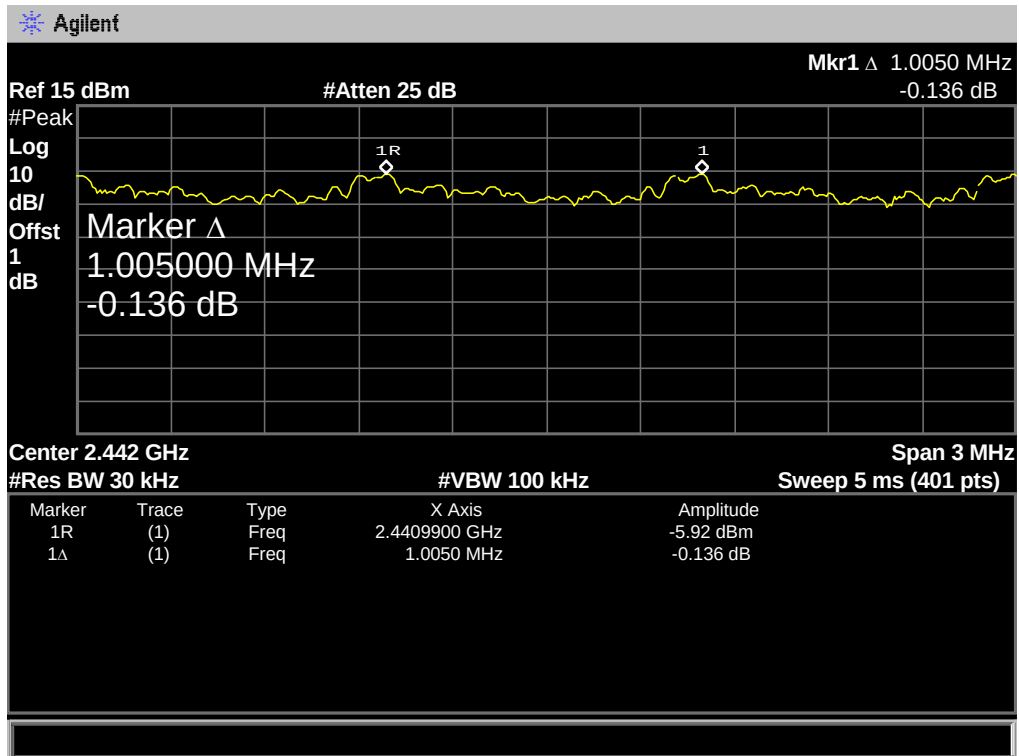

2480 MHz

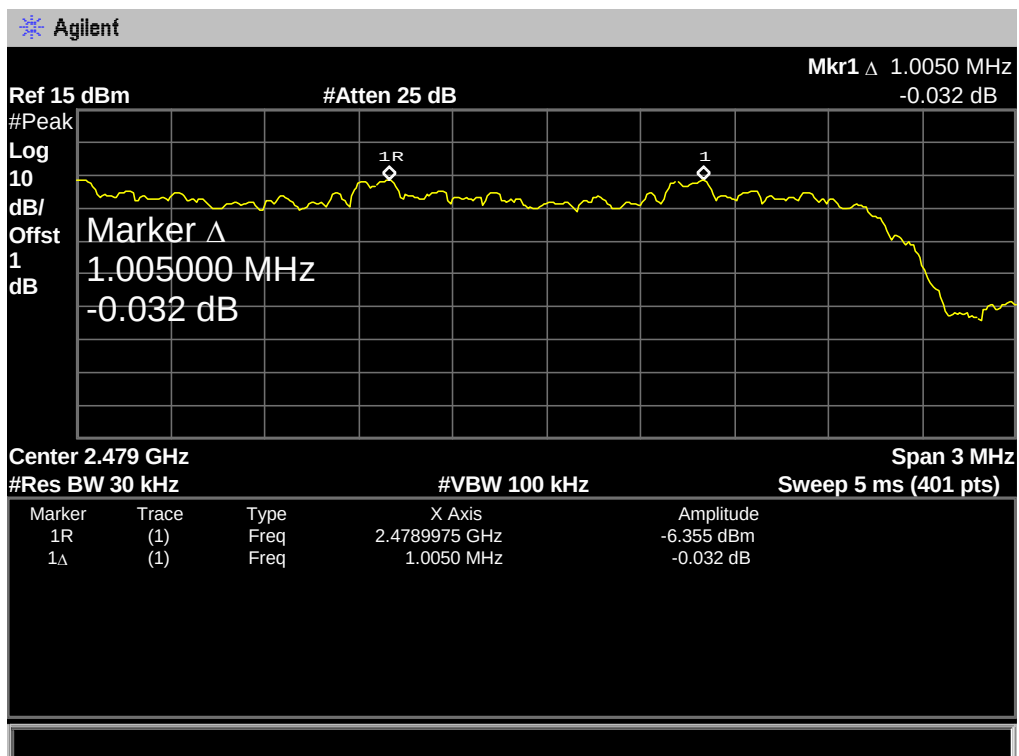




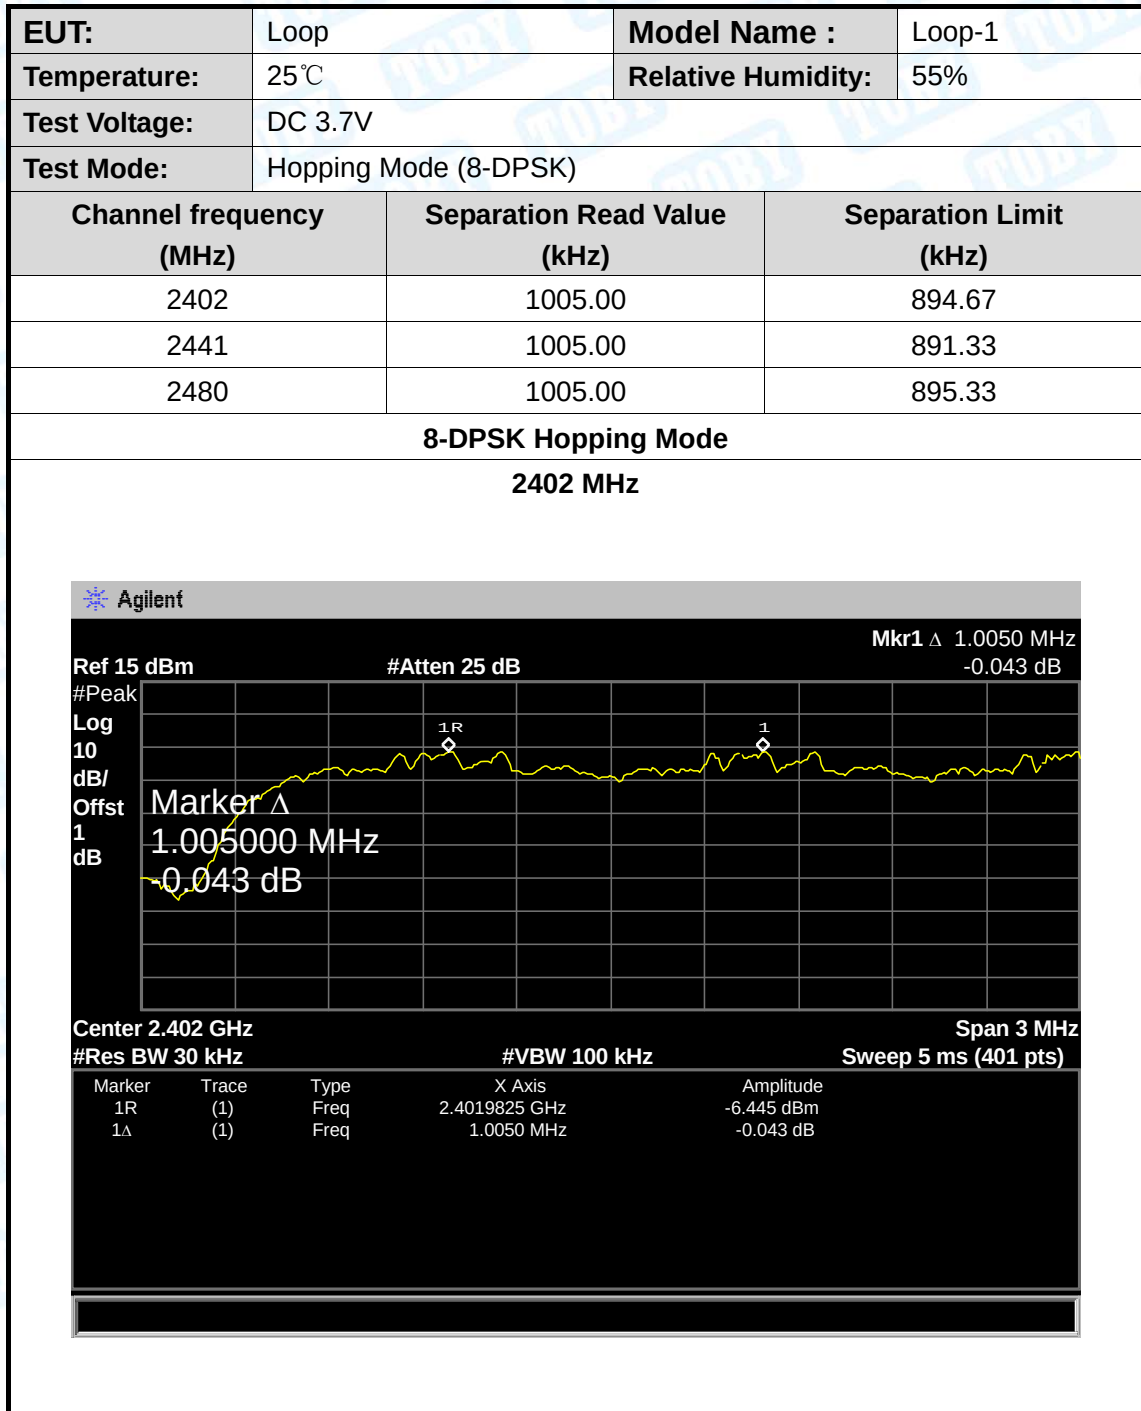


8-DPSK Hopping Mode

2441 MHz

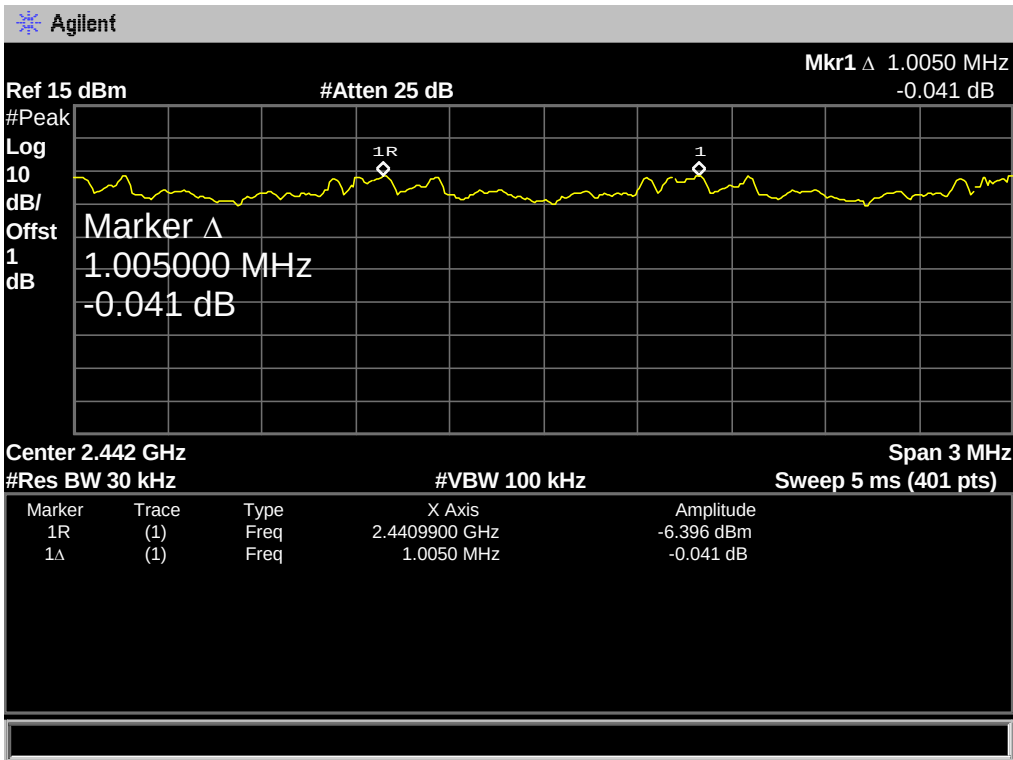

8-DPSK Hopping Mode

2480 MHz

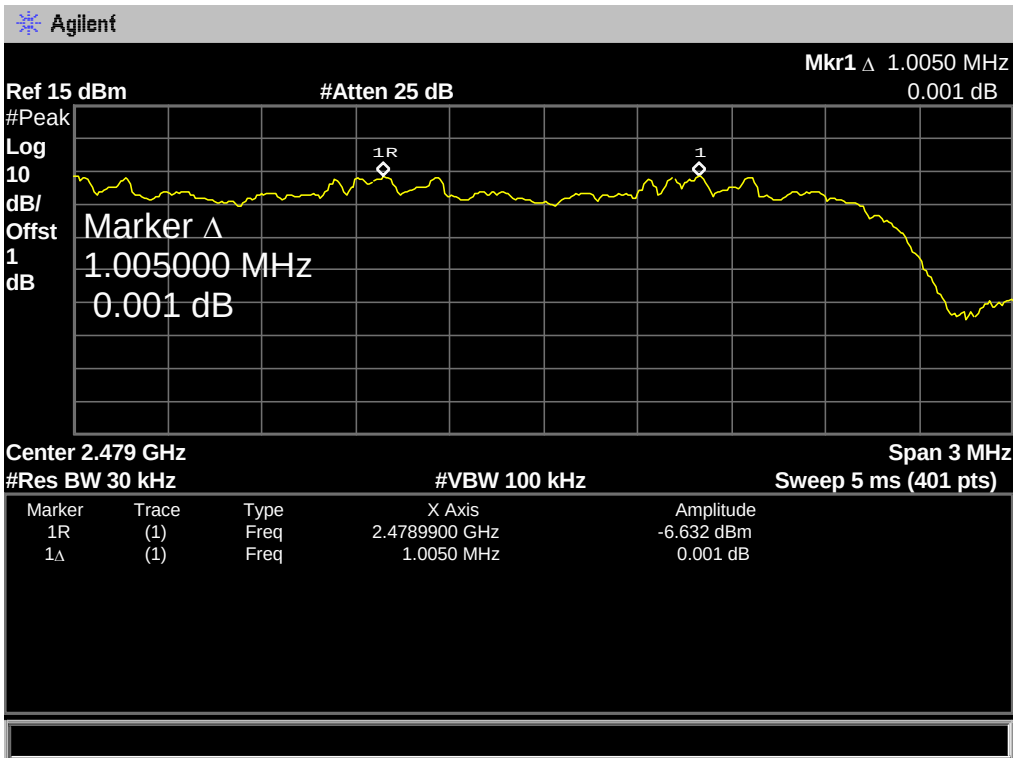



## 10. Peak Output Power Test

### 10.1 Test Standard and Limit


#### 10.1.1 Test Standard

FCC Part 15.247 (b) (1)

#### 10.1.2 Test Limit

| Test Item         | Limit                                                          | Frequency Range(MHz) |
|-------------------|----------------------------------------------------------------|----------------------|
| Peak Output Power | Hopping Channels>75<br>Power<1W(30dBm)<br>Other <125 mW(21dBm) | 2400~2483.5          |

### 10.2 Test Setup



### 10.3 Test Procedure

- (1) The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above.
- (2) Spectrum Setting:  
Peak Detector: RBW=1 MHz, VBW=3 MHz for bandwidth less than 1MHz.  
RBW=3 MHz, VBW=3 MHz for bandwidth more than 1MHz.

### 10.4 EUT Operating Condition

The EUT was set to continuously transmitting in the max power during the test.

## 10.5 Test Data

|                         |                   |                    |        |
|-------------------------|-------------------|--------------------|--------|
| EUT:                    | Loop              | Model Name :       | Loop-1 |
| Temperature:            | 25°C              | Relative Humidity: | 55%    |
| Test Voltage:           | DC 3.7V           |                    |        |
| Test Mode:              | TX Mode (GFSK)    |                    |        |
| Channel frequency (MHz) | Test Result (dBm) | Limit (dBm)        |        |
| 2402                    | 1.123             | 21                 |        |
| 2441                    | 1.164             |                    |        |
| 2480                    | 1.161             |                    |        |
| GFSK TX Mode            |                   |                    |        |
| 2402 MHz                |                   |                    |        |

Agilent

Ref 15 dBm

Atten 25 dB

Mkr1 2.4021500 GHz  
1.123 dBm

Peak

Log

10

dB/

Offst

1

dB

Marker

2.402150000 GHz

1.123 dBm

M1 S2

S3 LC

AA

Center 2.402 GHz


#Res BW 3 MHz


#VBW 3 MHz

Span 5 MHz



Sweep 5 ms (401 pts)




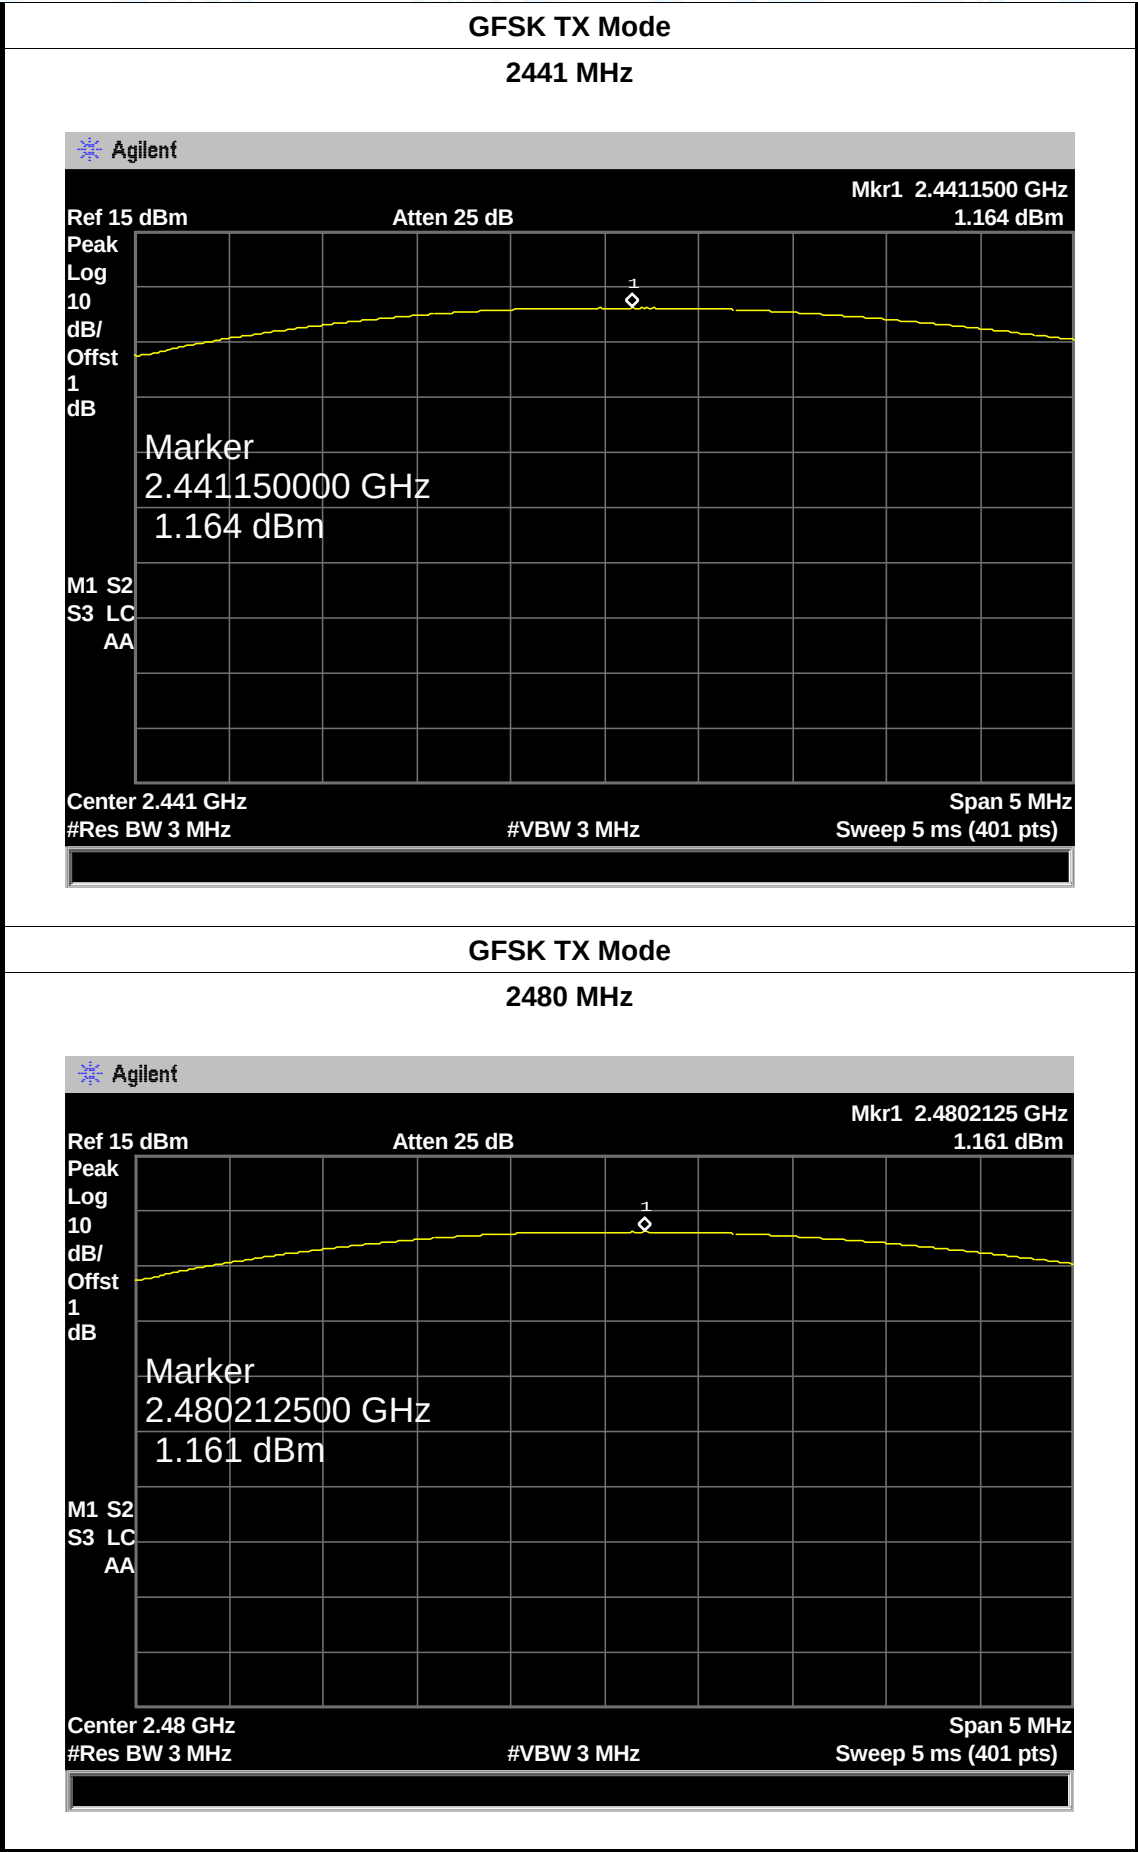

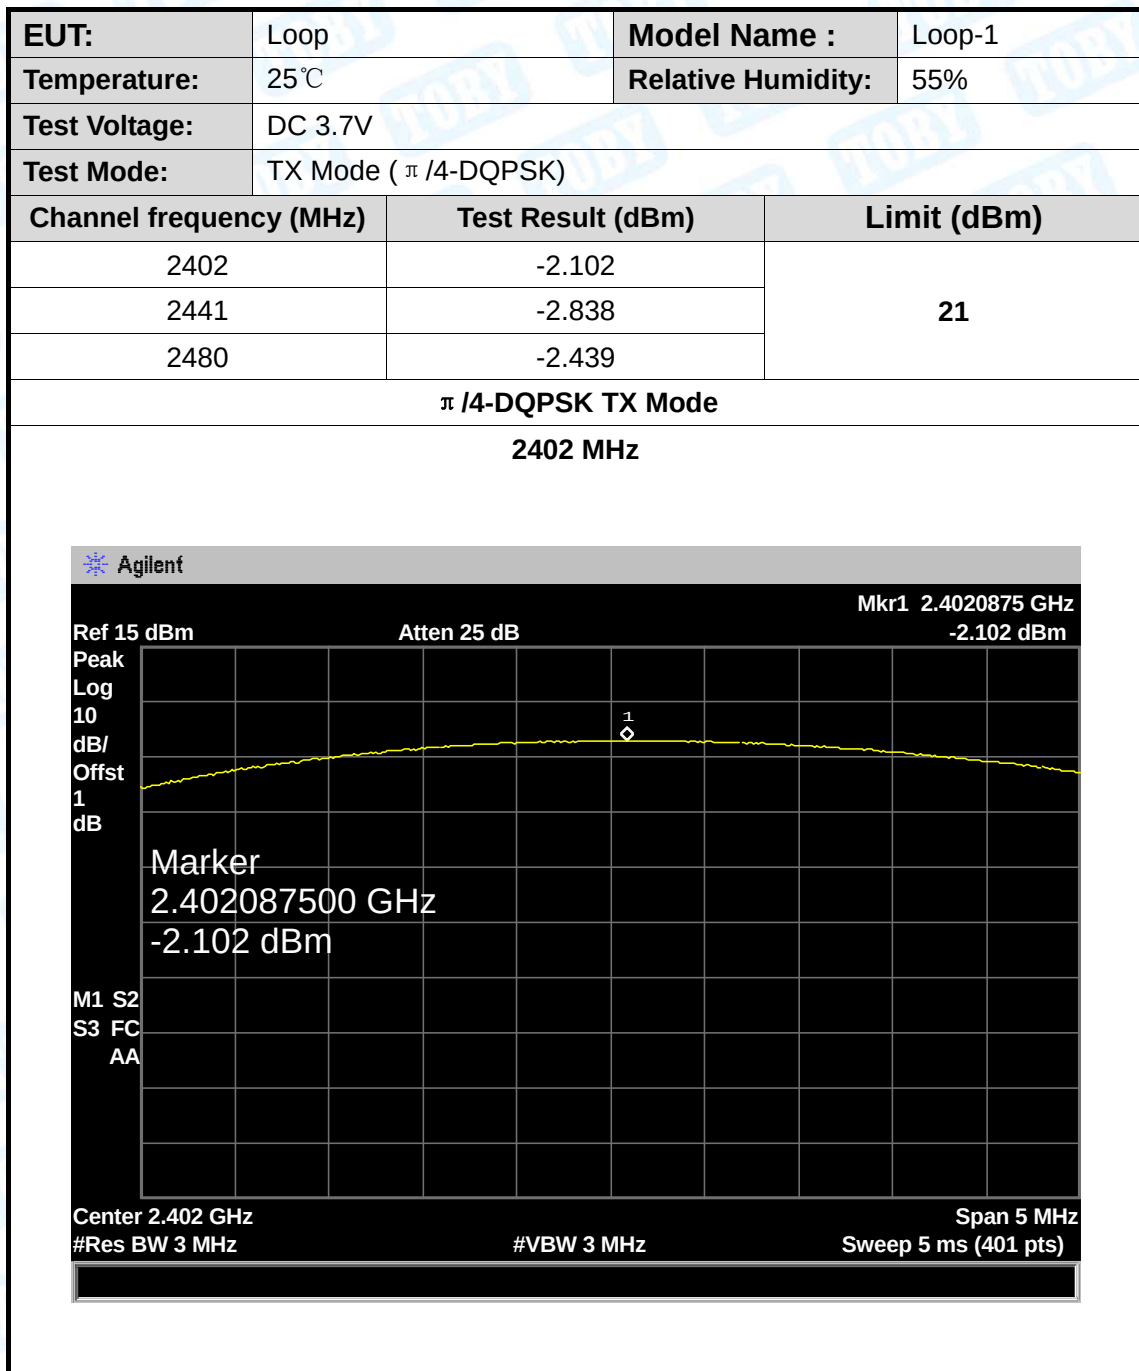




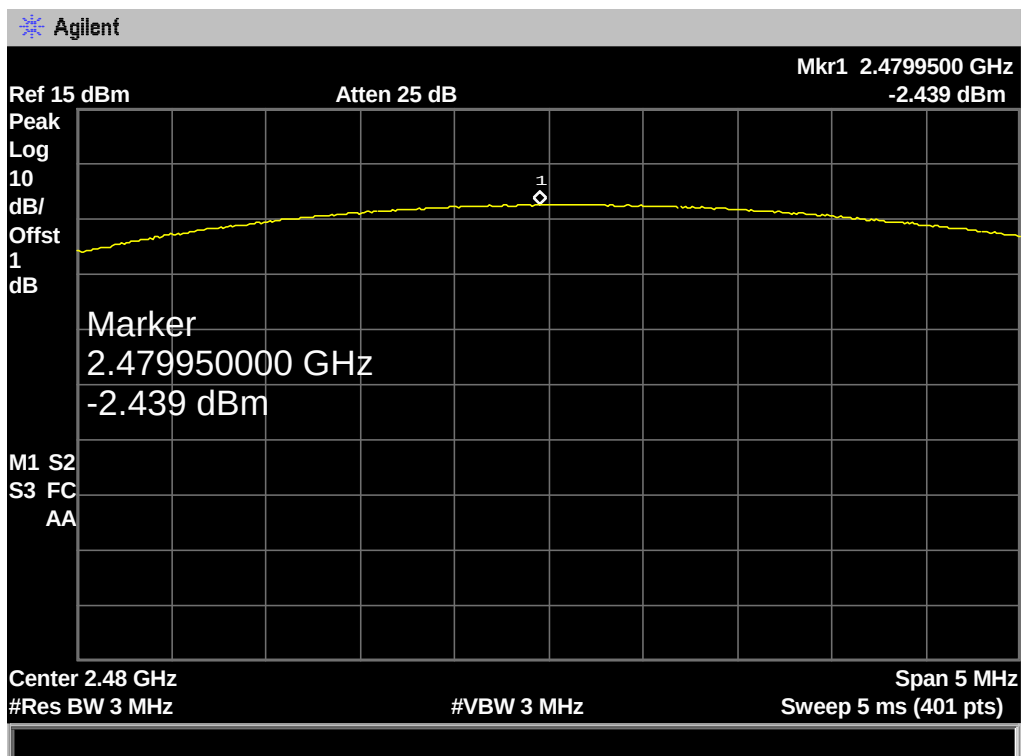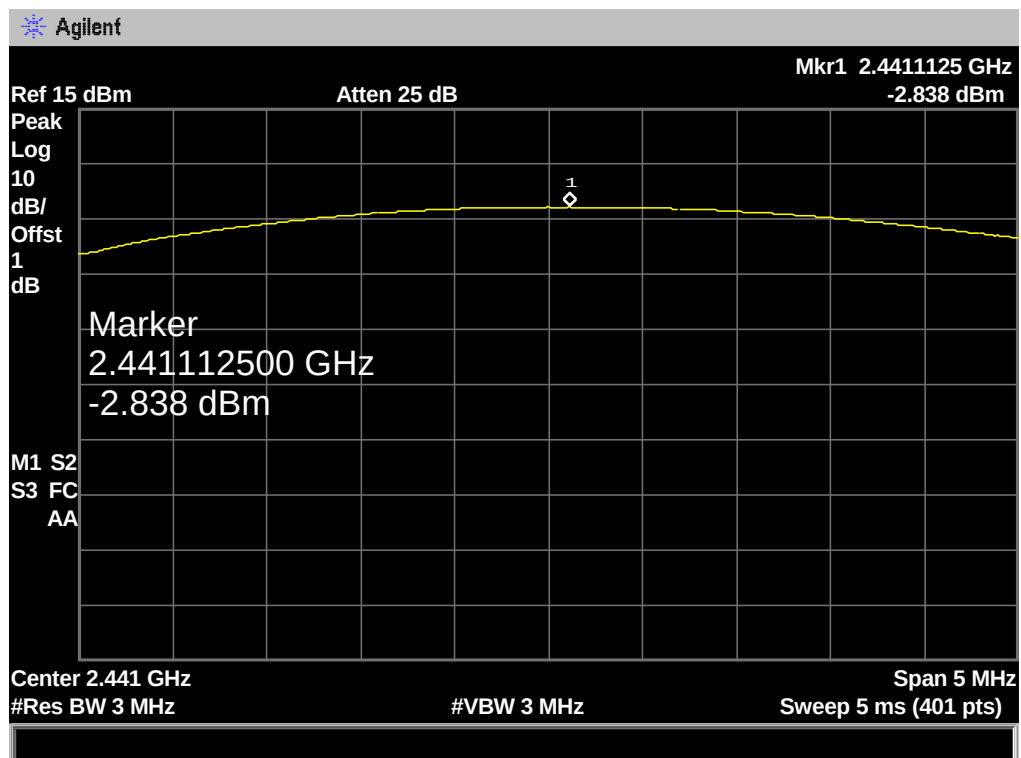

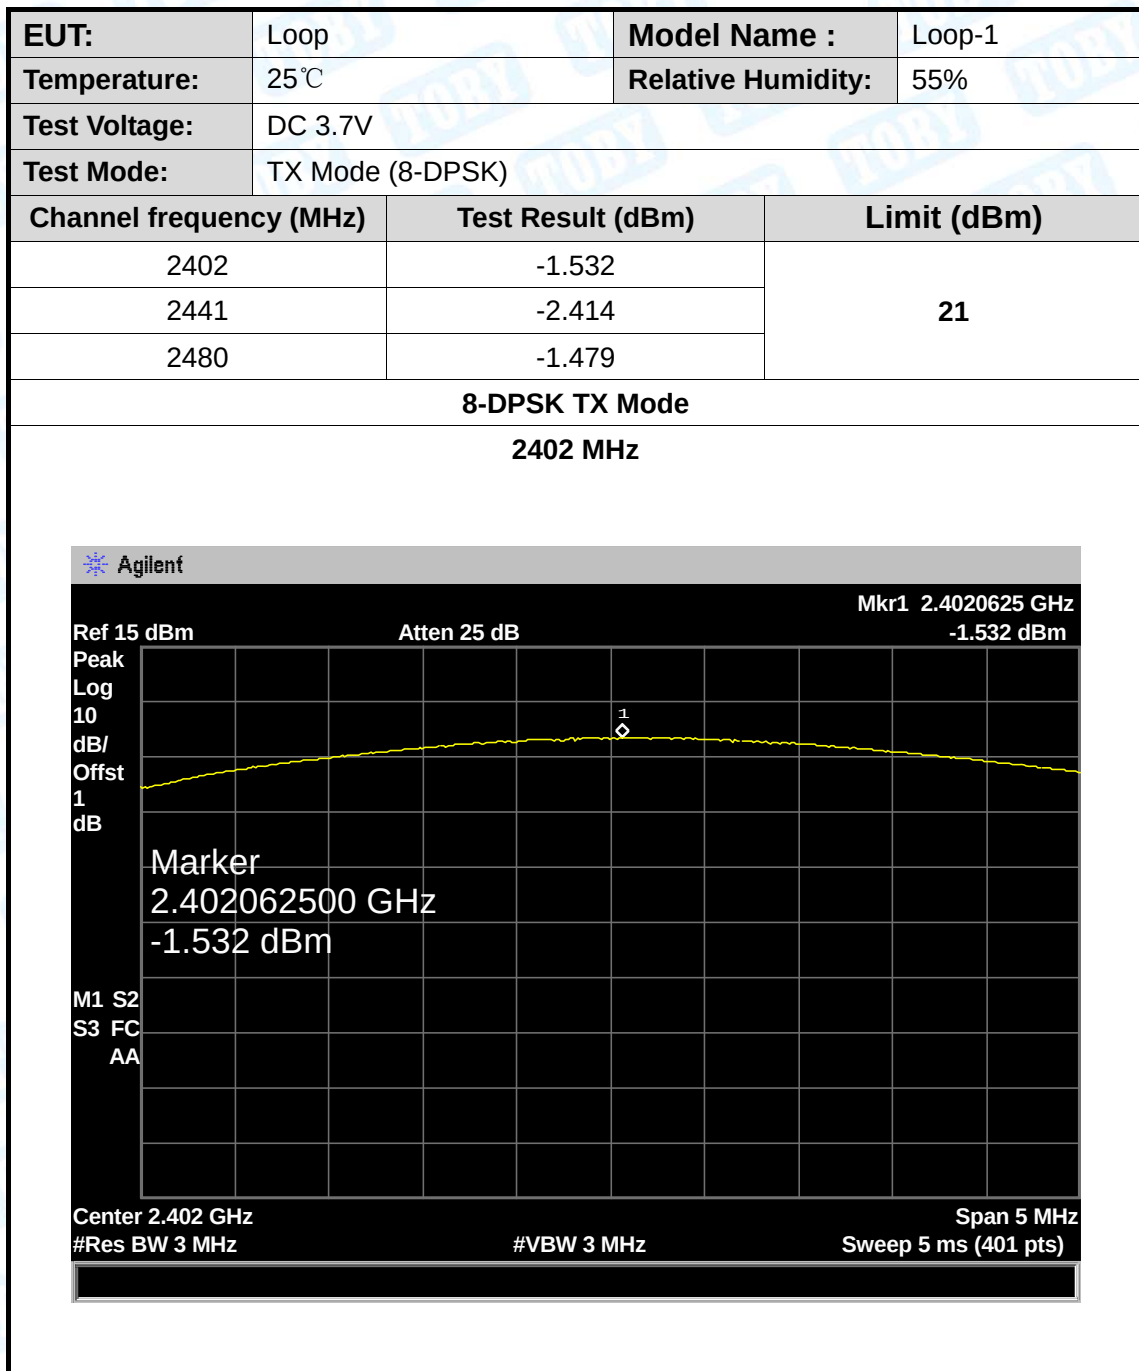




8-DPSK TX Mode  
 2441 MHz

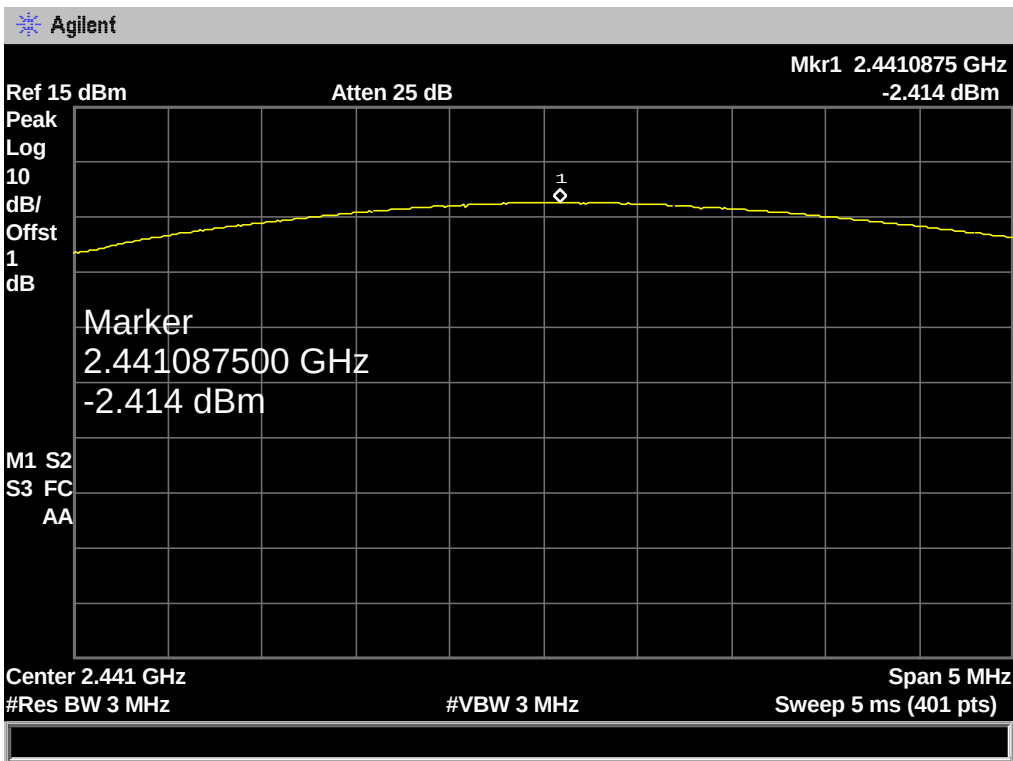

8-DPSK TX Mode  
 2480 MHz

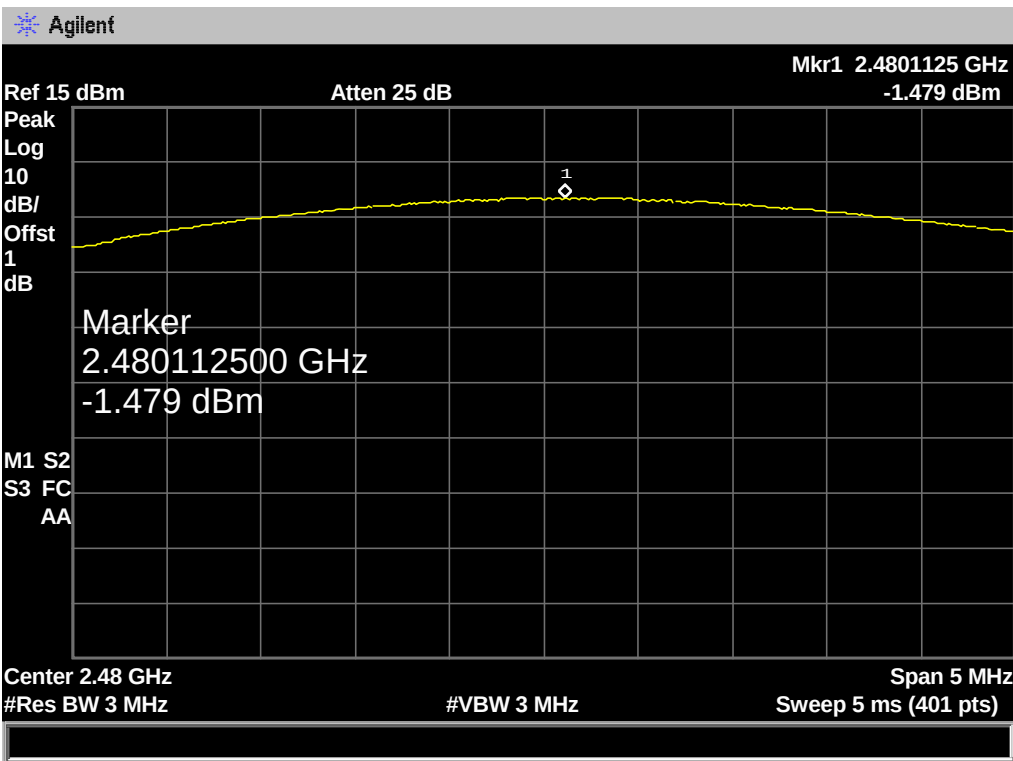

## 11. Antenna Requirement

### 11.1 Standard Requirement

#### 11.1.1 Standard

FCC Part 15.203

#### 11.1.2 Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 11.2 Antenna Connected Construction

The directional gains of the antenna used for transmitting is 5.5dBi, and the antenna connector is de-signed with permanent attachment and no consideration of replacement. Please see the EUT photo for details.

### 11.3 Result

The EUT antenna is a Integral Antenna. It complies with the standard requirement.

| Antenna Type                                                 |
|--------------------------------------------------------------|
| <input type="checkbox"/> Permanent attached antenna          |
| <input checked="" type="checkbox"/> Unique connector antenna |
| <input type="checkbox"/> Professional installation antenna   |

-----END OF REPORT-----