



FCC RADIO TEST REPORT

FCC ID : 2AMK2-RM03AA
Equipment : Paper Tablet
Brand Name : reMarkable
Model Name : 2AMK2-RM03AA
Applicant : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Manufacturer : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Standard : FCC Part 15 Subpart C §15.247

The product was received on Apr. 15, 2025 and testing was performed from Apr. 22, 2025 to Jun. 06, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	14
3.5 Radiated Band Edges and Spurious Emission Measurement	15
3.6 AC Conducted Emission Measurement.....	19
3.7 Antenna Requirements	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR541507C	01	Initial issue of report	Jun. 18, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.247(b)	Power Output Measurement	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges	Pass	-
		Conducted Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	-
3.7	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Dara Chiu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, and NFC(WPT).		
Antenna Type WLAN: Monopole Antenna		
Sample 1	Main source	
Sample 2	2nd source – FPC, PCB	
Sample 3	2nd source – DRAM	

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.4

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

<Sample List>

Main Board	Main source	Vendor	Avary
		Model Number	SB0SDV1BV0G
	2nd source	Vendor	PI
		Model Number	SB0SDV1B00G
Antenna SUB Board	Main source	Vendor	Avary
		Model Number	SB0SDV2BV0D
	2nd source	Vendor	ASKPCB
		Model Number	SB0SDV2B00D
PB FPC	Main source	Vendor	AKM
		Model Number	MESDV14201A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14211A
USB FPC	Main source	Vendor	AKM
		Model Number	MESDV14203A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14213A
Hall Sensor FPC	Main source	Vendor	AKM
		Model Number	MESDV14205A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14215A
DRAM	Main source	Vendor	Micron
		Model Number	MT53E1G16D1ZW-046 WT:C
	2nd source	Vendor	JSC
		Model Number	JSL4BAG167ZAMF-05A

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

This device support 26/52/106/242-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2018.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

Test Cases	
AC Conducted Emission	Mode 1: WLAN (2.4GHz) Link + Bluetooth Link + NFC Charging Pen 1 + USB Cable 1 (Charging from Adapter) for Sample 1
Remark: - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - For Radiated Test Cases, the tests were performed with USB Cable 2. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
2.	Notebook	DELL	Latitude 3420	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
3.	Adapter	MIBO	MB-21244274	N/A	N/A	N/A
4.	Adapter	Google	G9BR1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.3 PKPM1
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

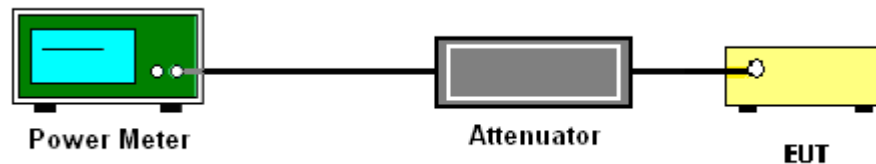

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

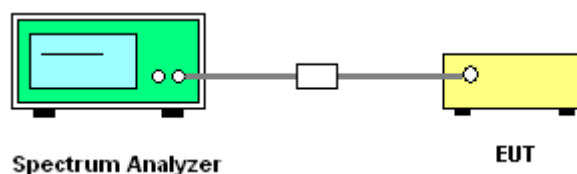

3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to Appendix A.



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.




7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3 MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

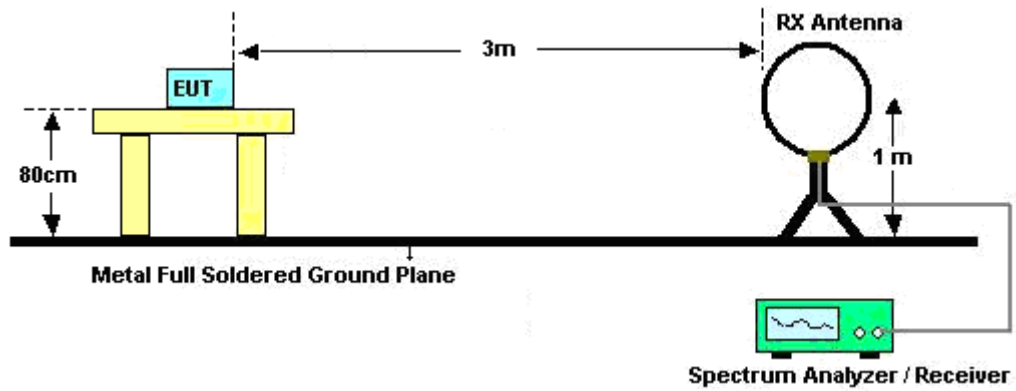


For radiated emissions from 30MHz to 1GHz

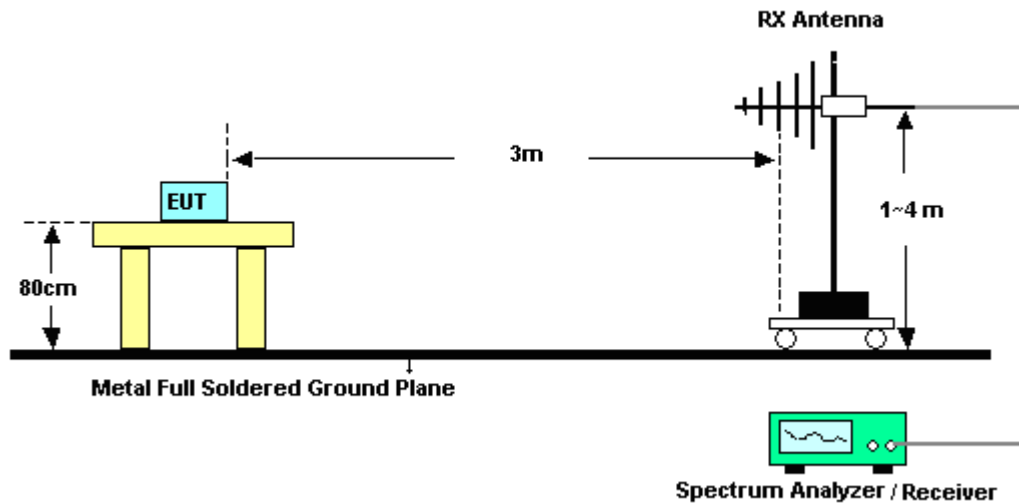

For radiated test from 1GHz to 18GHz

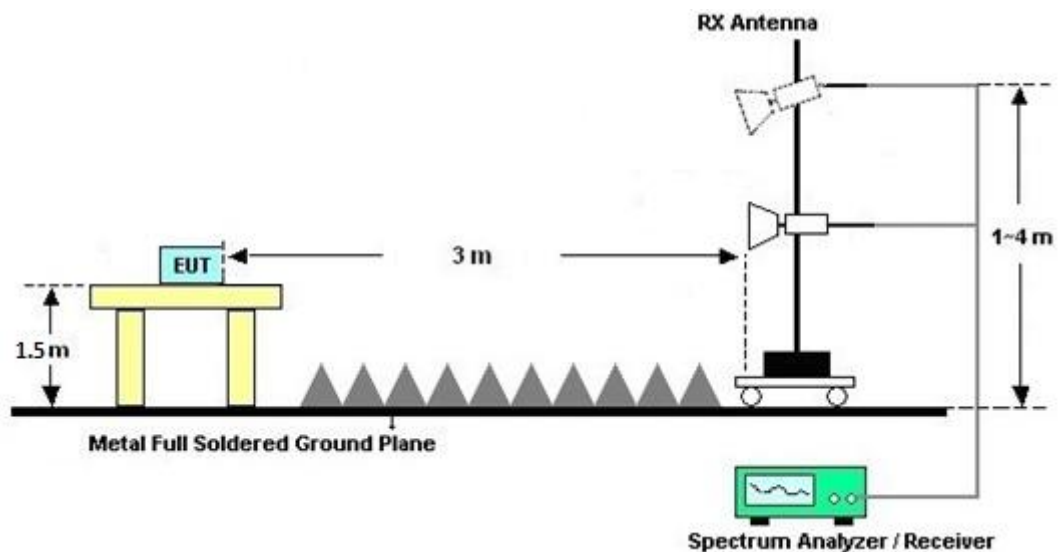

For radiated test above 18GHz

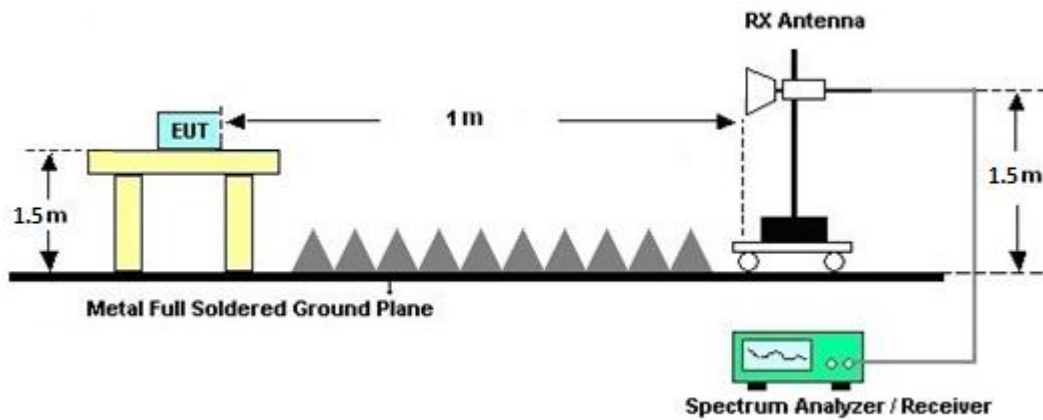

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

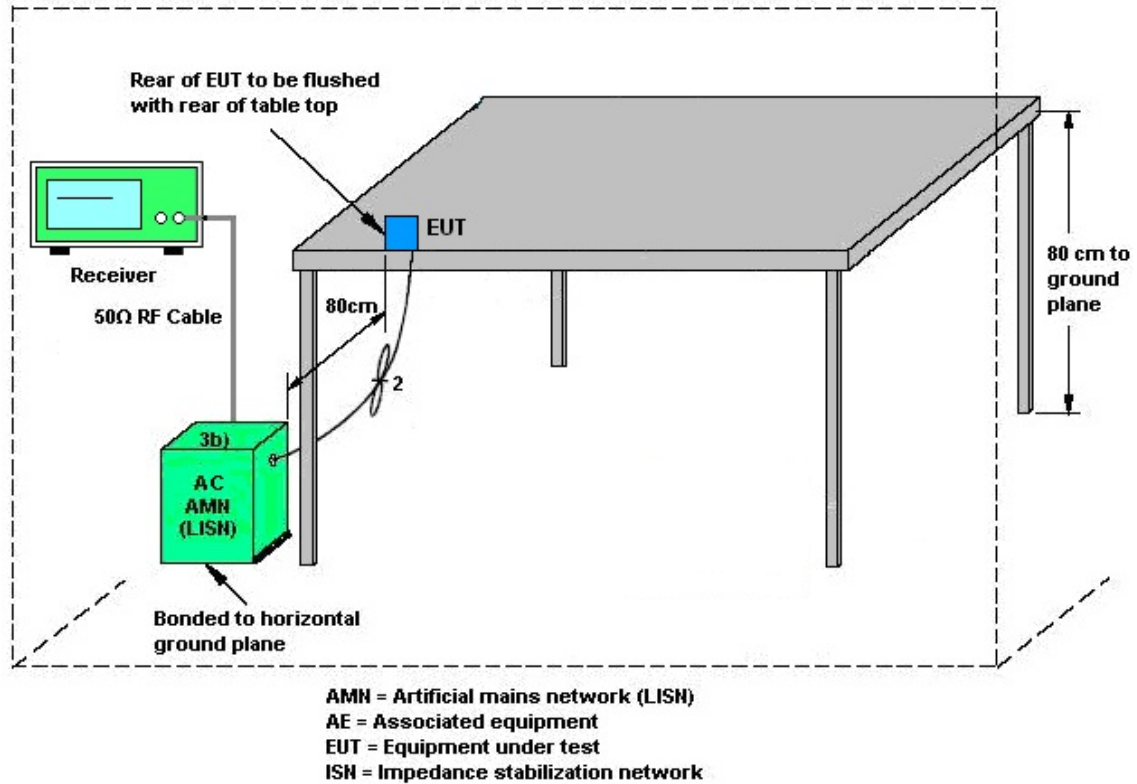

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Aug. 28, 2025	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A (MXE)	MY57290111	3Hz~26.5GHz	Nov. 22, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Nov. 21, 2025	Radiation (03CH16-HY)
BT Base Station	Rohde & Schwarz	CBT	101135	BT 3.0	Oct. 10, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Oct. 09, 2025	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 19, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Jul. 18, 2025	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01 N-06	47020 & 06	30MHz to 1GHz	Oct. 05, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Oct. 04, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 27, 2025	Apr. 22, 2025 ~ Jun. 06, 2025	Mar. 26, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 05, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Dec. 04, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Apr. 22, 2025 ~ May 26, 2025	May 26, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	May 27, 2025 ~ Jun. 06, 2025	Aug. 22, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-1530-8000-40S S	SN17	1.53GHz Low Pass Filter	Jan. 14, 2025	Apr. 22, 2025 ~ Jun. 06, 2025	Jan. 13, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Jun. 27, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5-6750-18000-40ST	SN27	6.75GHz High Pass Filter	Dec. 26, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Dec. 25, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102 505134/2	505134/2	30MHz ~ 40GHz	Dec. 19, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Dec. 18, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFL EX 104	EC-A5-300-5757,805935/4,802434/4	30MHz~18GHz	Aug. 07, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804012/2	18-40GHz	Dec. 31, 2024	Apr. 22, 2025 ~ Jun. 06, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Apr. 22, 2025 ~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Apr. 22, 2025 ~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 22, 2025 ~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 22, 2025 ~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Apr. 24, 2025 ~ Jun. 06, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Meter	Anritsu	ML2495A	1036004	N/A	Jul. 04, 2024	Apr. 24, 2025 ~ Jun. 06, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Power Sensor	Anritsu	MA2411B	1027253	300MHz~40GHz	Jul. 04, 2024	Apr. 24, 2025 ~ Jun. 06, 2025	Jul. 03, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10Hz~44GHz	Jan. 14, 2025	Apr. 24, 2025 ~ Jun. 06, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instrument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Apr. 24, 2025 ~ Jun. 06, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_version_240513	N/A	Conducted Other Test Item	N/A	Apr. 24, 2025 ~ Jun. 06, 2025	N/A	Conducted (TH05-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-FN	9561-FN00373	9kHz-200MHz	Oct. 23, 2024	May 13, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	May 13, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	May 13, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	May 13, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	May 13, 2025	Sep. 22, 2025	Conduction (CO07-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$) ¹	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Joseph Hu, Derek Hsu, and Shiming Liu	Temperature:	21~25	°C
Test Date:	2025/04/24~2025/06/06	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna										
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
					Ant1	Ant2	Ant1	Ant2		
11b	1Mbps	1	1	2412	13.37	-	10.07	-	0.50	Pass
11b	1Mbps	1	6	2437	13.39	-	10.07	-	0.50	Pass
11b	1Mbps	1	11	2462	13.39	-	10.06	-	0.50	Pass
11g	6Mbps	1	1	2412	17.16	-	16.35	-	0.50	Pass
11g	6Mbps	1	6	2437	17.17	-	16.34	-	0.50	Pass
11g	6Mbps	1	11	2462	17.17	-	16.34	-	0.50	Pass
VHT20	MCS0	1	1	2412	17.96	-	17.30	-	0.50	Pass
VHT20	MCS0	1	6	2437	17.94	-	17.30	-	0.50	Pass
VHT20	MCS0	1	11	2462	17.93	-	17.49	-	0.50	Pass
VHT40	MCS0	1	3	2422	36.43	-	35.44	-	0.50	Pass
VHT40	MCS0	1	6	2437	36.41	-	35.35	-	0.50	Pass
VHT40	MCS0	1	9	2452	36.46	-	35.63	-	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	15.10	-		30.00	-	0.40	-	15.50	-	36.00	-	Pass
11b	1Mbps	1	6	2437	14.92	-		30.00	-	0.40	-	15.32	-	36.00	-	Pass
11b	1Mbps	1	11	2462	14.88	-		30.00	-	0.40	-	15.28	-	36.00	-	Pass
11g	6Mbps	1	1	2412	22.58	-		30.00	-	0.40	-	22.98	-	36.00	-	Pass
11g	6Mbps	1	6	2437	22.11	-		30.00	-	0.40	-	22.51	-	36.00	-	Pass
11g	6Mbps	1	11	2462	22.09	-		30.00	-	0.40	-	22.49	-	36.00	-	Pass
HT20	MCS0	1	1	2412	22.09	-		30.00	-	0.40	-	22.49	-	36.00	-	Pass
HT20	MCS0	1	6	2437	21.86	-		30.00	-	0.40	-	22.26	-	36.00	-	Pass
HT20	MCS0	1	11	2462	21.67	-		30.00	-	0.40	-	22.07	-	36.00	-	Pass
HT40	MCS0	1	3	2422	22.00	-		30.00	-	0.40	-	22.40	-	36.00	-	Pass
HT40	MCS0	1	6	2437	21.59	-		30.00	-	0.40	-	21.99	-	36.00	-	Pass
HT40	MCS0	1	9	2452	21.80	-		30.00	-	0.40	-	22.20	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	22.19	-		30.00	-	0.40	-	22.59	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	21.96	-		30.00	-	0.40	-	22.36	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	21.77	-		30.00	-	0.40	-	22.17	-	36.00	-	Pass
VHT40	MCS0	1	3	2422	22.10	-		30.00	-	0.40	-	22.50	-	36.00	-	Pass
VHT40	MCS0	1	6	2437	21.69	-		30.00	-	0.40	-	22.09	-	36.00	-	Pass
VHT40	MCS0	1	9	2452	21.90	-		30.00	-	0.40	-	22.30	-	36.00	-	Pass

TEST RESULTS DATA
Average Output Power
(Reporting Only)

2.4GHz Band Single Antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
					Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	12.47	-		30.00	-	0.40	-	12.87	-	36.00	-	Pass
11b	1Mbps	1	6	2437	12.45	-		30.00	-	0.40	-	12.85	-	36.00	-	Pass
11b	1Mbps	1	11	2462	12.20	-		30.00	-	0.40	-	12.60	-	36.00	-	Pass
11g	6Mbps	1	1	2412	12.48	-		30.00	-	0.40	-	12.88	-	36.00	-	Pass
11g	6Mbps	1	6	2437	12.47	-		30.00	-	0.40	-	12.87	-	36.00	-	Pass
11g	6Mbps	1	11	2462	12.45	-		30.00	-	0.40	-	12.85	-	36.00	-	Pass
HT20	MCS0	1	1	2412	12.01	-		30.00	-	0.40	-	12.41	-	36.00	-	Pass
HT20	MCS0	1	6	2437	12.20	-		30.00	-	0.40	-	12.60	-	36.00	-	Pass
HT20	MCS0	1	11	2462	12.01	-		30.00	-	0.40	-	12.41	-	36.00	-	Pass
HT40	MCS0	1	3	2422	12.30	-		30.00	-	0.40	-	12.70	-	36.00	-	Pass
HT40	MCS0	1	6	2437	12.16	-		30.00	-	0.40	-	12.56	-	36.00	-	Pass
HT40	MCS0	1	9	2452	12.03	-		30.00	-	0.40	-	12.43	-	36.00	-	Pass
VHT20	MCS0	1	1	2412	12.11	-		30.00	-	0.40	-	12.51	-	36.00	-	Pass
VHT20	MCS0	1	6	2437	12.30	-		30.00	-	0.40	-	12.70	-	36.00	-	Pass
VHT20	MCS0	1	11	2462	12.11	-		30.00	-	0.40	-	12.51	-	36.00	-	Pass
VHT40	MCS0	1	3	2422	12.40	-		30.00	-	0.40	-	12.80	-	36.00	-	Pass
VHT40	MCS0	1	6	2437	12.26	-		30.00	-	0.40	-	12.66	-	36.00	-	Pass
VHT40	MCS0	1	9	2452	12.13	-		30.00	-	0.40	-	12.53	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band Single Antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
					Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
11b	1Mbps	1	1	2412	-6.70	-		0.40	-	8.00	-	Pass
11b	1Mbps	1	6	2437	-5.88	-		0.40	-	8.00	-	Pass
11b	1Mbps	1	11	2462	-6.07	-		0.40	-	8.00	-	Pass
11g	6Mbps	1	1	2412	-13.89	-		0.40	-	8.00	-	Pass
11g	6Mbps	1	6	2437	-12.97	-		0.40	-	8.00	-	Pass
11g	6Mbps	1	11	2462	-13.43	-		0.40	-	8.00	-	Pass
HT20	MCS0	1	1	2412	-12.98	-		0.40	-	8.00	-	Pass
HT20	MCS0	1	6	2437	-12.84	-		0.40	-	8.00	-	Pass
HT20	MCS0	1	11	2462	-12.39	-		0.40	-	8.00	-	Pass
HT40	MCS0	1	3	2422	-16.67	-		0.40	-	8.00	-	Pass
HT40	MCS0	1	6	2437	-16.17	-		0.40	-	8.00	-	Pass
HT40	MCS0	1	9	2452	-15.85	-		0.40	-	8.00	-	Pass
VHT20	MCS0	1	1	2412	-12.48	-		0.40	-	8.00	-	Pass
VHT20	MCS0	1	6	2437	-11.72	-		0.40	-	8.00	-	Pass
VHT20	MCS0	1	11	2462	-11.76	-		0.40	-	8.00	-	Pass
VHT40	MCS0	1	3	2422	-15.70	-		0.40	-	8.00	-	Pass
VHT40	MCS0	1	6	2437	-15.74	-		0.40	-	8.00	-	Pass
VHT40	MCS0	1	9	2452	-15.47	-		0.40	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band Single Antenna											
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	99% Occupied BW (MHz)		6dB BW (MHz)		6dB BW Limit (MHz)	Pass/Fail
						Ant1	Ant2	Ant1	Ant2		
HE20	MCS0	1	1	2412	Full	18.85	-	18.51	-	0.50	Pass
HE20	MCS0	1	6	2437	Full	18.85	-	18.37	-	0.50	Pass
HE20	MCS0	1	11	2462	Full	18.86	-	18.49	-	0.50	Pass
HE40	MCS0	1	3	2422	Full	37.70	-	37.21	-	0.50	Pass
HE40	MCS0	1	6	2437	Full	37.76	-	36.62	-	0.50	Pass
HE40	MCS0	1	9	2452	Full	37.70	-	36.80	-	0.50	Pass

TEST RESULTS DATA
Peak Output Power

2.4GHz Band Single Antenna																	
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	RU Config	Peak Conducted Power (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	22.29	-		30.00	-	0.40	-	22.69	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	14.36	-		30.00	-	0.40	-	14.76	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	16.67	-		30.00	-	0.40	-	17.07	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	19.16	-		30.00	-	0.40	-	19.56	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	22.06	-		30.00	-	0.40	-	22.46	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	16.26	-		30.00	-	0.40	-	16.66	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	17.63	-		30.00	-	0.40	-	18.03	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	19.69	-		30.00	-	0.40	-	20.09	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	21.87	-		30.00	-	0.40	-	22.27	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	14.52	-		30.00	-	0.40	-	14.92	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	17.29	-		30.00	-	0.40	-	17.69	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	19.80	-		30.00	-	0.40	-	20.20	-	36.00	-	Pass
HE40	MCS0	1	3	2422	Full	22.15	-		30.00	-	0.40	-	22.55	-	36.00	-	Pass
HE40	MCS0	1	3	2422	242/61	20.34	-		30.00	-	0.40	-	20.74	-	36.00	-	Pass
HE40	MCS0	1	6	2437	Full	22.29	-		30.00	-	0.40	-	22.69	-	36.00	-	Pass
HE40	MCS0	1	6	2437	242/61	20.53	-		30.00	-	0.40	-	20.93	-	36.00	-	Pass
HE40	MCS0	1	9	2452	Full	22.00	-		30.00	-	0.40	-	22.40	-	36.00	-	Pass
HE40	MCS0	1	9	2452	242/62	20.06	-		30.00	-	0.40	-	20.46	-	36.00	-	Pass

TEST RESULTS DATA
Average Output Power
(Reporting Only)

2.4GHz Band Single Antenna																	
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	Average Conducted Power with duty factor (dBm)			Conducted Power Limit (dBm)		DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)		Pass /Fail
						Ant1	Ant2	SUM	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	12.22	-		30.00	-	0.40	-	12.62	-	36.00	-	Pass
HE20	MCS0	1	1	2412	26/0	4.27	-		30.00	-	0.40	-	4.67	-	36.00	-	Pass
HE20	MCS0	1	1	2412	52/37	6.02	-		30.00	-	0.40	-	6.42	-	36.00	-	Pass
HE20	MCS0	1	1	2412	106/53	8.66	-		30.00	-	0.40	-	9.06	-	36.00	-	Pass
HE20	MCS0	1	6	2437	Full	12.41	-		30.00	-	0.40	-	12.81	-	36.00	-	Pass
HE20	MCS0	1	6	2437	26/4	6.19	-		30.00	-	0.40	-	6.59	-	36.00	-	Pass
HE20	MCS0	1	6	2437	52/38	7.29	-		30.00	-	0.40	-	7.69	-	36.00	-	Pass
HE20	MCS0	1	6	2437	106/53	9.37	-		30.00	-	0.40	-	9.77	-	36.00	-	Pass
HE20	MCS0	1	11	2462	Full	12.22	-		30.00	-	0.40	-	12.62	-	36.00	-	Pass
HE20	MCS0	1	11	2462	26/8	4.69	-		30.00	-	0.40	-	5.09	-	36.00	-	Pass
HE20	MCS0	1	11	2462	52/40	6.94	-		30.00	-	0.40	-	7.34	-	36.00	-	Pass
HE20	MCS0	1	11	2462	106/54	9.48	-		30.00	-	0.40	-	9.88	-	36.00	-	Pass
HE40	MCS0	1	3	2422	Full	12.47	-		30.00	-	0.40	-	12.87	-	36.00	-	Pass
HE40	MCS0	1	3	2422	242/61	9.99	-		30.00	-	0.40	-	10.39	-	36.00	-	Pass
HE40	MCS0	1	6	2437	Full	12.38	-		30.00	-	0.40	-	12.78	-	36.00	-	Pass
HE40	MCS0	1	6	2437	242/61	9.89	-		30.00	-	0.40	-	10.29	-	36.00	-	Pass
HE40	MCS0	1	9	2452	Full	12.25	-		30.00	-	0.40	-	12.65	-	36.00	-	Pass
HE40	MCS0	1	9	2452	242/62	9.62	-		30.00	-	0.40	-	10.02	-	36.00	-	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Power Spectral Density


2.4GHz Band Single Antenna													
Mod.	Data Rate	Ntx	CH.	Freq. (MHz)	RU Config	Peak PSD (dBm/3kHz)			DG (dBi)		Peak PSD Limit (dBm/3kHz)		Pass/Fail
						Ant1	Ant2	Worse + 3.01	Ant1	Ant2	Ant1	Ant2	
HE20	MCS0	1	1	2412	Full	-13.31	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	26/0	-13.83	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	52/37	-13.48	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	1	2412	106/53	-13.77	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	Full	-12.82	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	26/4	-13.20	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	52/38	-13.31	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	6	2437	106/53	-12.84	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	Full	-12.81	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	26/8	-13.11	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	52/40	-13.29	-		0.40	-	8.00	-	Pass
HE20	MCS0	1	11	2462	106/54	-13.16	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	3	2422	Full	-16.72	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	3	2422	242/61	-16.80	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	6	2437	Full	-14.63	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	6	2437	242/61	-14.87	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	9	2452	Full	-17.40	-		0.40	-	8.00	-	Pass
HE40	MCS0	1	9	2452	242/62	-17.41	-		0.40	-	8.00	-	Pass

Measured power density (dBm) has offset with cable loss.




6dB and 99% Occupied Bandwidth

<802.11b>

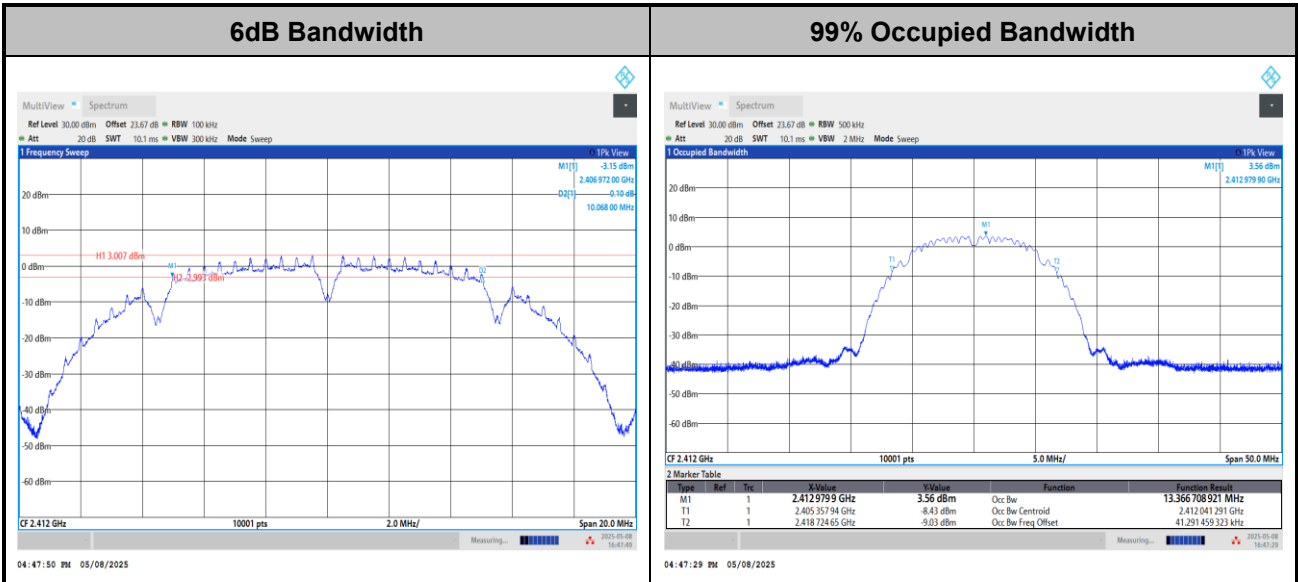

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11g>

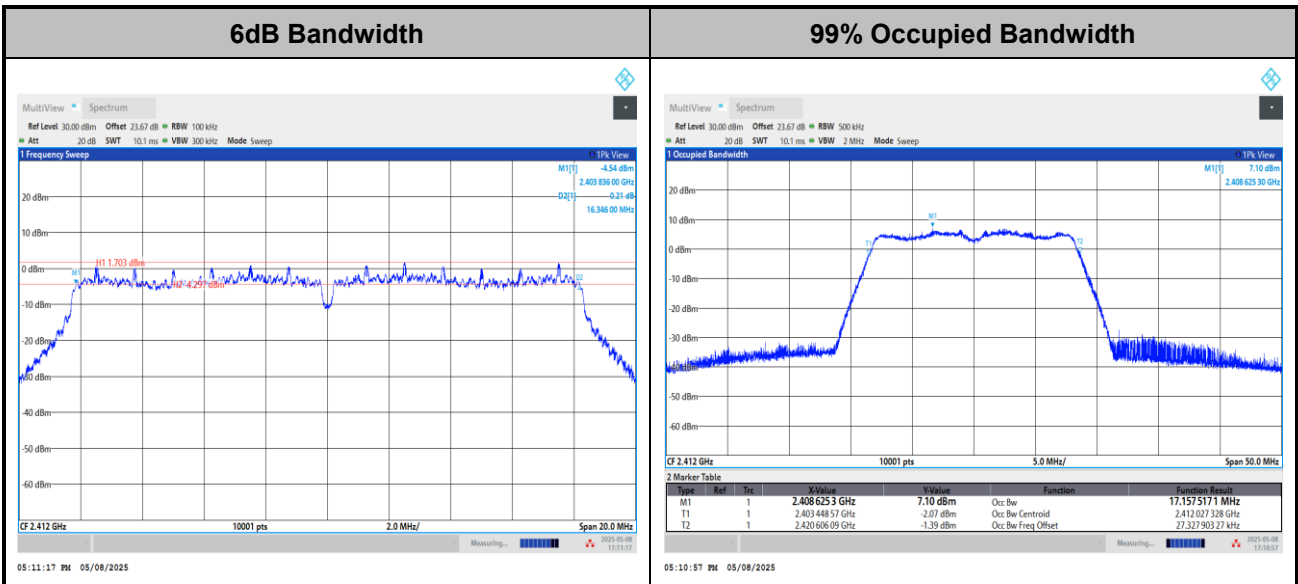

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac20>

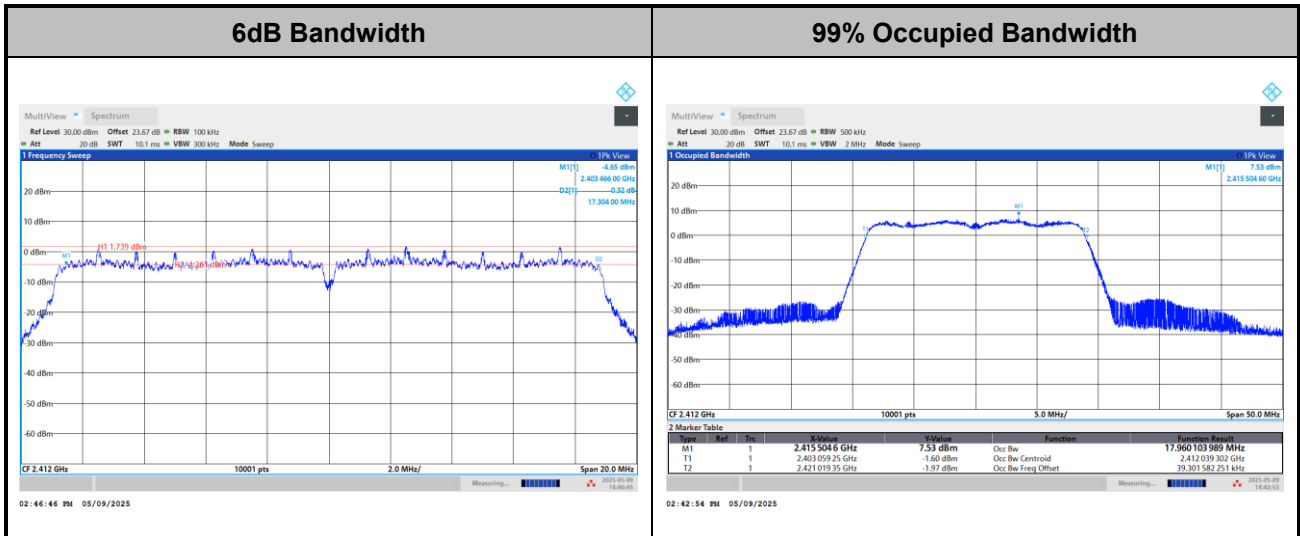

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac40>

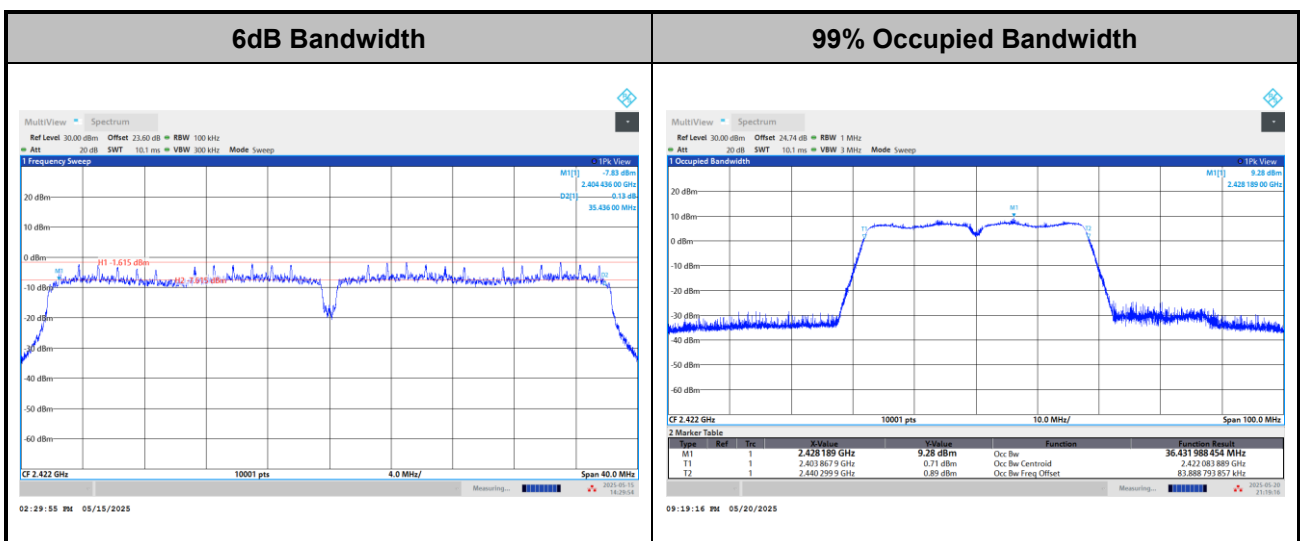

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax20>

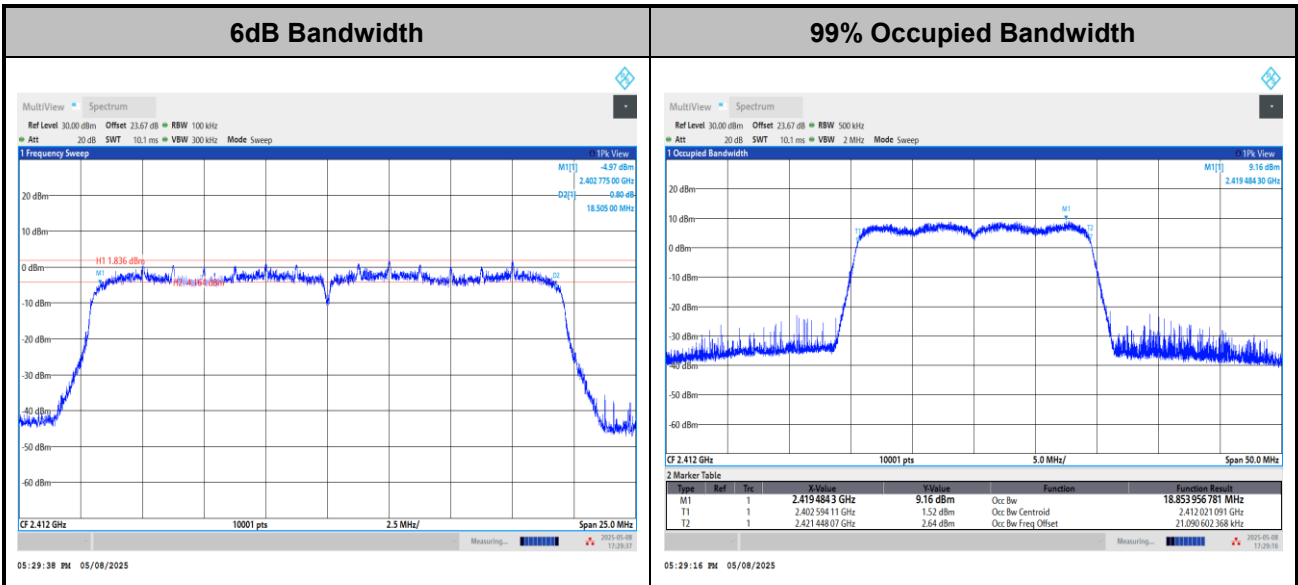

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax40>

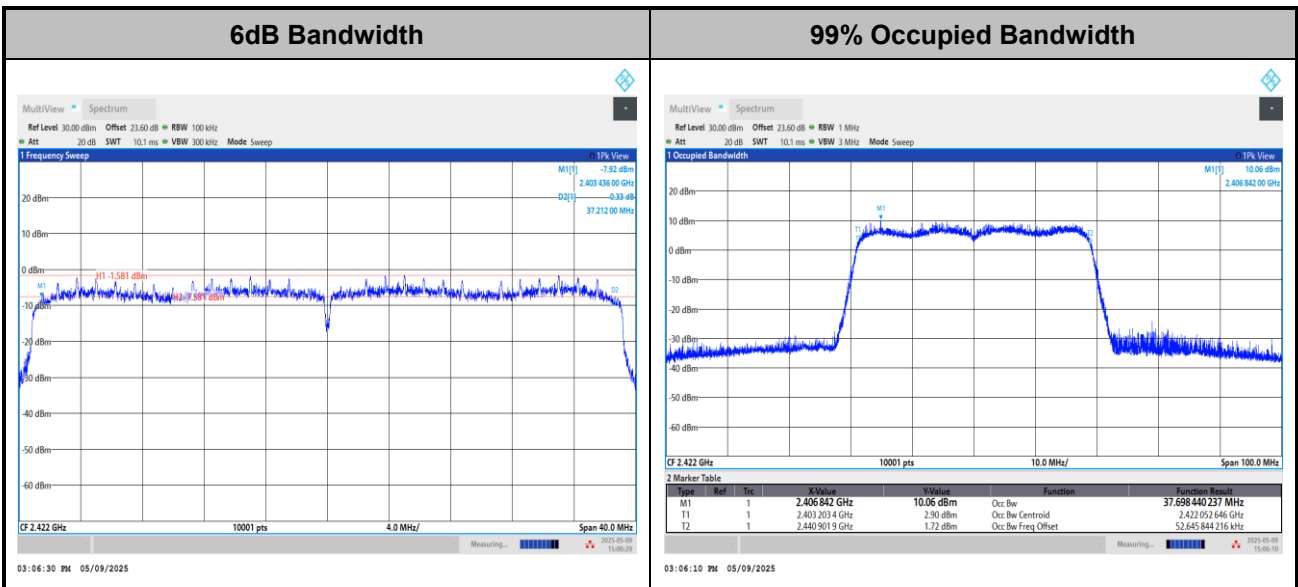


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

Power Spectral Density(dBm/3kHz)


<802.11b>

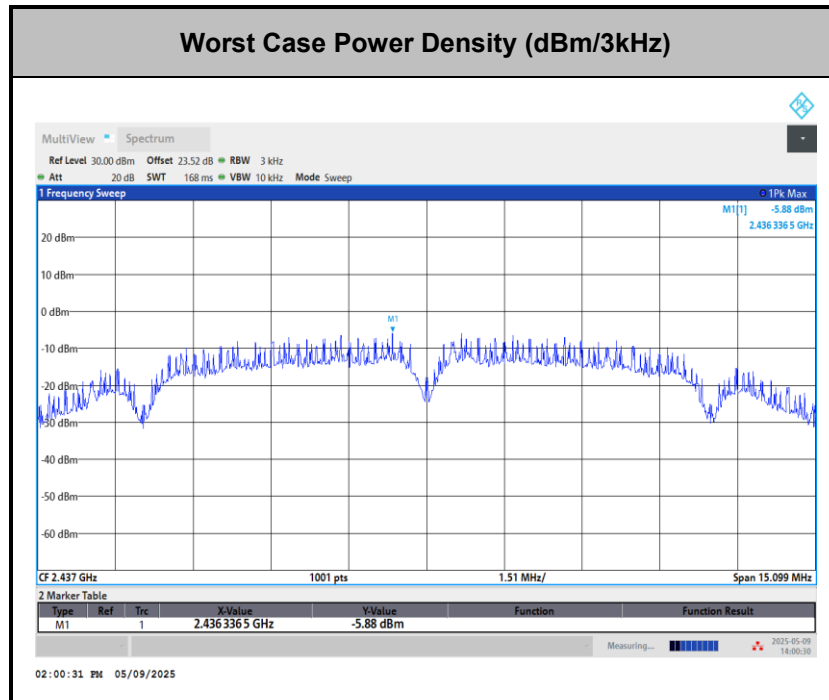


<802.11g>

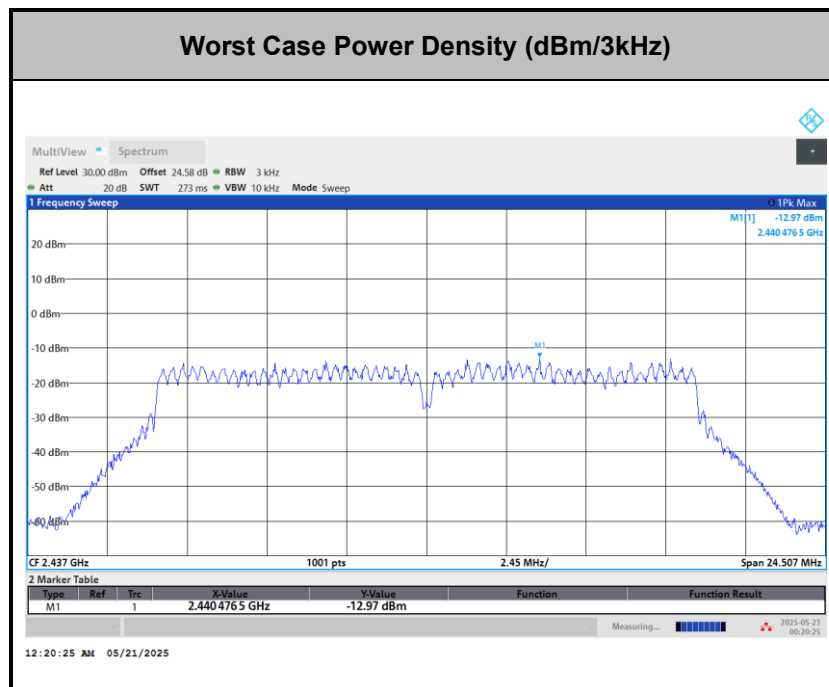


<802.11gN20>

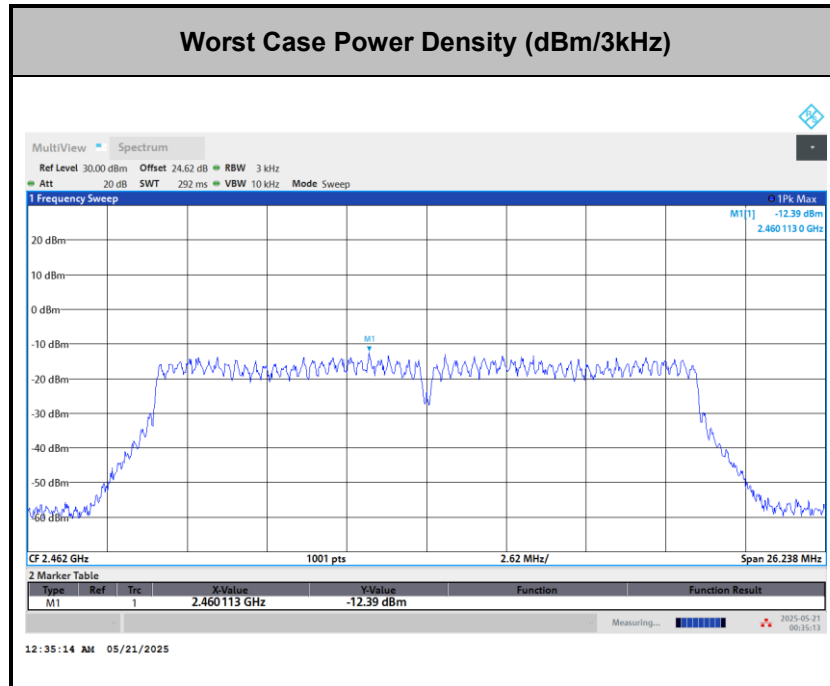


<802.11gN40>

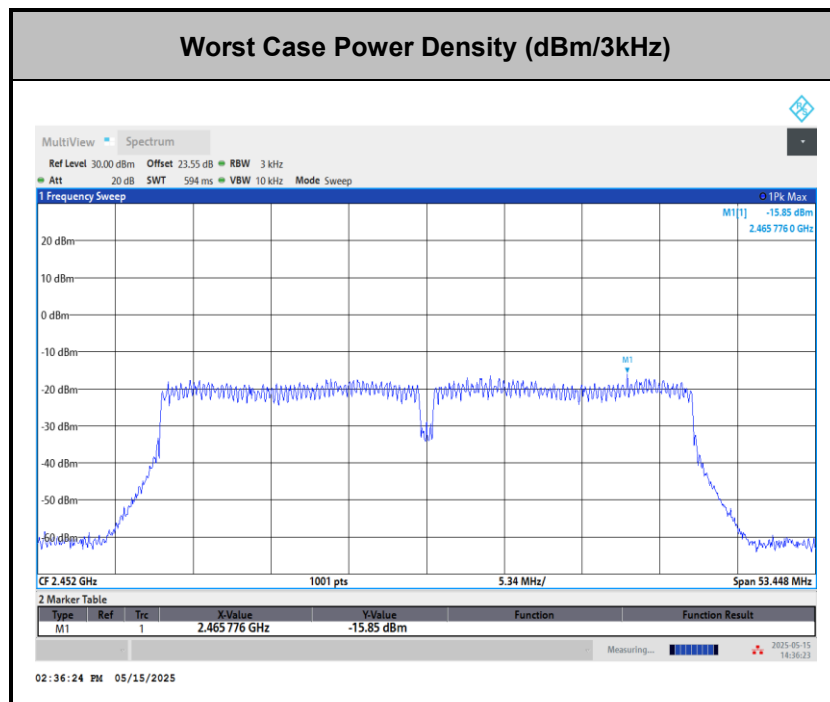

<802.11ac20>

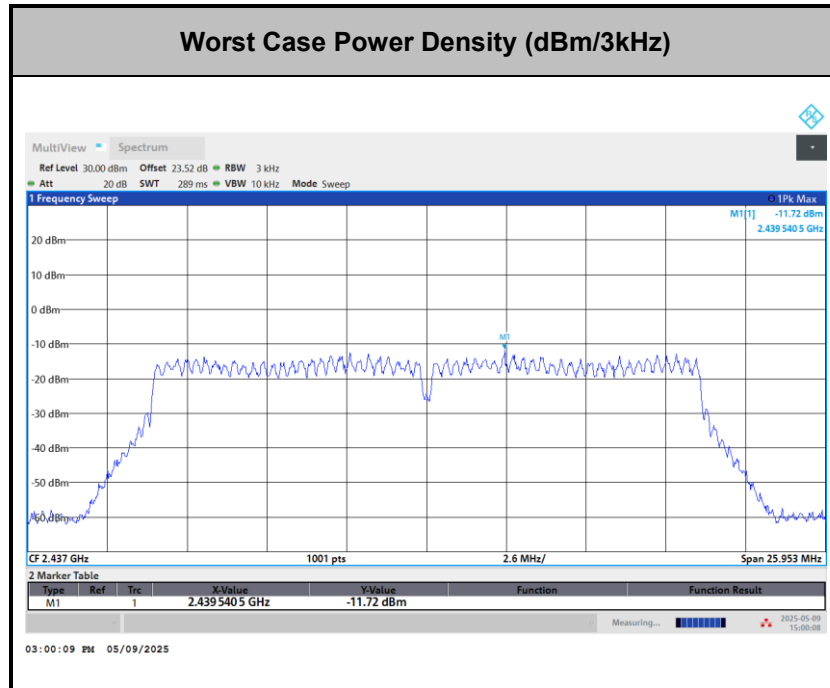


<802.11ac40>

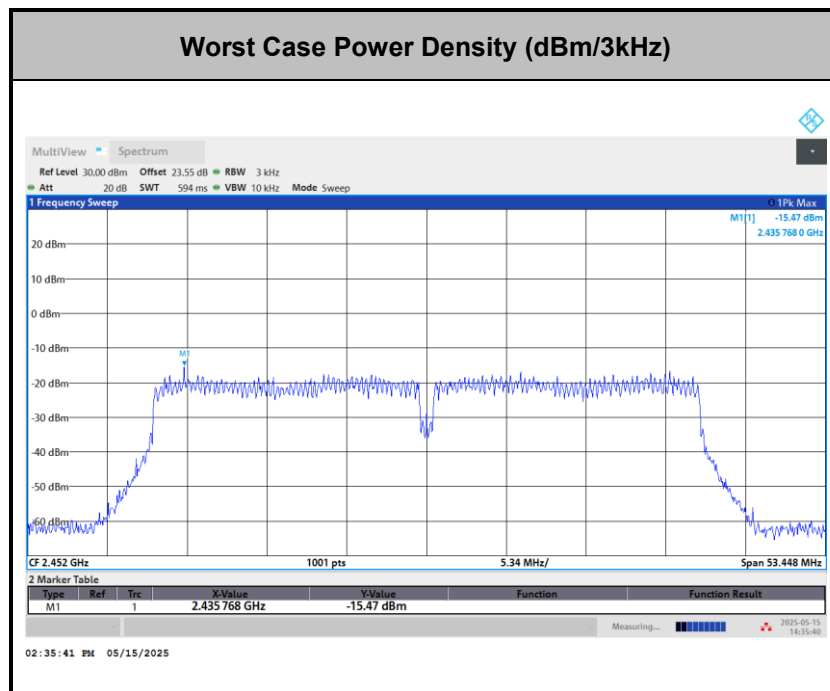




<802.11ax20>

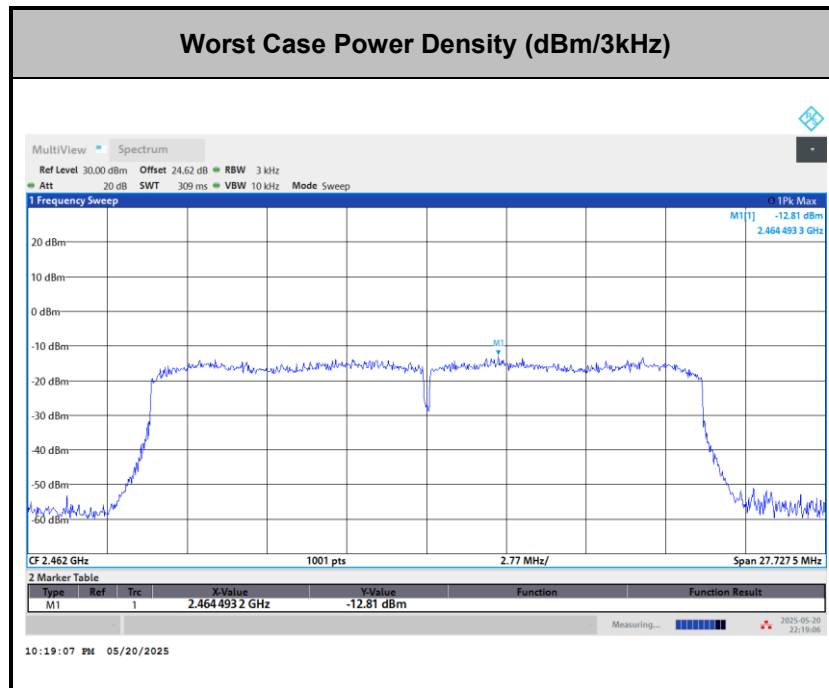

<802.11ax40>

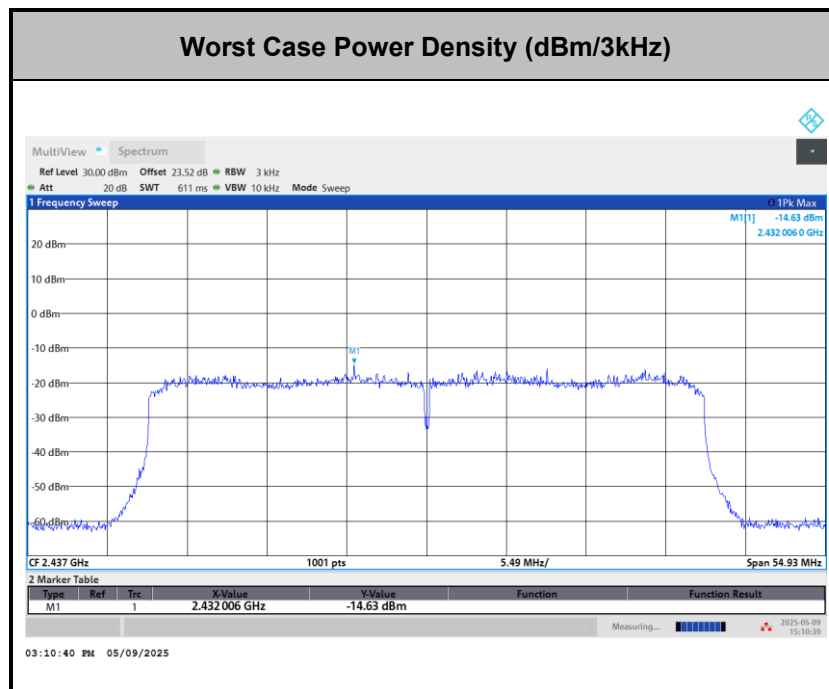




Band Edges and Spurious Emission


Test Mode : 802.11b

Test Channel : 01


100kHz PSD reference Level

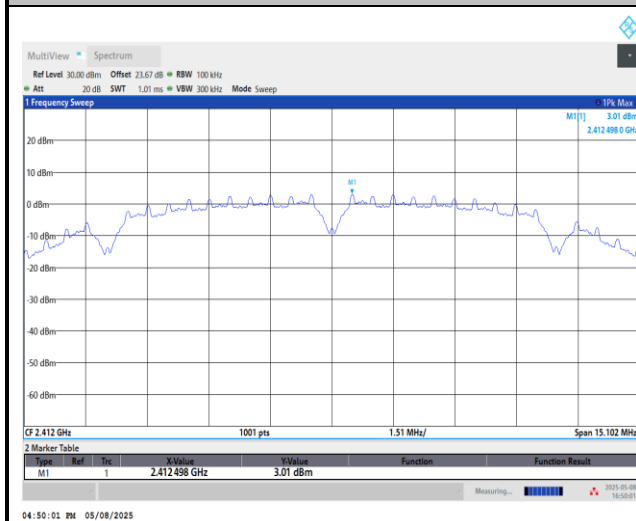


Channel 01 Plot

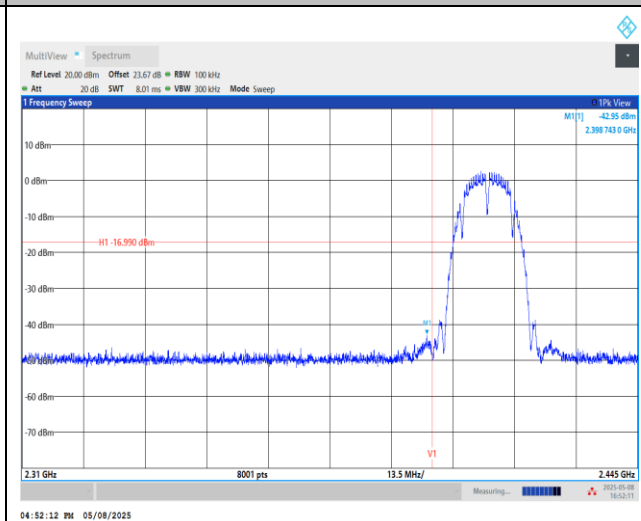

Spurious Emission 30MHz~1GHz

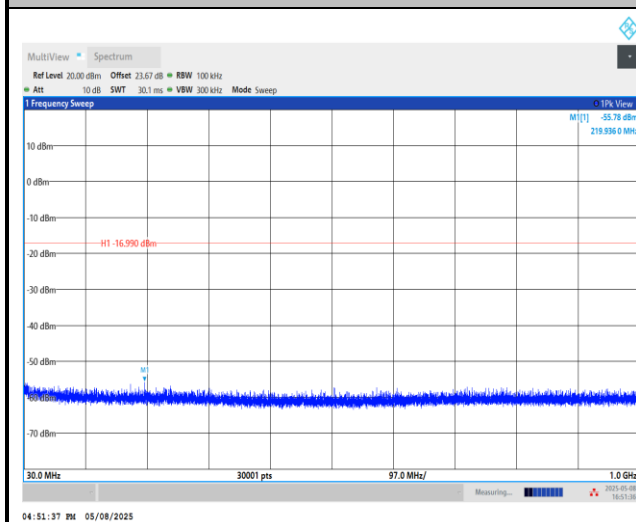


Spurious Emission 1GHz~26.5GHz

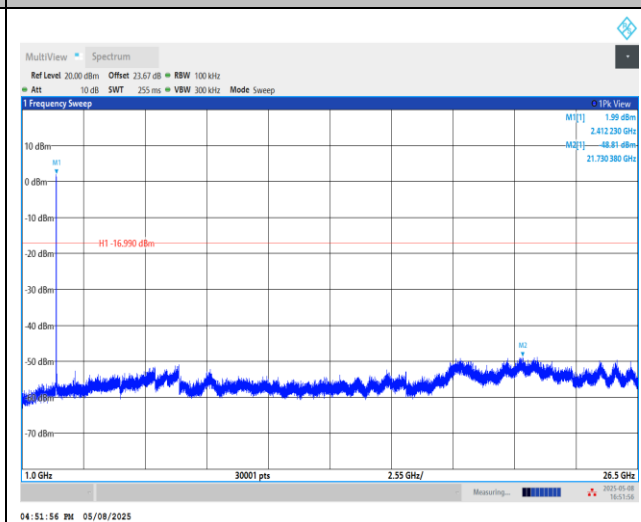



Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

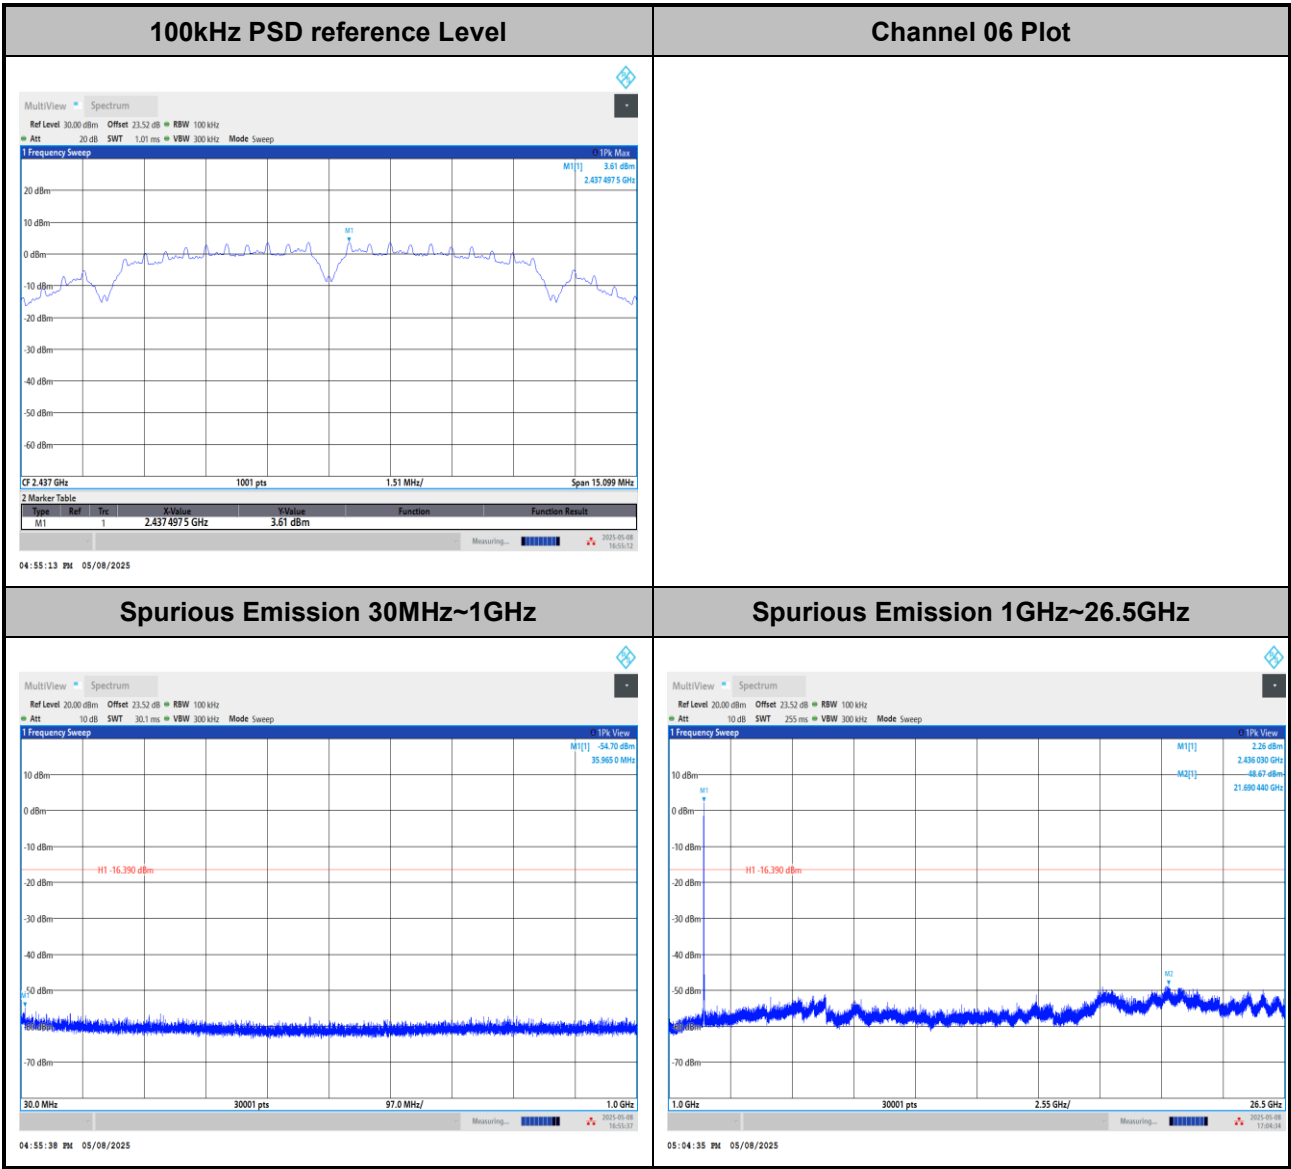





Test Mode : 802.11b

Test Channel : 11


100kHz PSD reference Level

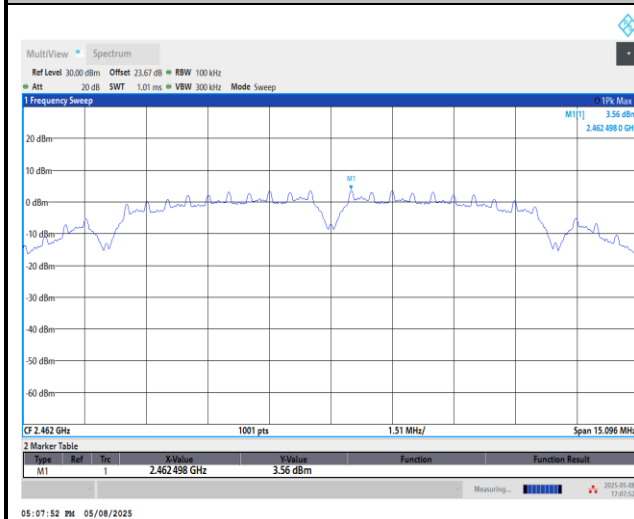


Channel 11 Plot

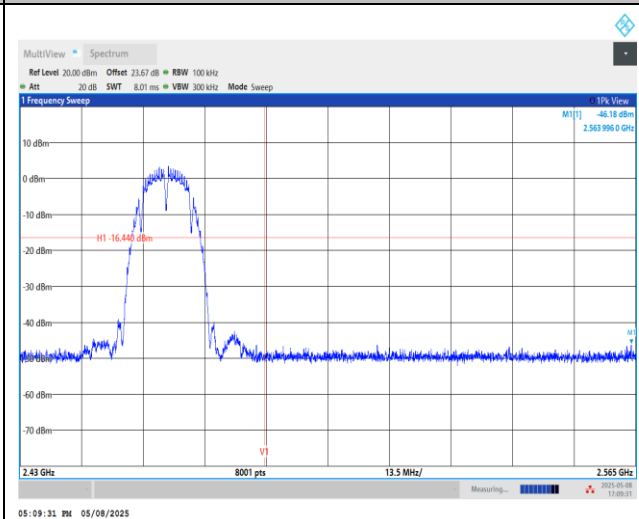

Spurious Emission 30MHz~1GHz

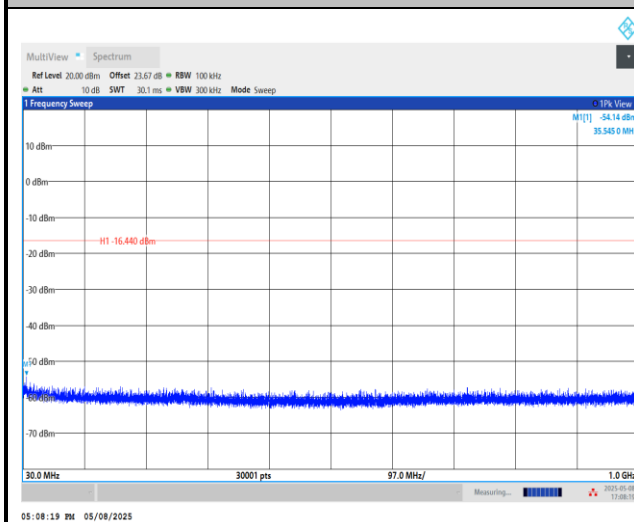

Spurious Emission 1GHz~26.5GHz

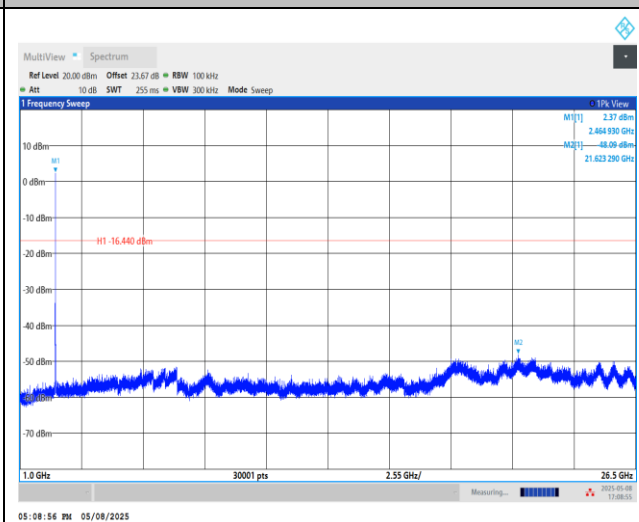





Test Mode : 802.11g

Test Channel : 01


100kHz PSD reference Level

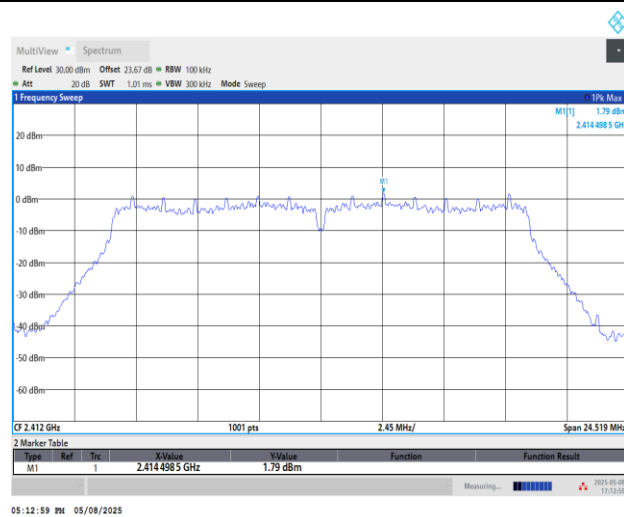


Channel 01 Plot

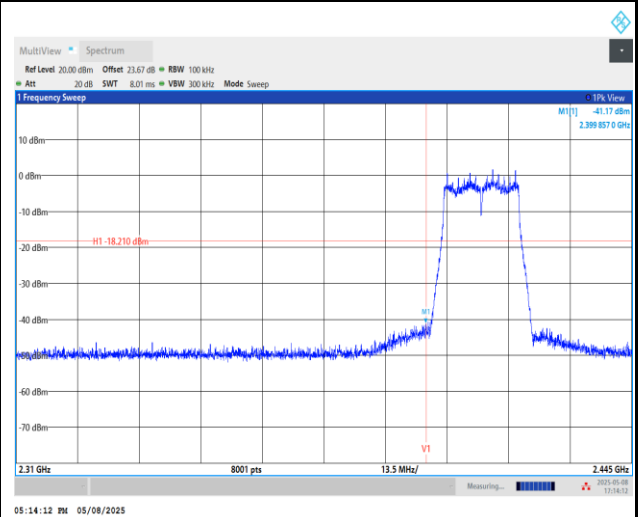

Spurious Emission 30MHz~1GHz

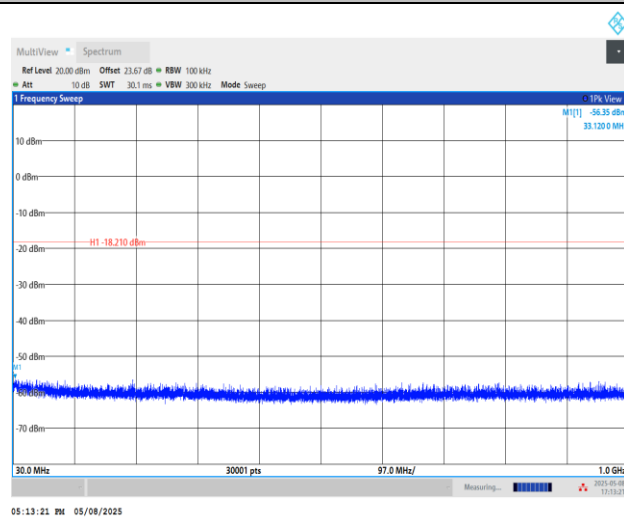

Spurious Emission 1GHz~26.5GHz

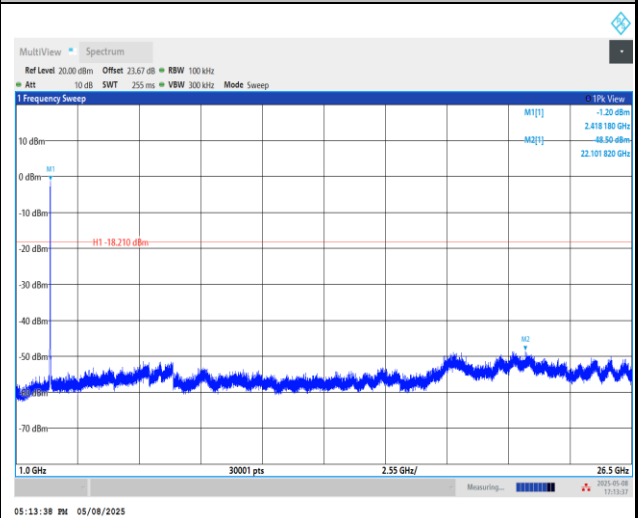





Test Mode : 802.11g

Test Channel : 06


100kHz PSD reference Level

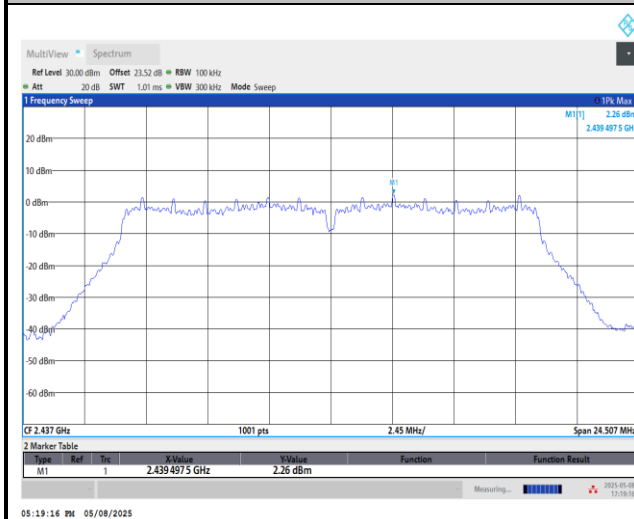


Channel 06 Plot



Spurious Emission 30MHz~1GHz

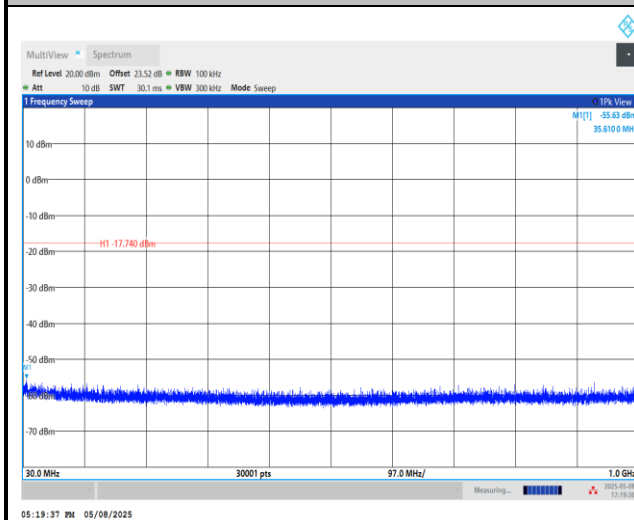

Spurious Emission 1GHz~26.5GHz

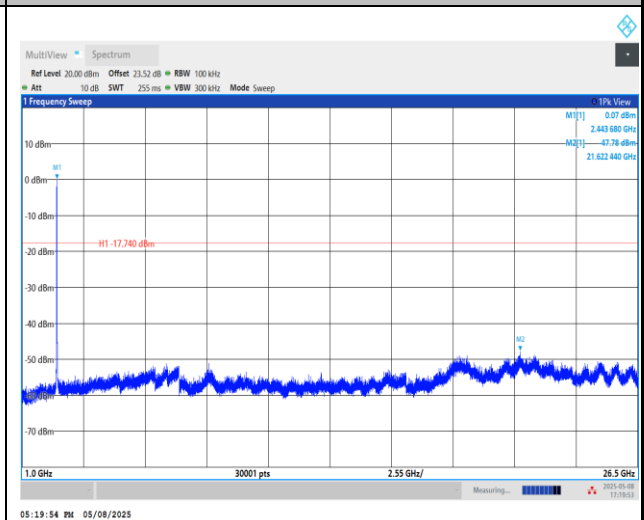





Test Mode : 802.11g

Test Channel : 11


100kHz PSD reference Level

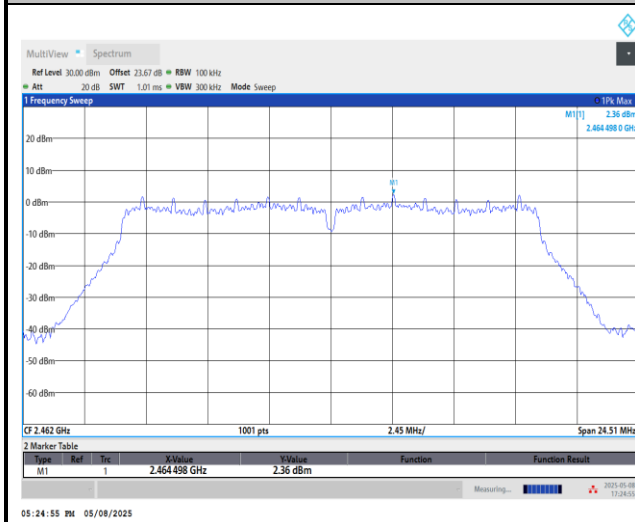


Channel 11 Plot

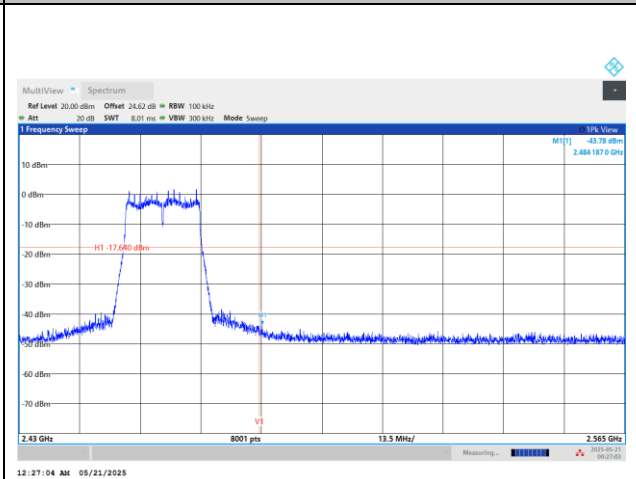

Spurious Emission 30MHz~1GHz

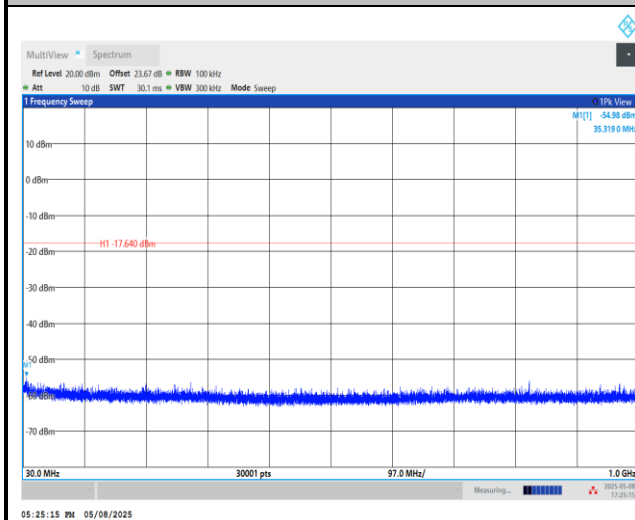

Spurious Emission 1GHz~26.5GHz

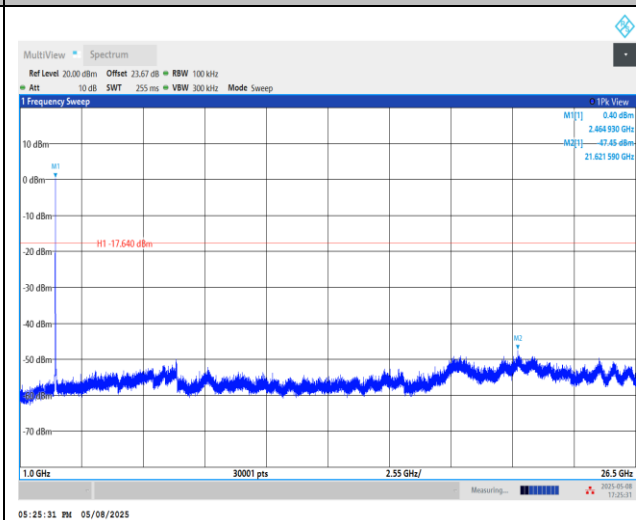





Test Mode : 802.11ac20

Test Channel : 01


100kHz PSD reference Level

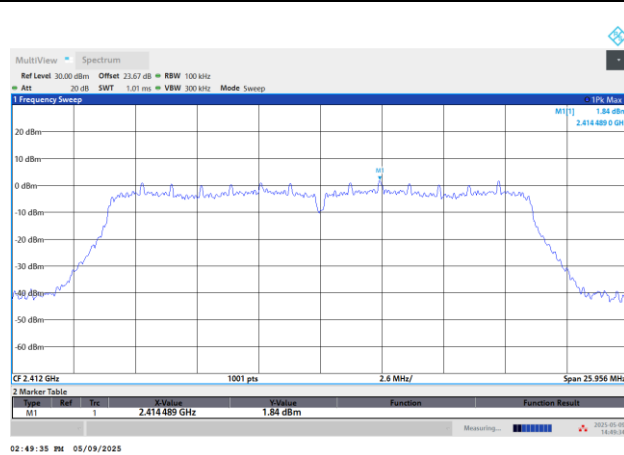


Channel 01 Plot

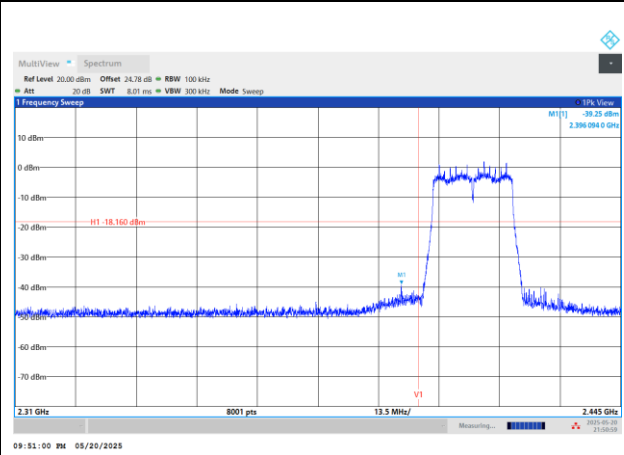

Spurious Emission 30MHz~1GHz

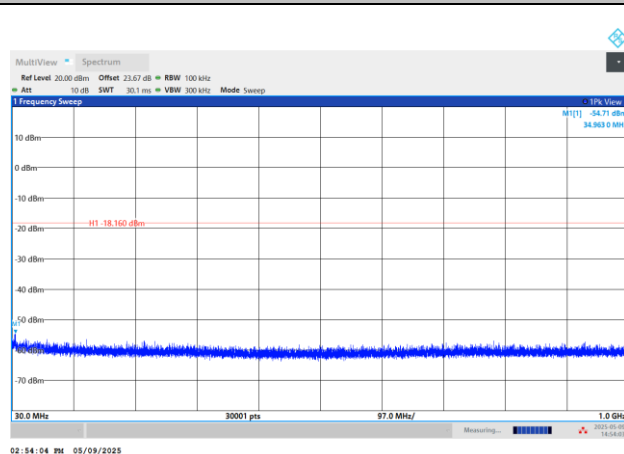

Spurious Emission 1GHz~26.5GHz

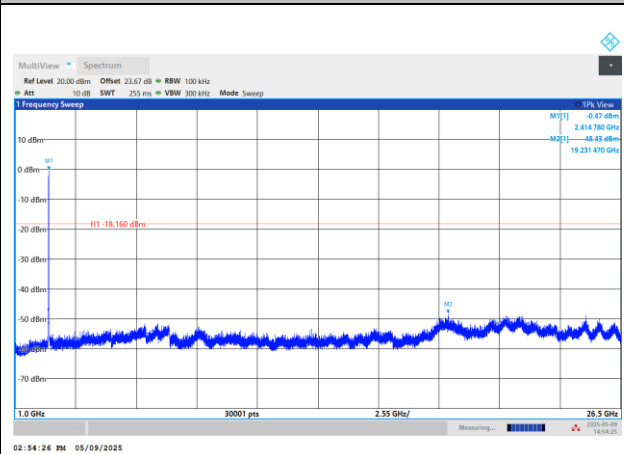




Test Mode : 802.11ac20

Test Channel : 06


100kHz PSD reference Level

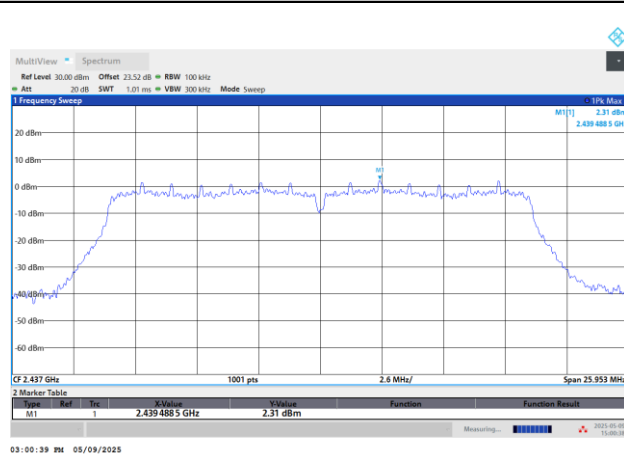


Channel 06 Plot



Spurious Emission 30MHz~1GHz

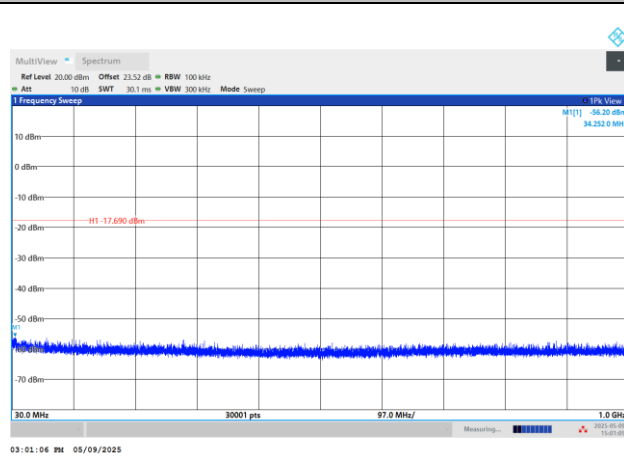

Spurious Emission 1GHz~26.5GHz

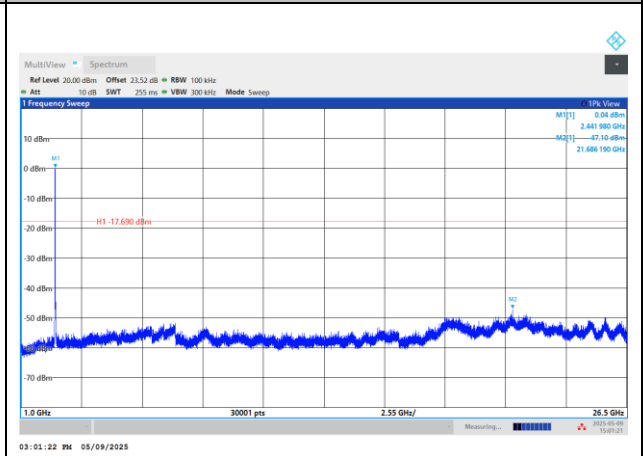





Test Mode : 802.11ac20

Test Channel : 11


100kHz PSD reference Level

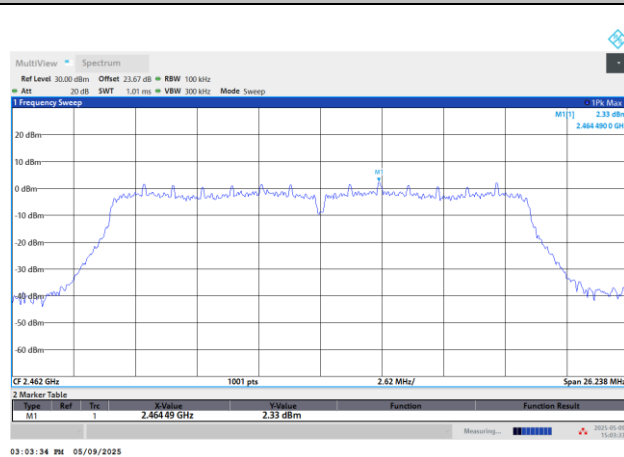


Channel 11 Plot

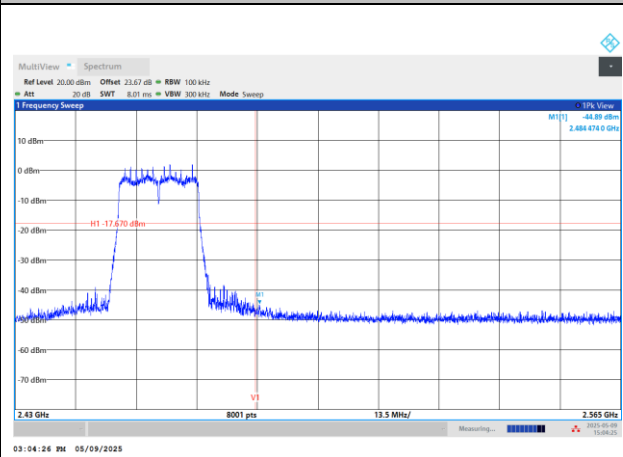

Spurious Emission 30MHz~1GHz

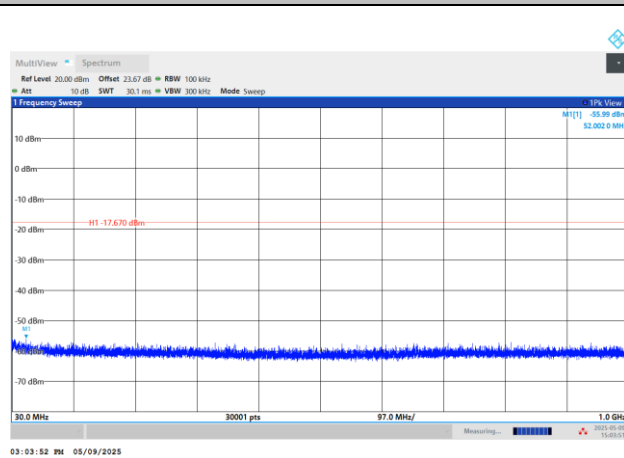

Spurious Emission 1GHz~26.5GHz

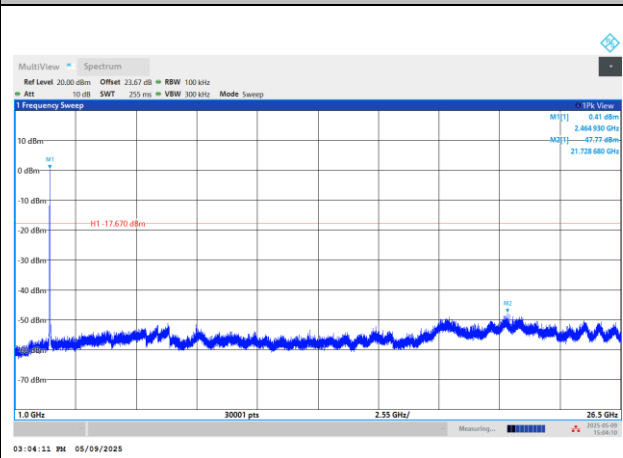





Test Mode : 802.11ax20_FullIRU

Test Channel : 01


100kHz PSD reference Level

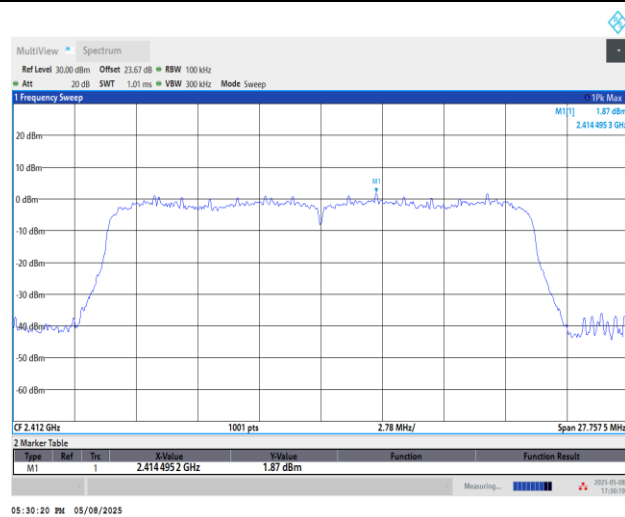


Channel 01 Plot

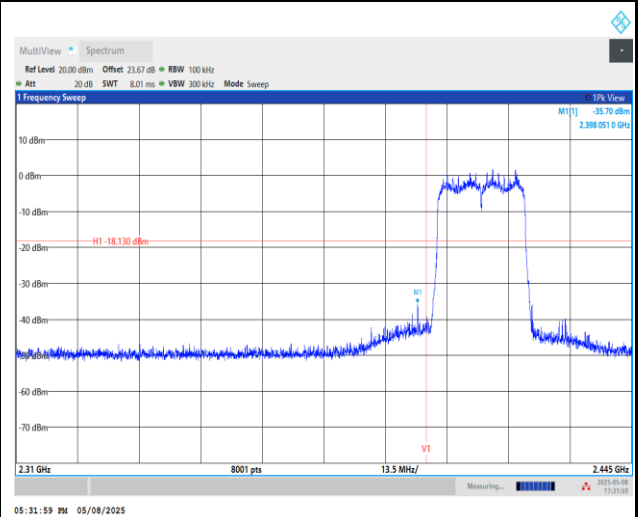

Spurious Emission 30MHz~1GHz

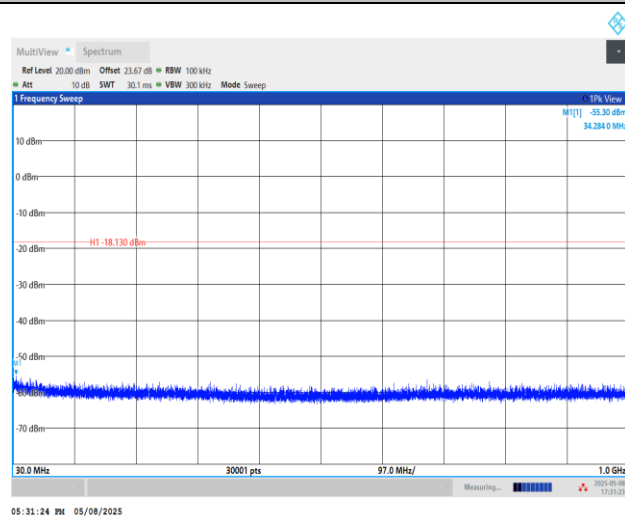


Spurious Emission 1GHz~26.5GHz

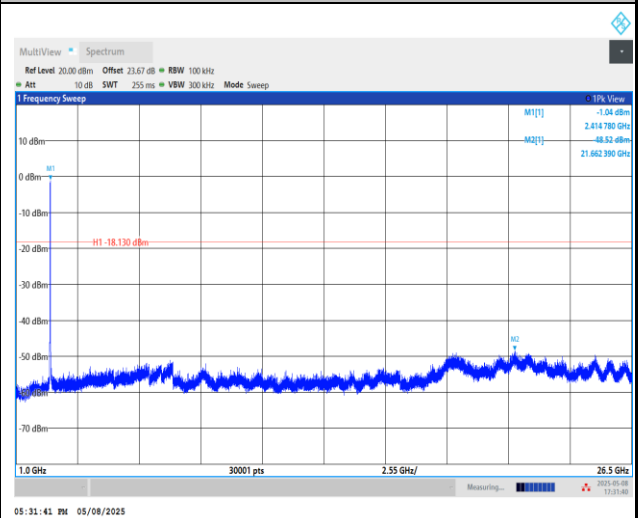



Test Mode :	802.11ax20_FullIRU	Test Channel :	06
-------------	--------------------	----------------	----

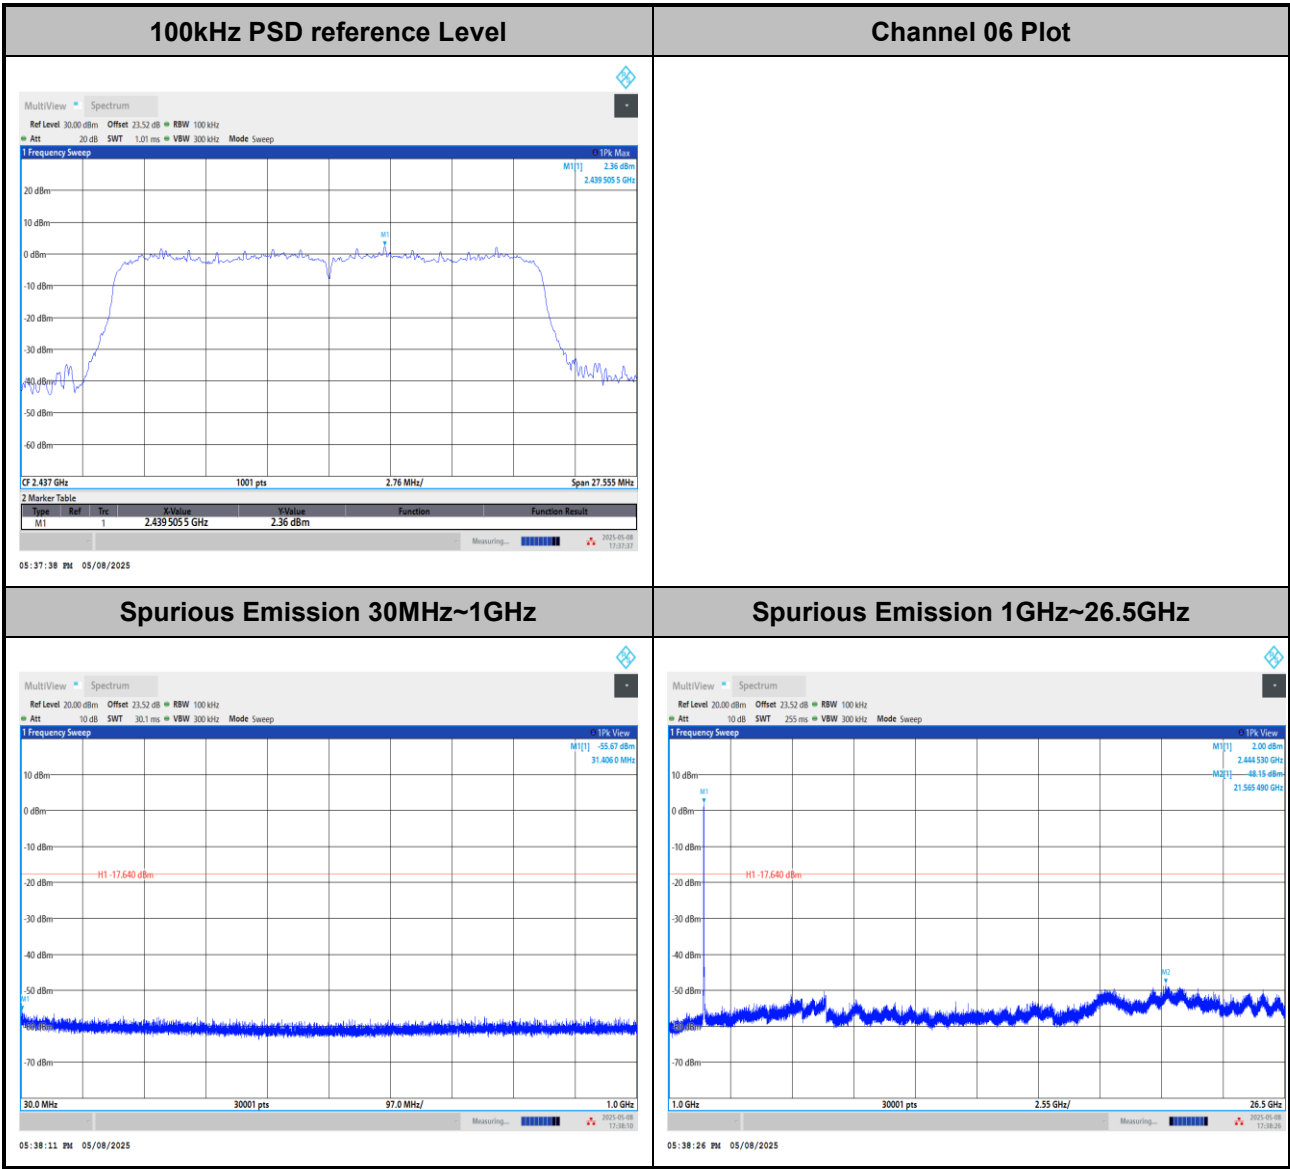





Test Mode : 802.11ax20_FullIRU

Test Channel : 11


100kHz PSD reference Level

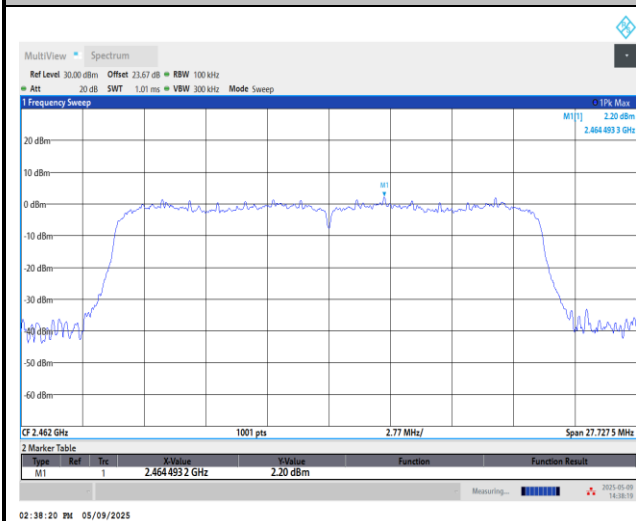


Channel 11 Plot

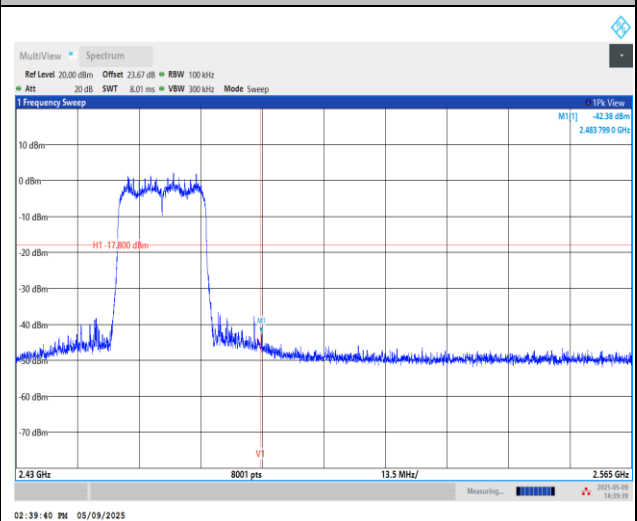

Spurious Emission 30MHz~1GHz

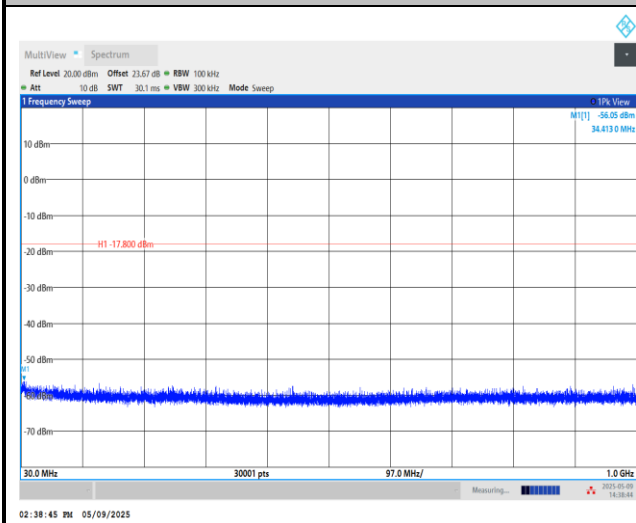

Spurious Emission 1GHz~26.5GHz

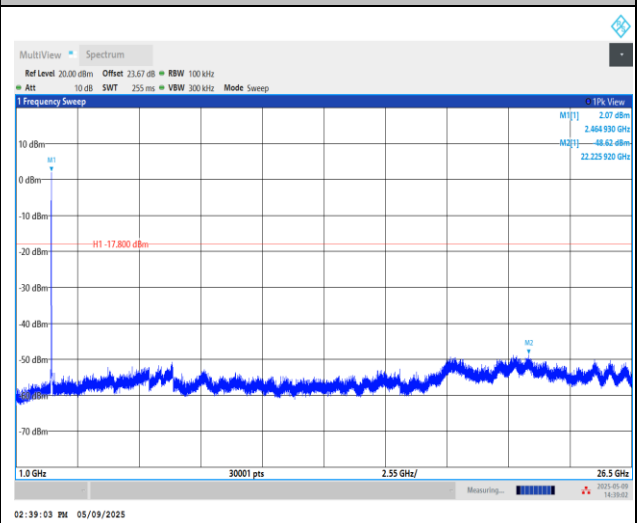





Test Mode : 802.11ac40

Test Channel : 03


100kHz PSD reference Level

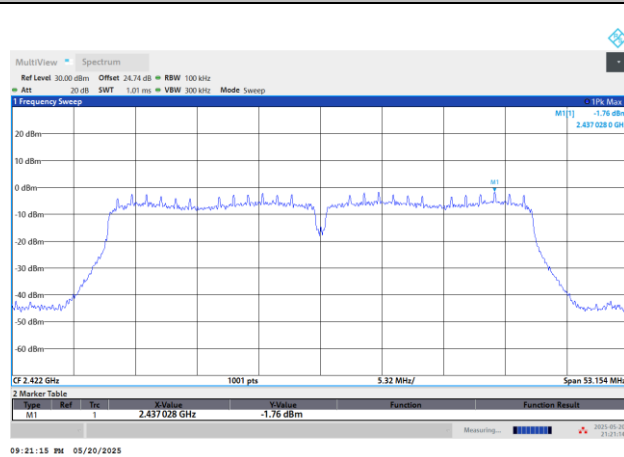


Channel 03 Plot

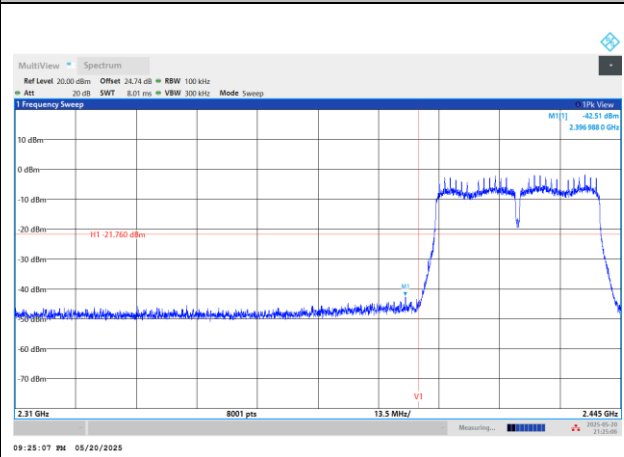

Spurious Emission 30MHz~1GHz

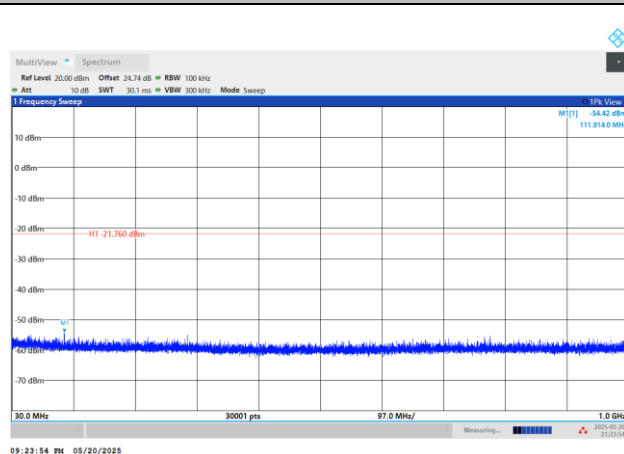

Spurious Emission 1GHz~26.5GHz

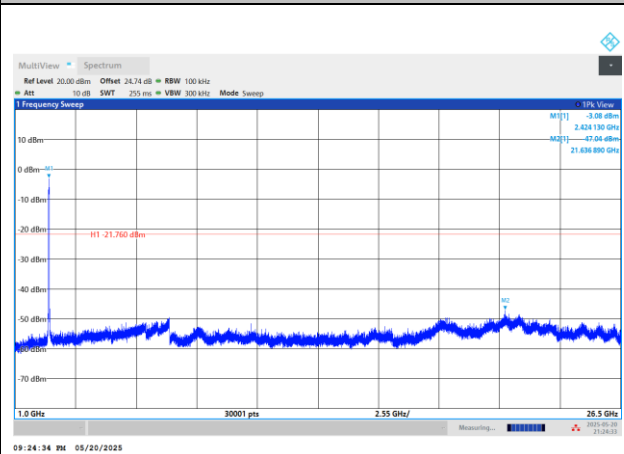




Test Mode : 802.11ac40

Test Channel : 06


100kHz PSD reference Level

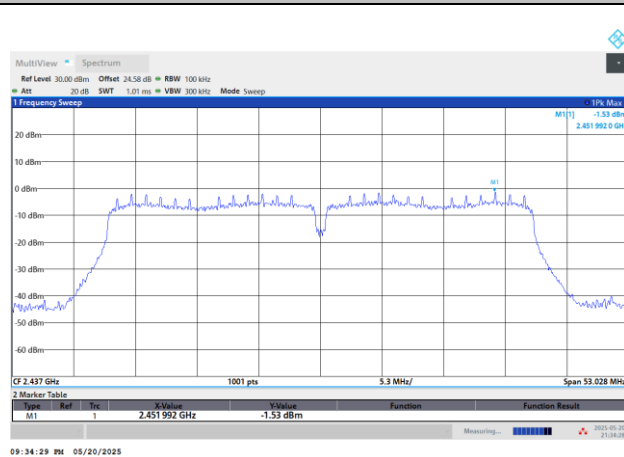


Channel 06 Plot



Spurious Emission 30MHz~1GHz

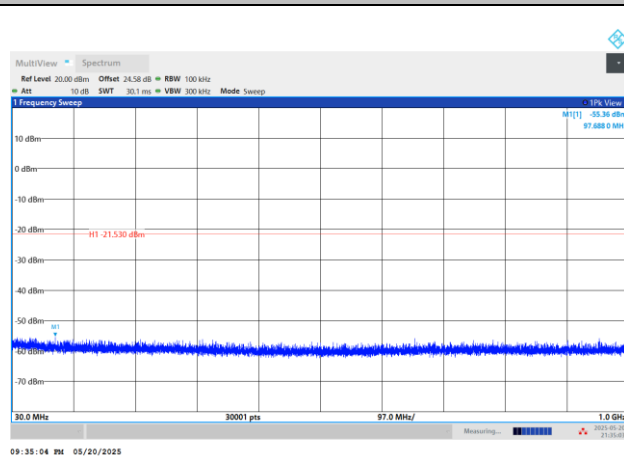

Spurious Emission 1GHz~26.5GHz

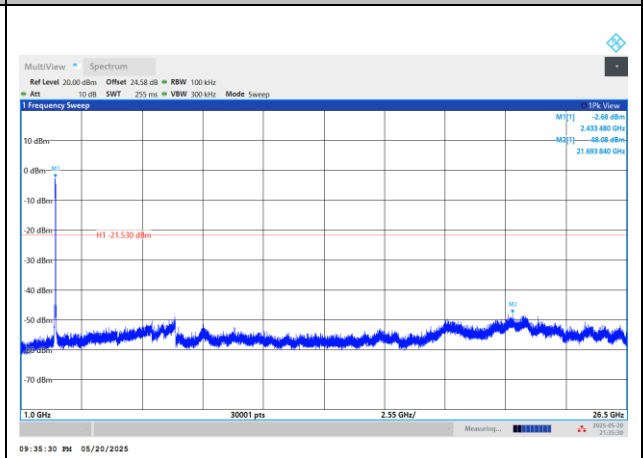





Test Mode : 802.11ac40

Test Channel : 09


100kHz PSD reference Level

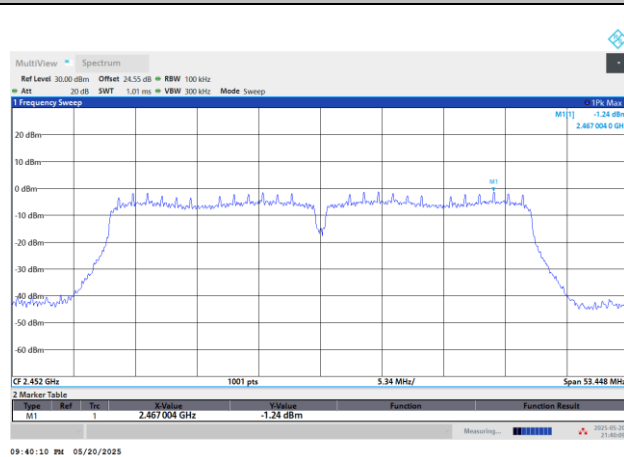


Channel 09 Plot

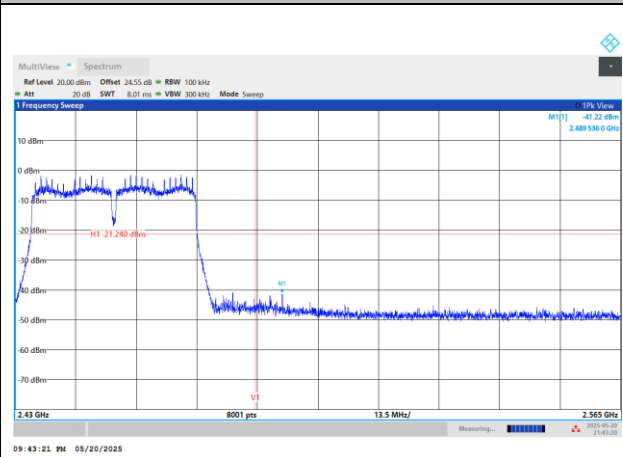

Spurious Emission 30MHz~1GHz

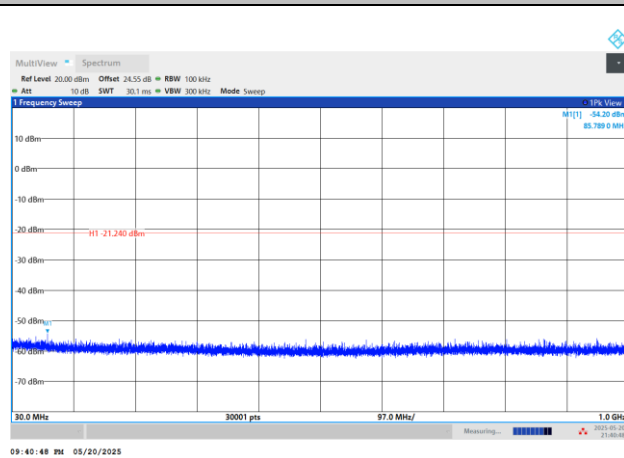

Spurious Emission 1GHz~26.5GHz

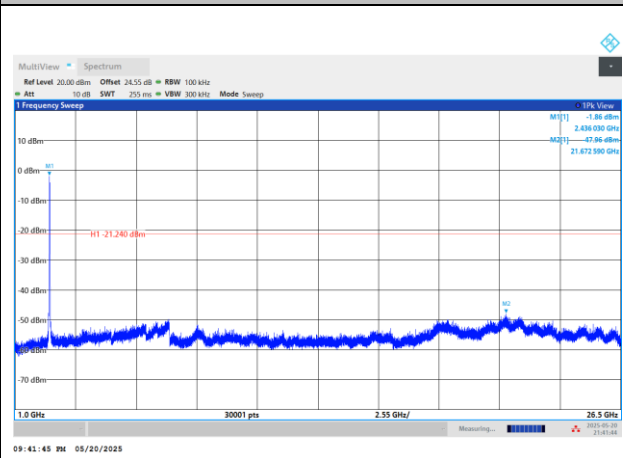





Test Mode : 802.11ax40_FullIRU

Test Channel : 03


100kHz PSD reference Level

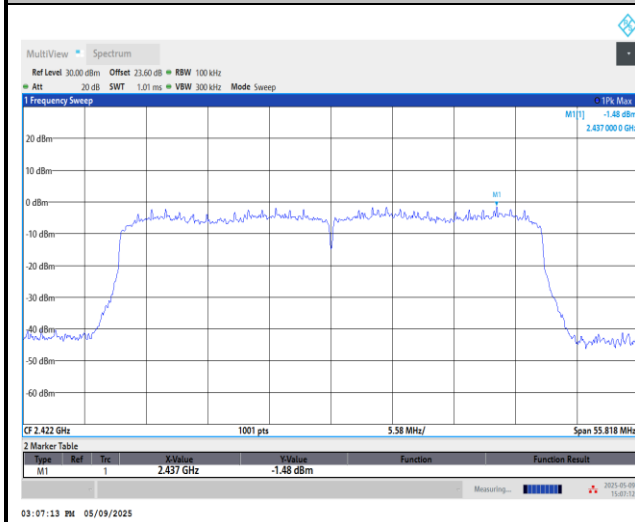


Channel 03 Plot

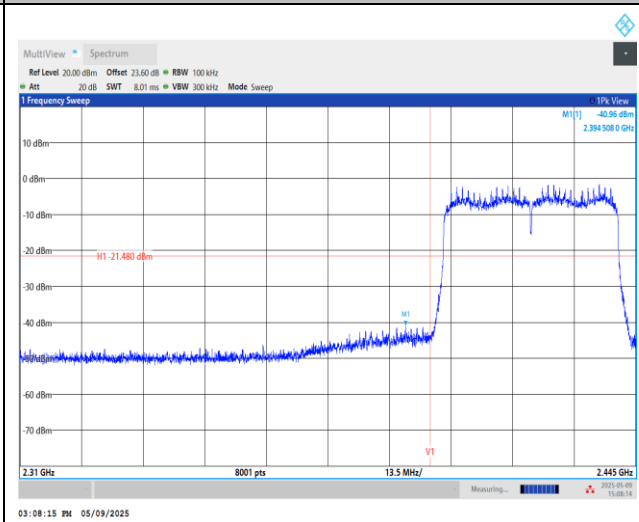

Spurious Emission 30MHz~1GHz

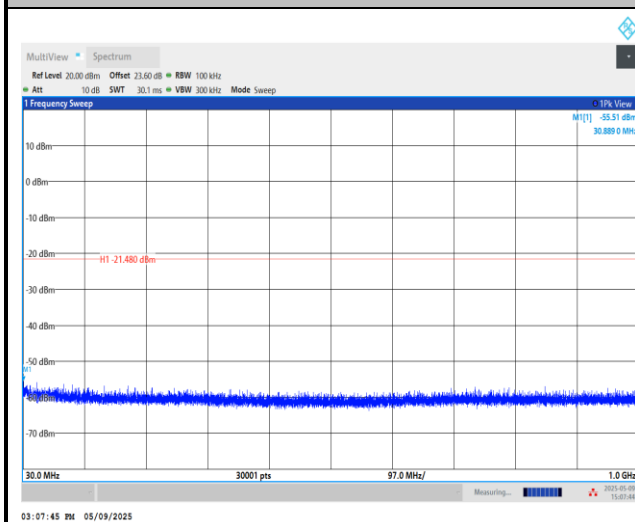


Spurious Emission 1GHz~26.5GHz

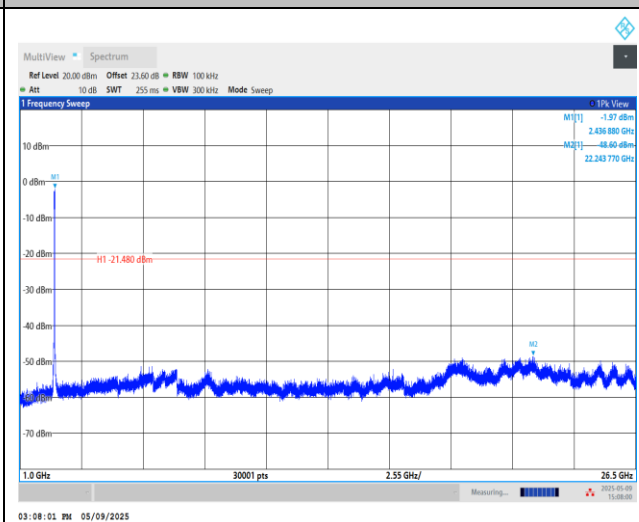



Test Mode :	802.11ax40_FullIRU	Test Channel :	06
-------------	--------------------	----------------	----

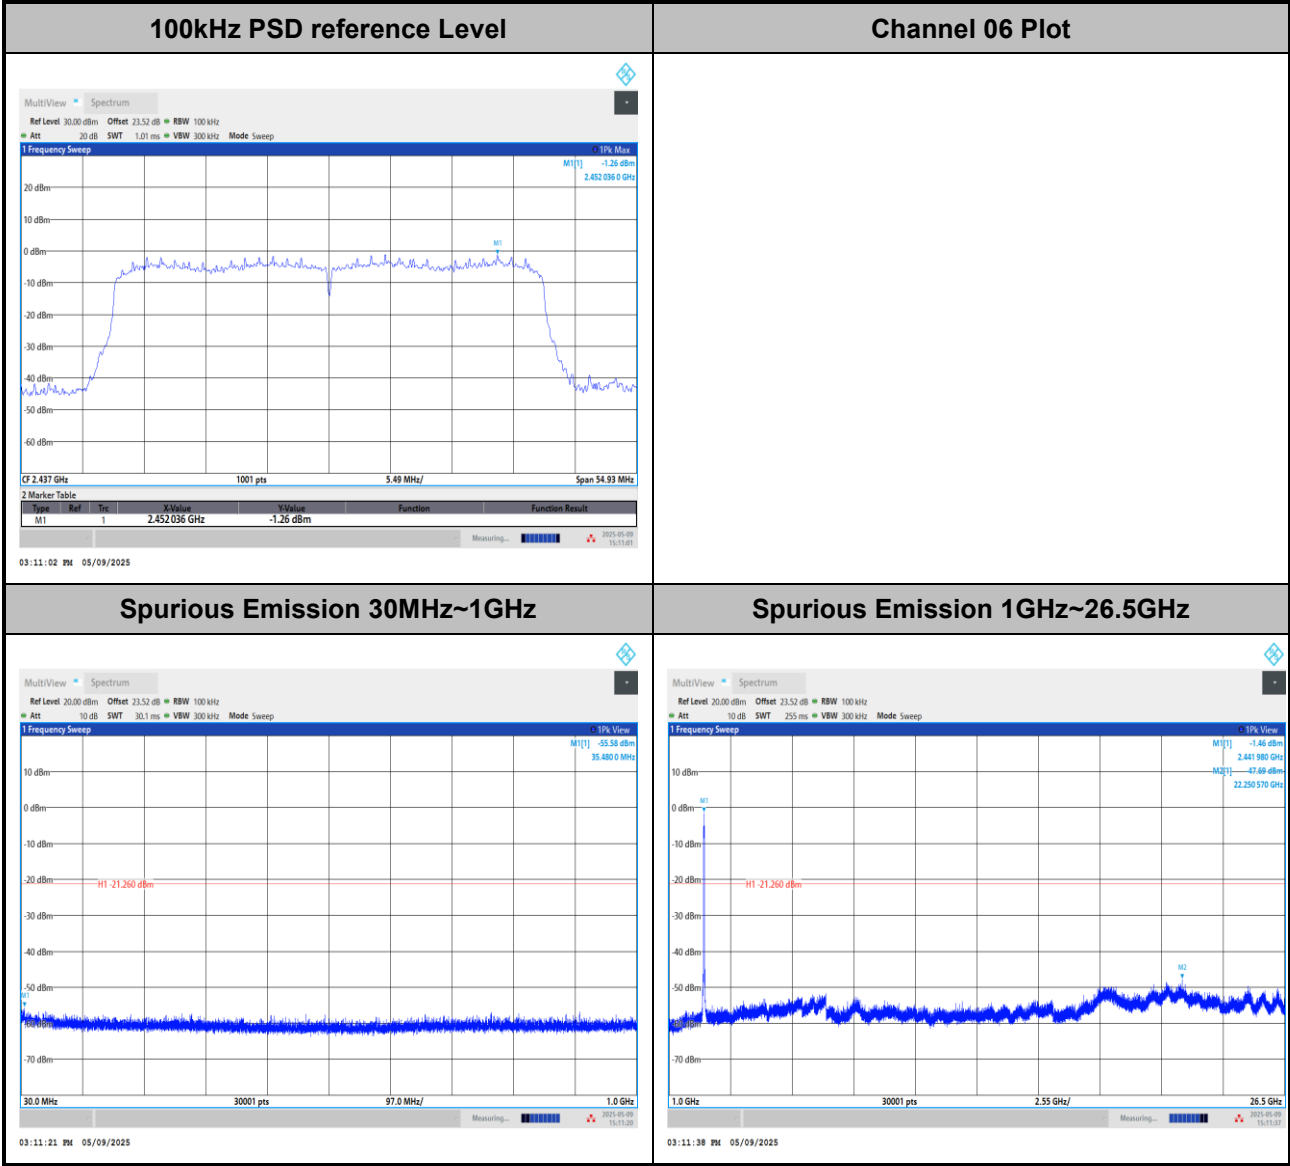





Test Mode : 802.11ax40_FullIRU

Test Channel : 09


100kHz PSD reference Level

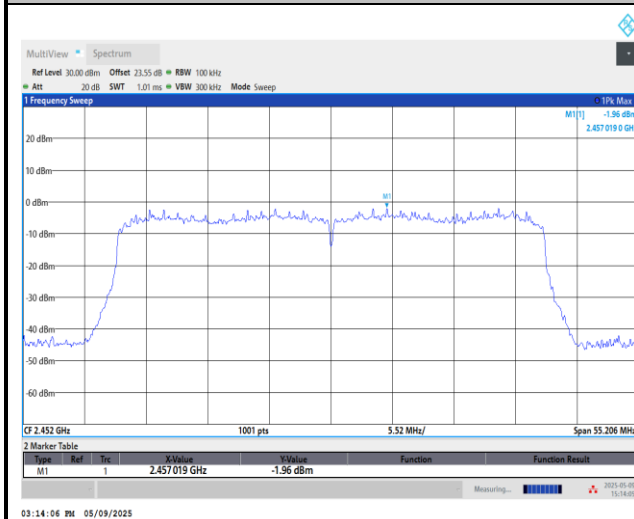


Channel 09 Plot

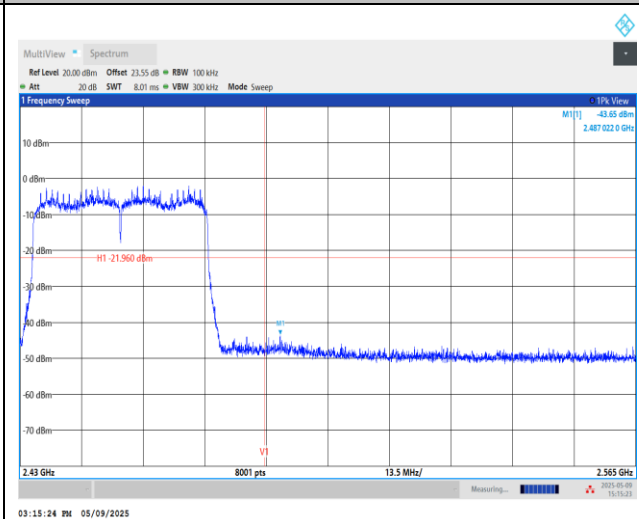

Spurious Emission 30MHz~1GHz

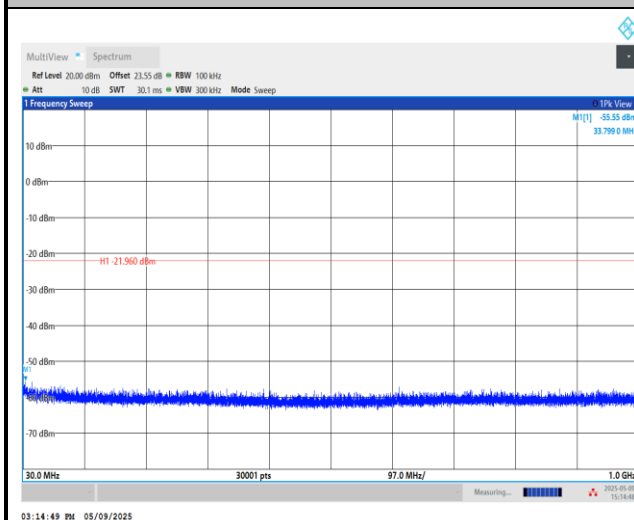

Spurious Emission 1GHz~26.5GHz

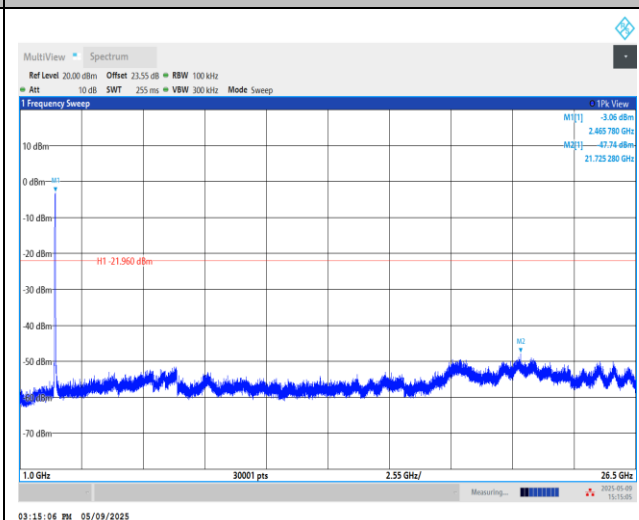



Appendix B. AC Conducted Emission Test Results


Test Engineer :	Louis Chung	Temperature :	22.4~25.6℃
		Relative Humidity :	43.3~49.1%

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

541507
Mode 1
120Vac/60Hz
Line

Full Spectrum

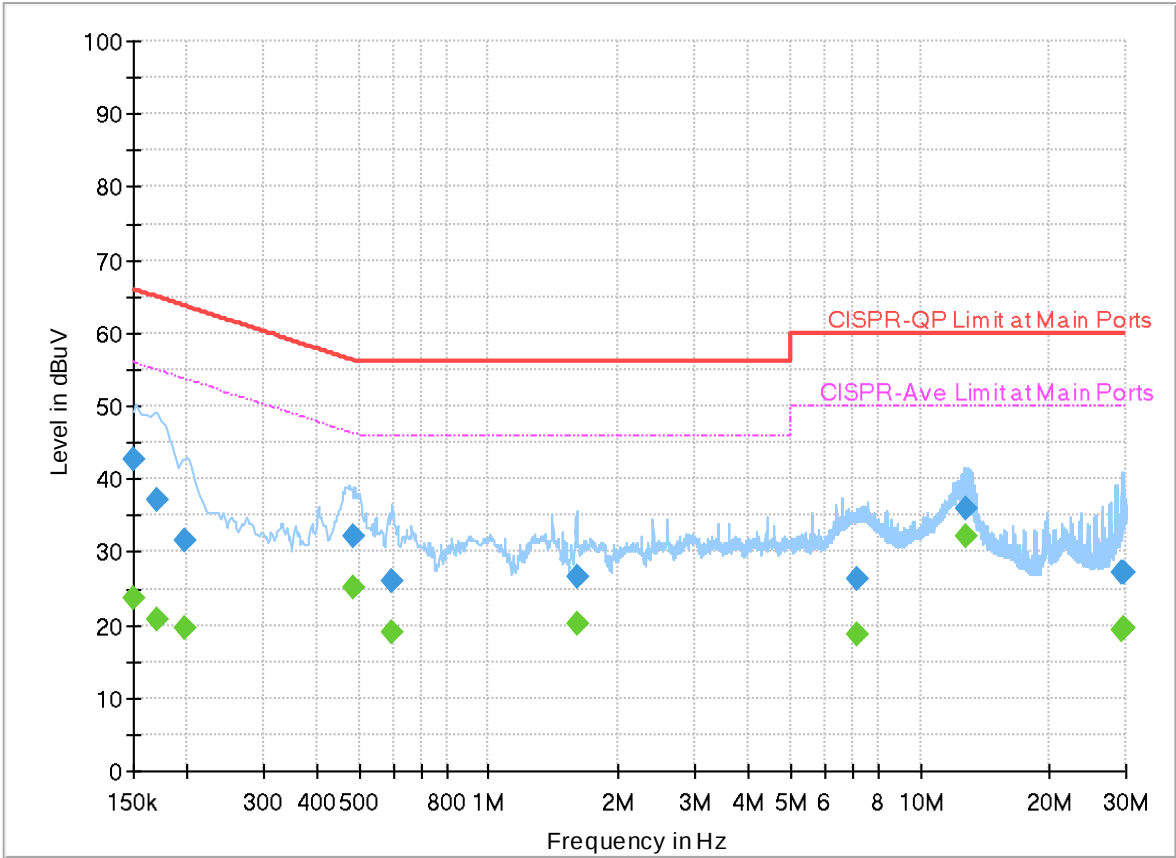

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.150000	---	23.56	56.00	32.44	L1	FLO	20.0
0.150000	42.62	---	66.00	23.38	L1	FLO	20.0
0.170610	---	20.77	54.93	34.16	L1	FLO	20.0
0.170610	36.99	---	64.93	27.94	L1	FLO	20.0
0.197250	---	19.71	53.73	34.02	L1	FLO	20.0
0.197250	31.47	---	63.73	32.26	L1	FLO	20.0
0.486690	---	25.21	46.22	21.01	L1	FLO	20.0
0.486690	32.08	---	56.22	24.14	L1	FLO	20.0
0.594240	---	19.08	46.00	26.92	L1	FLO	20.0
0.594240	25.96	---	56.00	30.04	L1	FLO	20.0
1.596930	---	20.32	46.00	25.68	L1	FLO	20.0
1.596930	26.60	---	56.00	29.40	L1	FLO	20.0
7.139760	---	18.77	50.00	31.23	L1	FLO	20.3
7.139760	26.19	---	60.00	33.81	L1	FLO	20.3
12.798420	---	32.15	50.00	17.85	L1	FLO	20.5
12.798420	36.06	---	60.00	23.94	L1	FLO	20.5
29.399460	---	19.42	50.00	30.58	L1	FLO	21.1
29.399460	27.15	---	60.00	32.85	L1	FLO	21.1
29.591970	---	19.49	50.00	30.51	L1	FLO	21.1


29.591970	27.13	---	60.00	32.87	L1	FLO	21.1
-----------	-------	-----	-------	-------	----	-----	------

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

541507
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

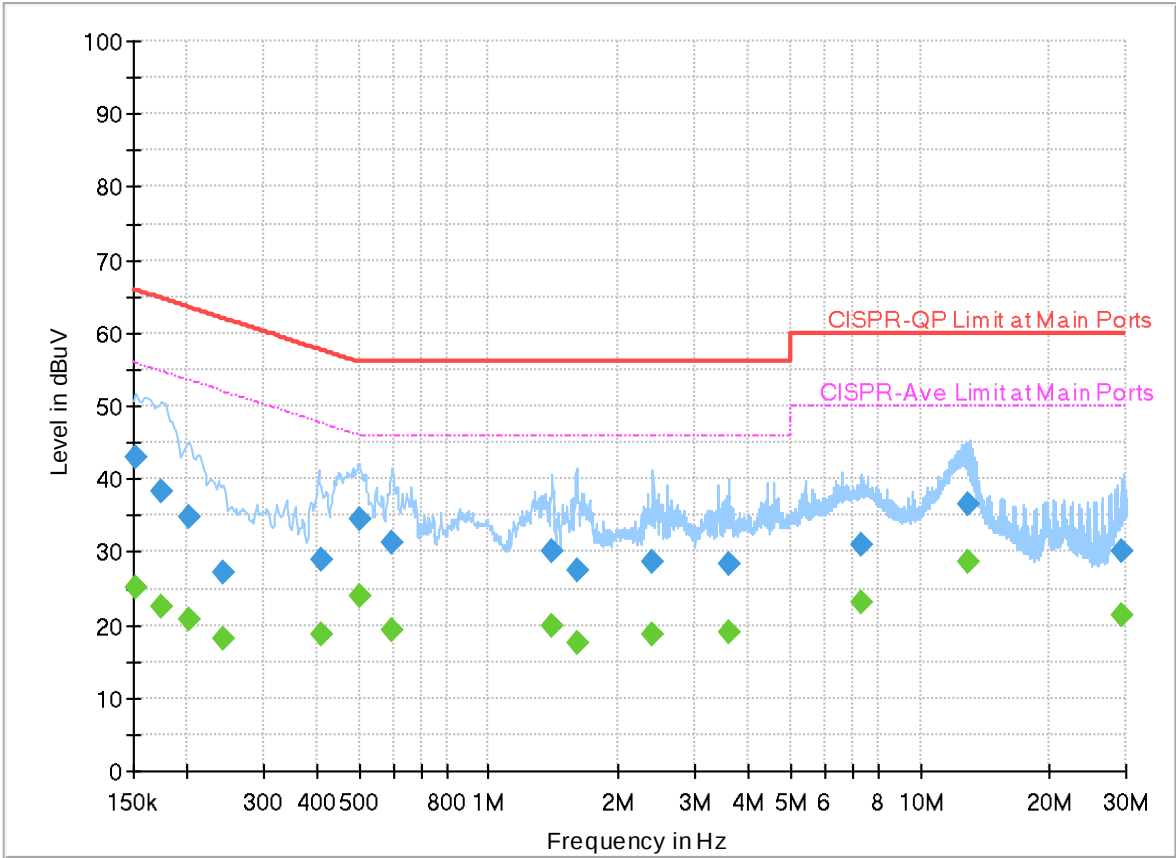

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.151350	---	25.18	55.93	30.75	N	FLO	20.0
0.151350	42.99	---	65.93	22.94	N	FLO	20.0
0.174030	---	22.43	54.77	32.34	N	FLO	20.0
0.174030	38.29	---	64.77	26.48	N	FLO	20.0
0.200760	---	20.78	53.58	32.80	N	FLO	20.0
0.200760	34.71	---	63.58	28.87	N	FLO	20.0
0.243330	---	18.22	51.98	33.76	N	FLO	20.0
0.243330	27.32	---	61.98	34.66	N	FLO	20.0
0.411000	---	18.58	47.63	29.05	N	FLO	20.0
0.411000	28.90	---	57.63	28.73	N	FLO	20.0
0.503340	---	23.95	46.00	22.05	N	FLO	20.0
0.503340	34.48	---	56.00	21.52	N	FLO	20.0
0.596220	---	19.32	46.00	26.68	N	FLO	20.0
0.596220	31.30	---	56.00	24.70	N	FLO	20.0
1.404510	---	19.87	46.00	26.13	N	FLO	20.0
1.404510	30.18	---	56.00	25.82	N	FLO	20.0
1.603500	---	17.46	46.00	28.54	N	FLO	20.0
1.603500	27.48	---	56.00	28.52	N	FLO	20.0
2.400000	---	18.78	46.00	27.22	N	FLO	20.1

2.400000	28.78	---	56.00	27.22	N	FLO	20.1
3.596370	---	19.07	46.00	26.93	N	FLO	20.1
3.596370	28.36	---	56.00	27.64	N	FLO	20.1
7.264680	---	23.11	50.00	26.89	N	FLO	20.3
7.264680	30.87	---	60.00	29.13	N	FLO	20.3
12.967440	---	28.77	50.00	21.23	N	FLO	20.5
12.967440	36.63	---	60.00	23.37	N	FLO	20.5
29.401800	---	21.42	50.00	28.58	N	FLO	21.0
29.401800	30.01	---	60.00	29.99	N	FLO	21.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan, Gary Guo, and Steven Wu	Temperature (°C):	20 ~ 26
		Relative Humidity (%):	40 ~ 65

Note symbol

-L	Low channel location
-R	High channel location

<Sample 1>

C1-1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 13	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 14	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 15	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 16	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 17	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 18	2400-2483.5	1	802.11ax HE20	01	2412	MCS0	Full RU	-
Mode 19	2400-2483.5	1	802.11ax HE20	06	2437	MCS0	Full RU	-
Mode 20	2400-2483.5	1	802.11ax HE20	11	2462	MCS0	Full RU	-
Mode 21	2400-2483.5	1	802.11ax HE40	03	2422	MCS0	Full RU	-
Mode 22	2400-2483.5	1	802.11ax HE40	06	2437	MCS0	Full RU	-
Mode 23	2400-2483.5	1	802.11ax HE40	09	2452	MCS0	Full RU	-
Mode 24	2400-2483.5	1	802.11ax HE20	01	2412	MCS0	Partial 106/53	-
Mode 25	2400-2483.5	1	802.11ac VHT20	11	2462	MCS0	Full RU	-
Mode 26	2400-2483.5	1	802.11g	11	2462	6Mbps	-	LF





**C1-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11b	01	2386.31	45.36	54.00	-8.64	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	41.93	54.00	-12.07	H	Avg.	Pass	-	Harmonic
13	802.11b	06	2484.69	45.29	54.00	-8.71	H	Avg.	Pass	-	Band Edge
	802.11b	06	4874.00	41.59	54.00	-12.41	V	Avg.	Pass	-	Harmonic
14	802.11b	11	2487.76	49.36	54.00	-4.64	H	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	42.05	54.00	-11.95	V	Avg.	Pass	-	Harmonic
15	802.11g	01	2389.95	49.26	54.00	-4.74	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	40.23	74.00	-33.77	H	Peak	Pass	-	Harmonic
16	802.11g	06	2483.56	46.16	54.00	-7.84	H	Avg.	Pass	-	Band Edge
	802.11g	06	7311.00	45.31	74.00	-28.69	H	Peak	Pass	-	Harmonic
17	802.11g	11	2483.51	50.65	54.00	-3.35	H	Avg.	Pass	-	Band Edge
	802.11g	11	7386.00	44.91	74.00	-29.09	H	Peak	Pass	-	Harmonic
18	802.11ax HE20	01	2389.95	50.30	54.00	-3.70	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	01	4824.00	40.00	74.00	-34.00	H	Peak	Pass	Full RU	Harmonic
19	802.11ax HE20	06	2483.56	48.36	54.00	-5.64	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	06	7311.00	45.39	74.00	-28.61	H	Peak	Pass	Full RU	Harmonic
20	802.11ax HE20	11	2483.55	69.57	74.00	-4.43	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	11	7386.00	44.49	74.00	-29.51	H	Peak	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
21	802.11ax HE40	03	2389.97	50.17	54.00	-3.83	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	03	7266.00	45.86	74.00	-28.14	H	Peak	Pass	Full RU	Harmonic
22	802.11ax HE40	06	2484.69	49.94	54.00	-4.06	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	06	7311.00	45.98	74.00	-28.02	H	Peak	Pass	Full RU	Harmonic
23	802.11ax HE40	09	2485.64	50.52	54.00	-3.48	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	09	7356.00	45.27	74.00	-28.73	V	Peak	Pass	Full RU	Harmonic
24	802.11ax HE20	01	2386.96	68.11	74.00	-5.89	H	Peak	Pass	Partial 106/53	Band Edge
	802.11ax HE20	01	-	-	-	-	-	-	-	Partial 106/53	Harmonic
25	802.11ac VHT20	11	2483.51	49.56	54.00	-4.44	H	Avg.	Pass	Full RU	Band Edge
	802.11ac VHT20	11	7386.00	44.62	74.00	-29.38	V	Peak	Pass	Full RU	Harmonic
26	LF	11	38.73	33.60	40.00	-6.40	V	QP	Pass	-	LF

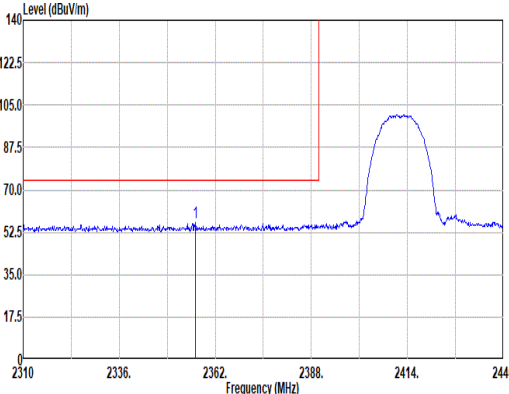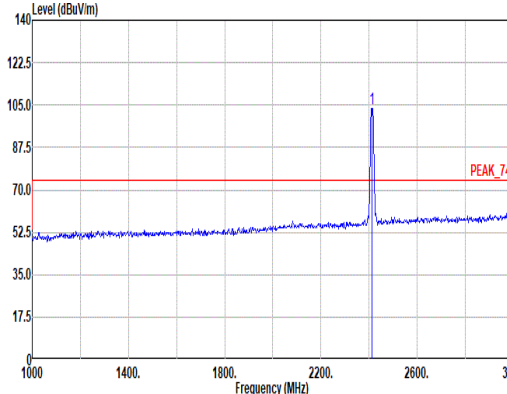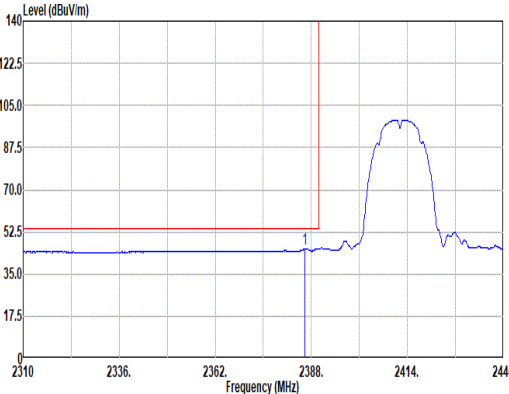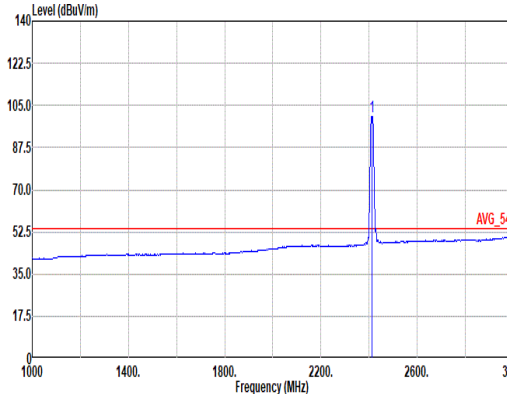

Mode	12																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2356.67</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>41.94</td><td>27.30</td><td>7.66</td><td>30.34</td><td>9.92</td><td>100</td><td>61 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2356.67	56.48	74.00	-17.52	41.94	27.30	7.66	30.34	9.92	100	61 Peak	 Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>103.54</td><td>-----</td><td>-----</td><td>88.57</td><td>27.62</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>61 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.54	-----	-----	88.57	27.62	7.75	30.32	9.92	100	61 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2356.67	56.48	74.00	-17.52	41.94	27.30	7.66	30.34	9.92	100	61 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	103.54	-----	-----	88.57	27.62	7.75	30.32	9.92	100	61 Peak																																																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.31</td><td>45.36</td><td>54.00</td><td>-8.64</td><td>30.63</td><td>27.43</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>61 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.31	45.36	54.00	-8.64	30.63	27.43	7.71	30.33	9.92	100	61 Average	 Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.48</td><td>-----</td><td>-----</td><td>85.49</td><td>27.64</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>61 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.48	-----	-----	85.49	27.64	7.75	30.32	9.92	100	61 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2386.31	45.36	54.00	-8.64	30.63	27.43	7.71	30.33	9.92	100	61 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	100.48	-----	-----	85.49	27.64	7.75	30.32	9.92	100	61 Average																																																																																							

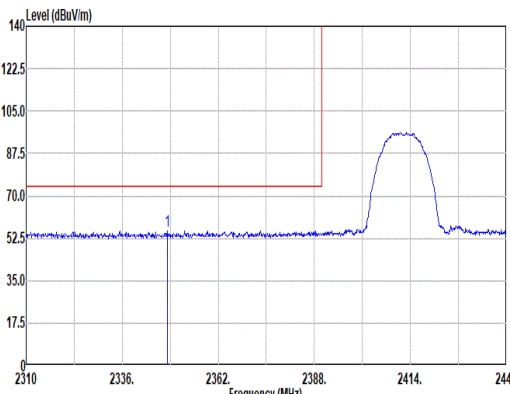
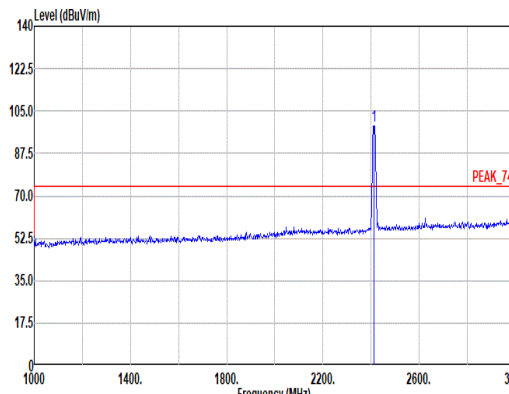
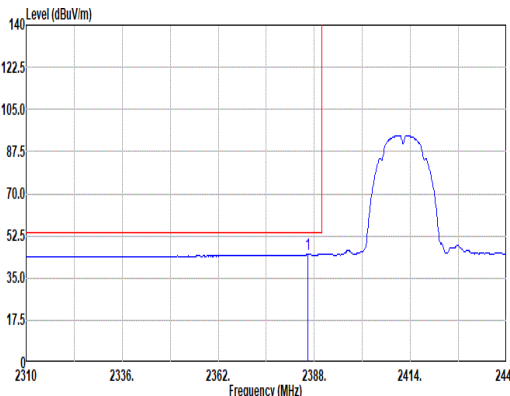
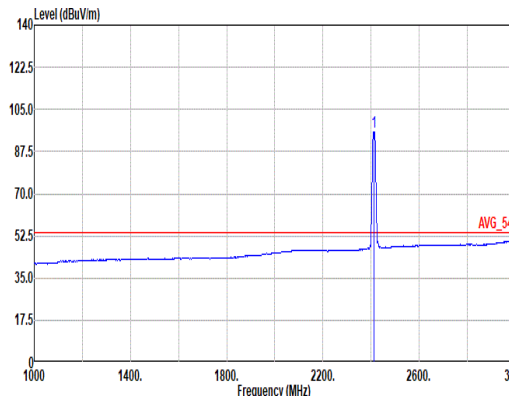


Mode	12																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2348.22</td><td>55.70</td><td>74.00</td><td>-18.30</td><td>41.19</td><td>27.30</td><td>7.64</td><td>30.35</td><td>9.92</td><td>100</td><td>54</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2348.22	55.70	74.00	-18.30	41.19	27.30	7.64	30.35	9.92	100	54	Peak	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.76</td><td>-----</td><td>-----</td><td>83.81</td><td>27.60</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>54</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	98.76	-----	-----	83.81	27.60	7.75	30.32	9.92	100	54
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2348.22	55.70	74.00	-18.30	41.19	27.30	7.64	30.35	9.92	100	54	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	98.76	-----	-----	83.81	27.60	7.75	30.32	9.92	100	54	Peak																																																																																					
Avg																																																																																																	
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>44.75</td><td>54.00</td><td>-9.25</td><td>30.03</td><td>27.42</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>54</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2386.18	44.75	54.00	-9.25	30.03	27.42	7.71	30.33	9.92	100	54	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>95.64</td><td>-----</td><td>-----</td><td>80.69</td><td>27.60</td><td>7.75</td><td>30.32</td><td>9.92</td><td>100</td><td>54</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	2412.00	95.64	-----	-----	80.69	27.60	7.75	30.32	9.92	100	54
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2386.18	44.75	54.00	-9.25	30.03	27.42	7.71	30.33	9.92	100	54	Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	95.64	-----	-----	80.69	27.60	7.75	30.32	9.92	100	54	Average																																																																																					





Mode	12																																																																				
	Harmonic																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal													Vertical																																																							
Peak Avg																																																																					
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_250327 HORIZONTAL																																																																				
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>45.62</td><td>74.00</td><td>-28.38</td><td>67.87</td><td>32.60</td><td>11.04</td><td>66.38</td><td>0.49</td><td>100</td><td>15</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>41.93</td><td>54.00</td><td>-12.07</td><td>64.18</td><td>32.60</td><td>11.04</td><td>66.38</td><td>0.49</td><td>100</td><td>15</td><td>Average</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	45.62	74.00	-28.38	67.87	32.60	11.04	66.38	0.49	100	15	Peak	2	4824.00	41.93	54.00	-12.07	64.18	32.60	11.04	66.38	0.49	100	15
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	4824.00	45.62	74.00	-28.38	67.87	32.60	11.04	66.38	0.49	100	15	Peak																																																									
2	4824.00	41.93	54.00	-12.07	64.18	32.60	11.04	66.38	0.49	100	15	Average																																																									
Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_250327 VERTICAL																																																																					
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>45.45</td><td>74.00</td><td>-28.55</td><td>67.70</td><td>32.60</td><td>11.04</td><td>66.38</td><td>0.49</td><td>100</td><td>17</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>40.68</td><td>54.00</td><td>-13.32</td><td>62.93</td><td>32.60</td><td>11.04</td><td>66.38</td><td>0.49</td><td>100</td><td>17</td><td>Average</td></tr></table>																	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	45.45	74.00	-28.55	67.70	32.60	11.04	66.38	0.49	100	17	Peak	2	4824.00	40.68	54.00	-13.32	62.93	32.60	11.04	66.38	0.49	100	17	Average
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																									
1	4824.00	45.45	74.00	-28.55	67.70	32.60	11.04	66.38	0.49	100	17	Peak																																																									
2	4824.00	40.68	54.00	-13.32	62.93	32.60	11.04	66.38	0.49	100	17	Average																																																									

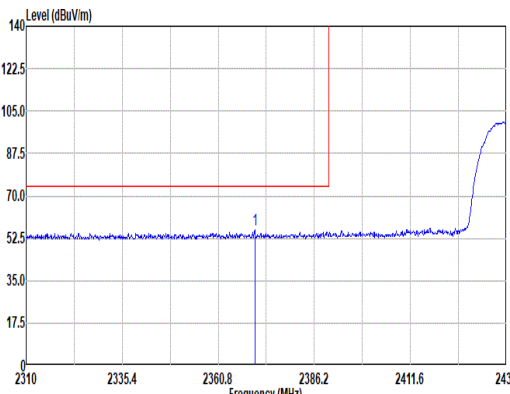
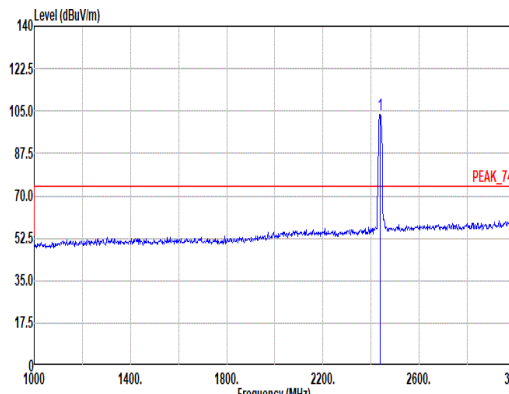
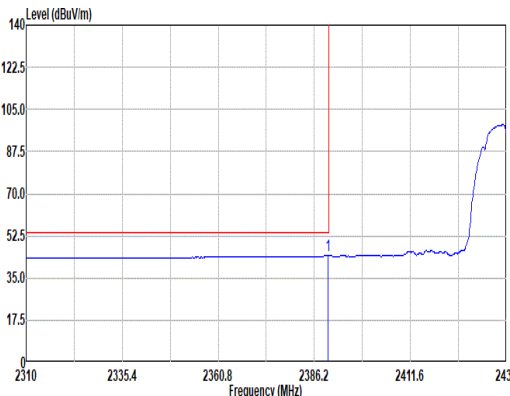
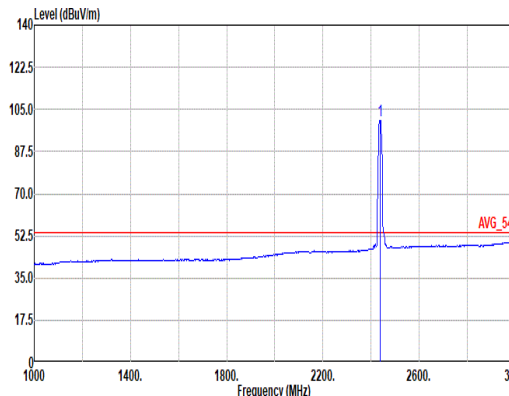


Mode	13																																																						
	Band Edge - L																																																						
	2400-2483.5_802.11b_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	Site : 03CH16-HY Condition: PEAK_BE_74_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																
Avg																																																							
	Site : 03CH16-HY Condition: AVG_BE_54_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2370.45</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>41.30</td><td>27.30</td><td>7.68</td><td>30.34</td><td>9.92</td><td>100</td><td>58 Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2370.45	55.86	74.00	-18.14	41.30	27.30	7.68	30.34	9.92	100	58 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2370.45	55.86	74.00	-18.14	41.30	27.30	7.68	30.34	9.92	100	58 Peak																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>103.33</td><td>-----</td><td>-----</td><td>88.23</td><td>27.70</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>58 Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	103.33	-----	-----	88.23	27.70	7.79	30.31	9.92	100	58 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2437.00	103.33	-----	-----	88.23	27.70	7.79	30.31	9.92	100	58 Peak																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>44.42</td><td>54.00</td><td>-9.58</td><td>29.62</td><td>27.50</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>58 Average</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	44.42	54.00	-9.58	29.62	27.50	7.71	30.33	9.92	100	58 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.88	44.42	54.00	-9.58	29.62	27.50	7.71	30.33	9.92	100	58 Average																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>100.33</td><td>-----</td><td>-----</td><td>85.23</td><td>27.70</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>58 Average</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	100.33	-----	-----	85.23	27.70	7.79	30.31	9.92	100	58 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2437.00	100.33	-----	-----	85.23	27.70	7.79	30.31	9.92	100	58 Average																																												

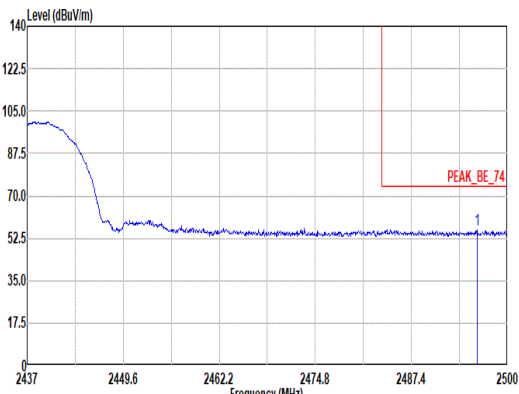
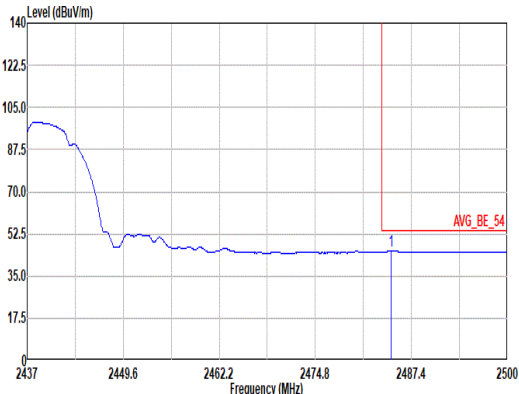


Mode	13																																																			
	Band Edge - R																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																			
ANT	1																																																			
Pol.	Horizontal												Fundamental																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2496.03</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>40.42</td><td>28.00</td><td>7.88</td><td>30.29</td><td>9.92</td><td>100</td><td>58</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2496.03	55.93	74.00	-18.07	40.42	28.00	7.88	30.29	9.92	100	58	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	2496.03	55.93	74.00	-18.07	40.42	28.00	7.88	30.29	9.92	100	58	Peak																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.69</td><td>45.29</td><td>54.00</td><td>-8.71</td><td>29.06</td><td>27.95</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>58</td><td>Average</td></tr></table>													Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.69	45.29	54.00	-8.71	29.06	27.95	7.86	30.30	9.92	100	58	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																									
1	2484.69	45.29	54.00	-8.71	29.06	27.95	7.86	30.30	9.92	100	58	Average																																								

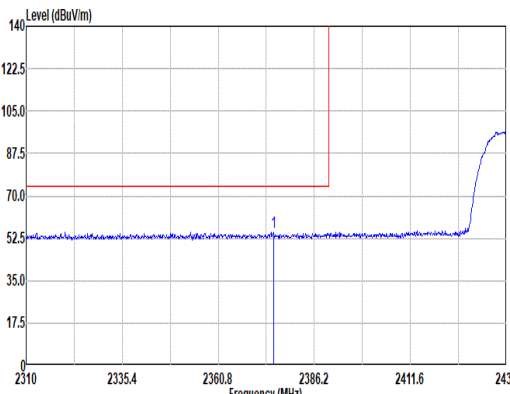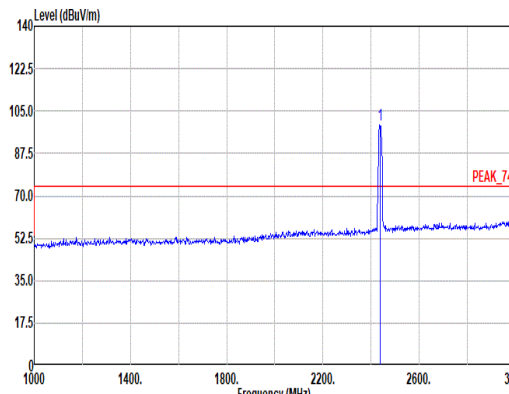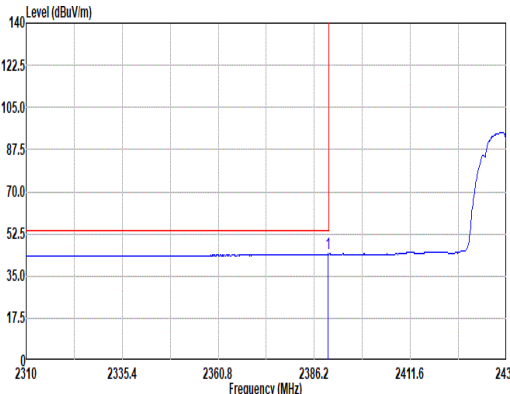
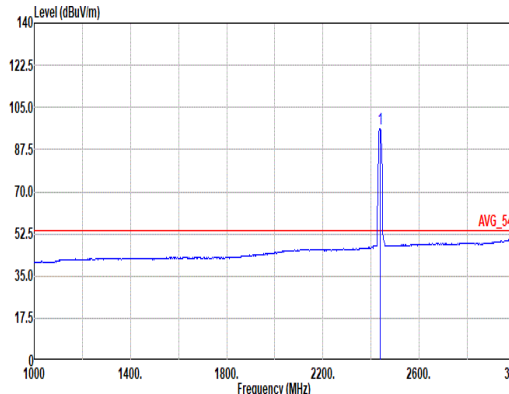


Mode	13																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	Site : 03CH16-HY Condition: PEAK_BE_74_3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.53</td><td>55.08</td><td>74.00</td><td>-18.92</td><td>40.51</td><td>27.30</td><td>7.69</td><td>30.34</td><td>9.92</td><td>100</td><td>55 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2375.53	55.08	74.00	-18.92	40.51	27.30	7.69	30.34	9.92	100	55 Peak	Site : 03CH16-HY Condition: PEAK_74_3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>99.18</td><td>-----</td><td>-----</td><td>84.08</td><td>27.70</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>55 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	99.18	-----	-----	84.08	27.70	7.79	30.31	9.92	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2375.53	55.08	74.00	-18.92	40.51	27.30	7.69	30.34	9.92	100	55 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	99.18	-----	-----	84.08	27.70	7.79	30.31	9.92	100	55 Peak																																																																																									
Avg																																																																																																				
	Site : 03CH16-HY Condition: AVG_BE_54_3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>44.12</td><td>54.00</td><td>-9.88</td><td>29.32</td><td>27.50</td><td>7.71</td><td>30.33</td><td>9.92</td><td>100</td><td>55 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	44.12	54.00	-9.88	29.32	27.50	7.71	30.33	9.92	100	55 Average	Site : 03CH16-HY Condition: AVG_54_3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>96.07</td><td>-----</td><td>-----</td><td>80.97</td><td>27.70</td><td>7.79</td><td>30.31</td><td>9.92</td><td>100</td><td>55 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.07	-----	-----	80.97	27.70	7.79	30.31	9.92	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.88	44.12	54.00	-9.88	29.32	27.50	7.71	30.33	9.92	100	55 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	96.07	-----	-----	80.97	27.70	7.79	30.31	9.92	100	55 Average																																																																																									

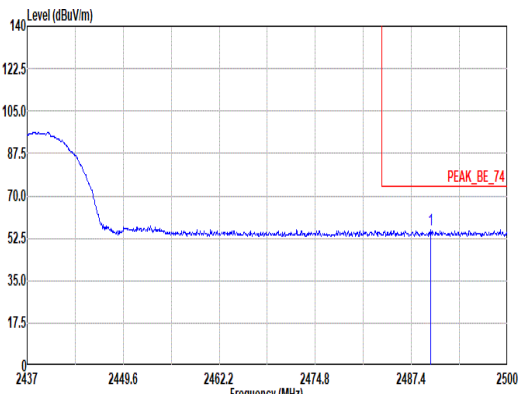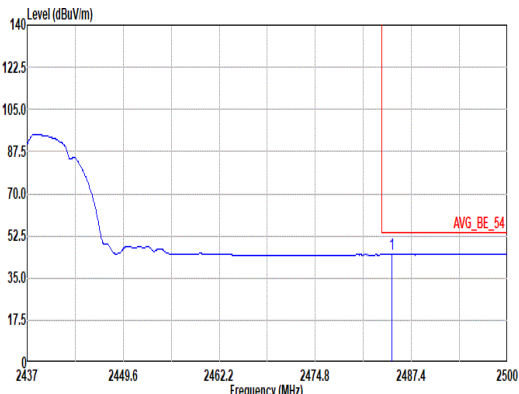

Mode	13																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11b_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Vertical												Fundamental																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2489.92</td><td>55.89</td><td>74.00</td><td>-18.11</td><td>40.39</td><td>28.00</td><td>7.87</td><td>30.29</td><td>9.92</td><td>100</td><td>55</td><td>Peak</td><td></td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2489.92	55.89	74.00	-18.11	40.39	28.00	7.87	30.29	9.92	100	55	Peak		Blank
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	2489.92	55.89	74.00	-18.11	40.39	28.00	7.87	30.29	9.92	100	55	Peak																																											
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.88</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>29.39</td><td>27.95</td><td>7.86</td><td>30.30</td><td>9.92</td><td>100</td><td>55</td><td>Average</td><td></td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.88	44.82	54.00	-9.18	29.39	27.95	7.86	30.30	9.92	100	55	Average		Blank
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																											
1	2484.88	44.82	54.00	-9.18	29.39	27.95	7.86	30.30	9.92	100	55	Average																																											

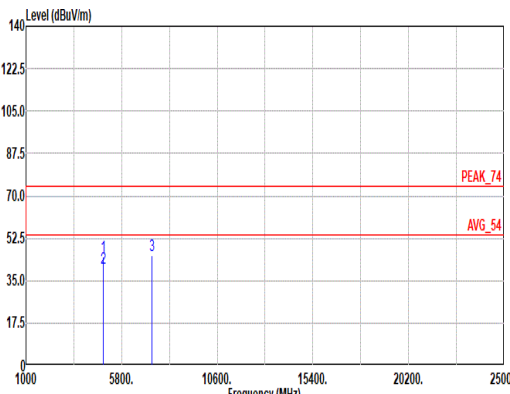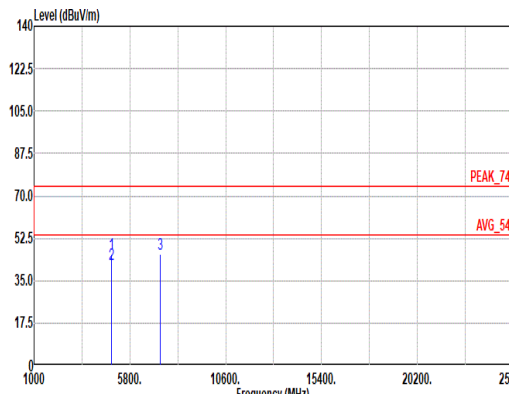

Mode	13																																																																																
	Harmonic																																																																																
	2400-2483.5_802.11b_CH06_2437MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal						Vertical																																																																										
Peak Avg																																																																																	
	Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK_74 3m 91200-1522_250327 VERTICAL																																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.77</td><td>74.00</td><td>-29.23</td><td></td><td>66.76</td><td>32.80</td><td>11.05</td><td>66.34</td><td>0.50</td><td>201</td><td></td><td>64 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>39.98</td><td>54.00</td><td>-14.02</td><td></td><td>61.97</td><td>32.80</td><td>11.05</td><td>66.34</td><td>0.50</td><td>201</td><td></td><td>64 Average</td></tr><tr><td>3</td><td>7311.00</td><td>45.61</td><td>74.00</td><td>-28.39</td><td></td><td>60.48</td><td>37.20</td><td>13.27</td><td>65.75</td><td>0.41</td><td>--</td><td></td><td>-- Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	4874.00	44.77	74.00	-29.23		66.76	32.80	11.05	66.34	0.50	201		64 Peak	2	4874.00	39.98	54.00	-14.02		61.97	32.80	11.05	66.34	0.50	201		64 Average	3	7311.00	45.61	74.00	-28.39		60.48	37.20	13.27	65.75	0.41	--		-- Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																				
1	4874.00	44.77	74.00	-29.23		66.76	32.80	11.05	66.34	0.50	201		64 Peak																																																																				
2	4874.00	39.98	54.00	-14.02		61.97	32.80	11.05	66.34	0.50	201		64 Average																																																																				
3	7311.00	45.61	74.00	-28.39		60.48	37.20	13.27	65.75	0.41	--		-- Peak																																																																				