



FCC RADIO TEST REPORT

FCC ID : 2AMK2-RM03AA
Equipment : PAPER TABLET
Brand Name : reMarkable
Model Name : 2AMK2-RM03AA
Applicant : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Manufacturer : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 15, 2025 and testing was performed from Apr. 22, 2025 to Jun. 06, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	13
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Antenna Requirements.....	24
4 List of Measuring Equipment.....	25
5 Measurement Uncertainty	27
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR541507E	01	Initial issue of report	Jun. 18, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Jessie Ho

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and NFC(WPT).	
Antenna Type WLAN: Monopole Antenna	
Sample 1	Main source
Sample 2	2nd source – FPC, PCB
Sample 3	2nd source – DRAM

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	1.11
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	1.40
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	2.60

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

<Sample List>

Main Board	Main source	Vendor	Avary
		Model Number	SB0SDV1BV0G
	2nd source	Vendor	PI
		Model Number	SB0SDV1B00G
Antenna SUB Board	Main source	Vendor	Avary
		Model Number	SB0SDV2BV0D
	2nd source	Vendor	ASKPCB
		Model Number	SB0SDV2B00D
PB FPC	Main source	Vendor	AKM
		Model Number	MESDV14201A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14211A
USB FPC	Main source	Vendor	AKM
		Model Number	MESDV14203A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14213A
Hall Sensor FPC	Main source	Vendor	AKM
		Model Number	MESDV14205A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14215A
DRAM	Main source	Vendor	Micron
		Model Number	MT53E1G16D1ZW-046 WT:C
	2nd source	Vendor	JSC
		Model Number	JSL4BAG167ZAMF-05A



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "[#]" are 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

This device support 26/52/106/242/484-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The power for 802.11n HT20/ HT40 mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + NFC Charging with Pen 1 + USB Cable 1 (Charging from AC Adapter) + Battery for Sample 1
Remark: - For Radiated Test Cases, the tests were performed with USB Cable 2. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	Adapter	MIBO	MB-21244274	N/A	N/A	N/A
4.	Adapter	Google	G9BR1	N/A	N/A	N/A



2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

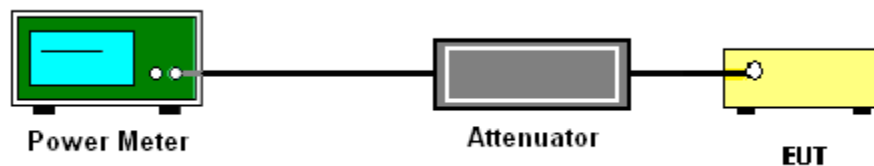

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ $1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

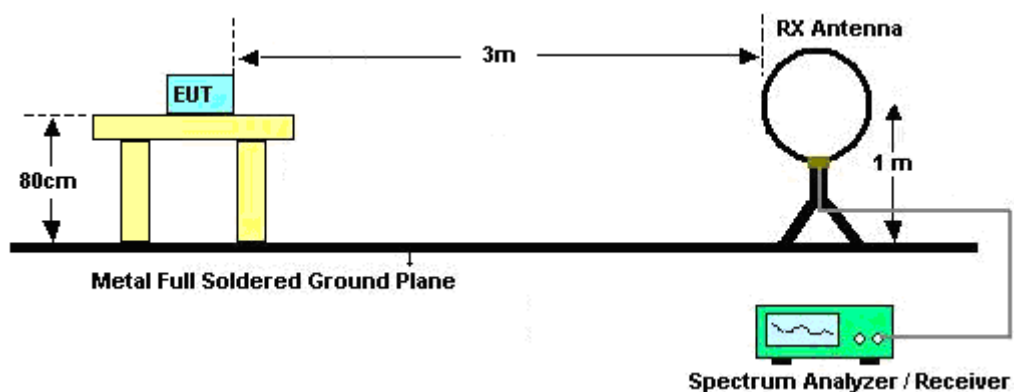


For radiated emissions from 30MHz to 1GHz

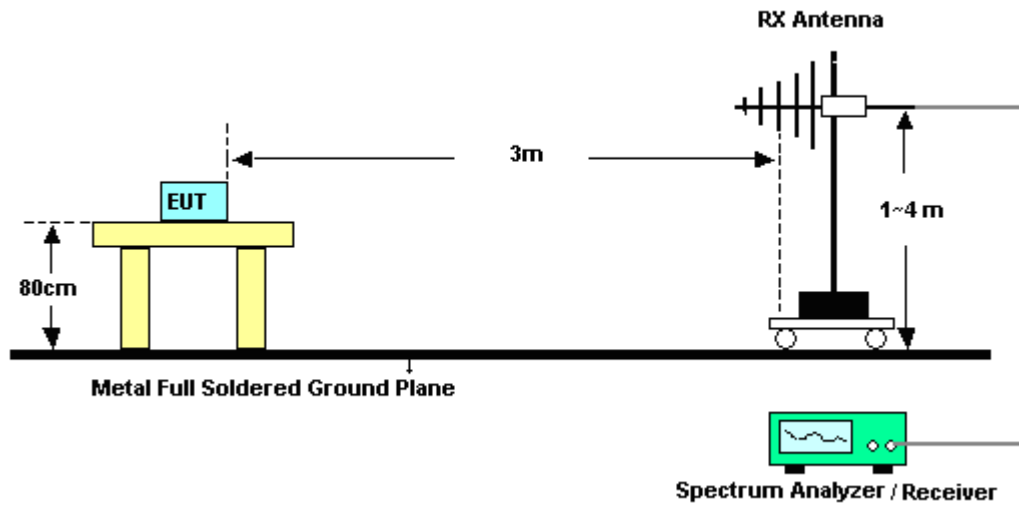

For radiated test from 1GHz to 18GHz

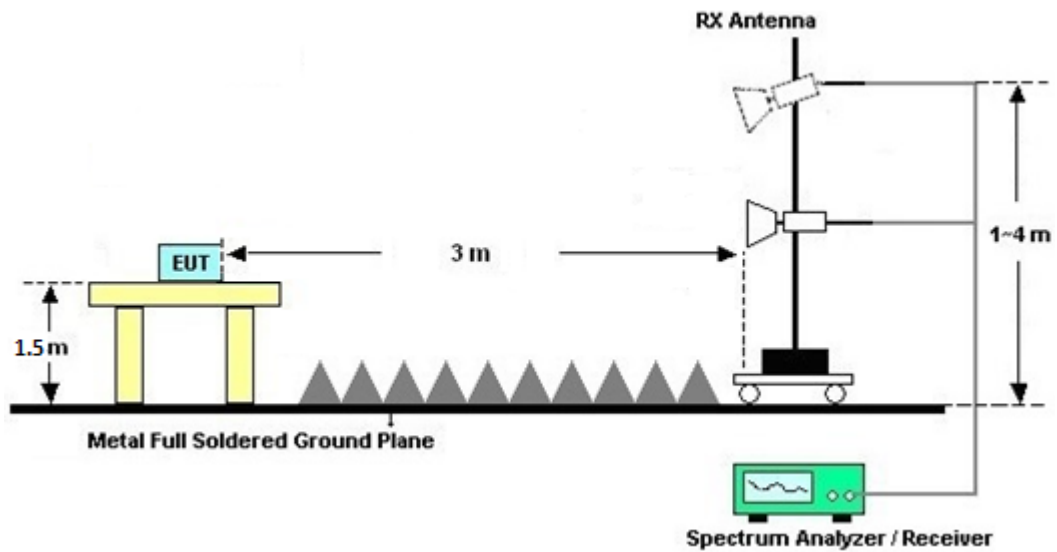

For radiated test above 18GHz

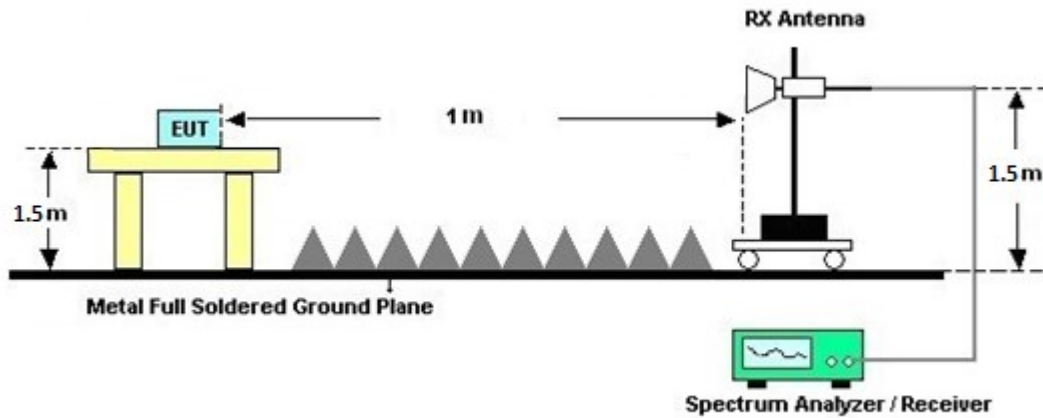

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

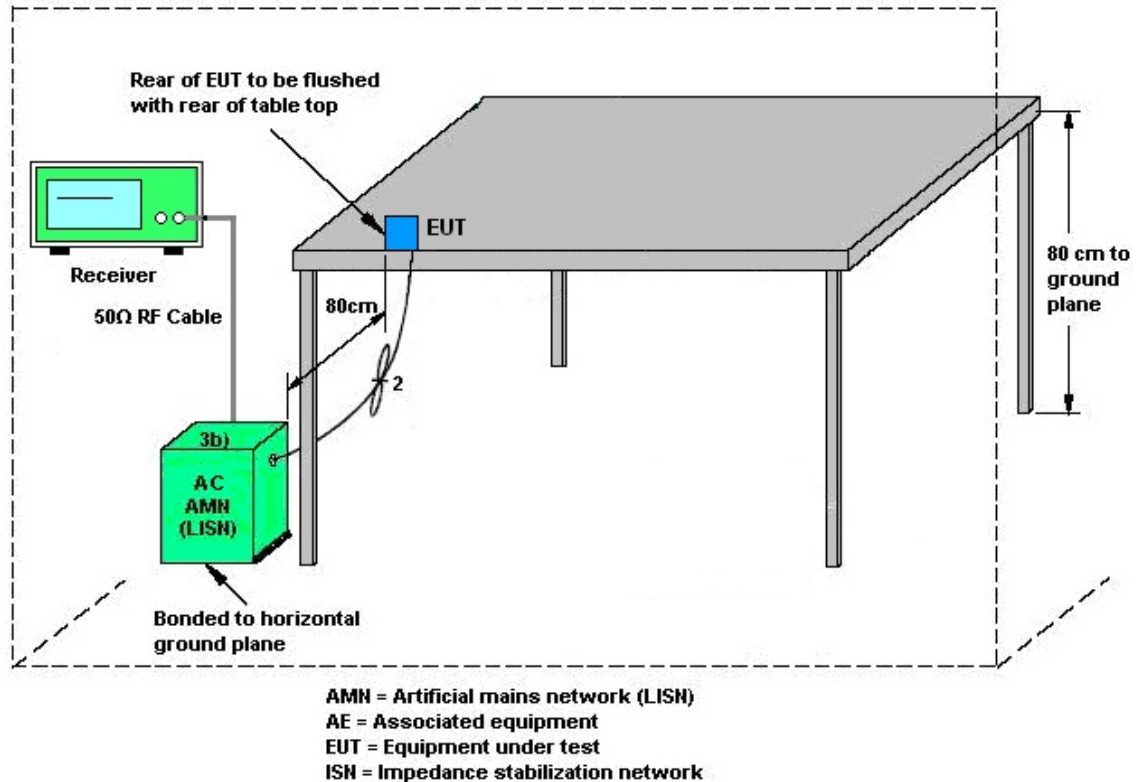

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Apr. 22, 2025~ Jun. 06, 2025	Aug. 28, 2025	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 22, 2024	Apr. 22, 2025~ Jun. 06, 2025	Nov. 21, 2025	Radiation (03CH16-HY)
BT Base Station	Rohde & Schwarz	CBT	101135	BT 3.0	Oct. 10, 2024	Apr. 22, 2025~ Jun. 06, 2025	Oct. 09, 2025	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 19, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jul. 18, 2025	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 05, 2024	Apr. 22, 2025~ Jun. 06, 2025	Oct. 04, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 27, 2025	Apr. 22, 2025~ Jun. 06, 2025	Mar. 26, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 05, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 04, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Apr. 22, 2025~ May 26, 2025	May 26, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	May 27, 2025~ Jun. 06, 2025	Aug. 22, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 14, 2025	Apr. 22, 2025~ Jun. 06, 2025	Jan. 13, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jun. 27, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Dec. 26, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 25, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23, 2025	Apr. 23, 2025~ Jun. 06, 2025	Apr. 22, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 07, 2024	Apr. 22, 2025~ Jun. 06, 2025	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Dec. 31, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZB ECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 23, 2024	May 13, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	May 13, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	May 13, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	May 13, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	May 13, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Apr. 24, 2025~ May 22, 2025	Oct. 30, 2025	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	13I00030SNO 31 (NO:182)	9kHz~6GHz	Jan. 09, 2025	Apr. 24, 2025~ May 22, 2025	Jan. 08, 2026	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Apr. 24, 2025~ May 22, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instrument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Apr. 24, 2025~ May 22, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Apr. 24, 2025~ May 22, 2025	N/A	Conducted (TH05-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Jospeh hu/Derek Hsu	Temperature:	21~25	°C
Test Date:	2025/04/24~2025/05/22	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	17.16	-	19.95	-	-	-	22.34	-	-
11a	6Mbps	1	44	5220	17.19	-	19.98	-	-	-	22.35	-	
11a	6Mbps	1	48	5240	17.17	-	19.98	-	-	-	22.35	-	
VHT20	MCS0	1	36	5180	17.94	-	20.34	-	-	-	22.54	-	
VHT20	MCS0	1	44	5220	17.94	-	20.30	-	-	-	22.54	-	
VHT20	MCS0	1	48	5240	17.93	-	20.45	-	-	-	22.54	-	
VHT40	MCS0	1	38	5190	36.46	-	41.52	-	-	-	23.01	-	
VHT40	MCS0	1	46	5230	36.47	-	41.47	-	-	-	23.01	-	
VHT80	MCS0	1	42	5210	76.31	-	82.11	-	-	-	23.01	-	

TEST RESULTS DATA
Average Power Table

IC U-NII-1 single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	12.86	-	-	21.23	-	1.11	-	22.34	-	Pass
11a	6Mbps	1	44	5220	12.59	-		21.24	-	1.11	-	22.35	-	Pass
11a	6Mbps	1	48	5240	12.57	-		21.24	-	1.11	-	22.35	-	Pass
HT20	MCS0	1	36	5180	12.42	-		21.43	-	1.11	-	22.54	-	Pass
HT20	MCS0	1	44	5220	12.62	-		21.43	-	1.11	-	22.54	-	Pass
HT20	MCS0	1	48	5240	12.53	-		21.43	-	1.11	-	22.54	-	Pass
HT40	MCS0	1	38	5190	12.35	-		21.90	-	1.11	-	23.01	-	Pass
HT40	MCS0	1	46	5230	12.32	-		21.90	-	1.11	-	23.01	-	Pass
VHT20	MCS0	1	36	5180	12.52	-		21.43	-	1.11	-	22.54	-	Pass
VHT20	MCS0	1	44	5220	12.72	-		21.43	-	1.11	-	22.54	-	Pass
VHT20	MCS0	1	48	5240	12.63	-		21.43	-	1.11	-	22.54	-	Pass
VHT40	MCS0	1	38	5190	12.45	-		21.90	-	1.11	-	23.01	-	Pass
VHT40	MCS0	1	46	5230	12.42	-		21.90	-	1.11	-	23.01	-	Pass
VHT80	MCS0	1	42	5210	12.46	-		21.90	-	1.11	-	23.01	-	Pass

TEST RESULTS DATA
Power Spectral Density

IC U-NII-1 single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		IC EIRP PSD Limit (dBm/MHz)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	36	5180	0.05	-	1.33	-	-	8.89	-	1.11	-	10		Pass
11a	6Mbps	1	44	5220	0.05	-	0.95	-		8.89	-	1.11	-	10		Pass
11a	6Mbps	1	48	5240	0.05	-	0.89	-		8.89	-	1.11	-	10		Pass
VHT20	MCS0	1	36	5180	0.05	-	0.86	-		8.89	-	1.11	-	10		Pass
VHT20	MCS0	1	44	5220	0.05	-	0.88	-		8.89	-	1.11	-	10		Pass
VHT20	MCS0	1	48	5240	0.05	-	0.65	-		8.89	-	1.11	-	10		Pass
VHT40	MCS0	1	38	5190	0.11	-	-2.02	-		8.89	-	1.11	-	10		Pass
VHT40	MCS0	1	46	5230	0.11	-	-2.46	-		8.89	-	1.11	-	10		Pass
VHT80	MCS0	1	42	5210	0.20	-	-6.15	-		8.89	-	1.11	-	10		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	17.17	-	19.78	-	23.35	-	29.35	-	23.96	-	-
11a	6Mbps	1	60	5300	17.16	-	19.97	-	23.34	-	29.34	-	23.98	-	
11a	6Mbps	1	64	5320	17.16	-	19.88	-	23.34	-	29.34	-	23.98	-	
VHT20	MCS0	1	52	5260	17.95	-	20.48	-	23.54	-	29.54	-	23.98	-	
VHT20	MCS0	1	60	5300	17.94	-	20.26	-	23.54	-	29.54	-	23.98	-	
VHT20	MCS0	1	64	5320	17.93	-	20.40	-	23.54	-	29.54	-	23.98	-	
VHT40	MCS0	1	54	5270	36.46	-	41.47	-	23.98	-	30.00	-	23.98	-	
VHT40	MCS0	1	62	5310	36.42	-	41.55	-	23.98	-	30.00	-	23.98	-	
VHT80	MCS0	1	58	5290	76.29	-	82.05	-	23.98	-	30.00	-	23.98	-	

TEST RESULTS DATA
Average Power Table

IC U-NII-2A single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	12.59	-	-	23.35	-	1.40	-	29.35	-	Pass
11a	6Mbps	1	60	5300	12.93	-		23.34	-	1.40	-	29.34	-	Pass
11a	6Mbps	1	64	5320	12.59	-		23.34	-	1.40	-	29.34	-	Pass
HT20	MCS0	1	52	5260	12.53	-		23.54	-	1.40	-	29.54	-	Pass
HT20	MCS0	1	60	5300	12.76	-		23.54	-	1.40	-	29.54	-	Pass
HT20	MCS0	1	64	5320	12.56	-		23.54	-	1.40	-	29.54	-	Pass
HT40	MCS0	1	54	5270	12.44	-		23.98	-	1.40	-	30.00	-	Pass
HT40	MCS0	1	62	5310	12.48	-		23.98	-	1.40	-	30.00	-	Pass
VHT20	MCS0	1	52	5260	12.63	-		23.54	-	1.40	-	29.54	-	Pass
VHT20	MCS0	1	60	5300	12.86	-		23.54	-	1.40	-	29.54	-	Pass
VHT20	MCS0	1	64	5320	12.66	-		23.54	-	1.40	-	29.54	-	Pass
VHT40	MCS0	1	54	5270	12.54	-		23.98	-	1.40	-	30.00	-	Pass
VHT40	MCS0	1	62	5310	12.58	-		23.98	-	1.40	-	30.00	-	Pass
VHT80	MCS0	1	58	5290	10.85	-		23.98	-	1.40	-	30.00	-	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	0.05	-	0.97	-	-	11.00	-	1.40	-	Pass
11a	6Mbps	1	60	5300	0.05	-	1.24	-		11.00	-	1.40	-	Pass
11a	6Mbps	1	64	5320	0.05	-	0.92	-		11.00	-	1.40	-	Pass
VHT20	MCS0	1	52	5260	0.05	-	1.17	-		11.00	-	1.40	-	Pass
VHT20	MCS0	1	60	5300	0.05	-	1.38	-		11.00	-	1.40	-	Pass
VHT20	MCS0	1	64	5320	0.05	-	0.96	-		11.00	-	1.40	-	Pass
VHT40	MCS0	1	54	5270	0.11	-	-1.87	-		11.00	-	1.40	-	Pass
VHT40	MCS0	1	62	5310	0.11	-	-2.11	-		11.00	-	1.40	-	Pass
VHT80	MCS0	1	58	5290	0.20	-	-8.14	-		11.00	-	1.40	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	17.17	-	20.10	-	23.35	-	29.35	-	23.98	-	----	----
11a	6Mbps	1	116	5580	17.19	-	19.98	-	23.35	-	29.35	-	23.98	-	----	----
11a	6Mbps	1	140	5700	17.17	-	19.93	-	23.35	-	29.35	-	23.98	-	----	----
VHT20	MCS0	1	100	5500	17.96	-	20.27	-	23.54	-	29.54	-	23.98	-	----	----
VHT20	MCS0	1	116	5580	17.95	-	20.35	-	23.54	-	29.54	-	23.98	-	----	----
VHT20	MCS0	1	140	5700	17.96	-	20.20	-	23.54	-	29.54	-	23.98	-	----	----
VHT40	MCS0	1	102	5510	36.48	-	41.15	-	23.98	-	30.00	-	23.98	-	----	----
VHT40	MCS0	1	110	5550	36.50	-	41.55	-	23.98	-	30.00	-	23.98	-	----	----
VHT40	MCS0	1	134	5670	36.58	-	41.38	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	106	5530	76.31	-	81.98	-	23.98	-	30.00	-	23.98	-	----	----
VHT80	MCS0	1	122	5610	76.29	-	81.95	-	23.98	-	30.00	-	23.98	-	----	----

U-NII-2C straddle channel single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	144	5720	13.58	-	15.02	-	23.35	-	29.35	-	23.98	-	3.2	-
VHT20	MCS0	1	144	5720	13.96	-	15.13	-	23.54	-	29.54	-	23.98	-	3.77	-
VHT40	MCS0	1	142	5710	33.24	-	35.69	-	23.98	-	30.00	-	23.98	-	2.775	-
VHT80	MCS0	1	138	5690	73.19	-	76.02	-	23.98	-	30.00	-	23.98	-	3.208	-
6dB Bandwidth Limit $\geq$ 500kHz															Pass	

TEST RESULTS DATA
Average Power Table

IC U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	11.49	-	-	23.35	-	2.60	-	29.35	-	Pass
11a	6Mbps	1	116	5580	11.48	-		23.35	-	2.60	-	29.35	-	Pass
11a	6Mbps	1	140	5700	11.32	-		23.35	-	2.60	-	29.35	-	Pass
HT20	MCS0	1	100	5500	11.28	-		23.54	-	2.60	-	29.54	-	Pass
HT20	MCS0	1	116	5580	11.09	-		23.54	-	2.60	-	29.54	-	Pass
HT20	MCS0	1	140	5700	11.29	-		23.54	-	2.60	-	29.54	-	Pass
HT40	MCS0	1	102	5510	10.87	-		23.98	-	2.60	-	30.00	-	Pass
HT40	MCS0	1	110	5550	10.92	-		23.98	-	2.60	-	30.00	-	Pass
HT40	MCS0	1	134	5670	10.87	-		23.98	-	2.60	-	30.00	-	Pass
VHT20	MCS0	1	100	5500	11.38	-		23.54	-	2.60	-	29.54	-	Pass
VHT20	MCS0	1	116	5580	11.19	-		23.54	-	2.60	-	29.54	-	Pass
VHT20	MCS0	1	140	5700	11.39	-		23.54	-	2.60	-	29.54	-	Pass
VHT40	MCS0	1	102	5510	10.97	-		23.98	-	2.60	-	30.00	-	Pass
VHT40	MCS0	1	110	5550	11.02	-		23.98	-	2.60	-	30.00	-	Pass
VHT40	MCS0	1	134	5670	10.97	-		23.98	-	2.60	-	30.00	-	Pass
VHT80	MCS0	1	106	5530	11.31	-		23.98	-	2.60	-	30.00	-	Pass
VHT80	MCS0	1	122	5610	11.12	-		23.98	-	2.60	-	30.00	-	Pass

IC U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	144	5720	11.45	-	-	23.35	-	2.60	-	29.35	-	Pass
HT20	MCS0	1	144	5720	10.99	-		23.54	-	2.60	-	29.54	-	Pass
HT40	MCS0	1	142	5710	10.85	-		23.98	-	2.60	-	30.00	-	Pass
VHT20	MCS0	1	144	5720	11.09	-		23.54	-	2.60	-	29.54	-	Pass
VHT40	MCS0	1	142	5710	10.95	-		23.98	-	2.60	-	30.00	-	Pass
VHT80	MCS0	1	138	5690	11.07	-		23.98	-	2.60	-	30.00	-	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	100	5500	0.05	-	-0.24	-	-	11.00	-	2.60	-	Pass
11a	6Mbps	1	116	5580	0.05	-	-0.50	-		11.00	-	2.60	-	Pass
11a	6Mbps	1	140	5700	0.05	-	-0.50	-		11.00	-	2.60	-	Pass
VHT20	MCS0	1	100	5500	0.05	-	-0.33	-		11.00	-	2.60	-	Pass
VHT20	MCS0	1	116	5580	0.05	-	-0.59	-		11.00	-	2.60	-	Pass
VHT20	MCS0	1	140	5700	0.05	-	-0.21	-		11.00	-	2.60	-	Pass
VHT40	MCS0	1	102	5510	0.11	-	-3.71	-		11.00	-	2.60	-	Pass
VHT40	MCS0	1	110	5550	0.11	-	-3.69	-		11.00	-	2.60	-	Pass
VHT40	MCS0	1	134	5670	0.11	-	-3.21	-		11.00	-	2.60	-	Pass
VHT80	MCS0	1	106	5530	0.20	-	-7.14	-		11.00	-	2.60	-	Pass
VHT80	MCS0	1	122	5610	0.20	-	-7.48	-		11.00	-	2.60	-	Pass

U-NII-2C straddle channel single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	144	5720	0.05	-	-0.34	-	-	11.00	-	2.60	-	Pass
VHT20	MCS0	1	144	5720	0.05	-	-0.45	-		11.00	-	2.60	-	Pass
VHT40	MCS0	1	142	5710	0.11	-	-3.72	-		11.00	-	2.60	-	Pass
VHT80	MCS0	1	138	5690	0.20	-	-7.40	-		11.00	-	2.60	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)			Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	18.86	-	20.45	-	-	-	22.75	-	-	-
HE20	MCS0	1	44	5220	Full	18.87	-	20.54	-	-	-	22.76	-		
HE20	MCS0	1	48	5240	Full	18.85	-	20.58	-	-	-	22.75	-		
HE40	MCS0	1	38	5190	Full	37.71	-	41.62	-	-	-	23.01	-		
HE40	MCS0	1	46	5230	Full	37.71	-	41.30	-	-	-	23.01	-		
HE80	MCS0	1	42	5210	Full	77.60	-	81.09	-	-	-	23.01	-		

TEST RESULTS DATA
Average Power Table

IC U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	36	5180	Full	12.62	-	-	21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	36	5180	26/0	2.78	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	36	5180	52/37	5.81	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	36	5180	106/53	8.62	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	44	5220	Full	12.82	-		21.65	-	1.11	-	22.76	-	Pass
HE20	MCS0	1	44	5220	26/4	4.50	-		21.65	-	1.11	-	22.76	-	Pass
HE20	MCS0	1	44	5220	52/38	6.06	-		21.65	-	1.11	-	22.76	-	Pass
HE20	MCS0	1	44	5220	106/53	8.96	-		21.65	-	1.11	-	22.76	-	Pass
HE20	MCS0	1	48	5240	Full	12.73	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	48	5240	26/8	2.75	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	48	5240	52/40	5.59	-		21.64	-	1.11	-	22.75	-	Pass
HE20	MCS0	1	48	5240	106/54	8.89	-		21.64	-	1.11	-	22.75	-	Pass
HE40	MCS0	1	38	5190	Full	12.55	-		21.90	-	1.11	-	23.01	-	Pass
HE40	MCS0	1	38	5190	242/61	9.18	-		21.90	-	1.11	-	23.01	-	Pass
HE40	MCS0	1	46	5230	Full	12.52	-		21.90	-	1.11	-	23.01	-	Pass
HE40	MCS0	1	46	5230	242/62	9.20	-		21.90	-	1.11	-	23.01	-	Pass
HE80	MCS0	1	42	5210	Full	12.56	-		21.90	-	1.11	-	23.01	-	Pass
HE80	MCS0	1	42	5210	484/65	9.28	-		21.90	-	1.11	-	23.01	-	Pass

TEST RESULTS DATA
Power Spectral Density

IC U-NII-1 single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		IC EIRP PSD Limit (dBm/MHz)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	36	5180	Full	0.07	-	0.46	-	-	8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	36	5180	26/0	0.21	-	0.25	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	36	5180	52/37	0.21	-	0.19	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	36	5180	106/53	0.21	-	0.26	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	44	5220	Full	0.07	-	0.63	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	44	5220	26/4	0.21	-	0.56	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	44	5220	52/38	0.21	-	0.37	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	44	5220	106/53	0.21	-	0.42	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	48	5240	Full	0.07	-	0.68	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	48	5240	26/8	0.21	-	0.37	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	48	5240	52/40	0.21	-	0.44	-		8.89	-	1.11	-	10	Pass	
HE20	MCS0	1	48	5240	106/54	0.21	-	0.54	-		8.89	-	1.11	-	10	Pass	
HE40	MCS0	1	38	5190	Full	0.12	-	-2.39	-		8.89	-	1.11	-	10	Pass	
HE40	MCS0	1	38	5190	242/61	0.21	-	-2.64	-		8.89	-	1.11	-	10	Pass	
HE40	MCS0	1	46	5230	Full	0.12	-	-2.83	-		8.89	-	1.11	-	10	Pass	
HE40	MCS0	1	46	5230	242/62	0.21	-	-3.10	-		8.89	-	1.11	-	10	Pass	
HE80	MCS0	1	42	5210	Full	0.23	-	-5.09	-	8.89	-	1.11	-	10	Pass		
HE80	MCS0	1	42	5210	484/65	0.22	-	-5.38	-	8.89	-	1.11	-	10	Pass		

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	18.86	-	20.50	-	23.75	-	29.75	-	23.98	-	
HE20	MCS0	1	60	5300	Full	18.85	-	20.59	-	23.75	-	29.75	-	23.98	-	
HE20	MCS0	1	64	5320	Full	18.85	-	20.51	-	23.75	-	29.75	-	23.98	-	
HE40	MCS0	1	54	5270	Full	37.74	-	41.63	-	23.98	-	30.00	-	23.98	-	
HE40	MCS0	1	62	5310	Full	37.73	-	41.31	-	23.98	-	30.00	-	23.98	-	
HE80	MCS0	1	58	5290	Full	77.55	-	80.90	-	23.98	-	30.00	-	23.98	-	

TEST RESULTS DATA
Average Power Table

IC U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	12.73	-	-	23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	52	5260	26/0	3.18	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	52	5260	52/37	5.69	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	52	5260	106/53	9.02	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	60	5300	Full	12.96	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	60	5300	26/4	4.85	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	60	5300	52/38	6.45	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	60	5300	106/53	9.41	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	64	5320	Full	12.76	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	64	5320	26/8	2.70	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	64	5320	52/40	5.62	-		23.75	-	1.40	-	29.75	-	Pass
HE20	MCS0	1	64	5320	106/54	8.51	-		23.75	-	1.40	-	29.75	-	Pass
HE40	MCS0	1	54	5270	Full	12.64	-		23.98	-	1.40	-	30.00	-	Pass
HE40	MCS0	1	54	5270	242/61	9.40	-		23.98	-	1.40	-	30.00	-	Pass
HE40	MCS0	1	62	5310	Full	12.68	-		23.98	-	1.40	-	30.00	-	Pass
HE40	MCS0	1	62	5310	242/62	8.93	-		23.98	-	1.40	-	30.00	-	Pass
HE80	MCS0	1	58	5290	Full	10.95	-		23.98	-	1.40	-	30.00	-	Pass
HE80	MCS0	1	58	5290	484/66	7.07	-		23.98	-	1.40	-	30.00	-	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	0.07	-	0.88	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	52	5260	26/0	0.21	-	0.60	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	52	5260	52/37	0.21	-	0.32	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	52	5260	106/53	0.21	-	0.57	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	60	5300	Full	0.07	-	1.32	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	60	5300	26/4	0.21	-	0.68	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	60	5300	52/38	0.21	-	1.01	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	60	5300	106/53	0.21	-	0.98	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	64	5320	Full	0.07	-	0.52	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	64	5320	26/8	0.21	-	0.25	-	-	11.00	-	1.40	-	Pass
HE20	MCS0	1	64	5320	52/40	0.21	-	0.46	-		11.00	-	1.40	-	Pass
HE20	MCS0	1	64	5320	106/54	0.21	-	0.12	-		11.00	-	1.40	-	Pass
HE40	MCS0	1	54	5270	Full	0.12	-	-2.18	-		11.00	-	1.40	-	Pass
HE40	MCS0	1	54	5270	242/61	0.21	-	-2.46	-		11.00	-	1.40	-	Pass
HE40	MCS0	1	62	5310	Full	0.12	-	-2.61	-		11.00	-	1.40	-	Pass
HE40	MCS0	1	62	5310	242/62	0.21	-	-2.84	-		11.00	-	1.40	-	Pass
HE80	MCS0	1	58	5290	Full	0.23	-	-7.17	-		11.00	-	1.40	-	Pass
HE80	MCS0	1	58	5290	484/66	0.22	-	-7.66	-		11.00	-	1.40	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	100	5500	Full	18.85	-	20.58	-	23.75	-	29.75	-	23.98	-	----	----
HE20	MCS0	1	116	5580	Full	18.86	-	20.45	-	23.76	-	29.76	-	23.98	-	----	----
HE20	MCS0	1	140	5700	Full	18.86	-	20.57	-	23.75	-	29.75	-	23.98	-	----	----
HE40	MCS0	1	102	5510	Full	37.80	-	41.50	-	23.98	-	30.00	-	23.98	-	----	----
HE40	MCS0	1	110	5550	Full	37.75	-	41.42	-	23.98	-	30.00	-	23.98	-	----	----
HE40	MCS0	1	134	5670	Full	37.76	-	41.31	-	23.98	-	30.00	-	23.98	-	----	----
HE80	MCS0	1	106	5530	Full	77.58	-	80.96	-	23.98	-	30.00	-	23.98	-	----	----
HE80	MCS0	1	122	5610	Full	77.58	-	81.12	-	23.98	-	30.00	-	23.98	-	----	----

U-NII-2C straddle channel single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	144	5720	Full	14.43	-	15.23	-	23.76	-	29.76	-	23.98	-	4.13	-
HE40	MCS0	1	142	5710	Full	33.87	-	35.70	-	23.98	-	30.00	-	23.98	-	2.973	-
HE80	MCS0	1	138	5690	Full	73.82	-	75.54	-	23.98	-	30.00	-	23.98	-	3.992	-
6dB Bandwidth Limit $\geq$ 500kHz																Pass	

TEST RESULTS DATA
Average Power Table

IC U-NII-2C single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	100	5500	Full	11.48	-	-	23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	100	5500	26/0	2.49	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	100	5500	52/37	4.73	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	100	5500	106/53	7.32	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	116	5580	Full	11.29	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	116	5580	26/4	3.06	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	116	5580	52/38	4.87	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	116	5580	106/53	7.57	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	140	5700	Full	11.49	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	140	5700	26/8	1.97	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	140	5700	52/40	4.10	-		23.75	-	2.60	-	29.75	-	Pass
HE20	MCS0	1	140	5700	106/54	7.68	-		23.75	-	2.60	-	29.75	-	Pass
HE40	MCS0	1	102	5510	Full	11.07	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	102	5510	242/61	7.80	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	110	5550	Full	11.12	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	110	5550	242/61	8.46	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	134	5670	Full	11.07	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	134	5670	242/62	7.45	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	106	5530	Full	11.41	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	106	5530	484/65	7.81	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	122	5610	Full	11.22	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	122	5610	484/66	7.53	-		23.98	-	2.60	-	30.00	-	Pass

IC U-NII-2C straddle channel single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			IC Conducted Power Limit (dBm)		DG (dBi)		IC EIRP Power Limit (dBm)		Pass /Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	144	5720	Full	11.19	-	-	23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	144	5720	26/8	0.88	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	144	5720	52/40	4.28	-		23.76	-	2.60	-	29.76	-	Pass
HE20	MCS0	1	144	5720	106/54	7.28	-		23.76	-	2.60	-	29.76	-	Pass
HE40	MCS0	1	142	5710	Full	11.05	-		23.98	-	2.60	-	30.00	-	Pass
HE40	MCS0	1	142	5710	242/62	7.71	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	138	5690	Full	11.17	-		23.98	-	2.60	-	30.00	-	Pass
HE80	MCS0	1	138	5690	484/66	7.52	-		23.98	-	2.60	-	30.00	-	Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	100	5500	Full	0.07	-	-0.37	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	100	5500	26/0	0.21	-	-0.55	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	100	5500	52/37	0.21	-	-0.69	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	100	5500	106/53	0.21	-	-0.78	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	116	5580	Full	0.07	-	-0.63	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	116	5580	26/4	0.21	-	-0.97	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	116	5580	52/38	0.21	-	-0.70	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	116	5580	106/53	0.21	-	-0.70	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	140	5700	Full	0.07	-	-0.39	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	140	5700	26/8	0.21	-	-0.70	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	140	5700	52/40	0.21	-	-1.06	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	140	5700	106/54	0.21	-	-0.68	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	102	5510	Full	0.12	-	-3.76	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	102	5510	242/61	0.21	-	-4.04	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	110	5550	Full	0.12	-	-4.03	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	110	5550	242/61	0.21	-	-4.15	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	134	5670	Full	0.12	-	-3.80	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	134	5670	242/62	0.21	-	-4.07	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	106	5530	Full	0.23	-	-6.63	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	106	5530	484/65	0.22	-	-7.06	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	122	5610	Full	0.23	-	-6.87	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	122	5610	484/66	0.22	-	-7.35	-		11.00	-	2.60	-	Pass

U-NII-2C straddle channel single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	144	5720	Full	0.07	-	-1.03	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	144	5720	26/8	0.21	-	-1.33	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	144	5720	52/40	0.21	-	-1.26	-		11.00	-	2.60	-	Pass
HE20	MCS0	1	144	5720	106/54	0.21	-	-1.04	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	142	5710	Full	0.12	-	-3.89	-		11.00	-	2.60	-	Pass
HE40	MCS0	1	142	5710	242/62	0.21	-	-3.97	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	138	5690	Full	0.23	-	-6.75	-		11.00	-	2.60	-	Pass
HE80	MCS0	1	138	5690	484/66	0.22	-	-7.20	-		11.00	-	2.60	-	Pass


**Test Result of 26dB & 99% Occupied Bandwidth**

<802.11a>

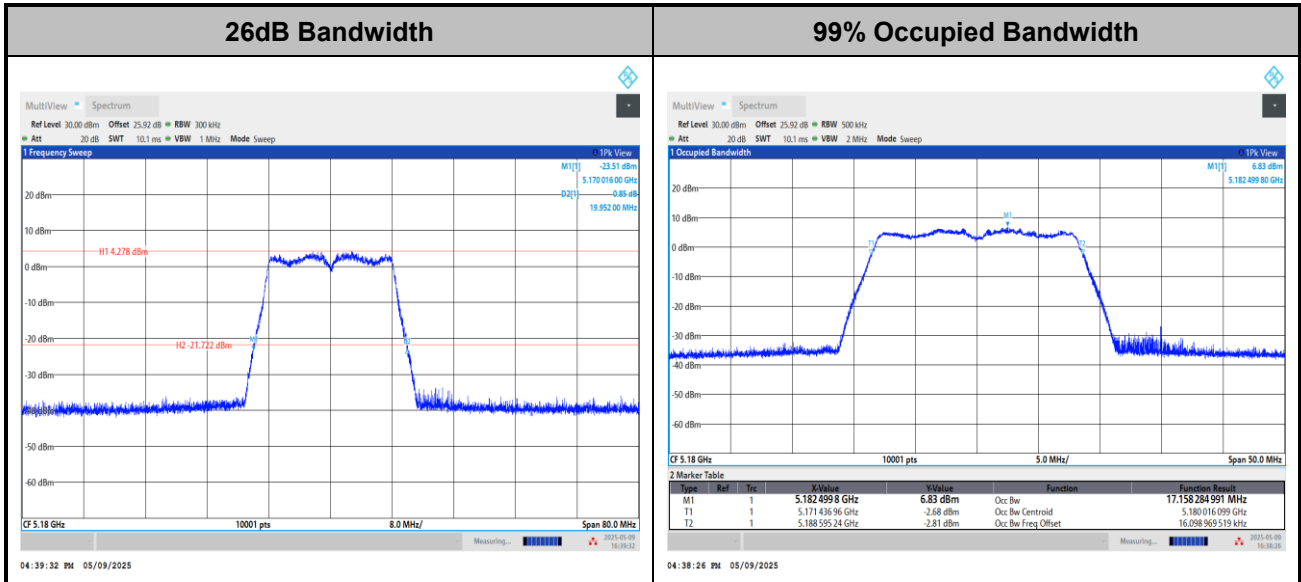

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT20>

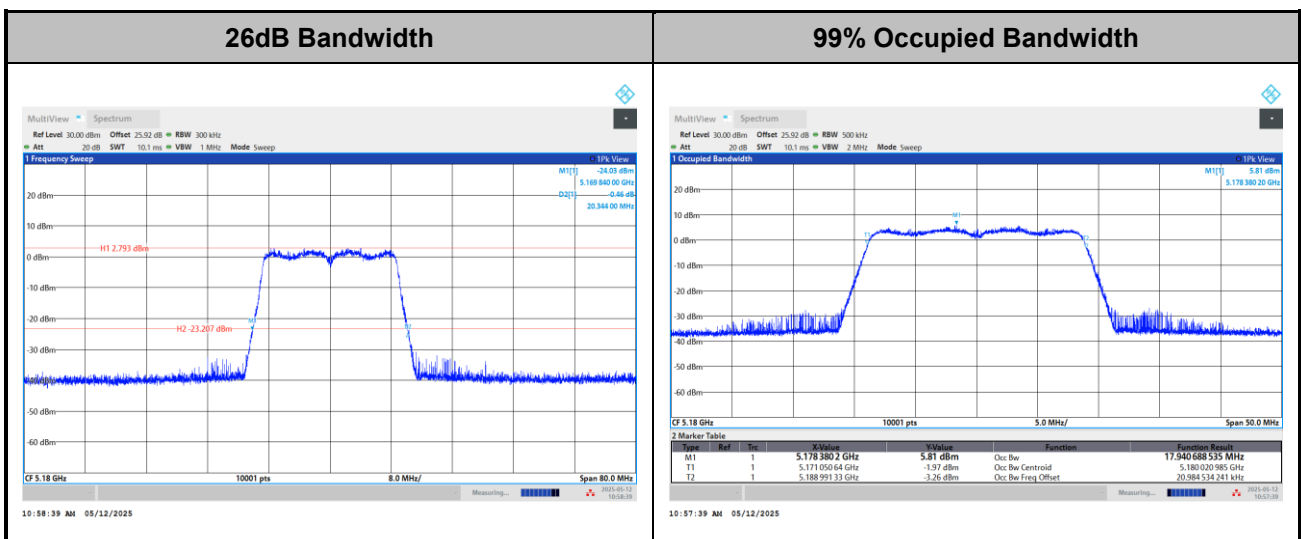

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE20>

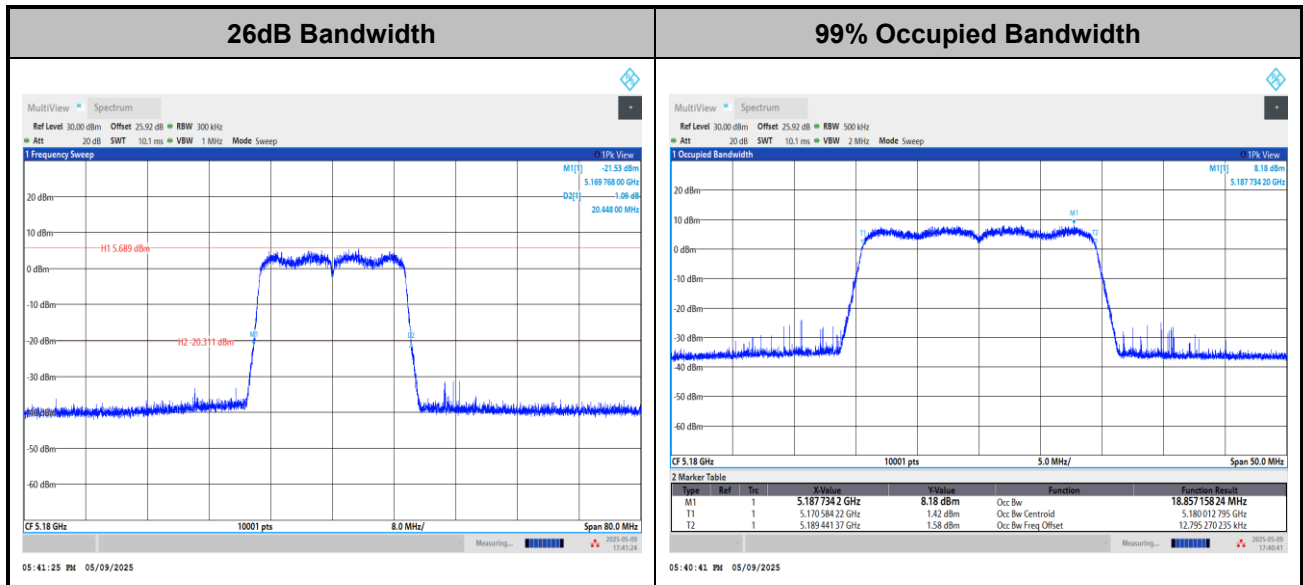

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT40>

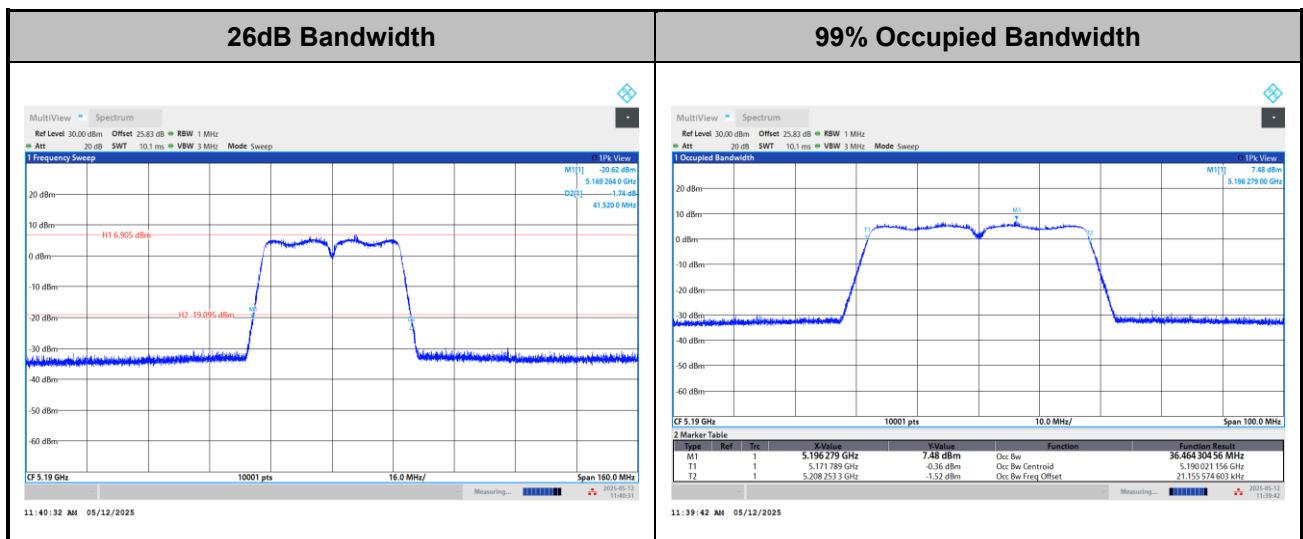

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

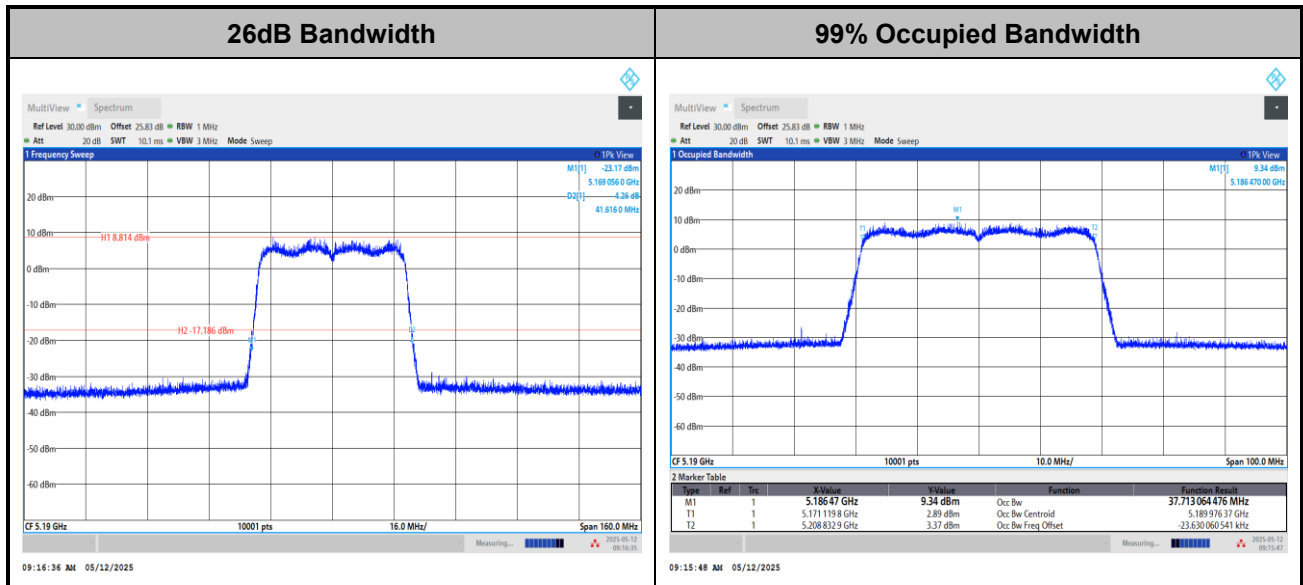

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT80>

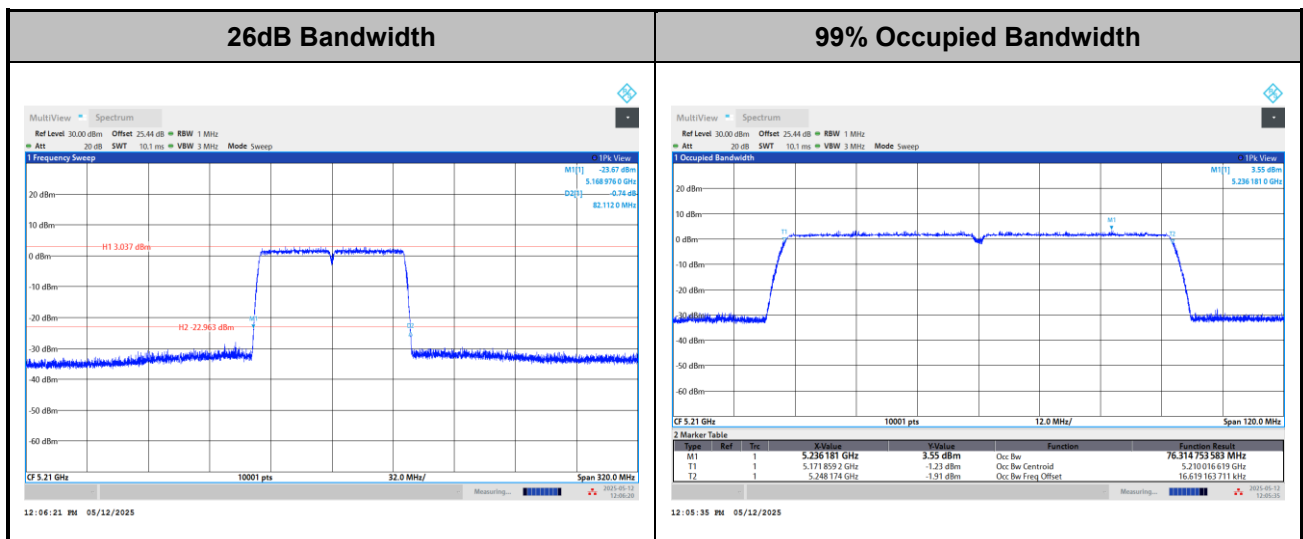

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE80>

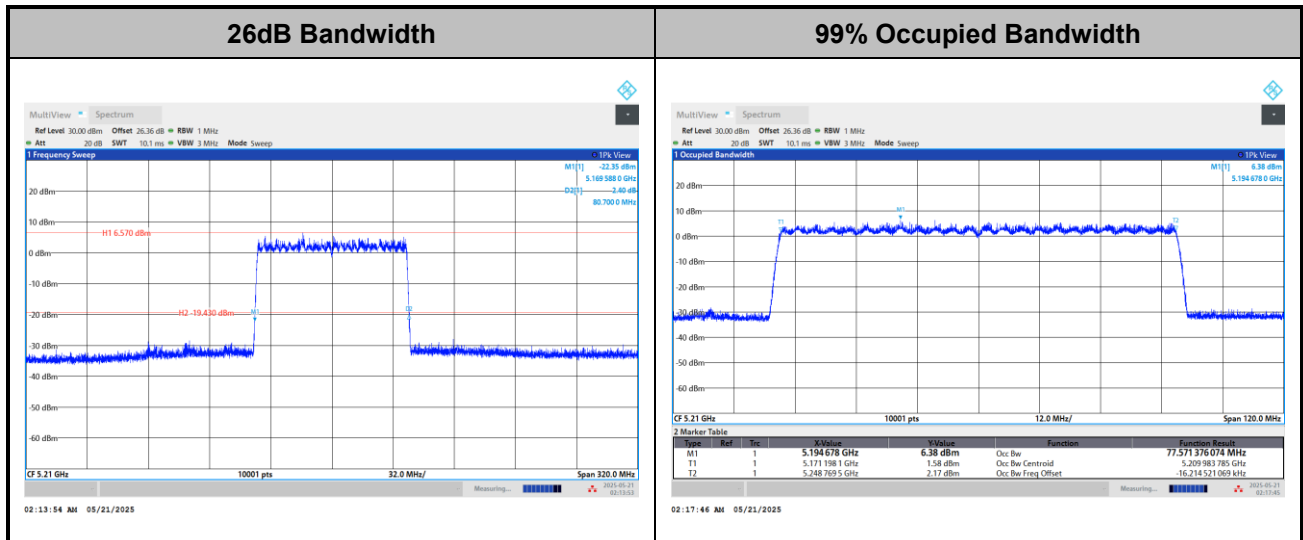


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

**Test Result of Power Spectral Density**

<802.11a>

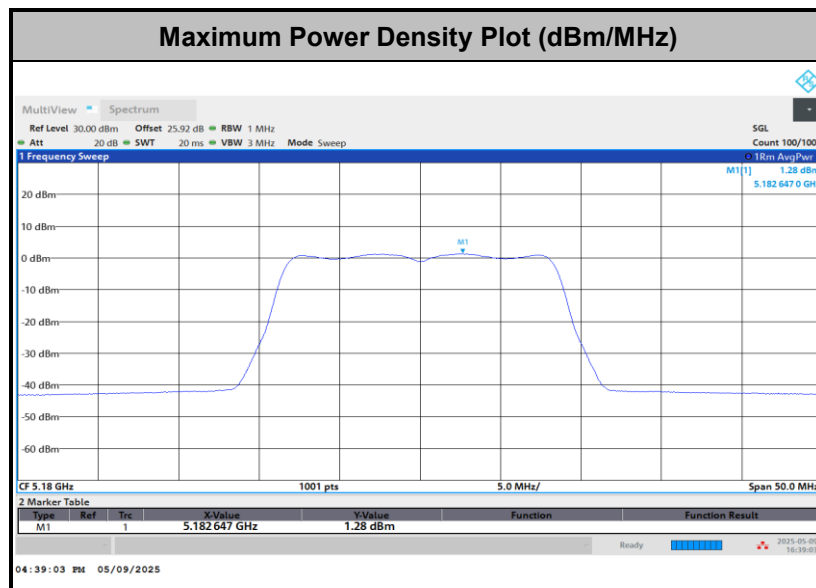


<802.11ac VHT20>

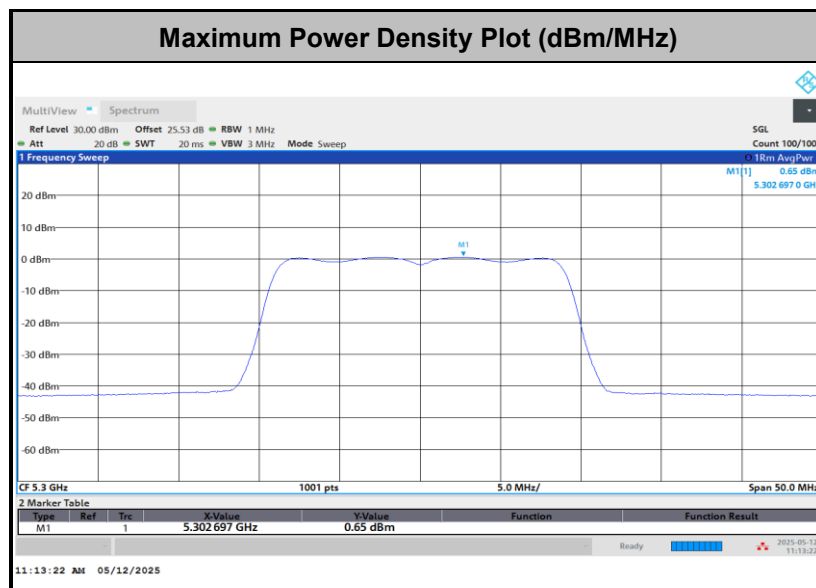




<802.11ac VHT40>

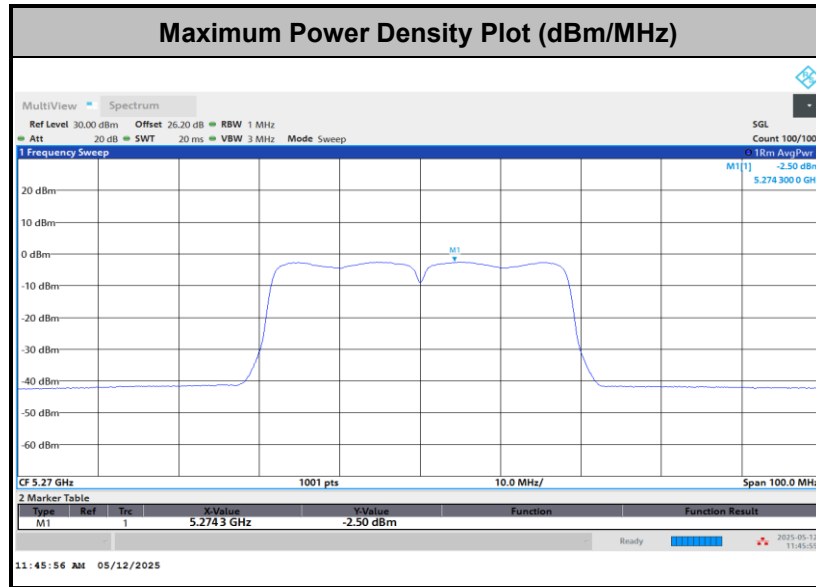


<802.11ac VHT80>

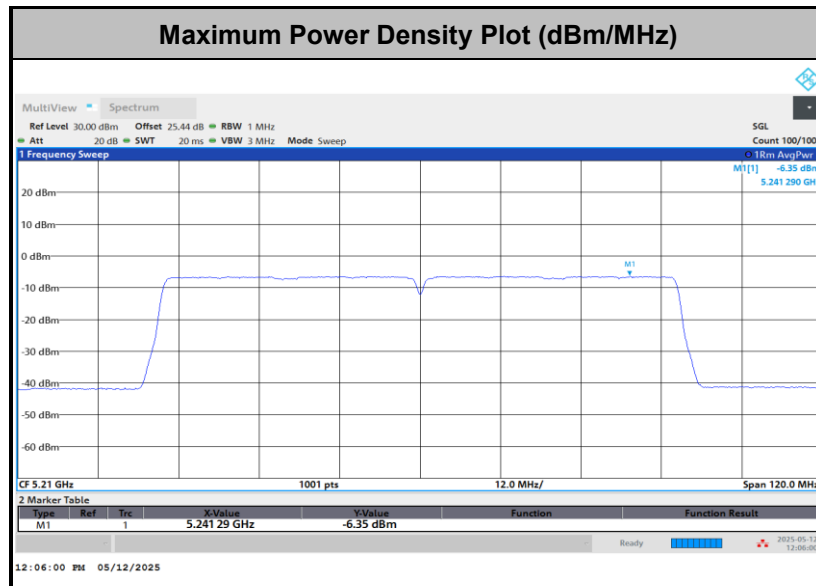




<802.11ax HE20>

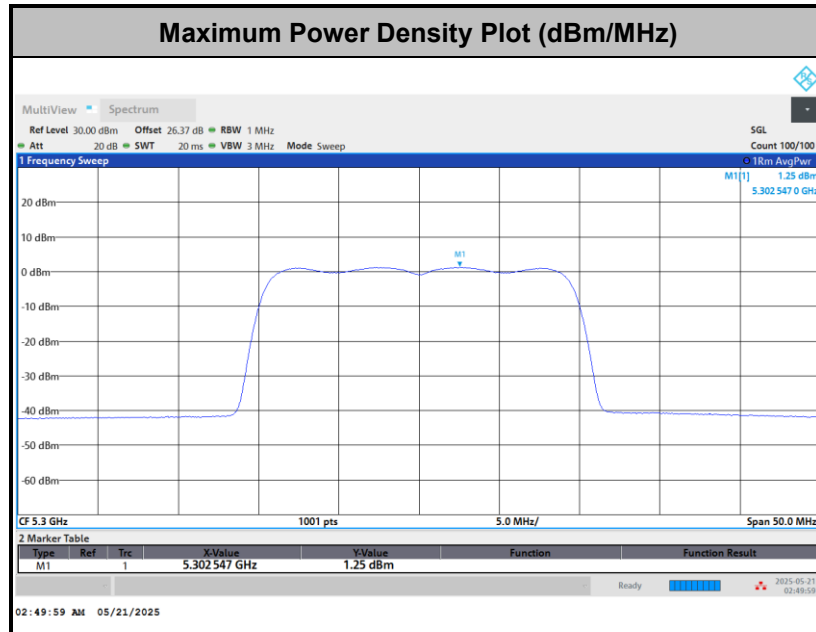


<802.11ax HE40>

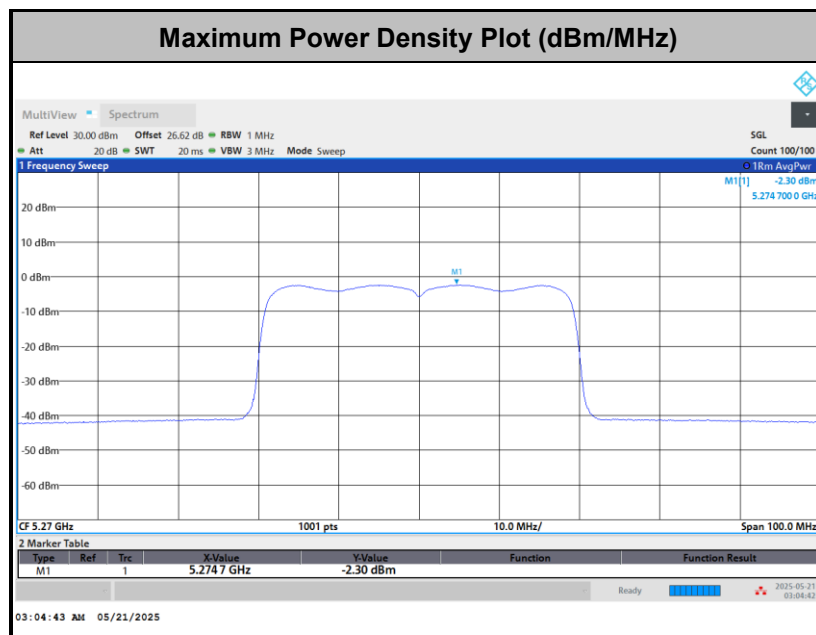



<802.11ax HE80>

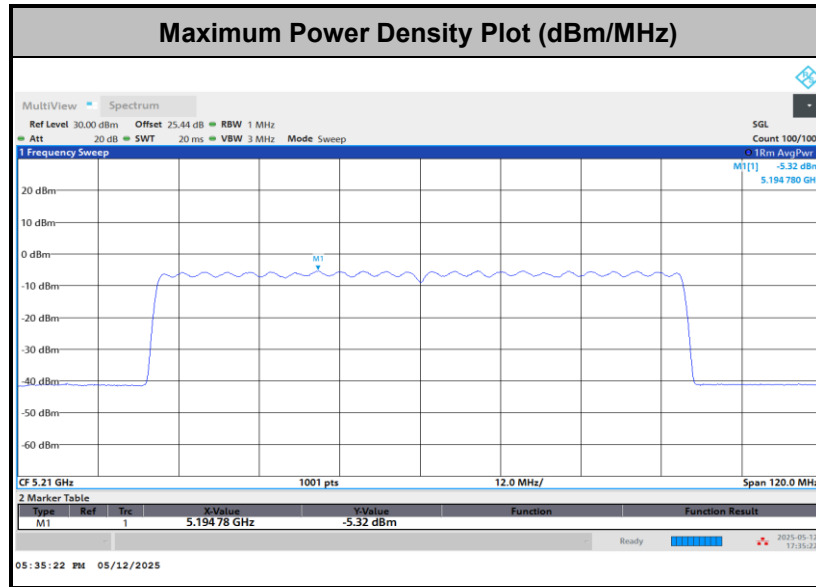




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.4 ~ 25.6℃
		Relative Humidity :	43.3 ~ 49.1%

EUT Information

Report NO : 541507
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

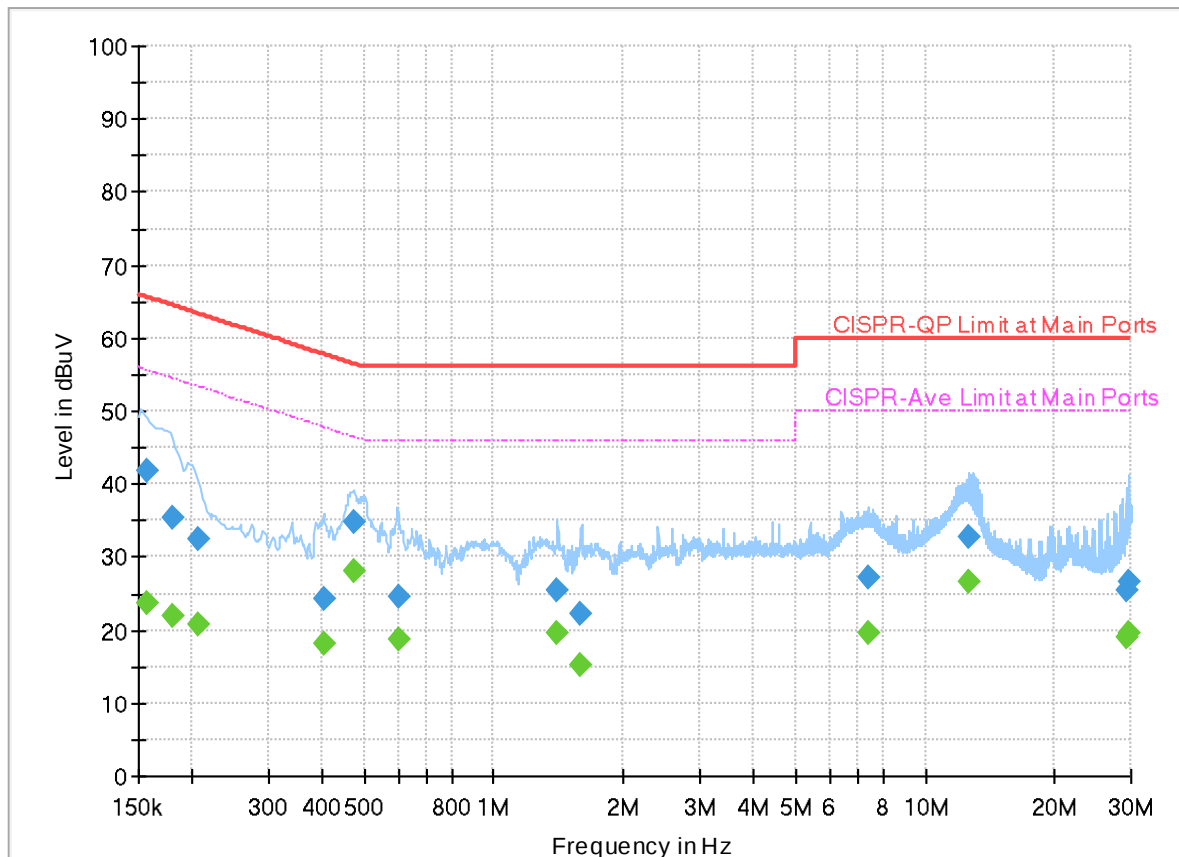

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	23.55	55.63	32.08	L1	FLO	20.0
0.156750	41.86	---	65.63	23.77	L1	FLO	20.0
0.179250	---	22.03	54.52	32.49	L1	FLO	20.0
0.179250	35.43	---	64.52	29.09	L1	FLO	20.0
0.206250	---	20.74	53.36	32.62	L1	FLO	20.0
0.206250	32.34	---	63.36	31.02	L1	FLO	20.0
0.402900	---	18.23	47.79	29.56	L1	FLO	20.0
0.402900	24.31	---	57.79	33.48	L1	FLO	20.0
0.473190	---	27.95	46.46	18.51	L1	FLO	20.0
0.473190	34.68	---	56.46	21.78	L1	FLO	20.0
0.602250	---	18.75	46.00	27.25	L1	FLO	20.0
0.602250	24.70	---	56.00	31.30	L1	FLO	20.0
1.401900	---	19.56	46.00	26.44	L1	FLO	20.0
1.401900	25.41	---	56.00	30.59	L1	FLO	20.0
1.592250	---	15.19	46.00	30.81	L1	FLO	20.0
1.592250	22.16	---	56.00	33.84	L1	FLO	20.0
7.404000	---	19.62	50.00	30.38	L1	FLO	20.3
7.404000	27.12	---	60.00	32.88	L1	FLO	20.3
12.619500	---	26.56	50.00	23.44	L1	FLO	20.5

12.619500	32.67	---	60.00	27.33	L1	FLO	20.5
29.402160	---	19.07	50.00	30.93	L1	FLO	21.1
29.402160	25.55	---	60.00	34.45	L1	FLO	21.1
29.598000	---	19.47	50.00	30.53	L1	FLO	21.1
29.598000	26.58	---	60.00	33.42	L1	FLO	21.1

EUT Information

Report NO : 541507
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Neutral

Full Spectrum

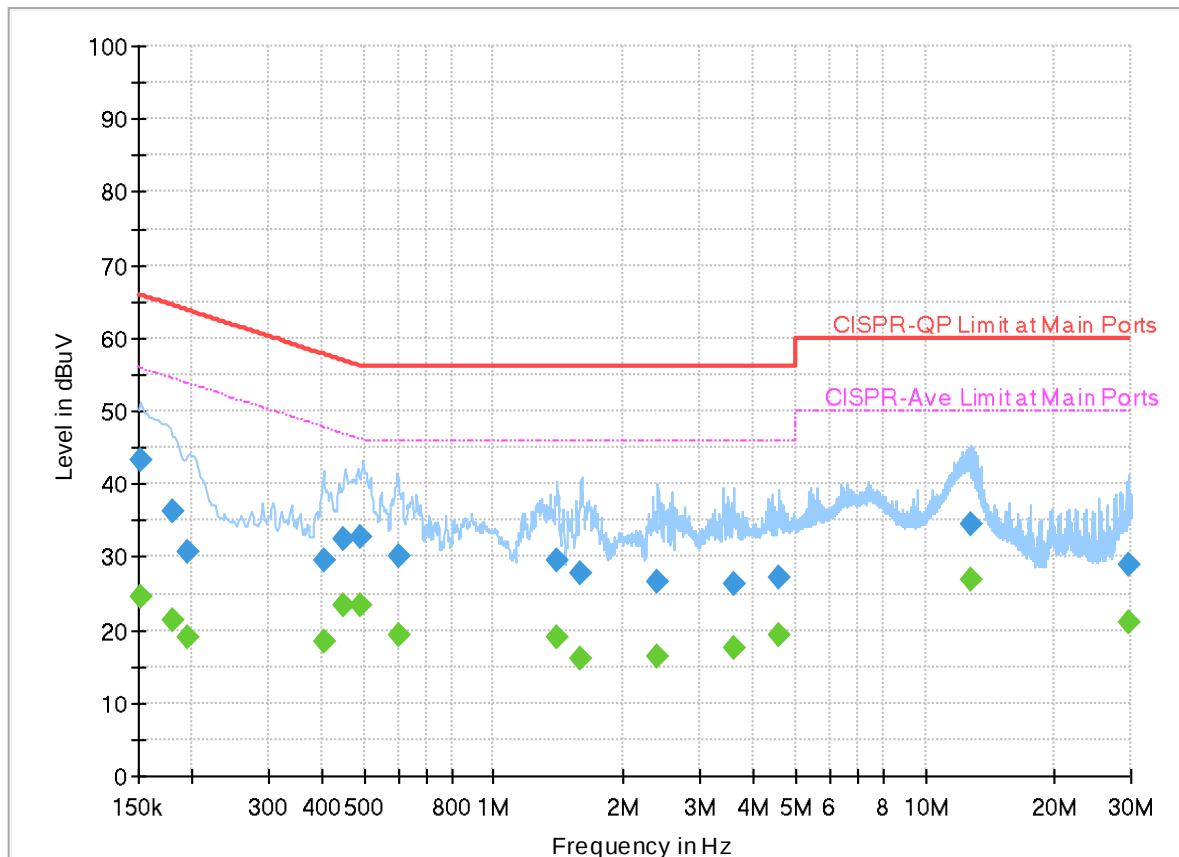

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152363	---	24.53	55.87	31.34	N	FLO	20.0
0.152363	43.31	---	65.87	22.56	N	FLO	20.0
0.179250	---	21.27	54.52	33.25	N	FLO	20.0
0.179250	36.31	---	64.52	28.21	N	FLO	20.0
0.195000	---	19.07	53.82	34.75	N	FLO	20.0
0.195000	30.83	---	63.82	32.99	N	FLO	20.0
0.402810	---	18.53	47.80	29.27	N	FLO	20.0
0.402810	29.44	---	57.80	28.36	N	FLO	20.0
0.447000	---	23.26	46.93	23.67	N	FLO	20.0
0.447000	32.32	---	56.93	24.61	N	FLO	20.0
0.492000	---	23.41	46.13	22.72	N	FLO	20.0
0.492000	32.69	---	56.13	23.44	N	FLO	20.0
0.600090	---	19.31	46.00	26.69	N	FLO	20.0
0.600090	29.99	---	56.00	26.01	N	FLO	20.0
1.402890	---	19.07	46.00	26.93	N	FLO	20.0
1.402890	29.40	---	56.00	26.60	N	FLO	20.0
1.592250	---	15.98	46.00	30.02	N	FLO	20.0
1.592250	27.91	---	56.00	28.09	N	FLO	20.0
2.397750	---	16.23	46.00	29.77	N	FLO	20.1

2.397750	26.51	---	56.00	29.49	N	FLO	20.1
3.593040	---	17.65	46.00	28.35	N	FLO	20.1
3.593040	26.43	---	56.00	29.57	N	FLO	20.1
4.600500	---	19.18	46.00	26.82	N	FLO	20.2
4.600500	27.21	---	56.00	28.79	N	FLO	20.2
12.786000	---	26.85	50.00	23.15	N	FLO	20.5
12.786000	34.58	---	60.00	25.42	N	FLO	20.5
29.591250	---	21.18	50.00	28.82	N	FLO	21.0
29.591250	28.85	---	60.00	31.15	N	FLO	21.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan, Gary Guo, and Steven Wu	Relative Humidity(%):	40 ~ 65
		Temperature(°C):	20 ~ 26

Note symbol

-L	Low channel location
-R	High channel location

**C1-1. Radiated Spurious Emission Test Modes**

<Sample 1>

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 10	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Partial RU 106/53	-
Mode 11	U-NII-1	5.15-5.25	1	802.11ac VHT80	42	5210	MCS0	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 16	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 19	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 20	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Partial RU 106/54	-
Mode 22	U-NII-2A	5.25-5.35	1	802.11ac VHT80	58	5290	MCS0	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 26	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 28	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 30	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 31	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 32	U-NII-2C	5.47-5.725	1	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 33	U-NII-2C	5.47-5.725	1	802.11ax HE80	122	5610	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 34	U-NII-2C	5.47-5.725	1	802.11a	144	5720	6Mbps	-	-
Mode 35	U-NII-2C	5.47-5.725	1	802.11ax HE20	144	5720	MCS0	-	-
Mode 36	U-NII-2C	5.47-5.725	1	802.11ax HE40	142	5710	MCS0	-	-
Mode 37	U-NII-2C	5.47-5.725	1	802.11ax HE80	138	5690	MCS0	-	-
Mode 38	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Partial RU 106/53	-
Mode 39	U-NII-2C	5.47-5.725	1	802.11ac VHT80	106	5530	MCS0	-	-
Mode 40	U-NII-2C	5.47-5.725	1	802.11ac VHT80	106	5530	MCS0	-	LF

**C1-2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5149.94	45.48	54.00	-8.52	V	Avg.	Pass	-	Band Edge
	802.11a	36	10360.00	47.08	68.20	-21.12	V	Peak	Pass	-	Harmonic
2	802.11a	44	5137.94	45.07	54.00	-8.93	H	Avg.	Pass	-	Band Edge
	802.11a	44	10440.00	47.92	68.20	-20.28	V	Peak	Pass	-	Harmonic
3	802.11a	48	5120.00	44.98	54.00	-9.02	H	Avg.	Pass	-	Band Edge
	802.11a	48	10480.00	47.76	68.20	-20.44	H	Peak	Pass	-	Harmonic
4	802.11ax HE20	36	5149.94	46.08	54.00	-7.92	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	36	10360.00	47.63	68.20	-20.57	H	Peak	Pass	Full RU	Harmonic
5	802.11ax HE20	44	5131.12	44.98	54.00	-9.02	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	44	10440.00	48.08	68.20	-20.12	V	Peak	Pass	Full RU	Harmonic
6	802.11ax HE20	48	5138.24	44.95	54.00	-9.05	H	Avg.	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
6	802.11ax HE20	48	10480.00	47.49	68.20	-20.71	H	Peak	Pass	Full RU	Harmonic
7	802.11ax HE40	38	5149.91	49.30	54.00	-4.70	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	38	10380.00	47.89	68.20	-20.31	V	Peak	Pass	Full RU	Harmonic
8	802.11ax HE40	46	5022.31	46.12	54.00	-7.88	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	46	10460.00	47.45	68.20	-20.75	H	Peak	Pass	Full RU	Harmonic
9	802.11ax HE80	42	5134.61	49.75	54.00	-4.25	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	42	10420.00	48.17	68.20	-20.03	V	Peak	Pass	Full RU	Harmonic
10	802.11ax HE20	36	5145.62	45.84	54.00	-8.16	H	Avg.	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	36	-	-	-	-	-	-	-	Partial RU 106/53	Harmonic
11	802.11ac VHT80	42	5142.59	49.81	54.00	-4.19	H	Avg.	Pass	-	Band Edge
	802.11ac VHT80	42	10420.00	47.68	68.20	-20.52	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
12	802.11a	52	5119.60	44.74	54.00	-9.26	H	Avg.	Pass	-	Band Edge
	802.11a	52	10520.00	48.01	68.20	-20.19	V	Peak	Pass	-	Harmonic
13	802.11a	60	5120.00	44.71	54.00	-9.29	V	Avg.	Pass	-	Band Edge
	802.11a	60	10600.00	47.90	74.00	-26.10	H	Peak	Pass	-	Harmonic
14	802.11a	64	5350.10	44.76	54.00	-9.24	H	Avg.	Pass	-	Band Edge
	802.11a	64	15960.00	47.85	74.00	-26.15	H	Peak	Pass	-	Harmonic
15	802.11ax HE20	52	5119.86	44.83	54.00	-9.17	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	52	10520.00	47.92	68.20	-20.28	H	Peak	Pass	Full RU	Harmonic
16	802.11ax HE20	60	5134.70	44.89	54.00	-9.11	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	60	15900.00	47.87	74.00	-26.13	H	Peak	Pass	Full RU	Harmonic
17	802.11ax HE20	64	5350.10	45.46	54.00	-8.54	H	Avg.	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11ax HE20	64	15960.00	47.78	74.00	-26.22	H	Peak	Pass	Full RU	Harmonic
18	802.11ax HE40	54	5029.16	46.52	54.00	-7.48	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	54	10540.00	49.17	68.20	-19.03	V	Peak	Pass	Full RU	Harmonic
19	802.11ax HE40	62	5350.50	50.30	54.00	-3.70	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	62	10620.00	47.97	74.00	-26.03	H	Peak	Pass	Full RU	Harmonic
20	802.11ax HE80	58	5352.22	50.62	54.00	-3.38	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	58	10580.00	48.71	68.20	-19.49	H	Peak	Pass	Full RU	Harmonic
21	802.11ax HE20	64	5350.52	45.94	54.00	-8.06	H	Avg.	Pass	Partial RU 106/54	Band Edge
	802.11ax HE20	64	-	-	-	-	-	-	-	Partial RU 106/54	Harmonic
22	802.11ac VHT80	58	5355.28	50.76	54.00	-3.24	H	Avg.	Pass	-	Band Edge
	802.11ac VHT80	58	10580.00	48.67	68.20	-19.53	V	Peak	Pass	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
23	802.11a	100	5465.20	60.07	68.20	-8.13	H	Peak	Pass	-	Band Edge
	802.11a	100	16500.00	49.76	68.20	-18.44	H	Peak	Pass	-	Harmonic
24	802.11a	116	5459.94	44.24	54.00	-9.76	H	Avg.	Pass	-	Band Edge
	802.11a	116	16740.00	50.02	68.20	-18.18	H	Peak	Pass	-	Harmonic
25	802.11a	140	5725.74	57.55	68.20	-10.65	H	Peak	Pass	-	Band Edge
	802.11a	140	17100.00	51.21	68.20	-16.99	H	Peak	Pass	-	Harmonic
26	802.11ax HE20	100	5466.40	60.86	68.20	-7.34	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	100	16500.00	49.27	68.20	-18.93	H	Peak	Pass	Full RU	Harmonic
27	802.11ax HE20	116	5457.41	44.31	54.00	-9.69	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	116	16740.00	50.03	68.20	-18.17	V	Peak	Pass	Full RU	Harmonic
28	802.11ax HE20	140	5727.30	59.65	68.20	-8.55	H	Peak	Pass	Full RU	Band Edge



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
28	802.11ax HE20	140	17100.00	50.54	68.20	-17.66	H	Peak	Pass	Full RU	Harmonic
29	802.11ax HE40	102	5457.84	50.26	54.00	-3.74	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	102	16530.00	49.63	68.20	-18.57	H	Peak	Pass	Full RU	Harmonic
30	802.11ax HE40	110	5456.60	45.81	54.00	-8.19	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	110	16650.00	50.23	68.20	-17.97	V	Peak	Pass	Full RU	Harmonic
31	802.11ax HE40	134	5455.28	45.58	54.00	-8.42	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	134	17010.00	51.03	68.20	-17.17	H	Peak	Pass	Full RU	Harmonic
32	802.11ax HE80	106	5454.76	50.62	54.00	-3.38	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	106	16590.00	49.74	68.20	-18.46	V	Peak	Pass	Full RU	Harmonic
33	802.11ax HE80	122	5456.60	49.32	54.00	-4.68	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	122	16830.00	50.18	68.20	-18.02	H	Peak	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
34	802.11a	144	5459.20	44.22	54.00	-9.78	H	Avg.	Pass	-	Band Edge
	802.11a	144	17160.00	50.60	68.20	-17.60	H	Peak	Pass	-	Harmonic
35	802.11ax HE20	144	5459.20	44.17	54.00	-9.83	H	Avg.	Pass	-	Band Edge
	802.11ax HE20	144	17160.00	50.11	68.20	-18.09	H	Peak	Pass	-	Harmonic
36	802.11ax HE40	142	5447.89	45.59	54.00	-8.41	H	Avg.	Pass	-	Band Edge
	802.11ax HE40	142	17130.00	50.69	68.20	-17.51	V	Peak	Pass	-	Harmonic
37	802.11ax HE80	138	5444.38	46.24	54.00	-7.76	V	Avg.	Pass	-	Band Edge
	802.11ax HE80	138	17070.00	50.48	68.20	-17.72	V	Peak	Pass	-	Harmonic
38	802.11ax HE20	100	5469.55	62.36	68.20	-5.84	H	Peak	Pass	Partial RU 106/53	Band Edge
	802.11ax HE20	100	-	-	-	-	-	-	-	Partial RU 106/53	Harmonic
39	802.11ac VHT80	106	5456.74	50.95	54.00	-3.05	H	Avg.	Pass	-	Band Edge







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
39	802.11ac VHT80	106	16590.00	50.25	68.20	-17.95	V	Peak	Pass	-	Harmonic
40	LF	106	36.79	32.47	40.00	-7.53	V	QP	Pass	-	LF

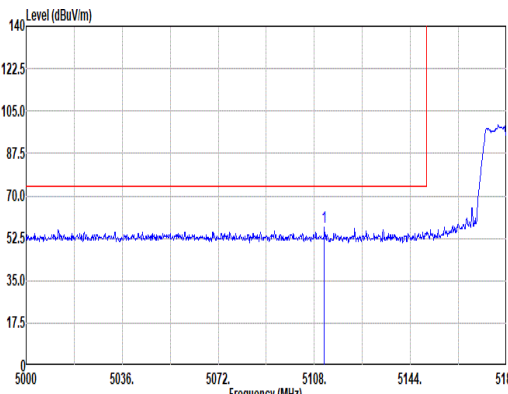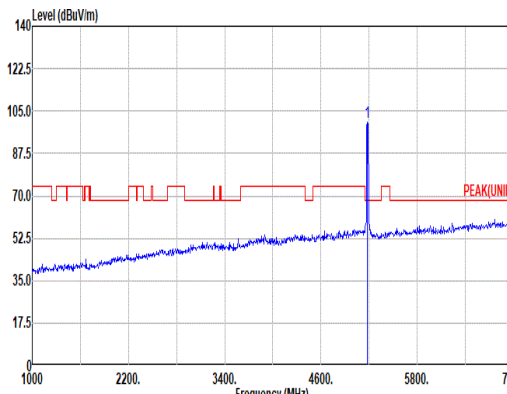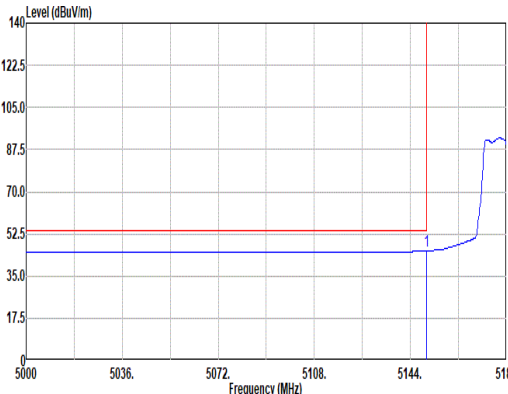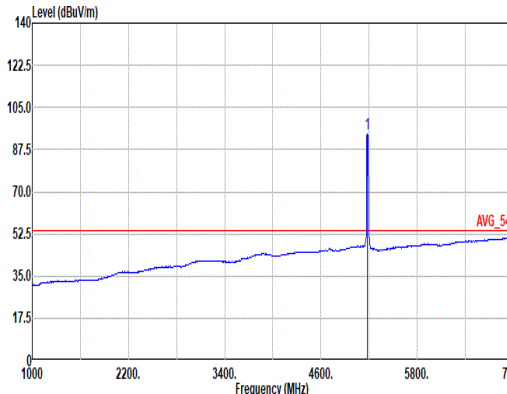

Mode	1																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																		
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5111.78</td><td>56.91</td><td>74.00</td><td>-17.09</td><td>42.34</td><td>33.15</td><td>11.15</td><td>29.73</td><td>0.00</td><td>194</td><td>64</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5111.78	56.91	74.00	-17.09	42.34	33.15	11.15	29.73	0.00	194	64	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>100.45</td><td>-----</td><td>-----</td><td>85.73</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>194</td><td>64</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	100.45	-----	-----	85.73	33.24	11.21	29.73	0.00	194	64
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5111.78	56.91	74.00	-17.09	42.34	33.15	11.15	29.73	0.00	194	64	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5180.00	100.45	-----	-----	85.73	33.24	11.21	29.73	0.00	194	64	Peak																																																																													
Avg																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																		
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.94</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>30.67</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>194</td><td>64</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.94	45.42	54.00	-8.58	30.67	33.30	11.18	29.73	0.00	194	64	Average	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>94.29</td><td>-----</td><td>-----</td><td>79.57</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>194</td><td>64</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	94.29	-----	-----	79.57	33.24	11.21	29.73	0.00	194	64
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5149.94	45.42	54.00	-8.58	30.67	33.30	11.18	29.73	0.00	194	64	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5180.00	94.29	-----	-----	79.57	33.24	11.21	29.73	0.00	194	64	Average																																																																													

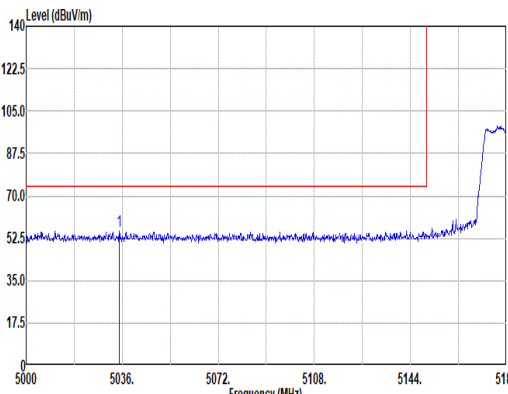
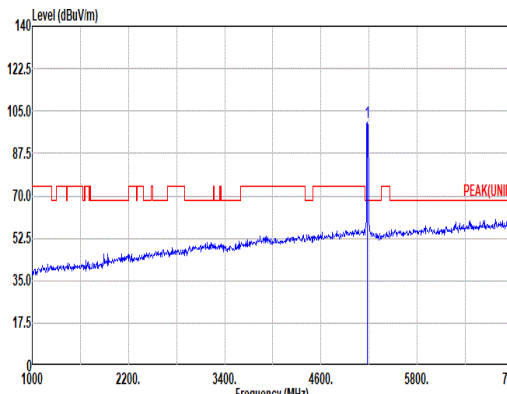
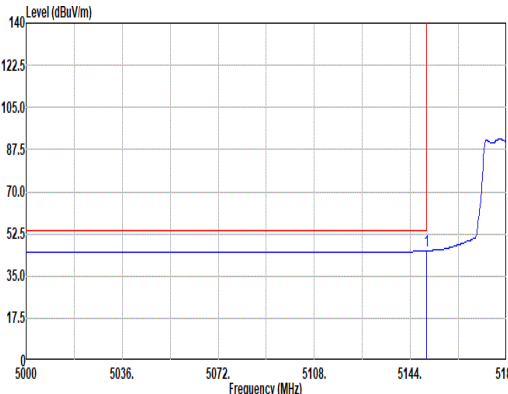
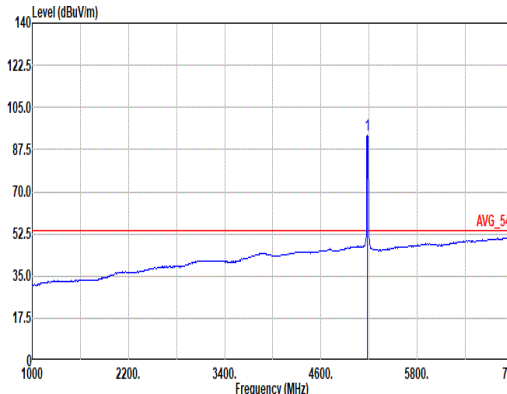


Mode	1																																																																																							
	Band Edge																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical						Fundamental																																																																																	
Peak																																																																																								
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5034.92</td><td>55.60</td><td>74.00</td><td>-18.40</td><td>41.02</td><td>33.23</td><td>11.09</td><td>29.74</td><td>0.00</td><td>320</td><td>360</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5034.92	55.60	74.00	-18.40	41.02	33.23	11.09	29.74	0.00	320	360	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>100.33</td><td>-----</td><td>-----</td><td>85.61</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>320</td><td>360</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	100.33	-----	-----	85.61	33.24	11.21	29.73	0.00	320	360
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5034.92	55.60	74.00	-18.40	41.02	33.23	11.09	29.74	0.00	320	360	Peak																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5180.00	100.33	-----	-----	85.61	33.24	11.21	29.73	0.00	320	360	Peak																																																																												
Avg																																																																																								
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>45.48</td><td>54.00</td><td>-8.52</td><td>30.73</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>320</td><td>360</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.94	45.48	54.00	-8.52	30.73	33.30	11.18	29.73	0.00	320	360	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>93.60</td><td>-----</td><td>-----</td><td>78.88</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>320</td><td>360</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	93.60	-----	-----	78.88	33.25	11.20	29.73	0.00	320	360
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5149.94	45.48	54.00	-8.52	30.73	33.30	11.18	29.73	0.00	320	360	Average																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5180.00	93.60	-----	-----	78.88	33.25	11.20	29.73	0.00	320	360	Average																																																																												





Mode	1																																																																																																																								
	Harmonic																																																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																								
ANT	1																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg																																																																																																																									
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.97</td><td>68.20</td><td>-21.23</td><td>58.28</td><td>38.70</td><td>15.81</td><td>66.55</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.37</td><td>74.00</td><td>-26.63</td><td>55.20</td><td>38.23</td><td>19.50</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.97	68.20	-21.23	58.28	38.70	15.81	66.55	0.73	--	Peak	2	15540.00	47.37	74.00	-26.63	55.20	38.23	19.50	66.21	0.65	--	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.08</td><td>68.20</td><td>-21.12</td><td>58.39</td><td>38.70</td><td>15.81</td><td>66.55</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.43</td><td>74.00</td><td>-26.57</td><td>55.26</td><td>38.23</td><td>19.50</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.08	68.20	-21.12	58.39	38.70	15.81	66.55	0.73	--	Peak	2	15540.00	47.43	74.00	-26.57	55.26	38.23	19.50	66.21	0.65	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	46.97	68.20	-21.23	58.28	38.70	15.81	66.55	0.73	--	Peak																																																																																																														
2	15540.00	47.37	74.00	-26.63	55.20	38.23	19.50	66.21	0.65	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10360.00	47.08	68.20	-21.12	58.39	38.70	15.81	66.55	0.73	--	Peak																																																																																																														
2	15540.00	47.43	74.00	-26.57	55.26	38.23	19.50	66.21	0.65	--	Peak																																																																																																														

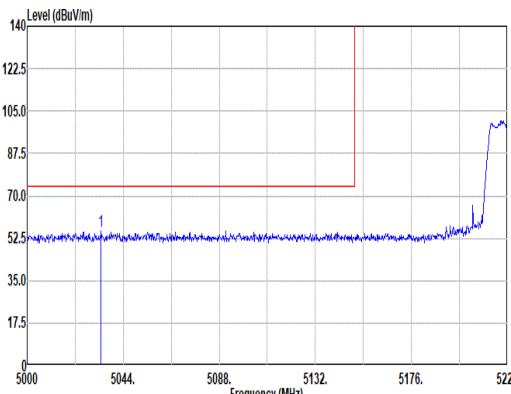
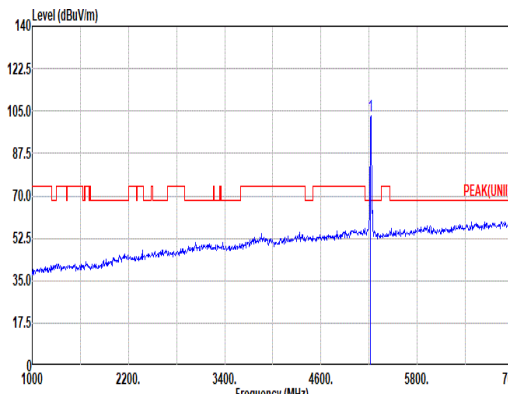
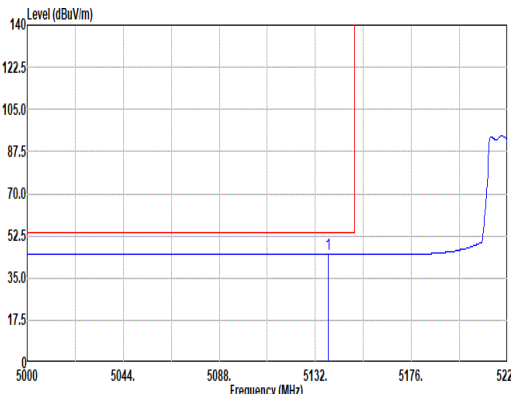
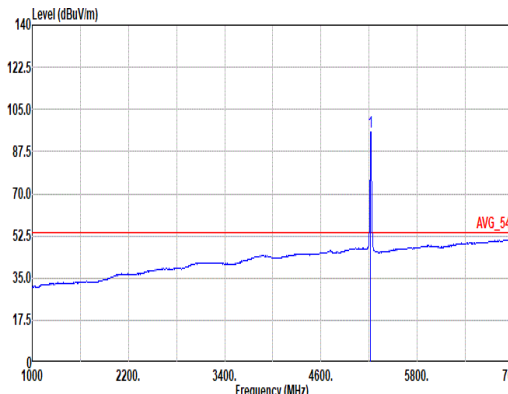


Mode	2																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																															
ANT	1																																																																																															
Pol.	Horizontal						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5033.88</td><td>55.57</td><td>74.00</td><td>-18.43</td><td>40.99</td><td>33.23</td><td>11.09</td><td>29.74</td><td>0.00</td><td>329</td><td>47 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5033.88	55.57	74.00	-18.43	40.99	33.23	11.09	29.74	0.00	329	47 Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.99</td><td>-----</td><td>-----</td><td>88.33</td><td>33.15</td><td>11.24</td><td>29.73</td><td>0.00</td><td>329</td><td>47 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.99	-----	-----	88.33	33.15	11.24	29.73	0.00	329
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5033.88	55.57	74.00	-18.43	40.99	33.23	11.09	29.74	0.00	329	47 Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5220.00	102.99	-----	-----	88.33	33.15	11.24	29.73	0.00	329	47 Peak																																																																																					
Avg																																																																																																
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.94</td><td>45.07</td><td>54.00</td><td>-8.93</td><td>30.38</td><td>33.25</td><td>11.17</td><td>29.73</td><td>0.00</td><td>329</td><td>47 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5137.94	45.07	54.00	-8.93	30.38	33.25	11.17	29.73	0.00	329	47 Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>95.75</td><td>-----</td><td>-----</td><td>81.08</td><td>33.16</td><td>11.24</td><td>29.73</td><td>0.00</td><td>329</td><td>47 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	95.75	-----	-----	81.08	33.16	11.24	29.73	0.00	329
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5137.94	45.07	54.00	-8.93	30.38	33.25	11.17	29.73	0.00	329	47 Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5220.00	95.75	-----	-----	81.08	33.16	11.24	29.73	0.00	329	47 Average																																																																																					

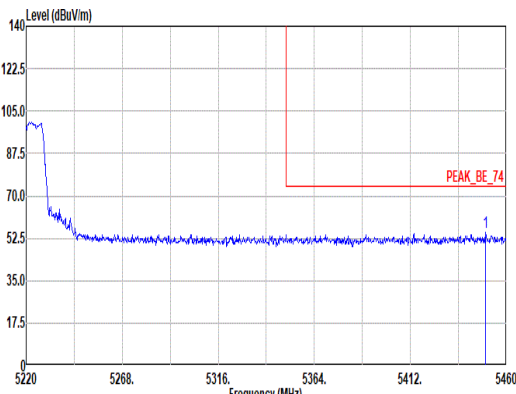
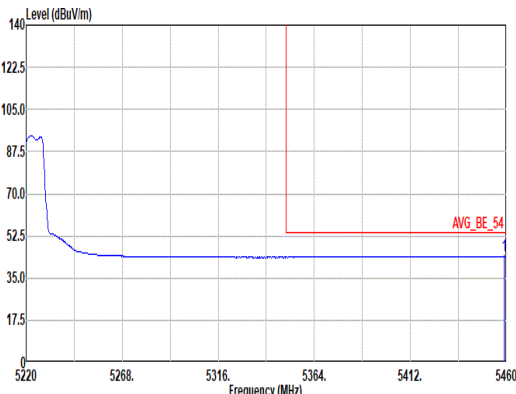


Mode	2																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5449.68</td><td>55.06</td><td>74.00</td><td>-18.94</td><td>40.30</td><td>33.00</td><td>11.47</td><td>29.71</td><td>0.00</td><td>329</td><td>47</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5449.68	55.06	74.00	-18.94	40.30	33.00	11.47	29.71	0.00	329	47	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5449.68	55.06	74.00	-18.94	40.30	33.00	11.47	29.71	0.00	329	47	Peak																													
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5458.80</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>29.34</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>329</td><td>47</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.80	44.13	54.00	-9.87	29.34	33.02	11.48	29.71	0.00	329	47	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5458.80	44.13	54.00	-9.87	29.34	33.02	11.48	29.71	0.00	329	47	Average																													

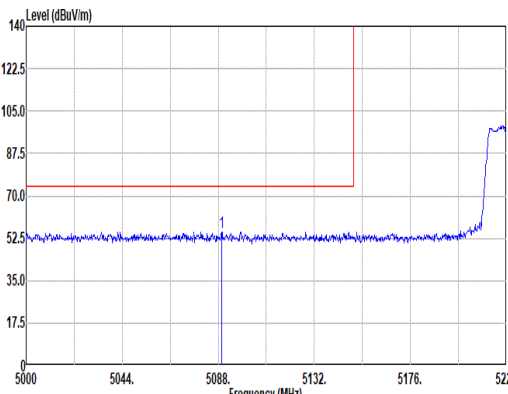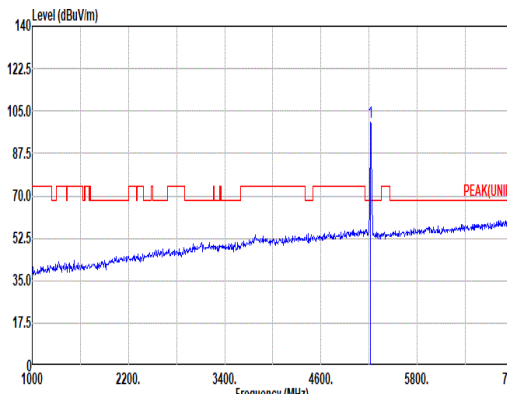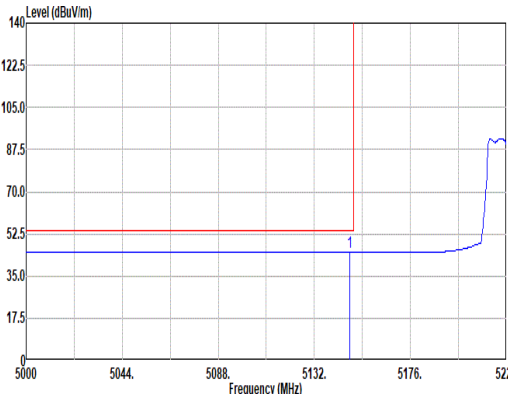
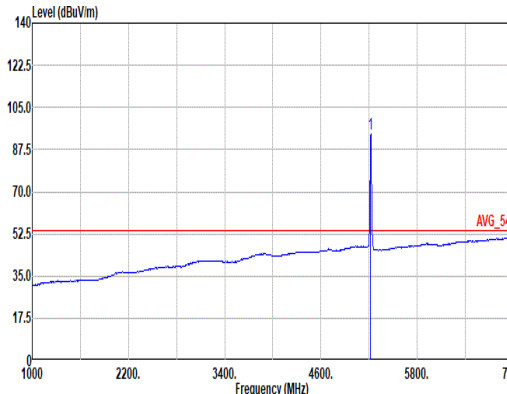


Mode	2																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5089.54</td><td>55.01</td><td>74.00</td><td>-18.99</td><td>40.49</td><td>33.12</td><td>11.13</td><td>29.73</td><td>0.00</td><td>296</td><td>360</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5089.54	55.01	74.00	-18.99	40.49	33.12	11.13	29.73	0.00	296	360	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>100.45</td><td>-----</td><td>-----</td><td>85.78</td><td>33.16</td><td>11.24</td><td>29.73</td><td>0.00</td><td>296</td><td>360</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5220.00	100.45	-----	-----	85.78	33.16	11.24	29.73	0.00	296	360
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5089.54	55.01	74.00	-18.99	40.49	33.12	11.13	29.73	0.00	296	360	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5220.00	100.45	-----	-----	85.78	33.16	11.24	29.73	0.00	296	360	Peak																																																																													
Avg																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5148.06</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>30.22</td><td>33.29</td><td>11.18</td><td>29.73</td><td>0.00</td><td>296</td><td>360</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5148.06	44.96	54.00	-9.04	30.22	33.29	11.18	29.73	0.00	296	360	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>93.86</td><td>-----</td><td>-----</td><td>79.20</td><td>33.15</td><td>11.24</td><td>29.73</td><td>0.00</td><td>296</td><td>360</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5220.00	93.86	-----	-----	79.20	33.15	11.24	29.73	0.00	296	360
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5148.06	44.96	54.00	-9.04	30.22	33.29	11.18	29.73	0.00	296	360	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5220.00	93.86	-----	-----	79.20	33.15	11.24	29.73	0.00	296	360	Average																																																																													



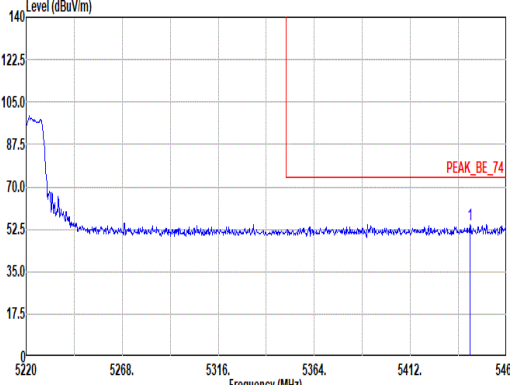
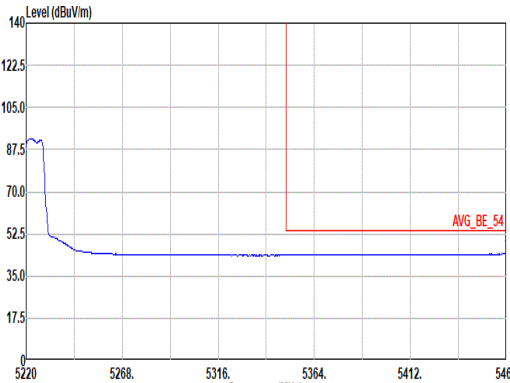


Mode	2																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.76</td><td>54.33</td><td>74.00</td><td>-19.67</td><td>39.56</td><td>33.02</td><td>11.46</td><td>29.71</td><td>0.00</td><td>296</td><td>360</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.76	54.33	74.00	-19.67	39.56	33.02	11.46	29.71	0.00	296	360	Peak	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5441.76	54.33	74.00	-19.67	39.56	33.02	11.46	29.71	0.00	296	360	Peak																																		
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>44.17</td><td>54.00</td><td>-9.83</td><td>29.38</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>296</td><td>360</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	44.17	54.00	-9.83	29.38	33.02	11.48	29.71	0.00	296	360	Average	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5460.00	44.17	54.00	-9.83	29.38	33.02	11.48	29.71	0.00	296	360	Average																																		

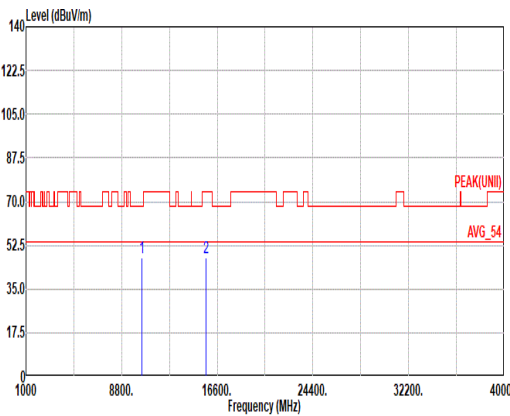
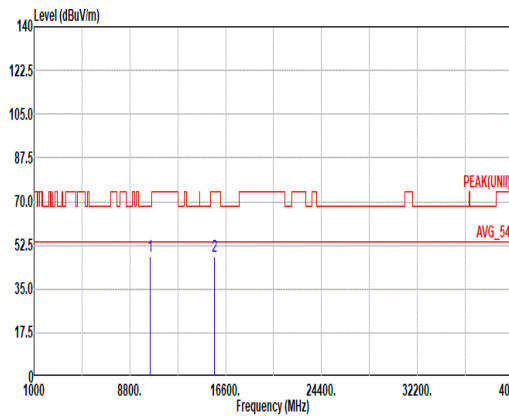


Mode	2																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>47.52</td><td>68.20</td><td>-20.68</td><td>58.71</td><td>38.70</td><td>15.87</td><td>66.48</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15657.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>55.61</td><td>37.73</td><td>19.55</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.52	68.20	-20.68	58.71	38.70	15.87	66.48	0.72	--	Peak	2	15657.00	47.33	74.00	-26.67	55.61	37.73	19.55	66.21	0.65	--	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>47.92</td><td>68.20</td><td>-20.28</td><td>59.11</td><td>38.70</td><td>15.87</td><td>66.48</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>56.12</td><td>37.73</td><td>19.55</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.92	68.20	-20.28	59.11	38.70	15.87	66.48	0.72	--	Peak	2	15660.00	47.84	74.00	-26.16	56.12	37.73	19.55	66.21	0.65	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	47.52	68.20	-20.68	58.71	38.70	15.87	66.48	0.72	--	Peak																																																																																																					
2	15657.00	47.33	74.00	-26.67	55.61	37.73	19.55	66.21	0.65	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10440.00	47.92	68.20	-20.28	59.11	38.70	15.87	66.48	0.72	--	Peak																																																																																																					
2	15660.00	47.84	74.00	-26.16	56.12	37.73	19.55	66.21	0.65	--	Peak																																																																																																					

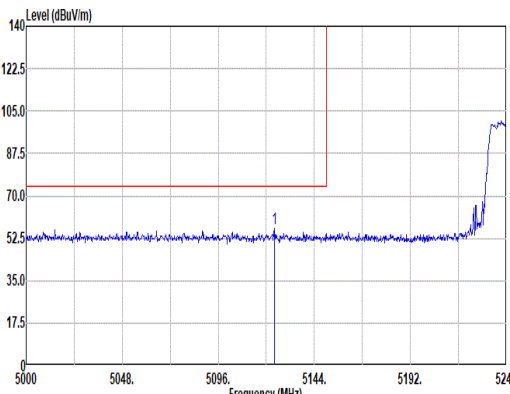
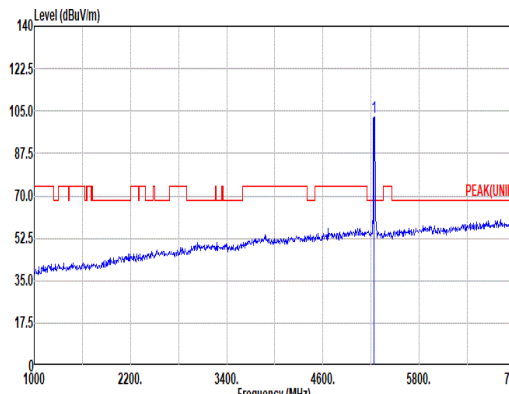
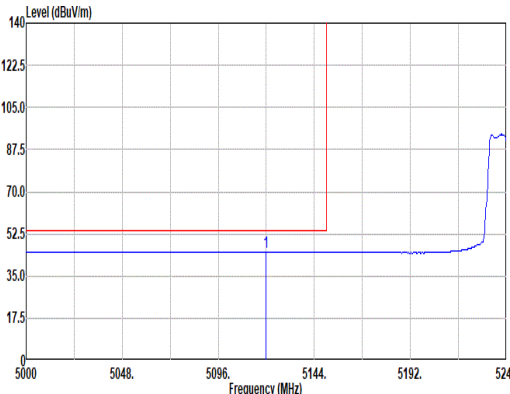
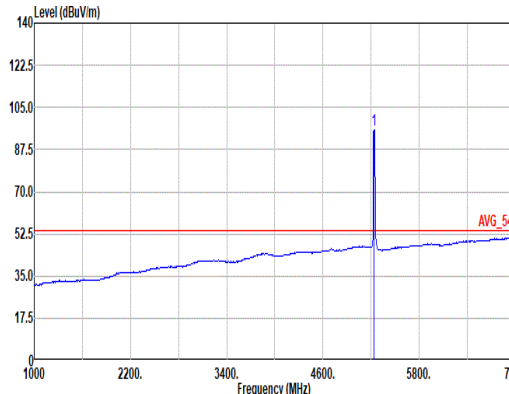


Mode	3																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5124.00</td><td>56.68</td><td>74.00</td><td>-17.32</td><td>42.05</td><td>33.20</td><td>11.16</td><td>29.73</td><td>0.00</td><td>100</td><td>67 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5124.00	56.68	74.00	-17.32	42.05	33.20	11.16	29.73	0.00	100	67 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.74</td><td>-----</td><td>-----</td><td>80.09</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>100</td><td>67 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.74	-----	-----	80.09	33.13	11.25	29.73	0.00	100	67 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5124.00	56.68	74.00	-17.32	42.05	33.20	11.16	29.73	0.00	100	67 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	102.74	-----	-----	80.09	33.13	11.25	29.73	0.00	100	67 Peak																																																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5120.00</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>30.37</td><td>33.18</td><td>11.16</td><td>29.73</td><td>0.00</td><td>100</td><td>67 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5120.00	44.98	54.00	-9.02	30.37	33.18	11.16	29.73	0.00	100	67 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.54</td><td>-----</td><td>-----</td><td>80.09</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>100</td><td>67 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	95.54	-----	-----	80.09	33.13	11.25	29.73	0.00	100	67 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5120.00	44.98	54.00	-9.02	30.37	33.18	11.16	29.73	0.00	100	67 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	95.54	-----	-----	80.09	33.13	11.25	29.73	0.00	100	67 Average																																																																																							

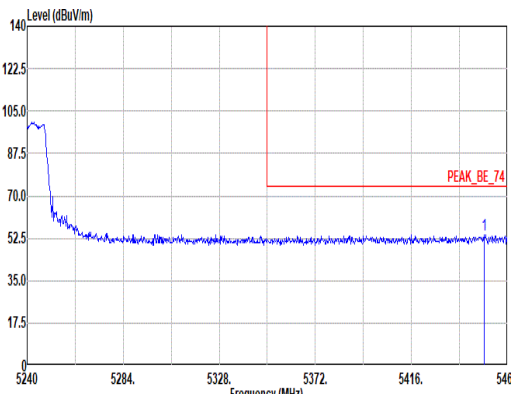
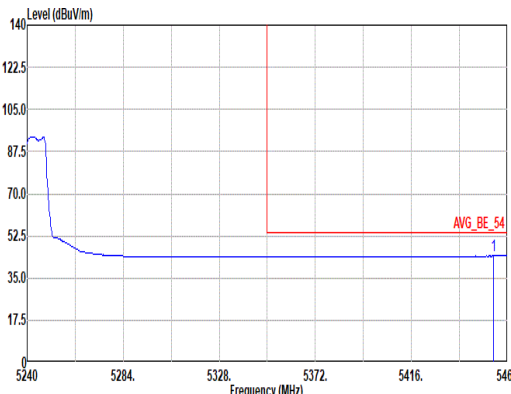


Mode	3																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																											
ANT	1																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5449.22</td><td>54.08</td><td>74.00</td><td>-19.92</td><td>39.32</td><td>33.00</td><td>11.47</td><td>29.71</td><td>0.00</td><td>100</td><td></td><td>67</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5449.22	54.08	74.00	-19.92	39.32	33.00	11.47	29.71	0.00	100		67	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																
1	5449.22	54.08	74.00	-19.92	39.32	33.00	11.47	29.71	0.00	100		67	Peak																															
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5453.62</td><td>44.20</td><td>54.00</td><td>-9.80</td><td>29.43</td><td>33.01</td><td>11.47</td><td>29.71</td><td>0.00</td><td>100</td><td></td><td>67</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5453.62	44.20	54.00	-9.80	29.43	33.01	11.47	29.71	0.00	100		67	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																
1	5453.62	44.20	54.00	-9.80	29.43	33.01	11.47	29.71	0.00	100		67	Average																															

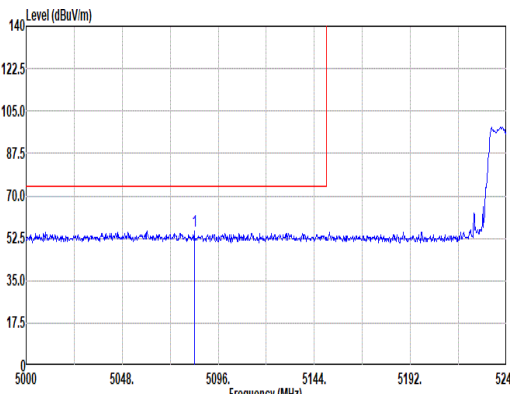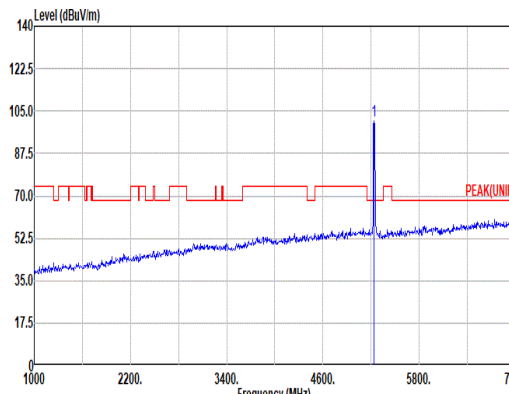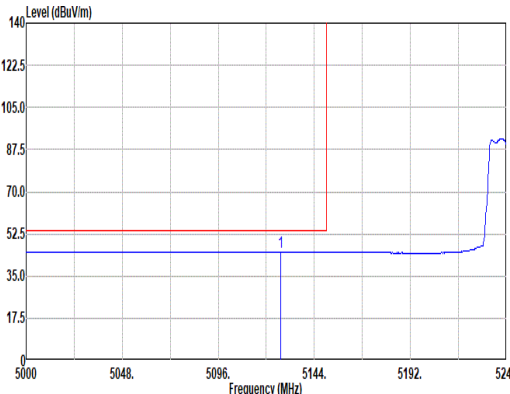
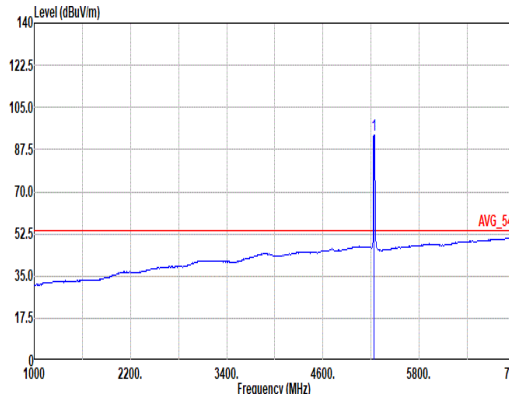


Mode	3																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5084.00</td><td>55.31</td><td>74.00</td><td>-18.69</td><td>40.78</td><td>33.13</td><td>11.13</td><td>29.73</td><td>0.00</td><td>310</td><td>360</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5084.00	55.31	74.00	-18.69	40.78	33.13	11.13	29.73	0.00	310	360	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>100.84</td><td>-----</td><td>-----</td><td>86.19</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>310</td><td>360</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5240.00	100.84	-----	-----	86.19	33.13	11.25	29.73	0.00	310	360	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	5084.00	55.31	74.00	-18.69	40.78	33.13	11.13	29.73	0.00	310	360	Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	5240.00	100.84	-----	-----	86.19	33.13	11.25	29.73	0.00	310	360	Peak																																																																														
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5127.20</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>30.32</td><td>33.21</td><td>11.16</td><td>29.73</td><td>0.00</td><td>310</td><td>360</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5127.20	44.96	54.00	-9.04	30.32	33.21	11.16	29.73	0.00	310	360	Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>93.77</td><td>-----</td><td>-----</td><td>79.12</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>310</td><td>360</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5240.00	93.77	-----	-----	79.12	33.13	11.25	29.73	0.00	310	360	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	5127.20	44.96	54.00	-9.04	30.32	33.21	11.16	29.73	0.00	310	360	Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	5240.00	93.77	-----	-----	79.12	33.13	11.25	29.73	0.00	310	360	Average																																																																														



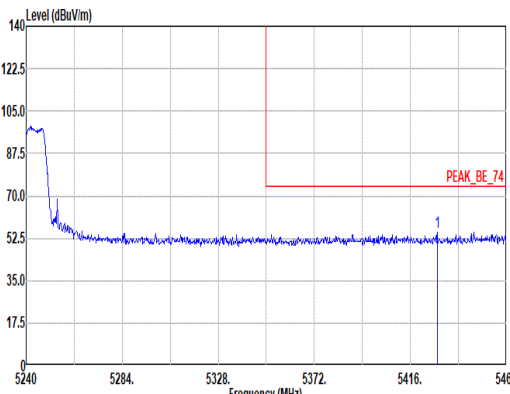
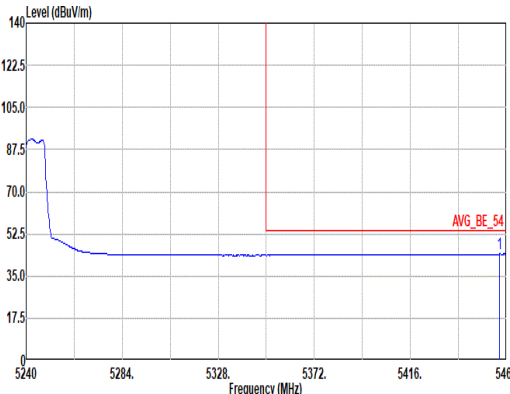


Mode	3																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																											
ANT	1																																											
Pol.	Vertical	Fundamental																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5428.32</td><td>54.85</td><td>74.00</td><td>-19.15</td><td>40.08</td><td>33.04</td><td>11.44</td><td>29.71</td><td>0.00</td><td></td><td>310</td><td>360</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5428.32	54.85	74.00	-19.15	40.08	33.04	11.44	29.71	0.00		310	360	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																															
1	5428.32	54.85	74.00	-19.15	40.08	33.04	11.44	29.71	0.00		310	360	Peak																															
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.92</td><td>44.15</td><td>54.00</td><td>-9.85</td><td>29.37</td><td>33.01</td><td>11.48</td><td>29.71</td><td>0.00</td><td></td><td>310</td><td>360</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5456.92	44.15	54.00	-9.85	29.37	33.01	11.48	29.71	0.00		310	360	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																															
1	5456.92	44.15	54.00	-9.85	29.37	33.01	11.48	29.71	0.00		310	360	Average																															



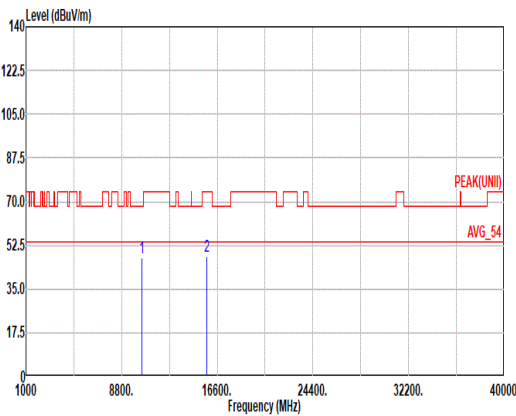
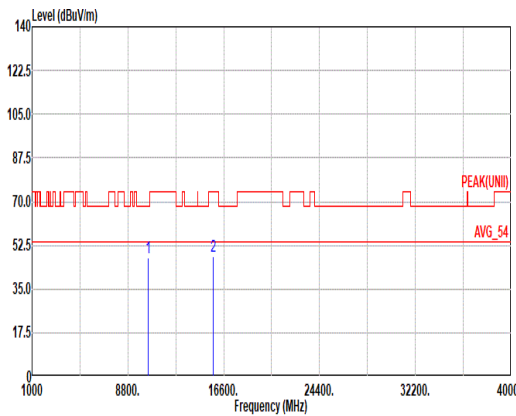


Mode	3																																																																		
	Harmonic																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal						Vertical																																																												
Peak Avg																																																																			
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.76</td><td>68.20</td><td>-20.44</td><td>58.88</td><td>38.70</td><td>15.90</td><td>66.44</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>55.89</td><td>37.95</td><td>19.57</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.76	68.20	-20.44	58.88	38.70	15.90	66.44	0.72	--	Peak	2	15720.00	47.85	74.00	-26.15	55.89	37.95	19.57	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	10480.00	47.76	68.20	-20.44	58.88	38.70	15.90	66.44	0.72	--	Peak																																																								
2	15720.00	47.85	74.00	-26.15	55.89	37.95	19.57	66.21	0.65	--	Peak																																																								
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.69</td><td>68.20</td><td>-20.51</td><td>58.81</td><td>38.70</td><td>15.90</td><td>66.44</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>55.93</td><td>37.95</td><td>19.57</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.69	68.20	-20.51	58.81	38.70	15.90	66.44	0.72	--	Peak	2	15720.00	47.89	74.00	-26.11	55.93	37.95	19.57	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	10480.00	47.69	68.20	-20.51	58.81	38.70	15.90	66.44	0.72	--	Peak																																																								
2	15720.00	47.89	74.00	-26.11	55.93	37.95	19.57	66.21	0.65	--	Peak																																																								

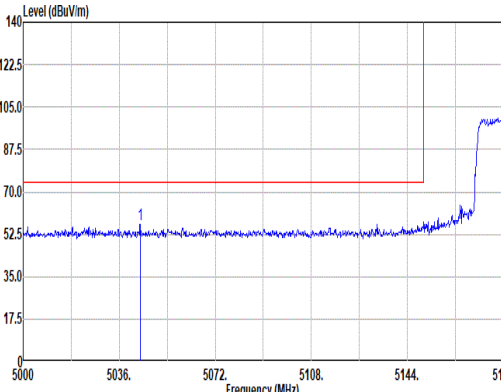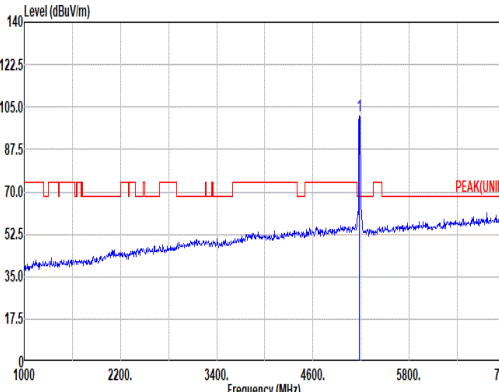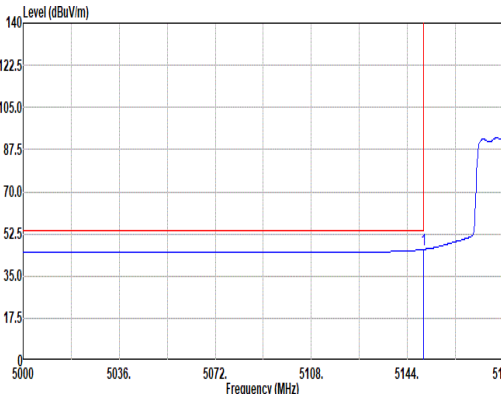
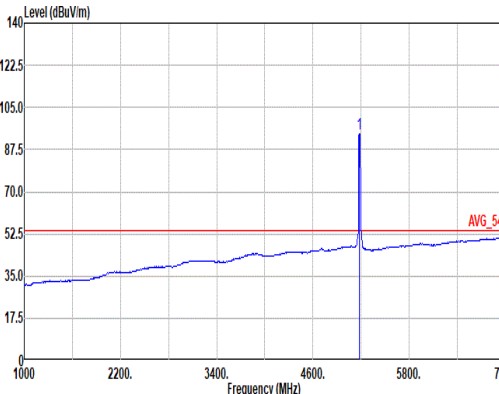


Mode	4																																																																																							
	Band Edge																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																							
ANT	1																																																																																							
Pol.	Horizontal						Fundamental																																																																																	
Peak																																																																																								
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5043.92</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>42.20</td><td>33.21</td><td>11.10</td><td>29.74</td><td>0.00</td><td>100</td><td></td><td>68 Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5043.92	56.77	74.00	-17.23	42.20	33.21	11.10	29.74	0.00	100		68 Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.60</td><td>-----</td><td>-----</td><td>86.88</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>100</td><td></td><td>68 Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	101.60	-----	-----	86.88	33.24	11.21	29.73	0.00	100		68 Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5043.92	56.77	74.00	-17.23	42.20	33.21	11.10	29.74	0.00	100		68 Peak																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5180.00	101.60	-----	-----	86.88	33.24	11.21	29.73	0.00	100		68 Peak																																																																												
Avg																																																																																								
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.94</td><td>46.08</td><td>54.00</td><td>-7.92</td><td>31.33</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>100</td><td></td><td>68 Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.94	46.08	54.00	-7.92	31.33	33.30	11.18	29.73	0.00	100		68 Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>94.23</td><td>-----</td><td>-----</td><td>79.51</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>100</td><td></td><td>68 Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	94.23	-----	-----	79.51	33.24	11.21	29.73	0.00	100		68 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5149.94	46.08	54.00	-7.92	31.33	33.30	11.18	29.73	0.00	100		68 Average																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5180.00	94.23	-----	-----	79.51	33.24	11.21	29.73	0.00	100		68 Average																																																																												

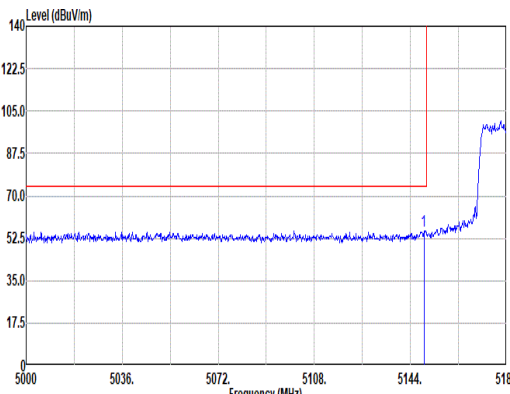
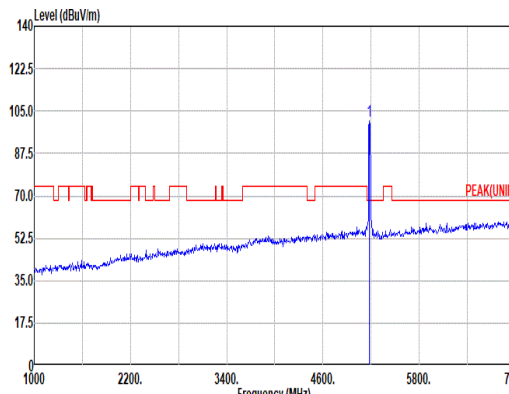
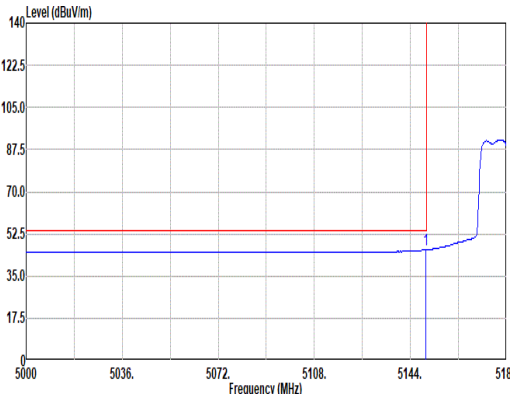
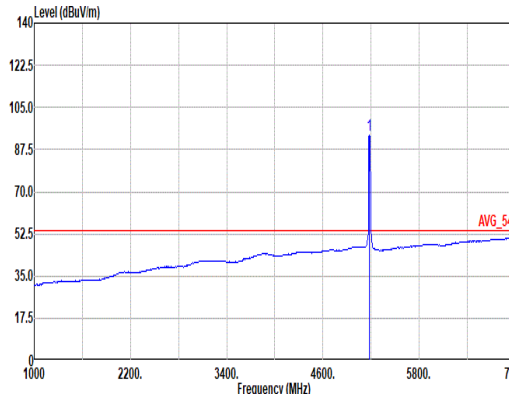


Mode	4																																				
	Band Edge																																				
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																				
ANT	1																																				
Pol.	Vertical						Fundamental																														
Peak																																					
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																														
Avg																																					
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																														
<table><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th colspan="2">Limit</th><th rowspan="2">Read Level</th><th rowspan="2">Ant Factor</th><th rowspan="2">Cable Loss</th><th rowspan="2">Preamp Factor</th><th rowspan="2">Aux Factor</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>dBuV/m</th><th>dBuV/m</th></tr><tr><td>1</td><td>5149.04</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>40.97</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>320</td><td>360 Peak</td></tr></table>												Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dBuV/m	1	5149.04	55.72	74.00	-18.28	40.97	33.30	11.18	29.73	0.00	320	360 Peak
Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																										
		dBuV/m	dBuV/m																																		
1	5149.04	55.72	74.00	-18.28	40.97	33.30	11.18	29.73	0.00	320	360 Peak																										
<table><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th colspan="2">Limit</th><th rowspan="2">Read Level</th><th rowspan="2">Ant Factor</th><th rowspan="2">Cable Loss</th><th rowspan="2">Preamp Factor</th><th rowspan="2">Aux Factor</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>dBuV/m</th><th>dBuV/m</th></tr><tr><td>1</td><td>5180.00</td><td>100.94</td><td>-----</td><td>86.22</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>320</td><td>360 Peak</td></tr></table>												Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dBuV/m	1	5180.00	100.94	-----	86.22	33.25	11.20	29.73	0.00	320	360 Peak	
Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																										
		dBuV/m	dBuV/m																																		
1	5180.00	100.94	-----	86.22	33.25	11.20	29.73	0.00	320	360 Peak																											
<table><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th colspan="2">Limit</th><th rowspan="2">Read Level</th><th rowspan="2">Ant Factor</th><th rowspan="2">Cable Loss</th><th rowspan="2">Preamp Factor</th><th rowspan="2">Aux Factor</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>dBuV/m</th><th>dBuV/m</th></tr><tr><td>1</td><td>5149.76</td><td>45.92</td><td>54.00</td><td>-8.08</td><td>31.17</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>320</td><td>360 Average</td></tr></table>												Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dBuV/m	1	5149.76	45.92	54.00	-8.08	31.17	33.30	11.18	29.73	0.00	320	360 Average
Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																										
		dBuV/m	dBuV/m																																		
1	5149.76	45.92	54.00	-8.08	31.17	33.30	11.18	29.73	0.00	320	360 Average																										
<table><tr><th rowspan="2">Freq</th><th rowspan="2">Level</th><th colspan="2">Limit</th><th rowspan="2">Read Level</th><th rowspan="2">Ant Factor</th><th rowspan="2">Cable Loss</th><th rowspan="2">Preamp Factor</th><th rowspan="2">Aux Factor</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>dBuV/m</th><th>dBuV/m</th></tr><tr><td>1</td><td>5180.00</td><td>93.26</td><td>-----</td><td>78.54</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>320</td><td>360 Average</td></tr></table>												Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	dBuV/m	dBuV/m	1	5180.00	93.26	-----	78.54	33.25	11.20	29.73	0.00	320	360 Average	
Freq	Level	Limit		Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																										
		dBuV/m	dBuV/m																																		
1	5180.00	93.26	-----	78.54	33.25	11.20	29.73	0.00	320	360 Average																											

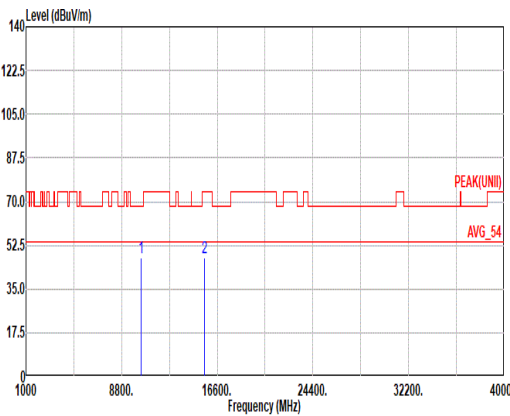
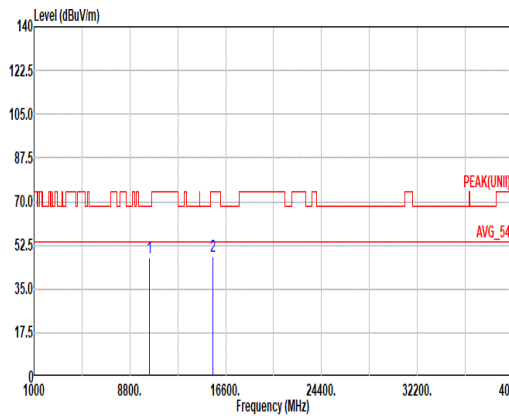


Mode	4																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.63</td><td>68.20</td><td>-20.57</td><td>58.97</td><td>38.70</td><td>15.79</td><td>66.57</td><td>0.74</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>55.56</td><td>38.25</td><td>19.49</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.63	68.20	-20.57	58.97	38.70	15.79	66.57	0.74	--	Peak	2	15540.00	47.74	74.00	-26.26	55.56	38.25	19.49	66.21	0.65	--	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.36</td><td>68.20</td><td>-20.84</td><td>58.68</td><td>38.70</td><td>15.80</td><td>66.56</td><td>0.74</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.98</td><td>74.00</td><td>-26.02</td><td>55.00</td><td>38.25</td><td>19.49</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.36	68.20	-20.84	58.68	38.70	15.80	66.56	0.74	--	Peak	2	15540.00	47.98	74.00	-26.02	55.00	38.25	19.49	66.21	0.65	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	47.63	68.20	-20.57	58.97	38.70	15.79	66.57	0.74	--	Peak																																																																																																					
2	15540.00	47.74	74.00	-26.26	55.56	38.25	19.49	66.21	0.65	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10360.00	47.36	68.20	-20.84	58.68	38.70	15.80	66.56	0.74	--	Peak																																																																																																					
2	15540.00	47.98	74.00	-26.02	55.00	38.25	19.49	66.21	0.65	--	Peak																																																																																																					

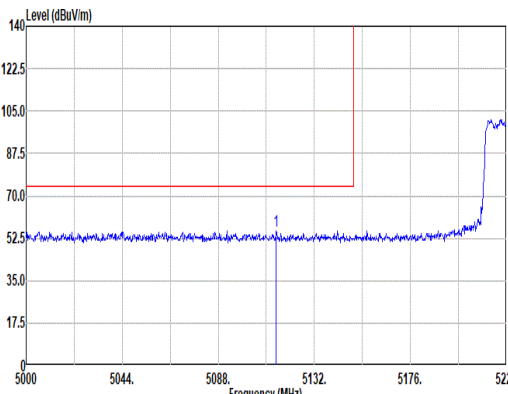
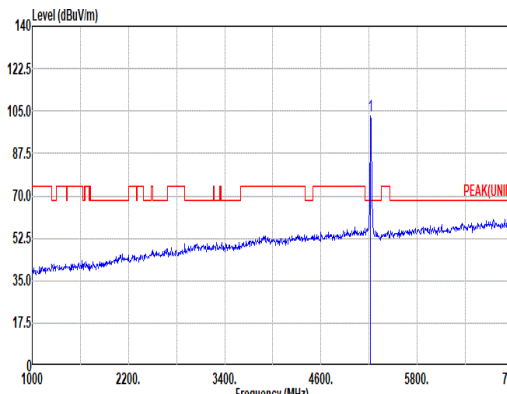
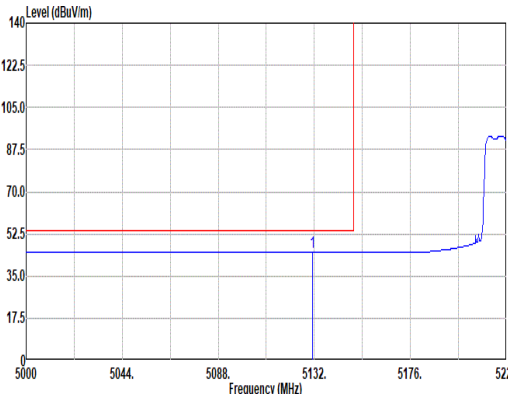
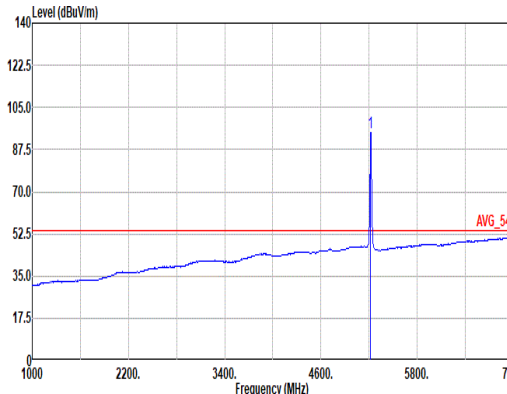


Mode	5																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5114.62</td><td>55.48</td><td>74.00</td><td>-18.52</td><td>40.90</td><td>33.16</td><td>11.15</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5114.62	55.48	74.00	-18.52	40.90	33.16	11.15	29.73	0.00	100	68 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.77</td><td>-----</td><td>-----</td><td>88.10</td><td>33.16</td><td>11.24</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.77	-----	-----	88.10	33.16	11.24	29.73	0.00	100	68 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5114.62	55.48	74.00	-18.52	40.90	33.16	11.15	29.73	0.00	100	68 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5220.00	102.77	-----	-----	88.10	33.16	11.24	29.73	0.00	100	68 Peak																																																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5131.12</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>30.33</td><td>33.22</td><td>11.16</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5131.12	44.98	54.00	-9.02	30.33	33.22	11.16	29.73	0.00	100	68 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>94.81</td><td>-----</td><td>-----</td><td>80.14</td><td>33.16</td><td>11.24</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	94.81	-----	-----	80.14	33.16	11.24	29.73	0.00	100	68 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5131.12	44.98	54.00	-9.02	30.33	33.22	11.16	29.73	0.00	100	68 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5220.00	94.81	-----	-----	80.14	33.16	11.24	29.73	0.00	100	68 Average																																																																																							

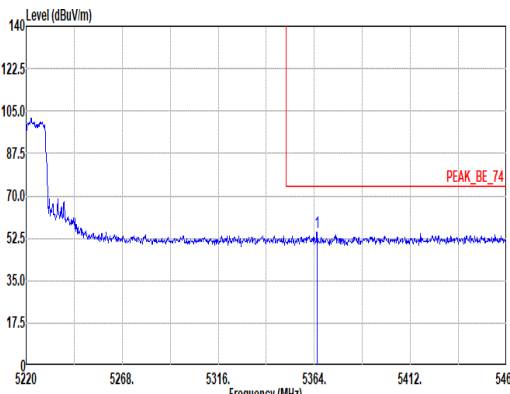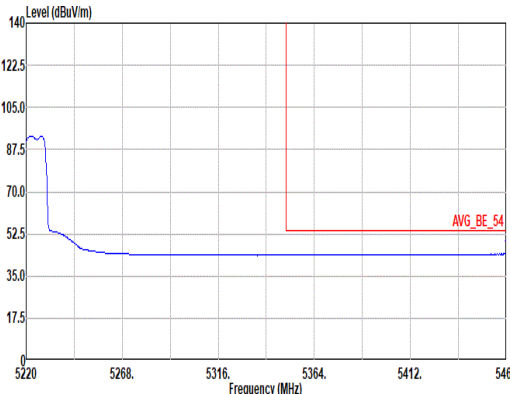

Mode	5																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																	
ANT	1																																																	
Pol.	Horizontal						Fundamental																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5365.44</td><td>54.83</td><td>74.00</td><td>-19.17</td><td>40.14</td><td>33.03</td><td>11.38</td><td>29.72</td><td>0.00</td><td>100</td><td>60</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5365.44	54.83	74.00	-19.17	40.14	33.03	11.38	29.72	0.00	100	60	Peak	Blank				
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5365.44	54.83	74.00	-19.17	40.14	33.03	11.38	29.72	0.00	100	60	Peak																																						
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5460.00</td><td>44.17</td><td>54.00</td><td>-9.83</td><td>29.38</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>100</td><td>60</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5460.00	44.17	54.00	-9.83	29.38	33.02	11.48	29.71	0.00	100	60	Average	Blank				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5460.00	44.17	54.00	-9.83	29.38	33.02	11.48	29.71	0.00	100	60	Average																																						

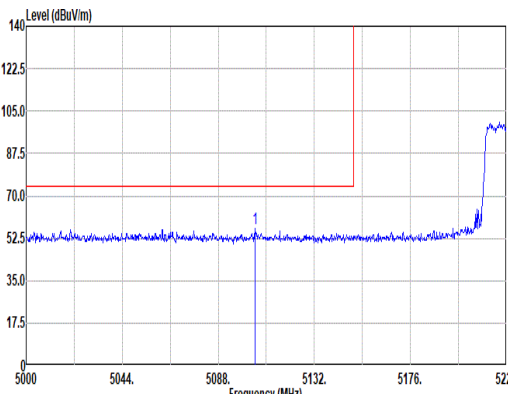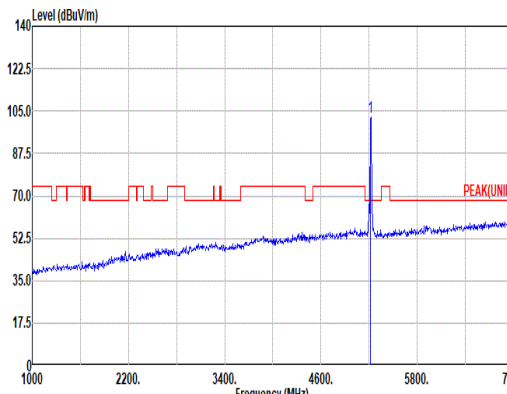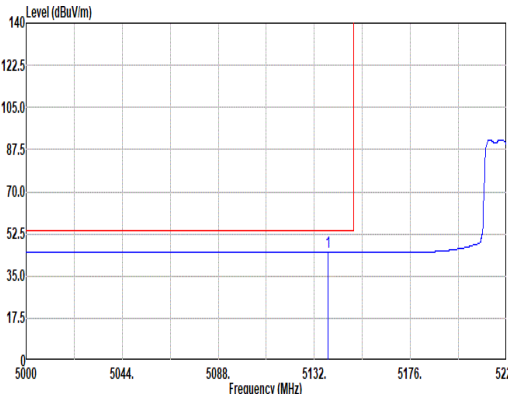
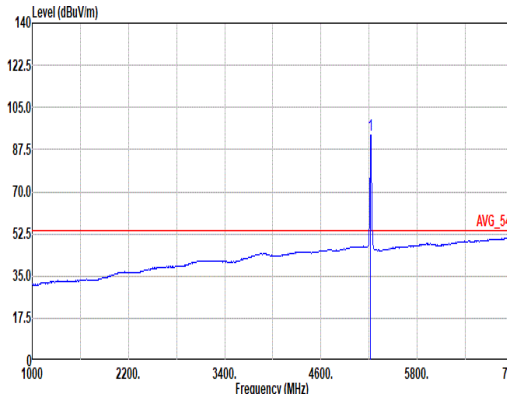


Mode	5																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5104.94</td><td>56.40</td><td>74.00</td><td>-17.60</td><td>41.87</td><td>33.12</td><td>11.14</td><td>29.73</td><td>0.00</td><td>296</td><td>0 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5104.94	56.40	74.00	-17.60	41.87	33.12	11.14	29.73	0.00	296	0 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>102.62</td><td>-----</td><td>-----</td><td>87.96</td><td>33.14</td><td>11.25</td><td>29.73</td><td>0.00</td><td>296</td><td>0 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	102.62	-----	-----	87.96	33.14	11.25	29.73	0.00	296	0 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5104.94	56.40	74.00	-17.60	41.87	33.12	11.14	29.73	0.00	296	0 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5220.00	102.62	-----	-----	87.96	33.14	11.25	29.73	0.00	296	0 Peak																																																																																						
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5130.16</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>30.27</td><td>33.25</td><td>11.17</td><td>29.73</td><td>0.00</td><td>296</td><td>0 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5130.16	44.96	54.00	-9.04	30.27	33.25	11.17	29.73	0.00	296	0 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5220.00</td><td>93.38</td><td>-----</td><td>-----</td><td>78.72</td><td>33.15</td><td>11.24</td><td>29.73</td><td>0.00</td><td>296</td><td>0 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	93.38	-----	-----	78.72	33.15	11.24	29.73	0.00	296	0 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5130.16	44.96	54.00	-9.04	30.27	33.25	11.17	29.73	0.00	296	0 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5220.00	93.38	-----	-----	78.72	33.15	11.24	29.73	0.00	296	0 Average																																																																																						







Mode	5																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5419.44</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>39.25</td><td>33.06</td><td>11.43</td><td>29.71</td><td>0.00</td><td>296</td><td>0</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5419.44	54.03	74.00	-19.97	39.25	33.06	11.43	29.71	0.00	296	0	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5419.44	54.03	74.00	-19.97	39.25	33.06	11.43	29.71	0.00	296	0	Peak																																							
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5451.36</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>29.37</td><td>33.00</td><td>11.47</td><td>29.71</td><td>0.00</td><td>296</td><td>0</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5451.36	44.13	54.00	-9.87	29.37	33.00	11.47	29.71	0.00	296	0	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5451.36	44.13	54.00	-9.87	29.37	33.00	11.47	29.71	0.00	296	0	Average																																							

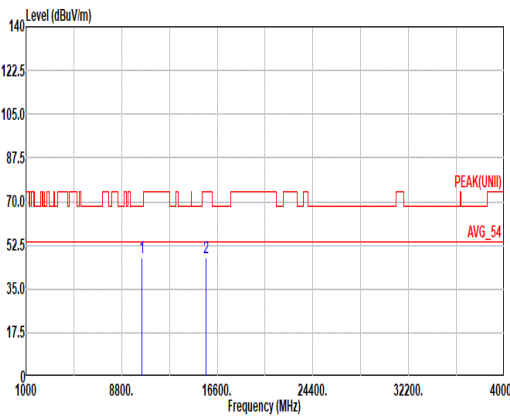
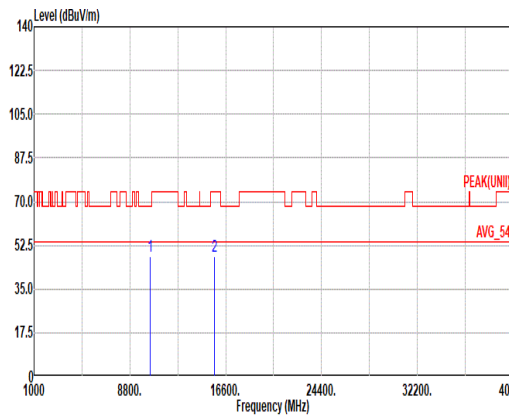


Mode	5																																																																																																																														
	Harmonic																																																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>47.44</td><td>68.20</td><td>-20.76</td><td>58.60</td><td>38.70</td><td>15.88</td><td>66.46</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>55.90</td><td>37.79</td><td>19.54</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.44	68.20	-20.76	58.60	38.70	15.88	66.46	0.72	--	Peak	2	15660.00	47.67	74.00	-26.33	55.90	37.79	19.54	66.21	0.65	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>48.08</td><td>68.20</td><td>-20.12</td><td>59.28</td><td>38.70</td><td>15.86</td><td>66.49</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.86</td><td>74.00</td><td>-26.14</td><td>56.16</td><td>37.72</td><td>19.54</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	48.08	68.20	-20.12	59.28	38.70	15.86	66.49	0.73	--	Peak	2	15660.00	47.86	74.00	-26.14	56.16	37.72	19.54	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	10440.00	47.44	68.20	-20.76	58.60	38.70	15.88	66.46	0.72	--	Peak																																																																																																																				
2	15660.00	47.67	74.00	-26.33	55.90	37.79	19.54	66.21	0.65	--	Peak																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	10440.00	48.08	68.20	-20.12	59.28	38.70	15.86	66.49	0.73	--	Peak																																																																																																																				
2	15660.00	47.86	74.00	-26.14	56.16	37.72	19.54	66.21	0.65	--	Peak																																																																																																																				

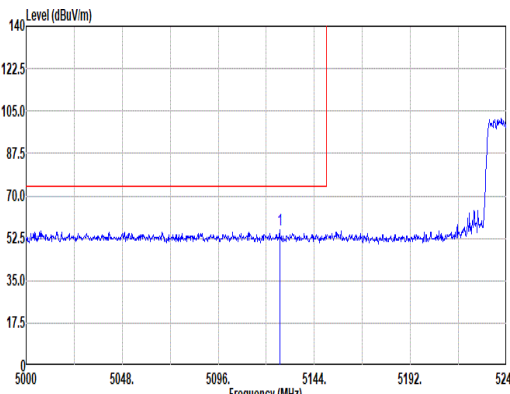
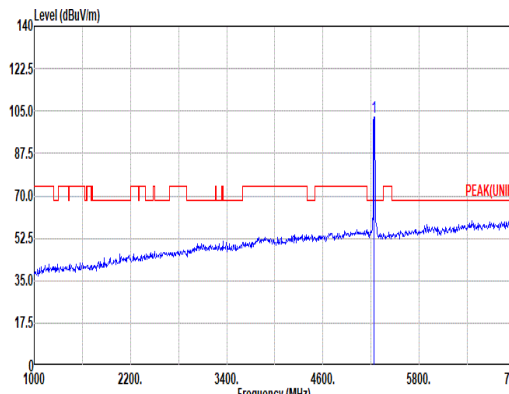
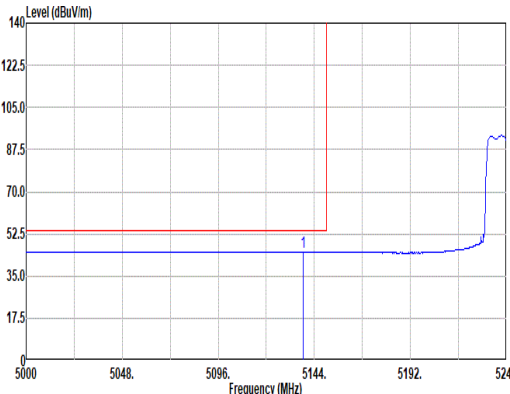
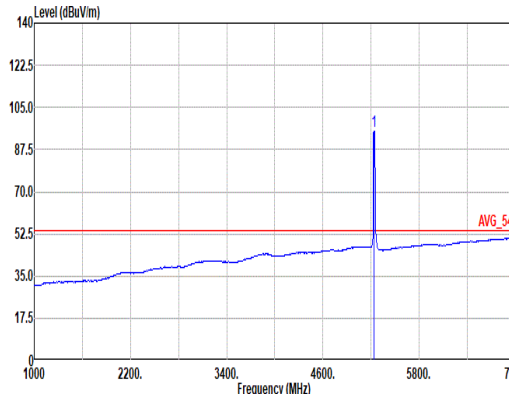


Mode	6																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5126.72</td><td>56.12</td><td>74.00</td><td>-17.88</td><td>41.48</td><td>33.21</td><td>11.16</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5126.72	56.12	74.00	-17.88	41.48	33.21	11.16	29.73	0.00	100	68 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.46</td><td>-----</td><td>-----</td><td>87.81</td><td>33.12</td><td>11.26</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.46	-----	-----	87.81	33.12	11.26	29.73	0.00	100	68 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5126.72	56.12	74.00	-17.88	41.48	33.21	11.16	29.73	0.00	100	68 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	102.46	-----	-----	87.81	33.12	11.26	29.73	0.00	100	68 Peak																																																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5138.24</td><td>44.95</td><td>54.00</td><td>-9.05</td><td>30.26</td><td>33.25</td><td>11.17</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5138.24	44.95	54.00	-9.05	30.26	33.25	11.17	29.73	0.00	100	68 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.05</td><td>-----</td><td>-----</td><td>80.40</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>100</td><td>68 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	95.05	-----	-----	80.40	33.13	11.25	29.73	0.00	100	68 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5138.24	44.95	54.00	-9.05	30.26	33.25	11.17	29.73	0.00	100	68 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5240.00	95.05	-----	-----	80.40	33.13	11.25	29.73	0.00	100	68 Average																																																																																							

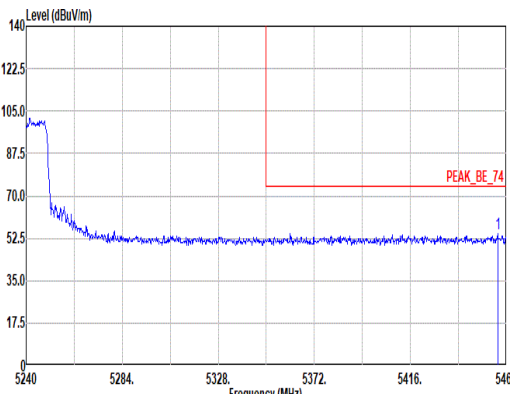
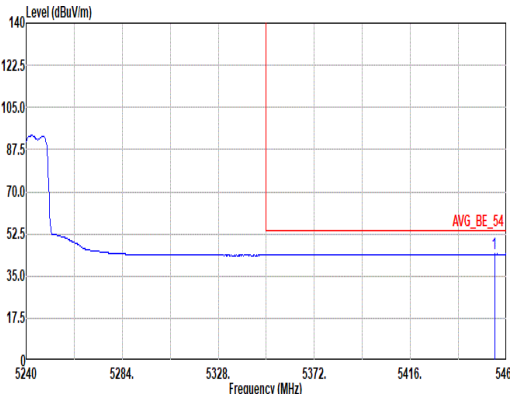


Mode	6																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5456.04</td><td>54.48</td><td>74.00</td><td>-19.52</td><td>39.70</td><td>33.01</td><td>11.48</td><td>29.71</td><td>0.00</td><td>100</td><td>60</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.04	54.48	74.00	-19.52	39.70	33.01	11.48	29.71	0.00	100	60	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5456.04	54.48	74.00	-19.52	39.70	33.01	11.48	29.71	0.00	100	60	Peak																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5454.50</td><td>44.13</td><td>54.00</td><td>-9.87</td><td>29.35</td><td>33.01</td><td>11.48</td><td>29.71</td><td>0.00</td><td>100</td><td>60</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5454.50	44.13	54.00	-9.87	29.35	33.01	11.48	29.71	0.00	100	60	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5454.50	44.13	54.00	-9.87	29.35	33.01	11.48	29.71	0.00	100	60	Average																																							

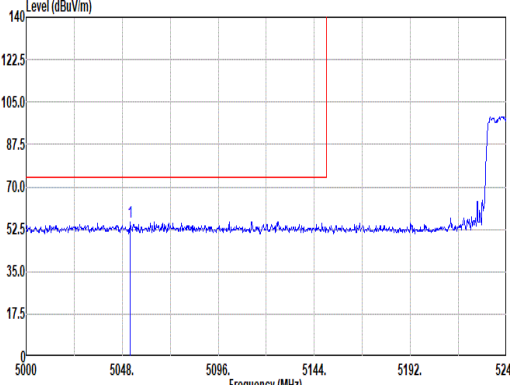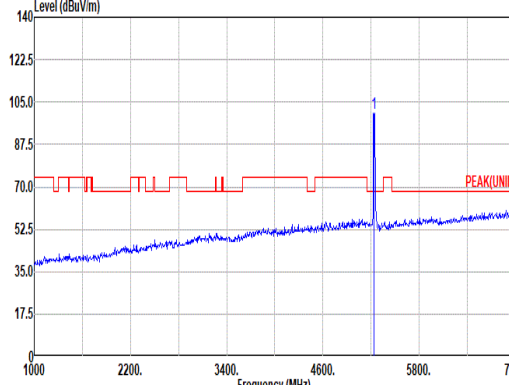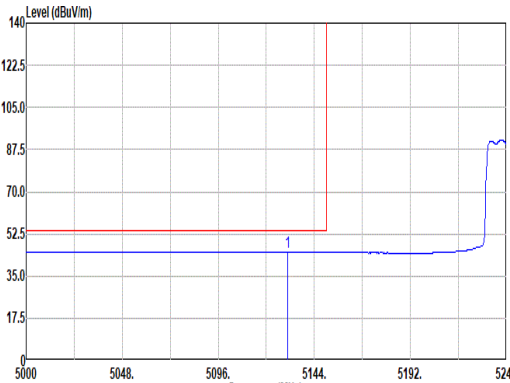
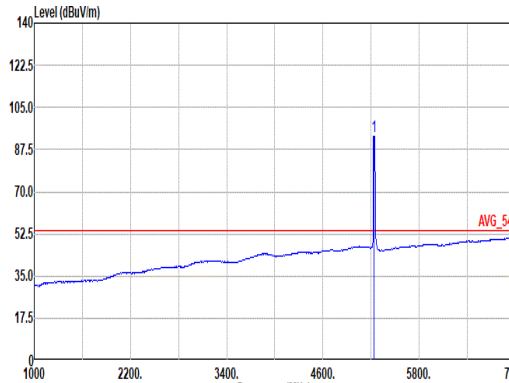


Mode	6																																																																																							
	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical						Fundamental																																																																																	
Peak																																																																																								
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5052.00</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>41.12</td><td>33.20</td><td>11.10</td><td>29.74</td><td>0.00</td><td>310</td><td></td><td>0 Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5052.00	55.68	74.00	-18.32	41.12	33.20	11.10	29.74	0.00	310		0 Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>100.33</td><td>-----</td><td>-----</td><td>85.69</td><td>33.10</td><td>11.27</td><td>29.73</td><td>0.00</td><td>310</td><td></td><td>0 Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5240.00	100.33	-----	-----	85.69	33.10	11.27	29.73	0.00	310		0 Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5052.00	55.68	74.00	-18.32	41.12	33.20	11.10	29.74	0.00	310		0 Peak																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5240.00	100.33	-----	-----	85.69	33.10	11.27	29.73	0.00	310		0 Peak																																																																												
Avg																																																																																								
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5130.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>30.27</td><td>33.22</td><td>11.16</td><td>29.73</td><td>0.00</td><td>310</td><td></td><td>0 Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5130.00	44.92	54.00	-9.08	30.27	33.22	11.16	29.73	0.00	310		0 Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>93.17</td><td>-----</td><td>-----</td><td>78.52</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>310</td><td></td><td>0 Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5240.00	93.17	-----	-----	78.52	33.13	11.25	29.73	0.00	310		0 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5130.00	44.92	54.00	-9.08	30.27	33.22	11.16	29.73	0.00	310		0 Average																																																																												
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5240.00	93.17	-----	-----	78.52	33.13	11.25	29.73	0.00	310		0 Average																																																																												



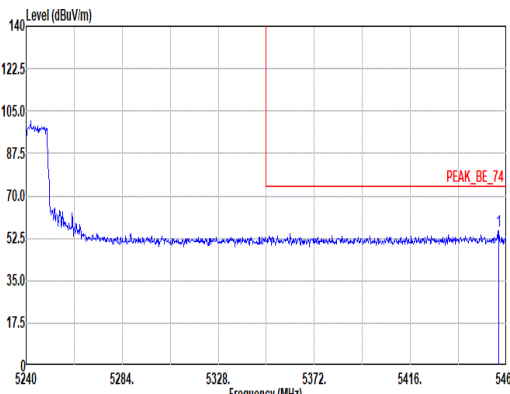
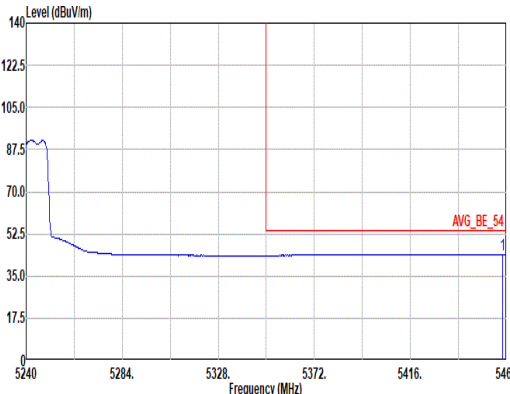


Mode	6																																																					
	Band Edge - R																																																					
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																					
ANT	1																																																					
Pol.	Vertical						Fundamental																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5456.48</td><td>55.58</td><td>74.00</td><td>-18.42</td><td>40.00</td><td>33.01</td><td>11.48</td><td>29.71</td><td>0.00</td><td>310</td><td></td><td>0</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.48	55.58	74.00	-18.42	40.00	33.01	11.48	29.71	0.00	310		0	Peak	Blank					
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5456.48	55.58	74.00	-18.42	40.00	33.01	11.48	29.71	0.00	310		0	Peak																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5458.24</td><td>44.05</td><td>54.00</td><td>-9.95</td><td>29.26</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>310</td><td></td><td>0</td><td>Average</td></tr></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.24	44.05	54.00	-9.95	29.26	33.02	11.48	29.71	0.00	310		0	Average	Blank					
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																										
1	5458.24	44.05	54.00	-9.95	29.26	33.02	11.48	29.71	0.00	310		0	Average																																									

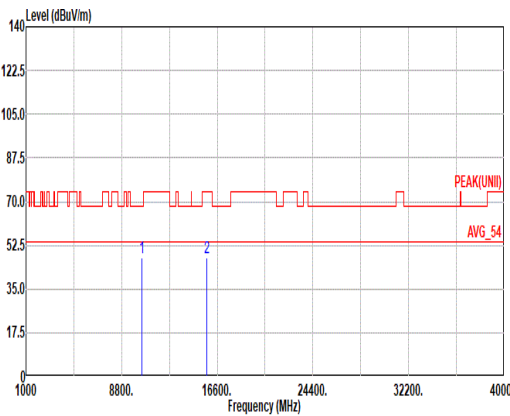
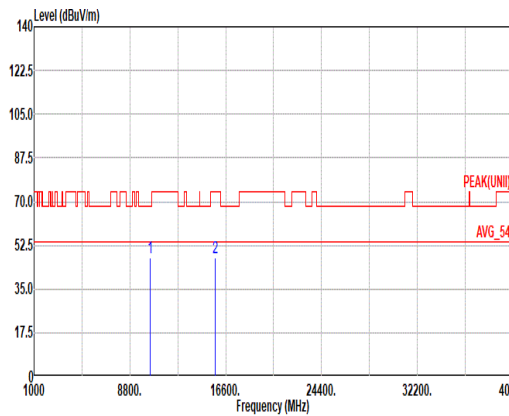


Mode	6																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.49</td><td>68.20</td><td>-20.71</td><td>58.61</td><td>38.70</td><td>15.90</td><td>66.44</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.75</td><td>74.00</td><td>-26.25</td><td>55.00</td><td>37.94</td><td>19.57</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.49	68.20	-20.71	58.61	38.70	15.90	66.44	0.72	--	Peak	2	15720.00	47.75	74.00	-26.25	55.00	37.94	19.57	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10480.00	47.49	68.20	-20.71	58.61	38.70	15.90	66.44	0.72	--	Peak																																																							
2	15720.00	47.75	74.00	-26.25	55.00	37.94	19.57	66.21	0.65	--	Peak																																																							

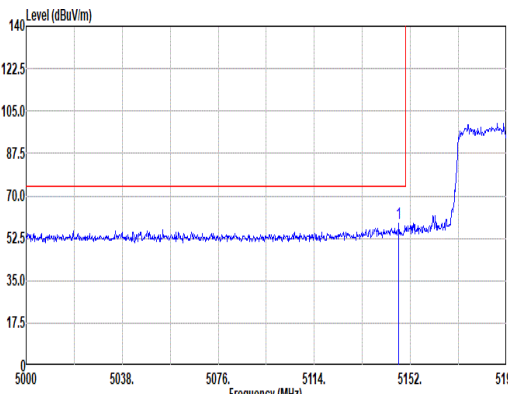
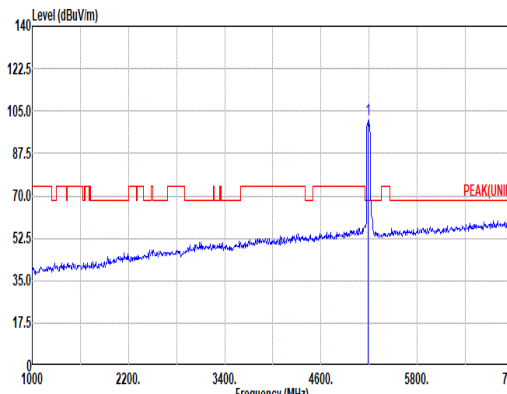
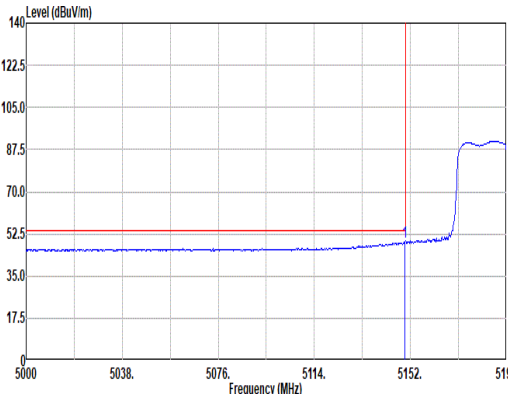
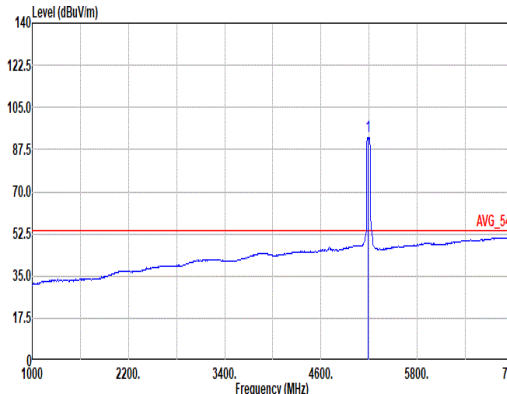


Mode	7																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal					Fundamental																																																																																					
Peak																																																																																											
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.44</td><td>58.48</td><td>74.00</td><td>-15.52</td><td>43.74</td><td>33.29</td><td>11.18</td><td>29.73</td><td>0.00</td><td>62 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5147.44	58.48	74.00	-15.52	43.74	33.29	11.18	29.73	0.00	62 Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>101.37</td><td>-----</td><td>-----</td><td>86.67</td><td>33.21</td><td>11.22</td><td>29.73</td><td>0.00</td><td>62 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	101.37	-----	-----	86.67	33.21	11.22	29.73	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5147.44	58.48	74.00	-15.52	43.74	33.29	11.18	29.73	0.00	62 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	101.37	-----	-----	86.67	33.21	11.22	29.73	0.00	62 Peak																																																																																	
Avg																																																																																											
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>49.30</td><td>54.00</td><td>-4.70</td><td>34.55</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>62 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5149.91	49.30	54.00	-4.70	34.55	33.30	11.18	29.73	0.00	62 Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>92.78</td><td>-----</td><td>-----</td><td>87.63</td><td>27.70</td><td>7.77</td><td>30.32</td><td>0.00</td><td>62 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	92.78	-----	-----	87.63	27.70	7.77	30.32	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5149.91	49.30	54.00	-4.70	34.55	33.30	11.18	29.73	0.00	62 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																		
1	5190.00	92.78	-----	-----	87.63	27.70	7.77	30.32	0.00	62 Average																																																																																	

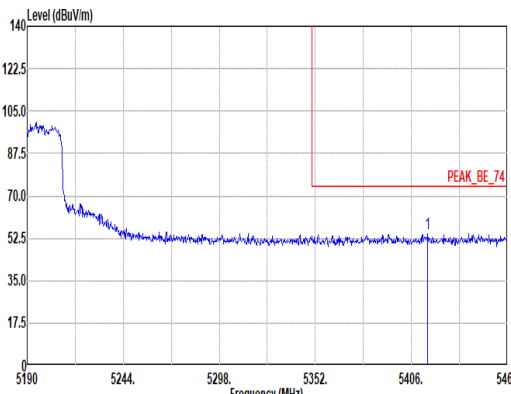
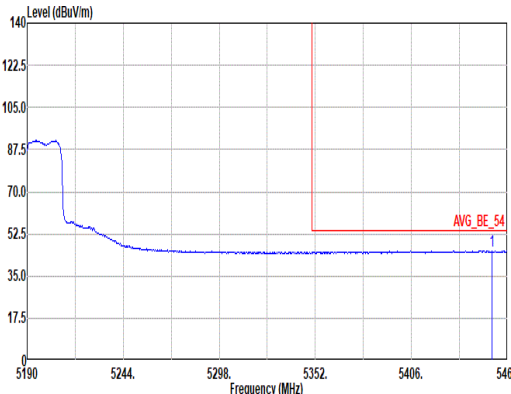


Mode	7																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5415.18</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>39.58</td><td>33.07</td><td>11.43</td><td>29.72</td><td>0.00</td><td>100</td><td>62</td><td>Peak</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5415.18	54.36	74.00	-19.64	39.58	33.07	11.43	29.72	0.00	100	62	Peak	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5415.18	54.36	74.00	-19.64	39.58	33.07	11.43	29.72	0.00	100	62	Peak																													
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5451.36</td><td>45.52</td><td>54.00</td><td>-8.48</td><td>30.76</td><td>33.00</td><td>11.47</td><td>29.71</td><td>0.00</td><td>100</td><td>62</td><td>Average</td></tr></table>	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5451.36	45.52	54.00	-8.48	30.76	33.00	11.47	29.71	0.00	100	62	Average	Blank
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																													
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5451.36	45.52	54.00	-8.48	30.76	33.00	11.47	29.71	0.00	100	62	Average																													

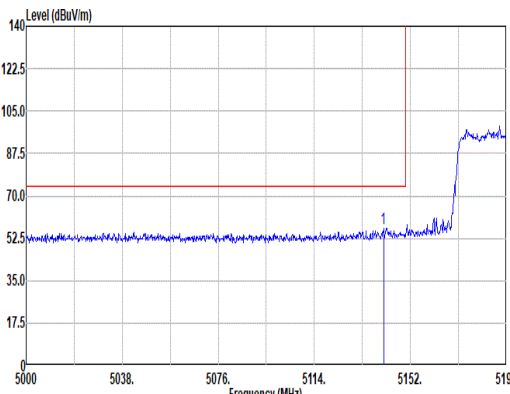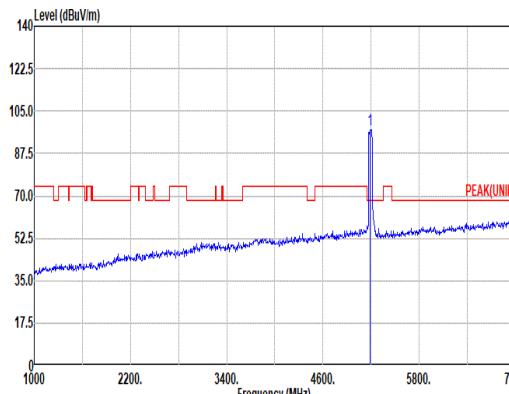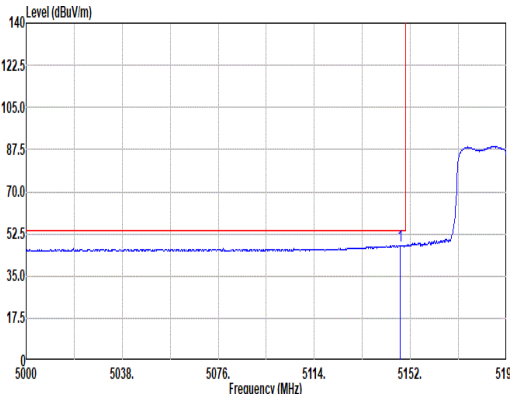
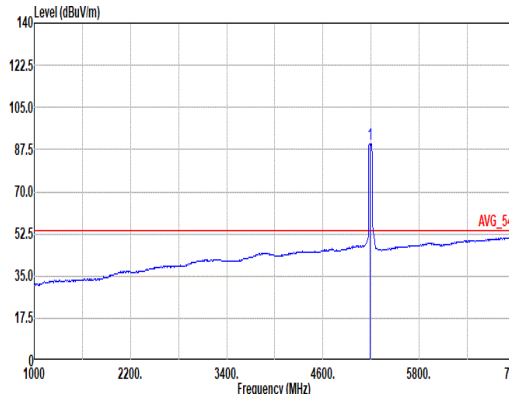


Mode	7																																																																																																	
	Band Edge - L																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.36</td><td>56.66</td><td>74.00</td><td>-17.34</td><td>41.95</td><td>33.27</td><td>11.17</td><td>29.73</td><td>0.00</td><td>292</td><td>352</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5141.36	56.66	74.00	-17.34	41.95	33.27	11.17	29.73	0.00	292	352	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>97.46</td><td>-----</td><td>-----</td><td>82.76</td><td>33.21</td><td>11.22</td><td>29.73</td><td>0.00</td><td>292</td><td>352</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	97.46	-----	-----	82.76	33.21	11.22	29.73	0.00	292	352	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5141.36	56.66	74.00	-17.34	41.95	33.27	11.17	29.73	0.00	292	352	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	97.46	-----	-----	82.76	33.21	11.22	29.73	0.00	292	352	Peak																																																																																						
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.01</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>33.05</td><td>33.29</td><td>11.18</td><td>29.73</td><td>0.00</td><td>292</td><td>352</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5148.01	47.79	54.00	-6.21	33.05	33.29	11.18	29.73	0.00	292	352	Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>90.00</td><td>-----</td><td>-----</td><td>75.30</td><td>33.21</td><td>11.22</td><td>29.73</td><td>0.00</td><td>292</td><td>352</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5190.00	90.00	-----	-----	75.30	33.21	11.22	29.73	0.00	292	352	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5148.01	47.79	54.00	-6.21	33.05	33.29	11.18	29.73	0.00	292	352	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	90.00	-----	-----	75.30	33.21	11.22	29.73	0.00	292	352	Average																																																																																						



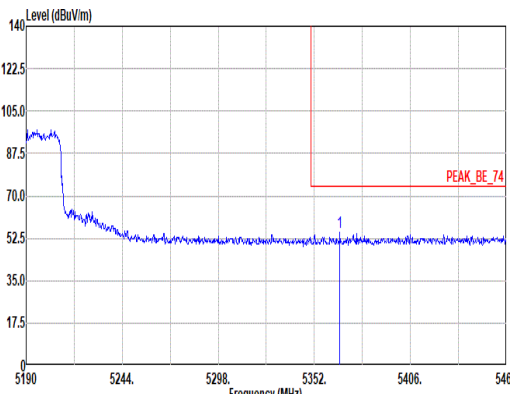
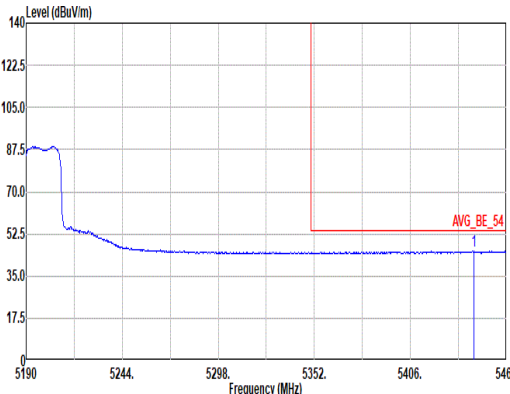


Mode	7																																								
	Band Edge - R																																								
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																								
ANT	1																																								
Pol.	Vertical	Fundamental																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5366.31</td><td>54.92</td><td>74.00</td><td>-19.08</td><td>40.23</td><td>33.03</td><td>11.38</td><td>29.72</td><td>0.00</td><td>292</td><td>352</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5366.31	54.92	74.00	-19.08	40.23	33.03	11.38	29.72	0.00	292	352	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5366.31	54.92	74.00	-19.08	40.23	33.03	11.38	29.72	0.00	292	352	Peak																													
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5441.64</td><td>45.23</td><td>54.00</td><td>-8.77</td><td>30.46</td><td>33.02</td><td>11.46</td><td>29.71</td><td>0.00</td><td>292</td><td>352</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5441.64	45.23	54.00	-8.77	30.46	33.02	11.46	29.71	0.00	292	352	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5441.64	45.23	54.00	-8.77	30.46	33.02	11.46	29.71	0.00	292	352	Average																													

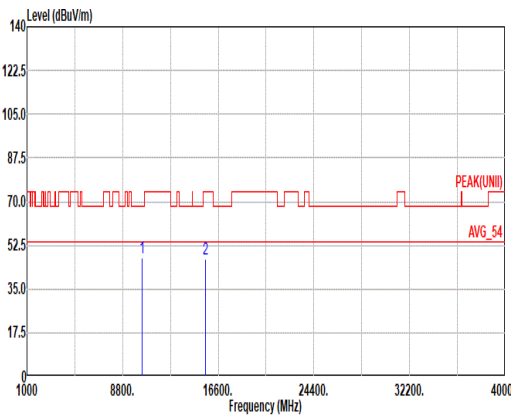
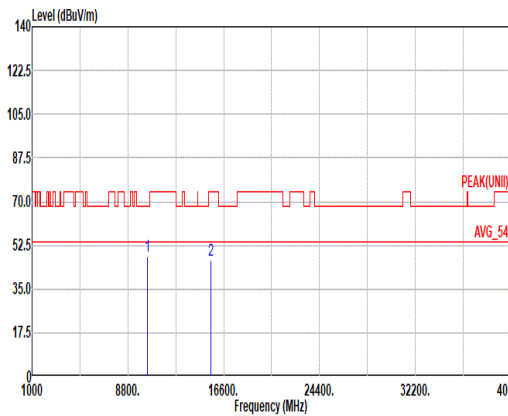


Mode	7																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>47.43</td><td>68.20</td><td>-20.77</td><td>58.72</td><td>38.70</td><td>15.82</td><td>66.54</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>47.25</td><td>74.00</td><td>-26.75</td><td>55.18</td><td>38.12</td><td>19.51</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	47.43	68.20	-20.77	58.72	38.70	15.82	66.54	0.73	--	Peak	2	15570.00	47.25	74.00	-26.75	55.18	38.12	19.51	66.21	0.65	--	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10380.00</td><td>47.89</td><td>68.20</td><td>-20.31</td><td>59.18</td><td>38.70</td><td>15.82</td><td>66.54</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15570.00</td><td>46.57</td><td>74.00</td><td>-27.43</td><td>54.50</td><td>38.12</td><td>19.51</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10380.00	47.89	68.20	-20.31	59.18	38.70	15.82	66.54	0.73	--	Peak	2	15570.00	46.57	74.00	-27.43	54.50	38.12	19.51	66.21	0.65	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10380.00	47.43	68.20	-20.77	58.72	38.70	15.82	66.54	0.73	--	Peak																																																																																																					
2	15570.00	47.25	74.00	-26.75	55.18	38.12	19.51	66.21	0.65	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10380.00	47.89	68.20	-20.31	59.18	38.70	15.82	66.54	0.73	--	Peak																																																																																																					
2	15570.00	46.57	74.00	-27.43	54.50	38.12	19.51	66.21	0.65	--	Peak																																																																																																					

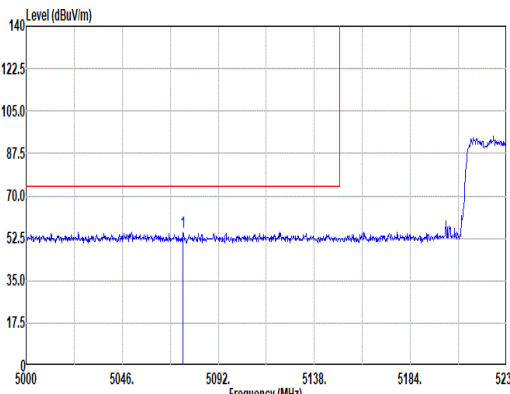
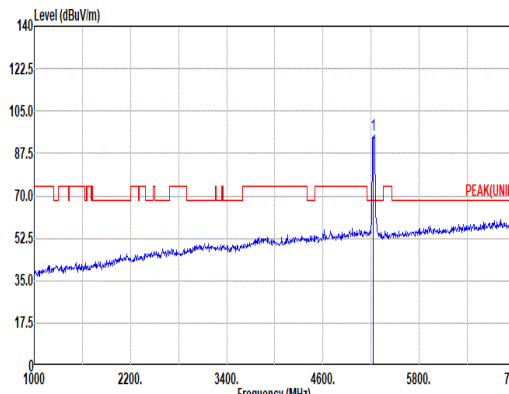
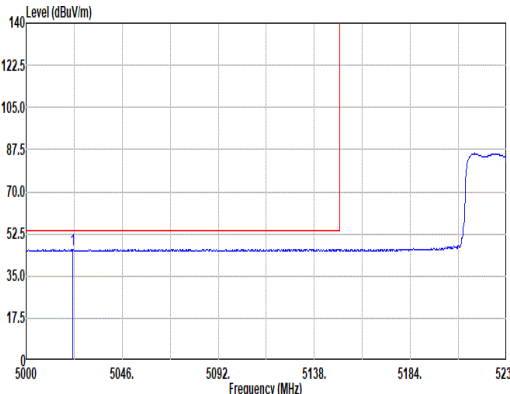
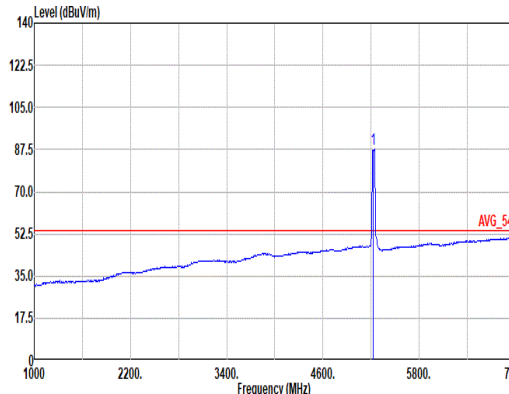


Mode	8																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5075.21</td><td>54.79</td><td>74.00</td><td>-19.21</td><td>40.26</td><td>33.15</td><td>11.12</td><td>29.74</td><td>0.00</td><td>131</td><td>360</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5075.21	54.79	74.00	-19.21	40.26	33.15	11.12	29.74	0.00	131	360	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>95.13</td><td>-----</td><td>-----</td><td>80.49</td><td>33.10</td><td>11.27</td><td>29.73</td><td>0.00</td><td>131</td><td>360</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	95.13	-----	-----	80.49	33.10	11.27	29.73	0.00	131	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5075.21	54.79	74.00	-19.21	40.26	33.15	11.12	29.74	0.00	131	360	Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	95.13	-----	-----	80.49	33.10	11.27	29.73	0.00	131	360	Peak																																																																																							
Avg																																																																																																			
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5022.31</td><td>46.12</td><td>54.00</td><td>-7.88</td><td>31.52</td><td>33.26</td><td>11.08</td><td>29.74</td><td>0.00</td><td>131</td><td>360</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5022.31	46.12	54.00	-7.88	31.52	33.26	11.08	29.74	0.00	131	360	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>87.87</td><td>-----</td><td>-----</td><td>73.23</td><td>33.10</td><td>11.27</td><td>29.73</td><td>0.00</td><td>131</td><td>360</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	87.87	-----	-----	73.23	33.10	11.27	29.73	0.00	131	360
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5022.31	46.12	54.00	-7.88	31.52	33.26	11.08	29.74	0.00	131	360	Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	87.87	-----	-----	73.23	33.10	11.27	29.73	0.00	131	360	Average																																																																																							

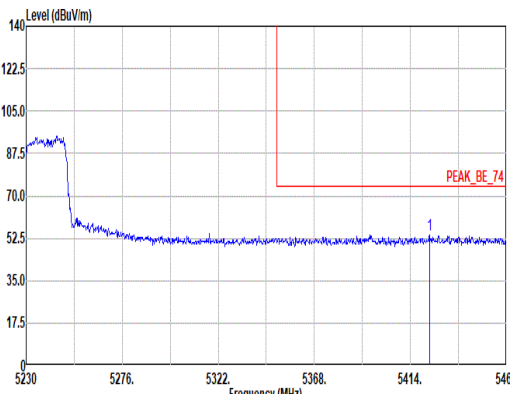
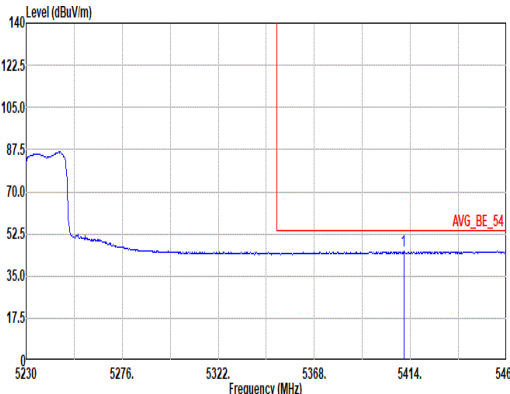


Mode	8																																											
	Band Edge - R																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																											
ANT	1																																											
Pol.	Horizontal	Fundamental																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5423.20</td><td>53.99</td><td>74.00</td><td>-20.01</td><td>39.21</td><td>33.05</td><td>11.44</td><td>29.71</td><td>0.00</td><td>131</td><td>360</td><td>Peak</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5423.20	53.99	74.00	-20.01	39.21	33.05	11.44	29.71	0.00	131	360	Peak		Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																
1	5423.20	53.99	74.00	-20.01	39.21	33.05	11.44	29.71	0.00	131	360	Peak																																
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5410.78</td><td>45.21</td><td>54.00</td><td>-8.79</td><td>30.43</td><td>33.08</td><td>11.42</td><td>29.72</td><td>0.00</td><td>131</td><td>360</td><td>Average</td><td></td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5410.78	45.21	54.00	-8.79	30.43	33.08	11.42	29.72	0.00	131	360	Average		Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																															
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																																
1	5410.78	45.21	54.00	-8.79	30.43	33.08	11.42	29.72	0.00	131	360	Average																																

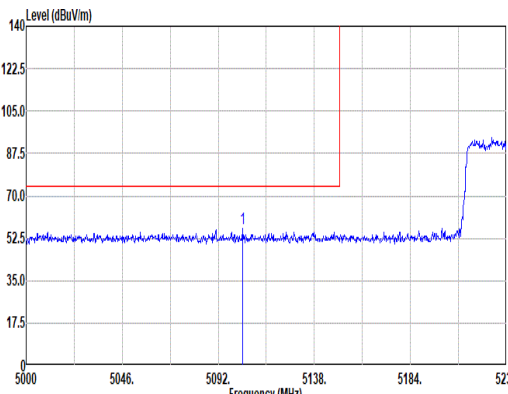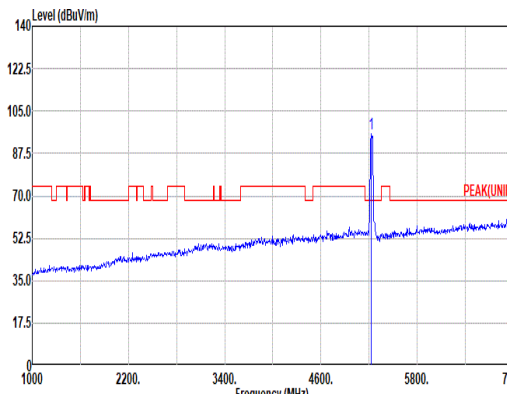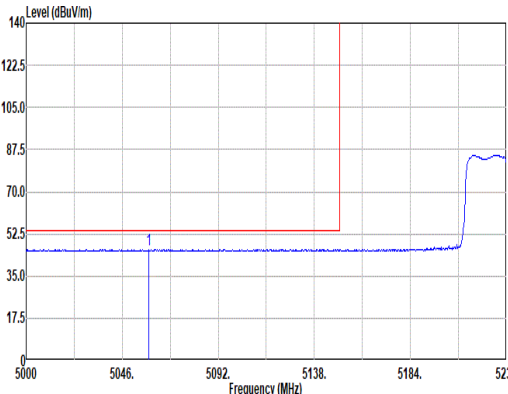
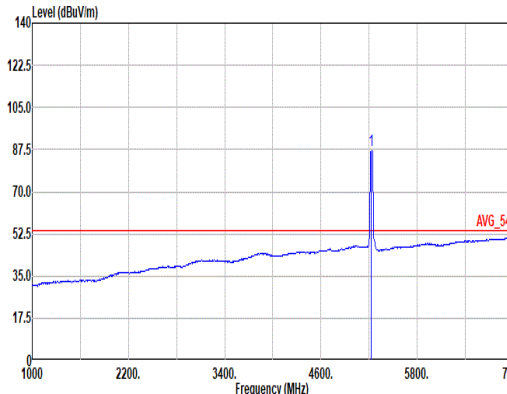


Mode	8																																																																																															
	Band Edge - L																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical						Fundamental																																																																																									
Peak																																																																																																
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5103.50</td><td>56.31</td><td>74.00</td><td>-17.69</td><td>41.79</td><td>33.11</td><td>11.14</td><td>29.73</td><td>0.00</td><td>300</td><td>314 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5103.50	56.31	74.00	-17.69	41.79	33.11	11.14	29.73	0.00	300	314 Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>95.79</td><td>-----</td><td>-----</td><td>81.13</td><td>33.14</td><td>11.25</td><td>29.73</td><td>0.00</td><td>300</td><td>314 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	95.79	-----	-----	81.13	33.14	11.25	29.73	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5103.50	56.31	74.00	-17.69	41.79	33.11	11.14	29.73	0.00	300	314 Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5230.00	95.79	-----	-----	81.13	33.14	11.25	29.73	0.00	300	314 Peak																																																																																					
Avg																																																																																																
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5058.65</td><td>46.02</td><td>54.00</td><td>-7.98</td><td>31.47</td><td>33.18</td><td>11.11</td><td>29.74</td><td>0.00</td><td>300</td><td>314 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5058.65	46.02	54.00	-7.98	31.47	33.18	11.11	29.74	0.00	300	314 Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>86.92</td><td>-----</td><td>-----</td><td>72.27</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>300</td><td>314 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	86.92	-----	-----	72.27	33.13	11.25	29.73	0.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5058.65	46.02	54.00	-7.98	31.47	33.18	11.11	29.74	0.00	300	314 Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5230.00	86.92	-----	-----	72.27	33.13	11.25	29.73	0.00	300	314 Average																																																																																					



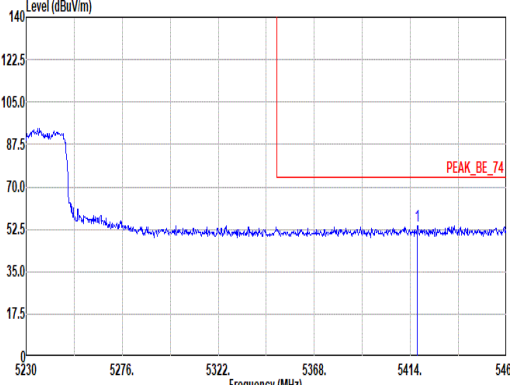
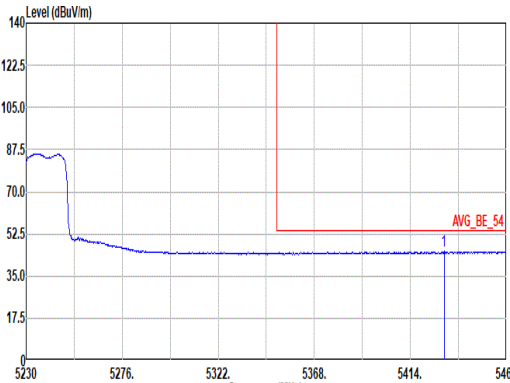


Mode	8																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5417.45</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>39.14</td><td>33.07</td><td>11.43</td><td>29.71</td><td>0.00</td><td>300</td><td>314</td><td>Peak</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5417.45	53.93	74.00	-20.07	39.14	33.07	11.43	29.71	0.00	300	314	Peak	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5417.45	53.93	74.00	-20.07	39.14	33.07	11.43	29.71	0.00	300	314	Peak																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto Detector : PEAK Mode : 8 Setting : 17 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5430.10</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>30.54</td><td>33.04</td><td>11.45</td><td>29.71</td><td>0.00</td><td>300</td><td>314</td><td>Average</td></tr></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5430.10	45.32	54.00	-8.68	30.54	33.04	11.45	29.71	0.00	300	314	Average	Blank					
Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5430.10	45.32	54.00	-8.68	30.54	33.04	11.45	29.71	0.00	300	314	Average																																							

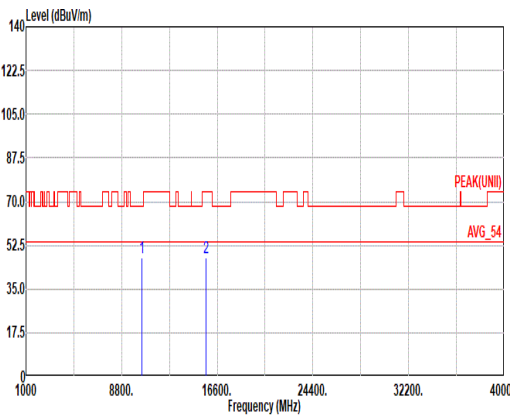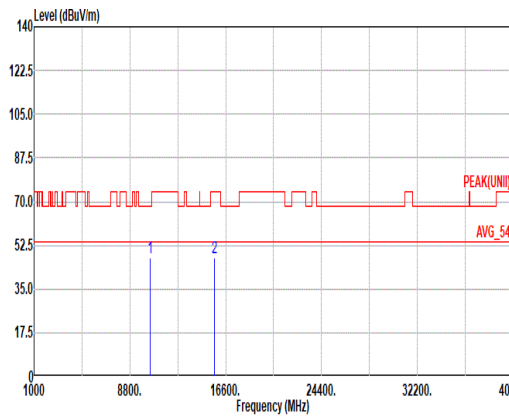

Mode	8																																																																		
	Harmonic																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal						Vertical																																																												
Peak Avg																																																																			
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>47.45</td><td>68.20</td><td>-20.75</td><td>58.61</td><td>38.70</td><td>15.88</td><td>66.46</td><td>0.72</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15690.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>55.66</td><td>37.86</td><td>19.56</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10460.00	47.45	68.20	-20.75	58.61	38.70	15.88	66.46	0.72	--	Peak	2	15690.00	47.52	74.00	-26.48	55.66	37.86	19.56	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	10460.00	47.45	68.20	-20.75	58.61	38.70	15.88	66.46	0.72	--	Peak																																																								
2	15690.00	47.52	74.00	-26.48	55.66	37.86	19.56	66.21	0.65	--	Peak																																																								

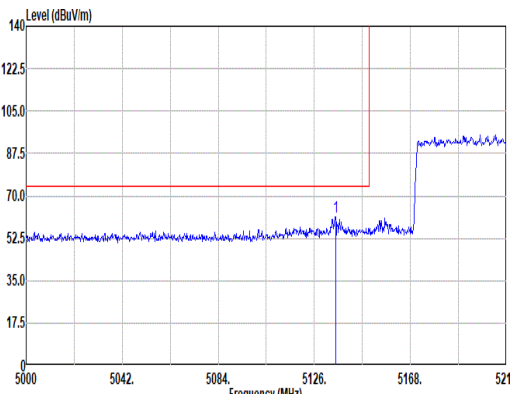
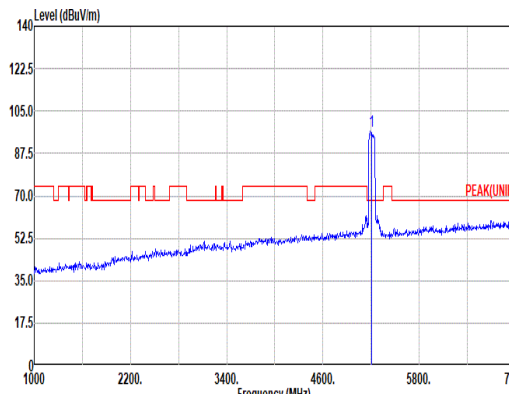
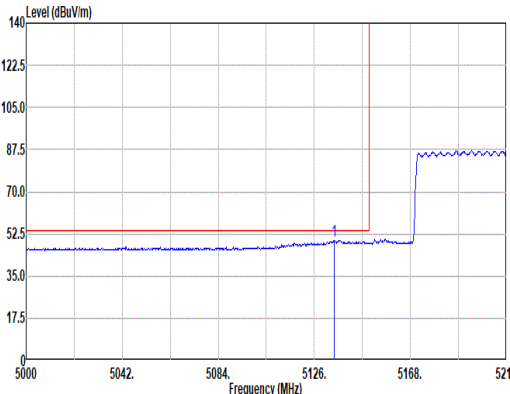
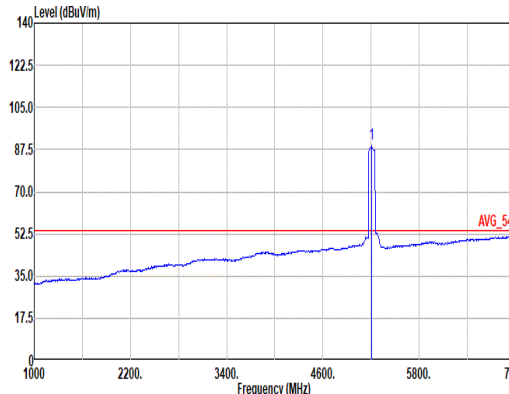


Mode	9																																																																																								
	Band Edge - L																																																																																								
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5135.24</td><td>61.41</td><td>74.00</td><td>-12.59</td><td>46.73</td><td>33.24</td><td>11.17</td><td>29.73</td><td>0.00</td><td>102</td><td>62</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5135.24	61.41	74.00	-12.59	46.73	33.24	11.17	29.73	0.00	102	62	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5210.00</td><td>96.47</td><td>-----</td><td>-----</td><td>81.77</td><td>33.22</td><td>11.21</td><td>29.73</td><td>0.00</td><td>102</td><td>62</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5210.00	96.47	-----	-----	81.77	33.22	11.21	29.73	0.00	102	62
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5135.24	61.41	74.00	-12.59	46.73	33.24	11.17	29.73	0.00	102	62	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5210.00	96.47	-----	-----	81.77	33.22	11.21	29.73	0.00	102	62	Peak																																																																													
Avg																																																																																									
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5134.61</td><td>49.75</td><td>54.00</td><td>-4.25</td><td>35.07</td><td>33.24</td><td>11.17</td><td>29.73</td><td>0.00</td><td>102</td><td>62</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5134.61	49.75	54.00	-4.25	35.07	33.24	11.17	29.73	0.00	102	62	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5210.00</td><td>89.90</td><td>-----</td><td>-----</td><td>84.59</td><td>27.80</td><td>7.82</td><td>30.31</td><td>0.00</td><td>102</td><td>62</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5210.00	89.90	-----	-----	84.59	27.80	7.82	30.31	0.00	102	62
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5134.61	49.75	54.00	-4.25	35.07	33.24	11.17	29.73	0.00	102	62	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	5210.00	89.90	-----	-----	84.59	27.80	7.82	30.31	0.00	102	62	Average																																																																													



Mode	9																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5451.00</td><td>55.18</td><td>74.00</td><td>-18.82</td><td>40.42</td><td>33.00</td><td>11.47</td><td>29.71</td><td>0.00</td><td>102</td><td>62</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5451.00	55.18	74.00	-18.82	40.42	33.00	11.47	29.71	0.00	102	62	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																															
1	5451.00	55.18	74.00	-18.82	40.42	33.00	11.47	29.71	0.00	102	62	Peak																															
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5367.25</td><td>45.93</td><td>54.00</td><td>-8.07</td><td>31.24</td><td>33.03</td><td>11.38</td><td>29.72</td><td>0.00</td><td>102</td><td>62</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg		1	5367.25	45.93	54.00	-8.07	31.24	33.03	11.38	29.72	0.00	102	62	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	dB	dB	cm	deg																															
1	5367.25	45.93	54.00	-8.07	31.24	33.03	11.38	29.72	0.00	102	62	Average																															

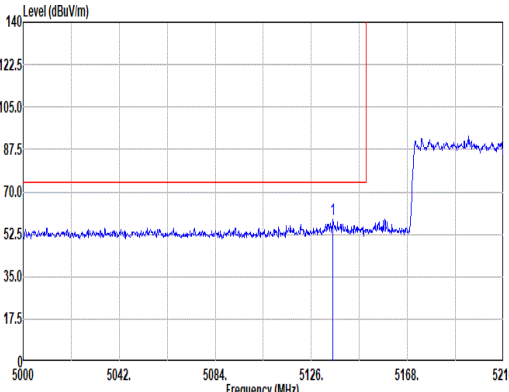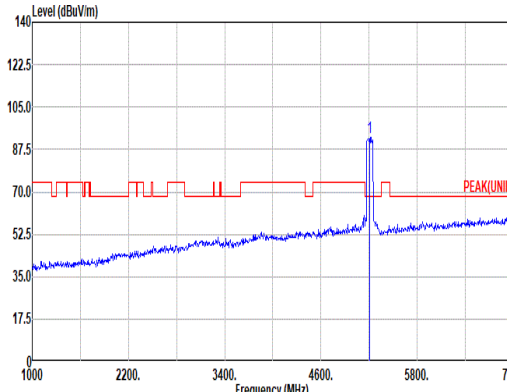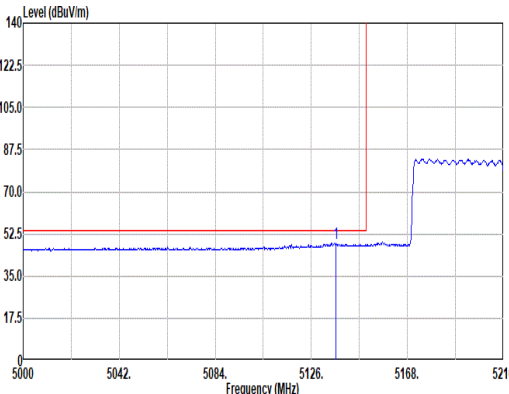
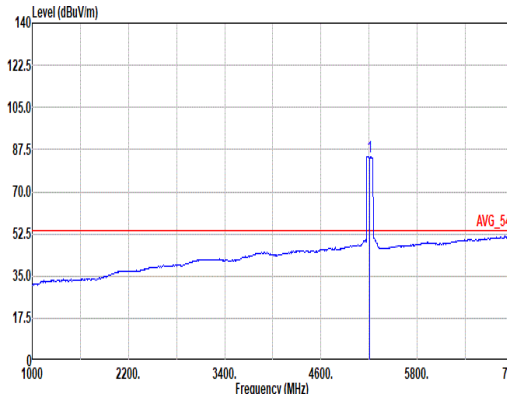


Mode	9																																																																																																				
	Band Edge - L																																																																																																				
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5135.45</td><td>58.71</td><td>74.00</td><td>-15.29</td><td>44.03</td><td>33.24</td><td>11.17</td><td>29.73</td><td>0.00</td><td>357</td><td>354 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5135.45	58.71	74.00	-15.29	44.03	33.24	11.17	29.73	0.00	357	354 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>92.60</td><td>-----</td><td>-----</td><td>77.93</td><td>33.16</td><td>11.24</td><td>29.73</td><td>0.00</td><td>357</td><td>354 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	92.60	-----	-----	77.93	33.16	11.24	29.73	0.00	357	354 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5135.45	58.71	74.00	-15.29	44.03	33.24	11.17	29.73	0.00	357	354 Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5210.00	92.60	-----	-----	77.93	33.16	11.24	29.73	0.00	357	354 Peak																																																																																										
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5136.71</td><td>48.50</td><td>54.00</td><td>-5.50</td><td>33.81</td><td>33.25</td><td>11.17</td><td>29.73</td><td>0.00</td><td>357</td><td>354 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5136.71	48.50	54.00	-5.50	33.81	33.25	11.17	29.73	0.00	357	354 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>84.52</td><td>-----</td><td>-----</td><td>69.80</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>357</td><td>354 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	84.52	-----	-----	69.80	33.25	11.20	29.73	0.00	357	354 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5136.71	48.50	54.00	-5.50	33.81	33.25	11.17	29.73	0.00	357	354 Average																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	5210.00	84.52	-----	-----	69.80	33.25	11.20	29.73	0.00	357	354 Average																																																																																										







Mode	9																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.25</td><td>53.77</td><td>74.00</td><td>-20.23</td><td>39.13</td><td>33.00</td><td>11.36</td><td>29.72</td><td>0.00</td><td>357</td><td>354</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.25	53.77	74.00	-20.23	39.13	33.00	11.36	29.72	0.00	357	354	Peak	Blank					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5351.25	53.77	74.00	-20.23	39.13	33.00	11.36	29.72	0.00	357	354	Peak																																												
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5444.00</td><td>45.79</td><td>54.00</td><td>-8.21</td><td>31.03</td><td>33.01</td><td>11.46</td><td>29.71</td><td>0.00</td><td>357</td><td>354</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5444.00	45.79	54.00	-8.21	31.03	33.01	11.46	29.71	0.00	357	354	Average	Blank					
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5444.00	45.79	54.00	-8.21	31.03	33.01	11.46	29.71	0.00	357	354	Average																																												



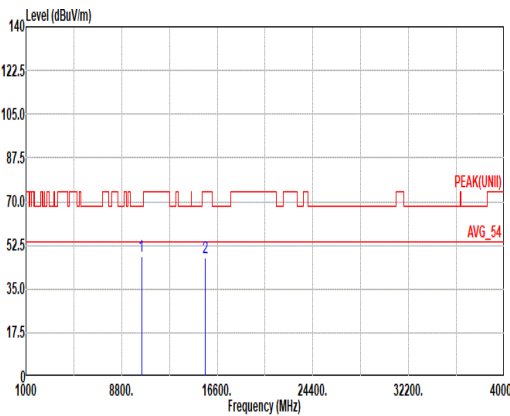
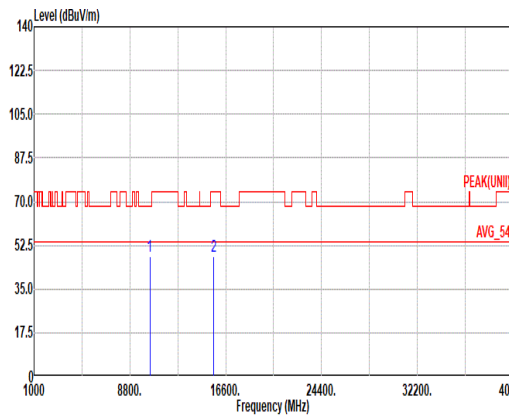


Mode	9																																																																	
	Harmonic																																																																	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>47.88</td><td>68.20</td><td>-20.32</td><td>59.10</td><td>38.70</td><td>15.85</td><td>66.50</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15630.00</td><td>47.36</td><td>74.00</td><td>-26.64</td><td>55.57</td><td>37.82</td><td>19.53</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	47.88	68.20	-20.32	59.10	38.70	15.85	66.50	0.73	--	Peak	2	15630.00	47.36	74.00	-26.64	55.57	37.82	19.53	66.21	0.65	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	10420.00	47.88	68.20	-20.32	59.10	38.70	15.85	66.50	0.73	--	Peak																																																							
2	15630.00	47.36	74.00	-26.64	55.57	37.82	19.53	66.21	0.65	--	Peak																																																							

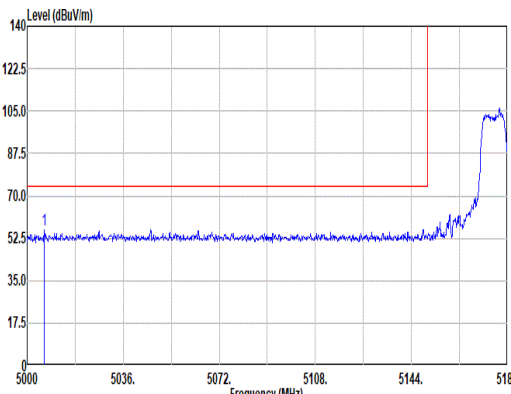
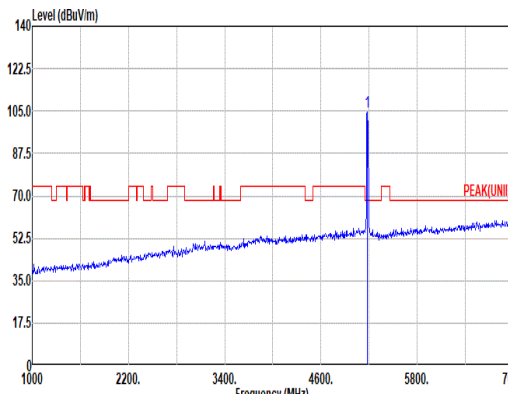
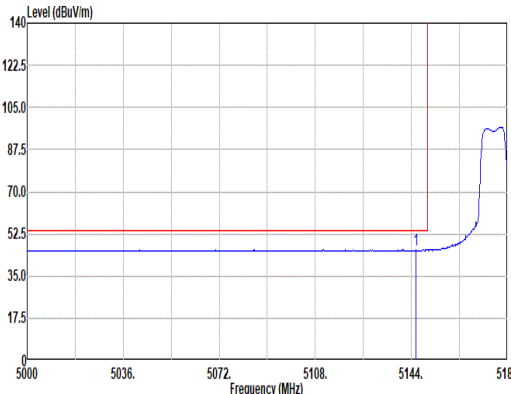
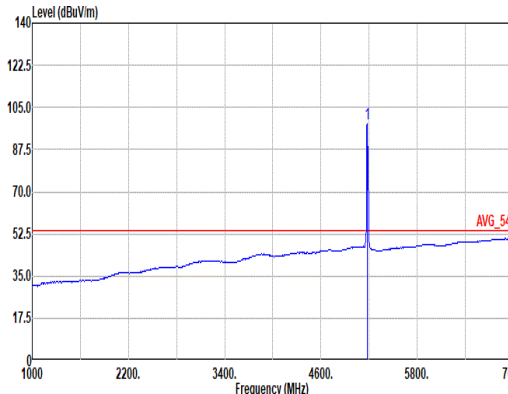


Mode	10																																																																																																
	Band Edge																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 106/53_5180MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5006.30</td><td>56.13</td><td>74.00</td><td>-17.87</td><td>41.51</td><td>33.29</td><td>11.07</td><td>29.74</td><td>0.00</td><td>196</td><td>67</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5006.30	56.13	74.00	-17.87	41.51	33.29	11.07	29.74	0.00	196	67	Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.68</td><td>-----</td><td>-----</td><td>89.96</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>196</td><td>67</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	104.68	-----	-----	89.96	33.25	11.20	29.73	0.00	196	67
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5006.30	56.13	74.00	-17.87	41.51	33.29	11.07	29.74	0.00	196	67	Peak																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	104.68	-----	-----	89.96	33.25	11.20	29.73	0.00	196	67	Peak																																																																																					
Avg																																																																																																	
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.62</td><td>45.84</td><td>54.00</td><td>-8.16</td><td>31.11</td><td>33.28</td><td>11.18</td><td>29.73</td><td>0.00</td><td>196</td><td>67</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5145.62	45.84	54.00	-8.16	31.11	33.28	11.18	29.73	0.00	196	67	Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.09</td><td>-----</td><td>-----</td><td>83.37</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>196</td><td>67</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5180.00	98.09	-----	-----	83.37	33.25	11.20	29.73	0.00	196	67
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5145.62	45.84	54.00	-8.16	31.11	33.28	11.18	29.73	0.00	196	67	Average																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																								
1	5180.00	98.09	-----	-----	83.37	33.25	11.20	29.73	0.00	196	67	Average																																																																																					

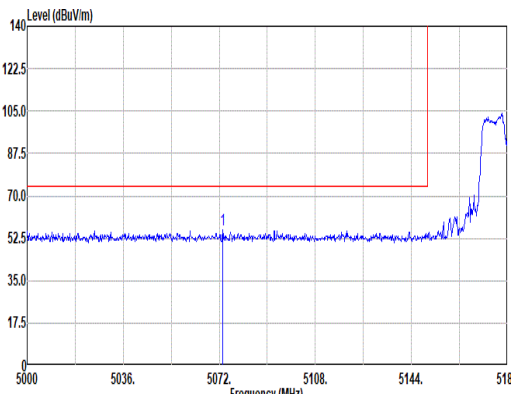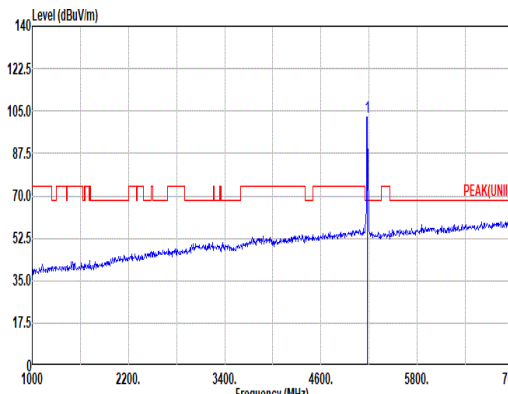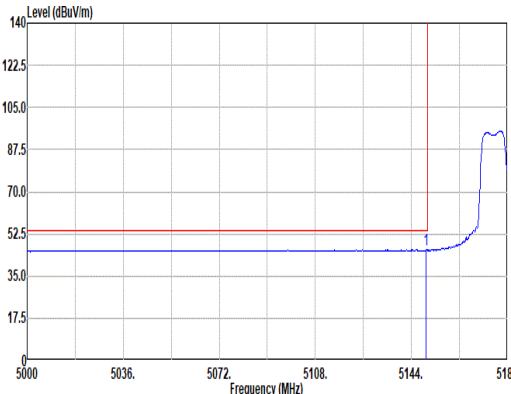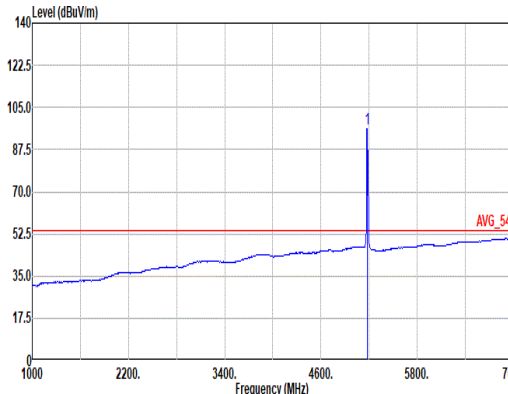

Mode	10																																																
	Band Edge																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU 106/53_5180MHz																																																
ANT	1																																																
Pol.	Vertical																																																
Peak																																																	
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5073.26</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>41.45</td><td>33.15</td><td>11.12</td><td>29.74</td><td>0.00</td><td>357</td><td>360</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5073.26	55.98	74.00	-18.02	41.45	33.15	11.12	29.74	0.00	357	360
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	5073.26	55.98	74.00	-18.02	41.45	33.15	11.12	29.74	0.00	357	360	Peak																																					
Fundamental																																																	
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>102.74</td><td>-----</td><td>-----</td><td>88.02</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>357</td><td>360</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	102.74	-----	-----	88.02	33.25	11.20	29.73	0.00	357	360
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	5180.00	102.74	-----	-----	88.02	33.25	11.20	29.73	0.00	357	360	Peak																																					
Avg																																																	
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.58</td><td>45.83</td><td>54.00</td><td>-8.17</td><td>31.08</td><td>33.30</td><td>11.18</td><td>29.73</td><td>0.00</td><td>357</td><td>360</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5149.58	45.83	54.00	-8.17	31.08	33.30	11.18	29.73	0.00	357	360
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	5149.58	45.83	54.00	-8.17	31.08	33.30	11.18	29.73	0.00	357	360	Average																																					
AVG_54																																																	
	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5180.00</td><td>96.32</td><td>-----</td><td>-----</td><td>81.60</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>357</td><td>360</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5180.00	96.32	-----	-----	81.60	33.25	11.20	29.73	0.00	357	360
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																						
1	5180.00	96.32	-----	-----	81.60	33.25	11.20	29.73	0.00	357	360	Average																																					

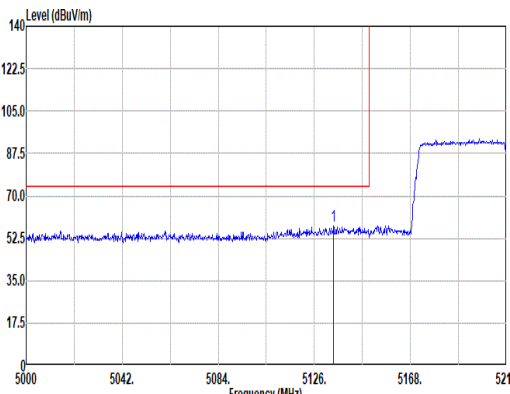
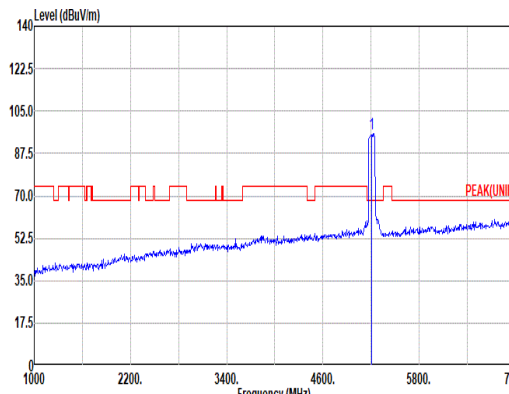
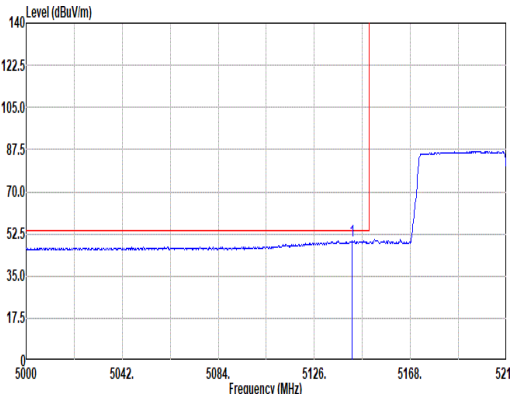
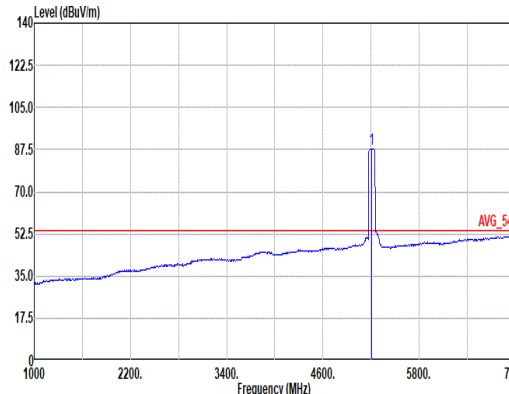


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5134.40</td><td>57.45</td><td>74.00</td><td>-16.55</td><td>42.77</td><td>33.24</td><td>11.17</td><td>29.73</td><td>0.00</td><td>101 62 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5134.40	57.45	74.00	-16.55	42.77	33.24	11.17	29.73	0.00	101 62 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>95.65</td><td>-----</td><td>-----</td><td>81.00</td><td>33.13</td><td>11.25</td><td>29.73</td><td>0.00</td><td>101 62 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	95.65	-----	-----	81.00	33.13	11.25	29.73	0.00	101 62 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5134.40	57.45	74.00	-16.55	42.77	33.24	11.17	29.73	0.00	101 62 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	95.65	-----	-----	81.00	33.13	11.25	29.73	0.00	101 62 Peak																																																																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.59</td><td>49.81</td><td>54.00</td><td>-4.19</td><td>35.10</td><td>33.27</td><td>11.17</td><td>29.73</td><td>0.00</td><td>101 62 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.59	49.81	54.00	-4.19	35.10	33.27	11.17	29.73	0.00	101 62 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>87.79</td><td>-----</td><td>-----</td><td>73.10</td><td>33.20</td><td>11.22</td><td>29.73</td><td>0.00</td><td>101 62 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor						MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	87.79	-----	-----	73.10	33.20	11.22	29.73	0.00	101 62 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5142.59	49.81	54.00	-4.19	35.10	33.27	11.17	29.73	0.00	101 62 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	87.79	-----	-----	73.10	33.20	11.22	29.73	0.00	101 62 Average																																																																																									





Mode	11																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																										
ANT	1																																										
Pol.	Horizontal	Fundamental																																									
Peak	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5460.00</td><td>54.91</td><td>74.00</td><td>-19.09</td><td>40.12</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>101</td><td>62</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5460.00	54.91	74.00	-19.09	40.12	33.02	11.48	29.71	0.00	101	62	Peak	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																															
1	5460.00	54.91	74.00	-19.09	40.12	33.02	11.48	29.71	0.00	101	62	Peak																															
Avg	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5357.75</td><td>46.24</td><td>54.00</td><td>-7.76</td><td>31.57</td><td>33.02</td><td>11.37</td><td>29.72</td><td>0.00</td><td>101</td><td>62</td><td>Average</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5357.75	46.24	54.00	-7.76	31.57	33.02	11.37	29.72	0.00	101	62	Average	Blank
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																														
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																															
1	5357.75	46.24	54.00	-7.76	31.57	33.02	11.37	29.72	0.00	101	62	Average																															

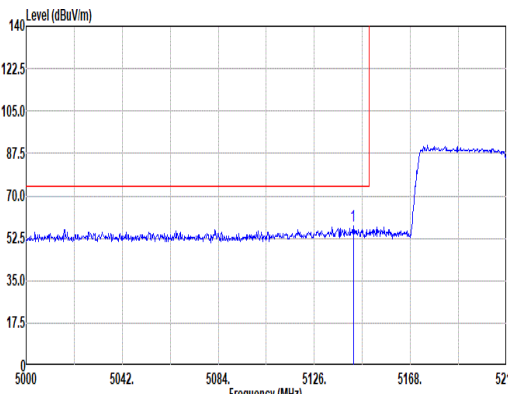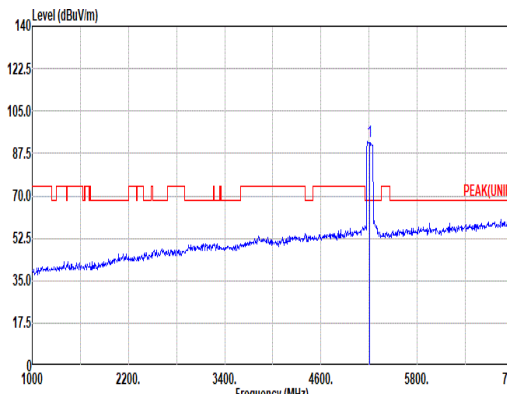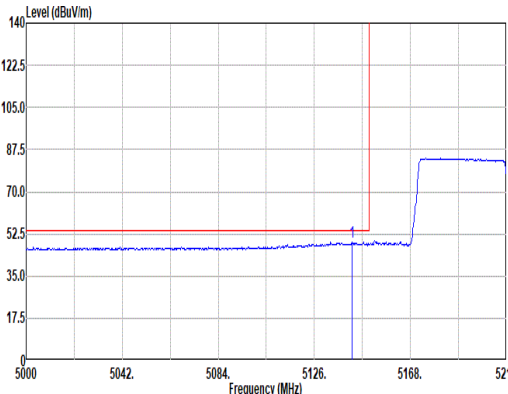
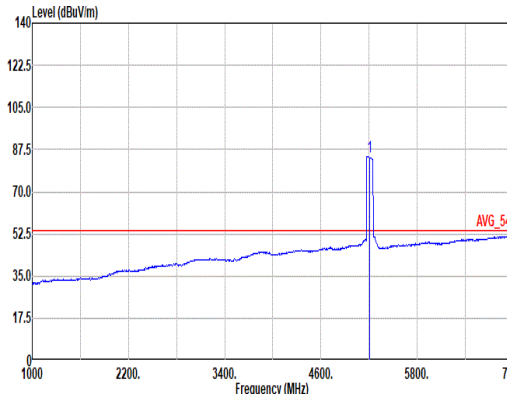


Mode	11																																																																																							
	Band Edge - L																																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																							
ANT	1																																																																																							
Pol.	Vertical						Fundamental																																																																																	
Peak																																																																																								
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5143.01</td><td>57.79</td><td>74.00</td><td>-16.21</td><td>43.08</td><td>33.27</td><td>11.17</td><td>29.73</td><td>0.00</td><td>361</td><td>360</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5143.01	57.79	74.00	-16.21	43.08	33.27	11.17	29.73	0.00	361	360	Peak	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>92.32</td><td>-----</td><td>-----</td><td>77.60</td><td>33.25</td><td>11.20</td><td>29.73</td><td>0.00</td><td>361</td><td>360</td><td>Peak</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5210.00	92.32	-----	-----	77.60	33.25	11.20	29.73	0.00	361	360	Peak
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5143.01	57.79	74.00	-16.21	43.08	33.27	11.17	29.73	0.00	361	360	Peak																																																																												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5210.00	92.32	-----	-----	77.60	33.25	11.20	29.73	0.00	361	360	Peak																																																																												
Avg																																																																																								
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto						Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto																																																																																	
<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5142.38</td><td>48.93</td><td>54.00</td><td>-5.07</td><td>34.22</td><td>33.27</td><td>11.17</td><td>29.73</td><td>0.00</td><td>361</td><td>360</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5142.38	48.93	54.00	-5.07	34.22	33.27	11.17	29.73	0.00	361	360	Average	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>84.77</td><td>-----</td><td>-----</td><td>70.05</td><td>33.24</td><td>11.21</td><td>29.73</td><td>0.00</td><td>361</td><td>360</td><td>Average</td></tr></tbody></table>						Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5210.00	84.77	-----	-----	70.05	33.24	11.21	29.73	0.00	361	360	Average
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5142.38	48.93	54.00	-5.07	34.22	33.27	11.17	29.73	0.00	361	360	Average																																																																												
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																													
1	5210.00	84.77	-----	-----	70.05	33.24	11.21	29.73	0.00	361	360	Average																																																																												



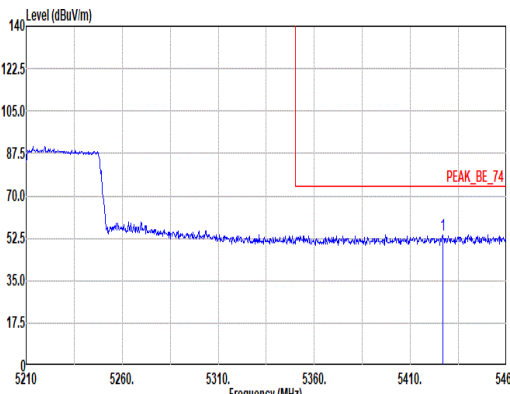
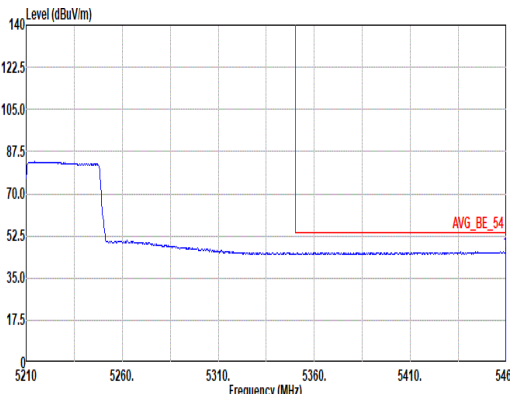


Mode	11																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																	
ANT	1																																																	
Pol.	Vertical						Fundamental																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5426.75</td><td>54.02</td><td>74.00</td><td>-19.98</td><td>39.24</td><td>33.05</td><td>11.44</td><td>29.71</td><td>0.00</td><td>361</td><td>360</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5426.75	54.02	74.00	-19.98	39.24	33.05	11.44	29.71	0.00	361	360	Peak	Blank				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5426.75	54.02	74.00	-19.98	39.24	33.05	11.44	29.71	0.00	361	360	Peak																																						
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.75</td><td>46.13</td><td>54.00</td><td>-7.87</td><td>31.34</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>361</td><td>360</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.75	46.13	54.00	-7.87	31.34	33.02	11.48	29.71	0.00	361	360	Average	Blank				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	5459.75	46.13	54.00	-7.87	31.34	33.02	11.48	29.71	0.00	361	360	Average																																						

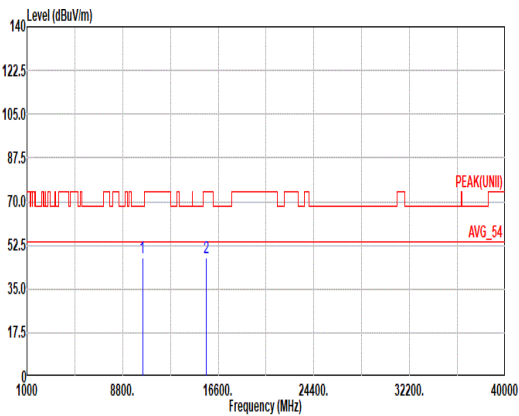
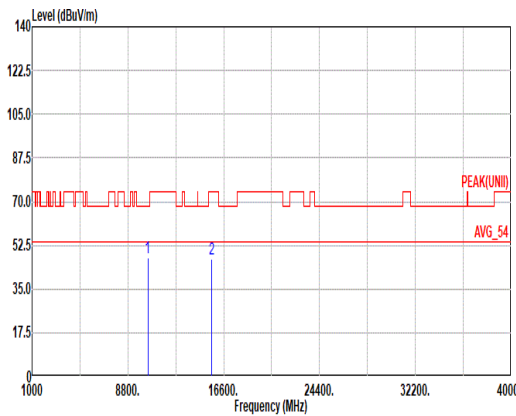


Mode	11																																																																																																															
	Harmonic																																																																																																															
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>47.49</td><td>68.20</td><td>-20.71</td><td>58.71</td><td>38.70</td><td>15.85</td><td>66.50</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15630.00</td><td>47.77</td><td>74.00</td><td>-26.23</td><td>55.98</td><td>37.82</td><td>19.53</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	47.49	68.20	-20.71	58.71	38.70	15.85	66.50	0.73	--	Peak	2	15630.00	47.77	74.00	-26.23	55.98	37.82	19.53	66.21	0.65	--	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>47.68</td><td>68.20</td><td>-20.52</td><td>58.90</td><td>38.70</td><td>15.85</td><td>66.50</td><td>0.73</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15630.00</td><td>47.25</td><td>74.00</td><td>-26.75</td><td>55.46</td><td>37.82</td><td>19.53</td><td>66.21</td><td>0.65</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	47.68	68.20	-20.52	58.90	38.70	15.85	66.50	0.73	--	Peak	2	15630.00	47.25	74.00	-26.75	55.46	37.82	19.53	66.21	0.65	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10420.00	47.49	68.20	-20.71	58.71	38.70	15.85	66.50	0.73	--	Peak																																																																																																					
2	15630.00	47.77	74.00	-26.23	55.98	37.82	19.53	66.21	0.65	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	10420.00	47.68	68.20	-20.52	58.90	38.70	15.85	66.50	0.73	--	Peak																																																																																																					
2	15630.00	47.25	74.00	-26.75	55.46	37.82	19.53	66.21	0.65	--	Peak																																																																																																					

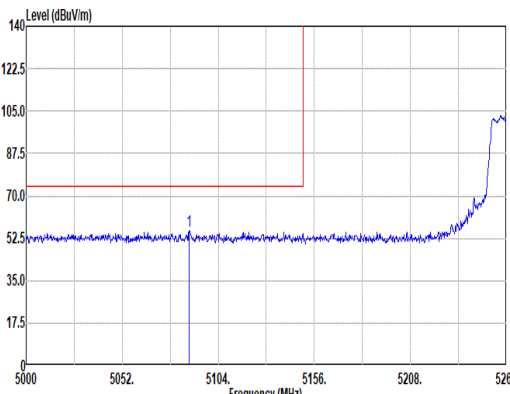
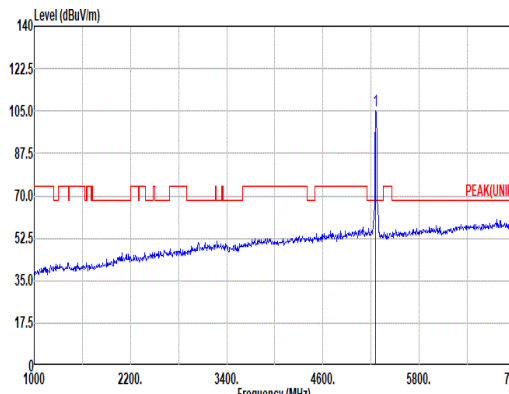
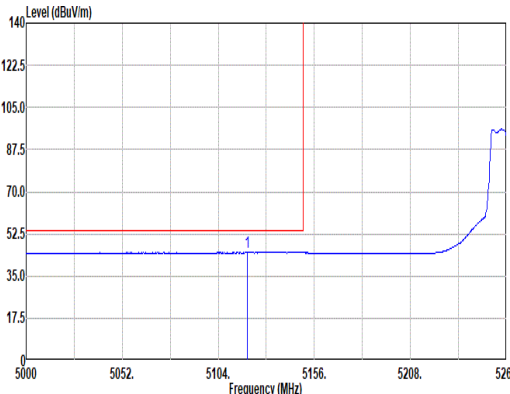
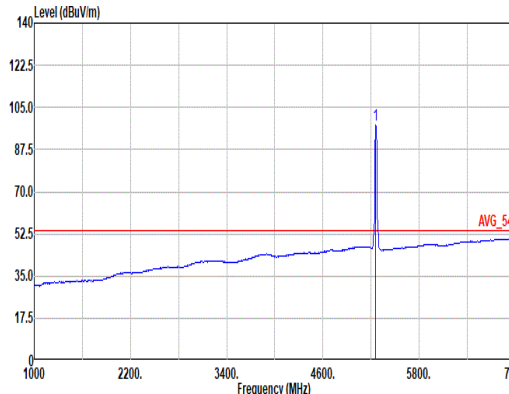


Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5088.40</td><td>55.35</td><td>74.00</td><td>-18.65</td><td>40.83</td><td>33.12</td><td>11.13</td><td>29.73</td><td>0.00</td><td>191 69 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5088.40	55.35	74.00	-18.65	40.83	33.12	11.13	29.73	0.00	191 69 Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>104.92</td><td>-----</td><td>-----</td><td>90.28</td><td>33.08</td><td>11.28</td><td>29.72</td><td>0.00</td><td>191 69 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	104.92	-----	-----	90.28	33.08	11.28	29.72	0.00	191 69 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5088.40	55.35	74.00	-18.65	40.83	33.12	11.13	29.73	0.00	191 69 Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	104.92	-----	-----	90.28	33.08	11.28	29.72	0.00	191 69 Peak																																																																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5119.60</td><td>44.74</td><td>54.00</td><td>-9.26</td><td>30.13</td><td>33.18</td><td>11.16</td><td>29.73</td><td>0.00</td><td>191 69 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5119.60	44.74	54.00	-9.26	30.13	33.18	11.16	29.73	0.00	191 69 Average	 Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>97.71</td><td>-----</td><td>-----</td><td>83.07</td><td>33.08</td><td>11.28</td><td>29.72</td><td>0.00</td><td>191 69 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	97.71	-----	-----	83.07	33.08	11.28	29.72	0.00	191 69 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5119.60	44.74	54.00	-9.26	30.13	33.18	11.16	29.73	0.00	191 69 Average																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	97.71	-----	-----	83.07	33.08	11.28	29.72	0.00	191 69 Average																																																																																									

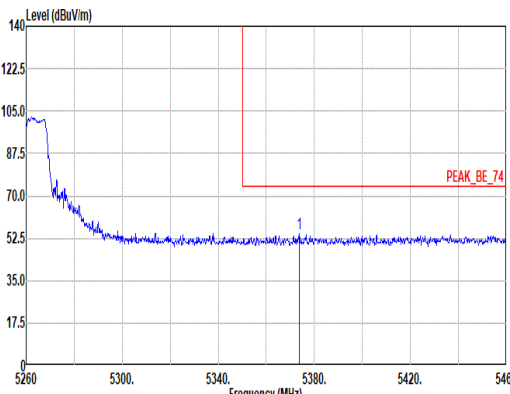
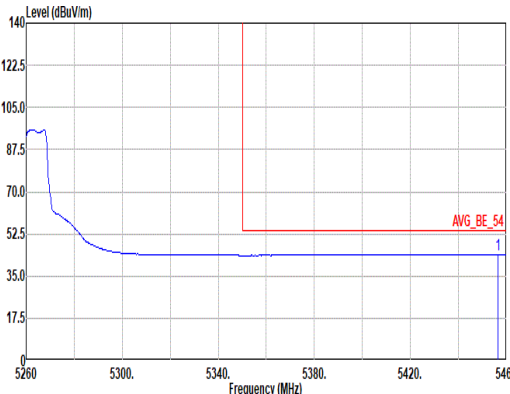


Mode	12																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																								
ANT	1																																								
Pol.	Horizontal	Fundamental																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5373.60</td><td>54.57</td><td>74.00</td><td>-19.43</td><td>39.86</td><td>33.05</td><td>11.38</td><td>29.72</td><td>0.00</td><td>191</td><td>69</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5373.60	54.57	74.00	-19.43	39.86	33.05	11.38	29.72	0.00	191	69	Peak	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5373.60	54.57	74.00	-19.43	39.86	33.05	11.38	29.72	0.00	191	69	Peak																													
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5456.48</td><td>43.96</td><td>54.00</td><td>-10.04</td><td>29.18</td><td>33.01</td><td>11.48</td><td>29.71</td><td>0.00</td><td>191</td><td>69</td><td>Average</td></tr></table>		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5456.48	43.96	54.00	-10.04	29.18	33.01	11.48	29.71	0.00	191	69	Average	Blank
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																														
1	5456.48	43.96	54.00	-10.04	29.18	33.01	11.48	29.71	0.00	191	69	Average																													

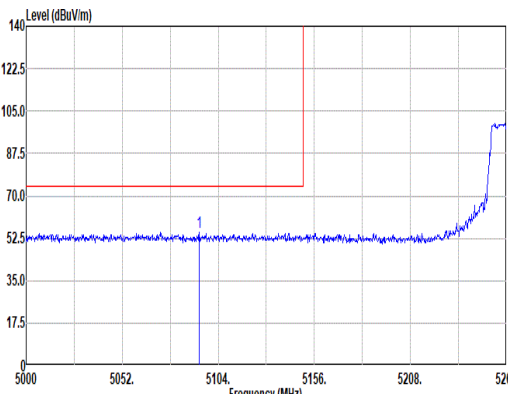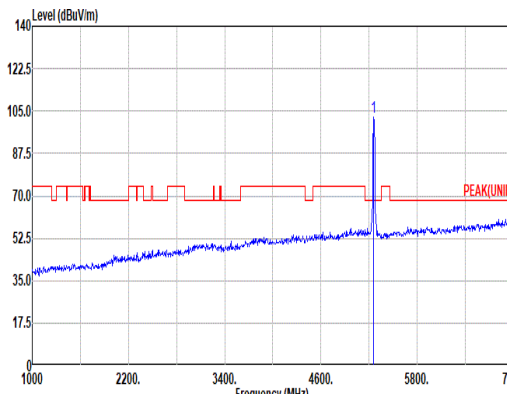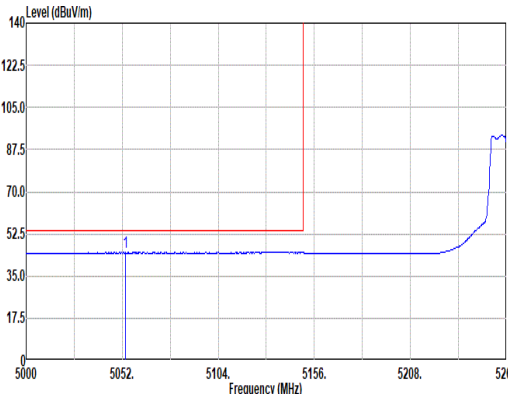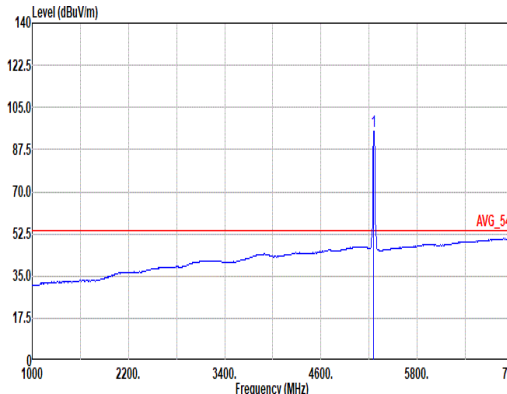

Mode	12																																																																																																
	Band Edge - L																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5093.60</td><td>54.92</td><td>74.00</td><td>-19.08</td><td>40.41</td><td>33.11</td><td>11.13</td><td>29.73</td><td>0.00</td><td>311</td><td>349 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5093.60	54.92	74.00	-19.08	40.41	33.11	11.13	29.73	0.00	311	349 Peak	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>102.57</td><td>-----</td><td>-----</td><td>87.93</td><td>33.08</td><td>11.28</td><td>29.72</td><td>0.00</td><td>311</td><td>349 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	102.57	-----	-----	87.93	33.08	11.28	29.72	0.00	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5093.60	54.92	74.00	-19.08	40.41	33.11	11.13	29.73	0.00	311	349 Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5260.00	102.57	-----	-----	87.93	33.08	11.28	29.72	0.00	311	349 Peak																																																																																						
Avg																																																																																																	
	Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5053.82</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>30.15</td><td>33.19</td><td>11.10</td><td>29.74</td><td>0.00</td><td>311</td><td>349 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5053.82	44.70	54.00	-9.30	30.15	33.19	11.10	29.74	0.00	311	349 Average	Site : 03CH16-HY Condition: AVG_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>95.17</td><td>-----</td><td>-----</td><td>80.53</td><td>33.08</td><td>11.28</td><td>29.72</td><td>0.00</td><td>311</td><td>349 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	95.17	-----	-----	80.53	33.08	11.28	29.72	0.00	311
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5053.82	44.70	54.00	-9.30	30.15	33.19	11.10	29.74	0.00	311	349 Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5260.00	95.17	-----	-----	80.53	33.08	11.28	29.72	0.00	311	349 Average																																																																																						

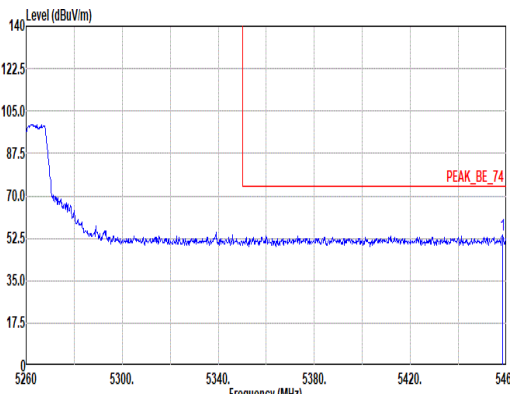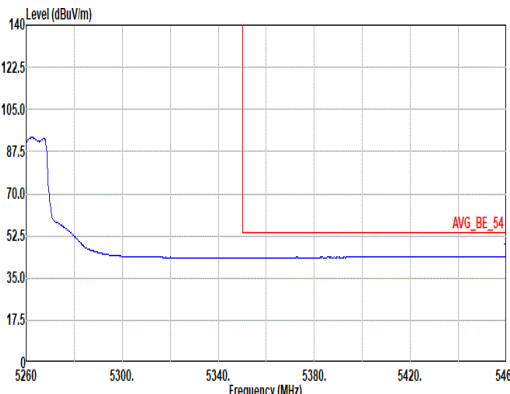

Mode	12																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																		
ANT	1																																																		
Pol.	Vertical						Fundamental																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE_74 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5458.40</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>39.34</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>311</td><td>349</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5458.40	54.13	74.00	-19.87	39.34	33.02	11.48	29.71	0.00	311	349	Peak	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5458.40	54.13	74.00	-19.87	39.34	33.02	11.48	29.71	0.00	311	349	Peak																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE_54 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5459.60</td><td>43.92</td><td>54.00</td><td>-10.08</td><td>29.13</td><td>33.02</td><td>11.48</td><td>29.71</td><td>0.00</td><td>311</td><td>349</td><td>Average</td></tr></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5459.60	43.92	54.00	-10.08	29.13	33.02	11.48	29.71	0.00	311	349	Average	Blank					
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	5459.60	43.92	54.00	-10.08	29.13	33.02	11.48	29.71	0.00	311	349	Average																																							