



FCC RADIO TEST REPORT

FCC ID : 2AMK2-RM03AA
Equipment : PAPER TABLET
Brand Name : reMarkable
Model Name : 2AMK2-RM03AA
Applicant : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Manufacturer : reMarkable AS
Fridtjof Nansens vei 12, 0369 Oslo, Norway
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 15, 2025 and testing was performed from Apr. 22, 2025 to Jun. 06, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
2.6 Measurement Results Explanation Example.....	10
3 Test Result	11
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	11
3.2 Maximum E.I.R.P Output Power Measurement	12
3.3 Power Spectral Density Measurement	13
3.4 Unwanted Emissions Measurement.....	14
3.5 AC Conducted Emission Measurement.....	19
3.6 Antenna Requirements.....	21
4 List of Measuring Equipment.....	22
5 Measurement Uncertainty	24
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR541507G	01	Initial issue of report	Jun. 18, 2025
FR541507G	02	Revise Antenna Gain. This report is an updated version, replacing the report issued on Jun. 18, 2025.	Jul. 01, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(e)	6dB & 26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum E.I.R.P Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	-
3.5	15.207	AC Conducted Emission	Pass	-
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Jessie Ho

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and NFC(WPT).	
Antenna Type Bluetooth: Monopole Antenna	
Sample 1	Main source
Sample 2	2nd source – FPC, PCB
Sample 3	2nd source – DRAM

Antenna information		
5850 MHz ~ 5895 MHz	Peak Gain (dBi)	1.07

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

<Sample List>

Main Board	Main source	Vendor	Avary
		Model Number	SB0SDV1BV0G
	2nd source	Vendor	PI
		Model Number	SB0SDV1B00G
Antenna SUB Board	Main source	Vendor	Avary
		Model Number	SB0SDV2BV0D
	2nd source	Vendor	ASKPCB
		Model Number	SB0SDV2B00D
PB FPC	Main source	Vendor	AKM
		Model Number	MESDV14201A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14211A
USB FPC	Main source	Vendor	AKM
		Model Number	MESDV14203A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14213A
Hall Sensor FPC	Main source	Vendor	AKM
		Model Number	MESDV14205A
	2nd source	Vendor	ICHIA
		Model Number	MESDV14215A
DRAM	Main source	Vendor	Micron
		Model Number	MT53E1G16D1ZW-046 WT:C
	2nd source	Vendor	JSC
		Model Number	JSL4BAG167ZAMF-05A

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. TH05-HY, CO07-HY, 03CH16-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 291074 D02 EMC Measurement v01
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Bandwidth	Channel	Frequency (MHz)	Note
5850-5895 MHz (U-NII-4)	20 MHz	169	5845	Straddle
		173	5865	
		177	5885	
	40 MHz	167	5835	Straddle
		175	5875	
	80 MHz	171	5855	Straddle

Note: The channel noted with “straddle” spans 5.725-5.850 GHz and 5.850-5.895 GHz.

2.2 Test Mode

This device support 26/52/106/242/484-tone RU.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.


The power for 802.11n HT20/ HT40 mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Specification	MCS index /Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + NFC Charging with Pen 1 + USB Cable 1 (Charging from AC Adapter) + Battery for Sample 1
Remark: - For Radiated Test Cases, the tests were performed with USB Cable 2. - For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power. - The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

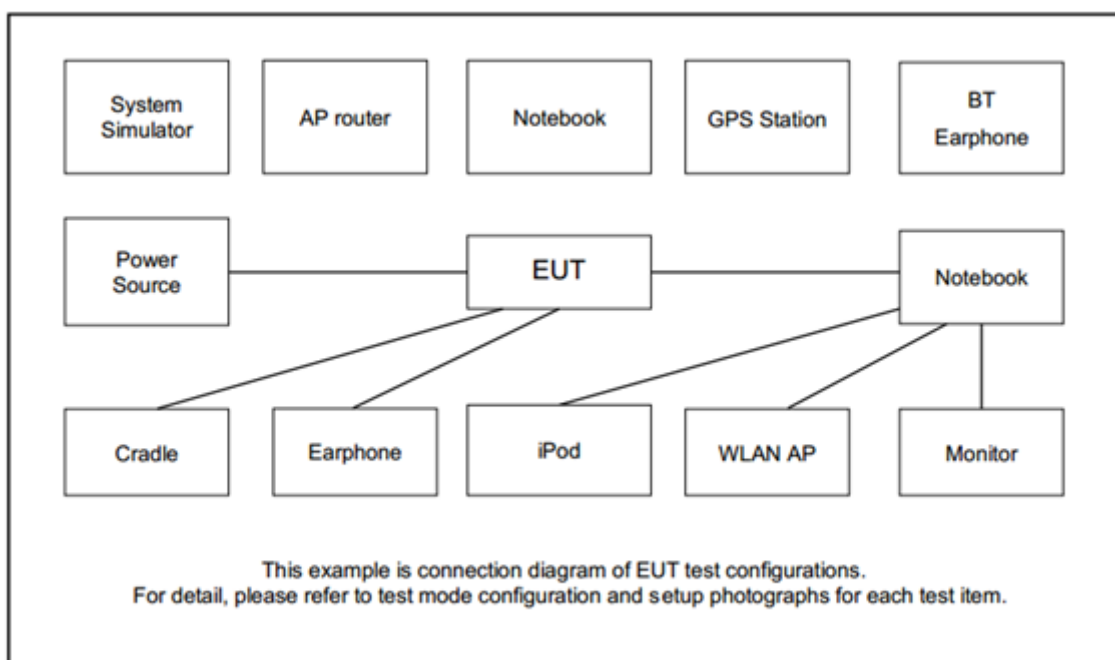

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
2.	Notebook	Dell	Latitude 3420	FCC DoC	N/A	AC I/P : Unshielded, 1.2m DC O/P : Shielded, 1.8m
3.	Adapter	MIBO	MB-21244274	N/A	N/A	N/A
4.	Adapter	Google	G9BR1	N/A	N/A	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “Tera Term Version 4.95” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.



2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments


See list of measuring equipment of this test report.

3.1.3 Test Procedures

The testing follows FCC KDB 291074 D02 EMC Measurement v01 Section 2.11 Minimum Emission bandwidth

1. Set RBW = 100 kHz.
2. Set the VBW $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold
5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Maximum E.I.R.P Output Power Measurement

3.2.1 Limit of Maximum E.I.R.P Output Power

For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band, and the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

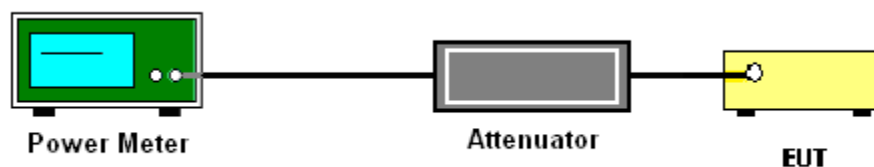

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

1. For client devices operating under the control of an indoor access point in the 5.850-5.895 GHz band, the maximum power spectral density must not exceed 14 dBm e.i.r.p. in any 1-megahertz band
2. For client devices operating on a channel that spans the 5.725-5.850 GHz and 5.850-5.895 GHz bands shall meet both 15.407(a)(3)(i) 30dBm/500kHz and 15.407(a)(3)(iii) 14dBm/MHz limit, where the stringent limit 14dBm/MHz is applied.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \quad \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) For transmitters operating solely in the 5.850-5.895 GHz band or operating on a channel that spans across 5.725-5.895 GHz:

15.407(b)(5)(i), all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz.

All emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.

- (3) KDB789033 D02 v02r01 G)2)c)

Use guidance in KDB Publication 789033 for all measurements. Unwanted emissions outside of restricted bands are measured with an RMS detector. In addition, 15.35(b) applies where the peak emissions must be limited to no more than 20 dB above the average limit.

Unwanted band-edge emissions may be measured using the integration method as described in KDB Publication 789033 3. d) (ii). Emissions below 5725 MHz should be measured using peak-detection while emission above 5895 MHz should be measured using average.

Frequency(GHz)	EIRP (dBm)	Field Strength @3m distance (dBuV/m)	Note
Below 5.65	-27dBm/MHz	68.2	Peak
5.7	10dBm/MHz	105.2	Peak
5.72	15.6dBm/MHz	110.8	Peak
5.725	27dBm/MHz	122.2	Peak
5.895	-5dBm/MHz	90.2	Average
5.895	15dBm/MHz	110.2	Peak
Above 5.925	-27dBm/MHz	68.2	Average
Above 5.925	-7dBm/MHz	88.2	Peak

Note: Field strength at 3 m distance is converted to EIRP as the following equation:

$$\text{EIRP[dBm]} = \text{E[dBuV/m]} - 95.2$$

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.


3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
 Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW ≥ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $\text{VBW} \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT was placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT was placed at distance 3 meter from measurement antenna which was mounted on the top of a variable height antenna tower.
4. The measurement antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1GHz was performed by adjusting the antenna tower from 1m to 4m and by rotating the turn table from 0 degree to 360 degree to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

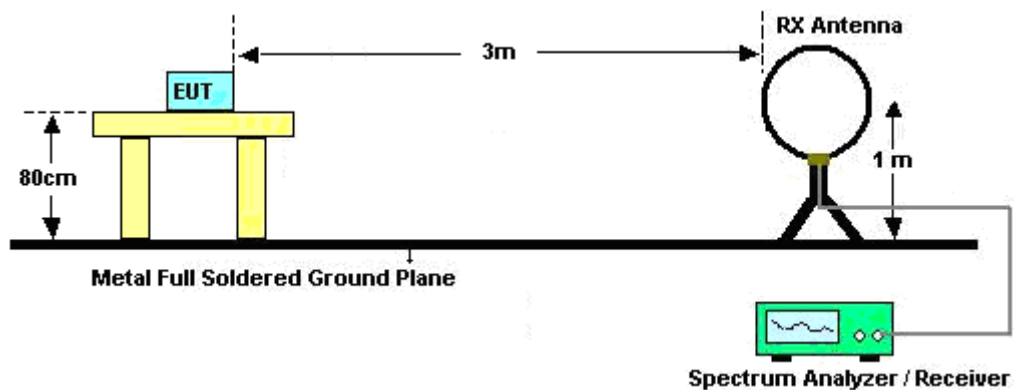


For radiated emissions from 30MHz to 1GHz

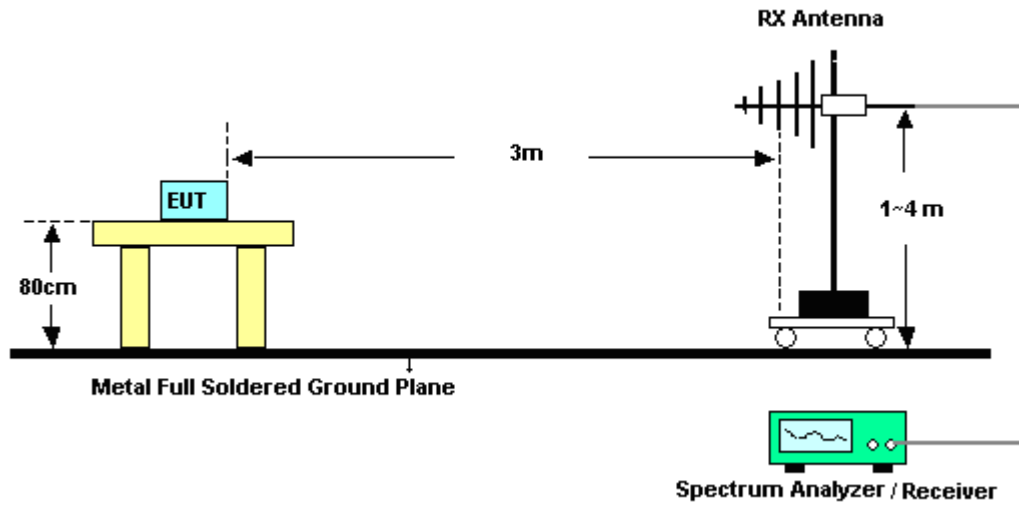

For radiated test from 1GHz to 18GHz

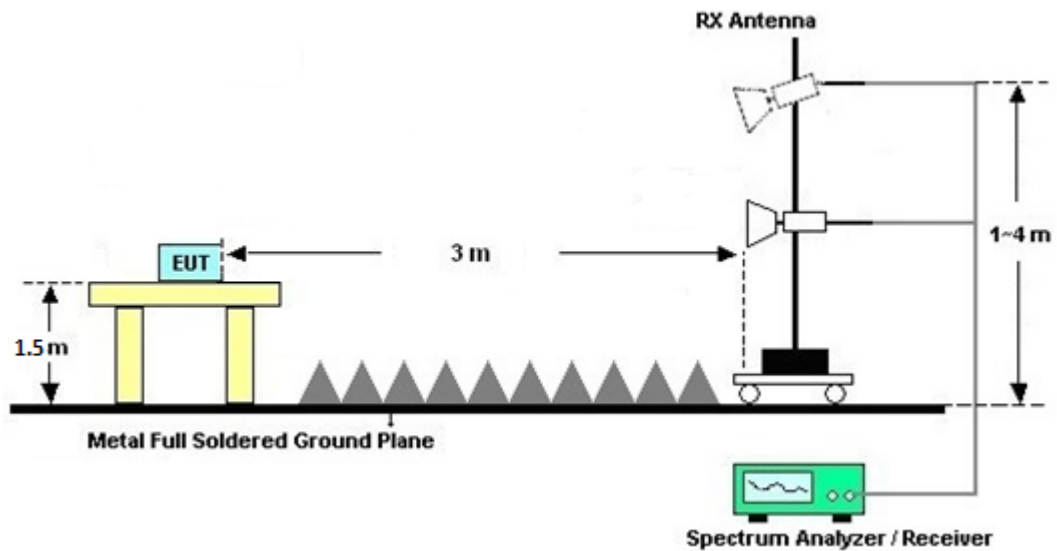

For radiated test above 18GHz

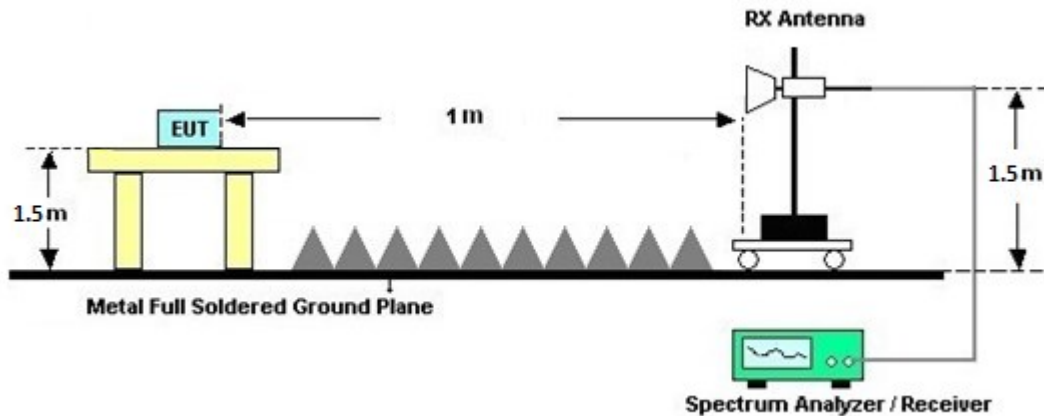

3.4.5 Test Results of Radiated Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Unwanted Radiated Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

See list of measuring equipment of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

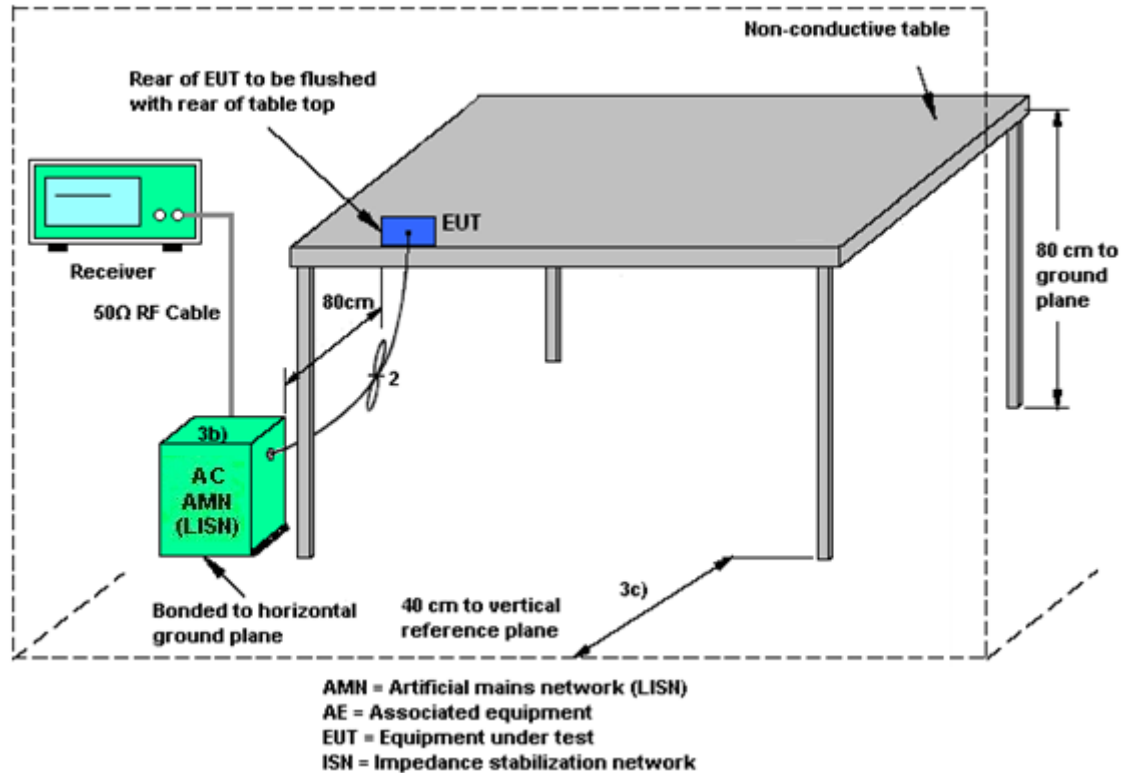

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9kHz~30MHz	Aug. 29, 2024	Apr. 22, 2025~ Jun. 06, 2025	Aug. 28, 2025	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 22, 2024	Apr. 22, 2025~ Jun. 06, 2025	Nov. 21, 2025	Radiation (03CH16-HY)
BT Base Station	Rohde & Schwarz	CBT	101135	BT 3.0	Oct. 10, 2024	Apr. 22, 2025~ Jun. 06, 2025	Oct. 09, 2025	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY60241055	10Hz~44GHz	Jul. 19, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jul. 18, 2025	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N -06	47020 & 06	30MHz to 1GHz	Oct. 05, 2024	Apr. 22, 2025~ Jun. 06, 2025	Oct. 04, 2025	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-1522	1G~18GHz	Mar. 27, 2025	Apr. 22, 2025~ Jun. 06, 2025	Mar. 26, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jul. 02, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jul. 01, 2025	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Dec. 05, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 04, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 24, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 23, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	May 27, 2024	Apr. 22, 2025~ May 26, 2025	May 26, 2025	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 23, 2024	May 27, 2025~ Jun. 06, 2025	Aug. 22, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-15 30-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 14, 2025	Apr. 22, 2025~ Jun. 06, 2025	Jan. 13, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700 -3000-18000-6 0ST	SN3	3GHz High Pass Filter	Jun. 28, 2024	Apr. 22, 2025~ Jun. 06, 2025	Jun. 27, 2025	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872. 5-6750-18000- 40ST	SN27	6.75GHz High Pass Filter	Dec. 26, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 25, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 23, 2025	Apr. 23, 2025~ Jun. 06, 2025	Apr. 22, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLE X 104	EC-A5-300-5 757,805935/4 ,802434/4	30MHz~18GHz	Aug. 07, 2024	Apr. 22, 2025~ Jun. 06, 2025	Aug. 06, 2025	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,804 012/2	18-40GHz	Dec. 31, 2024	Apr. 22, 2025~ Jun. 06, 2025	Dec. 30, 2025	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Apr. 22, 2025~ Jun. 06, 2025	N/A	Radiation (03CH16-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	May 13, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZB ECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	May 13, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	May 13, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	May 13, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	May 13, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	May 13, 2025	Sep. 22, 2025	Conduction (CO07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Apr. 24, 2025~ May 16, 2025	Oct. 30, 2025	Conducted (TH05-HY)
USB Power Sensor	DARE	RPR3008W	RPR8W-2301 0013 (NO:100)	10MHz~8GHz	Jul. 26, 2024	Apr. 24, 2025~ May 16, 2025	Jul. 25, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Apr. 24, 2025~ May 16, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instrument	ETF-1405-0	EC1900157 (BOX6)	N/A	Feb. 10, 2025	Apr. 24, 2025~ May 16, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final_v ersion_240513	N/A	Conducted Other Test Item	N/A	Apr. 24, 2025~ May 16, 2025	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	joseph hu	Temperature:	21~25	°C
Test Date:	2025/4/24~2025/06/06	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	169	5845	17.18	-	20.02	-	16.35	-	0.5	Pass
11a	6Mbps	1	173	5865	17.17	-	19.84	-	16.34	-	0.5	Pass
11a	6Mbps	1	177	5885	17.18	-	19.90	-	16.35	-	0.5	Pass
VHT20	MCS0	1	169	5845	17.95	-	20.28	-	17.55	-	0.5	Pass
VHT20	MCS0	1	173	5865	17.94	-	20.28	-	17.31	-	0.5	Pass
VHT20	MCS0	1	177	5885	17.96	-	20.24	-	17.26	-	0.5	Pass
VHT40	MCS0	1	167	5835	36.53	-	41.42	-	35.79	-	0.5	Pass
VHT40	MCS0	1	175	5875	36.47	-	41.50	-	35.57	-	0.5	Pass
VHT80	MCS0	1	171	5855	76.22	-	82.08	-	76.10	-	0.5	Pass

TEST RESULTS DATA
Average Power Table

UNII-4 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	169	5845	9.40	-		1.07	-	10.47	-	30	-
11a	6Mbps	1	173	5865	9.14	-		1.07	-	10.21	-	30	-
11a	6Mbps	1	177	5885	9.44	-		1.07	-	10.51	-	30	-
HT20	MCS0	1	169	5845	9.24	-		1.07	-	10.31	-	30	-
HT20	MCS0	1	173	5865	9.15	-		1.07	-	10.22	-	30	-
HT20	MCS0	1	177	5885	9.06	-		1.07	-	10.13	-	30	-
HT40	MCS0	1	167	5835	9.26	-		1.07	-	10.33	-	30	-
HT40	MCS0	1	175	5875	9.02	-		1.07	-	10.09	-	30	-
VHT20	MCS0	1	169	5845	9.34	-		1.07	-	10.41	-	30	-
VHT20	MCS0	1	173	5865	9.25	-		1.07	-	10.32	-	30	-
VHT20	MCS0	1	177	5885	9.16	-		1.07	-	10.23	-	30	-
VHT40	MCS0	1	167	5835	9.36	-		1.07	-	10.43	-	30	-
VHT40	MCS0	1	175	5875	9.12	-		1.07	-	10.19	-	30	-
VHT80	MCS0	1	171	5855	9.40	-		1.07	-	10.47	-	30	-

TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	169	5845	0.05	-	-2.31	-		1.07	-	-1.24	-	14.00	-	Pass
11a	6Mbps	1	173	5865	0.05	-	-2.55	-		1.07	-	-1.48	-	14.00	-	Pass
11a	6Mbps	1	177	5885	0.05	-	-2.23	-		1.07	-	-1.16	-	14.00	-	Pass
VHT20	MCS0	1	169	5845	0.05	-	-2.65	-		1.07	-	-1.58	-	14.00	-	Pass
VHT20	MCS0	1	173	5865	0.05	-	-2.85	-		1.07	-	-1.78	-	14.00	-	Pass
VHT20	MCS0	1	177	5885	0.05	-	-2.97	-		1.07	-	-1.90	-	14.00	-	Pass
VHT40	MCS0	1	167	5835	0.11	-	-5.69	-		1.07	-	-4.62	-	14.00	-	Pass
VHT40	MCS0	1	175	5875	0.11	-	-5.64	-		1.07	-	-4.57	-	14.00	-	Pass
VHT80	MCS0	1	171	5855	0.22	-	-9.19	-		1.07	-	-8.12	-	14.00	-	Pass

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

UNII-4 single antenna													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26dB Bandwidth (MHz)		6 dB Bandwidth (MHz)		6 dB Bandwidth Min. Limit (MHz)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	169	5845	Full	18.87	-	20.57	-	18.36	-	0.5	Pass
HE20	MCS0	1	173	5865	Full	18.86	-	20.51	-	18.39	-	0.5	Pass
HE20	MCS0	1	177	5885	Full	18.87	-	20.58	-	18.34	-	0.5	Pass
HE40	MCS0	1	167	5835	Full	37.83	-	41.65	-	36.94	-	0.5	Pass
HE40	MCS0	1	175	5875	Full	37.71	-	41.60	-	36.32	-	0.5	Pass
HE80	MCS0	1	171	5855	Full	77.51	-	80.77	-	77.87	-	0.5	Pass

TEST RESULTS DATA
Average Power Table


UNII-4 single antenna														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)			DG (dBi)		EIRP Power (dBm)		EIRP Power Limit (dBm)	
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	169	5845	Full	9.44	-		1.07	-	10.51	-	30	-
HE20	MCS0	1	169	5845	26/0	-0.30	-		1.07	-	0.77	-	30	-
HE20	MCS0	1	169	5845	52/37	2.18	-		1.07	-	3.25	-	30	-
HE20	MCS0	1	169	5845	106/53	5.47	-		1.07	-	6.54	-	30	-
HE20	MCS0	1	173	5865	Full	9.35	-		1.07	-	10.42	-	30	-
HE20	MCS0	1	173	5865	26/4	1.24	-		1.07	-	2.31	-	30	-
HE20	MCS0	1	173	5865	52/38	2.54	-		1.07	-	3.61	-	30	-
HE20	MCS0	1	173	5865	106/53	5.60	-		1.07	-	6.67	-	30	-
HE20	MCS0	1	177	5885	Full	9.26	-		1.07	-	10.33	-	30	-
HE20	MCS0	1	177	5885	26/8	-0.27	-		1.07	-	0.80	-	30	-
HE20	MCS0	1	177	5885	52/40	2.42	-		1.07	-	3.49	-	30	-
HE20	MCS0	1	177	5885	106/54	5.61	-		1.07	-	6.68	-	30	-
HE40	MCS0	1	167	5835	Full	9.46	-		1.07	-	10.53	-	30	-
HE40	MCS0	1	167	5835	242/61	6.32	-		1.07	-	7.39	-	30	-
HE40	MCS0	1	175	5875	Full	9.22	-		1.07	-	10.29	-	30	-
HE40	MCS0	1	175	5875	242/62	6.43	-		1.07	-	7.50	-	30	-
HE80	MCS0	1	171	5855	Full	9.50	-		1.07	-	10.57	-	30	-
HE80	MCS0	1	171	5855	484/65	6.20	-		1.07	-	7.27	-	30	-
HE80	MCS0	1	171	5855	484/66	5.80	-		1.07	-	6.87	-	30	-

TEST RESULTS DATA
Power Spectral Density

UNII-4 single antenna																	
Mod.	Data Rate	NTx	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			DG (dBi)		EIRP PSD (dBm/MHz)		EIRP PSD Limit (dBm/MHz)		Pass. /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	169	5845	Full	0.06	-	-3.09	-		1.07	-	-2.02	-	14.00	-	Pass
HE20	MCS0	1	169	5845	26/0	0.06	-	-3.32	-		1.07	-	-2.25	-	14.00	-	Pass
HE20	MCS0	1	169	5845	52/37	0.06	-	-3.43	-		1.07	-	-2.36	-	14.00	-	Pass
HE20	MCS0	1	169	5845	106/53	0.06	-	-3.11	-		1.07	-	-2.04	-	14.00	-	Pass
HE20	MCS0	1	173	5865	Full	0.06	-	-2.84	-		1.07	-	-1.77	-	14.00	-	Pass
HE20	MCS0	1	173	5865	26/4	0.06	-	-3.34	-		1.07	-	-2.27	-	14.00	-	Pass
HE20	MCS0	1	173	5865	52/38	0.06	-	-3.18	-		1.07	-	-2.11	-	14.00	-	Pass
HE20	MCS0	1	173	5865	106/53	0.06	-	-3.18	-		1.07	-	-2.11	-	14.00	-	Pass
HE20	MCS0	1	177	5885	Full	0.06	-	-2.96	-		1.07	-	-1.89	-	14.00	-	Pass
HE20	MCS0	1	177	5885	26/8	0.06	-	-3.11	-		1.07	-	-2.04	-	14.00	-	Pass
HE20	MCS0	1	177	5885	52/40	0.06	-	-3.10	-		1.07	-	-2.03	-	14.00	-	Pass
HE20	MCS0	1	177	5885	106/54	0.06	-	-3.08	-		1.07	-	-2.01	-	14.00	-	Pass
HE40	MCS0	1	167	5835	Full	0.12	-	-5.59	-		1.07	-	-4.52	-	14.00	-	Pass
HE40	MCS0	1	167	5835	242/61	0.12	-	-5.93	-		1.07	-	-4.86	-	14.00	-	Pass
HE40	MCS0	1	175	5875	Full	0.12	-	-5.52	-		1.07	-	-4.45	-	14.00	-	Pass
HE40	MCS0	1	175	5875	242/62	0.12	-	-5.56	-	1.07	-	-4.49	-	14.00	-	Pass	
HE80	MCS0	1	171	5855	Full	0.23	-	-8.30	-	1.07	-	-7.23	-	14.00	-	Pass	
HE80	MCS0	1	171	5855	484/65	0.23	-	-8.76	-	1.07	-	-7.69	-	14.00	-	Pass	
HE80	MCS0	1	171	5855	484/66	0.23	-	-8.77	-	1.07	-	-7.70	-	14.00	-	Pass	

**Test Result of 6dB and 26dB and 99% Occupied Bandwidth**


<802.11a>

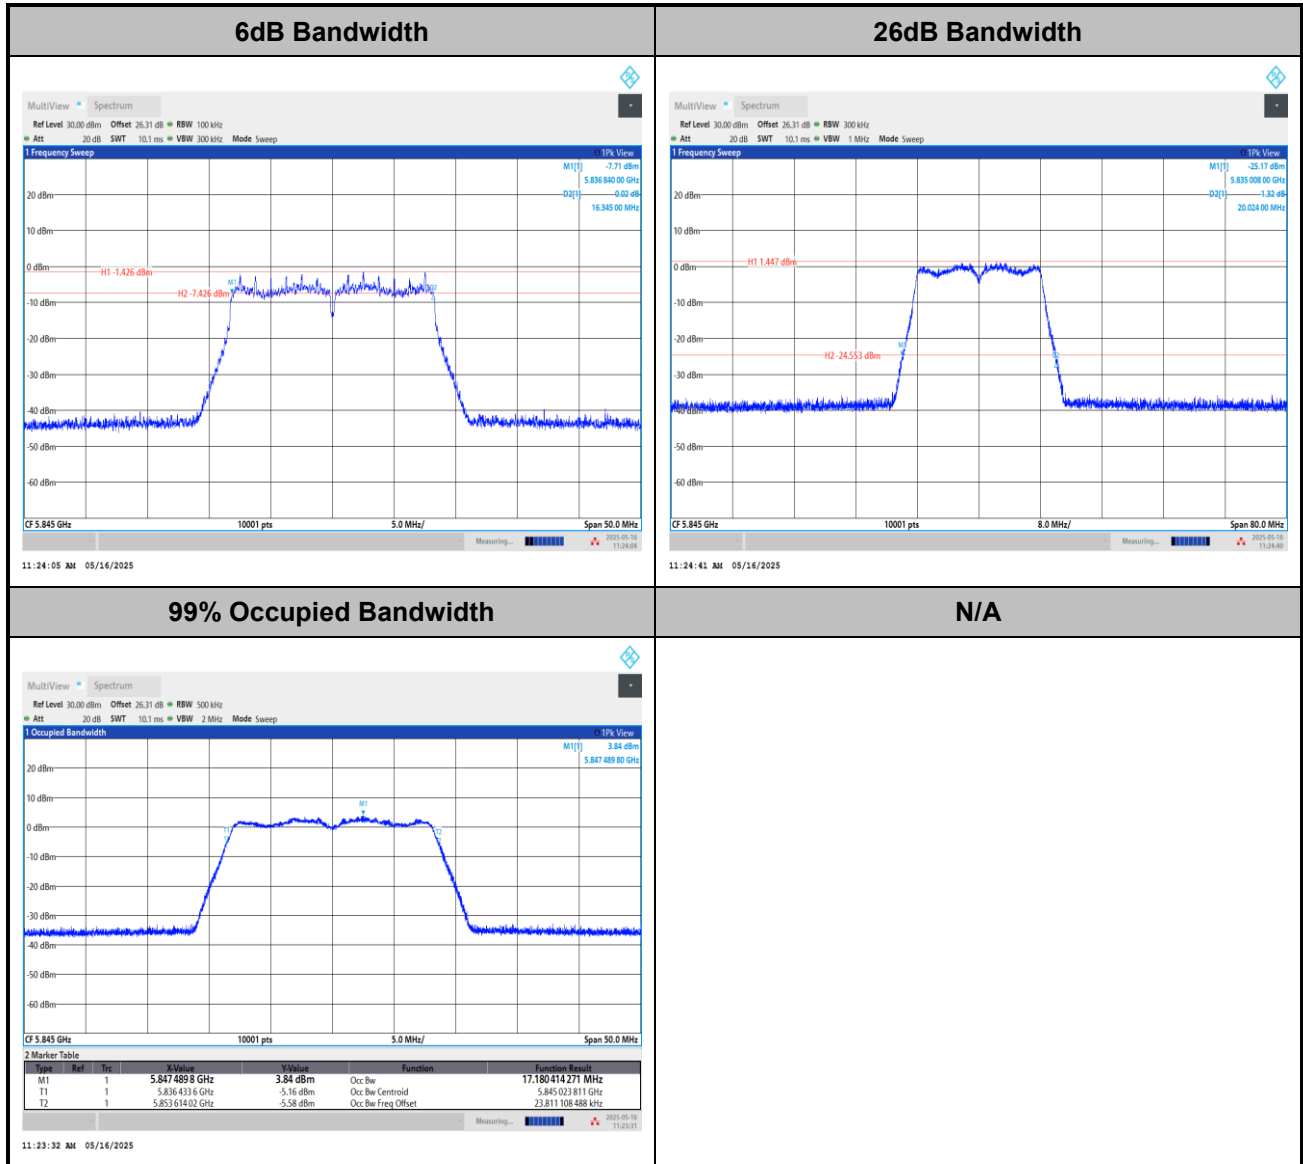

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ac VHT20>

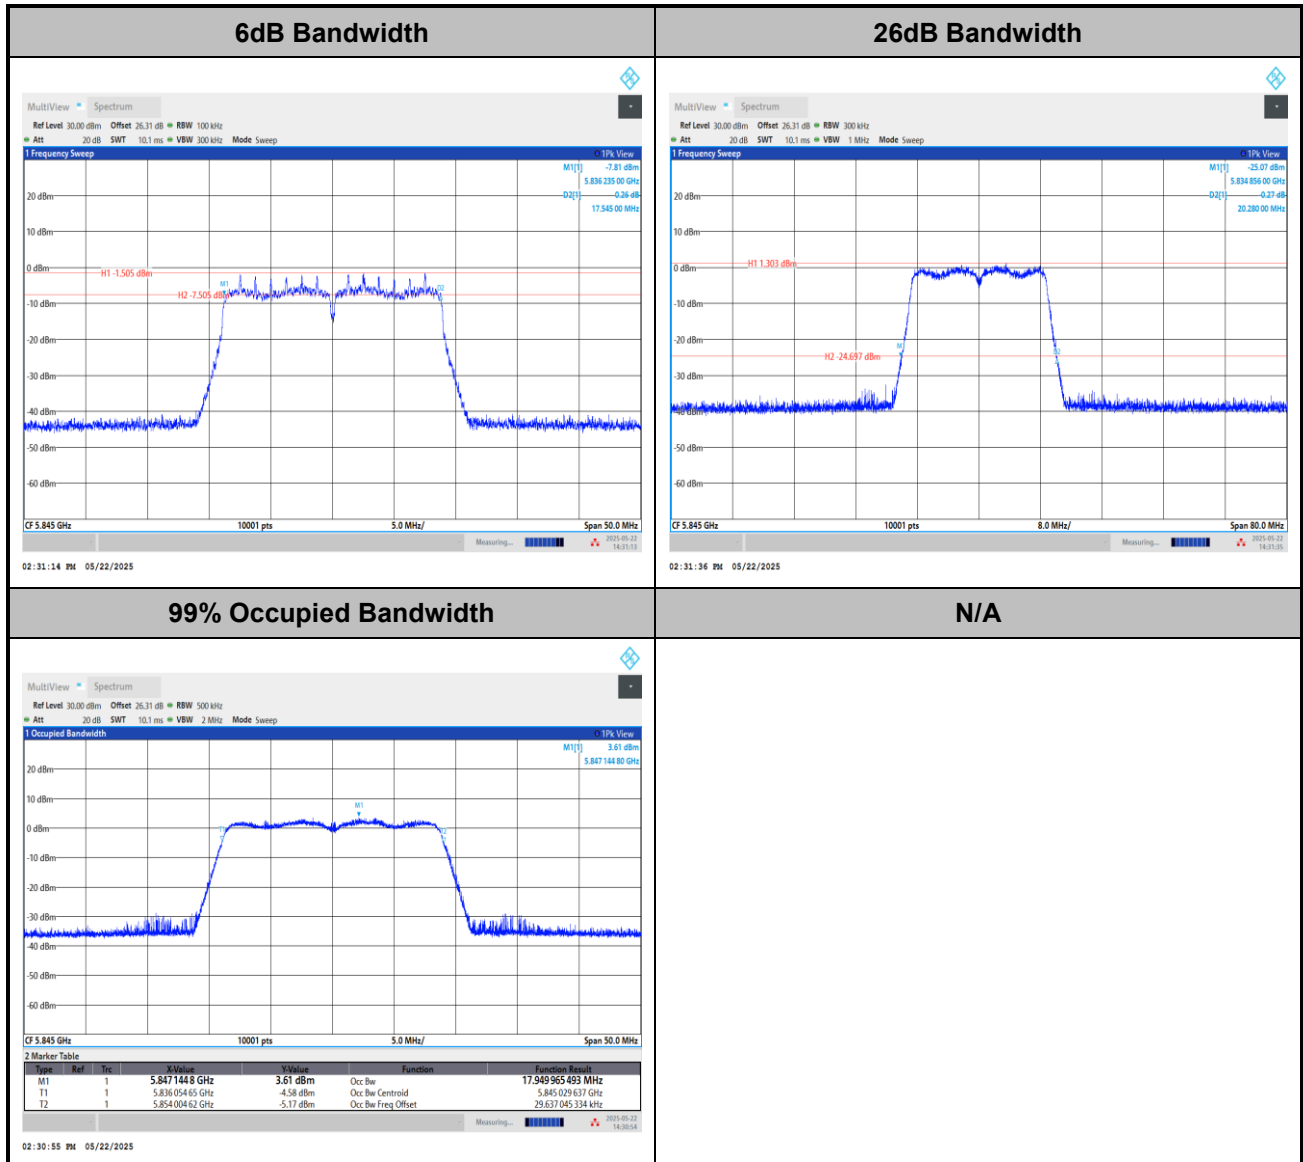

Note: The occupied channel bandwidth is maintained within the band of operation.



<802.11ac VHT40>

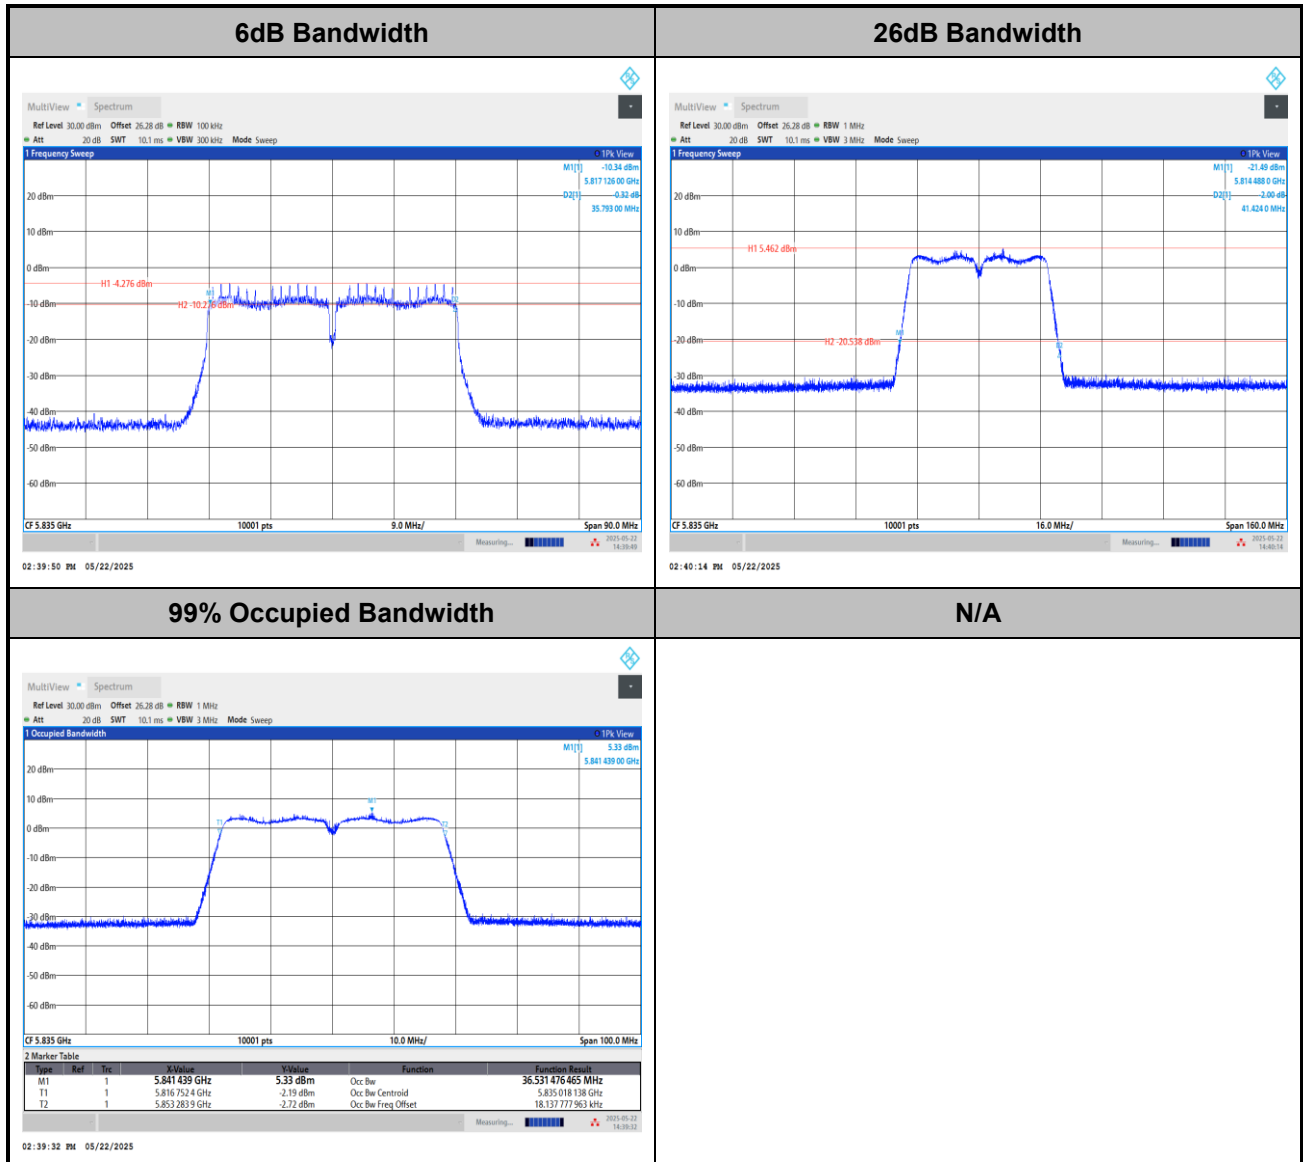


Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ac VHT80>


6dB Bandwidth

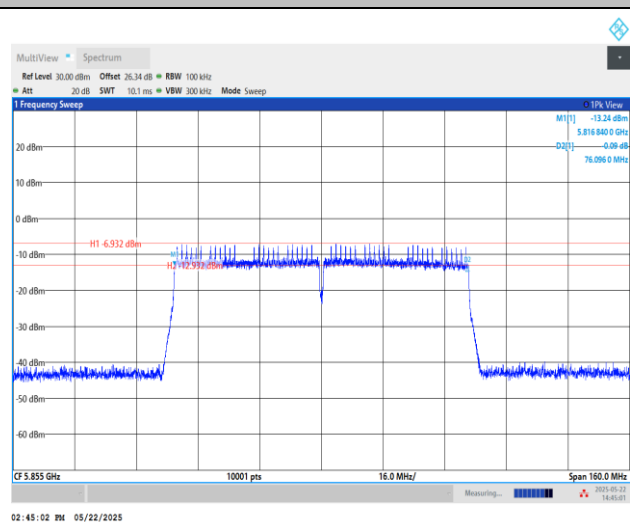

26dB Bandwidth

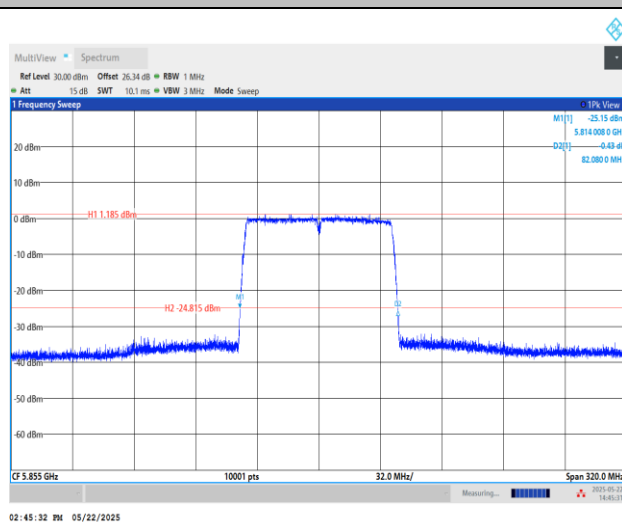

99% Occupied Bandwidth

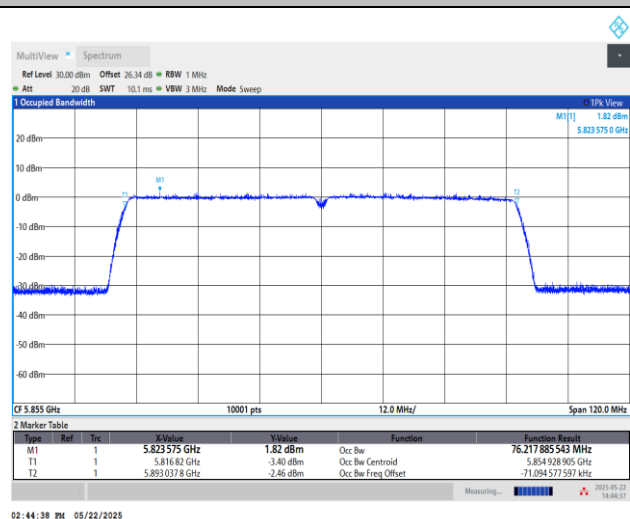


N/A

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE20>

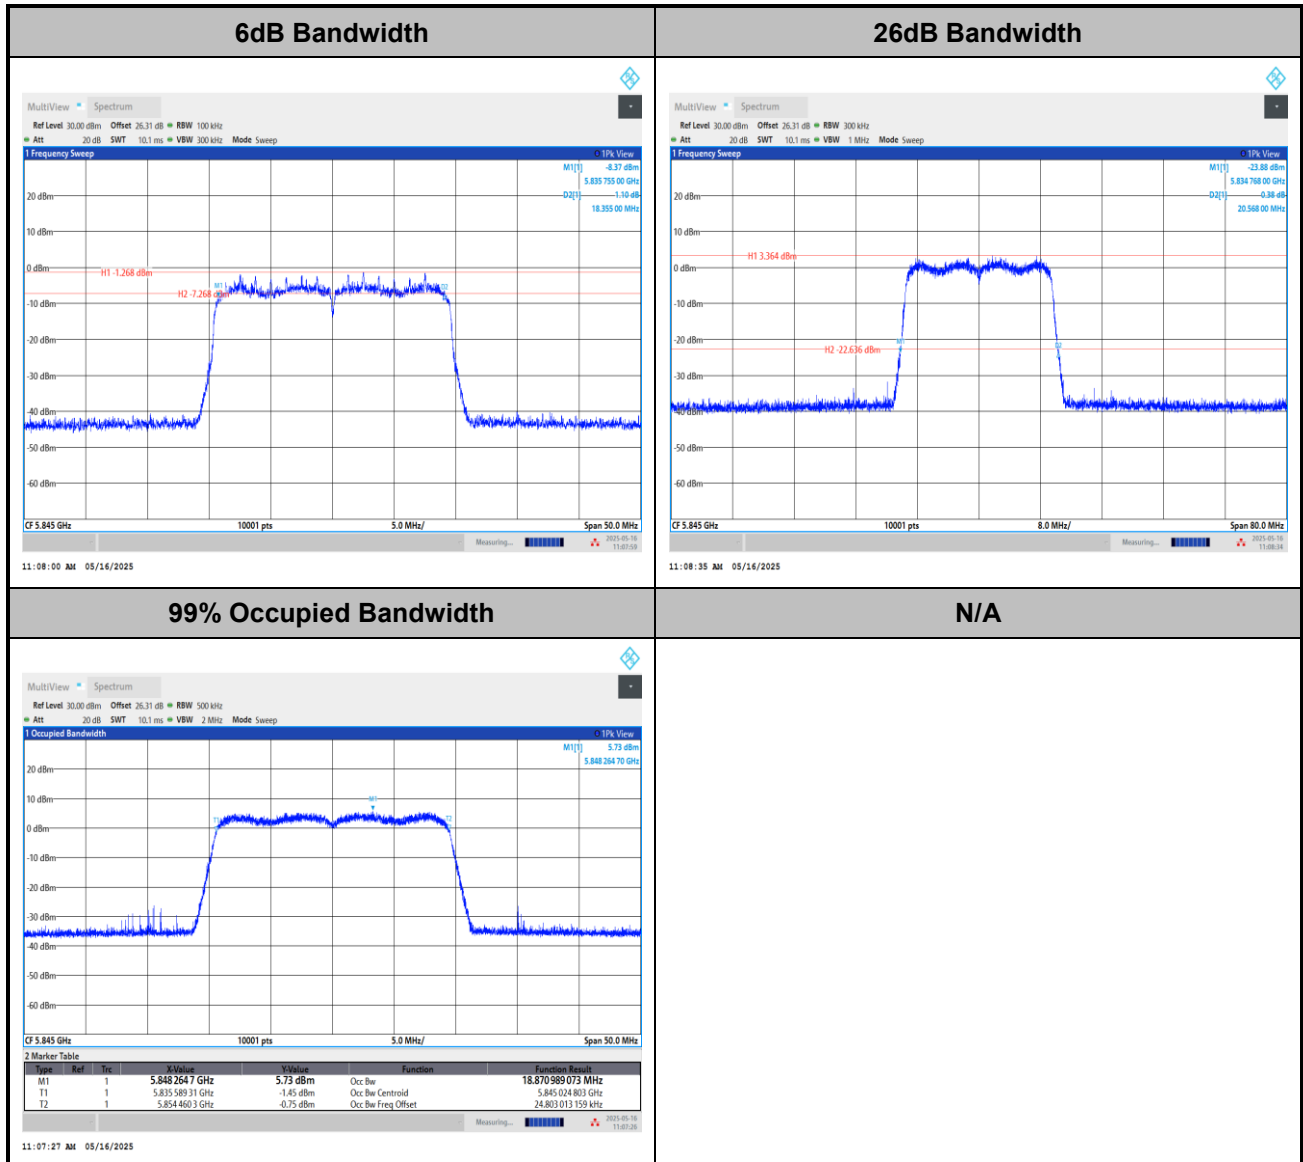

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE40>

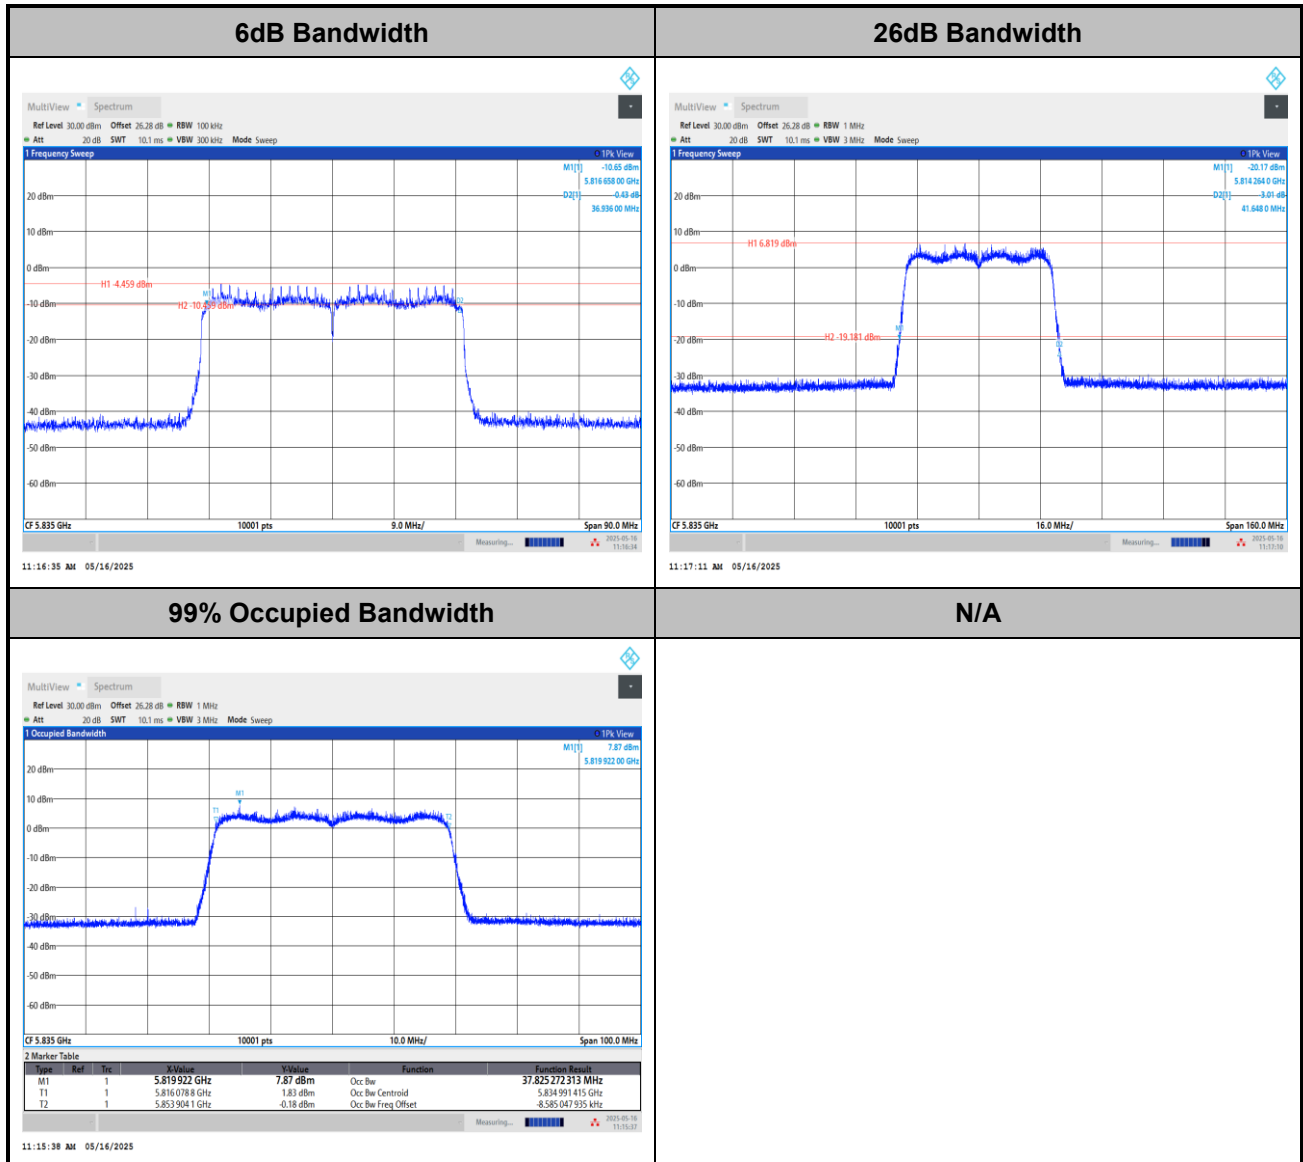

Note: The occupied channel bandwidth is maintained within the band of operation.




<802.11ax HE80>

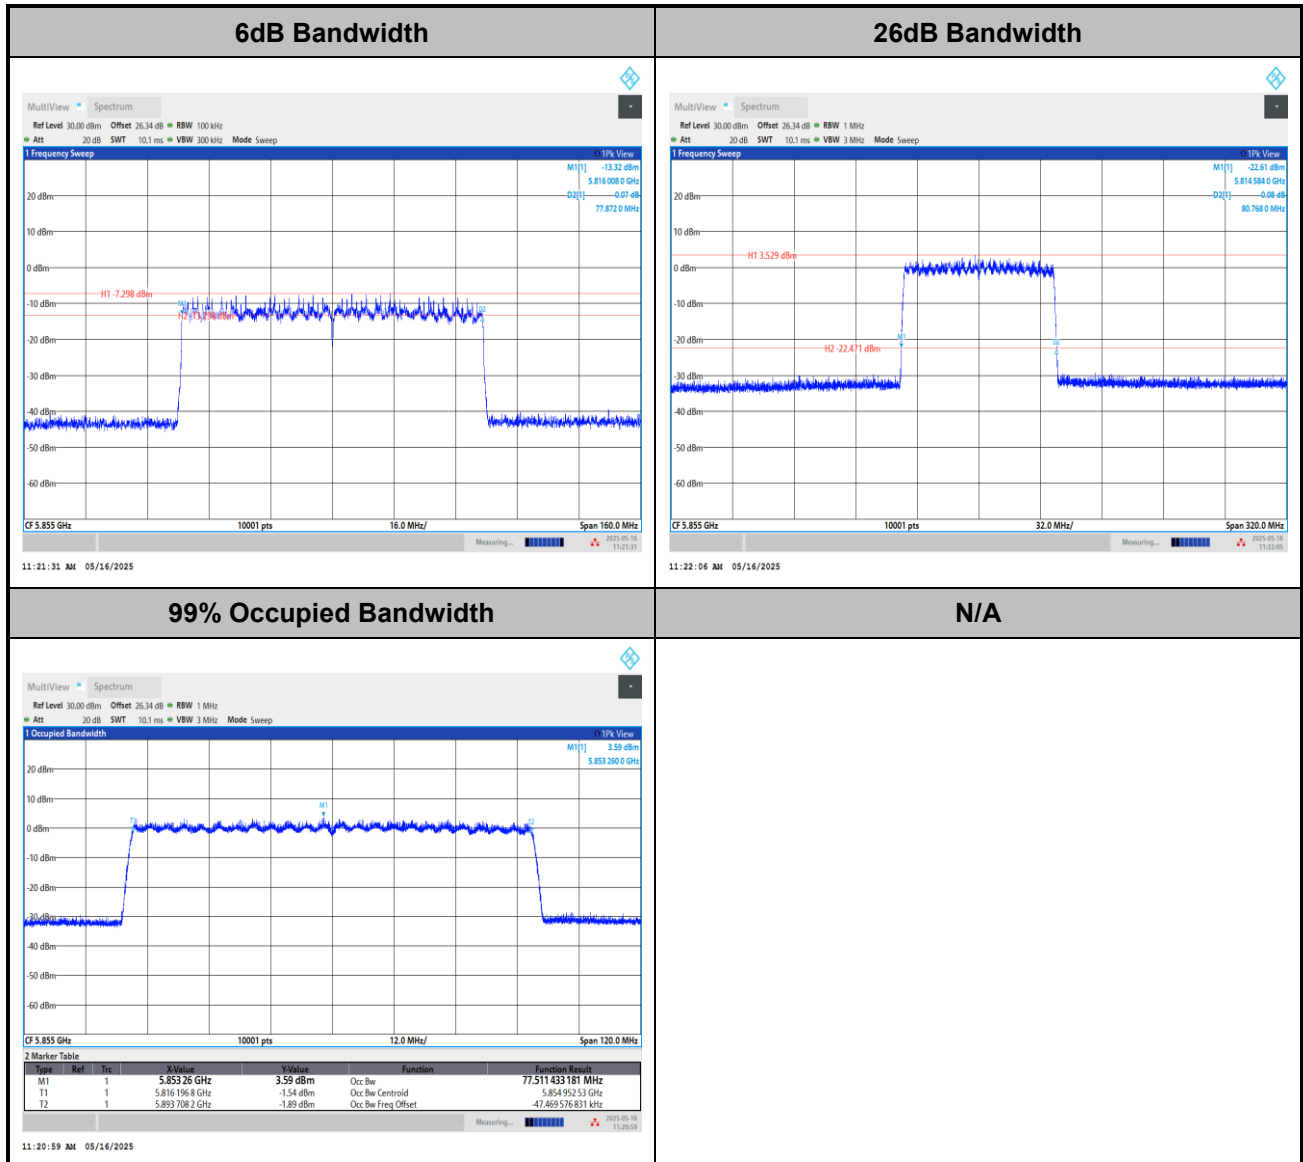


Note: The occupied channel bandwidth is maintained within the band of operation.

**Test Result of Power Spectral Density**

<802.11a>

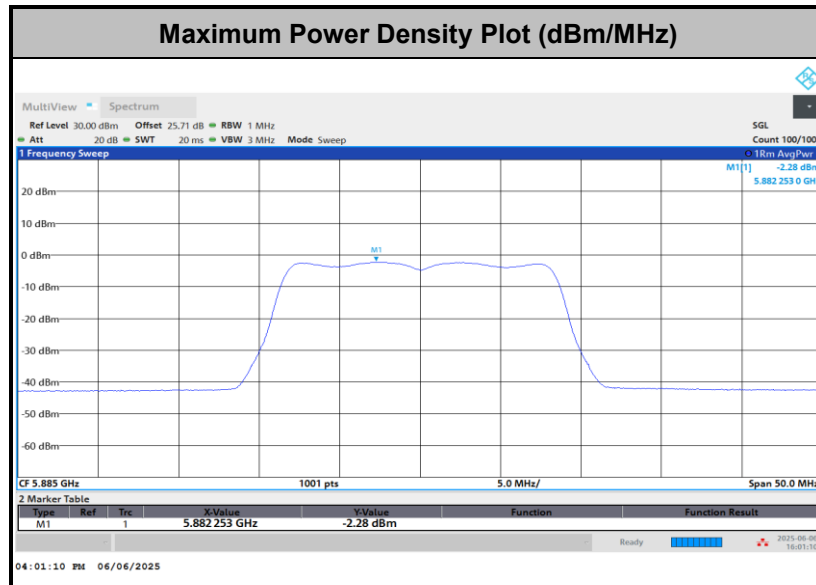


<802.11ac VHT20>

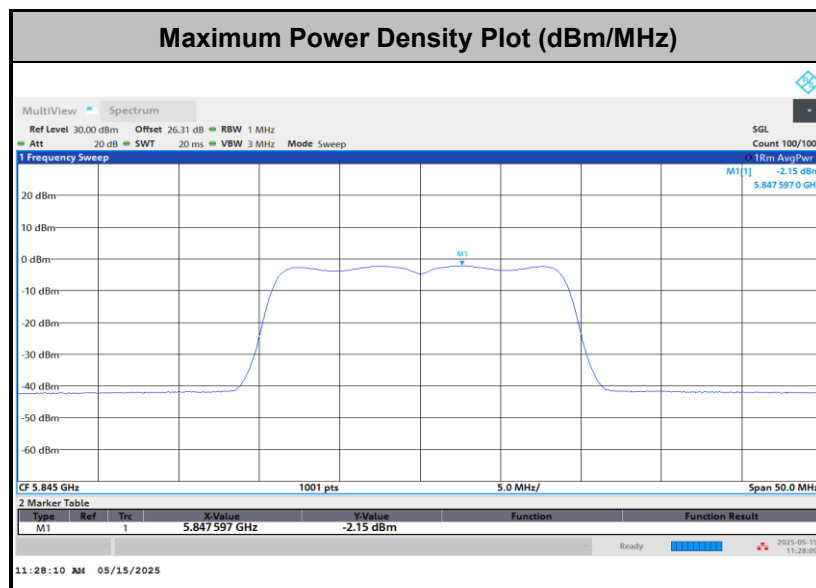




<802.11ac VHT40>

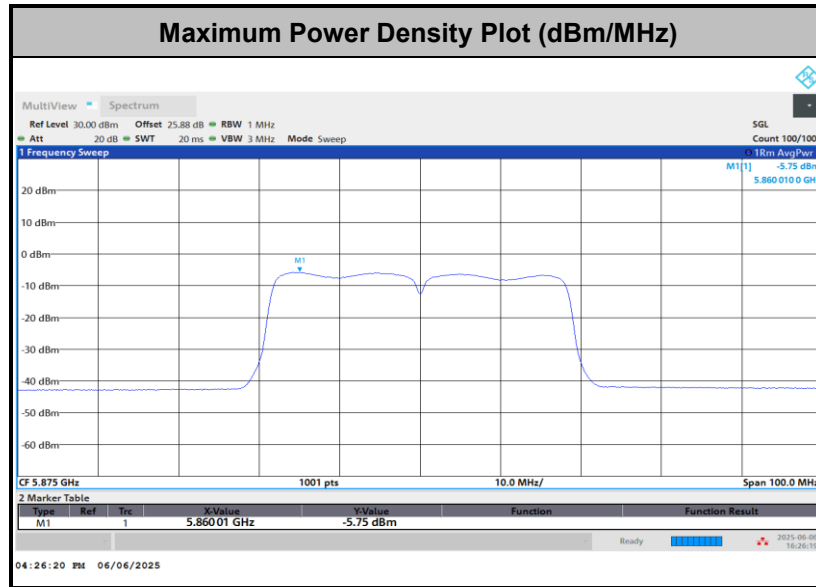


<802.11ac VHT80>

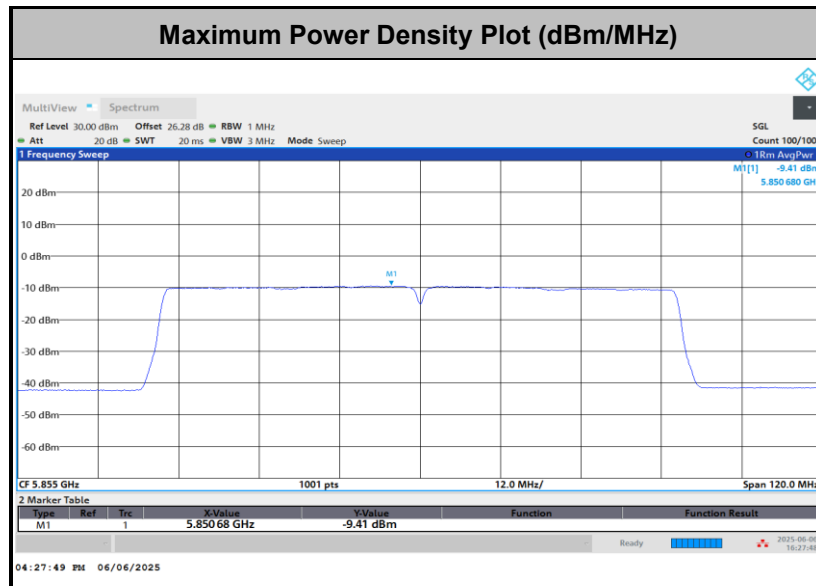




<802.11ax HE20>

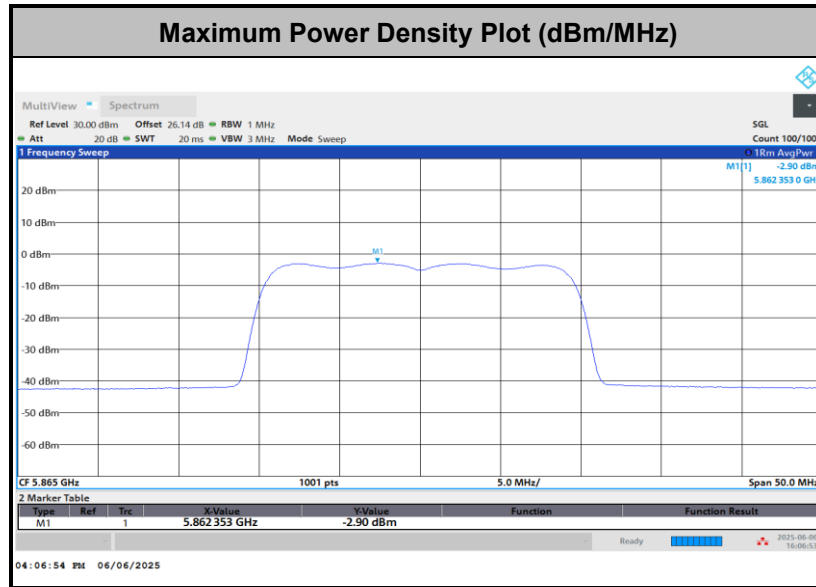


<802.11ax HE40>

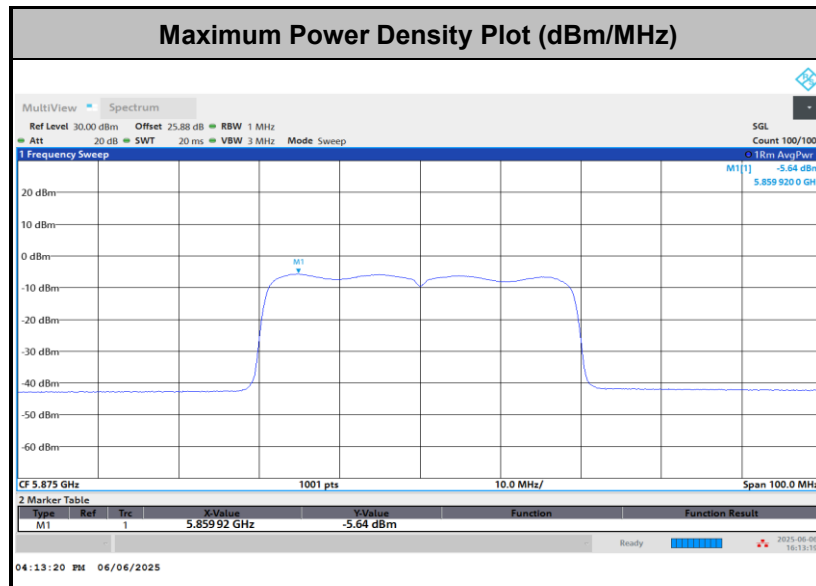



<802.11ax HE80>

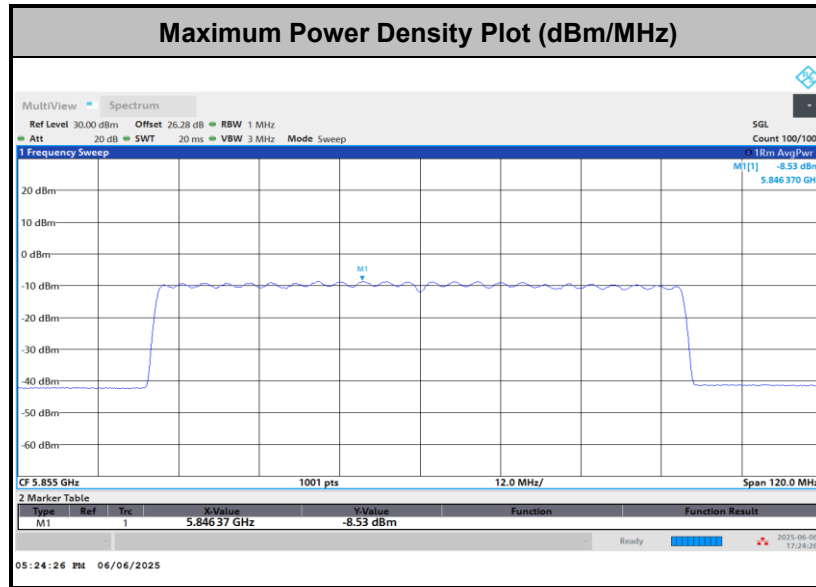




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.4 ~ 25.6℃
		Relative Humidity :	43.3 ~ 49.1%

EUT Information

Report NO : 541507
Test Mode : Mode 1
Test Voltage : 120Vac/60Hz
Phase : Line

Full Spectrum

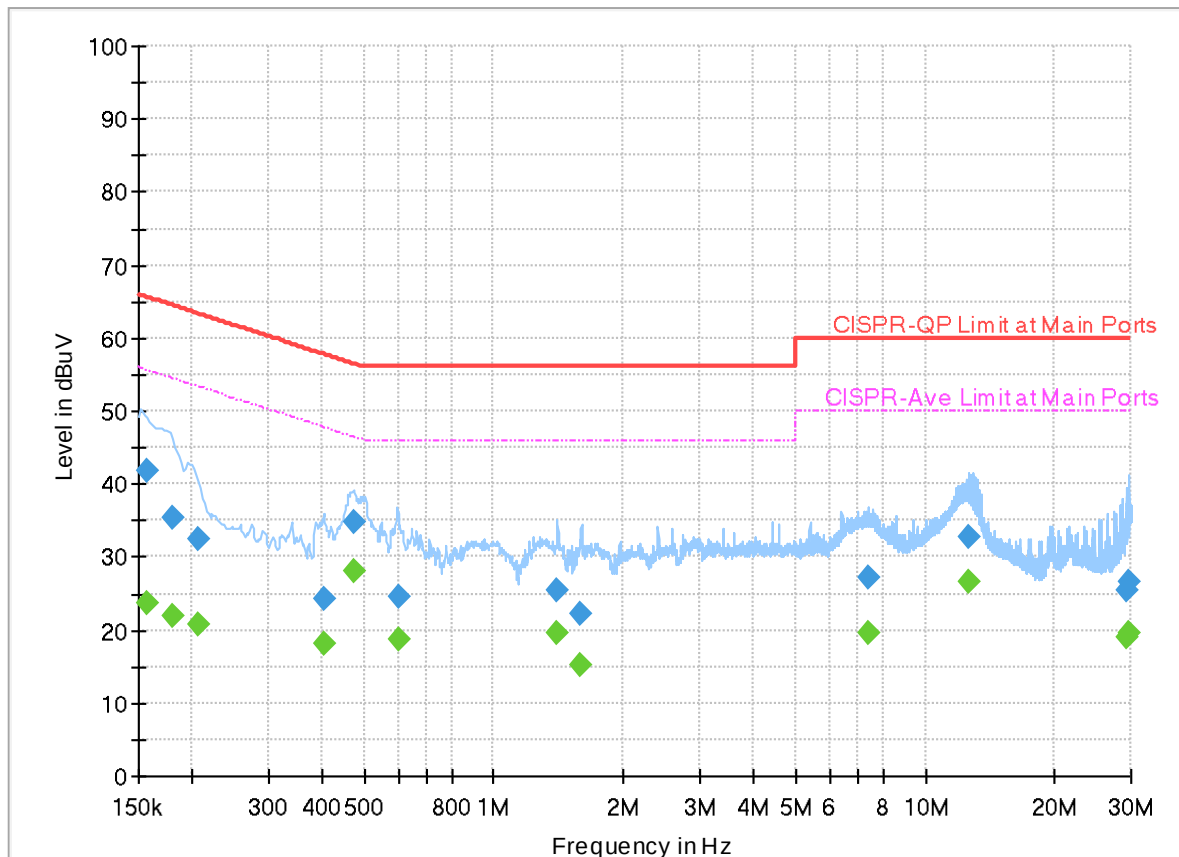

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	23.55	55.63	32.08	L1	FLO	20.0
0.156750	41.86	---	65.63	23.77	L1	FLO	20.0
0.179250	---	22.03	54.52	32.49	L1	FLO	20.0
0.179250	35.43	---	64.52	29.09	L1	FLO	20.0
0.206250	---	20.74	53.36	32.62	L1	FLO	20.0
0.206250	32.34	---	63.36	31.02	L1	FLO	20.0
0.402900	---	18.23	47.79	29.56	L1	FLO	20.0
0.402900	24.31	---	57.79	33.48	L1	FLO	20.0
0.473190	---	27.95	46.46	18.51	L1	FLO	20.0
0.473190	34.68	---	56.46	21.78	L1	FLO	20.0
0.602250	---	18.75	46.00	27.25	L1	FLO	20.0
0.602250	24.70	---	56.00	31.30	L1	FLO	20.0
1.401900	---	19.56	46.00	26.44	L1	FLO	20.0
1.401900	25.41	---	56.00	30.59	L1	FLO	20.0
1.592250	---	15.19	46.00	30.81	L1	FLO	20.0
1.592250	22.16	---	56.00	33.84	L1	FLO	20.0
7.404000	---	19.62	50.00	30.38	L1	FLO	20.3
7.404000	27.12	---	60.00	32.88	L1	FLO	20.3
12.619500	---	26.56	50.00	23.44	L1	FLO	20.5


12.619500	32.67	---	60.00	27.33	L1	FLO	20.5
29.402160	---	19.07	50.00	30.93	L1	FLO	21.1
29.402160	25.55	---	60.00	34.45	L1	FLO	21.1
29.598000	---	19.47	50.00	30.53	L1	FLO	21.1
29.598000	26.58	---	60.00	33.42	L1	FLO	21.1

EUT Information

Report NO :
Test Mode :
Test Voltage :
Phase :

541507
Mode 1
120Vac/60Hz
Neutral

Full Spectrum

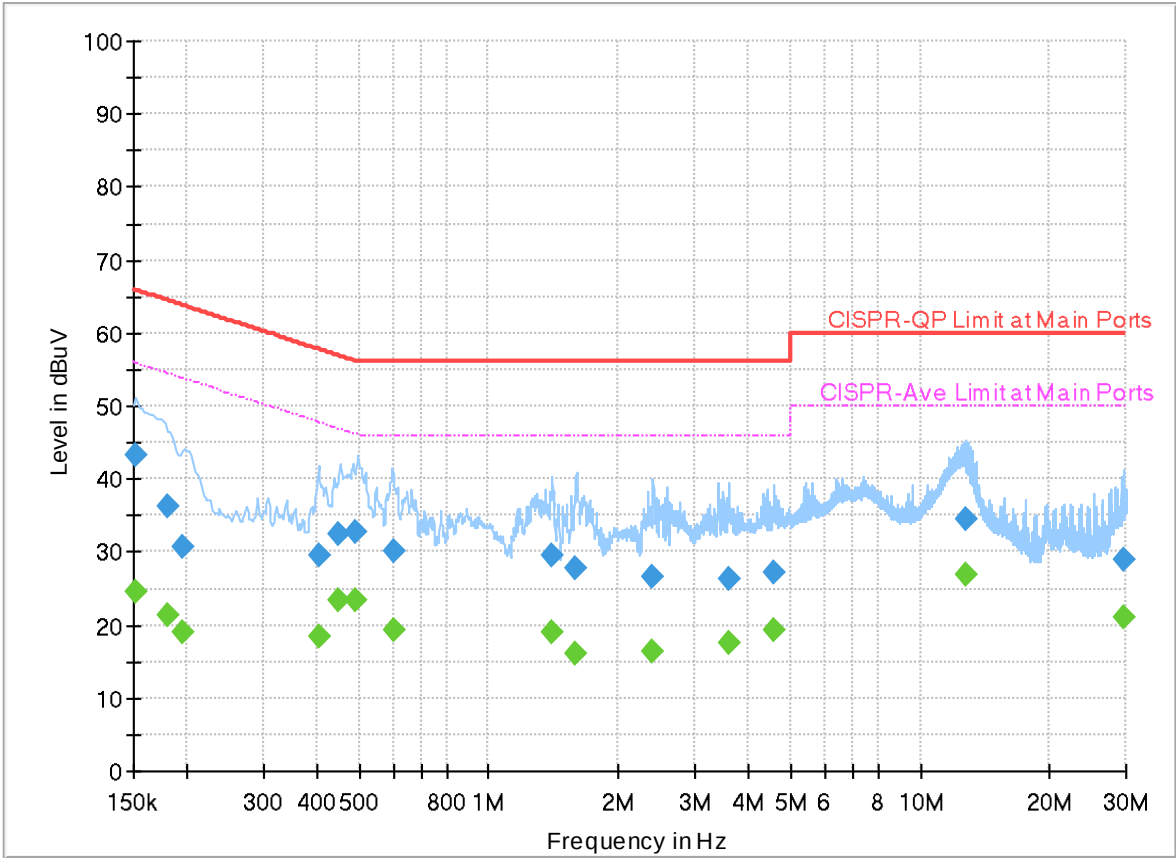

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.152363	---	24.53	55.87	31.34	N	FLO	20.0
0.152363	43.31	---	65.87	22.56	N	FLO	20.0
0.179250	---	21.27	54.52	33.25	N	FLO	20.0
0.179250	36.31	---	64.52	28.21	N	FLO	20.0
0.195000	---	19.07	53.82	34.75	N	FLO	20.0
0.195000	30.83	---	63.82	32.99	N	FLO	20.0
0.402810	---	18.53	47.80	29.27	N	FLO	20.0
0.402810	29.44	---	57.80	28.36	N	FLO	20.0
0.447000	---	23.26	46.93	23.67	N	FLO	20.0
0.447000	32.32	---	56.93	24.61	N	FLO	20.0
0.492000	---	23.41	46.13	22.72	N	FLO	20.0
0.492000	32.69	---	56.13	23.44	N	FLO	20.0
0.600090	---	19.31	46.00	26.69	N	FLO	20.0
0.600090	29.99	---	56.00	26.01	N	FLO	20.0
1.402890	---	19.07	46.00	26.93	N	FLO	20.0
1.402890	29.40	---	56.00	26.60	N	FLO	20.0
1.592250	---	15.98	46.00	30.02	N	FLO	20.0
1.592250	27.91	---	56.00	28.09	N	FLO	20.0
2.397750	---	16.23	46.00	29.77	N	FLO	20.1

2.397750	26.51	---	56.00	29.49	N	FLO	20.1
3.593040	---	17.65	46.00	28.35	N	FLO	20.1
3.593040	26.43	---	56.00	29.57	N	FLO	20.1
4.600500	---	19.18	46.00	26.82	N	FLO	20.2
4.600500	27.21	---	56.00	28.79	N	FLO	20.2
12.786000	---	26.85	50.00	23.15	N	FLO	20.5
12.786000	34.58	---	60.00	25.42	N	FLO	20.5
29.591250	---	21.18	50.00	28.82	N	FLO	21.0
29.591250	28.85	---	60.00	31.15	N	FLO	21.0



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan, Gary Guo, and Steven Wu	Relative Humidity(%):	40 ~ 65
		Temperature(°C):	20 ~ 26

Note symbol

-L	Low channel location
-R	High channel location

C1-1. Radiated Spurious Emission Test Modes

<Sample 1>

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 53	U-NII-4	5.85-5.895	1	802.11a	169	5845	MCS0	-	-
Mode 54	U-NII-4	5.85-5.895	1	802.11a	173	5865	MCS0	-	-
Mode 55	U-NII-4	5.85-5.895	1	802.11a	177	5885	MCS0	-	-
Mode 56	U-NII-4	5.85-5.895	1	802.11ax HE20	169	5845	MCS0	Full RU	-
Mode 57	U-NII-4	5.85-5.895	1	802.11ax HE20	173	5865	MCS0	Full RU	-
Mode 58	U-NII-4	5.85-5.895	1	802.11ax HE20	177	5885	MCS0	Full RU	-
Mode 59	U-NII-4	5.85-5.895	1	802.11ax HE40	167	5835	MCS0	Full RU	-
Mode 60	U-NII-4	5.85-5.895	1	802.11ax HE40	175	5875	MCS0	Full RU	-
Mode 61	U-NII-4	5.85-5.895	1	802.11ax HE80	171	5855	MCS0	Full RU	-
Mode 62	U-NII-4	5.85-5.895	1	802.11ax HE20	177	5885	MCS0	Partial RU 106/54	-
Mode 63	U-NII-4	5.85-5.895	1	802.11ac VHT80	171	5855	MCS0	-	-
Mode 64	U-NII-4	5.85-5.895	1	802.11ax HE20	177	5885	MCS0	Partial RU 106/54	LF



C1-2. Summary of each worse mode



<Sample 1>

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
53	802.11a	169	5617.70	54.66	68.20	-13.54	V	Peak	Pass	-	Band Edge
53	802.11a	169	17535.00	53.77	68.20	-14.43	V	Peak	Pass	-	Harmonic
54	802.11a	173	5634.52	54.80	68.20	-13.40	H	Peak	Pass	-	Band Edge
54	802.11a	173	17595.00	52.78	68.20	-15.42	V	Peak	Pass	-	Harmonic
55	802.11a	177	5641.30	55.53	68.20	-12.67	H	Peak	Pass	-	Band Edge
55	802.11a	177	17655.00	52.65	68.20	-15.55	H	Peak	Pass	-	Harmonic
56	802.11ax HE20	169	5612.39	54.53	68.20	-13.67	V	Peak	Pass	Full RU	Band Edge
56	802.11ax HE20	169	17535.00	52.40	68.20	-15.80	H	Peak	Pass	Full RU	Harmonic
57	802.11ax HE20	173	5605.31	54.08	68.20	-14.12	V	Peak	Pass	Full RU	Band Edge
57	802.11ax HE20	173	17595.00	52.83	68.20	-15.37	H	Peak	Pass	Full RU	Harmonic
58	802.11ax HE20	177	5895.25	78.96	90.02	-11.06	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	177	17655.00	52.80	68.20	-15.40	H	Peak	Pass	Full RU	Harmonic
59	802.11ax HE40	167	5645.73	55.28	68.20	-12.92	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	167	17505.00	53.04	68.20	-15.16	H	Peak	Pass	Full RU	Harmonic
60	802.11ax HE40	175	5922.00	57.28	70.39	-13.11	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	175	17625.00	52.96	68.20	-15.24	H	Peak	Pass	Full RU	Harmonic
61	802.11ax HE80	171	5925.50	61.38	68.20	-6.82	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	171	17565.00	52.89	68.20	-15.31	V	Peak	Pass	Full RU	Harmonic
62	802.11ax HE20	177	5895.25	83.83	90.02	-6.19	H	Avg.	Pass	Partial RU 106/54	Band Edge
	802.11ax HE20	177	-	-	-	-	-	-	-	Partial RU 106/54	Harmonic
63	802.11ac VHT80	171	5926.75	59.30	68.20	-8.90	H	Avg.	Pass	-	Band Edge
	802.11ac VHT80	171	17565.00	52.27	68.20	-15.93	H	Peak	Pass	-	Harmonic
64	LF	177	38.73	33.18	40.00	-6.82	V	QP	Pass	-	LF



Mode	53																																																																																																																																	
	Band Edge - L																																																																																																																																	
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Horizontal						Fundamental																																																																																																																											
Peak	Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5637.47</td><td>54.40</td><td>68.20</td><td>-13.80</td><td>39.35</td><td>33.15</td><td>11.69</td><td>29.79</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>2</td><td>5652.22</td><td>54.22</td><td>69.85</td><td>-15.63</td><td>39.10</td><td>33.22</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>3</td><td>5702.07</td><td>52.99</td><td>105.78</td><td>-52.79</td><td>37.45</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>52.79</td><td>110.95</td><td>-58.16</td><td>37.17</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>							MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5637.47	54.40	68.20	-13.80	39.35	33.15	11.69	29.79	0.00	100	115	Peak	2	5652.22	54.22	69.85	-15.63	39.10	33.22	11.70	29.80	0.00	100	115	Peak	3	5702.07	52.99	105.78	-52.79	37.45	33.61	11.76	29.83	0.00	100	115	Peak	4	5720.07	52.79	110.95	-58.16	37.17	33.68	11.78	29.84	0.00	100	115	Peak	Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>105.80</td><td>-----</td><td>-----</td><td>89.64</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>								MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5845.00	105.80	-----	-----	89.64	34.17	11.90	29.91	0.00	100	115	Peak
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5637.47	54.40	68.20	-13.80	39.35	33.15	11.69	29.79	0.00	100	115	Peak																																																																																																																						
2	5652.22	54.22	69.85	-15.63	39.10	33.22	11.70	29.80	0.00	100	115	Peak																																																																																																																						
3	5702.07	52.99	105.78	-52.79	37.45	33.61	11.76	29.83	0.00	100	115	Peak																																																																																																																						
4	5720.07	52.79	110.95	-58.16	37.17	33.68	11.78	29.84	0.00	100	115	Peak																																																																																																																						
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5845.00	105.80	-----	-----	89.64	34.17	11.90	29.91	0.00	100	115	Peak																																																																																																																						
Avg	Blank						Level (dBuV/m) Frequency (MHz) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th></th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5845.00</td><td>98.79</td><td>-----</td><td>-----</td><td>82.63</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>115</td><td>Average</td></tr></table>								MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5845.00	98.79	-----	-----	82.63	34.17	11.90	29.91	0.00	100	115	Average																																																																														
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
		dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5845.00	98.79	-----	-----	82.63	34.17	11.90	29.91	0.00	100	115	Average																																																																																																																						

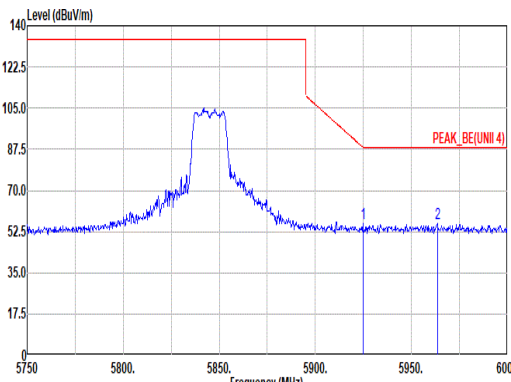
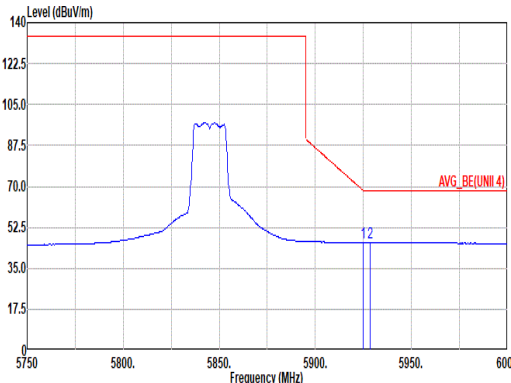


Mode	53																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																								
ANT	1																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>55.06</td><td>88.38</td><td>-32.52</td><td>39.55</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2</td><td>5963.50</td><td>56.22</td><td>88.20</td><td>-31.98</td><td>39.93</td><td>34.27</td><td>12.00</td><td>29.98</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	55.06	88.38	-32.52	39.55	34.30	11.97	29.96	0.00	100	115 Peak	2	5963.50	56.22	88.20	-31.98	39.93	34.27	12.00	29.98	0.00	100	115 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.75	55.06	88.38	-32.52	39.55	34.30	11.97	29.96	0.00	100	115 Peak																																														
2	5963.50	56.22	88.20	-31.98	39.93	34.27	12.00	29.98	0.00	100	115 Peak																																														
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>29.67</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr><tr><td>2</td><td>5928.50</td><td>46.05</td><td>68.20</td><td>-22.15</td><td>29.74</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	45.98	68.20	-22.22	29.67	34.30	11.97	29.96	0.00	100	115 Average	2	5928.50	46.05	68.20	-22.15	29.74	34.30	11.97	29.96	0.00	100	115 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5925.00	45.98	68.20	-22.22	29.67	34.30	11.97	29.96	0.00	100	115 Average																																														
2	5928.50	46.05	68.20	-22.15	29.74	34.30	11.97	29.96	0.00	100	115 Average																																														





Mode	53																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) vs Frequency (MHz) from 5600 to 5895 MHz. The plot shows a blue signal line with peaks labeled 1, 2, 3, and 4. A red limit line labeled 'PEAK_BE(UNII 4)' is shown at 140 dBuV/m. The signal level rises from 70 dBuV/m at 5600 MHz to 105 dBuV/m at 5718 MHz, then drops to 100 dBuV/m at 5836 MHz, and finally drops to 50 dBuV/m at 5895 MHz. Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5617.70</td><td>54.66</td><td>68.20</td><td>-13.54</td><td>39.70</td><td>33.07</td><td>11.67</td><td>29.78</td><td>0.00 321 112 Peak</td></tr><tr><td>2</td><td>5651.04</td><td>53.67</td><td>68.97</td><td>-15.30</td><td>38.56</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00 321 112 Peak</td></tr><tr><td>3</td><td>5700.01</td><td>53.59</td><td>105.20</td><td>-51.61</td><td>38.06</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00 321 112 Peak</td></tr><tr><td>4</td><td>5720.66</td><td>54.93</td><td>112.29</td><td>-57.36</td><td>39.31</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00 321 112 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5617.70	54.66	68.20	-13.54	39.70	33.07	11.67	29.78	0.00 321 112 Peak	2	5651.04	53.67	68.97	-15.30	38.56	33.21	11.70	29.80	0.00 321 112 Peak	3	5700.01	53.59	105.20	-51.61	38.06	33.60	11.76	29.83	0.00 321 112 Peak	4	5720.66	54.93	112.29	-57.36	39.31	33.68	11.78	29.84	0.00 321 112 Peak	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue signal line with a peak labeled 1 at 5845 MHz. A red limit line labeled 'PEAK(UNII 4)' is shown at 140 dBuV/m. The signal level is 50 dBuV/m at 1000 MHz, rises to 100 dBuV/m at 5845 MHz, and then drops to 50 dBuV/m at 7000 MHz. Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>103.44</td><td>-----</td><td>-----</td><td>87.26</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00 321 112 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5845.00	103.44	-----	-----	87.26	34.19	11.90	29.91	0.00 321 112 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1	5617.70	54.66	68.20	-13.54	39.70	33.07	11.67	29.78	0.00 321 112 Peak																																																																																																							
2	5651.04	53.67	68.97	-15.30	38.56	33.21	11.70	29.80	0.00 321 112 Peak																																																																																																							
3	5700.01	53.59	105.20	-51.61	38.06	33.60	11.76	29.83	0.00 321 112 Peak																																																																																																							
4	5720.66	54.93	112.29	-57.36	39.31	33.68	11.78	29.84	0.00 321 112 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1	5845.00	103.44	-----	-----	87.26	34.19	11.90	29.91	0.00 321 112 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. The plot shows a blue signal line with a peak labeled 1 at 5845 MHz. A red limit line labeled 'AVG(UNII 4)' is shown at 140 dBuV/m. The signal level is 50 dBuV/m at 1000 MHz, rises to 100 dBuV/m at 5845 MHz, and then drops to 50 dBuV/m at 7000 MHz. Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>96.21</td><td>-----</td><td>-----</td><td>80.03</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00 321 112 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5845.00	96.21	-----	-----	80.03	34.19	11.90	29.91	0.00 321 112 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1	5845.00	96.21	-----	-----	80.03	34.19	11.90	29.91	0.00 321 112 Average																																																																																																							


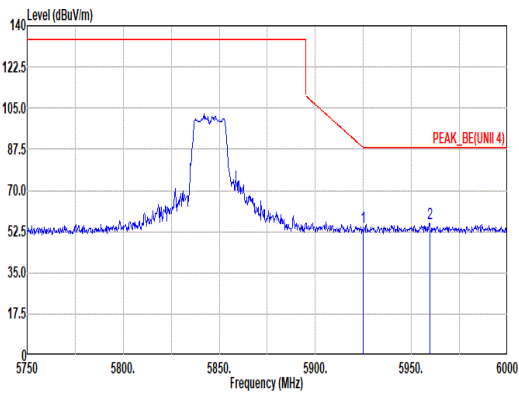
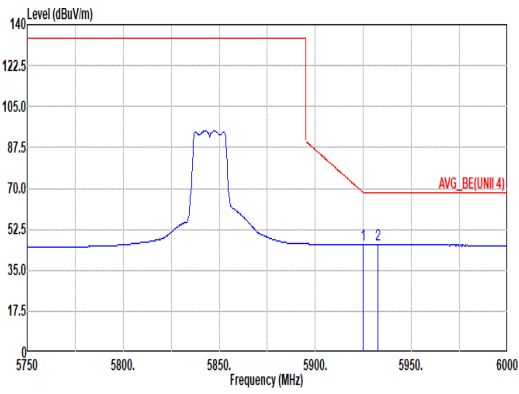


Mode	53																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																			
ANT	1																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>54.22</td><td>88.38</td><td>-34.16</td><td>37.91</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>321</td><td>112</td><td>Peak</td></tr><tr><td>2</td><td>5959.50</td><td>56.08</td><td>88.20</td><td>-32.12</td><td>39.78</td><td>34.28</td><td>12.00</td><td>29.98</td><td>0.00</td><td>321</td><td>112</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	54.22	88.38	-34.16	37.91	34.30	11.97	29.96	0.00	321	112	Peak	2	5959.50	56.08	88.20	-32.12	39.78	34.28	12.00	29.98	0.00	321	112	Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5924.75	54.22	88.38	-34.16	37.91	34.30	11.97	29.96	0.00	321	112	Peak																																																								
2	5959.50	56.08	88.20	-32.12	39.78	34.28	12.00	29.98	0.00	321	112	Peak																																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>45.90</td><td>68.20</td><td>-22.30</td><td>29.59</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>321</td><td>112</td><td>Average</td></tr><tr><td>2</td><td>5932.50</td><td>45.98</td><td>68.20</td><td>-22.22</td><td>29.67</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>321</td><td>112</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	45.90	68.20	-22.30	29.59	34.30	11.97	29.96	0.00	321	112	Average	2	5932.50	45.98	68.20	-22.22	29.67	34.30	11.97	29.96	0.00	321	112	Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5925.00	45.90	68.20	-22.30	29.59	34.30	11.97	29.96	0.00	321	112	Average																																																								
2	5932.50	45.98	68.20	-22.22	29.67	34.30	11.97	29.96	0.00	321	112	Average																																																								

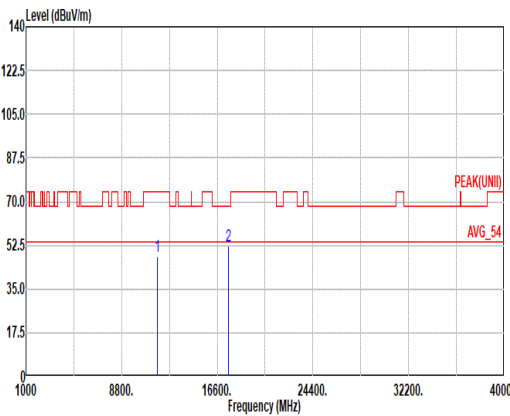
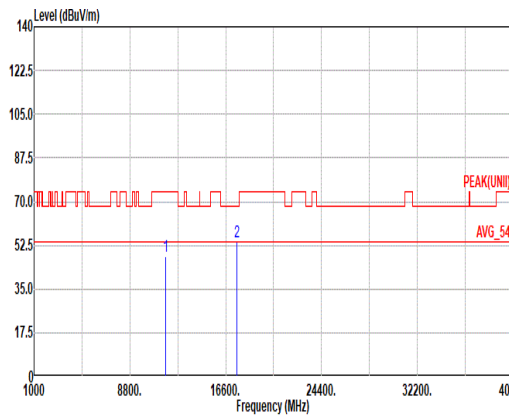


Mode	53																																																																																																																														
	Harmonic																																																																																																																														
	U-NII-4_5.85-5.895_802.11a_CH169_5845MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>57.55</td><td>38.60</td><td>16.90</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17535.00</td><td>52.19</td><td>68.20</td><td>-16.01</td><td>54.45</td><td>39.38</td><td>21.41</td><td>63.67</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	47.83	74.00	-26.17	57.55	38.60	16.90	65.79	0.57	--	Peak	2	17535.00	52.19	68.20	-16.01	54.45	39.38	21.41	63.67	0.62	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>57.61</td><td>38.60</td><td>16.90</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17535.00</td><td>53.77</td><td>68.20</td><td>-14.43</td><td>55.89</td><td>39.49</td><td>21.42</td><td>63.65</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	47.89	74.00	-26.11	57.61	38.60	16.90	65.79	0.57	--	Peak	2	17535.00	53.77	68.20	-14.43	55.89	39.49	21.42	63.65	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	11690.00	47.83	74.00	-26.17	57.55	38.60	16.90	65.79	0.57	--	Peak																																																																																																																				
2	17535.00	52.19	68.20	-16.01	54.45	39.38	21.41	63.67	0.62	--	Peak																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	11690.00	47.89	74.00	-26.11	57.61	38.60	16.90	65.79	0.57	--	Peak																																																																																																																				
2	17535.00	53.77	68.20	-14.43	55.89	39.49	21.42	63.65	0.62	--	Peak																																																																																																																				

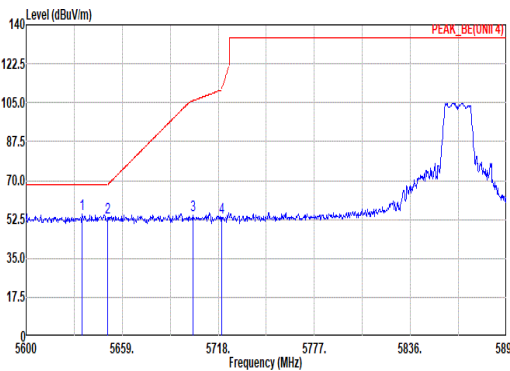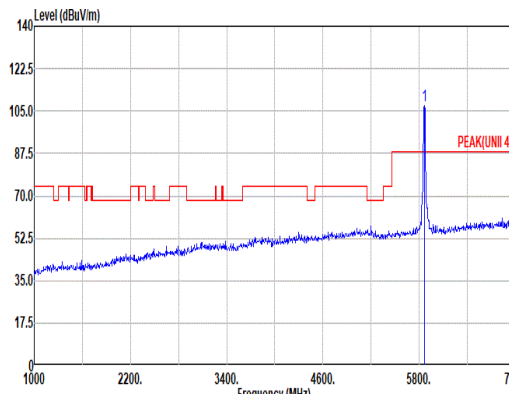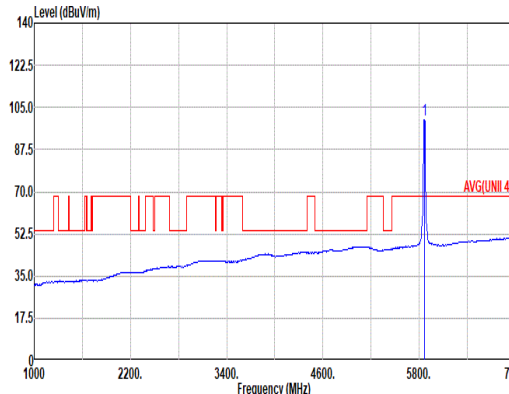

Mode	54																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5634.52</td><td>54.80</td><td>68.20</td><td>-13.40</td><td>39.76</td><td>33.14</td><td>11.69</td><td>29.79</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>2 5658.15</td><td>53.43</td><td>68.31</td><td>-14.88</td><td>38.33</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>3 5702.66</td><td>54.66</td><td>105.95</td><td>-51.29</td><td>39.12</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>4 5720.07</td><td>53.49</td><td>110.95</td><td>-57.46</td><td>37.87</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5634.52	54.80	68.20	-13.40	39.76	33.14	11.69	29.79	0.00	100	23 Peak	2 5658.15	53.43	68.31	-14.88	38.33	33.20	11.70	29.80	0.00	100	23 Peak	3 5702.66	54.66	105.95	-51.29	39.12	33.61	11.76	29.83	0.00	100	23 Peak	4 5720.07	53.49	110.95	-57.46	37.87	33.68	11.78	29.84	0.00	100	23 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5865.00</td><td>107.42</td><td>-----</td><td>-----</td><td>91.19</td><td>34.23</td><td>11.92</td><td>29.92</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5865.00	107.42	-----	-----	91.19	34.23	11.92	29.92	0.00	100	23 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5634.52	54.80	68.20	-13.40	39.76	33.14	11.69	29.79	0.00	100	23 Peak																																																																																																																										
2 5658.15	53.43	68.31	-14.88	38.33	33.20	11.70	29.80	0.00	100	23 Peak																																																																																																																										
3 5702.66	54.66	105.95	-51.29	39.12	33.61	11.76	29.83	0.00	100	23 Peak																																																																																																																										
4 5720.07	53.49	110.95	-57.46	37.87	33.68	11.78	29.84	0.00	100	23 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5865.00	107.42	-----	-----	91.19	34.23	11.92	29.92	0.00	100	23 Peak																																																																																																																										
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5865.00</td><td>99.84</td><td>-----</td><td>-----</td><td>83.63</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>23 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5865.00	99.84	-----	-----	83.63	34.22	11.91	29.92	0.00	100	23 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5865.00	99.84	-----	-----	83.63	34.22	11.91	29.92	0.00	100	23 Average																																																																																																																										

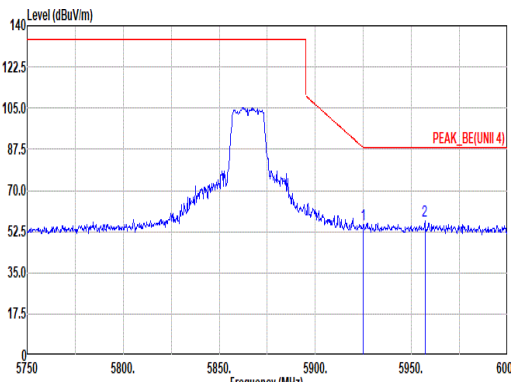
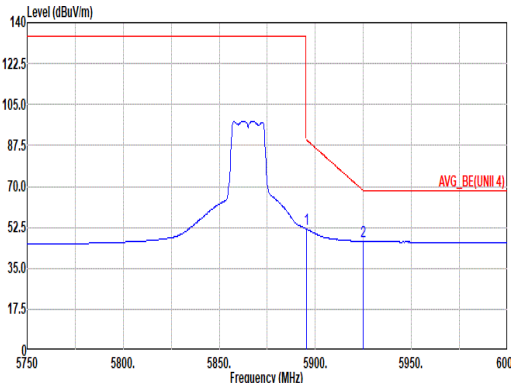


Mode	54																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>55.45</td><td>88.20</td><td>-32.75</td><td>39.14</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>2</td><td>5957.00</td><td>57.23</td><td>88.20</td><td>-30.97</td><td>40.93</td><td>34.29</td><td>11.99</td><td>29.98</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	55.45	88.20	-32.75	39.14	34.30	11.97	29.96	0.00	100	23 Peak	2	5957.00	57.23	88.20	-30.97	40.93	34.29	11.99	29.98	0.00	100	23 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5925.00	55.45	88.20	-32.75	39.14	34.30	11.97	29.96	0.00	100	23 Peak																																																							
2	5957.00	57.23	88.20	-30.97	40.93	34.29	11.99	29.98	0.00	100	23 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>51.79</td><td>90.02</td><td>-38.23</td><td>35.50</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>23 Average</td></tr><tr><td>2</td><td>5925.00</td><td>46.52</td><td>68.20</td><td>-21.68</td><td>30.21</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	51.79	90.02	-38.23	35.50	34.29	11.94	29.94	0.00	100	23 Average	2	5925.00	46.52	68.20	-21.68	30.21	34.30	11.97	29.96	0.00	100	23 Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.25	51.79	90.02	-38.23	35.50	34.29	11.94	29.94	0.00	100	23 Average																																																							
2	5925.00	46.52	68.20	-21.68	30.21	34.30	11.97	29.96	0.00	100	23 Average																																																							





Mode	54																																																																																																															
	Band Edge - L																																																																																																															
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Vertical	Fundamental																																																																																																														
Peak	Level (dBuV/m) vs Frequency (MHz) from 5600 to 5895 MHz. A red limit line rises from 70 dBuV/m at 5600 MHz to 135 dBuV/m at 5718 MHz, then stays flat. A blue trace shows a peak at 5865 MHz reaching 105 dBuV/m. Markers 1-4 are at 5600.26, 5650.15, 5700.01, and 5720.36 MHz. Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5600.26</td><td>54.39</td><td>68.20</td><td>-13.81</td><td>39.47</td><td>33.03</td><td>11.66</td><td>29.77</td><td>0.00</td><td>400 124 Peak</td></tr><tr><td>2 5650.15</td><td>53.20</td><td>68.31</td><td>-15.11</td><td>38.10</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>400 124 Peak</td></tr><tr><td>3 5700.01</td><td>54.67</td><td>105.20</td><td>-50.53</td><td>39.14</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>400 124 Peak</td></tr><tr><td>4 5720.36</td><td>53.29</td><td>111.62</td><td>-58.33</td><td>37.67</td><td>33.60</td><td>11.78</td><td>29.84</td><td>0.00</td><td>400 124 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5600.26	54.39	68.20	-13.81	39.47	33.03	11.66	29.77	0.00	400 124 Peak	2 5650.15	53.20	68.31	-15.11	38.10	33.20	11.70	29.80	0.00	400 124 Peak	3 5700.01	54.67	105.20	-50.53	39.14	33.60	11.76	29.83	0.00	400 124 Peak	4 5720.36	53.29	111.62	-58.33	37.67	33.60	11.78	29.84	0.00	400 124 Peak	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. A red limit line is at 70 dBuV/m from 1000 to 5718 MHz, then rises to 85 dBuV/m. A blue trace shows a peak at 5865 MHz reaching 105 dBuV/m. Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5865.00</td><td>105.27</td><td>-----</td><td>-----</td><td>89.06</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>400 124 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5865.00	105.27	-----	-----	89.06	34.22	11.91	29.92	0.00	400 124 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5600.26	54.39	68.20	-13.81	39.47	33.03	11.66	29.77	0.00	400 124 Peak																																																																																																							
2 5650.15	53.20	68.31	-15.11	38.10	33.20	11.70	29.80	0.00	400 124 Peak																																																																																																							
3 5700.01	54.67	105.20	-50.53	39.14	33.60	11.76	29.83	0.00	400 124 Peak																																																																																																							
4 5720.36	53.29	111.62	-58.33	37.67	33.60	11.78	29.84	0.00	400 124 Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5865.00	105.27	-----	-----	89.06	34.22	11.91	29.92	0.00	400 124 Peak																																																																																																							
Avg	Blank	Level (dBuV/m) vs Frequency (MHz) from 1000 to 7000 MHz. A red limit line is at 70 dBuV/m from 1000 to 5718 MHz, then rises to 70 dBuV/m. A blue trace shows a peak at 5865 MHz reaching 105 dBuV/m. Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5865.00</td><td>98.60</td><td>-----</td><td>-----</td><td>82.37</td><td>34.23</td><td>11.92</td><td>29.92</td><td>0.00</td><td>400 124 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5865.00	98.60	-----	-----	82.37	34.23	11.92	29.92	0.00	400 124 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																							
1 5865.00	98.60	-----	-----	82.37	34.23	11.92	29.92	0.00	400 124 Average																																																																																																							


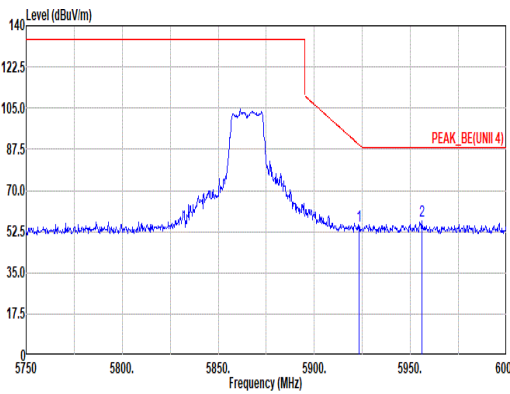
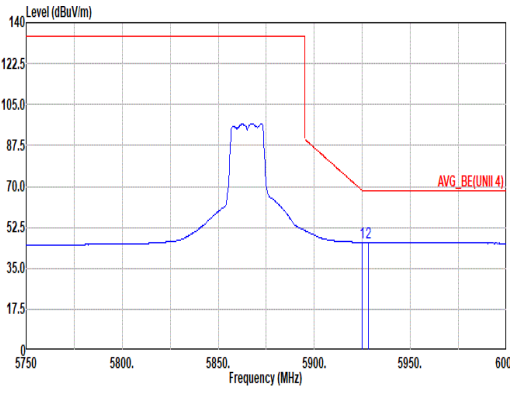


Mode	54																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																	
ANT	1																																																																	
Pol.	Vertical						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.25</td><td>55.02</td><td>89.48</td><td>-34.46</td><td>38.72</td><td>34.30</td><td>11.96</td><td>29.96</td><td>0.00</td><td>400</td><td>124 Peak</td></tr><tr><td>2</td><td>5956.00</td><td>57.00</td><td>88.20</td><td>-31.20</td><td>40.69</td><td>34.29</td><td>11.99</td><td>29.97</td><td>0.00</td><td>400</td><td>124 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.25	55.02	89.48	-34.46	38.72	34.30	11.96	29.96	0.00	400	124 Peak	2	5956.00	57.00	88.20	-31.20	40.69	34.29	11.99	29.97	0.00	400	124 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5923.25	55.02	89.48	-34.46	38.72	34.30	11.96	29.96	0.00	400	124 Peak																																																							
2	5956.00	57.00	88.20	-31.20	40.69	34.29	11.99	29.97	0.00	400	124 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>46.07</td><td>68.20</td><td>-22.13</td><td>29.76</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>400</td><td>124 Average</td></tr><tr><td>2</td><td>5928.00</td><td>46.09</td><td>68.20</td><td>-22.11</td><td>29.78</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>400</td><td>124 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	46.07	68.20	-22.13	29.76	34.30	11.97	29.96	0.00	400	124 Average	2	5928.00	46.09	68.20	-22.11	29.78	34.30	11.97	29.96	0.00	400	124 Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5925.00	46.07	68.20	-22.13	29.76	34.30	11.97	29.96	0.00	400	124 Average																																																							
2	5928.00	46.09	68.20	-22.11	29.78	34.30	11.97	29.96	0.00	400	124 Average																																																							

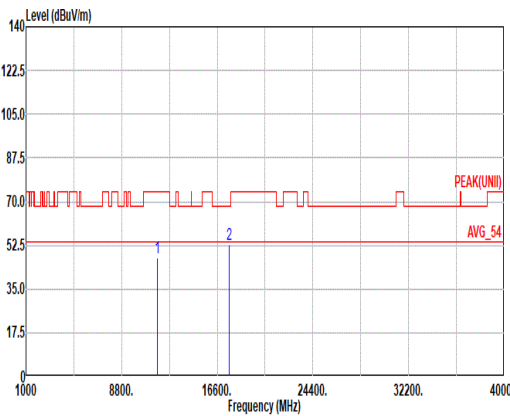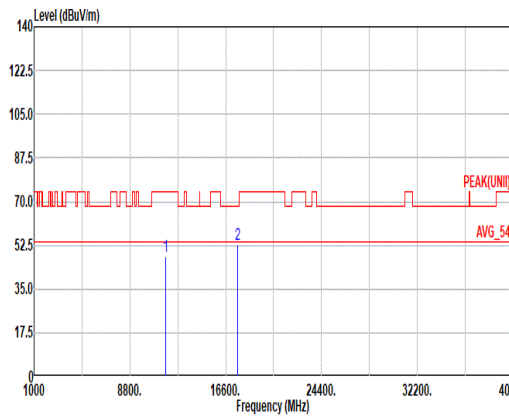

Mode	54																																																																																																																														
	Harmonic																																																																																																																														
	U-NII-4_5.85-5.895_802.11a_CH173_5865MHz																																																																																																																														
ANT	1																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																								
Peak Avg																																																																																																																															
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>47.79</td><td>74.00</td><td>-26.21</td><td>57.47</td><td>38.62</td><td>16.92</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17595.00</td><td>52.75</td><td>68.20</td><td>-15.45</td><td>54.75</td><td>39.54</td><td>21.45</td><td>63.61</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	47.79	74.00	-26.21	57.47	38.62	16.92	65.79	0.57	--	Peak	2	17595.00	52.75	68.20	-15.45	54.75	39.54	21.45	63.61	0.62	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>47.84</td><td>74.00</td><td>-26.16</td><td>57.52</td><td>38.62</td><td>16.92</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17595.00</td><td>52.78</td><td>68.20</td><td>-15.42</td><td>54.78</td><td>39.54</td><td>21.45</td><td>63.61</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	47.84	74.00	-26.16	57.52	38.62	16.92	65.79	0.57	--	Peak	2	17595.00	52.78	68.20	-15.42	54.78	39.54	21.45	63.61	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	11730.00	47.79	74.00	-26.21	57.47	38.62	16.92	65.79	0.57	--	Peak																																																																																																																				
2	17595.00	52.75	68.20	-15.45	54.75	39.54	21.45	63.61	0.62	--	Peak																																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																					
1	11730.00	47.84	74.00	-26.16	57.52	38.62	16.92	65.79	0.57	--	Peak																																																																																																																				
2	17595.00	52.78	68.20	-15.42	54.78	39.54	21.45	63.61	0.62	--	Peak																																																																																																																				

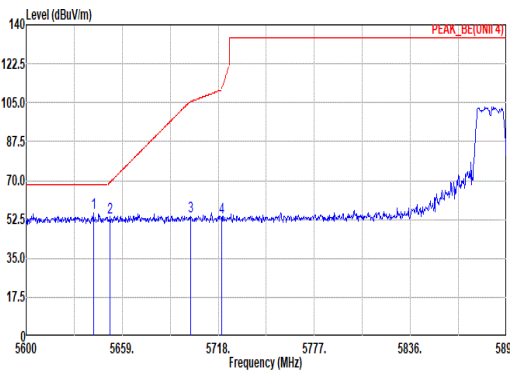
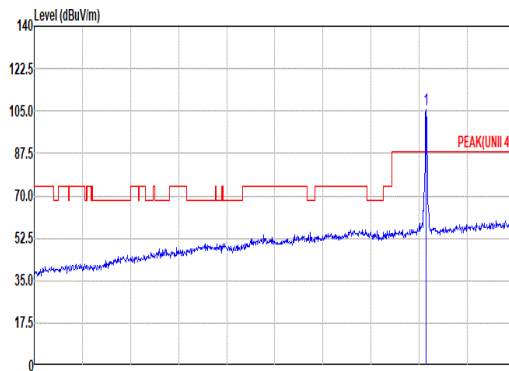
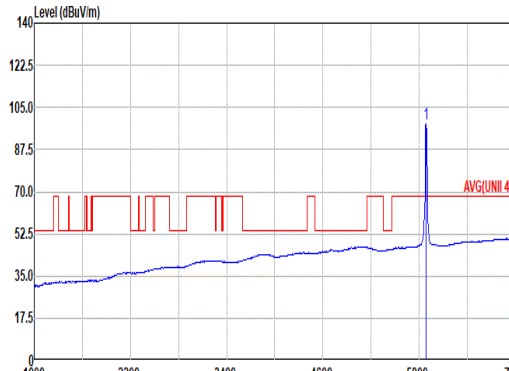


Mode	55																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5641.30</td><td>55.53</td><td>68.20</td><td>-12.67</td><td>40.46</td><td>33.17</td><td>11.69</td><td>29.79</td><td>0.00</td><td>100</td><td>117 Peak</td></tr><tr><td>2 5651.33</td><td>53.58</td><td>69.19</td><td>-15.61</td><td>38.47</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>117 Peak</td></tr><tr><td>3 5700.89</td><td>53.64</td><td>105.45</td><td>-51.81</td><td>38.11</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>117 Peak</td></tr><tr><td>4 5720.07</td><td>53.13</td><td>110.95</td><td>-57.82</td><td>37.51</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>117 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5641.30	55.53	68.20	-12.67	40.46	33.17	11.69	29.79	0.00	100	117 Peak	2 5651.33	53.58	69.19	-15.61	38.47	33.21	11.70	29.80	0.00	100	117 Peak	3 5700.89	53.64	105.45	-51.81	38.11	33.60	11.76	29.83	0.00	100	117 Peak	4 5720.07	53.13	110.95	-57.82	37.51	33.68	11.78	29.84	0.00	100	117 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5885.00</td><td>105.48</td><td>-----</td><td>-----</td><td>89.21</td><td>34.27</td><td>11.93</td><td>29.93</td><td>0.00</td><td>100</td><td>117 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5885.00	105.48	-----	-----	89.21	34.27	11.93	29.93	0.00	100	117 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5641.30	55.53	68.20	-12.67	40.46	33.17	11.69	29.79	0.00	100	117 Peak																																																																																																																										
2 5651.33	53.58	69.19	-15.61	38.47	33.21	11.70	29.80	0.00	100	117 Peak																																																																																																																										
3 5700.89	53.64	105.45	-51.81	38.11	33.60	11.76	29.83	0.00	100	117 Peak																																																																																																																										
4 5720.07	53.13	110.95	-57.82	37.51	33.68	11.78	29.84	0.00	100	117 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5885.00	105.48	-----	-----	89.21	34.27	11.93	29.93	0.00	100	117 Peak																																																																																																																										
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5885.00</td><td>98.11</td><td>-----</td><td>-----</td><td>81.84</td><td>34.27</td><td>11.93</td><td>29.93</td><td>0.00</td><td>100</td><td>117 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5885.00	98.11	-----	-----	81.84	34.27	11.93	29.93	0.00	100	117 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5885.00	98.11	-----	-----	81.84	34.27	11.93	29.93	0.00	100	117 Average																																																																																																																										





Mode	55																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal						Fundamental																																																													
Peak	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.50</td><td>80.88</td><td>109.83</td><td>-28.95</td><td>64.59</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>117</td><td>Peak</td></tr><tr><td>2</td><td>5925.75</td><td>57.47</td><td>88.20</td><td>-30.73</td><td>41.16</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>117</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.50	80.88	109.83	-28.95	64.59	34.29	11.94	29.94	0.00	100	117	Peak	2	5925.75	57.47	88.20	-30.73	41.16	34.30	11.97	29.96	0.00	100	117	Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5895.50	80.88	109.83	-28.95	64.59	34.29	11.94	29.94	0.00	100	117	Peak																																																								
2	5925.75	57.47	88.20	-30.73	41.16	34.30	11.97	29.96	0.00	100	117	Peak																																																								
Avg	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>67.90</td><td>90.02</td><td>-22.12</td><td>51.61</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>117</td><td>Average</td></tr><tr><td>2</td><td>5925.50</td><td>47.23</td><td>68.20</td><td>-20.97</td><td>30.92</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>117</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	67.90	90.02	-22.12	51.61	34.29	11.94	29.94	0.00	100	117	Average	2	5925.50	47.23	68.20	-20.97	30.92	34.30	11.97	29.96	0.00	100	117	Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5895.25	67.90	90.02	-22.12	51.61	34.29	11.94	29.94	0.00	100	117	Average																																																								
2	5925.50	47.23	68.20	-20.97	30.92	34.30	11.97	29.96	0.00	100	117	Average																																																								

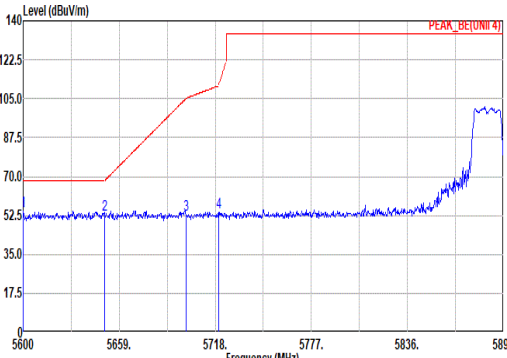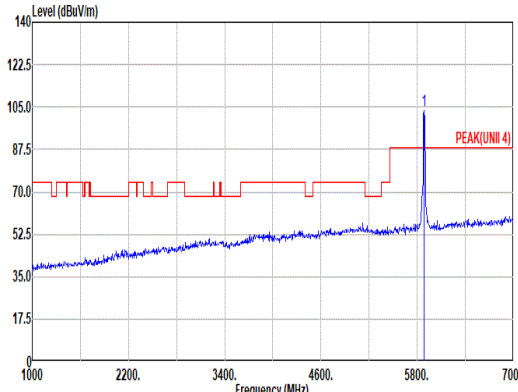
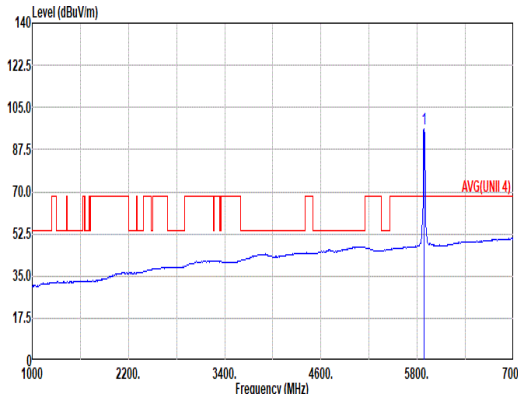


Mode	55																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5600.00</td><td>54.64</td><td>68.20</td><td>-13.56</td><td>39.76</td><td>33.00</td><td>11.65</td><td>29.77</td><td>0.00</td><td>331</td><td>111 Peak</td></tr><tr><td>2 5658.15</td><td>53.09</td><td>68.31</td><td>-15.22</td><td>37.99</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>331</td><td>111 Peak</td></tr><tr><td>3 5700.01</td><td>52.69</td><td>105.20</td><td>-52.51</td><td>37.16</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>331</td><td>111 Peak</td></tr><tr><td>4 5720.07</td><td>53.72</td><td>110.95</td><td>-57.23</td><td>38.10</td><td>33.60</td><td>11.78</td><td>29.84</td><td>0.00</td><td>331</td><td>111 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5600.00	54.64	68.20	-13.56	39.76	33.00	11.65	29.77	0.00	331	111 Peak	2 5658.15	53.09	68.31	-15.22	37.99	33.20	11.70	29.80	0.00	331	111 Peak	3 5700.01	52.69	105.20	-52.51	37.16	33.60	11.76	29.83	0.00	331	111 Peak	4 5720.07	53.72	110.95	-57.23	38.10	33.60	11.78	29.84	0.00	331	111 Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>103.49</td><td>-----</td><td>-----</td><td>87.21</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>331</td><td>111 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	103.49	-----	-----	87.21	34.28	11.94	29.94	0.00	331	111 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5600.00	54.64	68.20	-13.56	39.76	33.00	11.65	29.77	0.00	331	111 Peak																																																																																																																										
2 5658.15	53.09	68.31	-15.22	37.99	33.20	11.70	29.80	0.00	331	111 Peak																																																																																																																										
3 5700.01	52.69	105.20	-52.51	37.16	33.60	11.76	29.83	0.00	331	111 Peak																																																																																																																										
4 5720.07	53.72	110.95	-57.23	38.10	33.60	11.78	29.84	0.00	331	111 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	103.49	-----	-----	87.21	34.28	11.94	29.94	0.00	331	111 Peak																																																																																																																										
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>96.03</td><td>-----</td><td>-----</td><td>79.75</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>331</td><td>111 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	96.03	-----	-----	79.75	34.28	11.94	29.94	0.00	331	111 Average																																																																													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	96.03	-----	-----	79.75	34.28	11.94	29.94	0.00	331	111 Average																																																																																																																										


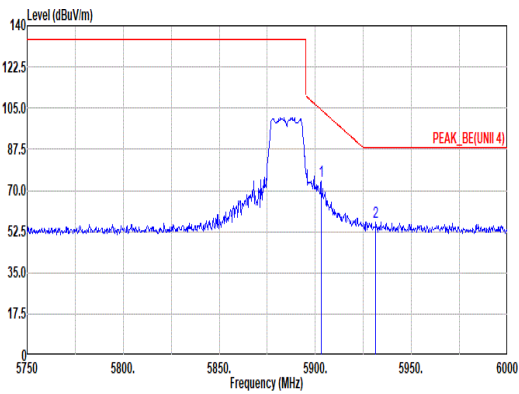
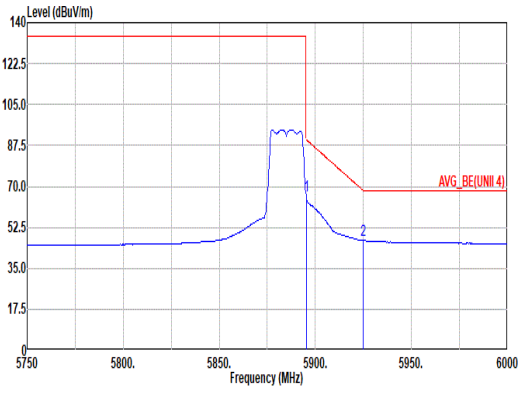


Mode	55																																																											
	Band Edge - R																																																											
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																											
ANT	1																																																											
Pol.	Vertical						Fundamental																																																					
Peak							Blank																																																					
	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5903.00</td><td>73.99</td><td>104.32</td><td>-30.33</td><td>57.68</td><td>34.30</td><td>11.95</td><td>29.94</td><td>0.00</td><td>331</td><td>111 Peak</td></tr><tr><td>2</td><td>5931.50</td><td>56.76</td><td>88.20</td><td>-31.44</td><td>40.45</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>331</td><td>111 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5903.00	73.99	104.32	-30.33	57.68	34.30	11.95	29.94	0.00	331	111 Peak	2	5931.50	56.76	88.20	-31.44	40.45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	5903.00	73.99	104.32	-30.33	57.68	34.30	11.95	29.94	0.00	331	111 Peak																																																	
2	5931.50	56.76	88.20	-31.44	40.45	34.30	11.97	29.96	0.00	331	111 Peak																																																	
Avg							Blank																																																					
	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>66.00</td><td>90.02</td><td>-24.02</td><td>49.71</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>331</td><td>111 Average</td></tr><tr><td>2</td><td>5925.00</td><td>46.81</td><td>68.20</td><td>-21.39</td><td>30.50</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>331</td><td>111 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	66.00	90.02	-24.02	49.71	34.29	11.94	29.94	0.00	331	111 Average	2	5925.00	46.81	68.20	-21.39	30.50
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	5895.25	66.00	90.02	-24.02	49.71	34.29	11.94	29.94	0.00	331	111 Average																																																	
2	5925.00	46.81	68.20	-21.39	30.50	34.30	11.97	29.96	0.00	331	111 Average																																																	

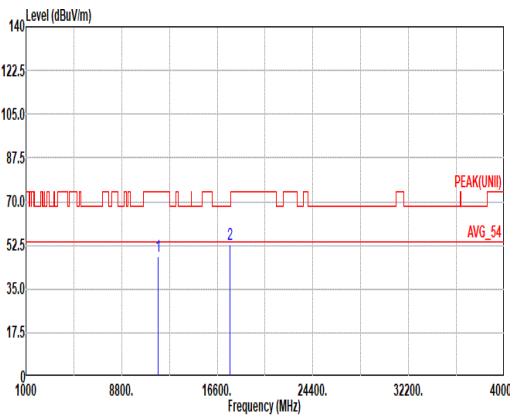
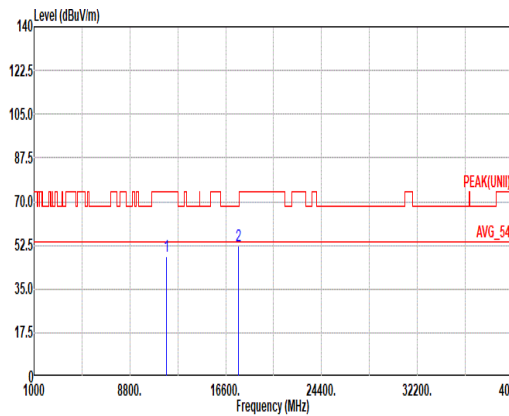


Mode	55																																																																		
	Harmonic																																																																		
	U-NII-4_5.85-5.895_802.11a_CH177_5885MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal						Vertical																																																												
Peak Avg																																																																			
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>47.82</td><td>74.00</td><td>-26.18</td><td>57.39</td><td>38.70</td><td>16.99</td><td>65.82</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17655.00</td><td>52.65</td><td>68.20</td><td>-15.55</td><td>54.26</td><td>39.70</td><td>21.55</td><td>63.48</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	47.82	74.00	-26.18	57.39	38.70	16.99	65.82	0.56	--	Peak	2	17655.00	52.65	68.20	-15.55	54.26	39.70	21.55	63.48	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	11770.00	47.82	74.00	-26.18	57.39	38.70	16.99	65.82	0.56	--	Peak																																																								
2	17655.00	52.65	68.20	-15.55	54.26	39.70	21.55	63.48	0.62	--	Peak																																																								

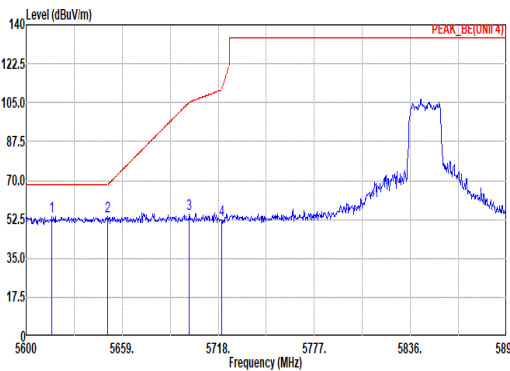
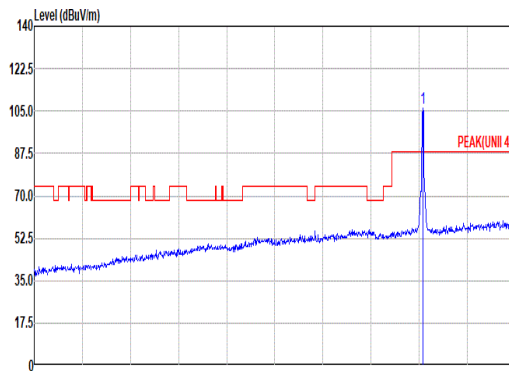
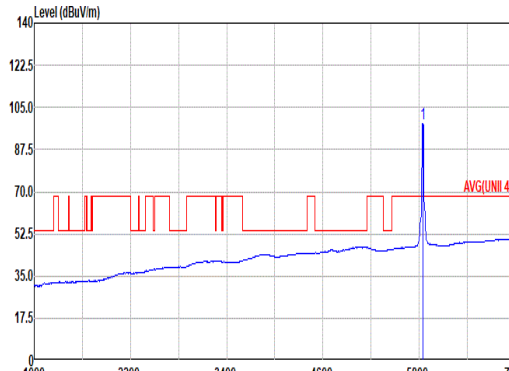


Mode	56																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Fundamental																																																																																																																										
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5615.93</td><td>54.00</td><td>68.20</td><td>-14.20</td><td>39.05</td><td>33.06</td><td>11.67</td><td>29.78</td><td>0.00</td><td>100</td><td>116 Peak</td></tr><tr><td>2 5658.15</td><td>53.94</td><td>68.31</td><td>-14.37</td><td>38.84</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>116 Peak</td></tr><tr><td>3 5700.30</td><td>54.72</td><td>105.28</td><td>-50.56</td><td>39.19</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>116 Peak</td></tr><tr><td>4 5720.07</td><td>52.55</td><td>110.95</td><td>-58.40</td><td>36.93</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>116 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5615.93	54.00	68.20	-14.20	39.05	33.06	11.67	29.78	0.00	100	116 Peak	2 5658.15	53.94	68.31	-14.37	38.84	33.20	11.70	29.80	0.00	100	116 Peak	3 5700.30	54.72	105.28	-50.56	39.19	33.60	11.76	29.83	0.00	100	116 Peak	4 5720.07	52.55	110.95	-58.40	36.93	33.68	11.78	29.84	0.00	100	116 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5845.00</td><td>106.24</td><td>-----</td><td>-----</td><td>90.06</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>116 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5845.00	106.24	-----	-----	90.06	34.19	11.90	29.91	0.00	100	116 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1 5615.93	54.00	68.20	-14.20	39.05	33.06	11.67	29.78	0.00	100	116 Peak																																																																																																																							
2 5658.15	53.94	68.31	-14.37	38.84	33.20	11.70	29.80	0.00	100	116 Peak																																																																																																																							
3 5700.30	54.72	105.28	-50.56	39.19	33.60	11.76	29.83	0.00	100	116 Peak																																																																																																																							
4 5720.07	52.55	110.95	-58.40	36.93	33.68	11.78	29.84	0.00	100	116 Peak																																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1 5845.00	106.24	-----	-----	90.06	34.19	11.90	29.91	0.00	100	116 Peak																																																																																																																							
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5845.00</td><td>98.31</td><td>-----</td><td>-----</td><td>82.15</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>116 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5845.00	98.31	-----	-----	82.15	34.17	11.90	29.91	0.00	100	116 Average																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																							
1 5845.00	98.31	-----	-----	82.15	34.17	11.90	29.91	0.00	100	116 Average																																																																																																																							

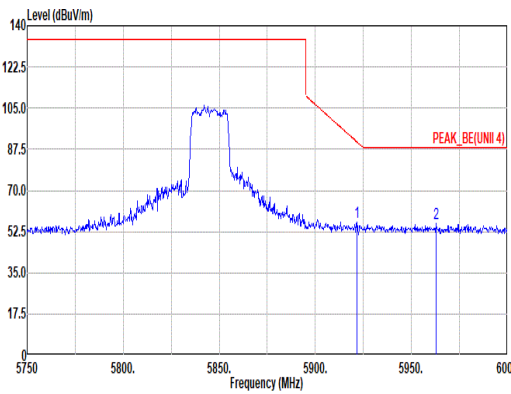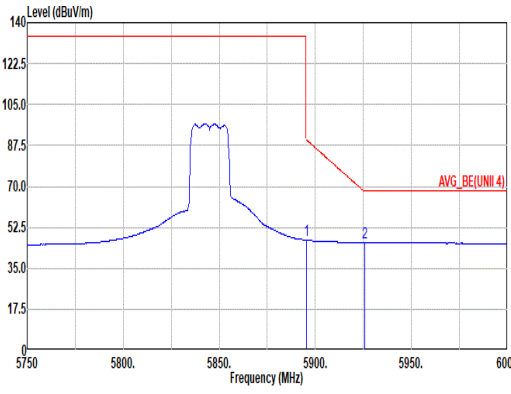

Mode	56																																																											
	Band Edge - R																																																											
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																											
ANT	1																																																											
Pol.	Horizontal						Fundamental																																																					
Peak							Blank																																																					
	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.50</td><td>56.71</td><td>90.76</td><td>-34.05</td><td>40.40</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>100</td><td>116 Peak</td></tr><tr><td>2</td><td>5963.00</td><td>55.84</td><td>88.20</td><td>-32.36</td><td>39.55</td><td>34.27</td><td>12.00</td><td>29.98</td><td>0.00</td><td>100</td><td>116 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.50	56.71	90.76	-34.05	40.40	34.30	11.96	29.95	0.00	100	116 Peak	2	5963.00	55.84	88.20	-32.36	39.55
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	5921.50	56.71	90.76	-34.05	40.40	34.30	11.96	29.95	0.00	100	116 Peak																																																	
2	5963.00	55.84	88.20	-32.36	39.55	34.27	12.00	29.98	0.00	100	116 Peak																																																	
Avg							Blank																																																					
	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>47.04</td><td>90.02</td><td>-42.98</td><td>30.75</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>116 Average</td></tr><tr><td>2</td><td>5925.75</td><td>46.06</td><td>68.20</td><td>-22.14</td><td>29.75</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>116 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	47.04	90.02	-42.98	30.75	34.29	11.94	29.94	0.00	100	116 Average	2	5925.75	46.06	68.20	-22.14	29.75
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																		
1	5895.25	47.04	90.02	-42.98	30.75	34.29	11.94	29.94	0.00	100	116 Average																																																	
2	5925.75	46.06	68.20	-22.14	29.75	34.30	11.97	29.96	0.00	100	116 Average																																																	

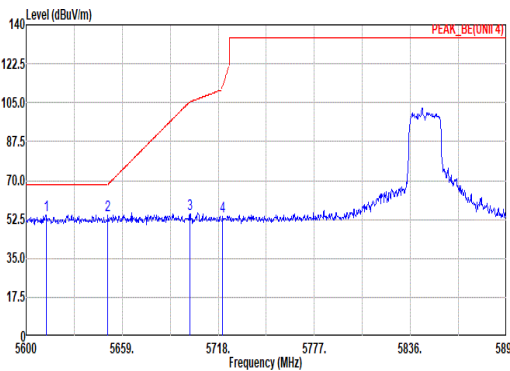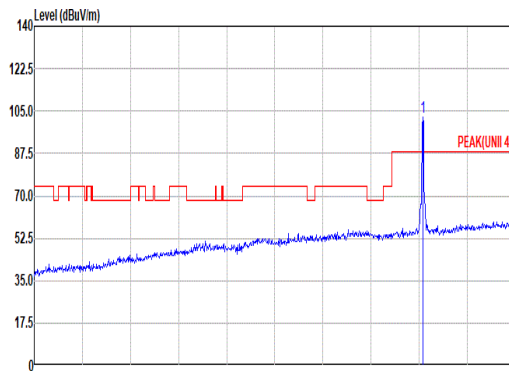
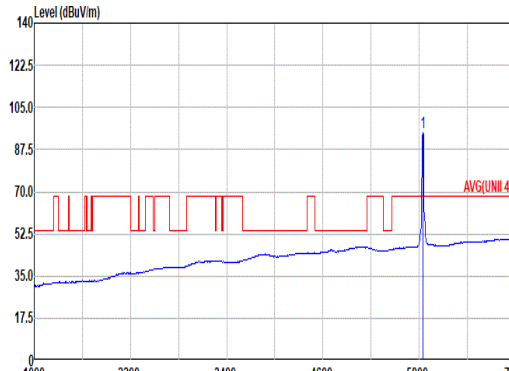


Mode	56																																																																																																																		
	Band Edge - L																																																																																																																		
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Vertical						Fundamental																																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5612.39</td><td>54.53</td><td>68.20</td><td>-13.67</td><td>39.60</td><td>33.05</td><td>11.66</td><td>29.78</td><td>0.00</td><td>200</td><td>62 Peak</td></tr><tr><td>2</td><td>5658.15</td><td>54.51</td><td>68.31</td><td>-13.80</td><td>39.41</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>200</td><td>62 Peak</td></tr><tr><td>3</td><td>5700.60</td><td>54.97</td><td>105.37</td><td>-50.40</td><td>39.44</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>200</td><td>62 Peak</td></tr><tr><td>4</td><td>5720.66</td><td>54.06</td><td>112.29</td><td>-58.23</td><td>38.44</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>200</td><td>62 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5612.39	54.53	68.20	-13.67	39.60	33.05	11.66	29.78	0.00	200	62 Peak	2	5658.15	54.51	68.31	-13.80	39.41	33.20	11.70	29.80	0.00	200	62 Peak	3	5700.60	54.97	105.37	-50.40	39.44	33.60	11.76	29.83	0.00	200	62 Peak	4	5720.66	54.06	112.29	-58.23	38.44	33.68	11.78	29.84	0.00	200	62 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>102.50</td><td>-----</td><td>-----</td><td>86.32</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00</td><td>200</td><td>62 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5845.00	102.50	-----	-----	86.32	34.19	11.90	29.91	0.00	200	62 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5612.39	54.53	68.20	-13.67	39.60	33.05	11.66	29.78	0.00	200	62 Peak																																																																																																								
2	5658.15	54.51	68.31	-13.80	39.41	33.20	11.70	29.80	0.00	200	62 Peak																																																																																																								
3	5700.60	54.97	105.37	-50.40	39.44	33.60	11.76	29.83	0.00	200	62 Peak																																																																																																								
4	5720.66	54.06	112.29	-58.23	38.44	33.68	11.78	29.84	0.00	200	62 Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5845.00	102.50	-----	-----	86.32	34.19	11.90	29.91	0.00	200	62 Peak																																																																																																								
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5845.00</td><td>94.36</td><td>-----</td><td>-----</td><td>78.18</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00</td><td>200</td><td>62 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5845.00	94.36	-----	-----	78.18	34.19	11.90	29.91	0.00	200	62 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5845.00	94.36	-----	-----	78.18	34.19	11.90	29.91	0.00	200	62 Average																																																																																																								






Mode	56																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																	
ANT	1																																																																	
Pol.	Vertical						Fundamental																																																											
Peak	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>53.66</td><td>88.57</td><td>-34.91</td><td>37.35</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>200</td><td>62 Peak</td></tr><tr><td>2</td><td>5962.50</td><td>56.54</td><td>88.20</td><td>-31.66</td><td>40.24</td><td>34.28</td><td>12.00</td><td>29.98</td><td>0.00</td><td>200</td><td>62 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.50	53.66	88.57	-34.91	37.35	34.30	11.97	29.96	0.00	200	62 Peak	2	5962.50	56.54	88.20	-31.66	40.24	34.28	12.00	29.98	0.00	200	62 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5924.50	53.66	88.57	-34.91	37.35	34.30	11.97	29.96	0.00	200	62 Peak																																																							
2	5962.50	56.54	88.20	-31.66	40.24	34.28	12.00	29.98	0.00	200	62 Peak																																																							
Avg	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>46.33</td><td>90.02</td><td>-43.69</td><td>30.04</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>200</td><td>62 Average</td></tr><tr><td>2</td><td>5925.75</td><td>45.92</td><td>68.20</td><td>-22.28</td><td>29.61</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>200</td><td>62 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	46.33	90.02	-43.69	30.04	34.29	11.94	29.94	0.00	200	62 Average	2	5925.75	45.92	68.20	-22.28	29.61	34.30	11.97	29.96	0.00	200	62 Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.25	46.33	90.02	-43.69	30.04	34.29	11.94	29.94	0.00	200	62 Average																																																							
2	5925.75	45.92	68.20	-22.28	29.61	34.30	11.97	29.96	0.00	200	62 Average																																																							

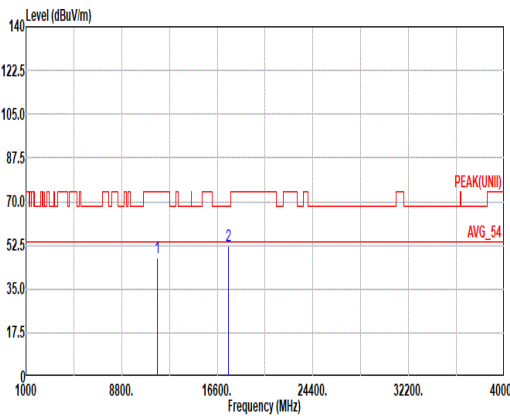
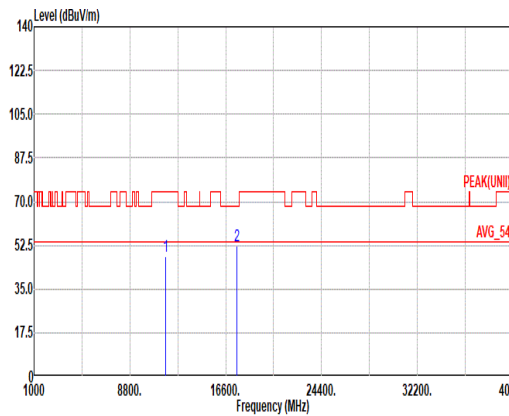


Mode	56																																																																	
	Harmonic																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH169_Full RU_5845MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11690.00</td><td>47.81</td><td>74.00</td><td>-26.19</td><td>57.53</td><td>38.60</td><td>16.90</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17535.00</td><td>52.40</td><td>68.20</td><td>-15.80</td><td>54.66</td><td>39.38</td><td>21.41</td><td>63.67</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11690.00	47.81	74.00	-26.19	57.53	38.60	16.90	65.79	0.57	--	Peak	2	17535.00	52.40	68.20	-15.80	54.66	39.38	21.41	63.67	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	11690.00	47.81	74.00	-26.19	57.53	38.60	16.90	65.79	0.57	--	Peak																																																							
2	17535.00	52.40	68.20	-15.80	54.66	39.38	21.41	63.67	0.62	--	Peak																																																							

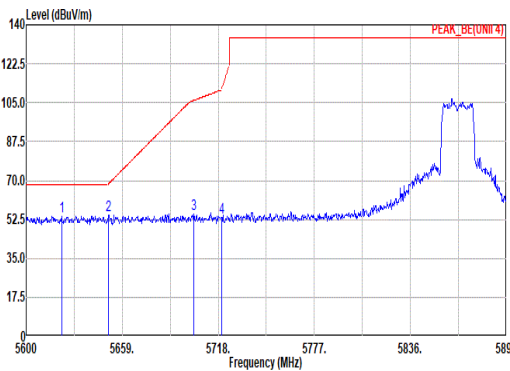
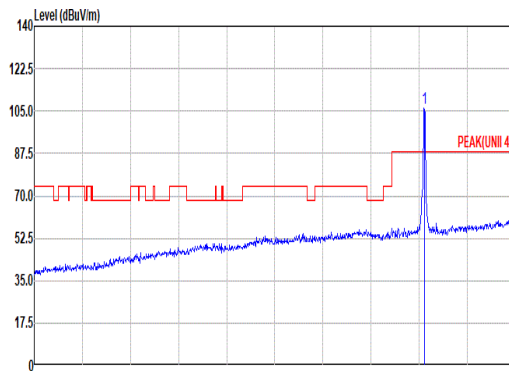
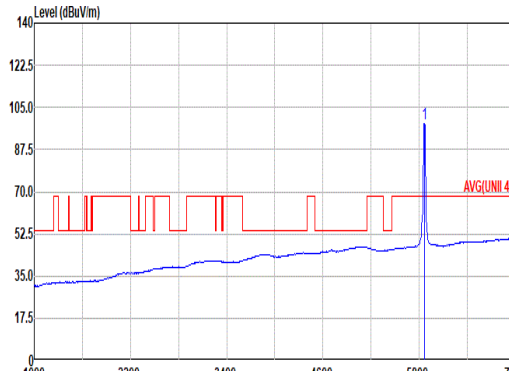


Mode	57																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5621.83</td><td>54.06</td><td>68.20</td><td>-14.14</td><td>39.00</td><td>33.09</td><td>11.67</td><td>29.78</td><td>0.00</td><td>100</td><td>172 Peak</td></tr><tr><td>2 5658.74</td><td>54.20</td><td>68.75</td><td>-14.55</td><td>39.09</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>172 Peak</td></tr><tr><td>3 5702.96</td><td>54.74</td><td>106.03</td><td>-51.29</td><td>39.20</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>172 Peak</td></tr><tr><td>4 5720.07</td><td>53.25</td><td>110.95</td><td>-57.70</td><td>37.63</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>172 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5621.83	54.06	68.20	-14.14	39.00	33.09	11.67	29.78	0.00	100	172 Peak	2 5658.74	54.20	68.75	-14.55	39.09	33.21	11.70	29.80	0.00	100	172 Peak	3 5702.96	54.74	106.03	-51.29	39.20	33.61	11.76	29.83	0.00	100	172 Peak	4 5720.07	53.25	110.95	-57.70	37.63	33.68	11.78	29.84	0.00	100	172 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5865.00</td><td>106.34</td><td>-----</td><td>-----</td><td>90.13</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>172 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5865.00	106.34	-----	-----	90.13	34.22	11.91	29.92	0.00	100	172 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5621.83	54.06	68.20	-14.14	39.00	33.09	11.67	29.78	0.00	100	172 Peak																																																																																																																										
2 5658.74	54.20	68.75	-14.55	39.09	33.21	11.70	29.80	0.00	100	172 Peak																																																																																																																										
3 5702.96	54.74	106.03	-51.29	39.20	33.61	11.76	29.83	0.00	100	172 Peak																																																																																																																										
4 5720.07	53.25	110.95	-57.70	37.63	33.68	11.78	29.84	0.00	100	172 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5865.00	106.34	-----	-----	90.13	34.22	11.91	29.92	0.00	100	172 Peak																																																																																																																										
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5865.00</td><td>98.32</td><td>-----</td><td>-----</td><td>82.11</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>100</td><td>172 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5865.00	98.32	-----	-----	82.11	34.22	11.91	29.92	0.00	100	172 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5865.00	98.32	-----	-----	82.11	34.22	11.91	29.92	0.00	100	172 Average																																																																																																																										

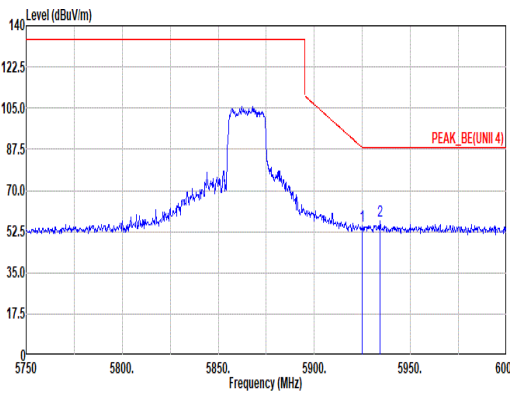
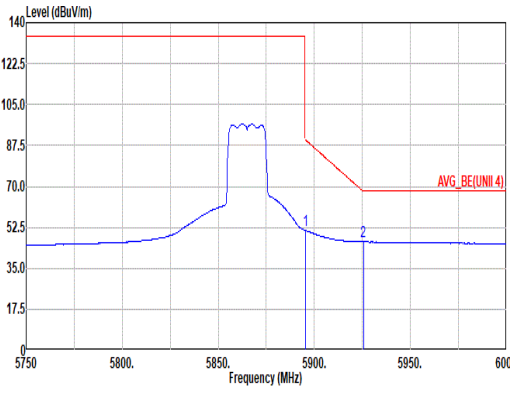


Mode	57																																																																				
	Band Edge - R																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																				
ANT	1																																																																				
Pol.	Horizontal						Fundamental																																																														
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>55.19</td><td>88.20</td><td>-33.01</td><td>38.88</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>172</td><td>Peak</td></tr><tr><td>2</td><td>5934.00</td><td>57.15</td><td>88.20</td><td>-31.05</td><td>40.84</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>172</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	55.19	88.20	-33.01	38.88	34.30	11.97	29.96	0.00	100	172	Peak	2	5934.00	57.15	88.20	-31.05	40.84	34.30	11.97	29.96	0.00	100	172	Peak	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5925.00	55.19	88.20	-33.01	38.88	34.30	11.97	29.96	0.00	100	172	Peak																																																									
2	5934.00	57.15	88.20	-31.05	40.84	34.30	11.97	29.96	0.00	100	172	Peak																																																									
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>51.24</td><td>90.02</td><td>-38.78</td><td>34.95</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>172</td><td>Average</td></tr><tr><td>2</td><td>5925.50</td><td>46.29</td><td>68.20</td><td>-21.91</td><td>29.98</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>172</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	51.24	90.02	-38.78	34.95	34.29	11.94	29.94	0.00	100	172	Average	2	5925.50	46.29	68.20	-21.91	29.98	34.30	11.97	29.96	0.00	100	172	Average	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																											
1	5895.25	51.24	90.02	-38.78	34.95	34.29	11.94	29.94	0.00	100	172	Average																																																									
2	5925.50	46.29	68.20	-21.91	29.98	34.30	11.97	29.96	0.00	100	172	Average																																																									

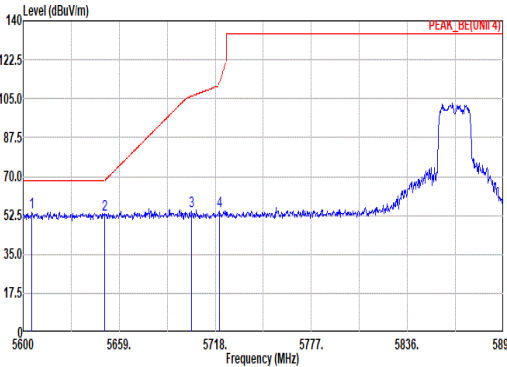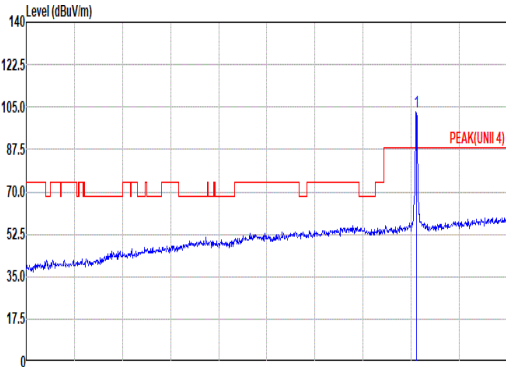
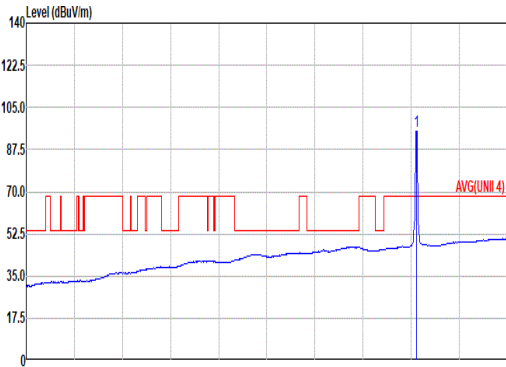


Mode	57																																																																																																																															
	Band Edge - L																																																																																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Vertical						Fundamental																																																																																																																									
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)						 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)																																																																																																																									
	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5605.31</td><td>54.08</td><td>68.20</td><td>-14.12</td><td>39.17</td><td>33.02</td><td>11.66</td><td>29.77</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr><tr><td>2</td><td>5658.15</td><td>52.77</td><td>68.31</td><td>-15.54</td><td>37.67</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr><tr><td>3</td><td>5703.55</td><td>54.59</td><td>106.19</td><td>-51.60</td><td>39.05</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr><tr><td>4</td><td>5720.36</td><td>54.17</td><td>111.62</td><td>-57.45</td><td>38.55</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5605.31	54.08	68.20	-14.12	39.17	33.02	11.66	29.77	0.00	316	109	Peak	2	5658.15	52.77	68.31	-15.54	37.67	33.20	11.70	29.80	0.00	316	109	Peak	3	5703.55	54.59	106.19	-51.60	39.05	33.61	11.76	29.83	0.00	316	109	Peak	4	5720.36	54.17	111.62	-57.45	38.55	33.68	11.78	29.84	0.00	316	109	Peak	Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>103.13</td><td>-----</td><td>-----</td><td>86.92</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5865.00	103.13	-----	-----	86.92	34.22	11.91	29.92	0.00	316	109
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5605.31	54.08	68.20	-14.12	39.17	33.02	11.66	29.77	0.00	316	109	Peak																																																																																																																				
2	5658.15	52.77	68.31	-15.54	37.67	33.20	11.70	29.80	0.00	316	109	Peak																																																																																																																				
3	5703.55	54.59	106.19	-51.60	39.05	33.61	11.76	29.83	0.00	316	109	Peak																																																																																																																				
4	5720.36	54.17	111.62	-57.45	38.55	33.68	11.78	29.84	0.00	316	109	Peak																																																																																																																				
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5865.00	103.13	-----	-----	86.92	34.22	11.91	29.92	0.00	316	109	Peak																																																																																																																				
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)																																																																																																																									
							Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5865.00</td><td>95.25</td><td>-----</td><td>-----</td><td>79.04</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>316</td><td>109</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5865.00	95.25	-----	-----	79.04	34.22	11.91	29.92	0.00	316	109	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																				
1	5865.00	95.25	-----	-----	79.04	34.22	11.91	29.92	0.00	316	109	Average																																																																																																																				


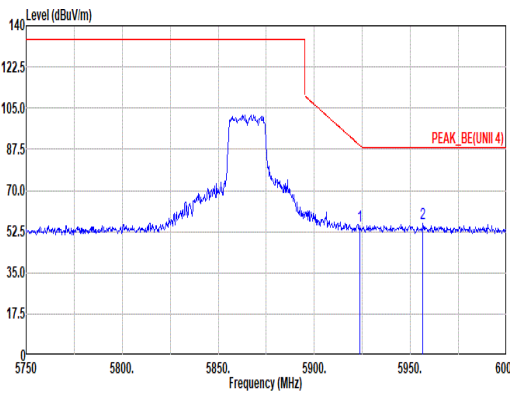
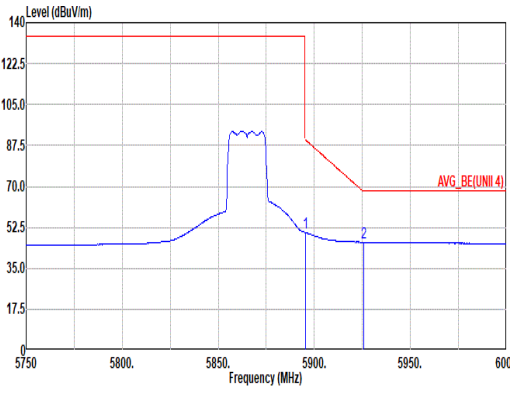


Mode	57																																																										
	Band Edge - R																																																										
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																										
ANT	1																																																										
Pol.	Vertical	Fundamental																																																									
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.75</td><td>55.13</td><td>89.11</td><td>-33.98</td><td>38.82</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr><tr><td>2</td><td>5956.50</td><td>55.98</td><td>88.20</td><td>-32.22</td><td>39.67</td><td>34.29</td><td>11.99</td><td>29.97</td><td>0.00</td><td>316</td><td>109</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.75	55.13	89.11	-33.98	38.82	34.30	11.97	29.96	0.00	316	109	Peak	2	5956.50	55.98	88.20	-32.22	39.67	34.29	11.99	29.97	0.00	316	109	Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5923.75	55.13	89.11	-33.98	38.82	34.30	11.97	29.96	0.00	316	109	Peak																																															
2	5956.50	55.98	88.20	-32.22	39.67	34.29	11.99	29.97	0.00	316	109	Peak																																															
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>50.28</td><td>90.02</td><td>-39.74</td><td>33.99</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>316</td><td>109</td><td>Average</td></tr><tr><td>2</td><td>5925.75</td><td>46.21</td><td>68.20</td><td>-21.99</td><td>29.90</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>316</td><td>109</td><td>Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	50.28	90.02	-39.74	33.99	34.29	11.94	29.94	0.00	316	109	Average	2	5925.75	46.21	68.20	-21.99	29.90	34.30	11.97	29.96	0.00	316	109	Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	5895.25	50.28	90.02	-39.74	33.99	34.29	11.94	29.94	0.00	316	109	Average																																															
2	5925.75	46.21	68.20	-21.99	29.90	34.30	11.97	29.96	0.00	316	109	Average																																															

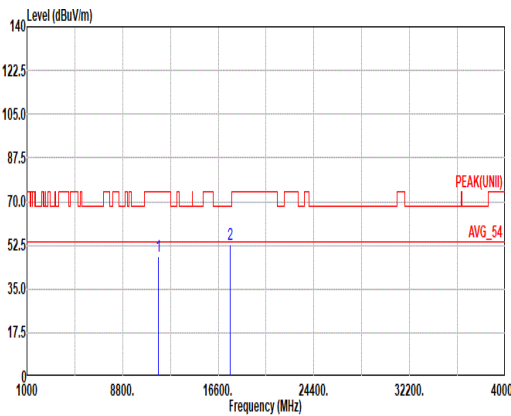
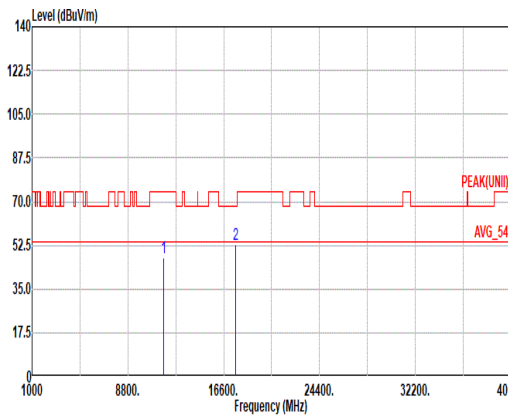


Mode	57																																																																																																															
	Harmonic																																																																																																															
	U-NII-4_5.85-5.895_802.11ax HE20_CH173_Full RU_5865MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal	Vertical																																																																																																														
Peak Avg	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>47.86</td><td>74.00</td><td>-26.14</td><td>57.50</td><td>38.66</td><td>16.94</td><td>65.80</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17595.00</td><td>52.83</td><td>68.20</td><td>-15.37</td><td>54.71</td><td>39.59</td><td>21.48</td><td>63.57</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	47.86	74.00	-26.14	57.50	38.66	16.94	65.80	0.56	--	Peak	2	17595.00	52.83	68.20	-15.37	54.71	39.59	21.48	63.57	0.62	--	Peak	 Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11730.00</td><td>47.33</td><td>74.00</td><td>-26.67</td><td>56.97</td><td>38.66</td><td>16.94</td><td>65.80</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17595.00</td><td>52.62</td><td>68.20</td><td>-15.58</td><td>54.50</td><td>39.59</td><td>21.48</td><td>63.57</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11730.00	47.33	74.00	-26.67	56.97	38.66	16.94	65.80	0.56	--	Peak	2	17595.00	52.62	68.20	-15.58	54.50	39.59	21.48	63.57	0.62	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11730.00	47.86	74.00	-26.14	57.50	38.66	16.94	65.80	0.56	--	Peak																																																																																																					
2	17595.00	52.83	68.20	-15.37	54.71	39.59	21.48	63.57	0.62	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	11730.00	47.33	74.00	-26.67	56.97	38.66	16.94	65.80	0.56	--	Peak																																																																																																					
2	17595.00	52.62	68.20	-15.58	54.50	39.59	21.48	63.57	0.62	--	Peak																																																																																																					

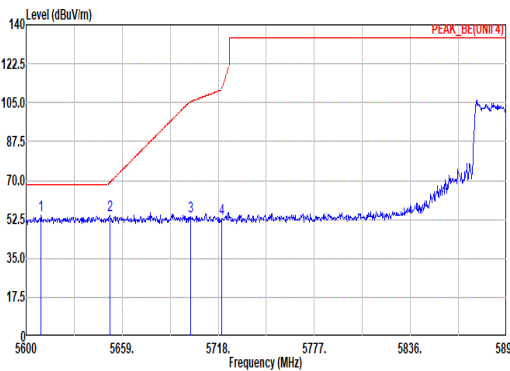
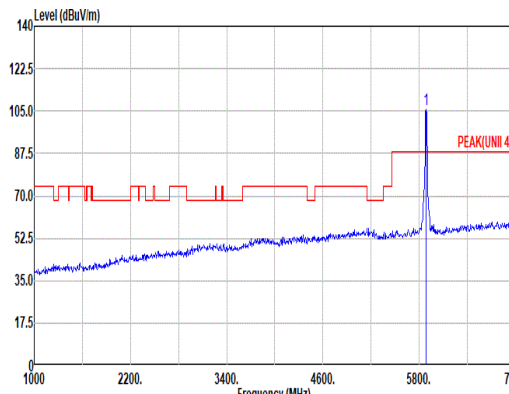
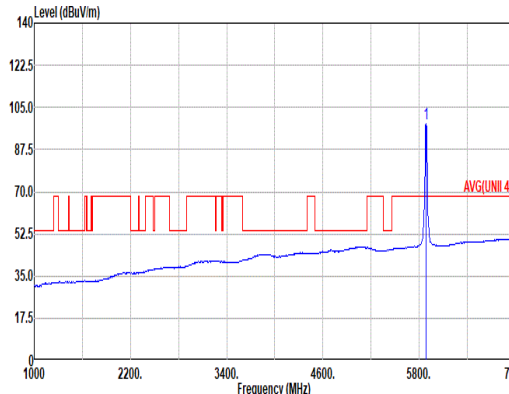


Mode	58																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5609.15</td><td>54.20</td><td>68.20</td><td>-14.00</td><td>39.27</td><td>33.04</td><td>11.66</td><td>29.77</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2 5651.33</td><td>54.60</td><td>69.19</td><td>-14.59</td><td>39.49</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>3 5701.19</td><td>53.80</td><td>105.53</td><td>-51.73</td><td>38.27</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>4 5720.07</td><td>52.80</td><td>110.95</td><td>-58.15</td><td>37.18</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5609.15	54.20	68.20	-14.00	39.27	33.04	11.66	29.77	0.00	100	115 Peak	2 5651.33	54.60	69.19	-14.59	39.49	33.21	11.70	29.80	0.00	100	115 Peak	3 5701.19	53.80	105.53	-51.73	38.27	33.60	11.76	29.83	0.00	100	115 Peak	4 5720.07	52.80	110.95	-58.15	37.18	33.68	11.78	29.84	0.00	100	115 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5885.00</td><td>105.43</td><td>-----</td><td>-----</td><td>89.16</td><td>34.27</td><td>11.93</td><td>29.93</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5885.00	105.43	-----	-----	89.16	34.27	11.93	29.93	0.00	100	115 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5609.15	54.20	68.20	-14.00	39.27	33.04	11.66	29.77	0.00	100	115 Peak																																																																																																																										
2 5651.33	54.60	69.19	-14.59	39.49	33.21	11.70	29.80	0.00	100	115 Peak																																																																																																																										
3 5701.19	53.80	105.53	-51.73	38.27	33.60	11.76	29.83	0.00	100	115 Peak																																																																																																																										
4 5720.07	52.80	110.95	-58.15	37.18	33.68	11.78	29.84	0.00	100	115 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5885.00	105.43	-----	-----	89.16	34.27	11.93	29.93	0.00	100	115 Peak																																																																																																																										
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5885.00</td><td>98.24</td><td>-----</td><td>-----</td><td>81.97</td><td>34.27</td><td>11.93</td><td>29.93</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5885.00	98.24	-----	-----	81.97	34.27	11.93	29.93	0.00	100	115 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5885.00	98.24	-----	-----	81.97	34.27	11.93	29.93	0.00	100	115 Average																																																																																																																										

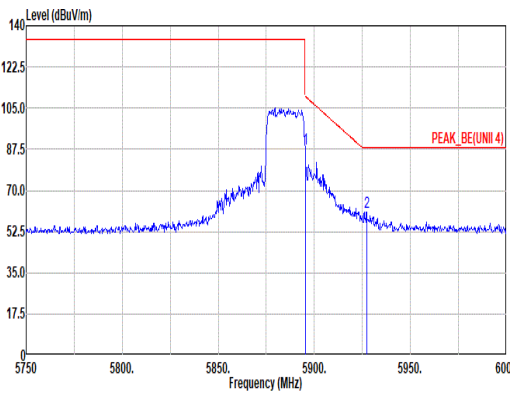
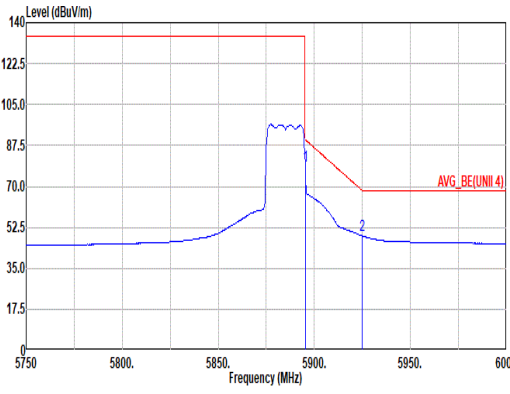


Mode	58																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																								
ANT	1																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>87.62</td><td>110.02</td><td>-22.40</td><td>71.33</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2</td><td>5927.25</td><td>60.93</td><td>88.20</td><td>-27.27</td><td>44.62</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	87.62	110.02	-22.40	71.33	34.29	11.94	29.94	0.00	100	115 Peak	2	5927.25	60.93	88.20	-27.27	44.62	34.30	11.97	29.96	0.00	100	115 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5895.25	87.62	110.02	-22.40	71.33	34.29	11.94	29.94	0.00	100	115 Peak																																														
2	5927.25	60.93	88.20	-27.27	44.62	34.30	11.97	29.96	0.00	100	115 Peak																																														
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>78.96</td><td>90.02</td><td>-11.06</td><td>62.67</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>115 Average</td></tr><tr><td>2</td><td>5925.00</td><td>48.91</td><td>68.20</td><td>-19.29</td><td>32.60</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	78.96	90.02	-11.06	62.67	34.29	11.94	29.94	0.00	100	115 Average	2	5925.00	48.91	68.20	-19.29	32.60	34.30	11.97	29.96	0.00	100	115 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5895.25	78.96	90.02	-11.06	62.67	34.29	11.94	29.94	0.00	100	115 Average																																														
2	5925.00	48.91	68.20	-19.29	32.60	34.30	11.97	29.96	0.00	100	115 Average																																														

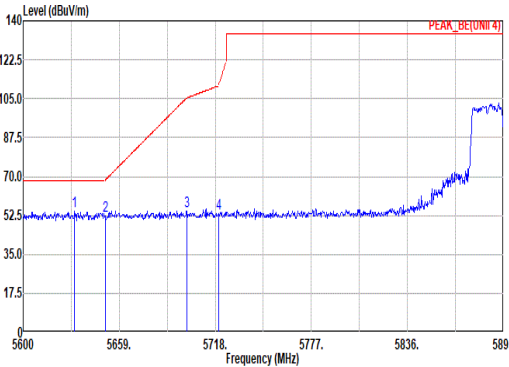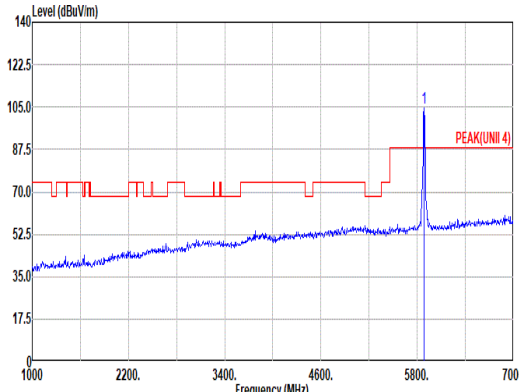
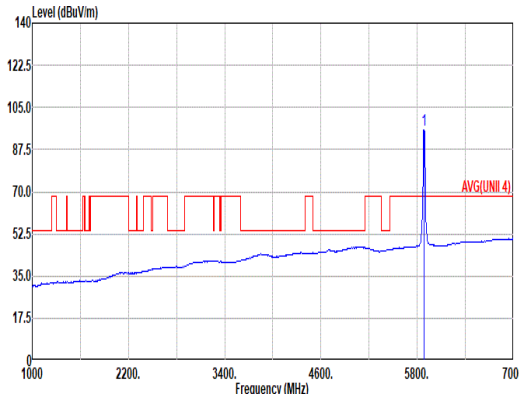


Mode	58																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5631.57</td><td>54.50</td><td>68.20</td><td>-13.70</td><td>39.48</td><td>33.13</td><td>11.68</td><td>29.79</td><td>0.00</td><td>332</td><td>113 Peak</td></tr><tr><td>2 5658.45</td><td>52.16</td><td>68.53</td><td>-16.37</td><td>37.06</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>332</td><td>113 Peak</td></tr><tr><td>3 5700.68</td><td>54.56</td><td>105.37</td><td>-50.81</td><td>39.03</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>332</td><td>113 Peak</td></tr><tr><td>4 5720.07</td><td>53.41</td><td>110.95</td><td>-57.54</td><td>37.79</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>332</td><td>113 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5631.57	54.50	68.20	-13.70	39.48	33.13	11.68	29.79	0.00	332	113 Peak	2 5658.45	52.16	68.53	-16.37	37.06	33.20	11.70	29.80	0.00	332	113 Peak	3 5700.68	54.56	105.37	-50.81	39.03	33.60	11.76	29.83	0.00	332	113 Peak	4 5720.07	53.41	110.95	-57.54	37.79	33.68	11.78	29.84	0.00	332	113 Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5885.00</td><td>104.71</td><td>-----</td><td>-----</td><td>88.44</td><td>34.27</td><td>11.93</td><td>29.93</td><td>0.00</td><td>332</td><td>113 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	104.71	-----	-----	88.44	34.27	11.93	29.93	0.00	332	113 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5631.57	54.50	68.20	-13.70	39.48	33.13	11.68	29.79	0.00	332	113 Peak																																																																																																																										
2 5658.45	52.16	68.53	-16.37	37.06	33.20	11.70	29.80	0.00	332	113 Peak																																																																																																																										
3 5700.68	54.56	105.37	-50.81	39.03	33.60	11.76	29.83	0.00	332	113 Peak																																																																																																																										
4 5720.07	53.41	110.95	-57.54	37.79	33.68	11.78	29.84	0.00	332	113 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	104.71	-----	-----	88.44	34.27	11.93	29.93	0.00	332	113 Peak																																																																																																																										
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5885.00</td><td>95.70</td><td>-----</td><td>-----</td><td>79.42</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>332</td><td>113 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	95.70	-----	-----	79.42	34.28	11.94	29.94	0.00	332	113 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	95.70	-----	-----	79.42	34.28	11.94	29.94	0.00	332	113 Average																																																																																																																										


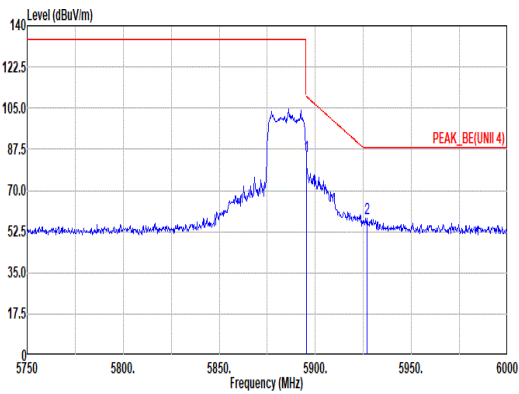
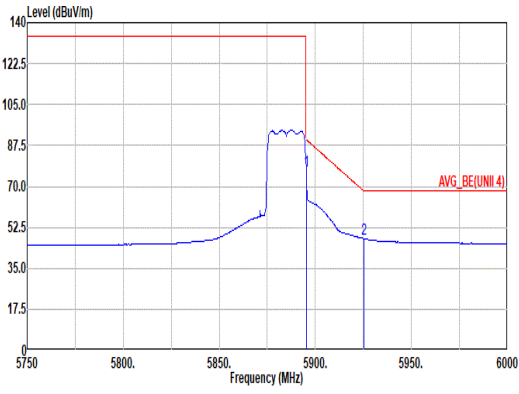


Mode	58																																																																
	Band Edge - R																																																																
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																
ANT	1																																																																
Pol.	Vertical																																																																
Peak	Fundamental																																																																
	Blank																																																																
	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>84.59</td><td>110.02</td><td>-25.43</td><td>68.30</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>332 113 Peak</td></tr><tr><td>2</td><td>5927.00</td><td>58.25</td><td>88.20</td><td>-29.95</td><td>41.94</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>332 113 Peak</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	84.59	110.02	-25.43	68.30	34.29	11.94	29.94	0.00	332 113 Peak	2	5927.00	58.25	88.20	-29.95	41.94	34.30	11.97	29.96	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5895.25	84.59	110.02	-25.43	68.30	34.29	11.94	29.94	0.00	332 113 Peak																																																							
2	5927.00	58.25	88.20	-29.95	41.94	34.30	11.97	29.96	0.00	332 113 Peak																																																							
Avg	Fundamental																																																																
	Blank																																																																
	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>76.47</td><td>90.02</td><td>-13.55</td><td>60.18</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>332 113 Average</td></tr><tr><td>2</td><td>5925.25</td><td>47.71</td><td>68.20</td><td>-20.49</td><td>31.40</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>332 113 Average</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	76.47	90.02	-13.55	60.18	34.29	11.94	29.94	0.00	332 113 Average	2	5925.25	47.71	68.20	-20.49	31.40	34.30	11.97	29.96	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5895.25	76.47	90.02	-13.55	60.18	34.29	11.94	29.94	0.00	332 113 Average																																																							
2	5925.25	47.71	68.20	-20.49	31.40	34.30	11.97	29.96	0.00	332 113 Average																																																							

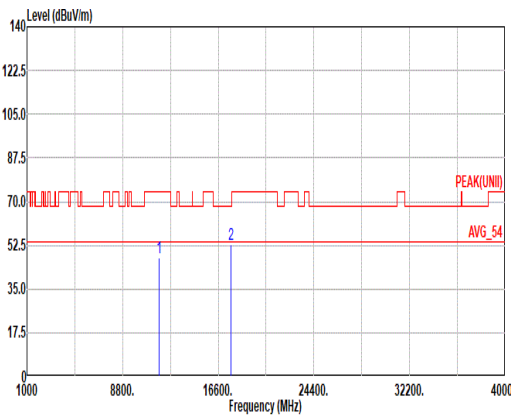
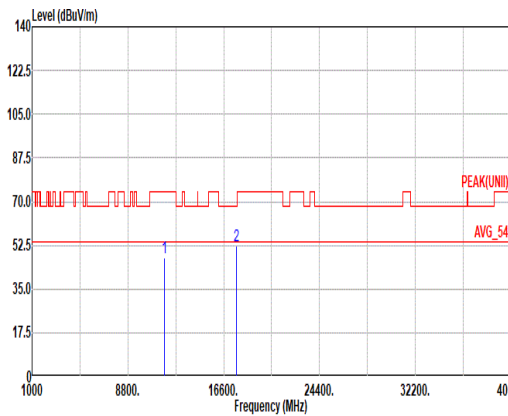


Mode	58																																																																						
	Harmonic																																																																						
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Full RU_5885MHz																																																																						
ANT	1																																																																						
Pol.	Horizontal								Vertical																																																														
Peak Avg																																																																							
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL								Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																														
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11770.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>57.09</td><td>38.70</td><td>16.99</td><td>65.82</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17655.00</td><td>52.80</td><td>68.20</td><td>-15.40</td><td>54.14</td><td>39.90</td><td>21.58</td><td>63.44</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>																		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11770.00	47.52	74.00	-26.48	57.09	38.70	16.99	65.82	0.56	--	Peak	2	17655.00	52.80	68.20	-15.40	54.14	39.90	21.58	63.44	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	11770.00	47.52	74.00	-26.48	57.09	38.70	16.99	65.82	0.56	--	Peak																																																												
2	17655.00	52.80	68.20	-15.40	54.14	39.90	21.58	63.44	0.62	--	Peak																																																												

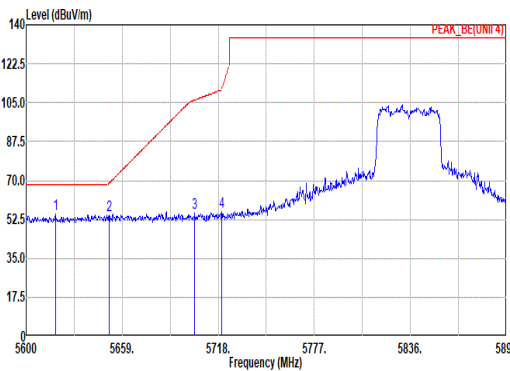
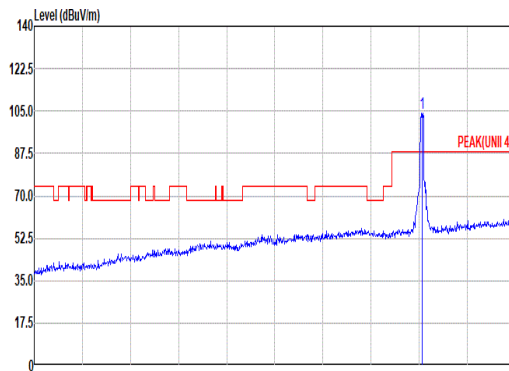
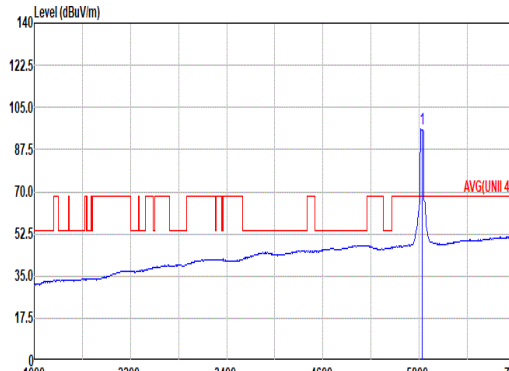


Mode	59																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Horizontal						Fundamental																																																																																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5618.00</td><td>54.83</td><td>68.20</td><td>-13.37</td><td>39.87</td><td>33.07</td><td>11.67</td><td>29.78</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2 5651.04</td><td>54.62</td><td>68.97</td><td>-14.35</td><td>39.51</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>3 5703.55</td><td>55.46</td><td>106.19</td><td>-50.73</td><td>39.92</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>4 5720.07</td><td>55.81</td><td>110.95</td><td>-55.14</td><td>40.19</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5618.00	54.83	68.20	-13.37	39.87	33.07	11.67	29.78	0.00	100	115 Peak	2 5651.04	54.62	68.97	-14.35	39.51	33.21	11.70	29.80	0.00	100	115 Peak	3 5703.55	55.46	106.19	-50.73	39.92	33.61	11.76	29.83	0.00	100	115 Peak	4 5720.07	55.81	110.95	-55.14	40.19	33.68	11.78	29.84	0.00	100	115 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5835.00</td><td>103.98</td><td>-----</td><td>-----</td><td>87.82</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5835.00	103.98	-----	-----	87.82	34.17	11.90	29.91	0.00	100	115 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5618.00	54.83	68.20	-13.37	39.87	33.07	11.67	29.78	0.00	100	115 Peak																																																																																																																										
2 5651.04	54.62	68.97	-14.35	39.51	33.21	11.70	29.80	0.00	100	115 Peak																																																																																																																										
3 5703.55	55.46	106.19	-50.73	39.92	33.61	11.76	29.83	0.00	100	115 Peak																																																																																																																										
4 5720.07	55.81	110.95	-55.14	40.19	33.68	11.78	29.84	0.00	100	115 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5835.00	103.98	-----	-----	87.82	34.17	11.90	29.91	0.00	100	115 Peak																																																																																																																										
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5835.00</td><td>96.11</td><td>-----</td><td>-----</td><td>80.05</td><td>34.07</td><td>11.88</td><td>29.89</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5835.00	96.11	-----	-----	80.05	34.07	11.88	29.89	0.00	100	115 Average																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																												
1 5835.00	96.11	-----	-----	80.05	34.07	11.88	29.89	0.00	100	115 Average																																																																																																																										

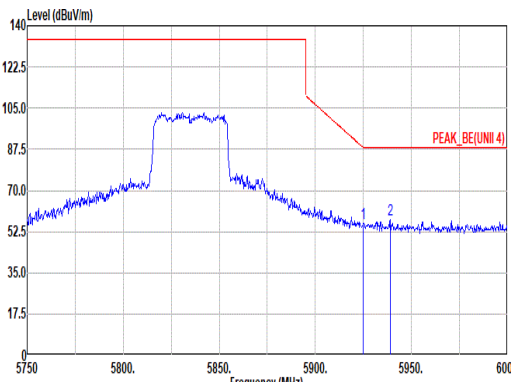
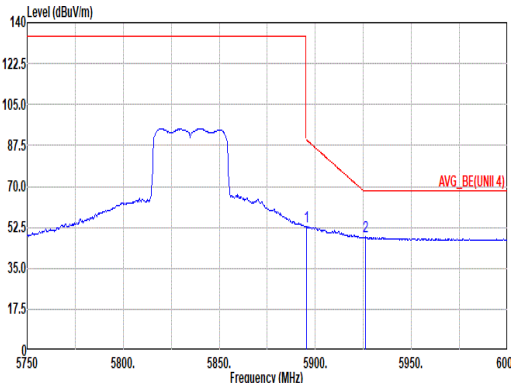


Mode	59																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5925.00</td><td>56.11</td><td>88.20</td><td>-32.09</td><td>39.00</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2</td><td>5939.00</td><td>57.58</td><td>88.20</td><td>-30.62</td><td>41.26</td><td>34.30</td><td>11.98</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	56.11	88.20	-32.09	39.00	34.30	11.97	29.96	0.00	100	115 Peak	2	5939.00	57.58	88.20	-30.62	41.26	34.30	11.98	29.96	0.00	100	115 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5925.00	56.11	88.20	-32.09	39.00	34.30	11.97	29.96	0.00	100	115 Peak																																																							
2	5939.00	57.58	88.20	-30.62	41.26	34.30	11.98	29.96	0.00	100	115 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.50</td><td>53.00</td><td>89.83</td><td>-36.83</td><td>36.71</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>115 Average</td></tr><tr><td>2</td><td>5926.00</td><td>48.39</td><td>68.20</td><td>-19.81</td><td>32.08</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.50	53.00	89.83	-36.83	36.71	34.29	11.94	29.94	0.00	100	115 Average	2	5926.00	48.39	68.20	-19.81	32.08	34.30	11.97	29.96	0.00	100	115 Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.50	53.00	89.83	-36.83	36.71	34.29	11.94	29.94	0.00	100	115 Average																																																							
2	5926.00	48.39	68.20	-19.81	32.08	34.30	11.97	29.96	0.00	100	115 Average																																																							

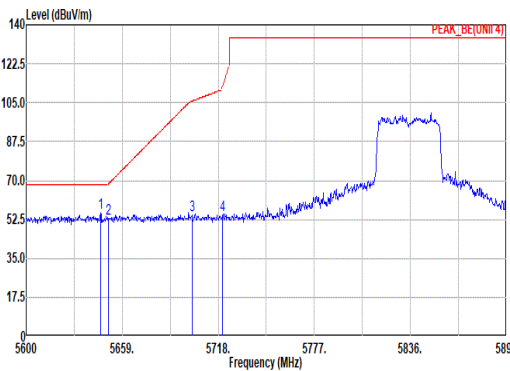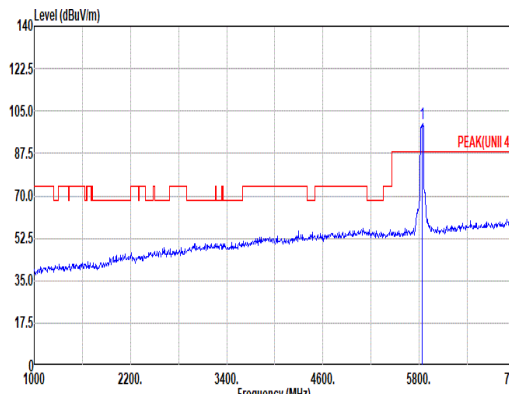
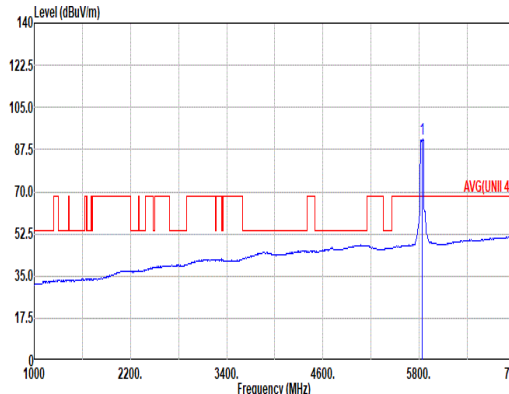


Mode	59																																																																																																																																									
	Band Edge - L																																																																																																																																									
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																																									
ANT	1																																																																																																																																									
Pol.	Vertical						Fundamental																																																																																																																																			
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5645.73</td><td>55.28</td><td>68.20</td><td>-12.92</td><td>40.19</td><td>33.18</td><td>11.70</td><td>29.79</td><td>0.00</td><td>208</td><td>59 Peak</td></tr><tr><td>2</td><td>5658.45</td><td>52.84</td><td>68.53</td><td>-15.69</td><td>37.74</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>208</td><td>59 Peak</td></tr><tr><td>3</td><td>5701.78</td><td>54.25</td><td>105.70</td><td>-51.45</td><td>38.71</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>208</td><td>59 Peak</td></tr><tr><td>4</td><td>5720.36</td><td>54.34</td><td>111.62</td><td>-57.28</td><td>38.72</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>208</td><td>59 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5645.73	55.28	68.20	-12.92	40.19	33.18	11.70	29.79	0.00	208	59 Peak	2	5658.45	52.84	68.53	-15.69	37.74	33.20	11.70	29.80	0.00	208	59 Peak	3	5701.78	54.25	105.70	-51.45	38.71	33.61	11.76	29.83	0.00	208	59 Peak	4	5720.36	54.34	111.62	-57.28	38.72	33.68	11.78	29.84	0.00	208	59 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>99.83</td><td>-----</td><td>-----</td><td>83.65</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00</td><td>208</td><td>59 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5835.00	99.83	-----	-----	83.65	34.19	11.90	29.91	0.00	208	59 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5645.73	55.28	68.20	-12.92	40.19	33.18	11.70	29.79	0.00	208	59 Peak																																																																																																																															
2	5658.45	52.84	68.53	-15.69	37.74	33.20	11.70	29.80	0.00	208	59 Peak																																																																																																																															
3	5701.78	54.25	105.70	-51.45	38.71	33.61	11.76	29.83	0.00	208	59 Peak																																																																																																																															
4	5720.36	54.34	111.62	-57.28	38.72	33.68	11.78	29.84	0.00	208	59 Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5835.00	99.83	-----	-----	83.65	34.19	11.90	29.91	0.00	208	59 Peak																																																																																																																															
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:2.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5835.00</td><td>91.86</td><td>-----</td><td>-----</td><td>75.70</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>208</td><td>59 Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5835.00	91.86	-----	-----	75.70	34.17	11.90	29.91	0.00	208	59 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	5835.00	91.86	-----	-----	75.70	34.17	11.90	29.91	0.00	208	59 Average																																																																																																																															


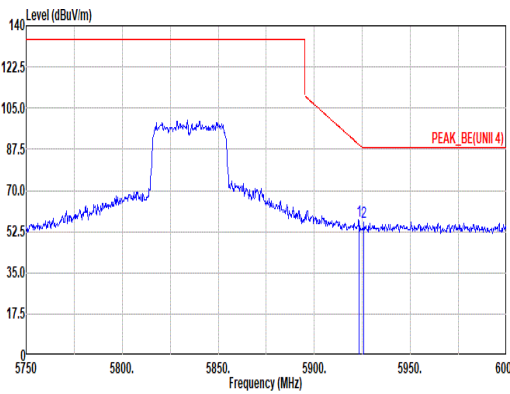
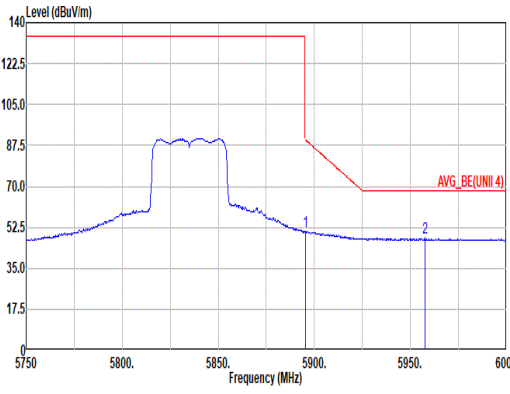


Mode	59																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																	
ANT	1																																																																	
Pol.	Vertical						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.25</td><td>57.31</td><td>89.48</td><td>-32.17</td><td>41.01</td><td>34.30</td><td>11.96</td><td>29.96</td><td>0.00</td><td>208</td><td>59 Peak</td></tr><tr><td>2</td><td>5925.75</td><td>56.55</td><td>88.20</td><td>-31.65</td><td>40.24</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>208</td><td>59 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.25	57.31	89.48	-32.17	41.01	34.30	11.96	29.96	0.00	208	59 Peak	2	5925.75	56.55	88.20	-31.65	40.24	34.30	11.97	29.96	0.00	208	59 Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5923.25	57.31	89.48	-32.17	41.01	34.30	11.96	29.96	0.00	208	59 Peak																																																							
2	5925.75	56.55	88.20	-31.65	40.24	34.30	11.97	29.96	0.00	208	59 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.50</td><td>50.72</td><td>89.83</td><td>-39.11</td><td>34.43</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>208</td><td>59 Average</td></tr><tr><td>2</td><td>5957.50</td><td>47.89</td><td>68.20</td><td>-20.31</td><td>31.60</td><td>34.28</td><td>11.99</td><td>29.98</td><td>0.00</td><td>208</td><td>59 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.50	50.72	89.83	-39.11	34.43	34.29	11.94	29.94	0.00	208	59 Average	2	5957.50	47.89	68.20	-20.31	31.60	34.28	11.99	29.98	0.00	208	59 Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.50	50.72	89.83	-39.11	34.43	34.29	11.94	29.94	0.00	208	59 Average																																																							
2	5957.50	47.89	68.20	-20.31	31.60	34.28	11.99	29.98	0.00	208	59 Average																																																							

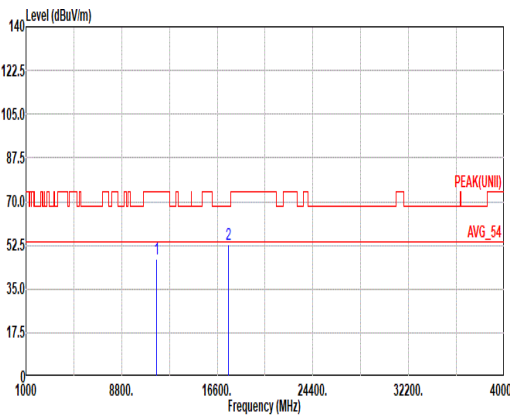
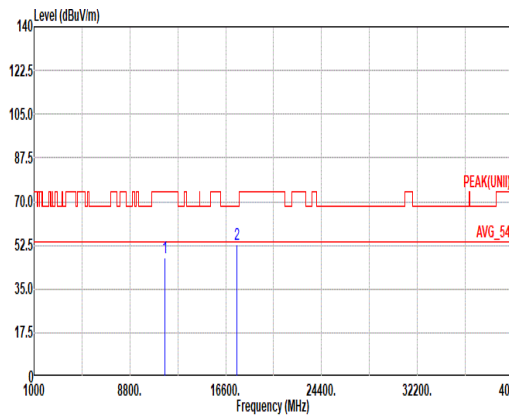


Mode	59																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE40_CH167_Full RU_5835MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11670.00</td><td>47.23</td><td>74.00</td><td>-26.77</td><td>56.95</td><td>38.60</td><td>16.89</td><td>65.78</td><td>0.57</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17505.00</td><td>53.04</td><td>68.20</td><td>-15.16</td><td>55.63</td><td>39.14</td><td>21.37</td><td>63.72</td><td>0.62</td><td>--</td><td>-- Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11670.00	47.23	74.00	-26.77	56.95	38.60	16.89	65.78	0.57	--	-- Peak	2	17505.00	53.04	68.20	-15.16	55.63	39.14	21.37	63.72	0.62	--	-- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11670.00</td><td>47.30</td><td>74.00</td><td>-26.70</td><td>57.02</td><td>38.60</td><td>16.89</td><td>65.78</td><td>0.57</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>17505.00</td><td>52.57</td><td>68.20</td><td>-15.63</td><td>55.16</td><td>39.14</td><td>21.37</td><td>63.72</td><td>0.62</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	11670.00	47.30	74.00	-26.70	57.02	38.60	16.89	65.78	0.57	--	-- Peak	2	17505.00	52.57	68.20	-15.63	55.16	39.14	21.37	63.72	0.62	--	-- Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	11670.00	47.23	74.00	-26.77	56.95	38.60	16.89	65.78	0.57	--	-- Peak																																																																																																																						
2	17505.00	53.04	68.20	-15.16	55.63	39.14	21.37	63.72	0.62	--	-- Peak																																																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	11670.00	47.30	74.00	-26.70	57.02	38.60	16.89	65.78	0.57	--	-- Peak																																																																																																																						
2	17505.00	52.57	68.20	-15.63	55.16	39.14	21.37	63.72	0.62	--	-- Peak																																																																																																																						

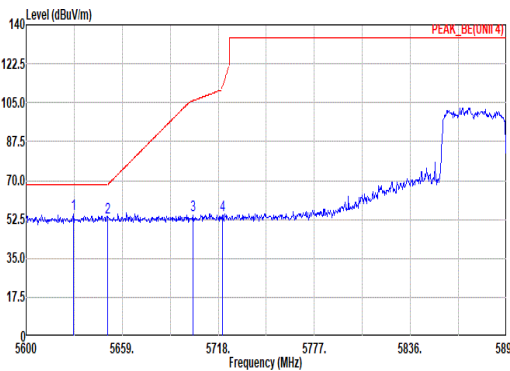
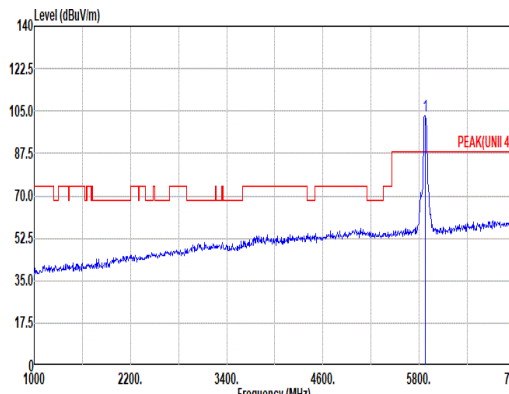
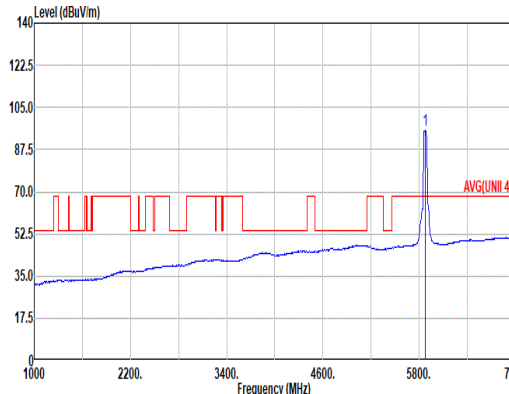


Mode	60																																																																																																																																					
	Band Edge - L																																																																																																																																					
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																																																																																					
ANT	1																																																																																																																																					
Pol.	Horizontal						Fundamental																																																																																																																															
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5629.21</td><td>54.90</td><td>68.20</td><td>-13.30</td><td>39.88</td><td>33.12</td><td>11.68</td><td>29.78</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>2 5658.15</td><td>53.24</td><td>68.31</td><td>-15.07</td><td>38.14</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>3 5702.37</td><td>54.26</td><td>105.86</td><td>-51.60</td><td>38.72</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>4 5720.36</td><td>54.46</td><td>111.62</td><td>-57.16</td><td>38.84</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5629.21	54.90	68.20	-13.30	39.88	33.12	11.68	29.78	0.00	100	115	Peak	2 5658.15	53.24	68.31	-15.07	38.14	33.20	11.70	29.80	0.00	100	115	Peak	3 5702.37	54.26	105.86	-51.60	38.72	33.61	11.76	29.83	0.00	100	115	Peak	4 5720.36	54.46	111.62	-57.16	38.84	33.68	11.78	29.84	0.00	100	115	Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5875.00</td><td>102.88</td><td>-----</td><td>-----</td><td>86.65</td><td>34.23</td><td>11.92</td><td>29.92</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5875.00	102.88	-----	-----	86.65	34.23	11.92	29.92	0.00	100	115	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5629.21	54.90	68.20	-13.30	39.88	33.12	11.68	29.78	0.00	100	115	Peak																																																																																																																											
2 5658.15	53.24	68.31	-15.07	38.14	33.20	11.70	29.80	0.00	100	115	Peak																																																																																																																											
3 5702.37	54.26	105.86	-51.60	38.72	33.61	11.76	29.83	0.00	100	115	Peak																																																																																																																											
4 5720.36	54.46	111.62	-57.16	38.84	33.68	11.78	29.84	0.00	100	115	Peak																																																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5875.00	102.88	-----	-----	86.65	34.23	11.92	29.92	0.00	100	115	Peak																																																																																																																											
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5875.00</td><td>95.48</td><td>-----</td><td>-----</td><td>79.25</td><td>34.24</td><td>11.92</td><td>29.93</td><td>0.00</td><td>100</td><td>115</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5875.00	95.48	-----	-----	79.25	34.24	11.92	29.93	0.00	100	115	Average																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																												
1 5875.00	95.48	-----	-----	79.25	34.24	11.92	29.93	0.00	100	115	Average																																																																																																																											

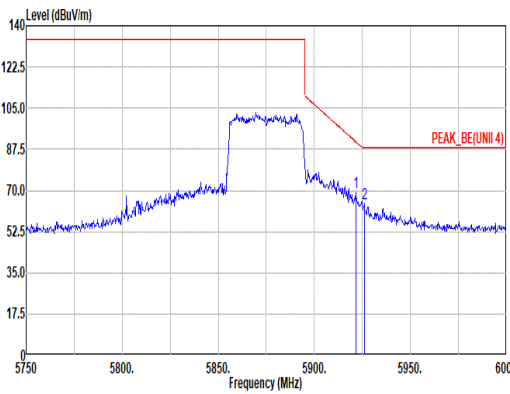
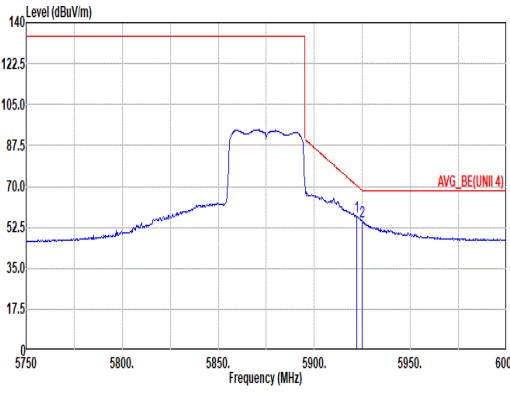


Mode	60																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5921.50</td><td>69.27</td><td>90.76</td><td>-21.49</td><td>52.96</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2</td><td>5926.00</td><td>64.45</td><td>88.20</td><td>-23.75</td><td>48.14</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5921.50	69.27	90.76	-21.49	52.96	34.30	11.96	29.95	0.00	100	115 Peak	2	5926.00	64.45	88.20	-23.75	48.14	34.30	11.97	29.96	0.00	100	115 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5921.50	69.27	90.76	-21.49	52.96	34.30	11.96	29.95	0.00	100	115 Peak																																																							
2	5926.00	64.45	88.20	-23.75	48.14	34.30	11.97	29.96	0.00	100	115 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.00</td><td>57.28</td><td>70.39</td><td>-13.11</td><td>40.97</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>100</td><td>115 Average</td></tr><tr><td>2</td><td>5925.00</td><td>55.06</td><td>68.20</td><td>-13.14</td><td>38.75</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.00	57.28	70.39	-13.11	40.97	34.30	11.96	29.95	0.00	100	115 Average	2	5925.00	55.06	68.20	-13.14	38.75	34.30	11.97	29.96	0.00	100	115 Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5922.00	57.28	70.39	-13.11	40.97	34.30	11.96	29.95	0.00	100	115 Average																																																							
2	5925.00	55.06	68.20	-13.14	38.75	34.30	11.97	29.96	0.00	100	115 Average																																																							

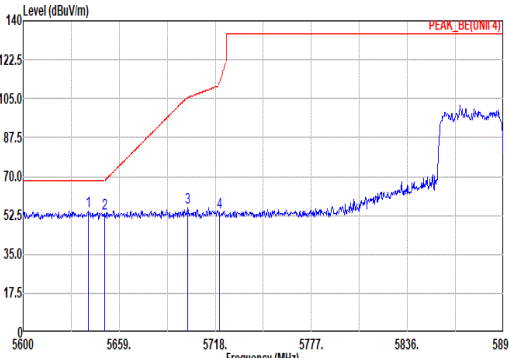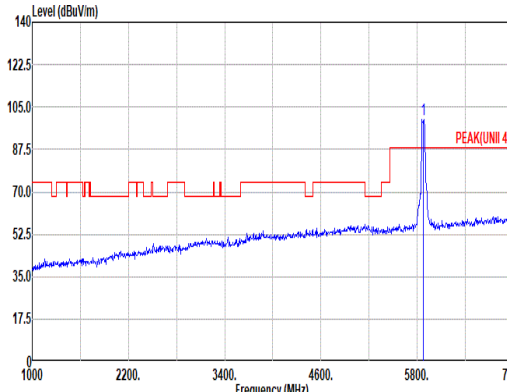
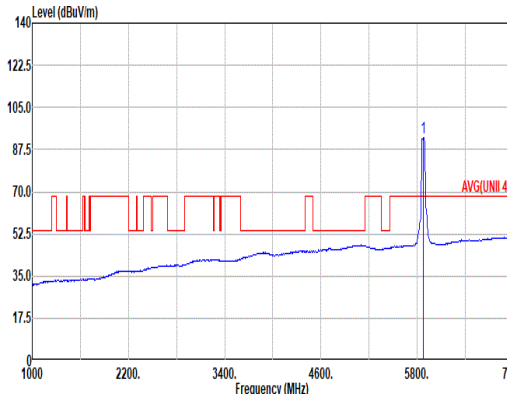


Mode	60																																																																																																																																	
	Band Edge - L																																																																																																																																	
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																																																																																	
ANT	1																																																																																																																																	
Pol.	Vertical						Fundamental																																																																																																																											
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5639.83</td><td>54.63</td><td>68.20</td><td>-13.57</td><td>39.57</td><td>33.16</td><td>11.69</td><td>29.79</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr><tr><td>2</td><td>5658.15</td><td>53.26</td><td>68.31</td><td>-15.05</td><td>38.16</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr><tr><td>3</td><td>5701.19</td><td>55.96</td><td>105.53</td><td>-49.57</td><td>40.43</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr><tr><td>4</td><td>5720.36</td><td>53.83</td><td>111.62</td><td>-57.79</td><td>38.21</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5639.83	54.63	68.20	-13.57	39.57	33.16	11.69	29.79	0.00	329	102	Peak	2	5658.15	53.26	68.31	-15.05	38.16	33.20	11.70	29.80	0.00	329	102	Peak	3	5701.19	55.96	105.53	-49.57	40.43	33.60	11.76	29.83	0.00	329	102	Peak	4	5720.36	53.83	111.62	-57.79	38.21	33.68	11.78	29.84	0.00	329	102	Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>99.94</td><td>-----</td><td>-----</td><td>83.73</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr></table>								Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5875.00	99.94	-----	-----	83.73	34.22	11.91	29.92	0.00	329	102	Peak
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5639.83	54.63	68.20	-13.57	39.57	33.16	11.69	29.79	0.00	329	102	Peak																																																																																																																						
2	5658.15	53.26	68.31	-15.05	38.16	33.20	11.70	29.80	0.00	329	102	Peak																																																																																																																						
3	5701.19	55.96	105.53	-49.57	40.43	33.60	11.76	29.83	0.00	329	102	Peak																																																																																																																						
4	5720.36	53.83	111.62	-57.79	38.21	33.68	11.78	29.84	0.00	329	102	Peak																																																																																																																						
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5875.00	99.94	-----	-----	83.73	34.22	11.91	29.92	0.00	329	102	Peak																																																																																																																						
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:2.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5875.00</td><td>92.34</td><td>-----</td><td>-----</td><td>76.08</td><td>34.26</td><td>11.93</td><td>29.93</td><td>0.00</td><td>329</td><td>102</td><td>Average</td></tr></table>								Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5875.00	92.34	-----	-----	76.08	34.26	11.93	29.93	0.00	329	102	Average																																																																														
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																						
1	5875.00	92.34	-----	-----	76.08	34.26	11.93	29.93	0.00	329	102	Average																																																																																																																						


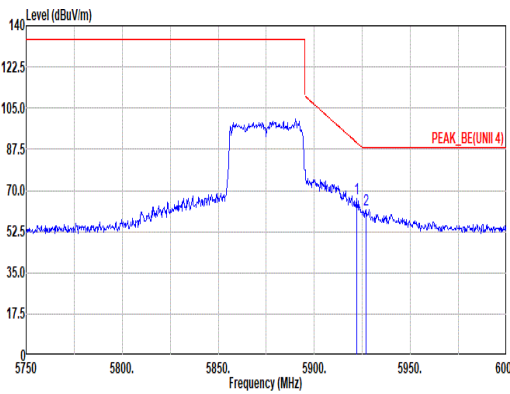
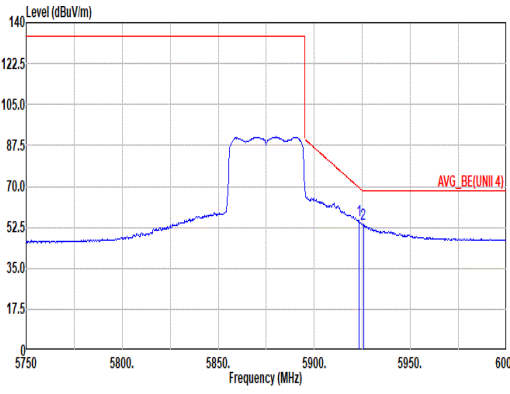


Mode	60																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																			
ANT	1																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.00</td><td>66.45</td><td>90.39</td><td>-23.94</td><td>50.14</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr><tr><td>2</td><td>5927.00</td><td>61.66</td><td>88.20</td><td>-26.54</td><td>45.35</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>329</td><td>102</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.00	66.45	90.39	-23.94	50.14	34.30	11.96	29.95	0.00	329	102	Peak	2	5927.00	61.66	88.20	-26.54	45.35	34.30	11.97	29.96	0.00	329	102	Peak	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5922.00	66.45	90.39	-23.94	50.14	34.30	11.96	29.95	0.00	329	102	Peak																																																								
2	5927.00	61.66	88.20	-26.54	45.35	34.30	11.97	29.96	0.00	329	102	Peak																																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:2.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5923.25</td><td>55.50</td><td>69.48</td><td>-13.98</td><td>39.20</td><td>34.30</td><td>11.96</td><td>29.96</td><td>0.00</td><td>329</td><td>102</td><td>Average</td></tr><tr><td>2</td><td>5925.50</td><td>53.91</td><td>68.20</td><td>-14.29</td><td>37.60</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>329</td><td>102</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5923.25	55.50	69.48	-13.98	39.20	34.30	11.96	29.96	0.00	329	102	Average	2	5925.50	53.91	68.20	-14.29	37.60	34.30	11.97	29.96	0.00	329	102	Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5923.25	55.50	69.48	-13.98	39.20	34.30	11.96	29.96	0.00	329	102	Average																																																								
2	5925.50	53.91	68.20	-14.29	37.60	34.30	11.97	29.96	0.00	329	102	Average																																																								

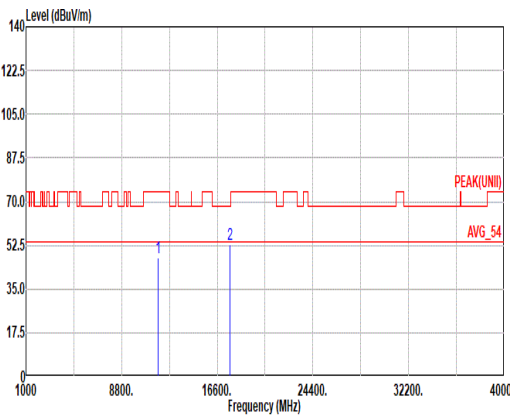
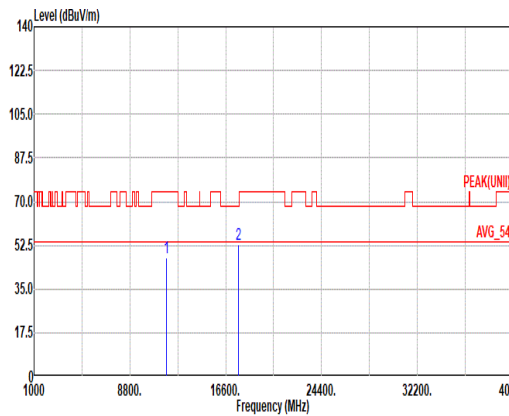


Mode	60																																																																																																																												
	Harmonic																																																																																																																												
	U-NII-4_5.85-5.895_802.11ax HE40_CH175_Full RU_5875MHz																																																																																																																												
ANT	1																																																																																																																												
Pol.	Horizontal						Vertical																																																																																																																						
Peak Avg																																																																																																																													
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																						
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>57.11</td><td>38.70</td><td>16.96</td><td>65.81</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17625.00</td><td>52.96</td><td>68.20</td><td>-15.24</td><td>54.69</td><td>39.65</td><td>21.52</td><td>63.52</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	47.52	74.00	-26.48	57.11	38.70	16.96	65.81	0.56	--	Peak	2	17625.00	52.96	68.20	-15.24	54.69	39.65	21.52	63.52	0.62	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11750.00</td><td>47.52</td><td>74.00</td><td>-26.48</td><td>57.18</td><td>38.64</td><td>16.93</td><td>65.80</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17625.00</td><td>52.86</td><td>68.20</td><td>-15.34</td><td>54.53</td><td>39.67</td><td>21.54</td><td>63.50</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>				Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11750.00	47.52	74.00	-26.48	57.18	38.64	16.93	65.80	0.57	--	Peak	2	17625.00	52.86	68.20	-15.34	54.53	39.67	21.54	63.50	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	11750.00	47.52	74.00	-26.48	57.11	38.70	16.96	65.81	0.56	--	Peak																																																																																																																		
2	17625.00	52.96	68.20	-15.24	54.69	39.65	21.52	63.52	0.62	--	Peak																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	11750.00	47.52	74.00	-26.48	57.18	38.64	16.93	65.80	0.57	--	Peak																																																																																																																		
2	17625.00	52.86	68.20	-15.34	54.53	39.67	21.54	63.50	0.62	--	Peak																																																																																																																		


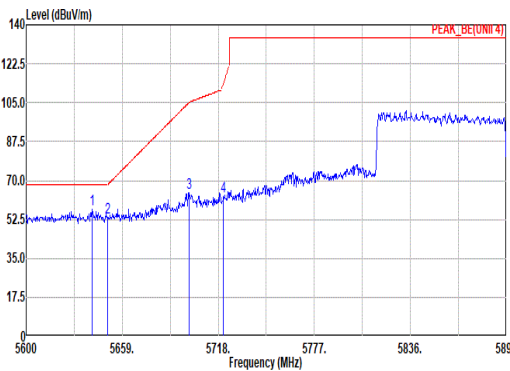
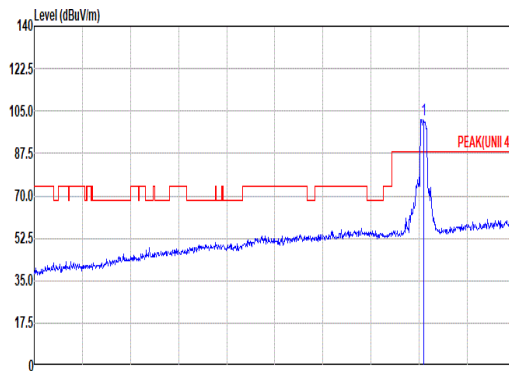
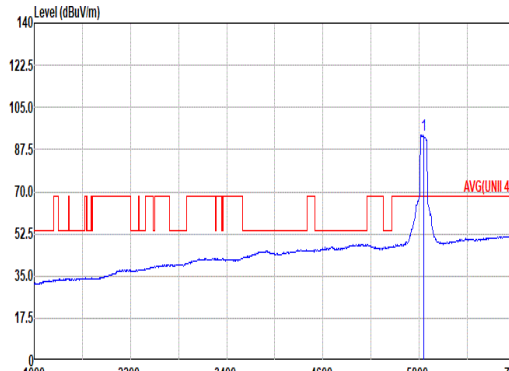


Mode	61																																																																																																																																										
	Band Edge - L																																																																																																																																										
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																																																																																										
ANT	1																																																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																																																				
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5640.71</td><td>56.94</td><td>68.20</td><td>-11.26</td><td>41.88</td><td>33.16</td><td>11.69</td><td>29.79</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>2</td><td>5650.15</td><td>53.28</td><td>68.31</td><td>-15.03</td><td>38.18</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>3</td><td>5700.01</td><td>64.22</td><td>105.20</td><td>-40.98</td><td>48.69</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr><tr><td>4</td><td>5721.25</td><td>62.89</td><td>113.64</td><td>-50.75</td><td>47.27</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5640.71	56.94	68.20	-11.26	41.88	33.16	11.69	29.79	0.00	100	115	Peak	2	5650.15	53.28	68.31	-15.03	38.18	33.20	11.70	29.80	0.00	100	115	Peak	3	5700.01	64.22	105.20	-40.98	48.69	33.60	11.76	29.83	0.00	100	115	Peak	4	5721.25	62.89	113.64	-50.75	47.27	33.68	11.78	29.84	0.00	100	115	Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>101.65</td><td>-----</td><td>-----</td><td>85.57</td><td>34.10</td><td>11.88</td><td>29.90</td><td>0.00</td><td>100</td><td>115</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	101.65	-----	-----	85.57	34.10	11.88	29.90	0.00	100	115	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5640.71	56.94	68.20	-11.26	41.88	33.16	11.69	29.79	0.00	100	115	Peak																																																																																																																															
2	5650.15	53.28	68.31	-15.03	38.18	33.20	11.70	29.80	0.00	100	115	Peak																																																																																																																															
3	5700.01	64.22	105.20	-40.98	48.69	33.60	11.76	29.83	0.00	100	115	Peak																																																																																																																															
4	5721.25	62.89	113.64	-50.75	47.27	33.68	11.78	29.84	0.00	100	115	Peak																																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	101.65	-----	-----	85.57	34.10	11.88	29.90	0.00	100	115	Peak																																																																																																																															
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>93.42</td><td>-----</td><td>-----</td><td>77.36</td><td>34.07</td><td>11.88</td><td>29.89</td><td>0.00</td><td>100</td><td>115</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5855.00	93.42	-----	-----	77.36	34.07	11.88	29.89	0.00	100	115	Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	5855.00	93.42	-----	-----	77.36	34.07	11.88	29.89	0.00	100	115	Average																																																																																																																															

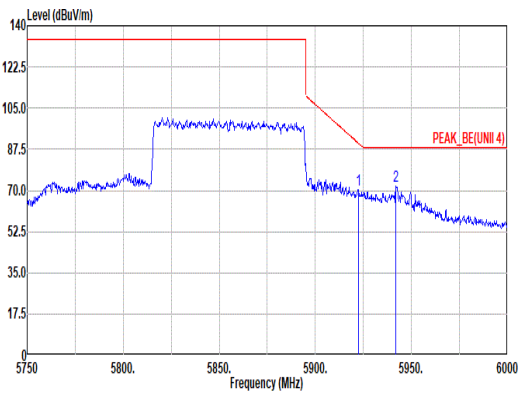
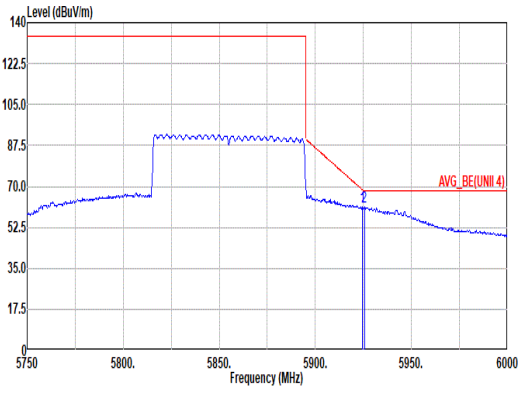


Mode	61																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																								
ANT	1																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.50</td><td>70.44</td><td>90.03</td><td>-19.59</td><td>54.14</td><td>34.30</td><td>11.96</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Peak</td></tr><tr><td>2</td><td>5942.00</td><td>71.70</td><td>88.20</td><td>-16.50</td><td>55.39</td><td>34.30</td><td>11.98</td><td>29.97</td><td>0.00</td><td>100</td><td>115 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.50	70.44	90.03	-19.59	54.14	34.30	11.96	29.96	0.00	100	115 Peak	2	5942.00	71.70	88.20	-16.50	55.39	34.30	11.98	29.97	0.00	100	115 Peak	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5922.50	70.44	90.03	-19.59	54.14	34.30	11.96	29.96	0.00	100	115 Peak																																														
2	5942.00	71.70	88.20	-16.50	55.39	34.30	11.98	29.97	0.00	100	115 Peak																																														
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.50</td><td>61.24</td><td>68.57</td><td>-7.33</td><td>44.93</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr><tr><td>2</td><td>5925.50</td><td>61.38</td><td>68.20</td><td>-6.82</td><td>45.07</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>115 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.50	61.24	68.57	-7.33	44.93	34.30	11.97	29.96	0.00	100	115 Average	2	5925.50	61.38	68.20	-6.82	45.07	34.30	11.97	29.96	0.00	100	115 Average	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5924.50	61.24	68.57	-7.33	44.93	34.30	11.97	29.96	0.00	100	115 Average																																														
2	5925.50	61.38	68.20	-6.82	45.07	34.30	11.97	29.96	0.00	100	115 Average																																														

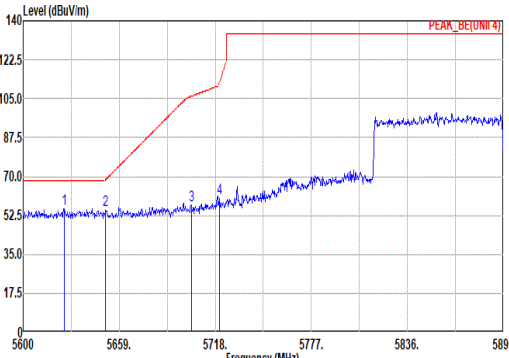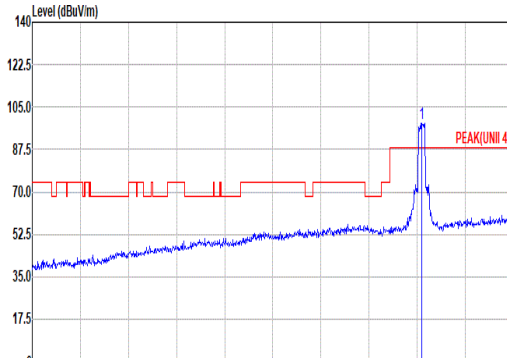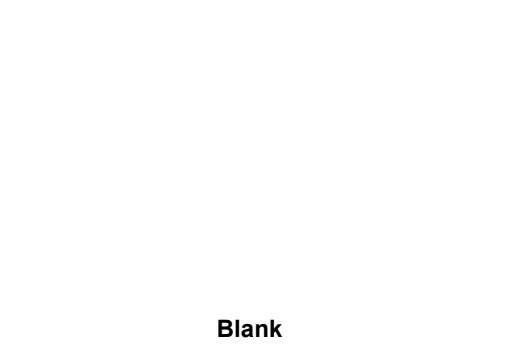
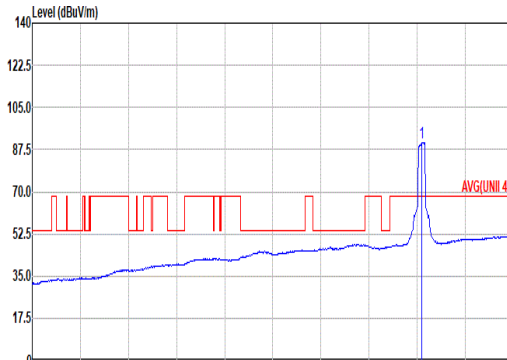


		61																																																																																																																															
Mode	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5625.08</td><td>55.57</td><td>68.20</td><td>-12.63</td><td>40.57</td><td>33.10</td><td>11.68</td><td>29.78</td><td>0.00</td><td>328</td><td>108</td><td>Peak</td></tr><tr><td>2</td><td>5658.74</td><td>55.16</td><td>68.75</td><td>-13.59</td><td>40.05</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>328</td><td>108</td><td>Peak</td></tr><tr><td>3</td><td>5703.25</td><td>57.12</td><td>106.11</td><td>-48.99</td><td>41.58</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>328</td><td>108</td><td>Peak</td></tr><tr><td>4</td><td>5720.36</td><td>60.11</td><td>111.62</td><td>-51.51</td><td>44.49</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>328</td><td>108</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5625.08	55.57	68.20	-12.63	40.57	33.10	11.68	29.78	0.00	328	108	Peak	2	5658.74	55.16	68.75	-13.59	40.05	33.21	11.70	29.80	0.00	328	108	Peak	3	5703.25	57.12	106.11	-48.99	41.58	33.61	11.76	29.83	0.00	328	108	Peak	4	5720.36	60.11	111.62	-51.51	44.49	33.68	11.78	29.84	0.00	328	108	Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>90.24</td><td>-----</td><td>-----</td><td>82.03</td><td>34.22</td><td>11.91</td><td>29.92</td><td>0.00</td><td>328</td><td>108</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5855.00	90.24	-----	-----	82.03	34.22	11.91	29.92	0.00	328	108	Peak
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5625.08	55.57	68.20	-12.63	40.57	33.10	11.68	29.78	0.00	328	108	Peak																																																																																																																					
2	5658.74	55.16	68.75	-13.59	40.05	33.21	11.70	29.80	0.00	328	108	Peak																																																																																																																					
3	5703.25	57.12	106.11	-48.99	41.58	33.61	11.76	29.83	0.00	328	108	Peak																																																																																																																					
4	5720.36	60.11	111.62	-51.51	44.49	33.68	11.78	29.84	0.00	328	108	Peak																																																																																																																					
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5855.00	90.24	-----	-----	82.03	34.22	11.91	29.92	0.00	328	108	Peak																																																																																																																					
Avg	 Level (dBuV/m) Frequency (MHz) Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>90.54</td><td>-----</td><td>-----</td><td>74.31</td><td>34.24</td><td>11.92</td><td>29.93</td><td>0.00</td><td>328</td><td>108</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	1	5855.00	90.54	-----	-----	74.31	34.24	11.92	29.93	0.00	328	108	Average																																																																														
		Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																					
1	5855.00	90.54	-----	-----	74.31	34.24	11.92	29.93	0.00	328	108	Average																																																																																																																					


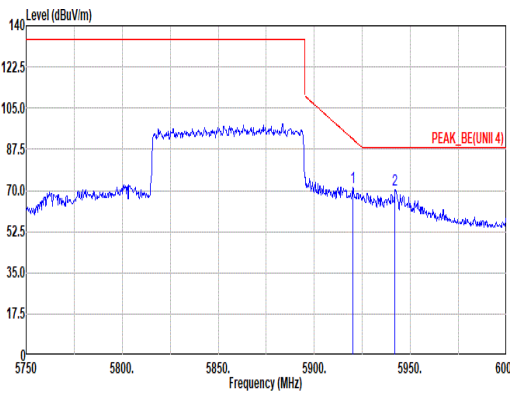
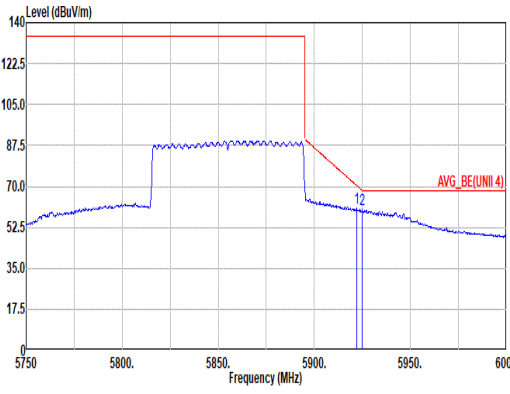


Mode	61																																																																			
	Band Edge - R																																																																			
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																			
ANT	1																																																																			
Pol.	Vertical						Fundamental																																																													
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5920.00</td><td>71.14</td><td>91.86</td><td>-20.72</td><td>54.83</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>328</td><td>100</td><td>Peak</td></tr><tr><td>2</td><td>5942.00</td><td>70.34</td><td>88.20</td><td>-17.86</td><td>54.83</td><td>34.30</td><td>11.98</td><td>29.97</td><td>0.00</td><td>328</td><td>100</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5920.00	71.14	91.86	-20.72	54.83	34.30	11.96	29.95	0.00	328	100	Peak	2	5942.00	70.34	88.20	-17.86	54.83	34.30	11.98	29.97	0.00	328	100	Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5920.00	71.14	91.86	-20.72	54.83	34.30	11.96	29.95	0.00	328	100	Peak																																																								
2	5942.00	70.34	88.20	-17.86	54.83	34.30	11.98	29.97	0.00	328	100	Peak																																																								
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.600kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5922.00</td><td>60.76</td><td>70.39</td><td>-9.63</td><td>44.45</td><td>34.30</td><td>11.96</td><td>29.95</td><td>0.00</td><td>328</td><td>100</td><td>Average</td></tr><tr><td>2</td><td>5925.00</td><td>60.22</td><td>68.20</td><td>-7.98</td><td>43.91</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>328</td><td>100</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5922.00	60.76	70.39	-9.63	44.45	34.30	11.96	29.95	0.00	328	100	Average	2	5925.00	60.22	68.20	-7.98	43.91	34.30	11.97	29.96	0.00	328	100	Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5922.00	60.76	70.39	-9.63	44.45	34.30	11.96	29.95	0.00	328	100	Average																																																								
2	5925.00	60.22	68.20	-7.98	43.91	34.30	11.97	29.96	0.00	328	100	Average																																																								

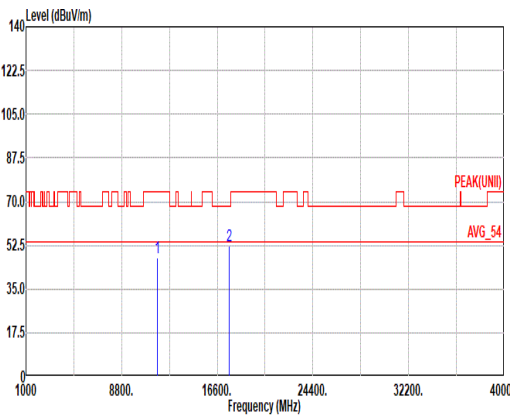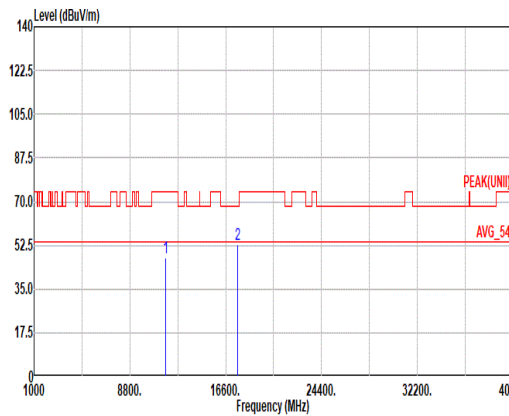

Mode	61																																																																	
	Harmonic																																																																	
	U-NII-4_5.85-5.895_802.11ax HE80_CH171_Full RU_5855MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Vertical																																																											
Peak Avg																																																																		
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11710.00</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>57.47</td><td>38.64</td><td>16.86</td><td>65.77</td><td>0.58</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17565.00</td><td>52.27</td><td>68.20</td><td>-15.93</td><td>53.94</td><td>39.67</td><td>21.54</td><td>63.50</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	47.78	74.00	-26.22	57.47	38.64	16.86	65.77	0.58	--	Peak	2	17565.00	52.27	68.20	-15.93	53.94	39.67	21.54	63.50	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	11710.00	47.78	74.00	-26.22	57.47	38.64	16.86	65.77	0.58	--	Peak																																																							
2	17565.00	52.27	68.20	-15.93	53.94	39.67	21.54	63.50	0.62	--	Peak																																																							

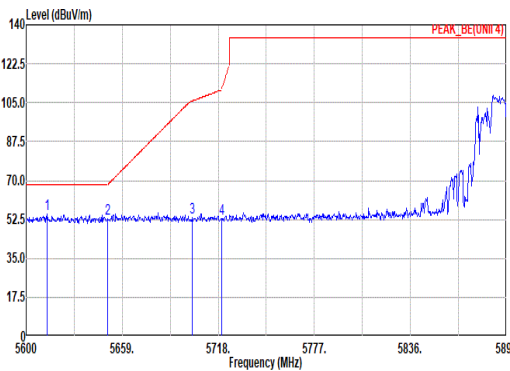
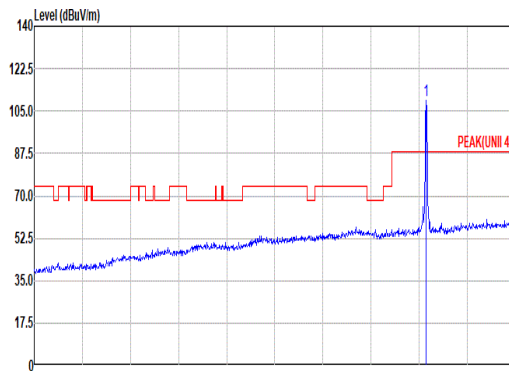
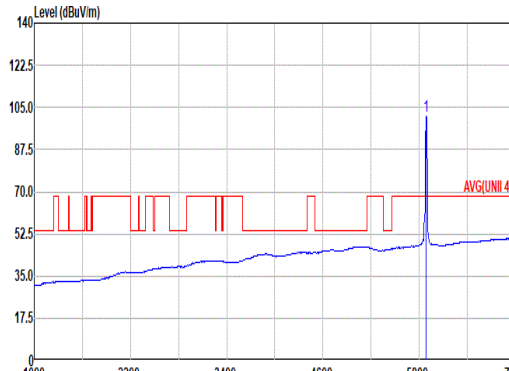


Mode	62																																																																																																													
	Band Edge - L																																																																																																													
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																																																													
ANT	1																																																																																																													
Pol.	Horizontal						Fundamental																																																																																																							
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 5612.69</td><td>54.79</td><td>68.20</td><td>-13.41</td><td>39.86</td><td>33.05</td><td>11.66</td><td>29.78</td><td>0.00</td><td>100</td><td>110 Peak</td></tr><tr><td>2 5658.15</td><td>52.98</td><td>68.31</td><td>-15.33</td><td>37.88</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>110 Peak</td></tr><tr><td>3 5701.78</td><td>53.51</td><td>105.70</td><td>-52.19</td><td>37.97</td><td>33.61</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>110 Peak</td></tr><tr><td>4 5720.07</td><td>52.60</td><td>110.95</td><td>-58.35</td><td>36.98</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>110 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5612.69	54.79	68.20	-13.41	39.86	33.05	11.66	29.78	0.00	100	110 Peak	2 5658.15	52.98	68.31	-15.33	37.88	33.20	11.70	29.80	0.00	100	110 Peak	3 5701.78	53.51	105.70	-52.19	37.97	33.61	11.76	29.83	0.00	100	110 Peak	4 5720.07	52.60	110.95	-58.35	36.98	33.68	11.78	29.84	0.00	100	110 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 5885.00</td><td>109.13</td><td>-----</td><td>-----</td><td>92.85</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>110 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5885.00	109.13	-----	-----	92.85	34.28	11.94	29.94	0.00	100	110 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1 5612.69	54.79	68.20	-13.41	39.86	33.05	11.66	29.78	0.00	100	110 Peak																																																																																																				
2 5658.15	52.98	68.31	-15.33	37.88	33.20	11.70	29.80	0.00	100	110 Peak																																																																																																				
3 5701.78	53.51	105.70	-52.19	37.97	33.61	11.76	29.83	0.00	100	110 Peak																																																																																																				
4 5720.07	52.60	110.95	-58.35	36.98	33.68	11.78	29.84	0.00	100	110 Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1 5885.00	109.13	-----	-----	92.85	34.28	11.94	29.94	0.00	100	110 Peak																																																																																																				
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 5885.00</td><td>101.44</td><td>-----</td><td>-----</td><td>85.16</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>110 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1 5885.00	101.44	-----	-----	85.16	34.28	11.94	29.94	0.00	100	110 Average																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																				
1 5885.00	101.44	-----	-----	85.16	34.28	11.94	29.94	0.00	100	110 Average																																																																																																				



Mode	62																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>90.17</td><td>110.02</td><td>-19.85</td><td>73.88</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>110 Peak</td></tr><tr><td>2</td><td>5928.50</td><td>57.70</td><td>88.20</td><td>-30.50</td><td>41.39</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>110 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	90.17	110.02	-19.85	73.88	34.29	11.94	29.94	0.00	100	110 Peak	2	5928.50	57.70	88.20	-30.50	41.39	34.30	11.97	29.96	0.00	100	110 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.25	90.17	110.02	-19.85	73.88	34.29	11.94	29.94	0.00	100	110 Peak																																																							
2	5928.50	57.70	88.20	-30.50	41.39	34.30	11.97	29.96	0.00	100	110 Peak																																																							
Avg	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>83.83</td><td>90.02</td><td>-6.19</td><td>67.54</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>100</td><td>110 Average</td></tr><tr><td>2</td><td>5928.50</td><td>47.46</td><td>68.20</td><td>-20.74</td><td>31.15</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>110 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	83.83	90.02	-6.19	67.54	34.29	11.94	29.94	0.00	100	110 Average	2	5928.50	47.46	68.20	-20.74	31.15	34.30	11.97	29.96	0.00	100	110 Average	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5895.25	83.83	90.02	-6.19	67.54	34.29	11.94	29.94	0.00	100	110 Average																																																							
2	5928.50	47.46	68.20	-20.74	31.15	34.30	11.97	29.96	0.00	100	110 Average																																																							

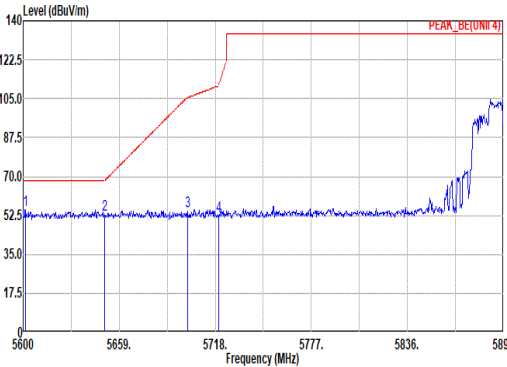
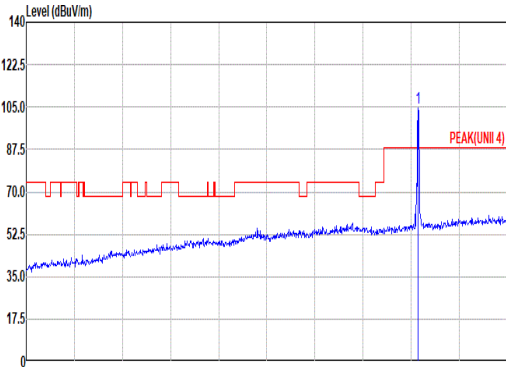
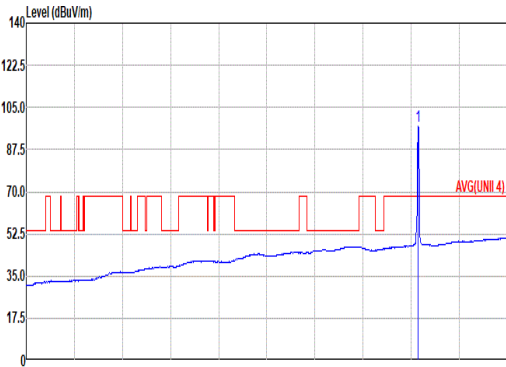


Mode	62																																																																																																																																			
	Band Edge - L																																																																																																																																			
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																																																																																			
ANT	1																																																																																																																																			
Pol.	Vertical						Fundamental																																																																																																																													
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4)						 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4)																																																																																																																													
	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5601.48</td><td>54.96</td><td>68.20</td><td>-13.24</td><td>40.07</td><td>33.01</td><td>11.65</td><td>29.77</td><td>0.00</td><td>300</td><td>123 Peak</td></tr><tr><td>2 5650.15</td><td>52.73</td><td>68.31</td><td>-15.58</td><td>37.63</td><td>33.20</td><td>11.70</td><td>29.80</td><td>0.00</td><td>300</td><td>123 Peak</td></tr><tr><td>3 5700.89</td><td>54.31</td><td>105.45</td><td>-51.14</td><td>38.78</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>300</td><td>123 Peak</td></tr><tr><td>4 5720.07</td><td>52.12</td><td>110.95</td><td>-58.83</td><td>36.50</td><td>33.60</td><td>11.78</td><td>29.84</td><td>0.00</td><td>300</td><td>123 Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5601.48	54.96	68.20	-13.24	40.07	33.01	11.65	29.77	0.00	300	123 Peak	2 5650.15	52.73	68.31	-15.58	37.63	33.20	11.70	29.80	0.00	300	123 Peak	3 5700.89	54.31	105.45	-51.14	38.78	33.60	11.76	29.83	0.00	300	123 Peak	4 5720.07	52.12	110.95	-58.83	36.50	33.60	11.78	29.84	0.00	300	123 Peak	Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>104.76</td><td>-----</td><td>-----</td><td>88.48</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>300</td><td>123 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	104.76	-----	-----	88.48	34.28	11.94	29.94	0.00	300	123 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5601.48	54.96	68.20	-13.24	40.07	33.01	11.65	29.77	0.00	300	123 Peak																																																																																																																										
2 5650.15	52.73	68.31	-15.58	37.63	33.20	11.70	29.80	0.00	300	123 Peak																																																																																																																										
3 5700.89	54.31	105.45	-51.14	38.78	33.60	11.76	29.83	0.00	300	123 Peak																																																																																																																										
4 5720.07	52.12	110.95	-58.83	36.50	33.60	11.78	29.84	0.00	300	123 Peak																																																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	104.76	-----	-----	88.48	34.28	11.94	29.94	0.00	300	123 Peak																																																																																																																										
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4)																																																																																																																													
							Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:0.750kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5885.00</td><td>97.27</td><td>-----</td><td>-----</td><td>80.99</td><td>34.28</td><td>11.94</td><td>29.94</td><td>0.00</td><td>300</td><td>123 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5885.00	97.27	-----	-----	80.99	34.28	11.94	29.94	0.00	300	123 Average																																																																													
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																										
1 5885.00	97.27	-----	-----	80.99	34.28	11.94	29.94	0.00	300	123 Average																																																																																																																										





Mode	62																																																																					
	Band Edge - R																																																																					
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																					
ANT	1																																																																					
Pol.	Vertical						Fundamental																																																															
Peak	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>84.61</td><td>110.02</td><td>-25.41</td><td>68.32</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>300</td><td>123</td><td>Peak</td></tr><tr><td>2</td><td>5941.25</td><td>56.49</td><td>88.20</td><td>-31.71</td><td>40.18</td><td>34.30</td><td>11.98</td><td>29.97</td><td>0.00</td><td>300</td><td>123</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	84.61	110.02	-25.41	68.32	34.29	11.94	29.94	0.00	300	123	Peak	2	5941.25	56.49	88.20	-31.71	40.18	34.30	11.98	29.97	0.00	300	123	Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5895.25	84.61	110.02	-25.41	68.32	34.29	11.94	29.94	0.00	300	123	Peak																																																										
2	5941.25	56.49	88.20	-31.71	40.18	34.30	11.98	29.97	0.00	300	123	Peak																																																										
Avg	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:0.750kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5895.25</td><td>79.90</td><td>90.02</td><td>-10.12</td><td>63.61</td><td>34.29</td><td>11.94</td><td>29.94</td><td>0.00</td><td>300</td><td>123</td><td>Average</td></tr><tr><td>2</td><td>5935.50</td><td>47.10</td><td>68.20</td><td>-21.10</td><td>30.78</td><td>34.30</td><td>11.98</td><td>29.96</td><td>0.00</td><td>300</td><td>123</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5895.25	79.90	90.02	-10.12	63.61	34.29	11.94	29.94	0.00	300	123	Average	2	5935.50	47.10	68.20	-21.10	30.78	34.30	11.98	29.96	0.00	300	123	Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	5895.25	79.90	90.02	-10.12	63.61	34.29	11.94	29.94	0.00	300	123	Average																																																										
2	5935.50	47.10	68.20	-21.10	30.78	34.30	11.98	29.96	0.00	300	123	Average																																																										

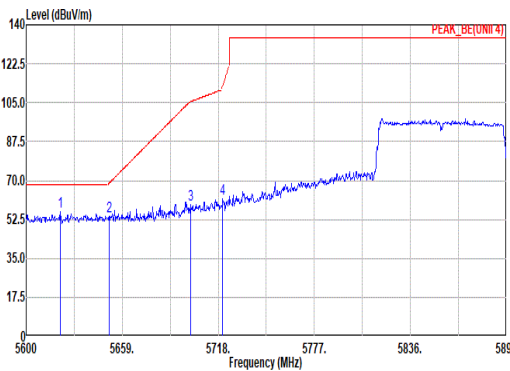
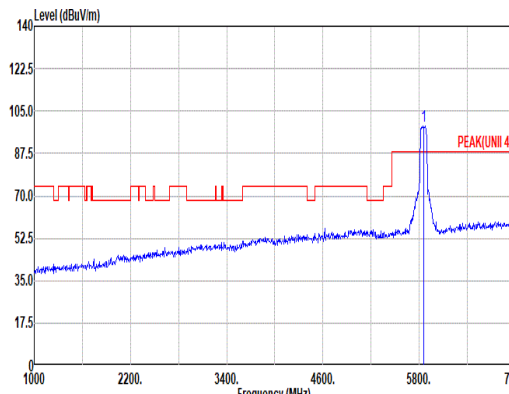
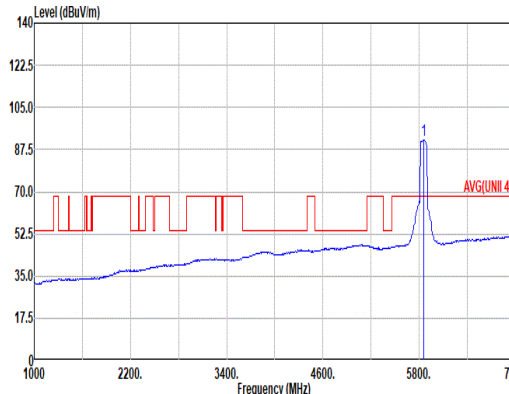


Mode	63																																																																																																																		
	Band Edge - L																																																																																																																		
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																		
ANT	1																																																																																																																		
Pol.	Horizontal						Fundamental																																																																																																												
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5620.95</td><td>56.07</td><td>68.20</td><td>-12.13</td><td>41.10</td><td>33.08</td><td>11.67</td><td>29.78</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>2</td><td>5651.04</td><td>54.13</td><td>68.97</td><td>-14.84</td><td>39.02</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>3</td><td>5701.19</td><td>59.41</td><td>105.53</td><td>-46.12</td><td>43.88</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>4</td><td>5720.66</td><td>61.85</td><td>112.29</td><td>-50.44</td><td>46.23</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5620.95	56.07	68.20	-12.13	41.10	33.08	11.67	29.78	0.00	100	23 Peak	2	5651.04	54.13	68.97	-14.84	39.02	33.21	11.70	29.80	0.00	100	23 Peak	3	5701.19	59.41	105.53	-46.12	43.88	33.60	11.76	29.83	0.00	100	23 Peak	4	5720.66	61.85	112.29	-50.44	46.23	33.68	11.78	29.84	0.00	100	23 Peak	 Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>99.01</td><td>-----</td><td>-----</td><td>82.83</td><td>34.19</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5855.00	99.01	-----	-----	82.83	34.19	11.90	29.91	0.00	100	23 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5620.95	56.07	68.20	-12.13	41.10	33.08	11.67	29.78	0.00	100	23 Peak																																																																																																								
2	5651.04	54.13	68.97	-14.84	39.02	33.21	11.70	29.80	0.00	100	23 Peak																																																																																																								
3	5701.19	59.41	105.53	-46.12	43.88	33.60	11.76	29.83	0.00	100	23 Peak																																																																																																								
4	5720.66	61.85	112.29	-50.44	46.23	33.68	11.78	29.84	0.00	100	23 Peak																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5855.00	99.01	-----	-----	82.83	34.19	11.90	29.91	0.00	100	23 Peak																																																																																																								
Avg	Blank						 Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBN:3.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5855.00</td><td>91.30</td><td>-----</td><td>-----</td><td>75.14</td><td>34.17</td><td>11.90</td><td>29.91</td><td>0.00</td><td>100</td><td>23 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	1	5855.00	91.30	-----	-----	75.14	34.17	11.90	29.91	0.00	100	23 Average																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																																									
1	5855.00	91.30	-----	-----	75.14	34.17	11.90	29.91	0.00	100	23 Average																																																																																																								

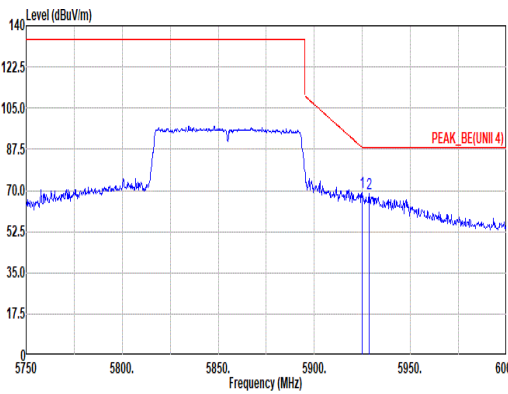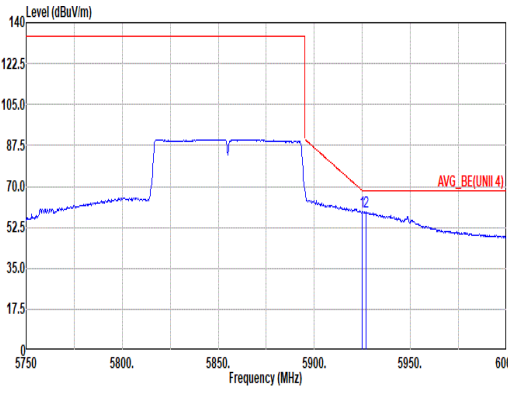

Mode	63																																																																	
	Band Edge - R																																																																	
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal						Fundamental																																																											
Peak	 Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>69.15</td><td>88.38</td><td>-19.23</td><td>52.84</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Peak</td></tr><tr><td>2</td><td>5928.50</td><td>68.71</td><td>88.20</td><td>-19.49</td><td>52.40</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	69.15	88.38	-19.23	52.84	34.30	11.97	29.96	0.00	100	23 Peak	2	5928.50	68.71	88.20	-19.49	52.40	34.30	11.97	29.96	0.00	100	23 Peak	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5924.75	69.15	88.38	-19.23	52.84	34.30	11.97	29.96	0.00	100	23 Peak																																																							
2	5928.50	68.71	88.20	-19.49	52.40	34.30	11.97	29.96	0.00	100	23 Peak																																																							
Avg	 Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 HORIZONTAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5924.75</td><td>59.11</td><td>68.38</td><td>-9.27</td><td>42.00</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Average</td></tr><tr><td>2</td><td>5926.75</td><td>59.30</td><td>68.20</td><td>-8.90</td><td>42.99</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>100</td><td>23 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5924.75	59.11	68.38	-9.27	42.00	34.30	11.97	29.96	0.00	100	23 Average	2	5926.75	59.30	68.20	-8.90	42.99	34.30	11.97	29.96	0.00	100	23 Average	Blank				
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																								
1	5924.75	59.11	68.38	-9.27	42.00	34.30	11.97	29.96	0.00	100	23 Average																																																							
2	5926.75	59.30	68.20	-8.90	42.99	34.30	11.97	29.96	0.00	100	23 Average																																																							

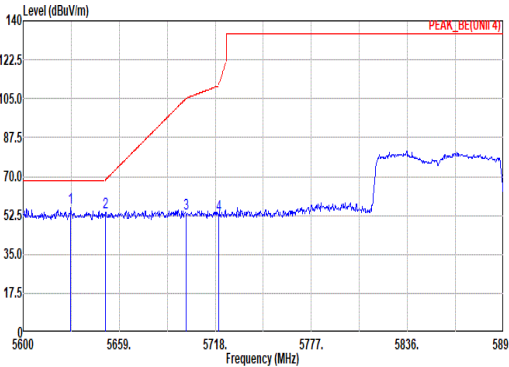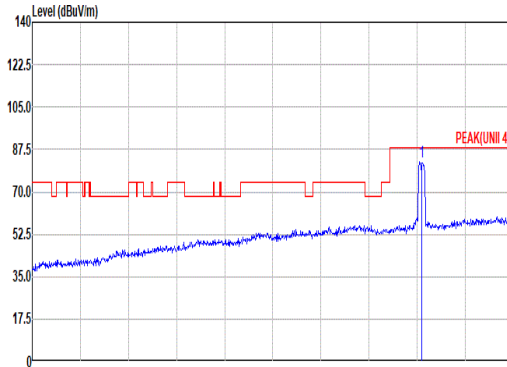
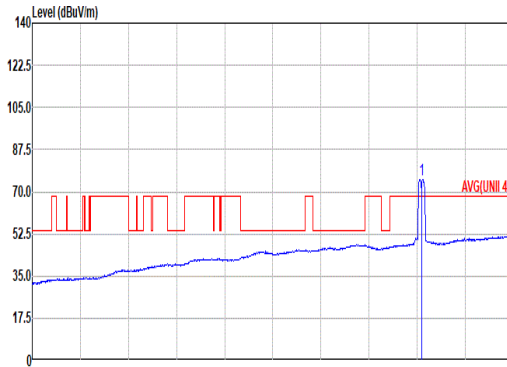


Mode	63																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak	 Level (dBuV/m) Frequency (MHz) PEAK_BE(UNII 4) Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5629.21</td><td>56.20</td><td>68.20</td><td>-12.00</td><td>41.18</td><td>33.12</td><td>11.68</td><td>29.78</td><td>0.00</td><td>200</td><td>212</td><td>Peak</td></tr><tr><td>2</td><td>5658.74</td><td>54.04</td><td>68.75</td><td>-14.71</td><td>38.93</td><td>33.21</td><td>11.70</td><td>29.80</td><td>0.00</td><td>200</td><td>212</td><td>Peak</td></tr><tr><td>3</td><td>5700.01</td><td>53.55</td><td>105.20</td><td>-51.65</td><td>38.02</td><td>33.60</td><td>11.76</td><td>29.83</td><td>0.00</td><td>200</td><td>212</td><td>Peak</td></tr><tr><td>4</td><td>5720.07</td><td>52.84</td><td>110.95</td><td>-58.11</td><td>37.22</td><td>33.68</td><td>11.78</td><td>29.84</td><td>0.00</td><td>200</td><td>212</td><td>Peak</td></tr></tbody></table>							MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5629.21	56.20	68.20	-12.00	41.18	33.12	11.68	29.78	0.00	200	212	Peak	2	5658.74	54.04	68.75	-14.71	38.93	33.21	11.70	29.80	0.00	200	212	Peak	3	5700.01	53.55	105.20	-51.65	38.02	33.60	11.76	29.83	0.00	200	212	Peak	4	5720.07	52.84	110.95	-58.11	37.22	33.68	11.78	29.84	0.00	200	212	Peak	 Level (dBuV/m) Frequency (MHz) PEAK(UNII 4) Site : 03CH16-HY Condition: PEAK(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>82.18</td><td>-----</td><td>-----</td><td>66.07</td><td>34.12</td><td>11.89</td><td>29.90</td><td>0.00</td><td>200</td><td>212</td><td>Peak</td></tr></tbody></table>							MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5855.00	82.18	-----	-----	66.07	34.12	11.89	29.90	0.00	200	212	Peak
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5629.21	56.20	68.20	-12.00	41.18	33.12	11.68	29.78	0.00	200	212	Peak																																																																																																																					
2	5658.74	54.04	68.75	-14.71	38.93	33.21	11.70	29.80	0.00	200	212	Peak																																																																																																																					
3	5700.01	53.55	105.20	-51.65	38.02	33.60	11.76	29.83	0.00	200	212	Peak																																																																																																																					
4	5720.07	52.84	110.95	-58.11	37.22	33.68	11.78	29.84	0.00	200	212	Peak																																																																																																																					
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5855.00	82.18	-----	-----	66.07	34.12	11.89	29.90	0.00	200	212	Peak																																																																																																																					
Avg	Blank						 Level (dBuV/m) Frequency (MHz) AVG(UNII 4) Site : 03CH16-HY Condition: AVG(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBN:3.000kHz SMT:Auto <table><thead><tr><th></th><th>MHz</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5855.00</td><td>75.14</td><td>-----</td><td>-----</td><td>59.03</td><td>34.12</td><td>11.89</td><td>29.90</td><td>0.00</td><td>200</td><td>212</td><td>Average</td></tr></tbody></table>							MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	5855.00	75.14	-----	-----	59.03	34.12	11.89	29.90	0.00	200	212	Average																																																																														
	MHz	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5855.00	75.14	-----	-----	59.03	34.12	11.89	29.90	0.00	200	212	Average																																																																																																																					





Mode	63																																																								
	Band Edge - R																																																								
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																								
ANT	1																																																								
Pol.	Vertical	Fundamental																																																							
Peak	Site : 03CH16-HY Condition: PEAK_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>54.58</td><td>88.20</td><td>-33.62</td><td>38.27</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>200</td><td>212 Peak</td></tr><tr><td>2</td><td>5973.00</td><td>55.86</td><td>88.20</td><td>-32.34</td><td>39.58</td><td>34.25</td><td>12.01</td><td>29.98</td><td>0.00</td><td>200</td><td>212 Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	54.58	88.20	-33.62	38.27	34.30	11.97	29.96	0.00	200	212 Peak	2	5973.00	55.86	88.20	-32.34	39.58	34.25	12.01	29.98	0.00	200	212 Peak	Blank
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5925.00	54.58	88.20	-33.62	38.27	34.30	11.97	29.96	0.00	200	212 Peak																																														
2	5973.00	55.86	88.20	-32.34	39.58	34.25	12.01	29.98	0.00	200	212 Peak																																														
Avg	Site : 03CH16-HY Condition: AVG_BE(UNII 4) 3m 91200-1522_250327 VERTICAL : RBW:1000.000kHz VBW:3.300kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5925.00</td><td>47.98</td><td>68.20</td><td>-20.22</td><td>31.67</td><td>34.30</td><td>11.97</td><td>29.96</td><td>0.00</td><td>200</td><td>212 Average</td></tr><tr><td>2</td><td>5936.00</td><td>48.20</td><td>68.20</td><td>-20.00</td><td>31.88</td><td>34.30</td><td>11.98</td><td>29.96</td><td>0.00</td><td>200</td><td>212 Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5925.00	47.98	68.20	-20.22	31.67	34.30	11.97	29.96	0.00	200	212 Average	2	5936.00	48.20	68.20	-20.00	31.88	34.30	11.98	29.96	0.00	200	212 Average	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	5925.00	47.98	68.20	-20.22	31.67	34.30	11.97	29.96	0.00	200	212 Average																																														
2	5936.00	48.20	68.20	-20.00	31.88	34.30	11.98	29.96	0.00	200	212 Average																																														

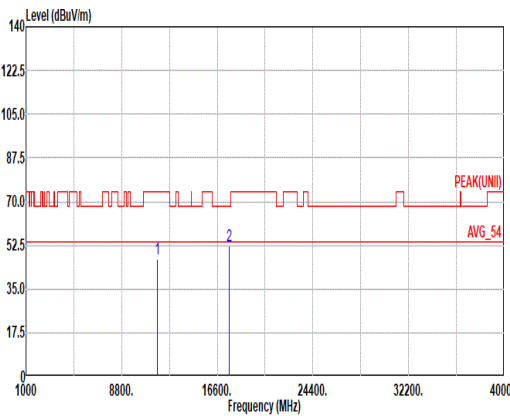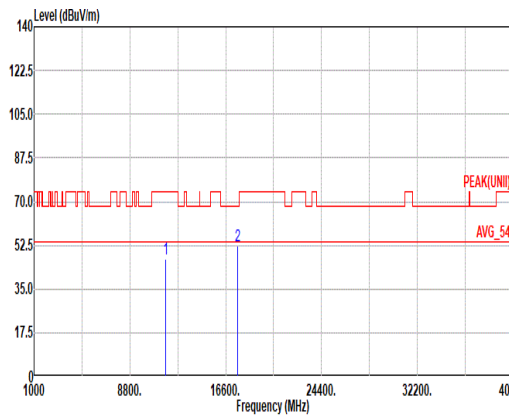

Mode	63																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-4_5.85-5.895_802.11ac VHT80_CH171_5855MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 HORIZONTAL						Site : 03CH16-HY Condition: PEAK(UNII) 3m 91200-1522_250327 VERTICAL																																																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11710.00</td><td>47.18</td><td>74.00</td><td>-26.82</td><td>56.90</td><td>38.60</td><td>16.90</td><td>65.79</td><td>0.57</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17565.00</td><td>52.27</td><td>68.20</td><td>-15.93</td><td>54.00</td><td>39.65</td><td>21.52</td><td>63.52</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	47.18	74.00	-26.82	56.90	38.60	16.90	65.79	0.57	--	Peak	2	17565.00	52.27	68.20	-15.93	54.00	39.65	21.52	63.52	0.62	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11710.00</td><td>47.26</td><td>74.00</td><td>-26.74</td><td>56.90</td><td>38.66</td><td>16.94</td><td>65.80</td><td>0.56</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17565.00</td><td>52.12</td><td>68.20</td><td>-16.08</td><td>54.12</td><td>39.54</td><td>21.45</td><td>63.61</td><td>0.62</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11710.00	47.26	74.00	-26.74	56.90	38.66	16.94	65.80	0.56	--	Peak	2	17565.00	52.12	68.20	-16.08	54.12	39.54	21.45	63.61	0.62	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	11710.00	47.18	74.00	-26.82	56.90	38.60	16.90	65.79	0.57	--	Peak																																																																																																																					
2	17565.00	52.27	68.20	-15.93	54.00	39.65	21.52	63.52	0.62	--	Peak																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																						
1	11710.00	47.26	74.00	-26.74	56.90	38.66	16.94	65.80	0.56	--	Peak																																																																																																																					
2	17565.00	52.12	68.20	-16.08	54.12	39.54	21.45	63.61	0.62	--	Peak																																																																																																																					

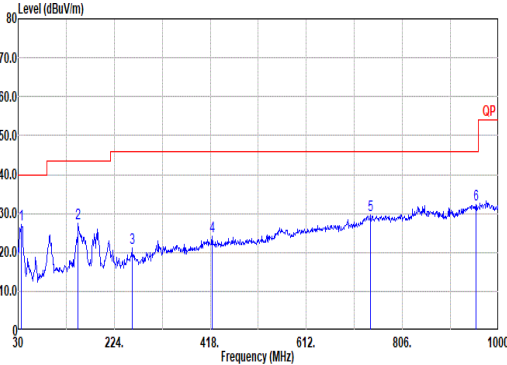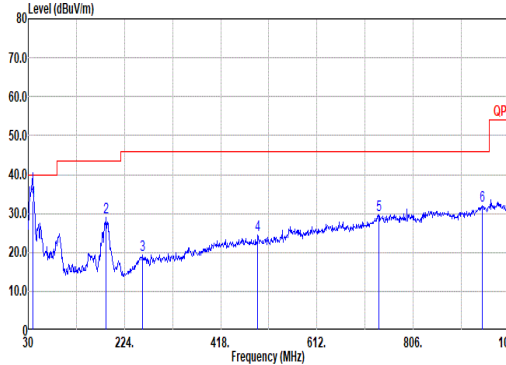

Mode	64																																																																																																				
	LF																																																																																																				
	U-NII-4_5.85-5.895_802.11ax HE20_CH177_Partial RU 106/54_5885MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal							Vertical																																																																																													
QP/ Peak																																																																																																					
	Site : 03CH16-HY Condition: QP 3m CBL6111D&00802NID01N-06_47020 & 06_241005 HORIZONTAL																																																																																																				
	<table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>36.79</td><td>27.10</td><td>40.00</td><td>-12.90</td><td>37.25</td><td>21.42</td><td>0.94</td><td>32.56</td><td>0.05</td><td>-- -- Peak</td></tr><tr><td>2</td><td>151.25</td><td>27.32</td><td>43.50</td><td>-16.18</td><td>40.50</td><td>17.30</td><td>1.92</td><td>32.48</td><td>0.08</td><td>-- -- Peak</td></tr><tr><td>3</td><td>259.89</td><td>21.14</td><td>46.00</td><td>-24.86</td><td>30.74</td><td>20.20</td><td>2.50</td><td>32.37</td><td>0.07</td><td>-- -- Peak</td></tr><tr><td>4</td><td>421.88</td><td>24.15</td><td>46.00</td><td>-21.85</td><td>30.59</td><td>22.57</td><td>3.22</td><td>32.35</td><td>0.12</td><td>-- -- Peak</td></tr><tr><td>5</td><td>741.98</td><td>29.44</td><td>46.00</td><td>-16.56</td><td>28.82</td><td>28.33</td><td>4.24</td><td>32.09</td><td>0.14</td><td>-- -- Peak</td></tr><tr><td>6</td><td>954.41</td><td>32.18</td><td>46.00</td><td>-13.82</td><td>27.68</td><td>31.11</td><td>4.82</td><td>31.69</td><td>0.26</td><td>-- -- Peak</td></tr></table>															Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	36.79	27.10	40.00	-12.90	37.25	21.42	0.94	32.56	0.05	-- -- Peak	2	151.25	27.32	43.50	-16.18	40.50	17.30	1.92	32.48	0.08	-- -- Peak	3	259.89	21.14	46.00	-24.86	30.74	20.20	2.50	32.37	0.07	-- -- Peak	4	421.88	24.15	46.00	-21.85	30.59	22.57	3.22	32.35	0.12	-- -- Peak	5	741.98	29.44	46.00	-16.56	28.82	28.33	4.24	32.09	0.14	-- -- Peak	6	954.41	32.18	46.00	-13.82	27.68	31.11	4.82	31.69	0.26
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	36.79	27.10	40.00	-12.90	37.25	21.42	0.94	32.56	0.05	-- -- Peak																																																																																											
2	151.25	27.32	43.50	-16.18	40.50	17.30	1.92	32.48	0.08	-- -- Peak																																																																																											
3	259.89	21.14	46.00	-24.86	30.74	20.20	2.50	32.37	0.07	-- -- Peak																																																																																											
4	421.88	24.15	46.00	-21.85	30.59	22.57	3.22	32.35	0.12	-- -- Peak																																																																																											
5	741.98	29.44	46.00	-16.56	28.82	28.33	4.24	32.09	0.14	-- -- Peak																																																																																											
6	954.41	32.18	46.00	-13.82	27.68	31.11	4.82	31.69	0.26	-- -- Peak																																																																																											
Site : 03CH16-HY Condition: QP 3m CBL6111D&00802NID01N-06_47020 & 06_241005 VERTICAL																																																																																																					
<table><tr><th></th><th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>38.73</td><td>33.18</td><td>40.00</td><td>-6.82</td><td>44.40</td><td>20.31</td><td>0.96</td><td>32.55</td><td>0.06</td><td>100 320 QP</td></tr><tr><td>2</td><td>187.14</td><td>28.94</td><td>43.50</td><td>-14.56</td><td>44.01</td><td>15.06</td><td>2.13</td><td>32.34</td><td>0.08</td><td>-- -- Peak</td></tr><tr><td>3</td><td>268.86</td><td>19.37</td><td>46.00</td><td>-26.63</td><td>28.99</td><td>20.17</td><td>2.50</td><td>32.36</td><td>0.07</td><td>-- -- Peak</td></tr><tr><td>4</td><td>492.69</td><td>24.51</td><td>46.00</td><td>-21.49</td><td>30.09</td><td>23.65</td><td>3.44</td><td>32.82</td><td>0.15</td><td>-- -- Peak</td></tr><tr><td>5</td><td>737.13</td><td>29.63</td><td>46.00</td><td>-16.37</td><td>29.18</td><td>28.19</td><td>4.22</td><td>32.10</td><td>0.14</td><td>-- -- Peak</td></tr><tr><td>6</td><td>945.68</td><td>31.88</td><td>46.00</td><td>-14.12</td><td>27.74</td><td>30.88</td><td>4.80</td><td>31.79</td><td>0.25</td><td>-- -- Peak</td></tr></table>															Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	38.73	33.18	40.00	-6.82	44.40	20.31	0.96	32.55	0.06	100 320 QP	2	187.14	28.94	43.50	-14.56	44.01	15.06	2.13	32.34	0.08	-- -- Peak	3	268.86	19.37	46.00	-26.63	28.99	20.17	2.50	32.36	0.07	-- -- Peak	4	492.69	24.51	46.00	-21.49	30.09	23.65	3.44	32.82	0.15	-- -- Peak	5	737.13	29.63	46.00	-16.37	29.18	28.19	4.22	32.10	0.14	-- -- Peak	6	945.68	31.88	46.00	-14.12	27.74	30.88	4.80	31.79	0.25	-- -- Peak
	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	38.73	33.18	40.00	-6.82	44.40	20.31	0.96	32.55	0.06	100 320 QP																																																																																											
2	187.14	28.94	43.50	-14.56	44.01	15.06	2.13	32.34	0.08	-- -- Peak																																																																																											
3	268.86	19.37	46.00	-26.63	28.99	20.17	2.50	32.36	0.07	-- -- Peak																																																																																											
4	492.69	24.51	46.00	-21.49	30.09	23.65	3.44	32.82	0.15	-- -- Peak																																																																																											
5	737.13	29.63	46.00	-16.37	29.18	28.19	4.22	32.10	0.14	-- -- Peak																																																																																											
6	945.68	31.88	46.00	-14.12	27.74	30.88	4.80	31.79	0.25	-- -- Peak																																																																																											