

TEST REPORT

Product Name : Wireless Mouse
Brand Mark : VOXON/Voxon
Model No. : VX-MS308
FCC ID : 2AMKH-VXMS308
Report Number : BLA-EMC-202206-A7802
Date of Sample Receipt : 2022/6/20
Date of Test : 2022/6/20 to 2022/7/18
Date of Issue : 2022/7/18
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

VOXON LIMITED

RM 2103 EASEY COMM BLDG, 253-261 HENNESSY RD, HongKong

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.

**Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China**

TEL: +86-755-23059481

Compiled by: Charlie

Approved by: Blue.Zheng



REPORT REVISE RECORD

Version No.	Date	Description
00	2022/7/18	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY	5
2	GENERAL INFORMATION	6
3	GENERAL DESCRIPTION OF E.U.T.	6
4	TEST ENVIRONMENT	7
5	TEST MODE	7
6	MEASUREMENT UNCERTAINTY	7
7	DESCRIPTION OF SUPPORT UNIT	8
8	LABORATORY LOCATION	8
9	TEST INSTRUMENTS LIST	9
10	CONDUCTED BAND EDGES MEASUREMENT	12
10.1	LIMITS	12
10.2	BLOCK DIAGRAM OF TEST SETUP	12
10.3	TEST DATA	13
11	RADIATED SPURIOUS EMISSIONS	14
11.1	LIMITS	14
11.2	BLOCK DIAGRAM OF TEST SETUP	15
11.3	PROCEDURE	15
11.4	TEST DATA	17
12	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	25
12.1	LIMITS	25
12.2	BLOCK DIAGRAM OF TEST SETUP	26
12.3	PROCEDURE	26
12.4	TEST DATA	28
13	CONDUCTED SPURIOUS EMISSIONS	32
13.1	LIMITS	32
13.2	BLOCK DIAGRAM OF TEST SETUP	32
13.3	TEST DATA	33
14	POWER SPECTRUM DENSITY	34
14.1	LIMITS	34
14.2	BLOCK DIAGRAM OF TEST SETUP	34

14.3	TEST DATA	34
15	CONDUCTED PEAK OUTPUT POWER	35
15.1	LIMITS	35
15.2	BLOCK DIAGRAM OF TEST SETUP	35
15.3	TEST DATA	36
16	MINIMUM 6DB BANDWIDTH	37
16.1	LIMITS	37
16.2	BLOCK DIAGRAM OF TEST SETUP	37
16.3	TEST DATA	37
17	ANTENNA REQUIREMENT	38
17.1	CONCLUSION	38
18	APPENDIX	39
APPENDIX A: PHOTOGRAPHS OF TEST SETUP		54

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	N/A
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

2 GENERAL INFORMATION

Applicant	VOXON LIMITED
Address	RM 2103 EASEY COMM BLDG, 253-261 HENNESSY RD, HongKong
Manufacturer	VOXON LIMITED
Address	RM 2103 EASEY COMM BLDG, 253-261 HENNESSY RD, HongKong
Factory	VOXON LIMITED
Address	RM 2103 EASEY COMM BLDG, 253-261 HENNESSY RD, HongKong
Product Name	Wireless Mouse
Test Model No.	VX-MS308

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	N/A
Software Version	N/A
Operation Frequency:	2402MHz-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	PCB Antenna
Antenna Gain:	3.1dBi(Provided by the customer)

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	DC3.0V

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode with modulation

Remark: Only the data of the worst mode would be recorded in this report.

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30Mz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:

BlueAsia of Technical Services(Shenzhen) Co., Ltd.

Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province, China

Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673

No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	25/11/2020	24/11/2023
Receiver	R&S	ESPI3	101082	24/9/2021	23/9/2022
LISN	R&S	ENV216	3560.6550.15	24/9/2021	23/9/2022
LISN	AT	AT166-2	AKK1806000003	26/9/2021	25/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Radiated Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022

Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	10/11/2020	9/11/2023
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Receiver	R&S	ESR7	101199	24/9/2021	23/9/2022
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	26/9/2020	25/9/2022
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	26/9/2020	25/9/2022
Amplifier	SKET	LNPA-0118-45	N/A	24/9/2021	23/9/2022
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	26/9/2020	25/9/2022

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	24/9/2021	23/9/2022
Spectrum	Agilent	N9020A	MY49100060	24/9/2021	23/9/2022
Signal Generator	Agilent	N5182A	MY49060650	24/9/2021	23/9/2022
Signal Generator	Agilent	E8257D	MY44320250	24/9/2021	23/9/2022

Test Equipment Of Antenna Requirement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due


10 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

10.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

10.2 BLOCK DIAGRAM OF TEST SETUP

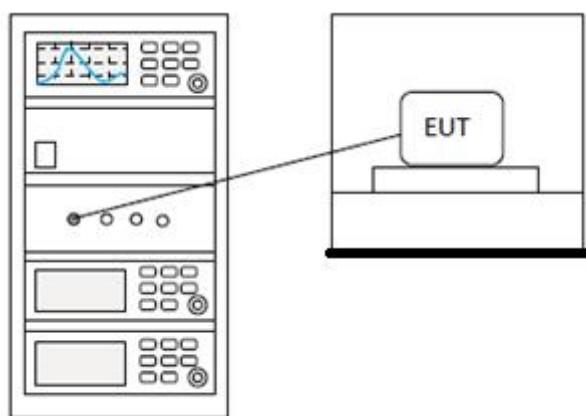

10.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia

11 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

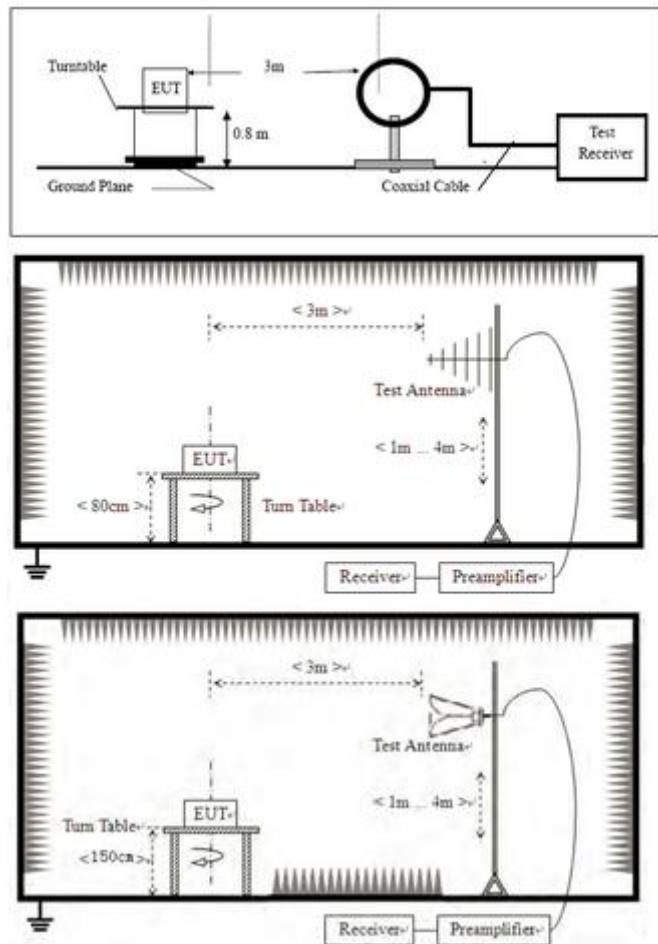

11.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11.4 TEST DATA

Below 1GHz

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202206-A7802
EUT: Wireless Mouse	Test Engineer: York
M/N: VX-MS308	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-06-23 14:09:27

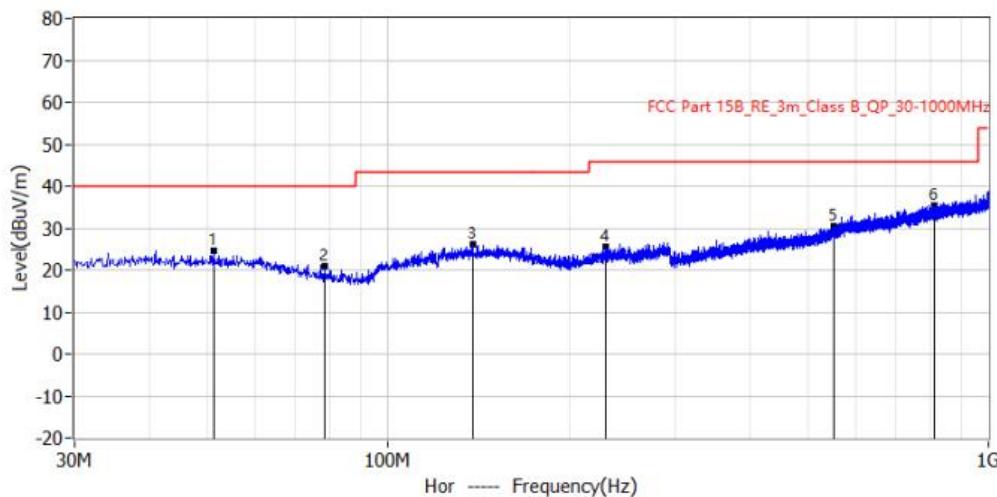


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	51.098MHz	40.0	24.7	-15.3	0.9	23.8	QP	Hor	100.0	262.0
2*	78.379MHz	40.0	20.9	-19.1	0.9	20.0	QP	Hor	100.0	0.0
3*	138.276MHz	43.5	26.2	-17.3	2.6	23.6	QP	Hor	100.0	66.0
4*	229.699MHz	46.0	25.6	-20.4	3.3	22.3	QP	Hor	100.0	4.0
5*	552.103MHz	46.0	30.4	-15.6	0.5	29.9	QP	Hor	100.0	108.0
6*	812.184MHz	46.0	35.4	-10.6	1.1	34.3	QP	Hor	100.0	197.0

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202206-A7802
EUT: Wireless Mouse	Test Engineer: York
M/N: VX-MS308	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2022-06-23 14:07:41

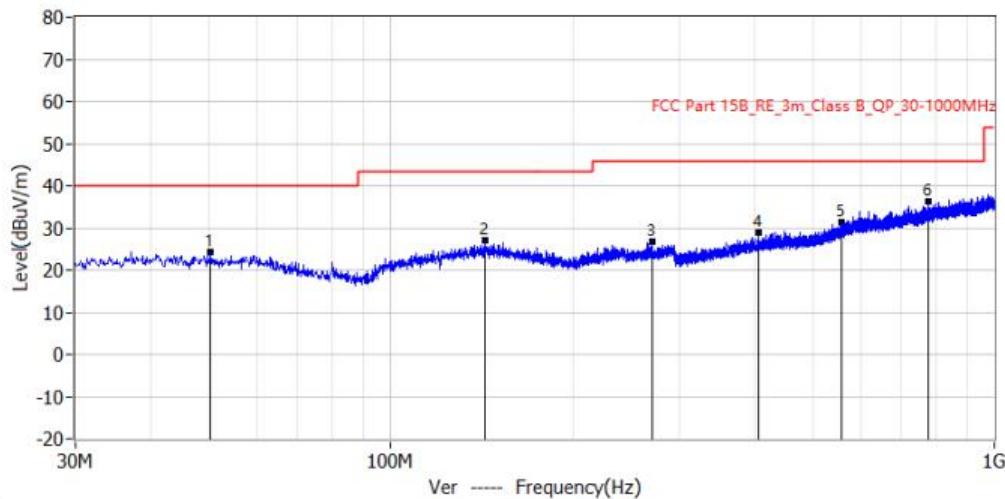


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	50.249MHz	40.0	24.3	-15.7	0.5	23.8	QP	Ver	100.0	28.0
2*	143.126MHz	43.5	27.1	-16.4	3.5	23.6	QP	Ver	100.0	310.0
3*	270.924MHz	46.0	26.7	-19.3	3.5	23.2	QP	Ver	100.0	162.0
4*	407.451MHz	46.0	28.8	-17.2	1.4	27.4	QP	Ver	100.0	286.0
5*	557.316MHz	46.0	31.4	-14.6	1.4	30.0	QP	Ver	100.0	341.0
6*	778.476MHz	46.0	36.2	-9.8	2.5	33.7	QP	Ver	100.0	348.0

Test Result: Pass

Above 1GHz

[TestMode: TX low channel]; [Polarity: Horizontal]

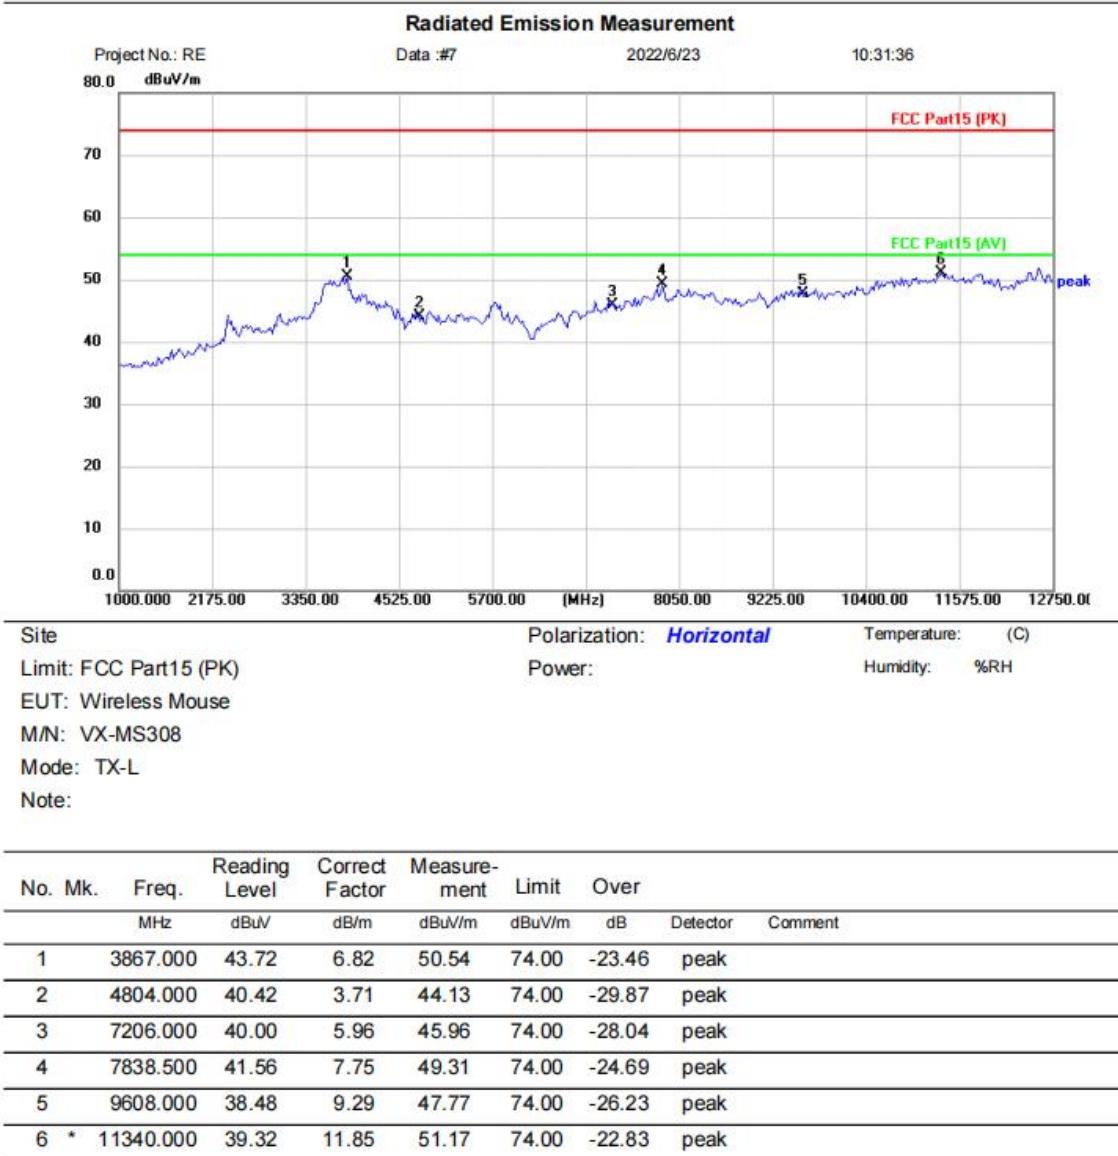


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

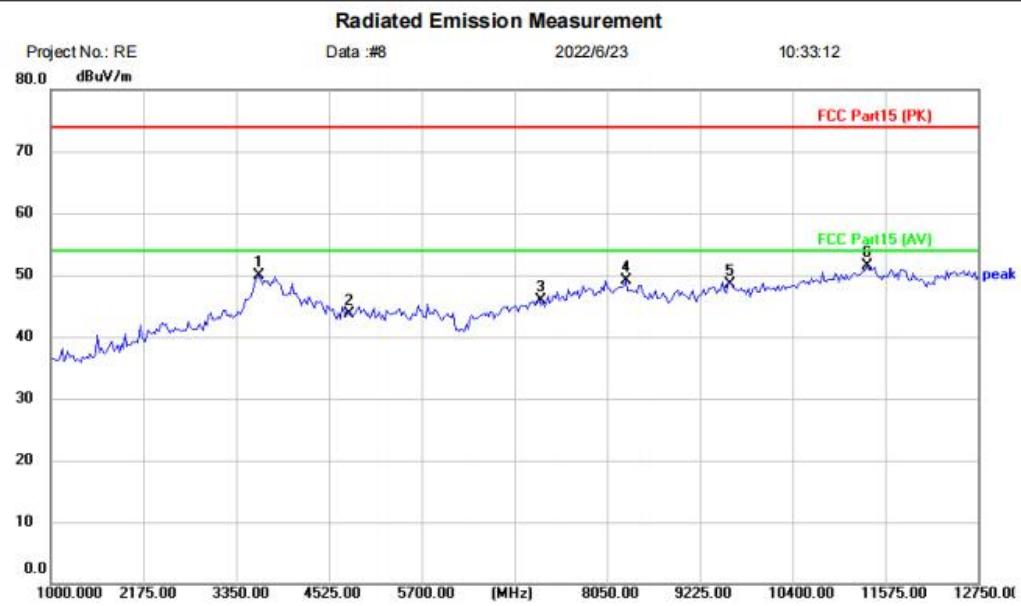

Site Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Wireless Mouse
M/N: VX-MS308
Mode: TX-L
Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB/m	dBuV/m	dB			
1		3632.000	42.17	7.77	49.94	74.00	-24.06	peak	
2		4804.000	39.92	3.71	43.63	74.00	-30.37	peak	
3		7206.000	39.92	5.96	45.88	74.00	-28.12	peak	
4		8285.000	40.93	8.24	49.17	74.00	-24.83	peak	
5		9608.000	39.19	9.29	48.48	74.00	-25.52	peak	
6	*	11340.000	39.59	11.85	51.44	74.00	-22.56	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]

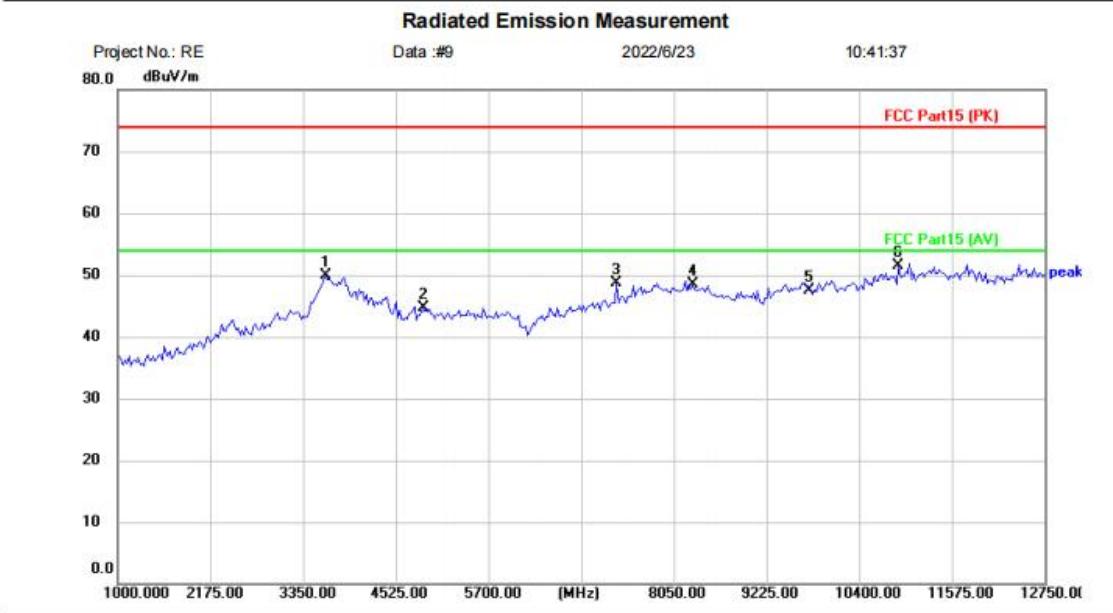

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Mouse		
M/N: VX-MS308		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Over							
						MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		3632.000	42.07	7.77	49.84	74.00	-24.16				peak		
2		4884.000	41.39	3.34	44.73	74.00	-29.27				peak		
3		7321.500	42.24	6.42	48.66	74.00	-25.34				peak		
4		8285.000	40.34	8.24	48.58	74.00	-25.42				peak		
5		9768.000	37.93	9.63	47.56	74.00	-26.44				peak		
6	*	10893.500	39.71	11.87	51.58	74.00	-22.42				peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Vertical]

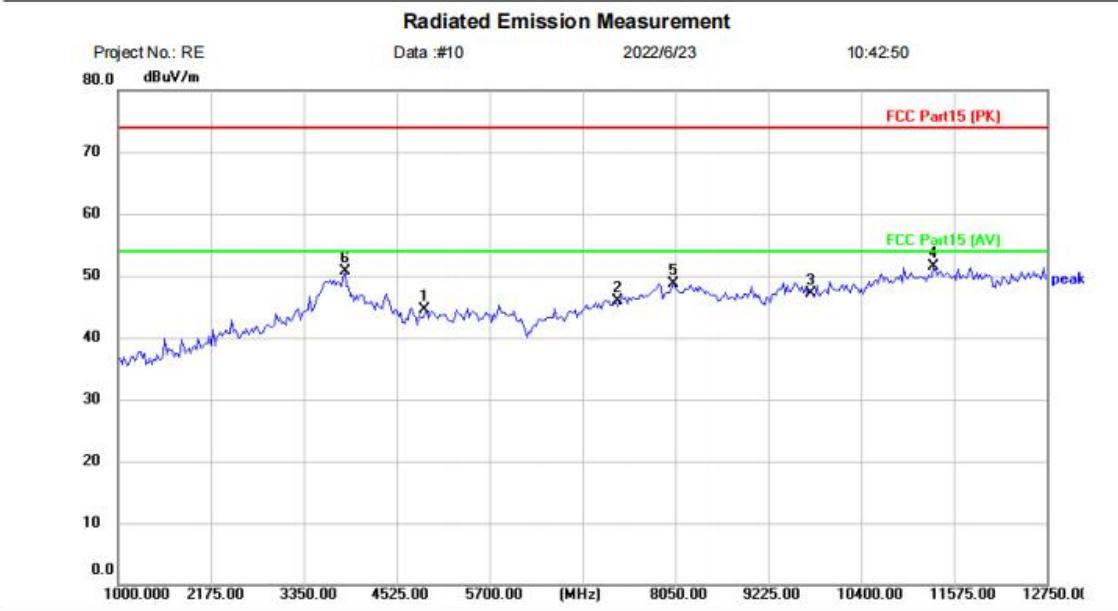

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Mouse		
M/N: VX-MS308		
Mode: TX-M		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Over							
						MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		4884.000	41.09	3.34	44.43	74.00	-29.57				peak		
2		7326.000	39.39	6.44	45.83	74.00	-28.17				peak		
3		9768.000	37.42	9.63	47.05	74.00	-26.95				peak		
4	*	11316.500	39.53	11.88	51.41	74.00	-22.59				peak		
5		8026.500	40.71	7.98	48.69	74.00	-25.31				peak		
6		3867.000	43.82	6.82	50.64	74.00	-23.36				peak		

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Horizontal]

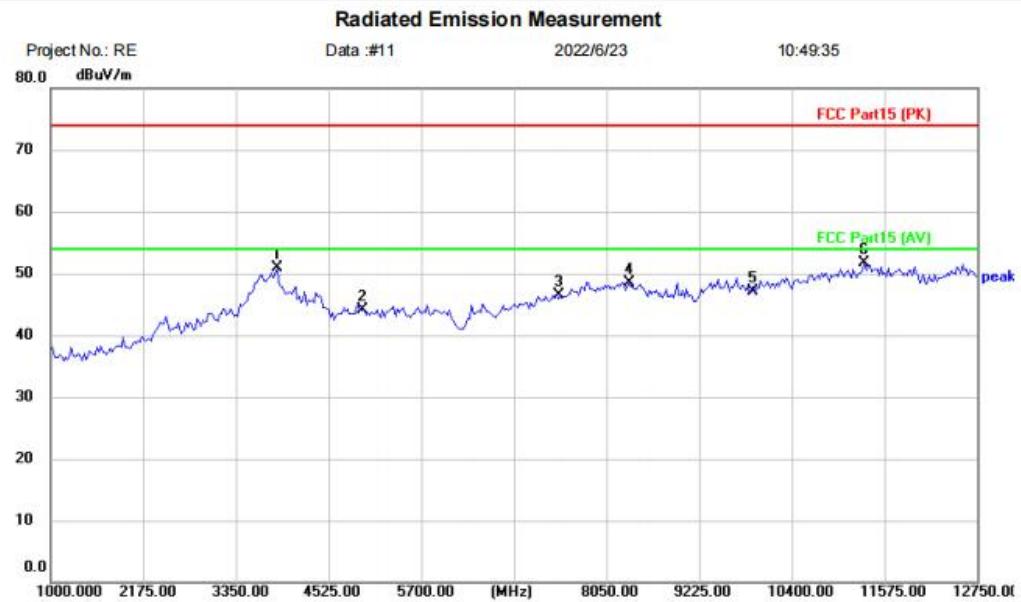

Site	Polarization: Horizontal	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Mouse		
M/N: VX-MS308		
Mode: TX-H		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Over							
						MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		3867.000	44.02	6.82	50.84	74.00	-23.16	peak					
2		4960.000	40.45	3.75	44.20	74.00	-29.80	peak					
3		7440.000	39.64	6.86	46.50	74.00	-27.50	peak					
4		8332.000	40.23	8.26	48.49	74.00	-25.51	peak					
5		9920.000	36.96	10.16	47.12	74.00	-26.88	peak					
6	*	11316.500	39.90	11.88	51.78	74.00	-22.22	peak					

*:Maximum data x:Over limit !:over margin

(Reference Only

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

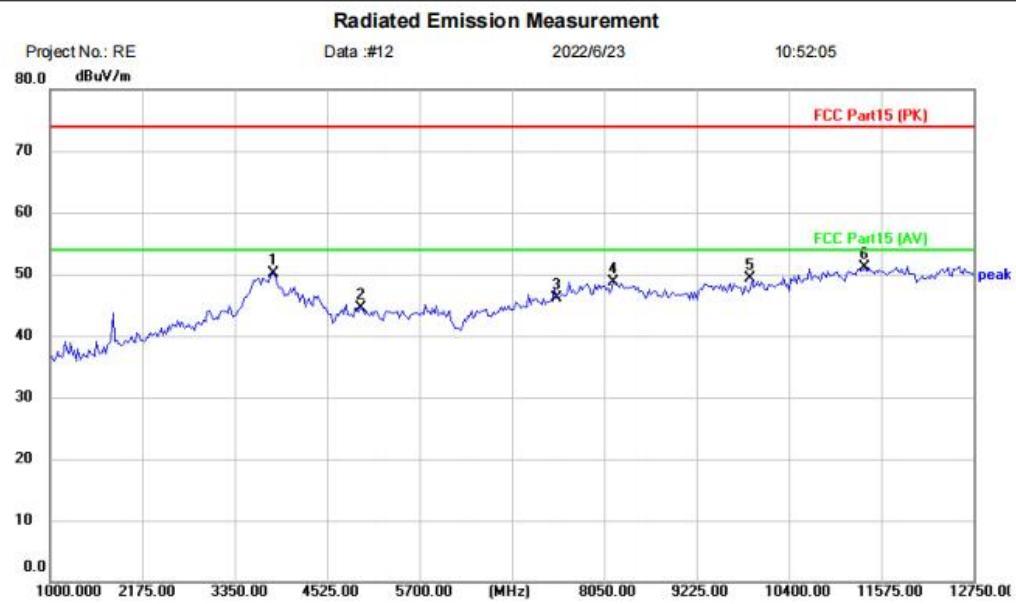

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Mouse		
M/N: VX-MS308		
Mode: TX-H		
Note:		

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit				
						dBuV	dB/m	dBuV/m	dB	Detector
1		3843.500	43.08	7.12	50.20	74.00	-23.80	peak		
2		4960.000	40.67	3.75	44.42	74.00	-29.58	peak		
3		7440.000	39.26	6.86	46.12	74.00	-27.88	peak		
4		8167.500	40.52	8.17	48.69	74.00	-25.31	peak		
5		9920.000	39.24	10.16	49.40	74.00	-24.60	peak		
6	*	11363.500	39.33	11.81	51.14	74.00	-22.86	peak		

*:Maximum data x:Over limit !:over margin

(Reference Only

Test Result: Pass

12 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

12.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

12.2 BLOCK DIAGRAM OF TEST SETUP

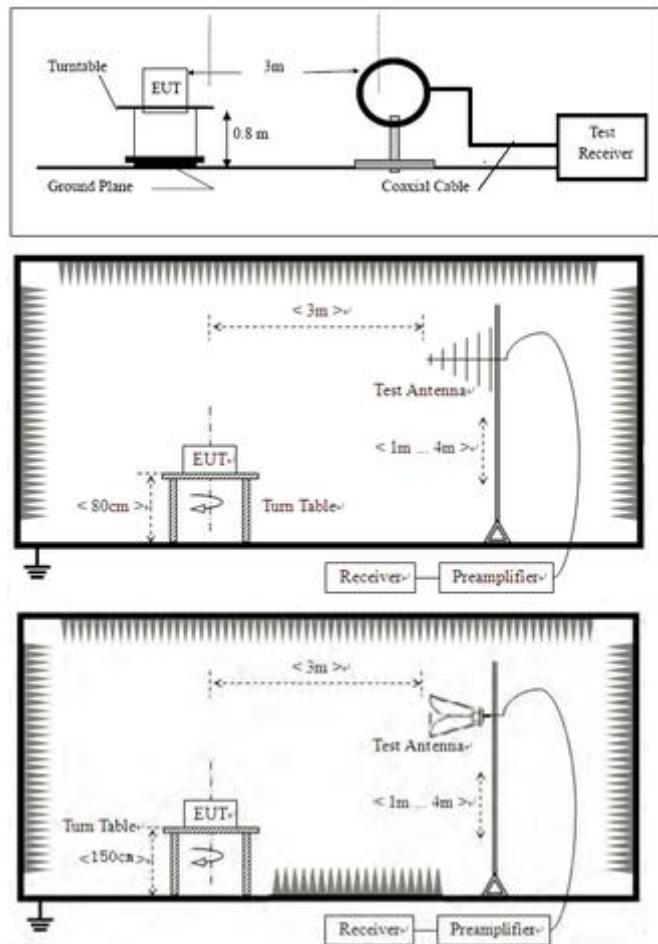

12.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.


Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

12.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

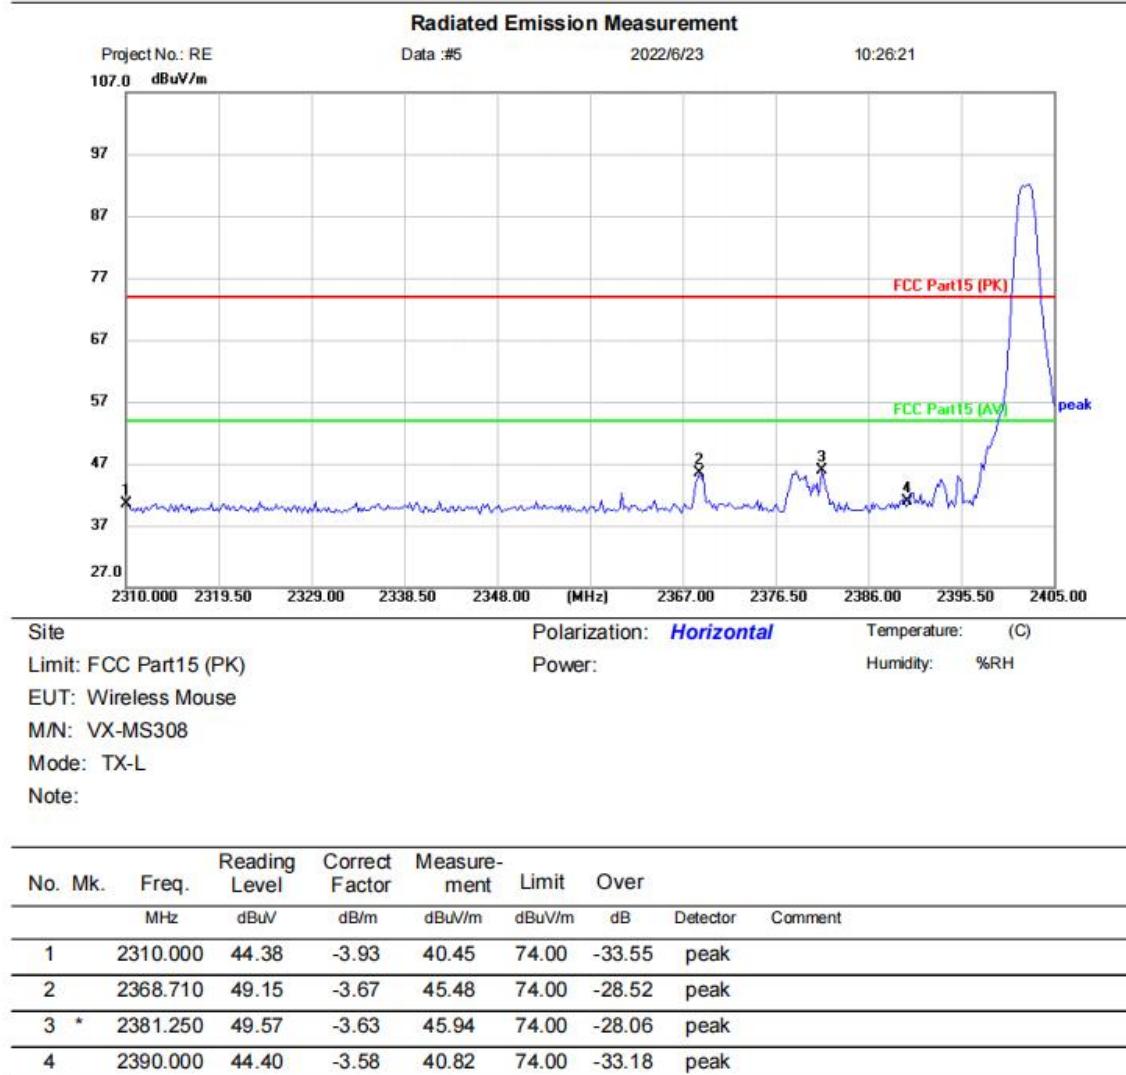


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

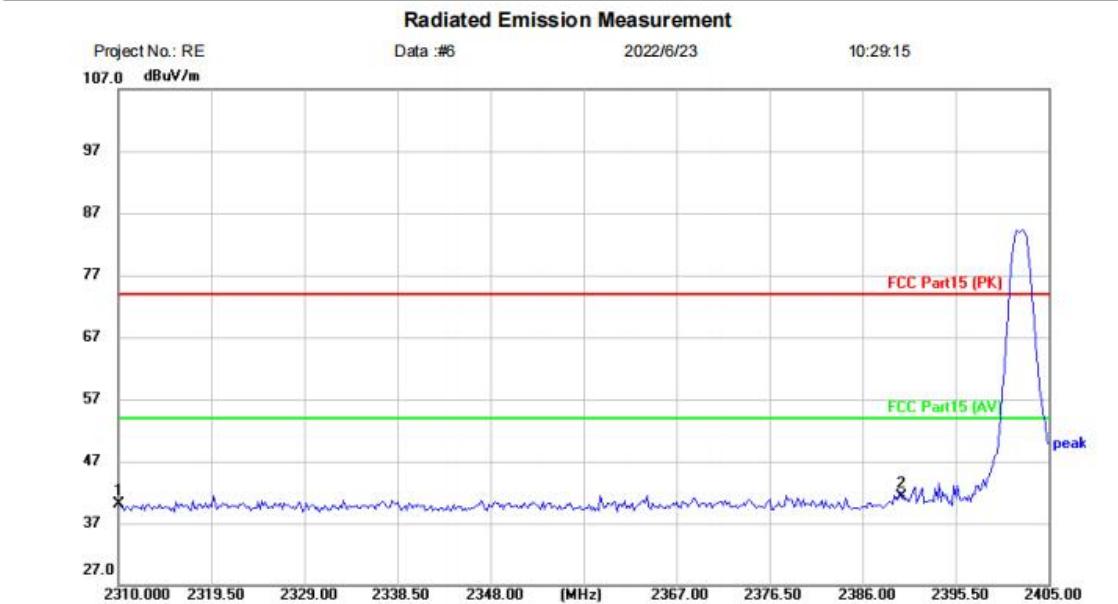

Site	Polarization: Vertical	Temperature: (C)
Limit: FCC Part15 (PK)	Power:	Humidity: %RH
EUT: Wireless Mouse		
M/N: VX-MS308		
Mode: TX-L		
Note:		


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over					
							MHz	dBuV	dB/m	dBuV/m	dB	Detector
1		2310.000	43.98	-3.93	40.05	74.00	-33.95	peak				
2	*	2390.000	44.98	-3.58	41.40	74.00	-32.60	peak				

*:Maximum data x:Over limit !:over margin

(Reference Only

Test Result: Pass

[TestMethod: TX High channel]; [Polarity: Horizontal]

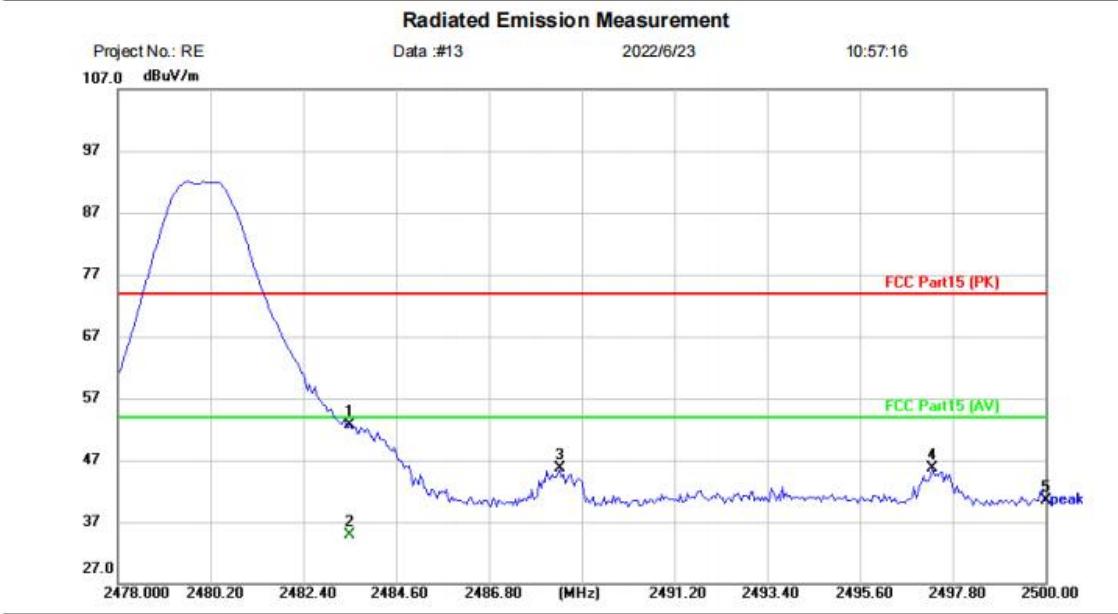
Site Polarization: **Horizontal** Temperature: (C)

Limit: FCC Part15 (PK) Power: Humidity: %RH

EUT: Wireless Mouse

M/N: VX-MS308

Mode: TX-H

Note:


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB/m	dBuV/m	dB		
1		2483.500	55.88	-3.14	52.74	74.00	-21.26	peak	
2	*	2483.500	38.13	-3.14	34.99	54.00	-19.01	AVG	
3		2488.472	48.90	-3.13	45.77	74.00	-28.23	peak	
4		2497.316	48.78	-3.08	45.70	74.00	-28.30	peak	
5		2500.000	43.66	-3.08	40.58	74.00	-33.42	peak	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX High channel]; [Polarity: Vertical]

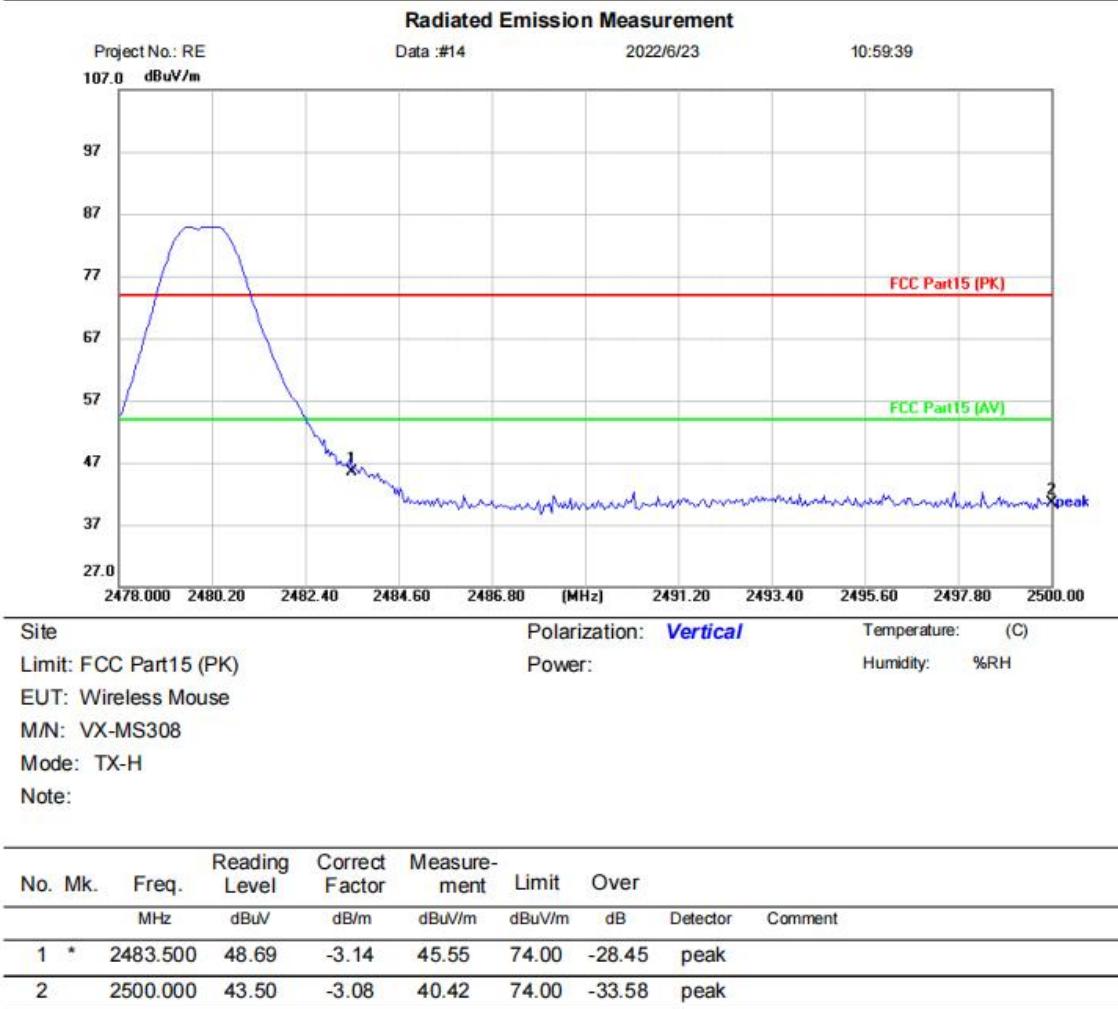

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


13 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25 °C
Humidity	60%

13.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

13.2 BLOCK DIAGRAM OF TEST SETUP

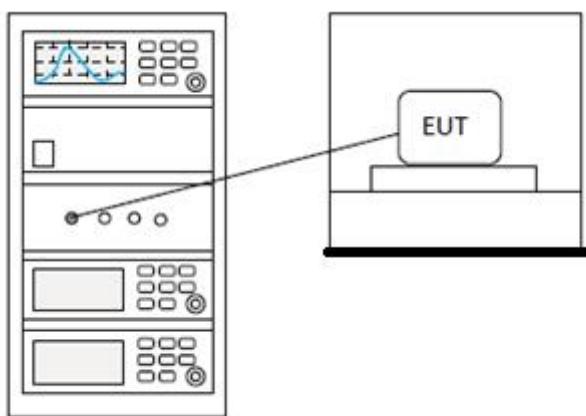

13.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


14 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

14.1 LIMITS

Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission
---------------	--

14.2 BLOCK DIAGRAM OF TEST SETUP

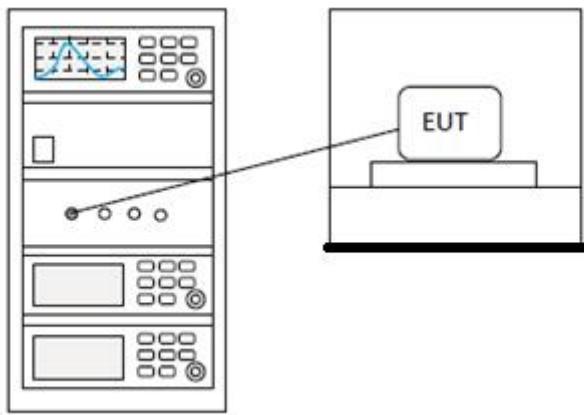

14.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--


15 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25 °C
Humidity	60%

15.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

15.2 BLOCK DIAGRAM OF TEST SETUP

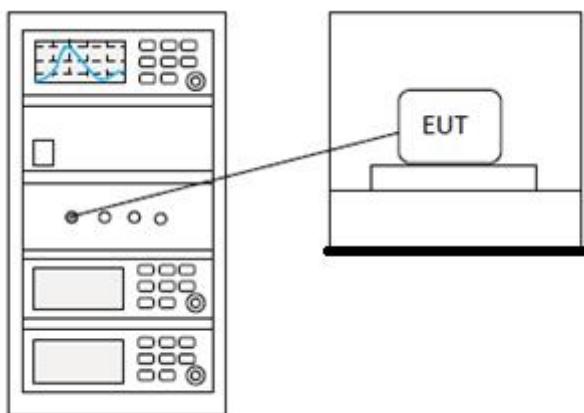

15.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


16 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Charlie
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	≥ 500 kHz
---------------	----------------

16.2 BLOCK DIAGRAM OF TEST SETUP

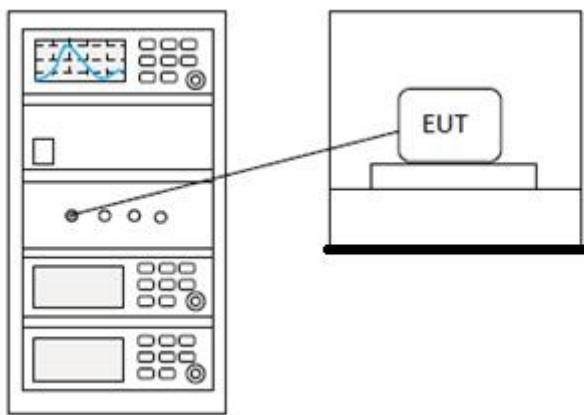

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

17 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


17.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3.1dBi.

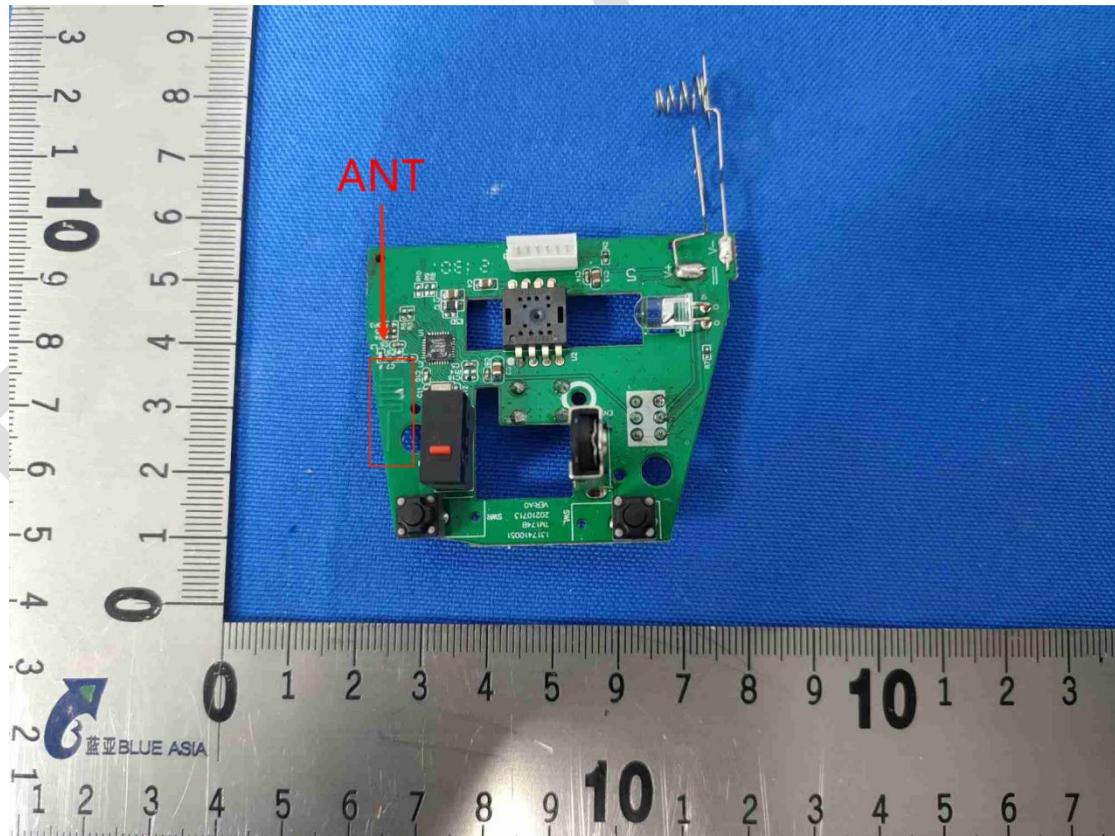


18 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-1.89	30	Pass
NVNT	BLE 1M	2442	Ant1	-2.754	30	Pass
NVNT	BLE 1M	2480	Ant1	-2.593	30	Pass


Power NVNT BLE 1M 2402MHz Ant1

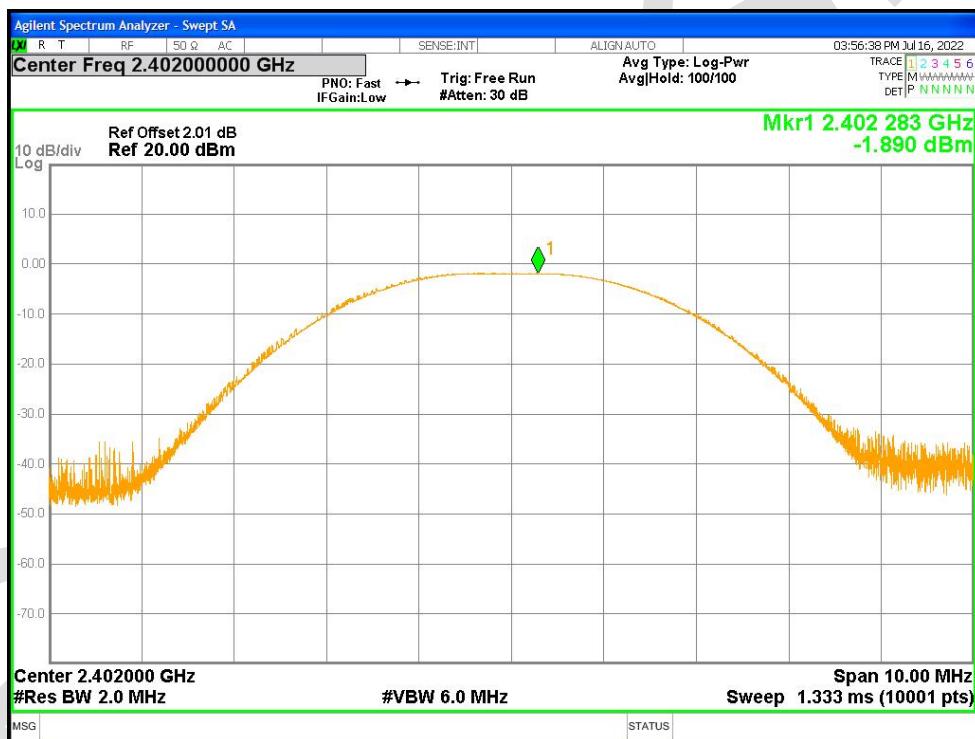

Power NVNT BLE 1M 2442MHz Ant1

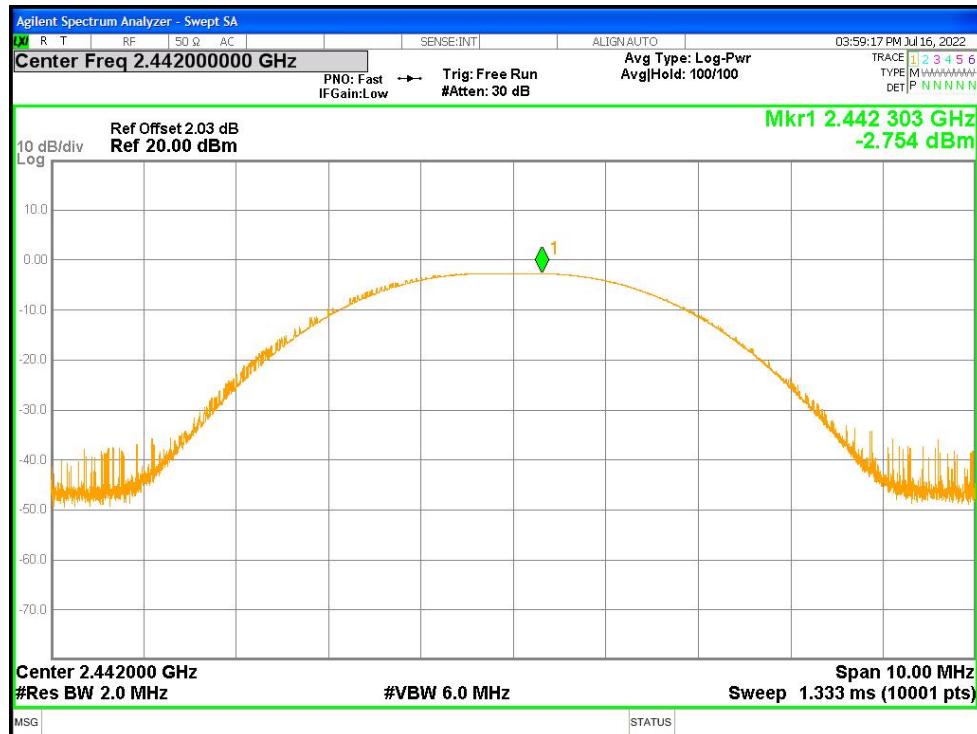



Power NVNT BLE 1M 2480MHz Ant1

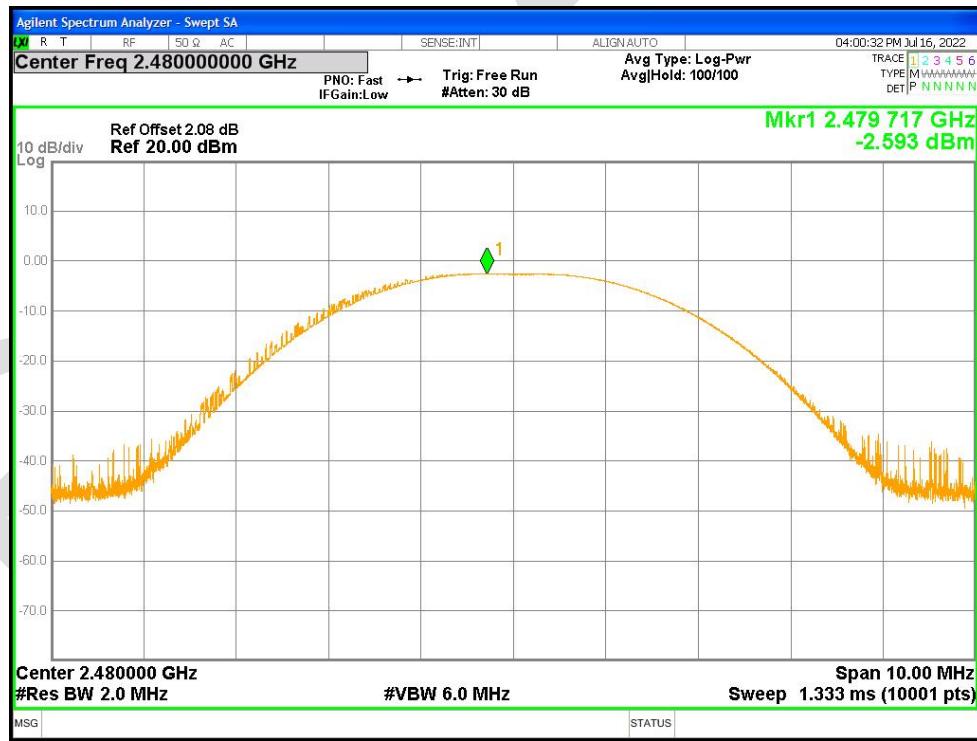


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.908	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.917	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.917	0.5	Pass

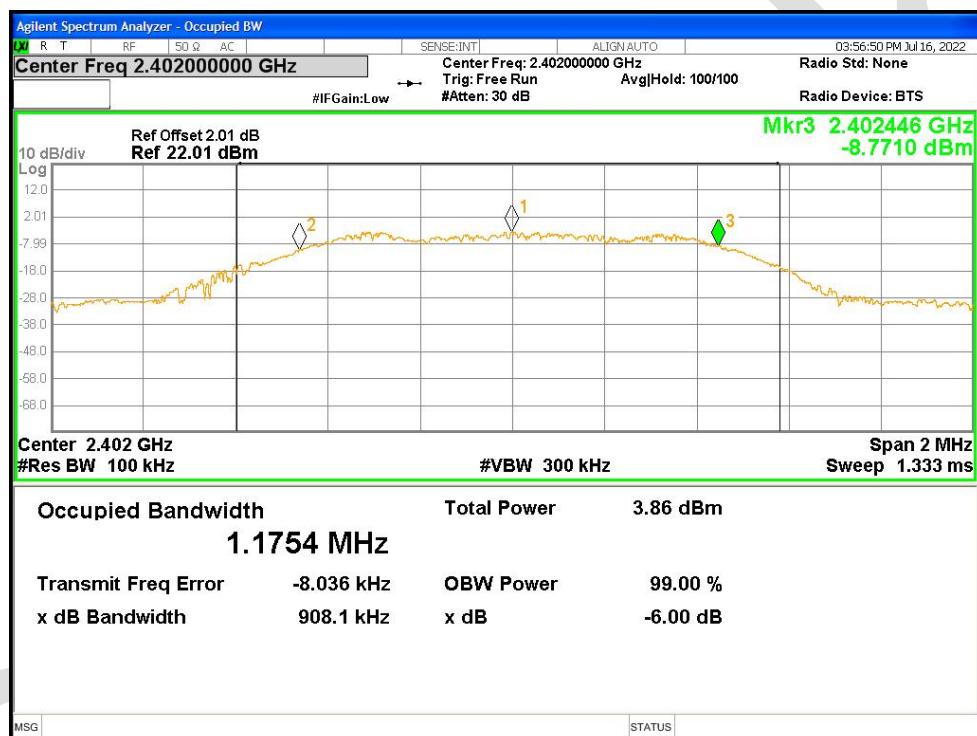-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

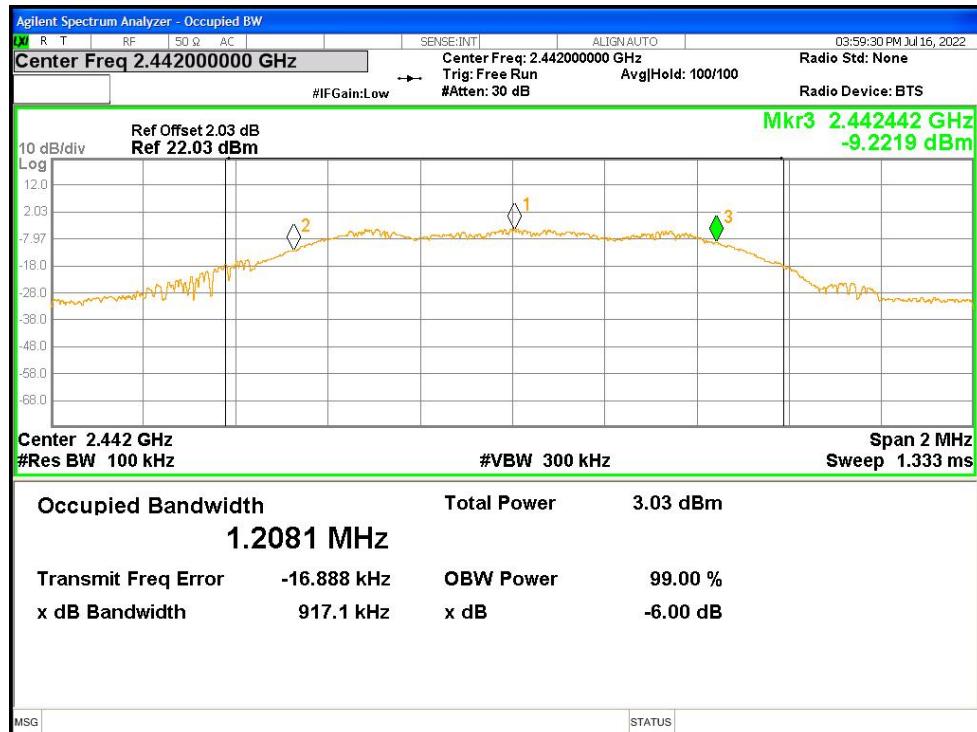-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

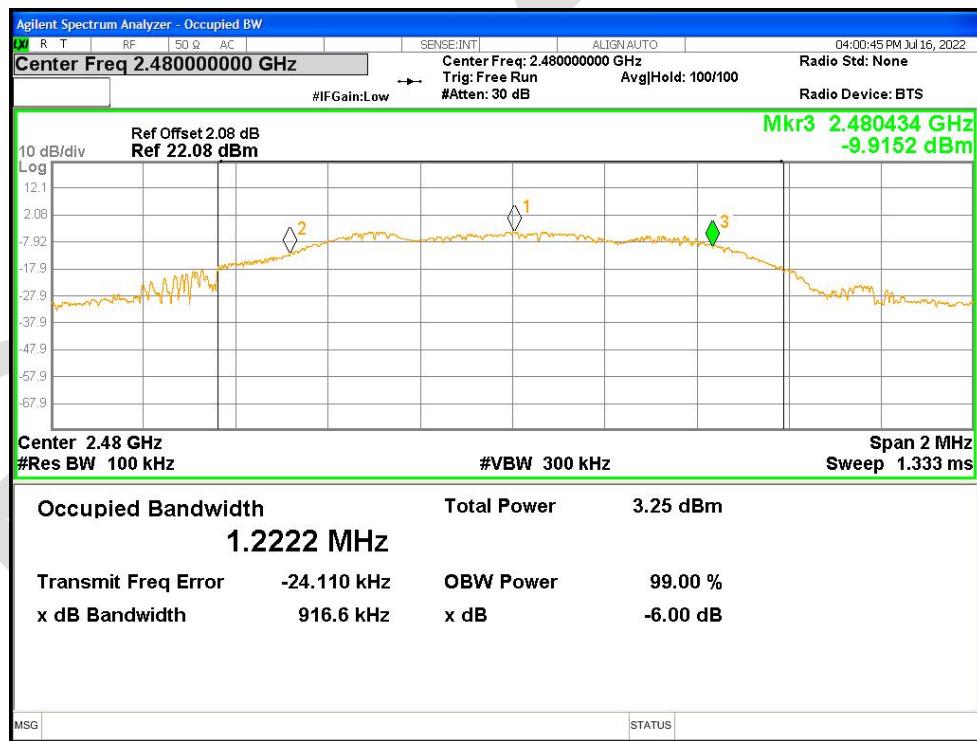



-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1




Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.1235
NVNT	BLE 1M	2442	Ant1	1.1632
NVNT	BLE 1M	2480	Ant1	1.1789

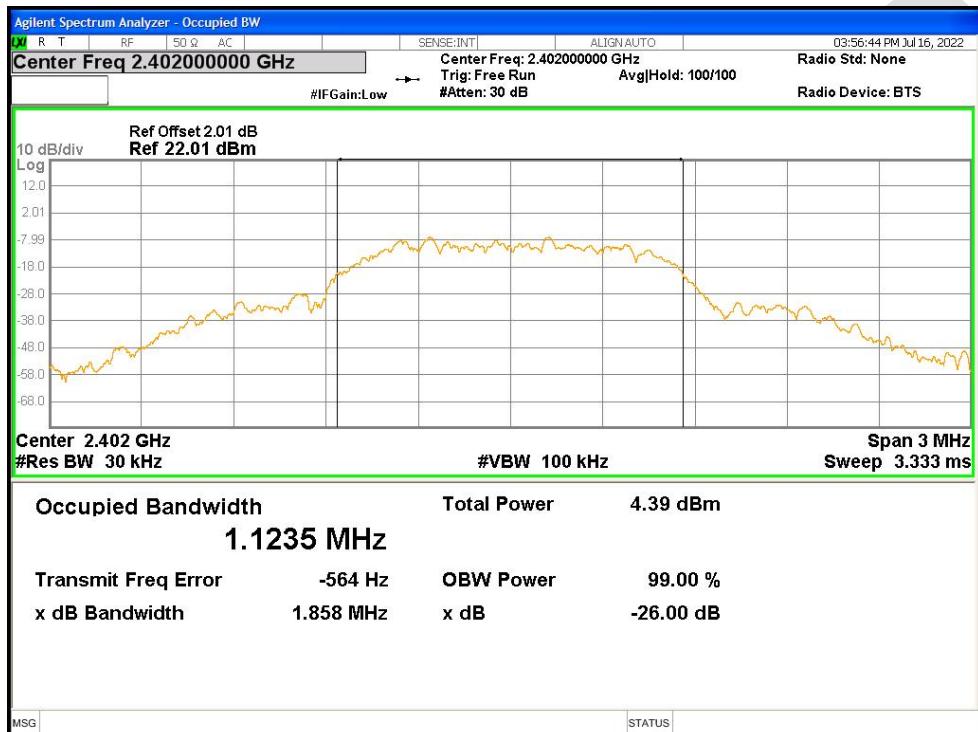OBW NVNT BLE 1M 2402MHz Ant1

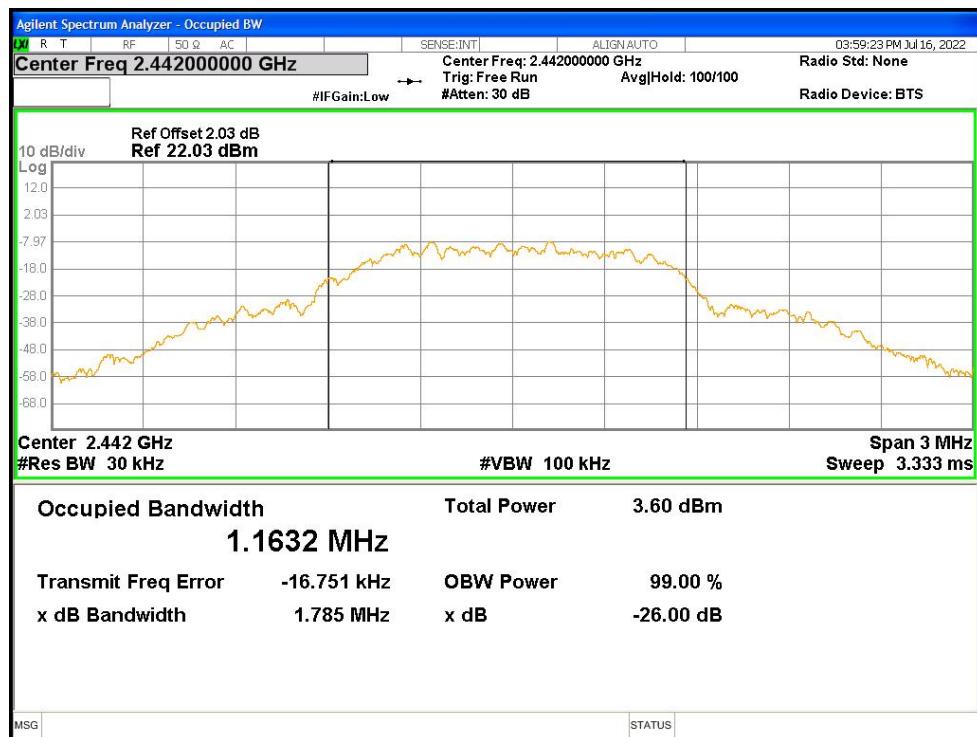OBW NVNT BLE 1M 2442MHz Ant1

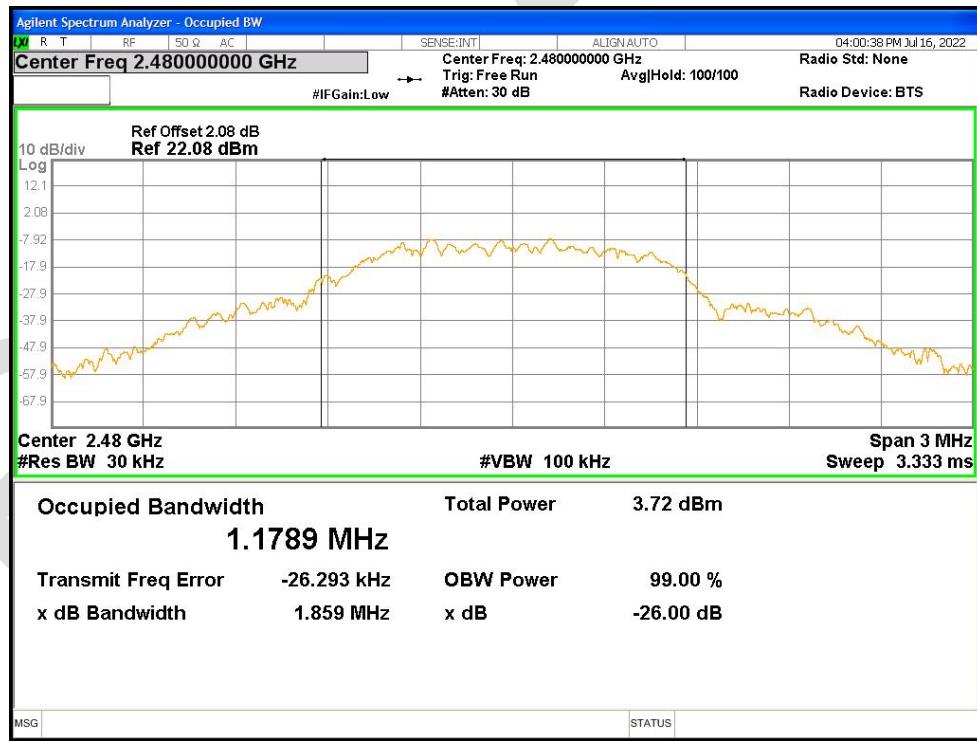

OBW NVNT BLE 1M 2480MHz Ant1



Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-11.174	8	Pass
NVNT	BLE 1M	2442	Ant1	-11.847	8	Pass
NVNT	BLE 1M	2480	Ant1	-11.52	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1

PSD NVNT BLE 1M 2442MHz Ant1





PSD NVNT BLE 1M 2480MHz Ant1




Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-49.34	-30	Pass
NVNT	BLE 1M	2480	Ant1	-50.87	-30	Pass

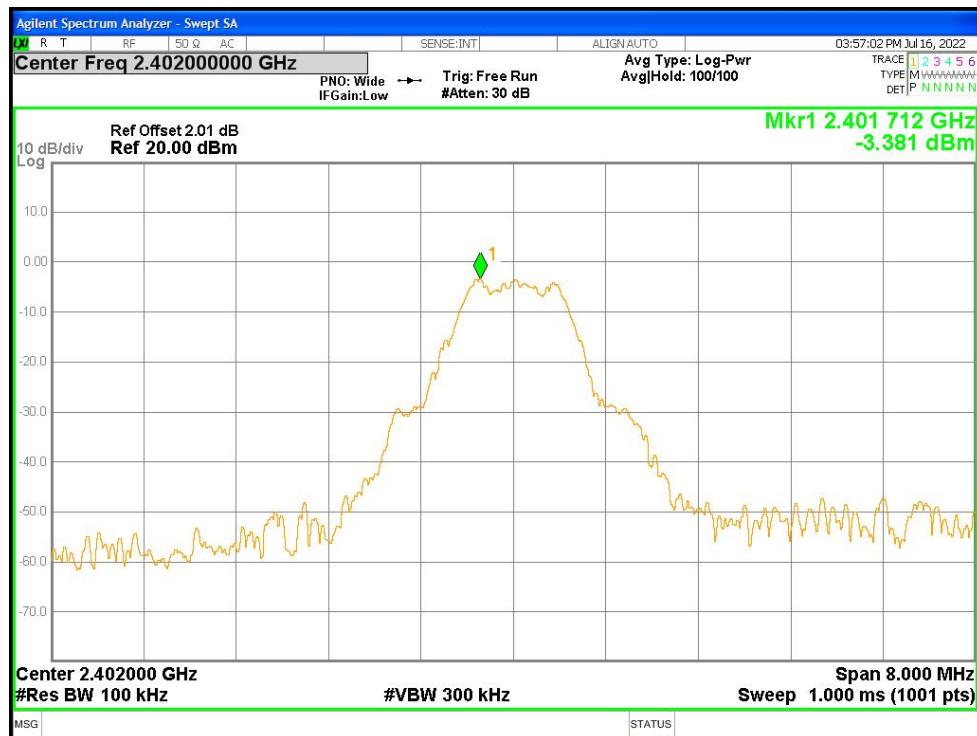
Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

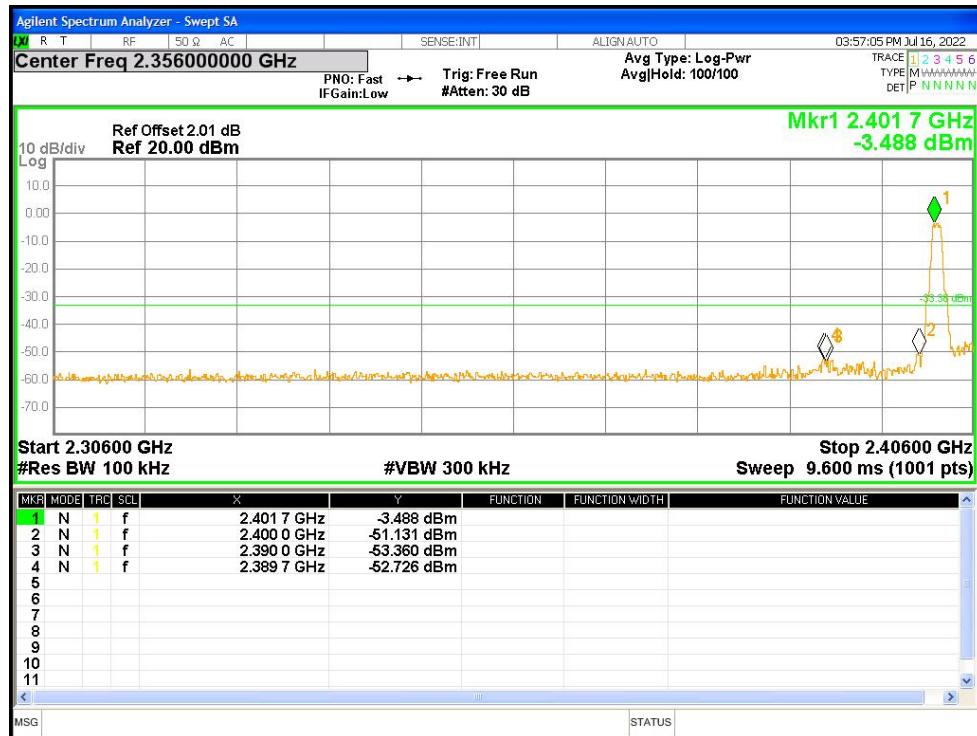Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

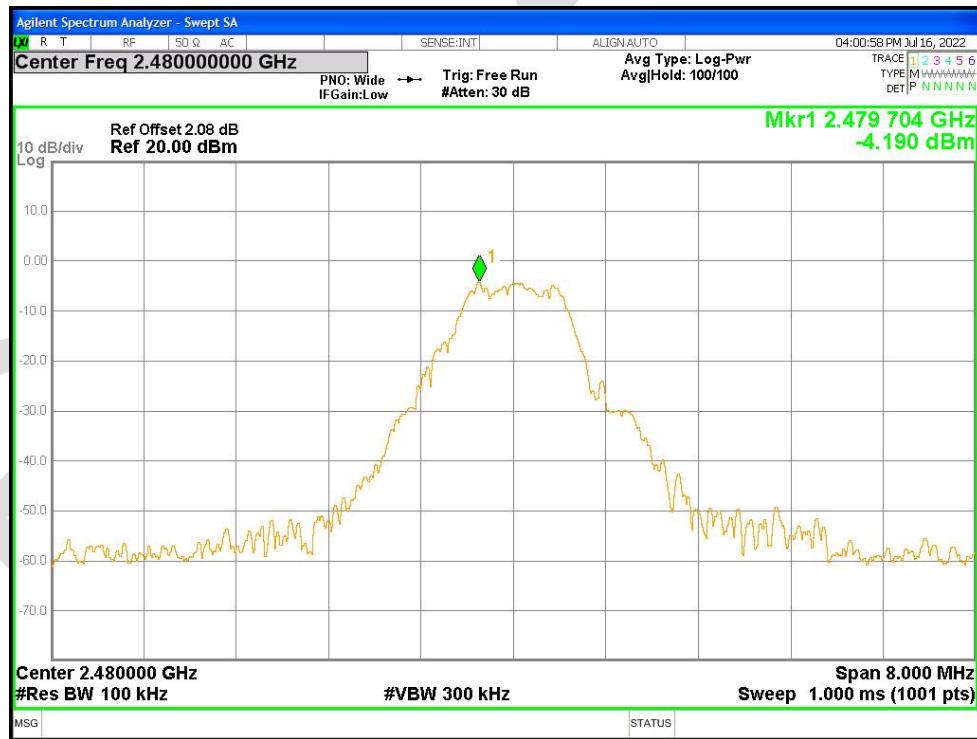

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref

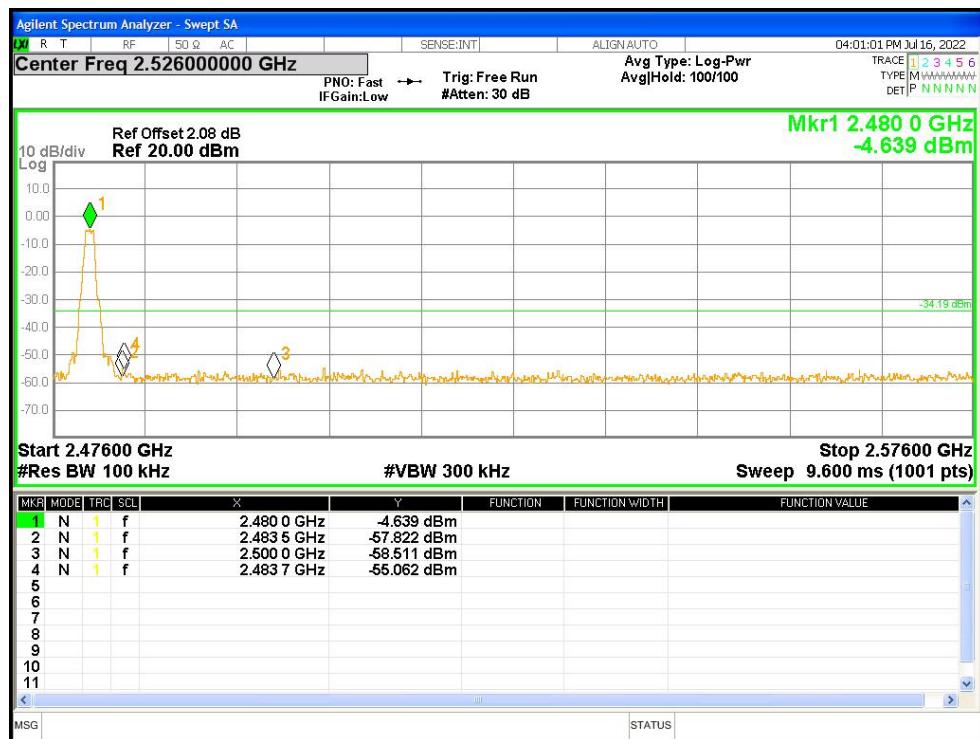


Band Edge NVNT BLE 1M 2480MHz Ant1 Emission



Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-41.64	-30	Pass
NVNT	BLE 1M	2442	Ant1	-41.27	-30	Pass
NVNT	BLE 1M	2480	Ant1	-40.17	-30	Pass

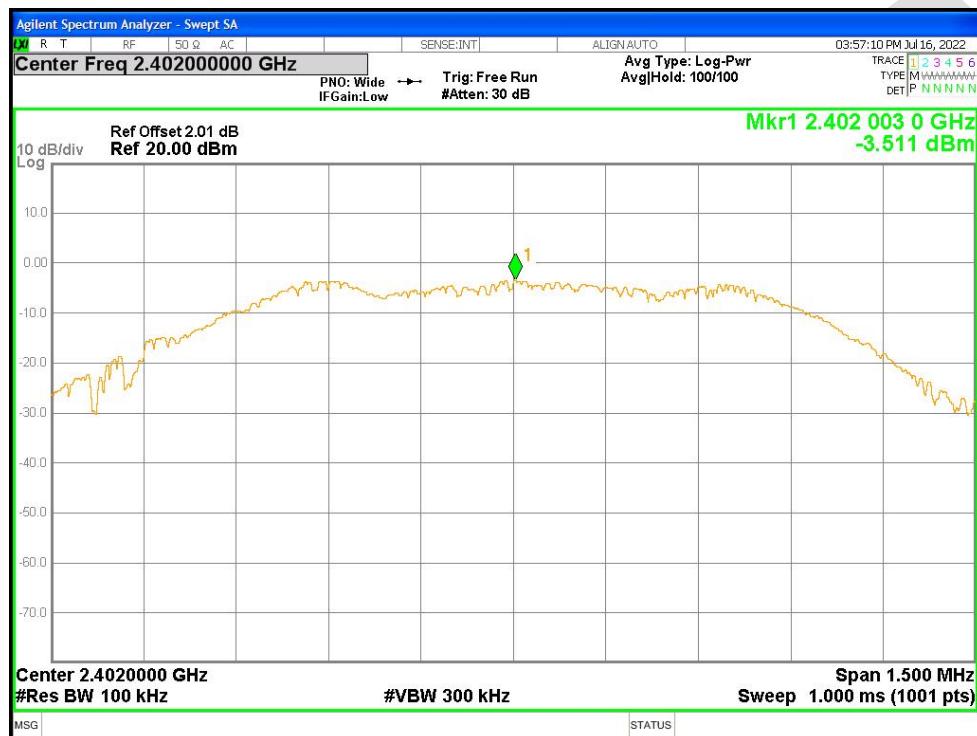Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission




Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref

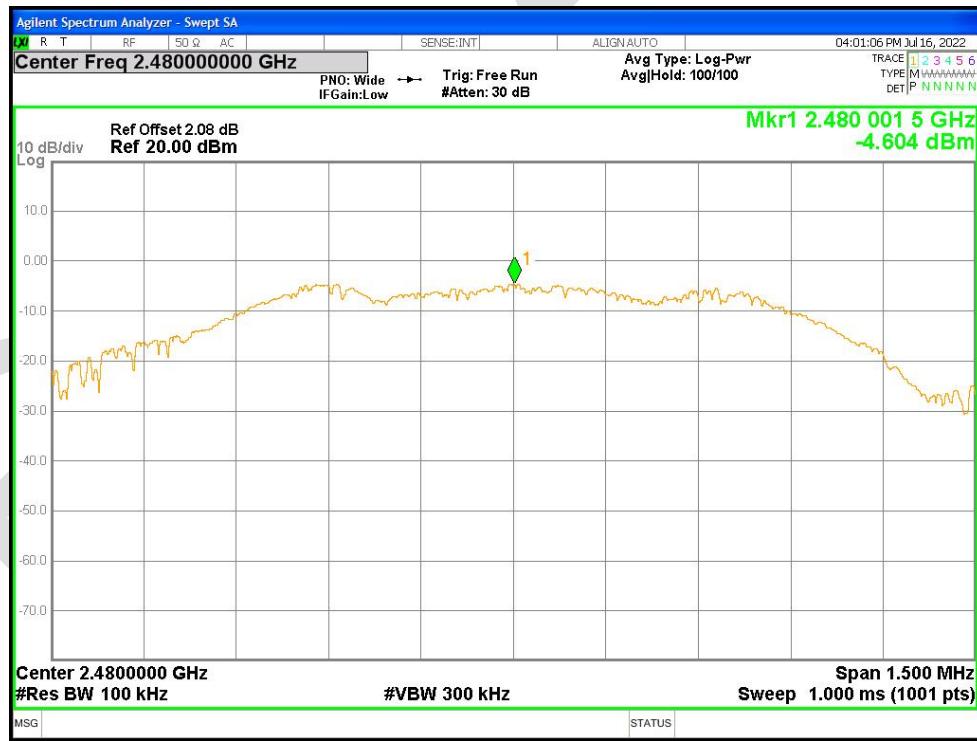


Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

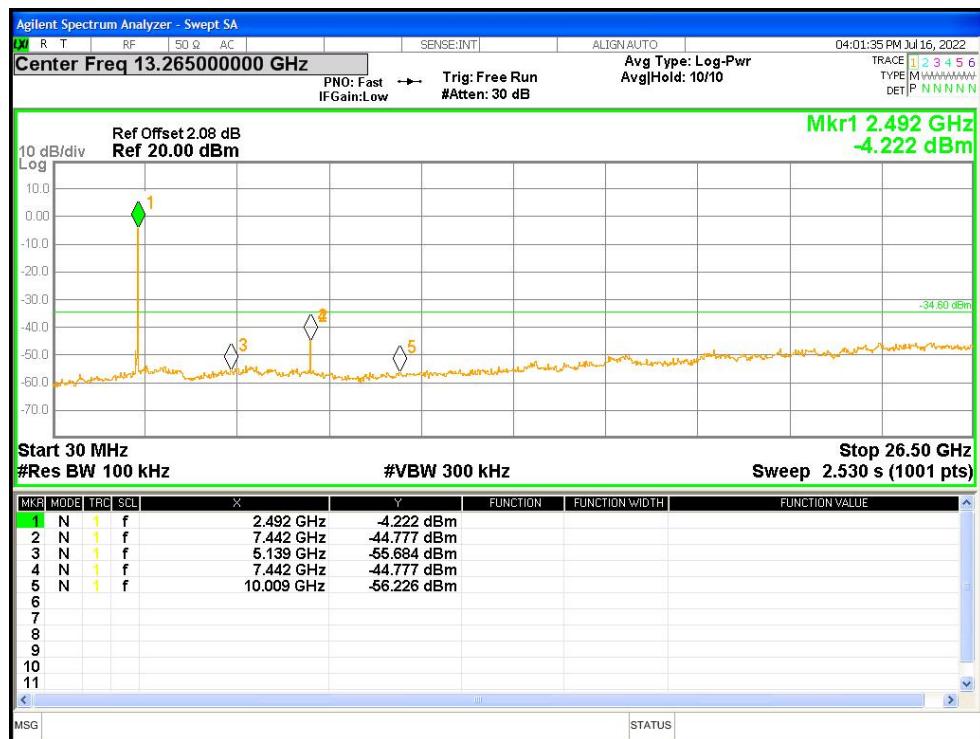

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Spurious Emissions

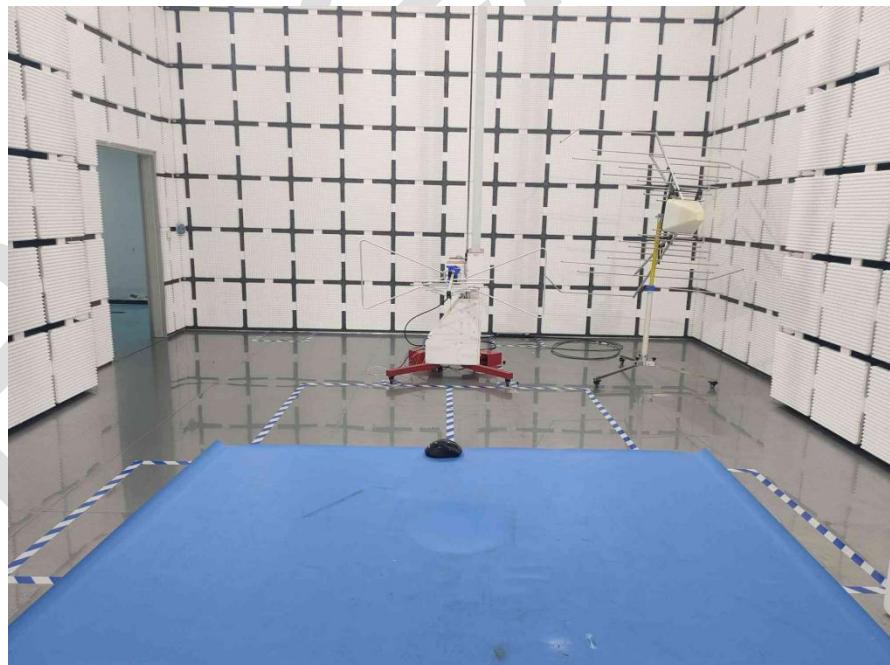

APPENDIX B: PHOTOGRAPHS OF EUT

Reference to the test report No. BLA-EMC-202206-A7801

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia