



# FCC TEST REPORT

Test report  
On Behalf of  
**KINGRAY ELECTRONICS Co., LTD**  
For  
Wireless headphone  
Model No.: BB1827, BB1774, BB1775, BB1776, KR601  
FCC ID: 2AML6KR601

Prepared for : **KINGRAY ELECTRONICS Co., LTD**  
**Building B, Ge Tailong Industrial Park, No.445 Bulong Rd, BanTian, LongGang,**  
**Shenzhen, Guangdong, China**

Prepared By : **Shenzhen HUAK Testing Technology Co., Ltd.**  
**1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,**  
**Bao'an District, Shenzhen City, China**



# TEST REPORT

**Applicant's name**.....: **KINGRAY ELECTRONICS Co., LTD**  
**Address**.....: Building B, Ge Tailong Industrial Park, No.445 Bulong Rd, BanTian, LongGang, Shenzhen, Guangdong, China  
**Manufacture's Name** .....: **KINGRAY ELECTRONICS Co., LTD**  
**Address**.....: Building B, Ge Tailong Industrial Park, No.445 Bulong Rd, BanTian, LongGang, Shenzhen, Guangdong, China

## Product description

**Trade Mark:** N/A  
**Product name**.....: Wireless headphone  
**Model and/or type reference** ..: BB1827, BB1774, BB1775, BB1776, KR601  
**Standards**.....: FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

## Date of Test..... :

Date (s) of performance of tests ..... : Jan. 08, 2019 ~ Jan. 17, 2019

Date of Issue ..... : Jan. 18, 2019

Test Result ..... : **Pass**

Testing Engineer :

(Gary Qian)

Technical Manager :

(Eden Hu)

Authorized Signatory :

(Jason Zhou)



## Contents

|           |                                                     |                  |
|-----------|-----------------------------------------------------|------------------|
| <b>1.</b> | <b><u>..TEST STANDARDS.....</u></b>                 | <b><u>4</u></b>  |
| <b>2.</b> | <b><u>..SUMMARY.....</u></b>                        | <b><u>5</u></b>  |
| 2.1.      | Product Description                                 | 5                |
| 2.2.      | Equipment Under Test                                | 5                |
| 2.3.      | Short description of the Equipment under Test (EUT) | 5                |
| 2.4.      | EUT operation mode                                  | 6                |
| 2.5.      | Block Diagram of Test Setup                         | 7                |
| 2.6.      | Related Submittal(s) / Grant (s)                    | 7                |
| 2.7.      | Modifications                                       | 7                |
| <b>3.</b> | <b><u>..TEST ENVIRONMENT .....</u></b>              | <b><u>8</u></b>  |
| 3.1.      | TEST FACILITY                                       | 8                |
| 3.2.      | Environmental conditions                            | 8                |
| 3.3.      | Summary of measurement results                      | 8                |
| 3.4.      | Statement of the measurement uncertainty            | 9                |
| 3.5.      | Equipments Used during the Test                     | 9                |
| <b>4.</b> | <b><u>..TEST CONDITIONS AND RESULTS.....</u></b>    | <b><u>10</u></b> |
| 4.1.      | AC Power Conducted Emission .....                   | 10               |
| 4.2.      | Radiated Emission.....                              | 13               |
| 4.3.      | Maximum Peak Output Power.....                      | 20               |
| 4.4.      | 20dB Bandwidth .....                                | 21               |
| 4.5.      | Frequency Separation .....                          | 25               |
| 4.6.      | Band Edge Compliance of RF Emission .....           | 27               |
| 4.7.      | Spurious RF Conducted Emission .....                | 32               |
| 4.8.      | Number of hopping frequency .....                   | 38               |
| 4.9.      | Time Of Occupancy(Dwell Time) .....                 | 40               |
| 4.10.     | Pseudorandom Frequency Hopping Sequence .....       | 44               |
| 4.11.     | Antenna Requirement.....                            | 45               |
| <b>5.</b> | <b><u>..TEST SETUP PHOTOS OF THE EUT .....</u></b>  | <b><u>46</u></b> |
| <b>6.</b> | <b><u>PHOTOS OF THE EUT .....</u></b>               | <b><u>47</u></b> |



## **1. TEST STANDARDS**

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10-2013](#): American National Standard for Testing Unlicensed Wireless Devices

[DA 00-705](#): Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems



## 2. SUMMARY

### 2.1. Product Description

|                                                     |                                                                      |
|-----------------------------------------------------|----------------------------------------------------------------------|
| Name of EUT:                                        | Wireless headphone                                                   |
| Trade Mark:                                         | N/A                                                                  |
| Model Number:                                       | BB1827                                                               |
| List Model:                                         | BB1774, BB1775, BB1776, KR601                                        |
| Power Rating:                                       | DC 3.7V and DC 5V From Adapter                                       |
| Adapter(Auxiliary test Provided by the laboratory): | Mode:EP-TA20CBC<br>Input:AC100-240V-50/60Hz, 0.5A<br>Output:DC 5V,2A |
| FCC ID:                                             | 2AML6KR601                                                           |
| Operation frequency:                                | 2402MHz-2480MHz                                                      |
| Modulation:                                         | GFSK,8DPSK, $\pi$ /4DQPSK                                            |
| Antenna Type:                                       | PCB antenna                                                          |
| Antenna gain:                                       | 0.0dBi                                                               |

### 2.2. Equipment Under Test

#### Power supply system utilised

|                      |   |                                                                   |                                   |
|----------------------|---|-------------------------------------------------------------------|-----------------------------------|
| Power supply voltage | : | <input type="radio"/> 230V / 50 Hz                                | <input type="radio"/> 120V / 60Hz |
|                      |   | <input type="radio"/> 12 V DC                                     | <input type="radio"/> 24 V DC     |
|                      |   | <input checked="" type="radio"/> Other (specified in blank below) |                                   |

DC 3.7V and DC 5V From Adapter

### 2.3. Short description of the Equipment under Test (EUT)

This is a Karaoke Microphone.

For more details, refer to the user's manual of the EUT.




## 2.4. EUT operation mode

The Applicant provides test software (FCCAssist ) to control the EUT for staying in continuous transmitting and receiving mode for testing .There are 79 channels provided to the EUT. Channel 00/39/78 was selected to test.

| Channel   | Frequency(MHz) | Channel   | Frequency(MHz) |
|-----------|----------------|-----------|----------------|
| <b>00</b> | <b>2402</b>    | 40        | 2442           |
| 01        | 2403           | 41        | 2443           |
| 02        | 2404           | 42        | 2444           |
| 03        | 2405           | 43        | 2445           |
| 04        | 2406           | 44        | 2446           |
| 05        | 2407           | 45        | 2447           |
| 06        | 2408           | 46        | 2448           |
| 07        | 2409           | 47        | 2449           |
| 08        | 2410           | 48        | 2450           |
| 09        | 2411           | 49        | 2451           |
| 10        | 2412           | 50        | 2452           |
| 11        | 2413           | 51        | 2453           |
| 12        | 2414           | 52        | 2454           |
| 13        | 2415           | 53        | 2455           |
| 14        | 2416           | 54        | 2456           |
| 15        | 2417           | 55        | 2457           |
| 16        | 2418           | 56        | 2458           |
| 17        | 2419           | 57        | 2459           |
| 18        | 2420           | 58        | 2460           |
| 19        | 2421           | 59        | 2461           |
| 20        | 2422           | 60        | 2462           |
| 21        | 2423           | 61        | 2463           |
| 22        | 2424           | 62        | 2464           |
| 23        | 2425           | 63        | 2465           |
| 24        | 2426           | 64        | 2466           |
| 25        | 2427           | 65        | 2467           |
| 26        | 2428           | 66        | 2468           |
| 27        | 2429           | 67        | 2469           |
| 28        | 2430           | 68        | 2470           |
| 29        | 2431           | 69        | 2471           |
| 30        | 2432           | 70        | 2472           |
| 31        | 2433           | 71        | 2473           |
| 32        | 2434           | 72        | 2474           |
| 33        | 2435           | 73        | 2475           |
| 34        | 2436           | 74        | 2476           |
| 35        | 2437           | 75        | 2477           |
| 36        | 2438           | 76        | 2478           |
| 37        | 2439           | 77        | 2479           |
| 38        | 2440           | <b>78</b> | <b>2480</b>    |
| <b>39</b> | <b>2441</b>    |           |                |



## 2.5. Block Diagram of Test Setup

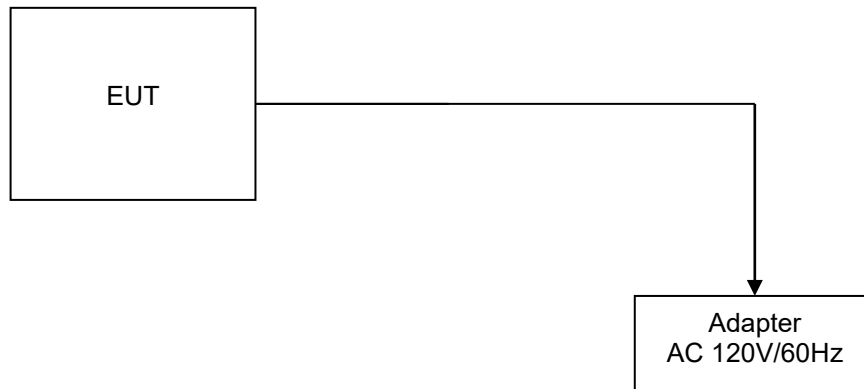

## 2.6. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID:2AML6KR601 filing to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

## 2.7. Modifications

No modifications were implemented to meet testing criteria.



### 3. TEST ENVIRONMENT

#### 3.1. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

#### 3.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

|                       |              |
|-----------------------|--------------|
| Temperature:          | 15-35 ° C    |
|                       |              |
| Humidity:             | 30-60 %      |
|                       |              |
| Atmospheric pressure: | 950-1050mbar |

#### 3.3. Summary of measurement results

| Test Specification clause | Test case                                          | Test Mode                 | Test Channel                                                                                                                            | Recorded In Report        |                                                                                                                                         | Pass                                | Fail                     | NA                       | NP                       | Remark   |
|---------------------------|----------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|--------------------------|--------------------------|--------------------------|----------|
| §15.247(a)(1)             | Carrier Frequency separation                       | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle                                                                                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(a)(1)             | Number of Hopping channels                         | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Full                                                                                                | GFSK<br>8DPSK             | <input checked="" type="checkbox"/> Full                                                                                                | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(a)(1)             | Time of Occupancy (dwell time)                     | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Middle                                                                                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(a)(1)             | Spectrum bandwidth of a FHSS system 20dB bandwidth | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(b)(1)             | Maximum output power                               | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d)                | Band edge compliance conducted                     | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.205                   | Band edge compliance radiated                      | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Highest                                               | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d)                | TX spurious emissions conducted                    | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d)                | TX spurious emissions radiated                     | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.209(a)                | TX spurious Emissions radiated Below 1GHz          | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle                                                                                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.107(a)<br>§15.207     | Conducted Emissions 9KHz-30 MHz                    | GFSK<br>Π/4DQPSK<br>8DPSK | <input checked="" type="checkbox"/> Lowest<br><input checked="" type="checkbox"/> Middle<br><input checked="" type="checkbox"/> Highest | GFSK                      | <input checked="" type="checkbox"/> Middle                                                                                              | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed
3. We tested all test mode and recorded worst case in report





### 3.4. Statement of the measurement uncertainty

#### Measurement Uncertainty

|                                                       |               |
|-------------------------------------------------------|---------------|
| Conducted Emission Expanded Uncertainty               | = 2.23dB, k=2 |
| Radiated emission expanded uncertainty(9kHz-30MHz)    | = 3.08dB, k=2 |
| Radiated emission expanded uncertainty(30MHz-1000MHz) | = 4.42dB, k=2 |
| Radiated emission expanded uncertainty(Above 1GHz)    | = 4.06dB, k=2 |

### 3.5. Equipments Used during the Test

| Item | Equipment                         | Manufacturer    | Model No.        | Serial No. | Last Cal.     | Cal. Interval |
|------|-----------------------------------|-----------------|------------------|------------|---------------|---------------|
| 1.   | L.I.S.N. Artificial Mains Network | R&S             | ENV216           | HKE-002    | Dec. 27, 2018 | 1 Year        |
| 2.   | Receiver                          | R&S             | ESCI 7           | HKE-010    | Dec. 27, 2018 | 1 Year        |
| 3.   | RF automatic control unit         | Tonscend        | JS0806-2         | HKE-060    | Dec. 27, 2018 | 1 Year        |
| 4.   | Spectrum analyzer                 | R&S             | FSP40            | HKE-025    | Dec. 27, 2018 | 1 Year        |
| 5.   | Spectrum analyzer                 | Agilent         | N9020A           | HKE-048    | Dec. 27, 2018 | 1 Year        |
| 6.   | Preamplifier                      | Schwarzbeck     | BBV 9743         | HKE-006    | Dec. 27, 2018 | 1 Year        |
| 7.   | EMI Test Receiver                 | Rohde & Schwarz | ESCI 7           | HKE-010    | Dec. 27, 2018 | 1 Year        |
| 8.   | Bilog Broadband Antenna           | Schwarzbeck     | VULB9163         | HKE-012    | Dec. 27, 2018 | 1 Year        |
| 9.   | Loop Antenna                      | Schwarzbeck     | FMZB 1519 B      | HKE-014    | Dec. 27, 2018 | 1 Year        |
| 10.  | Horn Antenna                      | Schwarzbeck     | 9120D            | HKE-013    | Dec. 27, 2018 | 1 Year        |
| 11.  | Broadband Horn Antenna            | SCHWARZBECK     | BBHA 9170        | HKE-017    | Dec. 27, 2018 | 1 Year        |
| 12.  | Pre-amplifier                     | EMCI            | EMC051845 SE     | HKE-015    | Dec. 27, 2018 | 1 Year        |
| 13.  | Pre-amplifier                     | Agilent         | 83051A           | HKE-016    | Dec. 27, 2018 | 1 Year        |
| 14.  | EMI Test Software EZ-EMC          | Tonscend        | JS1120-B Version | HKE-083    | Dec. 27, 2018 | N/A           |
| 15.  | Power Sensor                      | Agilent         | E9300A           | HKE-086    | Dec. 27, 2018 | 1 Year        |
| 16.  | Spectrum analyzer                 | Agilent         | N9020A           | HKE-048    | Dec. 27, 2018 | 1 Year        |
| 17.  | Signal generator                  | Agilent         | N5182A           | HKE-029    | Dec. 27, 2018 | 1 Year        |
| 18.  | Signal Generator                  | Agilent         | 83630A           | HKE-028    | Dec. 27, 2018 | 1 Year        |
| 19.  | Shielded room                     | Shiel Hong      | 4*3*3            | HKE-039    | Dec. 27, 2018 | 3 Year        |
| 20.  | RF Cable(below 1GHz)              | HUBER+SUHNER    | RG214            | HKE-055    | Dec. 27, 2018 | 1 Year        |
| 21.  | RF Cable(above 1GHz)              | HUBER+SUHNER    | RG214            | HKE-056    | Dec. 27, 2018 | 1 Year        |


Note: 1. The Cal.Interval was one year.



## 4. TEST CONDITIONS AND RESULTS

### 4.1. AC Power Conducted Emission

#### TEST CONFIGURATION

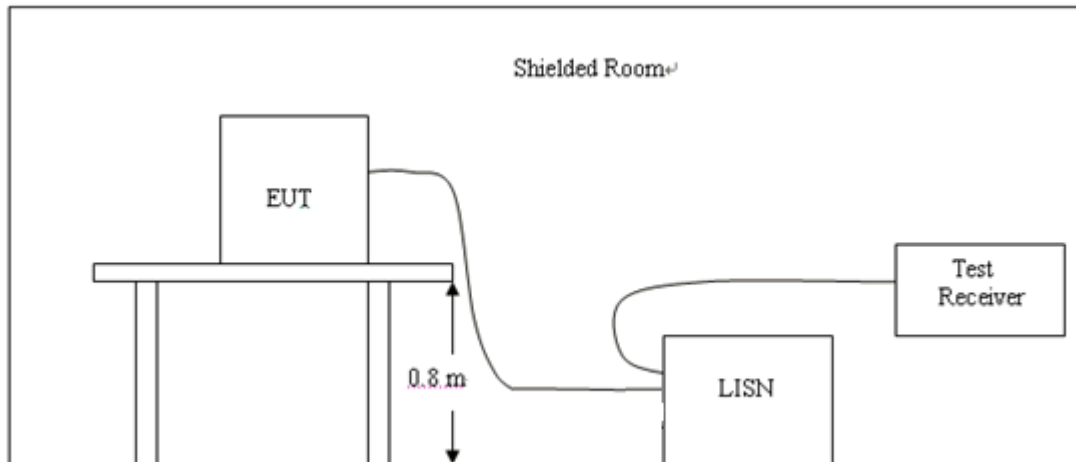

#### TEST PROCEDURE

- 1, The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10.
- 2, Support equipment, if needed, was placed as per ANSI C63.10.
- 3, All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4, If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5, All support equipments received AC power from a second LISN, if any.
- 6, The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7, Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.

#### AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following :

| Frequency range (MHz) | Limit (dBuV) |           |
|-----------------------|--------------|-----------|
|                       | Quasi-peak   | Average   |
| 0.15-0.5              | 66 to 56*    | 56 to 46* |
| 0.5-5                 | 56           | 46        |
| 5-30                  | 60           | 50        |

\* Decreases with the logarithm of the frequency.

#### TEST RESULTS

Remark:

1. All modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:
2. Both 120 VAC, 50/60 Hz and 240 VAC, 50/60 Hz power supply have been tested, only the worst result of 120 VAC, 60 Hz was reported as below:.




Power supply:

DC 5V from Adapter  
AC 120V/60Hz

Polarization

L

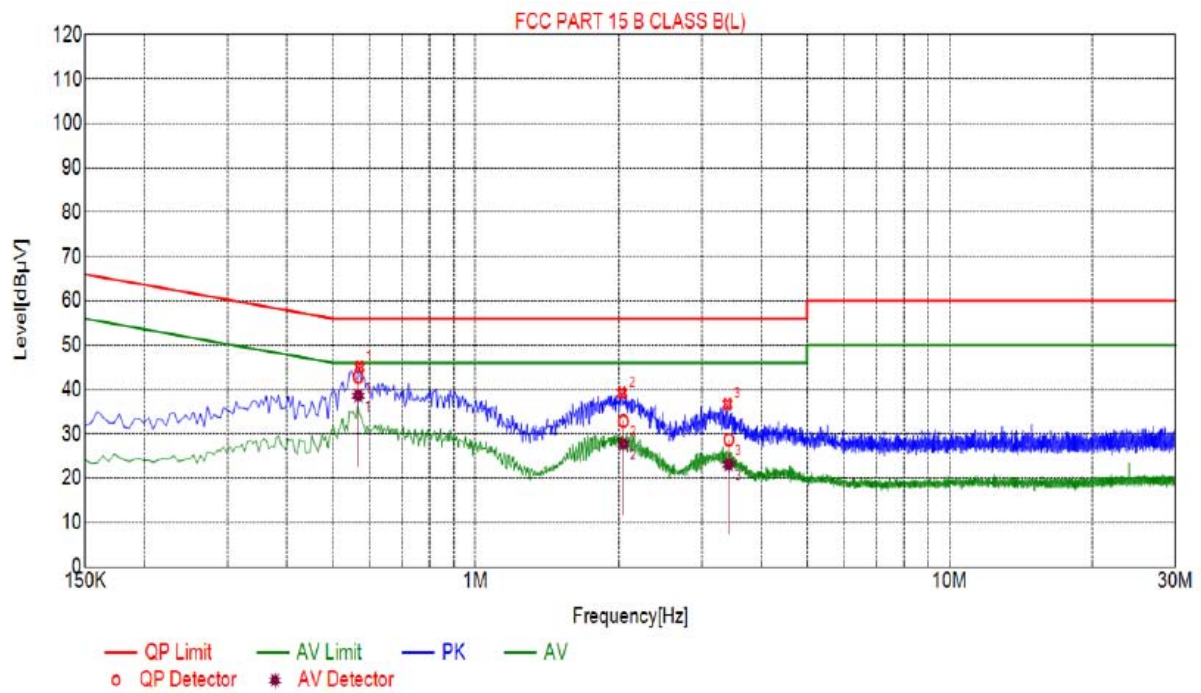

## Final Data List

| NO. | Freq.<br>[MHz] | Factor<br>[dB] | QP<br>Value<br>[dBμV] | QP<br>Limit<br>[dBμV] | QP<br>Margin<br>[dB] | AV<br>Value<br>[dBμV] | AV<br>Limit<br>[dBμV] | AV<br>Margin<br>[dB] |
|-----|----------------|----------------|-----------------------|-----------------------|----------------------|-----------------------|-----------------------|----------------------|
| 1   | 0.5650         | 10.06          | 42.85                 | 56.00                 | 13.15                | 38.63                 | 46.00                 | 7.37                 |
| 2   | 2.0493         | 10.15          | 32.93                 | 56.00                 | 23.07                | 27.74                 | 46.00                 | 18.26                |
| 3   | 3.4216         | 10.24          | 28.70                 | 56.00                 | 27.30                | 23.14                 | 46.00                 | 22.86                |




Power supply:

DC 5V from Adapter  
AC 120V/60Hz

Polarization

N

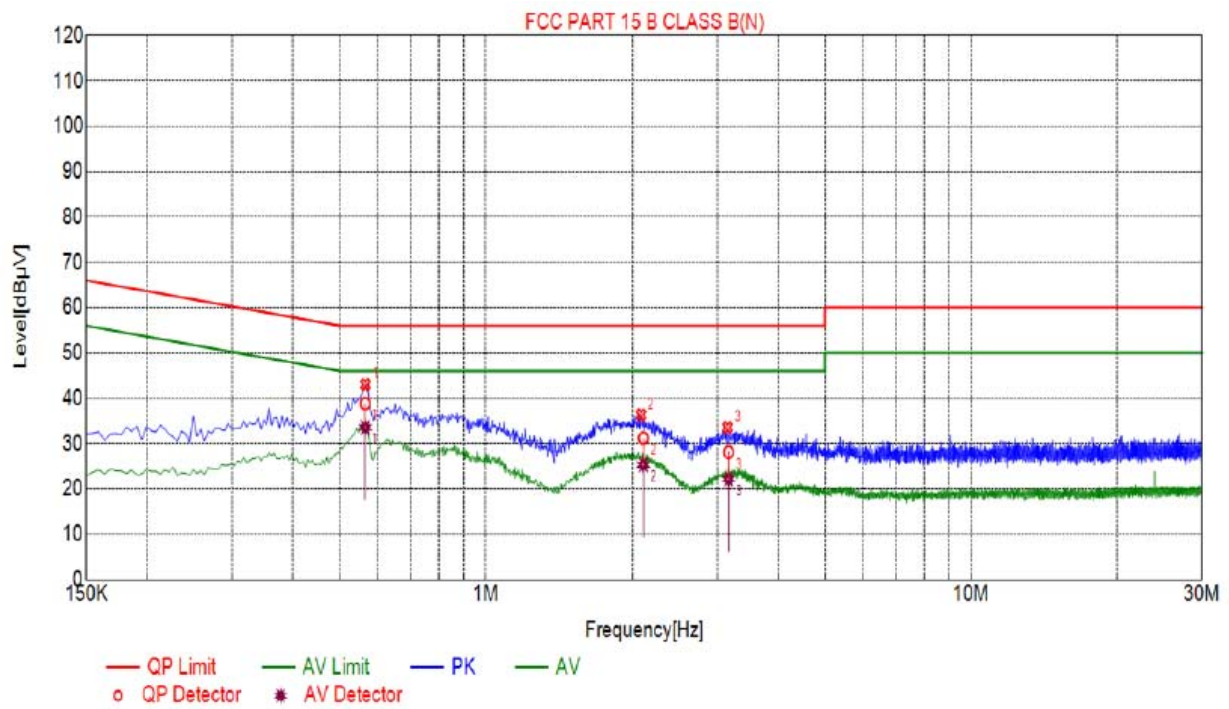


## Final Data List

| NO. | Freq.<br>[MHz] | Factor<br>[dB] | QP<br>Value<br>[dBμV] | QP<br>Limit<br>[dBμV] | QP<br>Margin<br>[dB] | AV<br>Value<br>[dBμV] | AV<br>Limit<br>[dBμV] | AV<br>Margin<br>[dB] |
|-----|----------------|----------------|-----------------------|-----------------------|----------------------|-----------------------|-----------------------|----------------------|
| 1   | 0.5634         | 10.06          | 38.85                 | 56.00                 | 17.15                | 33.61                 | 46.00                 | 12.39                |
| 2   | 2.1104         | 10.15          | 31.24                 | 56.00                 | 24.76                | 25.37                 | 46.00                 | 20.63                |
| 3   | 3.1644         | 10.23          | 28.14                 | 56.00                 | 27.86                | 22.22                 | 46.00                 | 23.78                |


## 4.2. Radiated Emission

### TEST CONFIGURATION


Frequency range 9 KHz – 30MHz

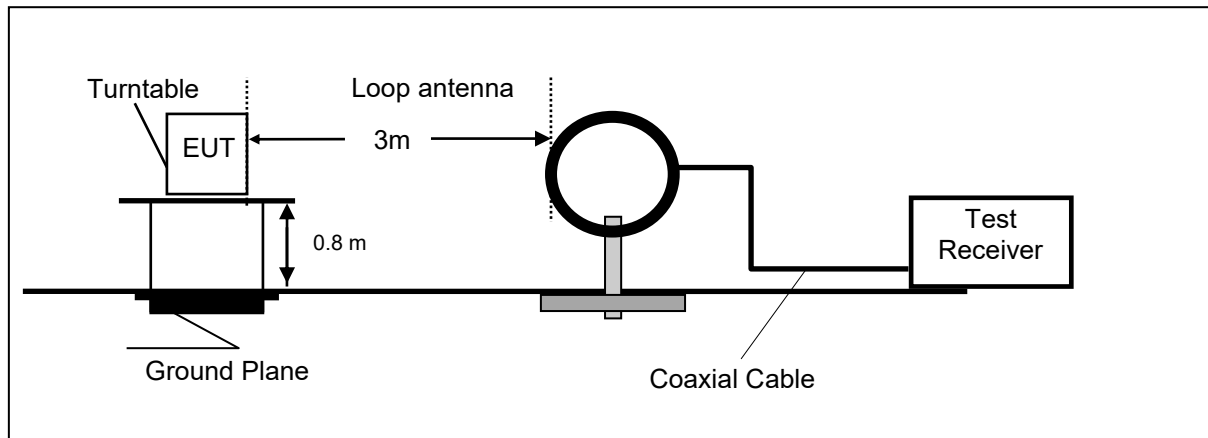

Frequency range 30MHz – 1000MHz

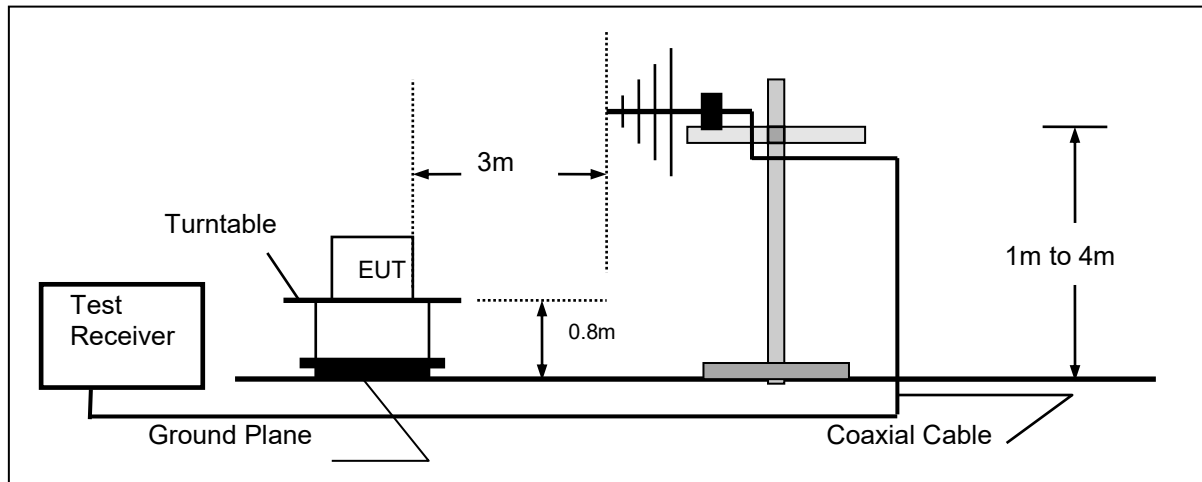

Frequency range above 1GHz-25GHz

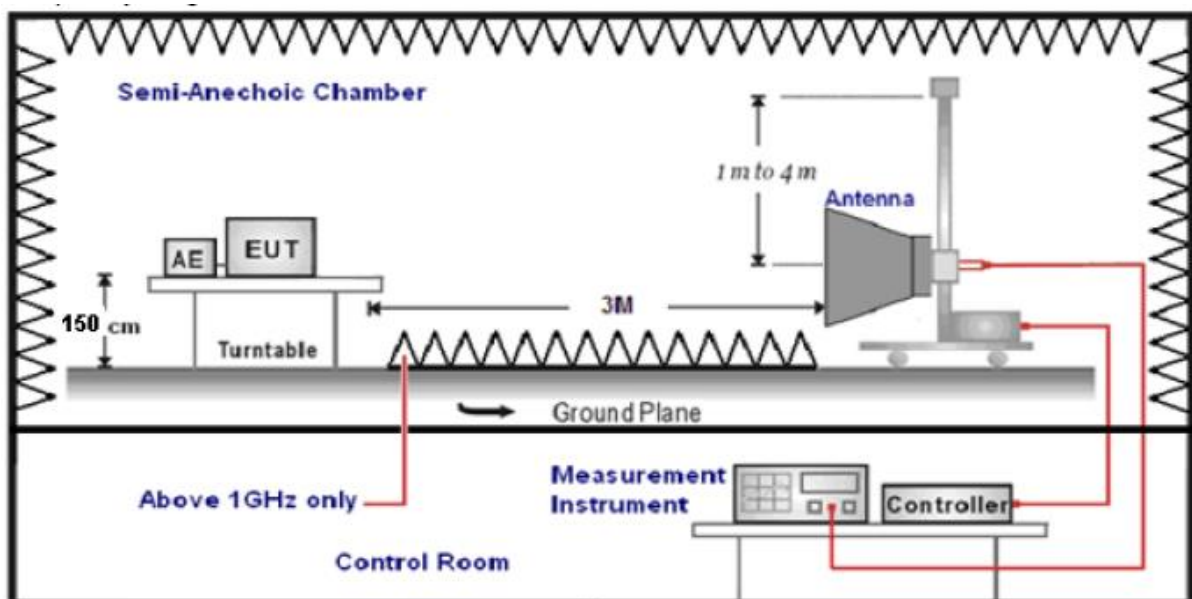

**TEST PROCEDURE**

1. The EUT was placed on a turn table which is 12mm above ground plane when testing frequency range 9 KHz –25GHz.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768KHz and maximum operation frequency was 2480MHz.so radiated emission test frequency band from 9KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type          | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz           | Active Loop Antenna        | 3             |
| 30MHz-1GHz           | Ultra-Broadband Antenna    | 3             |
| 1GHz-18GHz           | Double Ridged Horn Antenna | 3             |
| 18GHz-25GHz          | Horn Antenna               | 1             |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 9KHz-150KHz          | RBW=200Hz/VBW=3KHz, Sweep time=Auto                                                                       | QP       |
| 150KHz-30MHz         | RBW=9KHz/VBW=100KHz, Sweep time=Auto                                                                      | QP       |
| 30MHz-1GHz           | RBW=120KHz/VBW=1000KHz, Sweep time=Auto                                                                   | QP       |
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

**Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor(if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

|                           |                                            |
|---------------------------|--------------------------------------------|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude    | AG = Amplifier Gain                        |
| AF = Antenna Factor       |                                            |

$$\text{Transd} = AF + CL - AG$$

**RADIATION LIMIT**

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dBμV/m)                            | Radiated (μV/m)       |
|-----------------|-------------------|----------------------------------------------|-----------------------|
| 0.009-0.49      | 3                 | $20\log(2400/F(\text{KHz})) + 40\log(300/3)$ | $2400/F(\text{KHz})$  |
| 0.49-1.705      | 3                 | $20\log(24000/F(\text{KHz})) + 40\log(30/3)$ | $24000/F(\text{KHz})$ |
| 1.705-30        | 3                 | $20\log(30) + 40\log(30/3)$                  | 30                    |
| 30-88           | 3                 | 40.0                                         | 100                   |
| 88-216          | 3                 | 43.5                                         | 150                   |
| 216-960         | 3                 | 46.0                                         | 200                   |
| Above 960       | 3                 | 54.0                                         | 500                   |




**TEST RESULTS**


Remark: For test below 1GHz all modes of GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK Middle Channel was reported as below:

**For 9 KHz-30MHz**

| Frequency (MHz) | Corrected Reading (dBuV/m)@3m | FCC Limit (dBuV/m) @3m | Margin (dB) | Detector | Result |
|-----------------|-------------------------------|------------------------|-------------|----------|--------|
| 0.47            | 49.56                         | 94.16                  | 44.60       | QP       | PASS   |
| 1.57            | 50.41                         | 63.69                  | 13.28       | QP       | PASS   |
| 18.45           | 58.23                         | 69.54                  | 11.31       | QP       | PASS   |
| 20.69           | 45.54                         | 69.54                  | 24.00       | QP       | PASS   |

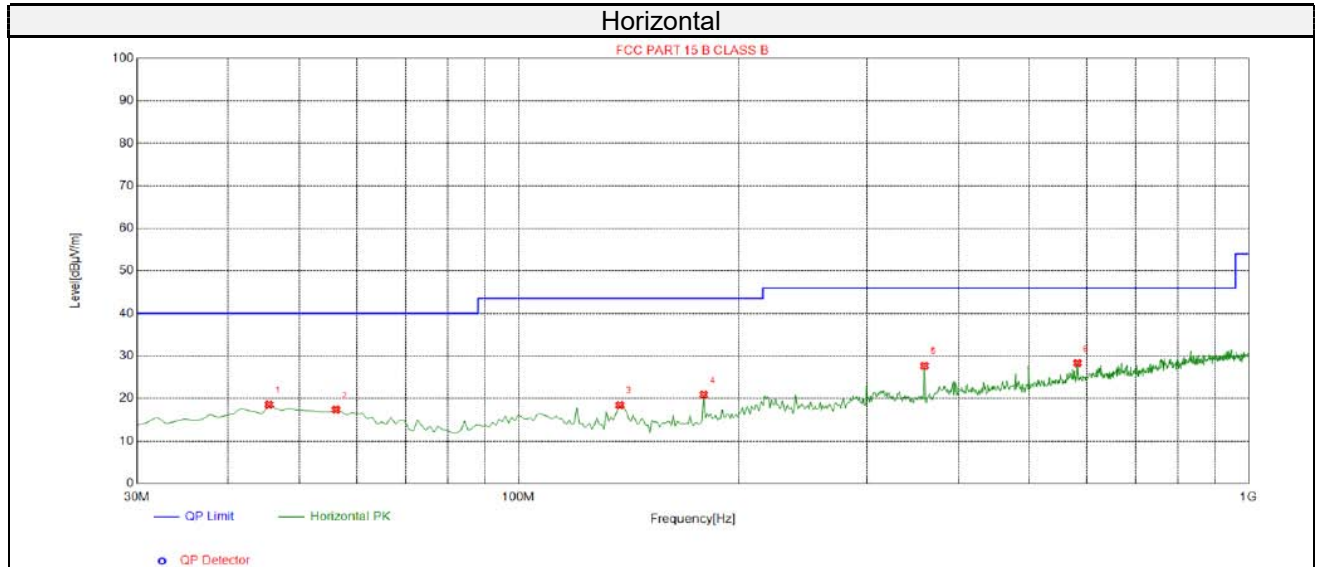**For 30MHz-1GHz****Suspected List**

| NO. | Freq. [MHz] | Level [dBuV/m] | Factor [dB] | Limit [dBuV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity   |
|-----|-------------|----------------|-------------|----------------|-------------|-------------|-----------|------------|
| 1   | 45.5200     | 18.58          | -13.65      | 40.00          | 21.42       | 100         | 32        | Horizontal |
| 2   | 56.1900     | 17.36          | -14.58      | 40.00          | 22.64       | 100         | 201       | Horizontal |
| 3   | 137.670     | 18.46          | -19.04      | 43.50          | 25.04       | 100         | 326       | Horizontal |
| 4   | 179.380     | 20.89          | -16.88      | 43.50          | 22.61       | 100         | 348       | Horizontal |
| 5   | 359.800     | 27.69          | -11.35      | 46.00          | 18.31       | 100         | 300       | Horizontal |
| 6   | 582.900     | 28.32          | -6.65       | 46.00          | 17.68       | 100         | 348       | Horizontal |

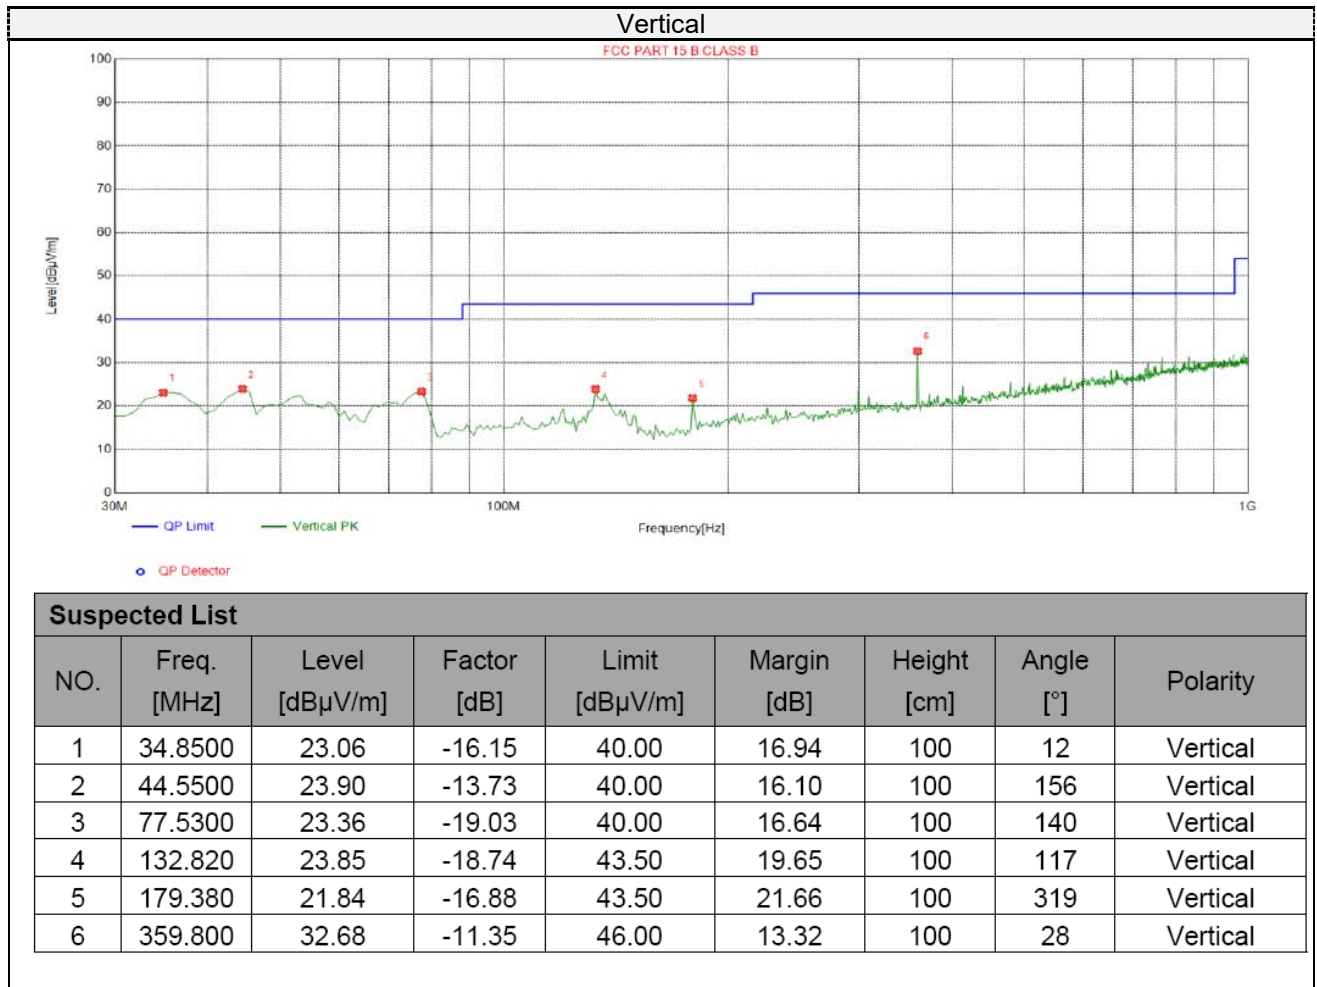



**For 1GHz to 25GHz**

Remark: For test above 1GHz GFSK, Pi/4 DQPSK, and 8DPSK were test at Low, Middle, and High channel; only the worst result of GFSK was reported as below:

CH Low (2402MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804      | 62.1          | -3.64  | 58.46          | 74       | -15.54 | peak          |
| 4804      | 52.89         | -3.64  | 49.25          | 54       | -4.75  | AVG           |
| 7206      | 51.69         | -0.95  | 50.74          | 74       | -23.26 | peak          |
| 7206      | 42.31         | -0.95  | 41.36          | 54       | -12.64 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4804      | 63.42         | -3.64  | 59.78          | 74       | -14.22 | peak          |
| 4804      | 54.38         | -3.64  | 50.74          | 54       | -3.26  | AVG           |
| 7206      | 50.18         | -0.95  | 49.23          | 74       | -24.77 | peak          |
| 7206      | 41.82         | -0.95  | 40.87          | 54       | -13.13 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## CH Middle (2441MHz)

## Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882      | 62.99         | -3.51  | 59.48          | 74       | -14.52 | peak          |
| 4882      | 53.74         | -3.51  | 50.23          | 54       | -3.77  | AVG           |
| 7326      | 52.24         | -0.82  | 51.42          | 74       | -22.58 | peak          |
| 7326      | 43.69         | -0.82  | 42.87          | 54       | -11.13 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

## Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4882      | 63.76         | -3.51  | 60.25          | 74       | -13.75 | peak          |
| 4882      | 55.29         | -3.51  | 51.78          | 54       | -2.22  | AVG           |
| 7326      | 53.18         | -0.82  | 52.36          | 74       | -21.64 | peak          |
| 7326      | 44.53         | -0.82  | 43.71          | 54       | -10.29 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



CH High (2480MHz)

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960      | 62.84         | -3.43  | 59.41          | 74       | -14.59 | peak          |
| 4960      | 53.66         | -3.43  | 50.23          | 54       | -3.77  | AVG           |
| 7440      | 51.11         | -0.75  | 50.36          | 74       | -23.64 | peak          |
| 7440      | 42.86         | -0.75  | 42.11          | 54       | -11.89 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4960      | 62.18         | -3.43  | 58.75          | 74       | -15.25 | peak          |
| 4960      | 52.96         | -3.43  | 49.53          | 54       | -4.47  | AVG           |
| 7440      | 50.97         | -0.75  | 50.22          | 74       | -23.78 | peak          |
| 7440      | 42.62         | -0.75  | 41.87          | 54       | -12.13 | AVG           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |
| ---       | ---           | ---    | ---            | ---      | ---    | ---           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:


(1) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



### 4.3. Maximum Peak Output Power

#### TEST CONFIGURATION



#### TEST PROCEDURE

According to ANSI C63.10:2013 Maximum peak conducted output power for HFSS devices:  
The maximum peak conducted output power may be measured using a broadband peak RF power meter.  
The power meter shall have a video bandwidth that is greater than or equal to the HFSS bandwidth and shall utilize a fast-responding diode detector.

#### LIMIT

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

#### TEST RESULTS


| Type          | Channel | Peak Output power (dBm) | Limit (dBm) | Result |
|---------------|---------|-------------------------|-------------|--------|
| GFSK          | 00      | 0.517                   | 21          | Pass   |
|               | 39      | 0.251                   |             |        |
|               | 78      | 0.117                   |             |        |
| $\pi/4$ DQPSK | 00      | 2.015                   | 21          | Pass   |
|               | 39      | 1.817                   |             |        |
|               | 78      | 1.770                   |             |        |
| 8DPSK         | 00      | 2.237                   | 21          | Pass   |
|               | 39      | 2.044                   |             |        |
|               | 78      | 1.966                   |             |        |

Note: 1. The test results including the cable loss.



#### 4.4. 20dB Bandwidth

##### TEST CONFIGURATION



##### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

##### LIMIT

For frequency hopping systems operating in the 2400MHz-2483.5MHz no limit for 20dB bandwidth.

##### TEST RESULTS


| Modulation    | Channel | 20dB bandwidth (MHz) | 99% OBW (MHz) | Result |
|---------------|---------|----------------------|---------------|--------|
| GFSK          | CH00    | 1.039                | 0.95431       | Pass   |
|               | CH39    | 1.032                | 0.96557       |        |
|               | CH78    | 1.041                | 0.94697       |        |
| $\pi/4$ DQPSK | CH00    | 1.129                | 1.1145        |        |
|               | CH39    | 1.131                | 1.1147        |        |
|               | CH78    | 1.134                | 1.1158        |        |
| 8DPSK         | CH00    | 1.048                | 1.1057        |        |
|               | CH39    | 1.046                | 1.1060        |        |
|               | CH78    | 1.046                | 1.0938        |        |




## GFSK Modulation




## CH00

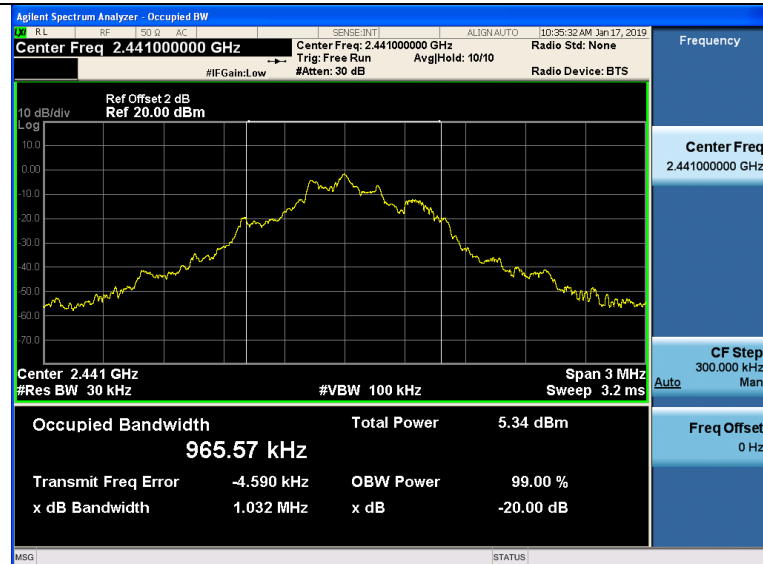


## CH39

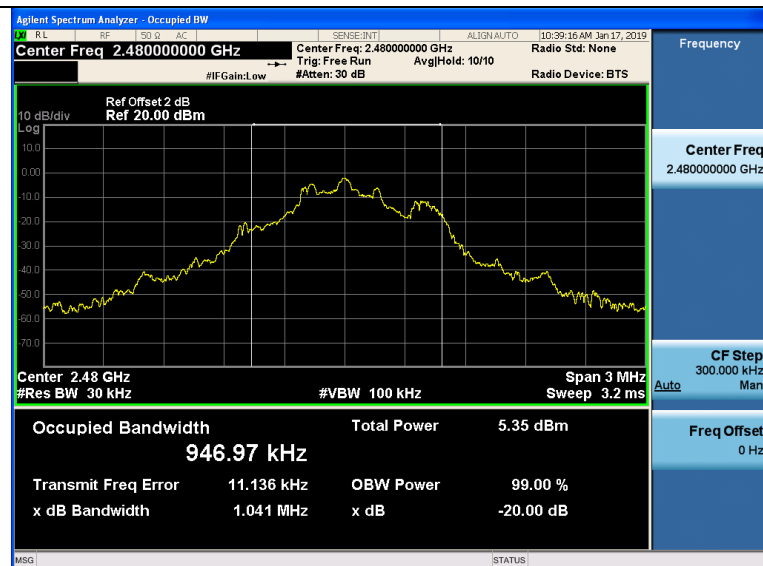


## CH78

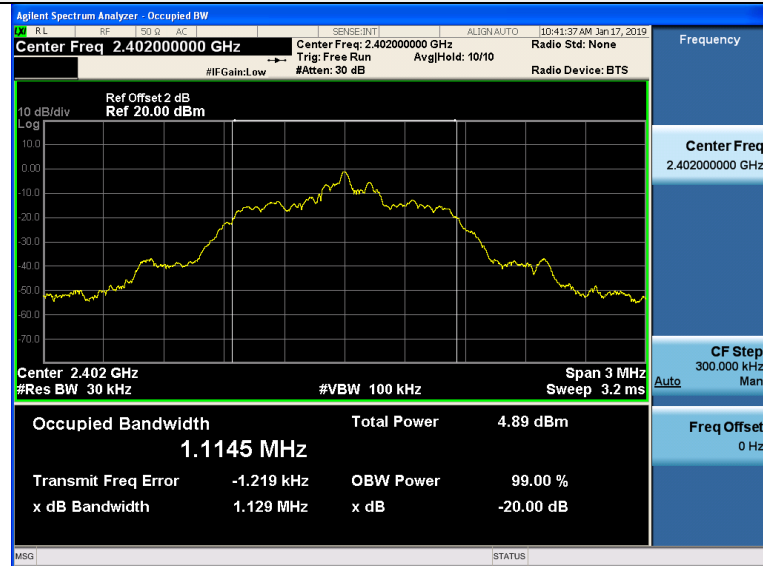 $\pi/4$ DQPSK Modulation

## CH00

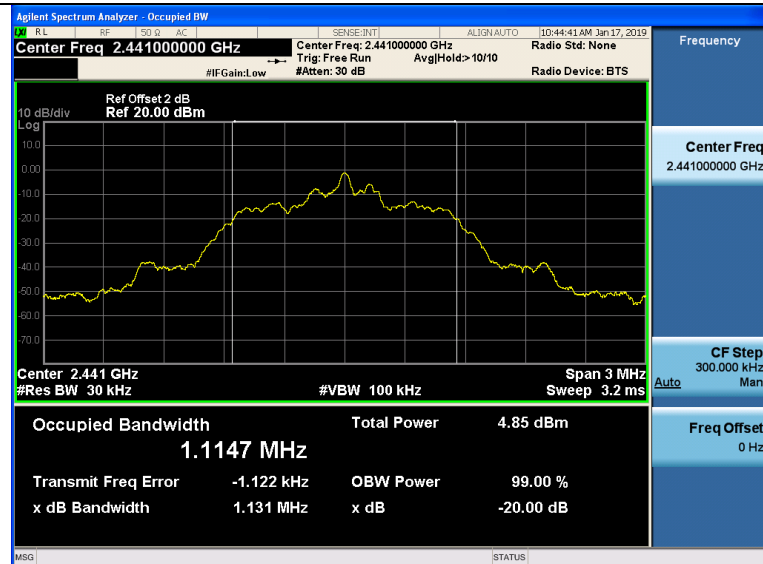


## CH39

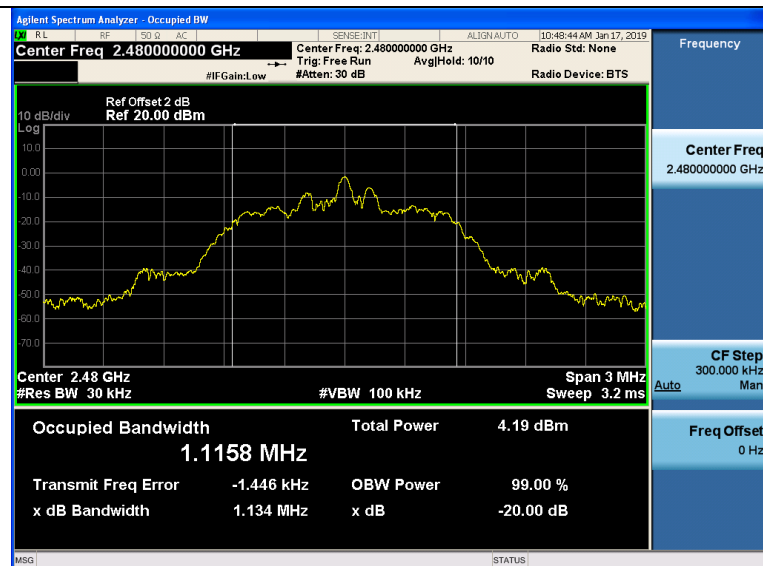


## CH78




## 8DPSK Modulation

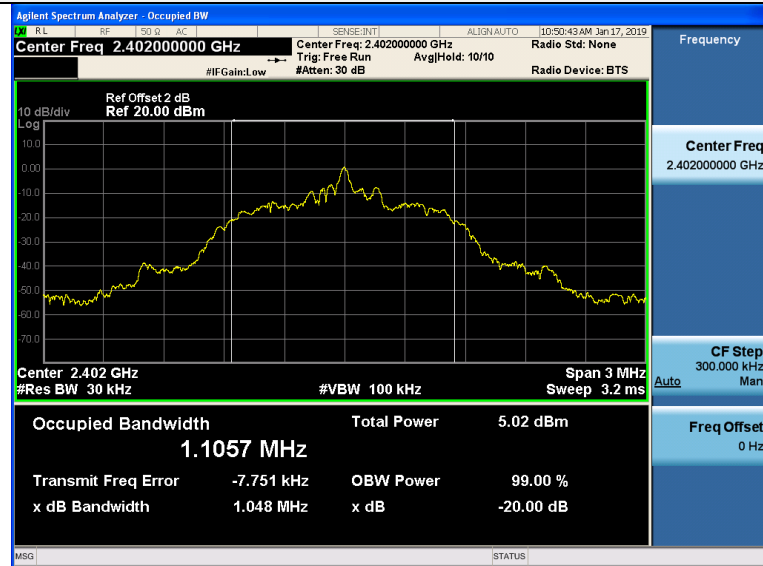

## CH00

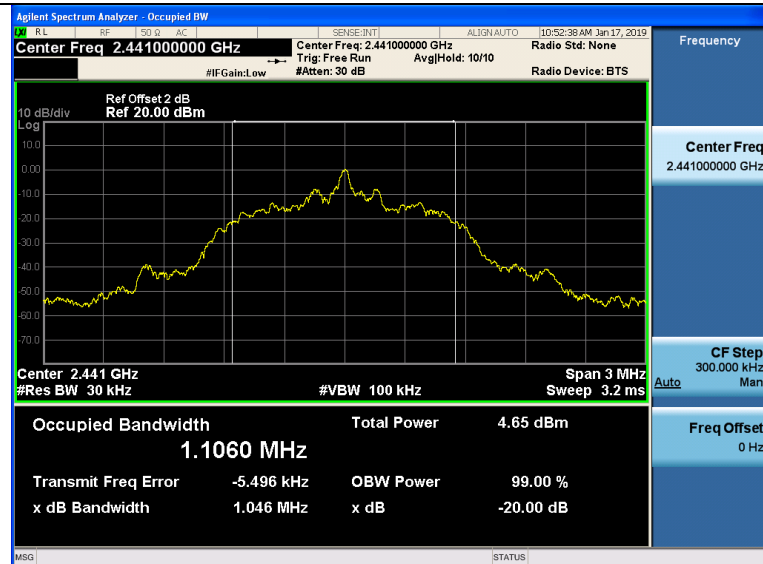

## CH39

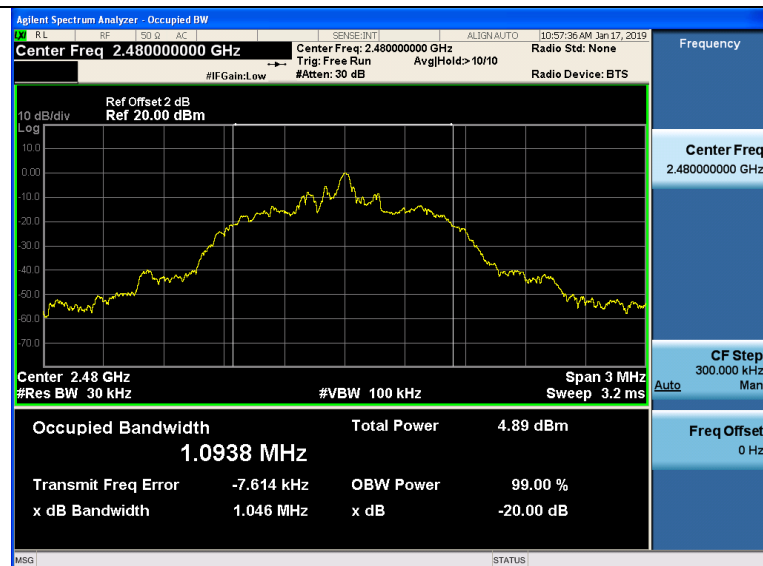


## CH78





## 4.5. Frequency Separation

### TEST CONFIGURATION



### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=30 KHz and VBW=100KHz.

### LIMIT

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25KHz or the  $2/3 \times 20\text{dB}$  bandwidth of the hopping channel, whichever is greater.

### TEST RESULTS

#### 4.5.1 GFSK Test Mode

| Modulation    | Channel | Channel Separation (MHz) | 20dB Bandwidth (MHz) | Limit(MHz)<br>$2/3 \times 20\text{dB BW}$ | Result |
|---------------|---------|--------------------------|----------------------|-------------------------------------------|--------|
| GFSK          | CH38    | 0.974                    | 0.9472               | 0.631                                     | Pass   |
|               | CH39    |                          |                      |                                           |        |
| $\pi/4$ DQPSK | CH38    | 1.014                    | 1.274                | 0.849                                     | Pass   |
|               | CH39    |                          |                      |                                           |        |
| 8DPSK         | CH38    | 0.991                    | 1.281                | 0.854                                     | Pass   |
|               | CH39    |                          |                      |                                           |        |

Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle




## 4.6. Band Edge Compliance of RF Emission

### TEST REQUIREMENT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

#### For Radiated

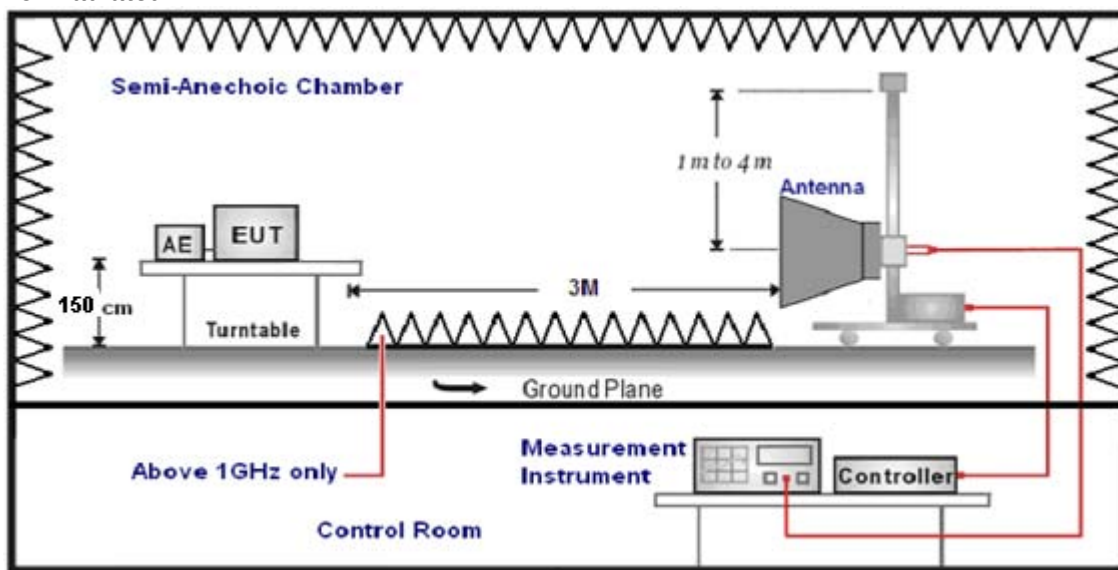

#### For Conducted



### TEST PROCEDURE

1. The EUT was placed on a turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting                                                                            | Detector |
|----------------------|-----------------------------------------------------------------------------------------------------------|----------|
| 1GHz-40GHz           | Peak Value: RBW=1MHz/VBW=3MHz,<br>Sweep time=Auto<br>Average Value: RBW=1MHz/VBW=10Hz,<br>Sweep time=Auto | Peak     |

### LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)

**TEST RESULTS****4.6.1 For Radiated Bandedge Measurement**

Remark: GFSK, Pi/4 DQPSK and 8DPSK all have been tested, only worse case GFSK is reported.

Operation Mode: GFSK TX Low channel(2402MHz)

Horizontal (Worst case)

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.04         | -5.81  | 50.23          | 74       | -23.77 | peak          |
| 2390      | 47.39         | -5.81  | 41.58          | 54       | -12.42 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.04         | -5.81  | 51.23          | 74       | -22.77 | peak          |
| 2390      | 49.37         | -5.81  | 43.56          | 54       | -10.44 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Operation Mode: GFSK TX High channel (2480MHz)

Horizontal (Worst case)

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 55.88         | -5.65  | 50.23          | 74       | -23.77 | peak          |
| 2483.5    | 48.31         | -5.65  | 42.66          | 54       | -11.34 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.94         | -5.65  | 51.29          | 74       | -22.71 | peak          |
| 2483.5    | 48.71         | -5.65  | 43.06          | 54       | -10.94 | AVG           |


Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



## 4.6.2 For Conducted Bandedge Measurement


## GFSK

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | -55.868                           | OFF          | -20         | PASS    |
| 2400.00         | -39.845                           | ON           | -20         | PASS    |
| 2483.50         | -58.786                           | OFF          | -20         | PASS    |
| 2483.50         | -57.554                           | ON           | -20         | PASS    |

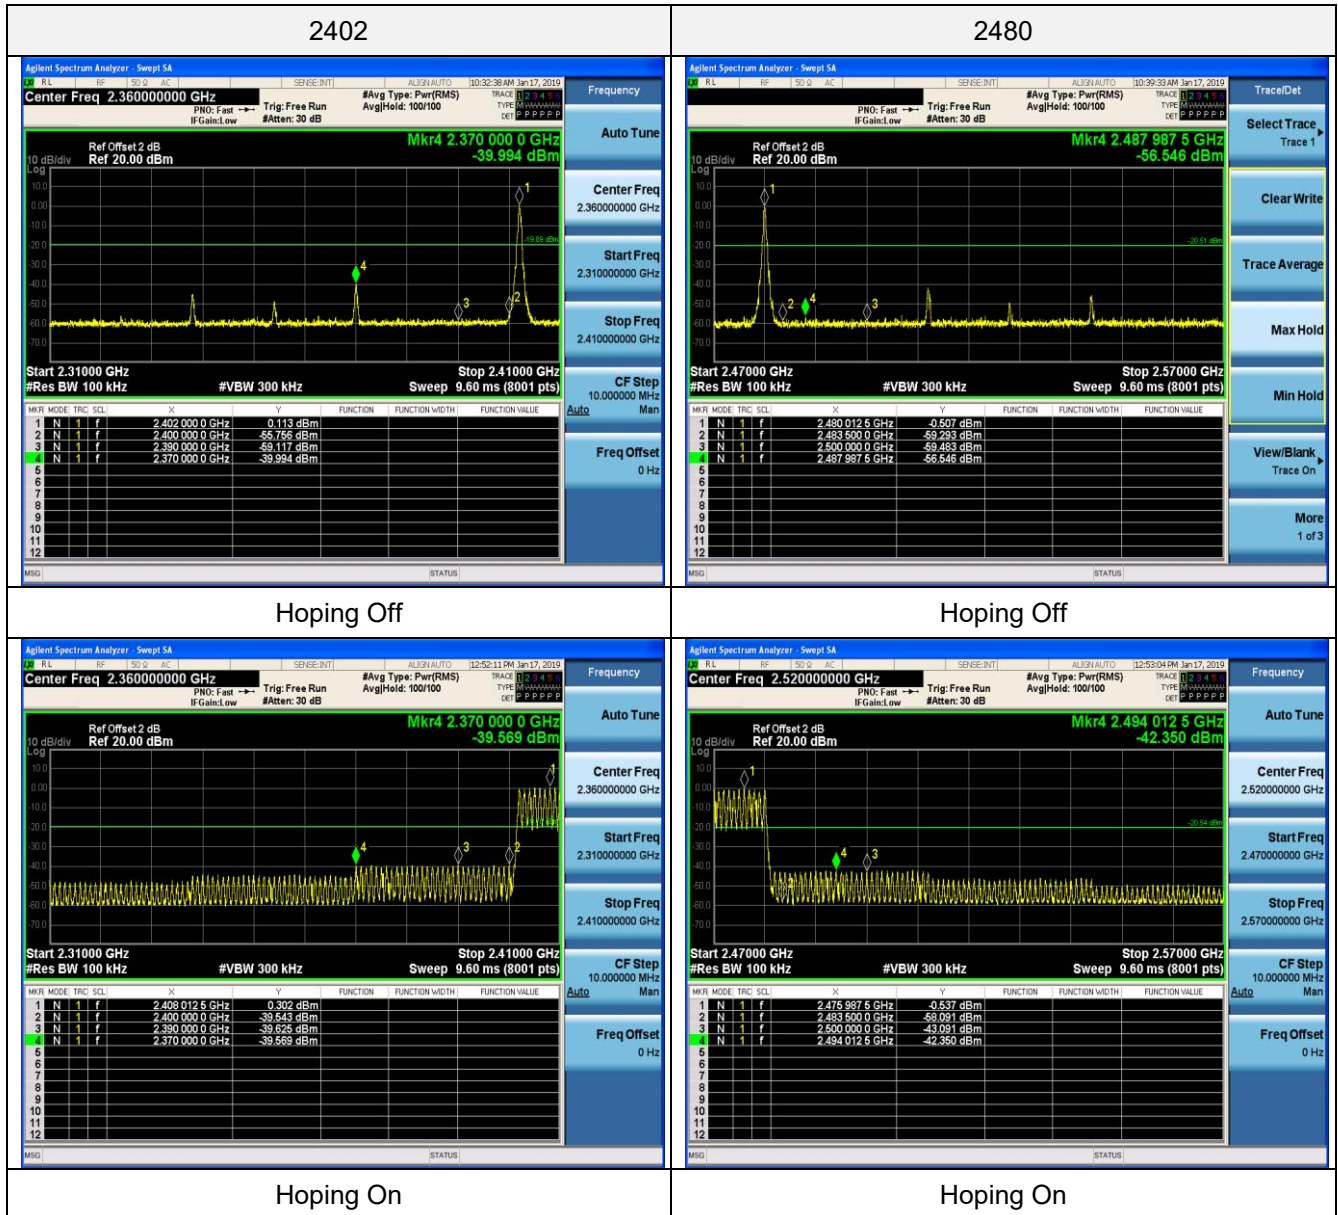

 $\pi/4$  DQPSK

| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | -56.448                           | OFF          | -20         | PASS    |
| 2400.00         | -52.063                           | ON           | -20         | PASS    |
| 2483.50         | -58.641                           | OFF          | -20         | PASS    |
| 2483.50         | -53.092                           | ON           | -20         | PASS    |

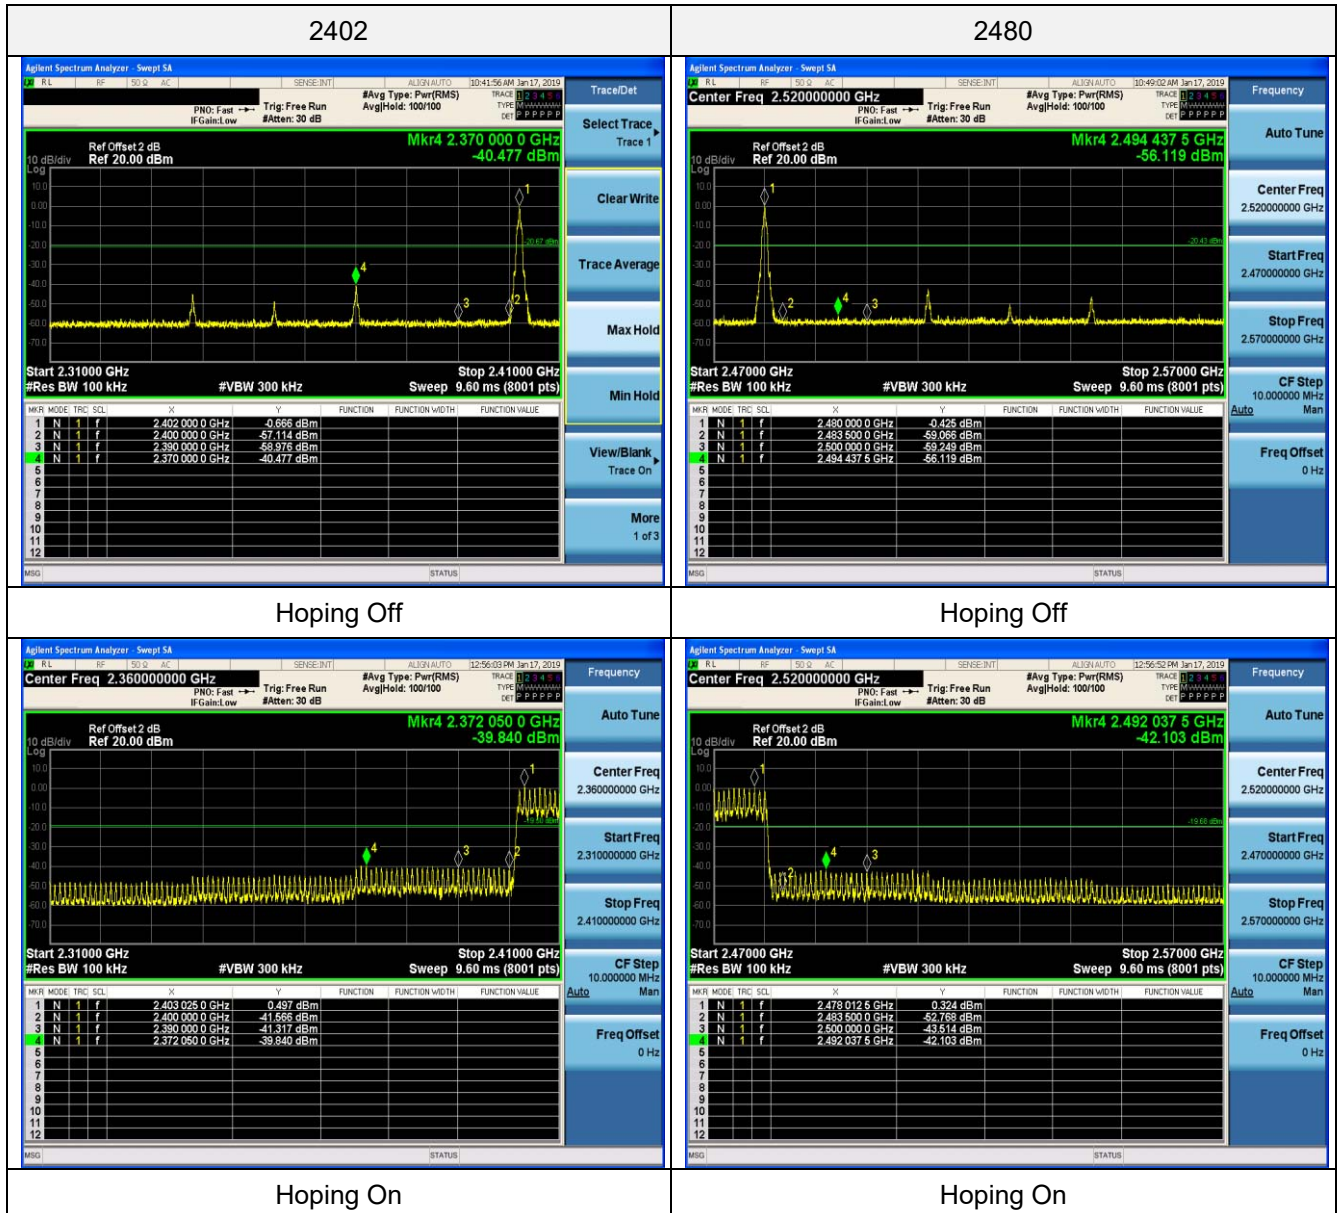






## 8DPSK


| Frequency (MHz) | Delta Peak to Band emission (dBc) | Hopping Mode | Limit (dBc) | Verdict |
|-----------------|-----------------------------------|--------------|-------------|---------|
| 2400.00         | -58.654                           | OFF          | -20         | PASS    |
| 2400.00         | -40.424                           | ON           | -20         | PASS    |
| 2483.50         | -58.826                           | OFF          | -20         | PASS    |
| 2483.50         | -56.164                           | ON           | -20         | PASS    |

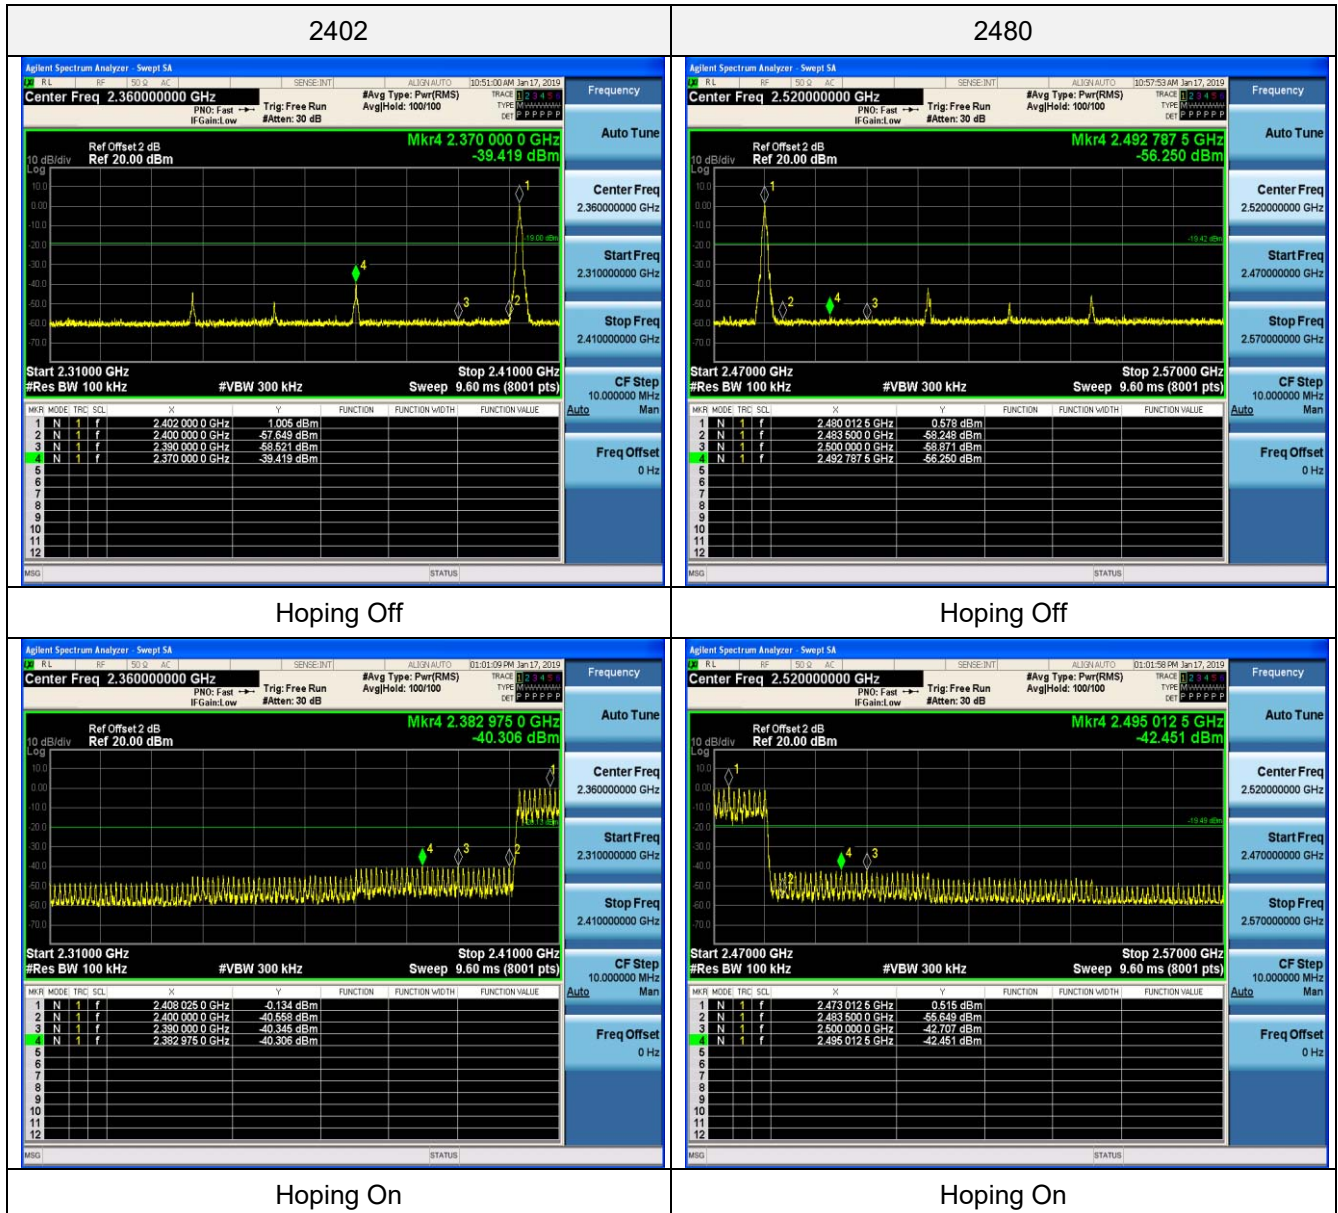



#### 4.7. Spurious RF Conducted Emission

##### TEST CONFIGURATION



##### TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100kHz and VBW= 300KHz to measure the peak field strength, and measure frequency range from 9KHz to 25GHz.

##### LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

##### TEST RESULTS

Remark: The measurement frequency range is from 30MHz to the 10<sup>th</sup> harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.





## GFSK CH00




## Reference


## GFSK CH39




## Reference

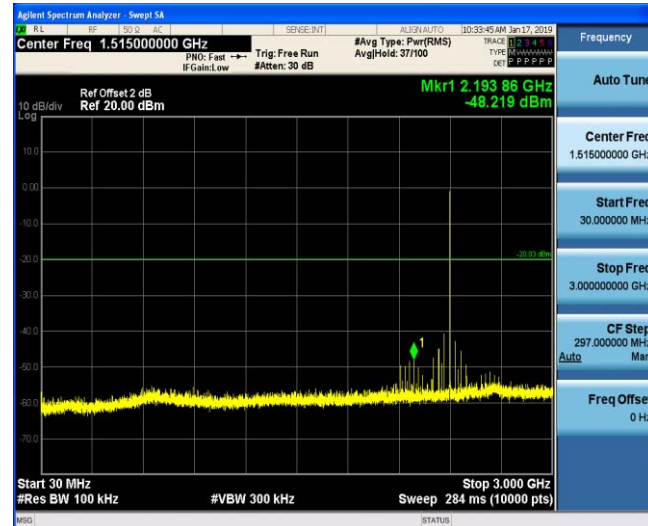


## 30MHz-3GHz

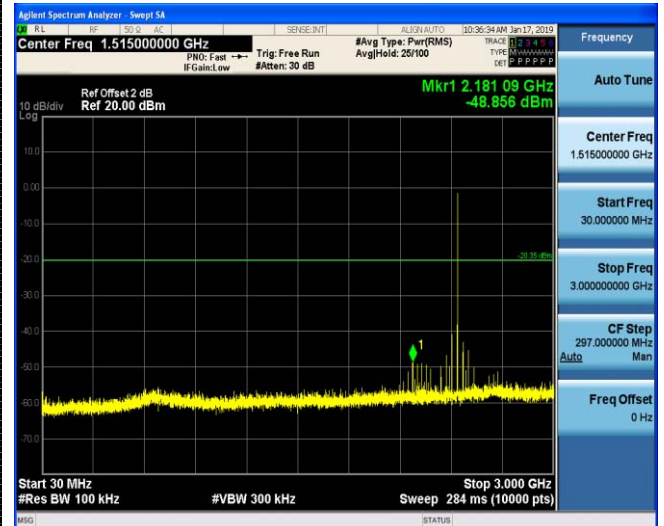

## 30MHz-3GHz

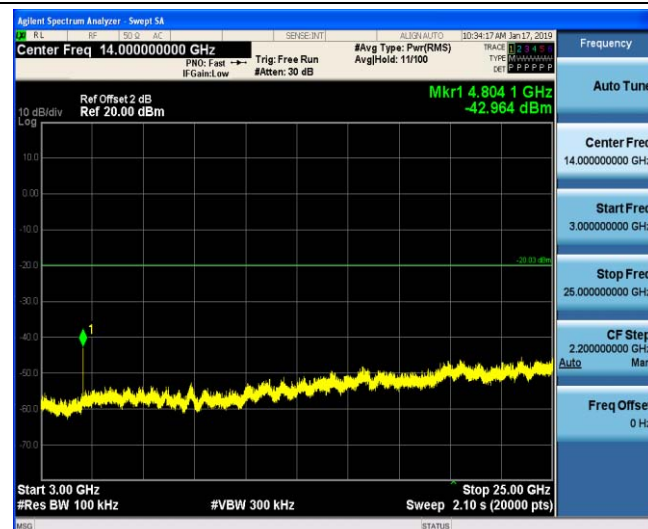

## 3GHz-25GHz

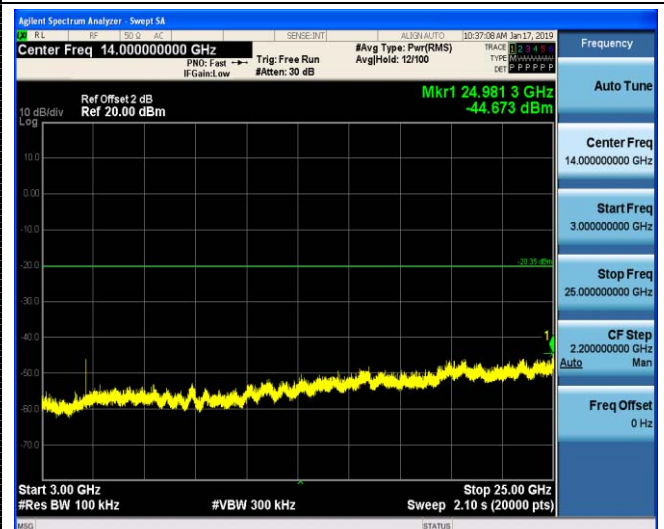

## 3GHz-25GHz




## GFSK CH78




## Reference

 $\pi/4$ DQPSK CH00


## Reference

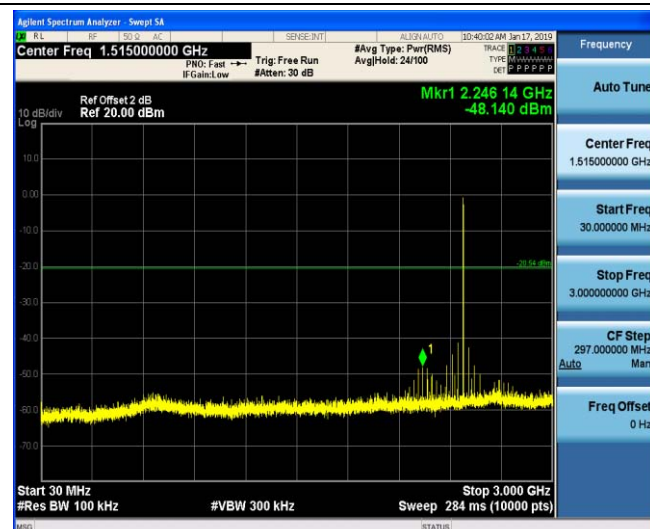


## 30MHz-3GHz

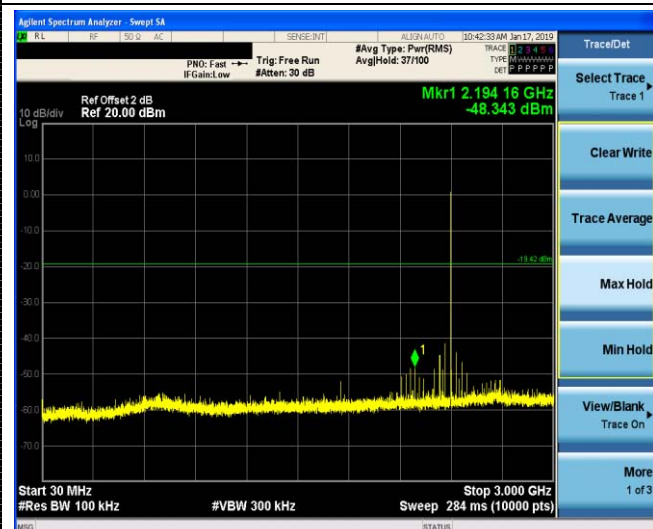

## 30MHz-3GHz

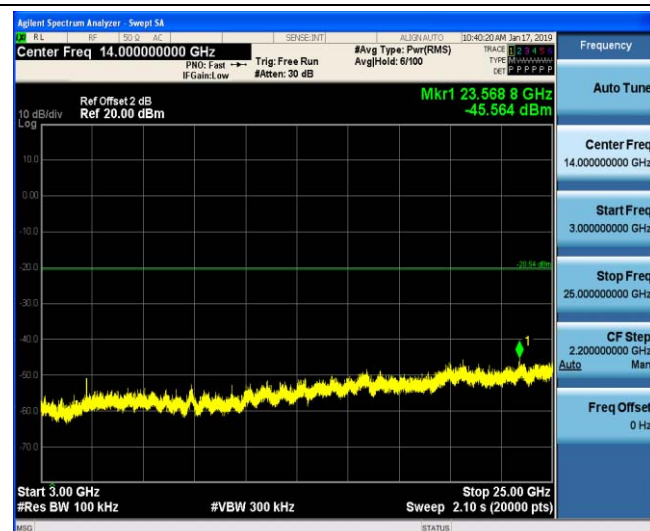

## 3GHz-25GHz

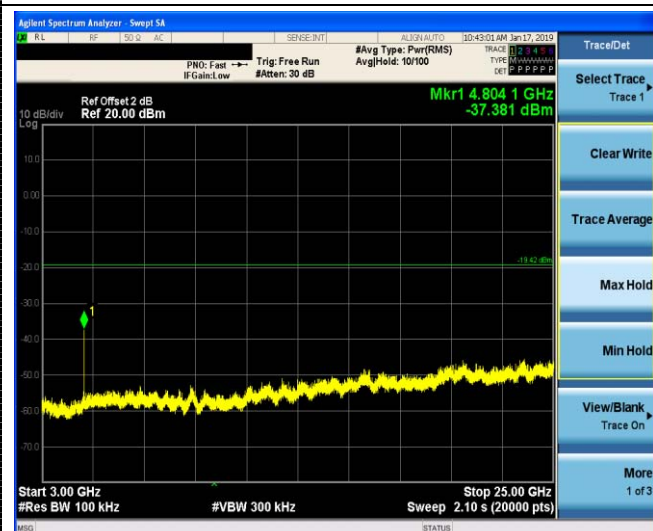


## 3GHz-25GHz

 $\pi$ /4DQPSK CH39


Reference

 $\pi$ /4DQPSK CH78


Reference

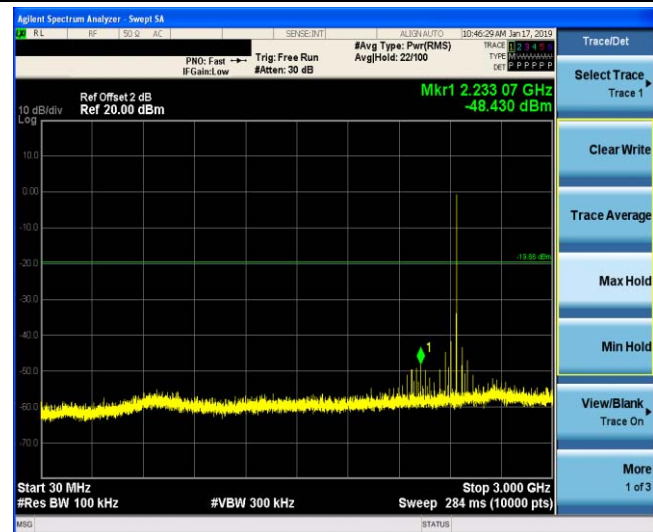

30MHz-3GHz

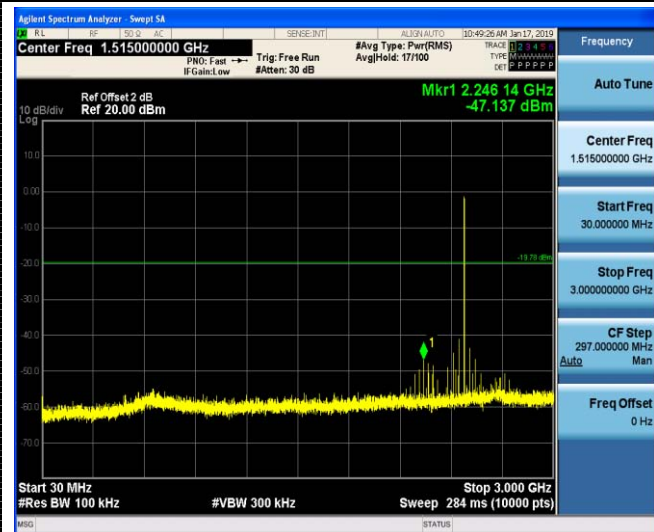

30MHz-3GHz

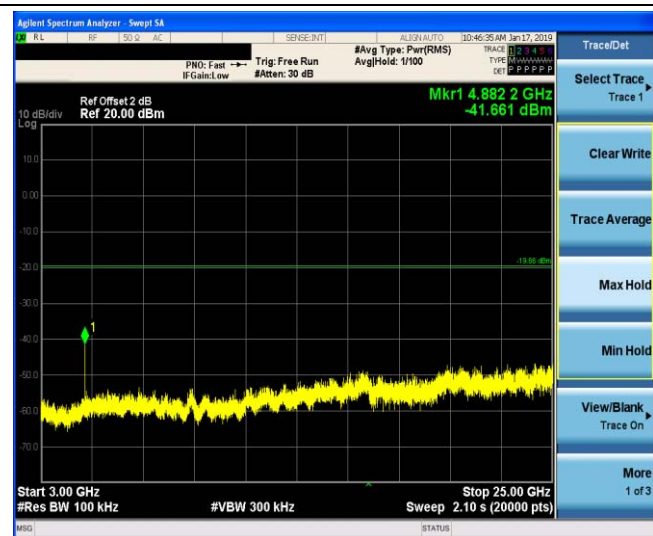

3GHz-25GHz



3GHz-25GHz



## 8DPSK CH00




## Reference


## 8DPSK CH39




## Reference

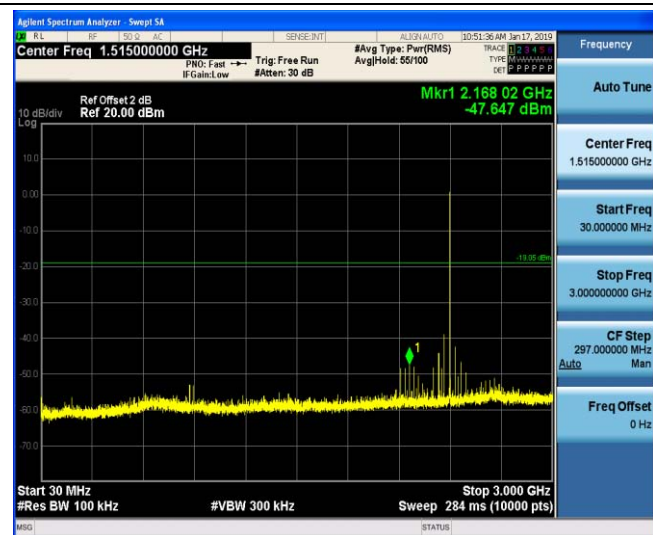


## 30MHz-3GHz

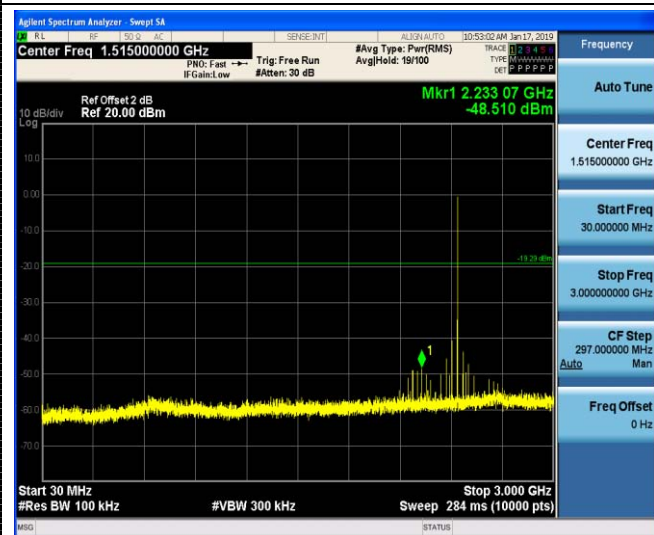

## 30MHz-3GHz

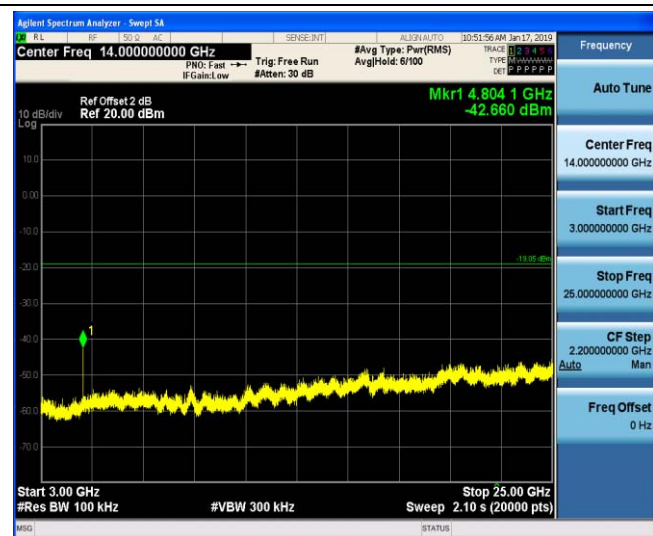

## 3GHz-25GHz

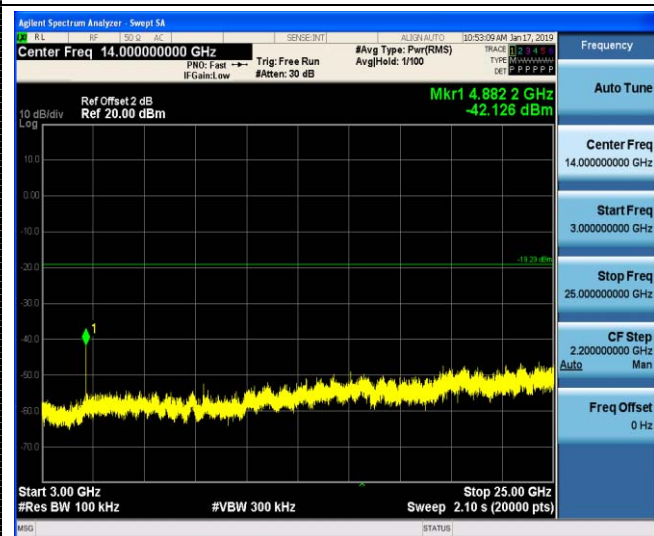


## 3GHz-25GHz




**8DPSK CH78**

Reference

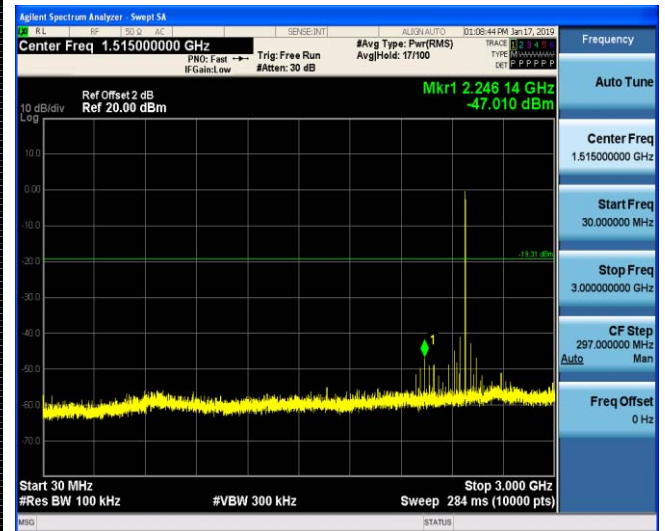

30MHz-3GHz

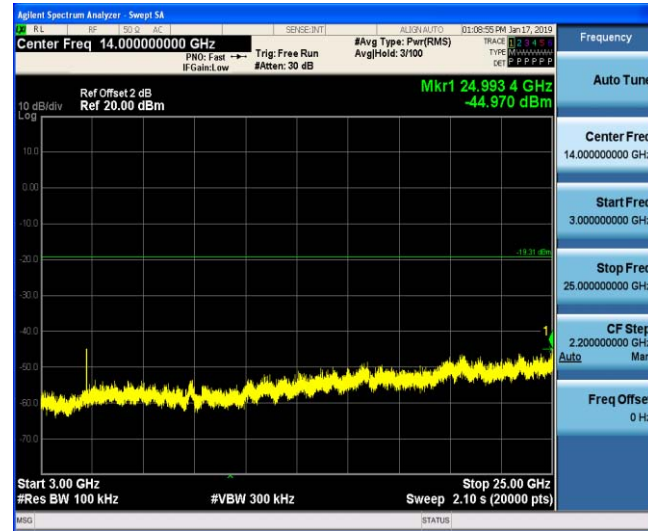


3GHz-25GHz



#### 4.8. Number of hopping frequency

##### TEST CONFIGURATION




##### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set spectrum analyzer start 2400MHz to 2483.5MHz with RBW=1MHz and VBW=3MHz.



##### LIMIT

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

| Modulation    | Number of Hopping Channel | Limit | Result |
|---------------|---------------------------|-------|--------|
| GFSK          | 79                        | ≥15   | Pass   |
| $\pi/4$ DQPSK | 79                        |       |        |
| 8DPSK         | 79                        |       |        |

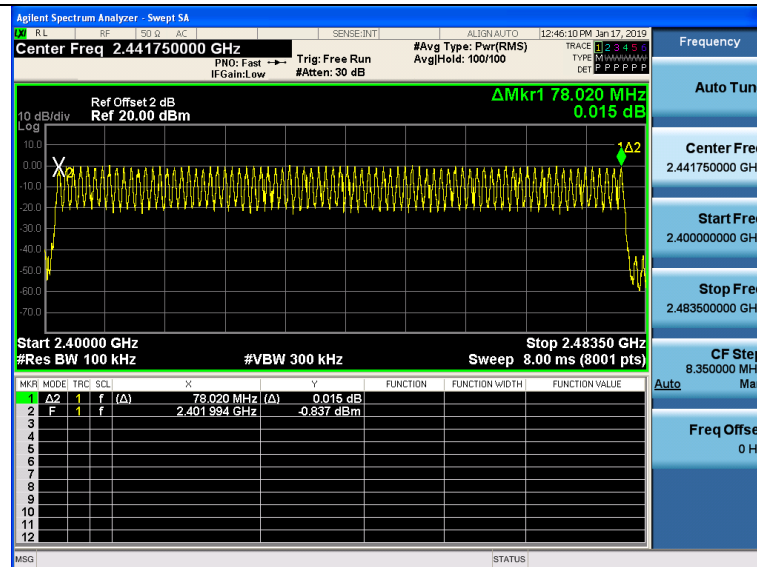

## GFSK Modulation

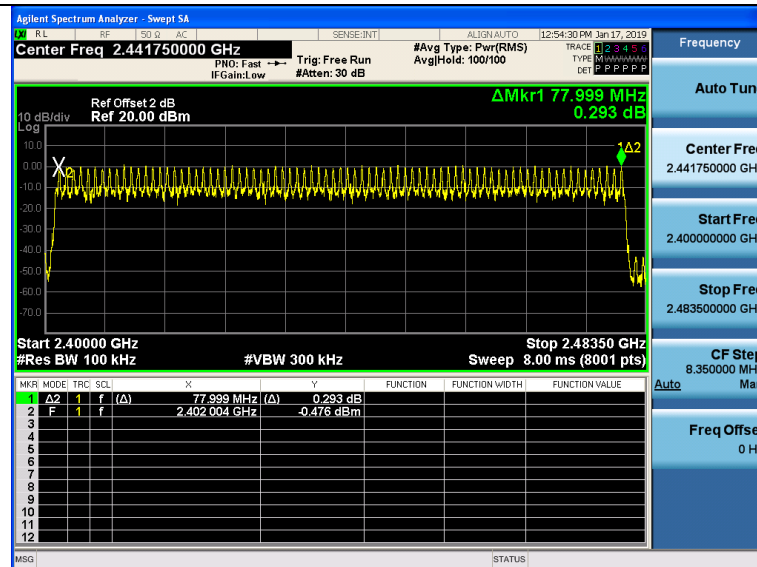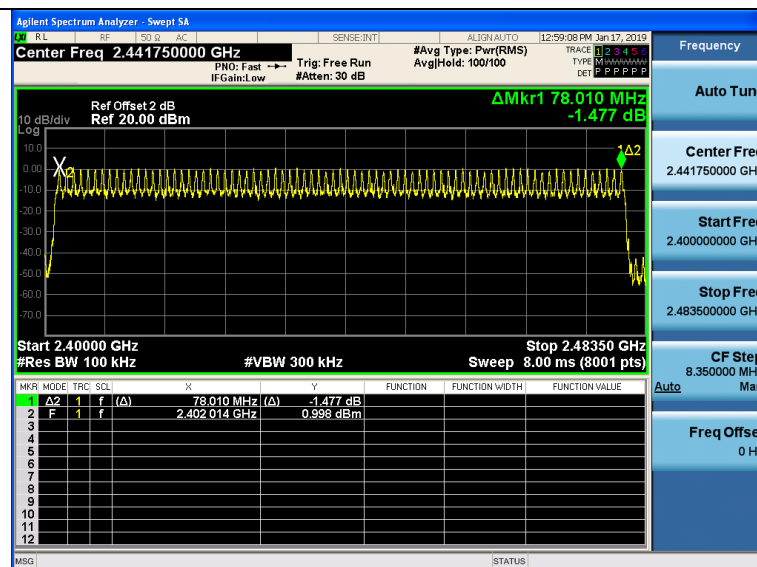
 $\pi/4$  DQPSK

## 8DPSK Modulation



#### 4.9. Time Of Occupancy(Dwell Time)

##### TEST CONFIGURATION



##### TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. Set center frequency of spectrum analyzer=operating frequency with RBW=1MHz and VBW=3MHz,Span=0Hz.

##### LIMIT

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a pe-riod of 0.4 seconds multiplied by the number of hopping channels employed.

##### TEST RESULTS

| Modulation | Packet | Pulse time (ms) | Dwell time (second) | Limit (second) | Result |
|------------|--------|-----------------|---------------------|----------------|--------|
| GFSK       | DH1    | 0.492           | 0.157               | 0.40           | Pass   |
|            | DH3    | 1.747           | 0.280               |                |        |
|            | DH5    | 2.994           | 0.319               |                |        |
| π/4 DQPSK  | DH1    | 0.504           | 0.161               | 0.40           | Pass   |
|            | DH3    | 1.754           | 0.281               |                |        |
|            | DH5    | 3.002           | 0.320               |                |        |
| 8DPSK      | 3-DH1  | 0.503           | 0.161               | 0.40           | Pass   |
|            | 3-DH3  | 1.752           | 0.280               |                |        |
|            | 3-DH5  | 3.002           | 0.320               |                |        |


Note:

1. We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.
2. Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1  
Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3  
Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5







## GFSK Modulation

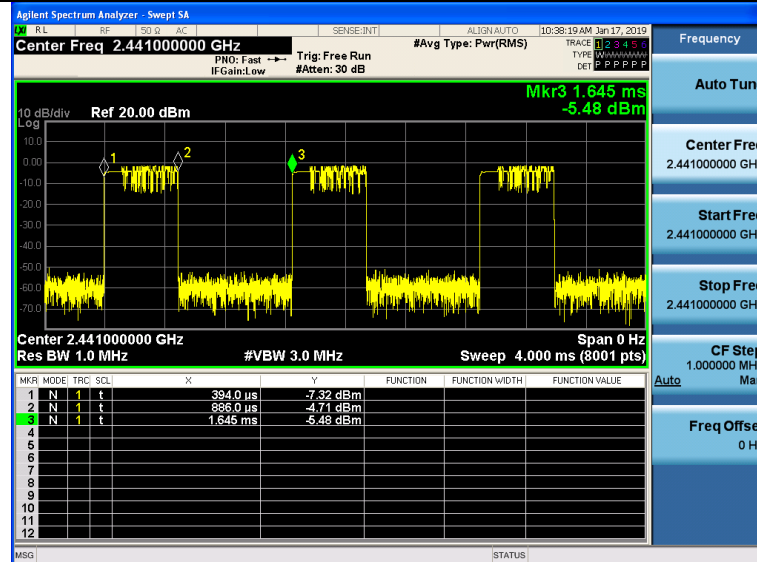


DH1

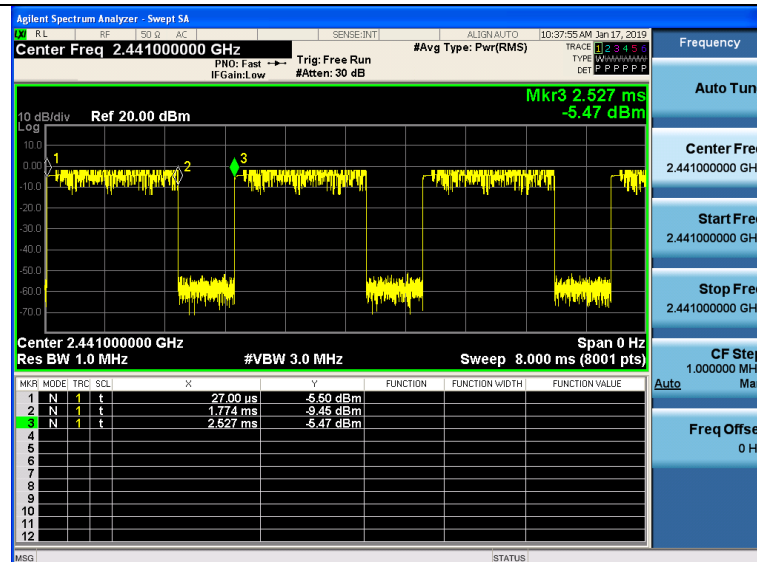


DH3

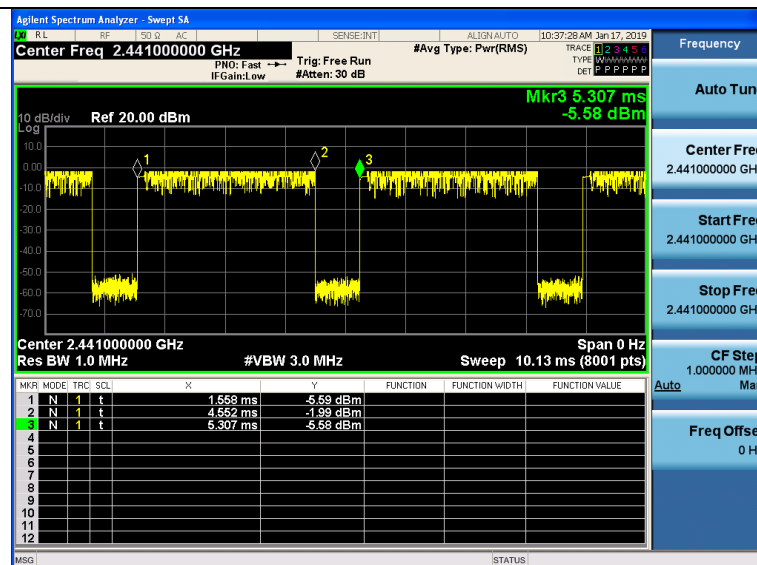


DH5

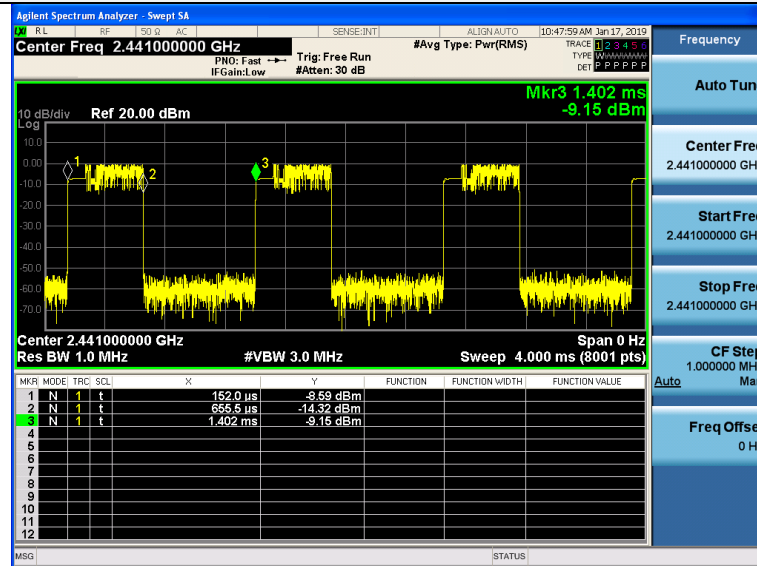 $\pi/4$ DQPSK Modulation

## 2-DH1

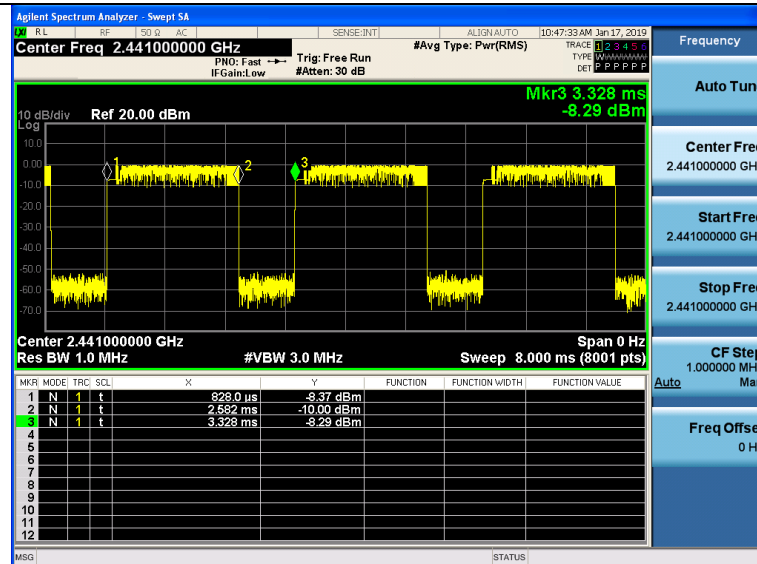


## 2-DH3

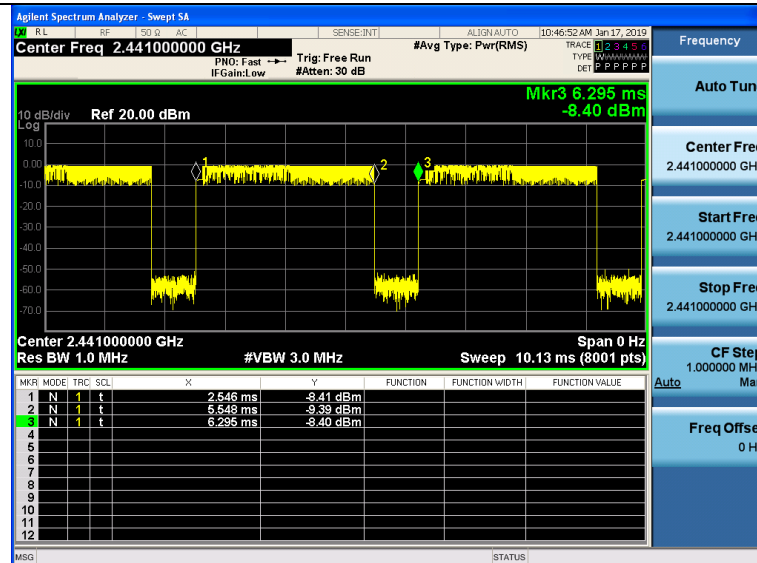


## 2-DH5




## 8DPSK Modulation

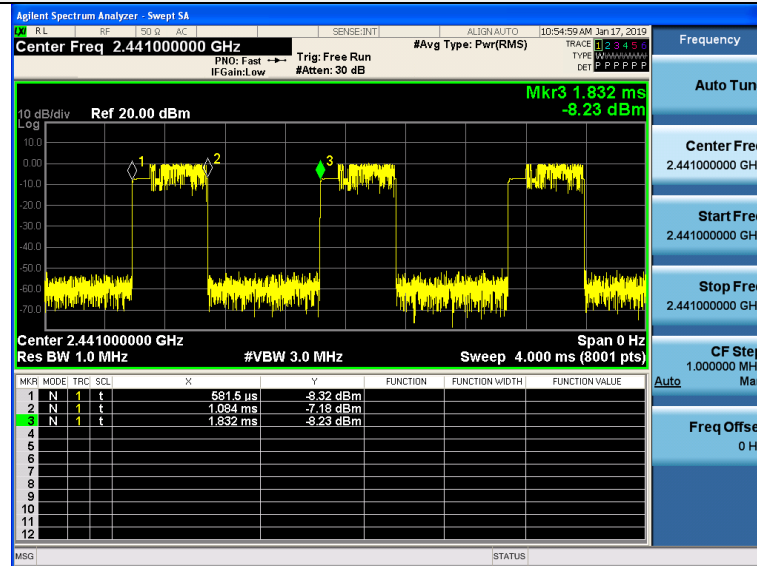

## 3-DH1

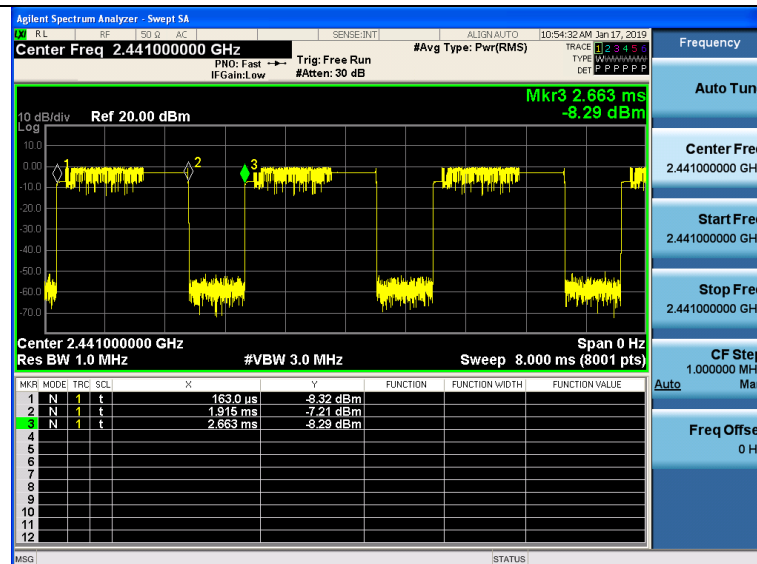

## 3-DH3

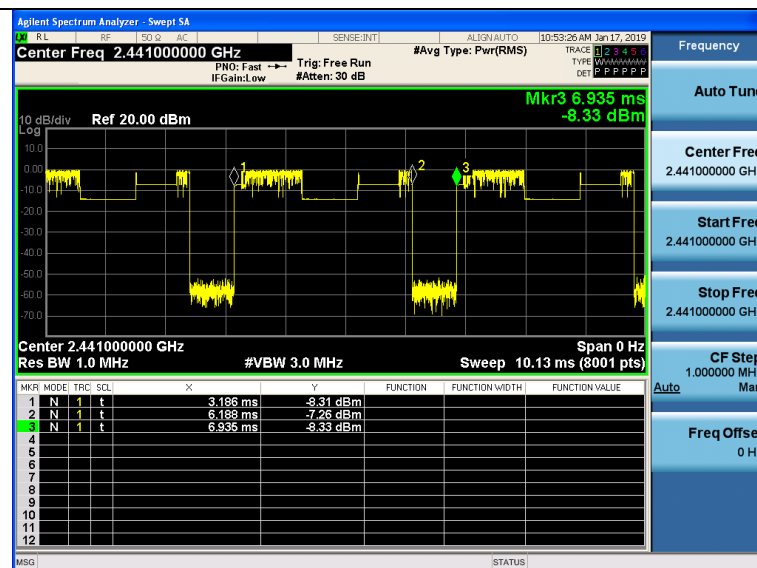

## 3-DH5



#### 4.10. Pseudorandom Frequency Hopping Sequence

##### TEST APPLICABLE


**For 47 CFR Part 15C section 15.247 (a)(1) requirement:**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

##### EUT Pseudorandom Frequency Hopping Sequence Requirement


The pseudorandom frequency hopping sequence may be generated in a nine-stage shift register whose 5<sup>th</sup> and 9<sup>th</sup> stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones, for example: the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence:  $2^9 - 1 = 511$  bits
- Longest sequence of zeros: 8 (non-inverted signal)

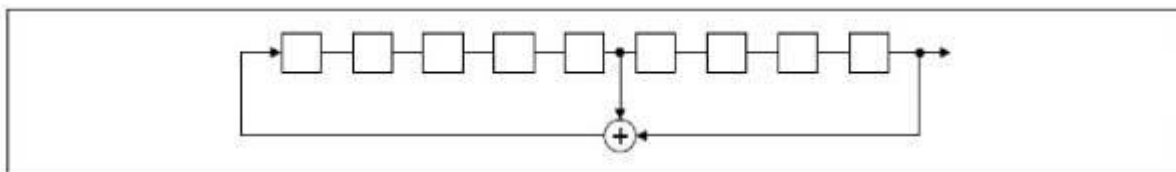

*Linear Feedback Shift Register for Generation of the PRBS sequence*

An example of pseudorandom frequency hopping sequence as follows:

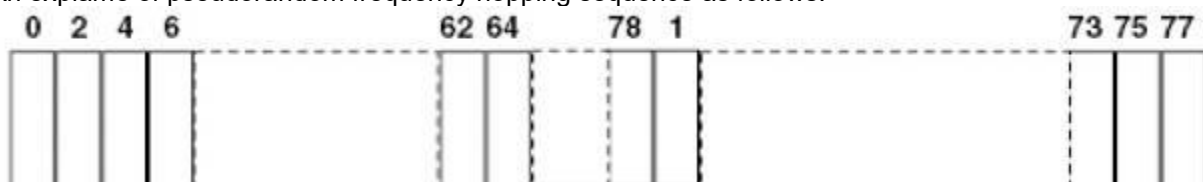

Each frequency used equally on the average by each transmitter.

The system receiver has input bandwidths that match the hopping channel bandwidths of their corresponding transmitter and shifts frequencies in synchronization with the transmitted signals.



#### **4.11. Antenna Requirement**

##### **Standard Applicable**

##### **Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

##### **Antenna Information**

The directional gains of antenna used for transmitting is 0.00 dBi.

## 5. Test Setup Photos of the EUT






## 6. PHOTOS OF THE EUT



### External Photos of EUT



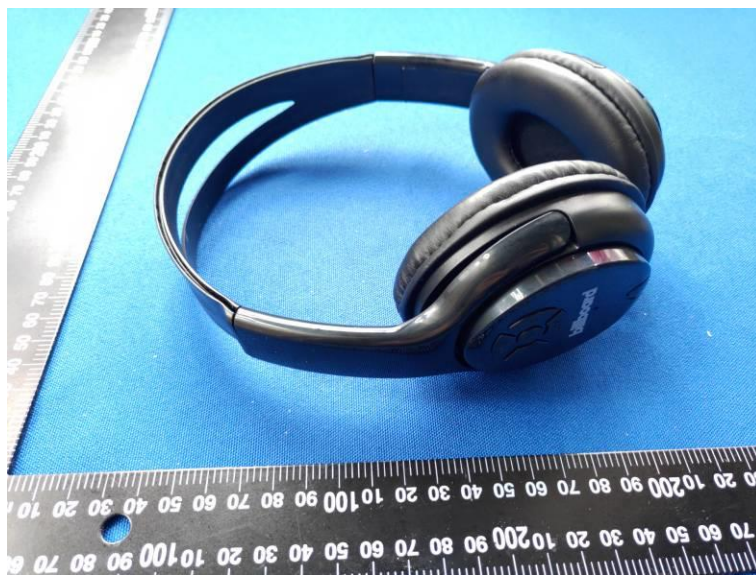



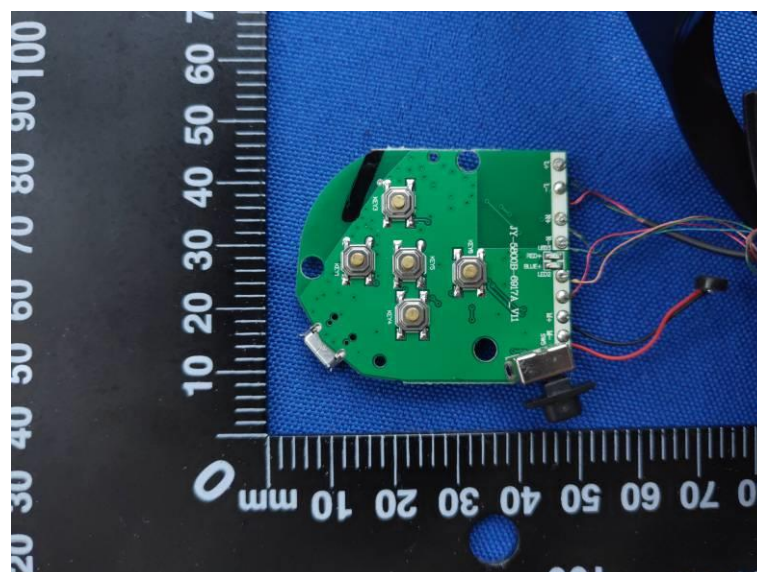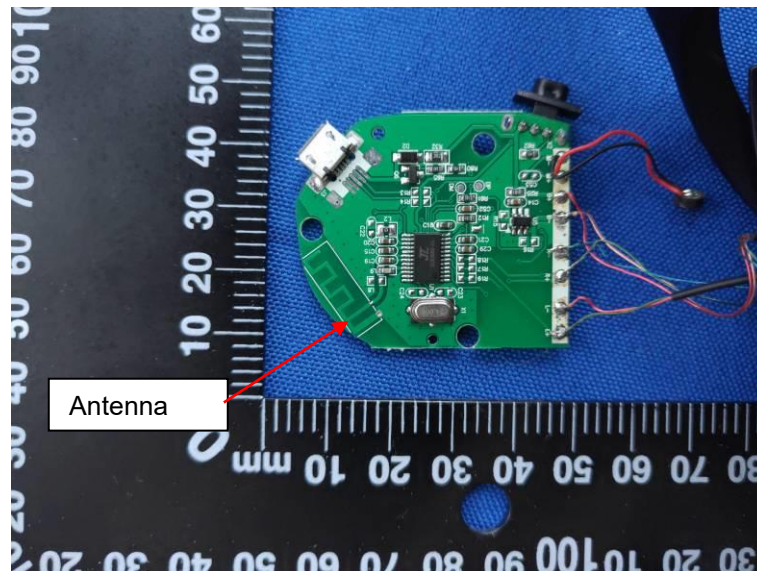

Internal Photos of EUT



.....End of Report.....