



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FCC PART 15.247

Report Reference No.: CTL1705227021-WF

Compiled by:
(position+printed name+signature)

Allen Wang
(File administrators)

Allen Wang

Tested by:
(position+printed name+signature)

Nice Nong
(Test Engineer)

Nice Nong

Approved by:
(position+printed name+signature)

Ivan Xie
(Manager)

Ivan Xie

Product Name.....: Electric smart blanket

Model/Type reference: FIR1701

List Model(s).....: N/A

Trade Mark.....: Firsermo

FCC ID: 2AMLJ-FIR1701

Applicant's name: Qingdao Jicheng Textile Co., Ltd

Address of applicant: Room 2#-2518, Minghui international building, NO.39th, Shiling road, Qingdao, China

Test Firm: Shenzhen CTL Testing Technology Co., Ltd.

Address of Test Firm: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Test specification.....:

Standard.....: FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz.

TRF Originator: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF: Dated 2011-01

Date of Receipt.....: Jun. 08, 2017

Date of Test Date.....: Jun. 09, 2017 –Jun. 20, 2017

Data of Issue.....: Jun. 21, 2017

Result.....: Pass

Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

TEST REPORT

Test Report No. :	CTL1705227021-WF	Jun. 21, 2017 Date of issue
--------------------------	-------------------------	--------------------------------

Equipment under Test : Electric smart blanket

Model /Type : FIR1701

Listed Models : N/A

Applicant : **Qingdao Jicheng Textile Co., Ltd**

Address : Room 2#-2518, Minghui international building,
NO.39th, Shiling road, Qingdao, China

Manufacturer : **Qingdao Jicheng Textile Co., Ltd**

Address : Room 2#-2518, Minghui international building,
NO.39th, Shiling road, Qingdao, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

**** Modified History ****


Revisions	Description	Issued Data	Report No.	Remark
Version 1.0	Initial Test Report Release	2017-06-21	CTL1705227021-WF	Tracy Qi



Table of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT (S).....	8
2.6. MODIFICATIONS.....	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSIONS TEST	9
3.2. RADIATED EMISSIONS AND BAND EDGE	12
3.3. MAXIMUM CONDUCTED OUTPUT POWER.....	19
3.4. POWER SPECTRAL DENSITY	20
3.5. 6dB BANDWIDTH.....	22
3.6. OUT-OF-BAND EMISSIONS	24
3.7. ANTENNA REQUIREMENT.....	28
4. TEST SETUP PHOTOS OF THE EUT	29
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT	30

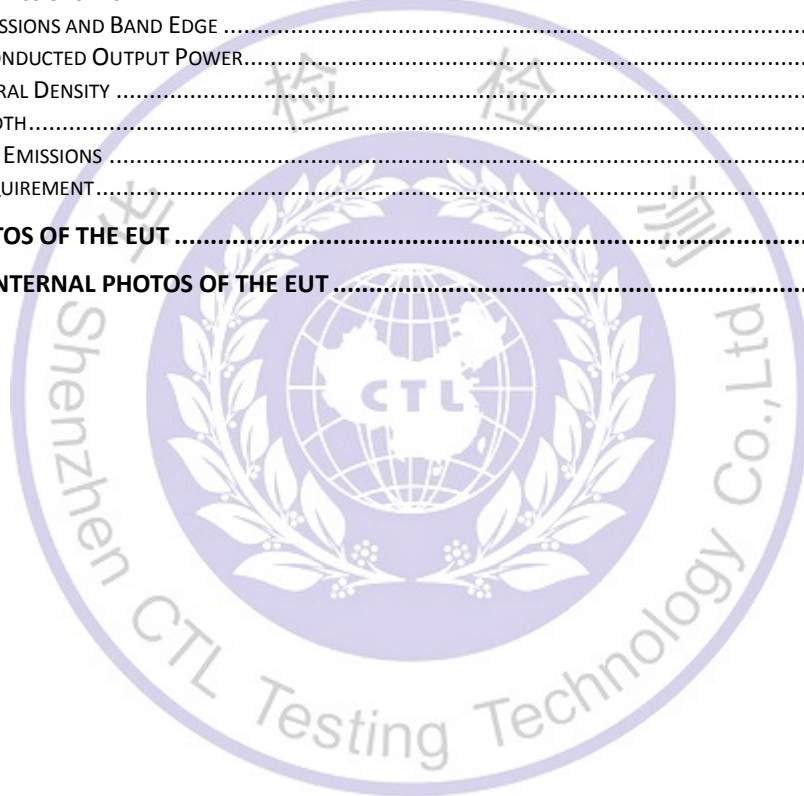

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

[ANSI C63.10: 2013](#): American National Standard for Testing Unlicensed Wireless Devices

[ANSI C63.4: 2014](#): –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz
Range of 9 kHz to 40GHz

[KDB558074 D01 V03r05](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

1.2. Test Description

FCC PART 15.247		
FCC Part 15.207	AC Power Conducted Emission	PASS
FCC Part 15.247(a)(2)	6dB Bandwidth	PASS
FCC Part 15.247(d)	Spurious RF Conducted Emission	PASS
FCC Part 15.247(b)	Maximum Conducted Output Power	PASS
FCC Part 15.247(e)	Power Spectral Density	PASS
FCC Part 15.109/ 15.205/ 15.209	Radiated Emissions	PASS
FCC Part 15.247(d)	Band Edge	PASS
FCC Part 15.203/15.247 (b)	Antenna Requirement	PASS

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	± 0.57 dB	(1)
Transmitter power Radiated	± 2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	± 2.20 dB	(1)
Occupied Bandwidth	± 0.01 ppm	(1)
Radiated Emission 30~1000MHz	± 4.10 dB	(1)
Radiated Emission Above 1GHz	± 4.32 dB	(1)
Conducted Disturbance 0.15~30MHz	± 3.20 dB	(1)

- (1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Electric smart blanket
Model/Type reference:	FIR1701
Power supply:	USB DC 5.0V
Bluetooth BLE	
Supported type:	Version 4.0 for low Energy
Modulation:	GFSK
Operation frequency:	2402MHz to 2480MHz
Channel number:	40
Channel separation:	2 MHz
Antenna type:	PCB Antenna
Antenna gain:	0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing.

There are 39 channels provided to the EUT and Channel 00/19/39 were selected for BT4.0 test.

Operation Frequency List BT4.0 :

Channel	Frequency (MHz)
00	2402
02	2404
03	2406
⋮	⋮
19	2440
⋮	⋮
37	2476
38	2478
39	2480

Note: The line display in grey were the channel selected for testing

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.1 2	2017/06/02	2018/06/01
LISN	R&S	ESH2-Z5	860014/010	2017/06/02	2018/06/01
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2017/06/02	2018/06/01
EMI Test Receiver	R&S	ESCI	103710	2017/06/02	2018/06/01
Spectrum Analyzer	Agilent	E4407B	MY41440676	2017/05/21	2018/05/20
Spectrum Analyzer	Agilent	N9020	US46220290	2017/01/16	2018/01/17
Power Meter	Anritsu	ML2487B	110553	2017/06/02	2018/06/01
Power Sensor	Anritsu	MA2411B	100345	2017/05/21	2018/05/20
Controller	EM Electronics	Controller EM 1000	N/A	2017/05/21	2018/05/20
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2017/05/19	2018/05/18
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2017/05/19	2018/05/18
Amplifier	Agilent	8349B	3008A02306	2017/05/19	2018/05/18
Amplifier	Agilent	8447D	2944A10176	2017/05/19	2018/05/18
Temperature/Humidity Meter	Gangxing	CTH-608	02	2017/05/20	2018/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2017/05/20	2018/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2017/05/20	2018/05/19
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-10M	10m	2017/06/02	2018/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2017/06/02	2018/06/01
Coaxial Cables	HUBER+SUHNER	SUCOFLEX 104PEA-3M	3m	2017/06/02	2018/06/01
RF Cable	Megalon	RF-A303	N/A	2017/06/02	2018/06/01

The calibration interval was one year

2.5. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

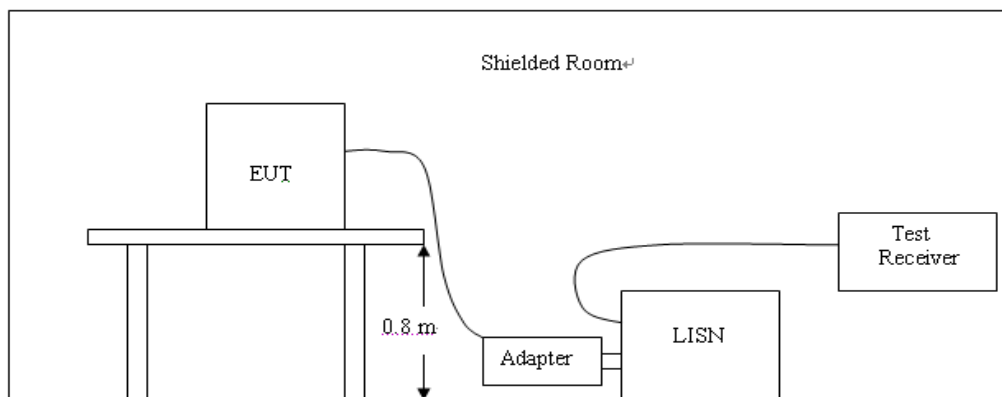


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. The adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS**SCAN TABLE: "Voltage (9K-30M)FIN"**

Short Description: 150K-30M Voltage

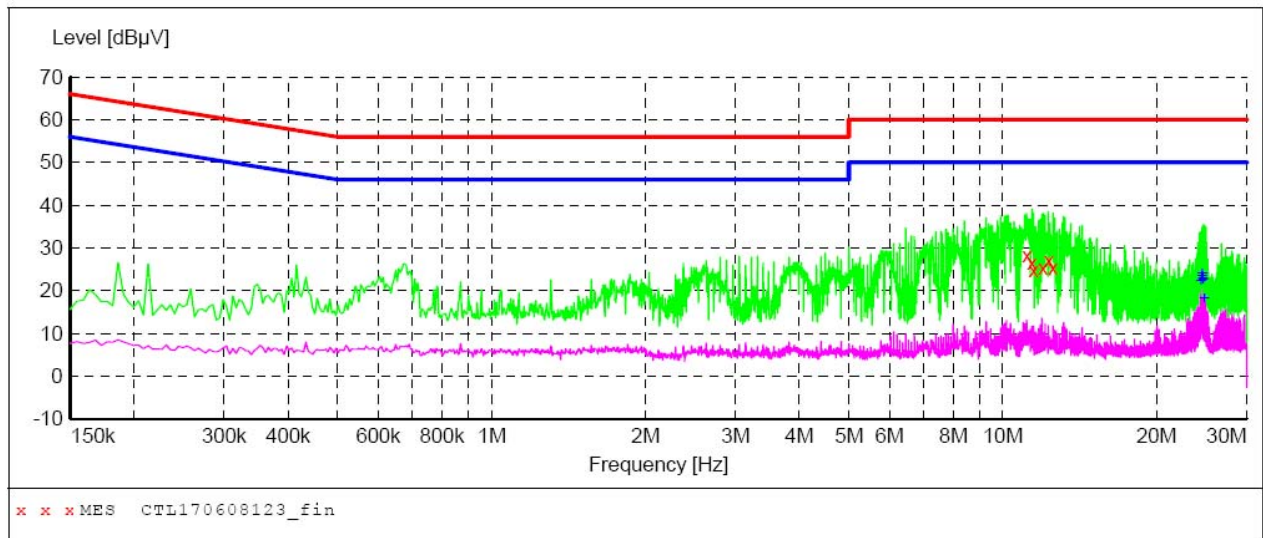**MEASUREMENT RESULT: "CTL170608123_fin"**

6/8/2017 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
11.144000	28.30	10.6	60	31.7	QP	L1	GND
11.402000	26.60	10.6	60	33.4	QP	L1	GND
11.492000	24.70	10.6	60	35.3	QP	L1	GND
11.978000	25.20	10.6	60	34.8	QP	L1	GND
12.302000	27.10	10.6	60	32.9	QP	L1	GND
12.530000	25.30	10.6	60	34.7	QP	L1	GND


MEASUREMENT RESULT: "CTL170608123_fin2"

6/8/2017 5:45PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
24.428000	22.20	11.1	50	27.8	AV	L1	GND
24.488000	23.20	11.1	50	26.8	AV	L1	GND
24.548000	23.80	11.1	50	26.2	AV	L1	GND
24.608000	22.70	11.1	50	27.3	AV	L1	GND
24.668000	22.50	11.1	50	27.5	AV	L1	GND
24.788000	18.00	11.1	50	32.0	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M)FIN"

Short Description: 150K-30M Voltage

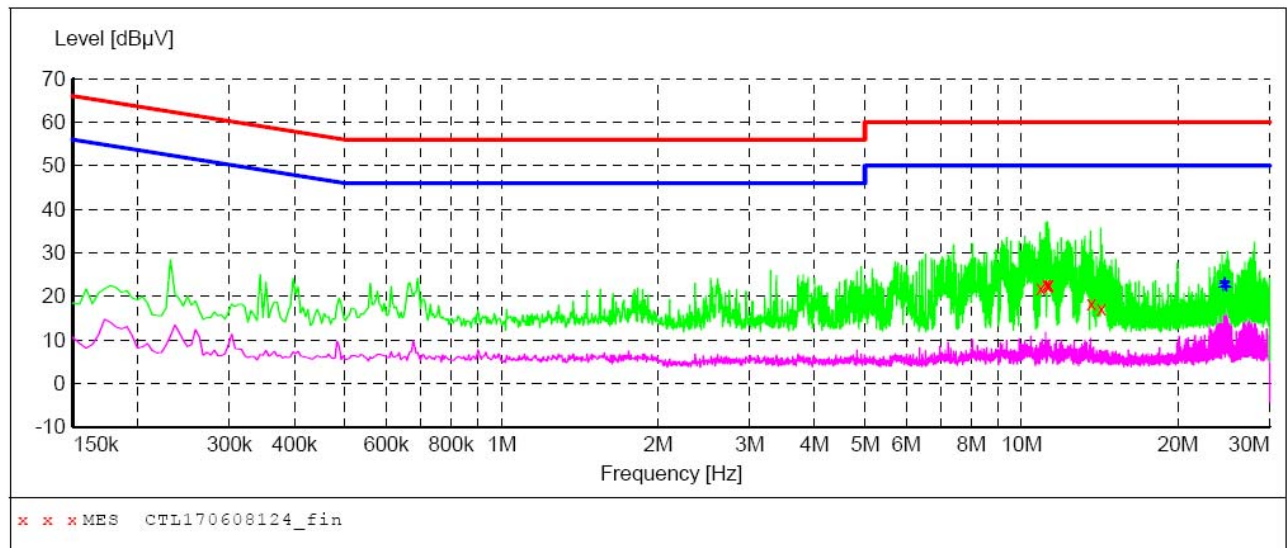**MEASUREMENT RESULT: "CTL170608124_fin"**

6/8/2017 5:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
10.892000	21.70	10.6	60	38.3	QP	N	GND
11.162000	22.60	10.6	60	37.4	QP	N	GND
11.252000	22.40	10.6	60	37.6	QP	N	GND
11.288000	22.60	10.6	60	37.4	QP	N	GND
13.628000	18.40	10.6	60	41.6	QP	N	GND
14.234000	17.30	10.6	60	42.7	QP	N	GND

MEASUREMENT RESULT: "CTL170608124_fin2"

6/8/2017 5:49PM

Frequency MHz	Level dBμV	Transd dB	Limit dBμV	Margin dB	Detector	Line	PE
24.428000	21.70	11.1	50	28.3	AV	N	GND
24.488000	22.70	11.1	50	27.3	AV	N	GND
24.548000	23.20	11.1	50	26.8	AV	N	GND
24.608000	23.00	11.1	50	27.0	AV	N	GND
24.668000	22.20	11.1	50	27.8	AV	N	GND
24.788000	21.80	11.1	50	28.2	AV	N	GND

3.2. Radiated Emissions and Band Edge

Limit

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission out of authorized band shall not exceed the following table at a 3 meters measurement distance.


In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a)

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dBμV/m)	Radiated (μV/m)
0.009-0.49	3	$20\log(2400/F(\text{KHz}))+40\log(300/3)$	$2400/F(\text{KHz})$
0.49-1.705	3	$20\log(24000/F(\text{KHz}))+40\log(30/3)$	$24000/F(\text{KHz})$
1.705-30	3	$20\log(30)+40\log(30/3)$	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

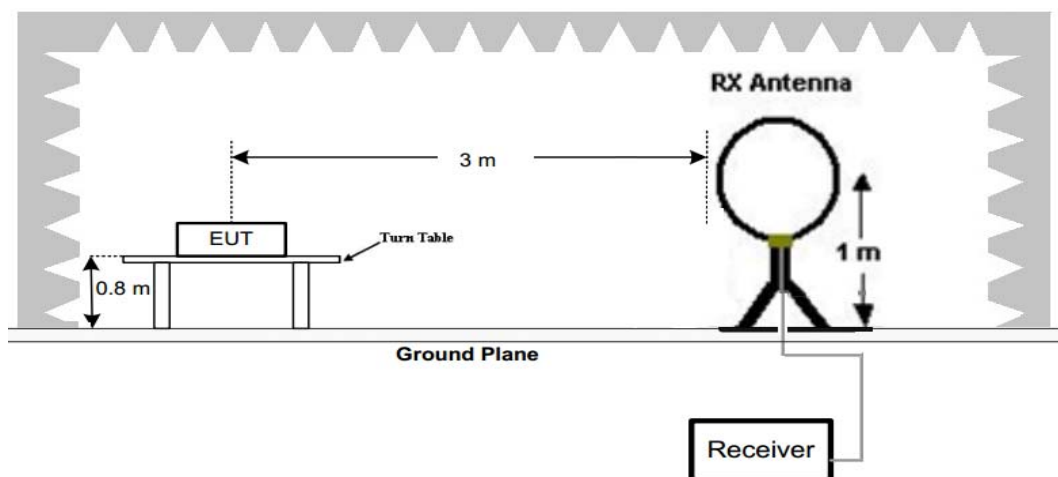

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

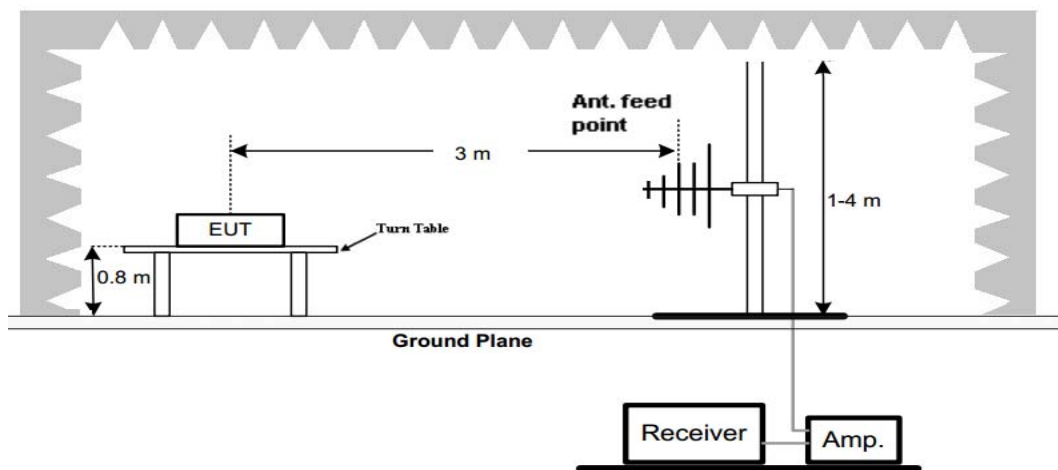

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

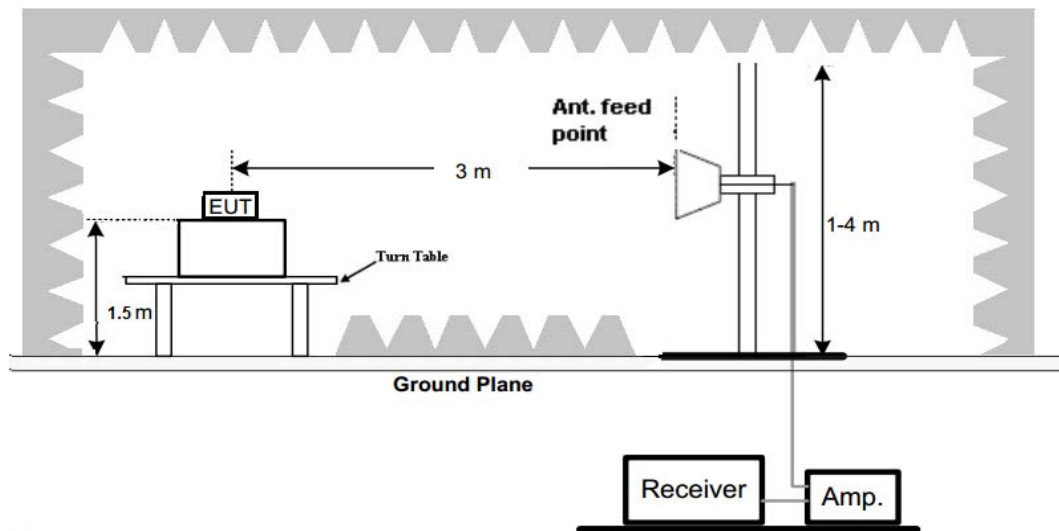

Test Procedure

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0° to 360° to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark:


1. For below 1GHz testing recorded worst at BLE low channel.
2. Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9 KHz to 30MHz and not recorded in this report.

For 30MHz-1GHz

Horizontal

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

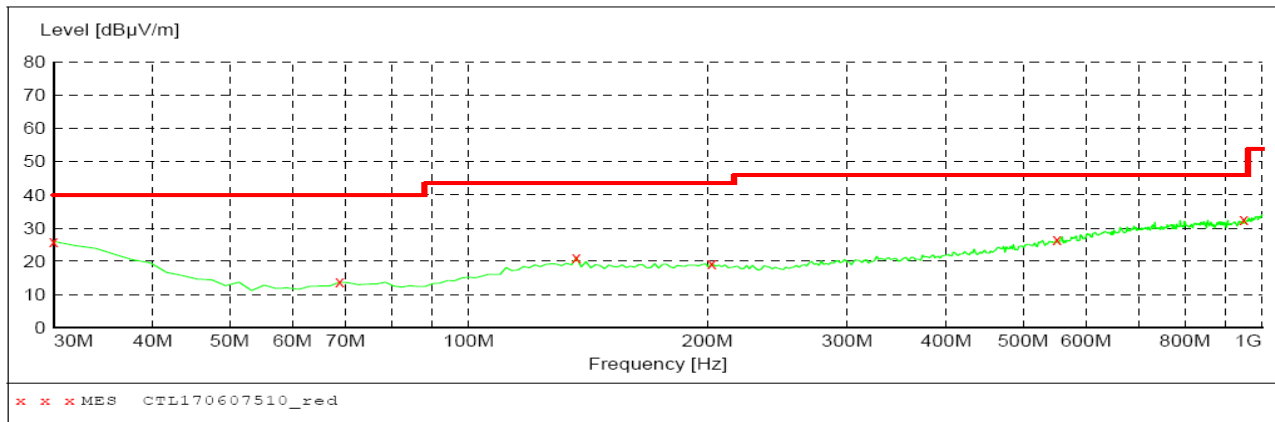**MEASUREMENT RESULT: "CTL170607510_red"**


6/7/2017 7:44PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	26.00	22.1	40.0	14.0	---	100.0	125.00	HORIZONTAL
68.800000	13.70	8.9	40.0	26.3	---	200.0	142.00	HORIZONTAL
136.700000	21.20	15.0	43.5	22.3	---	300.0	98.00	HORIZONTAL
202.660000	19.40	14.6	43.5	24.1	---	300.0	235.00	HORIZONTAL
551.860000	26.40	21.9	46.0	19.6	---	100.0	201.00	HORIZONTAL
949.560000	32.60	27.3	46.0	13.4	---	100.0	326.00	HORIZONTAL

Vertical

SWEEP TABLE: "test (30M-1G)"

Short Description: Field Strength
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 30.0 MHz 1.0 GHz MaxPeak 300.0 ms 120 kHz JB1

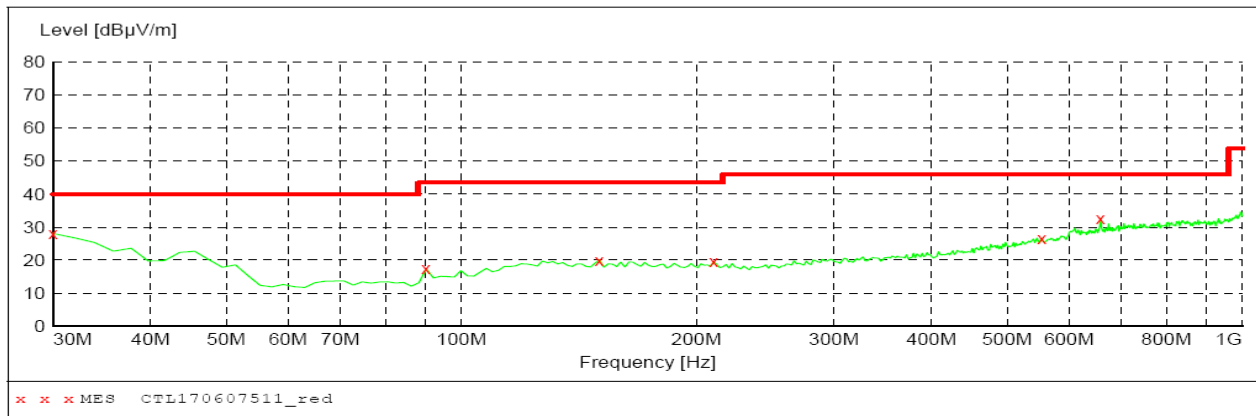**MEASUREMENT RESULT: "CTL170607511_red"**

6/7/2017 7:46PM

Frequency MHz	Level dBuV/m	Transd dB	Limit dBuV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
30.000000	28.00	22.1	40.0	12.0	---	100.0	125.00	VERTICAL
90.140000	17.40	8.8	43.5	26.1	---	200.0	342.00	VERTICAL
150.280000	20.00	14.4	43.5	23.5	---	200.0	145.00	VERTICAL
210.420000	19.60	14.5	43.5	23.9	---	100.0	204.00	VERTICAL
553.800000	26.70	21.9	46.0	19.3	---	100.0	85.00	VERTICAL
658.560000	32.70	23.8	46.0	13.3	---	100.0	112.00	VERTICAL

For 1GHz to 25GHz**BT4.0 Mode (above 1GHz)**

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1839.75	58.26	PK	74	15.74	62.09	27.36	4.05	35.23	-3.83
1839.75	50.62	AV	54	3.38	54.45	27.36	4.05	35.23	-3.83
4804.00	49.50	PK	74	24.50	43.44	33.49	6.91	34.34	6.06
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	46.50	PK	74	27.50	35.39	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1839.75	59.25	PK	74	14.75	63.08	27.36	4.05	35.23	-3.83
1839.75	51.12	AV	54	2.88	54.95	27.36	4.05	35.23	-3.83
4804.00	49.85	PK	74	24.15	43.79	33.49	6.91	34.34	6.06
4804.00	--	AV	54	--	--	--	--	--	--
7206.00	47.41	PK	74	26.59	36.30	36.95	9.18	35.03	11.11
7206.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1840.25	56.25	PK	74	17.75	60.08	27.36	4.05	35.23	-3.83
1840.25	48.71	AV	54	5.29	52.54	27.36	4.05	35.23	-3.83
4880.00	47.25	PK	74	26.75	41.00	33.60	6.95	34.30	6.25
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	45.22	PK	74	28.78	33.53	37.46	9.23	35.00	11.69
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2440		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1840.25	57.14	PK	74	16.86	60.97	27.36	4.05	35.23	-3.83
1840.25	49.21	AV	54	4.79	53.04	27.36	4.05	35.23	-3.83
4880.00	48.15	PK	74	25.85	41.90	33.60	6.95	34.30	6.25
4880.00	--	AV	54	--	--	--	--	--	--
7320.00	45.49	PK	74	28.51	33.80	37.46	9.23	35.00	11.69
7320.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1836.50	55.14	PK	74	18.86	58.99	27.34	4.04	35.23	-3.85
1836.50	47.52	AV	54	6.48	51.37	27.34	4.04	35.23	-3.85
4960.00	48.29	PK	74	25.71	41.70	33.84	7.00	34.25	6.59
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.01	PK	74	27.99	34.06	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
1836.50	55.65	PK	74	18.35	59.50	27.34	4.04	35.23	-3.85
1836.50	48.01	AV	54	5.99	51.86	27.34	4.04	35.23	-3.85
4960.00	49.12	PK	74	24.88	42.53	33.84	7.00	34.25	6.59
4960.00	--	AV	54	--	--	--	--	--	--
7440.00	46.27	PK	74	27.73	34.32	37.64	9.28	34.97	11.95
7440.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.

Results of Band Edges Test (Radiated)

Frequency(MHz):			2402		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	88.52	PK	--	--	55.12	28.78	4.61	0.00	33.40
2402.00	79.51	AV	--	--	46.11	28.78	4.61	0.00	33.40
2365.50	40.22	PK	74	33.78	7.08	28.57	4.57	0.00	33.14
2365.50	--	AV	54	--	--	--	--	--	--
2390.00	48.25	PK	74	25.75	14.93	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.34	PK	74	23.66	16.95	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--


Frequency(MHz):			2402		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2402.00	89.36	PK	--	--	55.96	28.78	4.61	0.00	33.40
2402.00	80.20	AV	--	--	46.80	28.78	4.61	0.00	33.40
2365.50	41.25	PK	74	32.75	8.11	28.57	4.57	0.00	33.14
2365.50	--	AV	54	--	--	--	--	--	--
2390.00	48.50	PK	74	25.50	15.18	28.72	4.60	0.00	33.32
2390.00	--	AV	54	--	--	--	--	--	--
2400.00	50.93	PK	74	23.07	17.54	28.78	4.61	0.00	33.39
2400.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			HORIZONTAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	88.44	PK	--	--	54.82	28.92	4.70	0.00	33.62
2480.00	79.12	AV	--	--	45.50	28.92	4.70	0.00	33.62
2483.50	51.24	PK	74	22.76	17.61	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2485.75	50.20	PK	74	23.80	16.56	28.93	4.70	0.00	33.64
2485.75	--	AV	54	--	--	--	--	--	--
2500.00	37.50	PK	74	36.50	3.82	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

Frequency(MHz):			2480		Polarity:			VERTICAL	
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre-amplifier (dB)	Correction Factor (dB/m)
2480.00	88.68	PK	--	--	51.23	28.92	4.70	0.00	33.62
2480.00	79.25	AV	--	--	42.59	28.92	4.70	0.00	33.62
2483.50	51.48	PK	74	35.75	4.62	28.93	4.70	0.00	33.63
2483.50	--	AV	54	--	--	--	--	--	--
2485.75	50.74	PK	74	32.32	8.04	28.94	4.71	0.00	33.64
2485.75	--	AV	54	--	--	--	--	--	--
2500.00	38.50	PK	74	36.52	3.80	28.96	4.72	0.00	33.68
2500.00	--	AV	54	--	--	--	--	--	--

REMARKS:

1. Emission level (dBuV/m) =Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) = Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level.
4. -- Mean the PK detector measured value is below average limit.
5. The other emission levels were very low against the limit.
6. RBW1MHz VBW3MHz Peak detector is for PK value; RBW 1MHz VBW10Hz Peak detector is for AV value.
7. For fundamental frequency, RBW 3MHz VBW 3MHz Peak detector is for PK Value; RMS detector is for AV value.

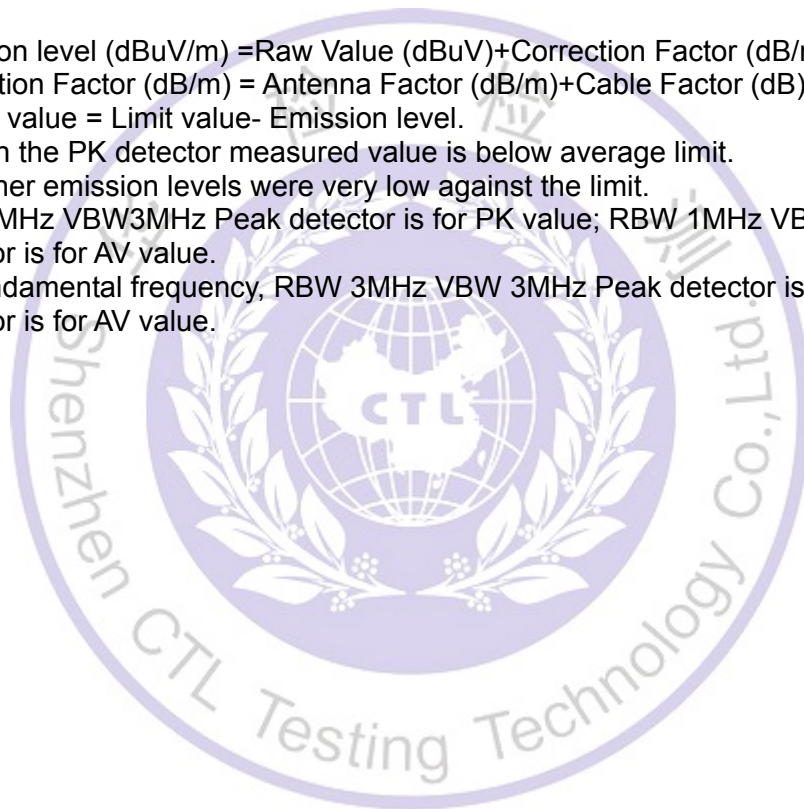

3.3. Maximum Conducted Output Power


Limit

The Maximum Peak Output Power Measurement is 30dBm.

Test Procedure

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power sensor.

Test Configuration



Test Results

BT4.0				
Type	Channel	Output power (dBm)	Limit (dBm)	Result
GFSK	00	-3.087	30.00	Pass
	19	-3.709		
	39	-4.118		

Note: 1.The test results including the cable lose.

3.4. Power Spectral Density

Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW ≥ 3 kHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 1.5 times the DTS channel bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum power level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
11. The resulting peak PSD level must be 8dBm.

Test Configuration




Test Results

BT4.0


Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
GFSK	00	-18.681	8.00	Pass
	19	-19.153		
	39	-19.352		

Test plot as follows:


BT4.0

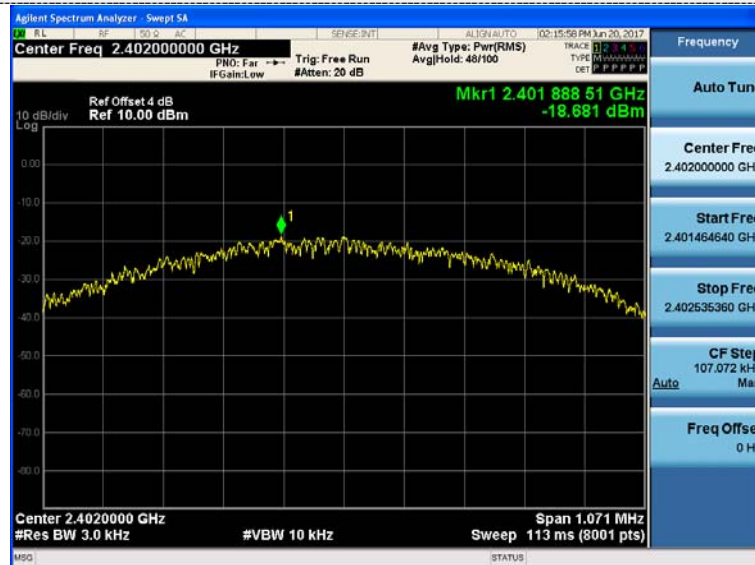

CH00

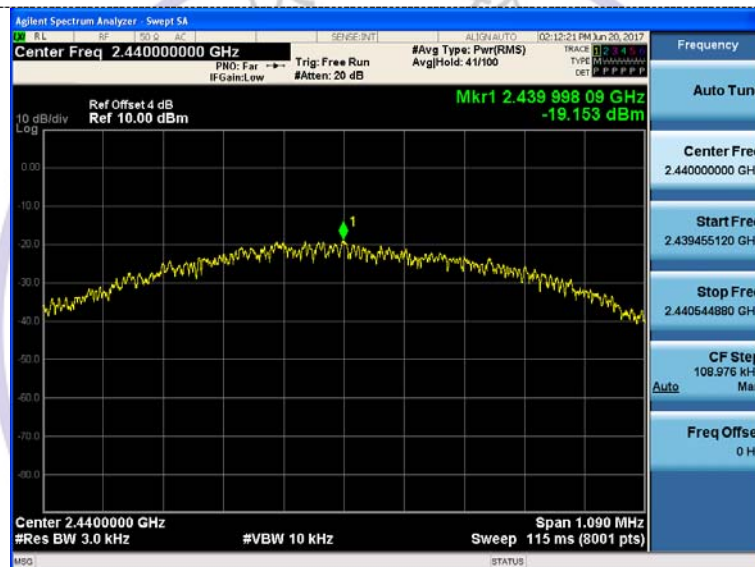

CH19

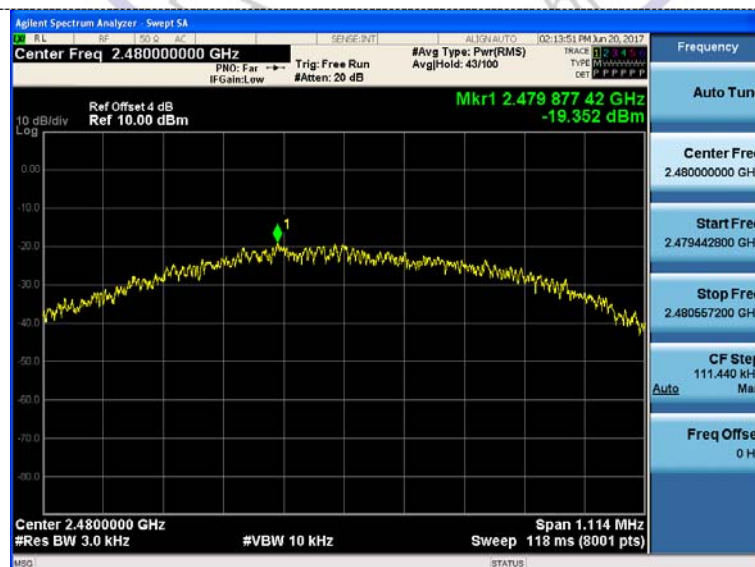

CH39

3.5. 6dB Bandwidth

Limit

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz

Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100 KHz RBW and 300 KHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

Test Configuration




Test Results


BT4.0					
Type	Channel	6dB Bandwidth (MHz)	99% OBW (MHz)	Limit (KHz)	Result
GFSK	00	0.6692	1.0082	≥500	Pass
	19	0.6811	1.0105		
	39	0.6965	1.0205		

Test plot as follows:


BT4.0

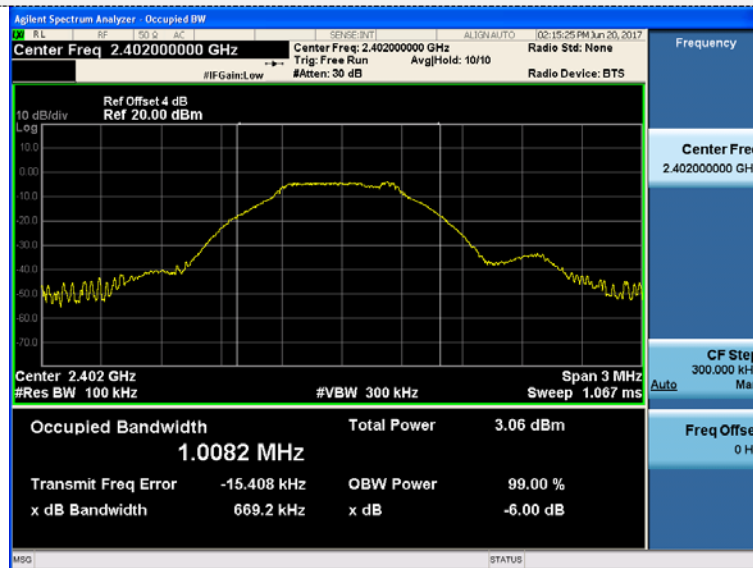

CH00

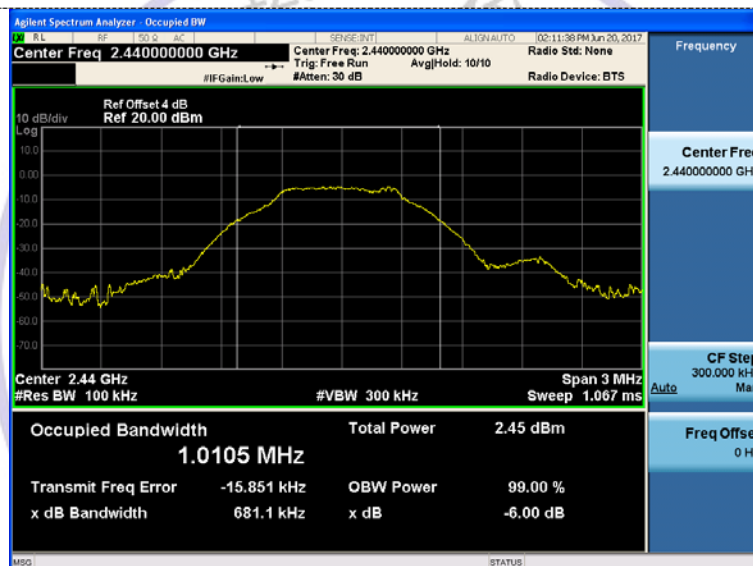

CH19

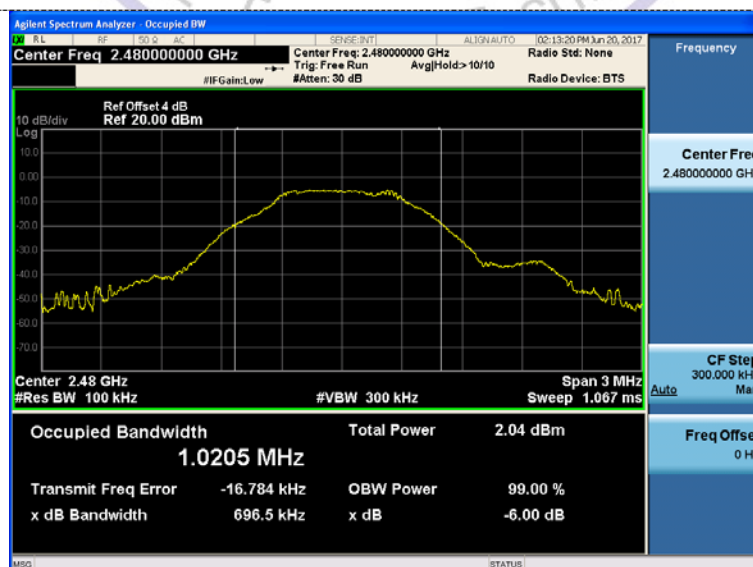

CH39

3.6. Out-of-band Emissions

Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

Test Procedure

Connect the transmitter output to spectrum analyzer using a low loss RF cable, and set the spectrum analyzer to RBW=100 kHz, VBW= 300 kHz, peak detector, and max hold. Measurements utilizing these settings are made of the in-band reference level, band edge and out-of-band emissions.

Test Configuration



Test Results

Remark: The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and band edge measurement data.

Test plot as follows:


BT4.0 CH00



BT4.0 CH19




Reference

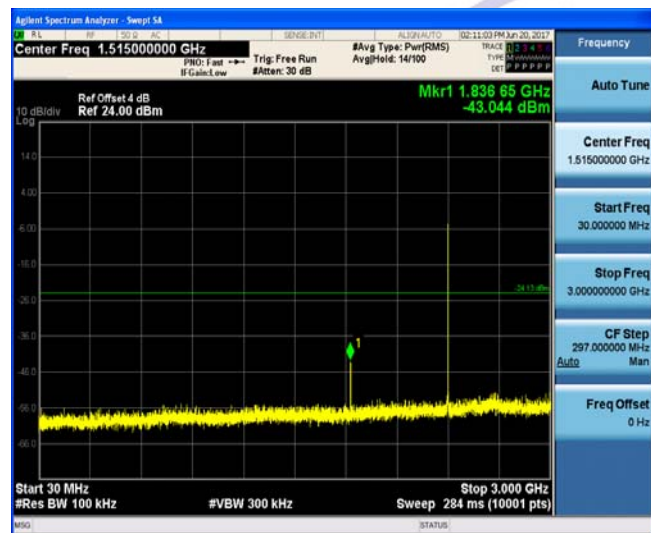

Reference



30MHz-3GHz

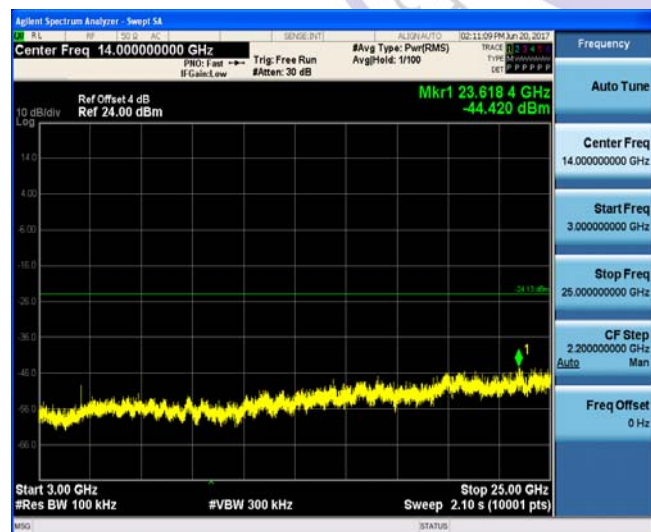

30MHz-3GHz



3GHz-25GHz

3GHz-25GHz

BT4.0 CH39

Agilent Spectrum Analyzer - Swept SA

Center Freq 2.48000000 GHz

Ref Offset 4 dB
Ref 30.00 dBm

Mkr1 2.480 221 0 GHz
-5.255 dBm

Span 4.000 MHz
Sweep 1.07 ms (8001 pts)

Frequency

Auto Tune

Center Freq 2.48000000 GHz

Start Freq 2.478000000 GHz

Stop Freq 2.482000000 GHz

CF Step 400.000 kHz

Man

Freq Offset 0 Hz

Trace/Ref

Select Trace Trace 1

Clear Write

Trace Average

Max Hold

Min Hold

View/Blank Trace On

More 1 of 3

Reference

Agilent Spectrum Analyzer - Swept SA

Center Freq 23.6294 GHz

Ref Offset 4 dB
Ref 24.00 dBm

Mkr1 23.629 4 GHz
-44.581 dBm

Span 25.00 GHz
Sweep 2.10 s (10001 pts)

Frequency

Auto Tune

Center Freq 23.6294 GHz

Start Freq 23.6294 GHz

Stop Freq 23.6294 GHz

CF Step 400.000 kHz

Man

Freq Offset 0 Hz

Trace/Ref

Select Trace Trace 1

Clear Write

Trace Average

Max Hold

Min Hold

View/Blank Trace On

More 1 of 3

30MHz-3GHz

Agilent Spectrum Analyzer - Swept SA

Center Freq 1.83962 GHz

Ref Offset 4 dB
Ref 24.00 dBm

Mkr1 1.839 62 GHz
-31.143 dBm

Span 3.000 GHz
Sweep 284 ms (10001 pts)

Frequency

Auto Tune

Center Freq 1.83962 GHz

Start Freq 30 MHz

Stop Freq 3.000 GHz

CF Step 400.000 kHz

Man

Freq Offset 0 Hz

Trace/Ref

Select Trace Trace 1

Clear Write

Trace Average

Max Hold

Min Hold

View/Blank Trace On

More 1 of 3

3GHz-25GHz

Agilent Spectrum Analyzer - Swept SA

Center Freq 23.6294 GHz

Ref Offset 4 dB
Ref 24.00 dBm

Mkr1 23.629 4 GHz
-44.581 dBm

Span 25.00 GHz
Sweep 2.10 s (10001 pts)

Frequency

Auto Tune

Center Freq 23.6294 GHz

Start Freq 3.000 GHz

Stop Freq 25.00 GHz

CF Step 400.000 kHz

Man

Freq Offset 0 Hz

Trace/Ref

Select Trace Trace 1

Clear Write

Trace Average



Max Hold

Min Hold

View/Blank Trace On

More 1 of 3

3GHz-25GHz

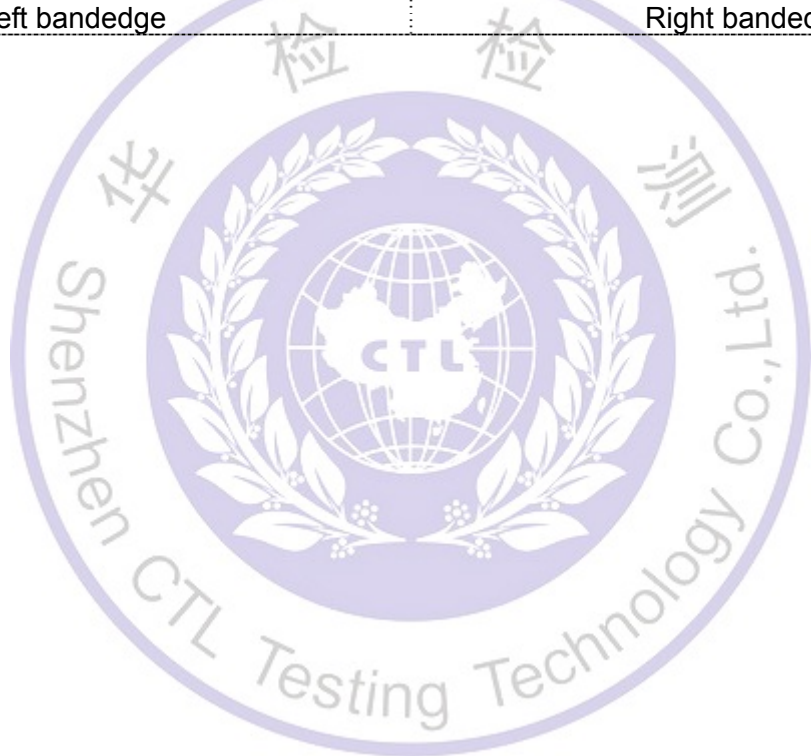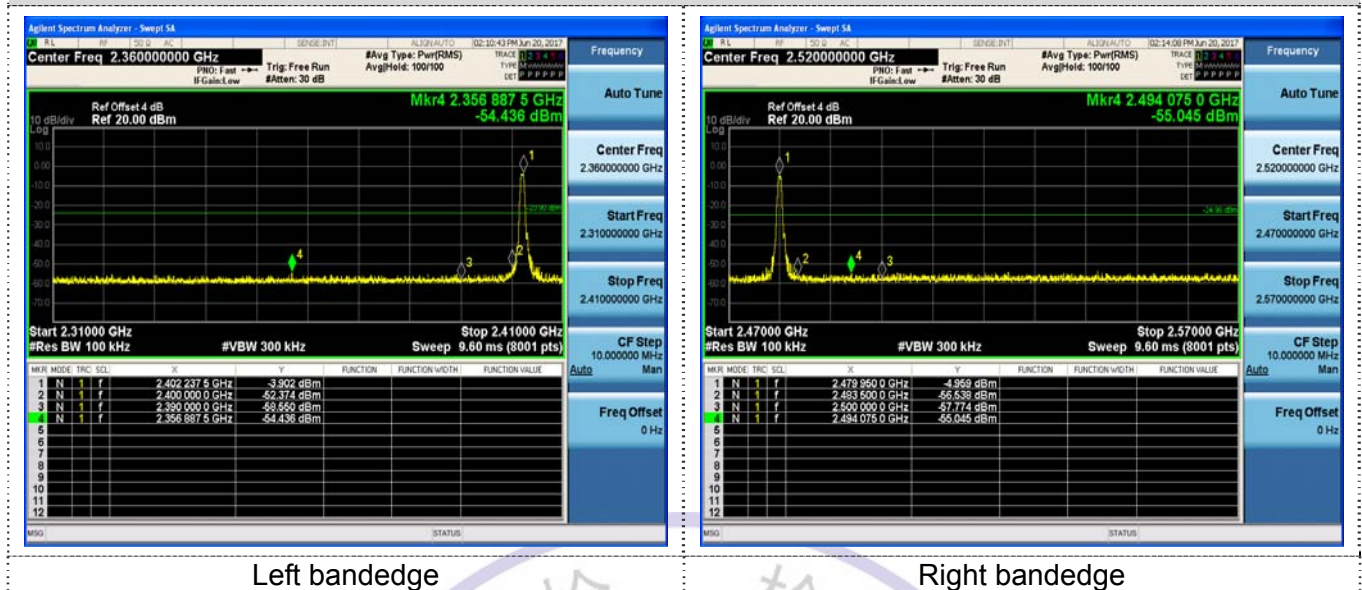Band-edge Measurements for RF Conducted Emissions:**BT4.0**

3.7. Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

Test Result:

The maximum gain of antenna was 0dBi.

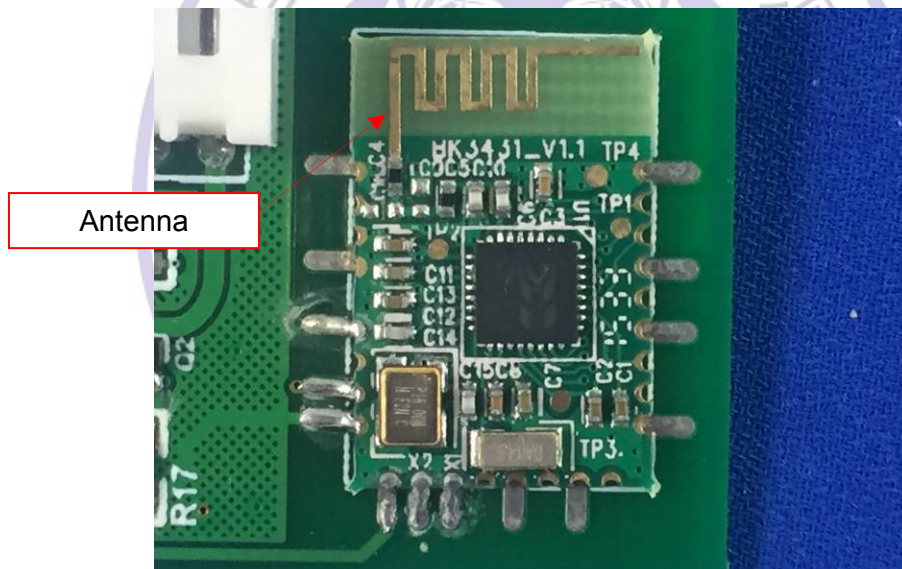





4. Test Setup Photos of the EUT









5. External and Internal Photos of the EUT


External Photos of EUT

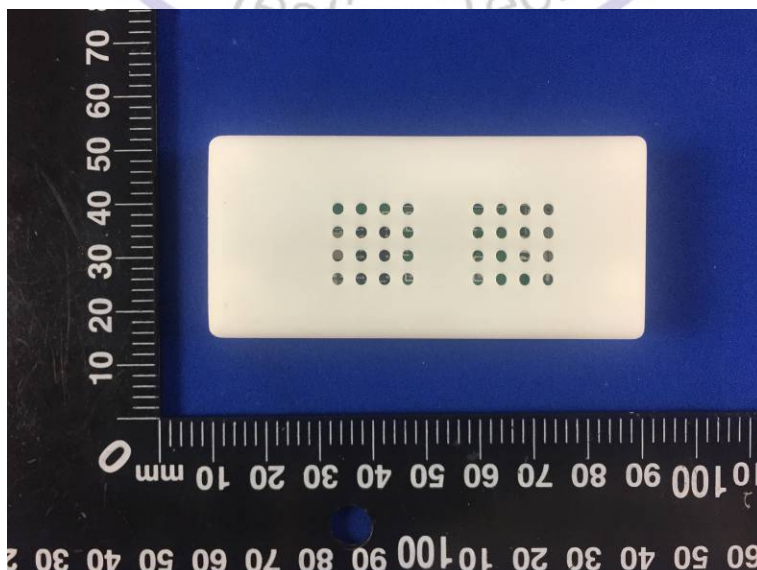

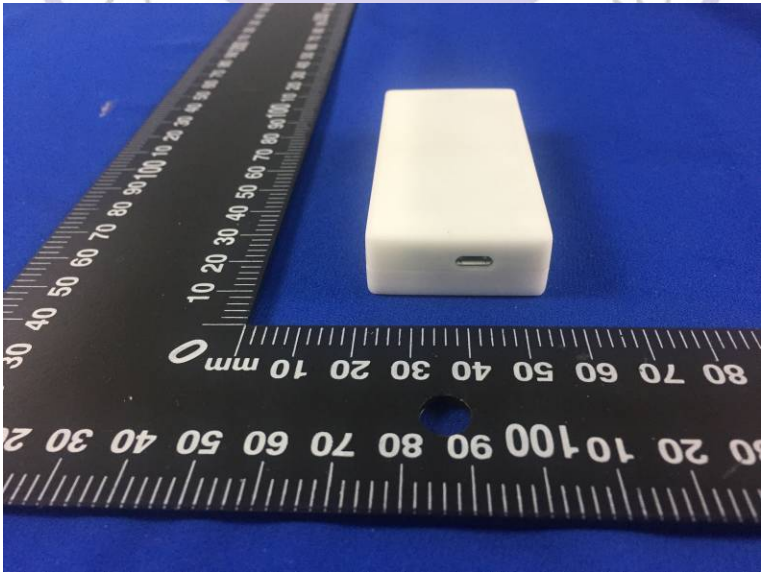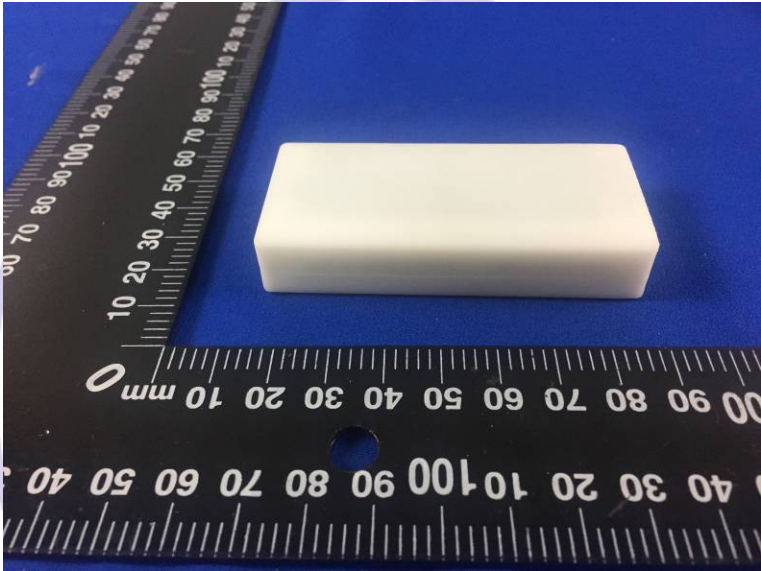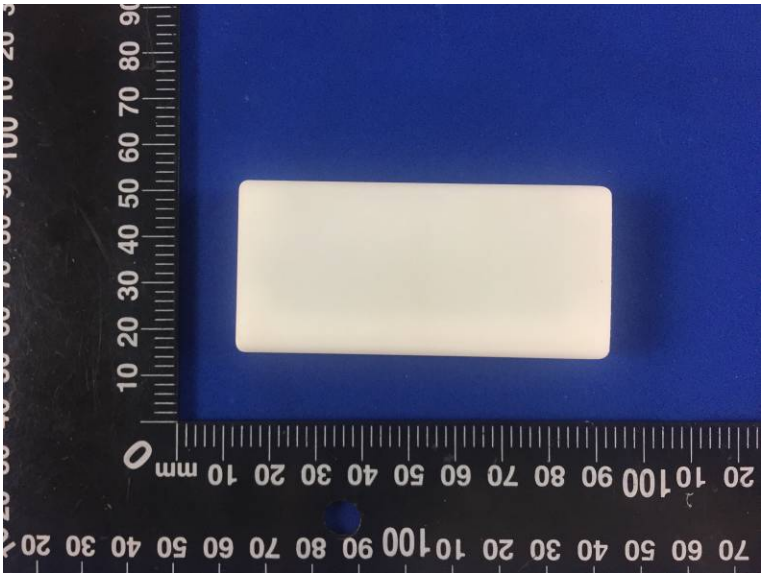

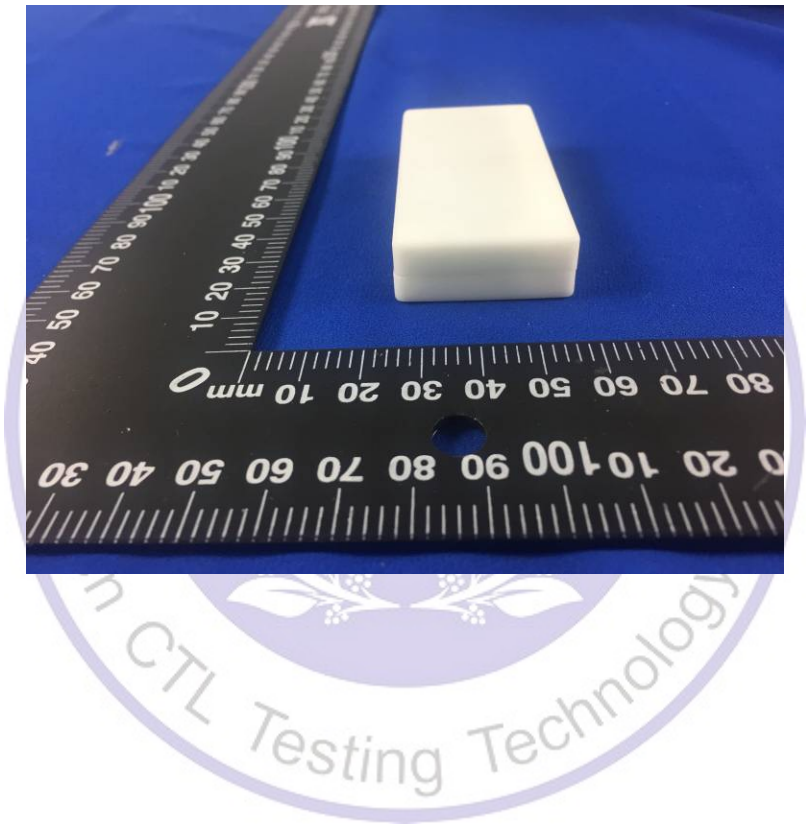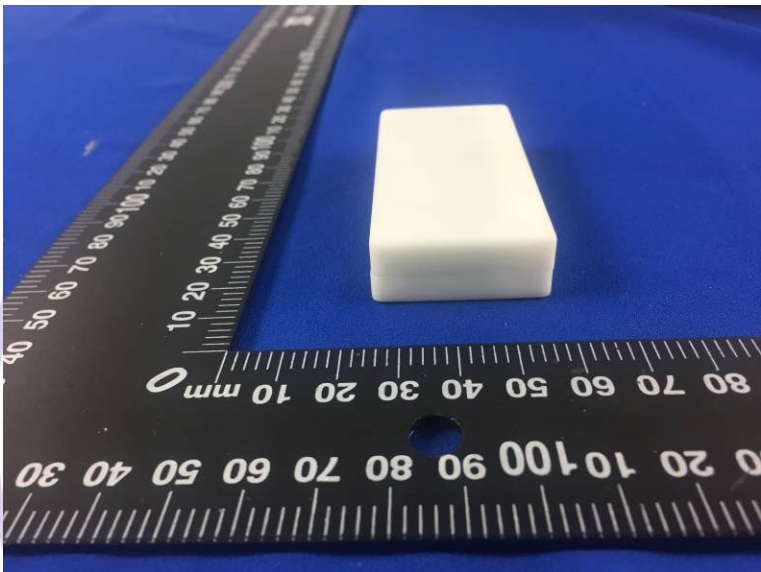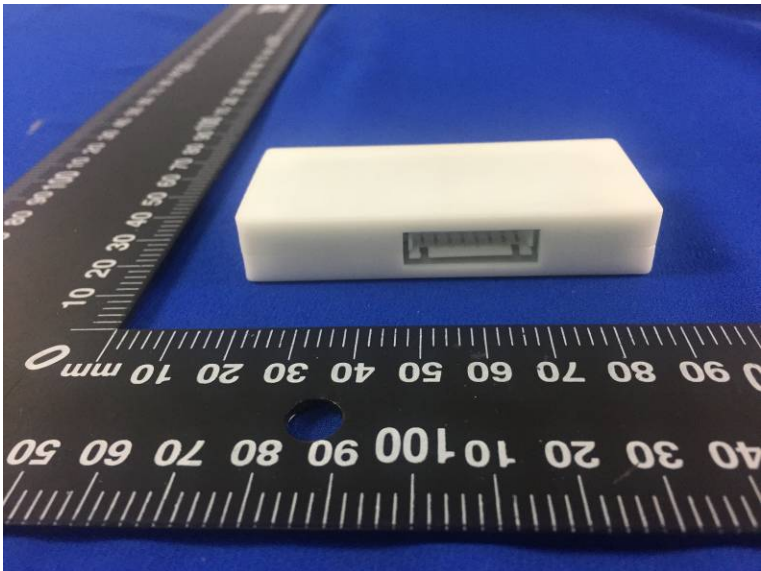

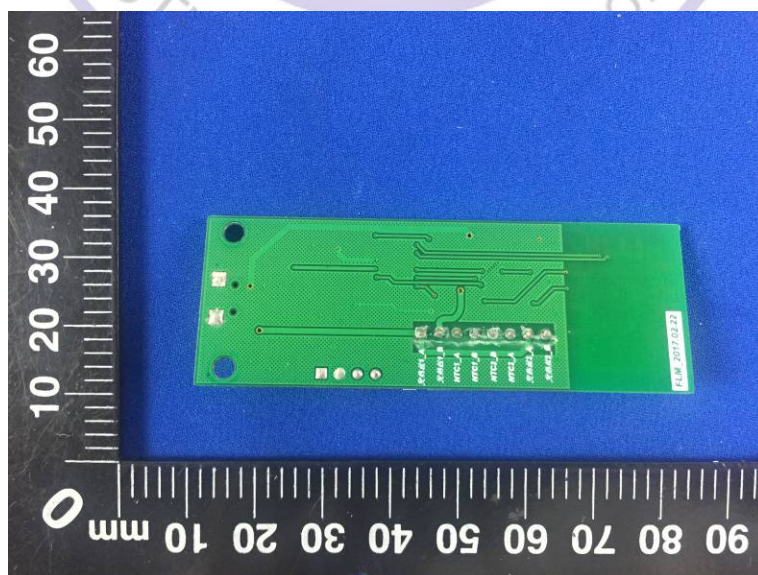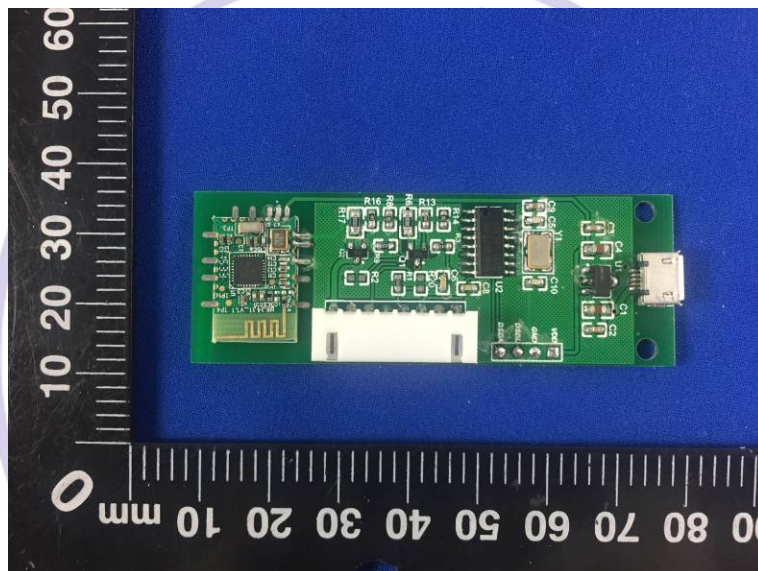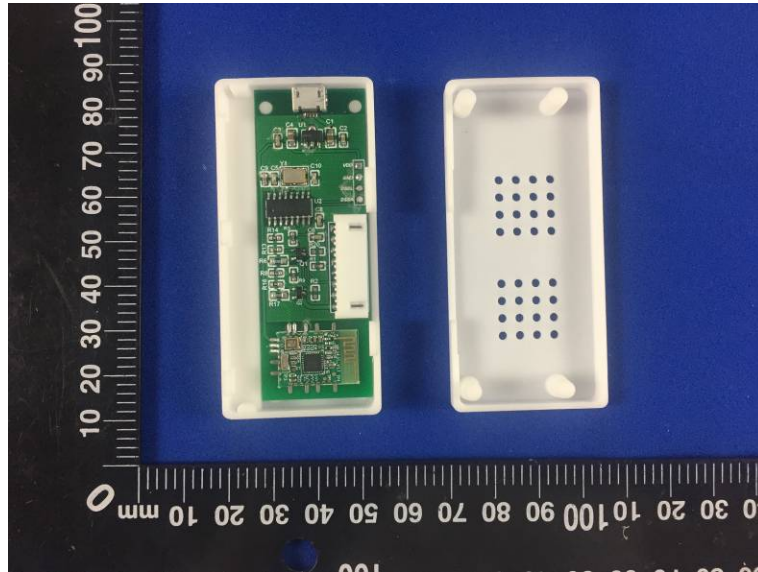Internal Photos of EUT

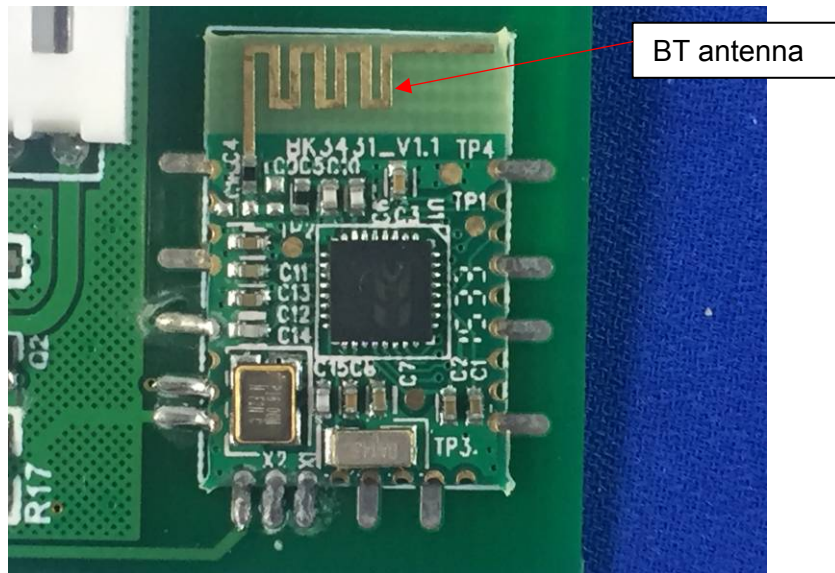

*****THE END*****

