

# TEST REPORT



**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (1) / (16) Pages

## 1. Client

- Name : Life Science Technology Inc.
- Address : Suite 1207, Gangseo Hangang Xi Tower, Yangcheon-ro 401, Gangseo-Gu, Seoul, South Korea
- Date of Receipt : 2018-12-10

## 2. Manufacturer

- Name : Life Science Technology Inc.
- Address : Suite 1207, Gangseo Hangang Xi Tower, Yangcheon-ro 401, Gangseo-Gu, Seoul, South Korea

## 3. Use of Report : For FCC Certification

## 4. Test Sample / Model: FEMON / TS100

## 5. Date of Test : 2018-12-24 to 2019-01-04

## 6. Test Standard(method) used : FCC 47 CFR part 15 subpart C 15.247

## 7. Testing Environment: Temp.: (23 ± 1) °C, Humidity: (48 ± 5) % R.H.

## 8. Test Results : Compliance

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This Test Report cannot be reproduced, except in full.

Affirmation	Gwanyong Kim: (Signature) 	Technical Manager Young-taek Lee: (Signature) 
-------------	---	--

2019-01-09

Republic of KOREA **CTK Co., Ltd.**



CTK Co., Ltd.  
The Prime Leader of Global Regulatory Certification

**CTK Co., Ltd.**  
(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (2) / (16) Pages

## REPORT REVISION HISTORY

Date	Revision	Page No
2019-01-09	Issued (CTK-2019-00115)	all

*This report shall not be reproduced except in full, without the written approval of CTK Co., Ltd. This document may be altered or revised by CTK Co., Ltd. personnel only, and shall be noted in the revision section of the document. Any alteration of this document not carried out by CTK Co., Ltd. will constitute fraud and shall nullify the document.*

 <b>CTK Co., Ltd.</b> <i>The Prime Leader of Global Regulatory Certification</i>	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-00115 Page (3) / (16) Pages	
---	---	--	--

## CONTENTS

1. General Product Description .....	4
1.1 Client Information .....	4
1.2 Product Information.....	4
1.3 Peripheral Devices .....	4
2. Facility and Accreditations.....	5
2.1 Test Facility .....	5
2.2 Laboratory Accreditations and Listings.....	5
2.3 Calibration Details of Equipment Used for Measurement.....	5
3. Test Specifications .....	6
3.1 Standards .....	6
3.2 Mode of operation during the test .....	6
3.3 Maximum Measurement Uncertainty .....	7
4. Technical Characteristic Test.....	8
4.1 Radiated Emission .....	8
APPENDIX A – Test Equipment Used For Tests .....	15
APPENDIX B – EUT Photographs .....	16



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (4) / (16) Pages

## 1. General Product Description

### 1.1 Client Information

<b>Company</b>	Life Science Technology Inc.
<b>Contact Point</b>	Suite B1207, Gangseo Hangang Xi Tower, 401 Yangcheon-ro, Gangseo-gu, Seoul, South Korea
<b>Contact Person</b>	Name : JaeWoo Jun E-mail : femon@lstgrp.com Tel : +82-70-8620-8021

### 1.2 Product Information

<b>FCC ID</b>	2AMMM-LST-TS100
<b>Product Description</b>	FEMON
<b>Model name</b>	TS100
<b>Operating Frequency</b>	2 402 MHz - 2 480 MHz
<b>Antenna type</b>	Chip Antenna
<b>Antenna gain</b>	0.5 dBi
<b>Number of channels</b>	40
<b>Channel Spacing</b>	2 MHz
<b>Type of Modulation</b>	GFSK
<b>Power Source</b>	DC 3 V
<b>Test Software(Version)</b>	Connection Manager (3.0.10)
<b>RF Power setting in Test SW</b>	Initial value

### 1.3 Peripheral Devices

Device	Manufacturer	Model No.	Serial No.
Notebook Computer	SONY	PCG-31119P(B)	27525279 7001364
AC Adapter	SONY	VGP-AC19V32	148095531 0260539



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (5) / (16) Pages

## 2. Facility and Accreditations

### 2.1 Test Facility

The measurement facility is located at (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea.

### 2.2 Laboratory Accreditations and Listings

Country	Agency	Scope of Accreditation	Registration Number	Logo
USA	FCC	FCC Part 15 & 18 EMI (Electromagnetic Interference / Emission)	805871	
CANADA	ISED	IC EMI (3/10m test site)	8737A-2	
JAPAN	VCCI	VCCI V-3 EMI (Electromagnetic Interference / Emission)	C-986 T-1843 R-3627 G-387	
KOREA	MSIP	EMI (Electromagnetic Interference / Emission) EMS (Electromagnetic Susceptibility / Immunity)	KR0025	

### 2.3 Calibration Details of Equipment Used for Measurement

Test equipment and test accessories are calibrated on regular basis. The maximum time between calibrations is one year or what is recommended by the manufacturer, whichever is less. All test equipment calibrations are traceable to the Korea Research Institute of Standards and Science (KRISS), therefore, all test data recorded in this report is traceable to KRISS.

**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (6) / (16) Pages

### 3. Test Specifications

#### 3.1 Standards

Section in FCC	Requirement(s)	Status (Note 1)	Test Condition
15.247(a)	6 dB Bandwidth	NT(Note 4)	Conducted
15.247(b)	Maximum Output Power	NT(Note 4)	
15.247(d)	Unwanted emission	NT(Note 4)	
15.247(e)	Transmitter Power Spectral Density	NT(Note 4)	
15.209	Transmitter emission	C	Radiated
15.207(a)	AC Conducted Emission	NA(Note 5)	Line Conducted
<i>Note 1:</i> C=Complies NC=Not Complies NT=Not Tested NA=Not Applicable			
<i>Note 2:</i> The data in this test report are traceable to the national or international standards.			
<i>Note 3:</i> The sample was tested according to the following specification: FCC Part 15.247, ANSI C63.10-2013			
<i>Note 4:</i> The test was performed according to the class II permissive change. This change is not related to the conducted-measurement item.			
<i>Note 5:</i> The equipment is operated on battery power only.			

#### 3.2 Mode of operation during the test

The EUT is operated in a manner representative of the typical of the equipments. During at testing, system components were manipulated within the confines of typical usage to maximize each emission. All modulation modes were tests. The results are only attached worst cases.

##### Test Frequency

Lowest channel	Middle channel	Highest channel
2 402 MHz	2 440 MHz	2 480 MHz

##### Test mode

Modulation	Duty Cycle
GFSK	61.98 %(On time : 0.388 ms, Off time : 0.238 ms)



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (7) / (16) Pages

### 3.3 Maximum Measurement Uncertainty

The value of the measurement uncertainty for the measurement of each parameter.  
Coverage factor  $k = 2$ , Confidence levels of 95 %

Description	Uncertainty
Conducted RF Output Power	1.5 dB
Power Spectral Density	1.5 dB
Occupied Bandwidth	0.1 MHz
Unwanted Emission(conducted)	3.0 dB
Radiated Emissions ( $f \leq 1$ GHz)	4.0 dB
Radiated Emissions ( $f > 1$ GHz)	5.0 dB



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (8) / (16) Pages

## 4. Technical Characteristic Test

### 4.1 Radiated Emission

#### Test Location

10 m SAC (test distance :  10 m,  3 m)  
 3 m SAC (test distance : 3 m)

#### Test Procedures

- 1) In the frequency range of 9 kHz to 30 MHz, magnetic field is measured with Loop Antenna. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- 2) In the frequency range above 30 MHz, Bi-Log Test Antenna(30 MHz to 1 GHz) and Horn Test Antenna(above 1 GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is carried from 1m to 4m above the ground to determine the maximum value of the field strength. The emissions levels at both horizontal and vertical polarizations should be tested.

#### Instrument Settings

Frequency Range = 9 kHz ~ 25 GHz (2.4 GHz 10<sup>th</sup> harmonic)

- a) RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz, 9 kHz for  $f < 30$  MHz
- b) VBW  $\geq$  RBW
- c) Sweep time = auto couple

 <b>CTK Co., Ltd.</b> <i>The Prime Leader of Global Regulatory Certification</i>	<b>CTK Co., Ltd.</b> (Ho-dong), 113, Yejik-ro, Cheoin-gu, Yongin-si, Gyeonggi-do, Korea Tel: +82-31-339-9970 Fax: +82-31-624-9501	Report No.: CTK-2019-00115 Page (9) / (16) Pages	
---	---	--	--

**Limit :**

FCC Part 15 § 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

**Table 1. Restricted Frequency Bands**

MHz	MHz	MHz	MHz	MHz	GHz
0.09-0.11	8.37626-8.38675	73-74.6	399.9-410	2690-2900	10.6-12.7
<sup>1</sup> 0.495-0.505	8.41425-8.41475	74.8-75.2	608-614	3260-3267	13.25-13.4
2.1735-2.1905	12.29-12.293	108-121.94	960-1240	3332-3339	14.47-14.5
4.125-4.128	12.51975-12.52025	123-138	1300-1427	3345.8-3358	15.35-16.2
4.17725-4.17775	12.57675-12.57725	149.9-150.05	1435-1626.5	3600-4400	17.7-21.4
4.20725-4.20775	13.36-13.41	156.52475- 156.52525	1645.5-1646.5	4500-5150	22.01-23.12
6.215-6.218	16.42-16.423	156.7-156.9	1660-1710	5350-5460	23.6-24
6.26775-6.26825	16.69475-16.69525	162.0125-167.17	1718.8-1722.2	7250-7750	31.2-31.8
6.31175-6.31225	16.80425-16.80475	167.72-173.2	2200-2300	8025-8500	36.43-36.5
8.291-8.294	25.5-25.67	240-285	2310-2390	9000-9200	<sup>2</sup> Above 38.6
8.362-8.366	37.5-38.25	322-335.4	2483.5-2500	9300-9500	

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (10) / (16) Pages

FCC Part 15 § 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Except when the requirements applicable to a given device state otherwise, emissions from licence-exempt transmitters shall comply with the field strength limits shown in Table 2. Additionally, the level of any transmitter emission shall not exceed the level of the transmitter's fundamental emission.

**Table 2. General Field Strength Limits for Licence-Exempt Transmitters**

Frequency(MHz)	Field Strength uV/m@3m	Field Strength dBuV/m@3m	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705-30	30	-	30
30-88	100**	40	3
88-216	150**	43.5	3
216-960	200**	46	3
Above 960	500	54	3


\*\* Except as provided in 15.209(g).fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz, 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g.15.231 and 15.241.

Note :


- 1) For above 1 GHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.
- 2) For above 1 GHz, limit field strength of harmonics : 54 dBuV/m@3m (AV) and 74 dBuV/m@3m (PK)
- 3) For measurement above 1GHz, the resolution bandwidth is set to 1 MHz and video bandwidth is set to 3 MHz for peak measurement.

**Test Setup:**


1) For field strength of emissions from 9 kHz to 30 MHz

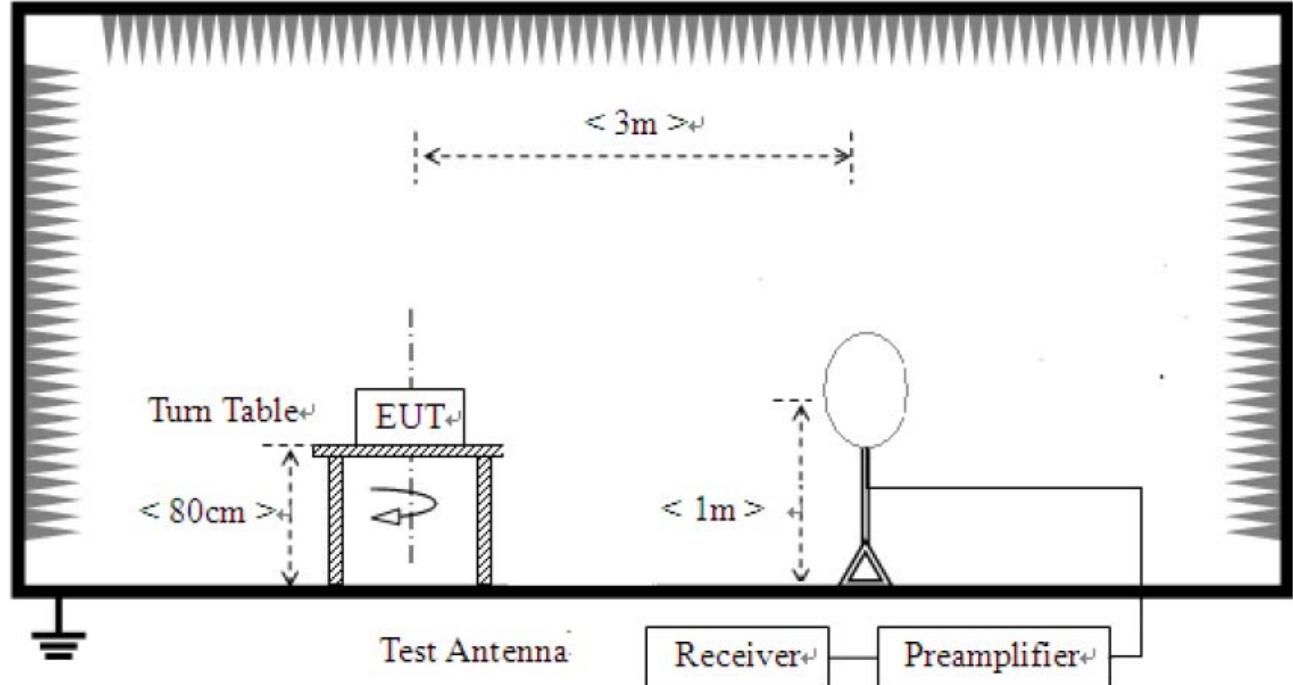

2) For field strength of emissions from 30 MHz to 1 GHz

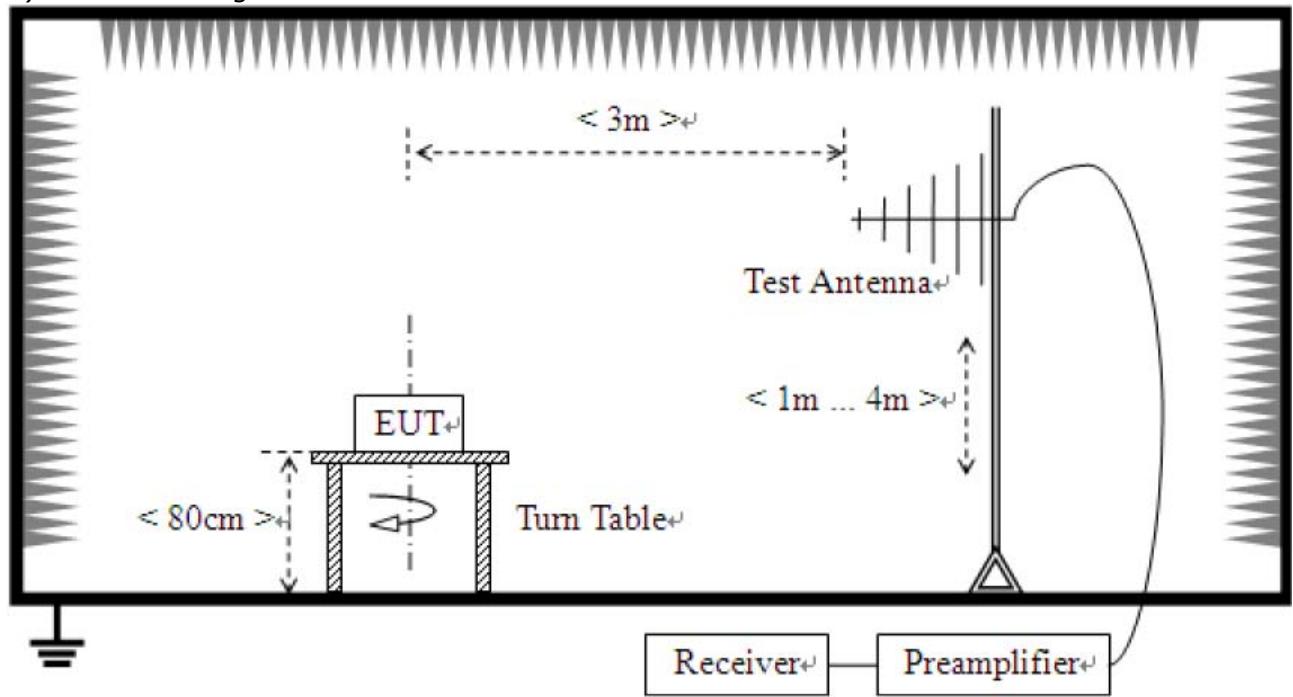

3) For field strength of emissions above 1 GHz

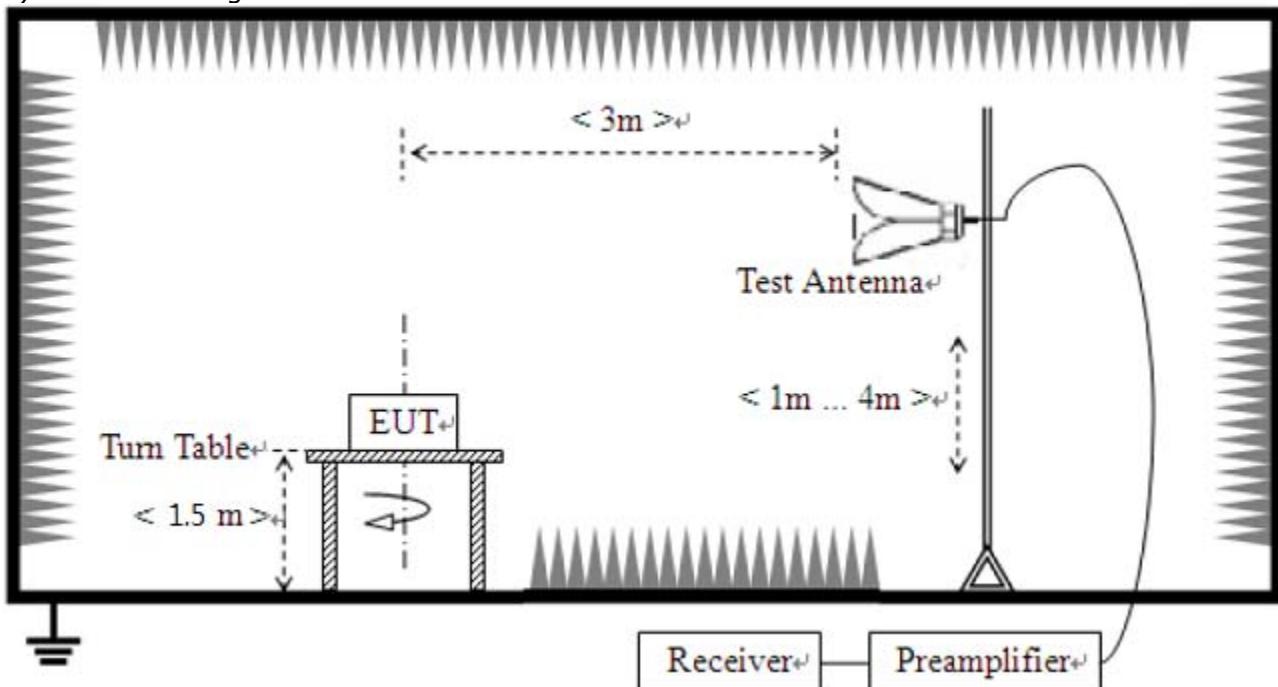

**Test results**

**1) 9 kHz to 30 MHz**

The requirements are:

Complies

Frequency (MHz)	Measured Data (dBuV/m)	Margin (dB)	Remark
-	-	-	See note

**Note :**

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB)



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (13) / (16) Pages


## 2) 30 MHz to 1 GHz

Test mode : low Channel(Worst case)

The requirements are:

Complies

### Test Data

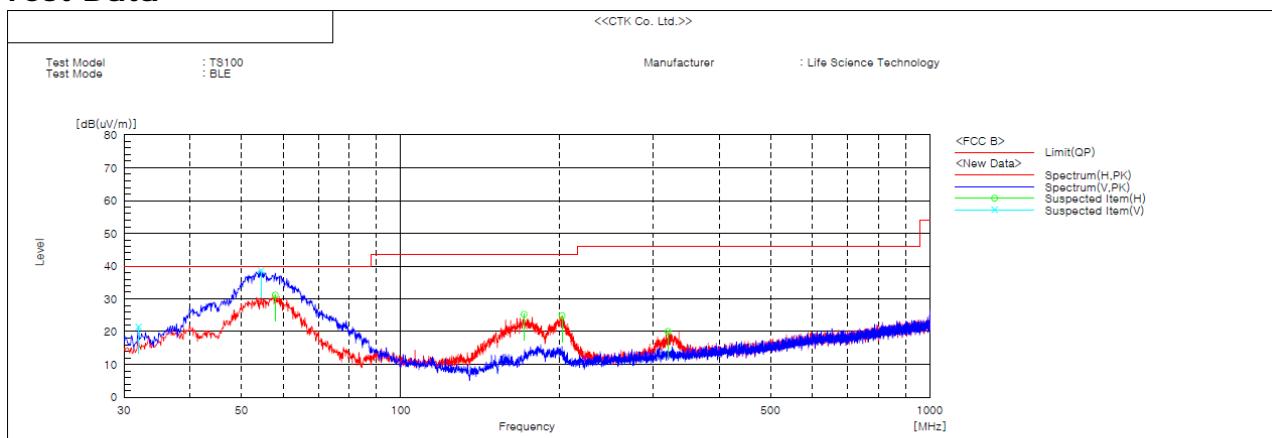

#### Spectrum Selection

No.	Frequency [MHz]	(P) [dB(uV)]	Reading [dB(1/m)]	c.f	Result PK [dB(uV/m)]	Limit OP [dB(uV/m)]	Margin OP [dB]	Height [cm]	Angle [deg]	Remark
1	31.960	V	36.6	-15.1	21.5	40.0	18.5	99.8	19.8	
2	54.495	V	51.4	-12.7	38.7	40.0	1.3	99.8	324.3	
3	57.979	H	44.6	-13.4	31.2	40.0	8.8	99.8	98.9	
4	171.093	H	42.0	-16.7	25.3	43.5	18.2	99.8	132.7	
5	201.793	H	39.0	-14.1	24.9	43.5	18.6	99.8	257.9	
6	320.023	H	31.8	-11.7	20.1	46.0	25.9	99.8	349.6	

#### Remark :

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f(Correction factor)
3. Correction factor = Antenna factor + Cable loss + 6 dB attenuator - Amp Gain
4. This data is the Peak(PK) value.



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (14) / (16) Pages

### 3) 1 GHz to 25 GHz

The requirements are:

Complies

#### Test Data

Channel	Frequency [MHz]	Ant. Pol. (V/H)	Reading [dBuV/m]	c.f [dB/m]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Low	1 200.45	H	50.9	-8.4	42.5	74	31.5	Peak
	1 200.45	H	38.4	-8.4	30.0	54	24.0	Average
Middle	1 200.45	H	51.8	-8.4	43.4	74	30.6	Peak
	1 200.45	H	38.8	-8.4	30.4	54	23.6	Average
High	1 200.45	H	51.9	-8.4	43.5	74	30.5	Peak
	1 200.45	H	38.7	-8.4	30.3	54	23.7	Average

#### Remarks

1. The Unwanted emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in stand-up position(Z axis) and the worst case was recorded.
2. Result = Reading + c.f (correction factor)
3. Correction factor = Antenna factor + Cable loss - Amp Gain



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (15) / (16) Pages

## APPENDIX A – Test Equipment Used For Tests

	<b>Name of Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Cal Date</b>	<b>Due Date</b>
1	Signal Analyzer	Agilent	N9020A	MY50510324	2018-01-26	2019-01-26
2	Signal Generator	Rohde & Schwarz	SMB100A	175528	2018-10-24	2019-10-24
3	EMI Test Receiver	Rohde & Schwarz	ESCI7	100814	2018-10-25	2019-10-25
4	Bilog Antenna	SCHAFFNER	CBL6111C	2551	2017-04-19	2019-04-19
5	6dB Attenuator	Rohde & Schwarz	DNF	272.4110.50-2	2018-10-25	2019-10-25
6	AMPLIFIER	SONOMA	310	291721	2018-02-02	2019-02-02
7	EMI Test Receiver	Rohde & Schwarz	ESU40	100336	2018-02-01	2019-02-01
8	Preamplifier	Agilent	8449B	3008A02011	2018-11-30	2019-12-03
9	Horn Antenna	ETS-Lindgren	3116	00062504	2017-12-04	2019-12-04
10	Horn Antenna	ETS-Lindgren	3117	00154525	2017-09-14	2019-09-14
11	Band Reject Filter	Micro Tronics	BRM50702	G233	2018-01-26	2019-01-26
12	Signal Analyzer	Rohde & Schwarz	FSV40	101574	2018-01-26	2019-01-26
13	Active Loop Antenna	SCHWARZBECK	FMZB 1513	1513-125	2018-05-02	2020-05-02



**CTK Co., Ltd.**

(Ho-dong), 113, Yejik-ro, Cheoin-gu,  
Yongin-si, Gyeonggi-do, Korea  
Tel: +82-31-339-9970  
Fax: +82-31-624-9501

Report No.:  
CTK-2019-00115  
Page (16) / (16) Pages

## APPENDIX B – EUT Photographs

