

**ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT
INTENTIONAL RADIATOR CERTIFICATION TO
FCC PART 15 SUBPART C REQUIREMENT**

OF

FL X-3 Destroyer

Model No.: AD12512

Trade Mark: N/A

FCC ID: 2AMON-HIK-AD12512

Report No.: ED170713014E

Issue Date: July 10, 2017

Prepared for

**Hikari Design Co.,Ltd.
156-1 Takashina-cho, Wakaba-ku, Chiba, 264-0024 Japan**

Prepared by

EMTEK(DONGGUAN) CO., LTD.

**No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China
TEL: 86-769-22807078
FAX: 86-769-22807079**

**This report shall not be reproduced, except in full, without the written approval of
EMTEK(DONGGUAN) CO., LTD.**

VERIFICATION OF COMPLIANCE

Applicant:	Hikari Design Co.,Ltd. 156-1 Takashina-cho, Wakaba-ku, Chiba, 264-0024 Japan
Manufacturer:	AERO CONCEPT LIMITED. UNIT A, 12/F., SHING KING INDUSTRIAL BUILDING, 45KUT SHING STREET, CHAI WAN, HONG KONG.
Product Description:	FL X-3 Destroyer
Trade Mark:	N/A
Model Number:	AD12512

We hereby certify that:

The above equipment was tested by EMTEK(DONGGUAN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10-2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.249(2016).

Date of Test :

July 01, 2017 to July 10, 2017

Abby Li

Prepared by :

Abby Li/Editor

Tomas Yang

Reviewer :

Tomas Yang/Supervisor

Sam Lv

Approved & Authorized Signer :

Sam Lv/Manager

Modified Information

Version	Summary	Revision Date	Report No.
Ver.1.0	Original Report	/	ED170713014E

Table of Contents

1. GENERAL INFORMATION.....	5
1.1 PRODUCT DESCRIPTION	5
1.2 TEST FACILITY	6
2. TEST CONFIGURATION	7
3. SUMMARY OF TEST RESULTS	8
4. DESCRIPTION OF TEST MODES.....	9
5. TEST SYSTEM UNCERTAINTY	10
6. 20DB BANDWIDTH TEST	11
6.1 MEASUREMENT PROCEDURE	11
6.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
6.3 MEASUREMENT EQUIPMENT USED:	11
6.4 MEASUREMENT RESULTS:	11
7. BAND EDGE TEST	14
7.1 MEASUREMENT PROCEDURE	14
7.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	15
7.3 MEASUREMENT EQUIPMENT USED:	15
7.4 MEASUREMENT RESULTS:	15
8. RADIATED EMISSION TEST	21
8.1 MEASUREMENT PROCEDURE	21
8.2 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	23
8.3 MEASUREMENT EQUIPMENT USED:	24
8.4 LIMIT:	25
8.5 MEASUREMENT RESULT	26
8.5 RADIATED MEASUREMENT PHOTOS:	35
9. ANTENNA REQUIREMENT	36
9.1 LIMIT	36
9.2 RESULT	36

Appendix I (Photos of EUT) (3 pages)

1. General Information

1.1 Product Description

Characteristics	Description
Product Name	FL X-3 Destroyer
Model number	AD12512
Power Supply	DC 9V Battery
Modulation	GFSK
Operating Frequency	2402MHz, 2434MHz, 2472MHz
Number of Channels	3
Antenna Type	Internal antenna
Antenna Gain	1 dBi
Product Hardware version	AD12512-HV01
Product Software version	AD12512-SV01
Radio Hardware version	AD12512-LT-H01
Radio Software version	AD12512-LT-S01

1.2 Test Facility

Site Description

EMC Lab. : Registered on FCC, July 06, 2016
The Certificate Number is 247565.

Registered on Industry Canada, January 13, 2017
The Certificate Number is 9444A.

Name of Firm : EMTEK(DONGGUAN) CO., LTD.

Site Location : No.281, Guantai Road, Nancheng District,
Dongguan, Guangdong, China

2. Test Configuration

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Trade Mark	Model No.	FCC ID	Note
1.	FL X-3 Destroyer	N/A	AD12512	2AMON-HIK-AD12512	<i>EUT</i>

Note:

- (1) Unless otherwise denoted as EUT in 『Remark』 column , device(s) used in tested system is a support equipment.

3. Summary of Test Results

FCC Rules	Description Of Test	Result
§15.207	AC Power Conducted Emission	N/A
2.1049	20dB Bandwidth	Complies
§15.249/15.205	Band Edge	Complies
§15.249(a)	Field Strength of Fundamental Emissions	Complies
§15.249(a)(d)	Radiated Spurious Emissions	Complies
§15.203	Antenna Requirements	Complies

Note: Due to this EUT is powered by batteries only, AC Power Conducted Emission is not applicable.

4. Description of test modes

The EUT is used as a receiver together with dongles, but it still has the function of transmitting. More detailed feature description, please refer to the operation description or Users Manual.

For Radiated: The EUT's antenna was pre-tested under the following modes:

Test Mode	Description
Mode A	X-Y axis
Mode B	Y-Z axis
Mode C	X-Z axis

From the above modes, the worst case was found in Mode B. Therefore only the test data of the mode was recorded in this report.

Channel List:

Channel	Frequency
CH0	2402
CH1	2434
CH2	2472

5. TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^{\circ}\text{C}$
Humidity	$\pm 3\%$

Remark: The coverage Factor ($k=2$), and measurement Uncertainty for a level of Confidence of 95%.

6. 20dB Bandwidth test

6.1 Measurement Procedure

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

6.2 Test SET-UP (Block Diagram of Configuration)



6.3 Measurement Equipment Used:

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	Characteristics	LAST CAL.	CAL DUE.
Spectrum Analyzer	Rohde & Schwarz	FSV30	1321.3008K	10Hz-30GHz	05/16/2017	05/15/2018
Coaxial Cable	CDS	79254	46107086	10Hz-30GHz	05/16/2017	05/15/2018
Antenna Connector	ARTHUR-YANG	2244-N1TG1	N/A	10Hz-30GHz	05/16/2017	05/15/2018



Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.
The cable loss is 0.4dBm, and impedance is 50 Ω for the antenna connector.


6.4 Measurement Results:

Refer to attached data chart.

Spectrum Detector:	PK	Test Date :	July 10, 2017
Test By:	Andy	Temperature :	24°C
Test Result:	PASS	Humidity :	53 %
Modulation:	GFSK		

Channel frequency (MHz)	20dB Down BW(kHz)
2402	1266
2434	1281
2472	1317

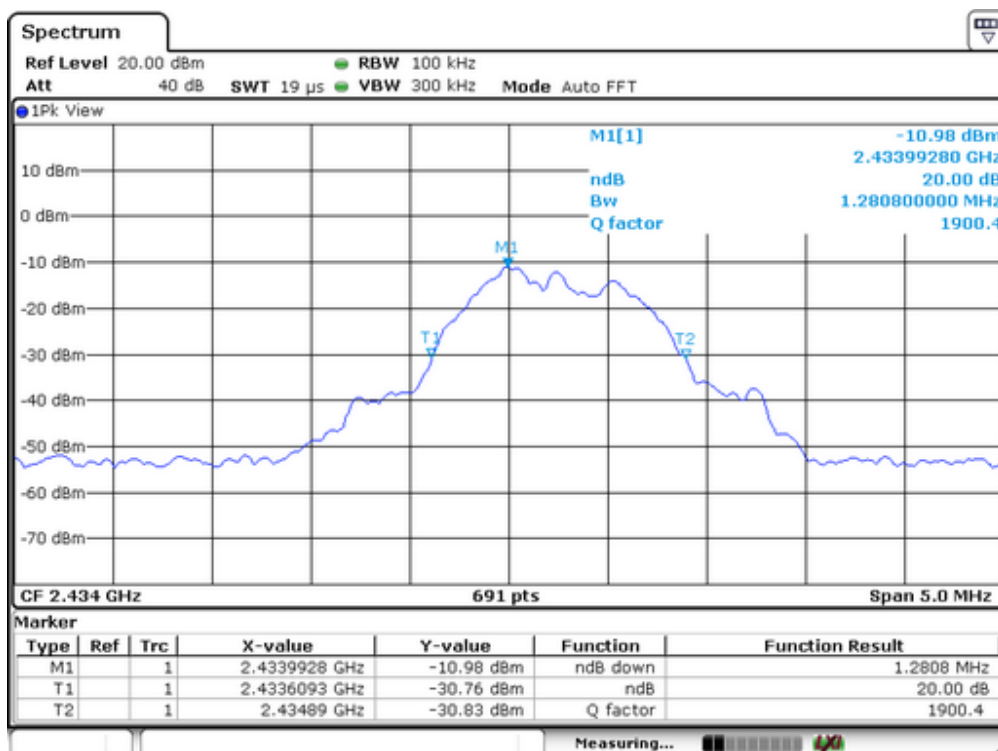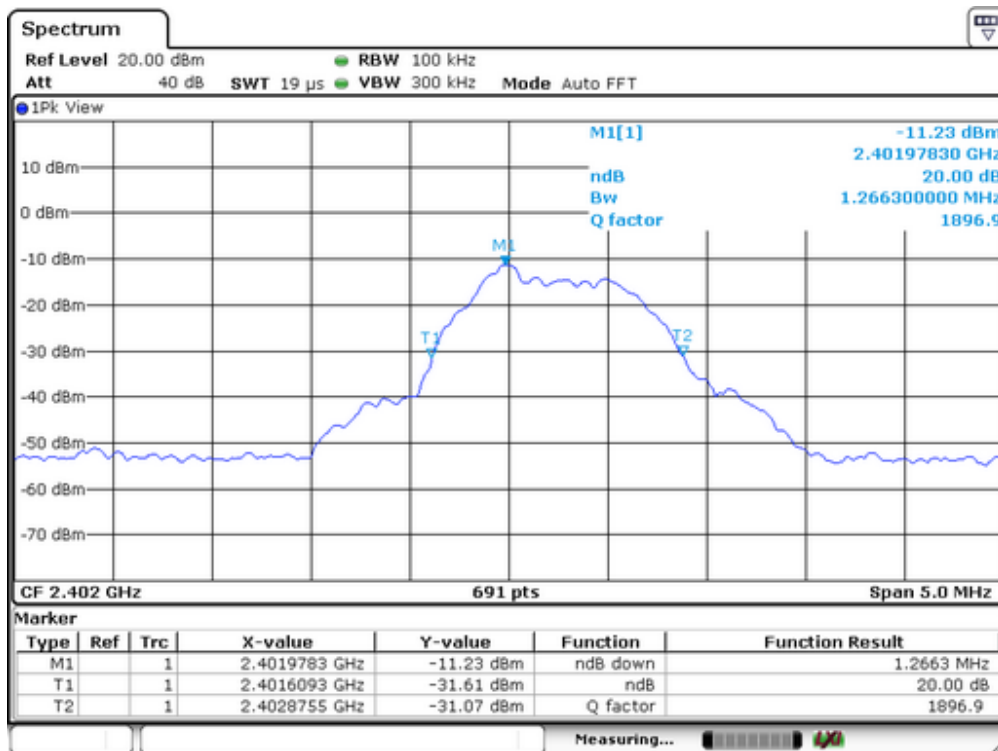

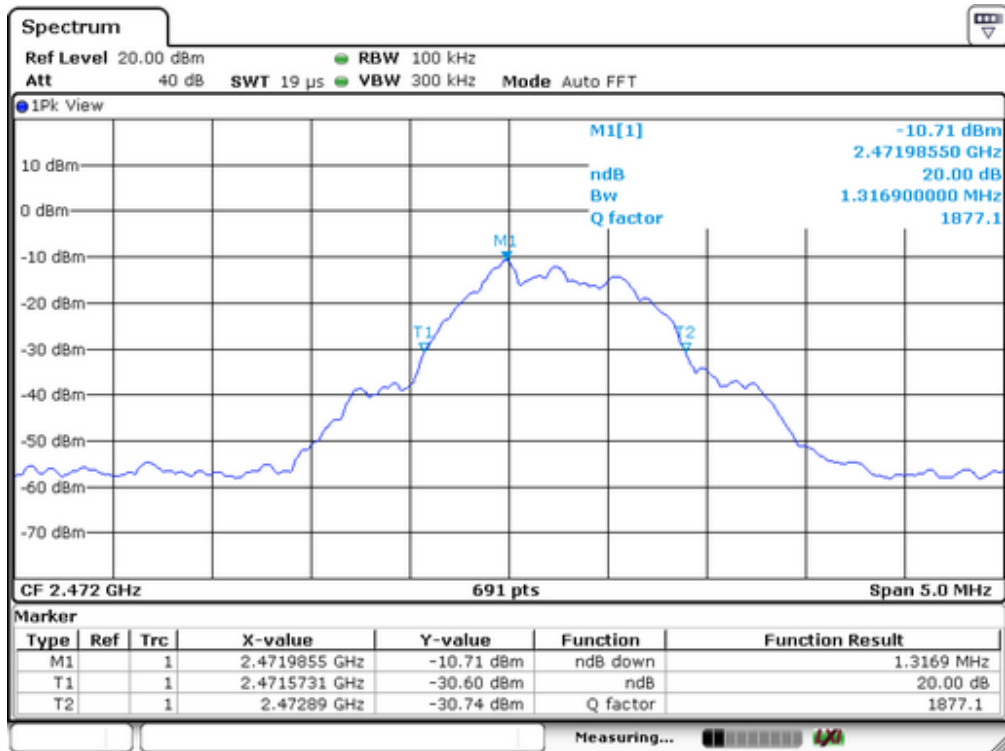

7. Band EDGE test

7.1 Measurement Procedure

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were encompassed by the span. After trace stabilization, the maximum peak was determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.

The measurements were performed at the lower end of the 2.4GHz band. Use the following spectrum analyzer settings:


When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

7.2 Test SET-UP (Block Diagram of Configuration)

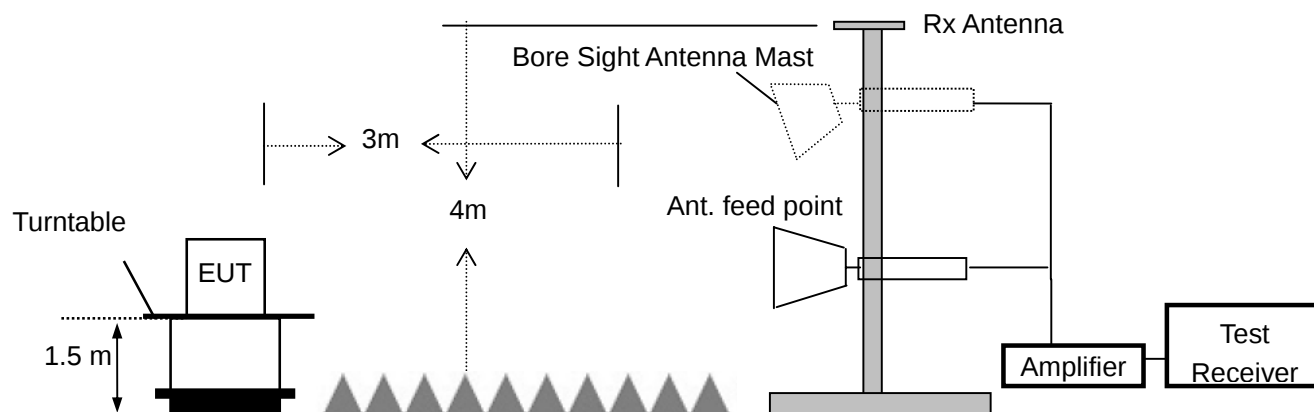



7.3 Measurement Equipment Used:


Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
2	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
3	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
4	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
5	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
6	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

7.4 Measurement Results:

Spectrum Detector: PK Test Date : July 10, 2017
 Test By: Andy Temperature : 25 °C
 Test Result: PASS Humidity : 50 %

Frequency (MHz)	Modulation	Peak Power Output(dBm)	Result of Band edge(dBc)	Band edge Limit(dBc)
2399.41	GFSK	-12.19	54.56	>20dBc
2484.48	GFSK	-36.71	44.38	>20dBc

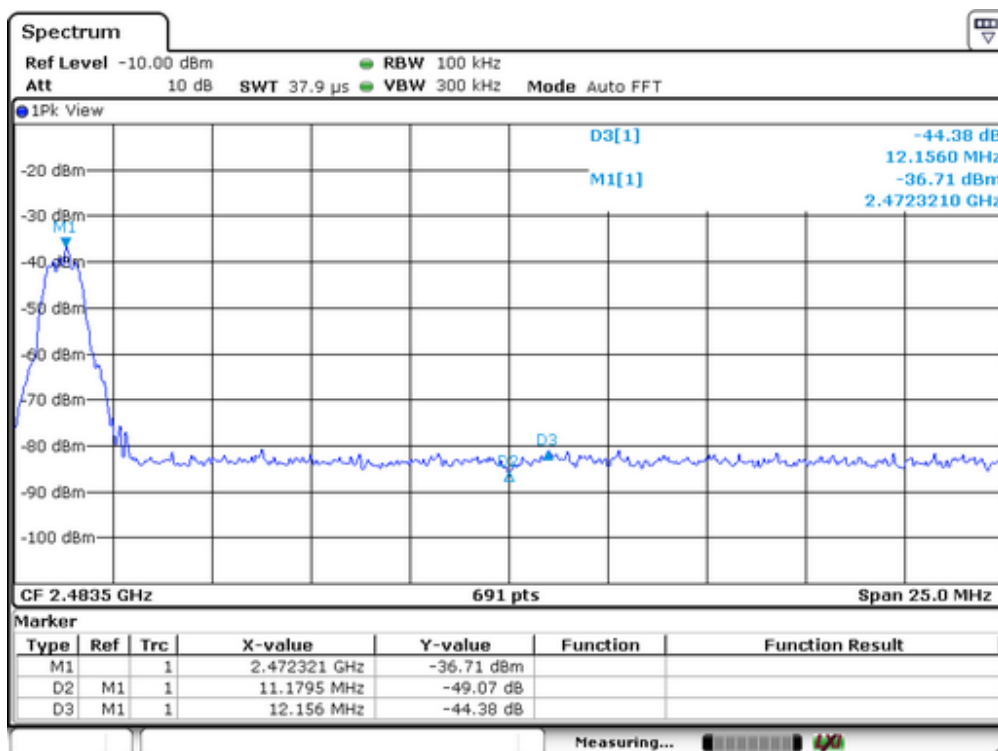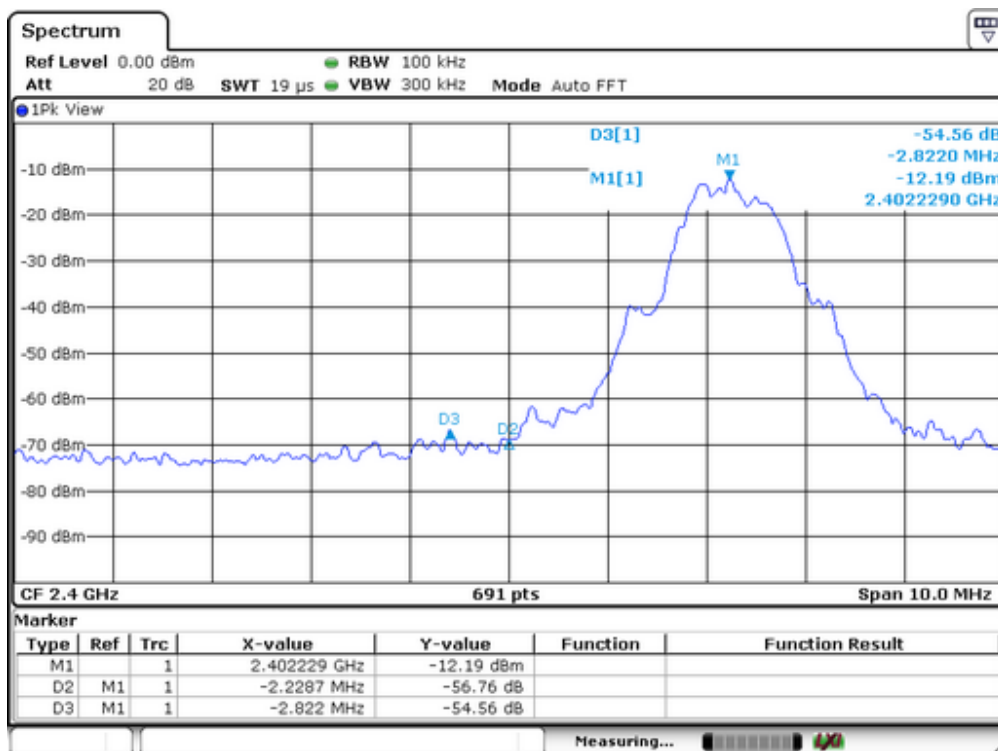

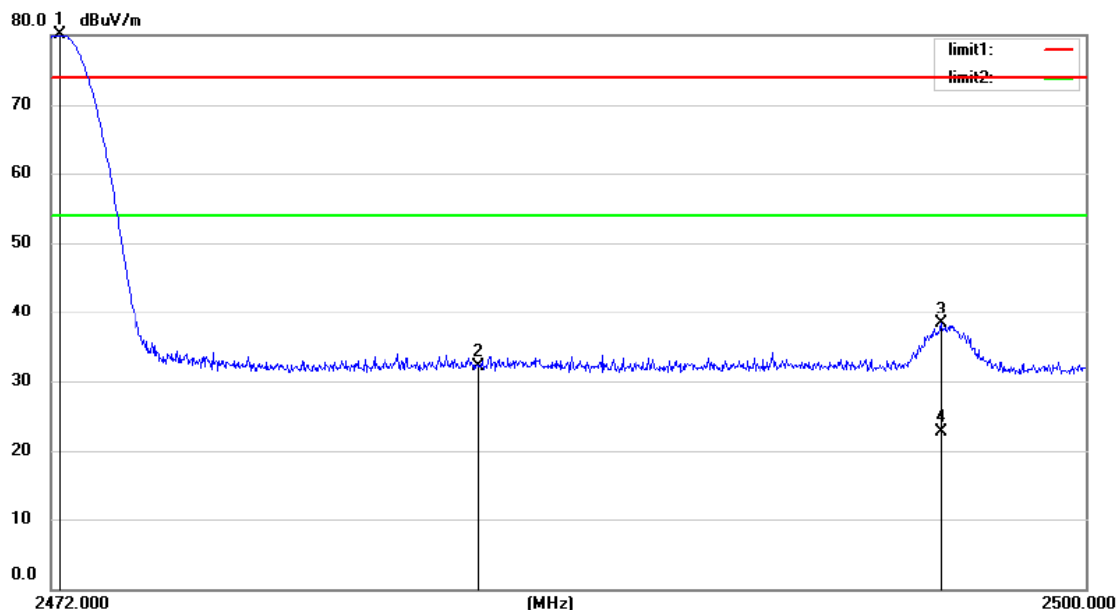

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC Part 15 C

Power: Battery 9V

Humidity: 55 %


Mode: TX 2472

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1	*	2472.224	100.81	-20.73	80.08	74.00	6.08	peak		
2		2483.500	52.78	-20.72	32.06	74.00	-41.94	peak		
3		2496.080	59.00	-20.68	38.32	74.00	-35.68	peak		
4		2496.080	43.33	-20.68	22.65	54.00	-31.35	AVG		

*:Maximum data x:Over limit !:over margin

Operator: washington

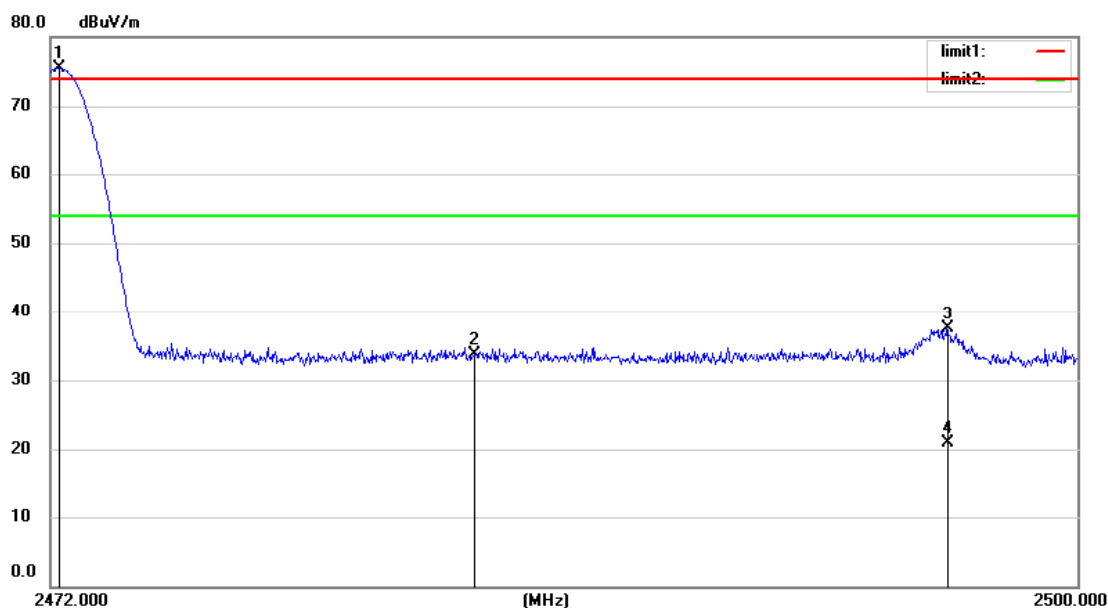


Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC Part 15 C Power: Battery 9V Humidity: 55 %
 Mode:TX 2472
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	2472.224	94.75	-19.33	75.42	74.00	1.42	peak		
2		2483.500	52.91	-19.27	33.64	74.00	-40.36	peak		
3		2496.444	56.69	-19.19	37.50	74.00	-36.50	peak		
4		2496.444	40.00	-19.19	20.81	54.00	-33.19	AVG		

*:Maximum data x:Over limit !:over margin

Operator: washington

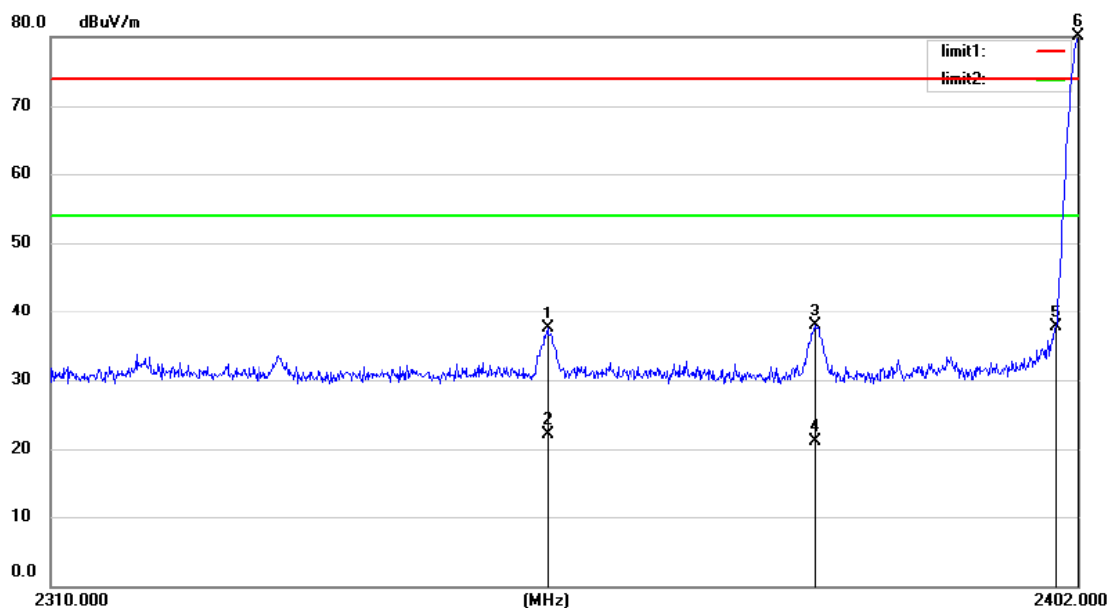

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC Part 15 C

Power: Battery 9V

Humidity: 55 %


Mode: TX 2402

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		2354.160	58.62	-21.05	37.57	74.00	-36.43	peak		
2		2354.160	43.20	-21.05	22.15	54.00	-31.85	AVG		
3		2378.172	58.83	-20.98	37.85	74.00	-36.15	peak		
4		2378.172	42.10	-20.98	21.12	54.00	-32.88	AVG		
5		2400.000	58.54	-20.93	37.61	74.00	-36.39	peak		
6	*	2402.000	101.05	-20.93	80.12	74.00	6.12	peak		

*:Maximum data x:Over limit !:over margin

Operator: washington

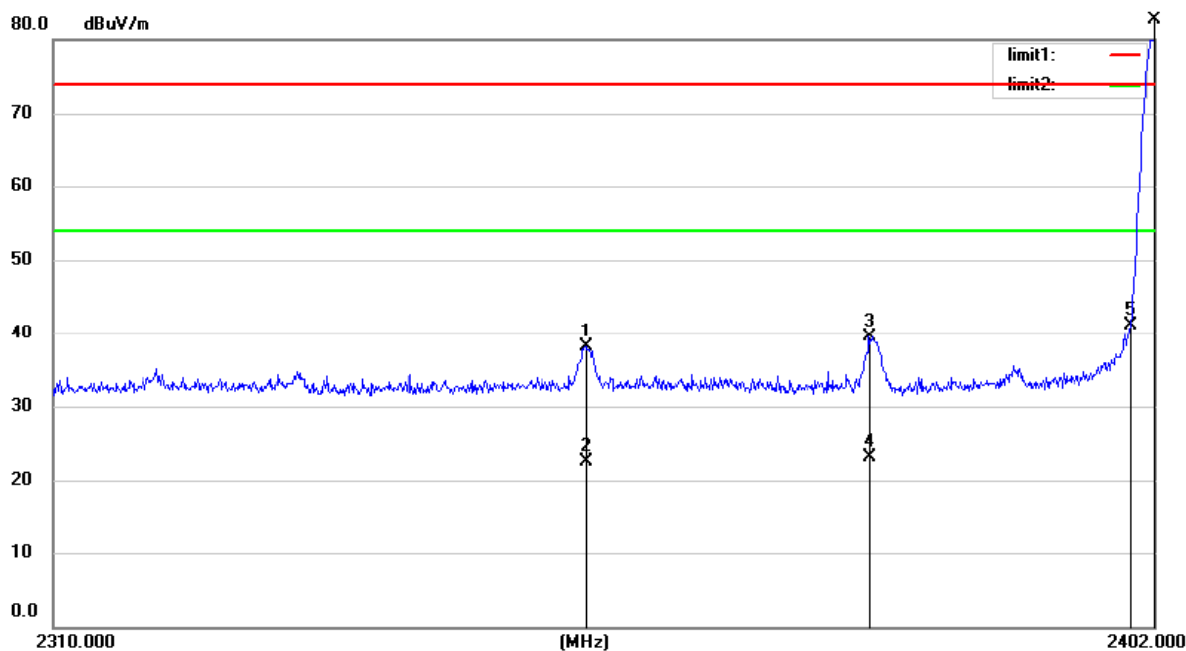

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC Part 15 C

Power: Battery 9V

Humidity: 55 %

Mode: TX 2402

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		2354.068	58.14	-20.05	38.09	74.00	-35.91	peak		
2		2354.068	42.56	-20.05	22.51	54.00	-31.49	AVG		
3		2377.896	59.44	-19.90	39.54	74.00	-34.46	peak		
4		2377.896	43.00	-19.90	23.10	54.00	-30.90	AVG		
5		2400.000	60.80	-19.77	41.03	74.00	-32.97	peak		
6	*	2402.000	102.60	-19.76	82.84	74.00	8.84	peak		

*:Maximum data x:Over limit !:over margin

Operator: washington

8. Radiated Emission Test

8.1 Measurement Procedure

1. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set to the maximum power setting and enable the EUT transmit continuously.
5. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
6. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.

The following table is the setting of spectrum analyzer:

When spectrum scanned from 30MHz to 1GHz setting resolution bandwidth 120KHz and video bandwidth 300KHz:

EMI Test Receiver	Setting
Attenuation	Auto
RB	120KHz
VB	300KHz
Detector	QP
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	3MHz
Detector	Peak
Trace	Max hold

When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 10Hz:


EMI Test Receiver	Setting
Attenuation	Auto
RB	1MHz
VB	10Hz
Detector	Peak
Trace	Max hold

8.2 Test SET-UP (Block Diagram of Configuration)


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

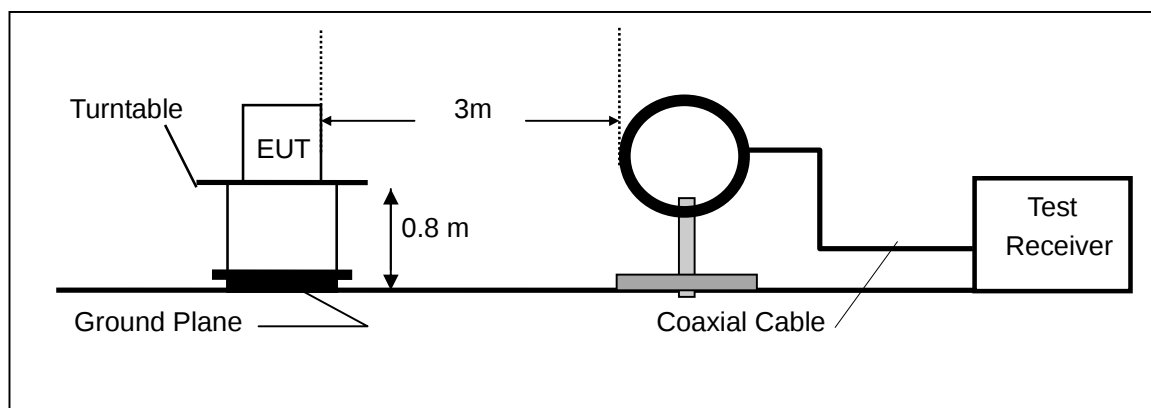

(B) Radiated Emission Test Set-Up, Frequency Below 1000MHz

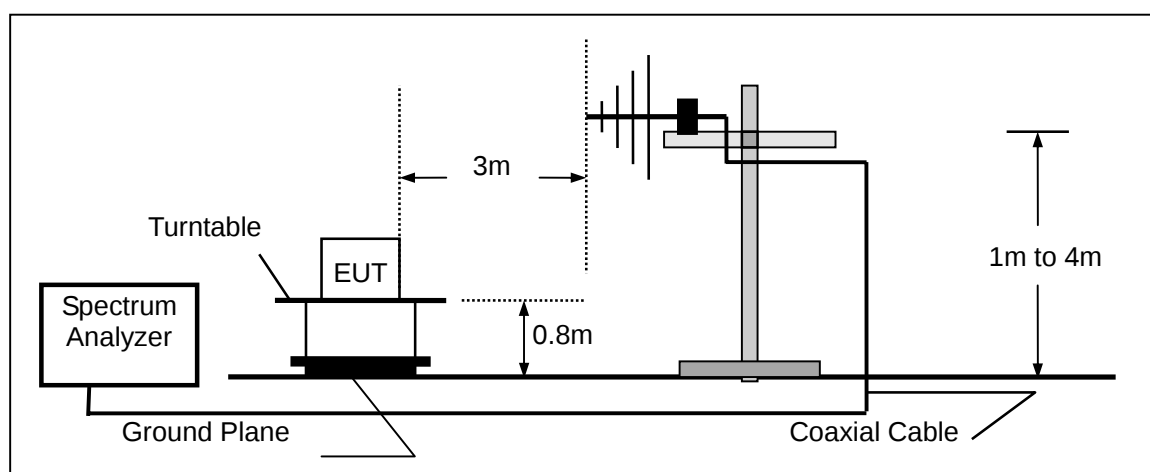

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

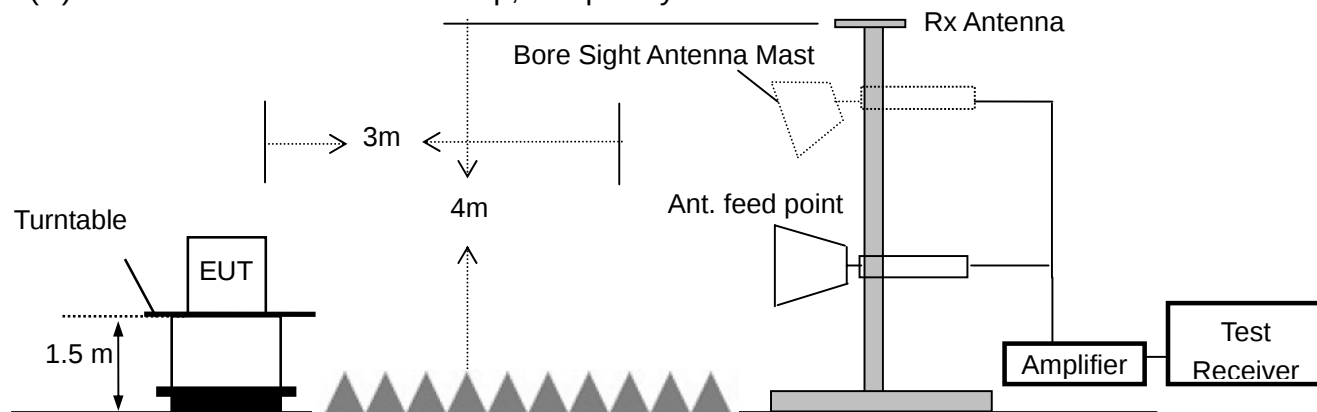

8.3 Measurement Equipment Used:

Item	Equipment	Manufacturer	Model No.	Serial No.	Characteristics	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	1166.5950.03	9KHz-3GHz	05/16/2017	1 Year
2.	Loop Antenna	Schwarzbeck	FMZB 1519	012	9 KHz -30MHz	05/16/2017	1 Year
3.	Bilog Antenna	Schwarzbeck	VULB9163	000141	25MHz-2GHz	05/16/2017	1 Year
4.	Power Amplifier	CDS	RSU-M352	818	1MHz-1GHz	05/16/2017	1 Year
5.	Power Amplifier	HP	8447F	OPT H64	1GHz-26.5GHz	05/16/2017	1 Year
6.	Color Monitor	SUNSPO	SP-140A	N/A	--	05/16/2017	1 Year
7.	Single Line Filter	JIANLI	XL-3	N/A	--	05/16/2017	1 Year
8.	Single Phase Power Line Filter	JIANLI	DL-2X100B	N/A	--	05/16/2017	1 Year
9.	3 Phase Power Line Filter	JIANLI	DL-4X100B	N/A	--	05/16/2017	1 Year
10.	DC Power Filter	JIANLI	DL-2X50B	N/A	--	05/16/2017	1 Year
11.	Cable	Schwarzbeck	PLF-100	549489	9KHz-3GHz	05/16/2017	1 Year
12.	Cable	Rosenberger	CIL02	A0783566	9KHz-3GHz	05/16/2017	1 Year
13.	Cable	Rosenberger	RG 233/U	525178	9KHz-3GHz	05/16/2017	1 Year
14.	Signal Analyzer	Rohde & Schwarz	FSV30	103040	9KHz-40GHz	05/16/2017	1 Year
15.	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1272	1GHz-18GHz	05/16/2017	1 Year
16.	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	14GHz -26.5GHz	05/16/2017	1 Year
17.	Boresight Antenna Tower	EMEC	AM-BS-4500-D	N/A	N/A	05/16/2017	1 Year
18.	Power Amplifier	LUNAR EM	LNA1G18-40	J10100000081	1GHz-26.5GHz	05/16/2017	1 Year
19.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
20.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year
21.	Cable	H+S	CBL-26	N/A	1GHz-26.5GHz	05/16/2017	1 Year

8.4 Limit:

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Remark: 1. Emission level in dBuV/m=20 log (uV/m)

2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Frequency(MHz)	Filed Strength of Fundamental(at 3m)		Filed Strength of Harmonics(at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0

8.5 Measurement Result

Below 30MHz:

Operation Mode:	TX	Test Date :	July 10, 2017
Frequency Range:	9KHz~30MHz	Temperature :	28℃
Test Result:	PASS	Humidity :	65 %
Measured Distance:	3m	Test By:	Andy

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	--


Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Below 1000MHz:

Pass.

All the modulation modes were tested the data of the mode are recorded in the following pages and the others modulation methods do not exceed the limits.

Please refer to the following data.

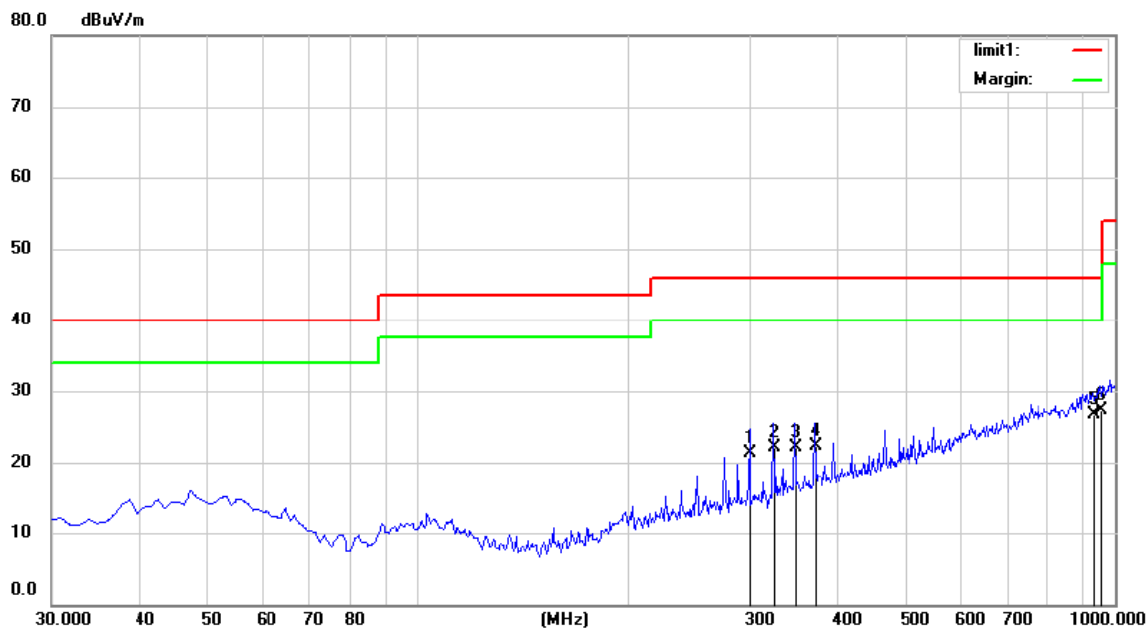

Site: Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 9V

Humidity: 55 %


Mode: TX2402

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		299.6600	35.22	-13.93	21.29	46.00	-24.71	QP		
2		323.9100	35.23	-13.19	22.04	46.00	-23.96	QP		
3		348.1600	34.25	-12.23	22.02	46.00	-23.98	QP		
4		372.4100	34.05	-11.65	22.40	46.00	-23.60	QP		
5		932.1000	26.55	0.23	26.78	46.00	-19.22	QP		
6	*	952.4700	26.58	0.81	27.39	46.00	-18.61	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

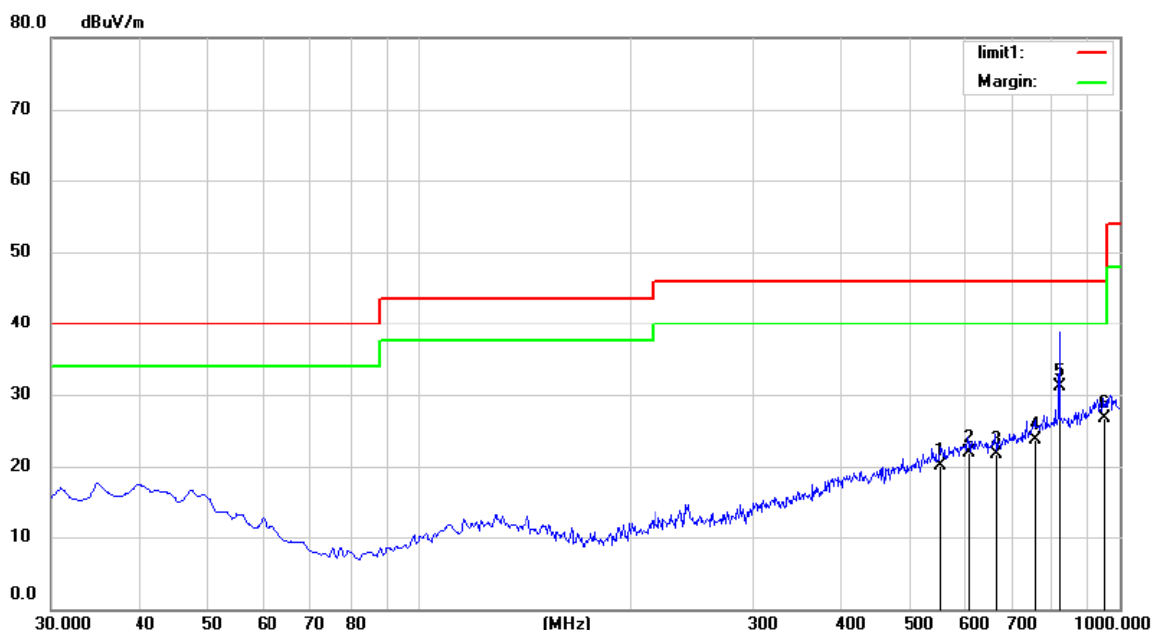


Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m Power: Battery 9V Humidity: 55 %
 Mode: TX2402
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		556.7100	28.05	-8.03	20.02	46.00	-25.98	QP		
2		609.0900	29.12	-7.28	21.84	46.00	-24.16	QP		
3		664.3800	28.35	-6.65	21.70	46.00	-24.30	QP		
4		756.5300	28.23	-4.46	23.77	46.00	-22.23	QP		
5	*	822.4900	34.23	-3.09	31.14	46.00	-14.86	QP		
6		951.5000	27.35	-0.65	26.70	46.00	-19.30	QP		

*:Maximum data x:Over limit !:over margin


Operator: washington

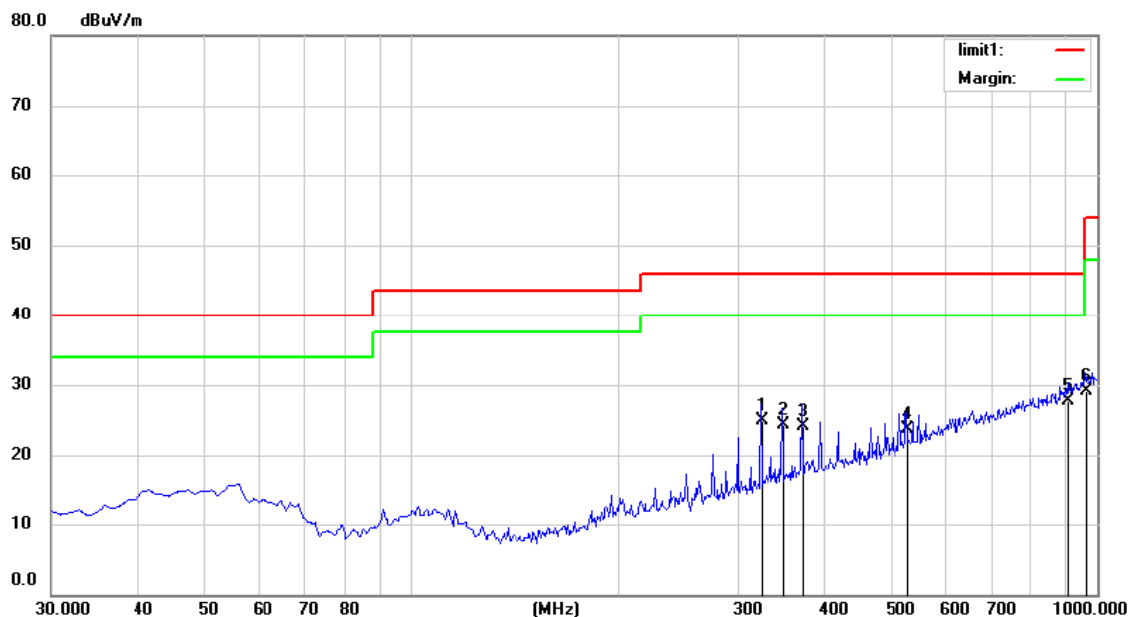

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		323.9100	38.13	-13.19	24.94	46.00	-21.06	QP		
2		348.1600	36.58	-12.23	24.35	46.00	-21.65	QP		
3		372.4100	35.85	-11.65	24.20	46.00	-21.80	QP		
4		528.5800	32.11	-8.32	23.79	46.00	-22.21	QP		
5	*	906.8800	28.12	-0.39	27.73	46.00	-18.27	QP		
6		964.1100	28.13	1.02	29.15	54.00	-24.85	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

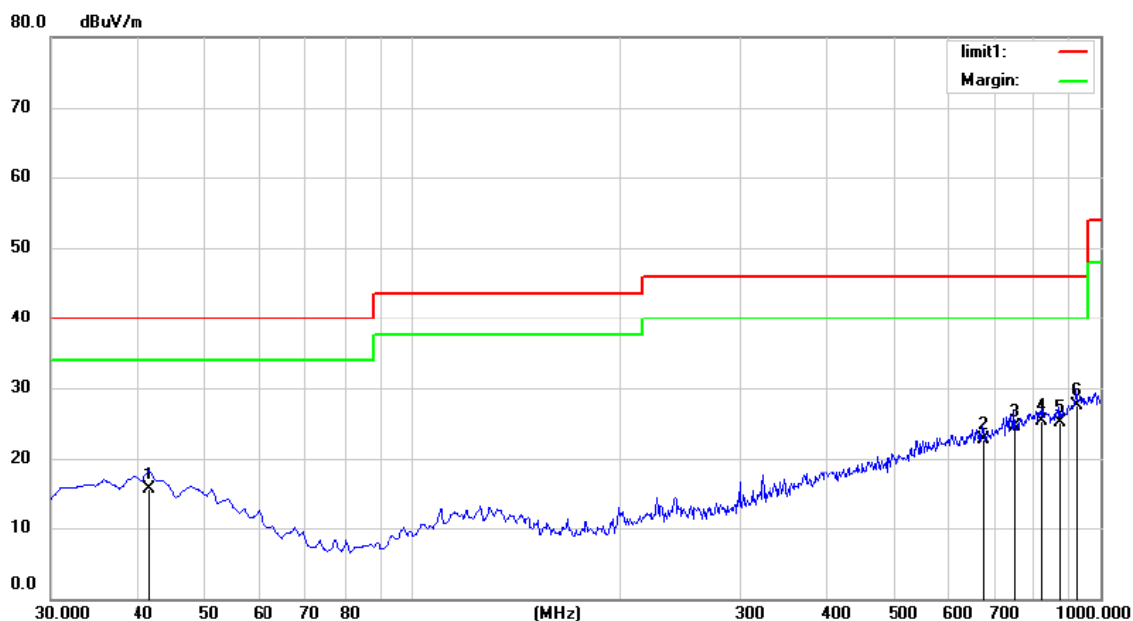

Site Chamber #1

Polarization: **Vertical**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 9V

Humidity: 55 %


Mode: TX2434

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		41.6400	28.90	-13.49	15.41	40.00	-24.59	QP		
2		675.0500	29.12	-6.50	22.62	46.00	-23.38	QP		
3		748.7700	29.13	-4.53	24.60	46.00	-21.40	QP		
4		824.4300	28.35	-3.11	25.24	46.00	-20.76	QP		
5		873.9000	28.13	-2.95	25.18	46.00	-20.82	QP		
6	*	925.3100	28.65	-1.19	27.46	46.00	-18.54	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

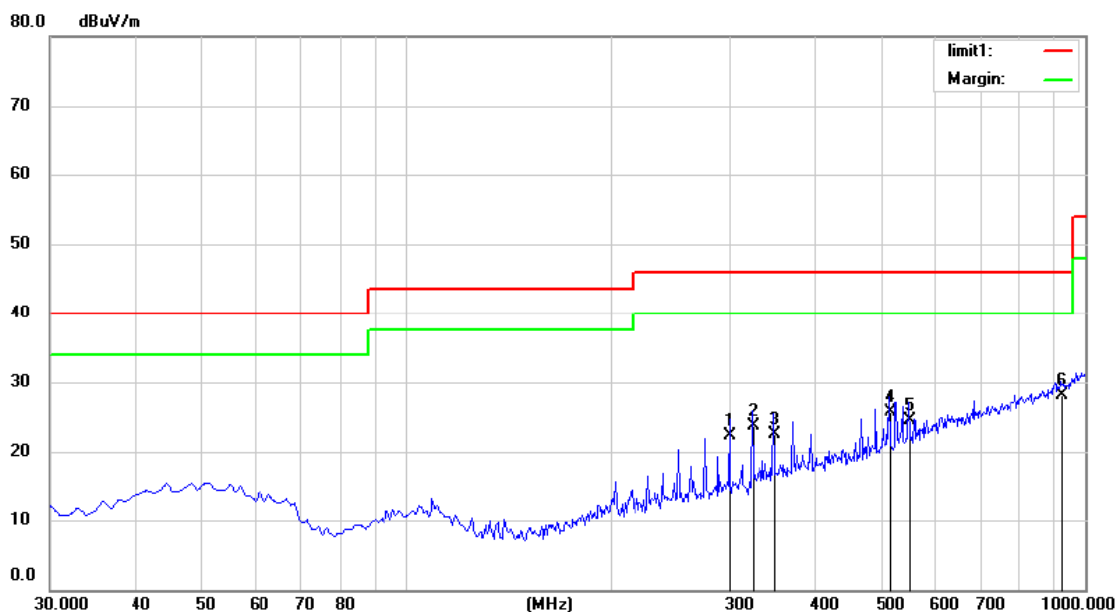

Site Chamber #1

Polarization: **Horizontal**

Temperature: 26

Limit: (RE)FCC PART 15 C 3m

Power: Battery 9V

Humidity: 55 %


Mode: TX2472

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		299.6600	36.23	-13.93	22.30	46.00	-23.70	QP		
2		323.9100	36.88	-13.19	23.69	46.00	-22.31	QP		
3		348.1600	34.80	-12.23	22.57	46.00	-23.43	QP		
4		515.9700	34.25	-8.60	25.65	46.00	-20.35	QP		
5		551.8600	32.22	-7.68	24.54	46.00	-21.46	QP		
6	*	923.3700	28.05	-0.01	28.04	46.00	-17.96	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

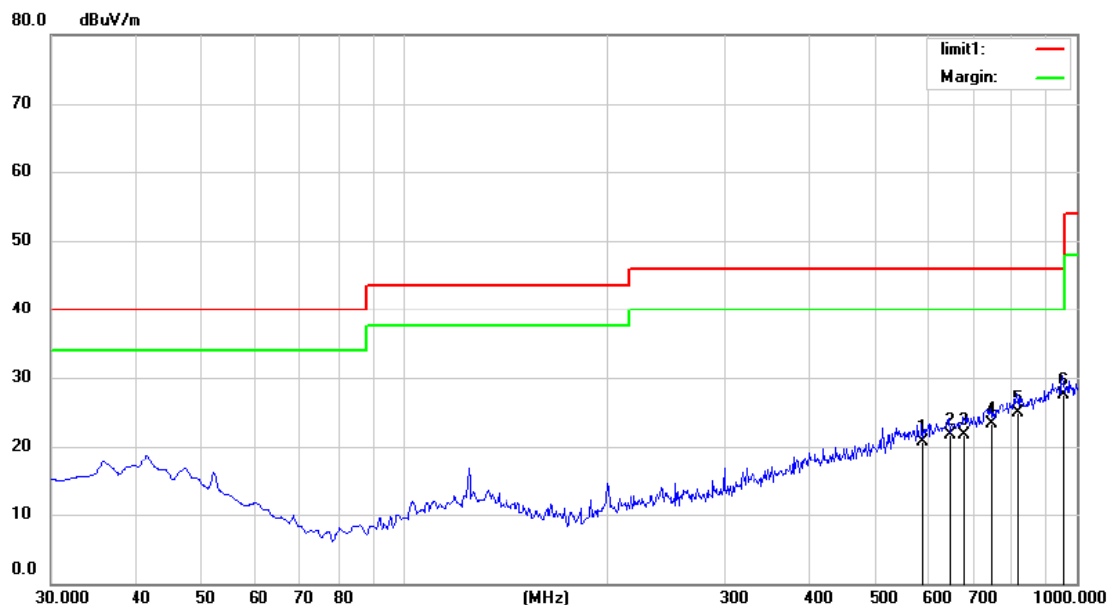

Site Chamber #1 Polarization: **Vertical** Temperature: 26
 Limit: (RE)FCC PART 15 C 3m Power: Battery 9V Humidity: 55 %
 Mode: TX2472
 Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		589.6900	28.23	-7.52	20.71	46.00	-25.29	QP		
2		645.9500	28.60	-6.88	21.72	46.00	-24.28	QP		
3		677.9600	28.11	-6.46	21.65	46.00	-24.35	QP		
4		742.9500	28.05	-4.71	23.34	46.00	-22.66	QP		
5		817.6400	28.10	-3.15	24.95	46.00	-21.05	QP		
6	*	955.3800	28.23	-0.65	27.58	46.00	-18.42	QP		

*:Maximum data x:Over limit !:over margin

Operator: washington

Above 1000MHz~10th Harmonics:

Operation Mode: GFSK (CH0: 2402MHz) Test Date : July 10, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2402(F)	V	97.58	77.14	114	94	-16.42	-16.86
4804	V	65.12	45.23	74	54	-8.88	-8.77
7206	V	64.26	44.21	74	54	-9.74	-9.79
9608	V	63.14	43.25	74	54	-10.86	-10.75
12010	V	62.95	42.12	74	54	-11.05	-11.88
14412	V	61.41	41.36	74	54	-12.59	-12.64
16814	V	60.29	40.28	74	54	-13.71	-13.72
2402(F)	H	98.65	78.65	114	94	-15.35	-15.35
4804	H	65.24	45.35	74	54	-8.76	-8.65
7206	H	64.14	44.02	74	54	-9.86	-9.98
9608	H	63.95	43.14	74	54	-10.05	-10.86
12010	H	62.22	42.17	74	54	-11.78	-11.83
14412	H	61.25	41.36	74	54	-12.75	-12.64
16814	H	60.82	40.84	74	54	-13.18	-13.16

Operation Mode: GFSK (CH34: 2440MHz) Test Date : July 10, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2434(F)	V	98.22	78.41	114	94	-15.78	-15.59
4868	V	64.12	44.26	74	54	-9.88	-9.74
7302	V	63.04	43.51	74	54	-10.96	-10.49
9736	V	62.41	42.19	74	54	-11.59	-11.81
12170	V	61.36	41.25	74	54	-12.64	-12.75
14604	V	60.59	40.36	74	54	-13.41	-13.64
17038	V	59.42	39.25	74	54	-14.58	-14.75
2434(F)	H	99.41	79.51	114	94	-14.59	-14.49
4868	H	65.14	45.62	74	54	-8.86	-8.38
7302	H	64.36	44.36	74	54	-9.64	-9.64
9736	H	63.25	43.51	74	54	-10.75	-10.49
12170	H	62.14	42.84	74	54	-11.86	-11.16
14604	H	61.29	41.58	74	54	-12.71	-12.42
17038	H	60.59	40.29	74	54	-13.41	-13.71

Operation Mode: GFSK (CH69: 2479MHz) Test Date : July 10, 2017

Freq. (MHz)	Ant. Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Margin(dB)	
		PK	AV	PK	AV	PK	AV
2472(F)	V	97.05	77.26	114	94	-16.95	-16.74
4944	V	64.15	44.14	74	54	-9.85	-9.86
7416	V	63.25	43.95	74	54	-10.75	-10.05
9888	V	61.26	41.24	74	54	-12.74	-12.76
12360	V	60.32	40.18	74	54	-13.68	-13.82
14832	V	59.52	39.61	74	54	-14.48	-14.39
17304	V	58.63	38.41	74	54	-15.37	-15.59
2472(F)	H	98.62	78.25	114	94	-15.38	-15.75
4944	H	65.14	45.25	74	54	-8.86	-8.75
7416	H	64.26	44.63	74	54	-9.74	-9.37
9888	H	63.25	43.51	74	54	-10.75	-10.49
12360	H	62.94	42.14	74	54	-11.06	-11.86
14832	H	61.11	41.25	74	54	-12.89	-12.75
17304	H	60.24	40.39	74	54	-13.76	-13.61

8.5 Radiated Measurement Photos:



9. Antenna requirement

9.1 Limit

Except for special regulations, the Low-power Radio-Frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacture may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

9.2 Result

The EUT's antenna, permanent attached antenna, used a Internal antenna, The antenna's gain is 1 dBi and meets the requirement.

APPENDIX I (Photos of EUT)



