

Produkte
Products



Prüfbericht - Nr.: 14049619 001			Seite 1 von 15 Page 1 of 15		
<i>Test Report No.:</i>					
Auftraggeber: <i>Client:</i>		SHANTOU PENGXIANG TOYS CO., LTD Pengxiang Building, Ganxia Road, Bumei Industrial Zone, Chenghai District, Shantou, China			
Gegenstand der Prüfung: <i>Test Item:</i>		Short Range Device - Radio Control Toy Transmitter (2.4GHz)			
Bezeichnung: <i>Identification:</i>	Please refer to "Models" on page 6	Serien-Nr.: <i>Serial No.:</i>	Engineering sample		
Wareneingangs-Nr.: <i>Receipt No.:</i>	A000623094-001	Eingangsdatum: <i>Date of Receipt:</i>	28.06.2017		
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of test item at delivery:</i>		Test sample is not damaged and suitable for testing.			
Prüfört: <i>Testing Location:</i>		TÜV Rheinland Hong Kong Ltd. 3/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong Global United Technology Services Co., Ltd. 2nd Floor, Block No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, China			
Prüfgrundlage: <i>Test Specification:</i>		FCC Part 15 Subpart C ANSI C63.10-2013			
Prüfergebnis: <i>Test Results:</i>		Das vorstehend beschriebene Gerät wurde geprüft und entspricht oben genannter Prüfgrundlage. The above mentioned product was tested and passed .			
Prüflaboratorium: <i>Testing Laboratory:</i>		TÜV Rheinland Hong Kong Ltd. 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong			
geprüft/ tested by:		kontrolliert/ reviewed by:			
11.07.2017 Kevin Wong Project Manager 		11.07.2017 Benny Lau Senior Project Manager 			
Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name/Stellung <i>Name/Position</i>	Unterschrift <i>Signature</i>
Sonstiges: Other Aspects		FCC ID: 2AM0Z075485806279			
Abkürzungen:		Abbreviations:			
P(ass) = entspricht Prüfgrundlage F(ail) = entspricht nicht Prüfgrundlage N/A = nicht anwendbar N/T = nicht getestet		P(ass) = passed F(ail) = failed N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any safety mark on this or similar products.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information.....	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	5
Related Submittal(s) Grants	5
Remark	5
Test Set-up and Operation Mode.....	6
Principle of Configuration Selection	6
Test Operation and Test Software	6
Special Accessories and Auxiliary Equipment.....	6
Countermeasures to achieve EMC Compliance.....	6
Test Methodology	7
Radiated Emission	7
Field Strength Calculation.....	7
Test Setup Diagram	8
List of Test and Measurement Instruments.....	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C	11
FCC 15.203 – Antenna Requirement 1.....	Pass 11
FCC 15.204 – Antenna Requirement 2.....	Pass 11
FCC 15.207 – Conducted Emission on AC Mains	N/A 11
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass 12
Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics.....	Pass 13
Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission	Pass 15
Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	2 pages
Appendix 3 – EUT External Photos	3 pages
Appendix 4 – EUT Internal Photos	8 pages

Appendix 5 – RF exposure information..... 2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2416 - 2480MHz
Type of modulation	GFSK
Number of channels	65
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nom} : 4.5 V

Product function and intended use

The equipment under test (EUT) is a radio control transmitter operating at 2.4GHz. It is powered by battery only.

The manufacturer declares that the models as listed below table are all identical in electrical, PCB layout and components used except the model number and packaging only.

FCC ID: 2AM0Z075485806279

Models	Product description
S757, S767, S777, S787, S797, 9600, 9601, 9602, 9603, 9604, 9605, 9600-1, 9601-1, 9602-1, 9603-1, 9604-1, 9605-1, S626, S636, S656, S666, S676, S686, S696, 9300, 9301, 9301-1, 9302, 9303, 9303-1, 9304, 9305, S727, S737, 9500, 9501, 9502, 9503, 9504, 9505, 9200, 9201, 9201-1, 9202, 9203, 9203-1, 9204, 9205, 9800, 9801, 9801-1, 9802, 9803, 9803-1, 9804, 9805, 9900, 9901, 9901-1, 9902, 9903, 9903-1, 9904, 9905	Short Range Device - Radio Control Toy Transmitter (2.4GHz)

Submitted documents

Circuit Diagram
 Block Diagram
 Bill of material
 Technical Description
 User manual
 Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.
- Normal operation mode

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- A test mode sample which can transmit continuously in the lowest, middle and highest frequency channels at its maximum power was provided by the applicant..

Special Accessories and Auxiliary Equipment

The product has been tested together with the following additional accessories:

- None

Countermeasures to achieve EMC Compliance

- None

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

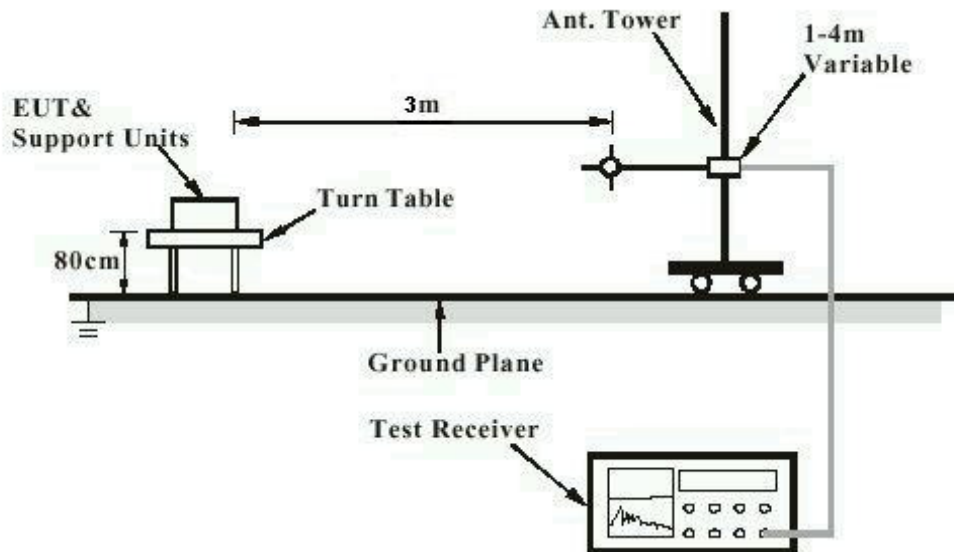

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

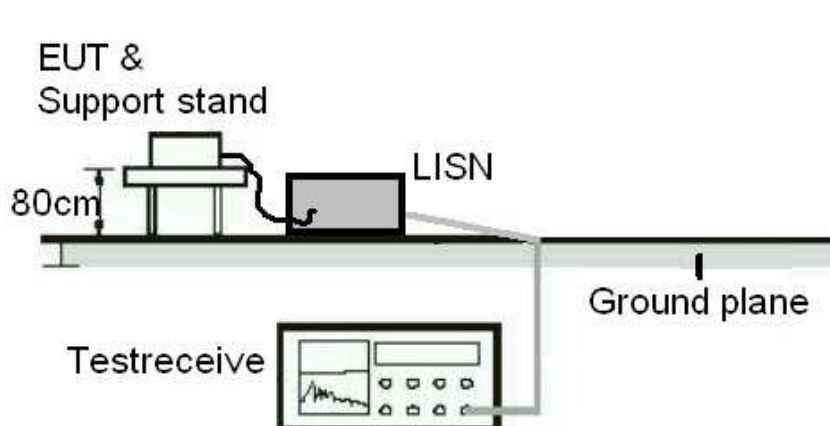

List of Test and Measurement Instruments

Global United Technology Services Co., Ltd. (Registration number: 600491)

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)*6.0(H)	03-Jul-2015	02-Jul-2018
Control Room	ZhongYu Electron	6.2(L)*2.5(W)*2.4(H)	N/A	N/A
ESU EMI Test Receiver	R&S	ESU26	26-Jun-2017	25-Jun-2018
Loop Antenna	Zhinan	ZN30900A	26-Jun-2017	25-Jun-2018
BiConiLog Antenna	SCHWARZBECK	VULB9163	26-Jun-2017	25-Jun-2018
Double-ridged horn antenna	SCHWARZBECK	9120D	26-Jun-2017	25-Jun-2018
Horn Antenna	ETS-LINDGREN	3160-09	26-Jun-2017	25-Jun-2018
RF Amplifier	HP	8347A	26-Jun-2017	25-Jun-2018
RF Amplifier	HP	8349B	26-Jun-2017	25-Jun-2018
Broadband Preamplifier	SCHWARZBECK	BBV9718	26-Jun-2017	25-Jun-2018
EMI Test Software	AUDIX	E3	N/A	N/A
Coaxial cable	GTS	N/A	N/A	N/A
Coaxial Cable	GTS	N/A	N/A	N/A
Thermo meter	N/A	N/A	26-Jun-2017	25-Jun-2018

TÜV Rheinland Hong Kong Ltd

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	15-Oct-16	15-Oct-2017

Measurement Uncertainty

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 3.70\text{dB}$ (9kHz to 30MHz) and $\pm 4.64\text{dB}$ (30MHz to 1000MHz) and is $\pm 4.83\text{dB}$ (1GHz to 18GHz) and $\pm 5.20\text{dB}$ (18GHz to 25GHz)

The estimated combined standard uncertainty for antenna conducted emission is $\pm 2.1\text{dB}$

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement: No antenna other than that furnished by the responsible party shall be used with the device		
Results:	a) Antenna type:	Fixed Integral antenna
	b) Manufacturer and model no:	N/A
	c) Peak Gain:	0dBi
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement: An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.		
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		N/A
There is no AC power input or output ports on the EUT.		

Subclause 15.215 (c) – 20 dB Bandwidth				Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Supply voltage : 4.5VDC, 3 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%				
Requirement: The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.				
Results: Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.				
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2416	2415.300	> 2400	2416.880	< 2483.5
2448	2447.300	> 2400	2448.790	< 2483.5
2480	2479.290	> 2400	2480.680	< 2483.5

Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics			Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 4.5VDC, 3 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%			
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.			
Results: PASS.			
Fundamental Frequency 2416MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2415.900	87.41	114.0 / PK	
2415.900	79.05	94.0 / AV	
Fundamental Frequency 2416MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2415.880	89.82	114.0 / PK	
2415.880	78.60	94.0 / AV	
Harmonics 2416MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4837.650	49.61	74.0 / PK	
4837.650	38.18	54.0 / AV	
Harmonics 2416MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4832.675	53.41	74.0 / PK	
4832.675	36.71	54.0 / AV	
7247.350	54.51	74.0 / PK	
7247.350	42.42	54.0 / AV	
Fundamental Frequency 2448MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2447.840	86.51	114.0 / PK	
2447.840	78.13	94.0 / AV	
Fundamental Frequency 2448MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2447.920	89.78	114.0 / PK	
2447.920	82.54	94.0 / AV	

Harmonics 2448MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4896.130	48.40	74.0 / PK	4896.130	37.36	54.0 / AV
Harmonics 2448MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4895.420	54.72	74.0 / PK	4895.520	43.96	54.0 / AV
7343.350	58.08	74.0 / PK	7343.350	44.97	54.0 / AV
Fundamental Frequency 2480MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2479.800	85.06	114.0 / PK	2479.800	76.59	94.0 / AV
Fundamental Frequency 2480MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2479.970	88.46	114.0 / PK	2479.970	81.17	94.0 / AV
Harmonics 2480MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4959.295	50.05	74.0 / PK	4959.295	36.78	54.0 / AV
Harmonics 2480MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4959.920	55.79	74.0 / PK	4959.920	41.18	54.0 / AV
7439.820	54.61	74.0 / PK	7439.820	42.46	54.0 / AV

Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Mode of operation : Tx mode Port of testing : Enclosure Detector : Peak Frequency range : 9kHz – 25GHz Supply voltage : 6.0VDC, 4 x 1.5V AA size new battery Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency 2416MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	45.53	74.0 / PK
2400.000	24.27	54.0 / AV
Tx frequency 2416MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	49.93	74.0 / PK
2400.000	24.27	54.0 / AV
Tx frequency 2448MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2448MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency 2480MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	58.47	74.0 / PK
2483.500	29.17	54.0 / AV
Tx frequency 2480MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	60.58	74.0 / PK
2483.500	29.90	54.0 / AV