



FCC RADIO TEST REPORT

FCC ID : 2AMP5K60C2
Equipment : 60 GHz Outdoor Distribution System
Brand Name : Kwikbit
Model Name : K60c+
Applicant : Kwikbit Inc.
7801 E. Bush Lake Rd Suite 300 Minneapolis
Minnesota United States 55439
Manufacturer : Kwikbit Inc.
7801 E. Bush Lake Rd Suite 300 Minneapolis
Minnesota United States 55439
Standard : 47 CFR FCC Part 15.255

The product was received on Oct. 27, 2020, and testing was started from Oct. 30, 2020 and completed on Jan. 28, 2021. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 47 CFR FCC Part 15.255 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Sam Chen

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	7
1.3 Testing Location	7
2 Test Configuration of Equipment under Test.....	8
2.1 Parameters of Test Software Setting	8
2.2 Conformance Tests and Related Test Frequencies.....	8
2.3 EUT Operation during Test	8
2.4 Accessories	8
2.5 Support Equipment.....	9
2.6 Far Field Boundary Calculations	10
2.7 Test Setup Diagram	11
3 Transmitter Test Result	14
3.1 AC Power Conducted Emissions	14
3.2 Occupied Bandwidth	19
3.3 EIRP Power	25
3.4 Peak Conducted Power.....	28
3.5 Transmitter Spurious Emissions.....	30
3.6 Frequency Stability	44
4 Test Equipment and Calibration Data	46
5 Measurement Uncertainty	48

Appendix A. Test Photos

Photographs of EUT v01



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Temp.late No.: CB-A9_1 Ver1.2



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.207	AC Power Conducted Emissions	PASS	-
3.2	15.255(e)	Occupied Bandwidth	PASS	-
3.3	15.255(c)	EIRP Power	PASS	-
3.4	15.255(c)	Peak Conducted Power	PASS	-
3.5	15.255(d)	Transmitter Spurious Emissions	PASS	-
3.6	15.255(f)	Frequency Stability	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Reviewed by: Sam Chen

Report Producer: Wendy Pan



1 General Description

1.1 Information

1.1.1 The Channel Plan(s)

Frequency Range	57-71 GHz
The Channel Plan(s)	Channel 1: 58.32 GHz Channel 2: 60.48 GHz Channel 3: 62.64 GHz

1.1.2 Modulation

IEEE 802.11ad Modulation Scheme

MCS Index	Modulation	Code rate	Data rate (Mbit/s)
1	$\pi/2$ -BPSK	1/2	310
2	$\pi/2$ -BPSK	1/2	620
3	$\pi/2$ -BPSK	5/8	775
4	$\pi/2$ -BPSK	3/4	930
5	$\pi/2$ -BPSK	13/16	1007
6	$\pi/2$ -QPSK	1/2	1240
7	$\pi/2$ -QPSK	5/8	1550
8	$\pi/2$ -QPSK	3/4	1860

1.1.3 Antenna Information

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	WNC	XEAG-V01	Integrated beamforming antenna	I-PEX	24.9

Note: The above information was declared by manufacturer.

**1.1.4 Operating Conditions**

Operating Conditions	
☐ -20 °C to +50 °C	
☐ 0 °C to +40 °C	
☒ Other: -30 ~ 55	
EUT Power Type	From PoE
Test Software Version	QCART (Version3.0.298.0)
Supply Voltage	☒ AC State AC voltage 110 V
Supply Voltage	☐ DC State DC voltage V

1.1.5 Equipment Use Condition

Equipment Use Condition
☐ Fixed field disturbance sensors at 61-61.5GHz
☐ Except fixed field disturbance sensors at 61-61.5GHz
☒ Except fixed field disturbance sensors

1.1.6 User Condition

Intended Operation
☐ Indoor
☒ Outdoor (except outdoor fixed Point to Point)
☐ Outdoor fixed Point to Point

Note: The above information was declared by manufacturer.

1.1.7 Duty Cycle

Duty Cycle	Duty Cycle Factor (dB)
100	0



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15.255
- ♦ ANSI C63.10-2013 Section 9. "Procedures for testing millimeter-wave systems"

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ FCC KDB 414788 D01 v01r01

1.3 Testing Location

Testing Location				
☐	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	TEL : 886-3-327-3456	FAX : 886-3-327-0973
☒	JHUBEI	ADD : No.8, Ln. 724, Bo'ai St., Zhubei City, Hsinchu County 302, Taiwan (R.O.C.)	TEL : 886-3-656-9065	FAX : 886-3-656-9085

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
AC Conduction	CO01-CB	Ryo Fan	23~24 / 59~62	Jan. 28, 2021
Radiated< 1GHz	03CH04-CB	Eason Chen	22.1-23.2 / 56-58	Nov. 17, 2020 ~ Jan. 26, 2021
Radiated 1-40GHz	03CH03-CB	Jay Luo	22.5-24.7 / 44-47	Oct. 30, 2020
Radiated (Other test items)	03CH03-CB	Jay Luo	22.5-24.7 / 44-47	Dec. 16, 2020
RF Radiated	TH03-CB	Jay Luo	21.2-23.1 / 56-60	Dec. 17, 2020

Test site Designation No. TW0006 with FCC.

Test site registered number IC 4086D with Industry Canada.



2 Test Configuration of Equipment under Test

2.1 Parameters of Test Software Setting

Channel Plan (GHz)	Setting
58.32	9/4
60.48	9/4
62.64	9/4

2.2 Conformance Tests and Related Test Frequencies

Test Item	Test Frequencies (GHz)
AC Power Conducted Emissions	Random Frequency
Occupied Bandwidth	58.32 / 60.48 / 62.64
EIRP Power	58.32 / 60.48 / 62.64
Peak Conducted Power	58.32 / 60.48 / 62.64
Transmitter Spurious Emissions (below 1 GHz)	Random Frequency
Transmitter Spurious Emissions (1 GHz-40 GHz)	58.32 / 60.48 / 62.64
Transmitter Spurious Emissions (above 40 GHz)	58.32 / 60.48 / 62.64
Frequency Stability	60.48

Note: The EUT can only use Y axis position.

2.3 EUT Operation during Test

During the test, executed the test program to control the EUT continuously transmit RF signal.

2.4 Accessories

Accessories			
Equipment Name	Brand Name	Model Name	Rating
PoE	RISUNIC	RP019-4800250USG	Input: 100-240V ~ 50/60Hz, 0.5A Max Output: 48V, 0.25A



2.5 Support Equipment

For AC Conduction:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	LAN NB	DELL	E6430	N/A
B	Device NB	DELL	E6430	N/A
C	Device	Kwikbit	K60c	2AMP5K60C

For Radiated below 1GHz:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A
B	Notebook	DELL	E4300	N/A
C	Device	Kwikbit	K60c	2AMP5K60C

For Radiated above 1GHz and Frequency Stability:

Support Equipment				
No.	Equipment	Brand Name	Model Name	FCC ID
A	Notebook	DELL	E4300	N/A



2.6 Far Field Boundary Calculations

The far-field boundary is given as:

$$\text{far field} = (2 * L^2) / \lambda$$


where:


L = Largest Antenna Dimension, including the reflector, in meters

λ = wavelength in meters


Far Field (m)				
Frequency (GHz)	L (m)	Lambda (m)	d(Far Field) (m)	d(Far Field) (cm)
58.32	0.05	0.0051440	0.972	97.20
60.48	0.05	0.0049603	1.008	100.80
62.64	0.05	0.0047893	1.044	104.40

2.7 Test Setup Diagram

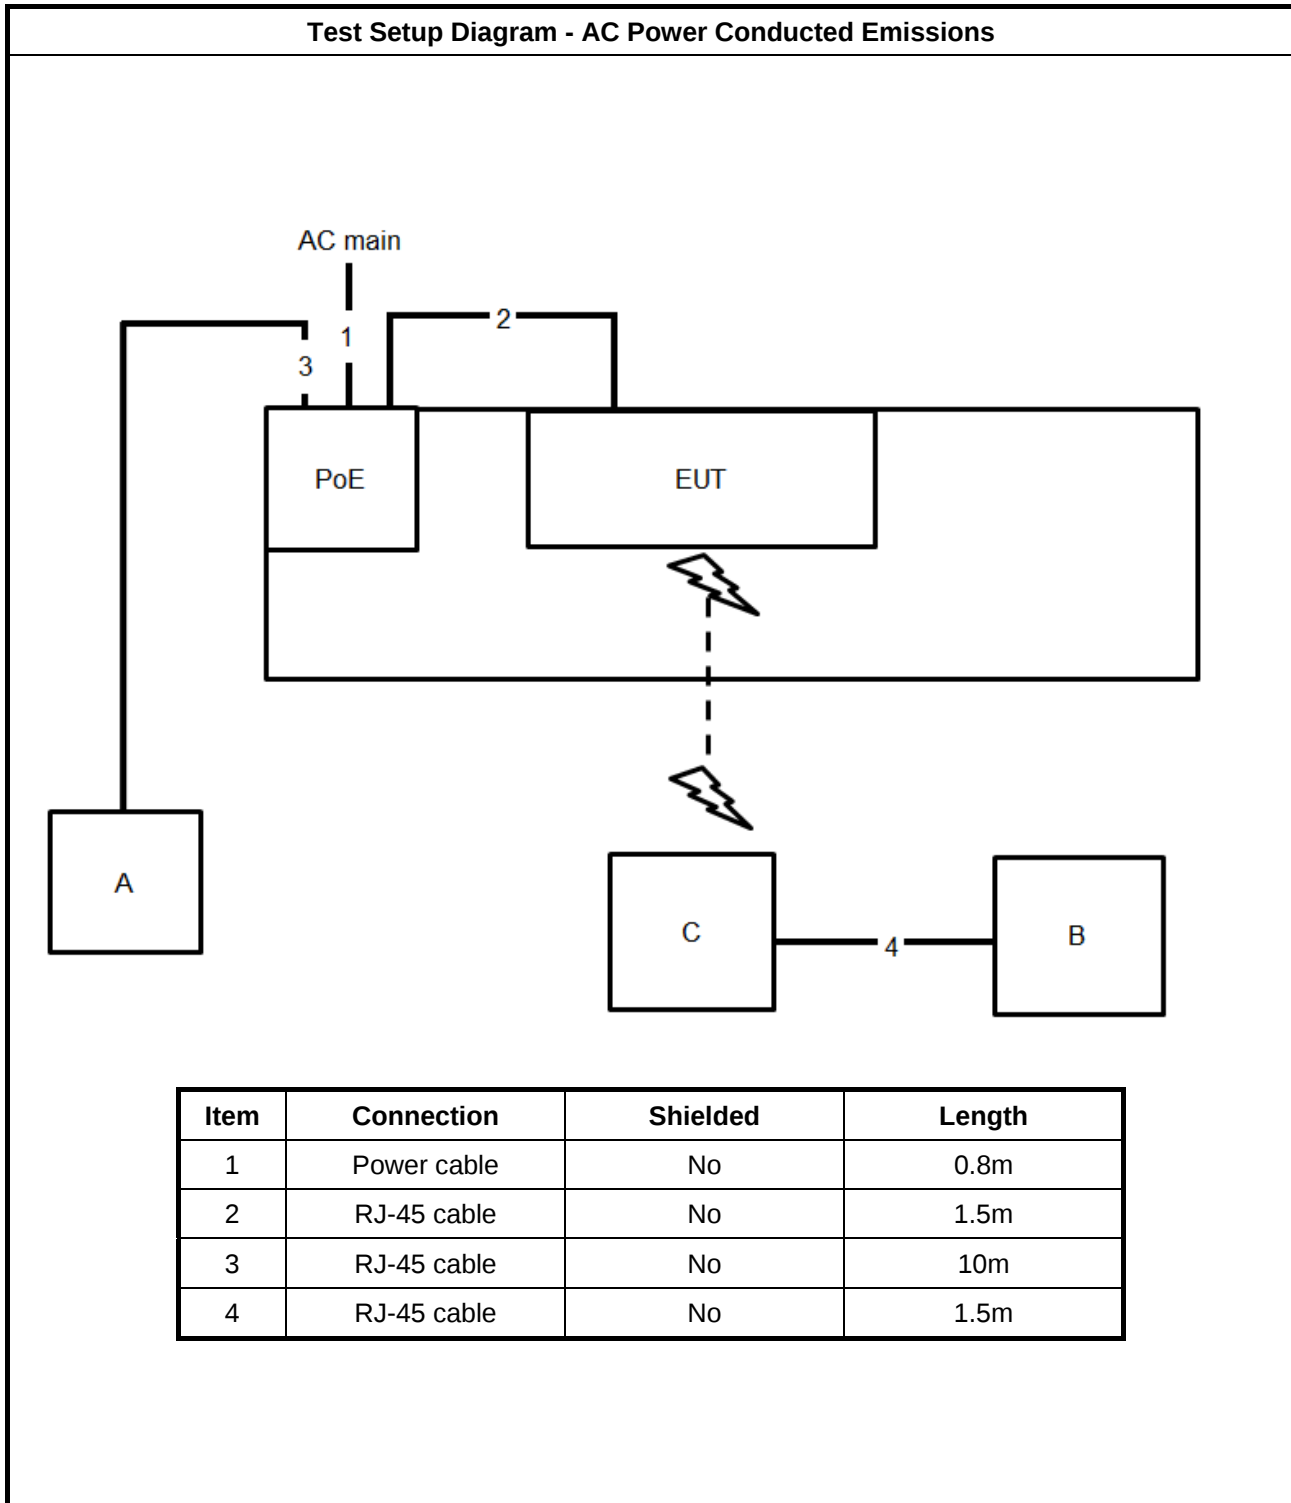

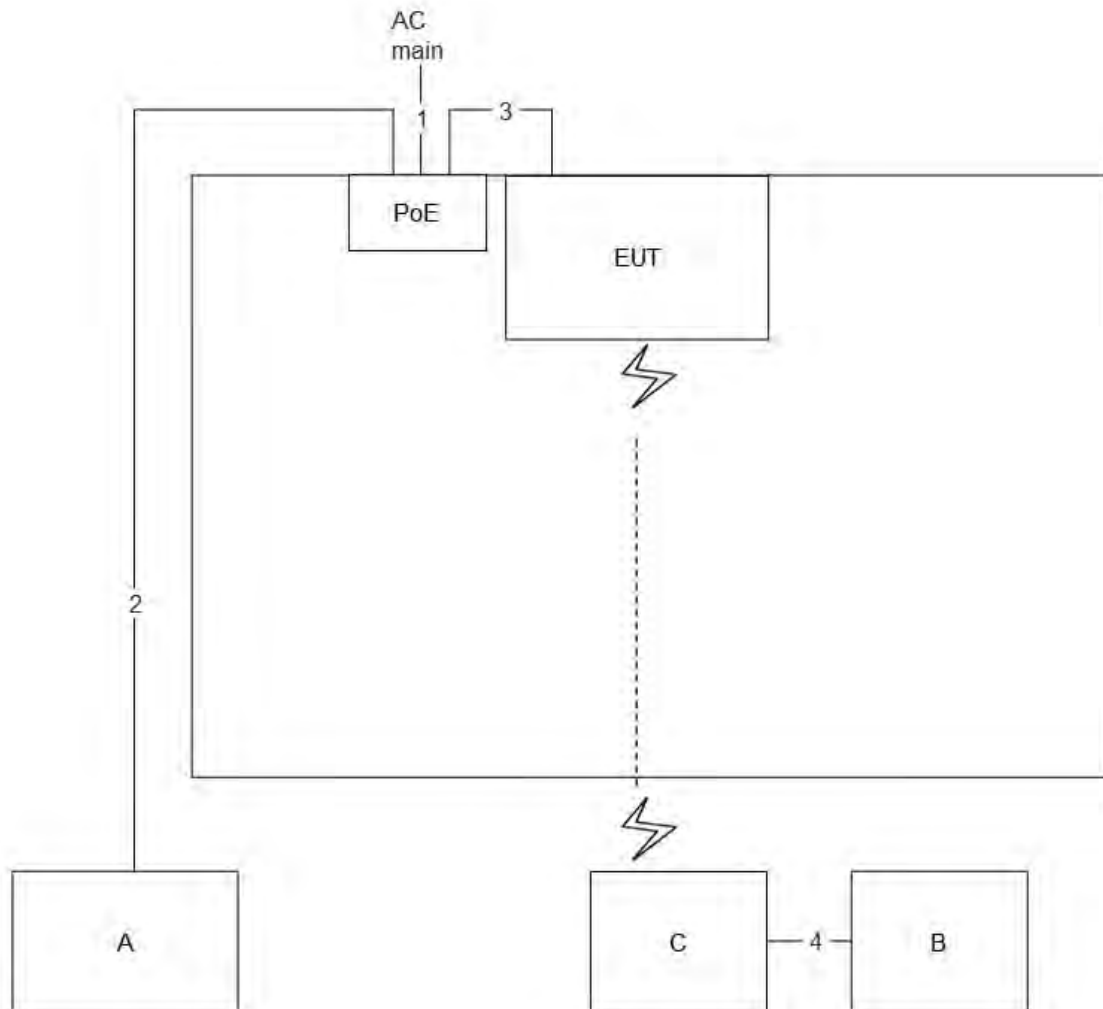Test Setup Diagram - Transmitter Spurious Emissions below 1 GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.8m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m
4	RJ-45 cable	No	1.5m

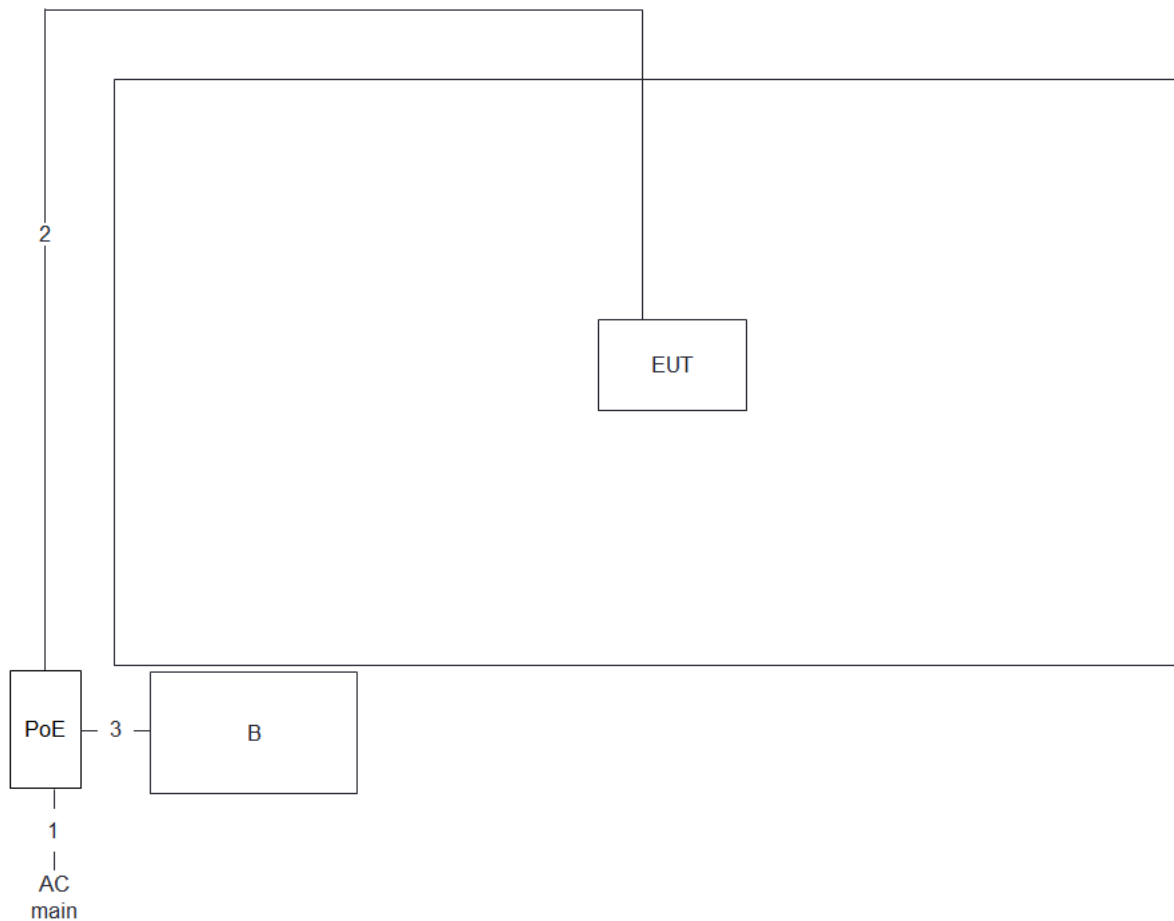Test Setup Diagram - Transmitter Spurious Emissions above 1 GHz


Item	Connection	Shielded	Length
1	Power cable	No	1.5m
2	RJ-45 cable	No	10m
3	RJ-45 cable	No	1.5m



3 Transmitter Test Result

3.1 AC Power Conducted Emissions

3.1.1 Limit of AC Power Conducted Emissions

AC Power Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments


Refer a measuring instruments list in this test report.

3.1.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 6.2.

3.1.4 Test Setup

AC Power Conducted Emissions

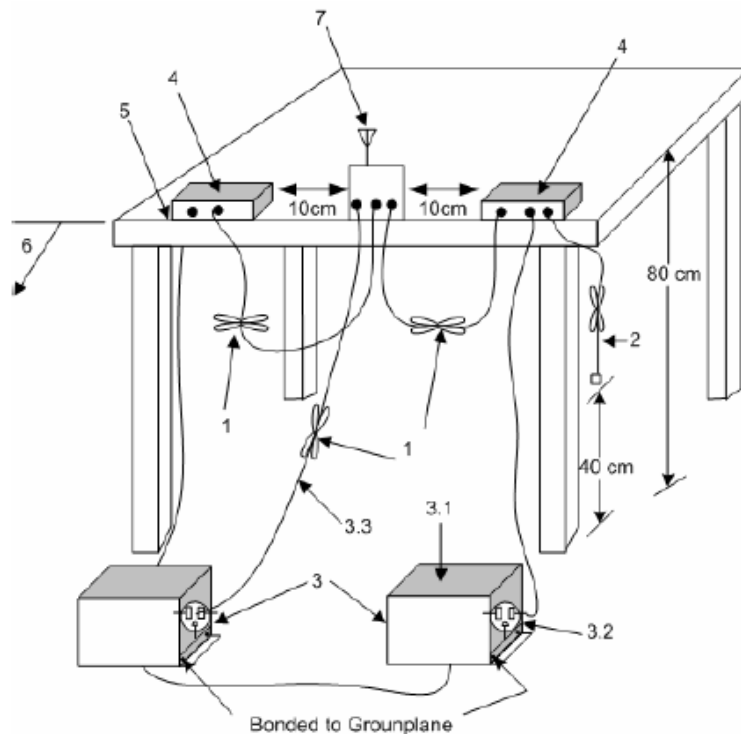

- 1—Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long.
- 2—The I/O cables that are not connected to an accessory shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- 3—EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω loads. LISN may be placed on top of, or immediately beneath, reference ground plane.
- 3.1—All other equipment powered from additional LISN(s).
- 3.2—A multiple-outlet strip may be used for multiple power cords of non-EUT equipment.
- 3.3—LISN at least 80 cm from nearest part of EUT chassis.
- 4—Non-EUT components of EUT system being tested.
- 5—Rear of EUT, including peripherals, shall all be aligned and flush with edge of tabletop.
- 6—Edge of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.
- 7—Antenna can be integral or detachable. If detachable, then the antenna shall be attached for this test.

3.1.5 Measurement Results Calculation

The measured Level is calculated using:

- a. Corrected Reading: LISN Factor (LISN) + Attenuator (AT/AUX) + Cable Loss (CL) + Read Level (Raw) = Level
- b. Margin = -Limit + Level



3.1.6 Test Result of AC Power Conducted Emissions

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.2.3

NOTE 1: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes. If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.12 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing.


NOTE 2: ">20dB" means the tables in this clause should only list values of spurious emissions that exceed the level of 20 dB below the applicable limit, see ANSI C63.4, clause 10.1.8.1.



Phase	Line	Configuration	Normal Link
-------	------	---------------	-------------

Mode 1

28/01/2021

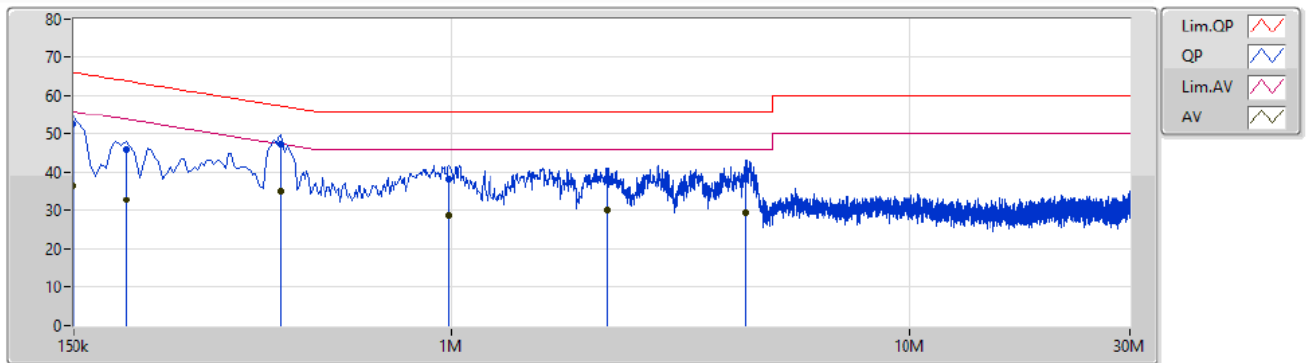

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	52.38	66.00	-13.62	9.89	Line	-	42.49	0.05	0.03	9.81			
AV	150k	36.56	56.00	-19.44	9.89	Line	-	26.67	0.05	0.03	9.81			
QP	195k	46.03	63.82	-17.79	9.89	Line	-	36.14	0.04	0.03	9.82			
AV	195k	32.80	53.82	-21.02	9.89	Line	-	22.91	0.04	0.03	9.82			
QP	424.5k	47.07	57.36	-10.29	9.90	Line	"Worst"	37.17	0.04	0.03	9.83			
AV	424.5k	35.11	47.36	-12.25	9.90	Line	-	25.21	0.04	0.03	9.83			
QP	987k	38.17	56.00	-17.83	9.92	Line	-	28.25	0.05	0.04	9.83			
AV	987k	28.50	46.00	-17.50	9.92	Line	-	18.58	0.05	0.04	9.83			
QP	2.189M	38.04	56.00	-17.96	10.00	Line	-	28.04	0.06	0.08	9.86			
AV	2.189M	30.06	46.00	-15.94	10.00	Line	-	20.06	0.06	0.08	9.86			
QP	4.394M	38.69	56.00	-17.31	10.08	Line	-	28.61	0.10	0.13	9.85			
AV	4.394M	29.29	46.00	-16.71	10.08	Line	-	19.21	0.10	0.13	9.85			



Phase	Neutral	Configuration	Normal Link
--------------	---------	----------------------	-------------

28/01/2021



Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	150k	52.27	66.00	-13.73	9.88	Neutral	-	42.39	0.04	0.03	9.81			
AV	150k	35.26	56.00	-20.74	9.88	Neutral	-	25.38	0.04	0.03	9.81			
QP	429k	47.14	57.28	-10.14	9.90	Neutral	"Worst"	37.24	0.04	0.03	9.83			
AV	429k	35.48	47.28	-11.80	9.90	Neutral	-	25.58	0.04	0.03	9.83			
QP	987k	37.66	56.00	-18.34	9.93	Neutral	-	27.73	0.06	0.04	9.83			
AV	987k	27.93	46.00	-18.07	9.93	Neutral	-	18.00	0.06	0.04	9.83			
QP	1.608M	37.60	56.00	-18.40	9.96	Neutral	-	27.62	0.07	0.06	9.85			
AV	1.608M	28.80	46.00	-17.20	9.96	Neutral	-	18.82	0.07	0.06	9.85			
QP	2.09M	36.96	56.00	-19.04	10.00	Neutral	-	26.96	0.07	0.07	9.86			
AV	2.09M	29.05	46.00	-16.95	10.00	Neutral	-	19.05	0.07	0.07	9.86			
QP	4.214M	37.17	56.00	-18.83	10.06	Neutral	-	27.11	0.09	0.13	9.84			
AV	4.214M	27.43	46.00	-18.57	10.06	Neutral	-	17.37	0.09	0.13	9.84			



3.2 Occupied Bandwidth

3.2.1 Limit of Occupied Bandwidth

6dBc Bandwidth (see Note 1)	None
99% Occupied Bandwidth (see Note 2)	None
NOTE 1: The 6dBc bandwidth is the frequency bandwidth of the signal power at the -6 dBc points when measured with a 100 kHz resolution bandwidth. These measurements shall also be performed at normal test conditions.	
NOTE 2: The 99% occupied bandwidth is the frequency bandwidth of the signal power at the 99% channel power of occupied bandwidth when resolution bandwidth should be approximately 1 % to 5 % of the occupied bandwidth (OBW). These measurements shall also be performed at normal test conditions.	


3.2.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.2.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 6.9.2.

3.2.4 Test Setup

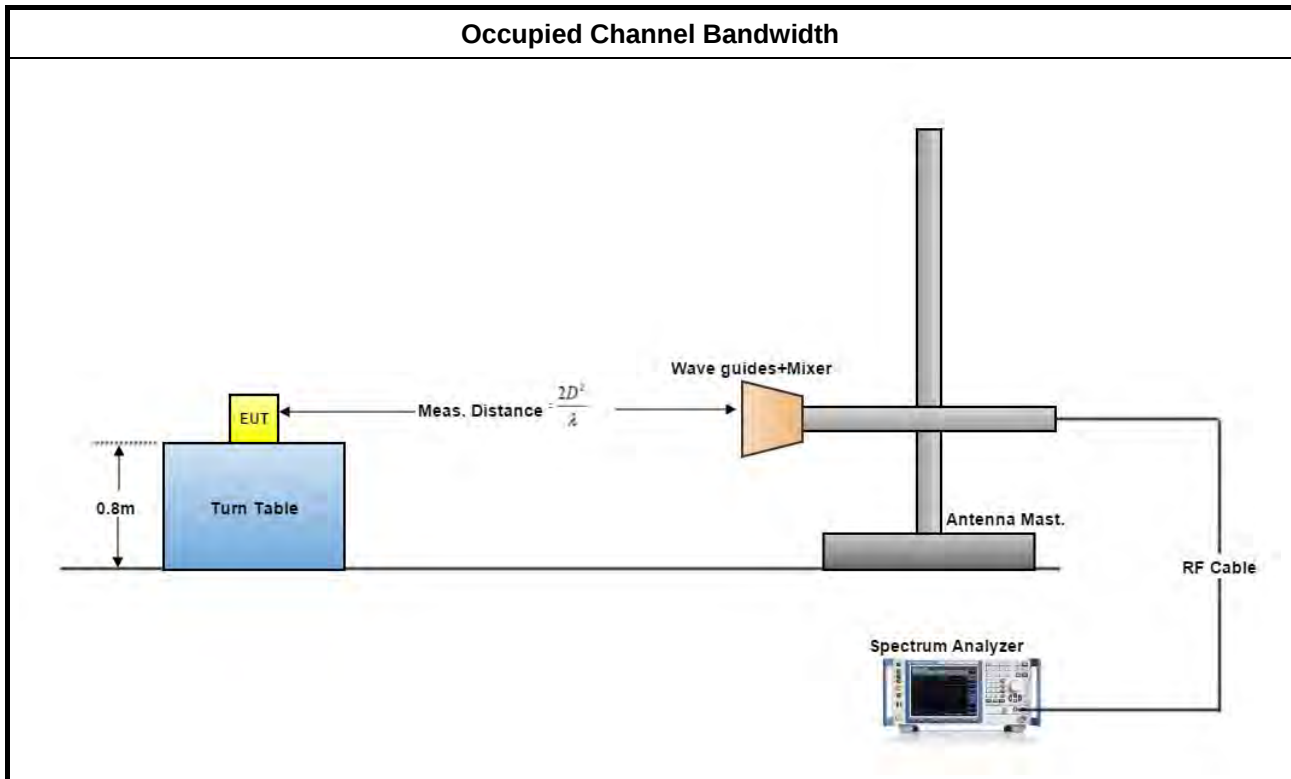




3.2.5 Test Result of Occupied Bandwidth

Test Conditions	see ANSI C63.10, clause 5.11
Test Setup	see ANSI C63.10, clause 6.9.2
NOTE: If equipment having different transmit operating modes (see test report clause 1.1.2), the measurements are uninfluenced by different transmit operating modes, may not need to be repeated for all the operating modes. Similar, if the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worse case combination to be used for the conformance testing. Refer as ANSI C63.10, clause 15, observe and record with plotted graphs or photographs the worst-case (i.e., widest) occupied bandwidth produced by these different modulation sources.	

Test Results			
Test Freq. (GHz)	6 dBc Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Limit (MHz)
58.32	1765.60	2214.18	N/A
60.48	1570.2	2221.41	N/A
62.64	2641.10	2120.11	N/A




3.2.5.1 Bandwidth Plots

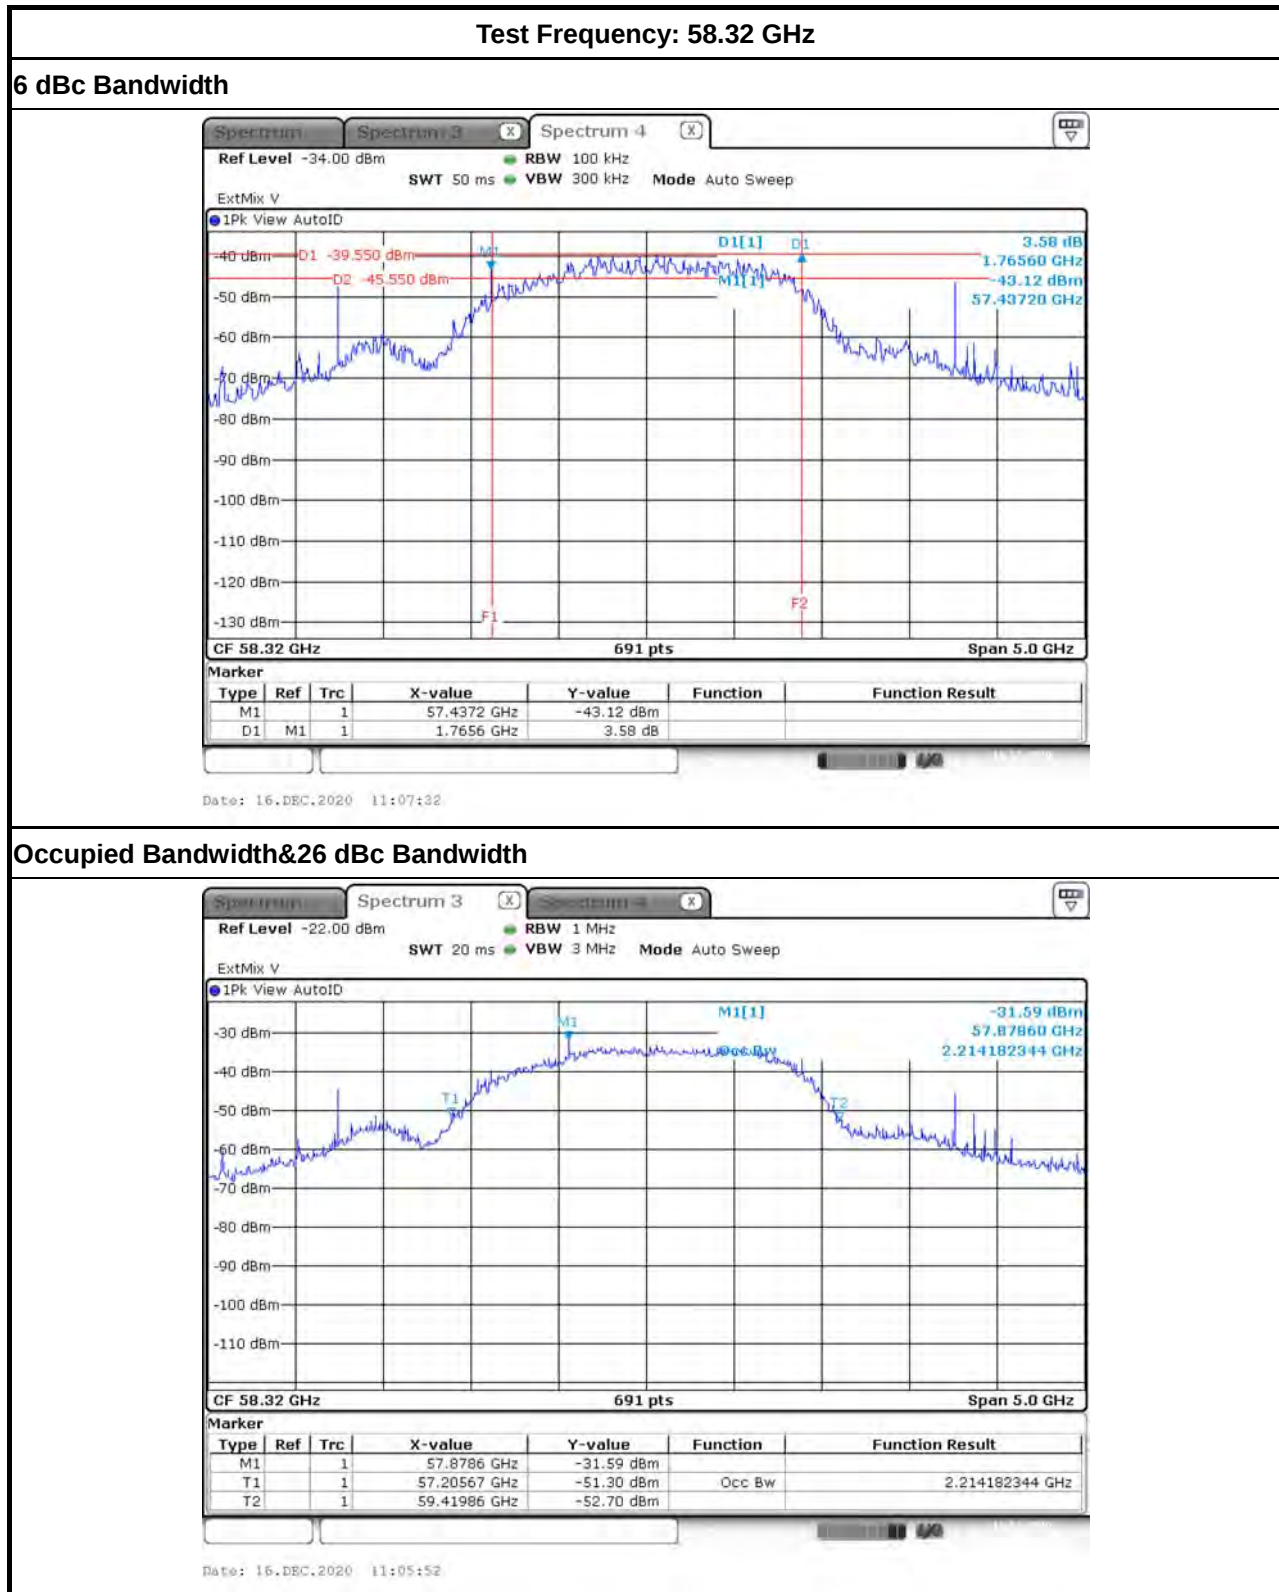




Test Frequency: 60.48 GHz

6 dBc Bandwidth

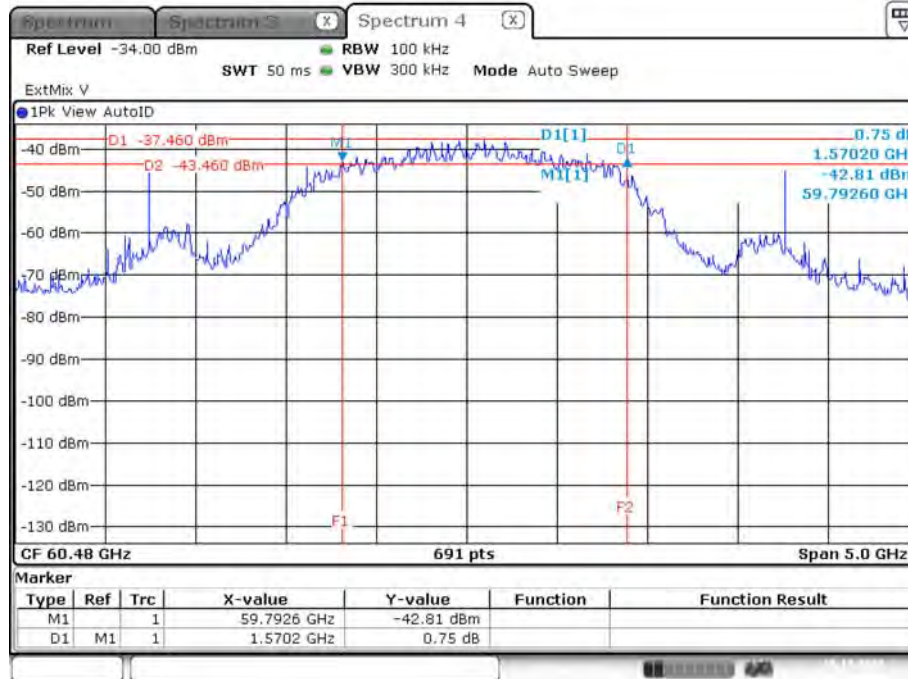


Date: 16.DEC.2020 10:32:54

Occupied Bandwidth & 26 dBc Bandwidth

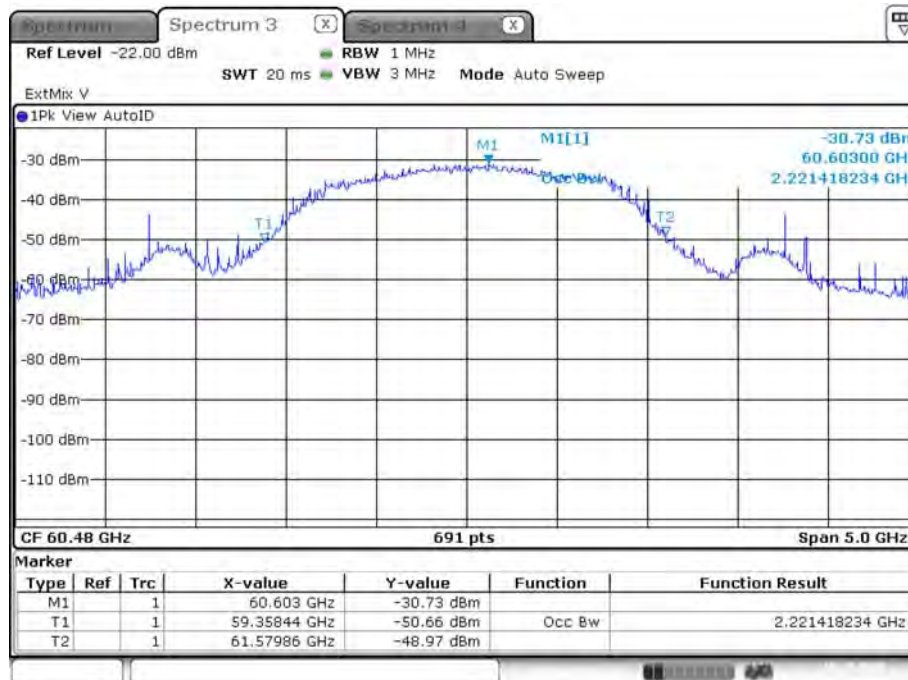

Date: 16.DEC.2020 10:29:58

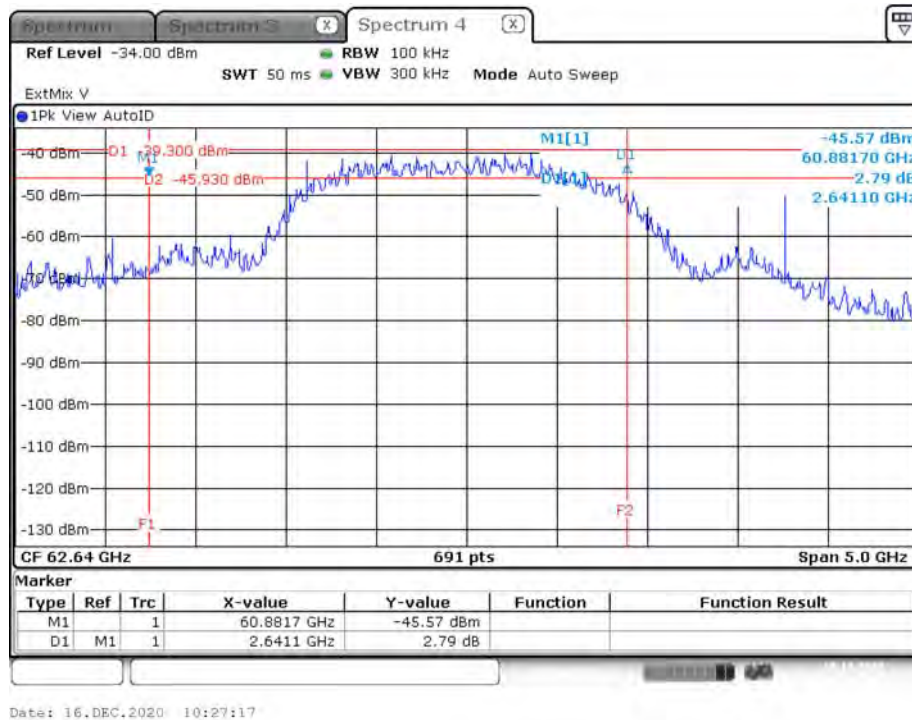**Test Frequency: 62.64 GHz****6 dBc Bandwidth****Occupied Bandwidth**



3.3 EIRP Power

3.3.1 Limit of EIRP Power

EIRP Power Limit		
Use Condition	EIRP Average Power	EIRP Peak Power
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	40 dBm	43 dBm
Fixed field disturbance sensors at outside of the band 61-61.5GHz	10 dBm	13 dBm
Except fixed field disturbance sensors at 61-61.5GHz	N/A	10 dBm
Except outdoor fixed Point to Point	40 dBm	43 dBm
Outdoor fixed Point to Point	82 dBm	85 dBm
Note: For fixed point-to-point transmitters located outdoors, the average power of any emission shall not exceed 82 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi. The peak power of any emission shall not exceed 85 dBm, and shall be reduced by 2 dB for every dB that the antenna gain is less than 51 dBi.		

NOTE: For the applicable limit, see 15.255 (c)


3.3.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.3.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013 clause 9.3 & 9.5.

3.3.4 Test Setup

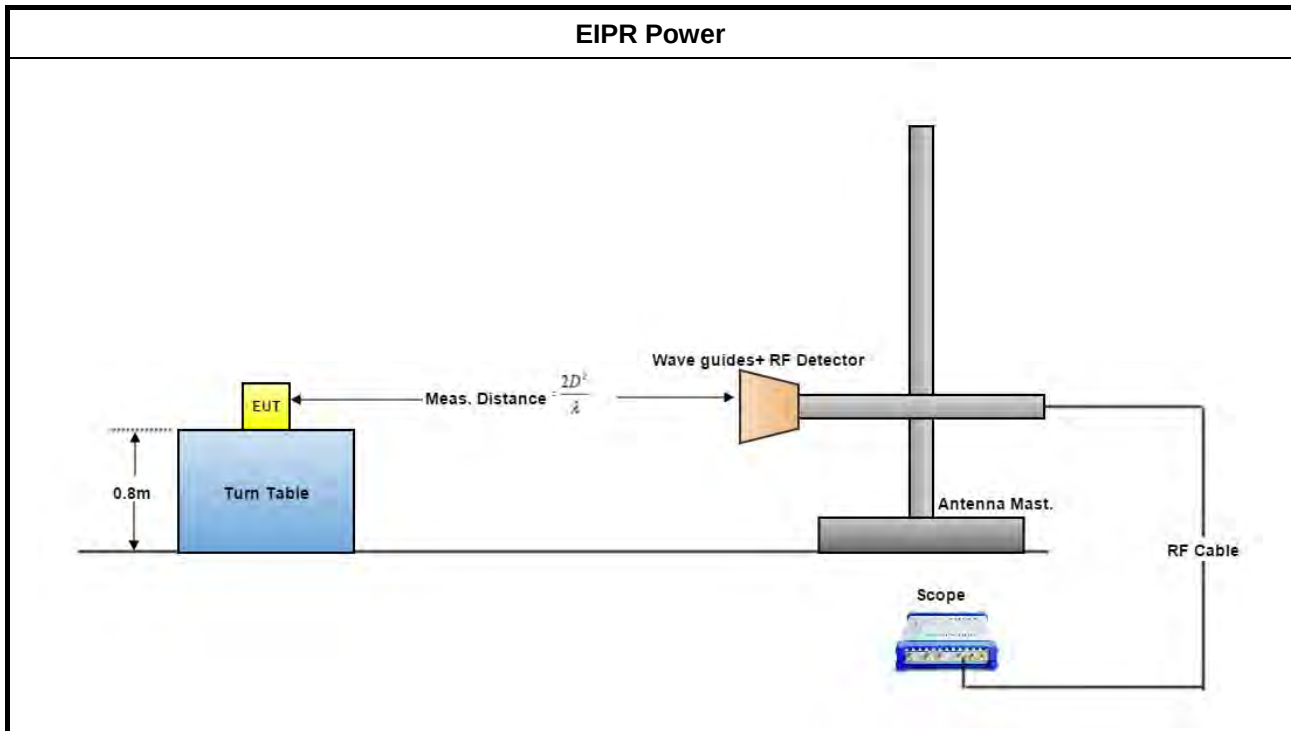

3.3.5 Test Result of EIRP Power

Test Conditions see ANSI C63.10, clause 5.11 & clause 9

Test Setup see ANSI C63.10, clause 9.11

NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.

3.3.5.1 Test Result of EIRP Power

Test Distance				1.5 m							
Test Results											
Test Freq. (GHz)	Rx Gain (dBi)	DSO (mV)		Power Measured (dBm)		E _{Meas} (dBuV/m)		EIRP (dBm)		EIRP Limit (dBm) (note 1)	
		Peak	AV	Peak	AV	Peak	AV	Peak	AV	Peak	AV
58.32	23.6	15.35	14.22	-7.77	-8.11	141.20	140.86	39.93	39.59	43	40
60.48	23.6	14.67	12.83	-7.97	-8.55	141.32	140.74	40.04	39.46	43	40
62.64	23.6	9.02	8.03	-10.02	-10.52	139.57	139.07	38.30	37.80	43	40

The measured power level is converted to EIRP using the Friis equation:

For radiated emissions, calculate the field strength (E) in dBμV/meter.

E = 126.8 – 20log(λ) + P – G

where:

E : is the field strength of the emission at the measurement distance, in dBμV/m

P : is the power measured at the output of the test antenna, in dBm

λ: is the wavelength of the emission under investigation [300/fMHz], in m

G : is the gain of the test antenna, in dBi For radiated emissions, calculate the EIRP (dBm). If the measurement was performed in the far field, calculate the EIRP.

EIRP = E-meas +20log(d-meas)-104.7

where:

EIRP : is the equivalent isotopically radiated power, in dBm

E-meas. : is the field strength of the emission at the measurement distance, in dBμV/m

d-meas. : is the measurement distance, in m

NOTE 1: For the applicable limit, see 15.255 (c)

NOTE 2: The comparison method which replaces EUT with a signal generator is used to find the correct conversion factor between “DSO(mV)” & “Power Measured(dBm)”.

3.4 Peak Conducted Power

3.4.1 Limit of Peak Conducted Power

Peak Conducted Power Limit			
Use Condition	6dBc Bandwidth	Occupied Bandwidth	Peak Conducted Power (note 1)
Fixed field disturbance sensors at within the frequency band 61-61.5GHz	> 100MHz	≤ 500MHz	500mW
	≤ 100MHz		500mW x (BW/100) (see note 2)
Fixed field disturbance sensors at outside of the band 61-61.5GHz and within 57 -71 GHz	> 100MHz	N/A	500mW
	≤ 100MHz		500mW x (BW/100) (see note 2)
Except fixed field disturbance sensors at 61-61.5GHz	N/A	> 500MHz	-10 dBm
Except outdoor fixed Point to Point,	> 100MHz	-	500mW
Outdoor fixed Point to Point	≤ 100MHz	-	500mW x (BW/100) (see note 2)
NOTE 1: For the applicable limit, see FCC 15.255(c)			
NOTE 2: BW= 6dB bandwidth (measured at RBW 100kHz)			

3.4.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.4.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.5

3.4.4 Test Result of Peak Conducted Power

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.11
NOTE: If the equipment supports different modulations and/or data rates, the measurements described in ANSI C63.10, clause 5.11 may not need to be repeated for all these modulations and data rates. Simple comparison of engineering test across all operating modes, modulations and data rates may need to be performed to define the worst case combination to be used for the conformance testing.	

3.4.4.1 Peak Conducted Power

Test Results						
Test Freq. (GHz)	EIRP (dBm)	Max. Ant. Gain (dBi)	Peak Power (dBm) (note1)	Peak Power (mW)	6dBc BW (MHz) (note2)	Peak Power Limit (mW) (note3)
58.32	39.93	24.9	15.03	31.811	1765.60	500.00
60.48	40.04	24.9	15.14	32.671	1570.20	500.00
62.64	38.30	24.9	13.40	21.860	2641.10	500.00
NOTE 1: Because EUT used for the integral antenna without temporary RF connector provided. Therefore peak conducted power is equal to EIRP power subtract the antenna gain. NOTE 2: For the 6dBc bandwidth, see test report clause 3.2.5. NOTE 3: For the applicable limit, see FCC 15.255(c) NOTE 4: For radiated emission measurements, calculate conducted transmitter output power P(cond)(dBm) $P(\text{cond}) = \text{EIRP} - G(\text{dBi})$ where: G(dBi) is gain of EUT antenna.						



3.5 Transmitter Spurious Emissions


3.5.1 Limit of Transmitter Spurious Emissions


Frequency Range	Limit
Radiated emissions below 40 GHz	15.209
Radiated emissions above 40 GHz – 200GHz	90 pW/cm ² @ 3 m (Equivalent EIRP 102 µW, -9.91dBm)
NOTE 1: For the applicable limit, see 15.255(d)	
NOTE 2: Spurious emissions shall not exceed the level of the fundamental emission.	


3.5.2 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clause 9.12

3.5.3 Test Setup

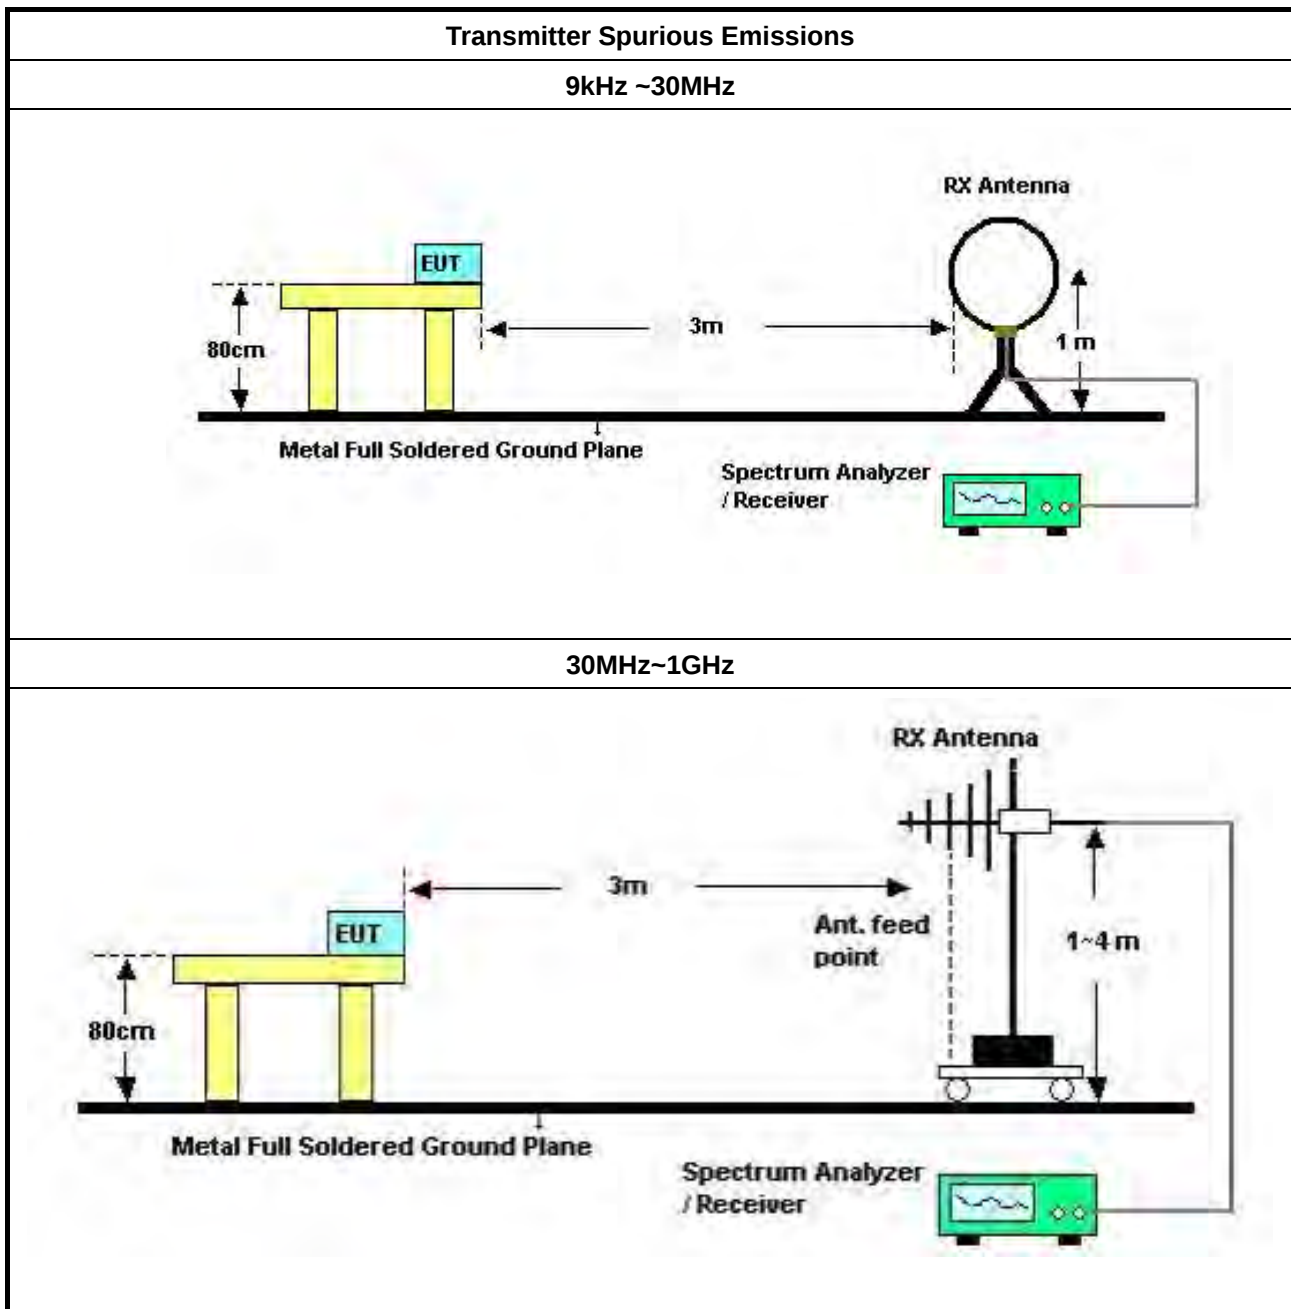

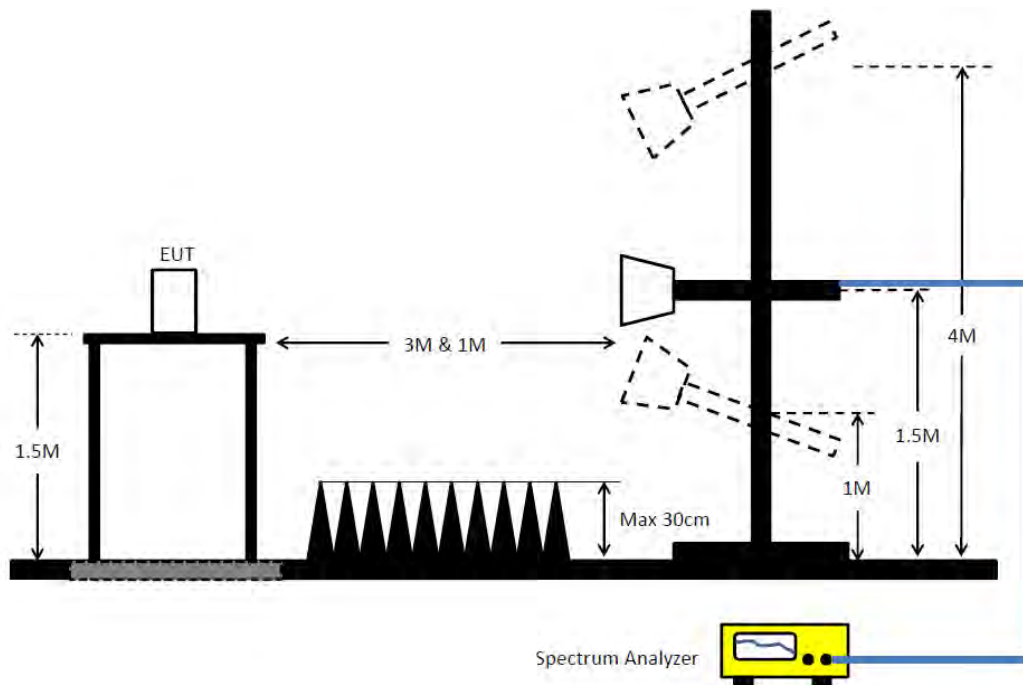

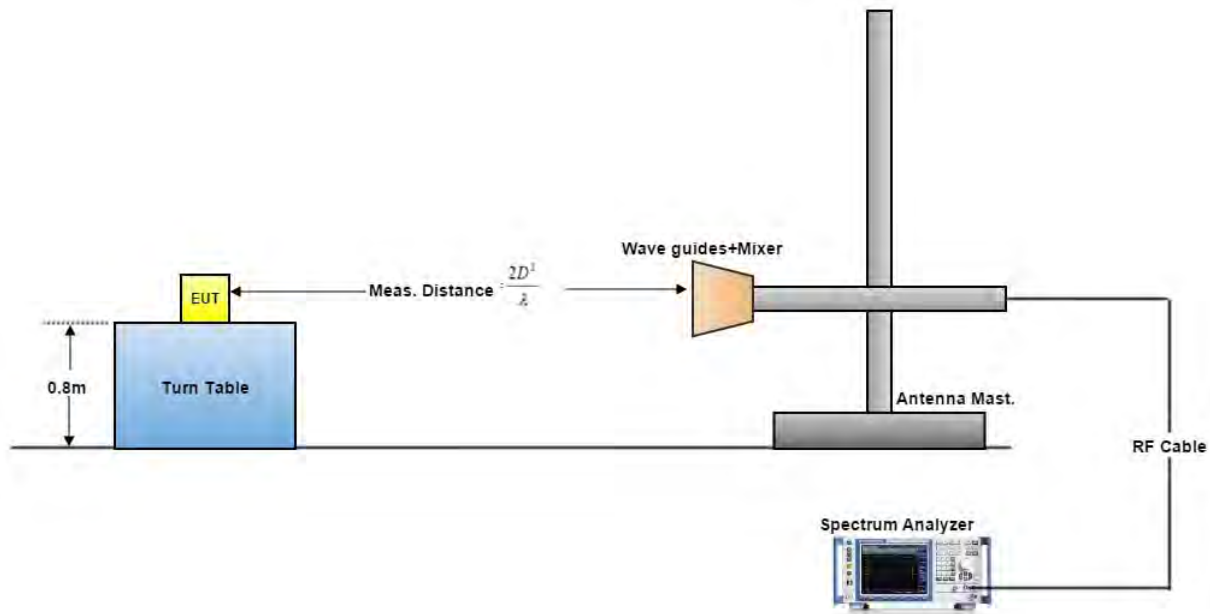Above 40GHz


A measuring distance of at 3 m shall be used for measurements at frequencies up to 15 GHz. For frequencies above 15 GHz, any suitable measuring distance may be used. The measurement distance is chosen up to far field distance, depending on the test system noise floor for detecting spurious emission signals. Then above 15 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from spec. distance (3 m) to measurement distance. Distance extrapolation factor = $20 \log (\text{spec. distance [3 m]} / \text{measurement distance [N m]})$ (dB) .The measurements described in ANSI C63.10, clause 7.8.6. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.

3.5.4 Measurement Results Calculation

The measured Level is calculated using:

For below 40GHz

Corrected Reading: Antenna factor (AF) + Cable loss (CL) + Read level (Raw) - Preamp factor (PA)(if applicable) = Level.

For above 40GHz

$\text{EIRP} = \text{Meas. Level} - \text{RX Antenna Gain} + 20 \cdot \log(4 \cdot \pi \cdot (3.14159) \cdot D / (300 / (\text{Frequency} \cdot 1000)))$



3.5.5 Test Result of Transmitter Spurious Emissions

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.12 ~ 9.13
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.5.5.1 Test Result of Transmitter Spurious Emissions (Below 30MHz)

There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to KDB414788 Radiated Test Site, and the result came out very similar.

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

The radiated emissions were investigated from 9 kHz or the lowest frequency generated within the device, up to the 10 harmonic or 40 GHz, whichever is appropriate.




3.5.5.2 Test Result of Transmitter Spurious Emissions

Test Range	30 MHz – 1000 MHz	Test Distance	3 m
Test Configuration	Normal Link		

Vertical

Mode 1

26/01/2021

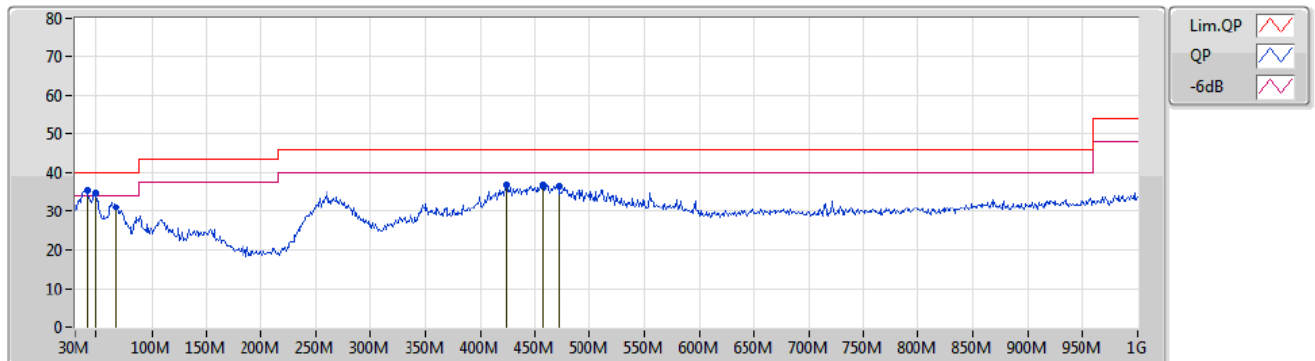


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	41.64M	35.57	40.00	-4.43	-13.21	3	Vertical	153	1.00	"Worst"	48.78	18.22	0.63	32.06
PK	49.4M	34.73	40.00	-5.27	-16.77	3	Vertical	97	1.00	-	51.50	14.61	0.70	32.08
PK	67.83M	31.14	40.00	-8.86	-19.03	3	Vertical	360	1.50	-	50.17	12.25	0.90	32.18
PK	424.79M	36.94	46.00	-9.06	-7.67	3	Vertical	154	1.50	-	44.61	22.68	2.25	32.60
PK	456.8M	36.86	46.00	-9.14	-7.44	3	Vertical	163	1.25	-	44.30	22.87	2.31	32.62
PK	471.35M	36.60	46.00	-9.40	-7.25	3	Vertical	179	1.25	-	43.85	23.16	2.34	32.75



Horizontal

Mode 1

26/01/2021

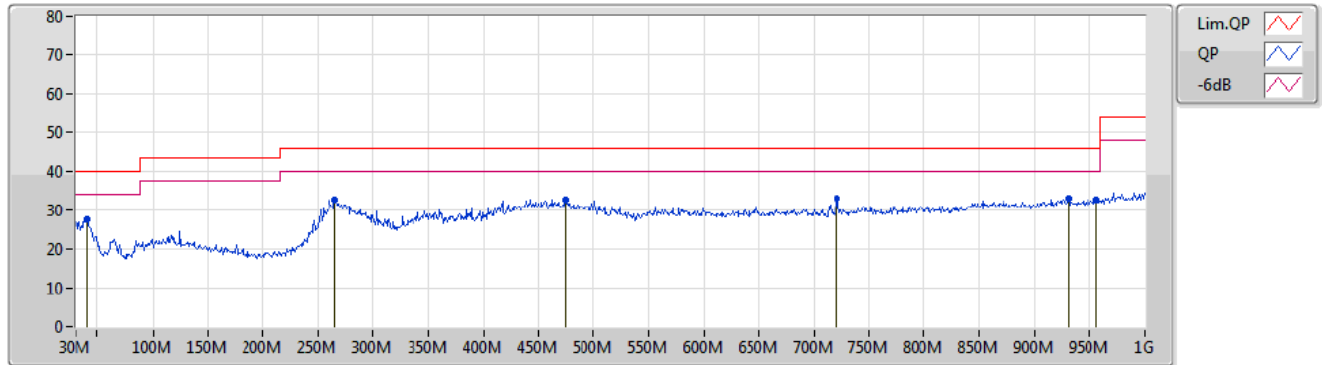

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV/m)	AF (dB/m)	CL (dB)	PA (dB)
PK	40.67M	27.60	40.00	-12.40	-12.71	3	Horizontal	95	1.25	"Worst"	40.31	18.74	0.61	32.06
PK	265.71M	32.91	46.00	-13.09	-11.55	3	Horizontal	138	1.00	-	44.46	19.15	1.76	32.46
PK	474.26M	32.90	46.00	-13.10	-7.21	3	Horizontal	292	1.00	-	40.11	23.22	2.35	32.78
PK	720.64M	33.00	46.00	-13.00	-5.51	3	Horizontal	275	1.50	-	38.51	25.05	2.94	33.50
PK	931.13M	33.22	46.00	-12.78	-2.53	3	Horizontal	338	1.50	-	35.75	26.40	3.42	32.35
PK	956.35M	32.82	46.00	-13.18	-1.81	3	Horizontal	193	1.50	-	34.63	26.67	3.51	31.99




Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	58.32		

Vertical

Mode 1

30/10/2020

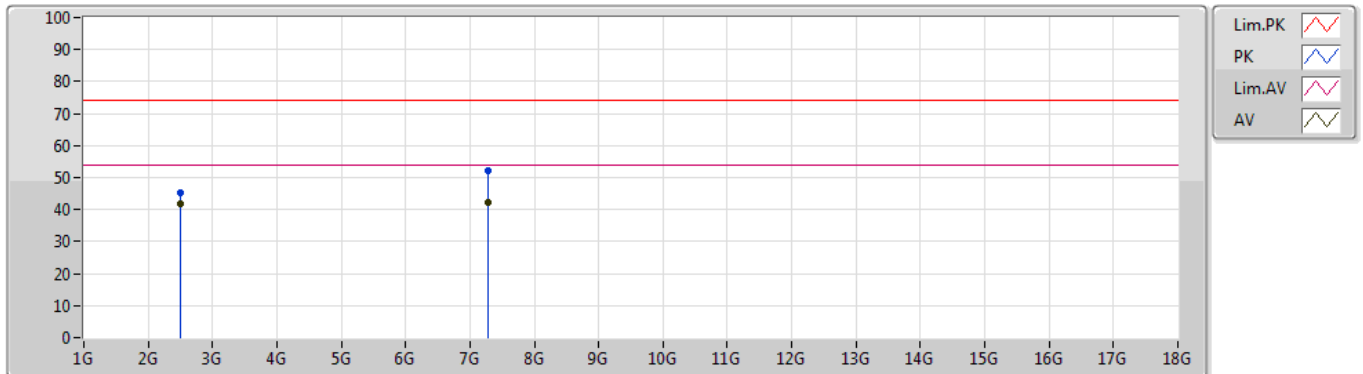


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50061G	45.43	74.00	-28.57	-1.52	3	Vertical	8	2.04	-	46.95	28.50	4.75	34.77
AV	2.50042G	41.89	54.00	-12.11	-1.52	3	Vertical	8	2.04	-	43.41	28.50	4.75	34.77
PK	7.28971G	52.28	74.00	-21.72	9.10	3	Vertical	340	1.87	-	43.18	36.66	7.83	35.39
AV	7.29002G	42.29	54.00	-11.71	9.11	3	Vertical	340	1.87	-	33.18	36.66	7.84	35.39

Horizontal

Mode 1

30/10/2020

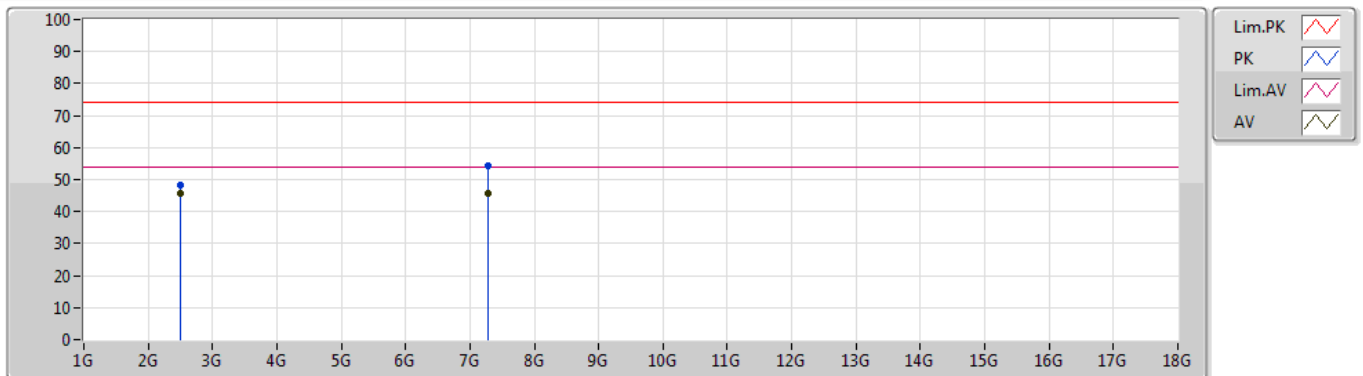

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50035G	48.31	74.00	-25.69	-1.52	3	Horizontal	317	3.00	-	49.83	28.50	4.75	34.77
AV	2.50046G	45.64	54.00	-8.36	-1.52	3	Horizontal	317	3.00	-	47.16	28.50	4.75	34.77
PK	7.28988G	54.18	74.00	-19.82	9.10	3	Horizontal	307	1.67	-	45.08	36.66	7.83	35.39
AV	7.28999G	45.55	54.00	-8.45	9.10	3	Horizontal	307	1.67	-	36.45	36.66	7.83	35.39




Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	58.32		

Vertical

Mode 1


30/10/2020

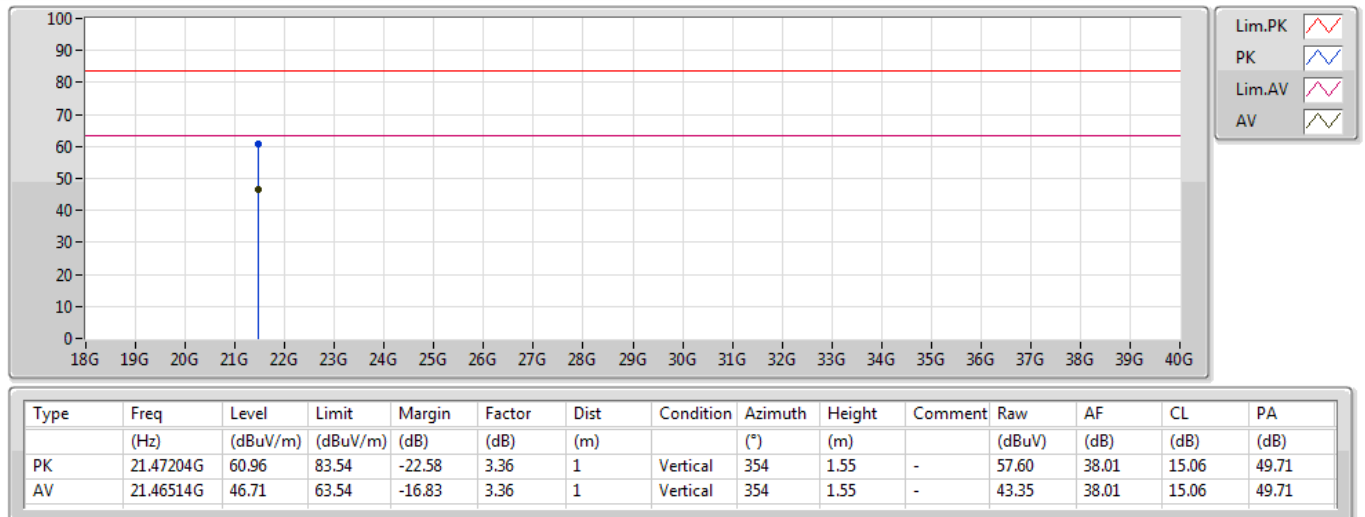

Horizontal

Mode 1

30/10/2020

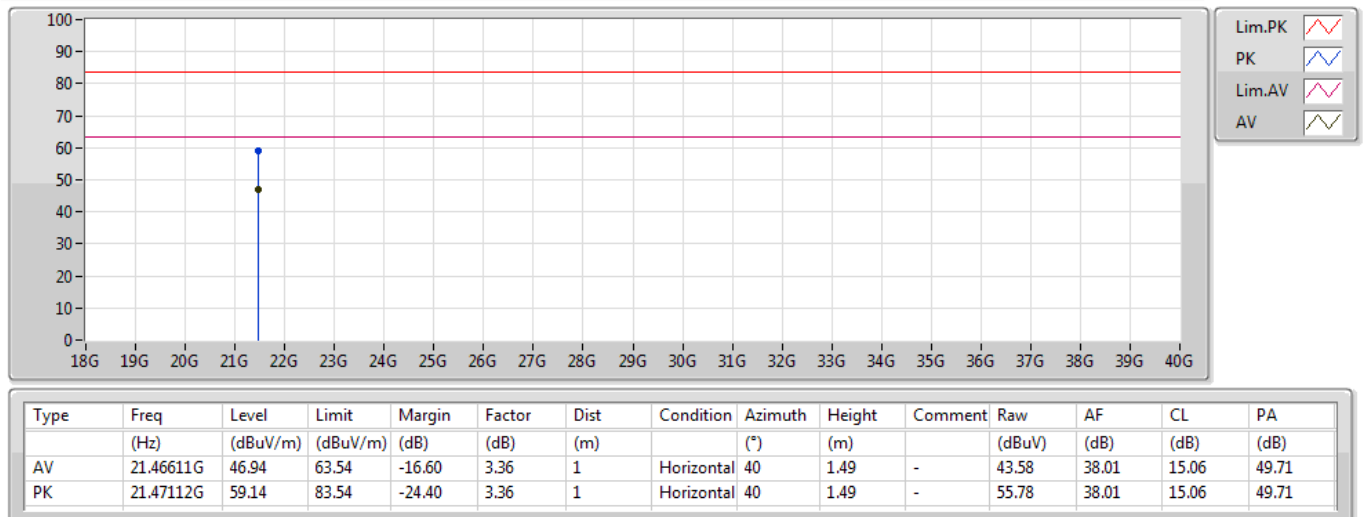




Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	60.48		

Vertical

Mode 2

30/10/2020

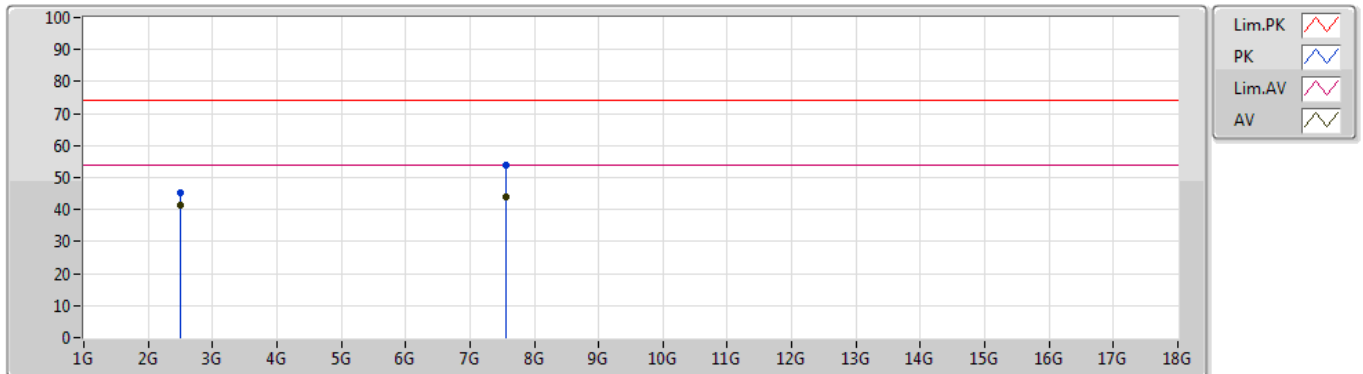


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50046G	45.30	74.00	-28.70	-1.52	3	Vertical	9	2.03	-	46.82	28.50	4.75	34.77
AV	2.50041G	41.56	54.00	-12.44	-1.52	3	Vertical	9	2.03	-	43.08	28.50	4.75	34.77
PK	7.56002G	53.78	74.00	-20.22	9.25	3	Vertical	313	1.67	-	44.53	36.68	8.00	35.43
AV	7.56001G	44.15	54.00	-9.85	9.25	3	Vertical	313	1.67	-	34.90	36.68	8.00	35.43

Horizontal

Mode 2

30/10/2020

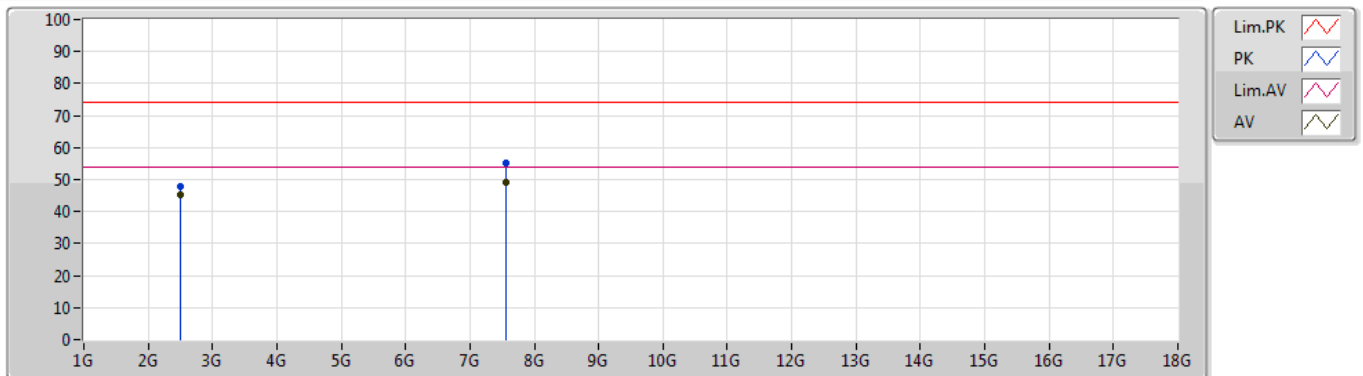

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50044G	48.00	74.00	-26.00	-1.52	3	Horizontal	317	3.00	-	49.52	28.50	4.75	34.77
AV	2.50047G	45.32	54.00	-8.68	-1.52	3	Horizontal	317	3.00	-	46.84	28.50	4.75	34.77
PK	7.55997G	55.15	74.00	-18.85	9.25	3	Horizontal	303	2.74	-	45.90	36.68	8.00	35.43
AV	7.56G	49.22	54.00	-4.78	9.25	3	Horizontal	303	2.74	-	39.97	36.68	8.00	35.43




Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	60.48		

Vertical

Mode 2


30/10/2020

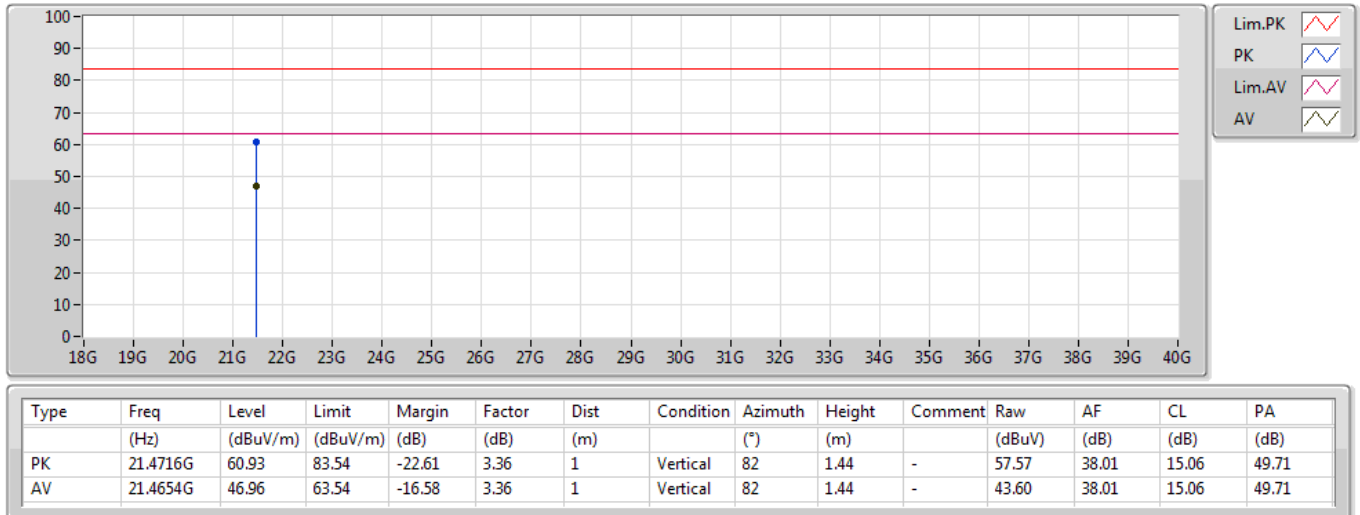

Horizontal

Mode 2

30/10/2020

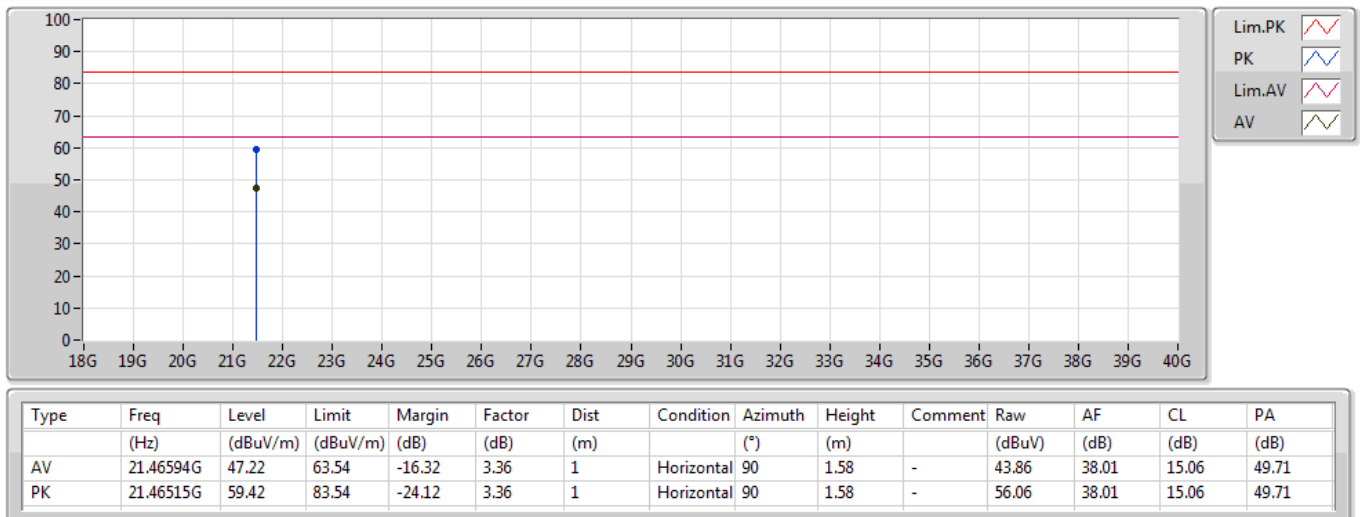




Test Range	1 GHz – 18 GHz	Test Distance	3 m
Test Freq. (GHz)	62.64		

Vertical

Mode 3

30/10/2020

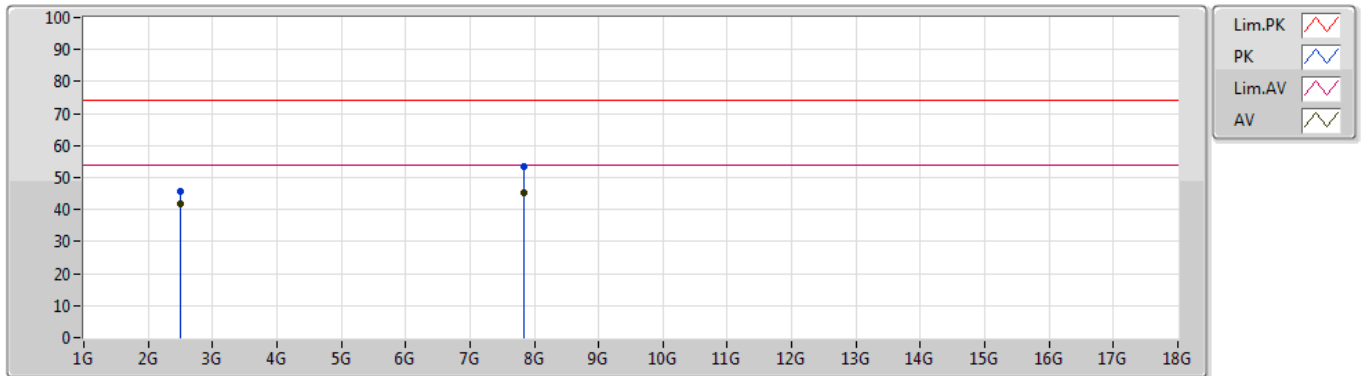


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50053G	45.75	74.00	-28.25	-1.52	3	Vertical	10	2.04	-	47.27	28.50	4.75	34.77
AV	2.50039G	41.80	54.00	-12.20	-1.52	3	Vertical	10	2.04	-	43.32	28.50	4.75	34.77
PK	7.83005G	53.55	74.00	-20.45	9.24	3	Vertical	299	1.51	-	44.31	36.70	7.95	35.41
AV	7.83001G	45.38	54.00	-8.62	9.24	3	Vertical	299	1.51	-	36.14	36.70	7.95	35.41

Horizontal

Mode 3

30/10/2020

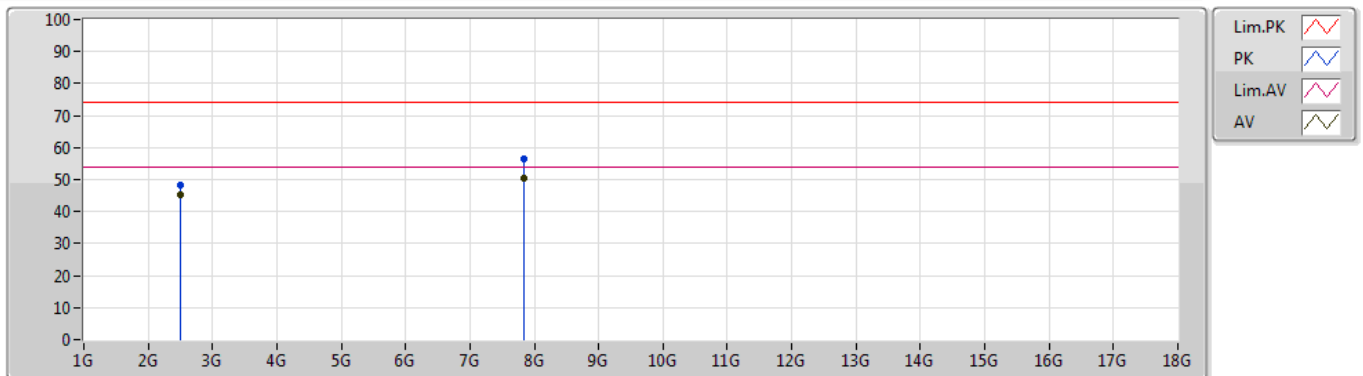

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	2.50048G	48.19	74.00	-25.81	-1.52	3	Horizontal	314	3.00	-	49.71	28.50	4.75	34.77
AV	2.50042G	45.31	54.00	-8.69	-1.52	3	Horizontal	314	3.00	-	46.83	28.50	4.75	34.77
PK	7.83002G	56.41	74.00	-17.59	9.24	3	Horizontal	309	2.68	-	47.17	36.70	7.95	35.41
AV	7.83001G	50.35	54.00	-3.65	9.24	3	Horizontal	309	2.68	-	41.11	36.70	7.95	35.41




Test Range	18 GHz – 40 GHz	Test Distance	1 m
Test Freq. (GHz)	62.64		

Vertical

Mode 3

30/10/2020

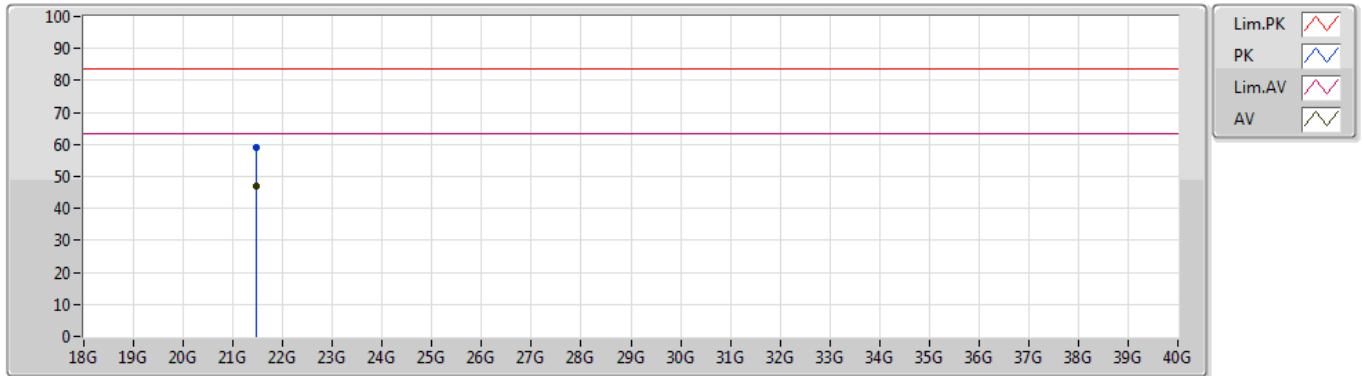


Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
AV	21.46567G	47.18	63.54	-16.36	3.36	1	Vertical	164	1.50	-	43.82	38.01	15.06	49.71
PK	21.46536G	59.04	83.54	-24.50	3.36	1	Vertical	164	1.50	-	55.68	38.01	15.06	49.71

Horizontal

Mode 3

30/10/2020

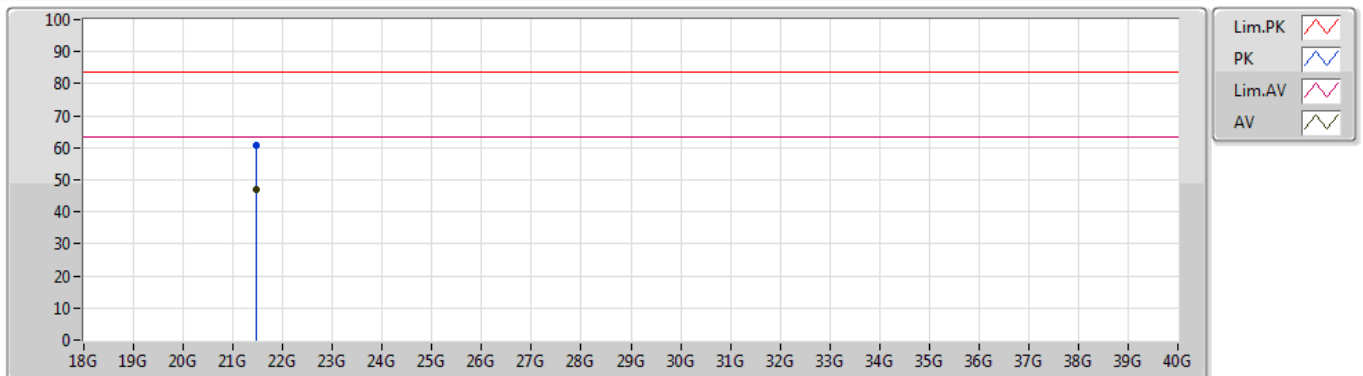

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	21.47209G	60.68	83.54	-22.86	3.36	1	Horizontal	144	1.48	-	57.32	38.01	15.06	49.71
AV	21.47449G	46.77	63.54	-16.77	3.36	1	Horizontal	144	1.48	-	43.41	38.01	15.06	49.71



Test Range	40GHz – 200GHz
-------------------	----------------

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
58.32	23.6	1.50	56.56	-57.79
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-10.38	3	81.0823	90	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
60.48	23.6	1.50	53.69	-71.17
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-24.21	3	3.3550	90	PASS

Test Frequency (GHz)	Rx Antenna Gain (dBi)	Measurement Distance (m)	Read Worse Frequency (GHz)	Read Level (dBm)
62.64	23.6	1.50	56.15	-73.98
EIRP (dBm)	Specification Distance (m)	Power Density (pW/cm ²)	Limit (pW/cm ²)	Test Result
-26.63	3	1.9214	90	PASS

Note:

$EIRP = P_{rx} - G_{rx} + \text{Free Space Path Loss} = P_{rx} - G_{rx} + 20\log(4\pi d / \lambda)^2$

Which

$P_{rx} = \text{Read Level.}$

$G_{rx} = \text{Rx Antenna Gain.}$

A distance factor is offset and the formula is $20\log(D1/D2)$

Which

$D1 = \text{Specification Distance}$

$D2 = \text{Measurement Distance}$

3.6 Frequency Stability

3.6.1 Limit of Frequency Stability

Frequency Stability	Limit
Refer as 15.255(f) and ANSI C63.10-2013, clause 9.14	within the frequency bands
Note: These measurements shall also be performed at normal and extreme test conditions.	


3.6.2 Measuring Instruments

Refer a measuring instruments list in this test report.

3.6.3 Test Procedures

Method of measurement: Refer as ANSI C63.10-2013, clauses 9.14.

3.6.4 Test Setup

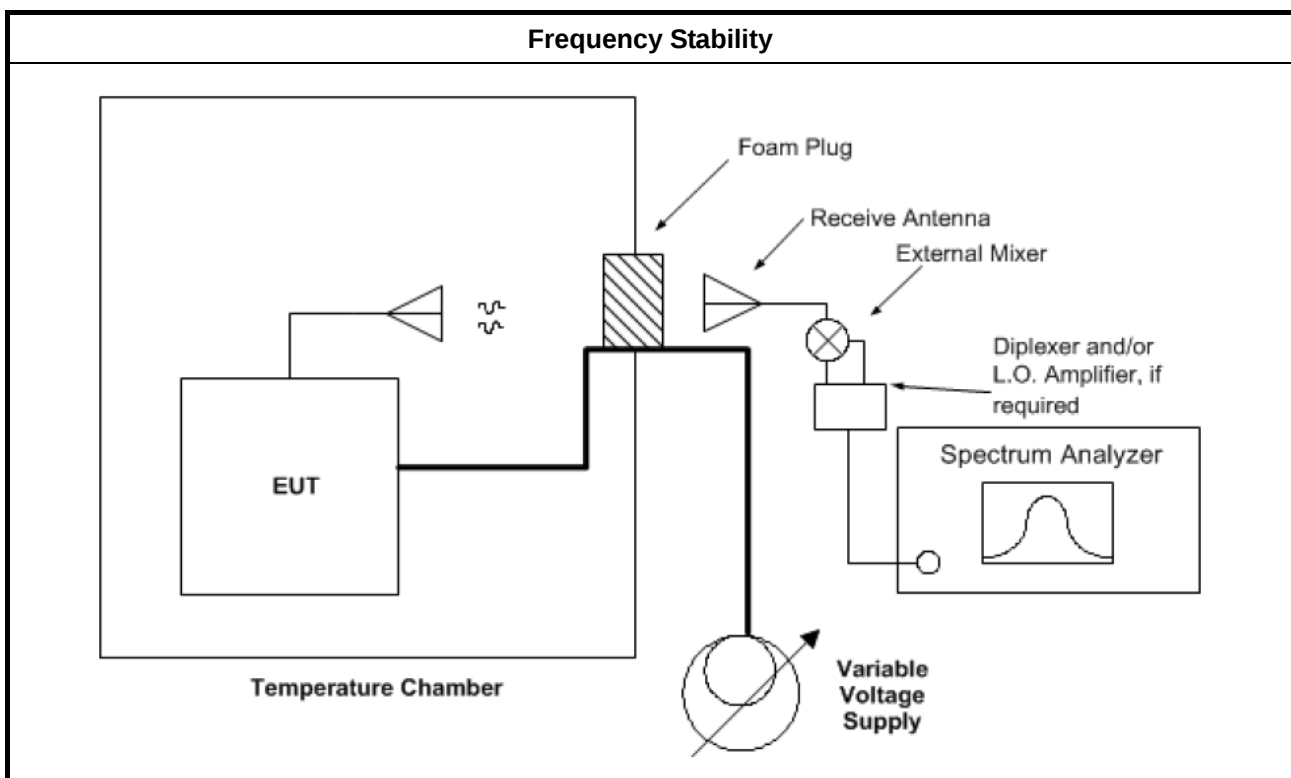

**3.6.5 Test Result of Frequency Stability**

Test Conditions	see ANSI C63.10, clause 5.11 & clause 9
Test Setup	see ANSI C63.10, clause 9.14
NOTE: If equipment having different channel plan and nominal channel bandwidth modes (see test report clause 1.1.1), the measurements are uninfluenced by different channel plan and nominal channel bandwidth modes, may not need to be repeated for all modes.	

3.6.5.1 Frequency Stability with Respect to Ambient Temperature

Frequency Stability with Respect to Ambient Temperature			
Test Results			
Test Temperature (°C)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
-30	60312.85	-156300	Within band
-20	60325.66	-143490	Within band
-10	60364.17	-104980	Within band
0	60412.52	-56630	Within band
10	60438.55	-30600	Within band
20	60469.15	Reference	Within band
30	60468.53	-620	Within band
40	60465.62	-3530	Within band
55	60461.91	-7240	Within band
NOTE: The manufacturer's specified temperature range of -30 to 55°C.			

3.6.5.2 Frequency Stability When Varying Supply Voltage

Frequency Stability When Varying Supply Voltage			
Test Results			
Test Voltage: (Vac)	Measured Frequency (MHz)	Delta Frequency (kHz)	Limit (±kHz)
93.5	60469.82	670	Within band
110	60469.15	Reference	Within band
126.5	60469.66	510	Within band



4 Test Equipment and Calibration Data

Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
EMI Receiver	Agilent	N9038A	My52260123	9kHz ~ 8.4GHz	Feb. 26, 2020	Feb. 25, 2021	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Jan. 06, 2021	Jan. 05, 2022	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Feb. 25, 2020	Feb. 24, 2021	Conduction (CO01-CB)
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100430	9kHz ~ 30MHz	Jan. 31, 2020	Jan. 30, 2021	Conduction (CO01-CB)
COND Cable	Woken	Cable	Low cable-CO01	9kHz ~ 30MHz	May 20, 2020	May 19, 2021	Conduction (CO01-CB)
Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Conduction (CO01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Apr. 13, 2020	Apr. 12, 2021	Conduction (CO01-CB)
3m Semi Anechoic Chamber NSA	TDK	SAC-3M	03CH04-CB	30 MHz ~ 1 GHz	Aug. 08, 2020	Aug. 07, 2021	Radiation (03CH04-CB)
BILOG ANTENNA with 6 dB attenuator	Schaffner & EMCI	CBL6112B & N-6-06	22021&AT-N0607	30MHz ~ 1GHz	Oct. 11, 2020	Oct. 10, 2021	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	310N	187291	0.1MHz ~ 1GHz	Mar. 19, 2020	Mar. 18, 2021	Radiation (03CH04-CB)
Pre-Amplifier	Agilent	310N	187291	0.1MHz ~ 1GHz	Nov. 05, 2020	Nov. 04, 2021	Radiation (03CH04-CB)
Pre-Amplifier	EMCI	EMC330N	980391	20MHz ~ 3GHz	May 21, 2020	May 20, 2021	Radiation (03CH04-CB)
Spectrum Analyzer	R&S	FSP40	100142	9kHz~40GHz	Dec. 18, 2019	Dec. 17, 2020	Radiation (03CH04-CB)
Signal Analyzer	R&S	FSV40	101904	9kHz ~ 40GHz	May 12, 2020	May 11, 2021	Radiation (03CH04-CB)
EMI Test Receiver	R&S	ESCS	826547/017	9kHz ~ 2.75GHz	May 13, 2020	May 12, 2021	Radiation (03CH04-CB)
RF Cable-low	Woken	RG402	Low Cable-03+67	30MHz ~ 1GHz	Nov. 05, 2020	Nov. 04, 2021	Radiation (03CH04-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH04-CB)
3m Semi Anechoic Chamber VSWR	TDK	SAC-3M	03CH03-CB	1GHz ~18GHz 3m	May 28, 2020	May 27, 2021	Radiation (03CH03-CB)
Horn Antenna	ETS•Lindgren	3115	6821	750MHz~18GHz	Jan. 20, 2020	Jan. 19, 2021	Radiation (03CH03-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2020	Jul. 20, 2021	Radiation (03CH03-CB)
Pre-Amplifier	Agilent	8449B	3008A02097	1GHz ~ 26.5GHz	Jul. 03, 2020	Jun. 02, 2021	Radiation (03CH03-CB)



Instrument	Brand	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date	Remark
Pre-Amplifier	MITEQ	TTA1840-35-HG	1864479	18GHz ~ 40GHz	Jul. 08, 2020	Jul. 07, 2021	Radiation (03CH03-CB)
Spectrum Analyzer	R&S	FSP40	100019	9kHz ~ 40GHz	Jun. 09, 2020	Jun. 08, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-20+29	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-29	1GHz ~ 18GHz	Oct. 05, 2020	Oct. 04, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#1	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH03-CB)
RF Cable-high	Woken	RG402	High Cable-40G#2	18GHz ~ 40 GHz	Jul. 16, 2020	Jul. 15, 2021	Radiation (03CH03-CB)
Test Software	SPORTON	SENSE	V5.10	-	N.C.R.	N.C.R.	Radiation (03CH03-CB)
Mixer	OML	M19HWA	U91113-1	40 ~ 60 GHz	Nov. 02, 2020	Nov. 01, 2021	Radiation (03CH03-CB)
Mixer	OML	M15HWA	V91113-1	50 ~ 75 GHz	Nov. 13, 2020	Nov. 12, 2021	Radiation (03CH03-CB)
Mixer	OML	M12HWA	E91113-1	60 ~ 90 GHz	Nov. 14, 2020	Nov. 13, 2021	Radiation (03CH03-CB)
Mixer	OML	M08HWA	F91113-1	90 ~ 140 GHz	Nov. 02, 2020	Nov. 01, 2021	Radiation (03CH03-CB)
Mixer	OML	M05HW/A	G91113-1	140 ~ 220 GHz	Nov. 02, 2020	Nov. 01, 2021	Radiation (03CH03-CB)
Detector	Millitech	DET-15-RPF W0	#A18185(074)	50 ~ 75 GHz	Apr. 02, 2020	Apr. 01, 2022	Radiation (03CH03-CB)
PC Oscilloscope	PICO TECH	6402C	CX372/002	N/A	Jul. 10, 2020	Jul. 09, 2021	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M19RH	U91113-A	40 ~ 60 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M15RH	V91113-A	50 ~ 75 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M12RH	E91113-A	60 ~ 90 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M08RH	F91113-A	90 ~ 140 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Standard Horn Antenna	Custom Microwave	M05RH	G91113-A	140 ~ 220 GHz	N.C.R	N.C.R	Radiation (03CH03-CB)
Signal Analyzer	R&S	FSV40	101903	9kHz ~ 40GHz	May 14, 2020	May 13, 2021	Radiation (TH03-CB)
Temp. and Humidity Chamber	Gaint Force	GTH-408-40-CP-AR	MAA1410-011	-40~100 degree	Sep. 09, 2020	Sep. 08, 2021	Radiation (TH03-CB)

Note: Calibration Interval of instruments listed above is one year.

N.C.R. means Non-Calibration required.



5 Measurement Uncertainty

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	2.0 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	3.8 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	5.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	5.0 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	4.9 dB	Confidence levels of 95%
Radiated Emission (40GHz ~ 60GHz)	3.9 dB	Confidence levels of 95%
Radiated Emission (60GHz ~ 90GHz)	4.5 dB	Confidence levels of 95%
Radiated Emission (90GHz ~ 200GHz)	5.3 dB	Confidence levels of 95%
Temperature	1.9°C	Confidence levels of 95%