

TEST REPORT

Product Name : Haylou Wireless Earbuds
Brand Mark : Haylou
Model No. : Haylou-GT5
FCC ID : 2AMQ6-GT5
Report Number : BLA-EMC-202005-A70-02
Date of Sample Receipt : 2020/5/27
Date of Test : 2020/5/28 to 2020/6/2
Date of Issue : 2020/6/2
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Dongguan Liesheng Electronic Co., Ltd.
13/F, Project Phase 2 of Gaosheng Tech Tower, No. 5, Longxi
Road, Nancheng, Dongguan, Guangdong, China

Prepared by:

BlueAsia of Technical Services (Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
TEL: +86-755-28682673
FAX: +86-755-28682673

Compiled by:

Ben Zang

Review by:

Sweet. Liang

Approved by:

Jamen Li

Date:

2020/6/2



REPORT REVISE RECORD

Version No.	Date	Description
00	2020/6/2	Original

TABLE OF CONTENTS

1	TEST SUMMARY	6
2	GENERAL INFORMATION	7
3	GENERAL DESCRIPTION OF E.U.T.	7
4	TEST ENVIRONMENT	8
5	TEST MODE	8
6	MEASUREMENT UNCERTAINTY	8
7	DESCRIPTION OF SUPPORT UNIT.....	9
8	LABORATORY LOCATION.....	9
9	TEST INSTRUMENTS LIST	10
1	ANTENNA REQUIREMENT	14
1.1	CONCLUSION	14
2	DWELL TIME.....	15
2.1	LIMITS	15
2.2	BLOCK DIAGRAM OF TEST SETUP	15
2.3	TEST DATA	15
3	CONDUCTED BAND EDGES MEASUREMENT.....	16
3.1	LIMITS	16
3.2	BLOCK DIAGRAM OF TEST SETUP	16
3.3	TEST DATA	16
4	CONDUCTED SPURIOUS EMISSIONS	17
4.1	LIMITS	17
4.2	BLOCK DIAGRAM OF TEST SETUP	17
4.3	TEST DATA	17
5	HOPPING CHANNEL NUMBER	18
5.1	LIMITS	18
5.2	BLOCK DIAGRAM OF TEST SETUP	18
5.3	TEST DATA	18
6	RADIATED SPURIOUS EMISSIONS.....	19
6.1	LIMITS	19

6.2	BLOCK DIAGRAM OF TEST SETUP	20
6.3	PROCEDURE	20
6.4	TEST DATA	22
7	CARRIER FREQUENCIES SEPARATION	27
7.1	LIMITS	27
7.2	BLOCK DIAGRAM OF TEST SETUP	27
7.3	TEST DATA	27
8	20DB BANDWIDTH.....	28
8.1	BLOCK DIAGRAM OF TEST SETUP	28
8.2	TEST DATA	28
9	CONDUCTED PEAK OUTPUT POWER	29
9.1	LIMITS	29
9.2	BLOCK DIAGRAM OF TEST SETUP	29
9.3	TEST DATA	29
10	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	30
10.1	LIMITS	30
10.2	BLOCK DIAGRAM OF TEST SETUP	30
10.3	PROCEDURE	30
10.4	TEST DATA.....	32
11	RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	34
11.1	LIMITS	34
11.2	BLOCK DIAGRAM OF TEST SETUP	35
11.3	PROCEDURE	35
11.4	TEST DATA.....	37
12	APPENDI	38
12.1	APPENDIXA: 20DBEMISSION BANDWIDTH	38
	<i>Test Result.....</i>	<i>38</i>
	<i>Test Graphs.....</i>	<i>38</i>
12.2	APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER	43
	<i>Test Result.....</i>	<i>43</i>
	<i>Test Graphs.....</i>	<i>43</i>
12.3	APPENDIX: CARRIER FREQUENCY SEPARATION	48
	<i>Test Result.....</i>	<i>48</i>

Test Graphs.....	48
12.4 APPENDIX: TIME OF OCCUPANCY.....	50
Test Result.....	50
Test Graphs.....	50
12.5 APPENDIX: NUMBER OF HOPPING CHANNELS.....	52
Test Result.....	52
Test Graphs.....	52
12.6 APPENDIX: BAND EDGE MEASUREMENTS.....	54
Test Result.....	54
Test Graphs.....	54
12.7 APPENDIX : CONDUCTED SPURIOUS EMISSION.....	61
Test Result.....	61
Test Graphs.....	61
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	63
APPENDIX B: PHOTOGRAPHS OF EUT	65

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Dwell Time	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.4	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Hopping Channel Number	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.3	47 CFR Part 15, Subpart C 15.247a(1)(iii)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Carrier Frequencies Separation	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.2	47 CFR Part 15, Subpart C 15.247a(1)	Pass
20dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.7	47 CFR Part 15, Subpart C 15.247(a)(1)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	Dongguan Liesheng Electronic Co., Ltd.
Address	13/F,Project Phrase 2 of GaoshengTechTower,No.5,Longxi Road,Nancheng,Dongguan,Guangdong,China
Manufacturer	Dongguan Liesheng Electronic Co., Ltd.
Address	13/F,Project Phrase 2 of GaoshengTechTower,No.5,Longxi Road,Nancheng,Dongguan,Guangdong,China
Factory	N/A
Address	N/A
Product Name	Haylou Wireless Earbuds
Test Model No.	Haylou-GT5

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	V1.0
Software Version	V1.0
Operation Frequency:	2402MHz~2480MHz
Modulation Type:	GFSK, p/4DQPSK, 8DPSK
Channel Spacing:	1MHz
Number of Channels:	79
Antenna Type:	PCB Antenna
Antenna Gain:	0.38 dBi

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25 °C	3.7Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
Transmitting mode	Keep the EUT in continuously transmitting mode with modulation. (hopping or no hopping mode)
Remark: Full battery is used during all test except ac conducted emission, DH1, DH3, DH5 all have been tested, during the test, GFSK, Pi/4QPSK, 8-DPSK modulation were all pre-scanned only worse case is reported.	

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission	±4.34dB
Radiated Emission	±4.24dB
Radiated Emission	±4.68dB
AC Power Line Conducted Emission	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
IOT Test Centre of BlueAsia
No. 448 Bulong Road, Bantian Street, Longgang District, Shenzhen, China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Dwell Time					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Band Edges Measurement					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Spurious Emissions					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Hopping Channel Number					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Radiated Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	4/20/2020	4/19/2021
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2022
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Carrier Frequencies Separation

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020

Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of 20dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Spectrum	Agilent	N9020A	MY49100060	12/17/2019	12/16/2020
Signal Generator	Agilent	N5182A	MY49060650	12/17/2019	12/16/2020
Signal Generator	Agilent	E8257D	MY44320250	4/20/2020	4/19/2021

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	6/10/2018	6/9/2021
Receiver	R&S	ESPI3	101082	4/20/2020	4/19/2021
LISN	R&S	ENV216	3560.6550.15	7/4/2019	7/3/2020
LISN	AT	AT166-2	AKK1806000003	12/17/2019	12/16/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands					
Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	5/8/2018	5/7/2021
Spectrum	R&S	FSP40	100817	7/4/2019	7/3/2020
Receiver	R&S	ESR7	101199	4/20/2020	4/19/2021
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	7/14/2018	7/13/2020
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	7/14/2018	7/13/2020
Amplifier	SKET	LNPA-0118-45	N/A	7/4/2019	7/3/2020
EMI software	EZ	EZ-EMC	N/A	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2/14/2019	2/13/2022
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

1 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A


1.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 0.38dBi.

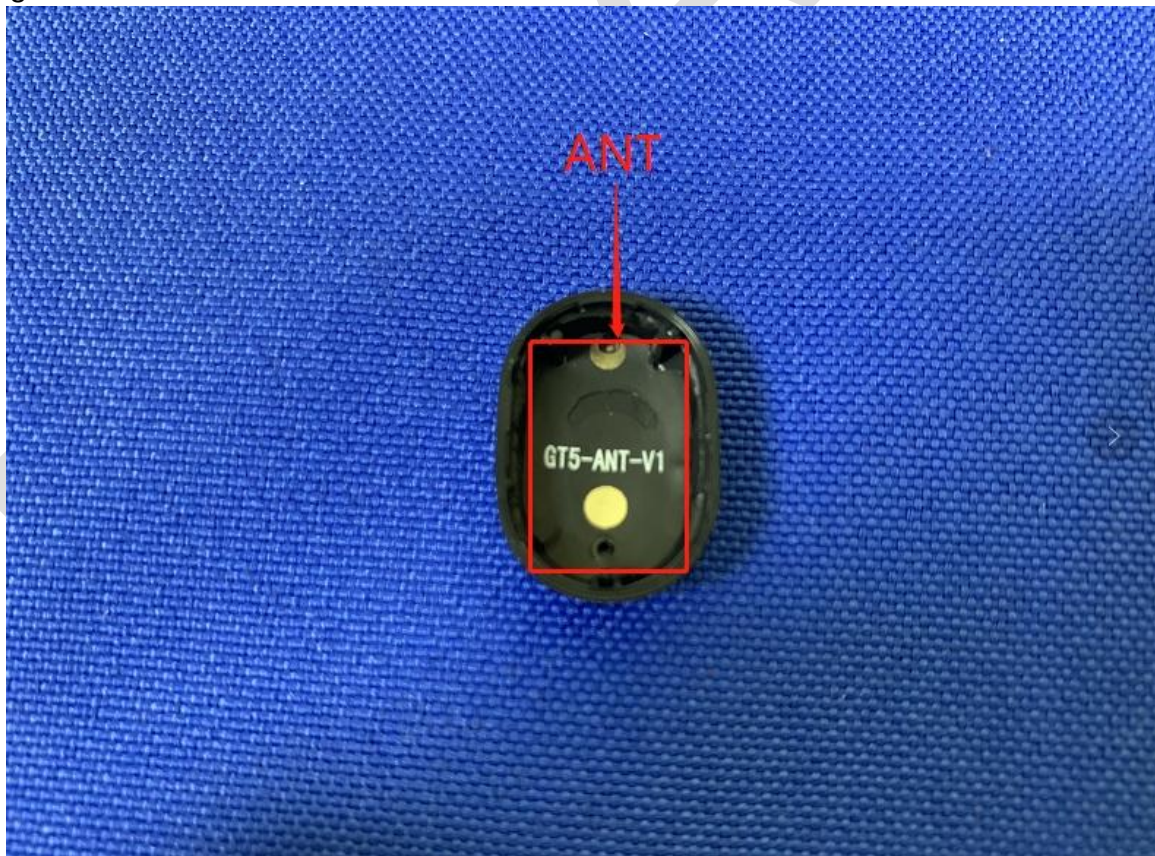


2 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX_Hop mode
Test Mode (Final Test)	TX_Hop mode
Tester	Ben
Temperature	25℃
Humidity	55%

2.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4Smultiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

2.2 BLOCK DIAGRAM OF TEST SETUP

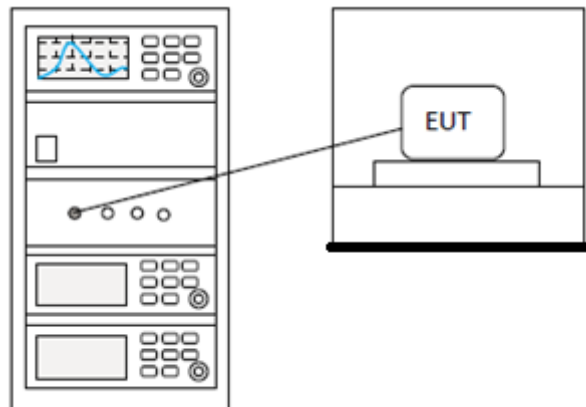

2.3 TEST DATA

Pass: Please Refer To Appendix: For Details


3 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

3.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

3.2 BLOCK DIAGRAM OF TEST SETUP

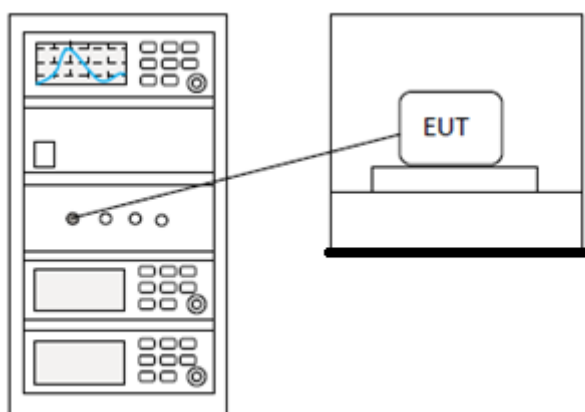

3.3 TEST DATA

Pass: Please Refer To Appendix: For Details


4 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

4.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

4.2 BLOCK DIAGRAM OF TEST SETUP

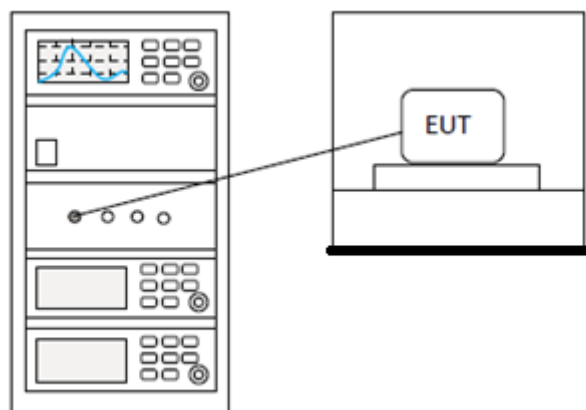

4.3 TEST DATA

Pass: Please Refer To Appendix: For Details


5 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX_Hop mode
Test Mode (Final Test)	TX_Hop mode
Tester	Ben
Temperature	25℃
Humidity	55%

5.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

5.2 BLOCK DIAGRAM OF TEST SETUP

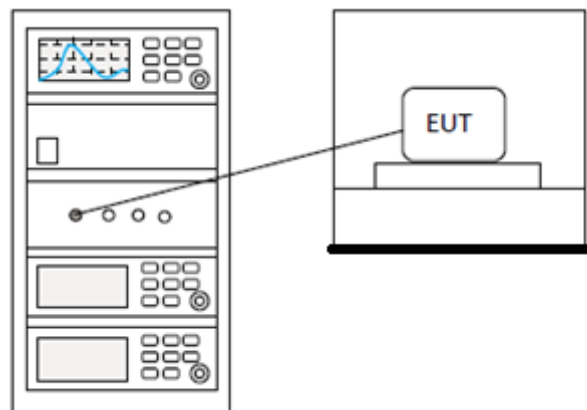

5.3 TEST DATA

Pass: Please Refer To Appendix: For Details

6 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25℃
Humidity	55%

6.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

6.2 BLOCK DIAGRAM OF TEST SETUP

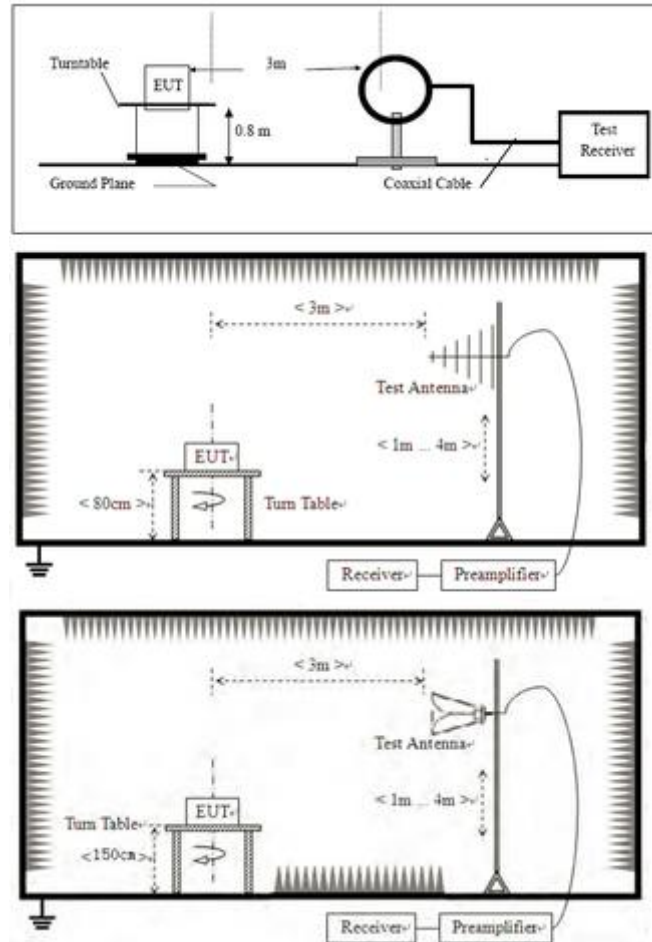

6.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:

- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

6.4 TEST DATA

During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

[TestMode: TX]						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	61.84	2.38	64.22	74	-9.78	Vertical
7206.00	60.32	2.17	62.49	74	-11.51	Vertical
9608.00	58.43	2.06	60.49	74	-13.51	Vertical
12010.00	*			74		Vertical
14412.00	*			74		Vertical
4804.00	58.3	2.38	60.68	74	-13.32	Horizontal
7206.00	58.91	2.17	61.08	74	-12.92	Horizontal
9608.00	58.38	2.06	60.44	74	-13.56	Horizontal
12010.00	*			74		Horizontal
14412.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4804.00	41.4	2.38	43.78	54	-10.22	Vertical
7206.00	40.78	2.17	42.95	54	-11.05	Vertical
9608.00	40.99	2.06	43.05	54	-10.95	Vertical
12010.00	*			54		Vertical
14412.00	*			54		Vertical
4804.00	41.57	2.38	43.95	54	-10.05	Horizontal
7206.00	41.37	2.17	43.54	54	-10.46	Horizontal
9608.00	41.13	2.06	43.19	54	-10.81	Horizontal
12010.00	*			54		Horizontal
14412.00	*			54		Horizontal

Test channel:Middle						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	60.05	0.17	60.22	74	-13.78	Vertical
7323.00	60.54	1.43	61.97	74	-12.03	Vertical
9764.00	59.36	1.26	60.62	74	-13.38	Vertical
12205.00	*			74		Vertical
14646.00	*			74		Vertical
4882.00	59.73	0.17	59.9	74	-14.1	Horizontal
7323.00	58.06	1.43	59.49	74	-14.51	Horizontal
9764.00	61.91	1.26	63.17	74	-10.83	Horizontal
12205.00	*			74		Horizontal
14646.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4882.00	39.95	0.17	40.12	54	-13.88	Vertical
7323.00	40.24	1.43	41.67	54	-12.33	Vertical
9764.00	40.29	1.26	41.55	54	-12.45	Vertical
12205.00	*			54		Vertical
14646.00	*			54		Vertical
4882.00	40.04	0.17	40.21	54	-13.79	Horizontal
7323.00	39.93	1.43	41.36	54	-12.64	Horizontal
9764.00	39.95	1.26	41.21	54	-12.79	Horizontal
12205.00	*			54		Horizontal
14646.00	*			54		Horizontal

Test channel: Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	60.03	1.04	61.07	74	-12.93	Vertical
7440.00	61.42	2.59	64.01	74	-9.99	Vertical
9920.00	59.67	2.74	62.41	74	-11.59	Vertical
12400.00	*			74		Vertical
14880.00	*			74		Vertical
4960.00	61.79	1.04	62.83	74	-11.17	Horizontal
7440.00	58.05	2.59	60.64	74	-13.36	Horizontal
9920.00	59.07	2.74	61.81	74	-12.19	Horizontal
12400.00	*			74		Horizontal
14880.00	*			74		Horizontal
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4960.00	41.44	1.04	42.48	54	-11.52	Vertical
7440.00	40.9	2.59	43.49	54	-10.51	Vertical
9920.00	41.92	2.74	44.66	54	-9.34	Vertical
12400.00	*			54		Vertical
14880.00	*			54		Vertical
4960.00	38.78	1.04	39.82	54	-14.18	Horizontal
7440.00	40.71	2.59	43.3	54	-10.7	Horizontal
9920.00	39.5	2.74	42.24	54	-11.76	Horizontal
12400.00	*			54		Horizontal
14880.00	*			54		Horizontal
Test Result: Pass						

[TestMode: TX]; [Polarity: Horizontal]

Radiated Emission Measurement


File :re

Data :#11

Date: 2020/5/28 星期

Time: 上午 11:16:40

72.0 dBuV/m

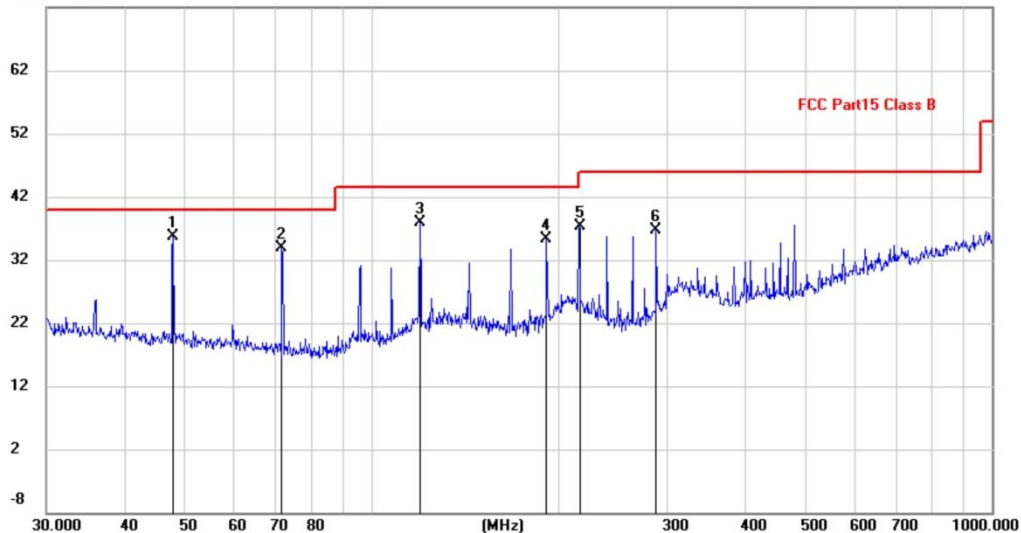

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 Class B

Power:

Humidity: %

EUT:

Distance:

M/N:

Mode:

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	47.9940	12.38	23.37	35.75	40.00	-4.25	QP		
2		71.8320	13.54	20.33	33.87	40.00	-6.13	QP		
3		119.8556	15.91	22.01	37.92	43.50	-5.58	QP		
4		191.7450	14.93	20.38	35.31	43.50	-8.19	QP		
5		216.0240	16.59	20.75	37.34	46.00	-8.66	QP		
6		287.9904	13.20	23.52	36.72	46.00	-9.28	QP		


*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Radiated Emission Measurement

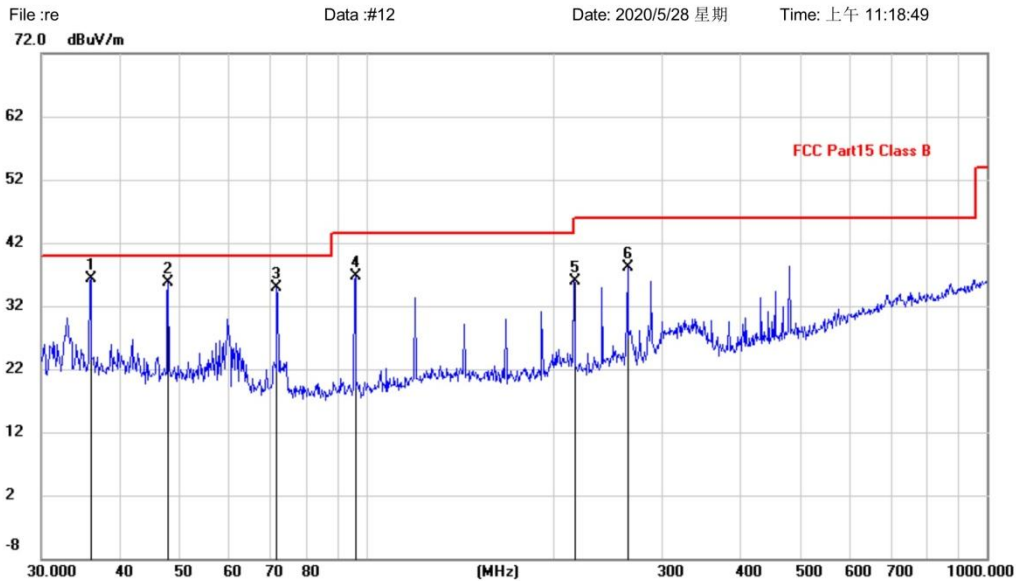

Site Polarization: **Vertical** Temperature:
Limit: FCC Part15 Class B Power: Humidity: %
EUT: Distance:
M/N:
Mode:
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	36.0007	12.90	23.32	36.22	40.00	-3.78	QP		
2		47.9940	12.35	23.37	35.72	40.00	-4.28	QP		
3		71.8320	14.51	20.33	34.84	40.00	-5.16	QP		
4		96.0986	17.15	19.65	36.80	43.50	-6.70	QP		
5		216.0240	15.20	20.75	35.95	46.00	-10.05	QP		
6		263.8190	15.50	22.67	38.17	46.00	-7.83	QP		

*:Maximum data x:Over limit !:over margin

<Reference Only

Test Result: Pass


7 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX_Hop mode
Test Mode (Final Test)	TX_Hop mode
Tester	Ben
Temperature	25°C
Humidity	55%

7.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

7.2 BLOCK DIAGRAM OF TEST SETUP

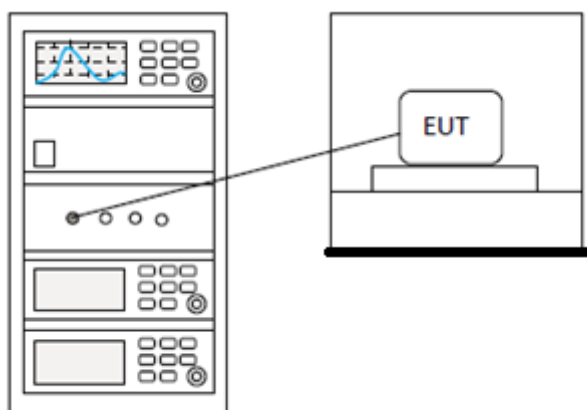


7.3 TEST DATA

Pass: Please Refer To Appendix: For Details

8 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25℃
Humidity	55%

8.1 BLOCK DIAGRAM OF TEST SETUP

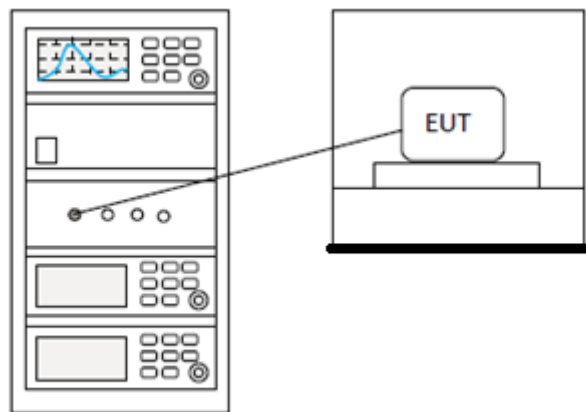

8.2 TEST DATA

Pass: Please Refer To Appendix: For Details


9 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

9.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq \text{hopping channels} < 50$
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

9.2 BLOCK DIAGRAM OF TEST SETUP

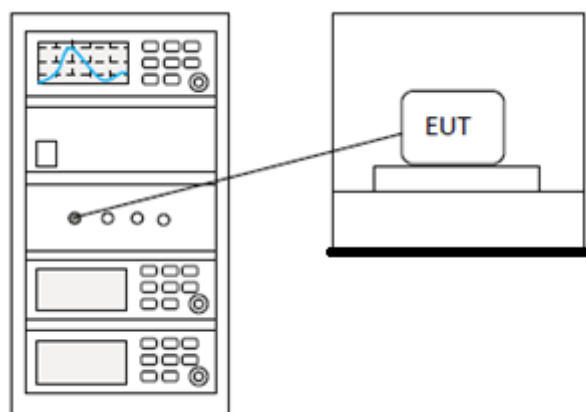

9.3 TEST DATA

Pass: Please Refer To Appendix: For Details

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25℃
Humidity	55%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 BLOCK DIAGRAM OF TEST SETUP

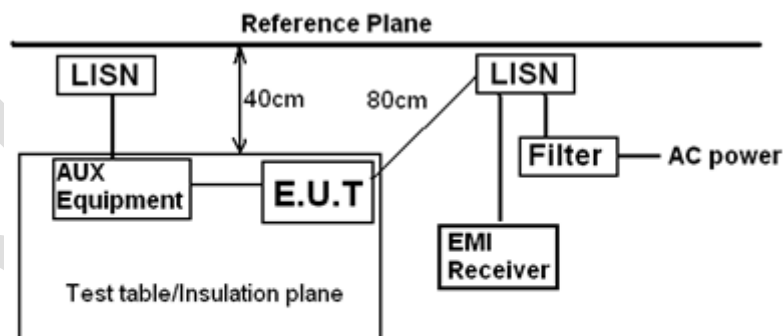

Remark
E.U.T: Equipment Under Test
LISN: Line Impedance Stabilization Network
Test table height=0.8m

10.3 PROCEDURE


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50?H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: $LISN = Read\ Level + Cable\ Loss + LISN\ Factor$

10.4 TEST DATA

[TestMode: TX]; [Line: Line]

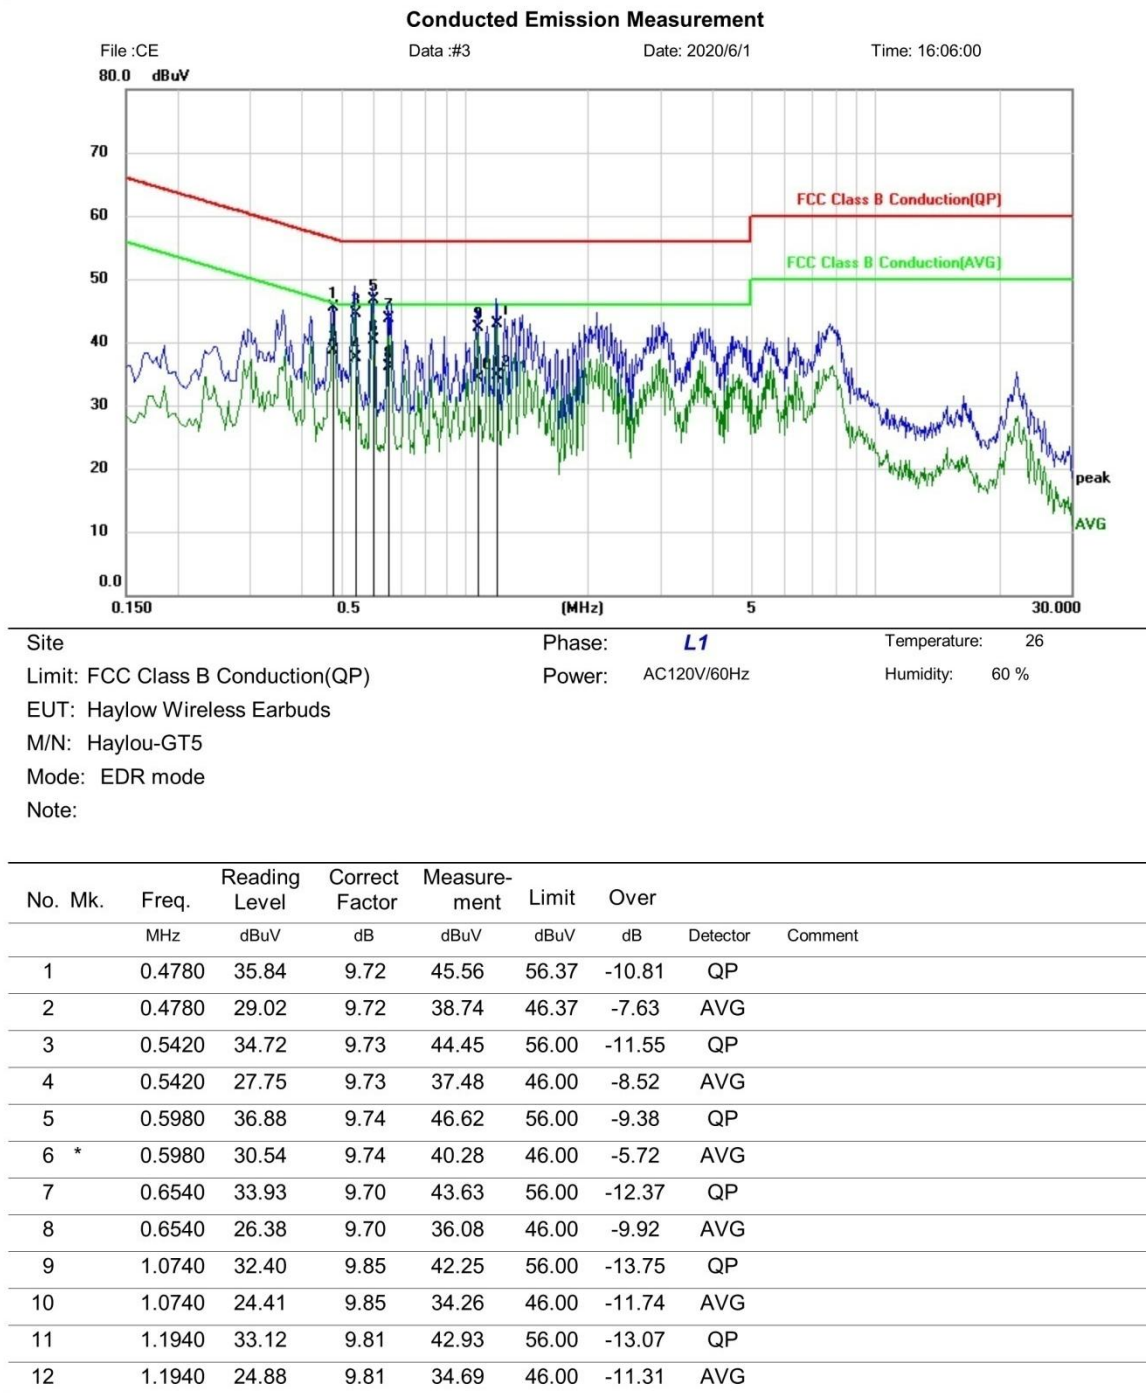


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Line: Nutral]

Conducted Emission Measurement

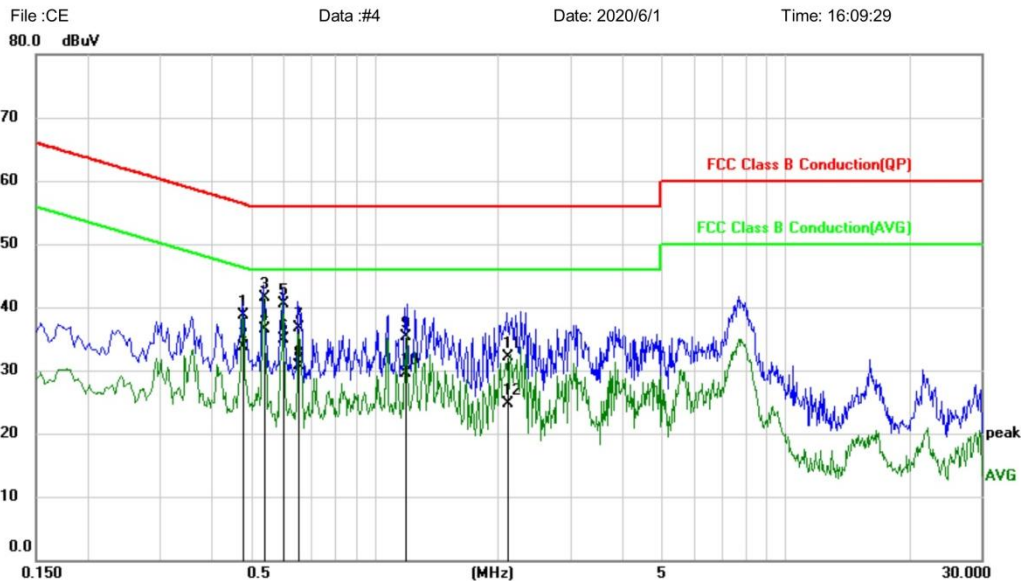

Site: Phase: **N** Temperature: 26
Limit: FCC Class B Conduction(QP) Power: AC120V/60Hz Humidity: 60 %
EUT: Haylow Wireless Earbuds
M/N: Haylou-GT5
Mode: EDR mode
Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.4780	28.93	9.72	38.65	56.37	-17.72	QP	
2		0.4780	24.07	9.72	33.79	46.37	-12.58	AVG	
3		0.5380	31.75	9.73	41.48	56.00	-14.52	QP	
4	*	0.5380	26.77	9.73	36.50	46.00	-9.50	AVG	
5		0.5980	30.81	9.74	40.55	56.00	-15.45	QP	
6		0.5980	25.15	9.74	34.89	46.00	-11.11	AVG	
7		0.6540	27.09	9.70	36.79	56.00	-19.21	QP	
8		0.6540	21.01	9.70	30.71	46.00	-15.29	AVG	
9		1.1900	25.52	9.81	35.33	56.00	-20.67	QP	
10		1.1900	19.66	9.81	29.47	46.00	-16.53	AVG	
11		2.1060	22.27	9.82	32.09	56.00	-23.91	QP	
12		2.1060	14.84	9.82	24.66	46.00	-21.34	AVG	

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

11 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Ben
Temperature	25°C
Humidity	55%

11.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

11.2 BLOCK DIAGRAM OF TEST SETUP

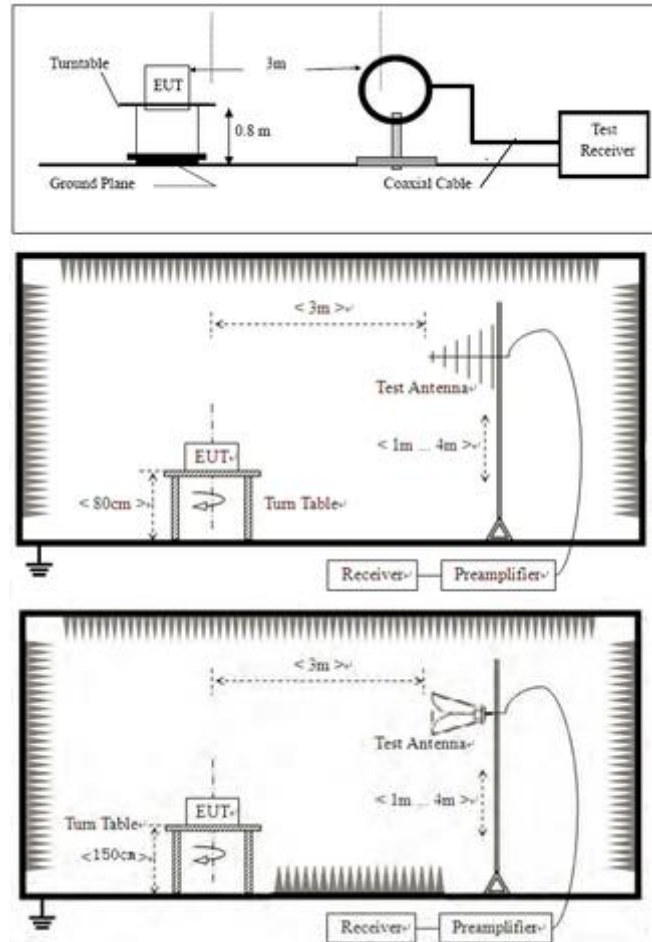

11.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

11.4 TEST DATA

During the test, pre-scan the GFSK, Pi/4QPSK, 8-DPSK modulation, and found the 8-DPSK modulation which it is worse case.

[TestMode: TX]						
Test channel:lowest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	43.94	-4.2	39.74	74	-34.26	Horizontal
2390	44.46	-3.88	40.58	74	-33.42	Horizontal
2310	49.27	-4.49	44.78	74	-29.22	Vertical
2390	57.04	-4.21	52.83	74	-21.17	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310	31.94	-4.2	27.74	54	-26.26	Horizontal
2390	31.83	-3.88	27.95	54	-26.05	Horizontal
2310	32.11	-4.49	27.62	54	-26.38	Vertical
2390	34.5	-4.21	30.29	54	-23.71	Vertical
Test channel:Highest						
Peak value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	44.03	-3.39	40.64	74	-33.36	Horizontal
2500	43.21	-3.3	39.91	74	-34.09	Horizontal
2483.5	45.74	-3.78	41.96	74	-32.04	Vertical
2500	44.96	-3.7	41.26	74	-32.74	Vertical
Average value:						
Frequency (MHz)	Read Level (dBuV)	Correct factor(dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.5	33.41	-3.39	30.02	54	-23.98	Horizontal
2500	31.85	-3.3	28.55	54	-25.45	Horizontal
2483.5	32.97	-3.78	29.19	54	-24.81	Vertical
2500	32.29	-3.7	28.59	54	-25.41	Vertical

Test Result: Pass


12 APPENDI



12.1 APPENDIXA: 20DBEMISSION BANDWIDTH

Test Result


TestMode	Antenna	Channel	20db EBW[MHz]	Limit[MHz]	Verdict
DH1	Ant1	2402	0.968	---	PASS
		2441	0.968	---	PASS
		2480	0.968	---	PASS
2DH1	Ant1	2402	1.374	---	PASS
		2441	1.374	---	PASS
		2480	1.374	---	PASS
3DH1	Ant1	2402	1.362	---	PASS
		2441	1.362	---	PASS
		2480	1.362	---	PASS

Test Graphs

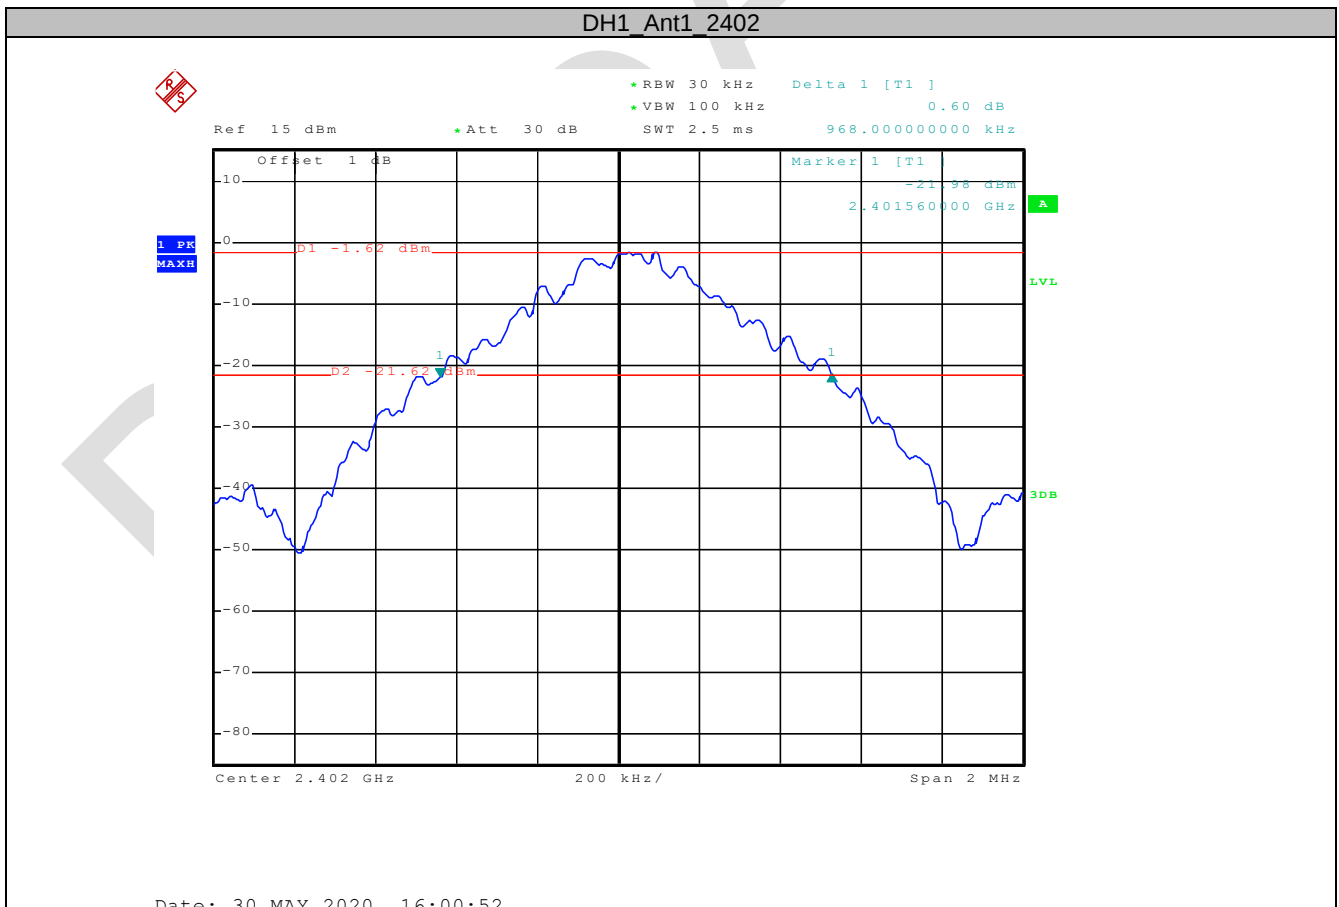

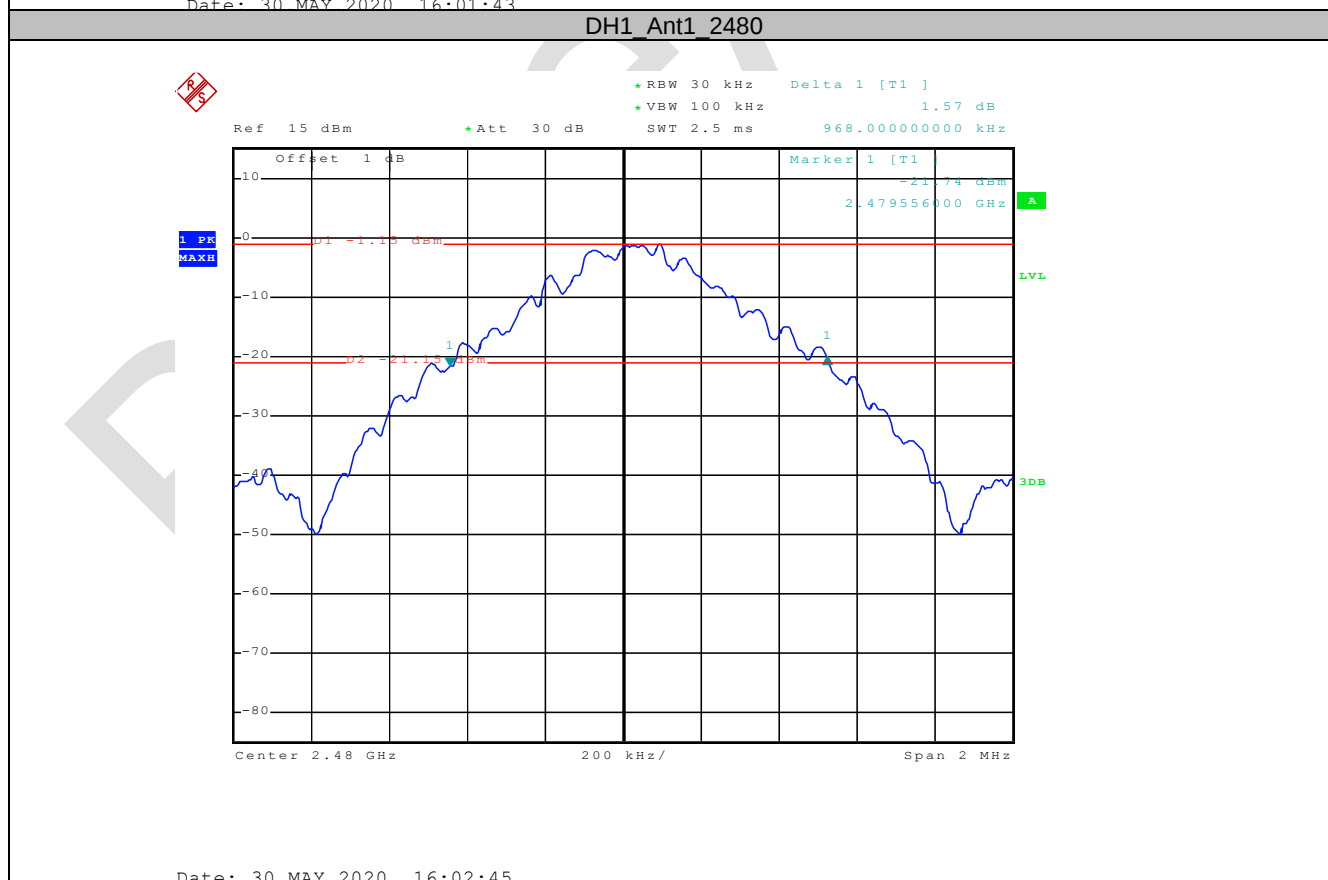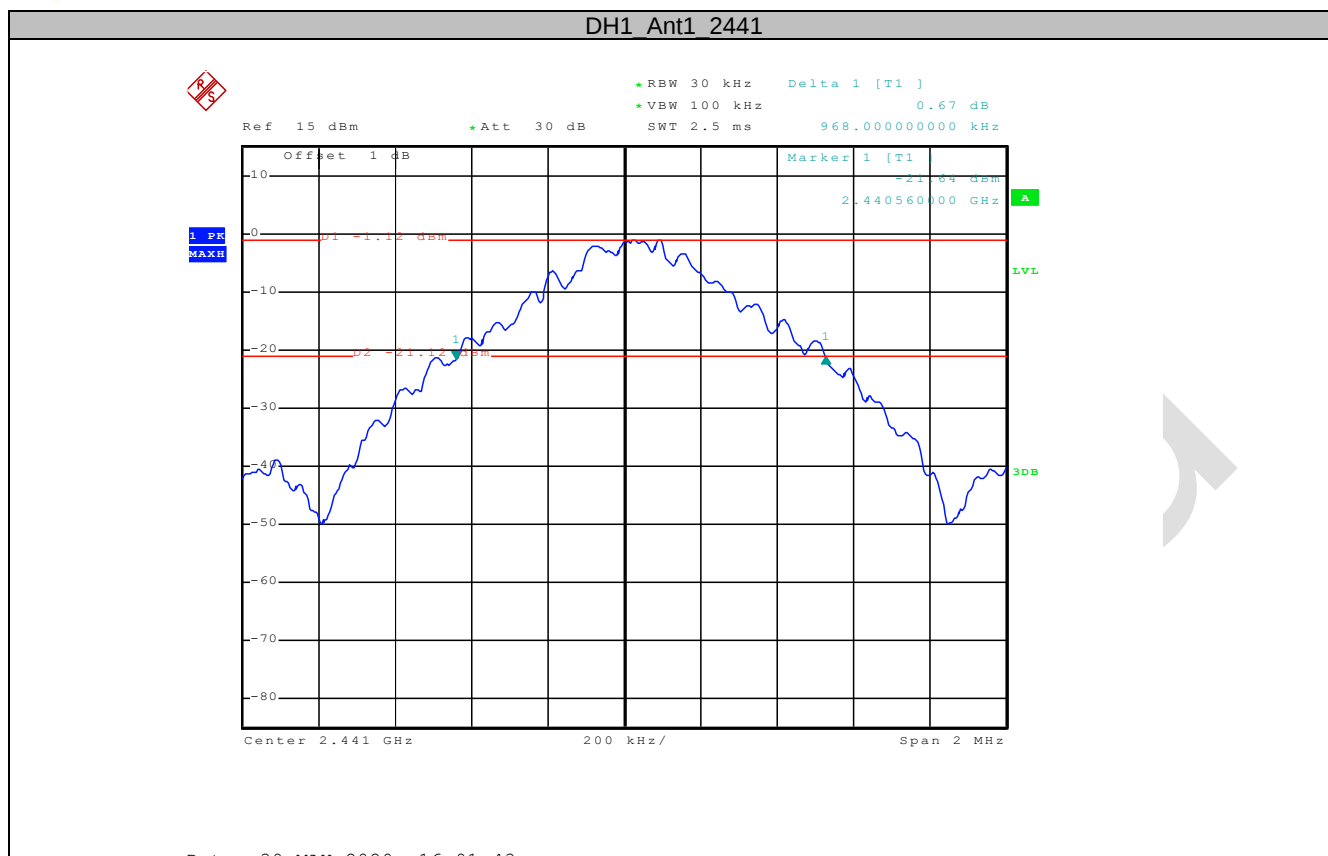


2DH1_Ant1_2402

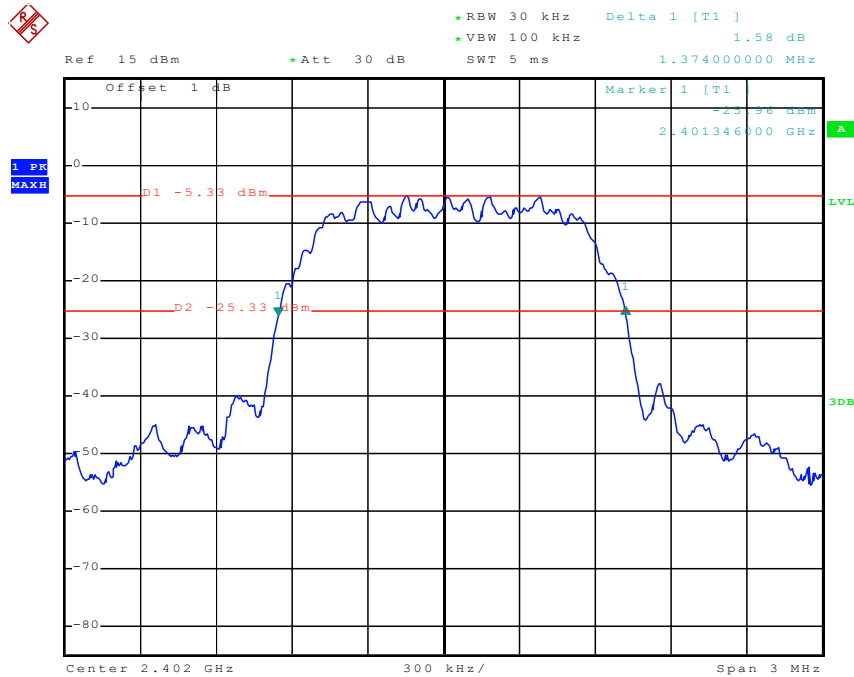


Date: 30 MAY 2020 16:06:45

2DH1_Ant1_2441

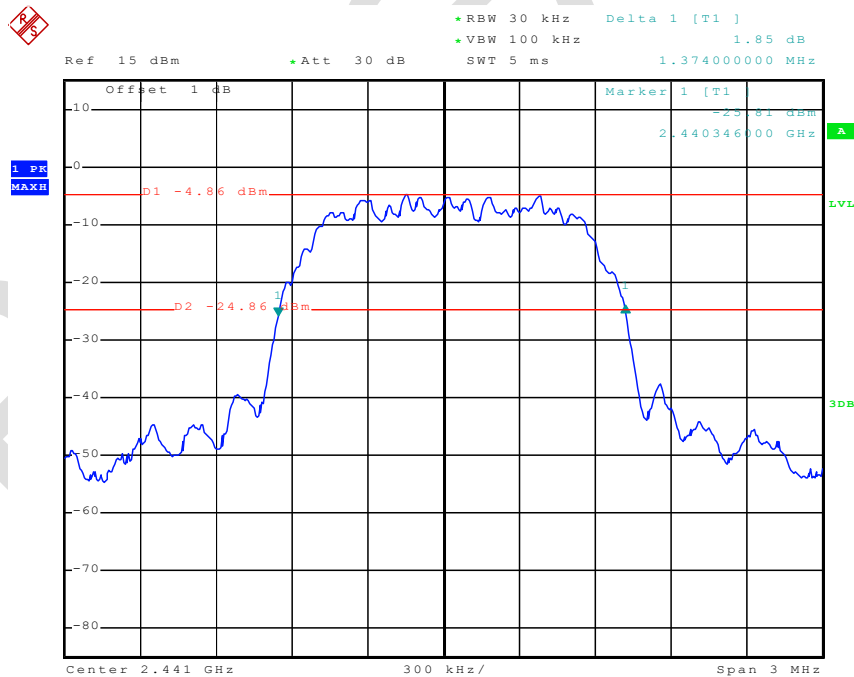


Date: 30 MAY 2020 16:05:26

2DH1 Ant1 2480

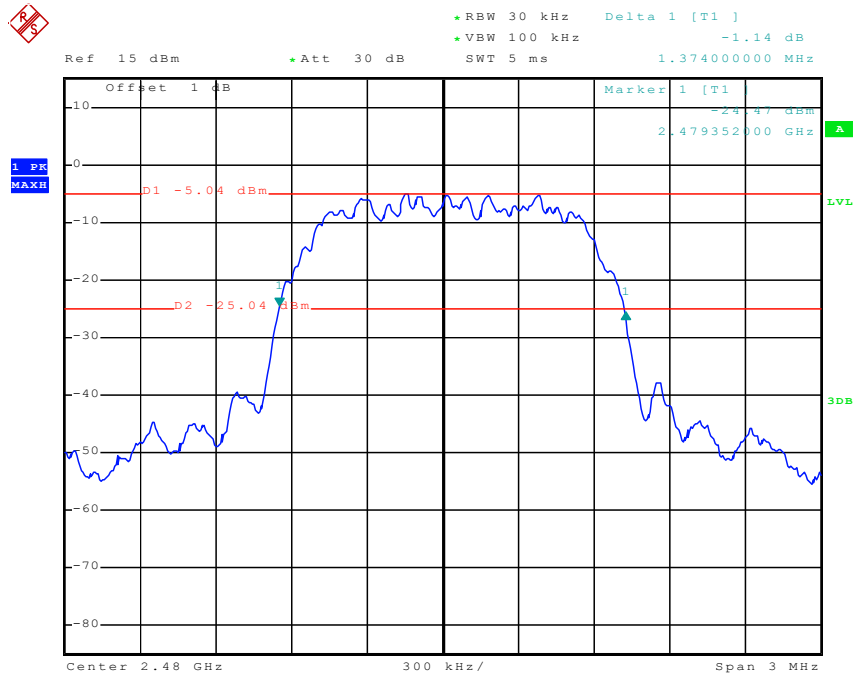


Date: 30 MAY 2020 16:04:13

3DH1 Ant1 2402

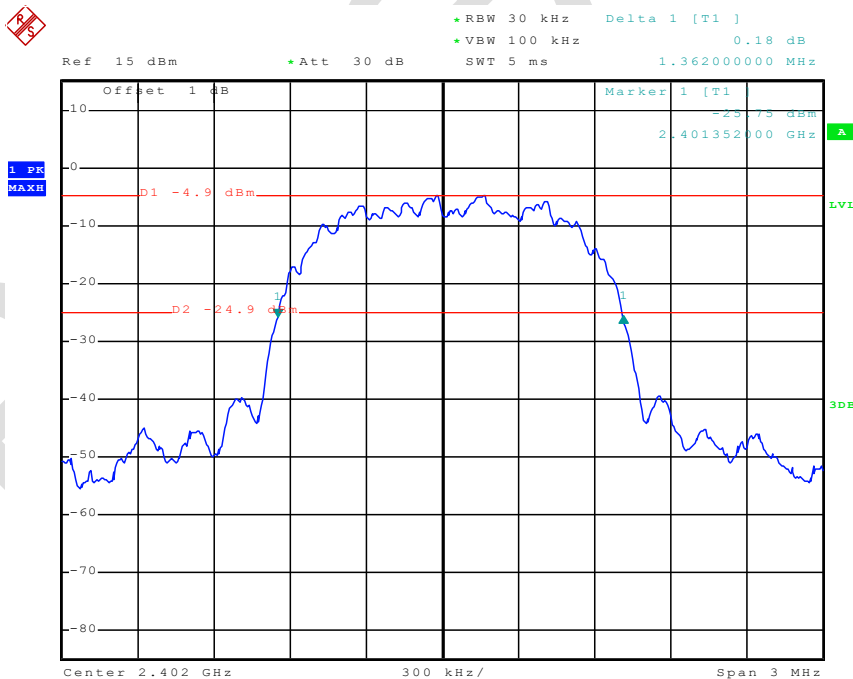


Date: 30 MAY 2020 16:07:53

3DH1 Ant1 2441

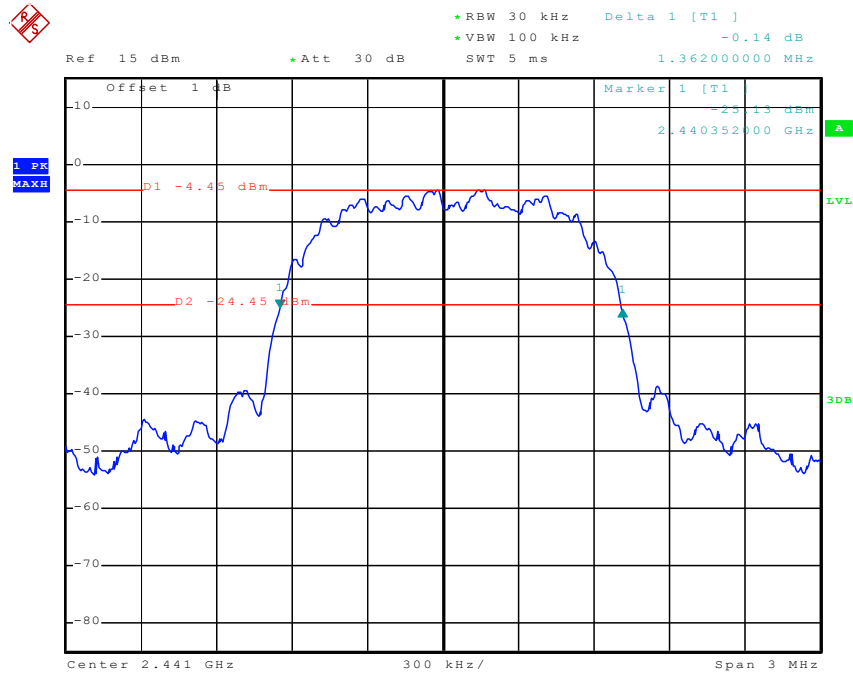

Date: 30 MAY 2020 16:09:00

3DH1 Ant1 2480

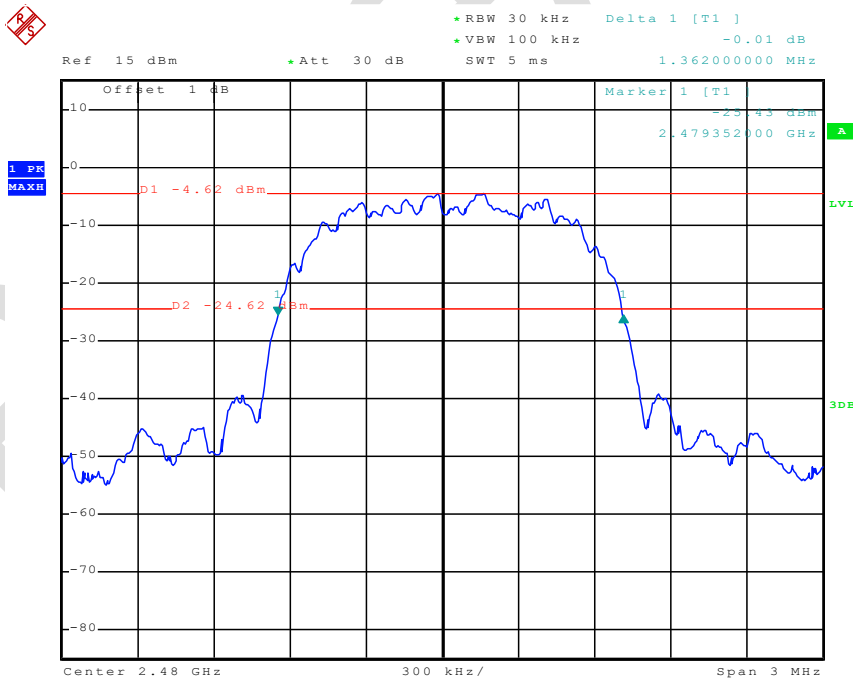


Date: 30 MAY 2020 16:09:48

12.2 APPENDIX: MAXIMUM CONDUCTED OUTPUT POWER


Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
DH1	Ant1	2402	1.17	<=20.97	PASS
		2441	1.66	<=20.97	PASS
		2480	1.70	<=20.97	PASS
2DH1	Ant1	2402	3.57	<=20.97	PASS
		2441	3.98	<=20.97	PASS
		2480	3.87	<=20.97	PASS
3DH1	Ant1	2402	4.11	<=20.97	PASS
		2441	4.53	<=20.97	PASS
		2480	4.36	<=20.97	PASS

Test Graphs

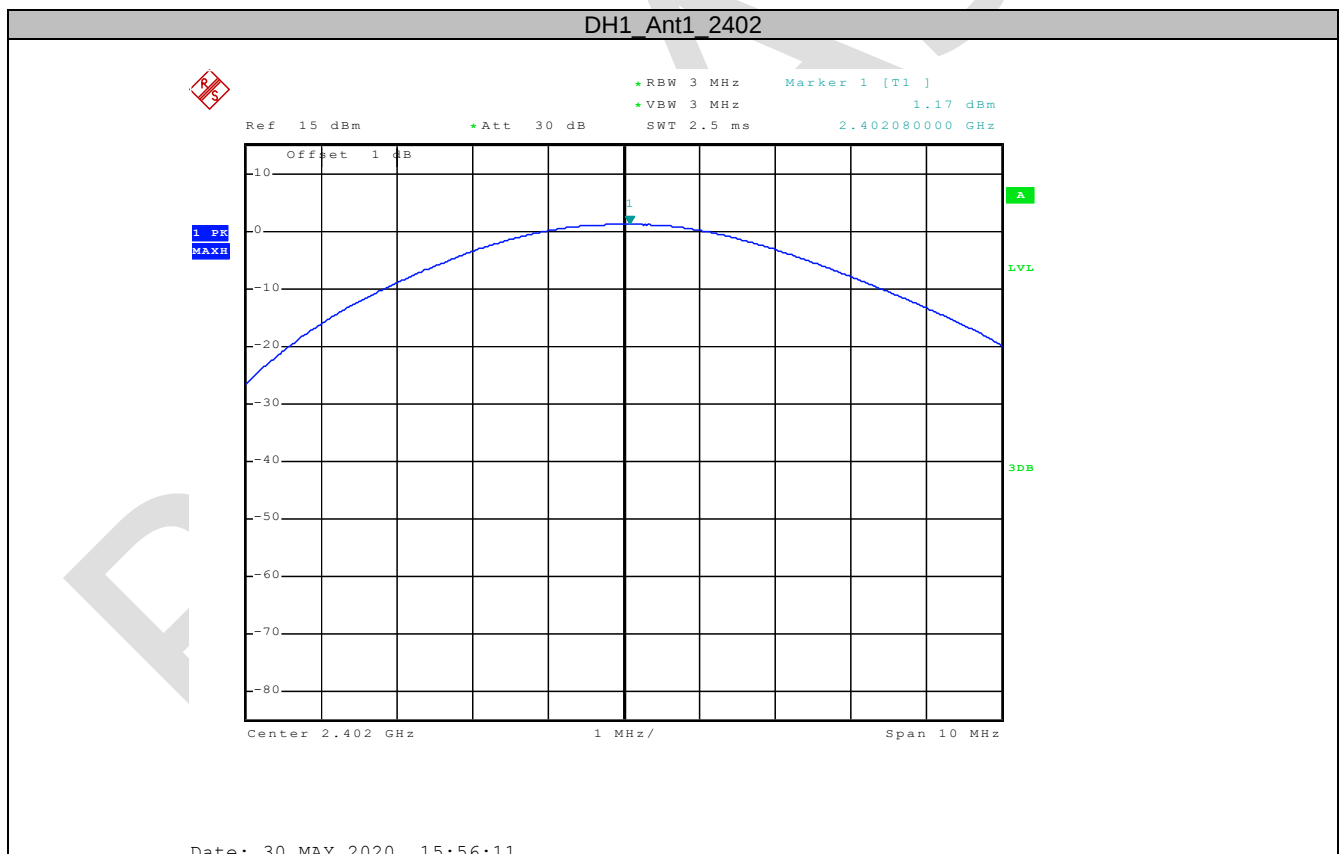


DH1 Ant1 2441

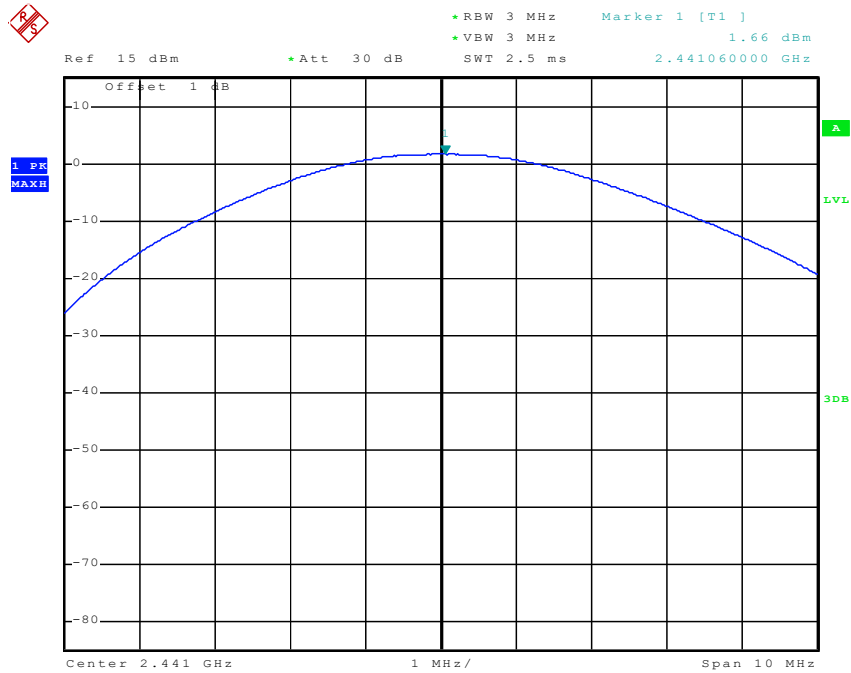


Date: 30 MAY 2020 15:56:32

DH1 Ant1 2480

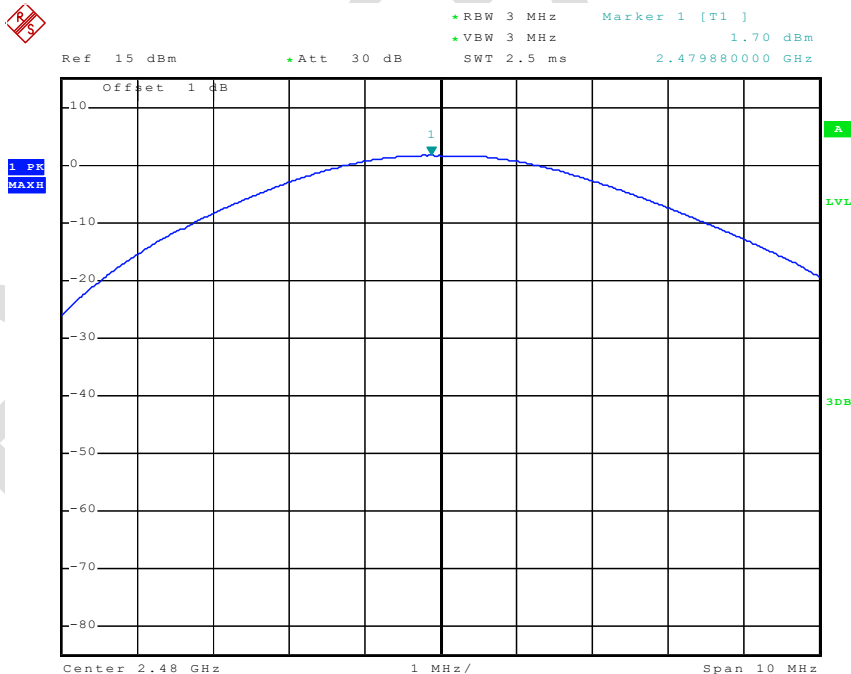


Date: 30 MAY 2020 15:56:57

2DH1 Ant1 2402

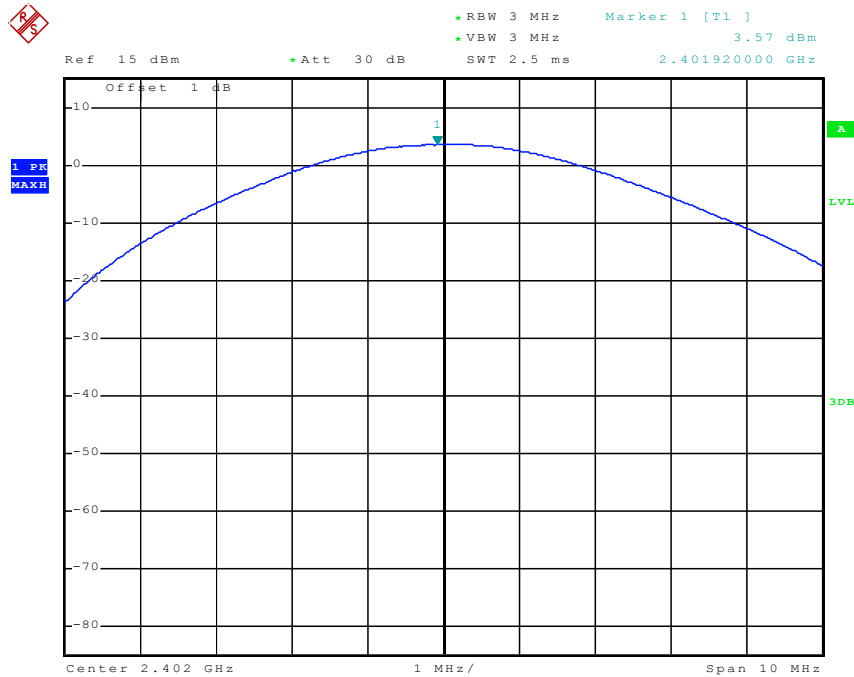


Date: 30 MAY 2020 15:58:00

2DH1 Ant1 2441

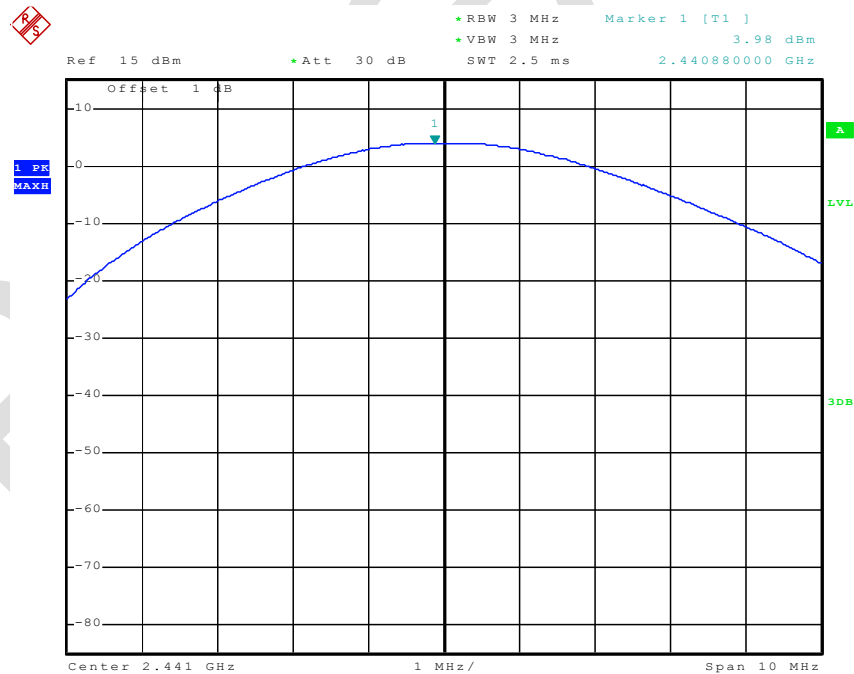


Date: 30 MAY 2020 15:57:38

2DH1 Ant1 2480

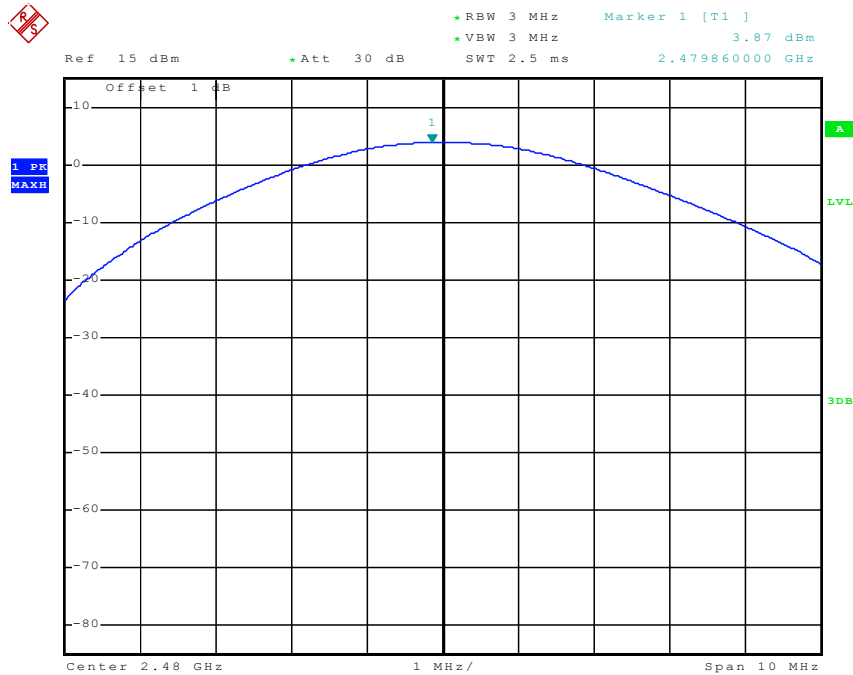


Date: 30 MAY 2020 15:57:18

3DH1 Ant1 2402

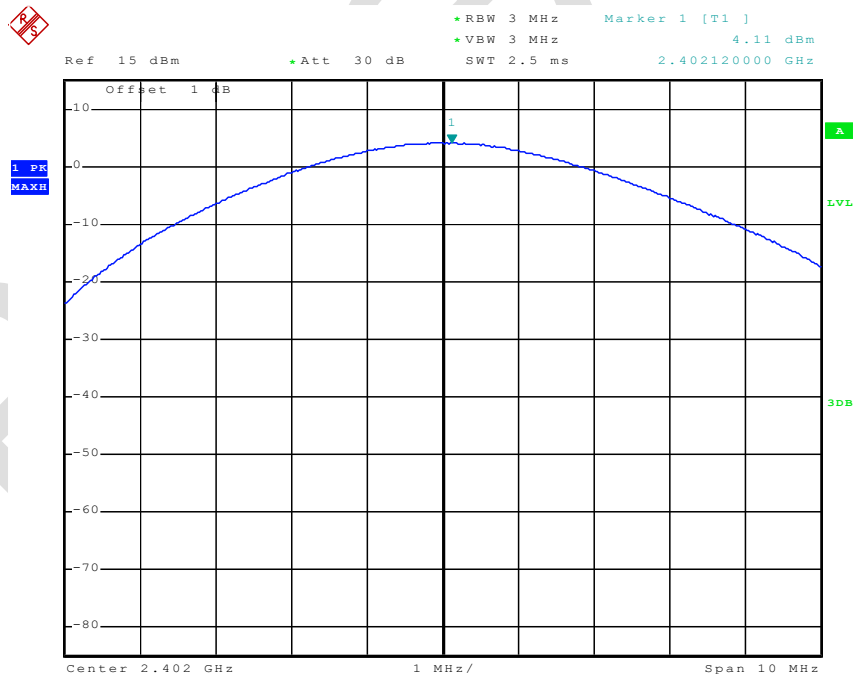


Date: 30 MAY 2020 15:58:19

3DH1 Ant1 2441

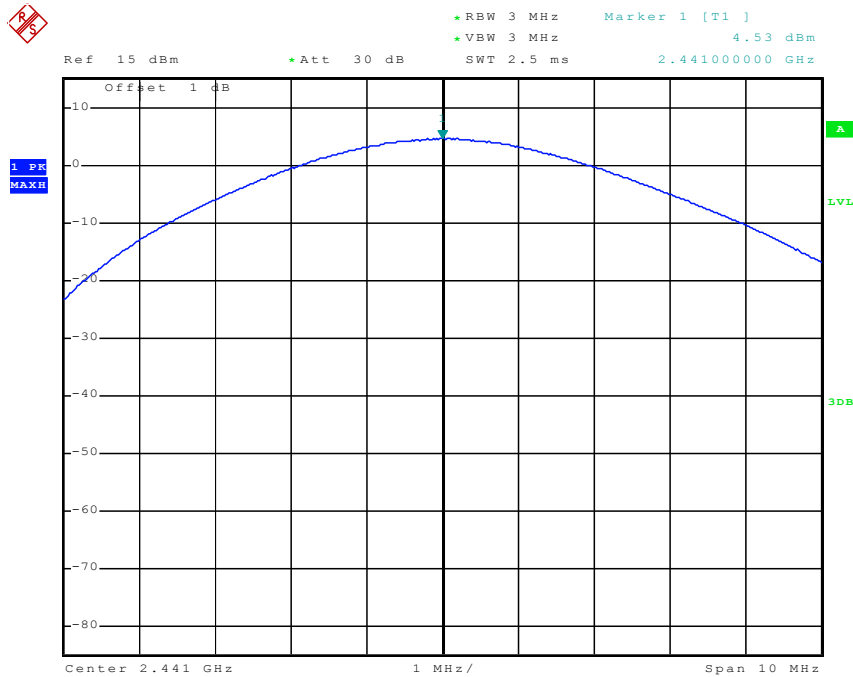

Date: 30 MAY 2020 15:58:44

3DH1 Ant1 2480

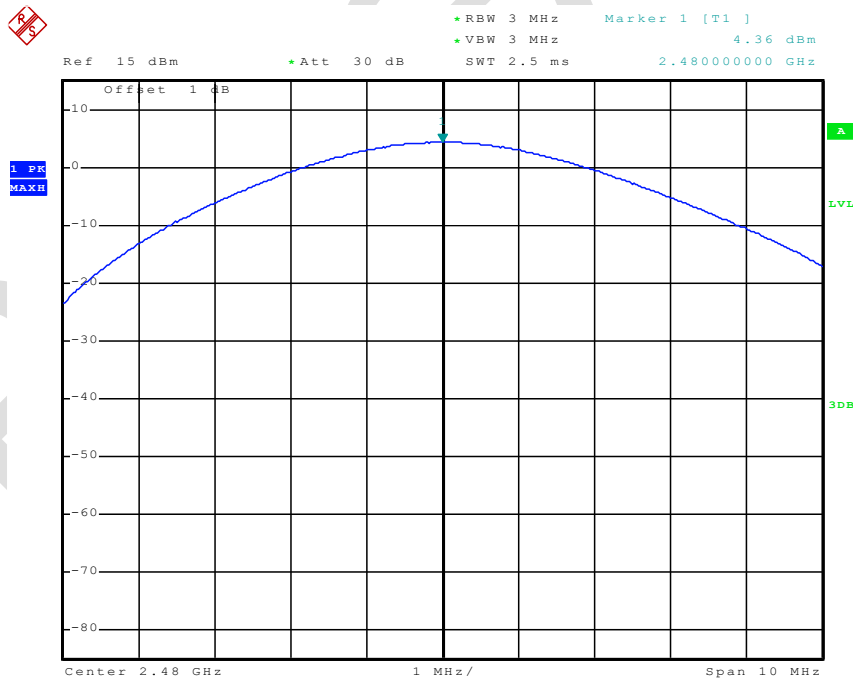


Date: 30 MAY 2020 15:59:03

12.3 APPENDIX: CARRIER FREQUENCY SEPARATION


Test Result

TestMode	Antenna	Channel	Result[MHz]	Limit[MHz]	Verdict
DH1	Ant1	Hop	1.004	≥ 0.736	PASS
2DH1	Ant1	Hop	1.008	≥ 0.928	PASS
3DH1	Ant1	Hop	1.008	≥ 0.914	PASS

Test Graphs

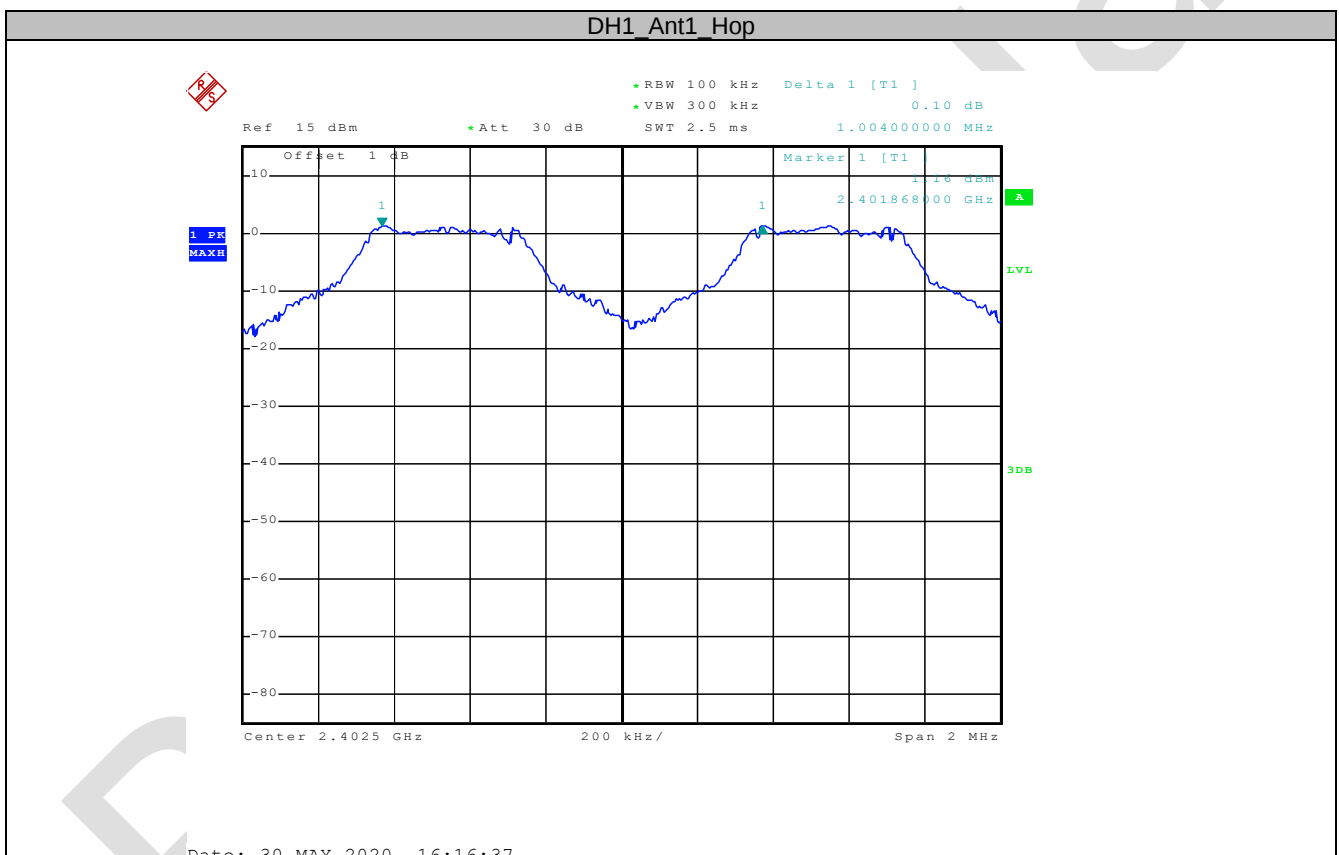


2DH1_Ant1_Hop

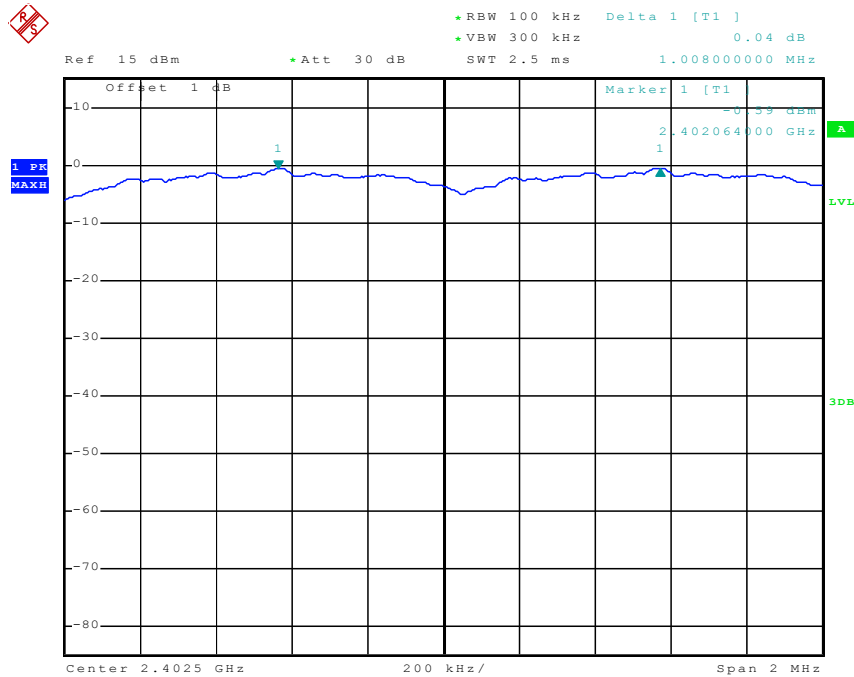

Date: 30 MAY 2020 16:23:47

3DH1_Ant1_Hop

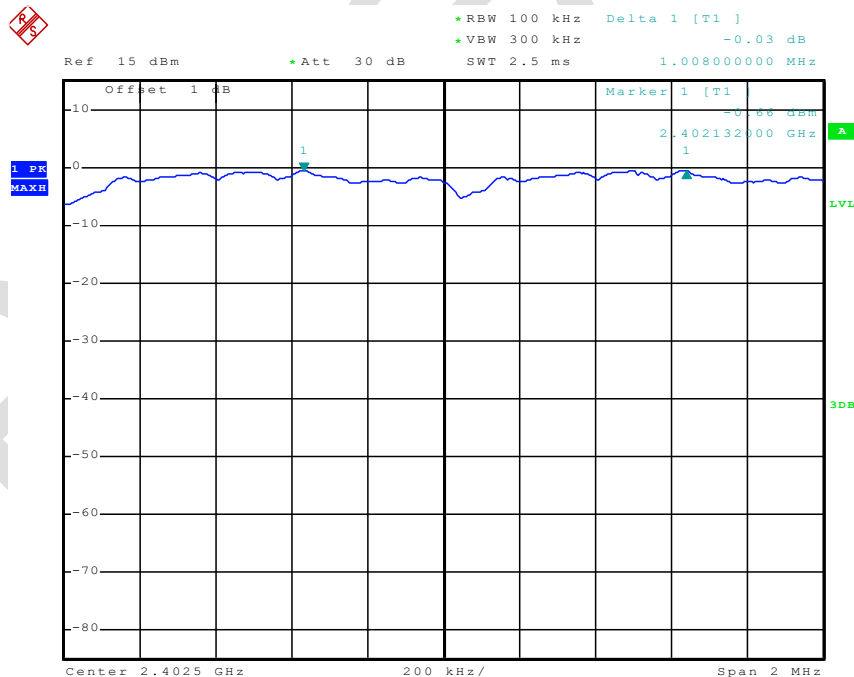

Date: 30 MAY 2020 16:24:43

12.4 APPENDIX: TIME OF OCCUPANCY

Test Result

Frequency	Packet	BurstWidth [ms]	Dwell time(ms)	Limit(ms)	Result
2441MHz	DH1/2-DH1/3-DH1	0.398	123.52	400	Pass
2441MHz	DH3/2-DH3/3-DH3	1.664	264.96	400	Pass
2441MHz	DH5/2-DH5/3-DH5	2.944	310.61	400	Pass

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$


Test channel: 2441MHz as blow

DH1/2-DH1/3-DH1 time slot = $0.386(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 123.52 \text{ ms}$


DH3/2-DH3/3-DH3 time slot = $1.656(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 264.96 \text{ ms}$

DH5/2-DH5/3-DH5 time slot = $2.912(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 310.61 \text{ ms}$

Test Graphs

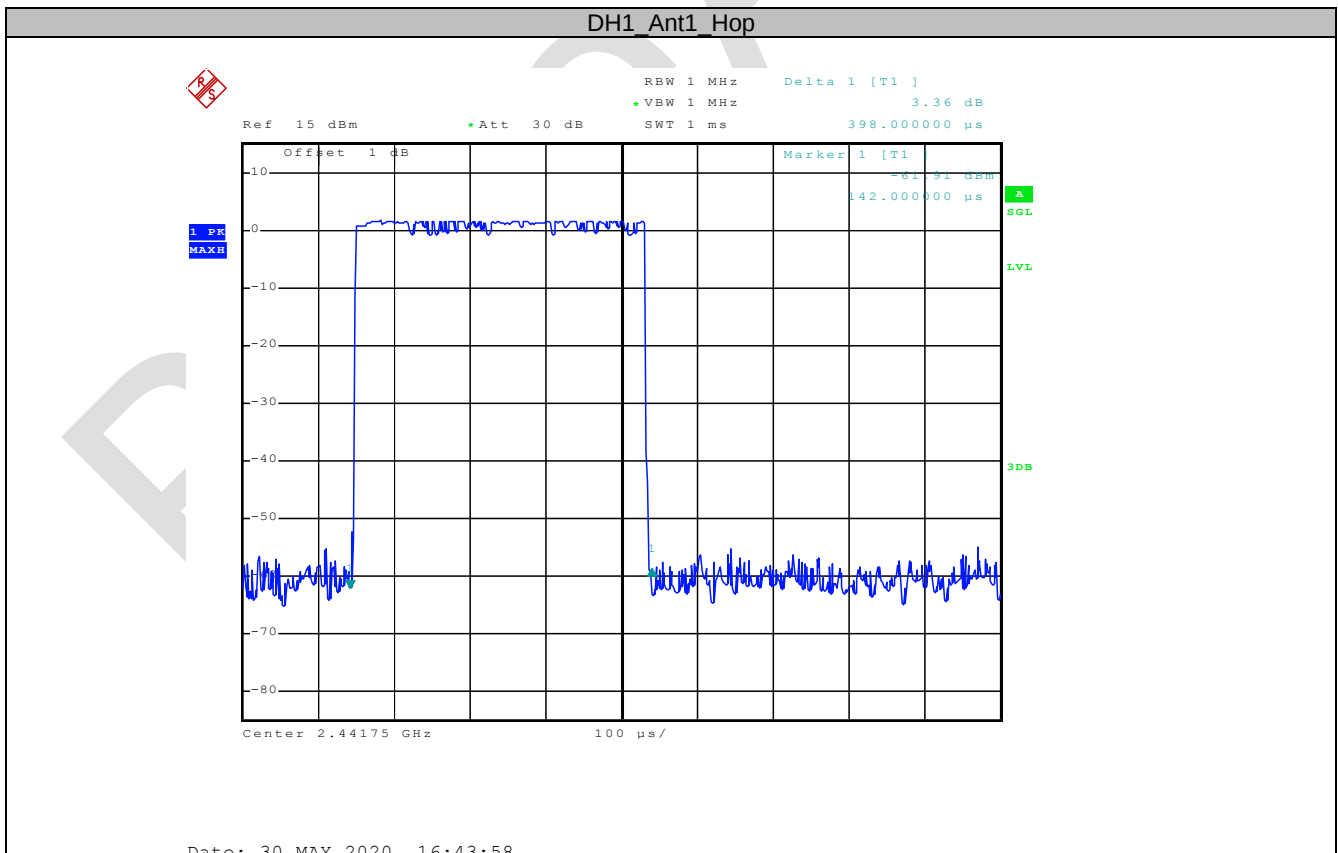


DH3 Ant1 Hop

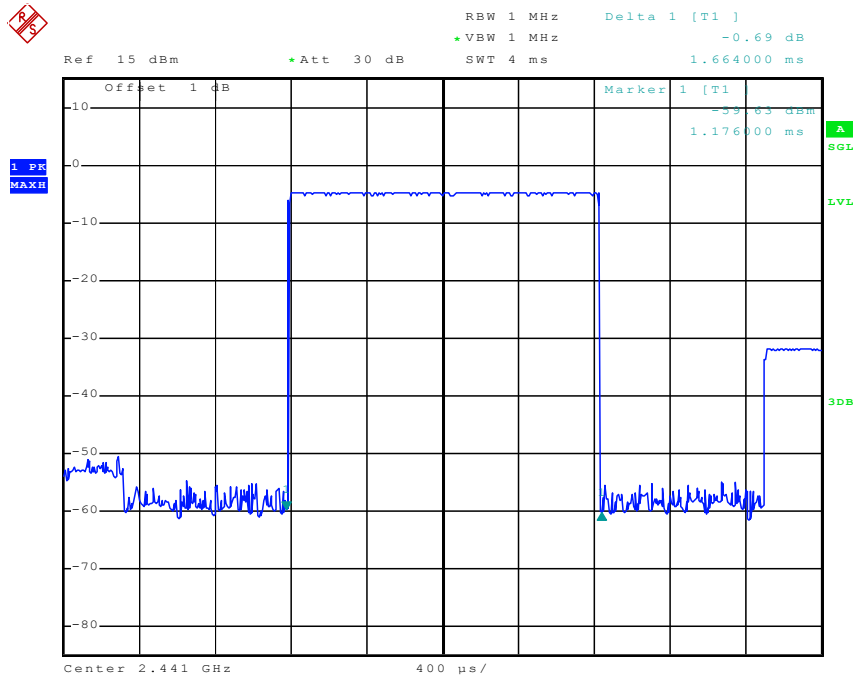

Date: 30 MAY 2020 16:46:56

DH5 Ant1 Hop

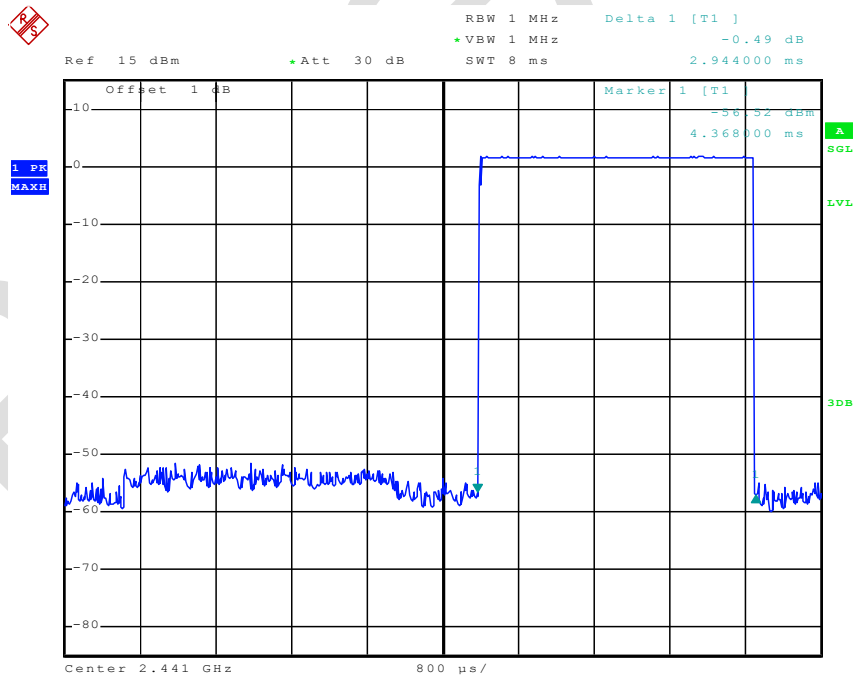


Date: 30 MAY 2020 16:47:42

12.5 APPENDIX: NUMBER OF HOPPING CHANNELS


Test Result

TestMode	Antenna	Channel	Result[Num]	Limit[Num]	Verdict
DH1	Ant1	Hop	78	≥ 15	PASS
2DH1	Ant1	Hop	78	≥ 15	PASS
3DH1	Ant1	Hop	78	≥ 15	PASS

Test Graphs

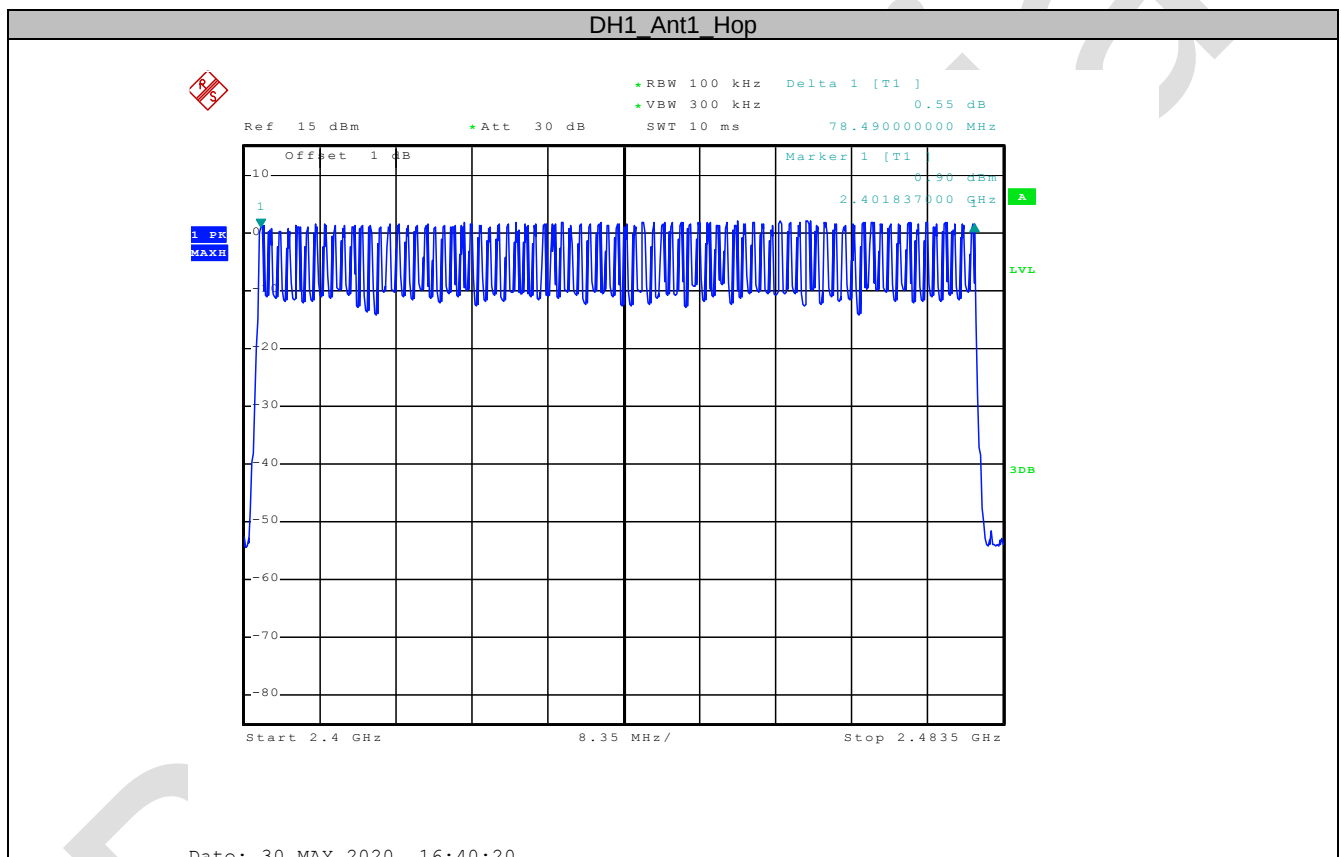


2DH1 Ant1 Hop

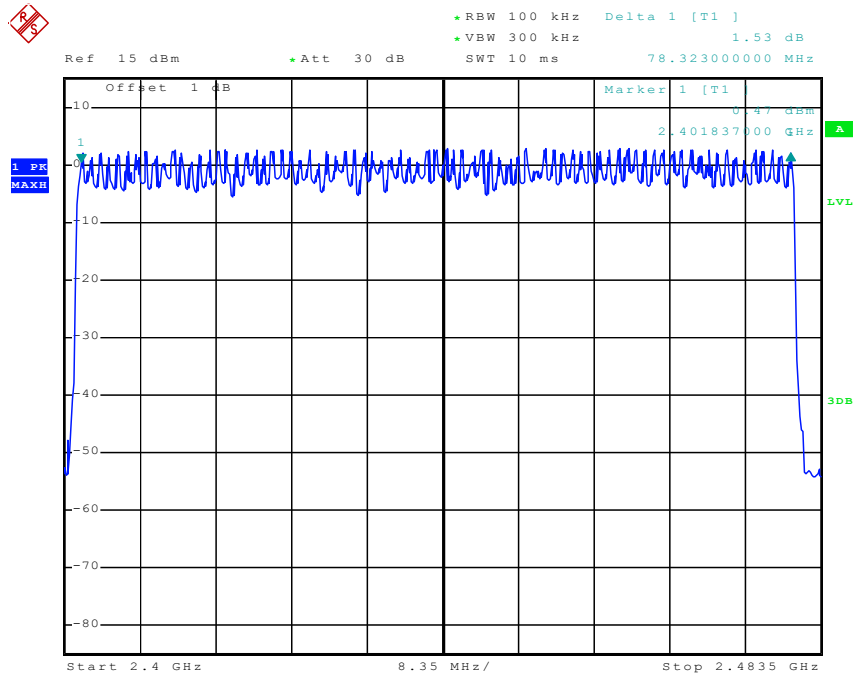

Date: 30 MAY 2020 16:37:12

3DH1 Ant1 Hop

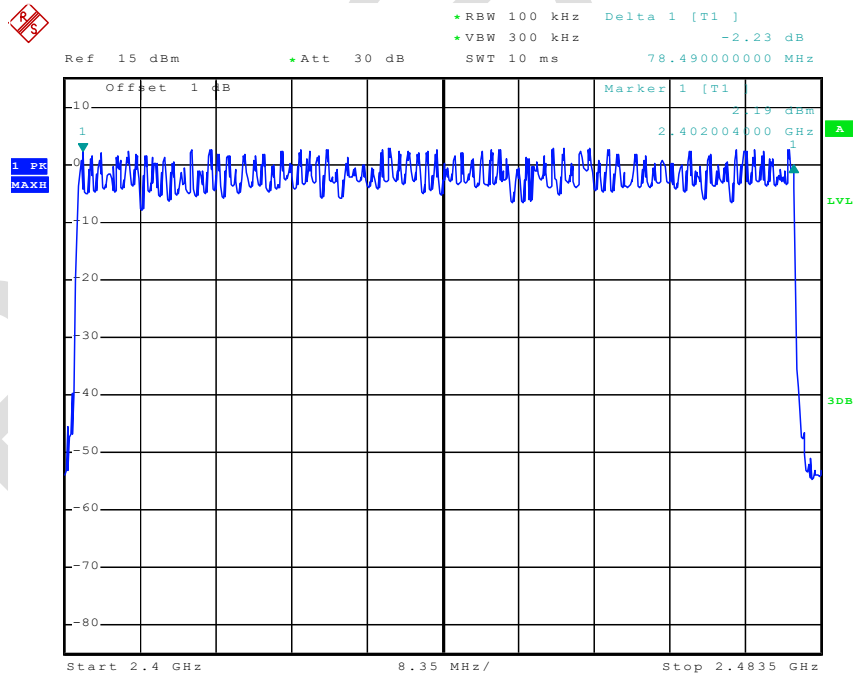


Date: 30 MAY 2020 16:41:41



12.6 APPENDIX:BAND EDGE MEASUREMENTS

Test Result


TestMode	Antenna	ChName	Channel	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH1	Ant1	Low	2402	0.83	-48.36	<=-19.17	PASS
		High	2480	1.50	-48.98	<=-18.50	PASS
		Low	Hop 2402	0.70	-50.63	<=-19.93	PASS
		High	Hop 2480	1.38	-53.09	<=-18.62	PASS
2DH1	Ant1	Low	2402	-0.50	-49.10	<=-20.50	PASS
		High	2480	-0.14	-50.84	<=-20.14	PASS
		Low	Hop 2402	2.01	-50.62	<=-17.99	PASS
		High	Hop 2480	2.7	-53.50	<=-17.30	PASS
3DH1	Ant1	Low	2402	-0.45	-48.21	<=-20.45	PASS
		High	2480	-0.11	-49.12	<=-20.11	PASS
		Low	Hop 2402	2.24	-49.27	<=-17.76	PASS
		High	Hop 2480	1.74	-52.97	<=-18.26	PASS

Test Graphs

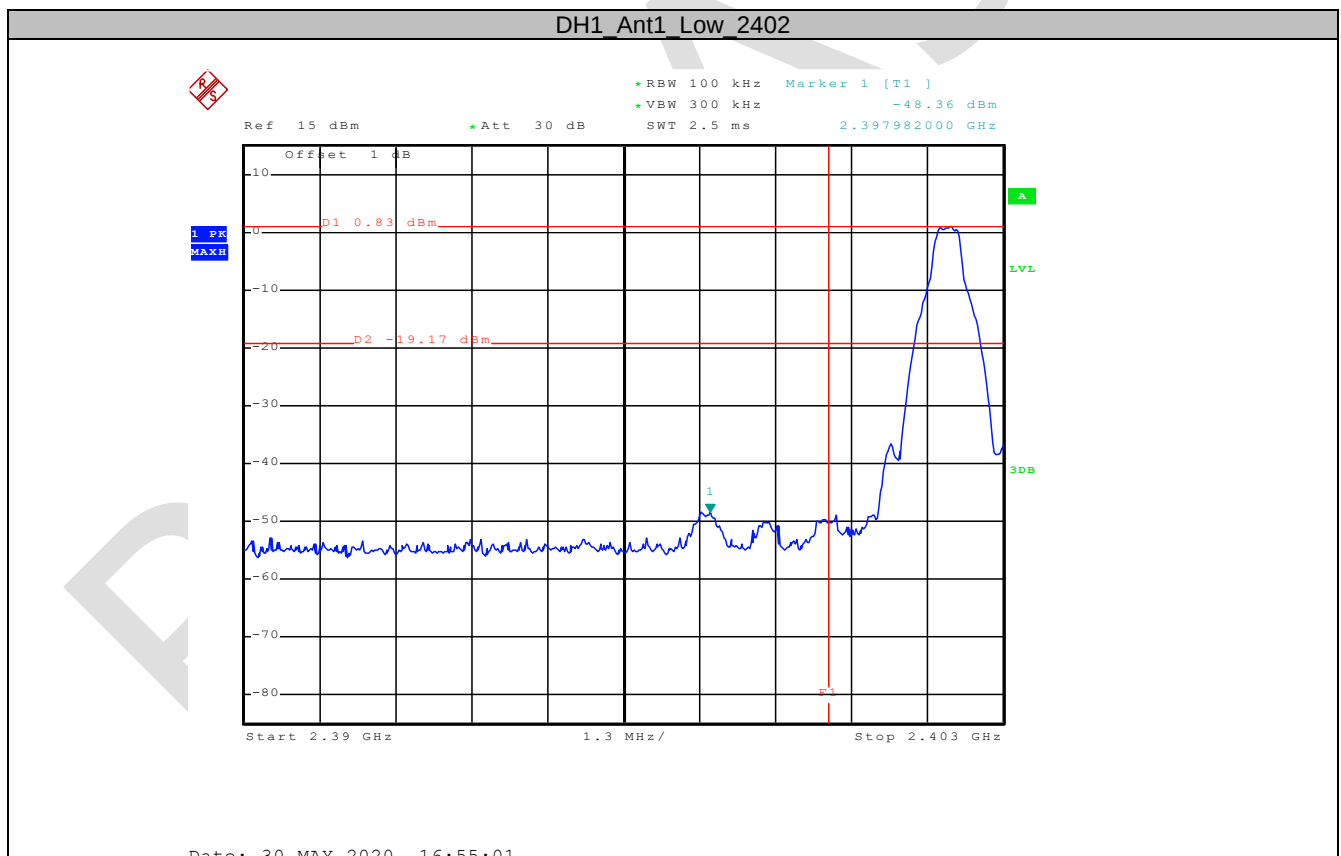

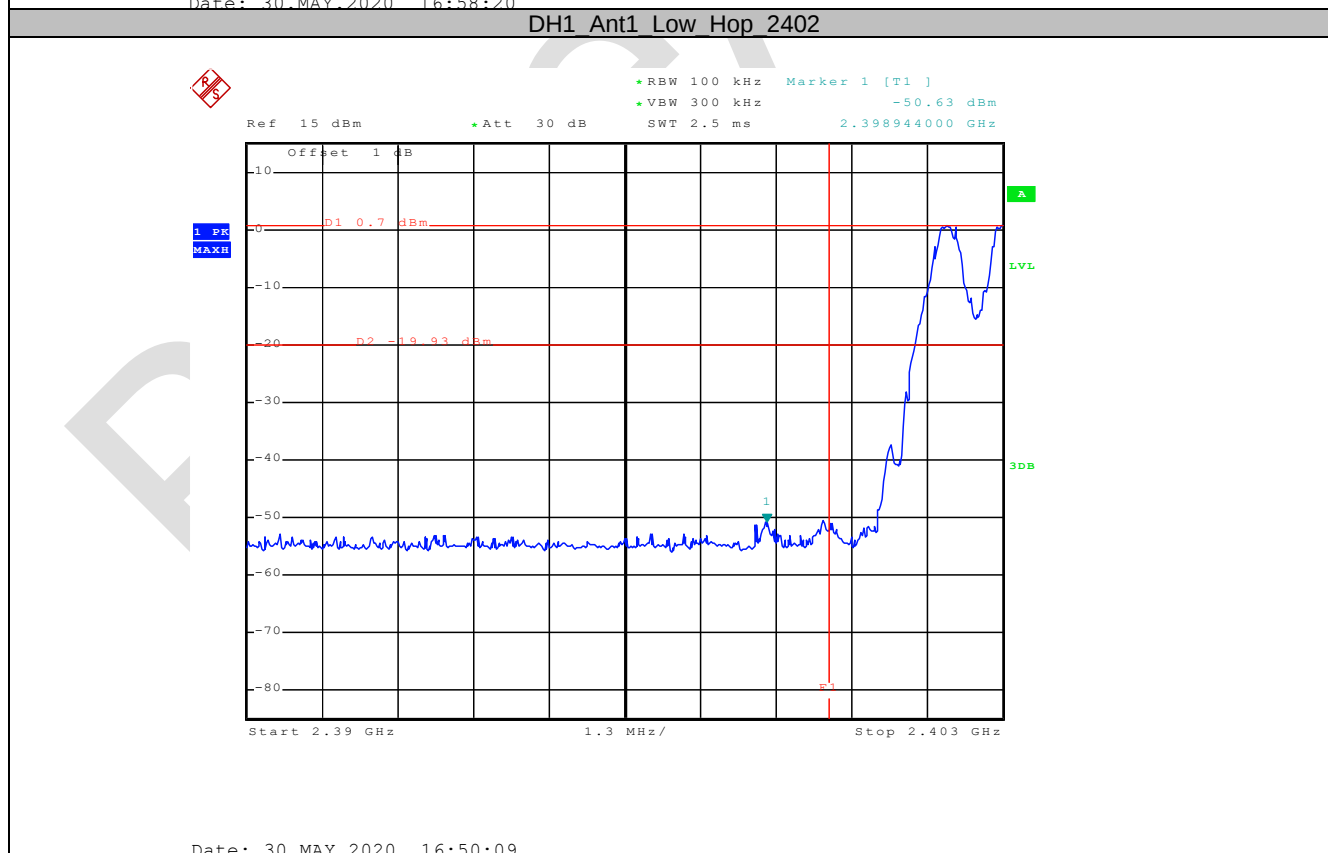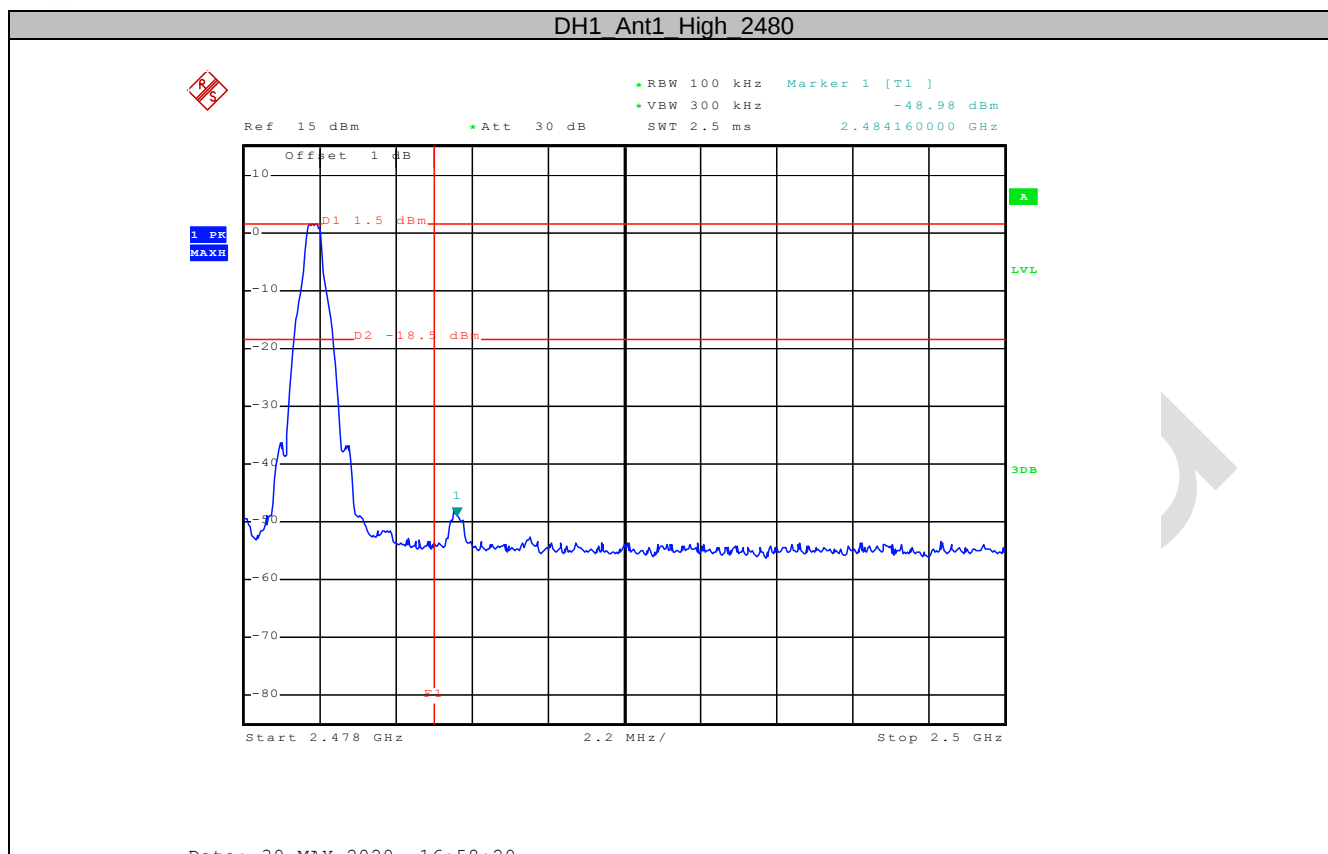


DH1 Ant1 High Hop 2480

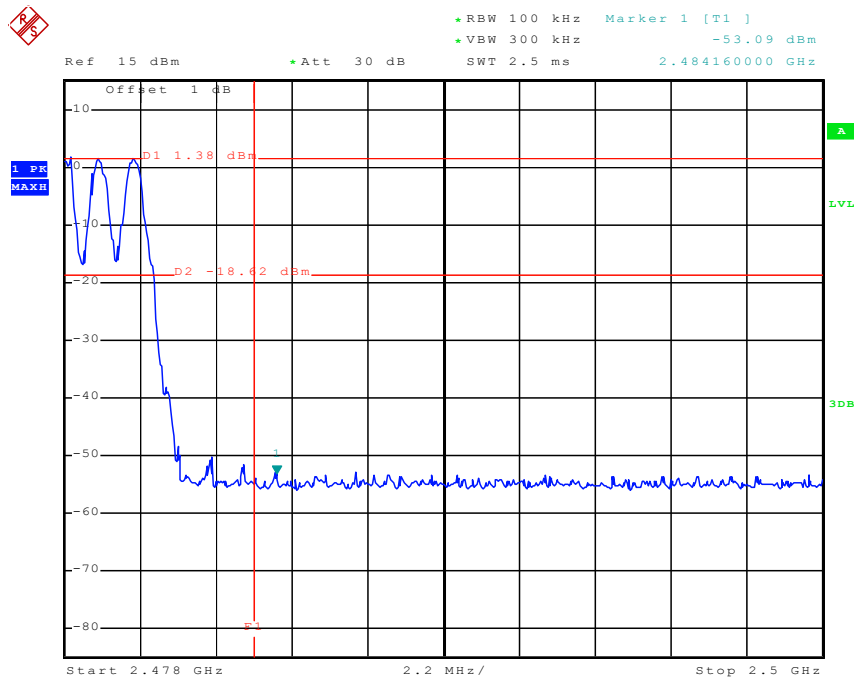


Date: 30 MAY 2020 17:01:32

2DH1 Ant1 Low 2402

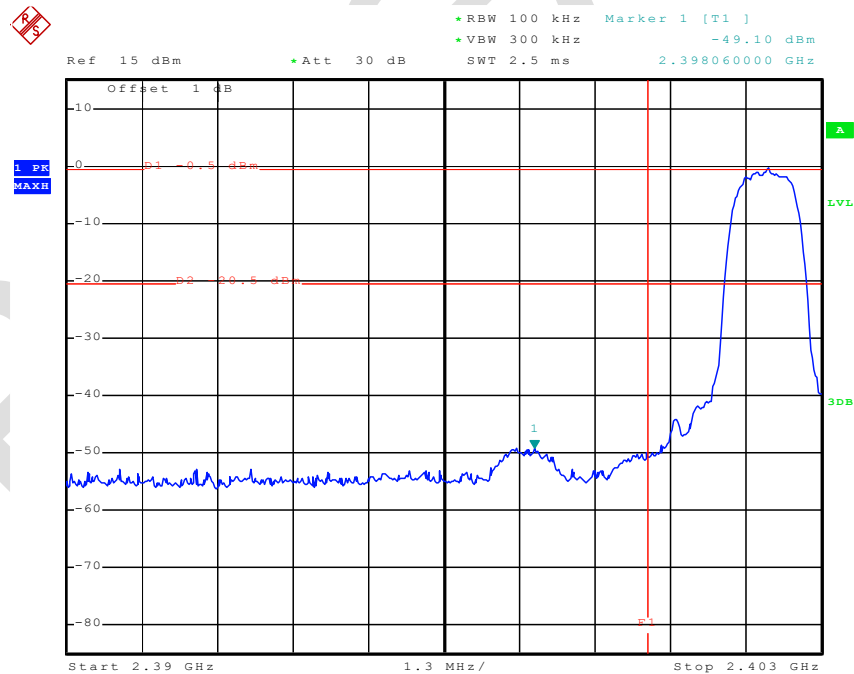


Date: 30 MAY 2020 16:55:45

2DH1 Ant1 High 2480

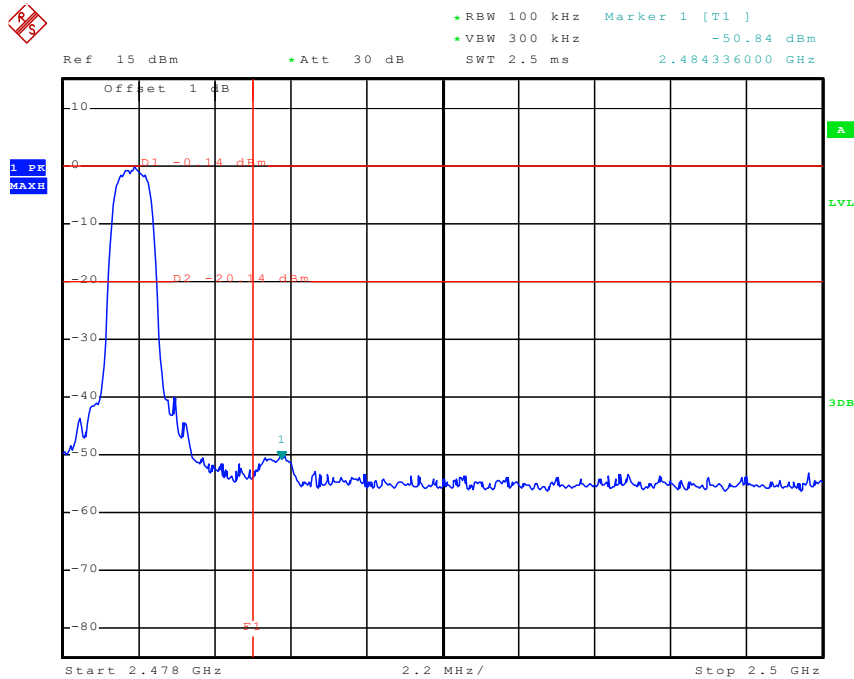


Date: 30.MAY.2020 16:59:12

2DH1 Ant1 Low Hop 2402

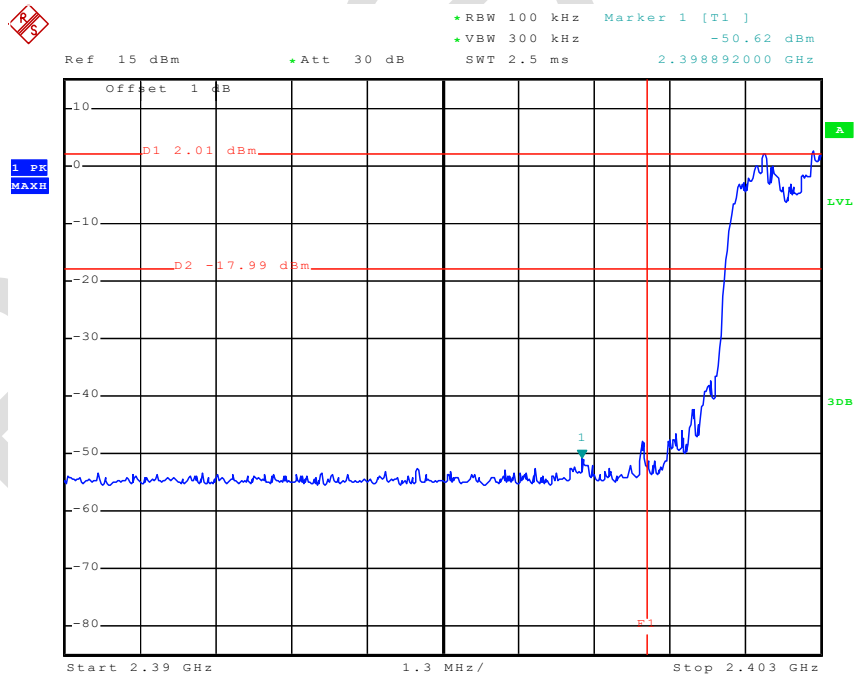


Date: 30.MAY.2020 16:51:58

2DH1 Ant1 High Hop 2480

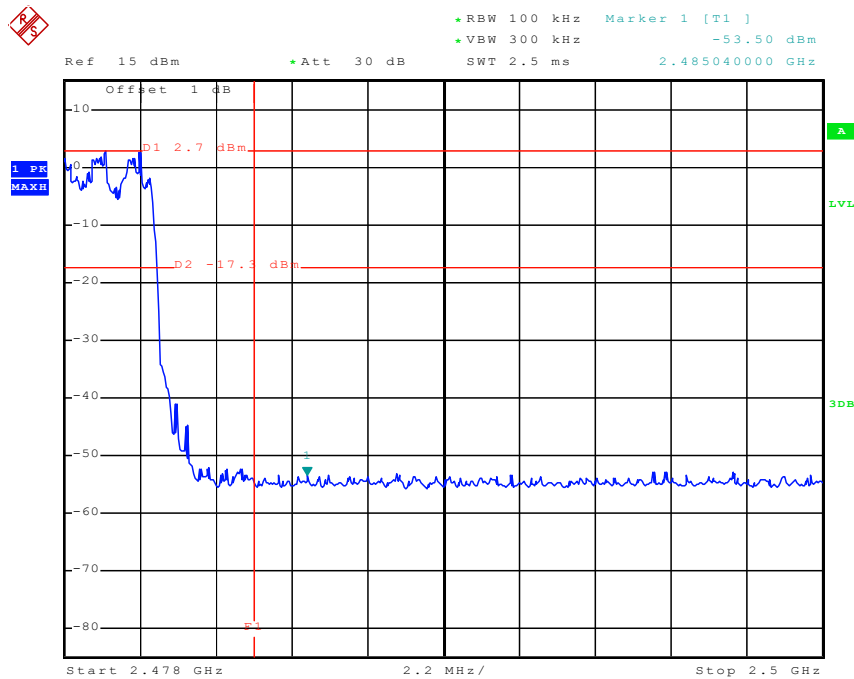


Date: 30 MAY 2020 17:03:24

3DH1 Ant1 Low 2402

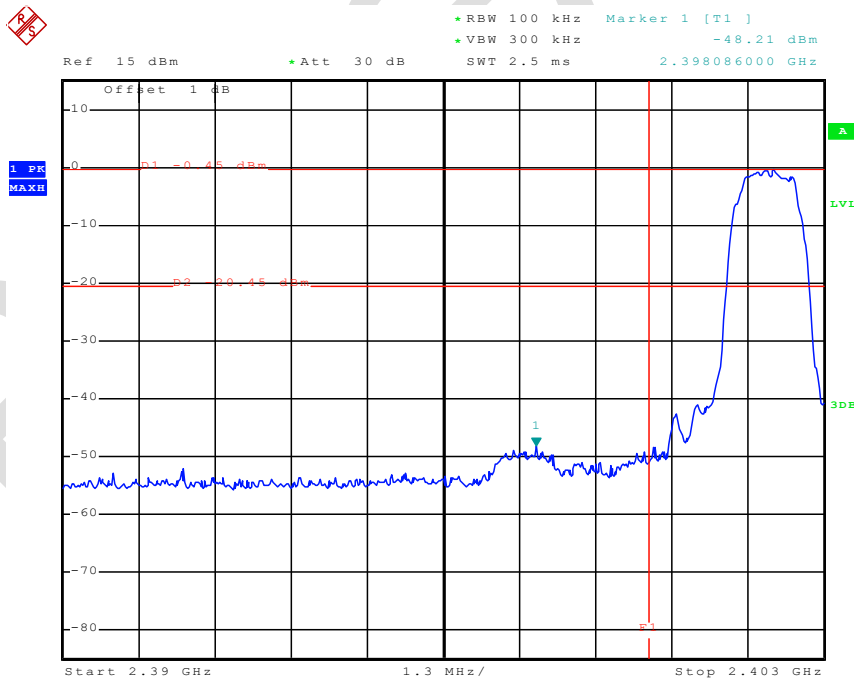


Date: 30 MAY 2020 16:56:52

3DH1 Ant1 High 2480

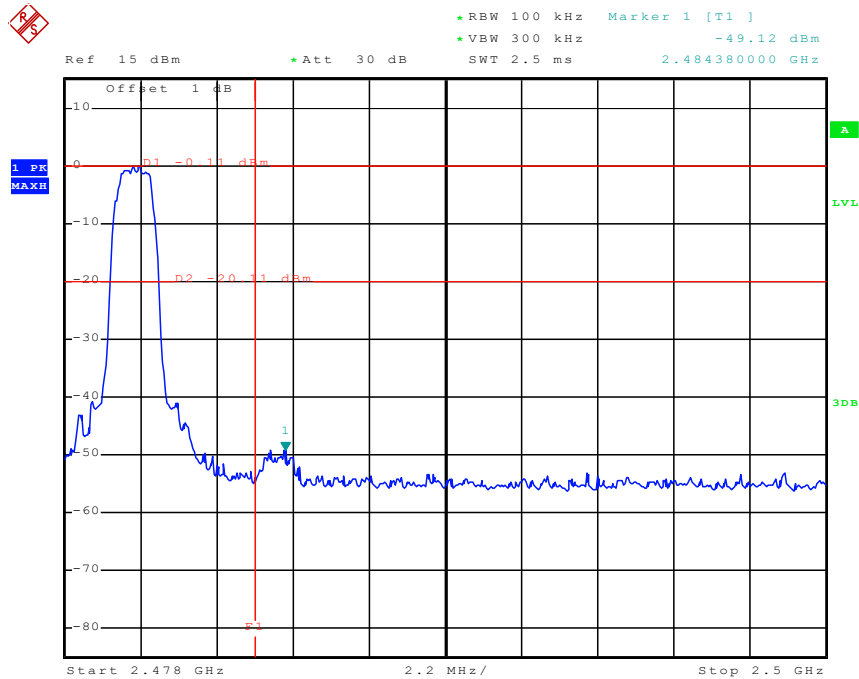


Date: 30.MAY.2020 17:00:05

3DH1 Ant1 Low Hop 2402

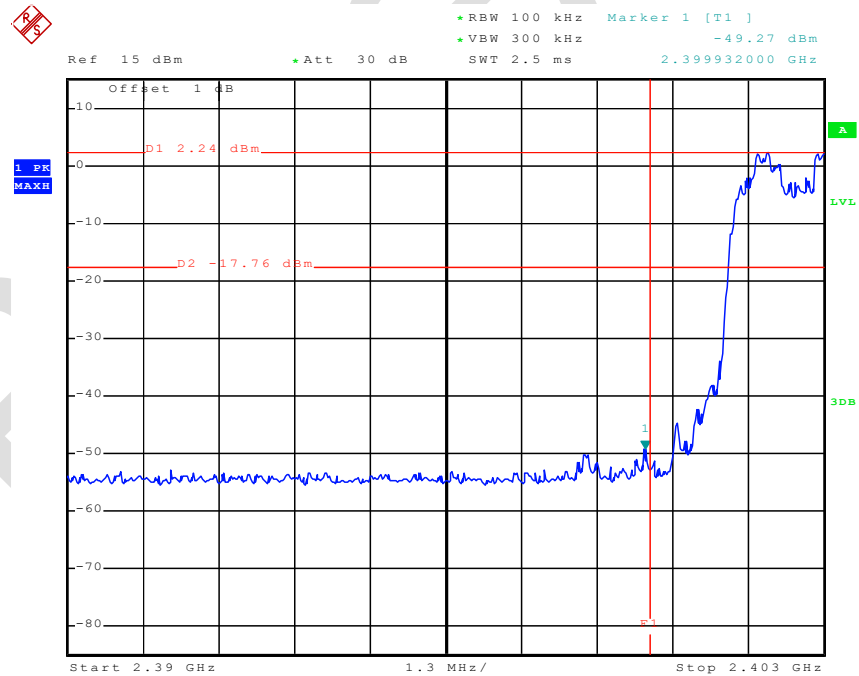

Date: 30.MAY.2020 16:54:06

3DH1 Ant1 High Hop 2480

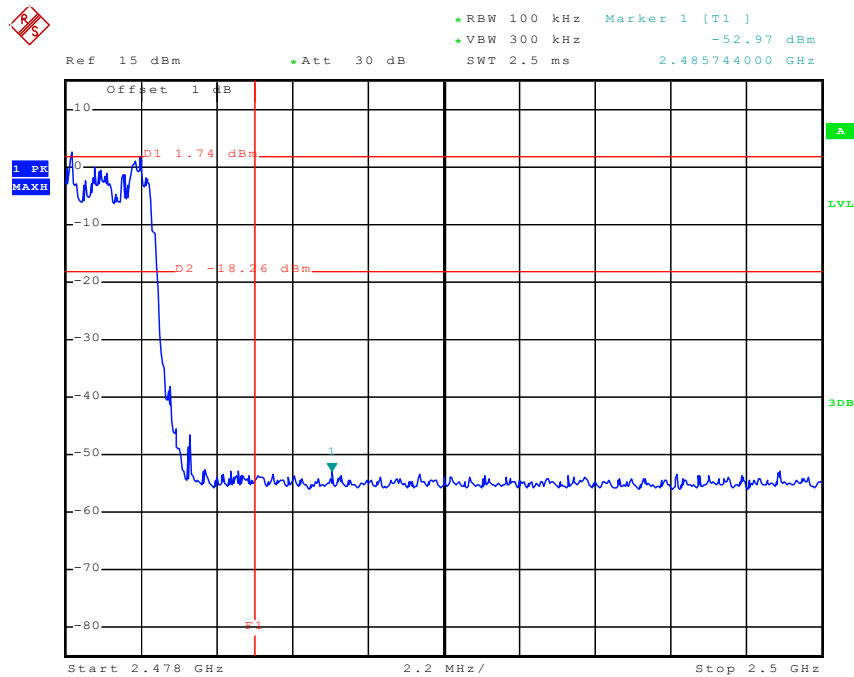


Date: 30 MAY 2020 17:04:38

12.7 APPENDIX:CONDUCTED SPURIOUSEMISSION


Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH1	Ant1	2402	30~25000	1.04	-39.95	<=-18.96	PASS
		2441	30~25000	0.87	-43.42	<=-19.13	PASS
		2480	30~25000	0.11	-43.11	<=-18.89	PASS

Test Graphs

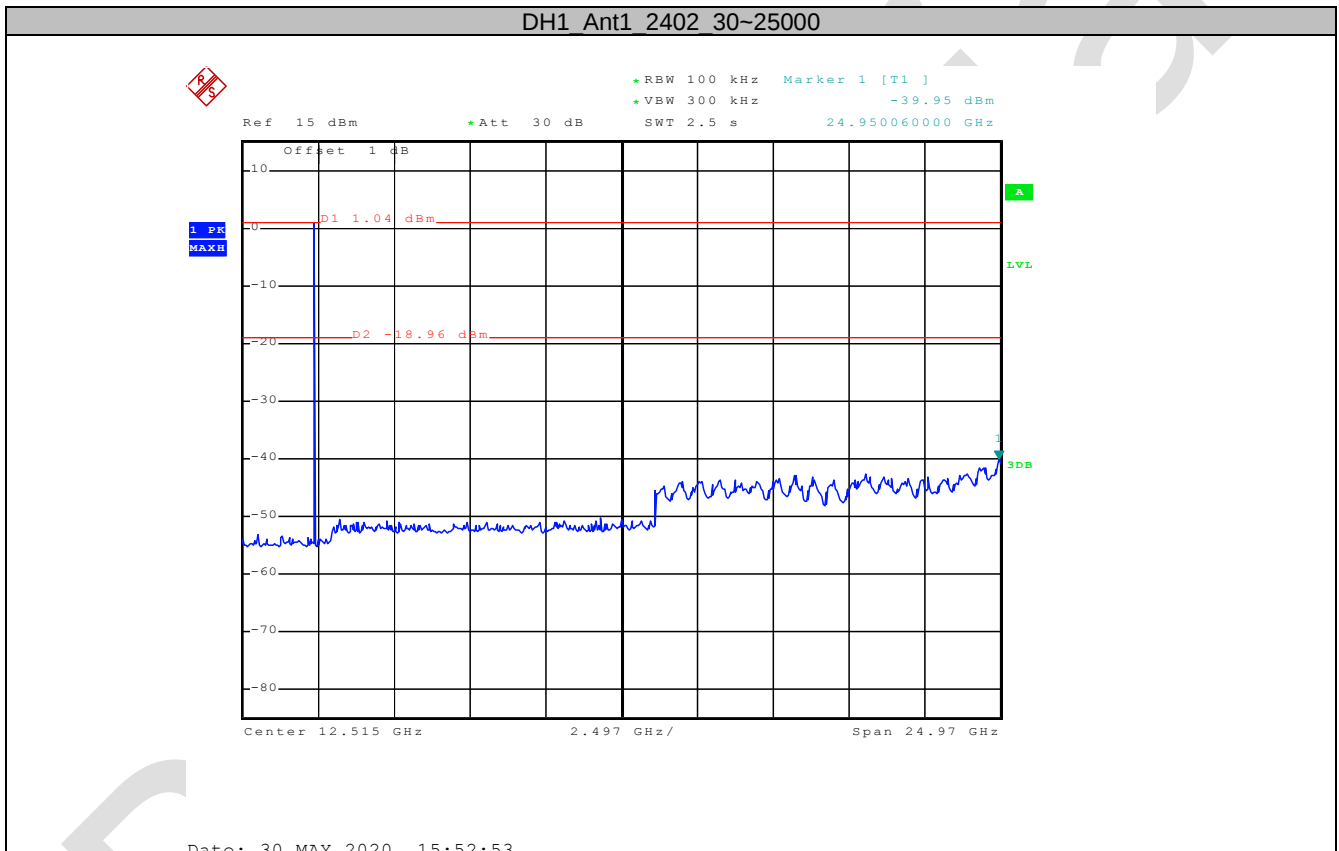


DH1_Ant1_2441_30-25000

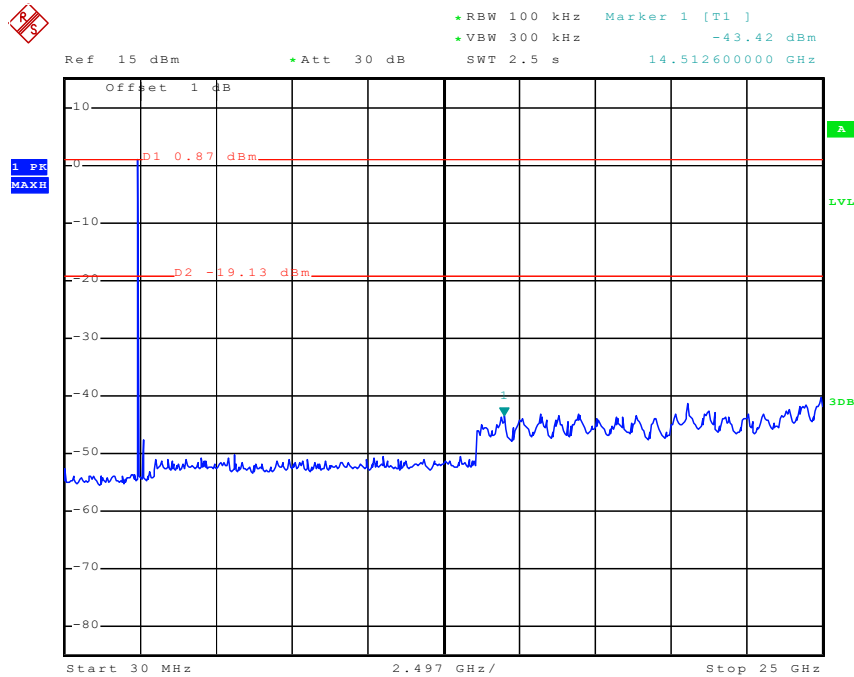

Date: 30 MAY 2020 15:54:11


DH1_Ant1_2480_30-25000

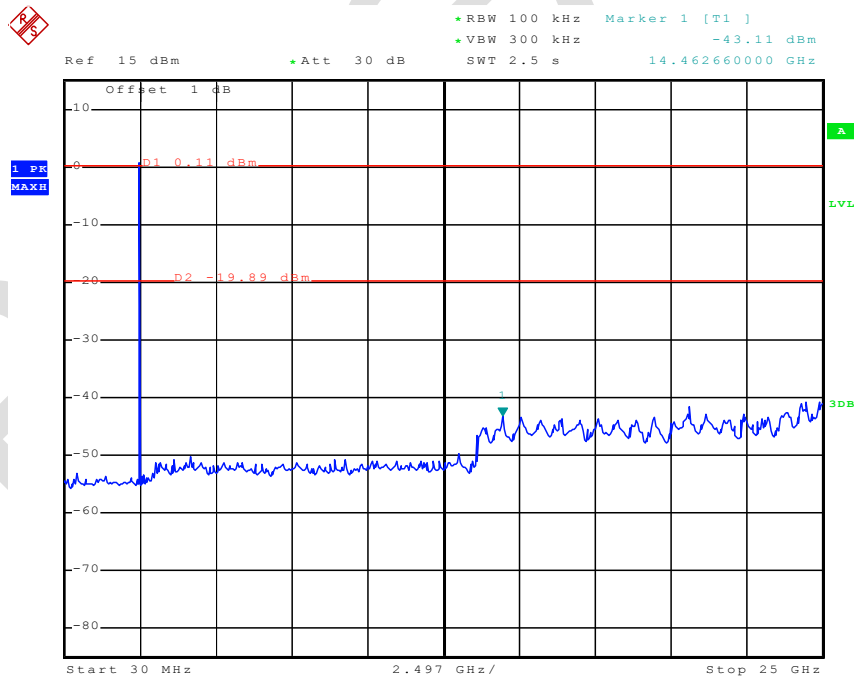

Date: 30 MAY 2020 15:55:11

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Radiated Spurious Emissions

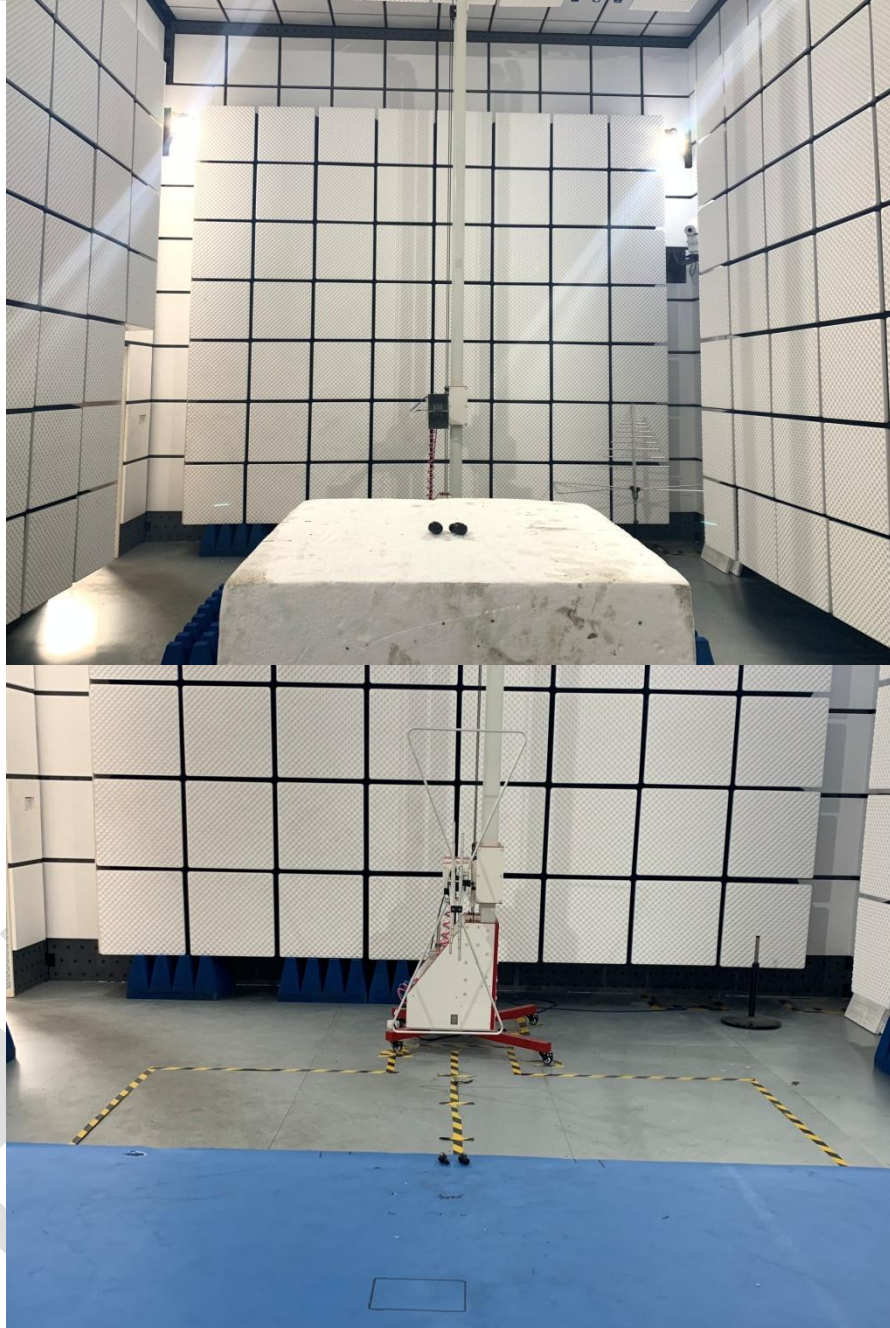

Conducted Emissions at AC Power Line (150kHz-30MHz)






APPENDIX B: PHOTOGRAPHS OF EUT











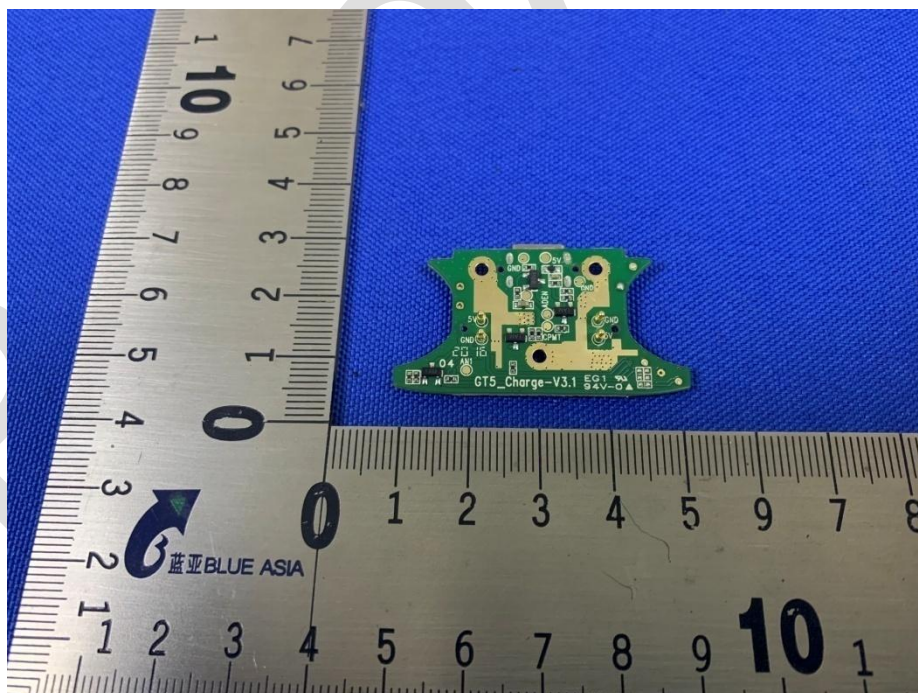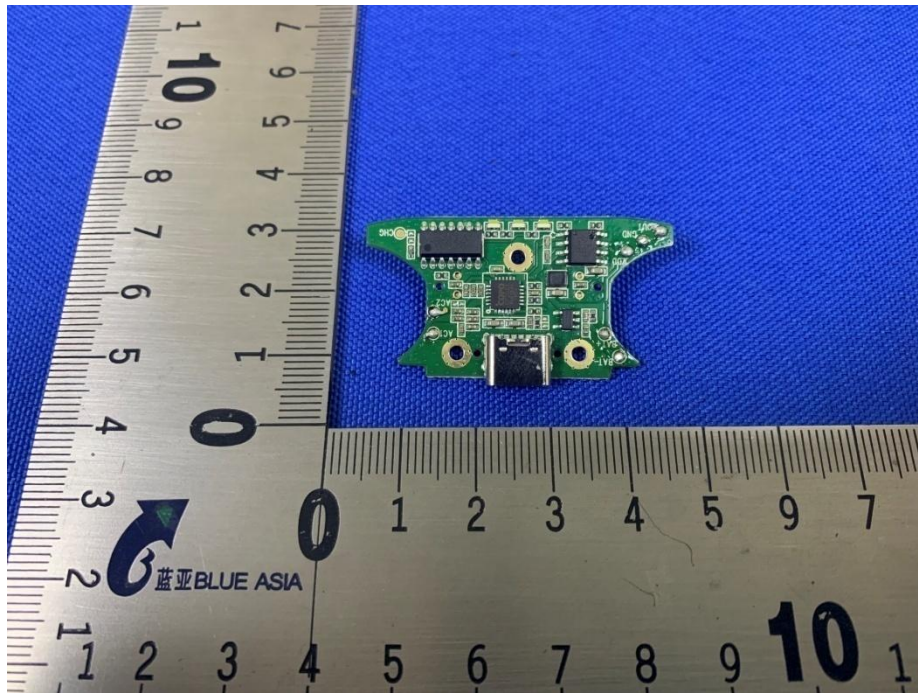

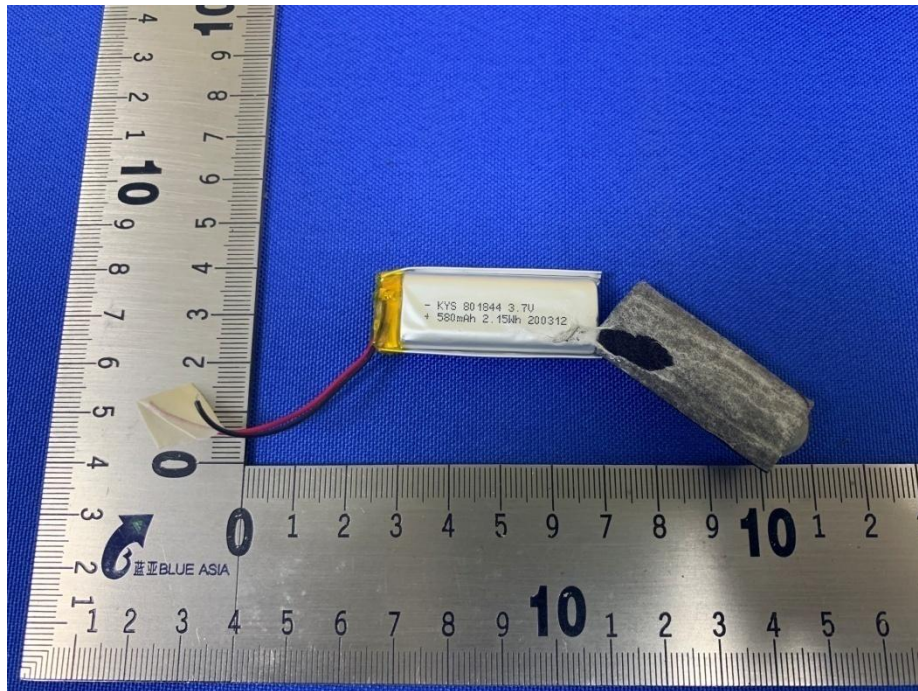

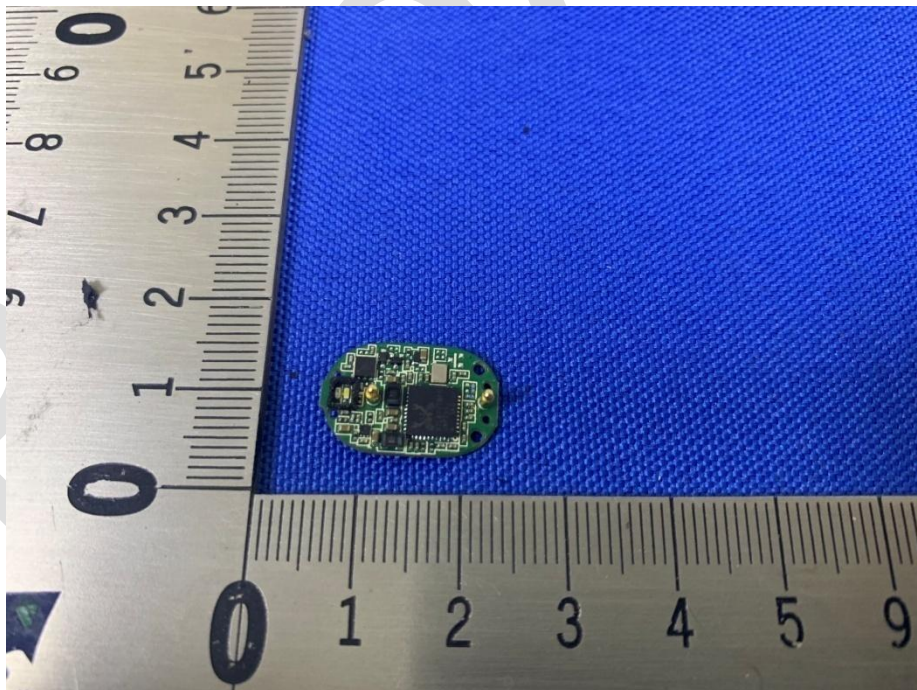

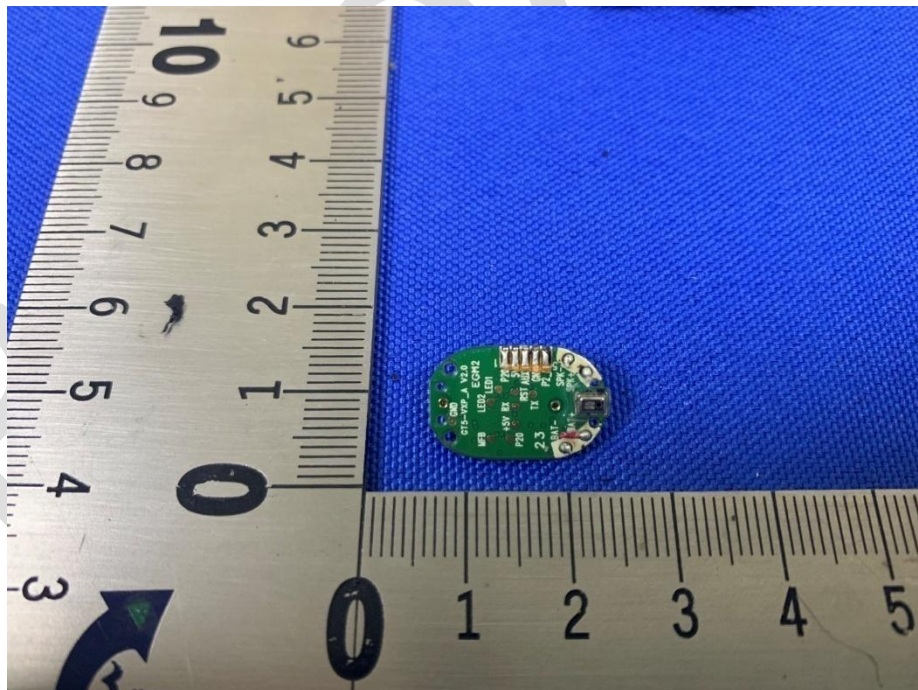

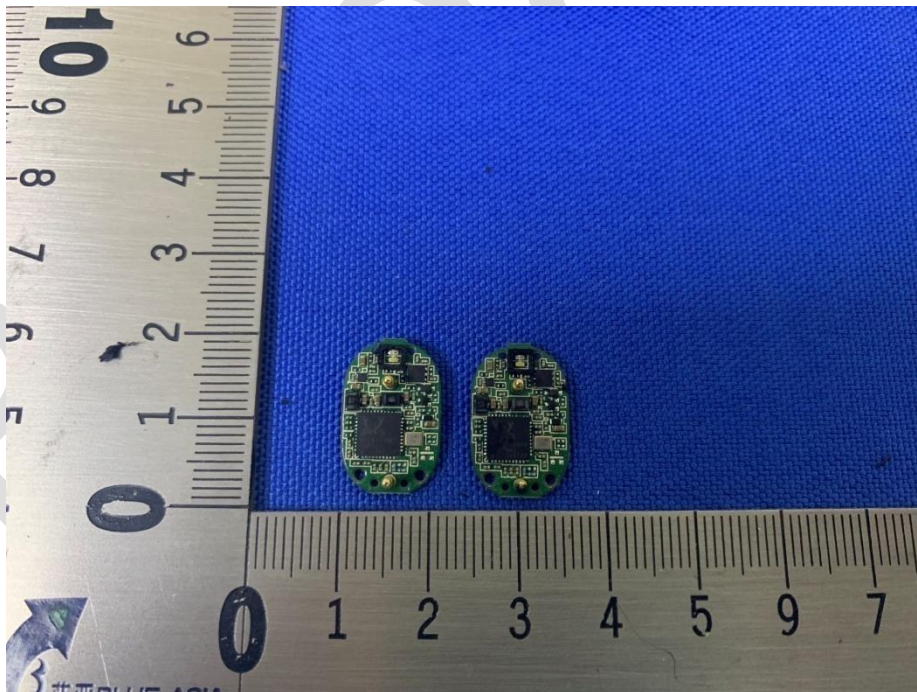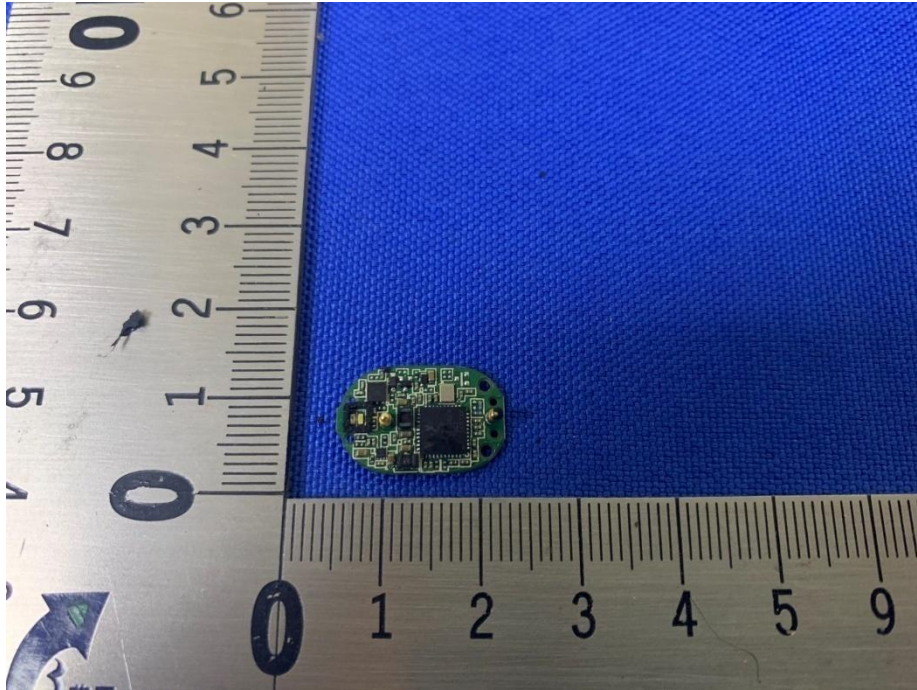

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia