

## Test Report

**Report No. :** CQASZ20250400856E-02  
**Applicant:** Dongguan Liesheng Electronic Co., Ltd.  
**Address of Applicant:** Room 10073, No. 156, Humen Avenue, Humen Town, Dongguan City, Guangdong Province, China

**Equipment Under Test (EUT):**

**Product:** Smart Watch  
**Model No.:** HF012  
**Test Model No.:** HF012  
**Brand Name:** Haylou  
**FCC ID:** 2AMQ6-HF012  
**Standards:** 47 CFR Part 15, Subpart C  
KDB558074 D01 15.247 Meas Guidance v05r02  
ANSI C63.10:2013

**Date of Receipt:** 2025-04-17  
**Date of Test:** 2025-04-17 to 2025-04-25  
**Date of Issue:** 2025-5-16  
**Test Result :** PASS\*

\*In the configuration tested, the EUT complied with the standards specified above.

**Tested By:**

*Lewis Zhou*

( Lewis Zhou )

**Reviewed By:**

*Timo Lei*

( Timo Lei )

**Approved By:**

*Jack Ai*

( Jack Ai )



## 1 Version

### Revision History Of Report

| Report No.           | Version | Description    | Issue Date |
|----------------------|---------|----------------|------------|
| CQASZ20250400856E-02 | Rev.01  | Initial report | 2025-5-16  |

## 2 Test Summary

| Test Item                                                         | Test Requirement                         | Test method      | Result |
|-------------------------------------------------------------------|------------------------------------------|------------------|--------|
| Antenna Requirement                                               | 47 CFR Part 15.203                       | /                | PASS   |
| AC Power Line Conducted Emission                                  | 47 CFR Part 15, Subpart C Section 15.207 | ANSI C63.10-2013 | PASS   |
| Conducted Peak Output Power                                       | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| 20dB Occupied Bandwidth                                           | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Carrier Frequencies Separation                                    | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Hopping Channel Number                                            | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Dwell Time                                                        | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Pseudorandom Frequency Hopping Sequence                           | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Band-edge for RF Conducted Emissions                              | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| RF Conducted Spurious Emissions                                   | 47 CFR Part 15.247                       | ANSI C63.10-2013 | PASS   |
| Radiated Spurious emissions                                       | 47 CFR Part 15.209                       | ANSI C63.10-2013 | PASS   |
| Restricted bands around fundamental frequency (Radiated Emission) | 47 CFR Part 15.205/15.209                | ANSI C63.10-2013 | PASS   |

Remark:

The tested sample(s) and the sample information are provided by the client.

Tx: In this whole report Tx (or tx) means Transmitter.

Rx: In this whole report Rx (or rx) means Receiver.

RF: In this whole report RF means Radiated Frequency.

CH: In this whole report CH means channel.

Volt: In this whole report Volt means Voltage.

Temp: In this whole report Temp means Temperature.

Humid: In this whole report Humid means humidity.

Press: In this whole report Press means Pressure.

N/A: In this whole report not application

### 3 Contents

|                                                                        | Page      |
|------------------------------------------------------------------------|-----------|
| <b>1 VERSION .....</b>                                                 | <b>2</b>  |
| <b>2 TEST SUMMARY .....</b>                                            | <b>3</b>  |
| <b>3 CONTENTS .....</b>                                                | <b>4</b>  |
| <b>4 GENERAL INFORMATION .....</b>                                     | <b>5</b>  |
| 4.1 CLIENT INFORMATION .....                                           | 5         |
| 4.2 GENERAL DESCRIPTION OF EUT .....                                   | 5         |
| 4.3 ADDITIONAL INSTRUCTIONS .....                                      | 7         |
| 4.4 TEST ENVIRONMENT .....                                             | 8         |
| 4.5 DESCRIPTION OF SUPPORT UNITS .....                                 | 8         |
| 4.6 TEST CONFIGURATION .....                                           | 8         |
| 4.7 STATEMENT OF THE MEASUREMENT UNCERTAINTY .....                     | 9         |
| 4.8 TEST LOCATION .....                                                | 10        |
| 4.9 TEST FACILITY .....                                                | 10        |
| 4.10 ABNORMALITIES FROM STANDARD CONDITIONS .....                      | 10        |
| 4.11 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....                 | 10        |
| 4.12 EQUIPMENT LIST .....                                              | 11        |
| <b>5 TEST RESULTS AND MEASUREMENT DATA .....</b>                       | <b>12</b> |
| 5.1 ANTENNA REQUIREMENT .....                                          | 12        |
| 5.2 CONDUCTED EMISSIONS .....                                          | 13        |
| 5.3 CONDUCTED PEAK OUTPUT POWER .....                                  | 17        |
| 5.4 20dB OCCUPIED BANDWIDTH .....                                      | 24        |
| 5.5 CARRIER FREQUENCIES SEPARATION .....                               | 28        |
| 5.6 HOPPING CHANNEL NUMBER .....                                       | 31        |
| 5.7 DWELL TIME .....                                                   | 33        |
| 5.8 BAND-EDGE FOR RF CONDUCTED EMISSIONS .....                         | 40        |
| 5.9 SPURIOUS RF CONDUCTED EMISSIONS .....                              | 45        |
| 5.10 OTHER REQUIREMENTS FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM ..... | 53        |
| 5.11 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS .....               | 55        |
| 5.11.1 Radiated Emission below 1GHz .....                              | 58        |
| 5.11.2 Transmitter Emission above 1GHz .....                           | 60        |
| <b>6 PHOTOGRAPHS - EUT TEST SETUP .....</b>                            | <b>62</b> |
| 6.1 RADIATED EMISSION .....                                            | 62        |
| 6.2 CONDUCTED EMISSION .....                                           | 63        |
| 6.3 RF CONDUCTED MEASUREMENT .....                                     | 64        |
| <b>7 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS .....</b>                | <b>65</b> |

## 4 General Information

### 4.1 Client Information

|                          |                                                                                                                                                                                               |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Dongguan Liesheng Electronic Co., Ltd.                                                                                                                                                        |
| Address of Applicant:    | Room 10073, No. 156, Humen Avenue, Humen Town, Dongguan City, Guangdong Province, China                                                                                                       |
| Manufacturer:            | Dongguan Liesheng Electronic Co., Ltd.                                                                                                                                                        |
| Address of Manufacturer: | Room 10073, No. 156, Humen Avenue, Humen Town, Dongguan City, Guangdong Province, China                                                                                                       |
| Factory:                 | Shenzhen Kingwear Technology Development Co., Ltd. Longhua Branch                                                                                                                             |
| Address of Factory:      | 501, Building A2, Silicon Valley Power Intelligent Terminal Industrial Park, No.20, Dafu Industrial Zone, Dafu Community, Guanlan Street, Longhua District, Shenzhen City, Guangdong Province |

### 4.2 General Description of EUT

|                           |                                                                                                                                                              |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:             | Smart Watch                                                                                                                                                  |
| Model No.:                | HF012                                                                                                                                                        |
| Test Model No.:           | HF012                                                                                                                                                        |
| Trade Mark:               | Haylou                                                                                                                                                       |
| Software Version:         | freertos                                                                                                                                                     |
| Hardware Version:         | MOY.MA1088.01                                                                                                                                                |
| Operation Frequency:      | 2402MHz~2480MHz                                                                                                                                              |
| Bluetooth Version:        | V5.3                                                                                                                                                         |
| Modulation Technique:     | Frequency Hopping Spread Spectrum(FHSS)                                                                                                                      |
| Modulation Type:          | GFSK, $\pi/4$ DQPSK                                                                                                                                          |
| Transfer Rate:            | 1Mbps/2Mbps                                                                                                                                                  |
| Number of Channel:        | 79                                                                                                                                                           |
| Hopping Channel Type:     | Adaptive Frequency Hopping systems                                                                                                                           |
| Product Type:             | <input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location                                           |
| Test Software of EUT:     | FCC_assist                                                                                                                                                   |
| Antenna Type:             | Internal antenna                                                                                                                                             |
| Antenna Gain:             | -5dBi                                                                                                                                                        |
| Power Supply:             | Battery: 3.8V 400mAh 1.52Wh, Charge by DC 5V for adapter                                                                                                     |
| Simultaneous Transmission | <input type="checkbox"/> Simultaneous TX is supported and evaluated in this report.<br><input checked="" type="checkbox"/> Simultaneous TX is not supported. |

| Operation Frequency each of channel |           |         |           |         |           |         |           |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                             | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 0                                   | 2402MHz   | 20      | 2422MHz   | 40      | 2442MHz   | 60      | 2462MHz   |
| 1                                   | 2403MHz   | 21      | 2423MHz   | 41      | 2443MHz   | 61      | 2463MHz   |
| 2                                   | 2404MHz   | 22      | 2424MHz   | 42      | 2444MHz   | 62      | 2464MHz   |
| 3                                   | 2405MHz   | 23      | 2425MHz   | 43      | 2445MHz   | 63      | 2465MHz   |
| 4                                   | 2406MHz   | 24      | 2426MHz   | 44      | 2446MHz   | 64      | 2466MHz   |
| 5                                   | 2407MHz   | 25      | 2427MHz   | 45      | 2447MHz   | 65      | 2467MHz   |
| 6                                   | 2408MHz   | 26      | 2428MHz   | 46      | 2448MHz   | 66      | 2468MHz   |
| 7                                   | 2409MHz   | 27      | 2429MHz   | 47      | 2449MHz   | 67      | 2469MHz   |
| 8                                   | 2410MHz   | 28      | 2430MHz   | 48      | 2450MHz   | 68      | 2470MHz   |
| 9                                   | 2411MHz   | 29      | 2431MHz   | 49      | 2451MHz   | 69      | 2471MHz   |
| 10                                  | 2412MHz   | 30      | 2432MHz   | 50      | 2452MHz   | 70      | 2472MHz   |
| 11                                  | 2413MHz   | 31      | 2433MHz   | 51      | 2453MHz   | 71      | 2473MHz   |
| 12                                  | 2414MHz   | 32      | 2434MHz   | 52      | 2454MHz   | 72      | 2474MHz   |
| 13                                  | 2415MHz   | 33      | 2435MHz   | 53      | 2455MHz   | 73      | 2475MHz   |
| 14                                  | 2416MHz   | 34      | 2436MHz   | 54      | 2456MHz   | 74      | 2476MHz   |
| 15                                  | 2417MHz   | 35      | 2437MHz   | 55      | 2457MHz   | 75      | 2477MHz   |
| 16                                  | 2418MHz   | 36      | 2438MHz   | 56      | 2458MHz   | 76      | 2478MHz   |
| 17                                  | 2419MHz   | 37      | 2439MHz   | 57      | 2459MHz   | 77      | 2479MHz   |
| 18                                  | 2420MHz   | 38      | 2440MHz   | 58      | 2460MHz   | 78      | 2480MHz   |
| 19                                  | 2421MHz   | 39      | 2441MHz   | 59      | 2461MHz   |         |           |

Note:


In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| Channel             | Frequency |
|---------------------|-----------|
| The Lowest channel  | 2402MHz   |
| The Middle channel  | 2441MHz   |
| The Highest channel | 2480MHz   |

### 4.3 Additional Instructions

| EUT Test Software Settings:                                                                                                 |                                                                                                                                                                                        |                |
|-----------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Mode:                                                                                                                       | <input checked="" type="checkbox"/> Special software is used.<br><input type="checkbox"/> Through engineering command into the engineering mode.<br>engineering command: *##3646633##* |                |
| EUT Power level:                                                                                                            | Class0 (Power level is built-in set parameters and cannot be changed and selected)                                                                                                     |                |
| Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. |                                                                                                                                                                                        |                |
| Mode                                                                                                                        | Channel                                                                                                                                                                                | Frequency(MHz) |
| DH1/DH3/DH5                                                                                                                 | CH0                                                                                                                                                                                    | 2402           |
|                                                                                                                             | CH39                                                                                                                                                                                   | 2441           |
|                                                                                                                             | CH78                                                                                                                                                                                   | 2480           |
| 2DH1/2DH3/2DH5                                                                                                              | CH0                                                                                                                                                                                    | 2402           |
|                                                                                                                             | CH39                                                                                                                                                                                   | 2441           |
|                                                                                                                             | CH78                                                                                                                                                                                   | 2480           |

#### Run Software:

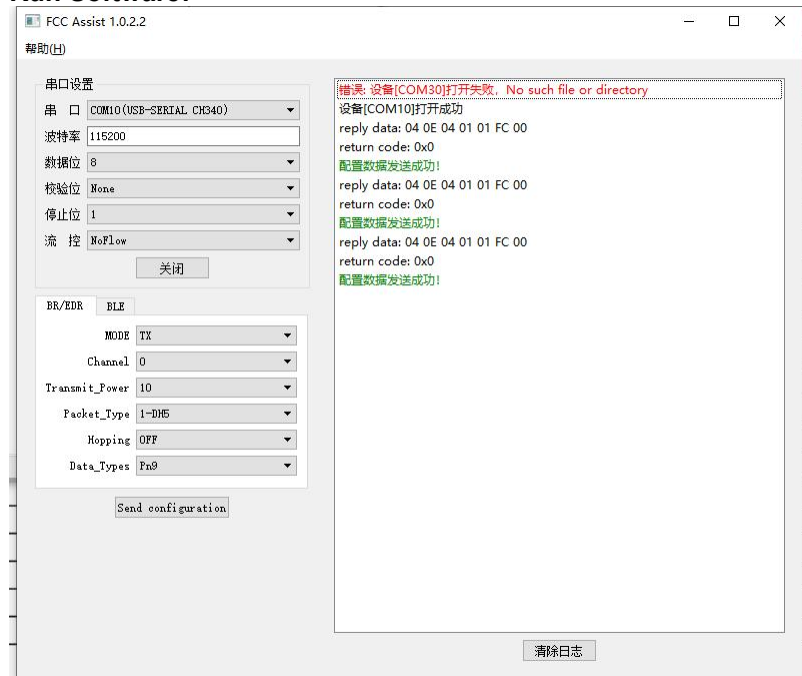

#### 4.4 Test Environment


| Operating Environment: |                                                                                                                             |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Temperature:           | 25 °C                                                                                                                       |
| Humidity:              | 54% RH                                                                                                                      |
| Atmospheric Pressure:  | 1009mbar                                                                                                                    |
| Test Mode:             | Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. |

#### 4.5 Description of Support Units

The EUT has been tested with associated equipment below.

| Description | Manufacturer | Model No. | Remark | Supplied |
|-------------|--------------|-----------|--------|----------|
| Adapter     | MI           | /         | /      | CQA      |

#### 4.6 Test configuration

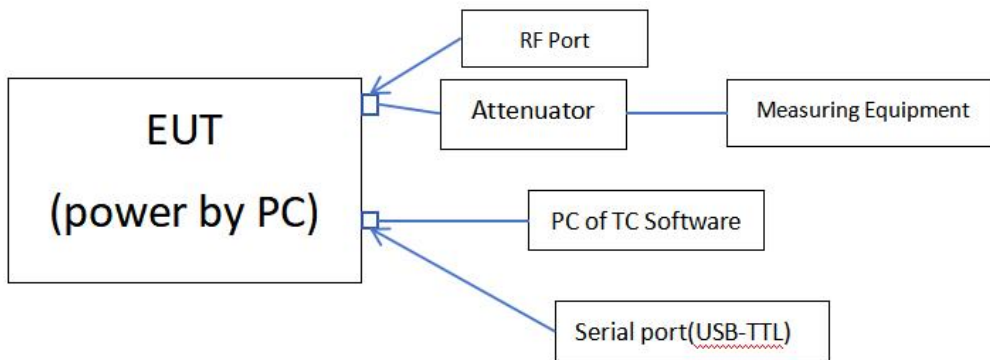



#### 4.7 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

| No. | Item                               | Uncertainty        |
|-----|------------------------------------|--------------------|
| 1   | Radiated Emission (Below 1GHz)     | 5.12dB             |
| 2   | Radiated Emission (Above 1GHz)     | 4.60dB             |
| 3   | Conducted Disturbance (0.15~30MHz) | 3.34dB             |
| 4   | Radio Frequency                    | $3 \times 10^{-8}$ |
| 5   | Duty cycle                         | 0.6 %              |
| 6   | Occupied Bandwidth                 | 1.1%               |
| 7   | RF conducted power                 | 0.86dB             |
| 8   | RF power density                   | 0.74               |
| 9   | Conducted Spurious emissions       | 0.86dB             |
| 10  | Temperature test                   | 0.8℃               |
| 11  | Humidity test                      | 2.0%               |
| 12  | Supply voltages                    | 0.5 %              |
| 13  | Frequency Error                    | 5.5 Hz             |

#### 4.8 Test Location

All tests were performed at:

Shenzhen Huaxia Testing Technology Co., Ltd.

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

#### 4.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

#### 4.10 Abnormalities from Standard Conditions

None.

#### 4.11 Other Information Requested by the Customer

None.

## 4.12 Equipment List

| Test Equipment             | Manufacturer | Model No.              | Instrument No. | Calibration Date | Calibration Due Date |
|----------------------------|--------------|------------------------|----------------|------------------|----------------------|
| EMI Test Receiver          | R&S          | ESR7                   | CQA-005        | 2024/9/2         | 2025/9/1             |
| Spectrum analyzer          | R&S          | FSU26                  | CQA-038        | 2024/9/2         | 2025/9/1             |
| Spectrum analyzer          | R&S          | FSU40                  | CQA-075        | 2024/9/2         | 2025/9/1             |
| Preamplifier               | MITEQ        | AFS4-00010300-18-10P-4 | CQA-035        | 2024/9/2         | 2025/9/1             |
| Preamplifier               | MITEQ        | AMF-6D-02001800-29-20P | CQA-036        | 2024/9/2         | 2025/9/1             |
| Preamplifier               | EMCI         | EMC184055SE            | CQA-089        | 2024/9/2         | 2025/9/1             |
| Loop antenna               | Schwarzbeck  | FMZB1516               | CQA-060        | 2023/9/8         | 2026/9/7             |
| Bilog Antenna              | R&S          | HL562                  | CQA-011        | 2023/11/01       | 2026/10/31           |
| Horn Antenna               | R&S          | HF906                  | CQA-012        | 2023/11/01       | 2026/10/31           |
| Horn Antenna               | Schwarzbeck  | BBHA 9170              | CQA-088        | 2023/9/7         | 2026/9/6             |
| Coaxial Cable (Above 1GHz) | CQA          | N/A                    | C007           | 2024/9/2         | 2025/9/1             |
| Coaxial Cable (Below 1GHz) | CQA          | N/A                    | C013           | 2024/9/2         | 2025/9/1             |
| Antenna Connector          | CQA          | RFC-01                 | CQA-080        | 2024/9/2         | 2025/9/1             |
| RF cable(9KHz~40GHz)       | CQA          | RF-01                  | CQA-079        | 2024/9/2         | 2025/9/1             |
| Power meter                | R&S          | NRVD                   | CQA-029        | 2024/9/2         | 2025/9/1             |
| Power divider              | MIDWEST      | PWD-2533-02-SMA-79     | CQA-067        | 2024/9/2         | 2025/9/1             |
| EMI Test Receiver          | R&S          | ESR7                   | CQA-005        | 2024/9/2         | 2025/9/1             |
| LISN                       | R&S          | ENV216                 | CQA-003        | 2024/9/2         | 2025/9/1             |
| Coaxial cable              | CQA          | N/A                    | CQA-C009       | 2024/9/2         | 2025/9/1             |
| DC power                   | KEYSIGHT     | E3631A                 | CQA-028        | 2024/9/2         | 2025/9/1             |

### Test software:


|                                   | Manufacturer | Software brand | Software version |
|-----------------------------------|--------------|----------------|------------------|
| Radiated Emissions test software  | Tonscend     | JS1120-3       | Version:8        |
| Conducted Emissions test software | Audix        | e3             | Version:9        |
| RF Conducted test software        | Audix        | e3             | V3.5.39          |

### Note:

The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 5 Test results and Measurement Data

### 5.1 Antenna Requirement
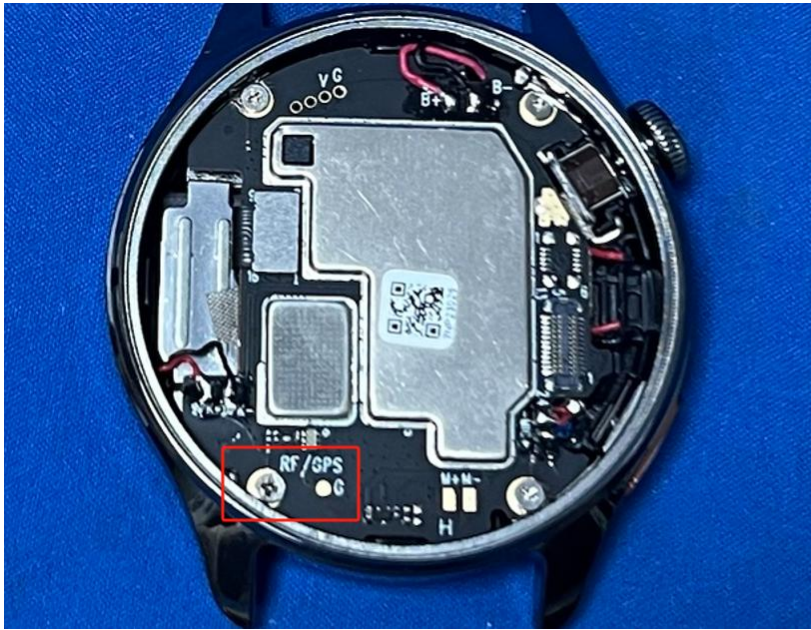
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                                                     |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| <b>Standard requirement:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 47 CFR Part 15C Section 15.203 /247(c)                                              |
| <p>15.203 requirement:<br/>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(b) (4) requirement:<br/>The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.</p> |                                                                                     |
| <b>EUT Antenna:</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |  |
| <p>The antenna is Internal antenna.</p> <p>The connection/connection type between the antenna to the EUT's antenna port is: permanently attachment.</p> <p>This is either permanently attachment or a unique coupling that satisfies the requirement.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                     |




|                        |                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Exploratory Test Mode: | Non-hopping transmitting mode with all kind of modulation and all kind of data type at the lowest, middle, high channel.                                   |
| Final Test Mode:       | Through Pre-scan, find the DH5 of data type and GFSK modulation at the lowest channel is the worst case.<br>Only the worst case is recorded in the report. |
| Test Voltage:          | AC 120V/60Hz                                                                                                                                               |
| Test Results:          | Pass                                                                                                                                                       |



## Measurement Data

Live line:

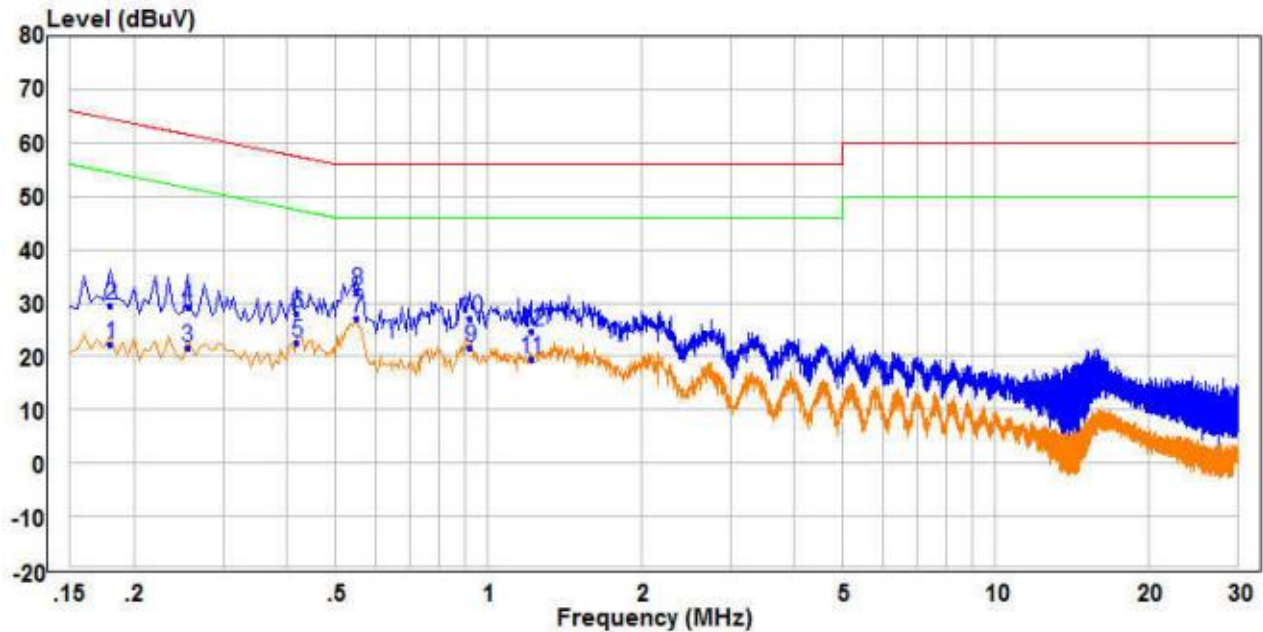


|      | Freq  | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|------|-------|------------|--------|-------|------------|------------|---------|-----------|
|      | MHz   | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1    | 0.180 | 12.48      | 9.64   | 22.12 | 54.49      | -32.37     | Average | Line      |
| 2    | 0.180 | 20.05      | 9.64   | 29.69 | 64.49      | -34.80     | QP      | Line      |
| 3    | 0.255 | 12.16      | 9.54   | 21.70 | 51.59      | -29.89     | Average | Line      |
| 4    | 0.255 | 19.63      | 9.54   | 29.17 | 61.59      | -32.42     | QP      | Line      |
| 5    | 0.420 | 12.79      | 9.63   | 22.42 | 47.45      | -25.03     | Average | Line      |
| 6    | 0.420 | 18.32      | 9.63   | 27.95 | 57.45      | -29.50     | QP      | Line      |
| 7 PP | 0.550 | 17.51      | 9.75   | 27.26 | 46.00      | -18.74     | Average | Line      |
| 8 QP | 0.550 | 22.60      | 9.75   | 32.35 | 56.00      | -23.65     | QP      | Line      |
| 9    | 0.920 | 11.97      | 9.75   | 21.72 | 46.00      | -24.28     | Average | Line      |
| 10   | 0.920 | 17.51      | 9.75   | 27.26 | 56.00      | -28.74     | QP      | Line      |
| 11   | 1.215 | 9.30       | 10.24  | 19.54 | 46.00      | -26.46     | Average | Line      |
| 12   | 1.215 | 14.46      | 10.24  | 24.70 | 56.00      | -31.30     | QP      | Line      |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

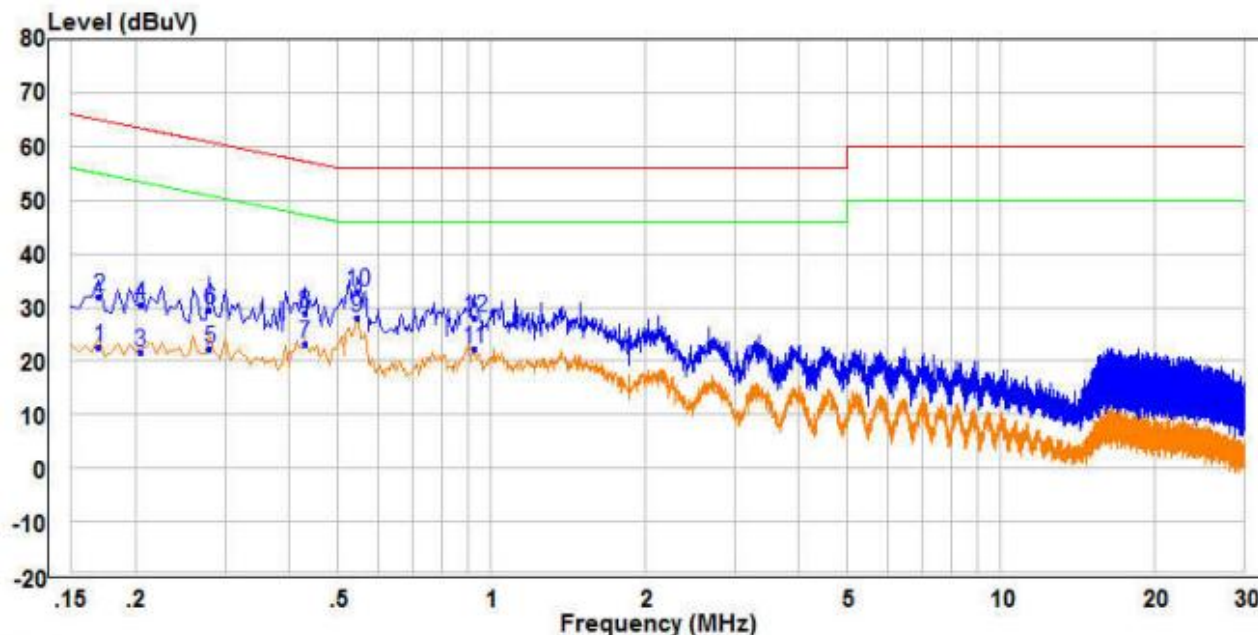


|       | Freq  | Read Level | Factor | Level | Limit Line | Over Limit | Remark  | Pol/Phase |
|-------|-------|------------|--------|-------|------------|------------|---------|-----------|
|       | MHz   | dBuV       | dB     | dBuV  | dBuV       | dB         |         |           |
| 1     | 0.170 | 12.83      | 9.66   | 22.49 | 54.96      | -32.47     | Average | Neutral   |
| 2     | 0.170 | 22.33      | 9.66   | 31.99 | 64.96      | -32.97     | QP      | Neutral   |
| 3     | 0.205 | 12.09      | 9.60   | 21.69 | 53.41      | -31.72     | Average | Neutral   |
| 4     | 0.205 | 20.84      | 9.60   | 30.44 | 63.41      | -32.97     | QP      | Neutral   |
| 5     | 0.280 | 12.77      | 9.50   | 22.27 | 50.82      | -28.55     | Average | Neutral   |
| 6     | 0.280 | 19.97      | 9.50   | 29.47 | 60.82      | -31.35     | QP      | Neutral   |
| 7     | 0.430 | 13.64      | 9.64   | 23.28 | 47.25      | -23.97     | Average | Neutral   |
| 8     | 0.430 | 19.30      | 9.64   | 28.94 | 57.25      | -28.31     | QP      | Neutral   |
| 9 PP  | 0.545 | 18.18      | 9.75   | 27.93 | 46.00      | -18.07     | Average | Neutral   |
| 10 QP | 0.545 | 23.21      | 9.75   | 32.96 | 56.00      | -23.04     | QP      | Neutral   |
| 11    | 0.925 | 12.65      | 9.75   | 22.40 | 46.00      | -23.60     | Average | Neutral   |
| 12    | 0.925 | 18.21      | 9.75   | 27.96 | 56.00      | -28.04     | QP      | Neutral   |

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.



### 5.3 Conducted Peak Output Power


|                        |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement:      | 47 CFR Part 15C Section 15.247 (b)(1)                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Method:           | ANSI C63.10:2013                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Test Setup:            | <p><b>Setup for Power meter measurement method</b></p>  <pre> graph LR     EUT[EUT] --- PM[Power Meter]           </pre> <p><b>Setup for Spectrum analyser measurement method</b></p>  <pre> graph LR     EUT[EUT] --- Att[Attenuator] --- SA[Spectrum Analyzer]           </pre> <p><i>Remark: Offset=Cable loss+ attenuation factor.</i></p> |
| Limit:                 | 30dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Exploratory Test Mode: | Non-hopping transmitting with all kind of modulation and all kind of data type                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Final Test Mode:       | Only the worst case is recorded in the report.                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test Results:          | Pass                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

| Operated Mode for Worst Duty Cycle: |                          |                           |                  |                               |
|-------------------------------------|--------------------------|---------------------------|------------------|-------------------------------|
| Test Mode                           | On time<br>[Ton]<br>(ms) | Period<br>[Ttotal]<br>ms) | Duty<br>Cycle(%) | Average correction factor(dB) |
| GFSK                                | 2.89                     | 3.75                      | 77.07            | 1.13                          |
| $\pi/4$ DQPSK                       | 2.89                     | 3.75                      | 77.07            | 1.13                          |

**Remark:**


- 1) Duty cycle= On Time/ Period;
- 2) Duty Cycle factor =  $10 * \log(1/ \text{Duty cycle})$ ;

Test Graph\_GFSK Duty Cycle:

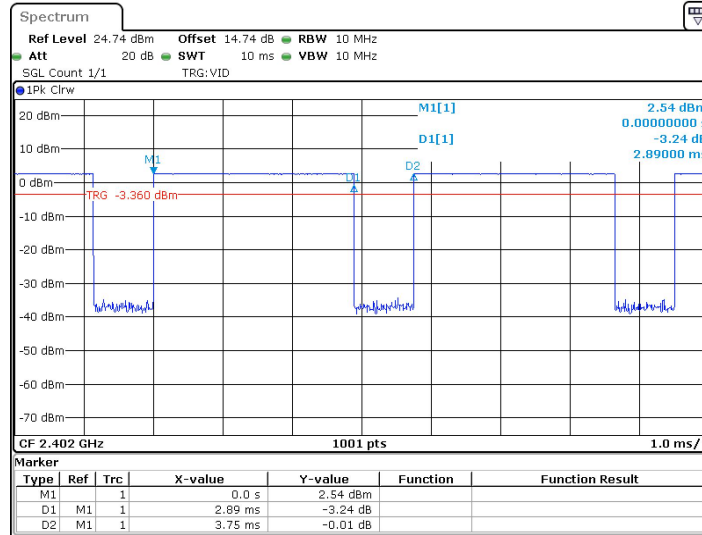

Date: 22.APR 2025 16:34:06

Test Graph\_π/4DQPSK Duty Cycle:

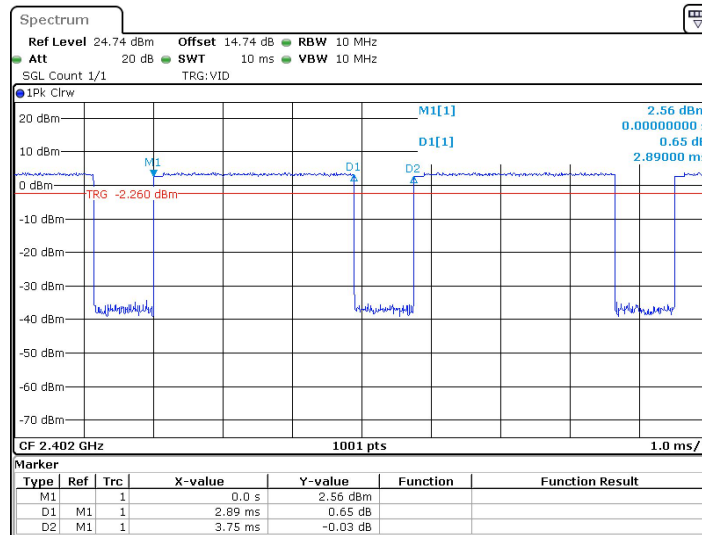

Date: 22.APR 2025 16:44:11

**Measurement Data**

| GFSK mode          |                         |             |        |
|--------------------|-------------------------|-------------|--------|
| Test channel       | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest             | 2.84                    | 30.00       | Pass   |
| Middle             | 3.61                    | 30.00       | Pass   |
| Highest            | 2.53                    | 30.00       | Pass   |
| $\pi/4$ DQPSK mode |                         |             |        |
| Test channel       | Peak Output Power (dBm) | Limit (dBm) | Result |
| Lowest             | 3.27                    | 30.00       | Pass   |
| Middle             | 4.23                    | 30.00       | Pass   |
| Highest            | 2.98                    | 30.00       | Pass   |