



## Shenzhen Huaxia Testing Technology Co., Ltd

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

Telephone: +86-755-26648640  
Fax: +86-755-26648637  
Website: [www.cqa-cert.com](http://www.cqa-cert.com)

Report Template Version: V03  
Report Template Revision Date: Mar.1st, 2017

# Test Report

**Report No. :** CQASZ20210901568E-01

**Applicant:** Dongguan Liesheng Electronic Co., Ltd.

**Address of Applicant:** Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China.

**Equipment Under Test (EUT):**

**Product:** Haylou GST

**Model No.:** Haylou-LS09B

**Test Model** Haylou-LS09B

**Brand Name:** Haylou

**FCC ID:** 2AMQ6-LS09B

**Standards:** 47 CFR Part 15, Subpart C

**Date of Test:** 2021-9-9 to 2021-9-17

**Date of Issue:** 2021-9-24

*lewis zhou*  
**Tested By:** \_\_\_\_\_

( Lewis Zhou )

*Timo Lei*  
**Reviewed By:** \_\_\_\_\_

( Timo Lei )

*Jack Ai*  
**Approved By:** \_\_\_\_\_

( Jack Ai )

**Test Result :** **PASS\***



\* In the configuration tested, the EUT complied with the standards specified above.

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CQA, this report can't be reproduced except in full.

## 2 Version

### Revision History Of Report

Report No.	Version	Description	Issue Date
CQASZ20210901568E-01	Rev.02	Initial report	2021-9-24

Note:

This case is based on the original case CQASZ20210801075E as C2PC. Increase production plants for products and increase battery suppliers.

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013	PASS

## 4 Contents

	Page
.....	1
<b>2 VERSION.....</b>	<b>2</b>
<b>3 TEST SUMMARY.....</b>	<b>3</b>
<b>4 CONTENTS.....</b>	<b>4</b>
<b>5 GENERAL INFORMATION.....</b>	<b>5</b>
5.1 CLIENT INFORMATION.....	5
5.2 GENERAL DESCRIPTION OF EUT.....	5
5.3 ADDITIONAL INSTRUCTIONS.....	7
5.4 TEST ENVIRONMENT.....	8
5.5 DESCRIPTION OF SUPPORT UNITS.....	8
5.6 STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	9
5.7 TEST LOCATION.....	10
5.8 TEST FACILITY.....	10
5.9 DEVIATION FROM STANDARDS.....	10
5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
5.11 EQUIPMENT LIST.....	11
<b>6 TEST RESULTS AND MEASUREMENT DATA.....</b>	<b>12</b>
6.1 ANTENNA REQUIREMENT.....	12
6.2 CONDUCTED EMISSIONS.....	13
6.3 RADIATED SPURIOUS EMISSION & RESTRICTED BANDS.....	16
6.3.1 <i>Spurious Emissions</i> .....	16
<b>7 PHOTOGRAPHS - EUT TEST SETUP.....</b>	<b>23</b>
7.1 RADIATED SPURIOUS EMISSION.....	23
7.2 CONDUCTED EMISSION.....	24
<b>8 PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS.....</b>	<b>25</b>

## 5 General Information

### 5.1 Client Information

Applicant:	Dongguan Liesheng Electronic Co., Ltd.
Address of Applicant:	Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China.
Manufacturer:	Dongguan Liesheng Electronic Co., Ltd.
Address of Manufacturer:	Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China.
Factory1:	Dongguan Zhengrong Electronics co. Ltd
Address of Factory1:	No.4 Shugang Acenue, Hongmei Town, Dongguan City, Guangdong Province
Factory2:	ShenZhen KingWear Technology Development Co., Ltd LongHua Branch
Address of Factory2:	501, BLDG A2, Silicon Valley Power Smart Terminal Industrial Park, Dafu Industrial Zone, Longhua District, Shenzhen, China

### 5.2 General Description of EUT

Product Name:	Haylou GST		
Model No.:	Haylou-LS09B		
Trade Mark:	Haylou		
Hardware Version:	V1.0		
Software Version:	V1.0		
Operation Frequency:	2402MHz~2480MHz		
Bluetooth Version:	V5.0		
Modulation Type:	GFSK		
Transfer Rate:	1Mbps, 2Mbps		
Number of Channel:	40		
Product Type:	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable	<input type="checkbox"/> Fix Location
Test Software of EUT:	RTLB8762C_RFTestTool_v1.0.1.2		
Antenna Type:	Integral antenna		
Antenna Gain:	-1.67dBI		
EUT Power Supply:	lithium battery:DC3.8V 220mAh, Charge by DC5.0V		

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
0	2402MHz	10	2422MHz	20	2442MHz	30	2462MHz
1	2404MHz	11	2424MHz	21	2444MHz	31	2464MHz
2	2406MHz	12	2426MHz	22	2446MHz	32	2466MHz
3	2408MHz	13	2428MHz	23	2448MHz	33	2468MHz
4	2410MHz	14	2430MHz	24	2450MHz	34	2470MHz
5	2412MHz	15	2432MHz	25	2452MHz	35	2472MHz
6	2414MHz	16	2434MHz	26	2454MHz	36	2474MHz
7	2416MHz	17	2436MHz	27	2456MHz	37	2476MHz
8	2418MHz	18	2438MHz	28	2458MHz	38	2478MHz
9	2420MHz	19	2440MHz	29	2460MHz	39	2480MHz

**Note:**


In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel (CH0)	2402MHz
The middle channel (CH19)	2440MHz
The highest channel (CH39)	2480MHz

### 5.3 Additional Instructions

EUT Test Software Settings:		
Mode:	<input checked="" type="checkbox"/> Special software is used. <input type="checkbox"/> Through engineering command into the engineering mode. engineering command: *###3646633#*##	
EUT Power level:	Class2 (Power level is built-in set parameters and cannot be changed and selected)	
Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT.		
Mode	Channel	Frequency(MHz)
GFSK	CH0	2402
	CH19	2440
	CH39	2480

#### Run Software:

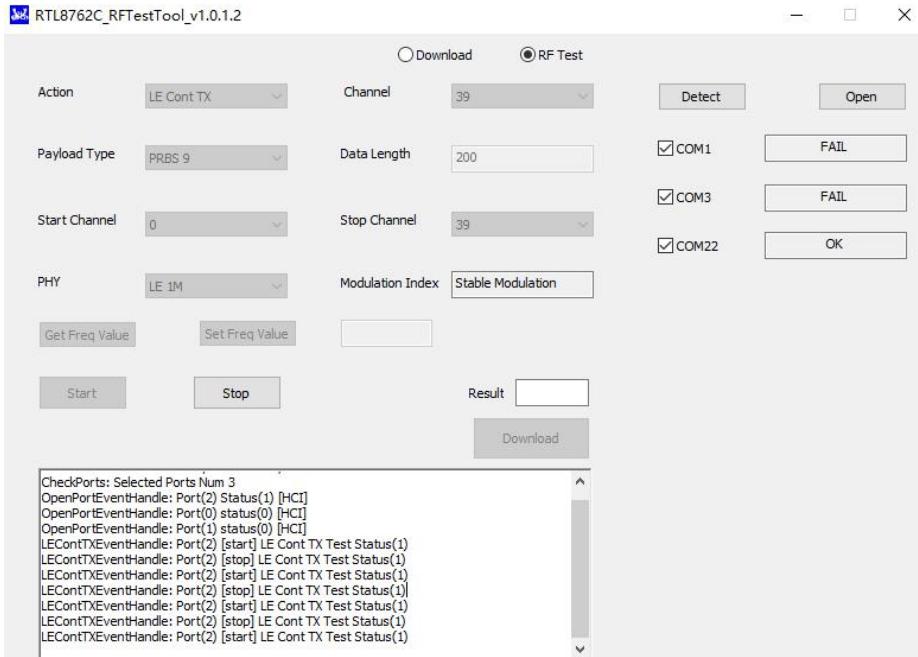

## 5.4 Test Environment

<b>Operating Environment:</b>	
Temperature:	25.5 °C
Humidity:	53 % RH
Atmospheric Pressure:	1010mbar
Test Mode:	Use test software to set the lowest frequency, the middle frequency and the highest frequency keep transmitting of the EUT. Note: In the process of transmitting of EUT, the duty cycle >98%.

## 5.5 Description of Support Units

The EUT has been tested with associated equipment below.

Description	Manufacturer	Model No.	Remark	FCC certification
Phone	APPLE	iphone5c	/	/

## 5.6 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate.

The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities.

The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the **Shenzhen Huaxia Testing Technology Co., Ltd.** quality system acc. to DIN EN ISO/IEC 17025.

Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CQA laboratory is reported:

No.	Item	Uncertainty	Notes
1	Radiated Emission (Below 1GHz)	±5.12dB	(1)
2	Radiated Emission (Above 1GHz)	±4.60dB	(1)
3	Conducted Disturbance (0.15~30MHz)	±3.34dB	(1)
4	Radio Frequency	$3 \times 10^{-8}$	(1)
5	Duty cycle	0.6 %.	(1)
6	Occupied Bandwidth	1.1%	(1)
7	RF conducted power	0.86dB	(1)
8	RF power density	0.74	(1)
9	Conducted Spurious emissions	0.86dB	(1)
10	Temperature test	0.8°C	(1)
11	Humidity test	2.0%	(1)
12	Supply voltages	0.5 %.	(1)
13	time	0.6 %.	(1)
14	Frequency Error	5.5 Hz	(1)

(1)This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

## 5.7 Test Location

**Shenzhen Huaxia Testing Technology Co., Ltd,**

1F., Block A of Tongsheng Technology Building, Huahui Road, Dalang Street, Longhua District, Shenzhen, China

## 5.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

**IC Registration No.: 22984-1**

The 3m Semi-anechoic chamber of Shenzhen Huaxia Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

The test facility is recognized, certified, or accredited by the following organizations:

• **CNAS (No. CNAS L5785)**

CNAS has accredited Shenzhen Huaxia Testing Technology Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

• **A2LA (Certificate No. 4742.01)**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 4742.01.

• **FCC Registration No.: 522263**

Shenzhen Huaxia Testing Technology Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.:522263

## 5.9 Deviation from Standards

None.

## 5.10 Other Information Requested by the Customer

None.

## 5.11 Equipment List


Test Equipment	Manufacturer	Model No.	Instrument No.	Calibration Date	Calibration Due Date
EMI Test Receiver	R&S	ESR7	CQA-005	2021/9/10	2022/9/09
Spectrum analyzer	R&S	FSU26	CQA-038	2021/9/10	2022/9/09
Preamplifier	MITEQ	AFS4-00010300-18-10P-4	CQA-035	2021/9/10	2022/9/09
Preamplifier	MITEQ	AMF-6D-02001800-29-20P	CQA-036	2021/9/10	2022/9/09
Loop antenna	Schwarzbeck	FMZB1516	CQA-087	2021/9/14	2024/9/13
Bilog Antenna	R&S	HL562	CQA-011	2021/9/14	2024/9/13
Horn Antenna	R&S	HF906	CQA-012	2021/9/14	2024/9/13
Horn Antenna	Schwarzbeck	BBHA 9170	CQA-088	2021/9/14	2024/9/13
Coaxial Cable (Above 1GHz)	CQA	N/A	C019	2021/9/10	2022/9/09
Coaxial Cable (Below 1GHz)	CQA	N/A	C020	2021/9/10	2022/9/09
Antenna Connector	CQA	RFC-01	CQA-080	2021/9/10	2022/9/09
RF cable(9KHz~40GHz)	CQA	RF-01	CQA-079	2021/9/10	2022/9/09
Power divider	MIDWEST	PWD-2533-02-SMA-79	CQA-067	2021/9/10	2022/9/09
EMI Test Receiver	R&S	ESPI3	CQA-013	2021/9/10	2022/9/09
LISN	R&S	ENV216	CQA-003	2021/9/10	2022/9/09
Coaxial cable	CQA	N/A	CQA-C009	2021/9/10	2022/9/09

Note:


The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

## 6 Test results and Measurement Data

### 6.1 Antenna Requirement

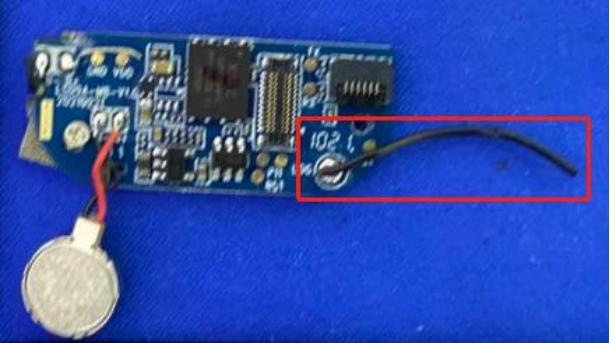
Standard requirement:	47 CFR Part 15C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(b) (4) requirement: The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	
EUT Antenna:	
The antenna is Integral antenna . The best case gain of the antenna is -1.67dBi.	

## 6.2 Conducted Emissions

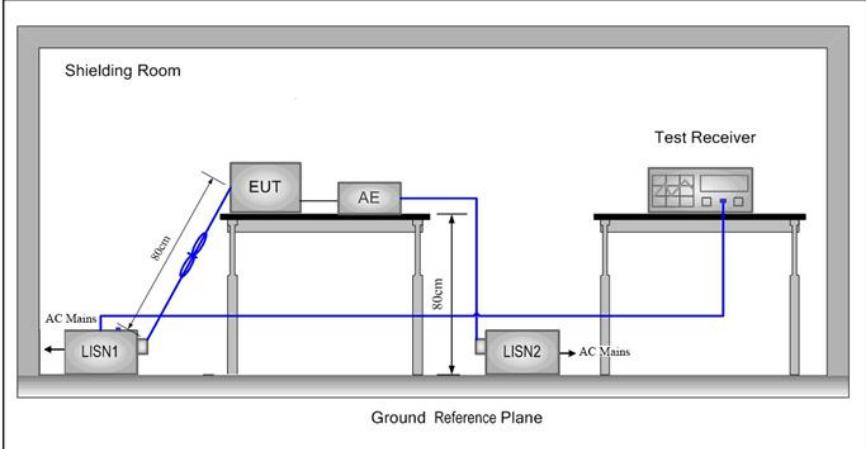Test Requirement:	47 CFR Part 15C Section 15.207		
Test Method:	ANSI C63.10: 2013		
Test Frequency Range:	150kHz to 30MHz		
Limit:	Frequency range (MHz)		Limit (dBuV)
			Quasi-peak
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	<ol style="list-style-type: none"> <li>1) The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>		
Test Setup:	 <p>The diagram illustrates the test setup. A 'Shielding Room' is shown with a 'Ground Reference Plane' at the bottom. Inside the room, an 'EUT' (Equipment Under Test) is connected to an 'AE' (Antenna Equipment) which is connected to a 'Test Receiver'. The 'EUT' is connected to an 'AC Mains' through a 'LISN1' (Line Impedance Stabilization Network). The 'Test Receiver' is also connected to an 'AC Mains' through a 'LISN2' (Line Impedance Stabilization Network). The distance between the LISN1 and the LISN2 is 0.8m. The LISN1 is placed 0.8m from the EUT. The LISN2 is placed 0.8m from the LISN1. The LISN1 and LISN2 are both bonded to the 'Ground Reference Plane'.</p>		
Test Mode:	Transmitting with GFSK modulation. Transmitting mode.		
Test Results:	Pass		

**Measurement Data**

Live line:

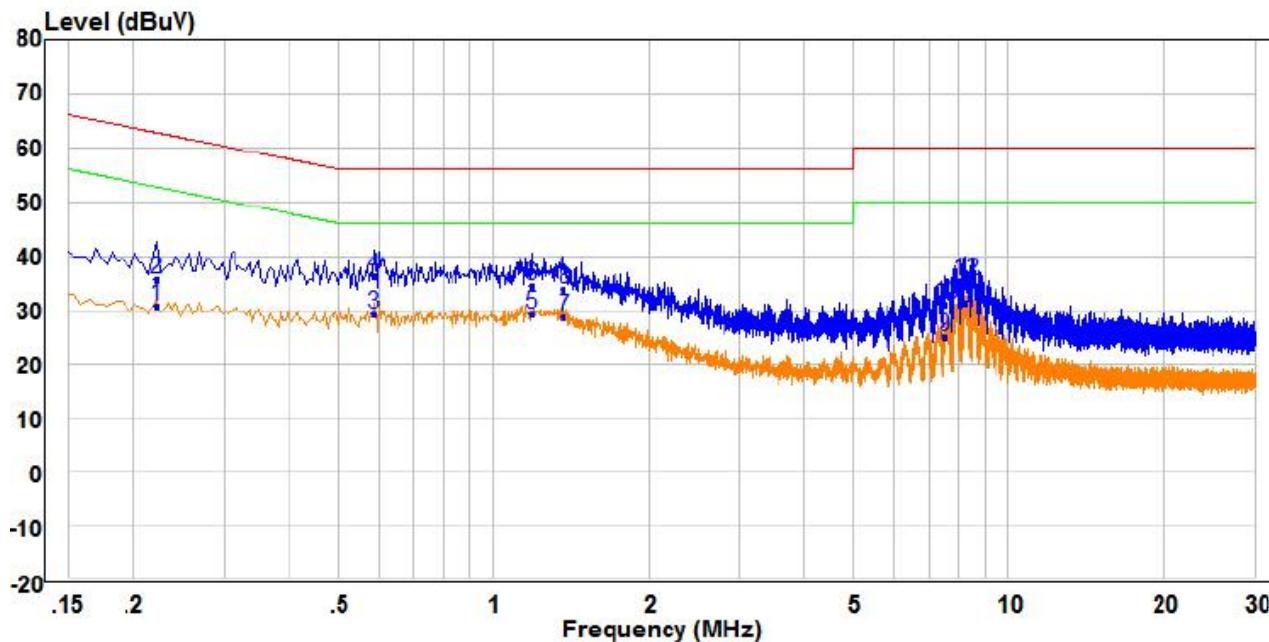


Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	Freq			dBuV	dB		
	MHz						
1	0.222	21.28	9.49	30.77	52.74	-21.97	Average Line
2	0.222	26.25	9.49	35.74	62.74	-27.00	QP Line
3	0.586	19.66	9.68	29.34	46.00	-16.66	Average Line
4 QP	0.586	26.61	9.68	36.29	56.00	-19.71	QP Line
5 PP	1.190	19.84	9.53	29.37	46.00	-16.63	Average Line
6	1.190	24.79	9.53	34.32	56.00	-21.68	QP Line
7	1.374	19.02	9.53	28.55	46.00	-17.45	Average Line
8	1.374	24.16	9.53	33.69	56.00	-22.31	QP Line
9	7.530	15.21	9.71	24.92	50.00	-25.08	Average Line
10	7.530	21.31	9.71	31.02	60.00	-28.98	QP Line
11	8.229	21.58	9.74	31.32	50.00	-18.68	Average Line
12	8.229	25.50	9.74	35.24	60.00	-24.76	QP Line

**Remark:**

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

Neutral line:

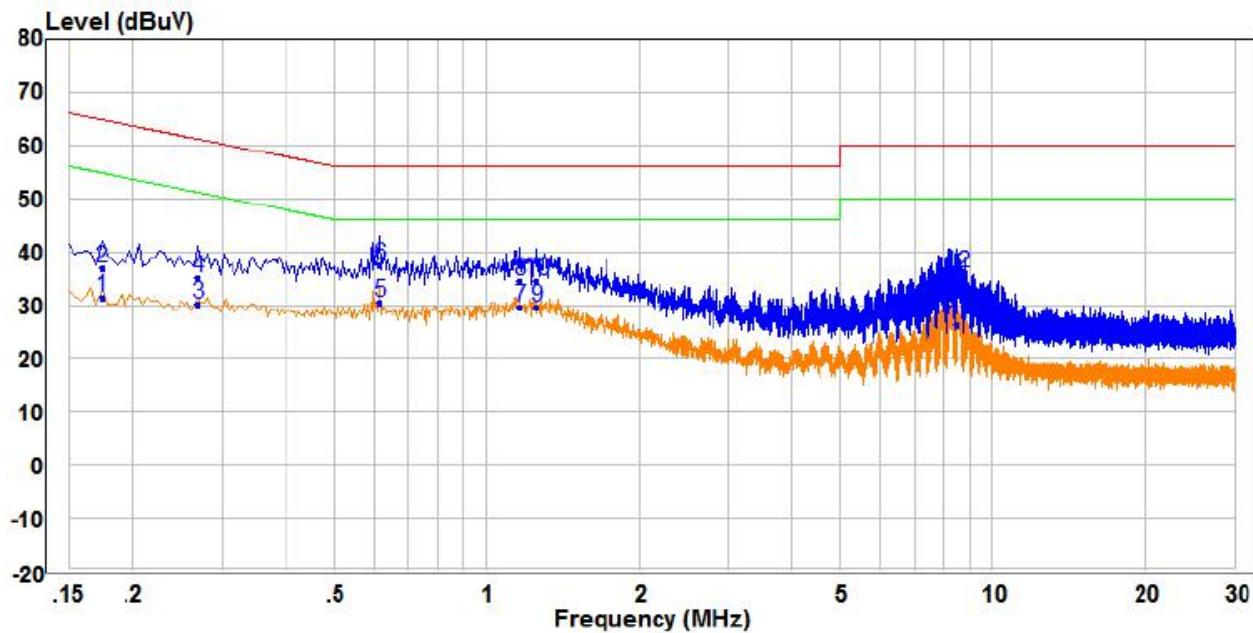

Freq	Read	Factor	Level	Limit	Over	Remark	Pol/Phase
	Freq			Line	Limit		
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.174	22.02	9.48	31.50	54.77	-23.27	Average
2	0.174	27.42	9.48	36.90	64.77	-27.87	QP
3	0.270	20.62	9.48	30.10	51.12	-21.02	Average
4	0.270	25.64	9.48	35.12	61.12	-26.00	QP
5	PP 0.614	20.66	9.72	30.38	46.00	-15.62	Average
6	QP 0.614	27.86	9.72	37.58	56.00	-18.42	QP
7	1.166	19.76	9.72	29.48	46.00	-16.52	Average
8	1.166	24.72	9.72	34.44	56.00	-21.56	QP
9	1.254	19.87	9.71	29.58	46.00	-16.42	Average
10	1.254	24.76	9.71	34.47	56.00	-21.53	QP
11	8.497	16.45	9.86	26.31	50.00	-23.69	Average
12	8.497	26.05	9.86	35.91	60.00	-24.09	QP

Remark:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.
3. If the Peak value under Average limit, the Average value is not recorded in the report.

## 6.3 Radiated Spurious Emission & Restricted bands

6.3.1 Spurious Emissions					
Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205				
Test Method:	ANSI C63.10 2013				
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)				
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.					

Test Setup:

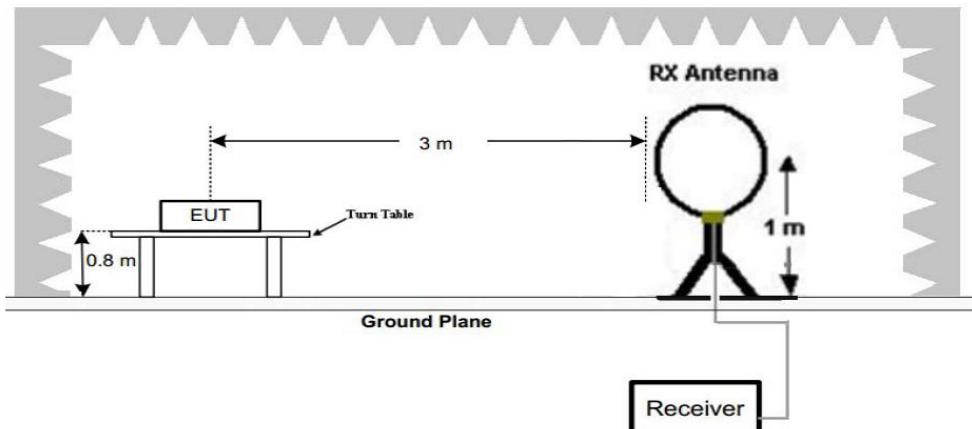


Figure 1. Below 30MHz

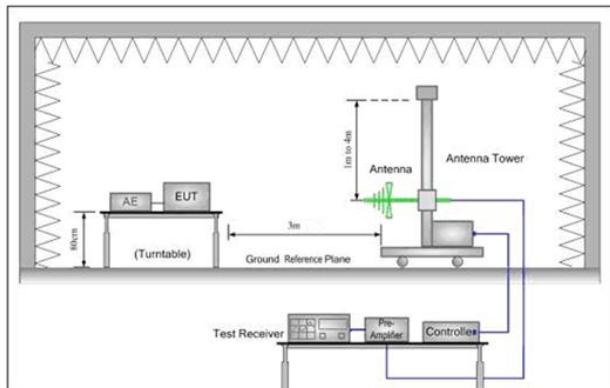


Figure 2. 30MHz to 1GHz

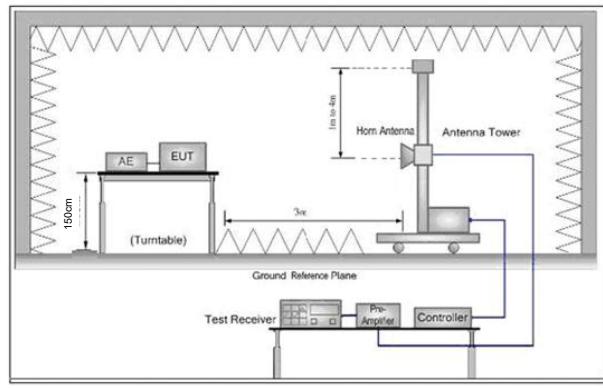


Figure 3. Above 1 GHz

Test Procedure:

- 1) Below 1G: The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
2) Above 1G: The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.  
Note: For the radiated emission test above 1GHz:  
Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the

	<p>measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p> <p>g. Test the EUT in the lowest channel (2402MHz),the middle channel (2440MHz),the Highest channel (2480MHz)</p> <p>h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.</p> <p>i. Repeat above procedures until all frequencies measured was complete.</p>
Exploratory Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>Transmitting mode, Charge + Transmitting mode.</p>
Final Test Mode:	<p>Transmitting with GFSK modulation.</p> <p>For below 1GHz part, through pre-scan, the worst case is the lowest channel.</p> <p>Only the worst case is recorded in the report.</p>
Test Results:	Pass


Radiated Emission below 1GHz

30MHz~1GHz, the worst case

Test mode:

Transmitting mode

Vertical

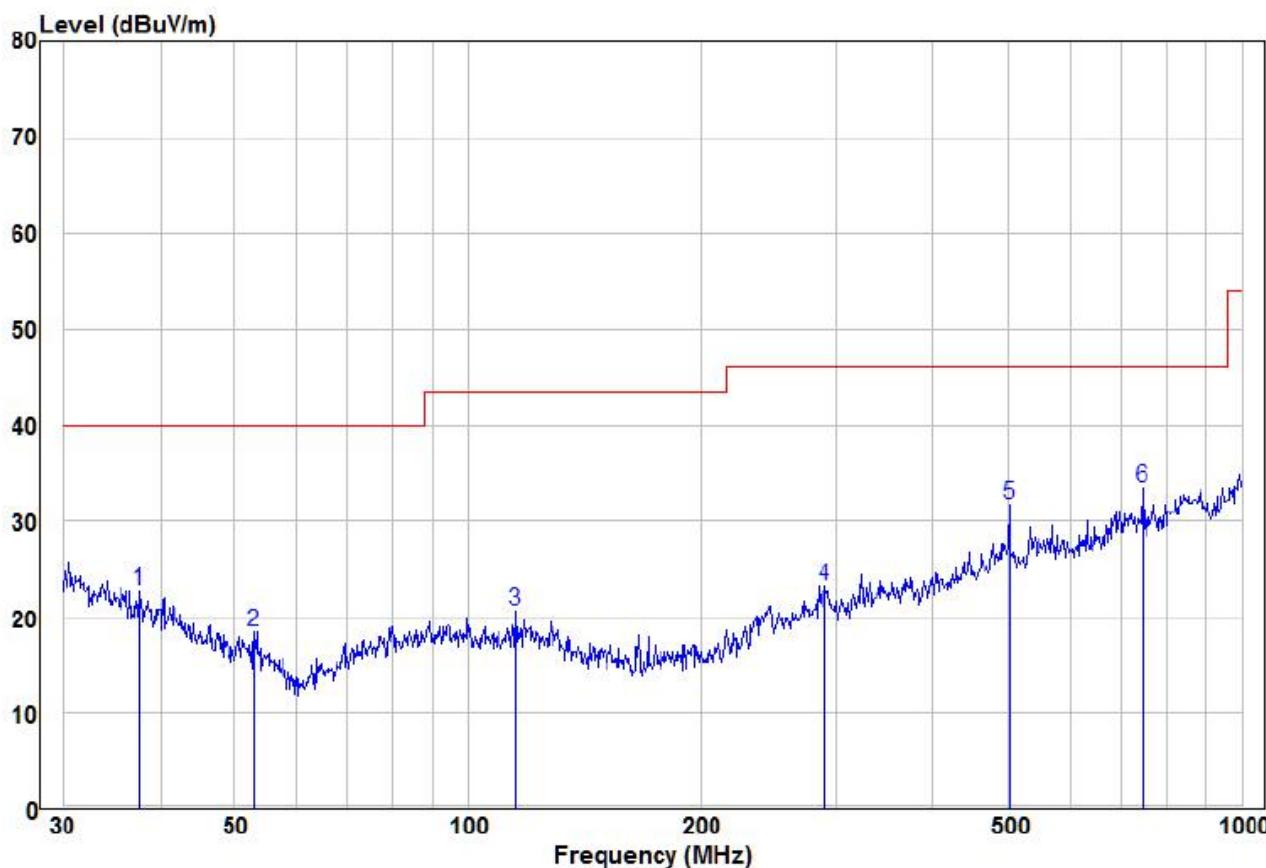


Freq	Read			Limit	Over	Remark	Pol/Phase
	Level	Factor	Level				
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	37.55	9.09	13.68	22.77	40.00	-17.23	Peak VERTICAL
2	52.95	10.95	7.48	18.43	40.00	-21.57	Peak VERTICAL
3	115.32	10.25	10.46	20.71	43.50	-22.79	Peak VERTICAL
4	290.02	9.87	13.40	23.27	46.00	-22.73	Peak VERTICAL
5	501.18	13.53	18.29	31.82	46.00	-14.18	Peak VERTICAL
6 pp	744.87	11.61	21.88	33.49	46.00	-12.51	Peak VERTICAL

30MHz~1GHz, the worst case

Test mode:

Transmitting mode

Horizontal

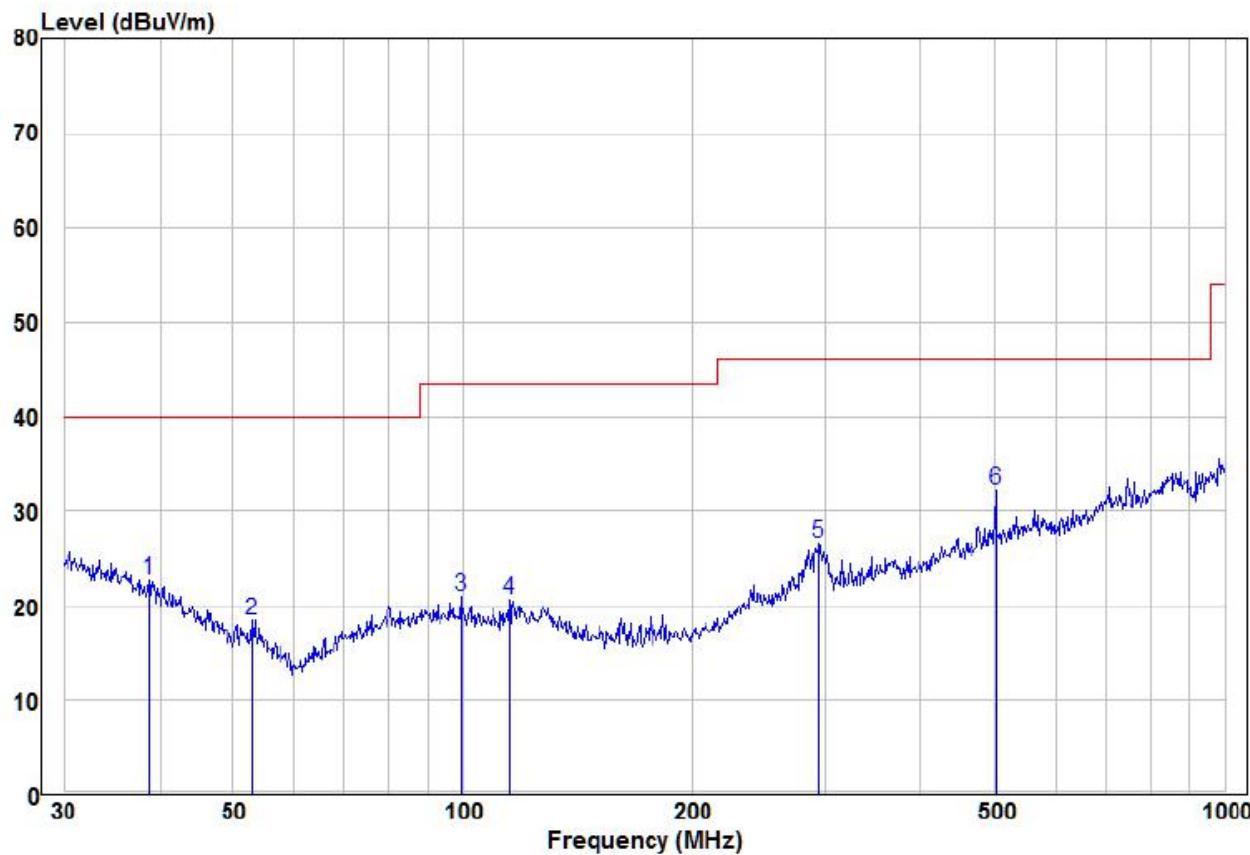

Freq	Read		Limit	Over	Remark	Pol/Phase	
	Freq	Level					
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	38.75	9.43	13.25	22.68	40.00	-17.32	Peak HORIZONTAL
2	52.95	10.95	7.48	18.43	40.00	-21.57	Peak HORIZONTAL
3	99.53	10.33	10.62	20.95	43.50	-22.55	Peak HORIZONTAL
4	115.32	10.25	10.46	20.71	43.50	-22.79	Peak HORIZONTAL
5	294.11	13.12	13.54	26.66	46.00	-19.34	Peak HORIZONTAL
6 pp	501.18	13.94	18.29	32.23	46.00	-13.77	Peak HORIZONTAL

**Transmitter Emission above 1GHz**

Worse case mode:		GFSK(1Mbps)		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2390	55.37	-9.2	46.17	74	-27.83	Peak	H
2400	56.74	-9.39	47.35	74	-26.65	Peak	H
4804	53.20	-4.33	48.87	74	-25.13	Peak	H
7206	50.81	1.01	51.82	74	-22.18	Peak	H
2390	54.20	-9.2	45.00	74	-29.00	Peak	V
2400	51.09	-9.39	41.70	74	-32.30	Peak	V
4804	54.87	-4.33	50.54	74	-23.46	Peak	V
7206	50.10	1.01	51.11	74	-22.89	Peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
4880	50.94	-4.11	46.83	74	-27.17	peak	H
7320	49.98	1.51	51.49	74	-22.51	peak	H
4880	52.82	-4.11	48.71	74	-25.29	peak	V
7320	49.20	1.51	50.71	74	-23.29	peak	V

Worse case mode:		GFSK(1Mbps)		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol. H/V
2483.5	56.82	-9.29	47.53	74	-26.47	Peak	H
4960	52.34	-4.04	48.30	74	-25.70	Peak	H
7440	49.53	1.57	51.10	74	-22.90	Peak	H
2483.5	56.37	-9.29	47.08	74	-26.92	Peak	V
4960	49.45	-4.04	45.41	74	-28.59	Peak	V
7440	49.19	1.57	50.76	74	-23.24	Peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Lowest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
<b>2390</b>	<b>54.06</b>	<b>-9.2</b>	<b>44.86</b>	<b>74</b>	<b>-29.14</b>	<b>Peak</b>	<b>H</b>
2400	56.45	-9.39	47.06	74	-26.94	Peak	H
4804	54.03	-4.33	49.70	74	-24.30	Peak	H
7206	49.29	1.01	50.30	74	-23.70	Peak	H
<b>2390</b>	<b>54.18</b>	<b>-9.2</b>	<b>44.98</b>	<b>74</b>	<b>-29.02</b>	<b>Peak</b>	<b>V</b>
2400	50.79	-9.39	41.40	74	-32.60	Peak	V
4804	54.60	-4.33	50.27	74	-23.73	Peak	V
7206	50.57	1.01	51.58	74	-22.42	Peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Middle	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
4880	51.53	-4.11	47.42	74	-26.58	peak	H
7320	48.98	1.51	50.49	74	-23.51	peak	H
4880	53.01	-4.11	48.90	74	-25.10	peak	V
7320	49.23	1.51	50.74	74	-23.26	peak	V

Worse case mode:		GFSK(2Mbps)		Test channel:		Highest	
Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Over (dB)	Detector Type	Ant. Pol.
							H/V
<b>2483.5</b>	<b>55.04</b>	<b>-9.29</b>	<b>45.75</b>	<b>74</b>	<b>-28.25</b>	<b>Peak</b>	<b>H</b>
4960	50.90	-4.04	46.86	74	-27.14	Peak	H
7440	49.10	1.57	50.67	74	-23.33	Peak	H
<b>2483.5</b>	<b>55.89</b>	<b>-9.29</b>	<b>46.60</b>	<b>74</b>	<b>-27.40</b>	<b>Peak</b>	<b>V</b>
4960	52.24	-4.04	48.20	74	-25.80	Peak	V
7440	50.27	1.57	51.84	74	-22.16	Peak	V


**Remark:**

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:  
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, the disturbance above 10GHz and below 30MHz was very low. As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.


## 7 Photographs - EUT Test Setup

### 7.1 Radiated Spurious Emission

9KHz~30MHz:

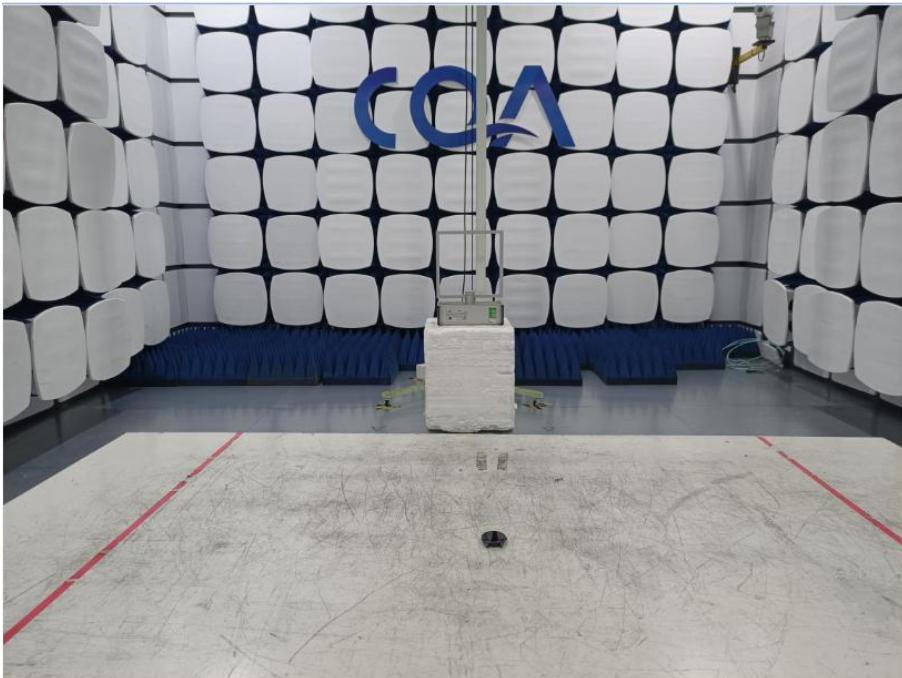


30MHz~1GHz:

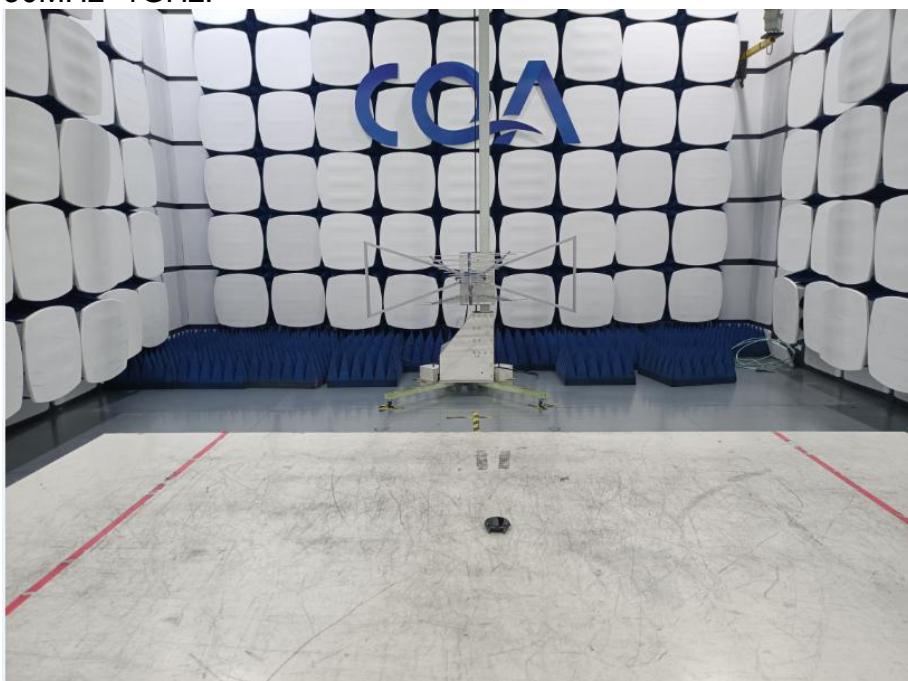

Above 1GHz:







## 7.2 Conducted Emission


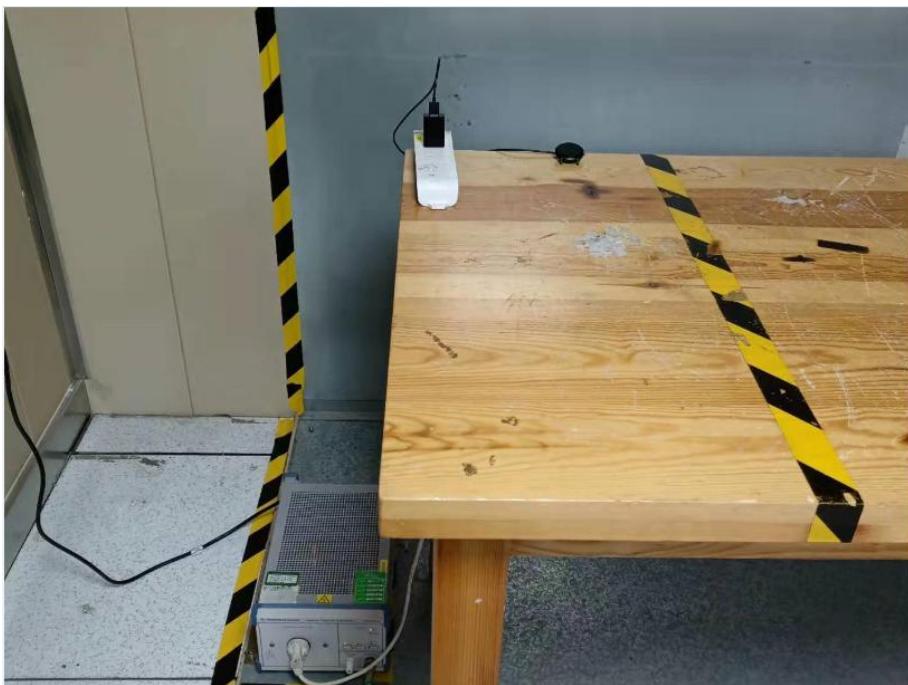




## 8 Photographs - EUT Constructional Details




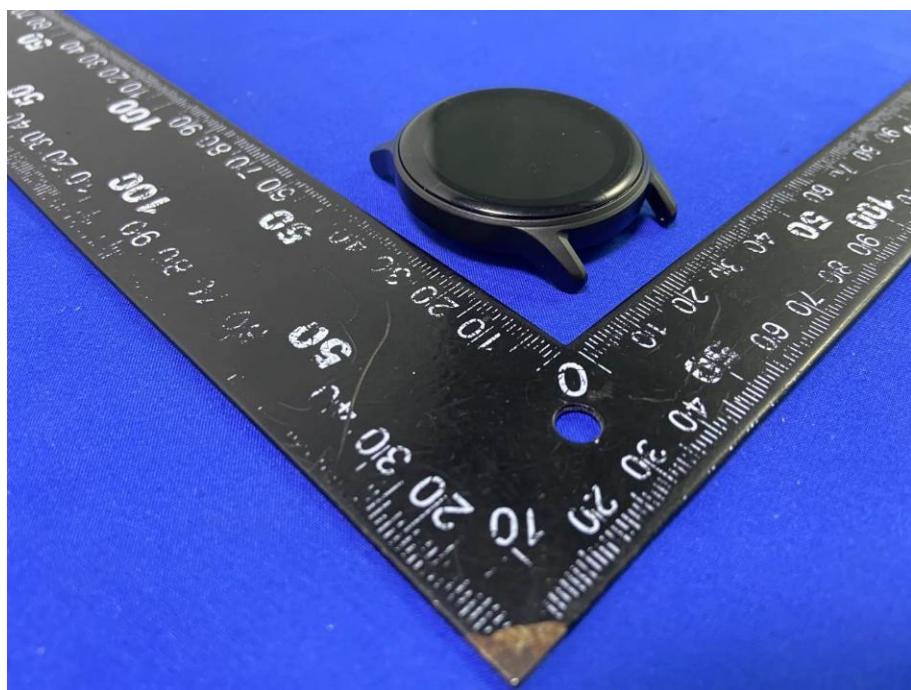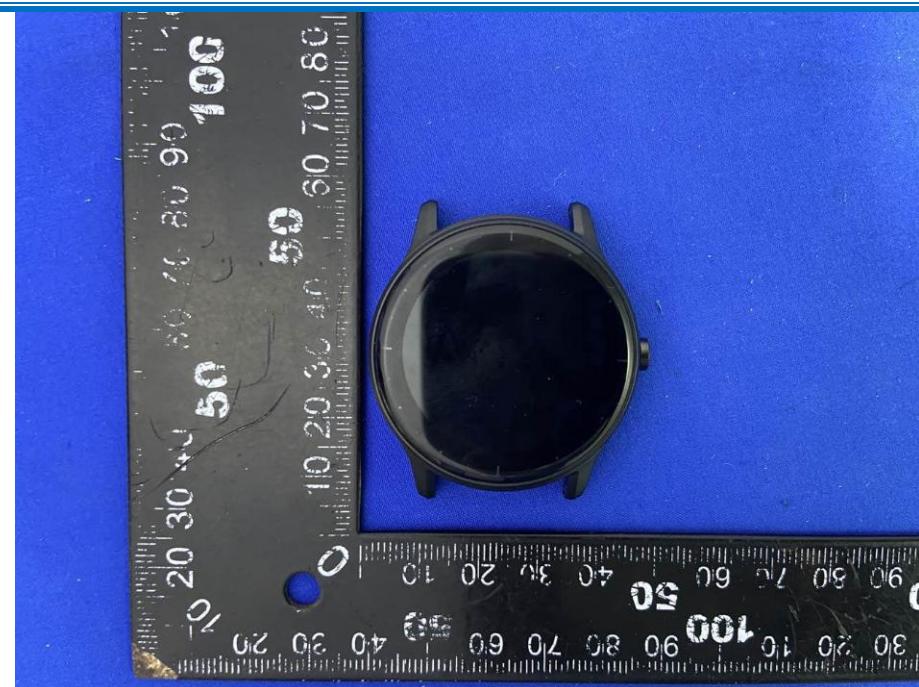

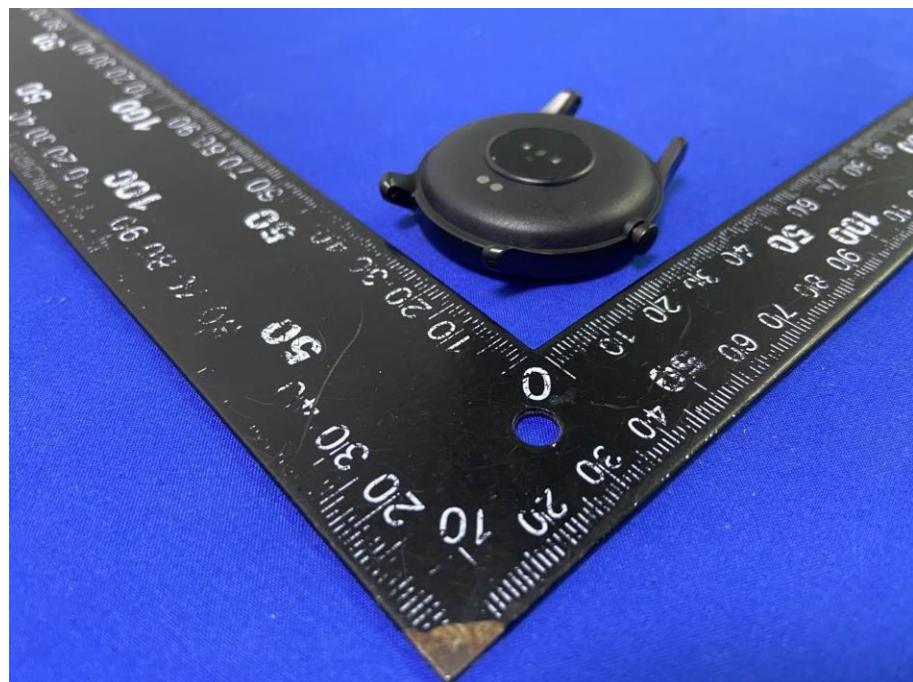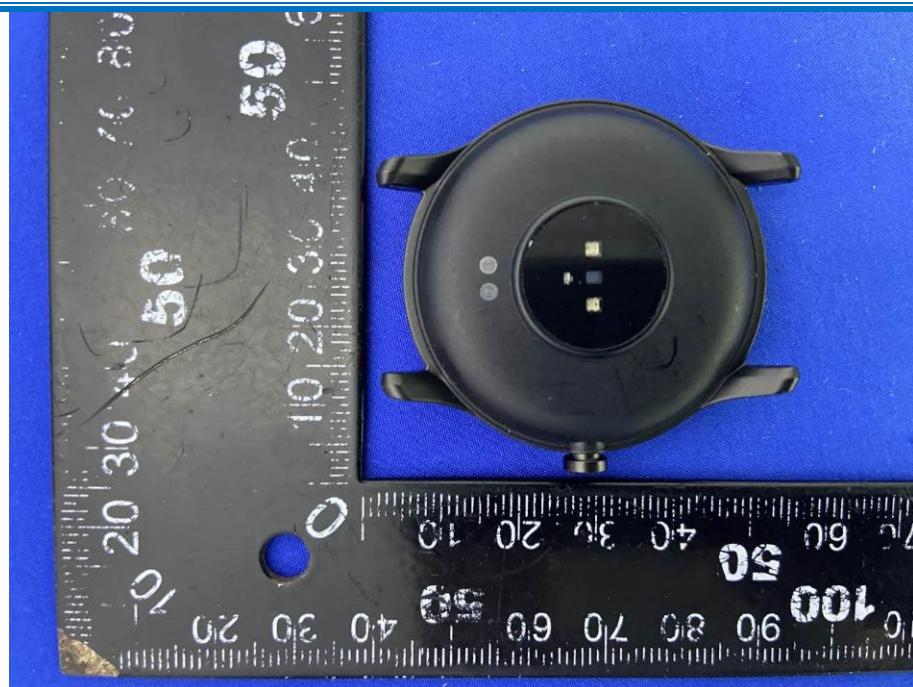

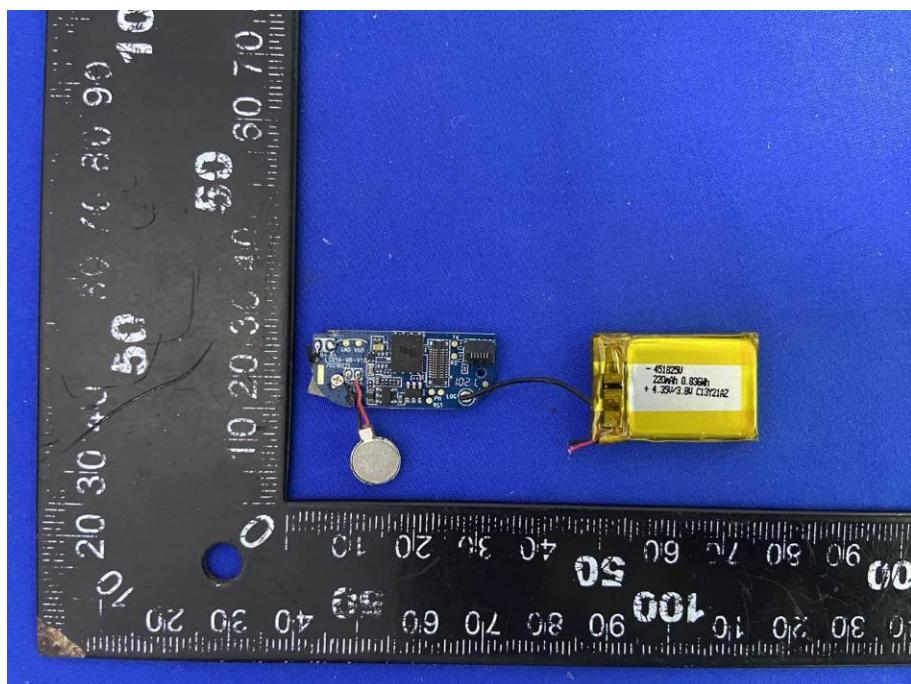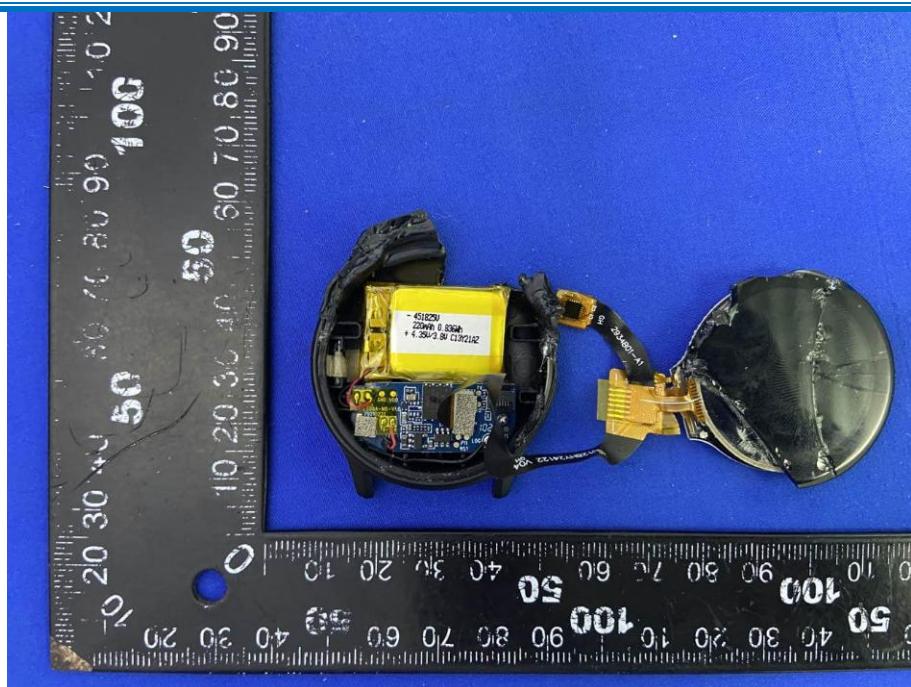

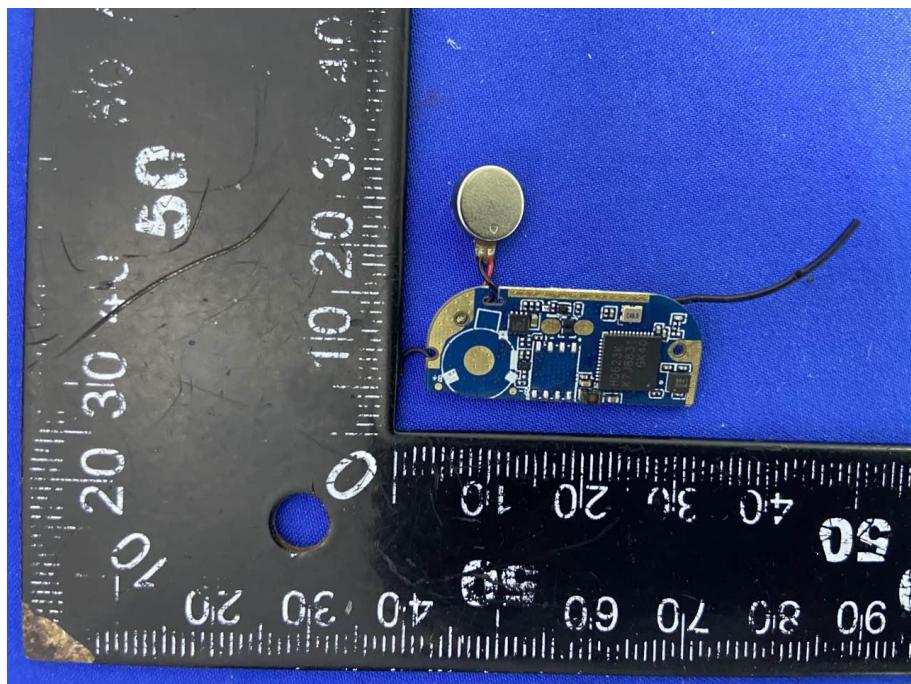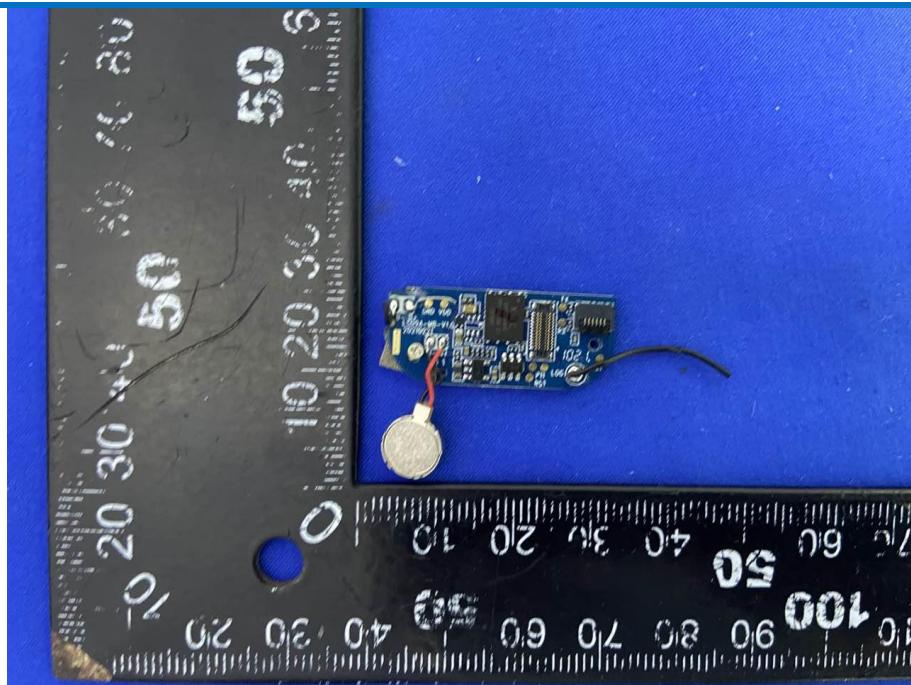

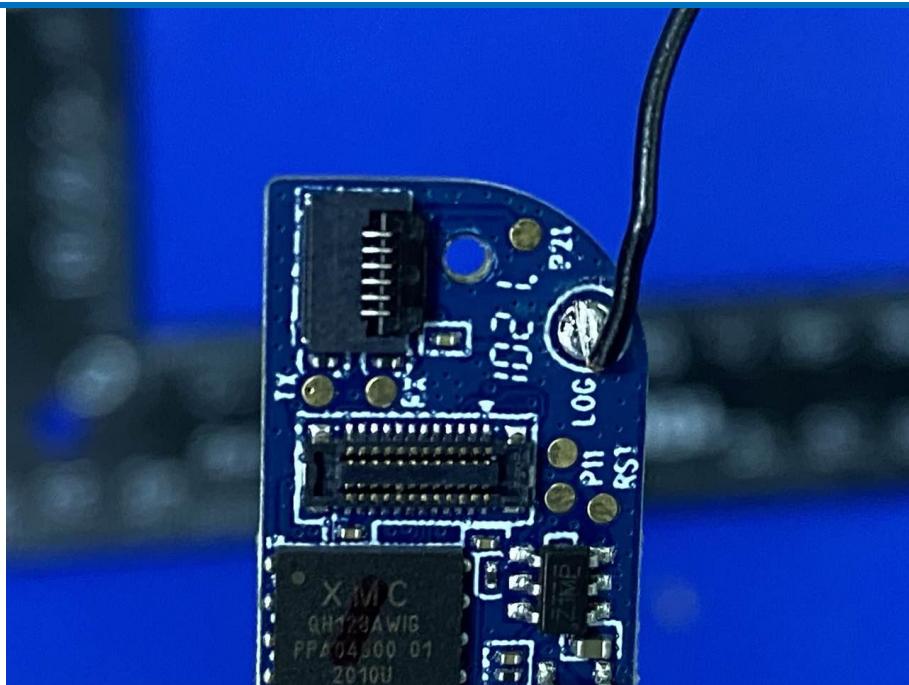

---

The End