

TEST REPORT

Product Name : Haylou RS4
Brand Mark : HAYLOU
Model No. : Haylou-LS12
FCC ID : 2AMQ6-LS12
Report Number : BLA-EMC-202107-A13102
Date of Sample Receipt : 2021/7/28
Date of Test : 2021/7/28 to 2021/8/20
Date of Issue : 2021/8/20
Test Standard : 47 CFR Part 15, Subpart C 15.247
Test Result : Pass

Prepared for:

Dongguan Liesheng Electronic Co., Ltd.
Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District,
Dongguan City, Guangdong, China.

Prepared by:

BlueAsia of Technical Services(Shenzhen) Co.,Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District,
Shenzhen, Guangdong Province, China
TEL: +86-755-23059481

Compiled by:

Sven

Review by:

Sueelle

Approved by:

Blue zhong

Date: 2021/8/20



REPORT REVISE RECORD

Version No.	Date	Description
00	2021/8/20	Original

BlueAsia

TABLE OF CONTENTS

1	TEST SUMMARY.....	5
2	GENERAL INFORMATION.....	6
3	GENERAL DESCRIPTION OF E.U.T.....	6
4	TEST ENVIRONMENT.....	7
5	TEST MODE.....	7
6	MEASUREMENT UNCERTAINTY.....	7
7	DESCRIPTION OF SUPPORT UNIT.....	8
8	LABORATORY LOCATION.....	8
9	TEST INSTRUMENTS LIST.....	9
10	CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ).....	13
10.1	LIMITS.....	13
10.2	BLOCK DIAGRAM OF TEST SETUP.....	13
10.3	PROCEDURE.....	13
10.4	TEST DATA.....	15
11	CONDUCTED BAND EDGES MEASUREMENT.....	19
11.1	LIMITS.....	19
11.2	BLOCK DIAGRAM OF TEST SETUP.....	19
11.3	TEST DATA.....	20
12	CONDUCTED SPURIOUS EMISSIONS.....	21
12.1	LIMITS.....	21
12.2	BLOCK DIAGRAM OF TEST SETUP.....	21
12.3	TEST DATA.....	22
13	POWER SPECTRUM DENSITY.....	23
13.1	LIMITS.....	23
13.2	BLOCK DIAGRAM OF TEST SETUP.....	23
13.3	TEST DATA.....	23
14	CONDUCTED PEAK OUTPUT POWER.....	24
14.1	LIMITS.....	24
14.2	BLOCK DIAGRAM OF TEST SETUP.....	24
14.3	TEST DATA.....	25

15 MINIMUM 6DB BANDWIDTH.....	26
15.1 LIMITS.....	26
15.2 BLOCK DIAGRAM OF TEST SETUP.....	26
15.3 TEST DATA.....	26
16 ANTENNA REQUIREMENT.....	27
16.1 CONCLUSION.....	27
17 RADIATED SPURIOUS EMISSIONS.....	28
17.1 LIMITS.....	28
17.2 BLOCK DIAGRAM OF TEST SETUP.....	29
17.3 PROCEDURE.....	29
17.4 TEST DATA.....	31
18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	47
18.1 LIMITS.....	47
18.2 BLOCK DIAGRAM OF TEST SETUP.....	48
18.3 PROCEDURE.....	48
18.4 TEST DATA.....	50
19 APPENDIX.....	58
APPENDIX A: PHOTOGRAPHS OF TEST SETUP.....	86
APPENDIX B: PHOTOGRAPHS OF THE EUT.....	88

1 TEST SUMMARY

Test item	Test Requirement	Test Method	Class/Severity	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 7.8.5	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

2 GENERAL INFORMATION

Applicant	Dongguan Liesheng Electronic Co., Ltd.
Address	Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China.
Manufacturer	Dongguan Liesheng Electronic Co., Ltd.
Address	Room 401-410, Building 1, No.86 Hongtu Road, Nancheng District, Dongguan City, Guangdong, China.
Factory	Dongguan Zhengrong Electronic Co., Ltd.
Address	No.4, Shugang Avenue, Hongmei Town, Dongguan City, Guangdong
Product Name	Haylou RS4
Test Model No.	Haylou-LS12

3 GENERAL DESCRIPTION OF E.U.T.

Hardware Version	NA
Software Version	NA
Operation Frequency:	2402-2480MHz
Modulation Type:	GFSK
Channel Spacing:	2MHz
Number of Channels:	40
Antenna Type:	Internal antenna
Antenna Gain:	-4.61dBi

4 TEST ENVIRONMENT

Environment	Temperature	Voltage
Normal	25°C	3.3Vdc

5 TEST MODE

TEST MODE	TEST MODE DESCRIPTION
TX	Keep the EUT in transmitting mode

Remark: Only the data of the worst mode would be recorded in this report.

6 MEASUREMENT UNCERTAINTY

Parameter	Expanded Uncertainty (Confidence of 95%)
Radiated Emission(9kHz-30MHz)	±4.34dB
Radiated Emission(30MHz-1000MHz)	±4.24dB
Radiated Emission(1GHz-18GHz)	±4.68dB
AC Power Line Conducted Emission(150kHz-30MHz)	±3.45dB

Parameter	Expanded Uncertainty (Confidence of 95%)
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±1.5 dB
Power Spectral Density, conducted	±3.0 dB
Unwanted Emissions, conducted	±3.0 dB
Temperature	±3 °C
Supply voltages	±3 %
Time	±5 %
Radiated Emission (30MHz ~ 1000MHz)	±4.35 dB
Radiated Emission (1GHz ~ 18GHz)	±4.44 dB

7 DESCRIPTION OF SUPPORT UNIT

Device Type	Manufacturer	Model Name	Serial No.	Remark
AC Adapter (UGREEN)	UGREEN	CD112	N/A	N/A
PC	HASEE	K610D	N/A	N/A

8 LABORATORY LOCATION

All tests were performed at:
BlueAsia of Technical Services(Shenzhen) Co., Ltd.
Building C, No. 107, Shihuan Road, Shiyan Sub-District, Baoan District, Shenzhen, Guangdong Province,
China
Telephone: TEL: +86-755-28682673 FAX: +86-755-28682673
No tests were sub-contracted.

9 TEST INSTRUMENTS LIST

Test Equipment Of Conducted Emissions at AC Power Line (150kHz-30MHz)

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Shield room	SKET	833	N/A	2020/11/25	2023/11/24
Receiver	R&S	ESPI3	101082	2020/10/12	2021/10/11
LISN	R&S	ENV216	3560.6550.15	2020/10/12	2021/10/11
LISN	AT	AT166-2	AKK1806000003	2020/10/12	2021/10/11
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A

Test Equipment Of Conducted Band Edges Measurement

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Power Spectrum Density

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due

Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Conducted Peak Output Power

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Minimum 6dB Bandwidth

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Spectrum	Agilent	N9020A	MY49100060	2020/10/12	2021/10/11
Signal Generator	Agilent	N5182A	MY49060650	2020/10/12	2021/10/11
Signal Generator	Agilent	E8257D	MY44320250	2020/10/12	2021/10/11

Test Equipment Of Radiated Spurious Emissions

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11

Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

Test Equipment Of Radiated Emissions which fall in the restricted bands

Equipment	Manufacturer	Model	S/N	Cal.Date	Cal.Due
Chamber	SKET	966	N/A	2020/11/10	2023/11/9
Spectrum	R&S	FSP40	100817	2020/10/12	2021/10/11
Receiver	R&S	ESR7	101199	2020/10/12	2021/10/11
broadband Antenna	Schwarzbeck	VULB9168	00836 P:00227	2020/9/26	2022/9/25
Horn Antenna	Schwarzbeck	9120D	01892 P:00331	2020/9/26	2022/9/25
Amplifier	SKET	PA-000318G-45	N/A	2020/10/16	2021/10/15
EMI software	EZ	EZ-EMC	EEMC-3A1	N/A	N/A
Loop antenna	SCHNARZBECK	FMZB1519B	00102	2020/9/26	2022/9/25
Controller	SKET	N/A	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-02	N/A	N/A	N/A

Coaxial Cable	BlueAsia	BLA-XC-03	N/A	N/A	N/A
Coaxial Cable	BlueAsia	BLA-XC-01	N/A	N/A	N/A

BlueAsia

10 CONDUCTED EMISSIONS AT AC POWER LINE (150KHZ-30MHZ)


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

10.1 LIMITS

Frequency of emission(MHz)	Conducted limit(dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

10.2 BLOCK DIAGRAM OF TEST SETUP

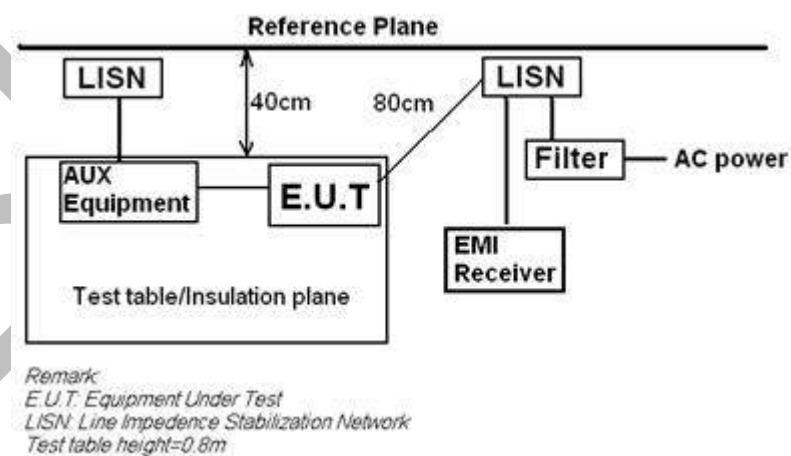

10.3 PROCEDURE

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50H + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.

- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor


BlueAsia

10.4 TEST DATA

BLE 1M

[TestMode: TX]; [Line: Line] [Power: AC120V/60Hz]

Conducted Emission Measurement

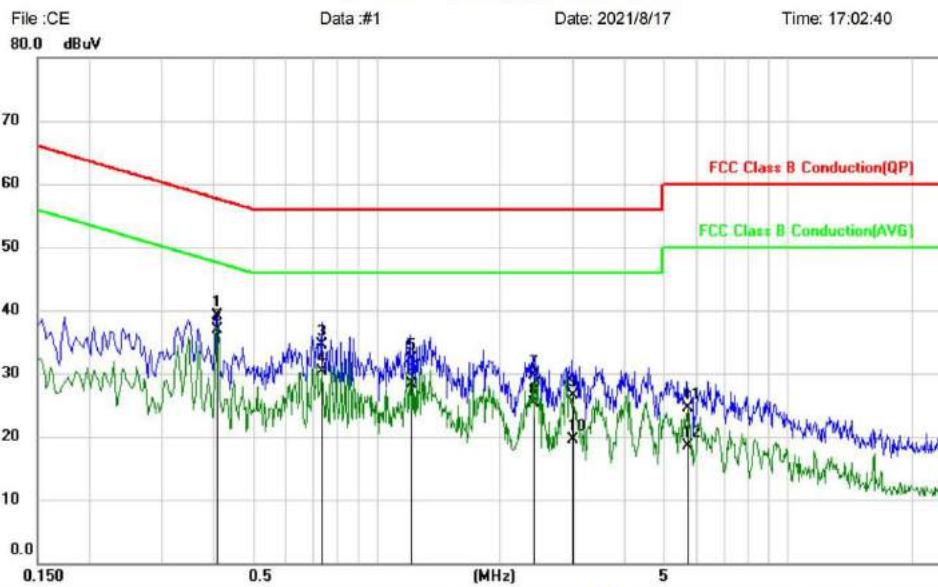

Site

Phase: **L1**

Temperature:

Limit: FCC Class B Conduction(QP)

Power:

Humidity: %

EUT: Haylou RS4

M/N: Haylou-LS12

Mode: TX mode

Note:

No. Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
	MHz	dBuV	dB	dBuV	dB	Detector	Comment
1	0.4100	29.26	9.85	39.11	57.65	-18.54	QP
2 *	0.4100	27.09	9.85	36.94	47.65	-10.71	AVG
3	0.7380	24.59	9.89	34.48	56.00	-21.52	QP
4	0.7380	20.48	9.89	30.37	46.00	-15.63	AVG
5	1.2100	22.48	9.92	32.40	56.00	-23.60	QP
6	1.2100	18.43	9.92	28.35	46.00	-17.65	AVG
7	2.3980	19.73	9.95	29.68	56.00	-26.32	QP
8	2.3980	15.26	9.95	25.21	46.00	-20.79	AVG
9	3.0020	16.47	9.97	26.44	56.00	-29.56	QP
10	3.0020	9.53	9.97	19.50	46.00	-26.50	AVG
11	5.7020	14.54	10.05	24.59	60.00	-35.41	QP
12	5.7020	8.45	10.05	18.50	50.00	-31.50	AVG


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Line: Nutral] [Power:AC120V/60Hz]

Conducted Emission Measurement

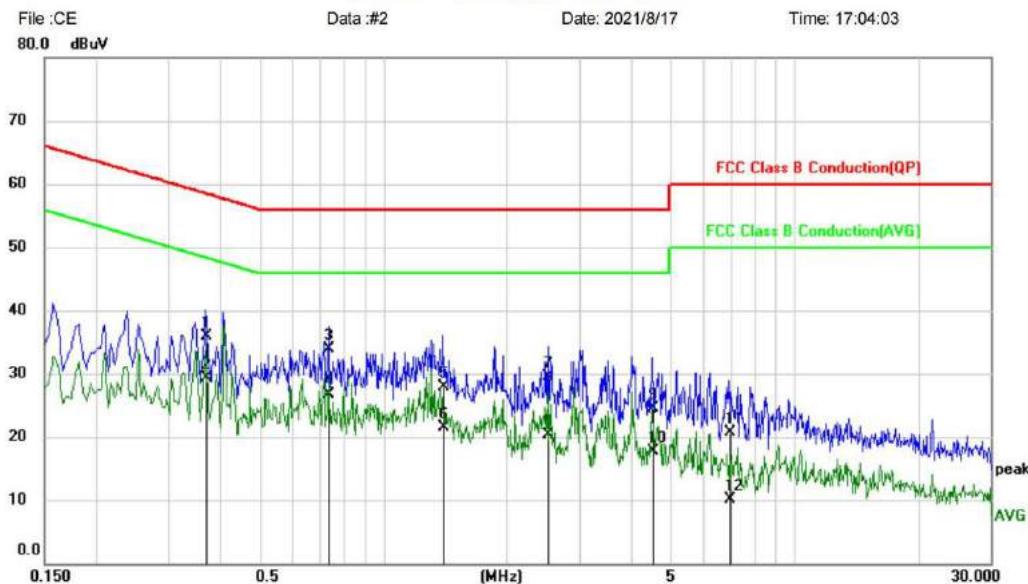

Site

Phase:

N

Temperature:

Limit: FCC Class B Conduction(QP)

Power:

Humidity: %

EUT: Haylou RS4

M/N: Haylou-LS12

Mode: TX mode

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		Level	Factor	ment		dB	Detector
1	0.3700	26.06	9.78	35.84	58.50	-22.66	QP
2 *	0.3700	19.62	9.78	29.40	48.50	-19.10	AVG
3	0.7380	24.11	9.82	33.93	56.00	-22.07	QP
4	0.7380	16.83	9.82	26.65	46.00	-19.35	AVG
5	1.4020	18.10	9.85	27.95	56.00	-28.05	QP
6	1.4020	11.75	9.85	21.60	46.00	-24.40	AVG
7	2.5220	19.68	9.89	29.57	56.00	-26.43	QP
8	2.5220	10.33	9.89	20.22	46.00	-25.78	AVG
9	4.5100	14.59	9.94	24.53	56.00	-31.47	QP
10	4.5100	7.68	9.94	17.62	46.00	-28.38	AVG
11	6.9460	10.74	10.02	20.76	60.00	-39.24	QP
12	6.9460	0.16	10.02	10.18	50.00	-39.82	AVG

*:Maximum data x:Over limit !:over margin


⟨Reference Only⟩

Test Result: Pass

BLE 2M

[TestMode: TX]; [Line: Line] [Power: AC120V/60Hz]

Conducted Emission Measurement

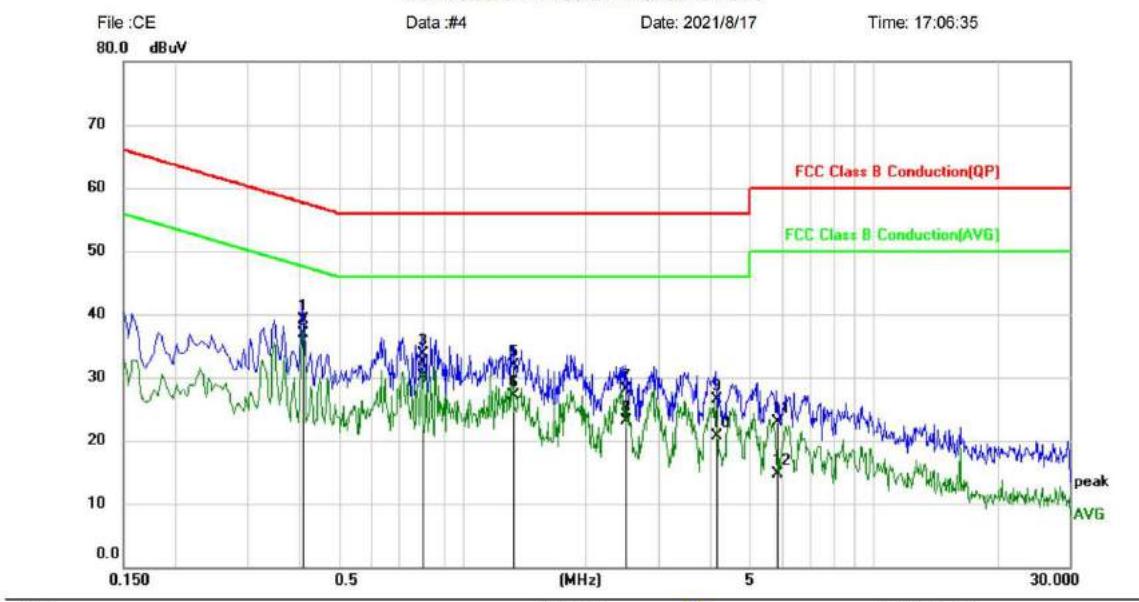
Site: Phase: **L1** Temperature:

Limit: FCC Class B Conduction(QP) Power: Humidity: %

EUT: Haylou RS4

M/N: Haylou-LS12

Mode: TX mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.4100	29.19	9.85	39.04	57.65	-18.61	QP
2	*	0.4100	27.05	9.85	36.90	47.65	-10.75	AVG
3		0.7980	23.88	9.89	33.77	56.00	-22.23	QP
4		0.7980	20.26	9.89	30.15	46.00	-15.85	AVG
5		1.3300	22.01	9.93	31.94	56.00	-24.06	QP
6		1.3300	17.22	9.93	27.15	46.00	-18.85	AVG
7		2.4940	18.23	9.95	28.18	56.00	-27.82	QP
8		2.4940	13.12	9.95	23.07	46.00	-22.93	AVG
9		4.1380	16.61	9.98	26.59	56.00	-29.41	QP
10		4.1380	10.63	9.98	20.61	46.00	-25.39	AVG
11		5.8100	12.84	10.05	22.89	60.00	-37.11	QP
12		5.8100	4.69	10.05	14.74	50.00	-35.26	AVG


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX]; [Line: Nutral] [Power:AC120V/60Hz]

Conducted Emission Measurement

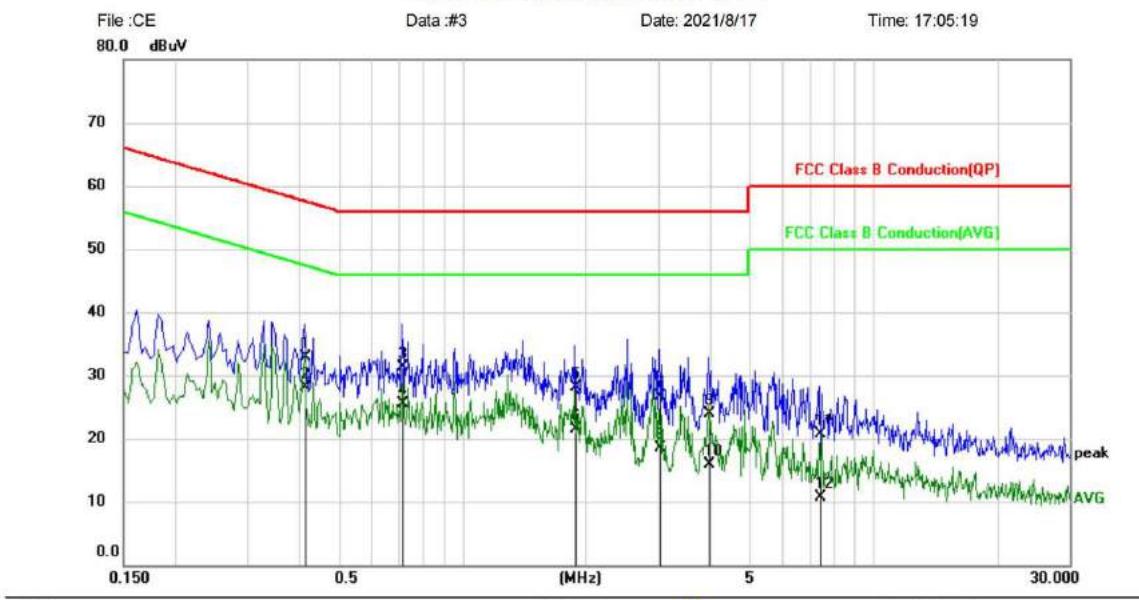

Site: **N** Phase: **N** Temperature:
 Limit: FCC Class B Conduction(QP)
 Power: **N** Humidity: %
 EUT: Haylou RS4
 M/N: Haylou-LS12
 Mode: TX mode

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	
		MHz	dBuV	dB	dBuV	dB	Detector	Comment
1		0.4140	23.21	9.78	32.99	57.57	-24.58	QP
2	*	0.4140	18.41	9.78	28.19	47.57	-19.38	AVG
3		0.7140	21.53	9.82	31.35	56.00	-24.65	QP
4		0.7140	15.65	9.82	25.47	46.00	-20.53	AVG
5		1.8820	18.30	9.86	28.16	56.00	-27.84	QP
6		1.8820	11.58	9.86	21.44	46.00	-24.56	AVG
7		3.0140	16.86	9.90	26.76	56.00	-29.24	QP
8		3.0140	8.69	9.90	18.59	46.00	-27.41	AVG
9		3.9820	14.09	9.91	24.00	56.00	-32.00	QP
10		3.9820	6.09	9.91	16.00	46.00	-30.00	AVG
11		7.3900	10.64	10.04	20.68	60.00	-39.32	QP
12		7.3900	0.60	10.04	10.64	50.00	-39.36	AVG

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


11 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

11.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

11.2 BLOCK DIAGRAM OF TEST SETUP

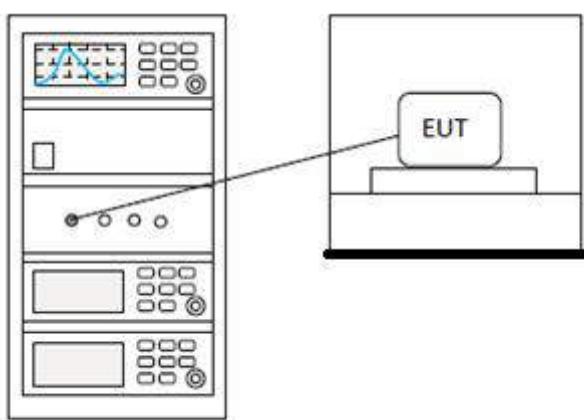

11.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


12 CONDUCTED SPURIOUS EMISSIONS

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.6 & Section 11.11
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

12.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

12.2 BLOCK DIAGRAM OF TEST SETUP

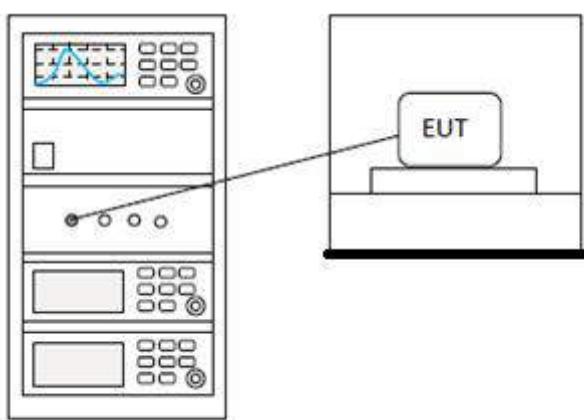

12.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


13 POWER SPECTRUM DENSITY

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.10.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25 °C
Humidity	52%

13.1 LIMITS

Limit: $\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

13.2 BLOCK DIAGRAM OF TEST SETUP

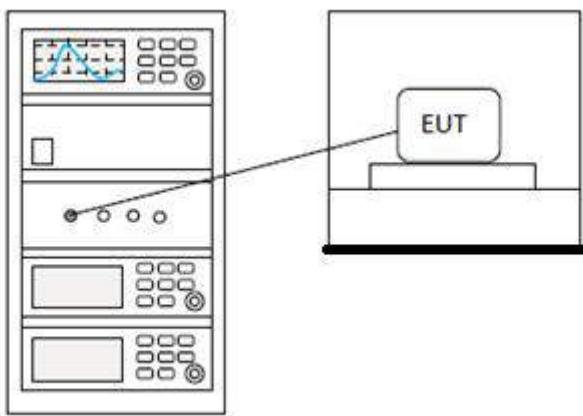

13.3 TEST DATA

Pass: Please Refer To Appendix: For Details


14 CONDUCTED PEAK OUTPUT POWER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.5
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

14.1 LIMITS

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation

14.2 BLOCK DIAGRAM OF TEST SETUP

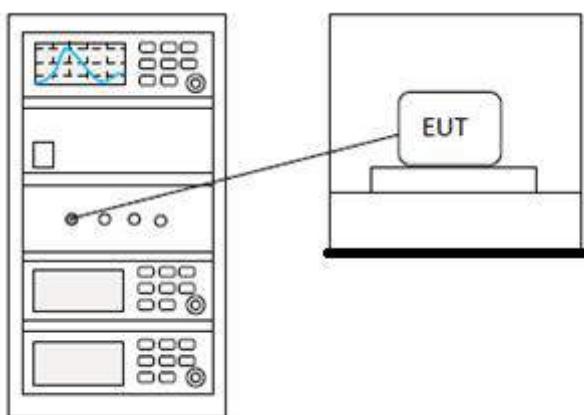

14.3 TEST DATA

Pass: Please Refer To Appendix: For Details

BlueAsia


15 MINIMUM 6DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 11.8.1
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

15.1 LIMITS

Limit: ≥ 500 kHz

15.2 BLOCK DIAGRAM OF TEST SETUP

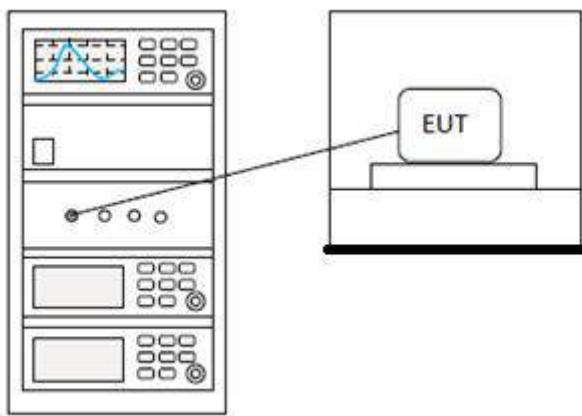

15.3 TEST DATA

Pass: Please Refer To Appendix: For Details

16 ANTENNA REQUIREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	N/A

16.1 CONCLUSION

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit permanently attached antenna or of an so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -4.61dBi.



17 RADIATED SPURIOUS EMISSIONS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.4,6.5,6.6
Test Mode (Pre-Scan)	TX;TX Low channel;TX middle channel;TX high channel
Test Mode (Final Test)	TX;TX middle channel;TX Low channel;TX high channel
Tester	Sven
Temperature	25°C
Humidity	52%

17.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

17.2 BLOCK DIAGRAM OF TEST SETUP

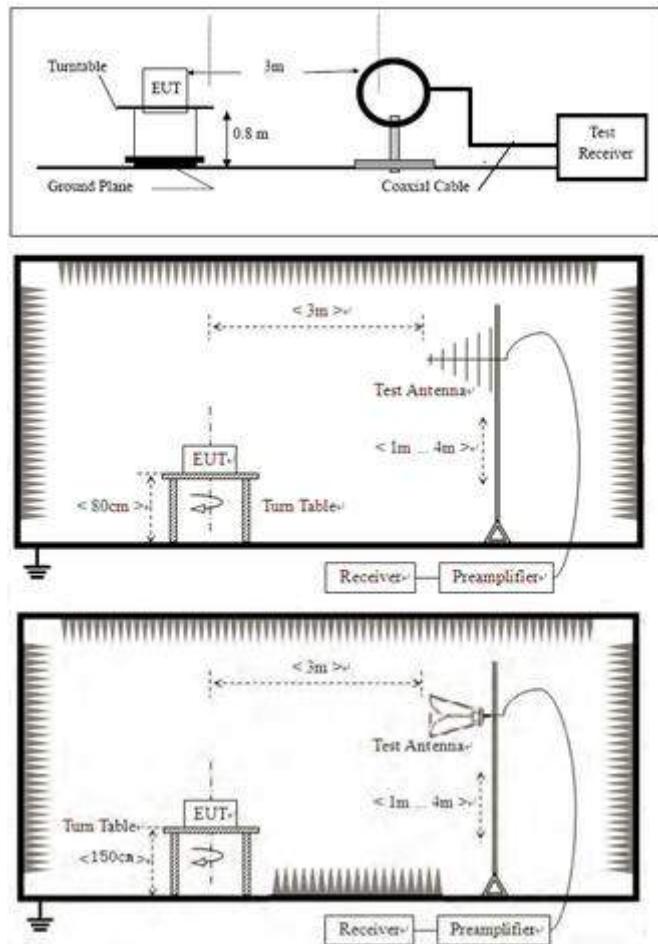

17.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 12.75GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported. Fundamental frequency is blocked by filter, and only spurious emission is shown.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

17.4 TEST DATA

BLE 1M

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202107-A131
EUT: Haylou RS4	Test Engineer:
M/N: Haylou-LS12	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-08-18 16:26:07

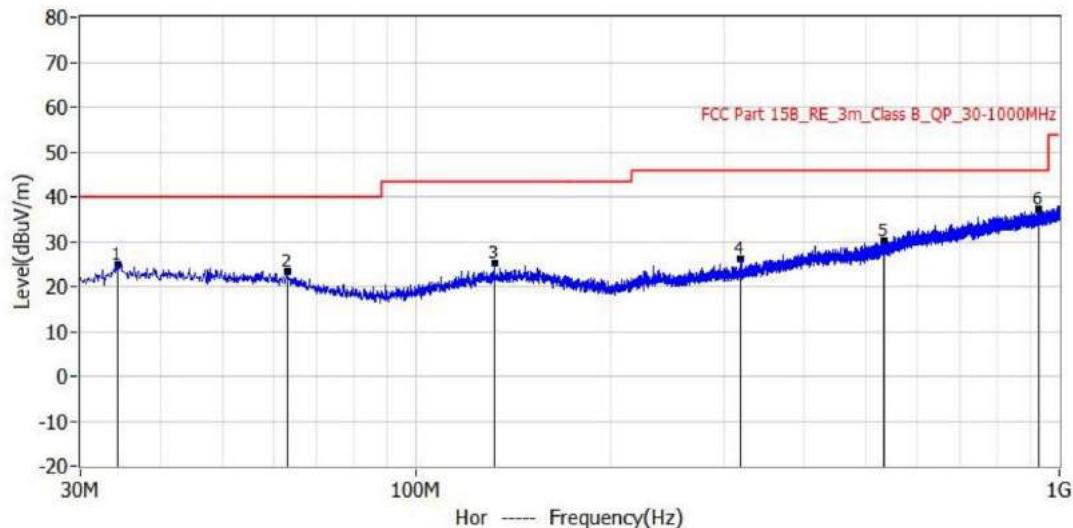


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	34.244MHz	40.0	24.9	-15.1	1.5	23.4	QP	Hor		
2*	62.980MHz	40.0	23.3	-16.7	0.4	22.9	QP	Hor		
3*	131.971MHz	43.5	25.3	-18.2	2.0	23.3	QP	Hor		
4*	318.818MHz	46.0	26.2	-19.8	1.5	24.7	QP	Hor		
5*	533.551MHz	46.0	30.3	-15.7	0.9	29.4	QP	Hor		
6*	928.220MHz	46.0	37.1	-8.9	1.8	35.3	QP	Hor		

Test Result: Pass

[TestMethod: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202107-A131
EUT: Haylou RS4	Test Engineer:
M/N: Haylou-LS12	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-08-18 16:27:55

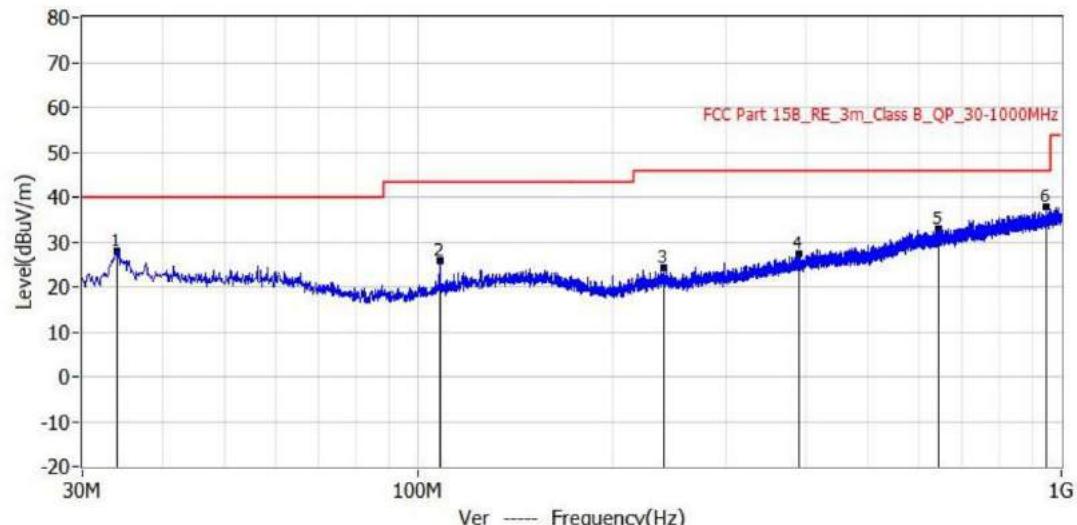

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	33.880MHz	40.0	28.0	-12.0	4.7	23.3	QP	Ver		
2*	107.964MHz	43.5	25.8	-17.7	4.3	21.5	QP	Ver		
3*	240.126MHz	46.0	24.2	-21.8	1.4	22.8	QP	Ver		
4*	391.325MHz	46.0	27.4	-18.6	0.4	27.0	QP	Ver		
5*	644.495MHz	46.0	32.9	-13.1	1.3	31.6	QP	Ver		
6*	948.590MHz	46.0	37.9	-8.1	2.3	35.6	QP	Ver		

Test Result: Pass


[TestMode: TX Low channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :2z
80.0 dBuV/m

Data :#3

Date: 2021/8/17

Time: 13:44:22

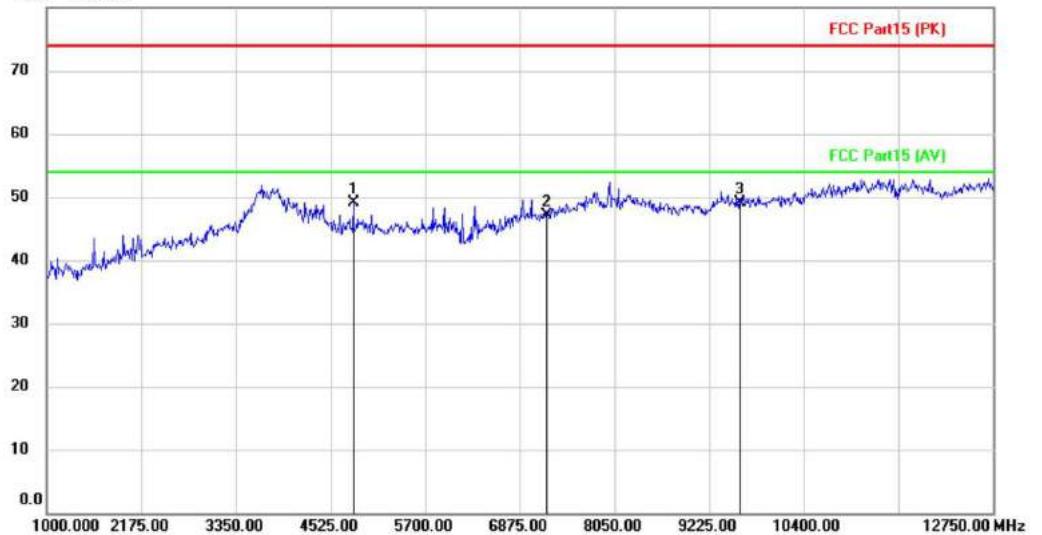

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4807.000	45.49	3.71	49.20	74.00	-24.80	peak		
2		7206.000	41.21	5.96	47.17	74.00	-26.83	peak		
3		9608.000	39.74	9.29	49.03	74.00	-24.97	peak		

*:Maximum data x:Over limit !:over margin


⟨Reference Only

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :2z Data :#4 Date: 2021/8/17 Time: 13:47:50

80.0 dBuV/m

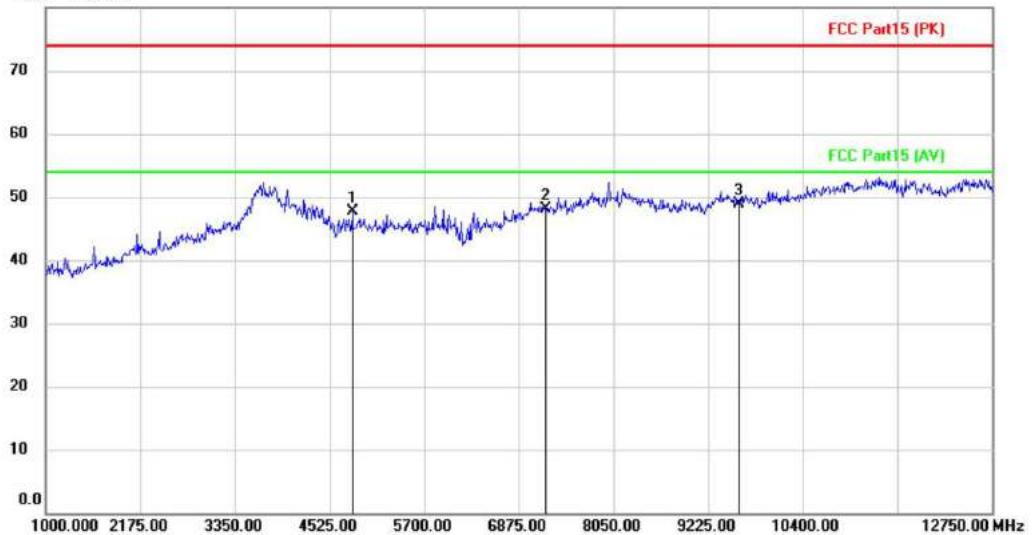

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4804.000	43.93	3.71	47.64	74.00	-26.36	peak			
2		7206.000	42.17	5.96	48.13	74.00	-25.87	peak			
3	*	9608.000	39.53	9.29	48.82	74.00	-25.18	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only


Test Result: Pass

[TestMode: TX middle channel]; [Polarity: Horizontal]


*Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

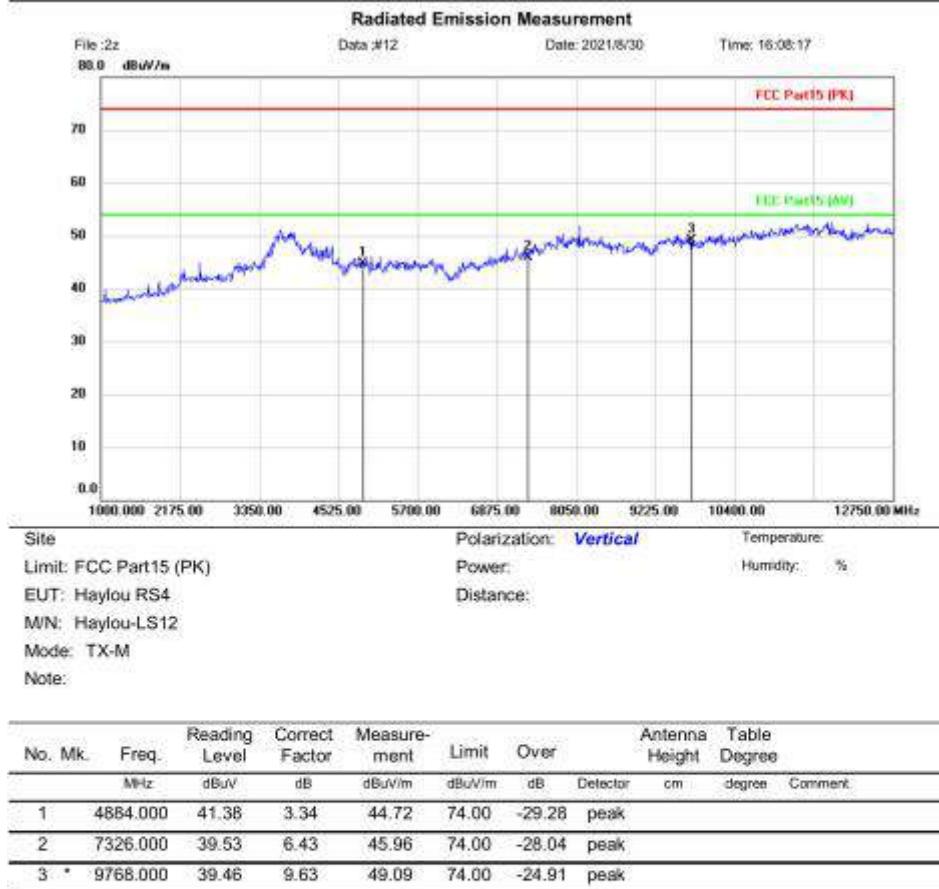[TestMode: TX middle channel]; [Polarity: Vertical]


*Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :2z

Data :#7

Date: 2021/8/17

Time: 14:14:57

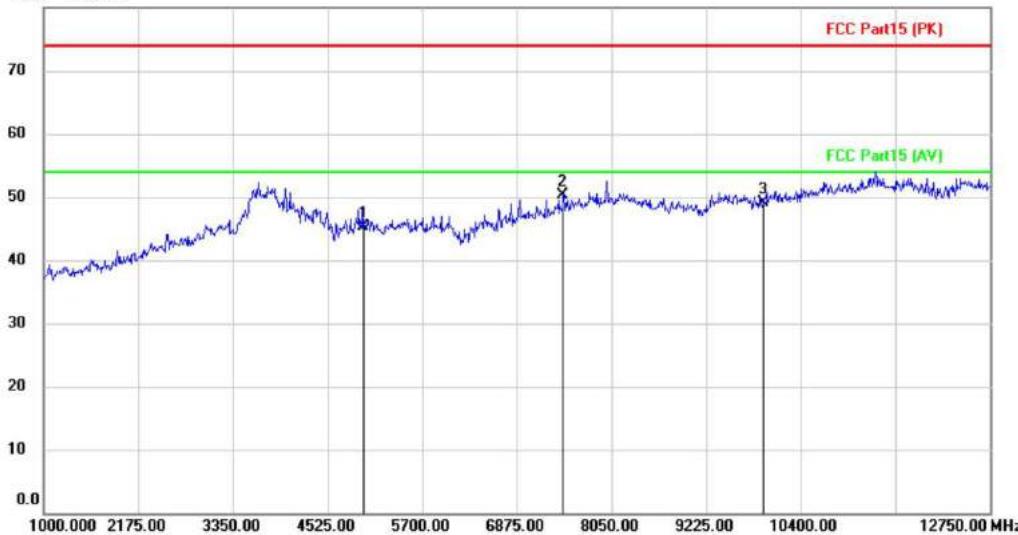

Site

Polarization: *Horizontal*

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
			Level	Factor	ment						
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		4960.000	41.49	3.75	45.24	74.00	-28.76	peak			
2	*	7440.000	43.40	6.86	50.26	74.00	-23.74	peak			
3		9920.000	38.90	10.16	49.06	74.00	-24.94	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :2z
80.0 dBuV/m

Data :#8

Date: 2021/8/17

Time: 14:16:57

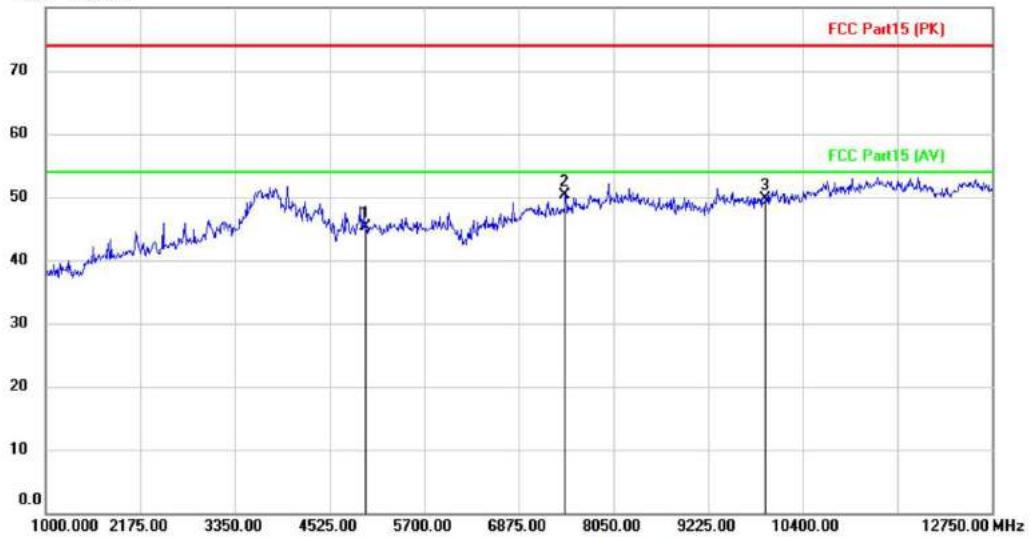

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Over Detector	Antenna Height cm	Table Degree degree	Comment
1		4960.000	41.63	3.75	45.38	74.00	-28.62	peak			
2	*	7440.000	43.44	6.86	50.30	74.00	-23.70	peak			
3		9920.000	39.57	10.16	49.73	74.00	-24.27	peak			

*:Maximum data x:Over limit !:over margin


⟨Reference Only

Test Result: Pass

BLE 2M

[TestMode: TX]; [Polarity: Horizontal]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202107-A131-1
EUT: Haylou RS4	Test Engineer:
M/N: Haylou-LS12	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-08-18 16:31:58

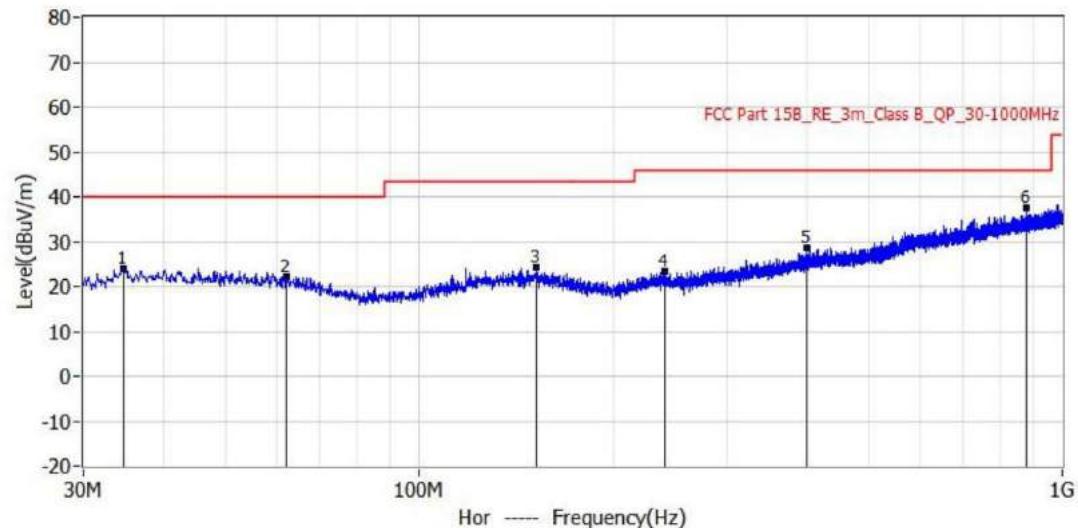


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	34.608MHz	40.0	24.1	-15.9	0.6	23.5	QP	Hor		
2*	62.010MHz	40.0	22.1	-17.9	-1.0	23.1	QP	Hor		
3*	152.099MHz	43.5	24.3	-19.2	0.8	23.5	QP	Hor		
4*	240.126MHz	46.0	23.3	-22.7	0.5	22.8	QP	Hor		
5*	401.025MHz	46.0	28.6	-17.4	1.3	27.3	QP	Hor		
6*	880.569MHz	46.0	37.6	-8.4	2.8	34.8	QP	Hor		

Test Result: Pass

[TestMode: TX]; [Polarity: Vertical]

Test Lab: BlueAsia EMC Lab (RE #1)	Project: BLA-EMC-202107-A131-1
EUT: Haylou RS4	Test Engineer:
M/N: Haylou-LS12	Temperature:
S/N:	Humidity:
Test Mode: TX mode	Test Voltage:
Note:	Test Data: 2021-08-18 16:30:43

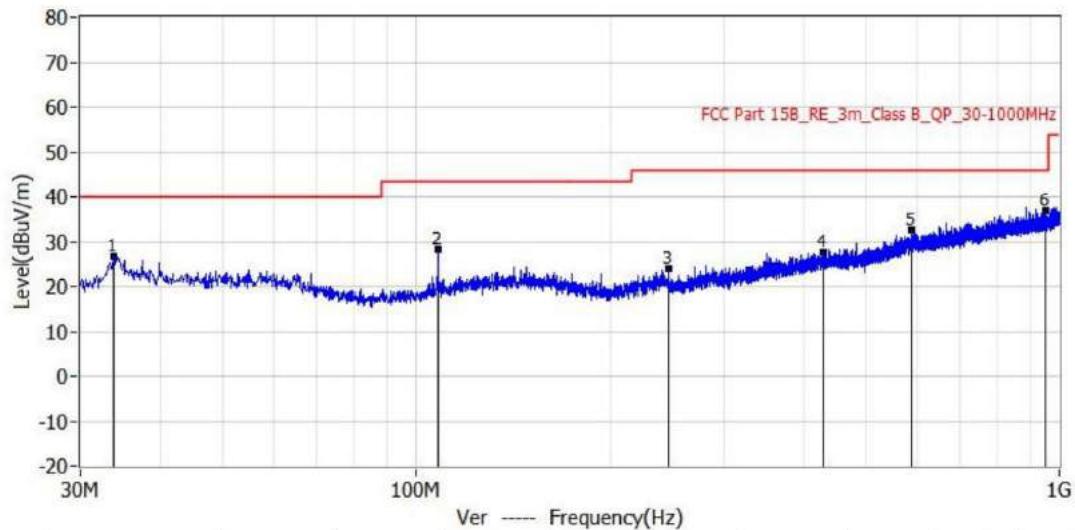

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	33.759MHz	40.0	26.7	-13.3	3.5	23.2	QP	Ver		
2*	107.964MHz	43.5	28.4	-15.1	6.9	21.5	QP	Ver		
3*	247.159MHz	46.0	23.9	-22.1	1.2	22.7	QP	Ver		
4*	429.276MHz	46.0	27.6	-18.4	0.0	27.6	QP	Ver		
5*	590.296MHz	46.0	32.6	-13.4	1.6	31.0	QP	Ver		
6*	952.228MHz	46.0	36.8	-9.2	1.2	35.6	QP	Ver		

Test Result: Pass


[TestMode: TX Low channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#8

Date: 2021/8/17

Time: 11:45:16

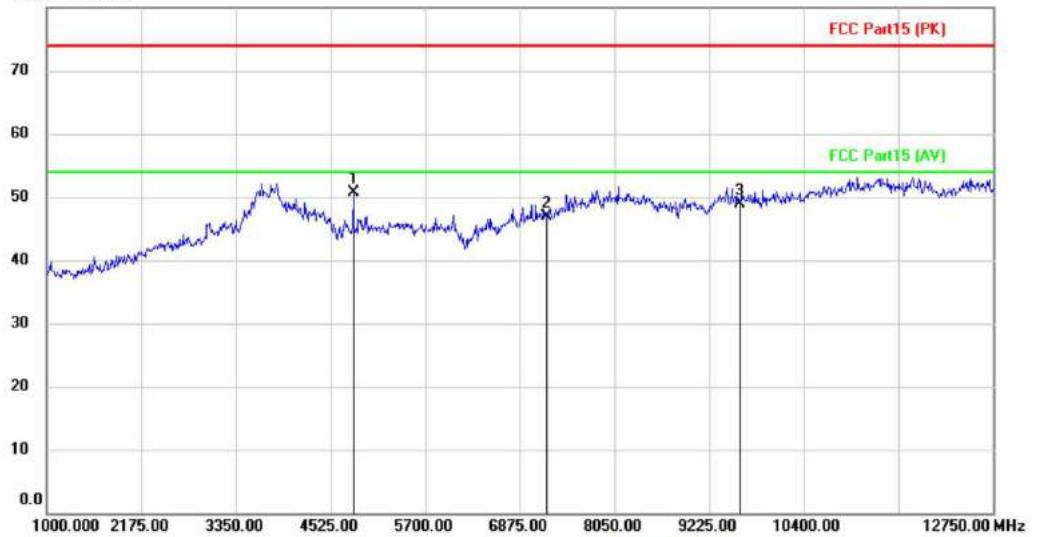

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4804.000	46.95	3.71	50.66	74.00	-23.34	peak		
2		7206.000	40.87	5.96	46.83	74.00	-27.17	peak		
3		9608.000	39.61	9.29	48.90	74.00	-25.10	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#7

Date: 2021/8/17

Time: 11:43:25

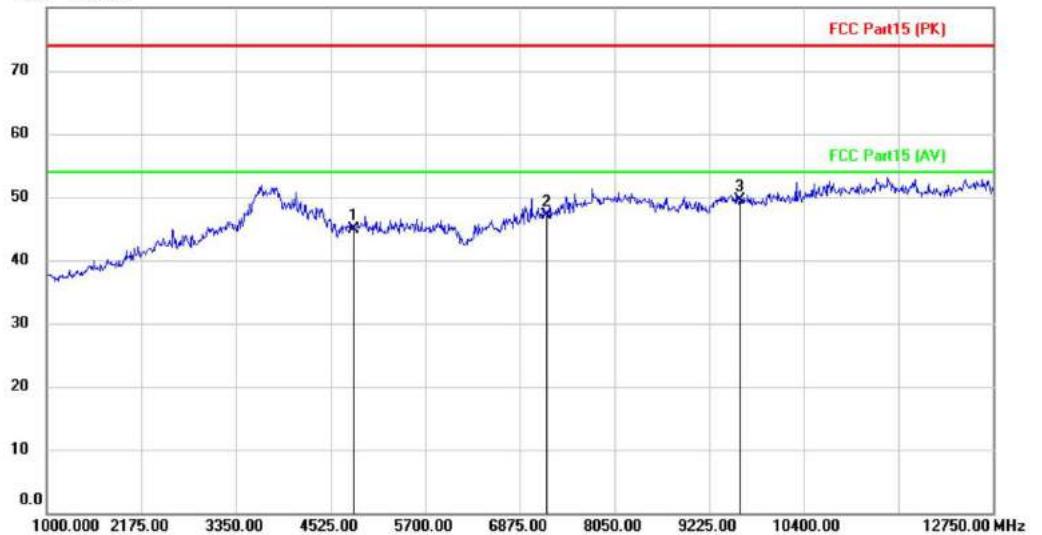

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		4804.000	41.14	3.71	44.85	74.00	-29.15	peak			
2		7206.000	41.24	5.96	47.20	74.00	-26.80	peak			
3	*	9608.000	40.31	9.29	49.60	74.00	-24.40	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX middle channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#10

Date: 2021/8/17

Time: 11:55:14

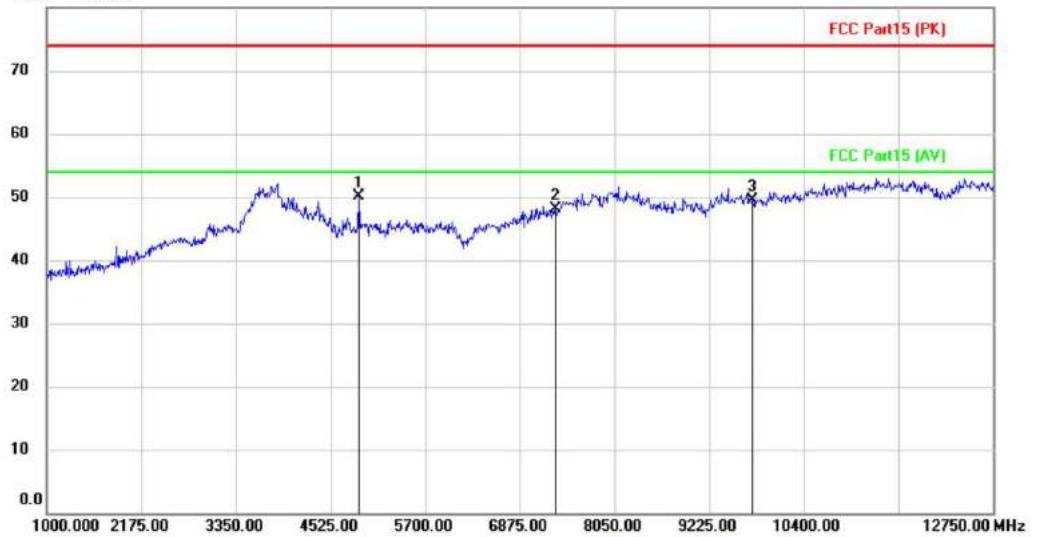

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-M

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	4877.500	46.81	3.37	50.18	74.00	-23.82	peak		
2		7320.000	41.63	6.41	48.04	74.00	-25.96	peak		
3		9760.000	39.82	9.62	49.44	74.00	-24.56	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMethod: TX middle channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#9

Date: 2021/8/17

Time: 11:53:03

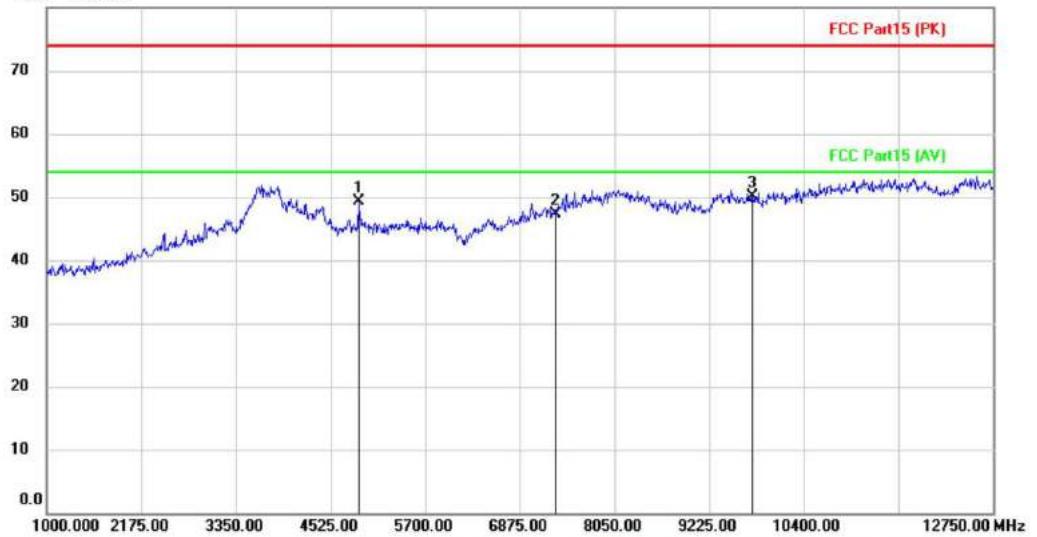

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-M

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		4877.500	46.01	3.37	49.38	74.00	-24.62	peak		
2		7320.000	40.92	6.41	47.33	74.00	-26.67	peak		
3	*	9760.000	40.45	9.62	50.07	74.00	-23.93	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#11

Date: 2021/8/17

Time: 11:57:25

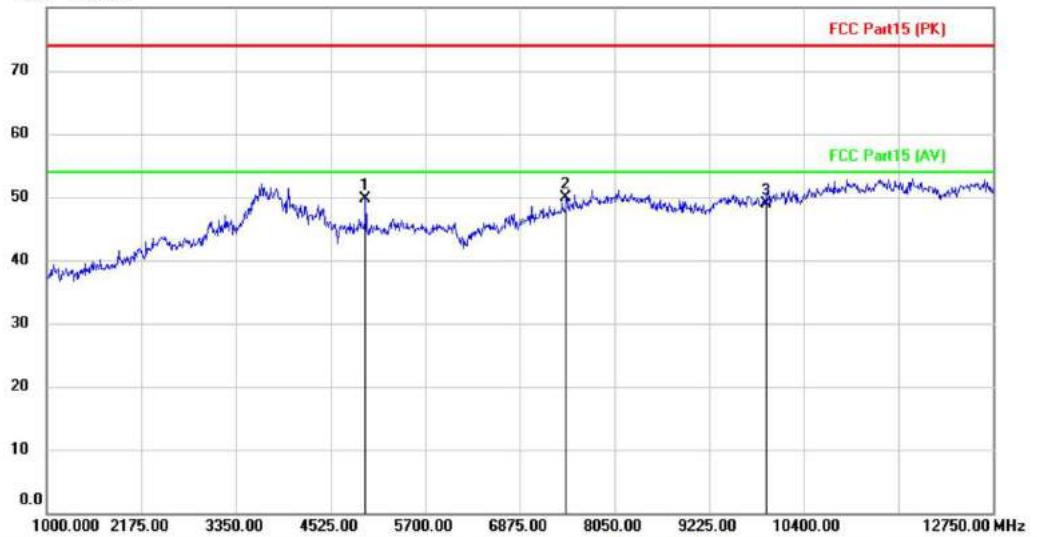

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4959.750	45.98	3.75	49.73	74.00	-24.27	peak		
2	*	7440.000	43.14	6.86	50.00	74.00	-24.00	peak		
3		9920.000	38.72	10.16	48.88	74.00	-25.12	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :RE
80.0 dBuV/m

Data :#12

Date: 2021/8/17

Time: 11:59:23

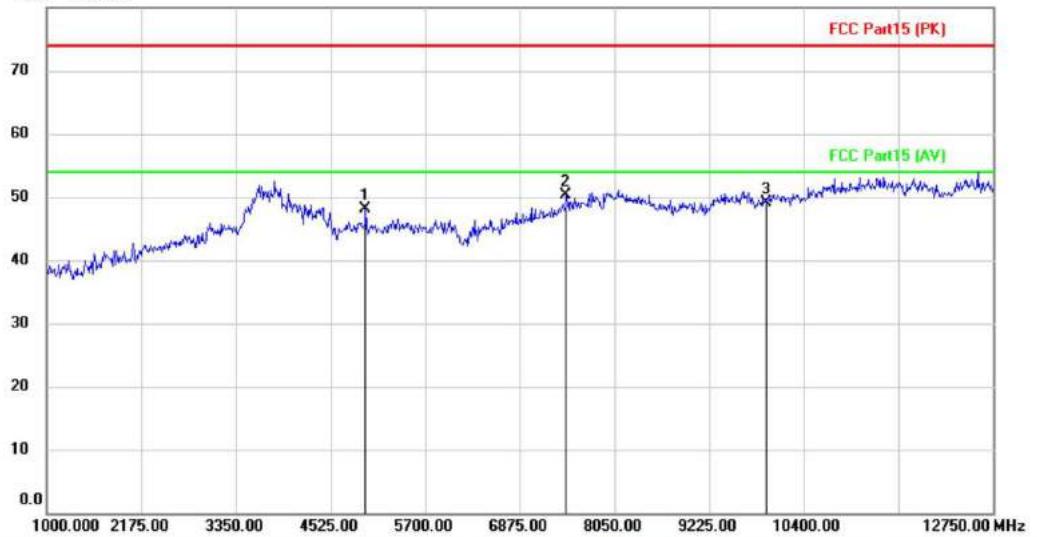

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		4959.750	44.36	3.75	48.11	74.00	-25.89	peak		
2	*	7440.000	43.35	6.86	50.21	74.00	-23.79	peak		
3		9920.000	38.99	10.16	49.15	74.00	-24.85	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

18 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS


Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 6.10.5
Test Mode (Pre-Scan)	TX;TX Low channel;TX high channel
Test Mode (Final Test)	TX;TX Low channel;TX high channel
Tester	Sven
Temperature	25°C
Humidity	52%

18.1 LIMITS

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

18.2 BLOCK DIAGRAM OF TEST SETUP

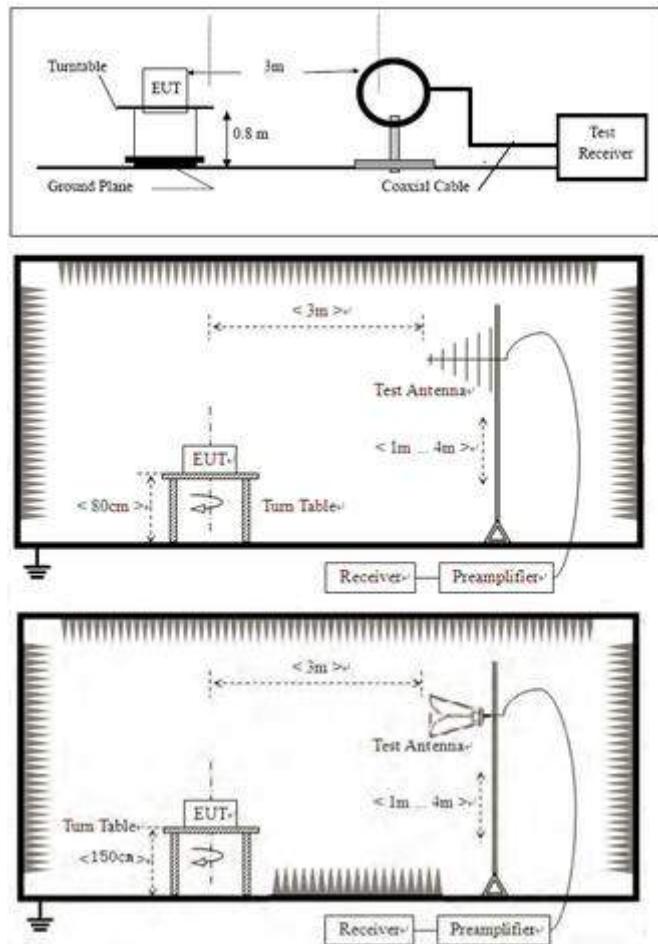

18.3 PROCEDURE

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: Level= Read Level+ Cable Loss+ Antenna Factor- Preamp Factor


Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

BlueAsia

18.4 TEST DATA

BLE 1M

[TestMode: TX Low channel]; [Polarity: Horizontal]

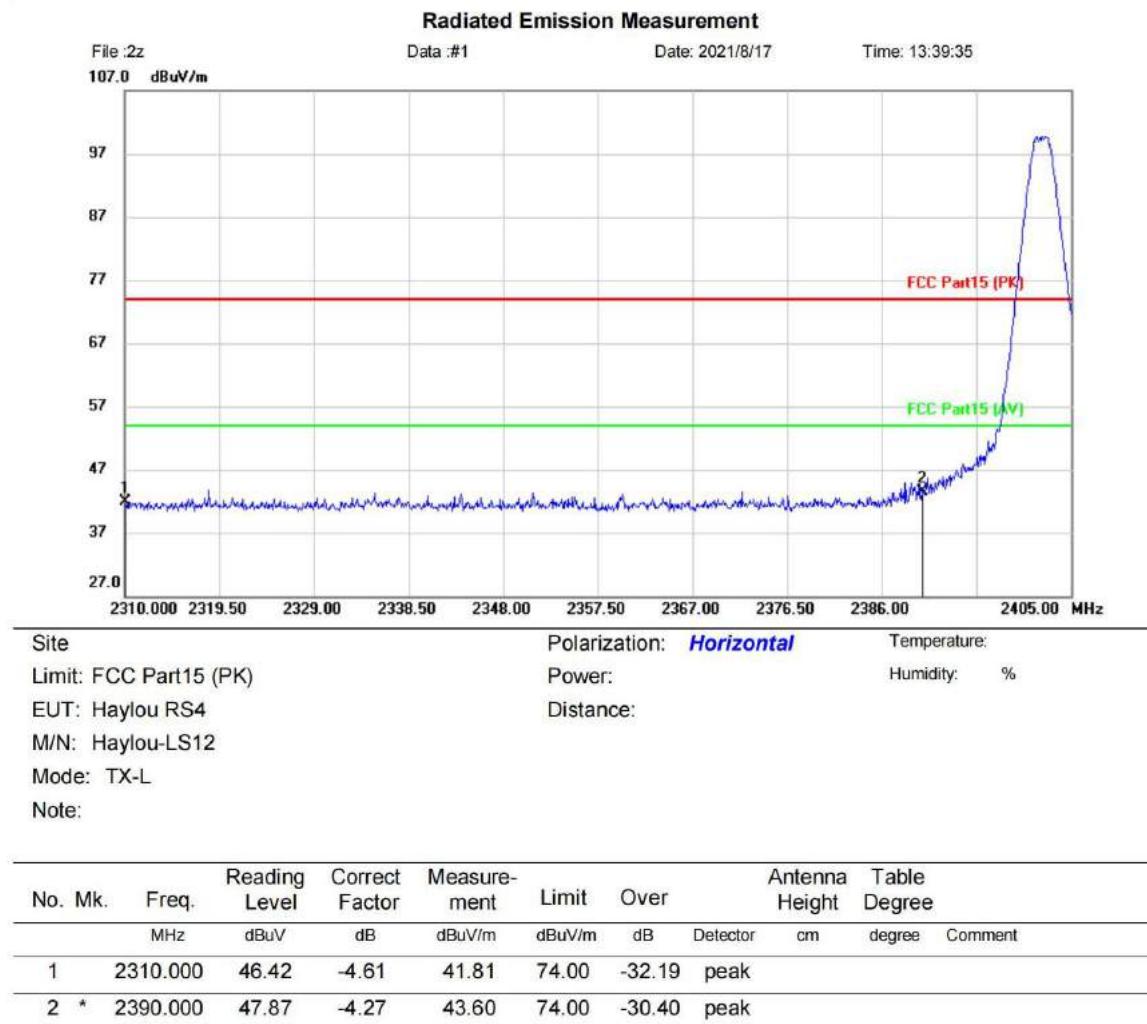


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX Low channel]; [Polarity: Vertical]

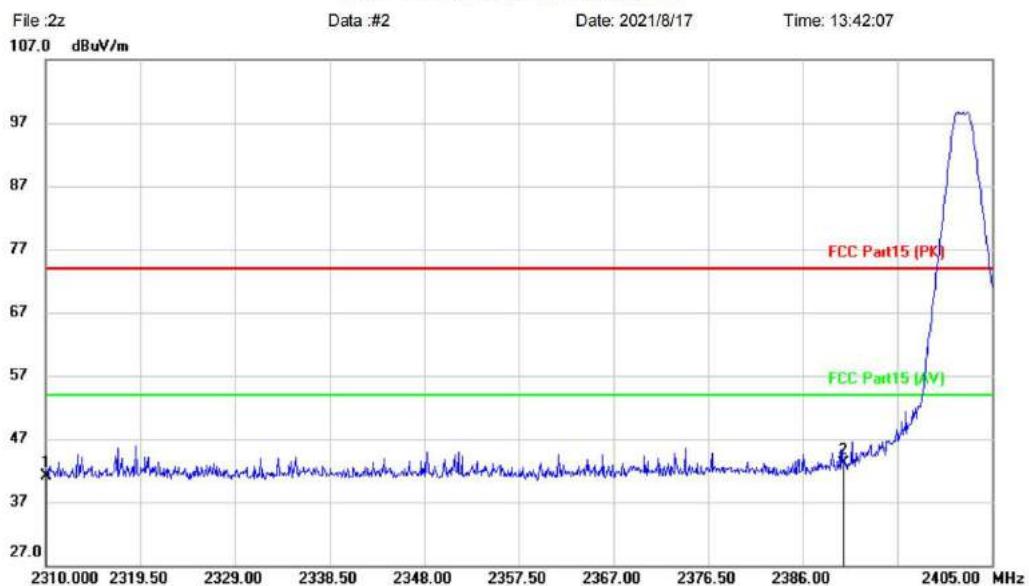Radiated Emission Measurement


Site Polarization: **Vertical** Temperature:

Limit: FCC Part15 (PK) Power: Humidity: %

EUT: Haylou RS4 Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	2310.000	45.73	-4.61	41.12	74.00	-32.88	peak			
2 *	2390.000	47.31	-4.27	43.04	74.00	-30.96	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only⟩

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :2z

Data #9

Date: 2021/8/17

Time: 14:19:13

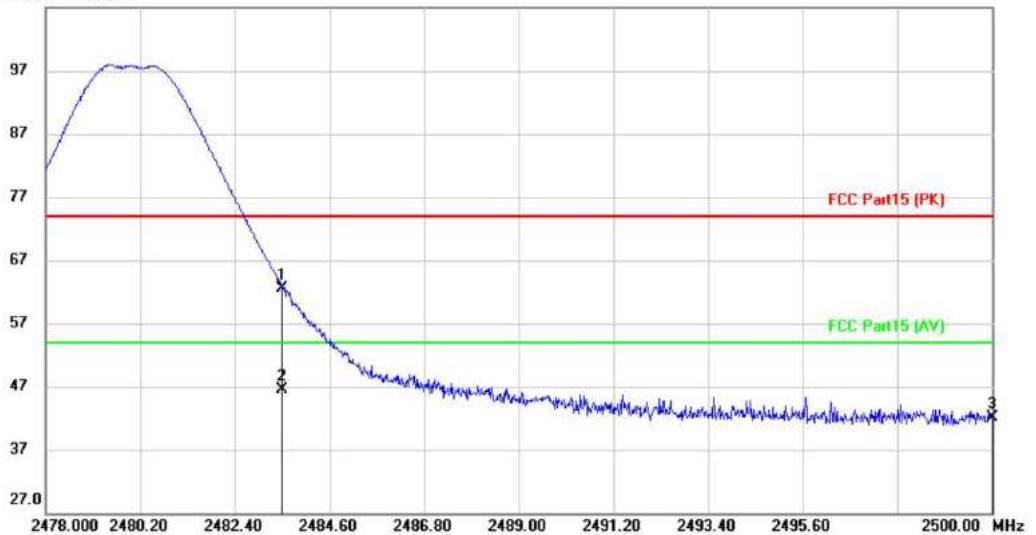

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power.

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table			
			Level	Factor	ment				Height	Degree		
			MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		2483.500	66.42	-3.84	62.58	74.00	-11.42	peak				
2	*	2483.500	50.29	-3.84	46.45	54.00	-7.55	AVG				
3		2500.000	45.89	-3.78	42.11	74.00	-31.89	peak				

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]


Radiated Emission Measurement

File :2z

Data #10

Date: 2021/8/17

Time: 14:23:51

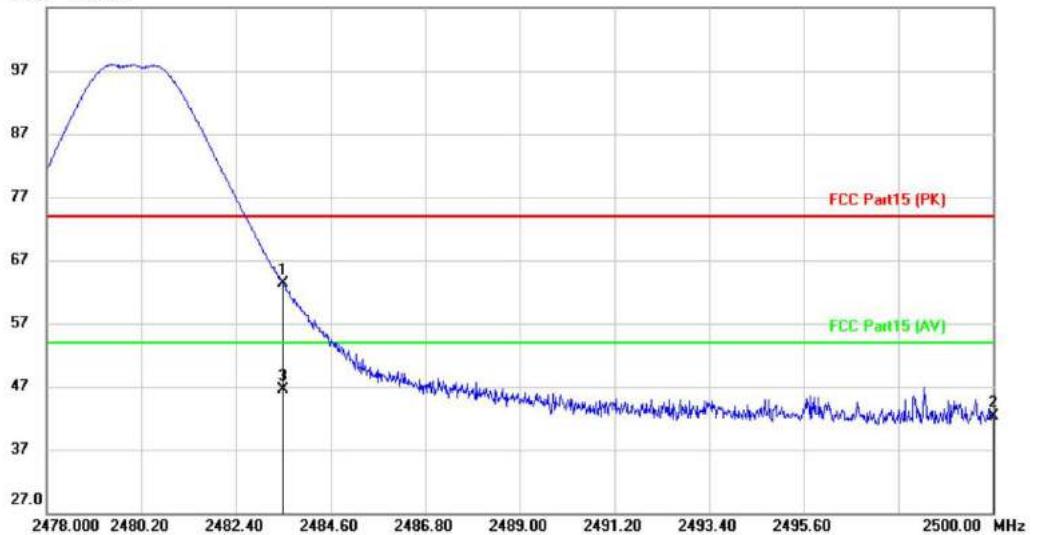

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power.

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No. Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table		
		Level	Factor	ment						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	2483.500	67.05	-3.84	63.21	74.00	-10.79	peak			
2	2500.000	46.09	-3.78	42.31	74.00	-31.69	peak			
3 *	2483.500	50.41	-3.84	46.57	54.00	-7.43	AVG			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

BLE 2M

[TestMode: TX Low channel]; [Polarity: Horizontal]


Radiated Emission Measurement

File :RE
107.0 dBuV/m

Data :#6

Date: 2021/8/17

Time: 11:40:55

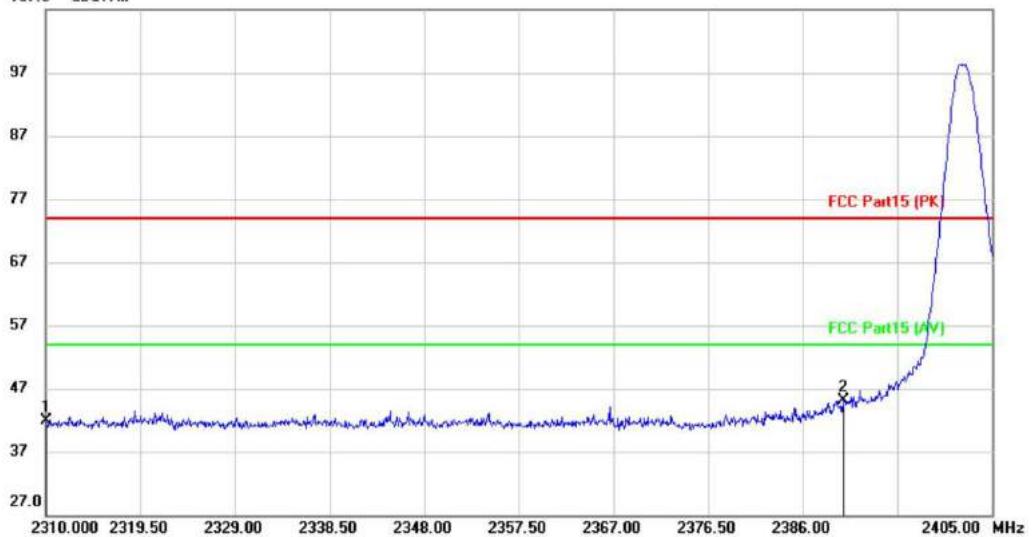

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	46.51	-4.61	41.90	74.00	-32.10	peak		
2	*	2390.000	49.38	-4.27	45.11	74.00	-28.89	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX Low channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :RE
107.0 dBuV/m

Data :#5

Date: 2021/8/17

Time: 11:38:03

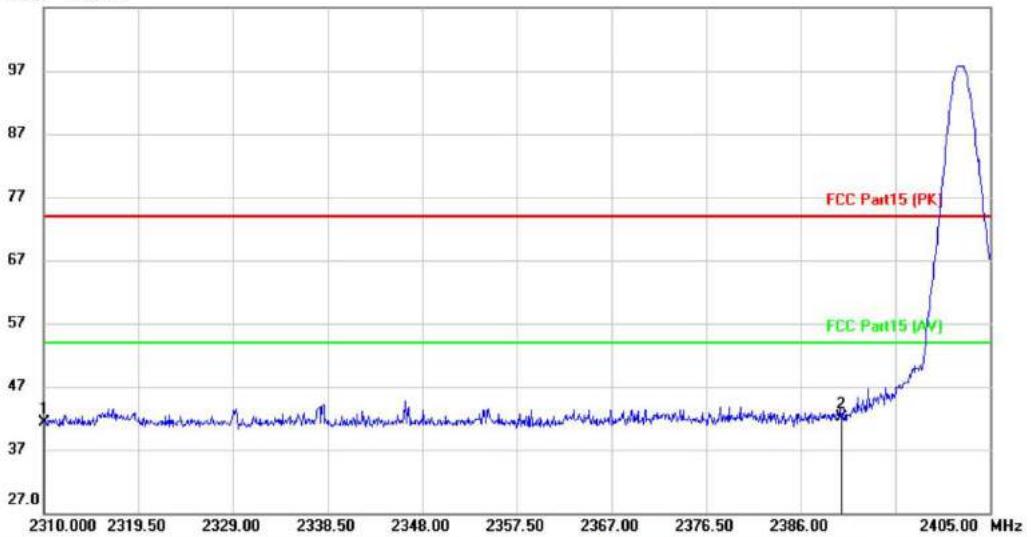

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-L

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2310.000	45.98	-4.61	41.37	74.00	-32.63	peak		
2	*	2390.000	46.40	-4.27	42.13	74.00	-31.87	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Horizontal]
Radiated Emission Measurement

File :RE
107.0 dBuV/m

Data :#14

Date: 2021/8/17

Time: 12:08:06

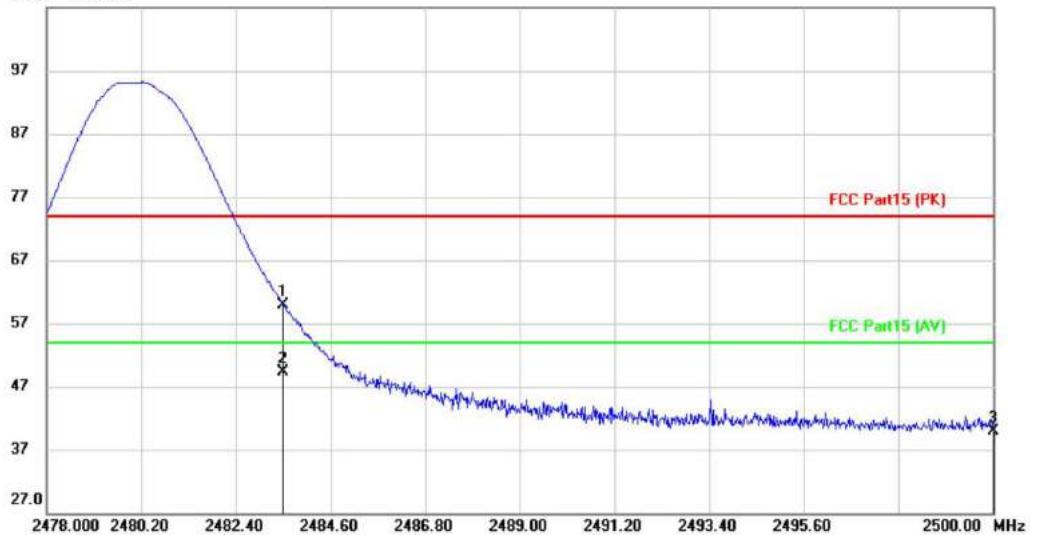

Site

Polarization: **Horizontal**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		2483.500	63.76	-3.84	59.92	74.00	-14.08	peak		
2	*	2483.500	53.23	-3.84	49.39	54.00	-4.61	AVG		
3		2500.000	43.76	-3.78	39.98	74.00	-34.02	peak		

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


[TestMode: TX high channel]; [Polarity: Vertical]
Radiated Emission Measurement

File :RE
107.0 dBuV/m

Data :#13

Date: 2021/8/17

Time: 12:06:00

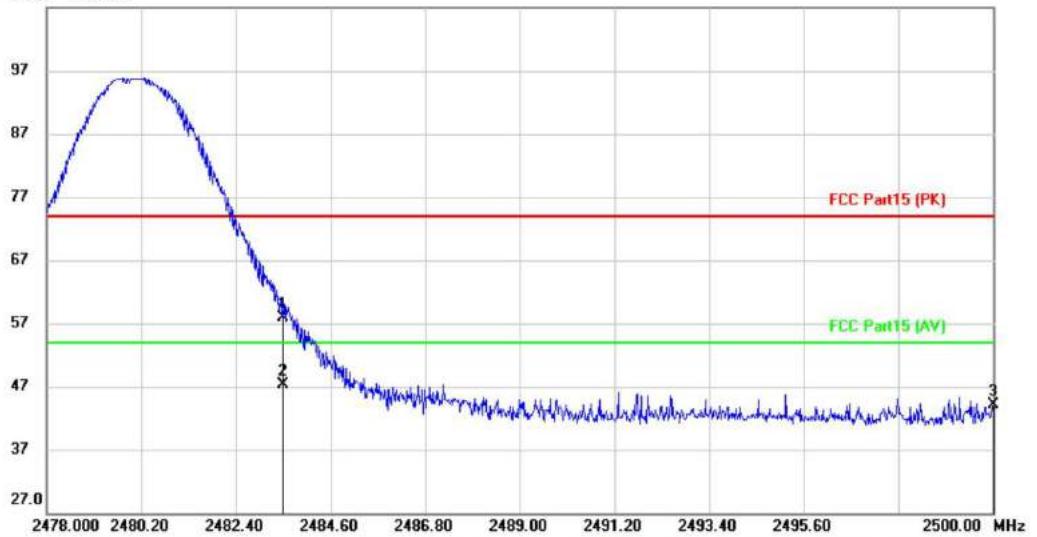

Site

Polarization: **Vertical**

Temperature:

Limit: FCC Part15 (PK)

Power:

Humidity: %

EUT: Haylou RS4

Distance:

M/N: Haylou-LS12

Mode: TX-H

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		2483.500	61.70	-3.84	57.86	74.00	-16.14	peak			
2	*	2483.500	51.24	-3.84	47.40	54.00	-6.60	AVG			
3		2500.000	47.79	-3.78	44.01	74.00	-29.99	peak			

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

19 APPENDIX


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.224	1.224	30	Pass
NVNT	BLE 1M	2442	Ant1	2.015	2.015	30	Pass
NVNT	BLE 1M	2480	Ant1	2.246	2.246	30	Pass
NVNT	BLE 2M	2402	Ant1	1.124	1.124	30	Pass
NVNT	BLE 2M	2442	Ant1	1.985	1.985	30	Pass
NVNT	BLE 2M	2480	Ant1	2.199	2.199	30	Pass

Power NVNT BLE 1M 2402MHz Ant1



Power NVNT BLE 1M 2442MHz Ant1

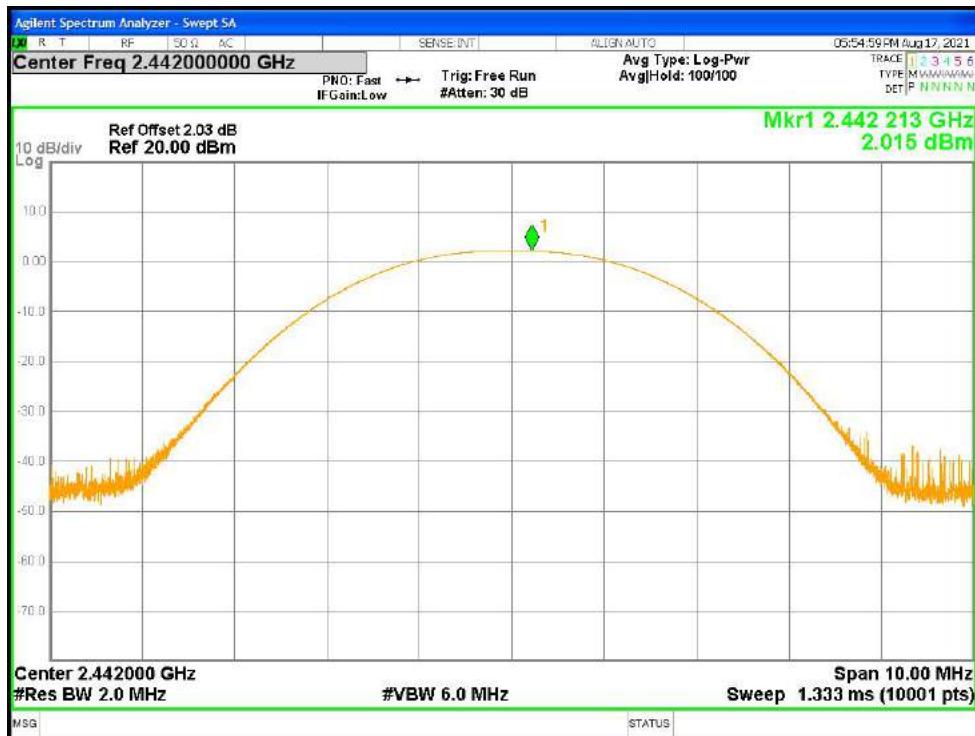

Power NVNT BLE 1M 2480MHz Ant1



Power NVNT BLE 2M 2402MHz Ant1



Power NVNT BLE 2M 2442MHz Ant1



Power NVNT BLE 2M 2480MHz Ant1




-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.648	0.5	Pass
NVNT	BLE 1M	2442	Ant1	0.644	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.647	0.5	Pass
NVNT	BLE 2M	2402	Ant1	1.105	0.5	Pass
NVNT	BLE 2M	2442	Ant1	0.922	0.5	Pass
NVNT	BLE 2M	2480	Ant1	0.956	0.5	Pass

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1


-6dB Bandwidth NVNT BLE 1M 2442MHz Ant1

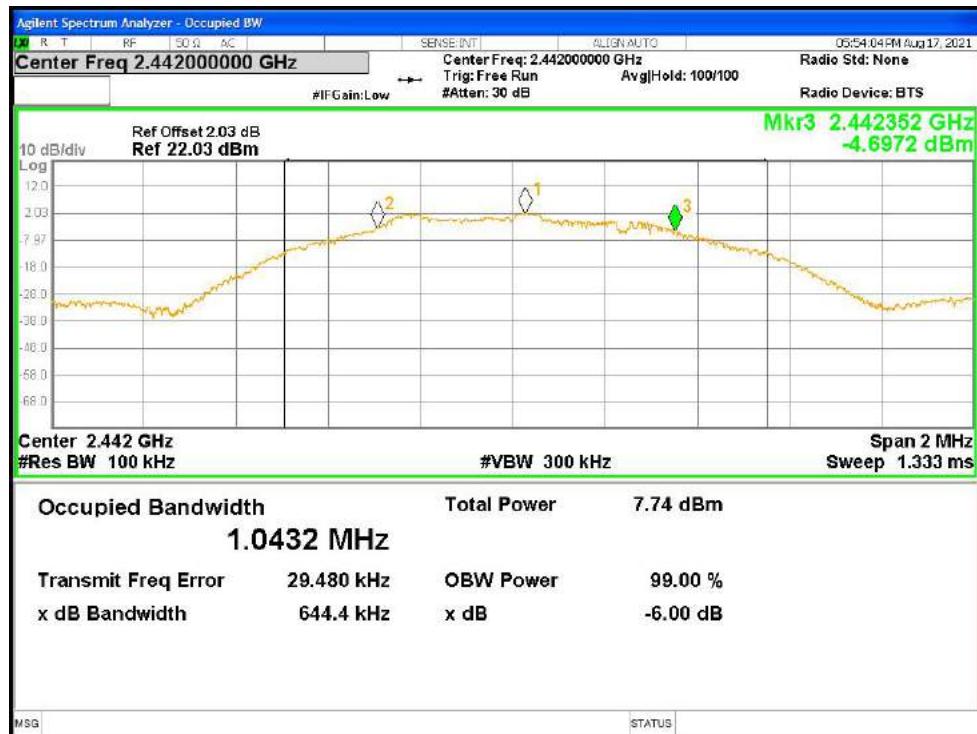

-6dB Bandwidth NVNT BLE 1M 2480MHz Ant1

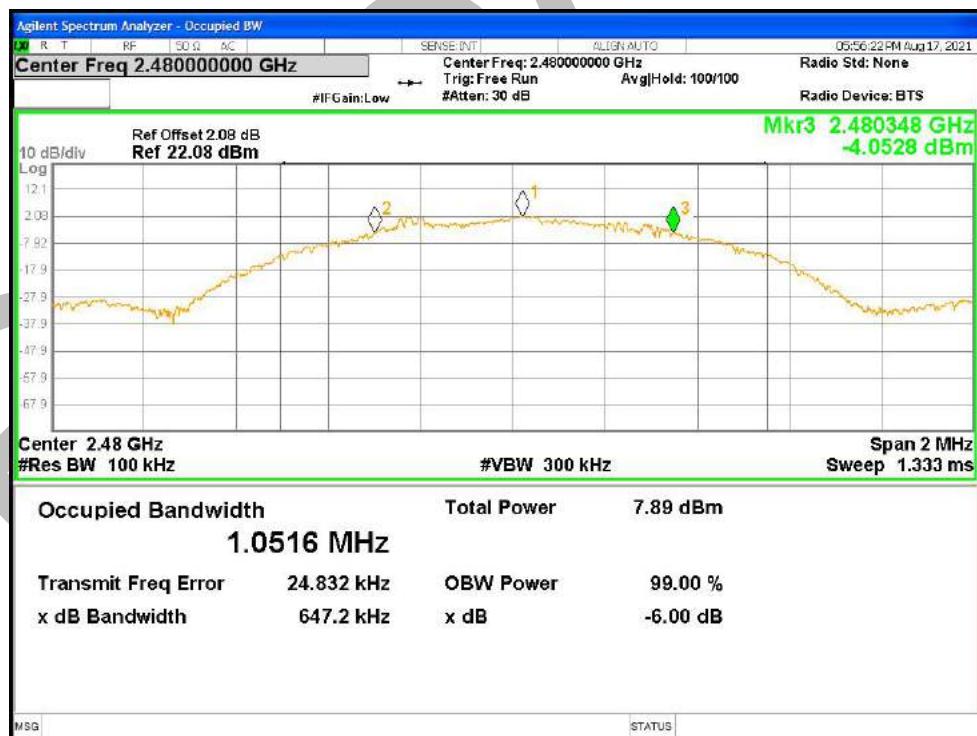

-6dB Bandwidth NVNT BLE 2M 2402MHz Ant1

-6dB Bandwidth NVNT BLE 2M 2442MHz Ant1


-6dB Bandwidth NVNT BLE 2M 2480MHz Ant1



Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.013226998
NVNT	BLE 1M	2442	Ant1	1.035098555
NVNT	BLE 1M	2480	Ant1	1.043058191
NVNT	BLE 2M	2402	Ant1	2.031996227
NVNT	BLE 2M	2442	Ant1	2.033499198
NVNT	BLE 2M	2480	Ant1	2.068015434

OBW NVNT BLE 1M 2402MHz Ant1


OBW NVNT BLE 1M 2442MHz Ant1

OBW NVNT BLE 1M 2480MHz Ant1



OBW NVNT BLE 2M 2402MHz Ant1

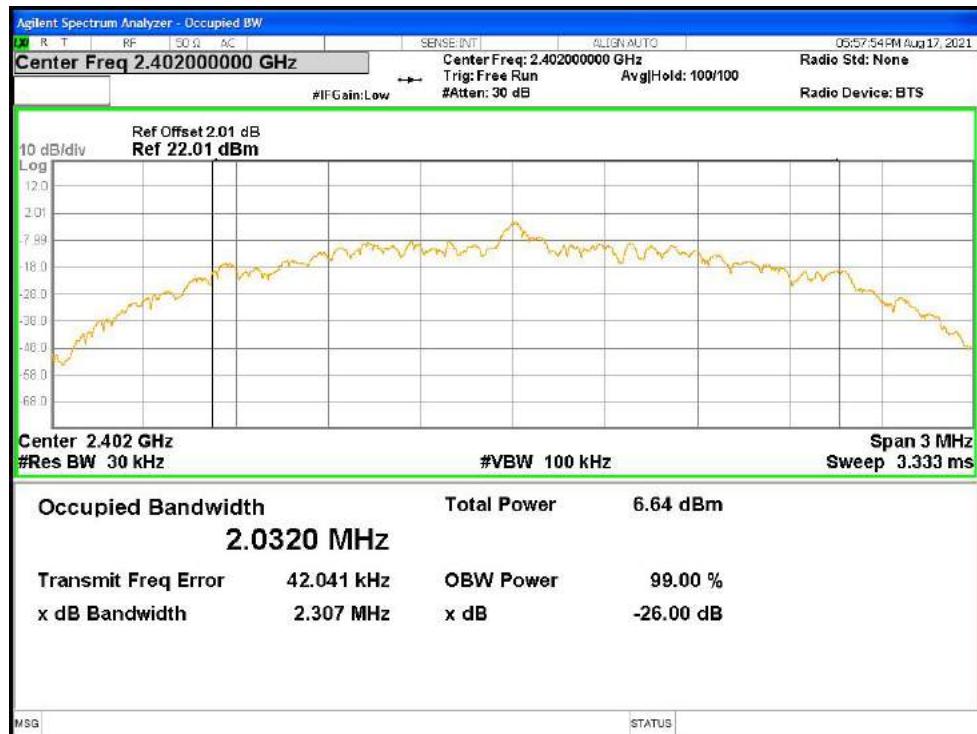

OBW NVNT BLE 2M 2442MHz Ant1



OBW NVNT BLE 2M 2480MHz Ant1

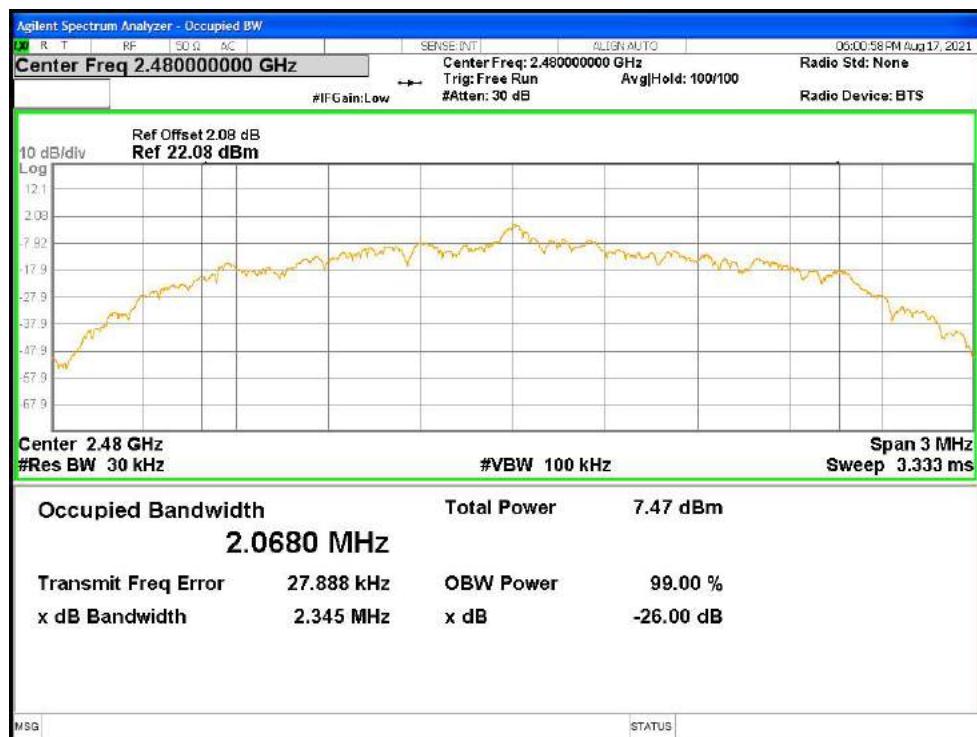

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	-6.617	8	Pass
NVNT	BLE 1M	2442	Ant1	-6.735	8	Pass
NVNT	BLE 1M	2480	Ant1	-6.835	8	Pass
NVNT	BLE 2M	2402	Ant1	-6.507	8	Pass
NVNT	BLE 2M	2442	Ant1	-6.233	8	Pass
NVNT	BLE 2M	2480	Ant1	-6.159	8	Pass

PSD NVNT BLE 1M 2402MHz Ant1



PSD NVNT BLE 1M 2442MHz Ant1




PSD NVNT BLE 1M 2480MHz Ant1




PSD NVNT BLE 2M 2402MHz Ant1

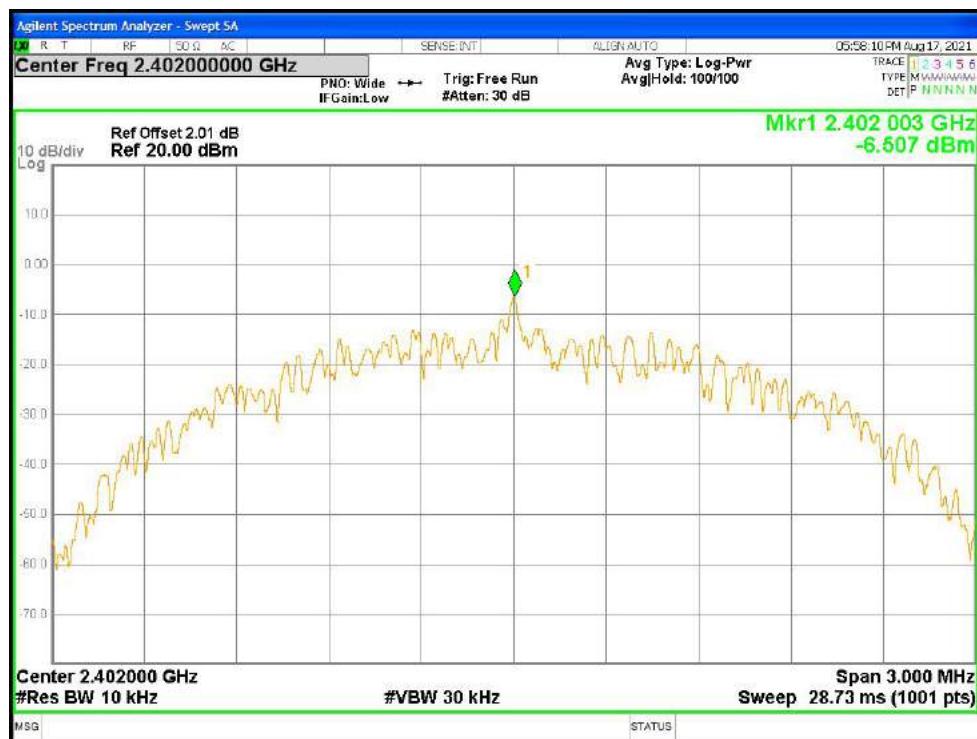

PSD NVNT BLE 2M 2442MHz Ant1

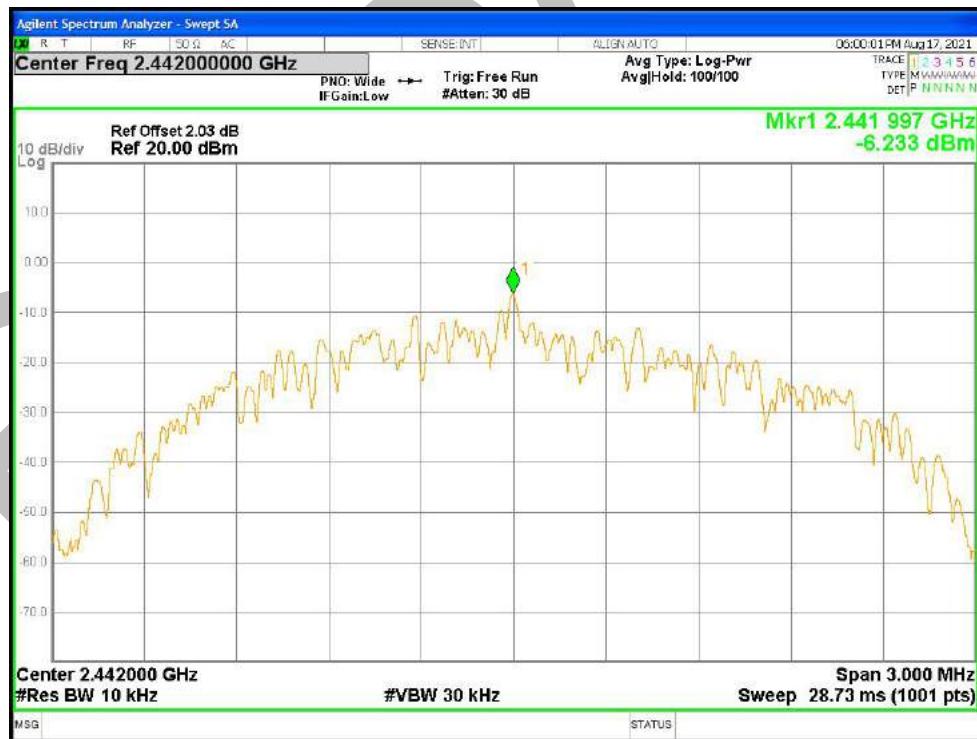

PSD NVNT BLE 2M 2480MHz Ant1

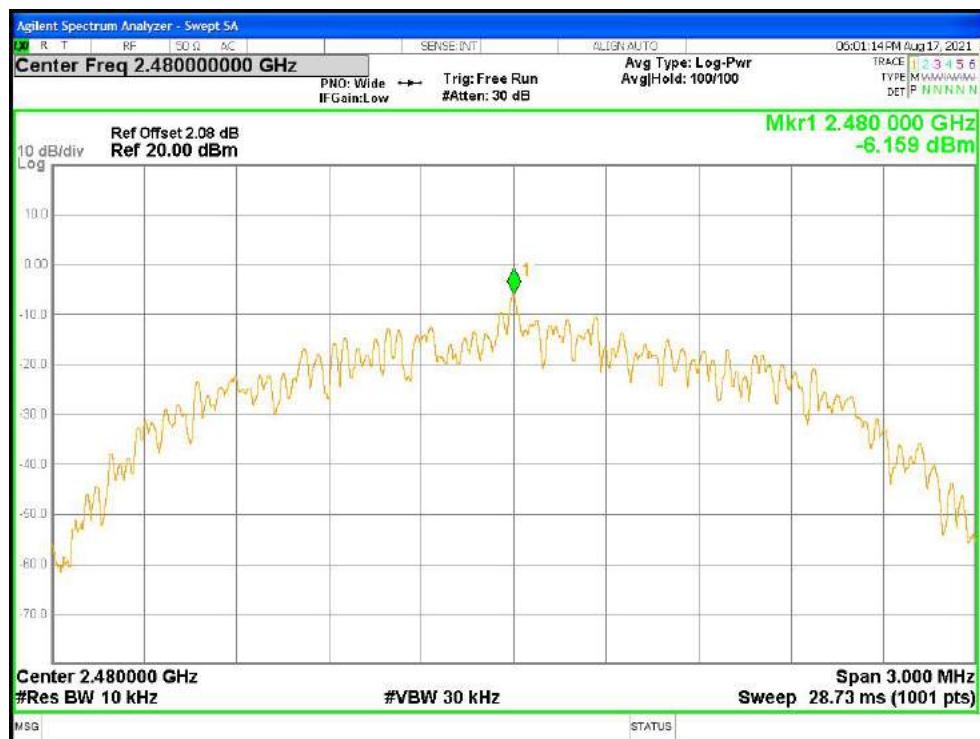


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-57	-30	Pass
NVNT	BLE 1M	2480	Ant1	-57.2	-30	Pass
NVNT	BLE 2M	2402	Ant1	-56.85	-30	Pass
NVNT	BLE 2M	2480	Ant1	-54.98	-30	Pass

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref



Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

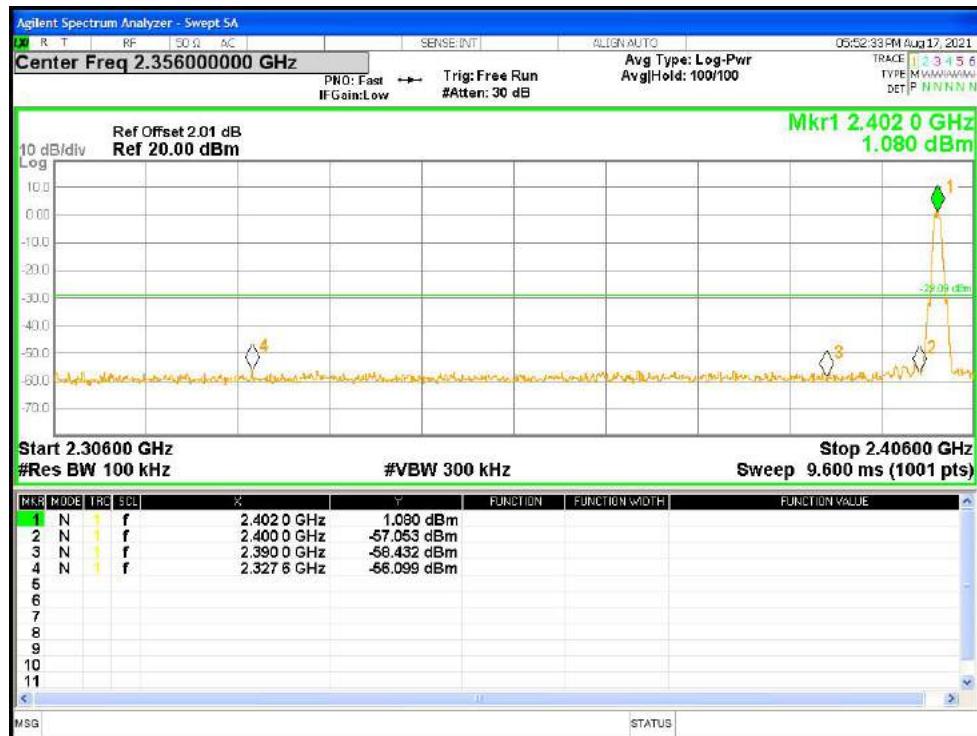

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref




Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

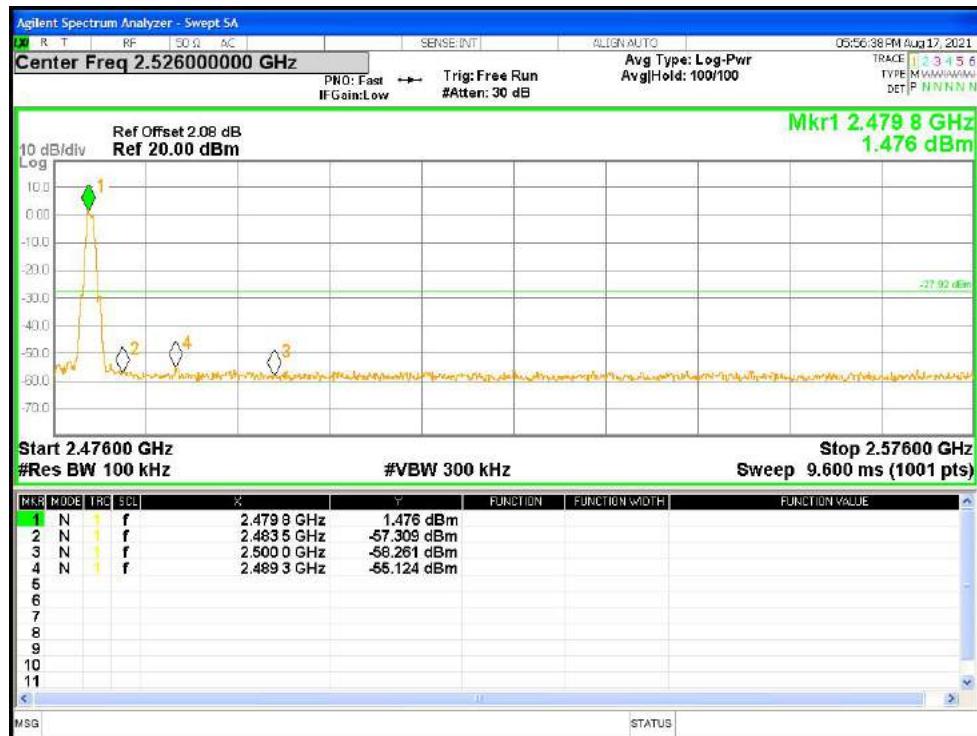

Band Edge NVNT BLE 2M 2402MHz Ant1 Ref




Band Edge NVNT BLE 2M 2402MHz Ant1 Emission

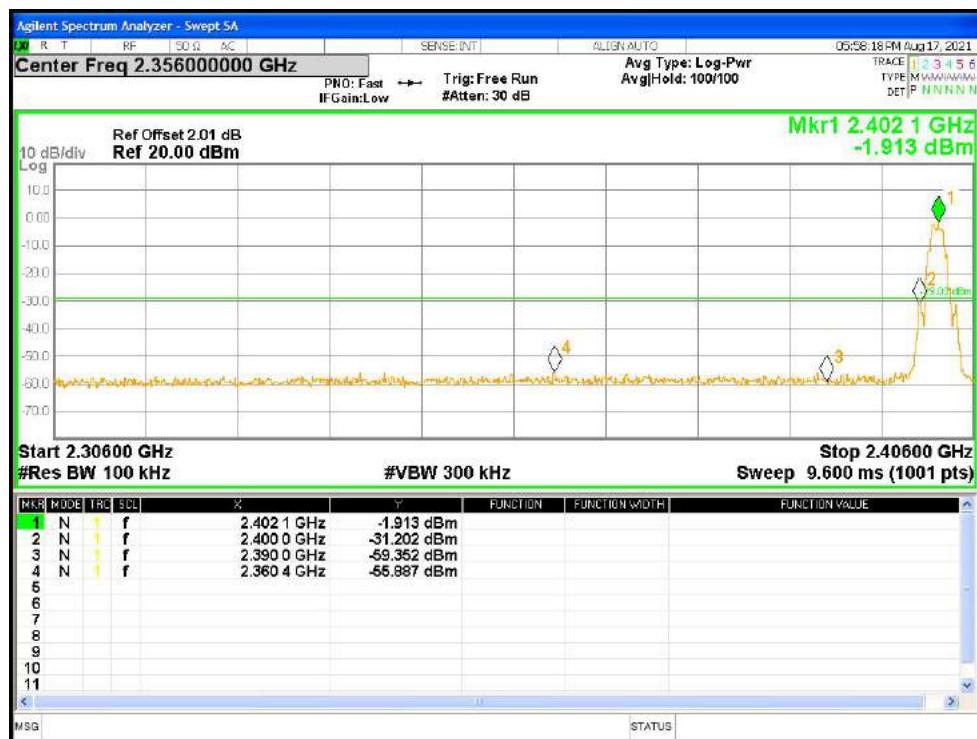

Band Edge NVNT BLE 2M 2480MHz Ant1 Ref



Band Edge NVNT BLE 2M 2480MHz Ant1 Emission

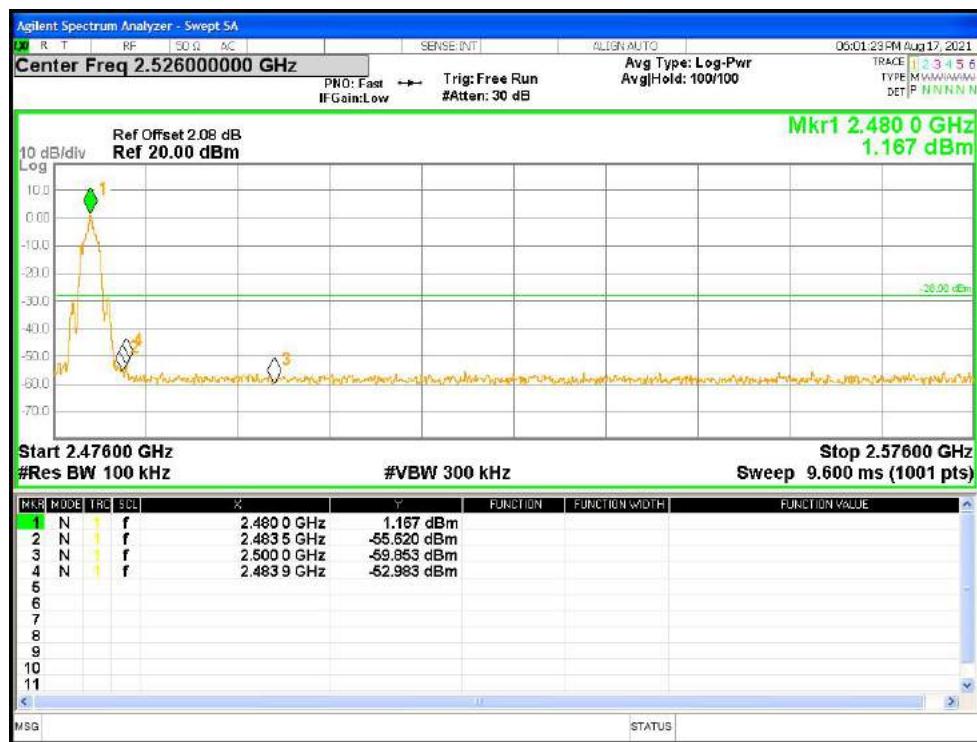


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-45.83	-30	Pass
NVNT	BLE 1M	2442	Ant1	-46.85	-30	Pass
NVNT	BLE 1M	2480	Ant1	-47.23	-30	Pass
NVNT	BLE 2M	2402	Ant1	-46.03	-30	Pass
NVNT	BLE 2M	2442	Ant1	-46.49	-30	Pass
NVNT	BLE 2M	2480	Ant1	-46.99	-30	Pass

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

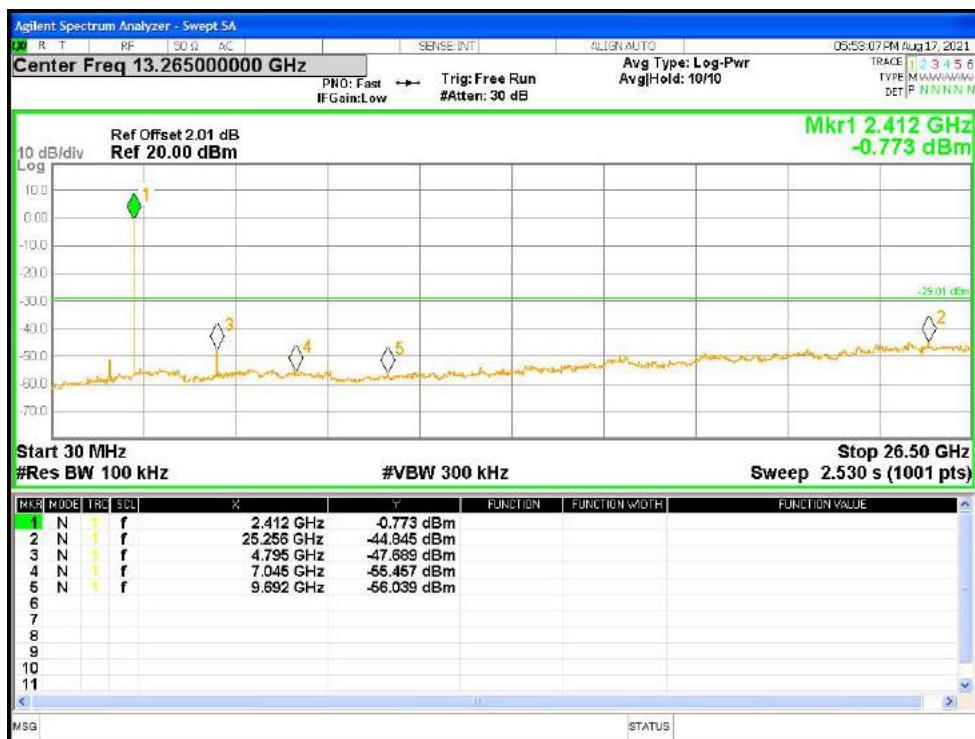

Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Emission

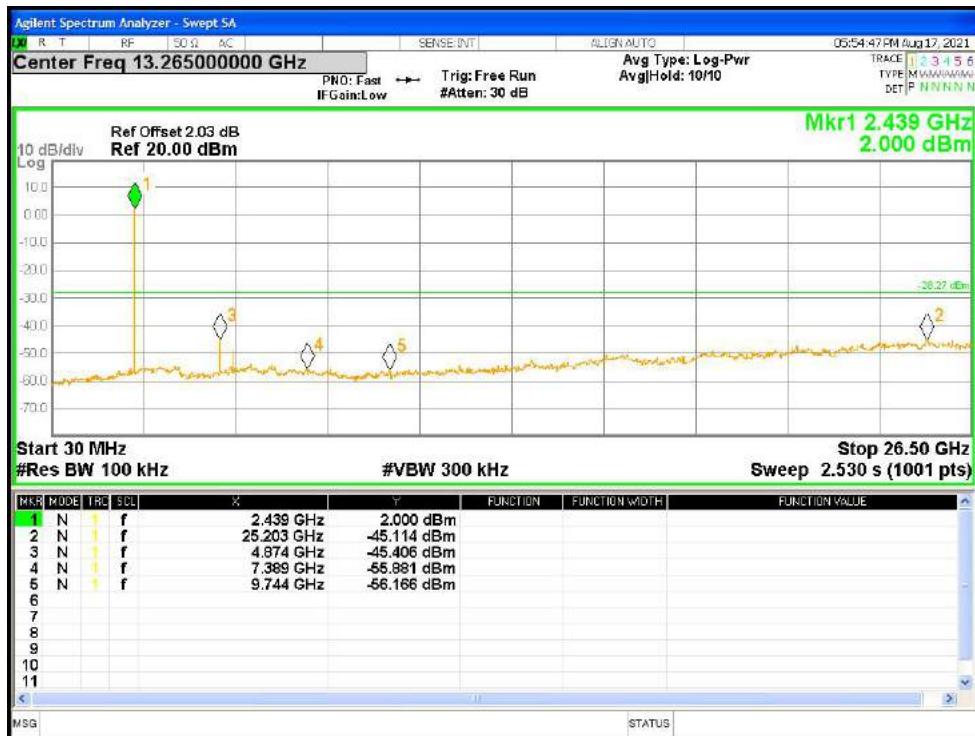

Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2480MHz Ant1 Emission

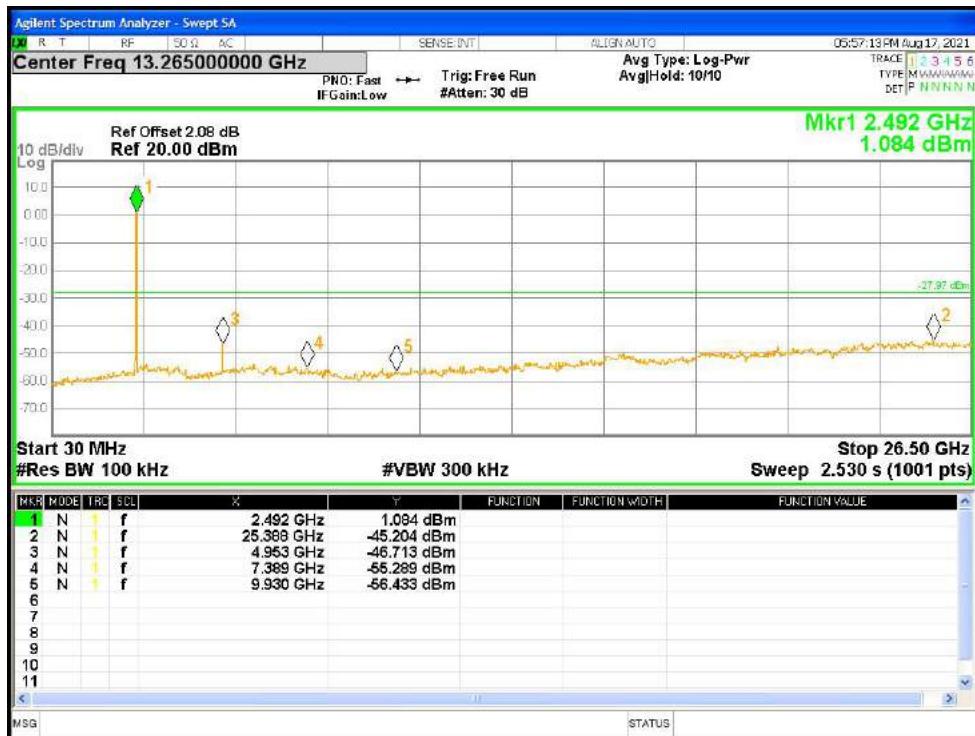

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission

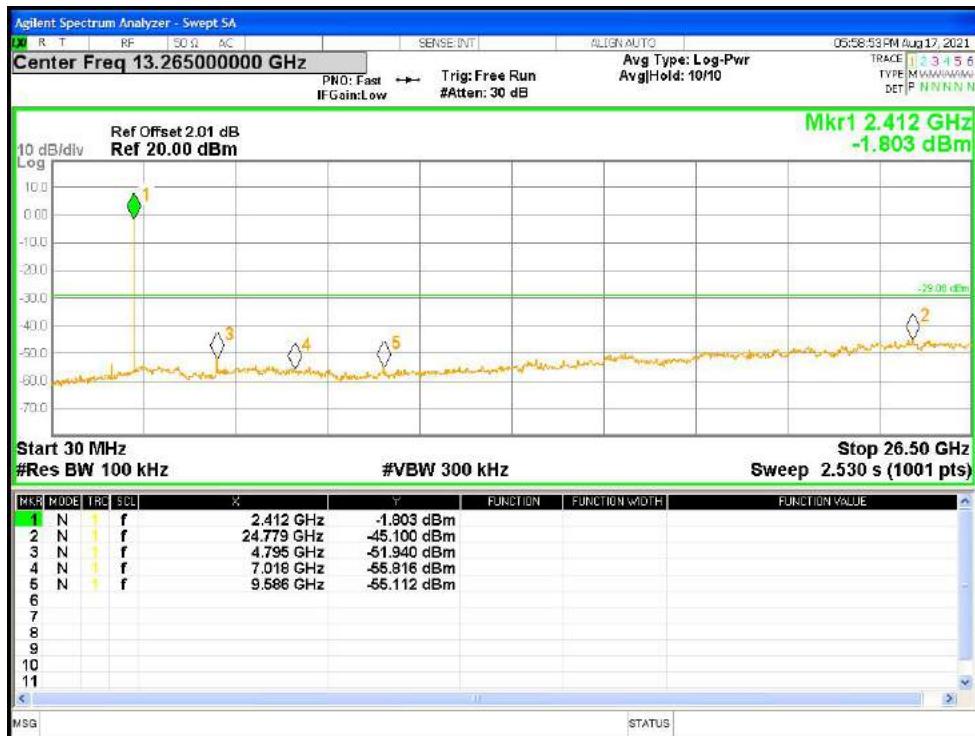

Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Emission

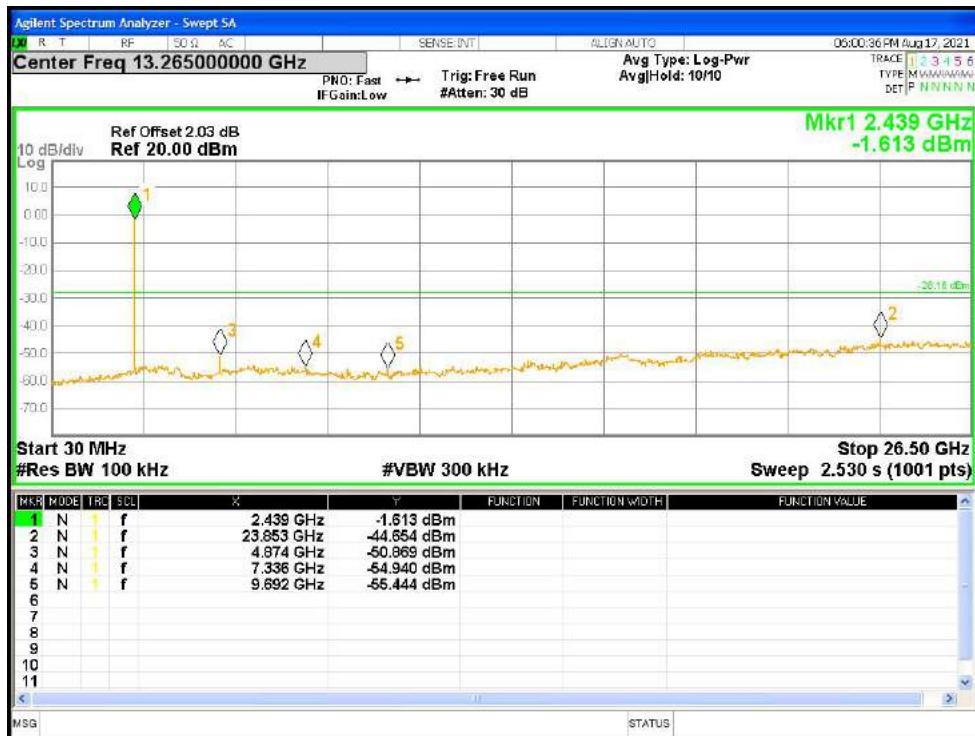

Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 2M 2480MHz Ant1 Emission

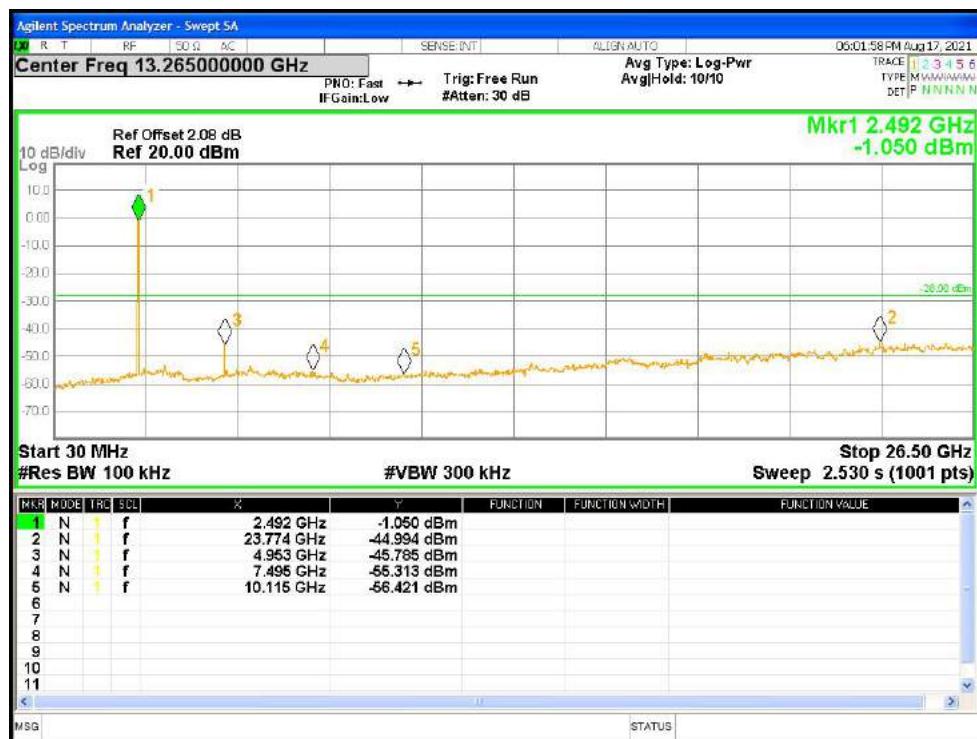

APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions



APPENDIX B: PHOTOGRAPHS OF THE EUT

(Reference to the test report NO.BLA-EMC-202107-A13101)

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.

BlueAsia