

FCC PART 15.407 TEST REPORT

For

QUANTUM NETWORKS (SG) PTE.LTD.

8 UBI ROAD 2 #08-10 ZERVEX SINGAPORE(408538), SINGAPORE, Singapore

FCC ID: 2AMQU-QN-O-230

Report Type: Original Report	Product Name: Wireless Access Point
Report Number: RDG190618002-00C	
Report Date: 2019-07-26	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
EQUIPMENT MODIFICATIONS	11
LOCAL SUPPORT EQUIPMENT LIST AND DETAILS	11
SUPPORT CABLE LIST AND DETAILS	11
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS.....	12
FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	13
APPLICABLE STANDARD	13
FCC §15.203 – ANTENNA REQUIREMENT	15
APPLICABLE STANDARD	15
ANTENNA CONNECTOR CONSTRUCTION	15
FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS	16
APPLICABLE STANDARD	16
EUT SETUP	16
EMI TEST RECEIVER SETUP.....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST EQUIPMENT LIST AND DETAILS.....	17
TEST PROCEDURE	17
TEST DATA	17
FCC §15.209, §15.205 & §15.407(b) –UNWANTED EMISSION.....	20
APPLICABLE STANDARD	20
EUT SETUP	21
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	22
TEST PROCEDURE	22
CORRECTED AMPLITUDE & MARGIN CALCULATION	23
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	24
FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH.....	42
APPLICABLE STANDARD	42
TEST EQUIPMENT LIST AND DETAILS.....	42
TEST PROCEDURE	42
TEST DATA	42
FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER.....	72
APPLICABLE STANDARD	72
TEST EQUIPMENT LIST AND DETAILS.....	73

TEST PROCEDURE	73
TEST DATA	73
FCC §15.407(a) - POWER SPECTRAL DENSITY	75
APPLICABLE STANDARD	75
TEST PROCEDURE	76
TEST EQUIPMENT LIST AND DETAILS.....	76
TEST DATA	76

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:	Wireless Access Point
EUT Model:	QN-O-230
Operation Frequency:	5180-5240(802.11a/n ht20/ac vht20) 5190-5230 MHz(802.11n ht40/ac vht40) 5210 MHz(802.11ac vht80) 5745-5825(802.11a/n ht20/ac vht20) 5755-5795 MHz(802.11n ht40/ac vht40) 5775 MHz(802.11ac vht80)
Maximum Output Power (Conducted):	5150-5250 MHz:14.95 dBm 5725-5850 MHz:24.22 dBm
Modulation Type:	OFDM
Rated Input Voltage:	DC 48V from POE Adapter
External Dimension:	220mm(L)*220mm(W)*88mm(H)
Serial Number:	190618002
EUT Received Date:	2019-06-21

Objective

This type approval report is prepared on behalf of the Applicant in accordance with Part 2-Subpart J, Part 15-Subparts A, and E of the Federal Communications Commission's rules.

The tests were performed in order to determine compliance with FCC Rules Part 15, Subpart E, section 15.203, 15.205, 15.207, 15.209 and 15.407 rules.

Related Submittal(s)/Grant(s)

FCC Part 15C DTS submissions with FCC ID: 2AMQU-QN-O-230

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices. And KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.55 dB,200M~1GHz: 5.92 dB,1G~6GHz: 4.98 dB, 6G~18GHz: 5.89 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions,conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The EUT was configured for testing in an engineering mode which was provided by the manufacturer.

The system only supports 802.11a/n ht20/n ht40/ac vht20/ac vht40/ac vht80 in 5.2G and 5.8 GHz band.

For 5150~5250 MHz band, 7 channels are provided:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
38	5190	46	5230
40	5200	48	5240
42	5210	/	/

For 802.11a, 802.11n ht20, 802.11ac vht20 channel 36, 40 and 48 was tested, for 802.11n ht40, 802.11ac vht40 channel 38, 46 were tested, for 802.11ac vht80, channel 42 was tested.

For 5725~5850MHz band, 8 channels are provided to testing:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	157	5785
151	5755	159	5795
153	5765	161	5805
155	5775	165	5825

For 802.11a, 802.11n ht20, 802.11ac vht20 channel 149, 157 and 165 was tested, for 802.11n ht40, 802.11ac vht40 channel 151, 159 were tested, for 802.11ac vht80, channel 155 was tested.

The device supports SISO and MIMO at 802.11n and ac mode, per pre-test, MIMO 2TX mode was the worst and reported.

EUT Exercise Software


The software “QRCT” was used for testing, the QRCT command was provided by manufacturer. The worst-case data rates are determined to be as follows for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. The maximum power was configured as below table, that provided by the manufacturer:

Band	Mode	Frequency (MHz)	Data Rate	Power level	
				Chain 0	Chain 1
5.2G	802.11a	5180	6Mbps	15	15
		5200	6Mbps	15	15
		5240	6Mbps	15	15
	802.11n ht20	5180	MCS8	13	13
		5200	MCS8	13	13
		5240	MCS8	13	13
	802.11n ht 40	5190	MCS8	13	13
		5230	MCS8	13	13
	802.11ac vht 20	5180	MCS8	13	13
		5200	MCS8	13	13
		5240	MCS8	13	13
	802.11ac vht 40	5190	MCS8	13	13
		5230	MCS8	13	13
	802.11ac vht 80	5210	MCS8	13	13
5.8G	802.11a	5745	6Mbps	24	24
		5785	6Mbps	24	24
		5825	6Mbps	24	24
	802.11n ht20	5745	MCS8	24	24
		5785	MCS8	24	24
		5825	MCS8	24	24
	802.11n ht 40	5755	MCS8	24	24
		5795	MCS8	24	24
	802.11ac vht20	5745	MCS8	24	24
		5785	MCS8	24	24
		5825	MCS8	24	24
	802.11ac vht 40	5755	MCS8	24	24
		5795	MCS8	24	24
	802.11ac vht 80	5775	MCS8	22	22

The duty cycle as below:


Mode	T _{on} (ms)	T _{on+off} (ms)	Duty Cycle(x) (%)
802.11 a	2.13	2.17	98.16
802.11n ht20	5.06	5.11	99.02
802.11n ht40	2.47	2.52	98.02
802.11ac vht20	5.12	5.14	99.61
802.11ac vht40	2.47	2.52	98.02
802.11ac vht80	1.18	1.23	95.93

802.11a

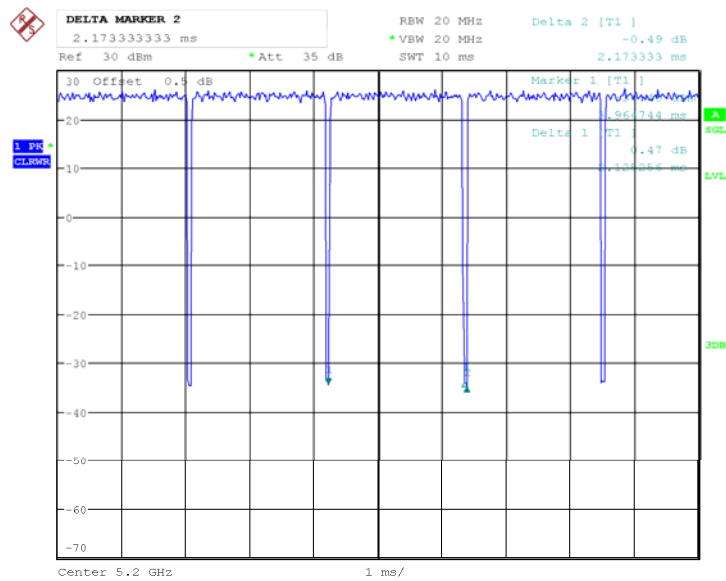


Date: 17.JUL.2019 18:33:55

802.11n ht20

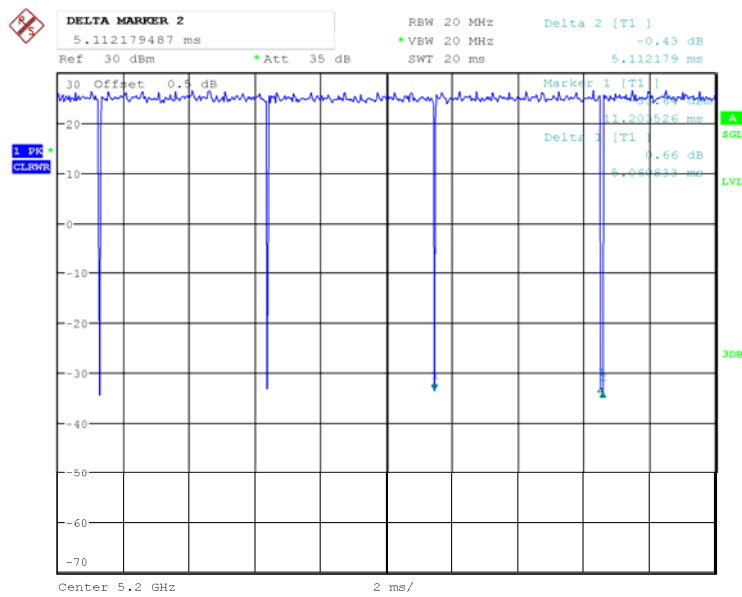


Date: 17.JUL.2019 18:33:09

802.11n ht40

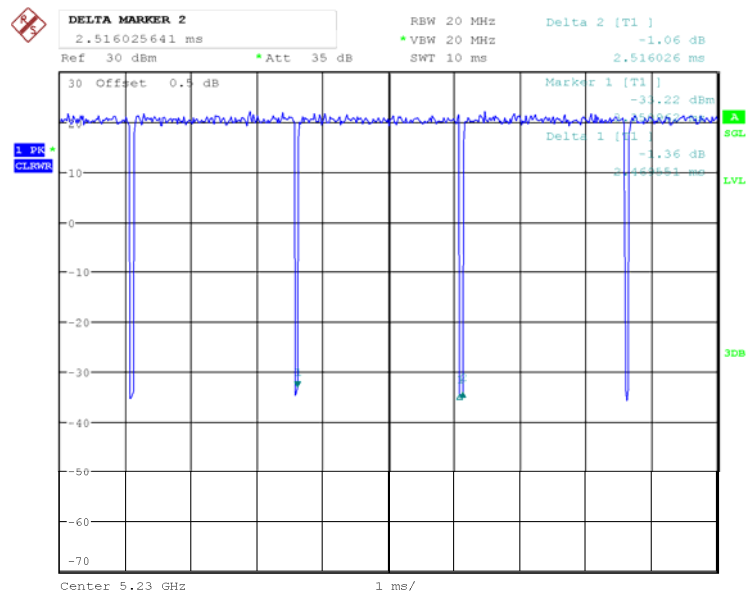


Date: 17.JUL.2019 18:30:17

802.11ac vht20

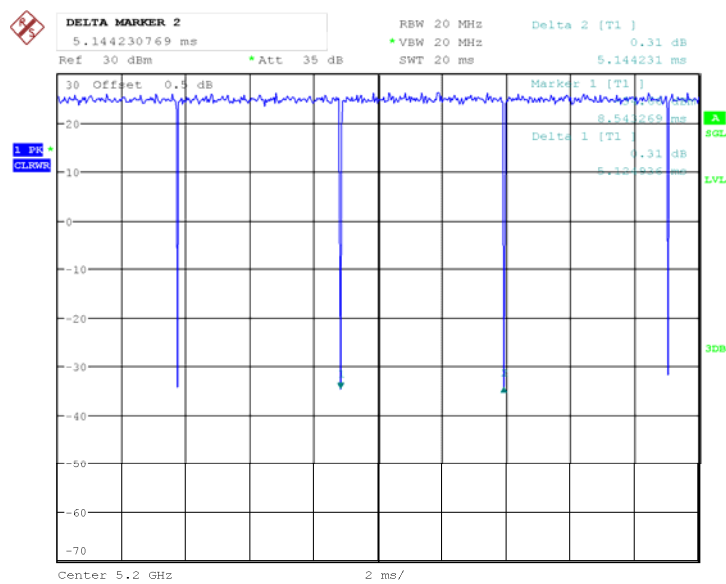


Date: 17.JUL.2019 18:32:32

802.11ac vht40

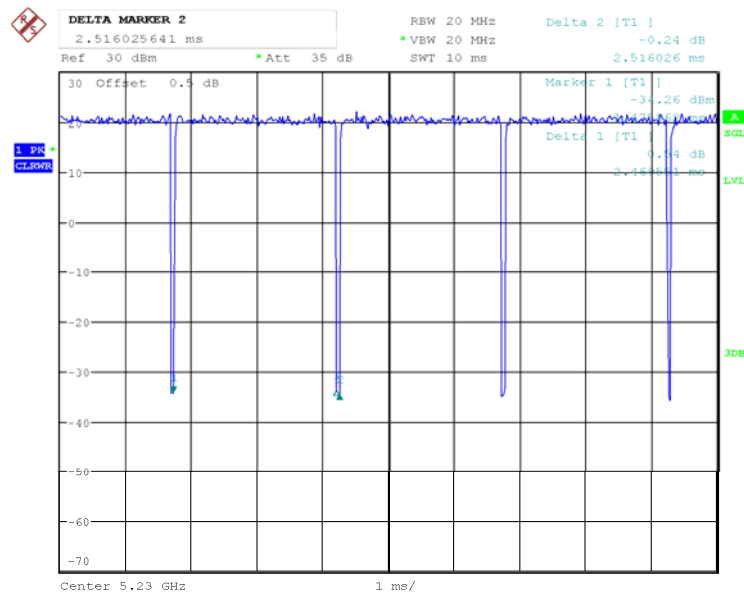

Date: 17.JUL.2019 18:29:43

802.11ac vht80

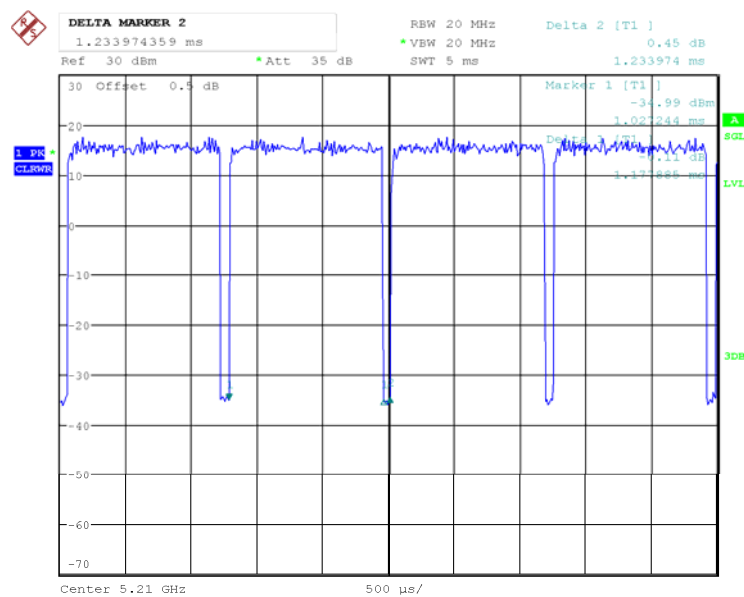

Date: 17.JUL.2019 18:28:49

Equipment Modifications

No modification was made to the EUT.


Local Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
Huawei	PoE Adapter	UE-PoE-35	/
Huawei	Optical Switch	S170016G	/

Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From	To
RJ45 Cable	Yes	No	1.8	PoE Adapter	EUT
RJ45 Cable	Yes	No	10	PoE Adapter	Laptop
Optical Cable	No	No	10	EUT	Optical Router

Block Diagram of Test Setup

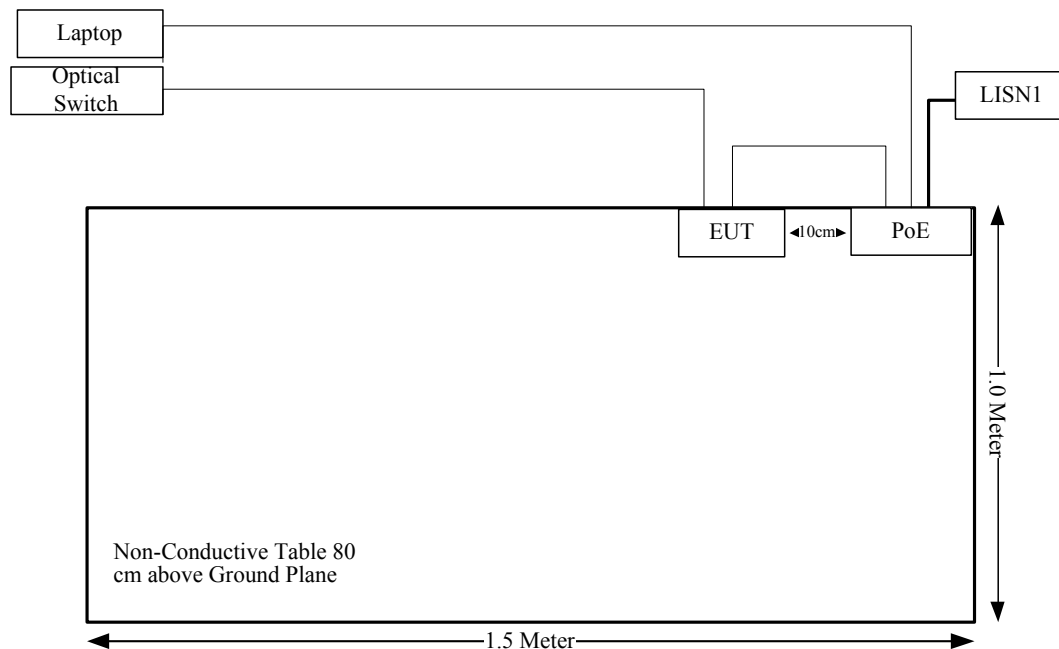

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.407 (f) & §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliance
§15.203	Antenna Requirement	Compliance
§15.407(b)(6)& §15.207(a)	Conducted Emissions	Compliance
§15.205& §15.209 &§15.407(b)	Undesirable Emission& Restricted Bands	Compliance
§15.407(a)(e)	Emission Bandwidth	Compliance
§15.407(a)	Conducted Transmitter Output Power	Compliance
§15.407 (a)	Power Spectral Density	Compliance

FCC §15.407 (f) & §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.407(f) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculation formula:

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Data:

Frequency Range (MHz)	Antenna Gain		Max. Target Power including Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
	(dBi)	(numeric)	(dBm)	(mW)			
2412-2462	4.8	3.02	27	501	20.00	0.30	1.0
5150-5250	5.7	3.72	15	31.62	20.00	0.02	1.0
5725-5850	5.7	3.72	25	316.23	20.00	0.23	1.0

The WLAN 2.4G and 5G can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{Limit,i}}$$

$$= S_{2.4}/S_{limit-2.4} + S_5/S_{limit-5}$$

$$= 0.30/1 + 0.23/1$$

$$= 0.53$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has two internal antennas for 5G wifi, the antenna gain is 5.7 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.407 (b) (6) §15.207 (a) – CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a), §15.407(b) (6)

EUT Setup

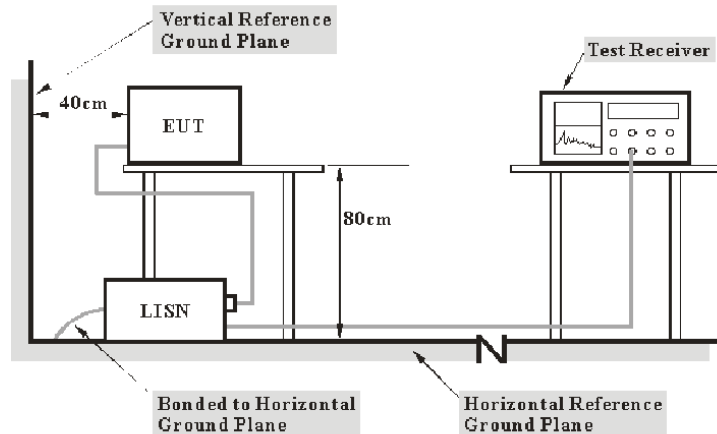

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisen with a 120 V/60 Hz AC power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

$$C_f = A_C + VDF$$

Herein,

V_C (cord. Reading): corrected voltage amplitude

V_R : reading voltage amplitude

A_c : attenuation caused by cable loss

VDF: voltage division factor of AMN

C_f : Correction Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-01	2018-09-05	2019-09-05
R&S	Test Software	EMC32	Version8.53.0	N/A	N/A
R&S	Two-line V-network	ENV 216	101614	2018-12-10	2019-12-10
R&S	EMI Test Receiver	ESPI	100120	2019-05-09	2020-05-09

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

During the conducted emission test, the adapter was connected to the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.


All data was recorded in the Quasi-peak and average detection mode.

Test Data

Environmental Conditions


Temperature:	28.2 °C
Relative Humidity:	58%
ATM Pressure:	100.4kPa
Test by:	Lily Xie
Test Date:	2019-07-09

Test Mode: Transmitting (802.11a chain 0 5825MHz was the worst)

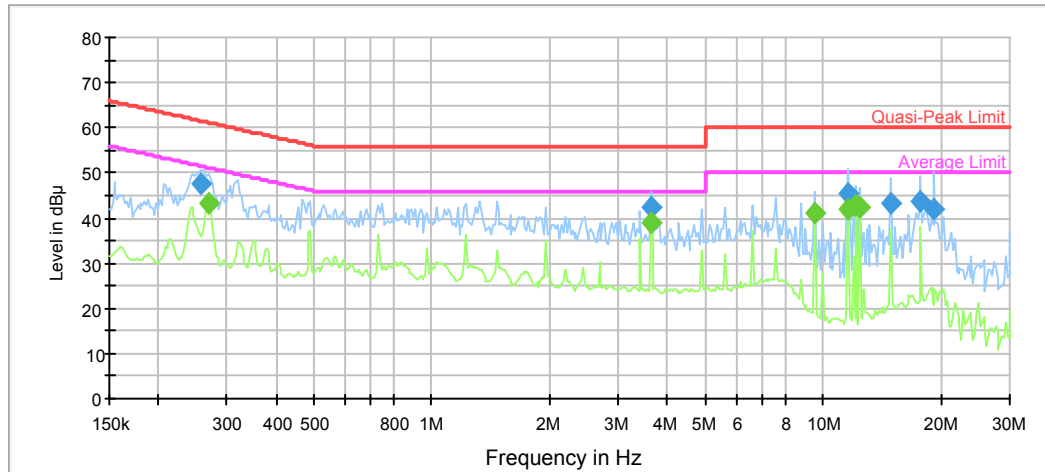AC120 V, 60 Hz, Line:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.256712	47.5	9.000	L1	10.3	14.0	61.5
3.621856	42.5	9.000	L1	9.8	13.5	56.0
11.601974	45.2	9.000	L1	9.8	14.8	60.0
14.878743	43.2	9.000	L1	9.9	16.8	60.0
17.797171	43.8	9.000	L1	10.0	16.2	60.0
19.271786	41.8	9.000	L1	10.1	18.2	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.269807	43.0	9.000	L1	10.2	8.1	51.1
3.621856	38.9	9.000	L1	9.8	7.1	46.0
9.508334	41.2	9.000	L1	9.8	8.8	50.0
11.601974	41.8	9.000	L1	9.8	8.2	50.0
12.193791	43.0	9.000	L1	9.9	7.0	50.0
12.438887	42.4	9.000	L1	9.9	7.6	50.0

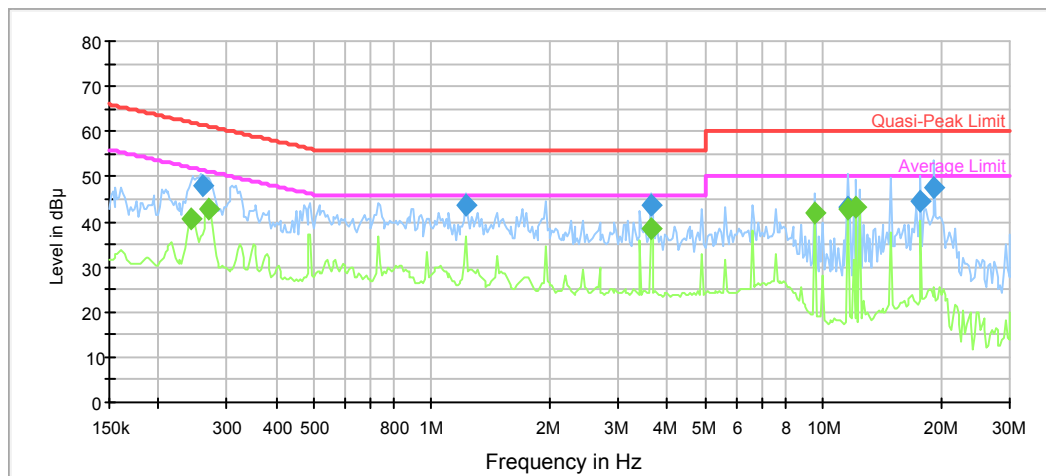AC120 V, 60 Hz, Neutral:

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.259279	48.0	9.000	N	11.2	13.0	61.0
1.224338	43.9	9.000	N	9.8	12.1	56.0
3.621856	43.5	9.000	N	9.8	12.5	56.0
11.601974	43.3	9.000	N	9.8	16.7	60.0
17.797171	44.5	9.000	N	10.0	15.5	60.0
19.271786	47.4	9.000	N	10.0	12.6	60.0

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.241834	40.6	9.000	N	11.2	11.4	52.0
0.269807	43.0	9.000	N	10.2	8.1	51.1
3.621856	38.6	9.000	N	9.8	7.4	46.0
9.508334	42.1	9.000	N	9.8	7.9	50.0
11.601974	42.7	9.000	N	9.8	7.3	50.0
12.193791	43.0	9.000	N	9.9	7.0	50.0

FCC §15.209, §15.205 & §15.407(b) –UNWANTED EMISSION

Applicable Standard

FCC §15.407; §15.209; §15.205;

(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4) For transmitters operating in the 5.725-5.85 GHz band:

(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in §15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.


(5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

(6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.


(7) The provisions of §15.205 apply to intentional radiators operating under this section.

EUT Setup


Below 1 GHz:

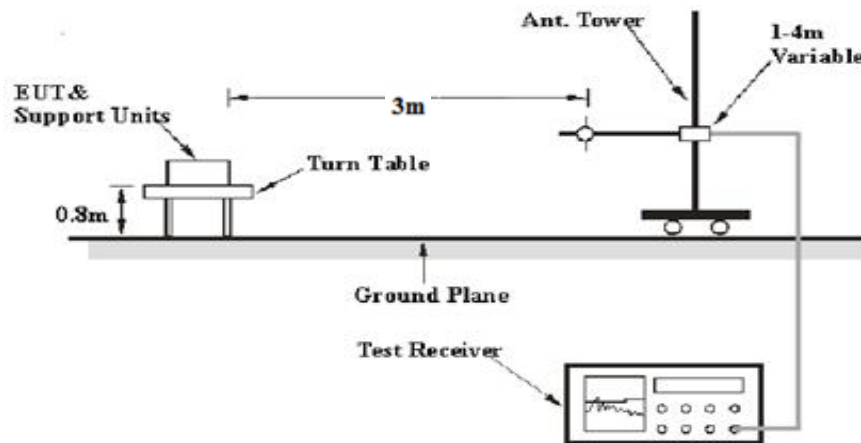

1-26.5 GHz:

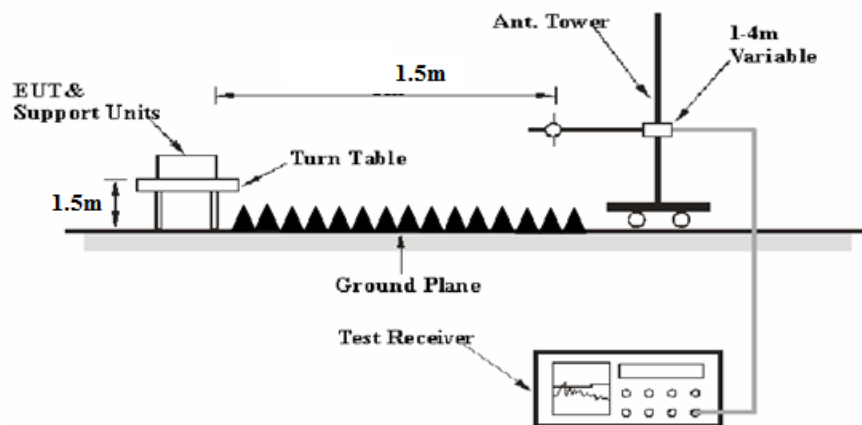

26.5-40 GHz:

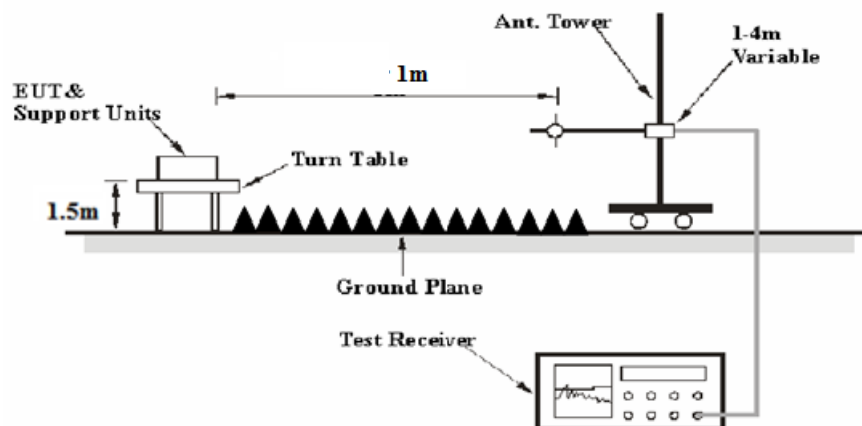

The radiated emission Below 1GHz tests were performed in the 3 meters chamber test site A, above 1GHz tests were performed in the 3 meters chamber test site A, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.407 limits

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30-1000MHz:

Measurement	RBW	Video B/W	IF B/W
QP	120 kHz	300 kHz	120kHz

1GHz- 40GHz:

Measurement	Duty cycle	RBW	Video B/W
PK	Any	1MHz	3 MHz
Ave.	>98%	1MHz	10 Hz
	<98%	1MHz	1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

Test Procedure

During the radiated emission test, the adapter was connected to the first AC floor outlet.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1GHz, peak and Average detection modes for frequencies above 1GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m or 1m

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB= 6.02 dB

or

Distance extrapolation factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1m])$ dB= 9.54 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

Corrected Amplitude & Margin Calculation

For the range 30MHz-1GHz, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

For the range 1GHz-40GHz, Test performed at 1.5m or 1m, the Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading and the Distance extrapolation factor. The basic equation is as follows:

$$\begin{aligned} &\text{Corrected Amplitude} \\ &= \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain} - \text{Distance extrapolation factor} \end{aligned}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESR3	102453	2019-06-26	2020-06-26
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2019-05-06	2020-05-06
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
R&S	Spectrum Analyzer	FSP 38	100478	2019-05-09	2020-05-09
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
MICRO-COAX	Coaxial Cable	UFA147-1-2362- 100100	64639 231029- 001	2019-02-24	2020-02-24
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-2.4J2.4J-50	C-0700-02	2019-06-27	2020-06-27
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2018-09-05	2019-09-05
Quinstar	Amplifier	QLW-18405536-JO	15964001001	2019-06-27	2020-06-27
Sinoscite	Bandstop Filters	BSF5150-5850MN- 0899-003	0899003	2019-05-06	2020-05-06
Mini Circuits	High Pass Filter	VHF-6010+	31118	2019-06-16	2020-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data**Environmental Conditions**

Test Items	Radiation Below 1GHz	Radiation Above 1GHz
Temperature:	27.9 °C	29.1 °C
Relative Humidity:	51%	66 %
ATM Pressure:	99.2 kPa	100.1 kPa
Tester:	Tyler Pan	Lucy Lu
Test Date:	2019-07-22	2019-07-21


Test Mode: Transmitting

Below 1GHz (802.11n ht20, 5240 MHz was the worst):

Horizontal

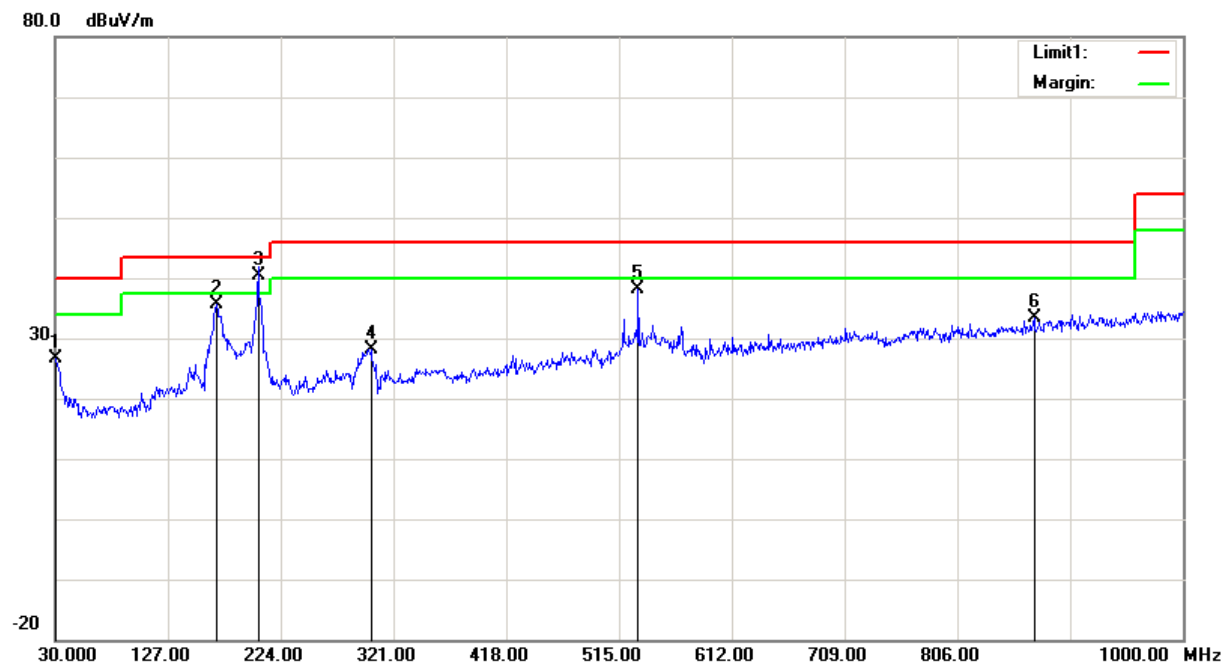

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	24.97	peak	1.72	26.69	40.00	13.31
168.7100	42.11	peak	-6.47	35.64	43.50	7.86
204.6000	46.87	QP	-6.57	40.30	43.50	3.20
301.6000	31.94	peak	-3.78	28.16	46.00	17.84
531.4900	37.68	peak	0.39	38.07	46.00	7.93
871.9600	27.99	peak	5.46	33.45	46.00	12.55

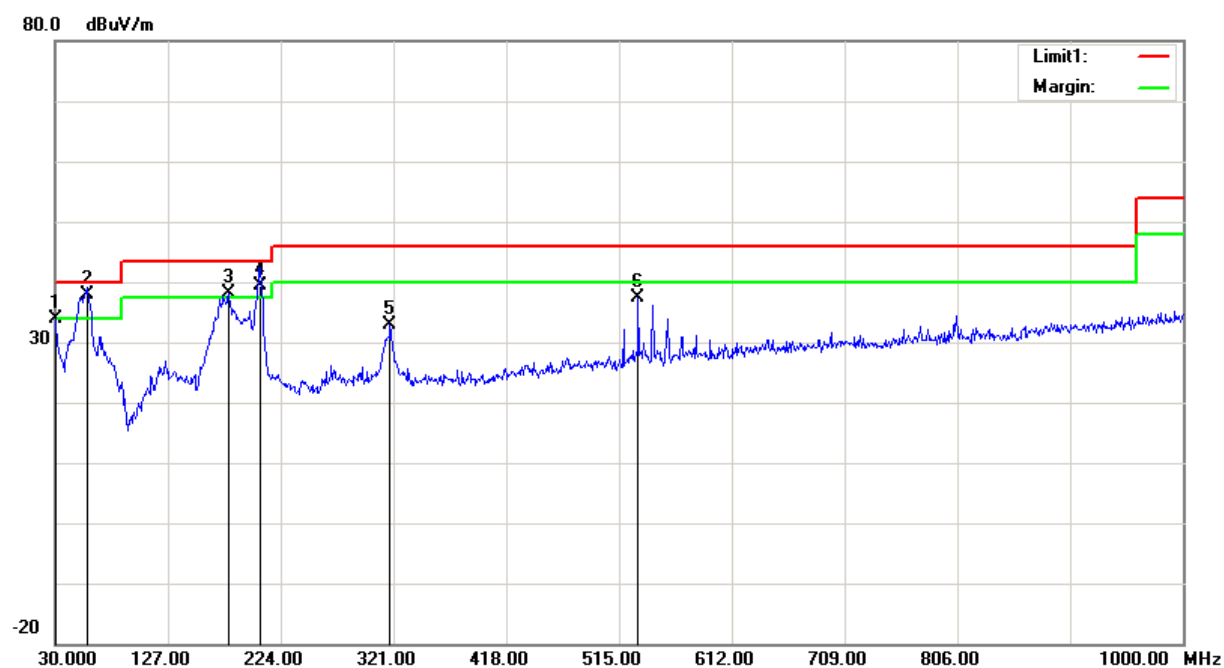Vertical

Frequency (MHz)	Receiver Reading (dBμV)	Detector	Correction Factor (dB/m)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
30.0000	32.28	peak	1.72	34.00	40.00	6.00
57.1600	50.10	QP	-12.21	37.89	40.00	2.11
179.3800	45.18	peak	-7.12	38.06	43.50	5.44
206.5400	46.50	QP	-7.10	39.40	43.50	4.10
318.0900	36.25	peak	-3.44	32.81	46.00	13.19
531.4900	36.89	peak	0.39	37.28	46.00	8.72

1GHz-40GHz:**5150-5250MHz****802.11a (Chain 0 was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	85.60	PK	H	30.46	4.71	0.00	120.77	114.75	N/A	N/A
5180.00	75.85	AV	H	30.46	4.71	0.00	111.02	105	N/A	N/A
5180.00	79.87	PK	V	30.46	4.71	0.00	115.04	109.02	N/A	N/A
5180.00	69.07	AV	V	30.46	4.71	0.00	104.24	98.22	N/A	N/A
5150.00	36.00	PK	H	30.40	4.70	0.00	71.10	65.08	74.00	8.92
5150.00	19.54	AV	H	30.40	4.70	0.00	54.64	48.62	54.00	5.38
10360.00	35.52	PK	H	37.10	6.91	26.86	52.67	46.65	68.20	21.55
15540.00	35.60	PK	H	36.79	8.39	25.66	55.12	49.1	74.00	24.90
15540.00	22.28	AV	H	36.79	8.39	25.66	41.80	35.78	54.00	18.22
3280.00	49.63	PK	H	26.54	3.89	27.22	52.84	46.82	68.20	21.38
1707.00	47.65	PK	H	24.10	2.83	27.93	46.65	40.63	74.00	33.37
1707.00	40.32	AV	H	24.10	2.83	27.93	39.32	33.3	54.00	20.70
Middle Channel: 5200 MHz										
5200.00	86.25	PK	H	30.50	4.71	0.00	121.46	115.44	N/A	N/A
5200.00	76.20	AV	H	30.50	4.71	0.00	111.41	105.39	N/A	N/A
5200.00	79.32	PK	V	30.50	4.71	0.00	114.53	108.51	N/A	N/A
5200.00	69.25	AV	V	30.50	4.71	0.00	104.46	98.435	N/A	N/A
10400.00	35.60	PK	H	37.16	6.92	26.84	52.84	46.82	68.20	21.38
15600.00	36.80	PK	H	36.78	8.43	25.97	56.04	50.02	74.00	23.98
15600.00	23.50	AV	H	36.78	8.43	25.97	42.74	36.72	54.00	17.28
3265.00	50.31	PK	H	26.50	3.89	27.23	53.47	47.45	68.20	20.75
1707.00	46.67	PK	H	24.10	2.83	27.93	45.67	39.65	74.00	34.35
1707.00	40.85	AV	H	24.10	2.83	27.93	39.85	33.832	54.00	20.17
High Channel: 5240 MHz										
5240.00	85.00	PK	H	30.58	4.75	0.00	120.33	114.31	N/A	N/A
5240.00	74.14	AV	H	30.58	4.75	0.00	109.47	103.45	N/A	N/A
5240.00	79.92	PK	V	30.58	4.75	0.00	115.25	109.23	N/A	N/A
5240.00	69.84	AV	V	30.58	4.75	0.00	105.17	99.15	N/A	N/A
5350.00	29.77	PK	H	30.80	4.84	0.00	65.41	59.39	74.00	14.61
5350.00	15.41	AV	H	30.80	4.84	0.00	51.05	45.03	54.00	8.97
10480.00	36.70	PK	H	37.27	6.94	27.02	53.89	47.87	68.20	20.33
15720.00	35.45	PK	H	36.76	8.51	25.68	55.04	49.02	74.00	24.98
15720.00	22.70	AV	H	36.76	8.51	25.68	42.29	36.27	54.00	17.73
3257.00	46.70	PK	H	26.47	3.89	27.24	49.82	43.8	68.20	24.40
1710.00	46.37	PK	H	24.10	2.84	27.93	45.38	39.36	74.00	34.64
1710.00	41.33	AV	H	24.10	2.84	27.93	40.34	34.32	54.00	19.68

802.11n ht20(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	88.94	PK	H	30.46	4.71	0.00	124.11	118.09	N/A	N/A
5180.00	78.60	AV	H	30.46	4.71	0.00	113.77	107.75	N/A	N/A
5180.00	79.13	PK	V	30.46	4.71	0.00	114.30	108.28	N/A	N/A
5180.00	69.13	AV	V	30.46	4.71	0.00	104.30	98.28	N/A	N/A
5150.00	35.87	PK	H	30.40	4.70	0.00	70.97	64.95	74.00	9.05
5150.00	19.87	AV	H	30.40	4.70	0.00	54.97	48.95	54.00	5.05
10360.00	37.25	PK	H	37.10	6.91	26.86	54.40	48.38	68.20	19.82
15540.00	35.54	PK	H	36.79	8.39	25.66	55.06	49.04	74.00	24.96
15540.00	22.21	AV	H	36.79	8.39	25.66	41.73	35.71	54.00	18.29
3255.00	47.85	PK	H	26.47	3.89	27.24	50.97	44.95	68.20	23.25
1707.00	46.69	PK	H	24.10	2.83	27.93	45.69	39.67	74.00	34.33
1707.00	39.99	AV	H	24.10	2.83	27.93	38.99	32.97	54.00	21.03
Middle Channel: 5200 MHz										
5200.00	89.60	PK	H	30.50	4.71	0.00	124.81	118.79	N/A	N/A
5200.00	79.54	AV	H	30.50	4.71	0.00	114.75	108.73	N/A	N/A
5200.00	79.54	PK	V	30.50	4.71	0.00	114.75	108.73	N/A	N/A
5200.00	69.14	AV	V	30.50	4.71	0.00	104.35	98.33	N/A	N/A
10400.00	35.54	PK	H	37.16	6.92	26.84	52.78	46.76	68.20	21.44
15600.00	35.21	PK	H	36.78	8.43	25.97	54.45	48.43	74.00	25.57
15600.00	21.70	AV	H	36.78	8.43	25.97	40.94	34.92	54.00	19.08
3224.00	47.73	PK	H	26.37	3.88	27.27	50.71	44.69	68.20	23.51
1707.00	47.88	PK	H	24.10	2.83	27.93	46.88	40.86	74.00	33.14
1707.00	40.65	AV	H	24.10	2.83	27.93	39.65	33.63	54.00	20.37
High Channel: 5240 MHz										
5240.00	90.27	PK	H	30.58	4.75	0.00	125.60	119.58	N/A	N/A
5240.00	79.46	AV	H	30.58	4.75	0.00	114.79	108.77	N/A	N/A
5240.00	79.85	PK	V	30.58	4.75	0.00	115.18	109.16	N/A	N/A
5240.00	69.74	AV	V	30.58	4.75	0.00	105.07	99.05	N/A	N/A
5350.00	31.30	PK	H	30.80	4.84	0.00	66.94	60.92	74.00	13.08
5350.00	15.46	AV	H	30.80	4.84	0.00	51.10	45.08	54.00	8.92
10480.00	36.70	PK	H	37.27	6.94	27.02	53.89	47.87	68.20	20.33
15720.00	35.51	PK	H	36.76	8.51	25.68	55.10	49.08	74.00	24.92
15720.00	22.10	AV	H	36.76	8.51	25.68	41.69	35.67	54.00	18.33
3250.00	48.90	PK	H	26.45	3.89	27.25	51.99	45.97	68.20	22.23
1707.00	48.05	PK	H	24.10	2.83	27.93	47.05	41.03	74.00	32.97
1707.00	41.36	AV	H	24.10	2.83	27.93	40.36	34.34	54.00	19.66

802.11n ht40(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	83.29	PK	H	30.48	4.71	0.00	118.48	112.46	N/A	N/A
5190.00	73.83	AV	H	30.48	4.71	0.00	109.02	103	N/A	N/A
5190.00	74.40	PK	V	30.48	4.71	0.00	109.59	103.57	N/A	N/A
5190.00	64.55	AV	V	30.48	4.71	0.00	99.74	93.72	N/A	N/A
5150.00	34.36	PK	H	30.40	4.70	0.00	69.46	63.44	74.00	10.56
5150.00	18.34	AV	H	30.40	4.70	0.00	53.44	47.42	54.00	6.58
10380.00	35.23	PK	H	37.13	6.92	26.85	52.43	46.41	68.20	21.79
15570.00	35.12	PK	H	36.79	8.41	25.82	54.50	48.48	74.00	25.52
15570.00	21.86	AV	H	36.79	8.41	25.82	41.24	35.217	54.00	18.78
3234.00	48.65	PK	H	26.40	3.88	27.26	51.67	45.65	68.20	22.55
1707.00	48.99	PK	H	24.10	2.83	27.93	47.99	41.97	74.00	32.03
1707.00	42.35	AV	H	24.10	2.83	27.93	41.35	35.33	54.00	18.67
High Channel: 5230 MHz										
5230.00	84.32	PK	H	30.56	4.74	0.00	119.62	113.6	N/A	N/A
5230.00	74.40	AV	H	30.56	4.74	0.00	109.70	103.68	N/A	N/A
5230.00	75.10	PK	V	30.56	4.74	0.00	110.40	104.38	N/A	N/A
5230.00	65.01	AV	V	30.56	4.74	0.00	100.31	94.29	N/A	N/A
5350.00	29.53	PK	H	30.80	4.84	0.00	65.17	59.15	74.00	14.85
5350.00	15.41	AV	H	30.80	4.84	0.00	51.05	45.03	54.00	8.97
10460.00	36.80	PK	H	37.24	6.93	26.98	53.99	47.97	68.20	20.23
15690.00	35.23	PK	H	36.76	8.49	25.71	54.77	48.75	74.00	25.25
15690.00	22.21	AV	H	36.76	8.49	25.71	41.75	35.73	54.00	18.27
3215.00	47.65	PK	H	26.35	3.88	27.28	50.60	44.58	68.20	23.62
1707.00	48.66	PK	H	24.10	2.83	27.93	47.66	41.64	74.00	32.36
1707.00	41.03	AV	H	24.10	2.83	27.93	40.03	34.01	54.00	19.99

802.11ac vht20(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5180 MHz										
5180.00	89.24	PK	H	30.46	4.71	0.00	124.41	118.39	N/A	N/A
5180.00	78.43	AV	H	30.46	4.71	0.00	113.60	107.58	N/A	N/A
5180.00	80.73	PK	V	30.46	4.71	0.00	115.90	109.88	N/A	N/A
5180.00	70.32	AV	V	30.46	4.71	0.00	105.49	99.47	N/A	N/A
5150.00	37.19	PK	H	30.40	4.70	0.00	72.29	66.27	74.00	7.73
5150.00	18.34	AV	H	30.40	4.70	0.00	53.44	47.42	54.00	6.58
10360.00	37.25	PK	H	37.10	6.91	26.86	54.40	48.38	68.20	19.82
15540.00	35.66	PK	H	36.79	8.39	25.66	55.18	49.16	74.00	24.84
15540.00	22.35	AV	H	36.79	8.39	25.66	41.87	35.85	54.00	18.15
3216.00	45.75	PK	H	26.35	3.88	27.28	48.70	42.68	68.20	25.52
1707.00	48.35	PK	H	24.10	2.83	27.93	47.35	41.33	74.00	32.67
1707.00	40.66	AV	H	24.10	2.83	27.93	39.66	33.64	54.00	20.36
Middle Channel: 5200 MHz										
5200.00	90.16	PK	H	30.50	4.71	0.00	125.37	119.35	N/A	N/A
5200.00	79.88	AV	H	30.50	4.71	0.00	115.09	109.07	N/A	N/A
5200.00	80.32	PK	V	30.50	4.71	0.00	115.53	109.51	N/A	N/A
5200.00	70.45	AV	V	30.50	4.71	0.00	105.66	99.64	N/A	N/A
10400.00	36.10	PK	H	37.16	6.92	26.84	53.34	47.32	68.20	20.88
15600.00	35.21	PK	H	36.78	8.43	25.97	54.45	48.43	74.00	25.57
15600.00	21.70	AV	H	36.78	8.43	25.97	40.94	34.92	54.00	19.08
3223.00	47.36	PK	H	26.37	3.88	27.27	50.34	44.32	68.20	23.88
1707.00	47.66	PK	H	24.10	2.83	27.93	46.66	40.64	74.00	33.36
1707.00	40.55	AV	H	24.10	2.83	27.93	39.55	33.53	54.00	20.47
High Channel: 5240 MHz										
5240.00	90.56	PK	H	30.58	4.75	0.00	125.89	119.87	N/A	N/A
5240.00	79.87	AV	H	30.58	4.75	0.00	115.20	109.18	N/A	N/A
5240.00	80.66	PK	V	30.58	4.75	0.00	115.99	109.97	N/A	N/A
5240.00	70.53	AV	V	30.58	4.75	0.00	105.86	99.84	N/A	N/A
5350.00	31.65	PK	H	30.80	4.84	0.00	67.29	61.27	74.00	12.73
5350.00	17.06	AV	H	30.80	4.84	0.00	52.70	46.68	54.00	7.32
10480.00	36.53	PK	H	37.27	6.94	27.02	53.72	47.7	68.20	20.50
15720.00	36.92	PK	H	36.76	8.51	25.68	56.51	50.49	74.00	23.51
15720.00	22.86	AV	H	36.76	8.51	25.68	42.45	36.43	54.00	17.57
3283.00	49.35	PK	H	26.55	3.89	27.22	52.57	46.55	68.20	21.65
1707.00	47.41	PK	H	24.10	2.83	27.93	46.41	40.39	74.00	33.61
1707.00	40.54	AV	H	24.10	2.83	27.93	39.54	33.52	54.00	20.48

802.11ac vht40(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5190 MHz										
5190.00	83.49	PK	H	30.48	4.71	0.00	118.68	112.66	N/A	N/A
5190.00	73.61	AV	H	30.48	4.71	0.00	108.80	102.78	N/A	N/A
5190.00	74.06	PK	V	30.48	4.71	0.00	109.25	103.23	N/A	N/A
5190.00	63.87	AV	V	30.48	4.71	0.00	99.06	93.04	N/A	N/A
5150.00	33.55	PK	H	30.40	4.70	0.00	68.65	62.63	74.00	11.37
5150.00	18.13	AV	H	30.40	4.70	0.00	53.23	47.21	54.00	6.79
10380.00	36.02	PK	H	37.13	6.92	26.85	53.22	47.2	68.20	21.00
15570.00	36.03	PK	H	36.79	8.41	25.82	55.41	49.39	74.00	24.61
15570.00	22.65	AV	H	36.79	8.41	25.82	42.03	36.01	54.00	17.99
3223.00	47.65	PK	H	26.37	3.88	27.27	50.63	44.61	68.20	23.59
1707.00	48.66	PK	H	24.10	2.83	27.93	47.66	41.64	74.00	32.36
1707.00	41.01	AV	H	24.10	2.83	27.93	40.01	33.99	54.00	20.01
High Channel: 5230 MHz										
5230.00	84.10	PK	H	30.56	4.74	0.00	119.40	113.38	N/A	N/A
5230.00	74.44	AV	H	30.56	4.74	0.00	109.74	103.72	N/A	N/A
5230.00	74.98	PK	V	30.56	4.74	0.00	110.28	104.26	N/A	N/A
5230.00	65.10	AV	V	30.56	4.74	0.00	100.40	94.38	N/A	N/A
5350.00	29.80	PK	H	30.80	4.84	0.00	65.44	59.42	74.00	14.58
5350.00	15.87	AV	H	30.80	4.84	0.00	51.51	45.49	54.00	8.51
10460.00	36.74	PK	H	37.24	6.93	26.98	53.93	47.91	68.20	20.29
15690.00	36.23	PK	H	36.76	8.49	25.71	55.77	49.75	74.00	24.25
15690.00	23.77	AV	H	36.76	8.49	25.71	43.31	37.29	54.00	16.71
3271.00	47.71	PK	H	26.51	3.89	27.23	50.88	44.86	68.20	23.34
1707.00	48.65	PK	H	24.10	2.83	27.93	47.65	41.63	74.00	32.37
1707.00	41.54	AV	H	24.10	2.83	27.93	40.54	34.52	54.00	19.48

802.11ac vht80(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5210 MHz										
5210.00	79.09	PK	H	30.52	4.72	0.00	114.33	108.31	N/A	N/A
5210.00	69.58	AV	H	30.52	4.72	0.00	104.82	98.8	N/A	N/A
5210.00	69.80	PK	V	30.52	4.72	0.00	105.04	99.02	N/A	N/A
5210.00	59.54	AV	V	30.52	4.72	0.00	94.78	88.76	N/A	N/A
5150.00	37.23	PK	H	30.40	4.70	0.00	72.33	66.31	74.00	7.69
5150.00	20.52	AV	H	30.40	4.70	0.00	55.62	49.6	54.00	4.40
5350.00	30.26	PK	H	30.80	4.84	0.00	65.90	59.88	74.00	14.12
5350.00	15.41	AV	H	30.80	4.84	0.00	51.05	45.03	54.00	8.97
10420.00	38.03	PK	H	37.19	6.93	26.89	55.26	49.24	68.20	18.96
15630.00	35.94	PK	H	36.77	8.45	25.88	55.28	49.26	74.00	24.74
15630.00	22.26	AV	H	36.77	8.45	25.88	41.60	35.58	54.00	18.42
3271.00	47.40	PK	H	26.51	3.89	27.23	50.57	44.55	68.20	23.65
1707.00	47.65	PK	H	24.10	2.83	27.93	46.65	40.63	74.00	33.37
1707.00	40.32	AV	H	24.10	2.83	27.93	39.32	33.3	54.00	20.70

5725-5850MHz**802.11a (Chain 0 was the worst)**

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	86.72	PK	H	31.44	4.96	0.00	123.12	117.1	N/A	N/A
5745.00	76.35	AV	H	31.44	4.96	0.00	112.75	106.73	N/A	N/A
5745.00	77.60	PK	V	31.44	4.96	0.00	114.00	107.98	N/A	N/A
5745.00	67.24	AV	V	31.44	4.96	0.00	103.64	97.62	N/A	N/A
5725.00	41.18	PK	H	31.42	4.96	0.00	77.56	71.54	122.20	50.66
5720.00	38.53	PK	H	31.41	4.96	0.00	74.90	68.88	110.80	41.92
5700.00	30.54	PK	H	31.38	4.97	0.00	66.89	60.87	105.20	44.33
5650.00	30.87	PK	H	31.31	4.95	0.00	67.13	61.11	68.20	7.09
11490.00	39.41	PK	H	38.29	6.98	26.57	58.11	52.09	74.00	21.91
11490.00	26.54	AV	H	38.29	6.98	26.57	45.24	39.22	54.00	14.78
17235.00	35.40	PK	H	41.02	9.01	25.11	60.32	54.3	68.20	13.90
3257.00	46.37	PK	H	26.47	3.89	27.24	49.49	43.47	68.20	24.73
1707.00	48.65	PK	H	24.10	2.83	27.93	47.65	41.63	74.00	32.37
1707.00	42.03	AV	H	24.10	2.83	27.93	41.03	35.01	54.00	18.99
Middle Channel: 5785 MHz										
5785.00	87.52	PK	H	31.50	4.94	0.00	123.96	117.94	N/A	N/A
5785.00	77.21	AV	H	31.50	4.94	0.00	113.65	107.63	N/A	N/A
5785.00	79.40	PK	V	31.50	4.94	0.00	115.84	109.82	N/A	N/A
5785.00	69.34	AV	V	31.50	4.94	0.00	105.78	99.76	N/A	N/A
11570.00	41.54	PK	H	38.36	6.98	26.97	59.91	53.89	74.00	20.11
11570.00	27.50	AV	H	38.36	6.98	26.97	45.87	39.85	54.00	14.15
17355.00	35.42	PK	H	41.28	9.04	25.16	60.58	54.56	68.20	13.64
3216.00	46.33	PK	H	26.35	3.88	27.28	49.28	43.26	68.20	24.94
1707.00	45.67	PK	H	24.10	2.83	27.93	44.67	38.65	74.00	35.35
1707.00	39.66	AV	H	24.10	2.83	27.93	38.66	32.64	54.00	21.36
High Channel: 5825 MHz										
5825.00	87.06	PK	H	31.56	4.94	0.00	123.56	117.54	N/A	N/A
5825.00	77.08	AV	H	31.56	4.94	0.00	113.58	107.56	N/A	N/A
5825.00	79.18	PK	V	31.56	4.94	0.00	115.68	109.66	N/A	N/A
5825.00	69.08	AV	V	31.56	4.94	0.00	105.58	99.56	N/A	N/A
5850.00	41.90	PK	H	31.59	4.95	0.00	78.44	72.42	122.20	49.78
5855.00	35.96	PK	H	31.60	4.95	0.00	72.51	66.49	110.80	44.31
5875.00	31.00	PK	H	31.63	4.95	0.00	67.58	61.56	105.20	43.64
5925.00	31.21	PK	H	31.70	4.95	0.00	67.86	61.84	68.20	6.36
11650.00	42.65	PK	H	38.42	6.99	26.84	61.22	55.2	74.00	18.80
11650.00	29.88	AV	H	38.42	6.99	26.84	48.45	42.43	54.00	11.57
17475.00	37.86	PK	H	41.55	9.06	24.55	63.92	57.9	68.20	10.30
3258.00	47.86	PK	H	26.47	3.89	27.24	50.98	44.96	68.20	23.24
1707.00	48.52	PK	H	24.10	2.83	27.93	47.52	41.5	74.00	32.50
1707.00	41.00	AV	H	24.10	2.83	27.93	40.00	33.98	54.00	20.02

802.11n ht20(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	89.18	PK	H	31.44	4.96	0.00	125.58	119.56	N/A	N/A
5745.00	78.73	AV	H	31.44	4.96	0.00	115.13	109.11	N/A	N/A
5745.00	81.60	PK	V	31.44	4.96	0.00	118.00	111.98	N/A	N/A
5745.00	72.10	AV	V	31.44	4.96	0.00	108.50	102.48	N/A	N/A
5725.00	44.38	PK	H	31.42	4.96	0.00	80.76	74.74	122.20	47.46
5720.00	39.64	PK	H	31.41	4.96	0.00	76.01	69.99	110.80	40.81
5700.00	33.97	PK	H	31.38	4.97	0.00	70.32	64.3	105.20	40.90
5650.00	30.34	PK	H	31.31	4.95	0.00	66.60	60.58	68.20	7.62
11490.00	41.81	PK	H	38.29	6.98	26.57	60.51	54.49	74.00	19.51
11490.00	28.38	AV	H	38.29	6.98	26.57	47.08	41.06	54.00	12.94
17235.00	35.60	PK	H	41.02	9.01	25.11	60.52	54.5	68.20	13.70
3254.00	38.60	PK	H	26.46	3.89	27.24	41.71	35.69	68.20	32.51
1707.00	48.21	PK	H	24.10	2.83	27.93	47.21	41.19	74.00	32.81
1707.00	41.54	AV	H	24.10	2.83	27.93	40.54	34.52	54.00	19.48
Middle Channel: 5785 MHz										
5785.00	89.54	PK	H	31.50	4.94	0.00	125.98	119.96	N/A	N/A
5785.00	79.40	AV	H	31.50	4.94	0.00	115.84	109.82	N/A	N/A
5785.00	82.40	PK	V	31.50	4.94	0.00	118.84	112.82	N/A	N/A
5785.00	72.54	AV	V	31.50	4.94	0.00	108.98	102.96	N/A	N/A
11570.00	42.27	PK	H	38.36	6.98	26.97	60.64	54.62	74.00	19.38
11570.00	29.54	AV	H	38.36	6.98	26.97	47.91	41.89	54.00	12.11
17355.00	36.54	PK	H	41.28	9.04	25.16	61.70	55.68	68.20	12.52
3260.00	48.64	PK	H	26.48	3.89	27.24	51.77	45.75	68.20	22.45
1707.00	48.10	PK	H	24.10	2.83	27.93	47.10	41.08	74.00	32.92
1707.00	41.36	AV	H	24.10	2.83	27.93	40.36	34.34	54.00	19.66
High Channel: 5825 MHz										
5825.00	88.23	PK	H	31.56	4.94	0.00	124.73	118.71	N/A	N/A
5825.00	78.25	AV	H	31.56	4.94	0.00	114.75	108.73	N/A	N/A
5825.00	80.40	PK	V	31.56	4.94	0.00	116.90	110.88	N/A	N/A
5825.00	70.14	AV	V	31.56	4.94	0.00	106.64	100.62	N/A	N/A
5850.00	44.89	PK	H	31.59	4.95	0.00	81.43	75.41	122.20	46.79
5855.00	45.87	PK	H	31.60	4.95	0.00	82.42	76.4	110.80	34.40
5875.00	31.90	PK	H	31.63	4.95	0.00	68.48	62.46	105.20	42.74
5925.00	31.10	PK	H	31.70	4.95	0.00	67.75	61.73	68.20	6.47
11650.00	41.78	PK	H	38.42	6.99	26.84	60.35	54.33	74.00	19.67
11650.00	28.40	AV	H	38.42	6.99	26.84	46.97	40.95	54.00	13.05
17475.00	35.87	PK	H	41.55	9.06	24.55	61.93	55.91	68.20	12.29
3225.00	48.87	PK	H	26.38	3.88	27.27	51.86	45.84	68.20	22.36
1707.00	48.65	PK	H	24.10	2.83	27.93	47.65	41.63	74.00	32.37
1707.00	42.01	AV	H	24.10	2.83	27.93	41.01	34.99	54.00	19.01

802.11n ht40(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	85.66	PK	H	31.46	4.95	0.00	122.07	116.05	N/A	N/A
5755.00	75.40	AV	H	31.46	4.95	0.00	111.81	105.79	N/A	N/A
5755.00	78.10	PK	V	31.46	4.95	0.00	114.51	108.49	N/A	N/A
5755.00	68.12	AV	V	31.46	4.95	0.00	104.53	98.51	N/A	N/A
5725.00	47.35	PK	H	31.42	4.96	0.00	83.73	77.71	122.20	44.49
5720.00	46.89	PK	H	31.41	4.96	0.00	83.26	77.24	110.80	33.56
5700.00	42.19	PK	H	31.38	4.97	0.00	78.54	72.52	105.20	32.68
5650.00	31.15	PK	H	31.31	4.95	0.00	67.41	61.39	68.20	6.81
11510.00	37.22	PK	H	38.31	6.98	26.58	55.93	49.91	74.00	24.09
11510.00	22.12	AV	H	38.31	6.98	26.58	40.83	34.81	54.00	19.19
17265.00	36.21	PK	H	41.08	9.02	24.84	61.47	55.45	68.20	12.75
3262.00	48.32	PK	H	26.49	3.89	27.23	51.47	45.45	68.20	22.75
1707.00	47.54	PK	H	24.10	2.83	27.93	46.54	40.52	74.00	33.48
1707.00	40.03	AV	H	24.10	2.83	27.93	39.03	33.01	54.00	20.99
High Channel: 5795 MHz										
5795.00	85.65	PK	H	31.51	4.94	0.00	122.10	116.08	N/A	N/A
5795.00	75.15	AV	H	31.51	4.94	0.00	111.60	105.58	N/A	N/A
5795.00	78.12	PK	V	31.51	4.94	0.00	114.57	108.55	N/A	N/A
5795.00	68.25	AV	V	31.51	4.94	0.00	104.70	98.68	N/A	N/A
5850.00	43.21	PK	H	31.59	4.95	0.00	79.75	73.73	122.20	48.47
5855.00	38.88	PK	H	31.60	4.95	0.00	75.43	69.41	110.80	41.39
5875.00	33.00	PK	H	31.63	4.95	0.00	69.58	63.56	105.20	41.64
5925.00	31.03	PK	H	31.70	4.95	0.00	67.68	61.66	68.20	6.54
11590.00	37.17	PK	H	38.37	6.99	27.10	55.43	49.41	74.00	24.59
11590.00	22.40	AV	H	38.37	6.99	27.10	40.66	34.64	54.00	19.36
17385.00	36.47	PK	H	41.35	9.04	25.51	61.35	55.33	68.20	12.87
3265.00	47.88	PK	H	26.50	3.89	27.23	51.04	45.02	68.20	23.18
1707.00	48.05	PK	H	24.10	2.83	27.93	47.05	41.03	74.00	32.97
1707.00	40.36	AV	H	24.10	2.83	27.93	39.36	33.34	54.00	20.66

802.11ac vht20(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5745 MHz										
5745.00	87.50	PK	H	31.44	4.96	0.00	123.90	117.88	N/A	N/A
5745.00	77.65	AV	H	31.44	4.96	0.00	114.05	108.03	N/A	N/A
5745.00	78.96	PK	V	31.44	4.96	0.00	115.36	109.34	N/A	N/A
5745.00	68.75	AV	V	31.44	4.96	0.00	105.15	99.13	N/A	N/A
5725.00	45.21	PK	H	31.42	4.96	0.00	81.59	75.57	122.20	46.63
5720.00	38.76	PK	H	31.41	4.96	0.00	75.13	69.11	110.80	41.69
5700.00	34.26	PK	H	31.38	4.97	0.00	70.61	64.59	105.20	40.61
5650.00	31.05	PK	H	31.31	4.95	0.00	67.31	61.29	68.20	6.91
11490.00	40.57	PK	H	38.29	6.98	26.57	59.27	53.25	74.00	20.75
11490.00	28.60	AV	H	38.29	6.98	26.57	47.30	41.28	54.00	12.72
17235.00	36.02	PK	H	41.02	9.01	25.11	60.94	54.92	68.20	13.28
3233.00	46.99	PK	H	26.40	3.88	27.26	50.01	43.99	68.20	24.21
1707.00	49.06	PK	H	24.10	2.83	27.93	48.06	42.04	74.00	31.96
1707.00	42.33	AV	H	24.10	2.83	27.93	41.33	35.31	54.00	18.69
Middle Channel: 5785 MHz										
5785.00	87.93	PK	H	31.50	4.94	0.00	124.37	118.35	N/A	N/A
5785.00	77.85	AV	H	31.50	4.94	0.00	114.29	108.27	N/A	N/A
5785.00	79.01	PK	V	31.50	4.94	0.00	115.45	109.43	N/A	N/A
5785.00	69.13	AV	V	31.50	4.94	0.00	105.57	99.55	N/A	N/A
11570.00	40.98	PK	H	38.36	6.98	26.97	59.35	53.33	74.00	20.67
11570.00	28.05	AV	H	38.36	6.98	26.97	46.42	40.4	54.00	13.60
17355.00	37.02	PK	H	41.28	9.04	25.16	62.18	56.16	68.20	12.04
3263.00	47.02	PK	H	26.49	3.89	27.23	50.17	44.15	68.20	24.05
1707.00	48.56	PK	H	24.10	2.83	27.93	47.56	41.54	74.00	32.46
1707.00	41.11	AV	H	24.10	2.83	27.93	40.11	34.09	54.00	19.91
High Channel: 5825 MHz										
5825.00	87.77	PK	H	31.56	4.94	0.00	124.27	118.25	N/A	N/A
5825.00	77.60	AV	H	31.56	4.94	0.00	114.10	108.08	N/A	N/A
5825.00	79.41	PK	V	31.56	4.94	0.00	115.91	109.89	N/A	N/A
5825.00	69.50	AV	V	31.56	4.94	0.00	106.00	99.98	N/A	N/A
5850.00	46.23	PK	H	31.59	4.95	0.00	82.77	76.75	122.20	45.45
5855.00	45.87	PK	H	31.60	4.95	0.00	82.42	76.4	110.80	34.40
5875.00	33.10	PK	H	31.63	4.95	0.00	69.68	63.66	105.20	41.54
5925.00	31.04	PK	H	31.70	4.95	0.00	67.69	61.67	68.20	6.53
11650.00	39.65	PK	H	38.42	6.99	26.84	58.22	52.2	74.00	21.80
11650.00	28.32	AV	H	38.42	6.99	26.84	46.89	40.87	54.00	13.13
17475.00	34.88	PK	H	41.55	9.06	24.55	60.94	54.92	68.20	13.28
3225.00	48.88	PK	H	26.38	3.88	27.27	51.87	45.85	68.20	22.35
1707.00	47.56	PK	H	24.10	2.83	27.93	46.56	40.54	74.00	33.46
1707.00	40.25	AV	H	24.10	2.83	27.93	39.25	33.23	54.00	20.77

802.11ac vht40(2Tx was the worst)




Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5755 MHz										
5755.00	85.44	PK	H	31.46	4.95	0.00	121.85	115.83	N/A	N/A
5755.00	75.29	AV	H	31.46	4.95	0.00	111.70	105.68	N/A	N/A
5755.00	76.54	PK	V	31.46	4.95	0.00	112.95	106.93	N/A	N/A
5755.00	66.70	AV	V	31.46	4.95	0.00	103.11	97.09	N/A	N/A
5725.00	46.31	PK	H	31.42	4.96	0.00	82.69	76.67	122.20	45.53
5720.00	46.23	PK	H	31.41	4.96	0.00	82.60	76.58	110.80	34.22
5700.00	40.06	PK	H	31.38	4.97	0.00	76.41	70.39	105.20	34.81
5650.00	31.22	PK	H	31.31	4.95	0.00	67.48	61.46	68.20	6.74
11510.00	37.22	PK	H	38.31	6.98	26.58	55.93	49.91	74.00	24.09
11510.00	22.12	AV	H	38.31	6.98	26.58	40.83	34.81	54.00	19.19
17265.00	36.65	PK	H	41.08	9.02	24.84	61.91	55.89	68.20	12.31
3225.00	47.22	PK	H	26.38	3.88	27.27	50.21	44.19	68.20	24.01
1707.00	48.13	PK	H	24.10	2.83	27.93	47.13	41.11	74.00	32.89
1707.00	41.32	AV	H	24.10	2.83	27.93	40.32	34.3	54.00	19.70
High Channel: 5795 MHz										
5795.00	85.48	PK	H	31.51	4.94	0.00	121.93	115.91	N/A	N/A
5795.00	75.36	AV	H	31.51	4.94	0.00	111.81	105.79	N/A	N/A
5795.00	76.28	PK	V	31.51	4.94	0.00	112.73	106.71	N/A	N/A
5795.00	66.30	AV	V	31.51	4.94	0.00	102.75	96.73	N/A	N/A
5850.00	40.27	PK	H	31.59	4.95	0.00	76.81	70.79	122.20	51.41
5855.00	38.13	PK	H	31.60	4.95	0.00	74.68	68.66	110.80	42.14
5875.00	35.44	PK	H	31.63	4.95	0.00	72.02	66	105.20	39.20
5925.00	29.87	PK	H	31.70	4.95	0.00	66.52	60.5	68.20	7.70
11590.00	38.06	PK	H	38.37	6.99	27.10	56.32	50.3	74.00	23.70
11590.00	22.40	AV	H	38.37	6.99	27.10	40.66	34.64	54.00	19.36
17385.00	37.17	PK	H	41.35	9.04	25.51	62.05	56.03	68.20	12.17
3236.00	47.40	PK	H	26.41	3.88	27.26	50.43	44.41	68.20	23.79
1707.00	48.15	PK	H	24.10	2.83	27.93	47.15	41.13	74.00	32.87
1707.00	40.66	AV	H	24.10	2.83	27.93	39.66	33.64	54.00	20.36


802.11ac vht80(2Tx was the worst)

Frequency (MHz)	Receiver		Rx Antenna		Cable loss (dB)	Amplifier Gain (dB)	Corrected Amplitude (dBμV/m)	Extrapolation result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Detector	Polar (H/V)	Factor (dB/m)						
Low Channel: 5775 MHz										
5775.00	81.22	PK	H	31.49	4.95	0.00	117.66	111.64	N/A	N/A
5775.00	70.06	AV	H	31.49	4.95	0.00	106.50	100.48	N/A	N/A
5775.00	72.07	PK	V	31.49	4.95	0.00	108.51	102.49	N/A	N/A
5775.00	62.07	AV	V	31.49	4.95	0.00	98.51	92.49	N/A	N/A
5725.00	37.00	PK	H	31.42	4.96	0.00	73.38	67.36	122.20	54.84
5720.00	40.40	PK	H	31.41	4.96	0.00	76.77	70.75	110.80	40.05
5700.00	40.00	PK	H	31.38	4.97	0.00	76.35	70.33	105.20	34.87
5650.00	30.24	PK	H	31.31	4.95	0.00	66.50	60.48	68.20	7.72
5850.00	42.04	PK	H	31.59	4.95	0.00	78.58	72.56	122.20	49.64
5855.00	39.54	PK	H	31.60	4.95	0.00	76.09	70.07	110.80	40.73
5875.00	41.23	PK	H	31.63	4.95	0.00	77.81	71.79	105.20	33.41
5925.00	33.47	PK	H	31.70	4.95	0.00	70.12	64.1	68.20	4.10
11550.00	37.50	PK	H	38.34	6.98	26.84	55.98	49.96	74.00	24.04
11550.00	22.21	AV	H	38.34	6.98	26.84	40.69	34.67	54.00	19.33
17325.00	35.98	PK	H	41.22	9.03	24.81	61.42	55.4	68.20	12.80
3216.00	48.86	PK	H	26.35	3.88	27.28	51.81	45.79	68.20	22.41
1707.00	47.96	PK	H	24.10	2.83	27.93	46.96	40.94	74.00	33.06
1707.00	40.57	AV	H	24.10	2.83	27.93	39.57	33.55	54.00	20.45

Test Plots(For worst mode 802.11a chain 0 5825MHz)
Horizontal



Fundamental
Test with Band
Rejection Filter

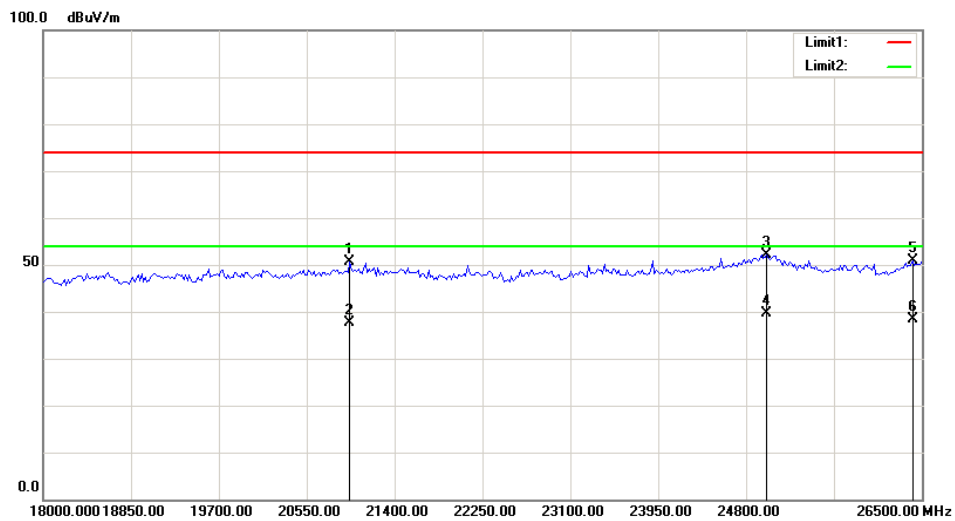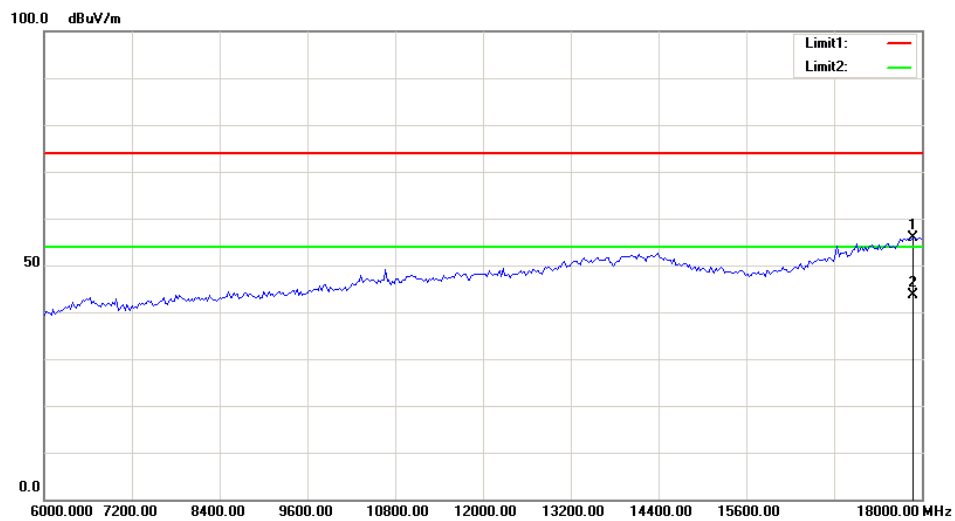
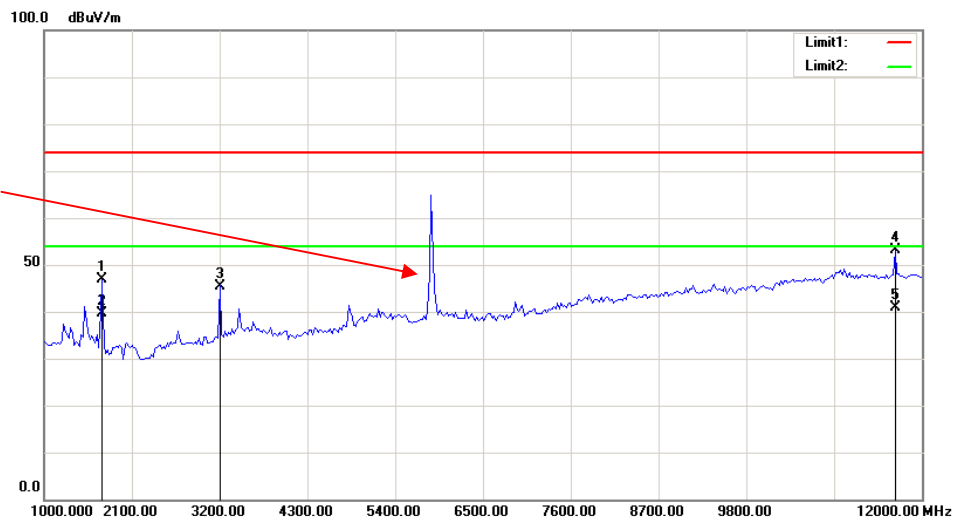


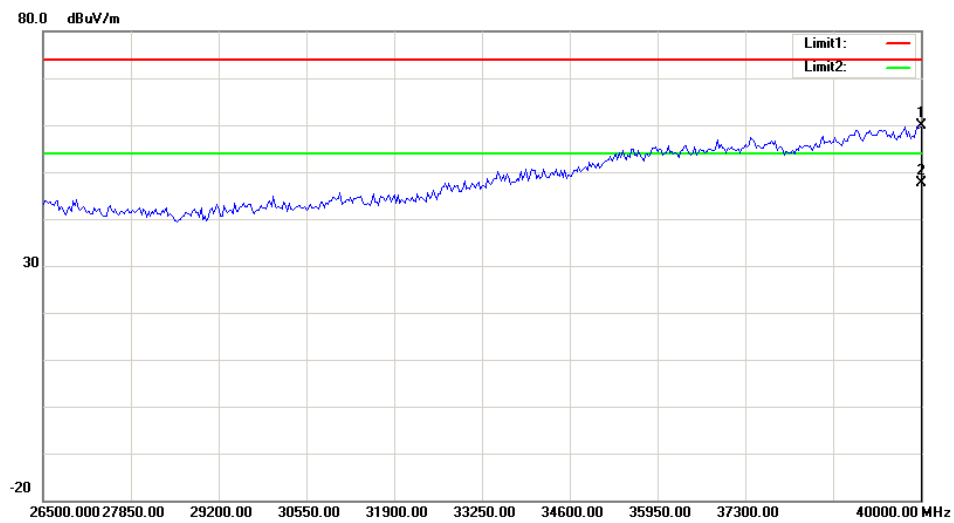

Vertical

Fundamental
Test with Band
Rejection Filter

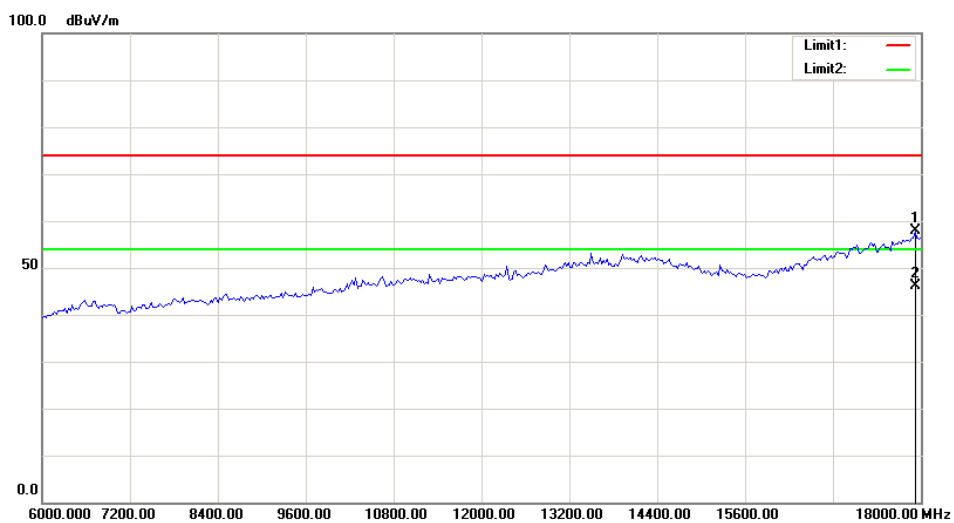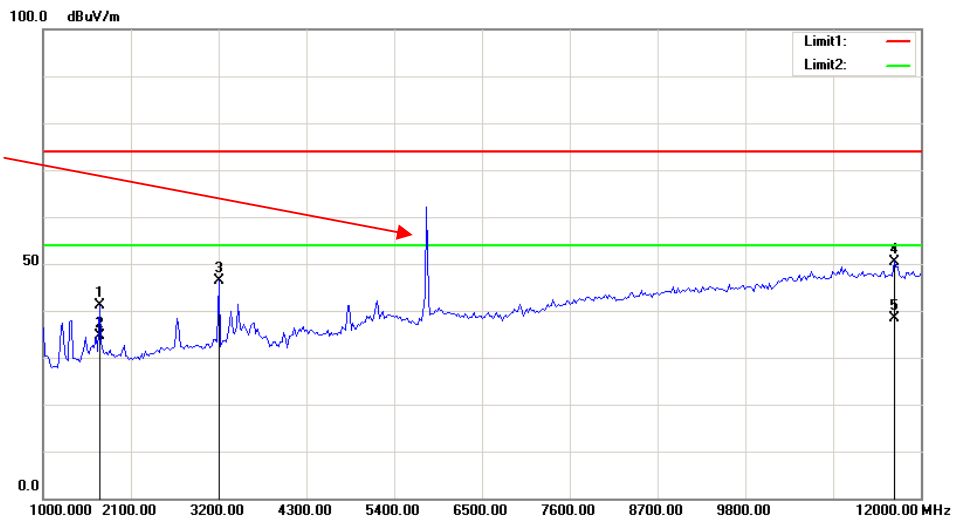

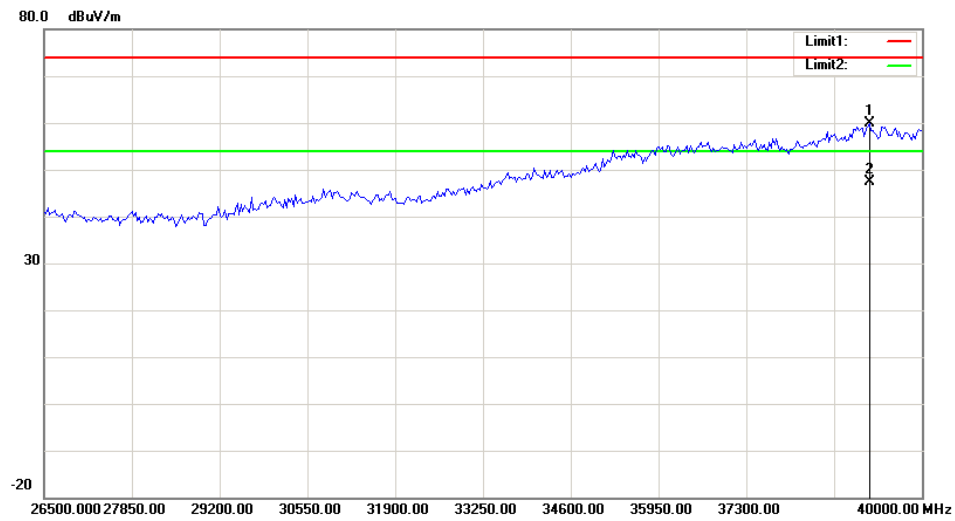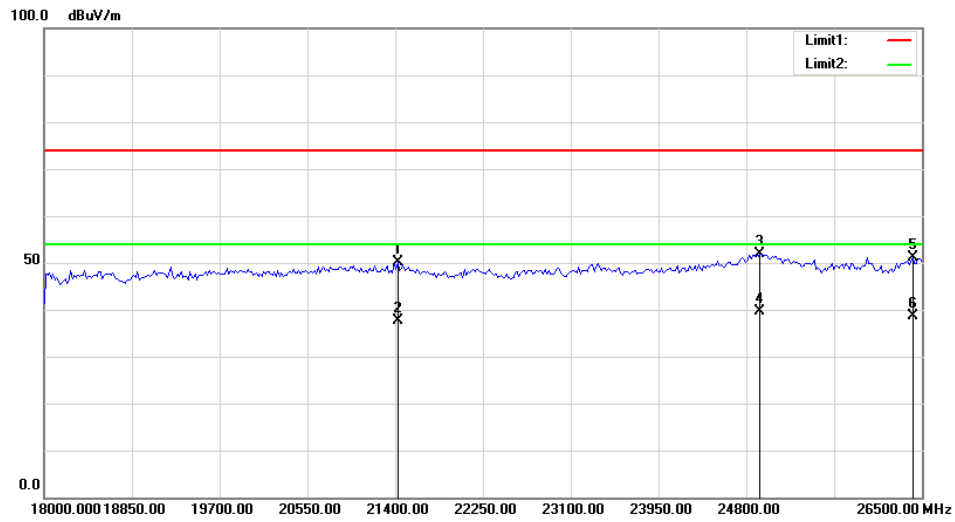

FCC §15.407(a)(e)–EMISSION BANDWIDTH AND OCCUPIED BANDWIDTH**Applicable Standard**

15.407(a) (e)

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/31	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data**Environmental Conditions**

Temperature:	28.2 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa
Tester:	Elena Lei
Test Date:	2019-07-17

Test Result: Pass.

Please refer to the following tables and plots.

Test mode: Transmitting (test was only performed at chain 0)


5150-5250MHz:

Mode	Frequency (MHz)	26 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5180	19.319	16.560
	5200	19.319	16.560
	5240	19.319	16.560
802.11n ht20	5180	20.200	17.680
	5200	20.200	17.680
	5240	20.200	17.680
802.11n ht40	5190	38.798	36.000
	5230	38.798	36.160
802.11ac vht20	5180	20.200	17.680
	5200	20.200	17.680
	5240	20.200	17.680
802.11ac vht40	5190	38.798	36.160
	5230	38.798	36.000
802.11ac vht80	5210	83.687	76.160


5725-5850MHz:

Mode	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
802.11 a	5745	16.192	16.560
	5785	16.192	16.560
	5825	16.192	16.560
802.11n ht20	5745	17.395	17.680
	5785	17.475	17.680
	5825	17.475	17.680
802.11n ht40	5755	35.110	36.160
	5795	34.950	36.160
802.11ac vht20	5745	17.475	17.680
	5785	17.475	17.680
	5825	17.475	17.680
802.11ac vht40	5755	34.950	36.160
	5795	35.110	36.160
802.11ac vht80	5775	75.671	76.160


Note: the 99% Occupied Bandwidth have not fall into the band 5250-5350MHz or 5470-5725MHz, please refer to the test plots of 99% Occupied Bandwidth.

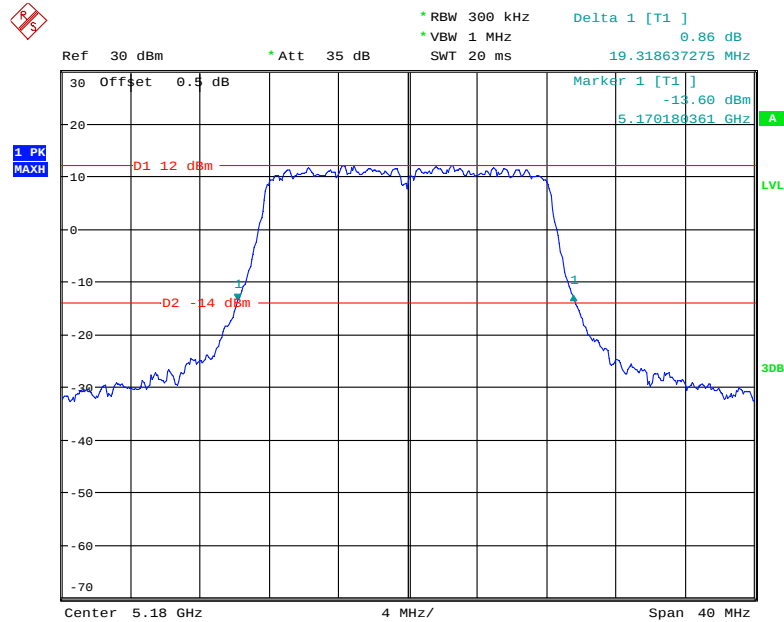**5150-5250MHz:
26dB Emission Bandwidth:****802.11a Low Channel**


Date: 17.JUL.2019 17:21:34

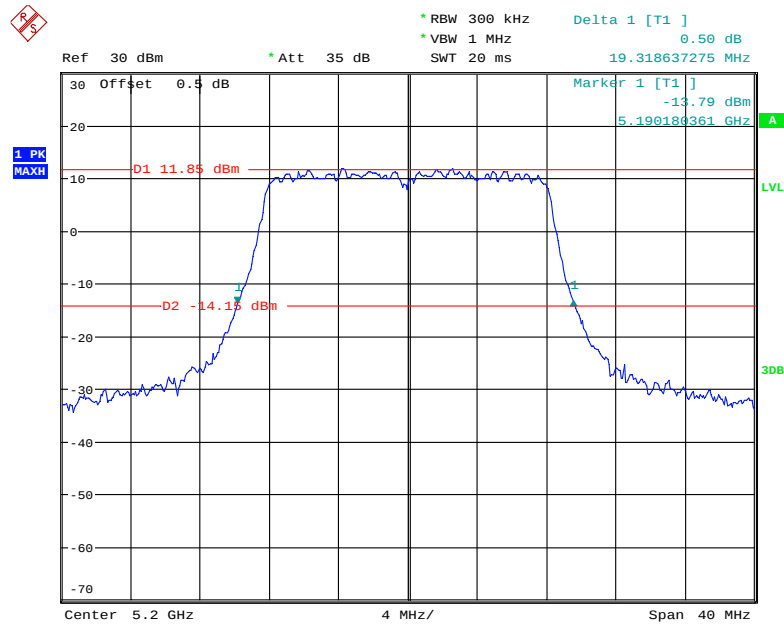802.11a Middle Channel

Date: 17.JUL.2019 17:22:42

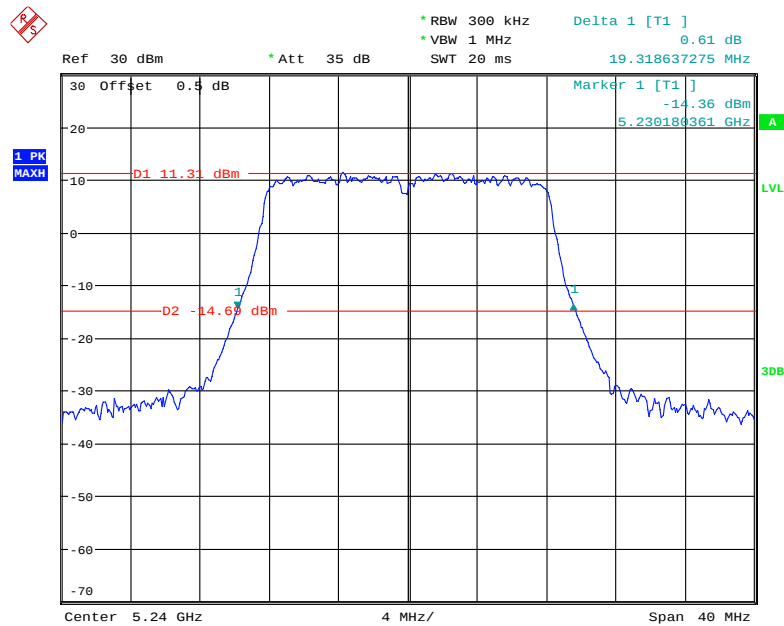
802.11a High Channel

Date: 17.JUL.2019 17:23:40

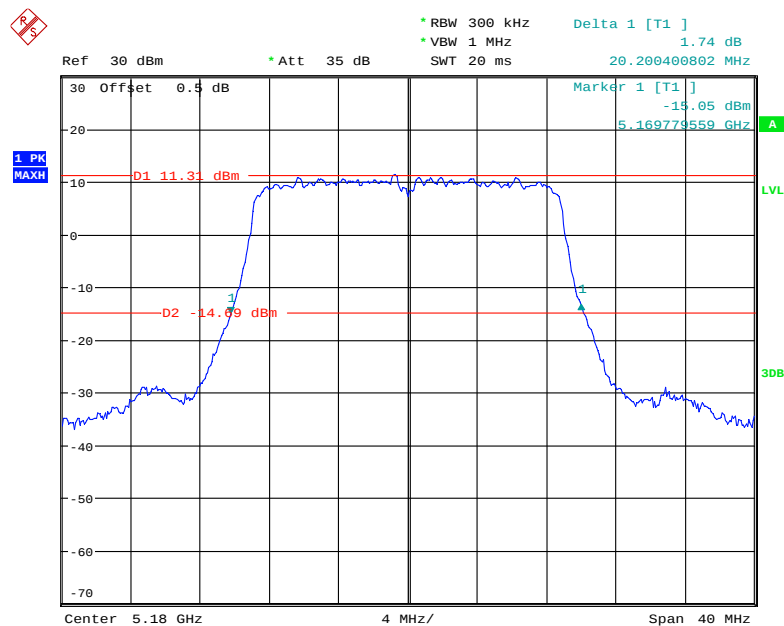802.11n ht20 Low Channel


Date: 17.JUL.2019 17:25:14

802.11n ht20 Middle Channel

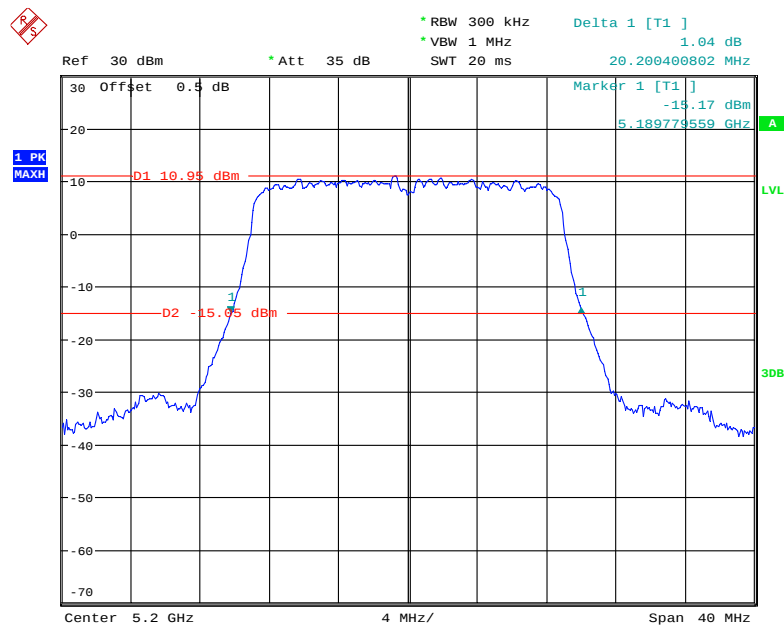


Date: 17.JUL.2019 17:26:29

802.11n ht20 High Channel

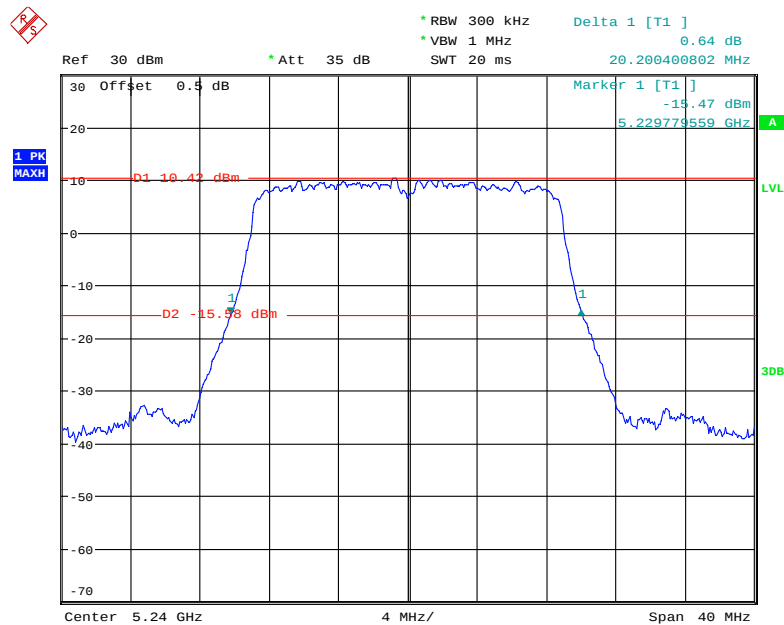


Date: 17.JUL.2019 17:27:54

802.11n ht40 Low Channel

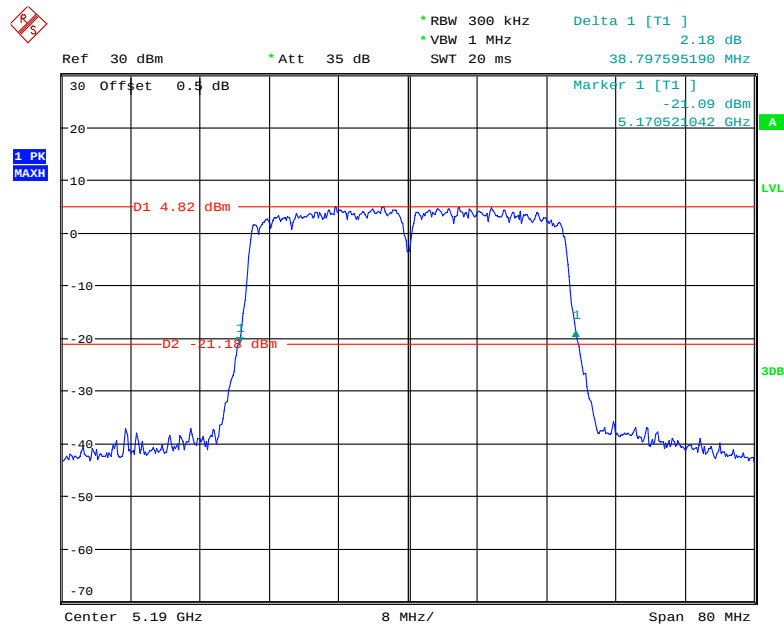


Date: 17.JUL.2019 17:33:17

802.11n ht40 High Channel

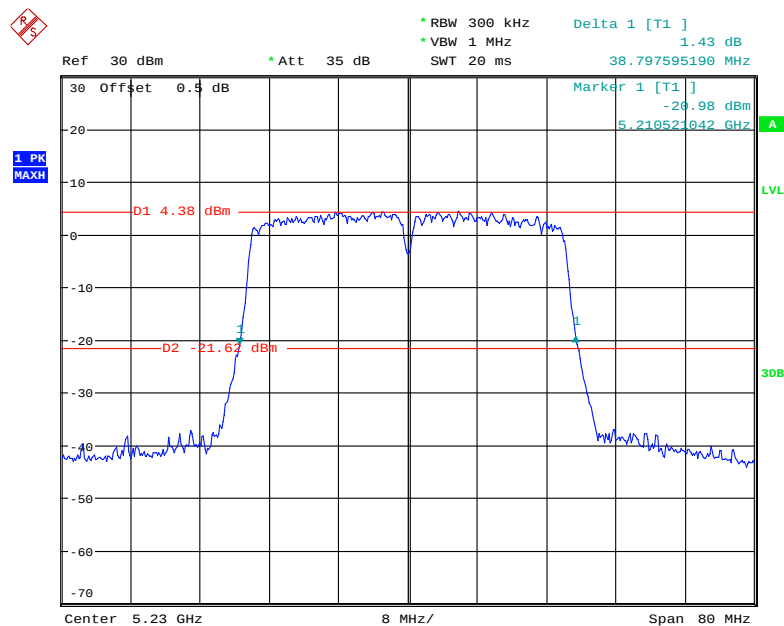


Date: 17.JUL.2019 17:34:49

802.11ac ht20 Low Channel

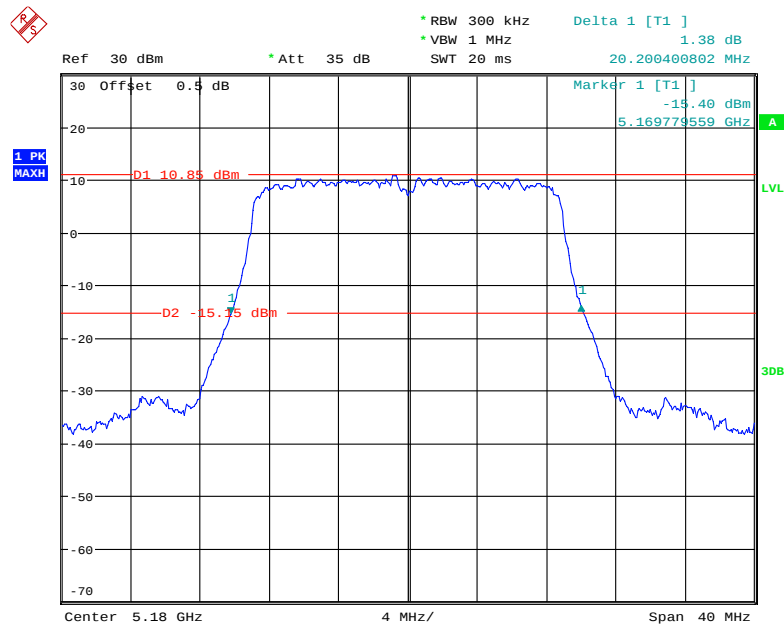


Date: 17.JUL.2019 17:29:27

802.11ac ht20 Middle Channel

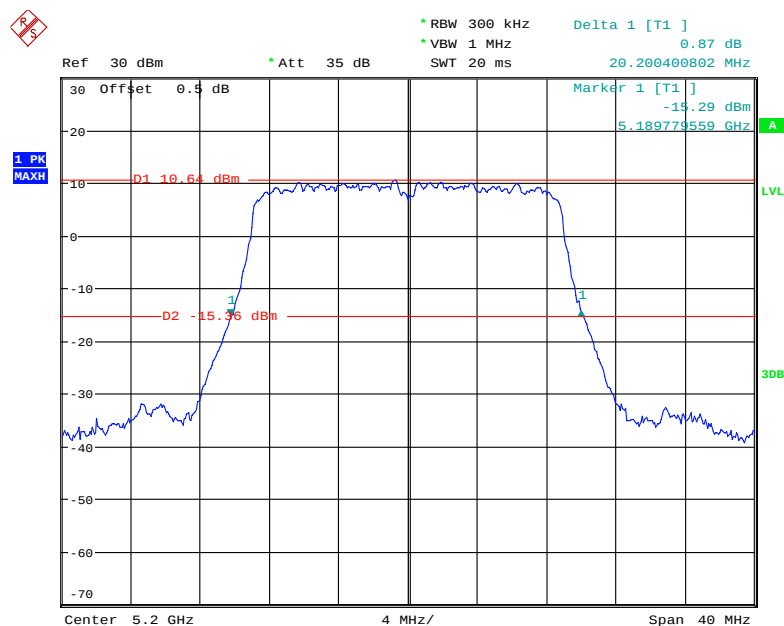


Date: 17.JUL.2019 17:30:59

802.11ac ht20 High Channel

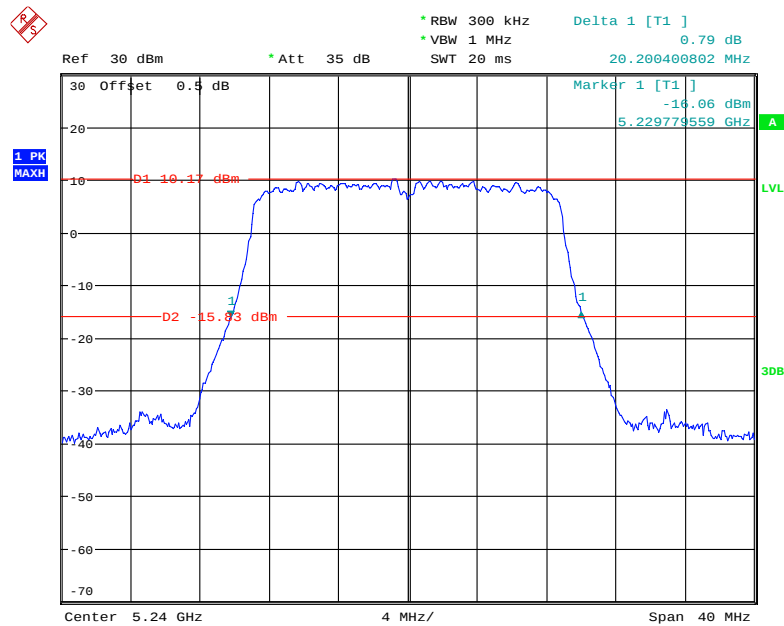


Date: 17.JUL.2019 17:32:05

802.11ac ht40 Low Channel

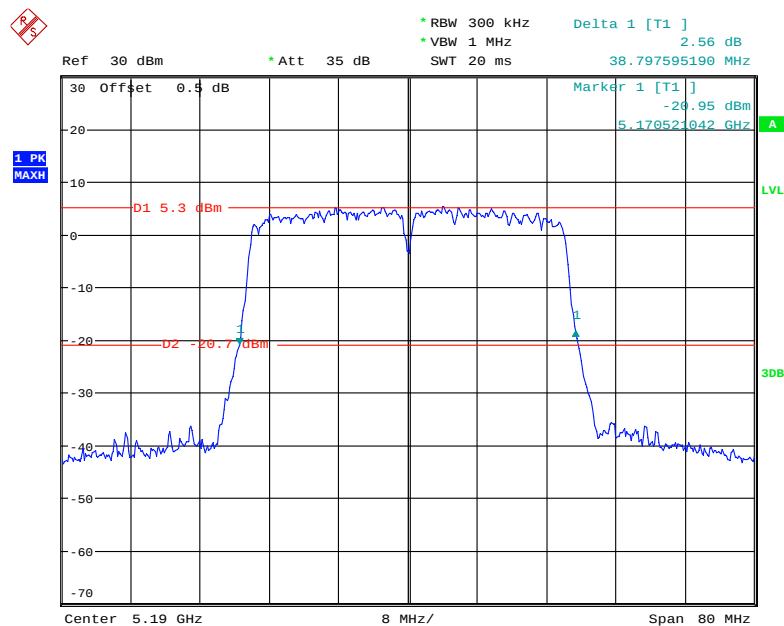


Date: 17.JUL.2019 17:36:56

802.11ac vht40 High Channel

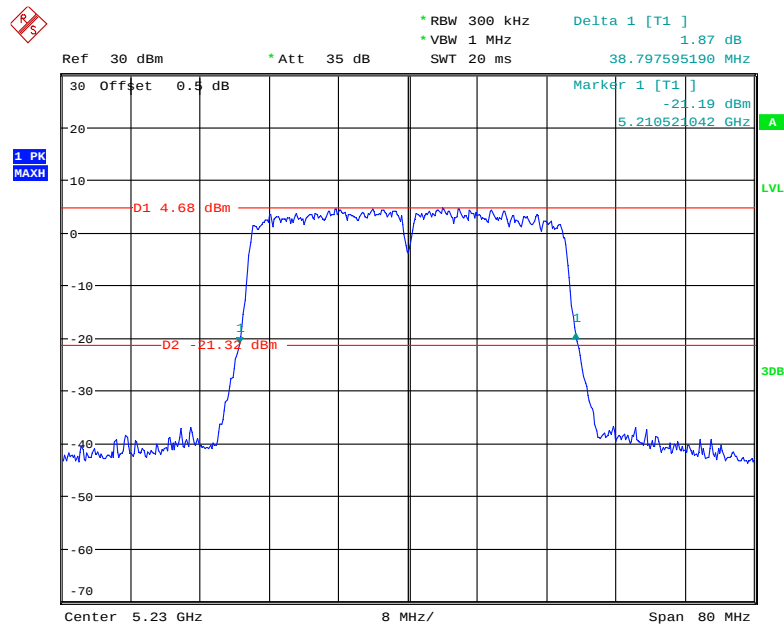


Date: 17.JUL.2019 17:38:02


802.11ac vht80

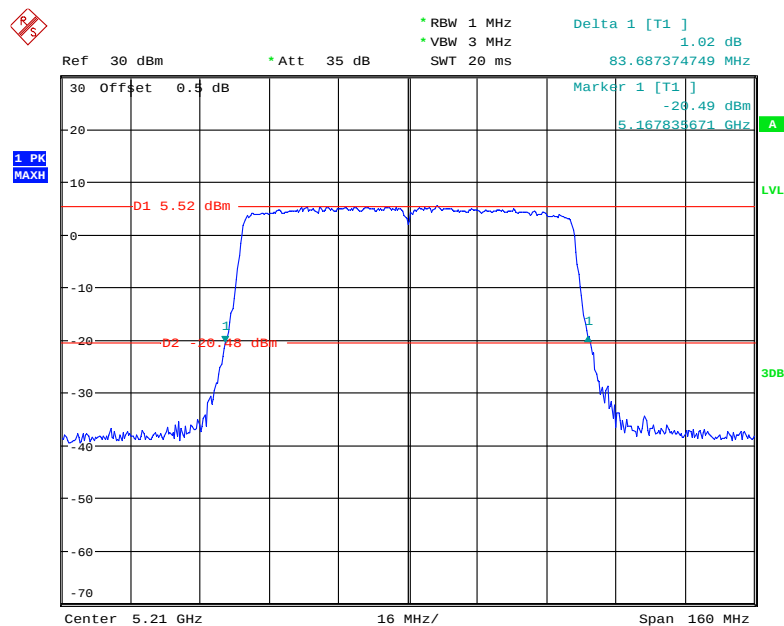

Date: 17.JUL.2019 17:39:36

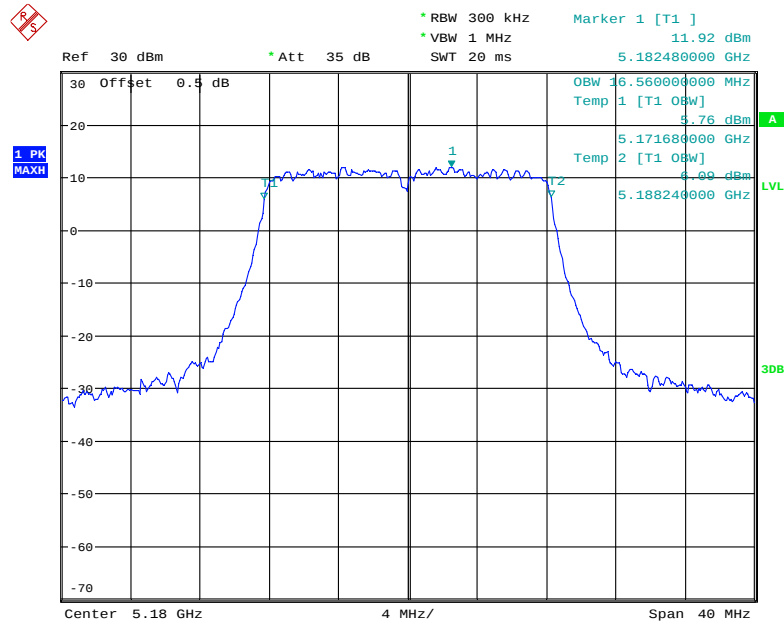
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 17.JUL.2019 17:21:50

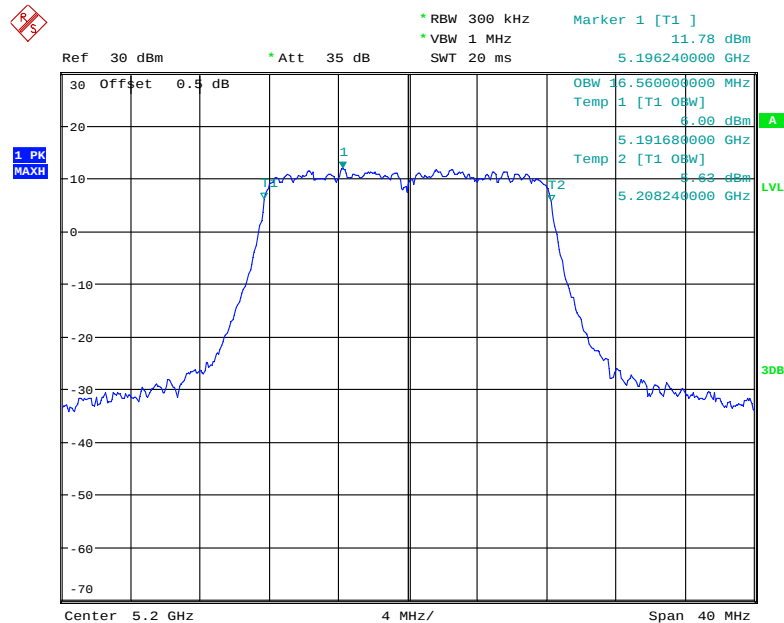802.11a Middle Channel


Date: 17.JUL.2019 17:22:57

802.11a High Channel

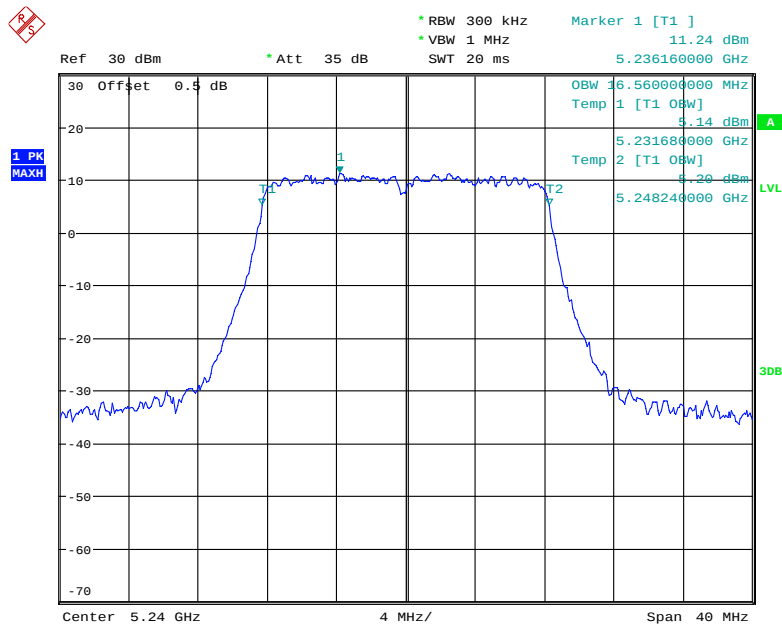


Date: 17.JUL.2019 17:23:58

802.11n ht20 Low Channel

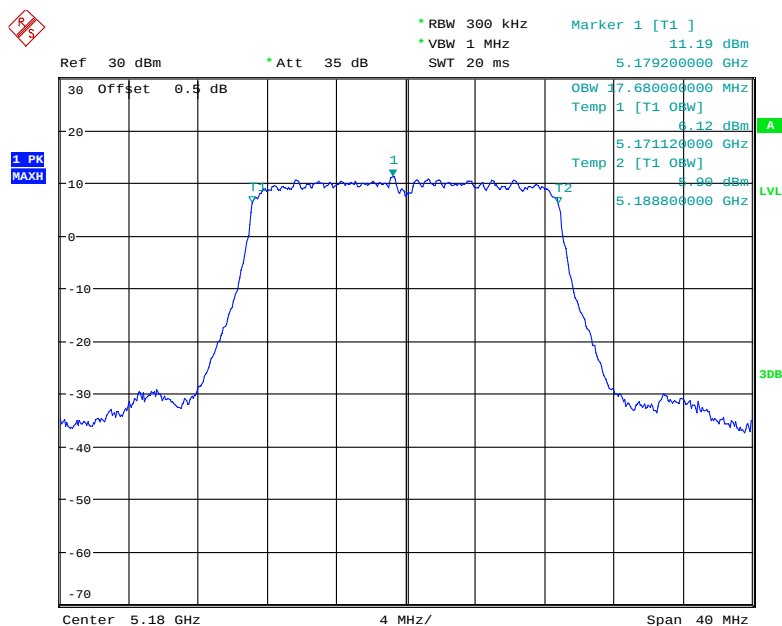


Date: 17.JUL.2019 17:25:33

802.11n ht20 Middle Channel

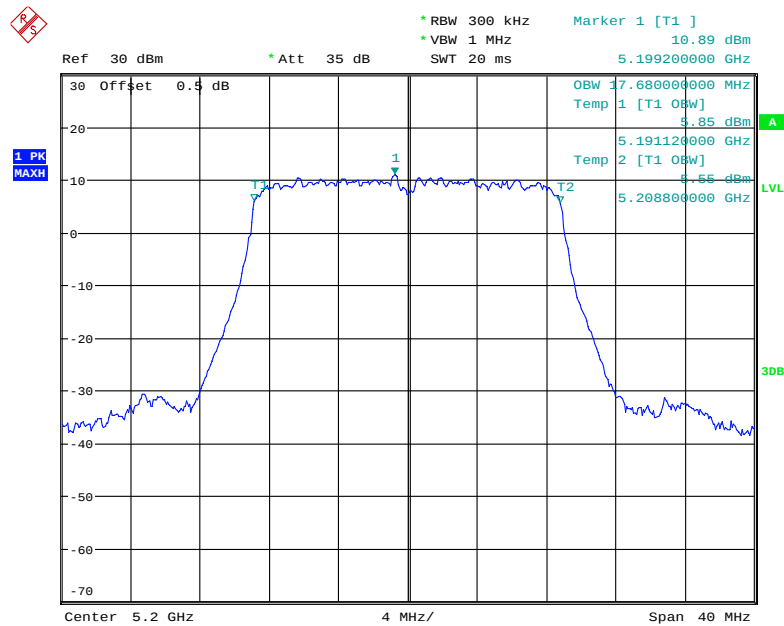


Date: 17.JUL.2019 17:26:47

802.11n ht20 High Channel

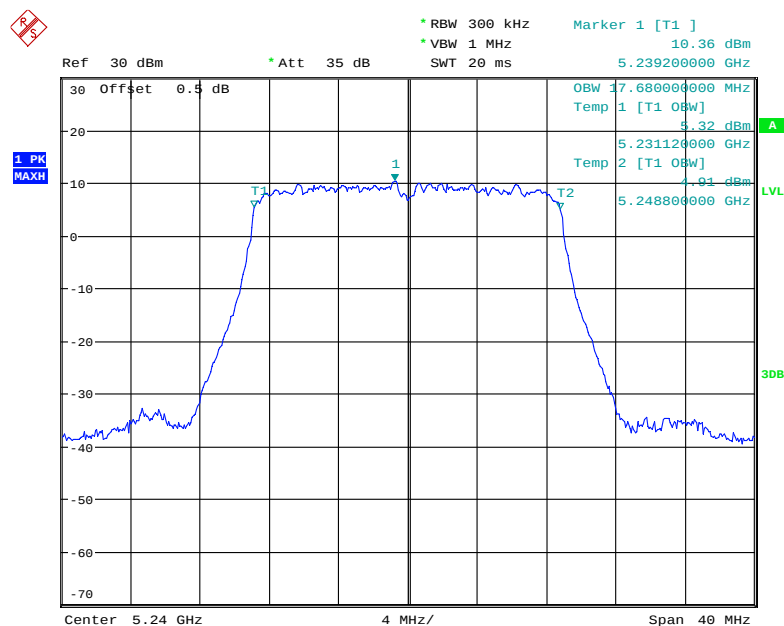


Date: 17.JUL.2019 17:28:20

802.11n ht40 Low Channel

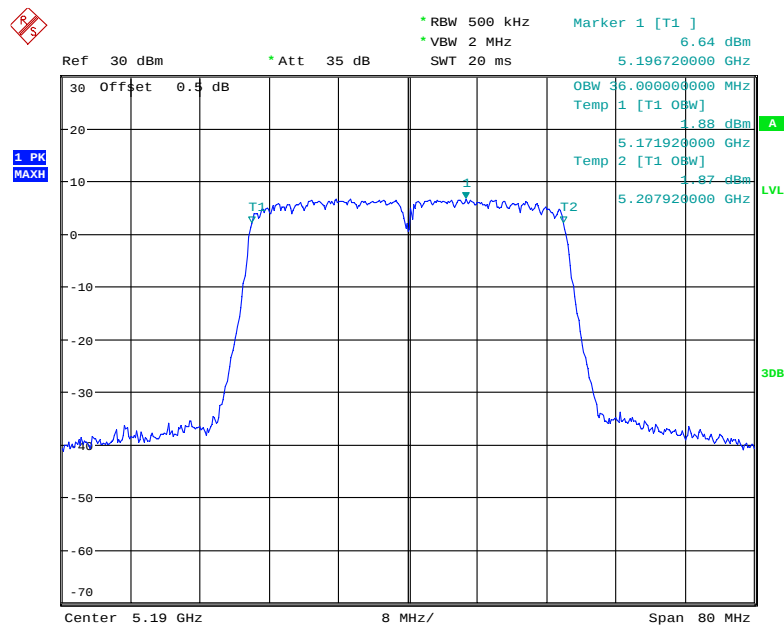


Date: 17.JUL.2019 17:33:47

802.11n ht40 High Channel

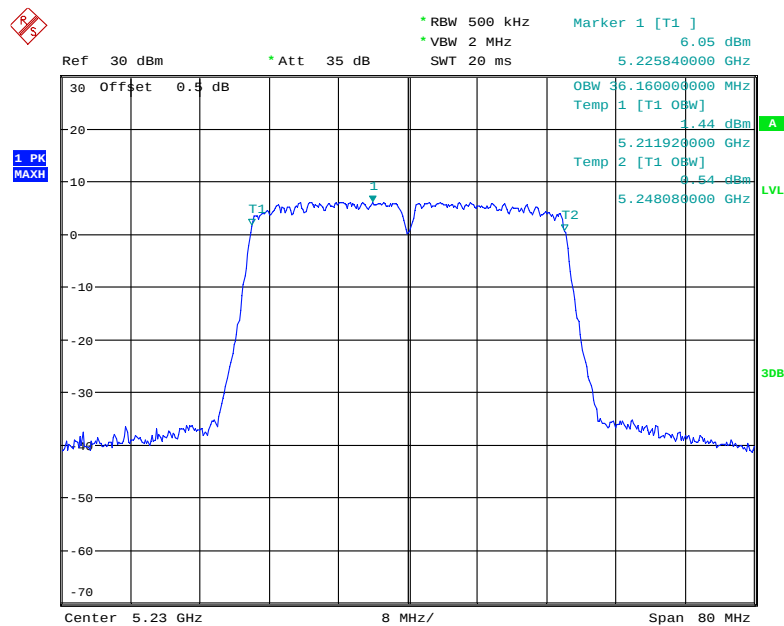


Date: 17.JUL.2019 17:35:08

802.11ac ht20 Low Channel

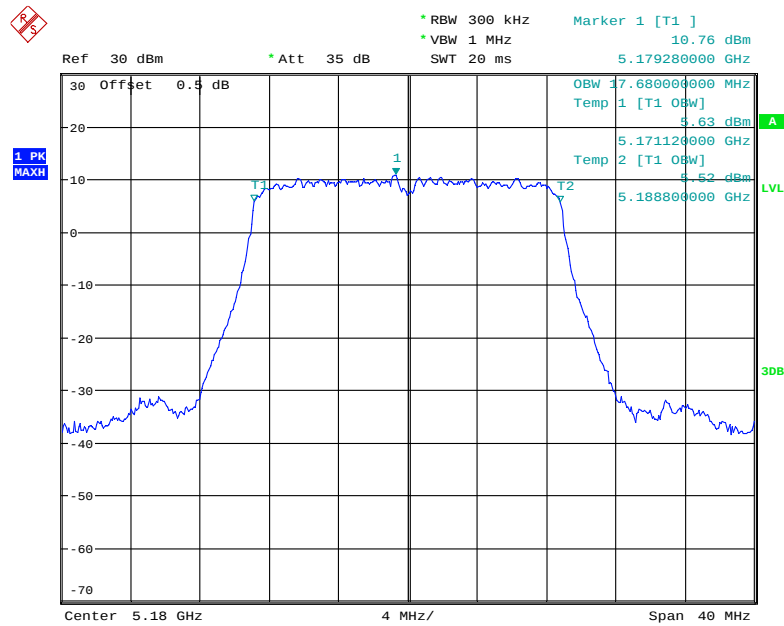


Date: 17.JUL.2019 17:29:46

802.11ac ht20 Middle Channel

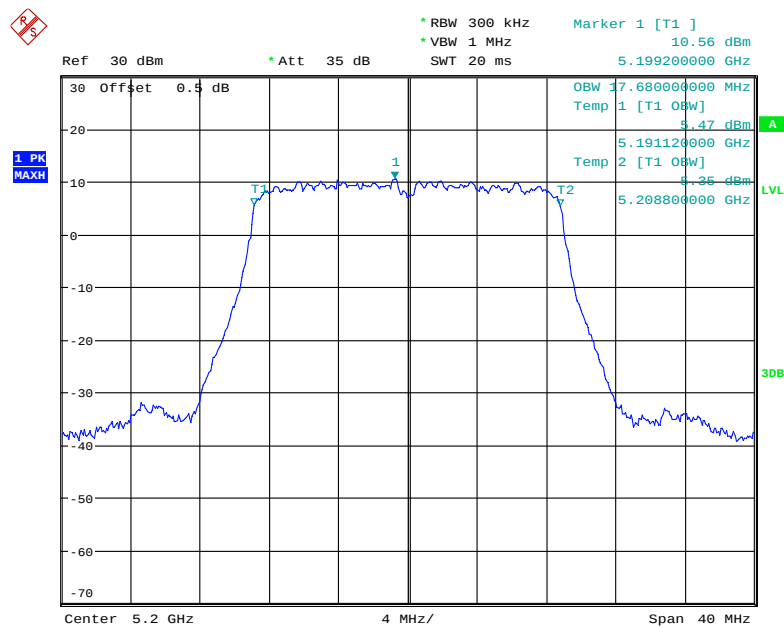


Date: 17.JUL.2019 17:31:21

802.11ac ht20 High Channel

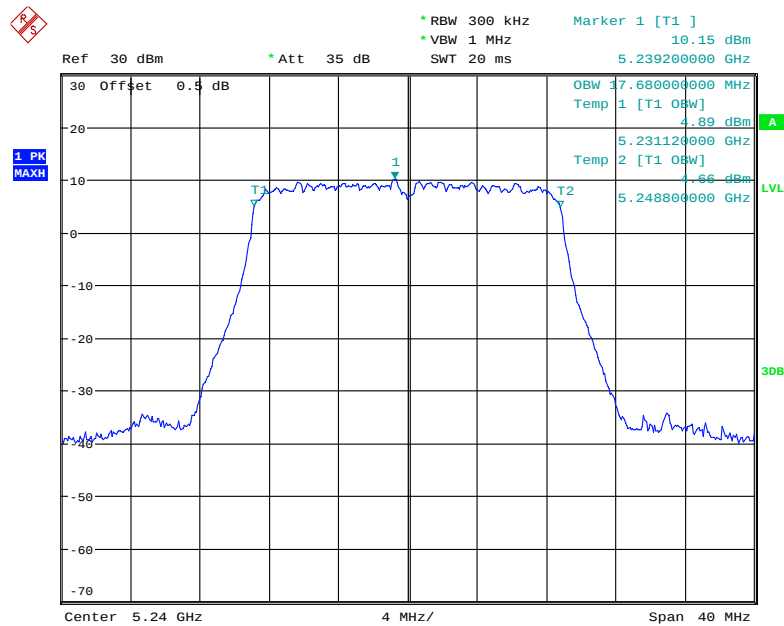


Date: 17.JUL.2019 17:32:23

802.11ac ht40 Low Channel

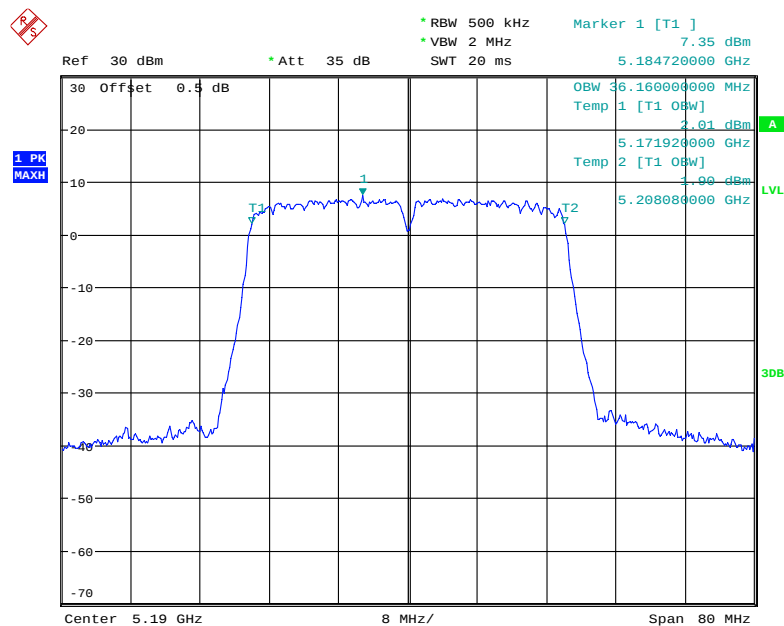


Date: 17.JUL.2019 17:37:14

802.11ac vht40 High Channel

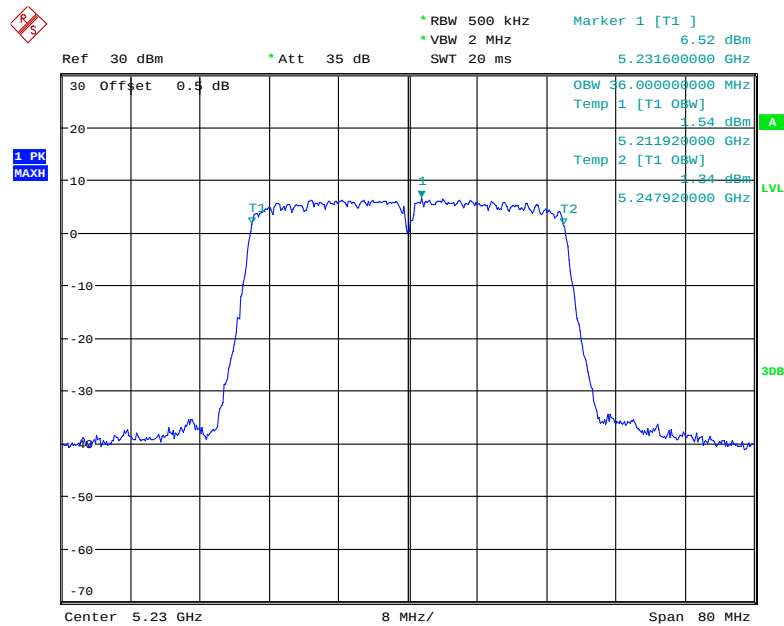

Date: 17.JUL.2019 17:38:20


802.11ac vht80

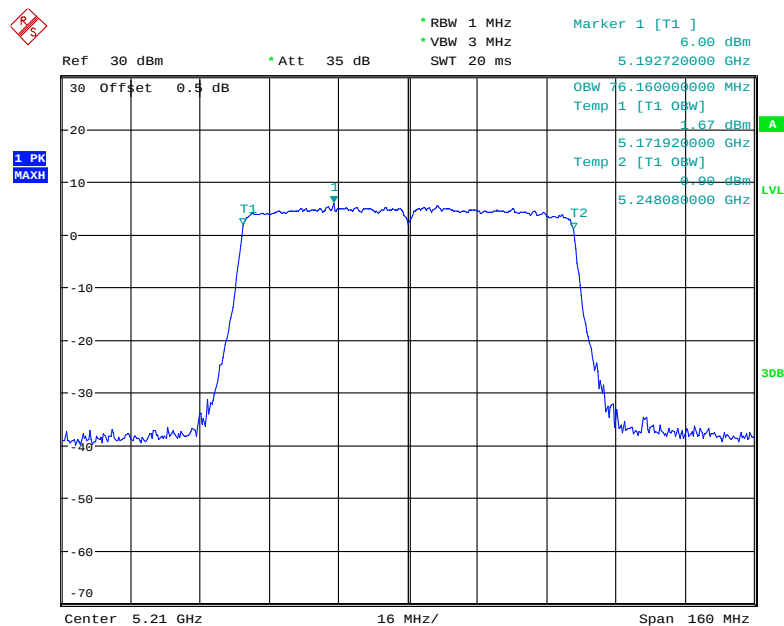

Date: 17.JUL.2019 17:40:02


5725-5850MHz:
6dB Emission Bandwidth:

802.11a Low Channel

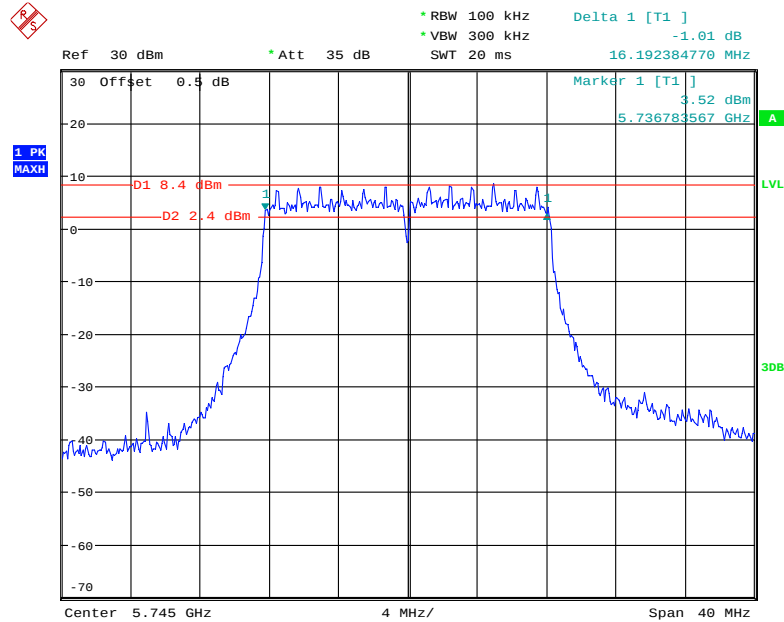


Date: 17.JUL.2019 17:54:45

802.11a Middle Channel

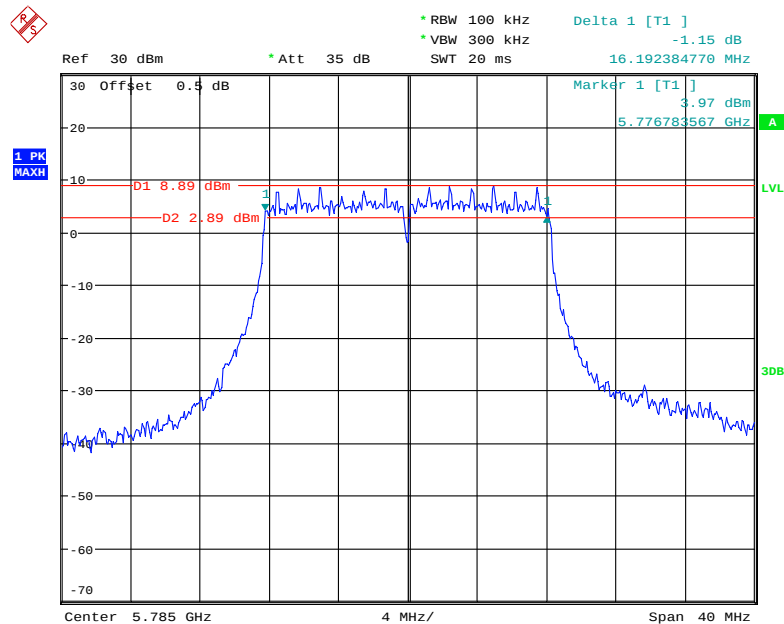


Date: 17.JUL.2019 17:55:50

802.11a High Channel

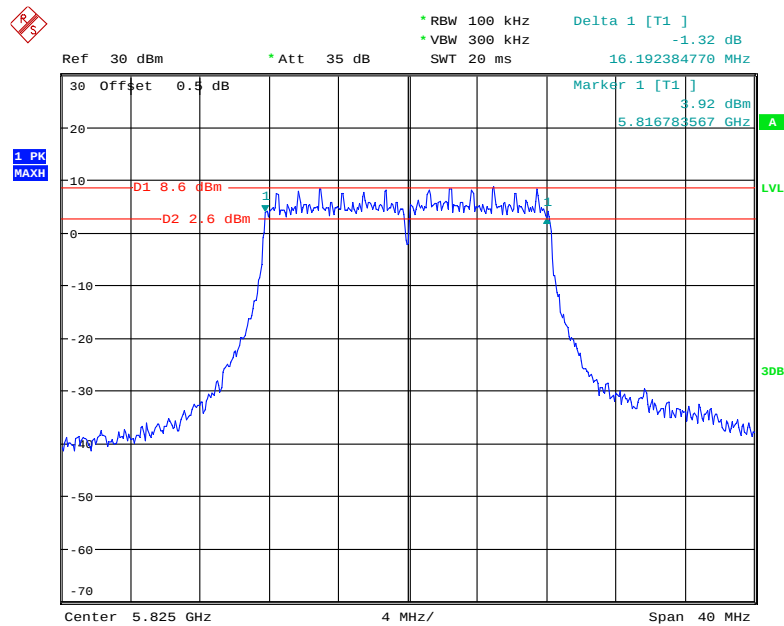


Date: 17.JUL.2019 17:56:53

802.11n ht20 Low Channel

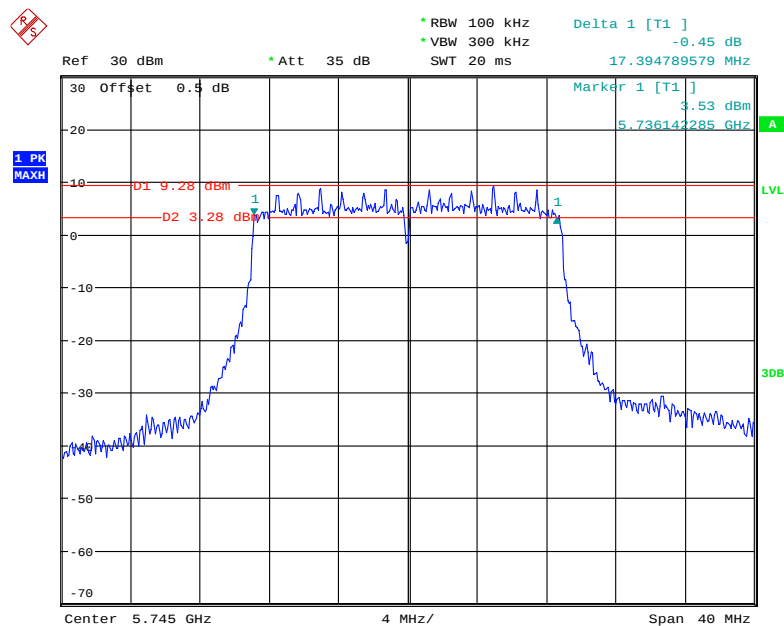


Date: 17.JUL.2019 17:58:02

802.11n ht20 Middle Channel

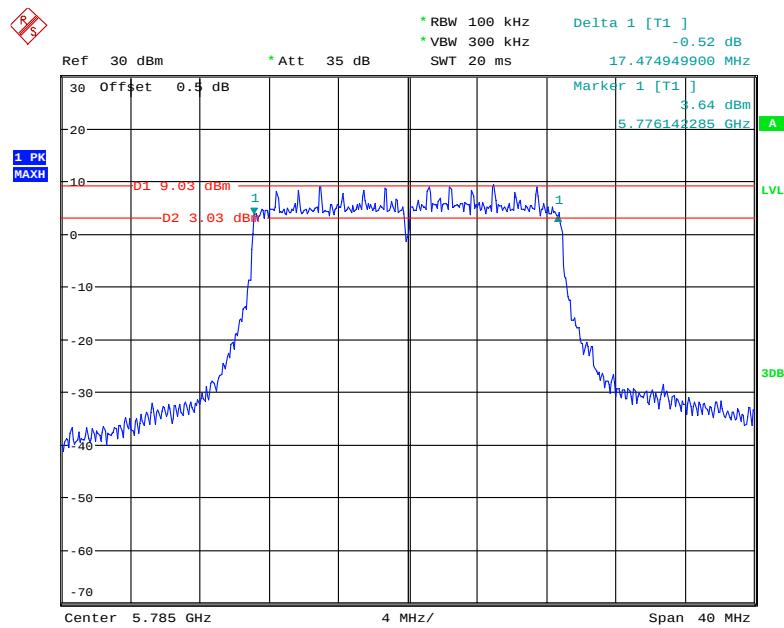


Date: 17.JUL.2019 17:59:01

802.11n ht20 High Channel

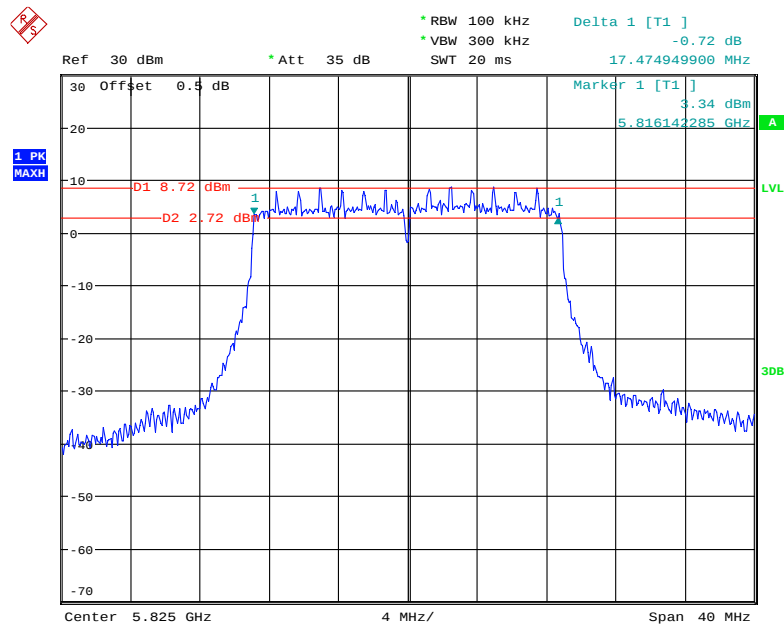


Date: 17.JUL.2019 18:00:33

802.11n ht40 Low Channel

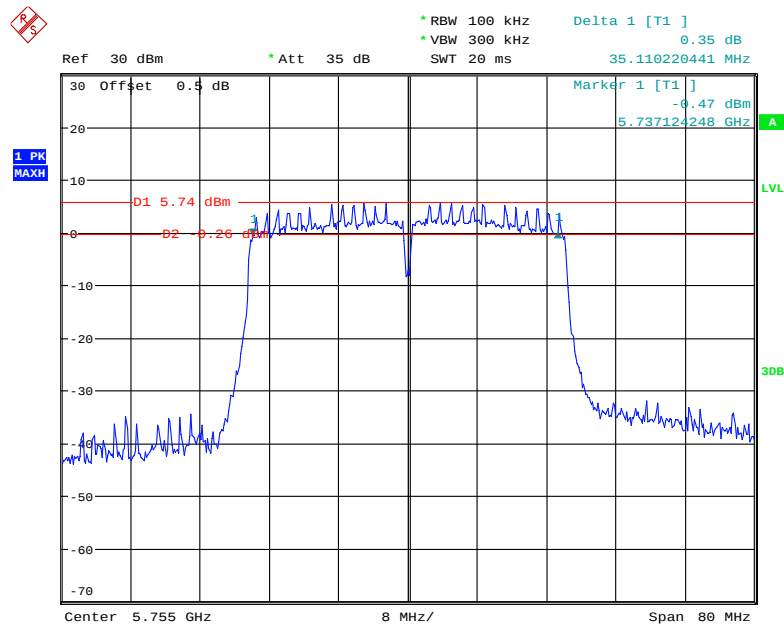


Date: 17.JUL.2019 18:05:42

802.11n ht40 High Channel

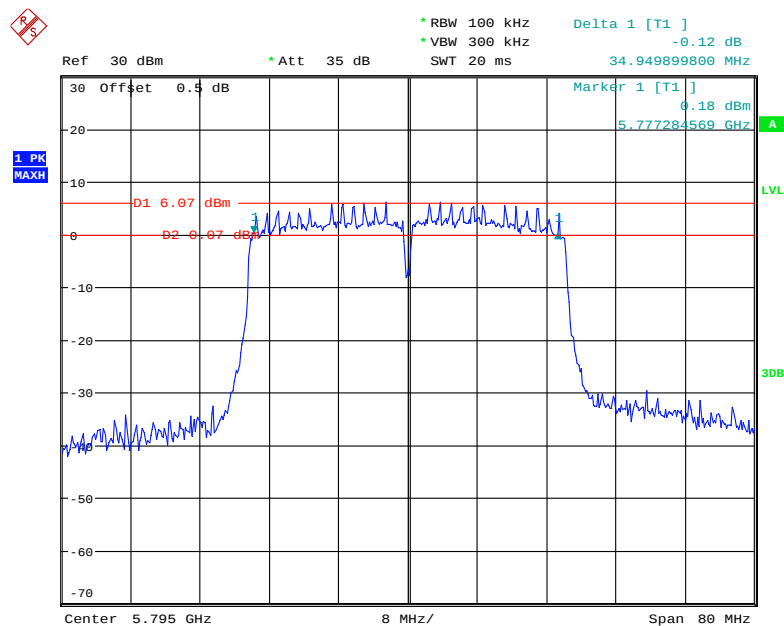


Date: 17.JUL.2019 18:07:10

802.11ac ht20 Low Channel

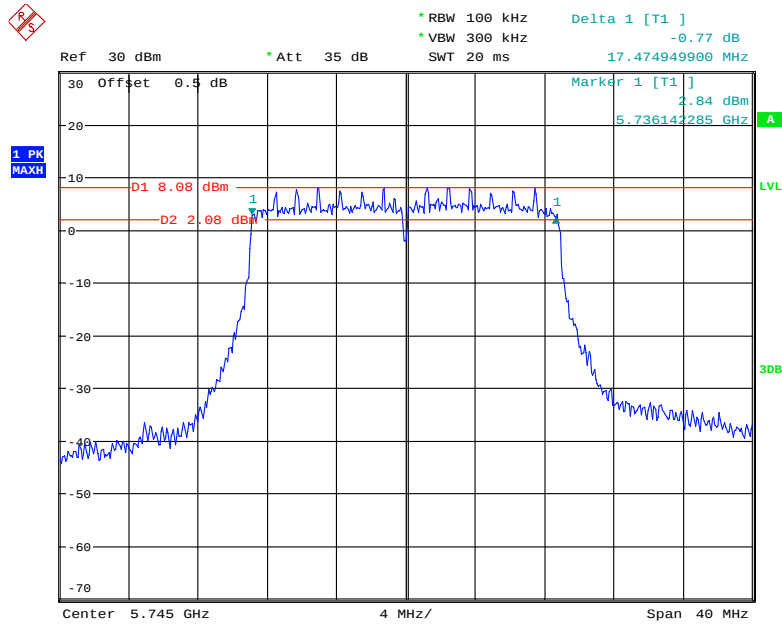


Date: 17.JUL.2019 18:01:40

802.11ac ht20 Middle Channel

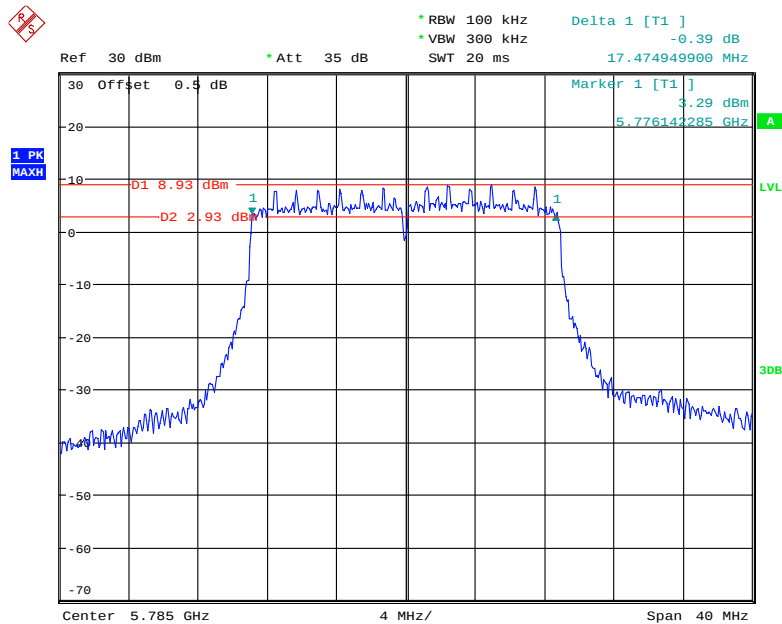


Date: 17.JUL.2019 18:03:02

802.11ac ht20 High Channel

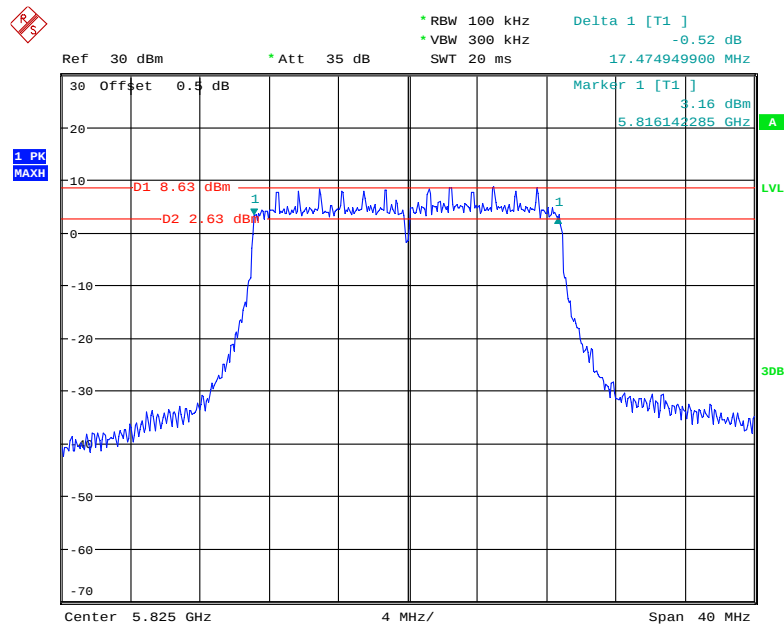


Date: 17.JUL.2019 18:04:00

802.11ac ht40 Low Channel

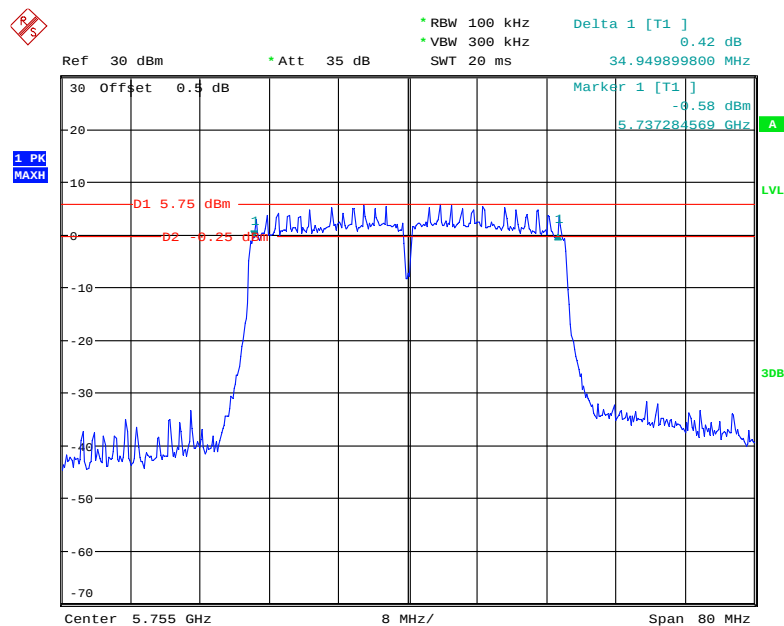


Date: 17.JUL.2019 18:08:23

802.11ac vht40 High Channel

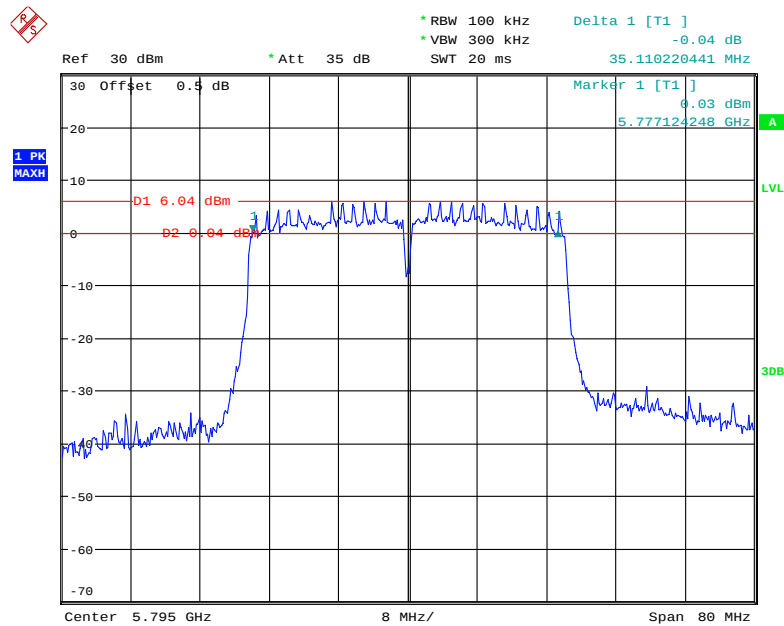


Date: 17.JUL.2019 18:09:48


802.11ac vht80

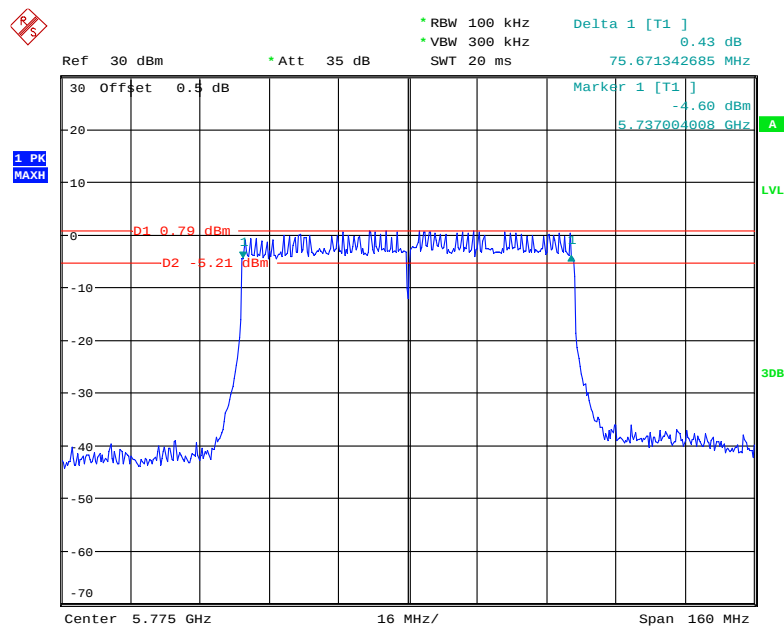

Date: 17.JUL.2019 18:11:26

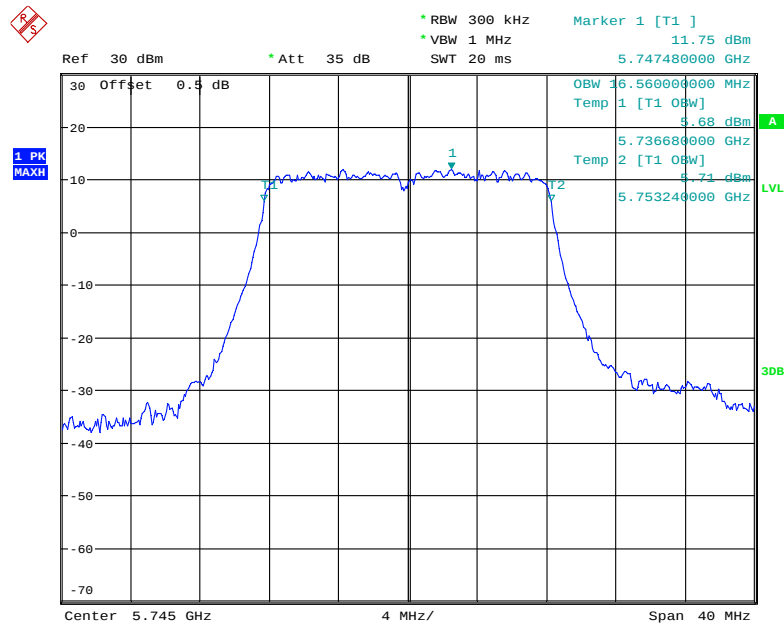
99% Occupied Bandwidth:**802.11a Low Channel**

Date: 17.JUL.2019 17:55:04

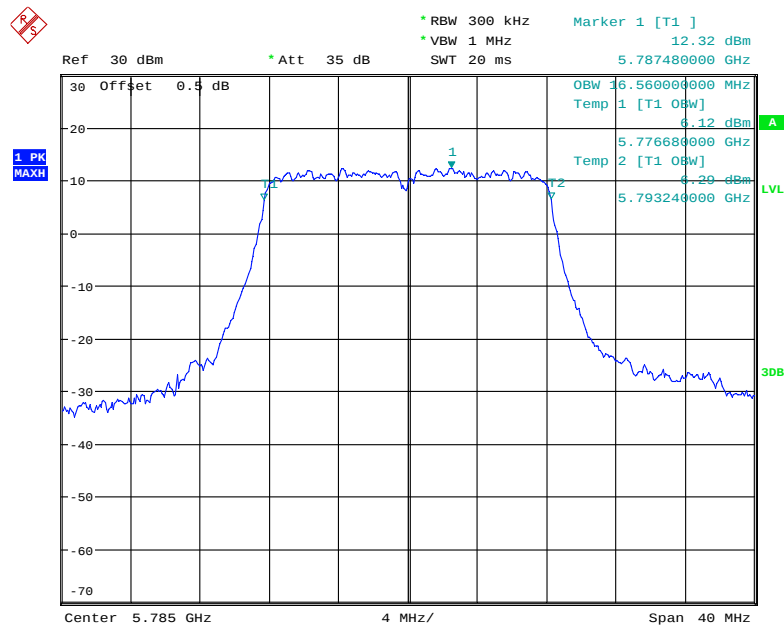802.11a Middle Channel


Date: 17.JUL.2019 17:56:06

802.11a High Channel

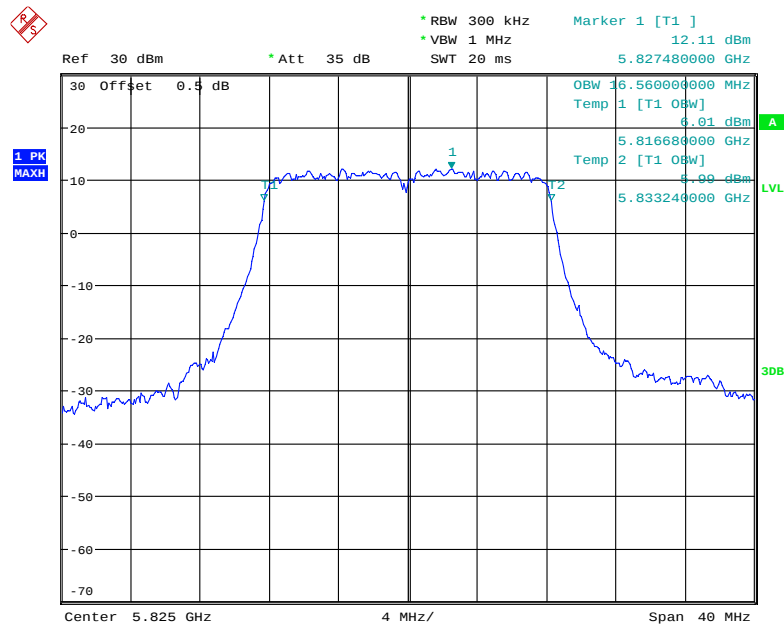


Date: 17.JUL.2019 17:57:12

802.11n ht20 Low Channel

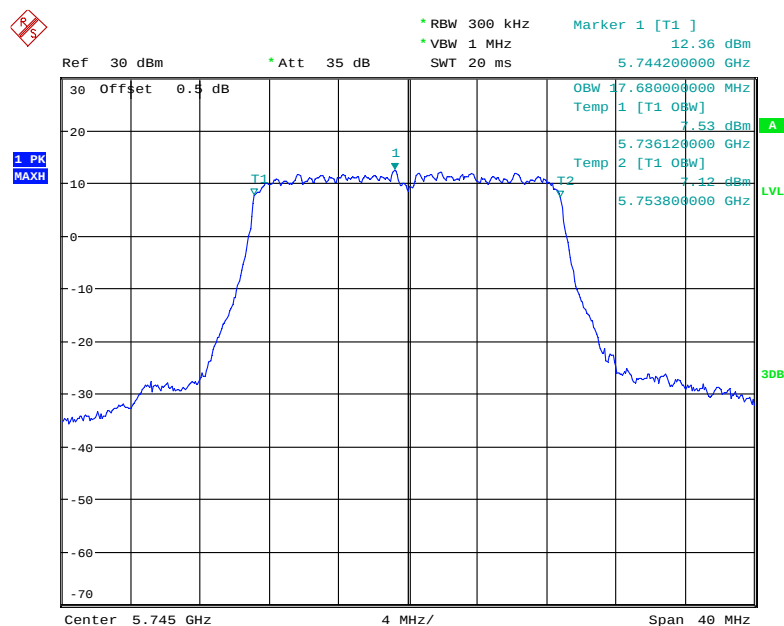


Date: 17.JUL.2019 17:58:17

802.11n ht20 Middle Channel

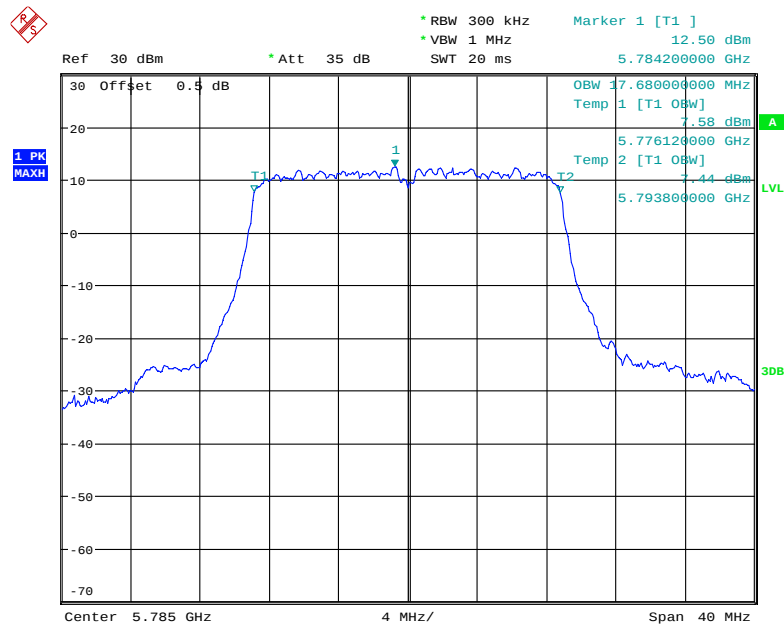


Date: 17.JUL.2019 17:59:20

802.11n ht20 High Channel

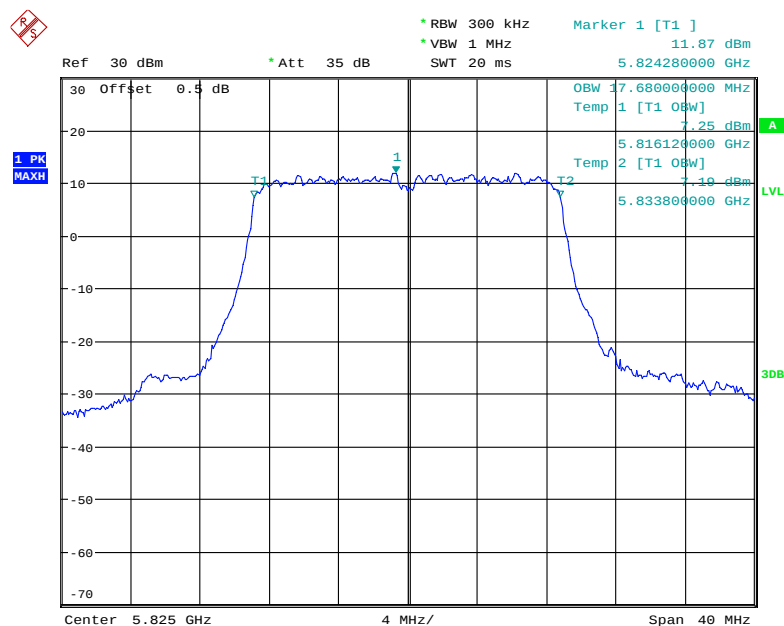


Date: 17.JUL.2019 18:00:52

802.11n ht40 Low Channel

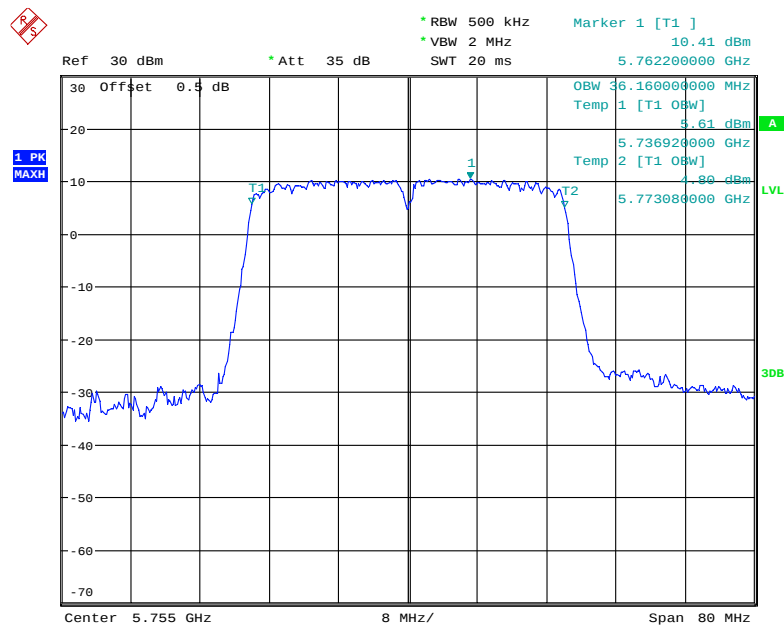


Date: 17.JUL.2019 18:06:04

802.11n ht40 High Channel

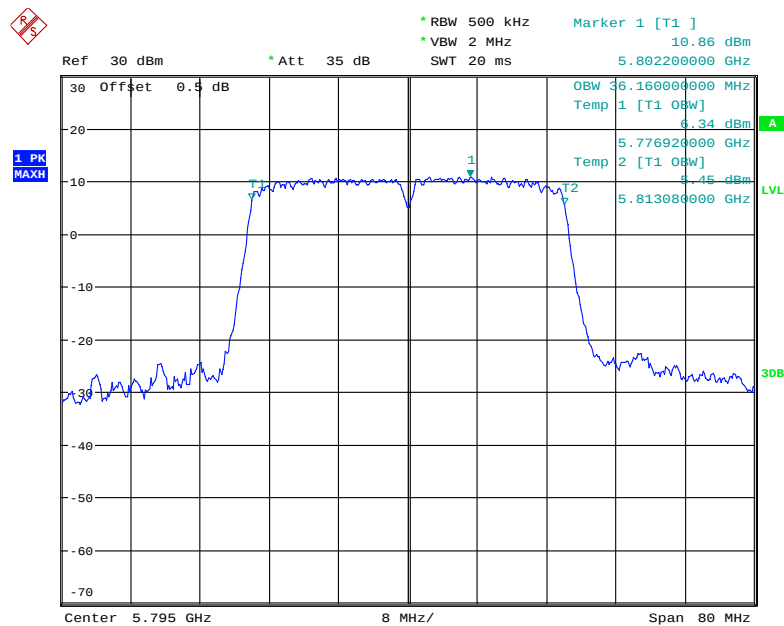


Date: 17.JUL.2019 18:07:29

802.11ac ht20 Low Channel

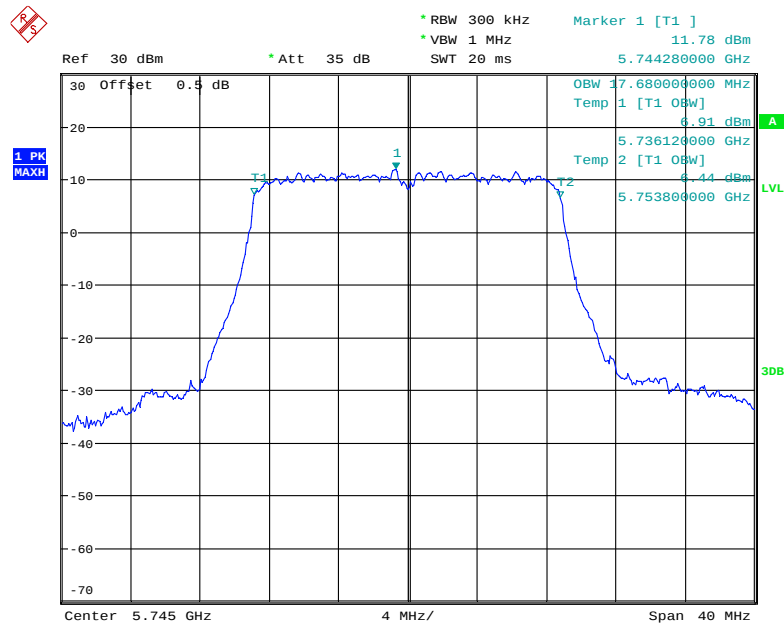


Date: 17.JUL.2019 18:02:02

802.11ac ht20 Middle Channel

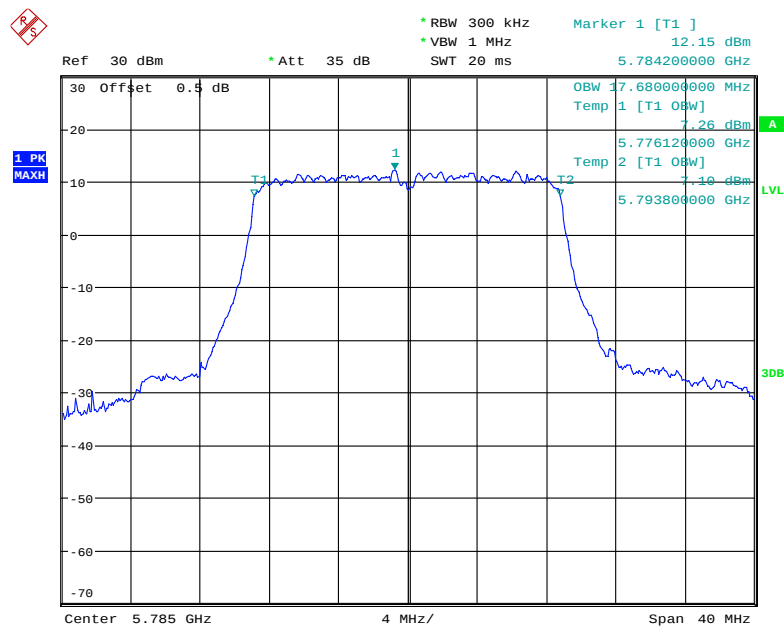


Date: 17.JUL.2019 18:03:21

802.11ac ht20 High Channel

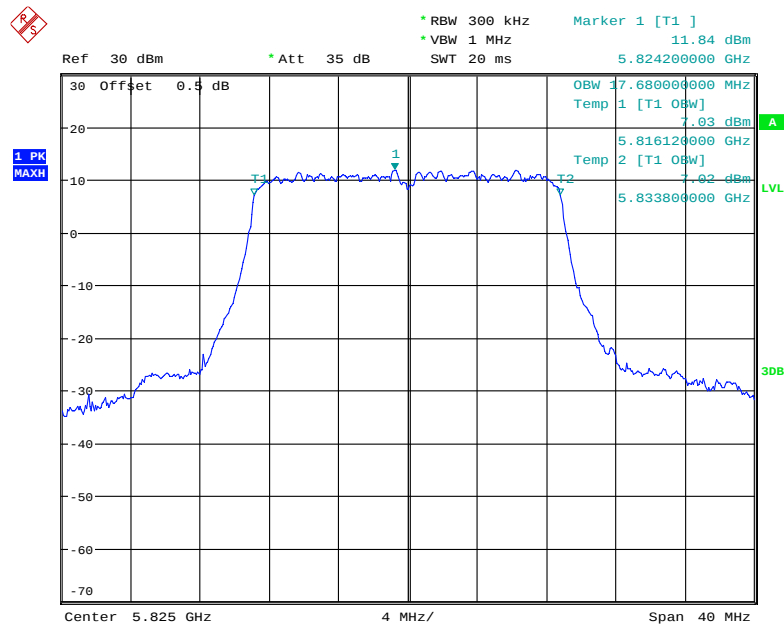


Date: 17.JUL.2019 18:04:19

802.11ac ht40 Low Channel

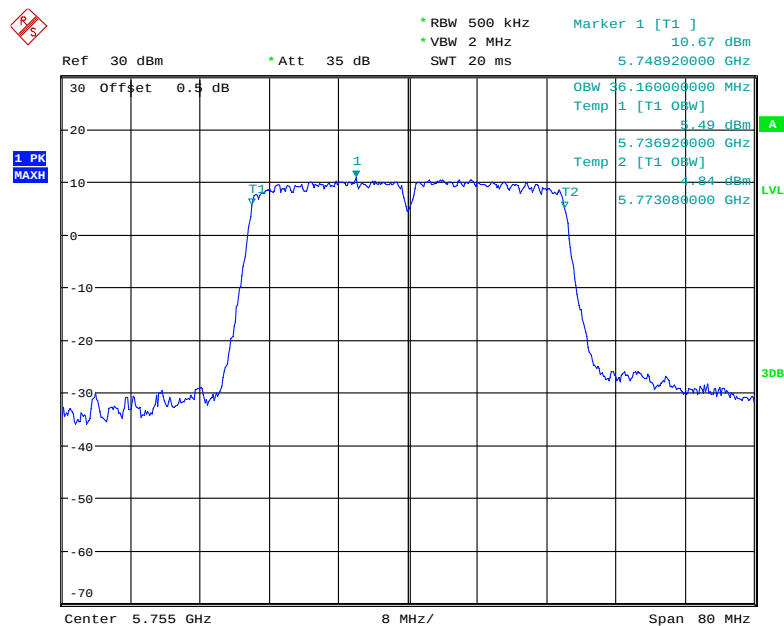


Date: 17.JUL.2019 18:08:42

802.11ac vht40 High Channel

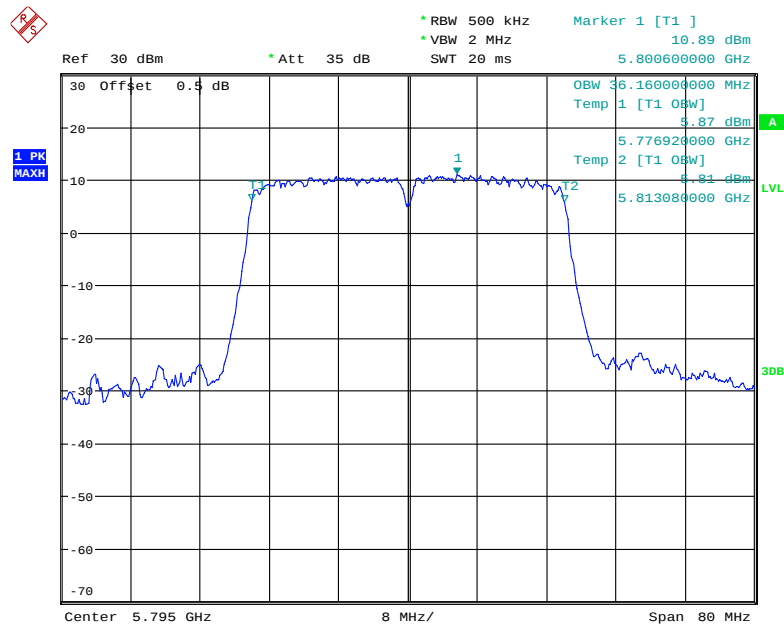

Date: 17.JUL.2019 18:10:10

802.11ac vht80

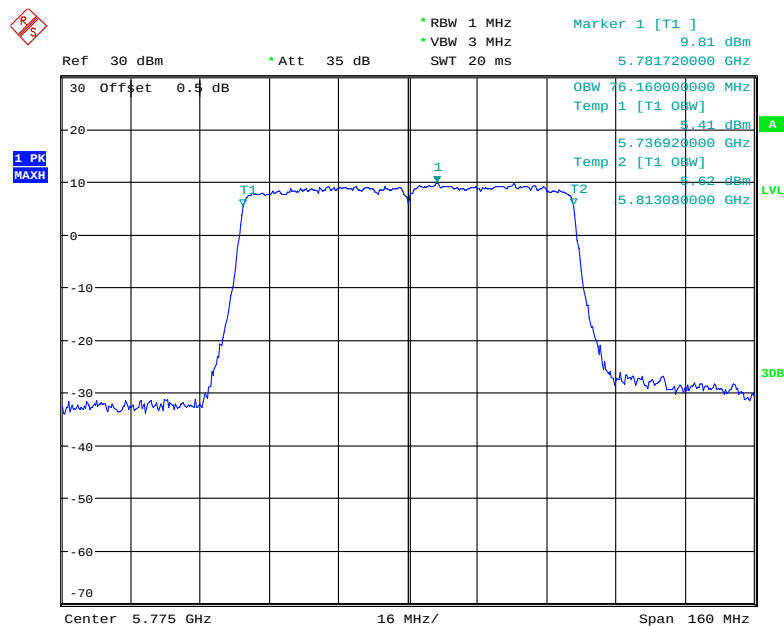

Date: 17.JUL.2019 18:11:49

FCC §15.407(a) –MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple colocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(4) The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	USB Wideband Power Sensor	U2022XA	MY5417006	2018-12-10	2019-12-10
Unknown	Coaxial Cable	C-SJ00-0010	C0010/31	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa
Tester:	Elena Lei
Test Date:	2019-07-17

Test Mode: Transmitting

Band	Mode	Frequency (MHz)	Conducted Average Output Power (dBm)			Limit (dBm)
			Chain 0	Chain 1	Total	
5150 - 5250 MHz	802.11 a	5180	14.91	14.53	/	30
		5200	14.83	14.70	/	30
		5240	14.84	14.94	/	30
	802.11n ht20	5180	11.64	11.57	14.62	30
		5200	11.96	11.62	14.80	30
		5240	11.53	11.86	14.71	30
	802.11n ht40	5190	12.20	11.54	14.89	30
		5230	11.86	11.45	14.67	30
	802.11ac vht20	5180	11.72	11.09	14.43	30
		5200	11.67	11.20	14.45	30
		5240	11.51	11.56	14.55	30
	802.11ac vht40	5190	12.29	11.52	14.93	30
		5230	12.02	11.86	14.95	30
	802.11ac vht80	5210	11.71	11.40	14.57	30
5725 - 5850 MHz	802.11 a	5745	21.03	20.65	/	30
		5785	21.38	20.25	/	30
		5825	20.87	19.95	/	30
	802.11n ht20	5745	21.62	20.76	24.22	30
		5785	21.87	20.28	24.16	30
		5825	21.38	19.87	23.70	30
	802.11n ht40	5755	21.64	20.25	24.01	30
		5795	21.82	19.79	23.93	30
	802.11ac vht20	5745	21.51	20.67	24.12	30
		5785	21.75	20.37	24.12	30
		5825	21.37	19.91	23.71	30
	802.11ac vht40	5755	21.22	20.61	23.94	30
		5795	21.57	19.91	23.83	30
	802.11ac vht80	5775	19.80	18.16	22.07	30

Note:

The device is an outdoor AP.

The duty cycle factor has been calculated into the test data.

For 5150-5250MHz, the maximum EIRP(14.95+5.7=20.65dBm) is less than 21dBm, which meets the requirement:

The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

The maximum antenna gain is 5.7dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power measurements on IEEE 802.11 devices:

$$\text{Array Gain} = 0 \text{ dB (i.e., no array gain) for } N_{\text{ANT}} \leq 4;$$

So:

$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5.7\text{dBi}$$

FCC §15.407(a) - POWER SPECTRAL DENSITY

Applicable Standard

(a) Power limits:

(1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output

power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
Unknown	Coaxial Cable	C-SJ00-0010	C0010/31	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions

Temperature:	28.2 °C
Relative Humidity:	53 %
ATM Pressure:	100.1 kPa
Tester:	Elena Lei
Test Date:	2019-07-17

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plot.

5150-5250MHz

Mode	Frequency (MHz)	Result (dBm/MHz)			Limit (dBm/MHz)
		Chain 0	Chain 1	Total	
802.11a	5180	9.36	7.61	/	17
	5200	9.04	7.85	/	17
	5240	8.62	8.28	/	17
802.11n ht20	5180	8.41	7.16	10.84	14.3
	5200	8.13	7.39	10.79	14.3
	5240	7.57	7.63	10.61	14.3
802.11n ht40	5190	2.51	2.19	5.36	14.3
	5230	1.94	2.34	5.15	14.3
802.11ac vht20	5180	7.97	7.03	10.54	14.3
	5200	7.89	7.15	10.55	14.3
	5240	7.43	7.47	10.46	14.3
802.11ac vht40	5190	2.65	2.60	5.64	14.3
	5230	1.99	2.49	5.26	14.3
802.11ac vht80	5210	-2.76	-2.65	0.31	14.3

5725-5850MHz

Mode	Frequency (MHz)	Reading (dBm/300kHz)		Result (dBm/500kHz)			Limit (dBm/500kHz)
		Chain 0	Chain 1	Chain 0	Chain 1	Total	
802.11a	5745	6.99	7.08	9.21	9.30	/	30
	5785	7.47	6.56	9.69	8.78	/	30
	5825	7.29	6.00	9.51	8.22	/	30
802.11n ht20	5745	6.51	4.81	8.73	7.03	10.97	27.3
	5785	6.68	3.98	8.90	6.20	10.77	27.3
	5825	6.45	3.20	8.67	5.42	10.35	27.3
802.11n ht40	5755	3.18	2.35	5.40	4.57	8.02	27.3
	5795	3.45	1.44	5.67	3.66	7.79	27.3
802.11ac vht20	5745	5.82	4.72	8.04	6.94	10.54	27.3
	5785	5.76	4.11	7.98	6.33	10.24	27.3
	5825	5.80	3.70	8.02	5.92	10.11	27.3
802.11ac vht40	5755	2.78	1.61	5.00	3.83	7.46	27.3
	5795	3.18	0.70	5.40	2.92	7.34	27.3
802.11ac vht80	5775	-1.97	-3.44	0.25	-1.22	2.59	27.3

Note:

The device is an outdoor AP.

The maximum antenna gain is 5.7dBi in 5GHz band. The device employed Cyclic Delay Diversity (CDD) for 802.11 MIMO transmitting, per KDB 662911 D01 Multiple Transmitter Output v02r01, for power spectral density (PSD) measurements on the devices:

$$\text{Array Gain} = 10 \log(N_{\text{ANT}}/N_{\text{SS}}) \text{ dB.}$$

So:


$$\text{Directional gain} = G_{\text{ANT}} + \text{Array Gain} = 5.7\text{dBi} + 10 \cdot \log(2/1) = 8.7\text{dBi}$$

For 5.8GHz band, If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/\text{RBW})$ to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.

Method SA-3 in KDB 789033 D02 General UNII Test Procedures New Rules v02r01 was used for PSD test.


5150-5250MHz
Chain 0:

802.11a Low Channel

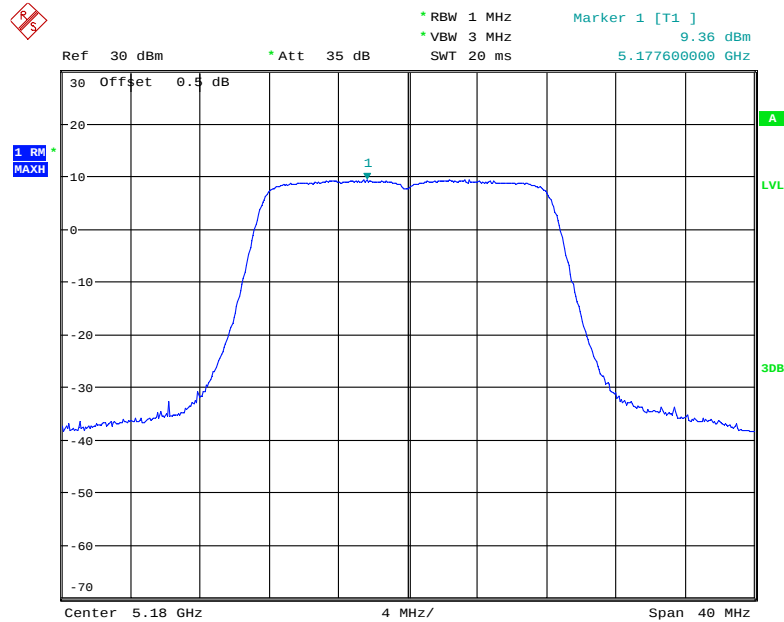


Date: 17.JUL.2019 17:22:04

802.11a Middle Channel

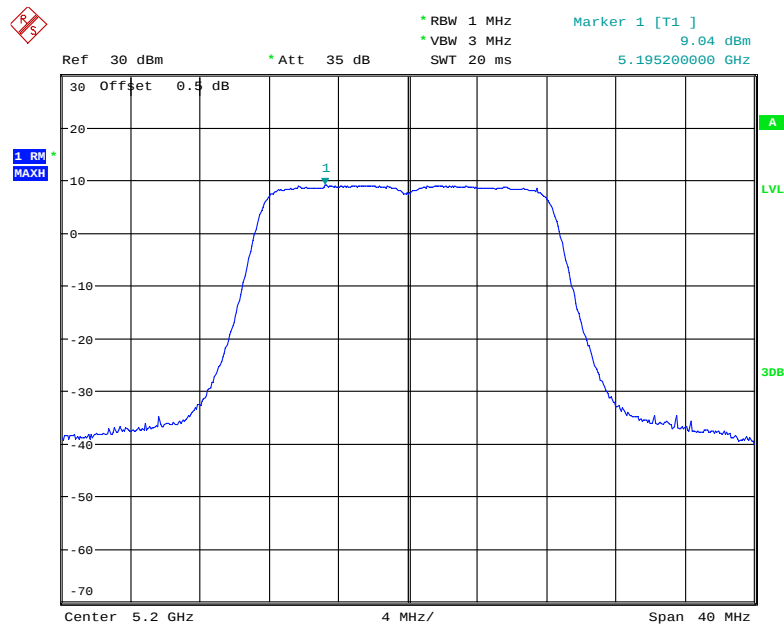


Date: 17.JUL.2019 17:23:11

802.11a High Channel

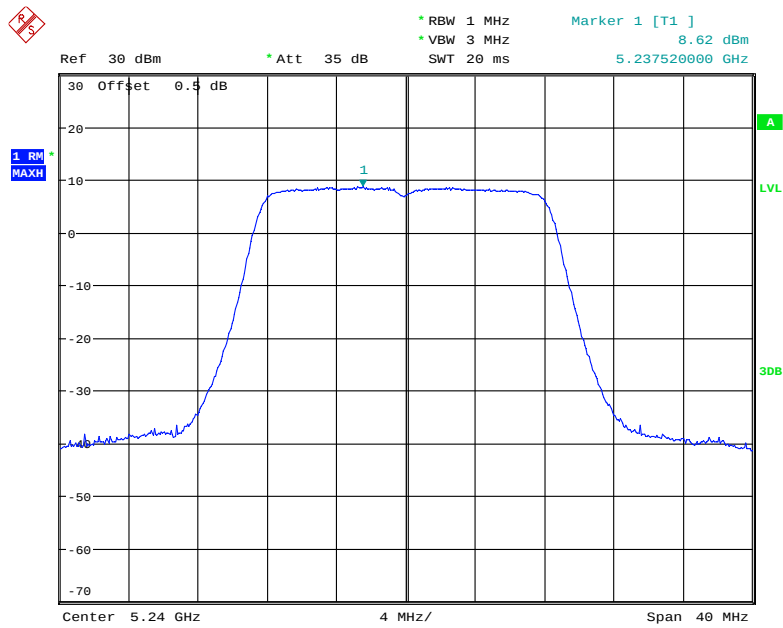


Date: 17.JUL.2019 17:24:13

802.11n ht20 Low Channel

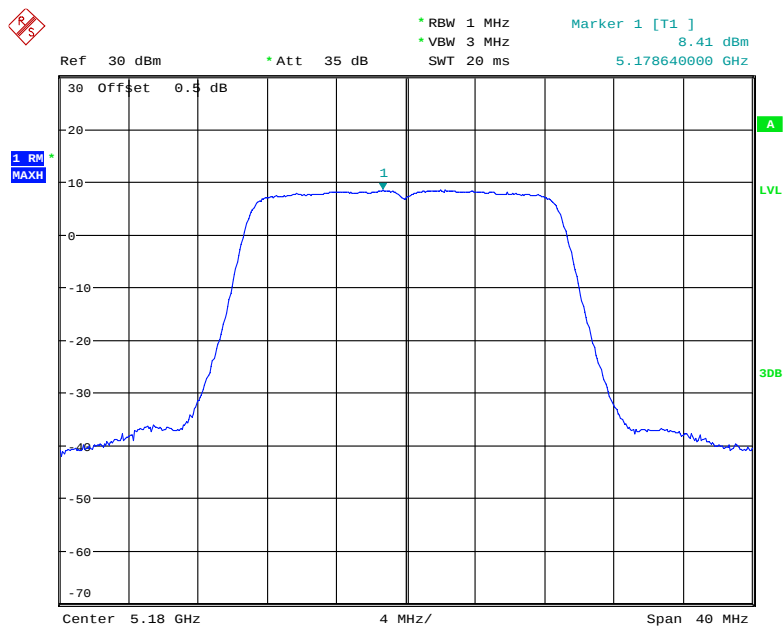


Date: 17.JUL.2019 17:25:47

802.11n ht20 Middle Channel

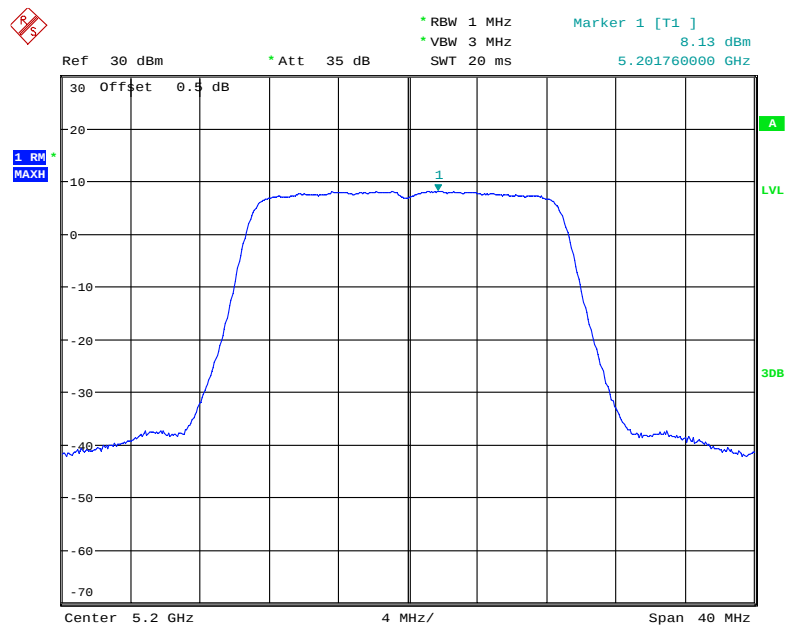


Date: 17.JUL.2019 17:27:01

802.11n ht20 High Channel

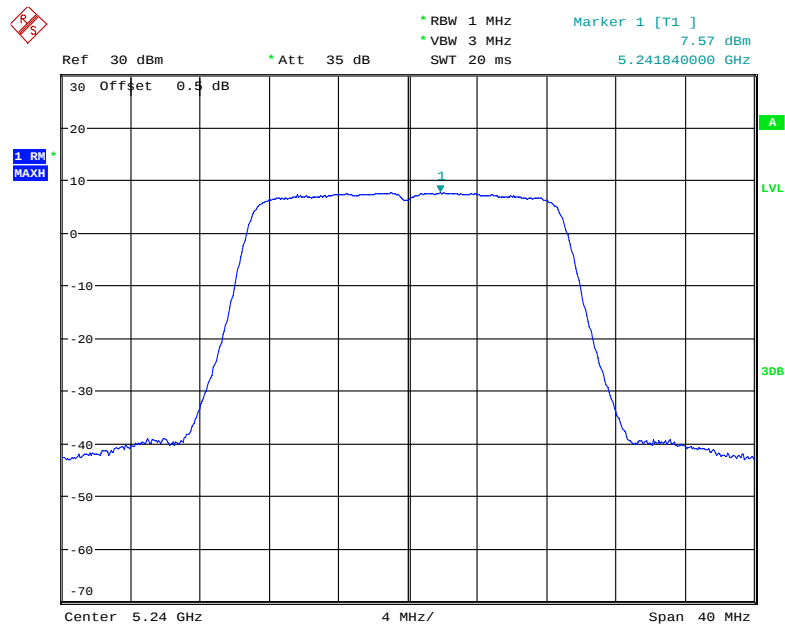


Date: 17.JUL.2019 17:28:33

802.11n ht40 Low Channel

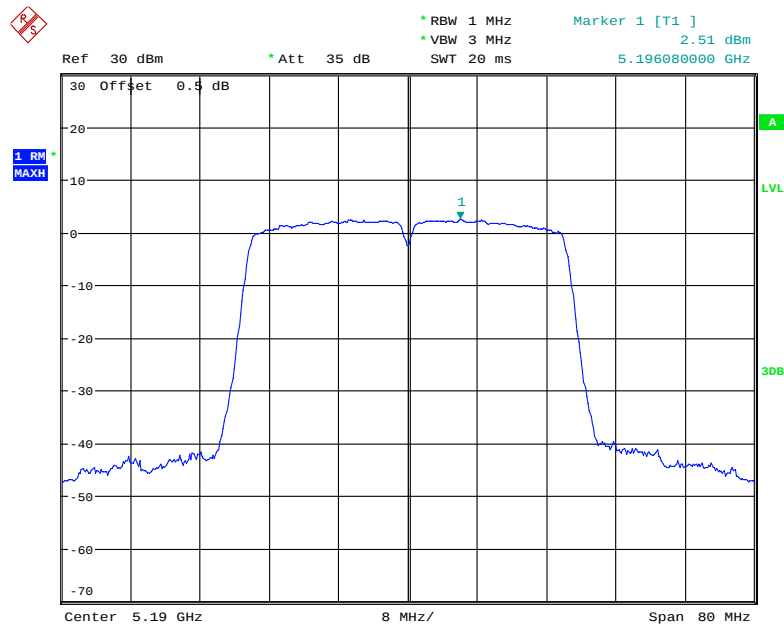


Date: 17.JUL.2019 17:34:05

802.11n ht40 High Channel

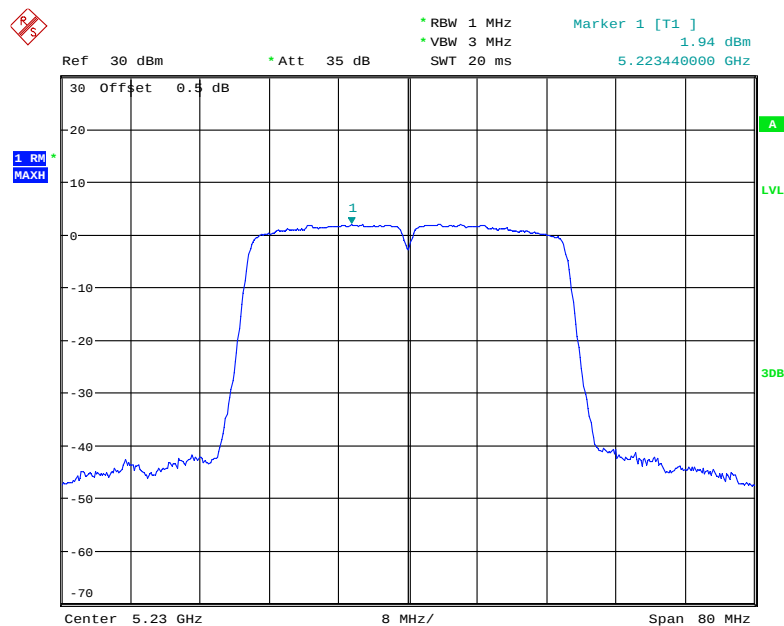


Date: 17.JUL.2019 17:35:26

802.11ac vht20 Low Channel

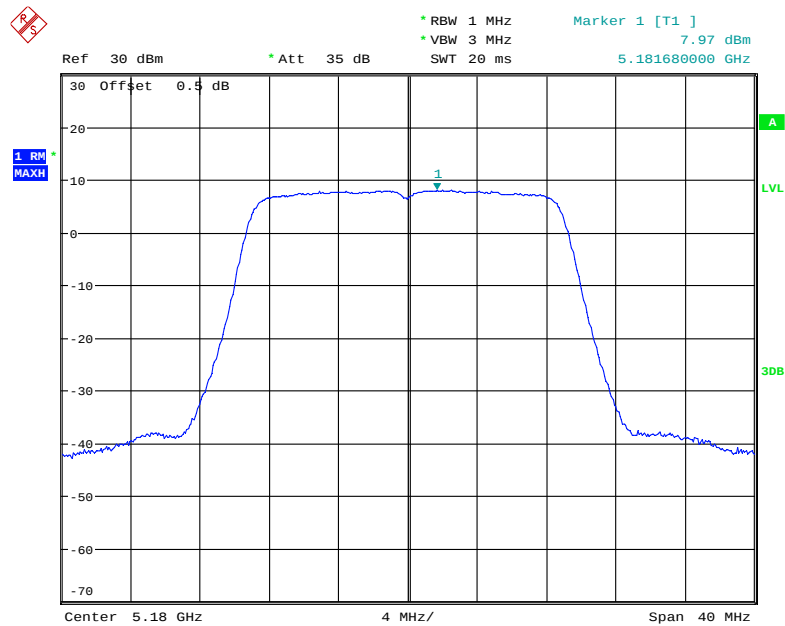


Date: 17.JUL.2019 17:30:00

802.11ac vht20 Middle Channel

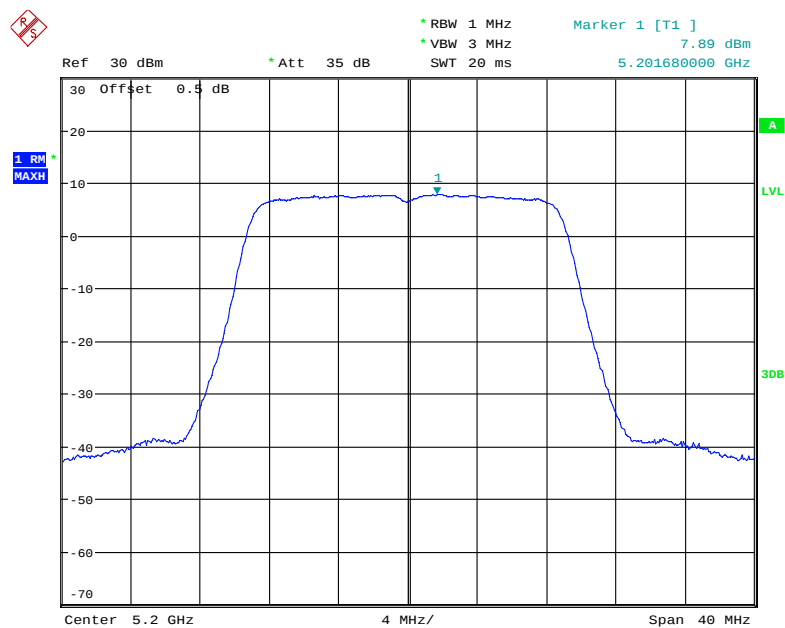


Date: 17.JUL.2019 17:31:35

802.11ac vht20 High Channel

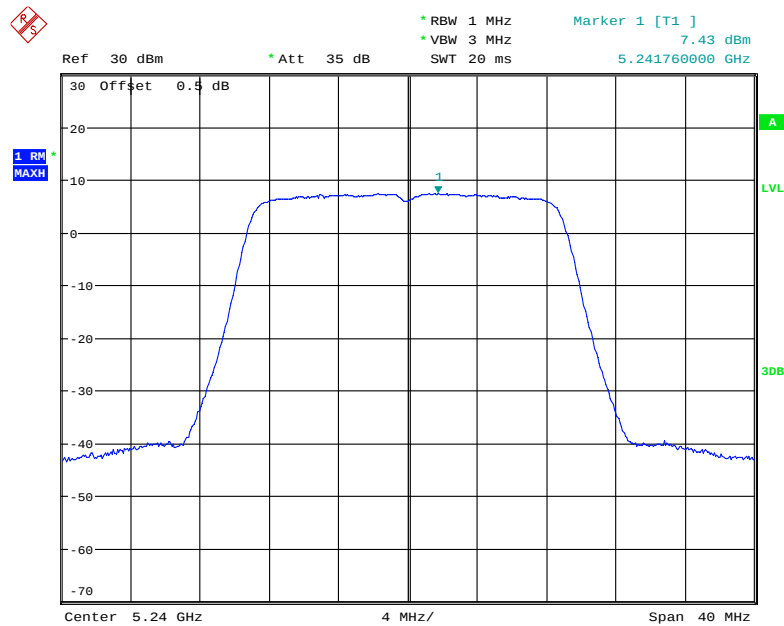


Date: 17.JUL.2019 17:32:38

802.11ac vht40 Low Channel

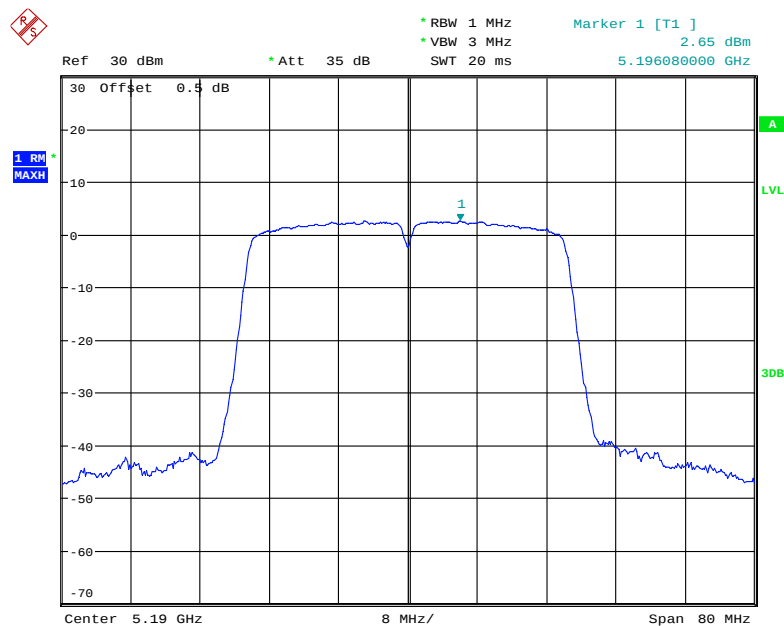


Date: 17.JUL.2019 17:37:32

802.11ac vht40 High Channel

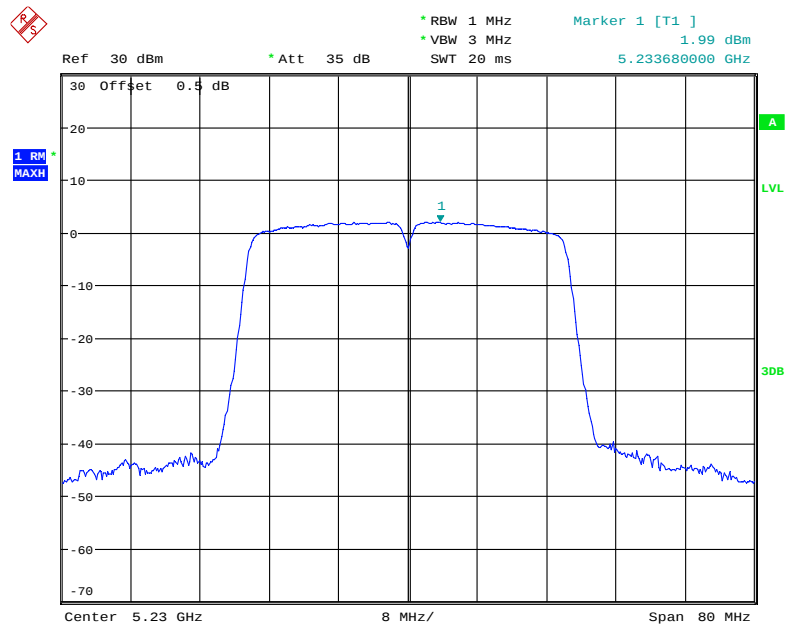

Date: 17.JUL.2019 17:38:34


802.11ac vht80 Channel

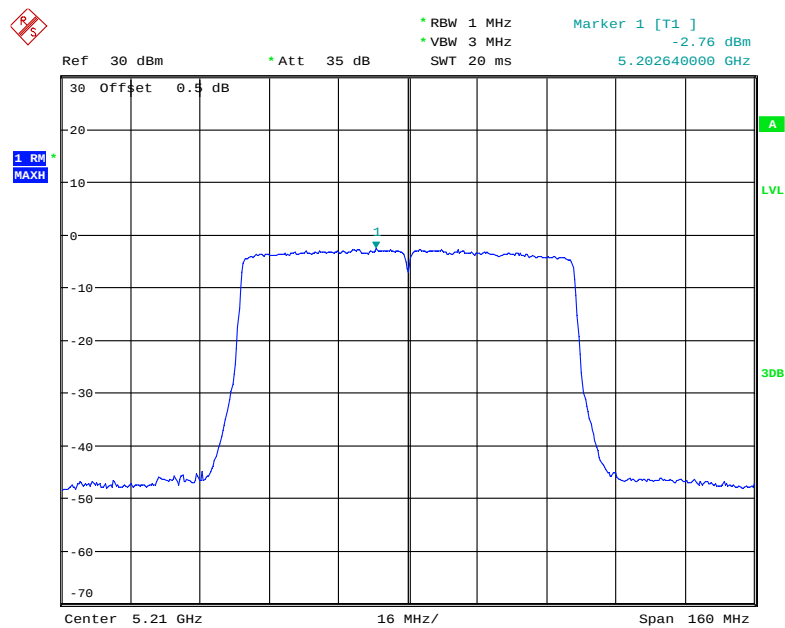

Date: 17.JUL.2019 17:40:16


Chain 1:

802.11a Low Channel

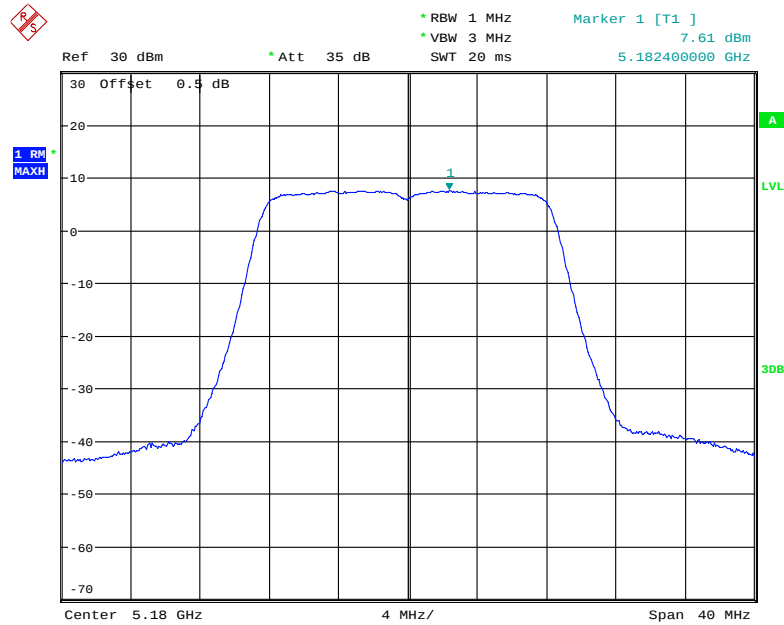


Date: 17.JUL.2019 17:52:55

802.11a Middle Channel

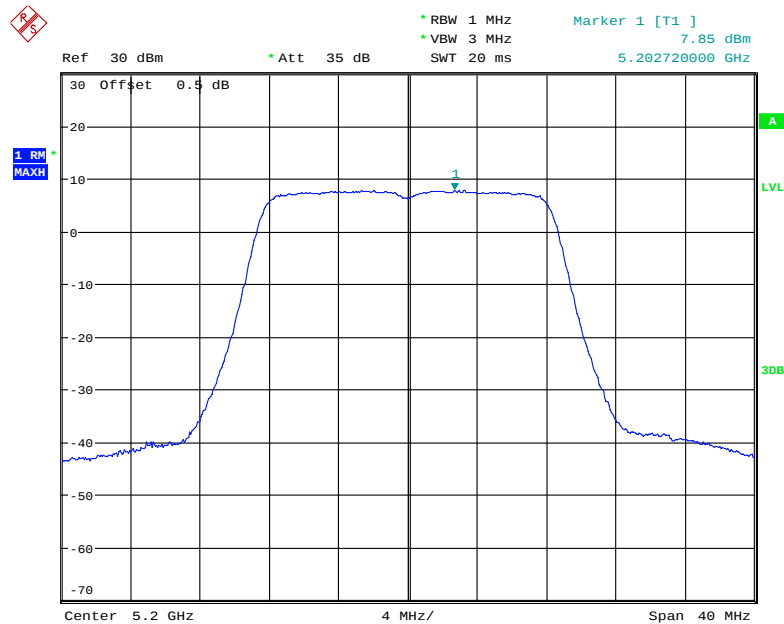


Date: 17.JUL.2019 17:53:25

802.11a High Channel

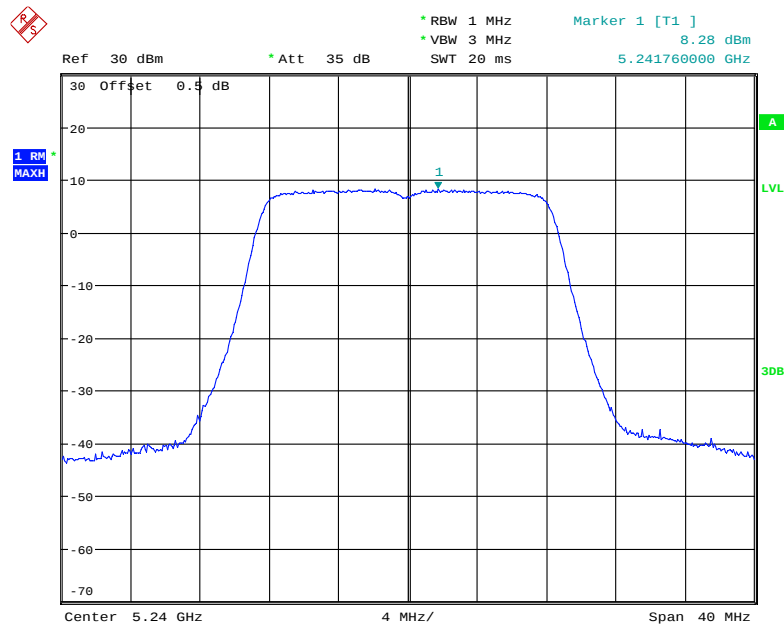


Date: 17.JUL.2019 17:52:31

802.11n ht20 Low Channel

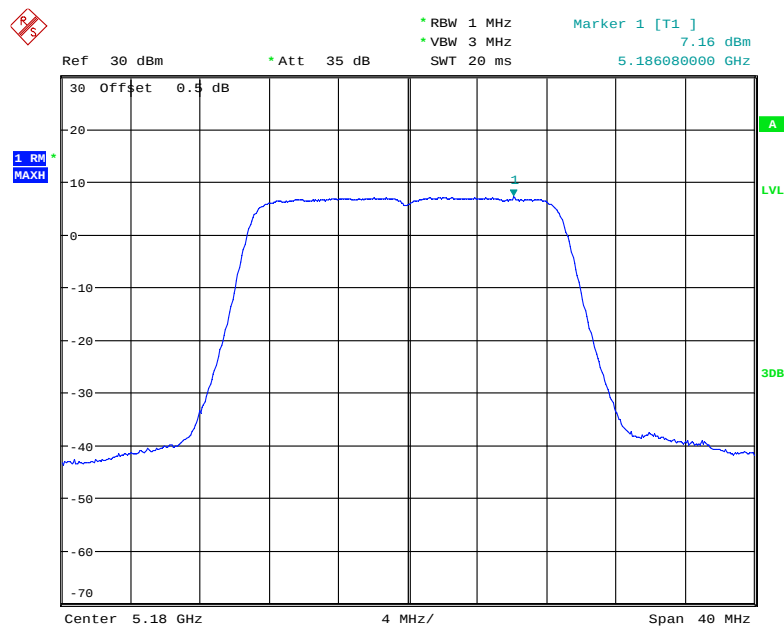


Date: 17.JUL.2019 17:49:02

802.11n ht20 Middle Channel

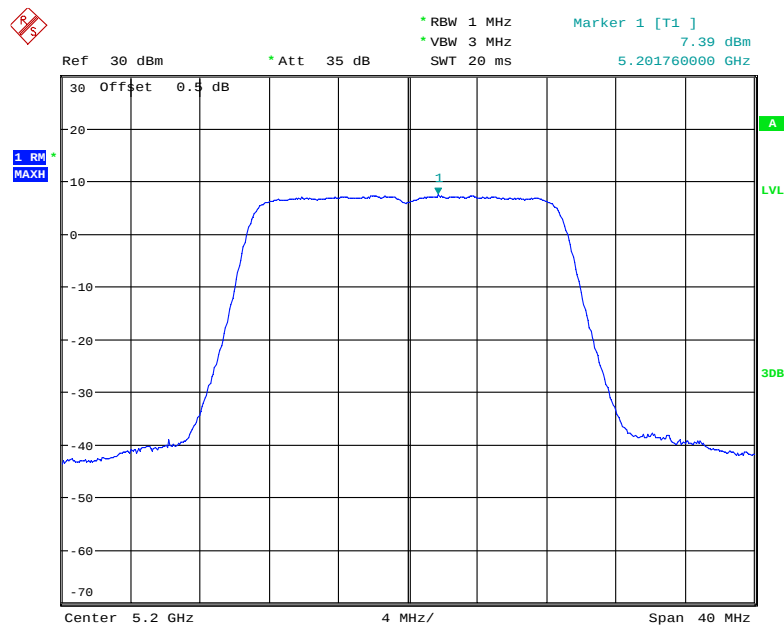


Date: 17.JUL.2019 17:49:18

802.11n ht20 High Channel

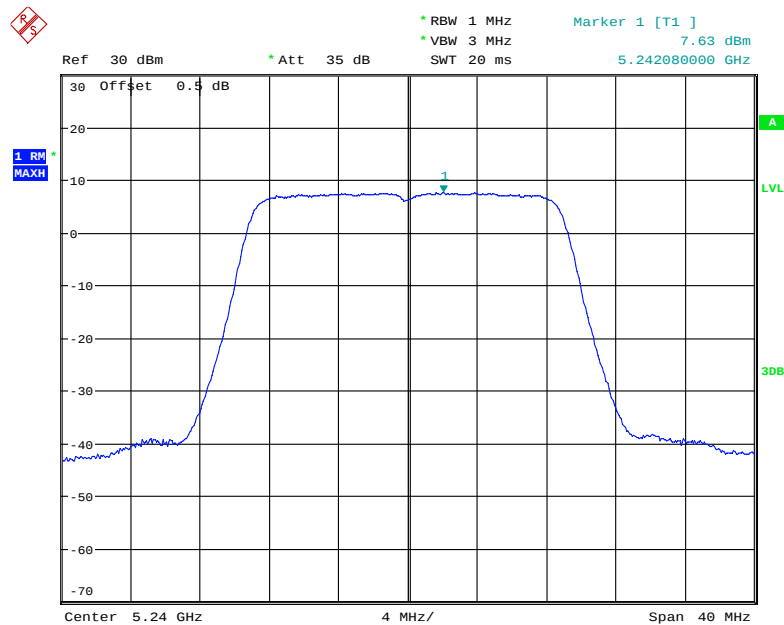


Date: 17.JUL.2019 17:49:41

802.11n ht40 Low Channel

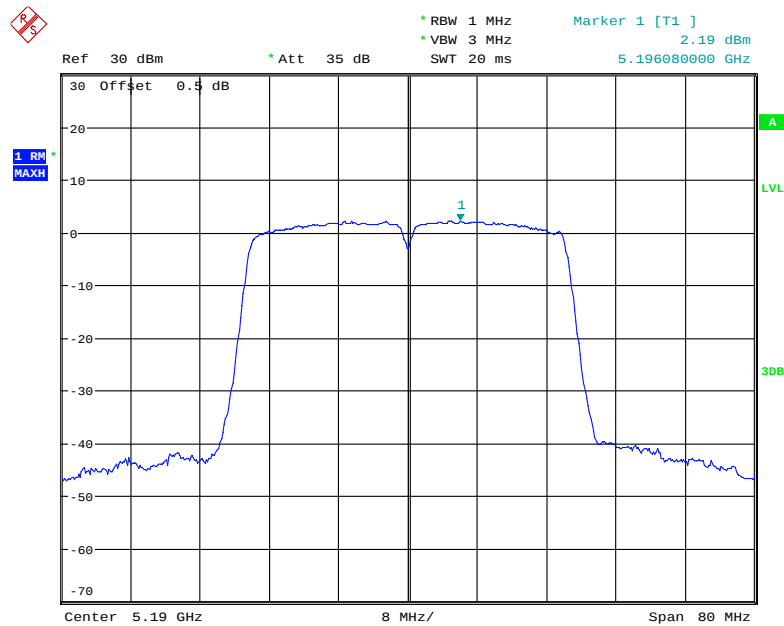


Date: 17.JUL.2019 17:45:50

802.11n ht40 High Channel

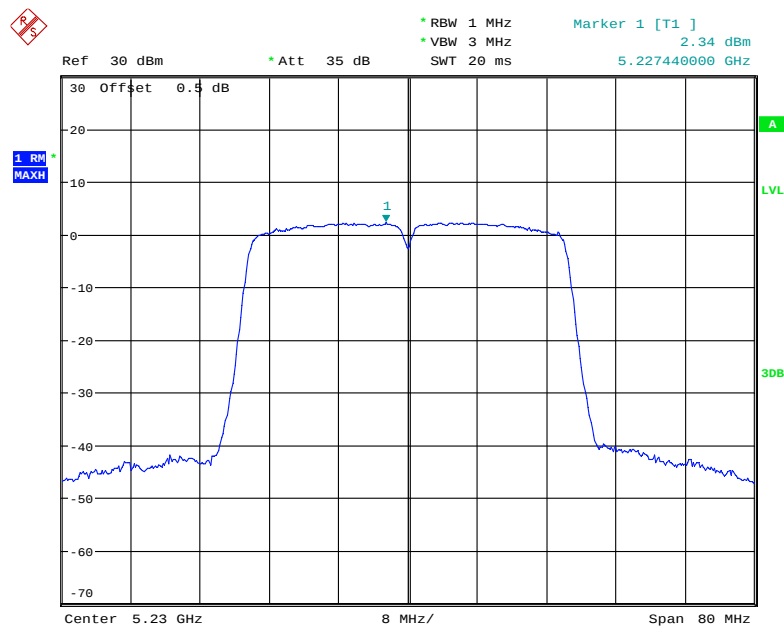


Date: 17.JUL.2019 17:47:02

802.11ac vht20 Low Channel

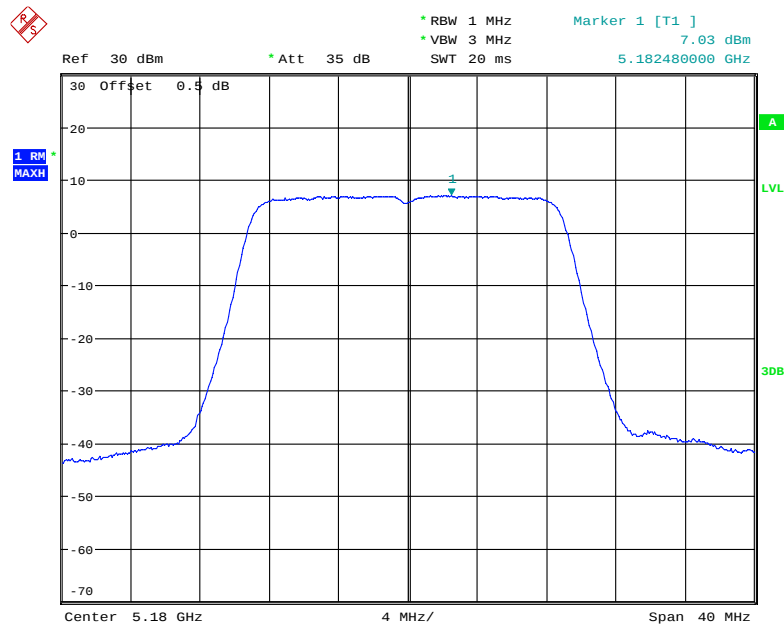


Date: 17.JUL.2019 17:50:26

802.11ac vht20 Middle Channel

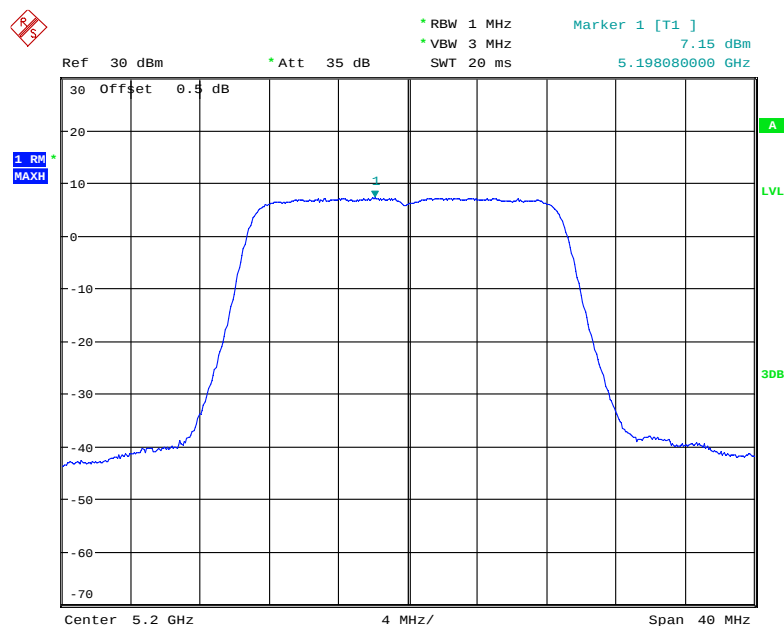


Date: 17.JUL.2019 17:50:47

802.11ac vht20 High Channel

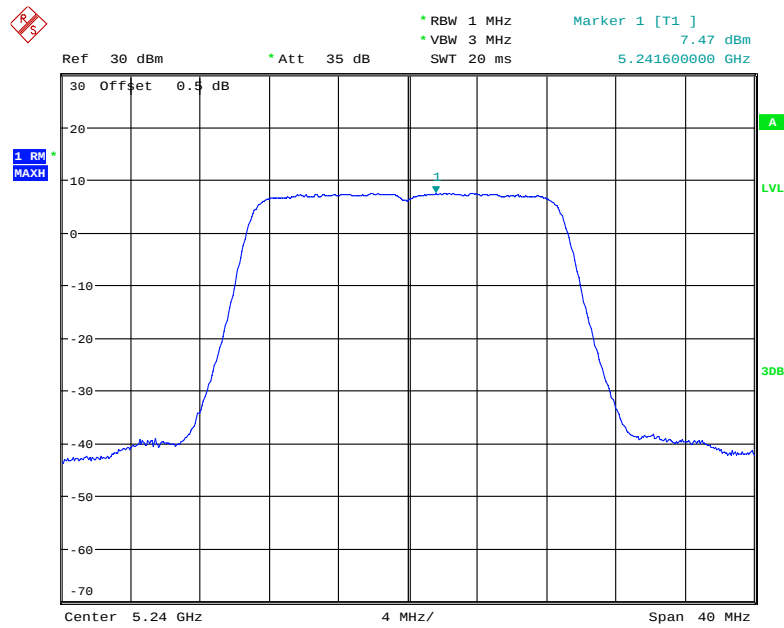


Date: 17.JUL.2019 17:51:09

802.11ac vht40 Low Channel

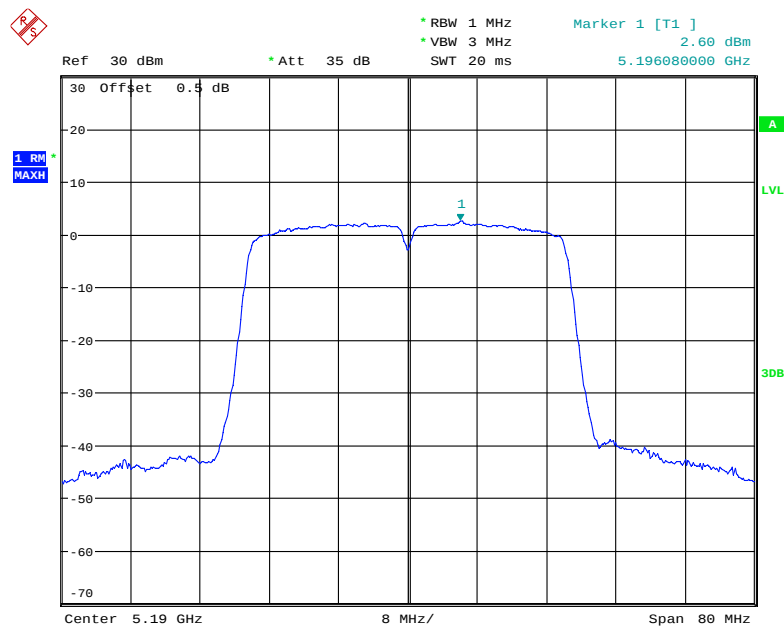


Date: 17.JUL.2019 17:43:31

802.11ac vht40 High Channel

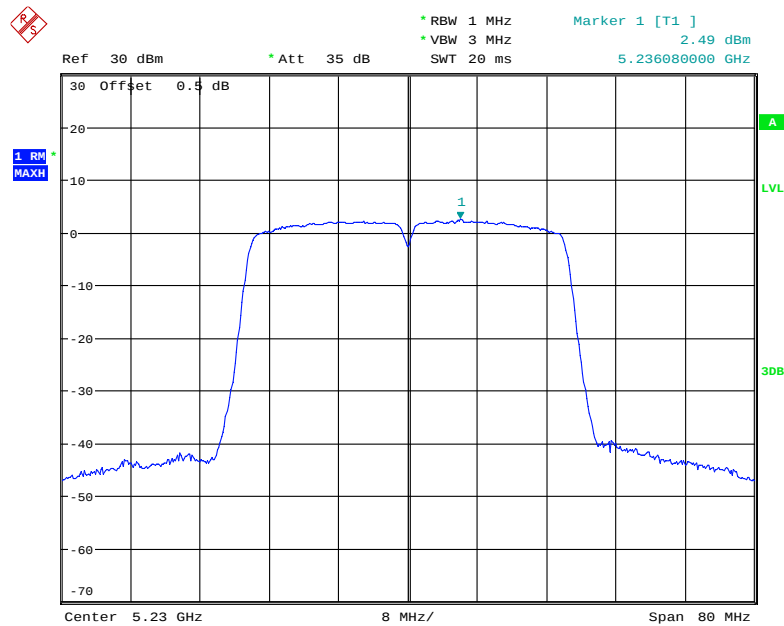

Date: 17.JUL.2019 17:44:43


802.11ac vht80 Channel

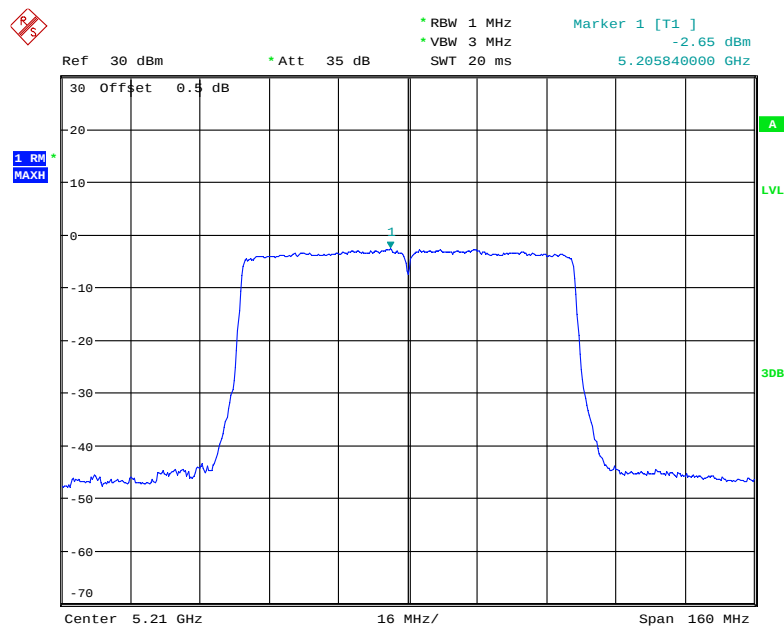

Date: 17.JUL.2019 17:41:51


**5725-5850MHz
Chain 0**

802.11a Low Channel

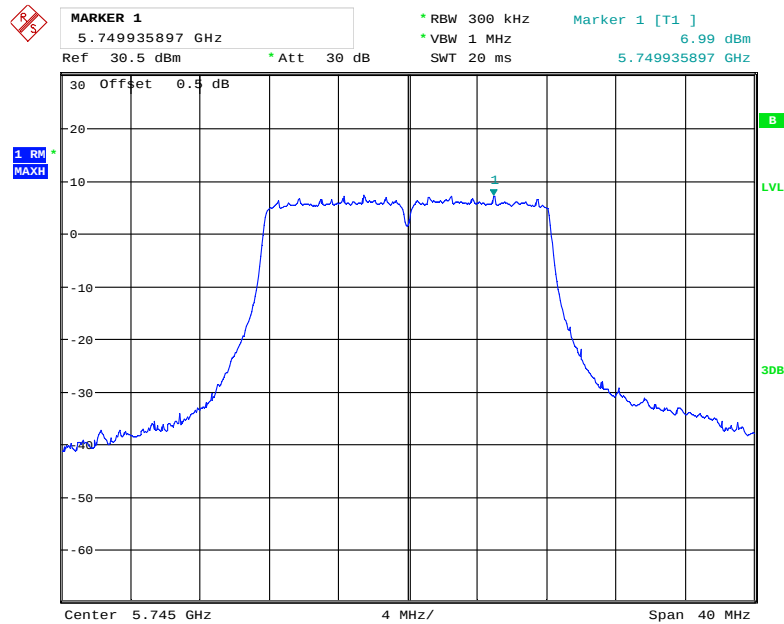


Date: 18.JUL.2019 08:50:54

802.11a Middle Channel

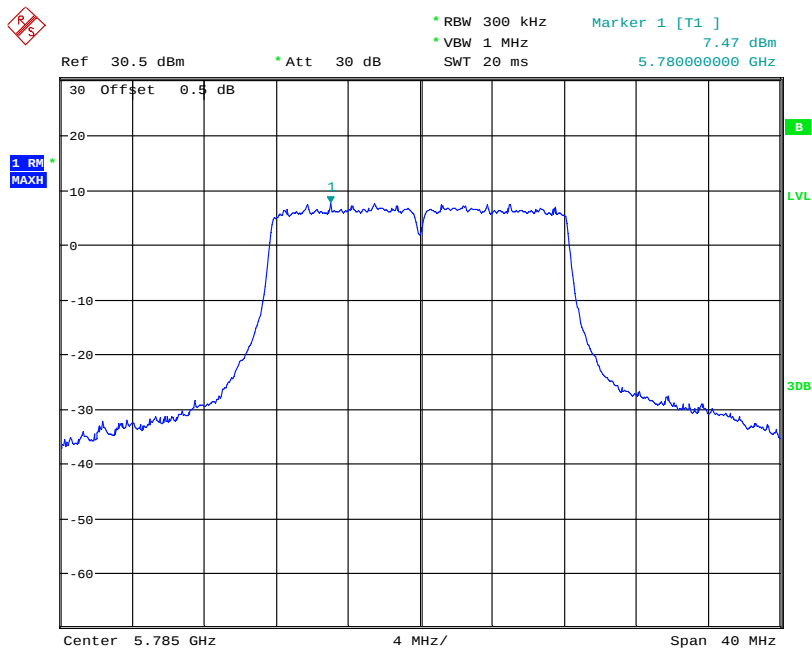


Date: 18.JUL.2019 08:52:02

802.11a High Channel

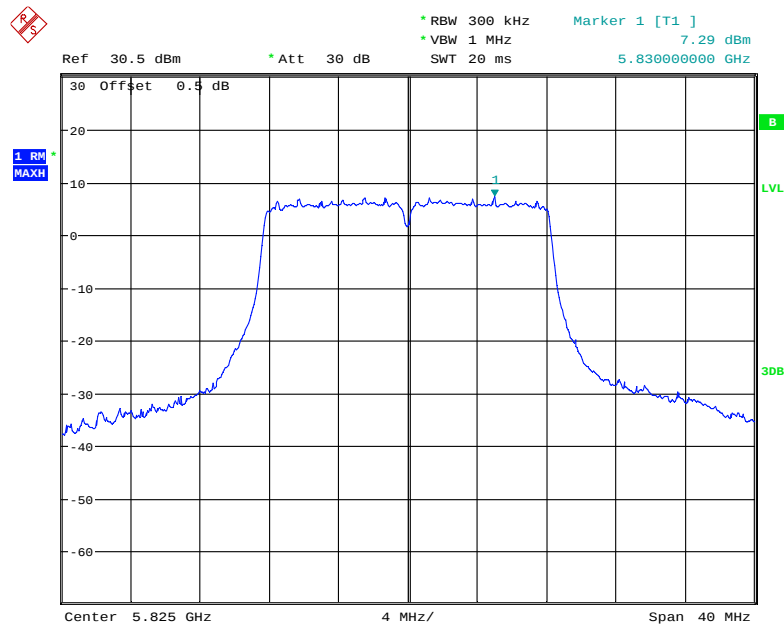


Date: 18.JUL.2019 08:52:33

802.11n ht20 Low Channel

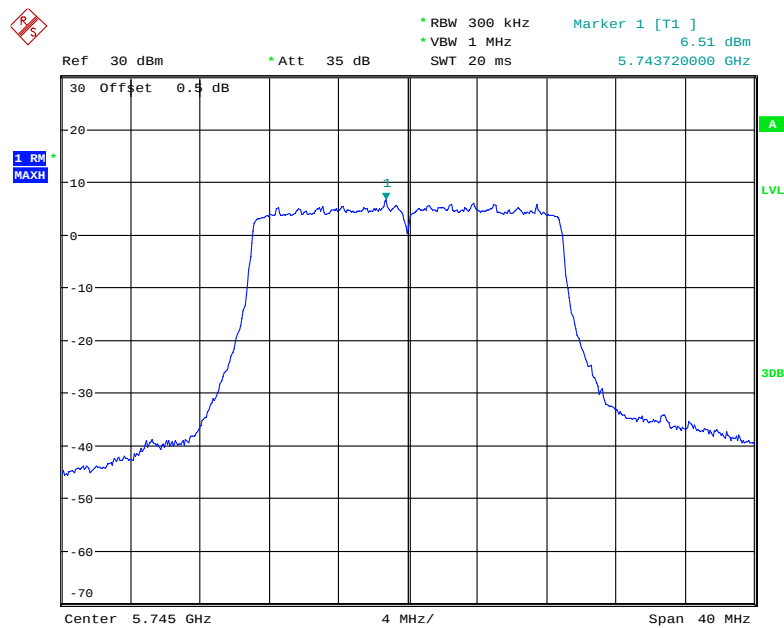


Date: 17.JUL.2019 17:58:31

802.11n ht20 Middle Channel

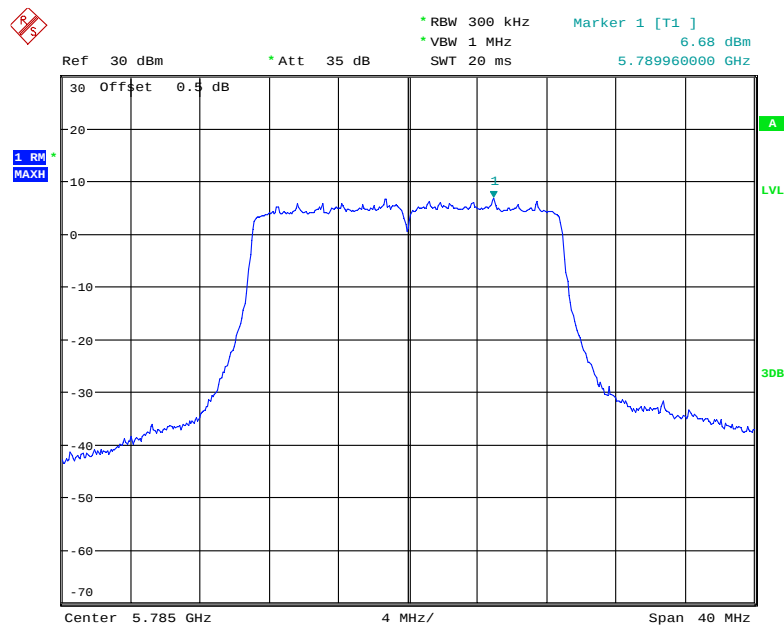


Date: 17.JUL.2019 17:59:34

802.11n ht20 High Channel

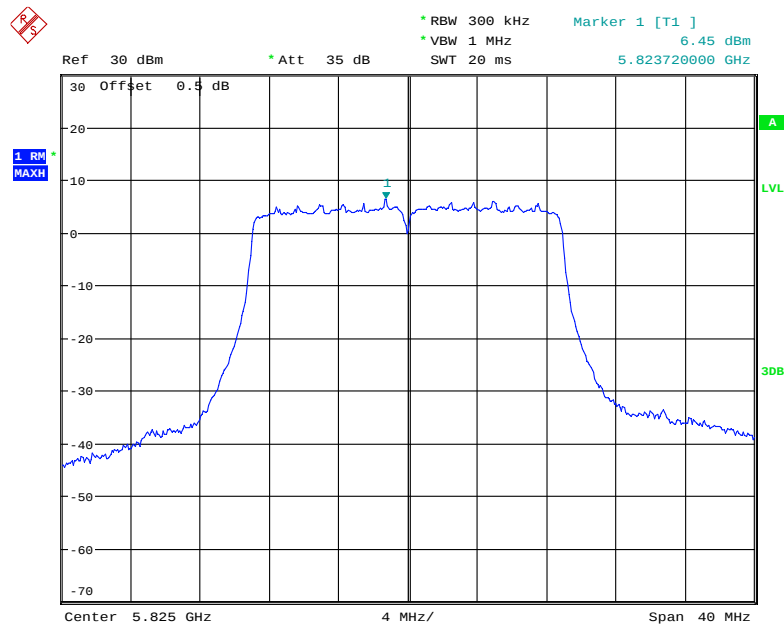


Date: 17.JUL.2019 18:01:10

802.11n ht40 Low Channel

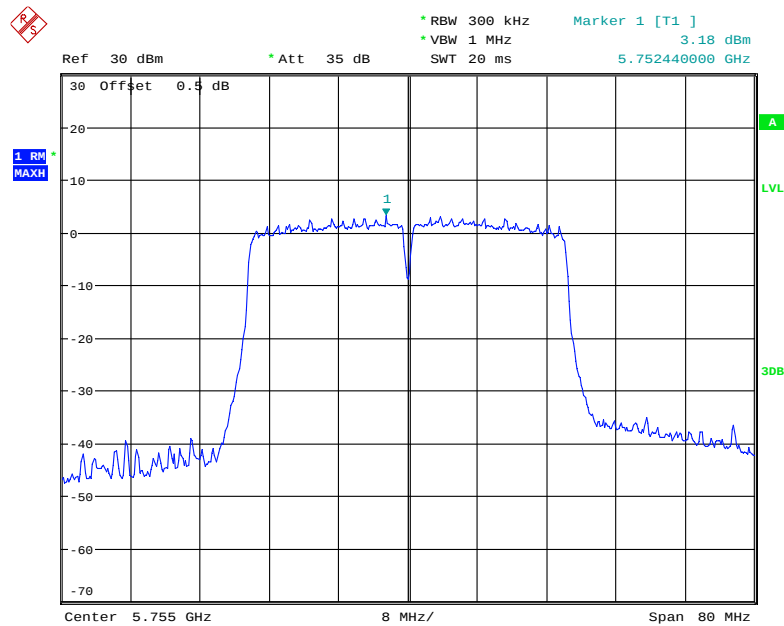


Date: 17.JUL.2019 18:06:21

802.11n ht40 High Channel

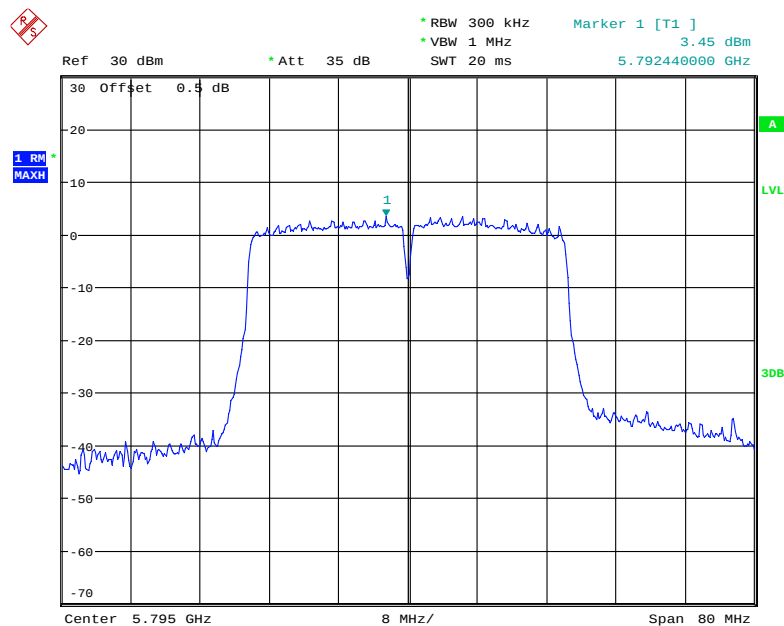


Date: 17.JUL.2019 18:07:43

802.11ac vht20 Low Channel

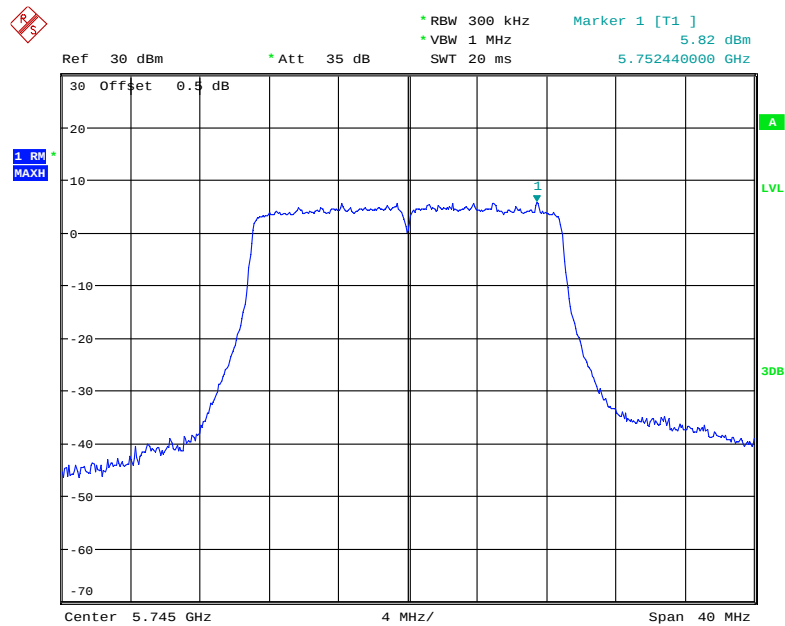


Date: 17.JUL.2019 18:02:26

802.11ac vht20 Middle Channel

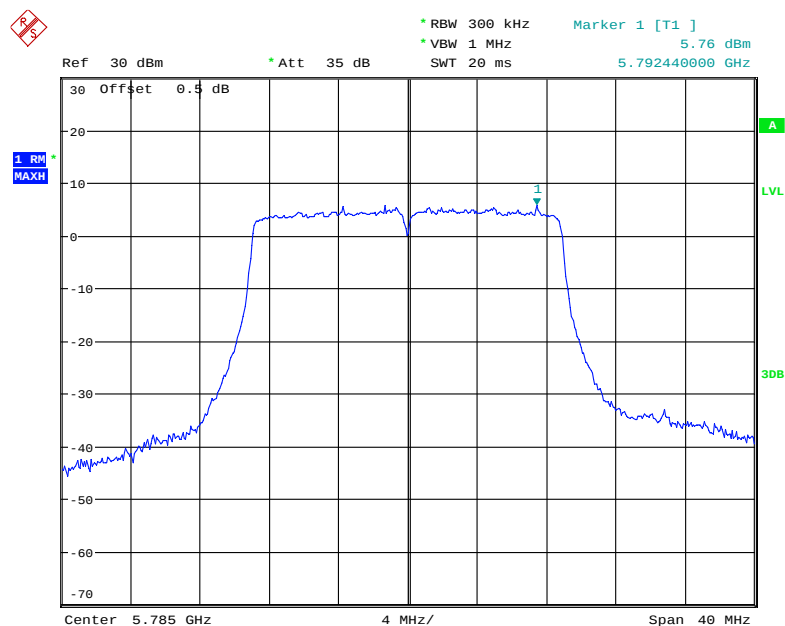


Date: 17.JUL.2019 18:03:31

802.11ac vht20 High Channel

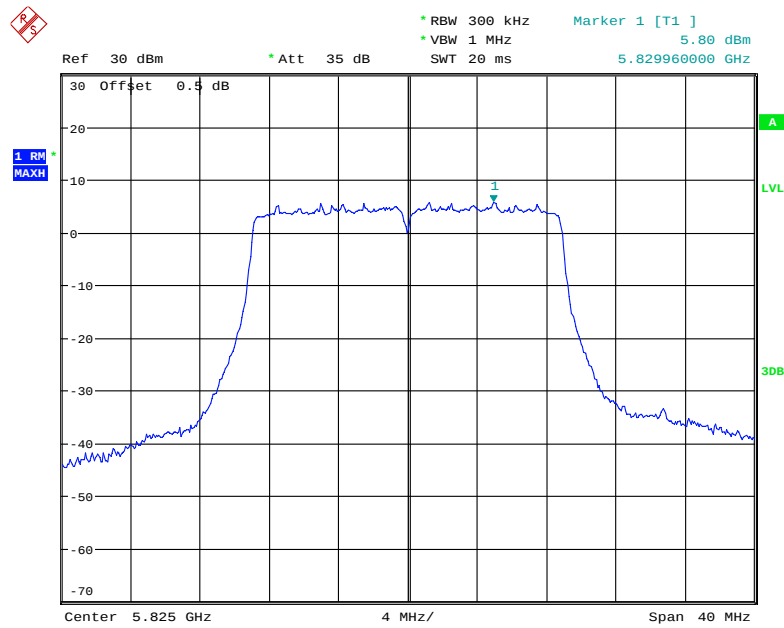


Date: 17.JUL.2019 18:04:33

802.11ac vht40 Low Channel

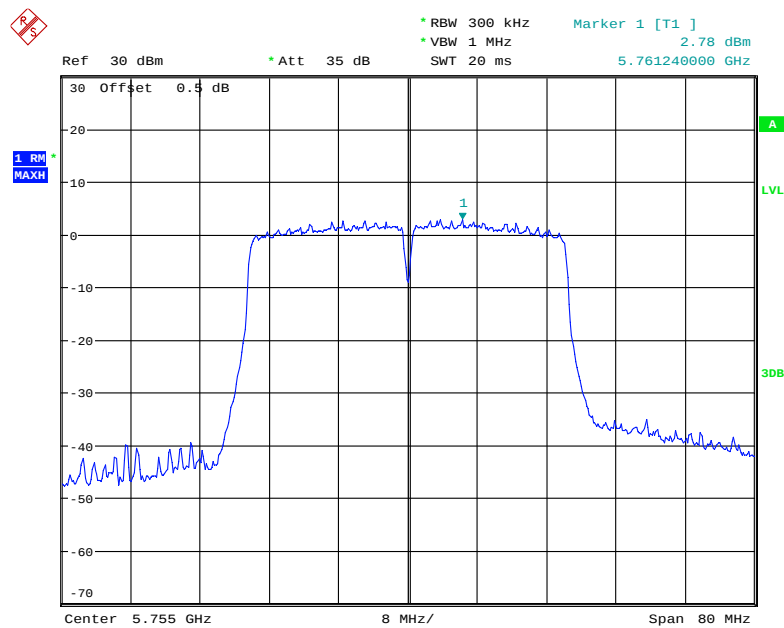


Date: 17.JUL.2019 18:09:03

802.11ac vht40 High Channel

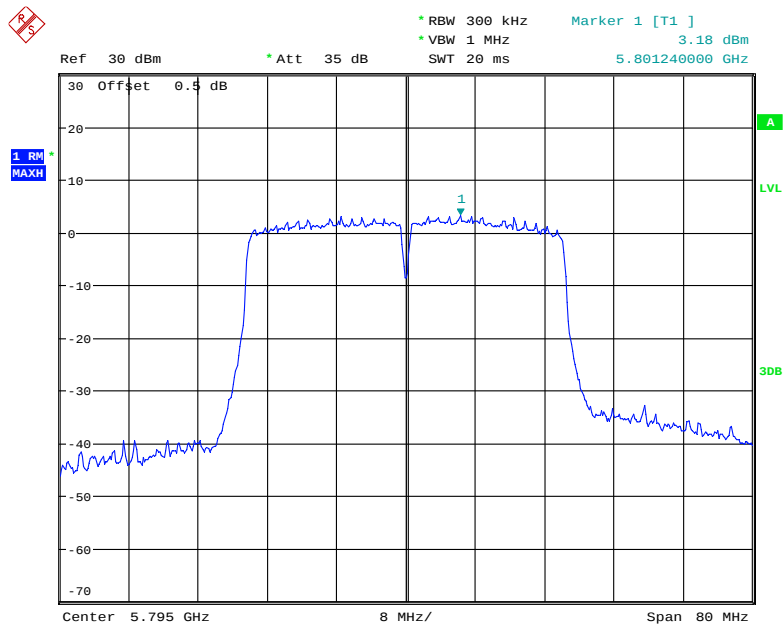

Date: 17.JUL.2019 18:10:28


802.11ac vht80 Channel

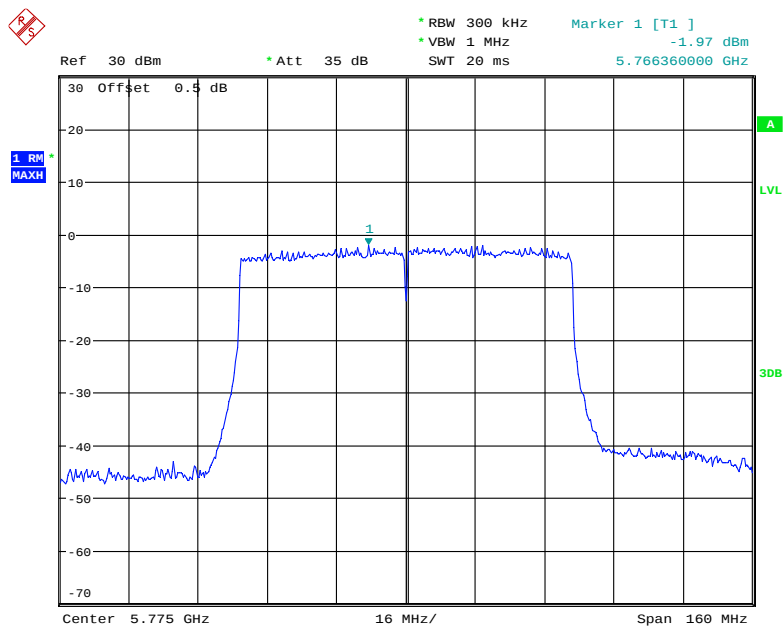

Date: 17.JUL.2019 18:12:10


Chain 1

802.11a Low Channel

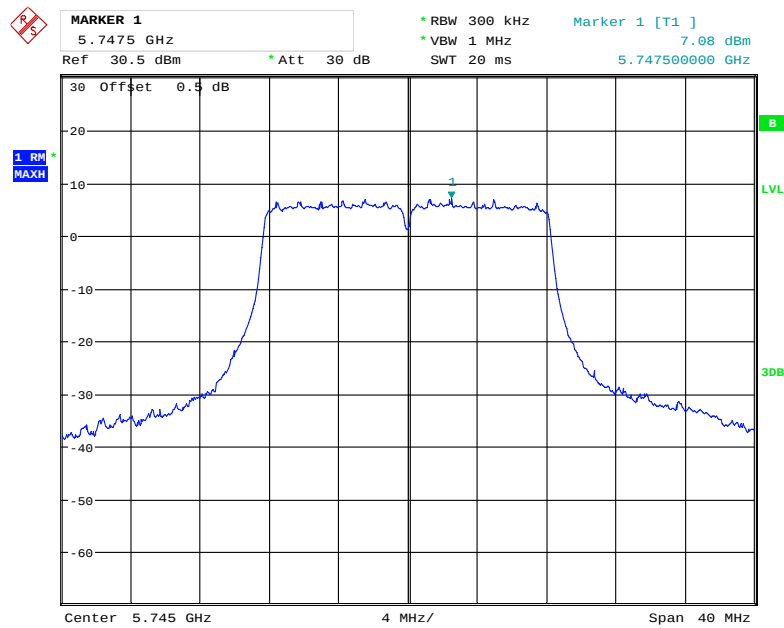


Date: 18.JUL.2019 08:55:25

802.11a Middle Channel

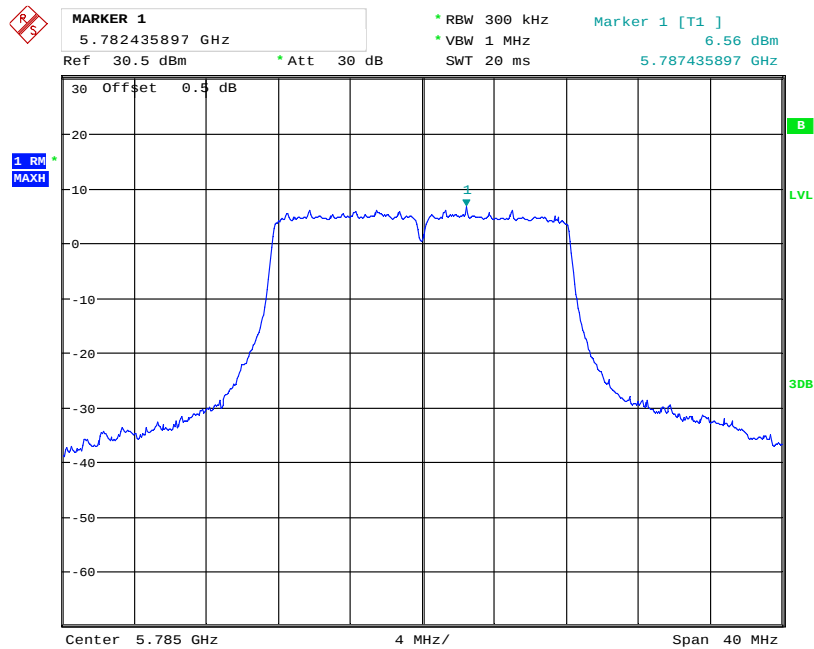


Date: 18.JUL.2019 08:54:48

802.11a High Channel

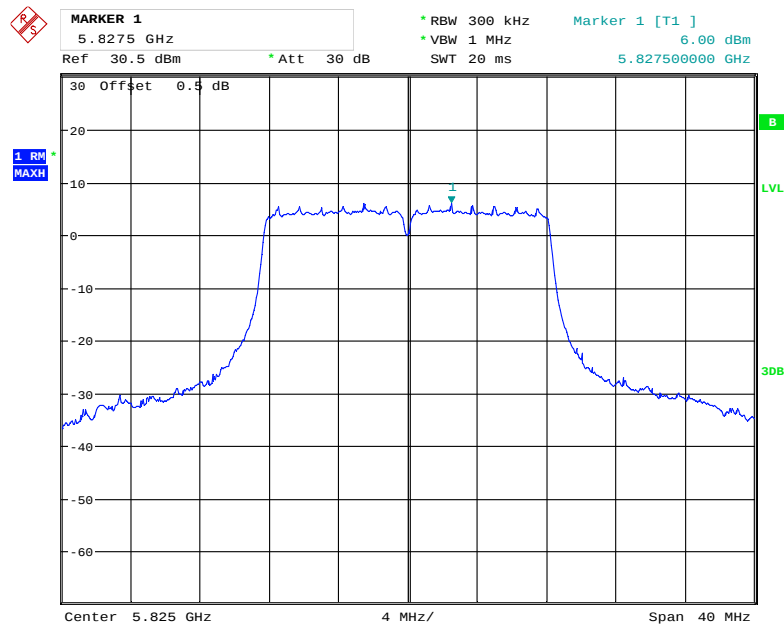


Date: 18.JUL.2019 08:54:06

802.11n ht20 Low Channel

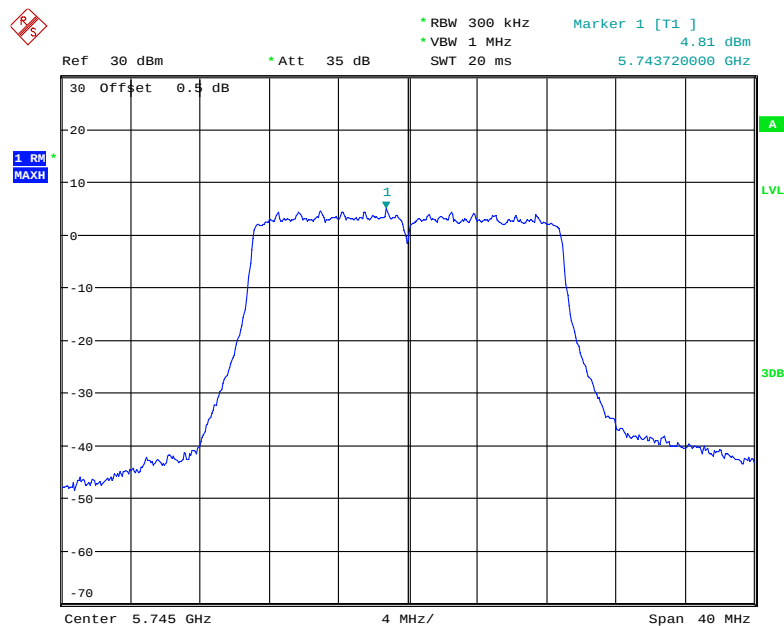


Date: 17.JUL.2019 18:17:10

802.11n ht20 Middle Channel

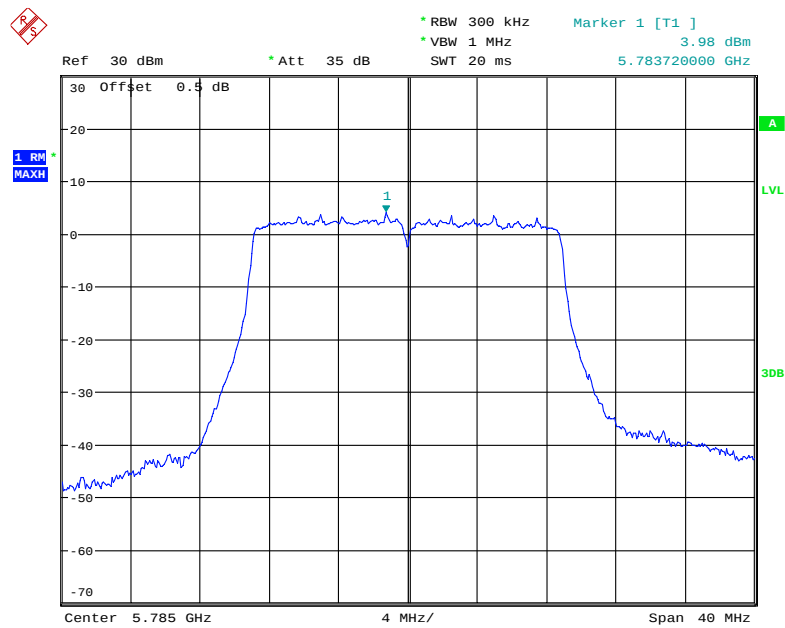


Date: 17.JUL.2019 18:17:31

802.11n ht20 High Channel

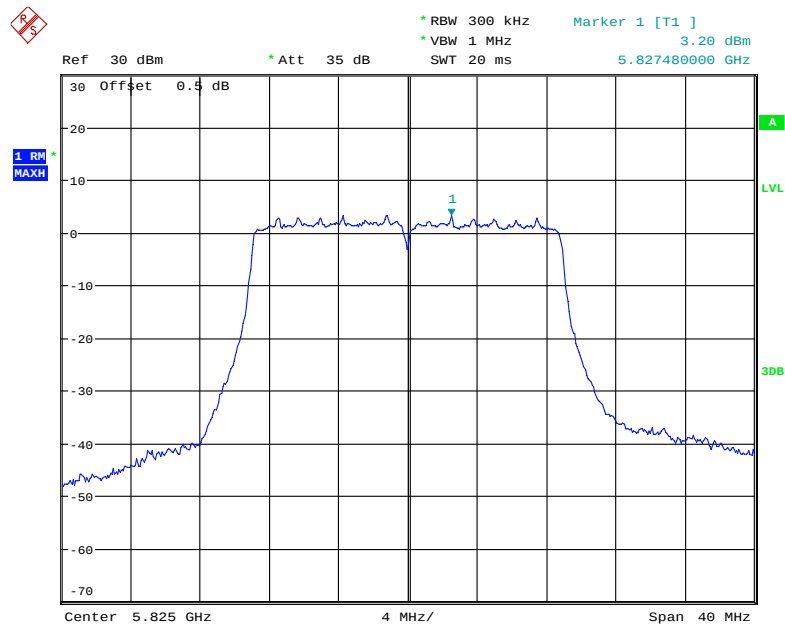


Date: 17.JUL.2019 18:17:58

802.11n ht40 Low Channel

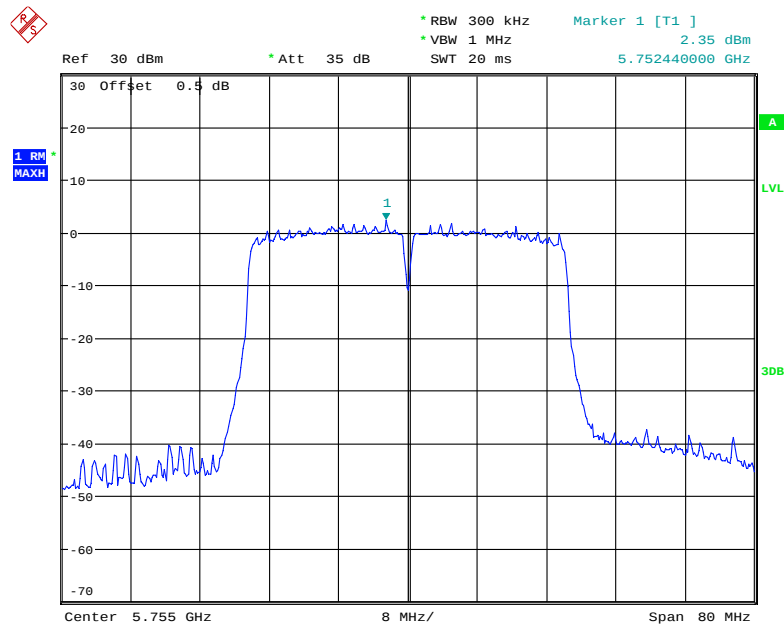


Date: 17.JUL.2019 18:14:26

802.11n ht40 High Channel

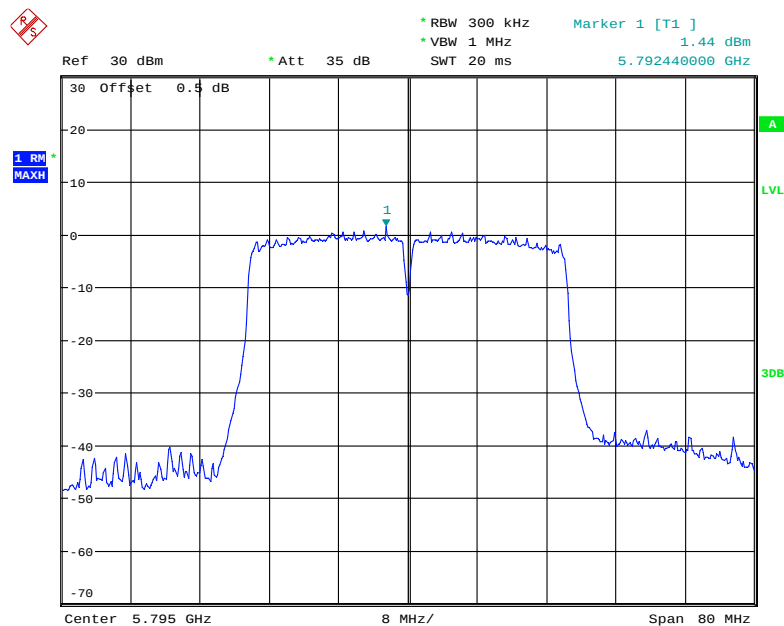


Date: 17.JUL.2019 18:14:50

802.11ac vht20 Low Channel

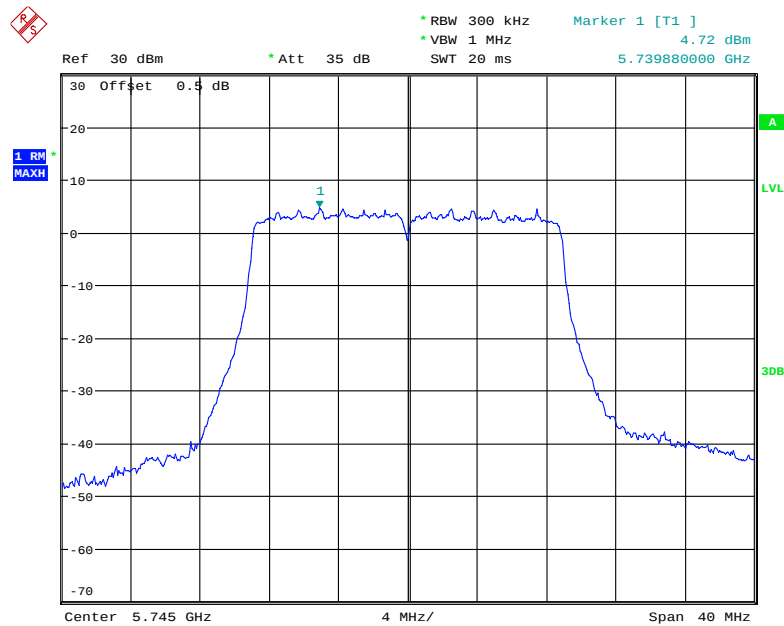


Date: 17.JUL.2019 18:15:33

802.11ac vht20 Middle Channel

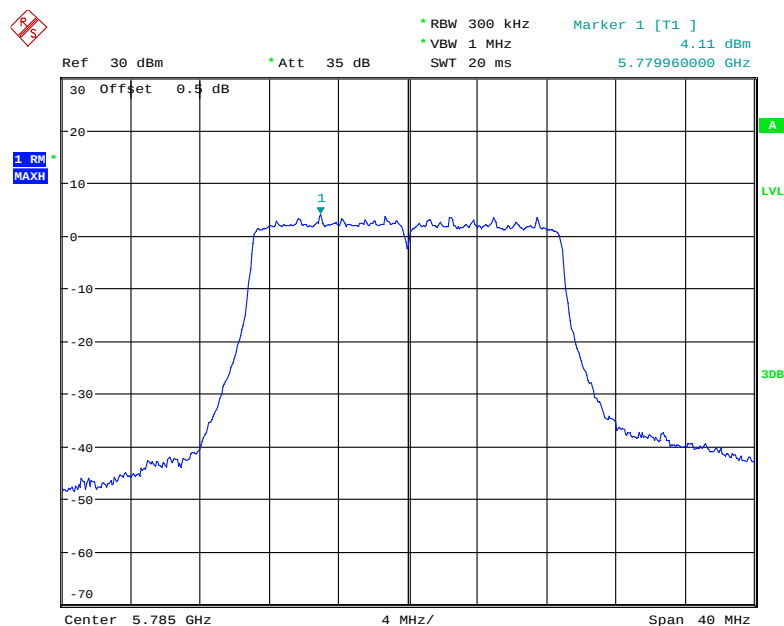


Date: 17.JUL.2019 18:16:08

802.11ac vht20 High Channel

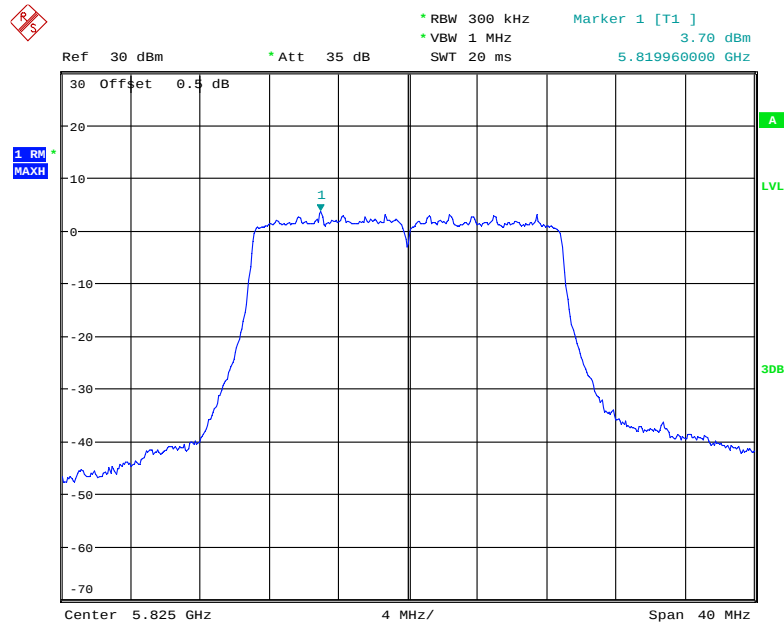


Date: 17.JUL.2019 18:16:38

802.11ac vht40 Low Channel

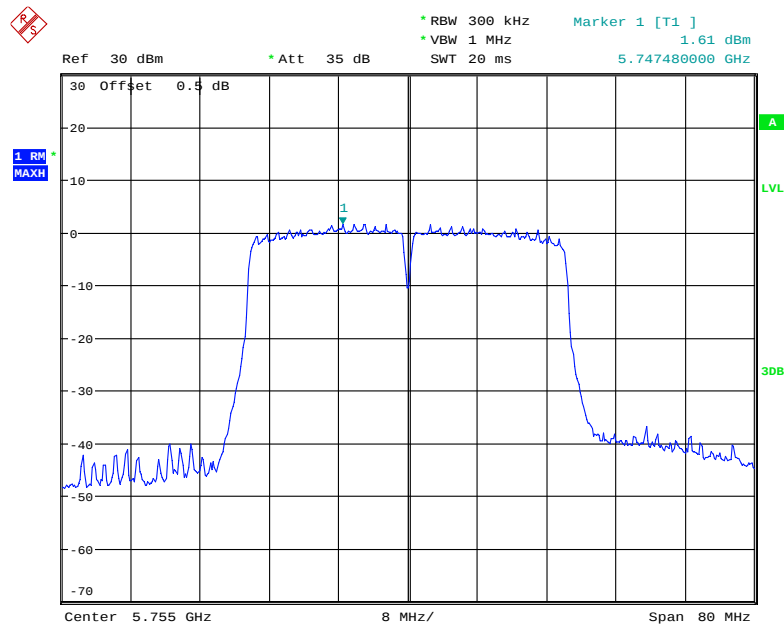


Date: 17.JUL.2019 18:13:26

802.11ac vht40 High Channel

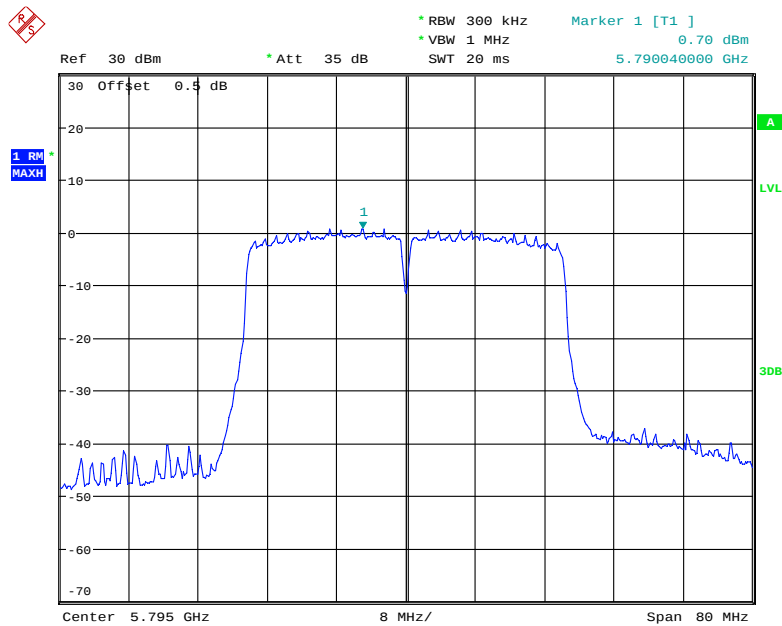

Date: 17.JUL.2019 18:13:52

802.11ac vht80 Channel

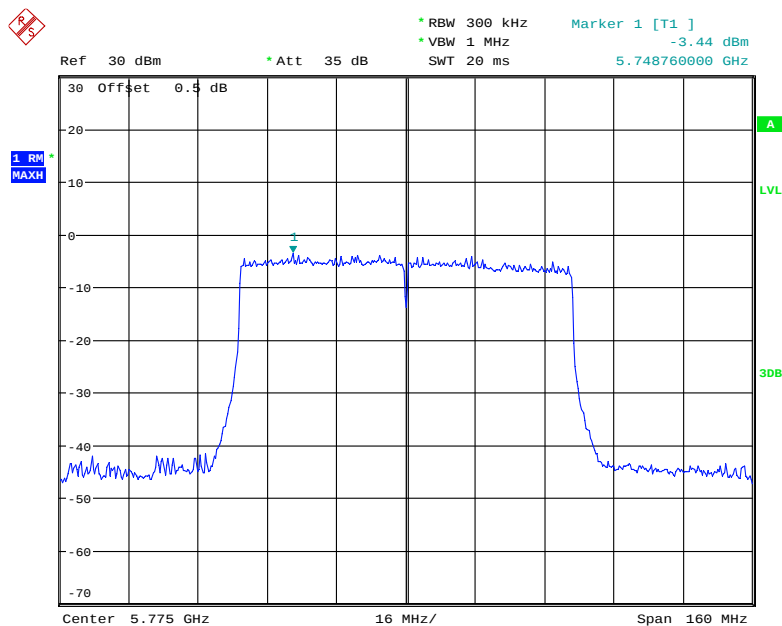

Date: 17.JUL.2019 18:12:59

***** END OF REPORT *****