

Prüfbericht-Nr.: Test report no.:	CN228ZHJ 001	Auftrags-Nr.: Order no.:	168373325	Seite 1 von 25 Page 1 of 25
Kunden-Referenz-Nr.: Client reference no.:	N/A	Auftragsdatum: Order date:	2022-05-19	
Auftraggeber: Client:	United Automotive Electronic Systems Co., Ltd. No. 555 Rong Qiao Road, Pudong New Area, Shanghai, China			
Prüfgegenstand: Test item:	Body control module			
Bezeichnung / Typ-Nr.: Identification / Type no.:	GEM LV2.1 DLIS			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	CFR47 FCC Part15: Subpart C Section 15.209			
Wareneingangsdatum: Date of sample receipt:	2022-05-19	Please refer to photo documents		
Prüfmuster-Nr.: Test sample no.:	A003256798-003			
Prüfzeitraum: Testing period:	2022-05-19 to 2022-05-25			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	Hardy Suo		genehmigt von: authorized by:	Lin Lin
Datum: Date:	2022-06-06		Ausstellungsdatum: Issue date:	2022-06-06
Stellung / Position:	Sachverständige(r) / Expert		Stellung / Position:	Sachverständige(r) / Expert
Sonstiges / Other:	FCC ID: 2AMR2DLIS21			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	1 = sehr gut P(ass) = entspricht o.g. Prüfgrundlage(n)	2 = gut F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	3 = befriedigend F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	4 = ausreichend N/A = nicht anwendbar
* Legend:	1 = very good P(ass) = passed a.m. test specification(s)	2 = good F(ail) = failed a.m. test specification(s)	3 = satisfactory F(ail) = failed a.m. test specification(s)	4 = sufficient N/A = not applicable
5 = mangelhaft N/T = nicht getestet				
5 = poor N/T = not tested				
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht - Nr.: CN228ZHJ 001
Test Report No.

Seite 2 von 25
Page 2 of 25

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 SPURIOUS EMISSION

RESULT: Pass

CONTENTS

1.	GENERAL REMARKS	4
1.1	COMPLEMENTARY MATERIALS	4
2.	TEST SITES.....	5
2.1	TEST FACILITIES.....	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	6
2.5	MEASUREMENT UNCERTAINTY.....	7
2.6	LOCATION OF ORIGINAL DATA	7
2.7	STATUS OF FACILITY USED FOR TESTING.....	7
3.	GENERAL PRODUCT INFORMATION	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS.....	9
3.5	SUBMITTED DOCUMENTS.....	9
4.	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE	10
4.5	TEST SETUP DIAGRAM	11
5.	TEST RESULTS	12
5.1	TRANSMITTER REQUIREMENT & TEST SUITES.....	12
5.1.1	Antenna Requirement	12
5.1.2	Spurious Emission	13
6.	LIST OF TABLES.....	25

Prüfbericht - Nr.: CN228ZHJ 001
Test Report No.

Seite 4 von 25
Page 4 of 25

1. General Remarks

1.1 Complementary Materials

All attachments are integral parts of this test report. This applies especially to the following appendixes:
None.

Prüfbericht - Nr.: CN228ZHJ 001
Test Report No.

Seite 5 von 25
Page 5 of 25

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shenzhen) Co., Ltd. (A2LA Certificate Number: 5162.01)

No. 362 Huanguan Road Middle, Longhua District, Shenzhen 518110, People's Republic of China

FCC Accreditation Designation No.: CN1260

ISED Wireless Device Testing Laboratory: 25069

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equip. No.	Description	Manufacturer	Model	Serial No.	Calibrated until (DD.MM.YYYY)
G1826021	EMI Test Receiver	R&S	ESR 7	102021	10.08.2022
G1826023	Signal Analyzer	R&S	FSV 40	101439	09.08.2022
G1826024	System Controller Interface	R&S	SCI-100	S10010038	N/A
G1826025	Filterbank	R&S	Wlan	100759	09.08.2022
G1826026	OSP	R&S	OSP 120	102040	N/A
G1826028	Pre-amplifier	R&S	SCU08F1	08320031	09.08.2022
G1826029	Amplifier	R&S	SCU-18F	180070	09.08.2022
G1826030	Amplifier	R&S	SCU40A	100475	09.08.2022
G1826031	Trilog Broadband Antenna (30 MHz - 7 GHz)	Schwarzbeck	VULB 9162	193	08.08.2022
G1826032	Double-Ridged Antenna (1 -18 GHz)	ETS-LINDGREN	3117	00218717	08.08.2022
G1826033	Wideband Ridged Horn Antenna (18-40 GHz)	Steatite	QMS-00880	19067	08.08.2022
G1826034	Active Loop Antenna	Schwarzbeck	FMZB 1513	302	13.09.2022
G1826036	Test software	R&S	EMC32 (V10.60.10)	N/A	N/A
G1826037	Control PC	Dell	OptiPlex 7050	36NV9P2	N/A
G1826433	3m Semi-Anechoic Chamber	Albatross	SAC-3m	APC17151-SAC	22.06.2024

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 1 \times 10^{-7}$
3	Radiated Emission of Transmitter, valid up to 26.5 GHz	± 6 dB
4	Radiated Emission of Receiver, valid up to 26.5 GHz	± 6 dB
5	Radiated Emission (3m SAC), 30MHz to 1000MHz	± 4.52 dB
6	Radiated Emission (3m SAC), above 1000MHz	± 4.37 dB
7	Temperature	± 1 °C
8	Humidity	± 5 %
9	Voltage (DC)	± 1 %
10	Voltage (AC, <10kHz)	± 2 %

2.6 Location of Original Data

The original copies of all test data taken during actual testing were attached in this report and delivered to the applicant. A copy has been retained in the TÜV Rheinland (Shenzhen) Co., Ltd. file for certification follow-up purposes.

2.7 Status of Facility Used for Testing

The TÜV Rheinland (Shenzhen) Co., Ltd. Test facility located at 362 Huanguan Road Middle Longhua District, Shenzhen 518110 People's Republic of China is listed on the US Federal Communications Commission list of facilities approved to perform measurements.

3. General Product Information

3.1 Product Function and Intended Use

The EUT is a vehicular instrument Body control module (M/N: GEM LV2.1 DLIS) which that supports RFID 125 kHz and 433.92MHz wireless technologies.

For details refer to user manual and circuit diagram.

3.2 Ratings and System Details

Table 3: Technical Specification

Technical Specification	Value
Product Name	Body control module
Model	GEM LV2.1 DLIS
Brand Name	UAES
FCC ID	2AMR2DLIS21
Operating Frequency	Tx: 125kHz Rx: 433.92MHz
Modulation	ASK
Antenna Number	2 (1 for 125kHz, 1 for 433.92MHz)
Antenna Type	Ferrite loop antenna for 125kHz Micro strip monopole antenna for 433.92MHz
Antenna Gain	0dBi max
Operation Voltage	DC 12V
Operation Temperature	-40 °C ~ 85 °C

3.3 Independent Operation Modes

The basic operation modes are:

- A. Transmission
- B. Standby

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

3.5 Submitted Documents

- | | |
|--------------------|----------------------|
| - Bill of Material | - Circuit Diagram |
| - PCB Layout | - Instruction Manual |
| - Photo Document | - Rating Label |

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

4.3 Special Accessories and Auxiliary Equipment

The EUT was tested together with the following accessories:


Description	Manufacturer	Model	S/N	Note
-	-	-	-	-

4.4 Countermeasures to achieve EMC Compliance

The test sample which has been tested contained the noise suppression parts as described in the Constructional Data Form or the Technical Construction File. No additional measures were employed to achieve compliance.

4.5 Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

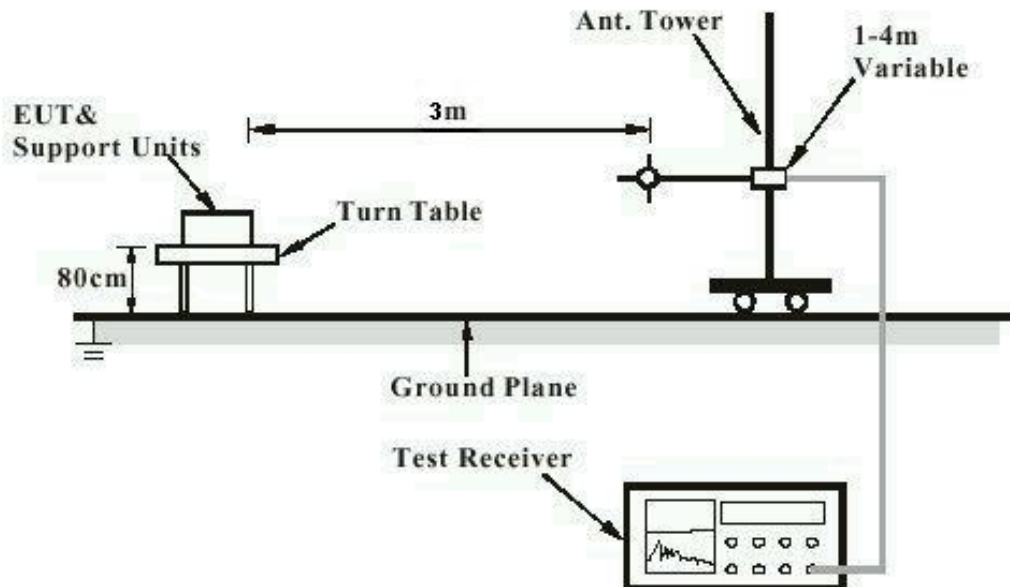

Prüfbericht - Nr.: **CN228ZHJ 001**
Test Report No.Seite 12 von 25
Page 12 of 25

5. Test Results

5.1 Transmitter Requirement & Test Suites

5.1.1 Antenna Requirement

RESULT:**Pass****Test Specification**

Test standard

FCC Part 15.203

The EUT has a Ferrite loop antenna for 125kHz transmitter with gain 0 dBi max. Therefore the EUT is considered sufficient to comply with the provision.

Refer to EUT Photo for further details.

Prüfbericht - Nr.: CN228ZHJ 001
Test Report No.**Seite 13 von 25**
Page 13 of 25

5.1.2 Spurious Emission

RESULT:**Pass****Test Specification**

Date of testing	:	2022-05-19 to 2022-05-25
Test standard	:	FCC part 15.209
Basic standard	:	ANSI C63.10: 2013
Limits	:	FCC part 15.209(a)
Kind of test site	:	3m Semi-Anechoic Chamber & Anechoic Chamber

Test setup


Test Channel	:	125 kHz
Operation mode	:	A
Ambient temperature	:	Refer to test plot
Relative humidity	:	Refer to test plot
Atmospheric pressure	:	101kPa

Test plot as below.

5.1.2.1 9 kHz – 30 MHz

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: X
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

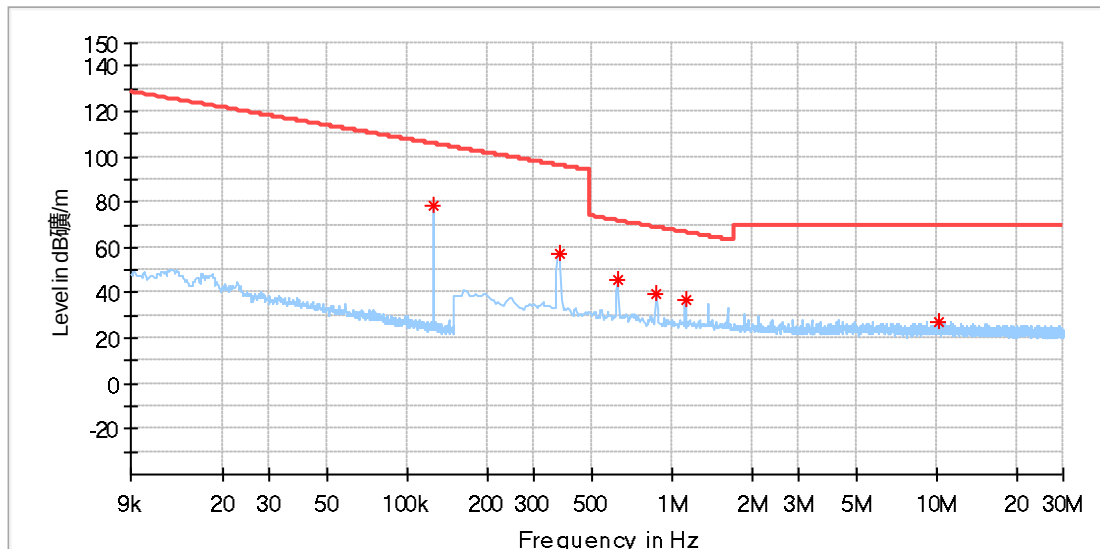

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124821	78.55	105.67	27.12	100.0	V	339.0	20.1
0.373875	57.61	96.15	38.54	100.0	V	182.0	20.1
0.619699	45.93	71.77	25.83	100.0	V	190.0	20.1
0.869912	39.59	68.83	29.24	100.0	V	187.0	20.1
1.120125	36.51	66.64	30.13	100.0	V	182.0	20.1
10.171699	27.07	69.50	42.43	100.0	V	199.0	20.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: Y
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

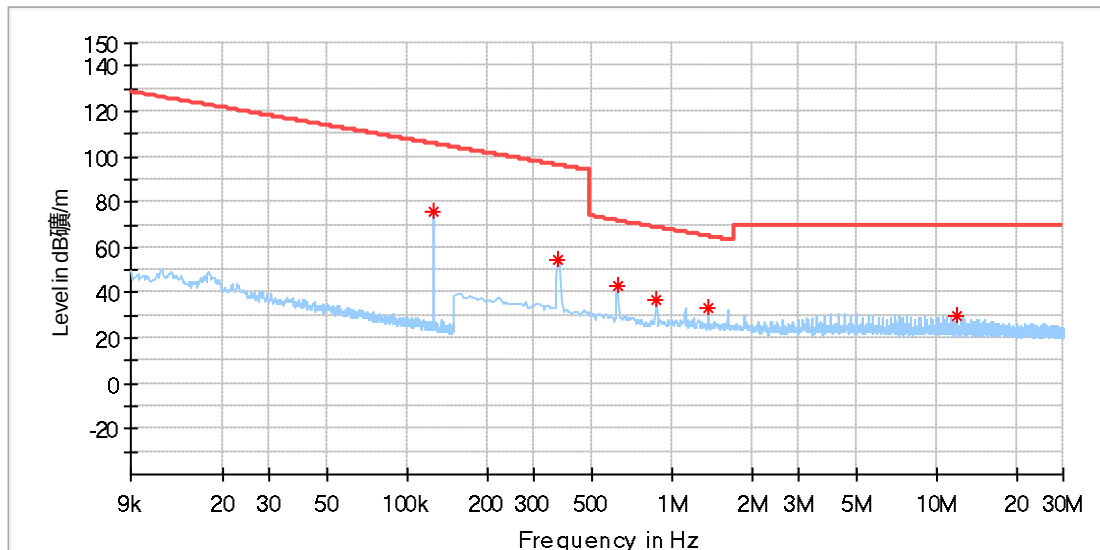

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124821	75.58	105.67	30.09	100.0	V	265.0	20.1
0.369485	54.41	96.25	41.84	100.0	V	267.0	20.1
0.619699	43.42	71.77	28.35	100.0	V	258.0	20.1
0.874302	36.64	68.79	32.14	100.0	V	267.0	20.1
1.370338	32.92	64.89	31.97	100.0	V	122.0	20.1
11.980257	29.41	69.50	40.09	100.0	V	60.0	20.4

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Body control module
Model: GEM LV2.1 DLIS
Test Mode: 125kHz, test Antenna orientation: Z
Order No/Sample No: 168373325/A003256798-003
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:58%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

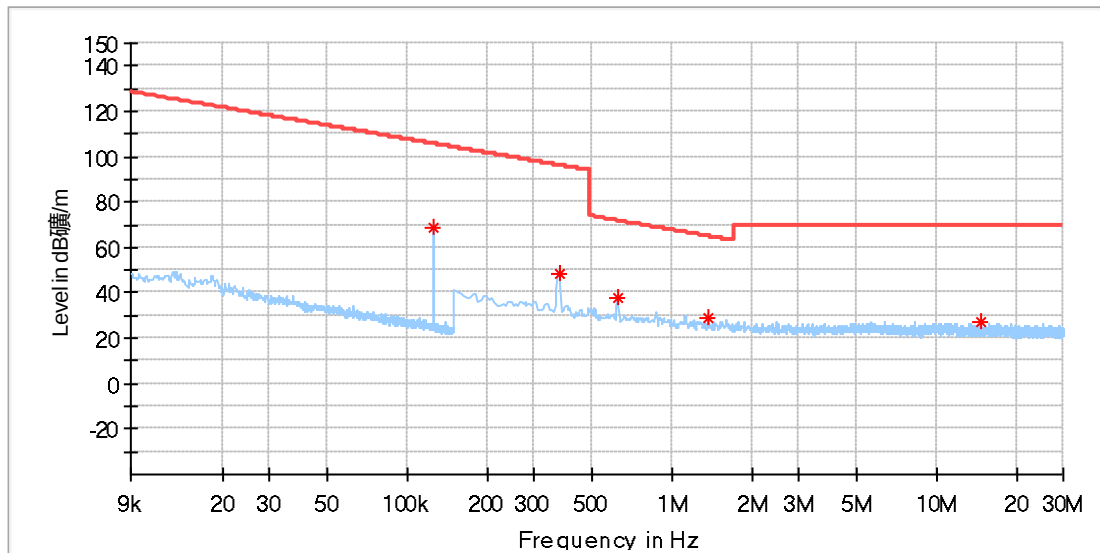

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124821	68.84	105.67	36.84	100.0	V	185.0	20.1
0.373875	48.73	96.15	47.42	100.0	V	342.0	20.1
0.624088	37.93	71.71	33.78	100.0	V	353.0	20.1
1.370338	29.29	64.89	35.60	100.0	V	350.0	20.1
14.706265	26.78	69.50	42.72	100.0	V	205.0	20.5

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

5.1.2.2 9 kHz – 90 kHz

Test Report

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: X
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

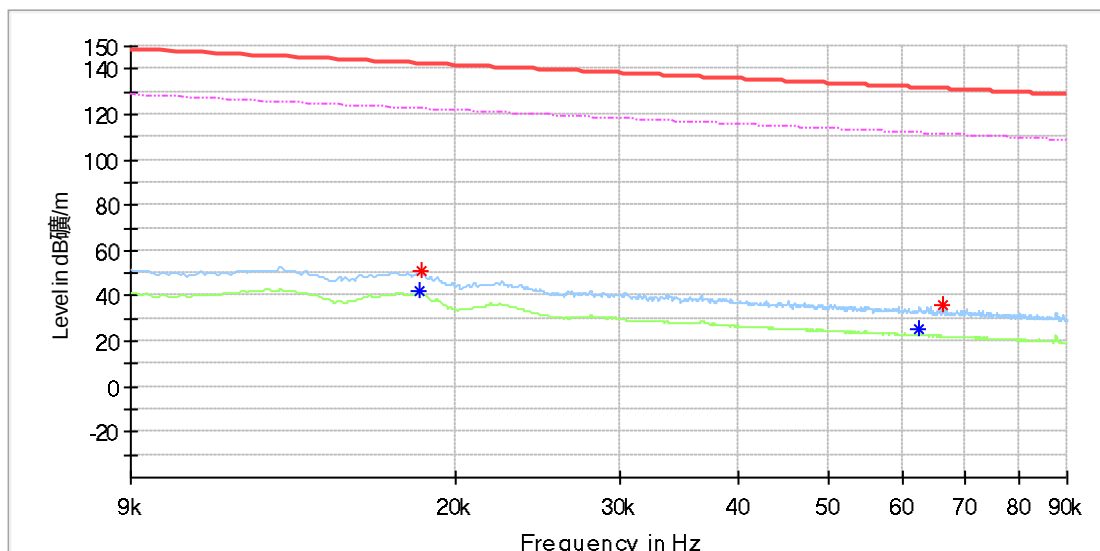


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	---	42.06	122.33	80.27	100.0	V	306.0	20.0
0.018373	50.88	---	142.31	91.43	100.0	V	306.0	20.0
0.062576	---	25.20	111.67	86.47	100.0	V	54.0	20.0
0.066452	36.11	---	131.14	95.03	100.0	V	131.0	20.0

EUT Information

EUT Name: Body control module
Model: GEM LV2.1 DLIS
Test Mode: 125kHz, test Antenna orientation: Y
Order No/Sample No: 168373325/A003256798-003
Test Voltage:: DC 12V From DC Source
Remark: Temp 23 Humi:58%
Test Standard: FCC Part 15C
Tested By: Kei Zhang
Reviewed By: Terry Yin

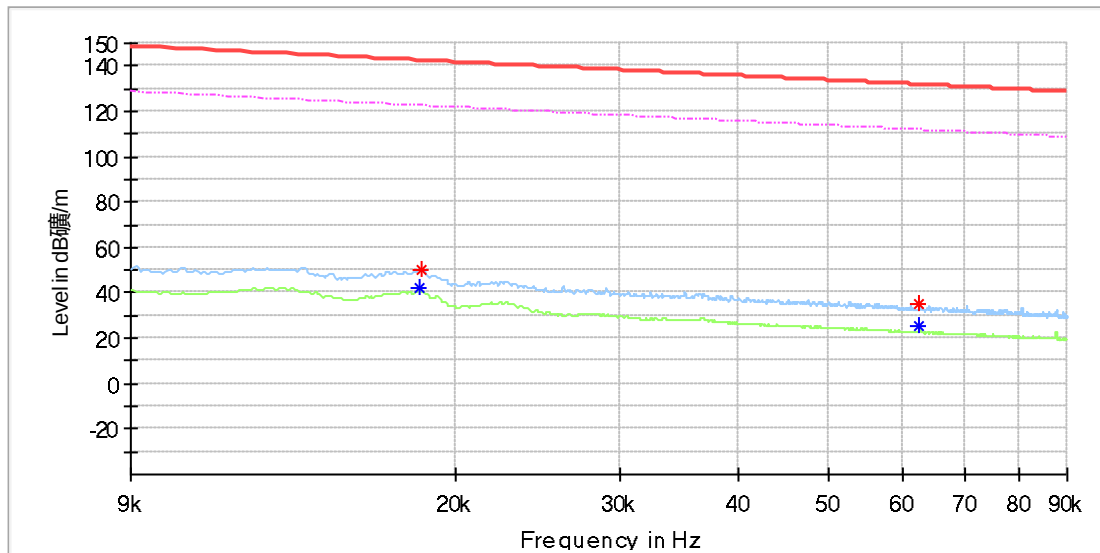


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	---	41.84	122.33	80.49	100.0	V	261.0	20.0
0.018431	50.44	---	142.28	91.84	100.0	V	261.0	20.0
0.062576	35.07	---	131.67	96.60	100.0	V	337.0	20.0
0.062576	---	25.16	111.67	86.51	100.0	V	337.0	20.0

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: Z
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

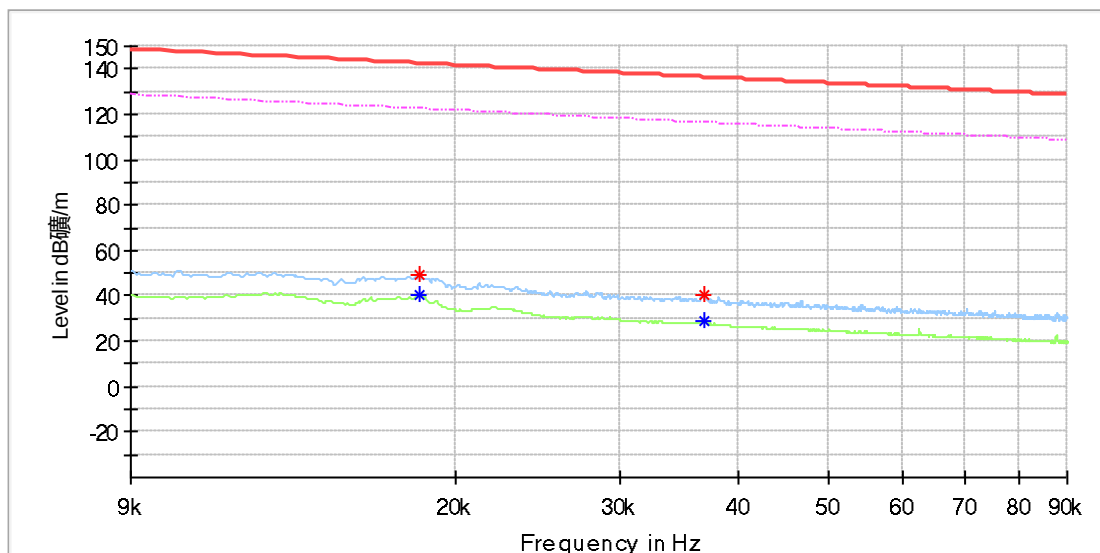


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.018315	48.85	---	142.33	93.49	100.0	V	257.0	20.0
0.018315	---	40.76	122.33	81.57	100.0	V	257.0	20.0
0.036829	40.32	---	136.27	95.94	100.0	V	233.0	20.0
0.036887	---	28.83	116.25	87.42	100.0	V	233.0	20.0

5.1.2.3 110 kHz – 490 kHz

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: X
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

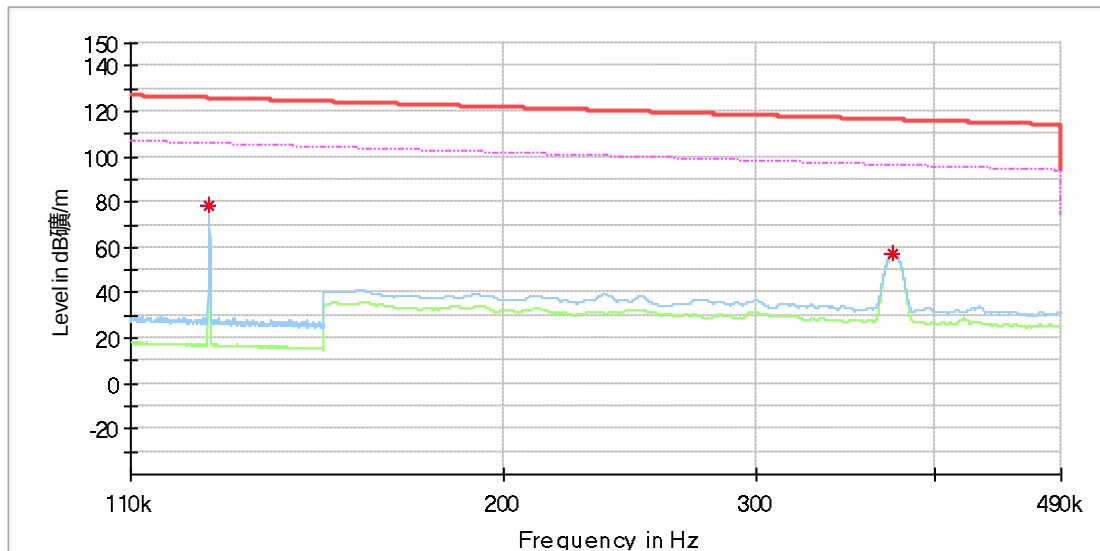


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124772	78.51	---	125.68	47.17	100.0	V	329.0	20.0
0.124772	---	78.38	105.68	27.30	100.0	V	329.0	20.0
0.374350	57.64	---	116.14	58.49	100.0	V	343.0	20.0
0.374350	---	57.48	96.14	38.66	100.0	V	343.0	20.0

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: Y
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

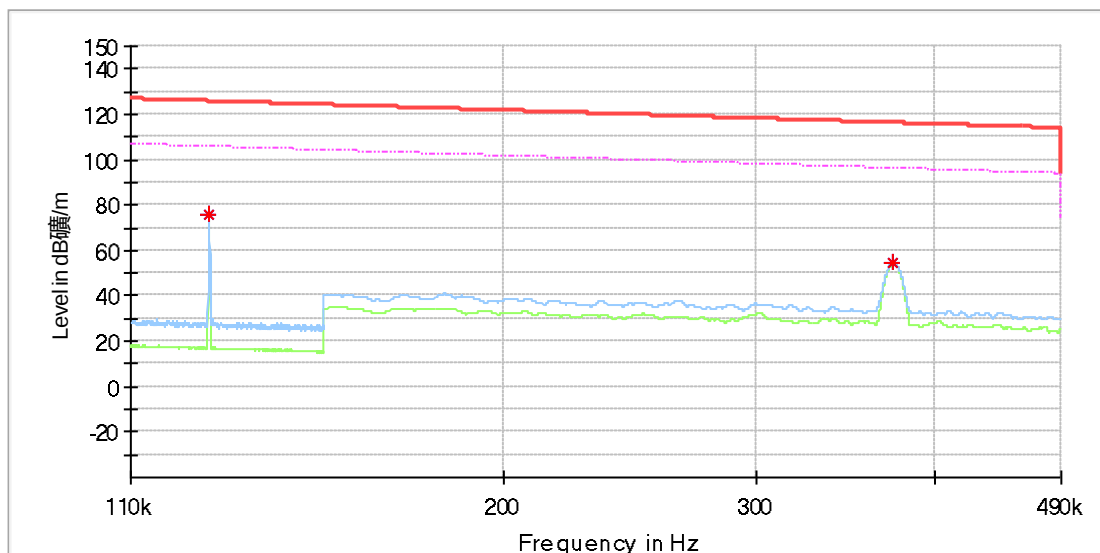


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124772	75.55	---	125.68	50.13	100.0	V	250.0	20.0
0.124772	---	75.46	105.68	30.22	100.0	V	250.0	20.0
0.374350	54.79	---	116.14	61.34	100.0	V	268.0	20.0
0.374350	---	54.37	96.14	41.77	100.0	V	268.0	20.0

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: Z
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

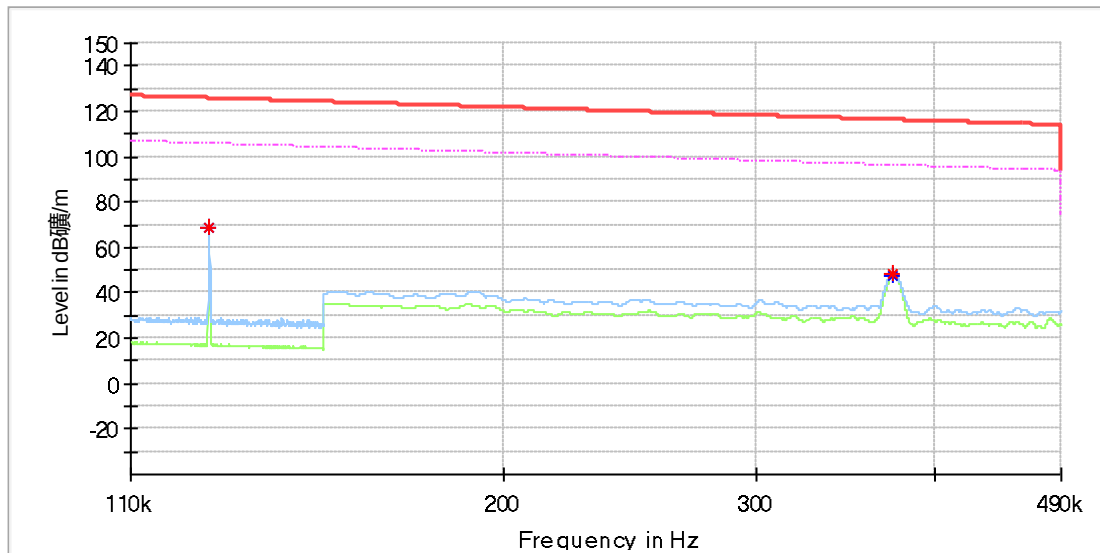


Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
0.124772	68.74	---	125.68	56.93	100.0	V	179.0	20.0
0.124772	---	68.63	105.68	37.05	100.0	V	179.0	20.0
0.374250	48.56	---	116.14	67.58	100.0	V	194.0	20.0
0.374450	---	47.79	96.14	48.34	100.0	V	194.0	20.0

5.1.2.4 30 MHz – 1 GHz

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: H
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

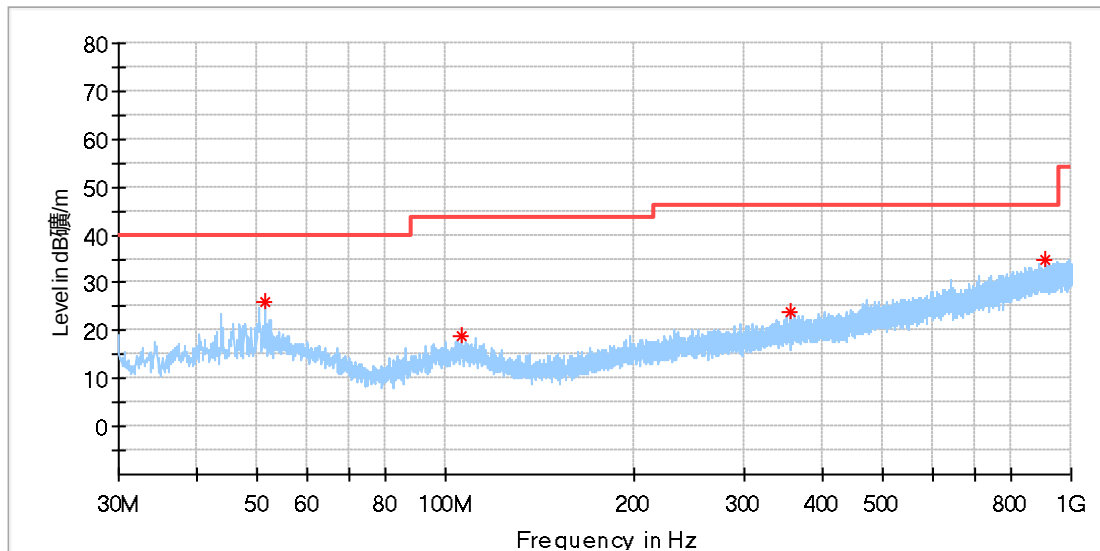

Critical_Freqs


Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.388500	25.90	40.00	14.10	100.0	H	20.0	-18.3
106.193500	18.78	43.50	24.72	100.0	H	218.0	-18.8
356.017000	23.73	46.00	22.27	100.0	H	358.0	-14.7
908.092500	34.82	46.00	11.18	100.0	H	211.0	-4.9

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name:	Body control module
Model:	GEM LV2.1 DLIS
Test Mode:	125kHz, test Antenna orientation: V
Order No/Sample No:	168373325/A003256798-003
Test Voltage::	DC 12V From DC Source
Remark:	Temp 23 Humi:58%
Test Standard:	FCC Part 15C
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

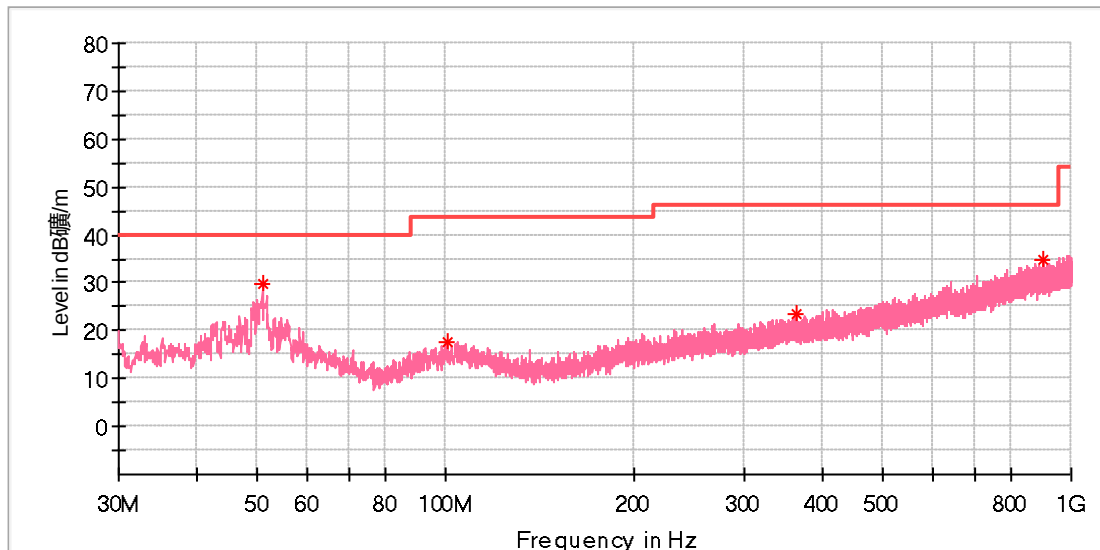

Critical_Freqs

Frequency (MHz)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
51.000500	29.89	40.00	10.11	100.0	V	239.0	-18.3
100.325000	17.72	43.50	25.78	100.0	V	73.0	-19.0
364.553000	23.63	46.00	22.37	100.0	V	355.0	-14.6
899.993000	34.64	46.00	11.36	100.0	V	14.0	-5.0

Final_Result

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

Prüfbericht - Nr.: CN228ZHJ 001
Test Report No.

Seite 25 von 25
Page 25 of 25

6. List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification.....	8