



# Test Report

## FCC Part15 Subpart C& RSS-247 Issue 2

Product Name : Object Locator  
Model No. : TBOL100-915  
FCC ID : 2AMUGTBOL100  
IC : 22980-TBOL100

Applicant : TrackNet, Inc

Address : 900 Lafayette Street #329 Santa Clara, CA 95050 USA

Date of Receipt : Aug. 25, 2017  
Test Date : Aug. 25, 2017~ Dec. 01, 2017  
Issued Date : Dec. 22, 2017  
Report No. : 1782120R-RF-US-P06V02  
Report Version : V2.0

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF, A2LA or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

# Test Report Certification

Issued Date : Dec. 22, 2017  
Report No. : 1782120R-RF-US-P06V02



Product Name : Object Locator  
Applicant : TrackNet, Inc  
Address : 900 Lafayette Street #329 Santa Clara, CA 95050 USA  
Manufacturer : FLEXTRONICS COMPUTING (SUZHOU) CO., LTD  
Address : No. 1 Guanpu Road, Guoxiang Street, Wuzhong District  
Suzhou, Jiangsu, China, 215124  
Model No. : TBOL100-915  
FCC ID : 2AMUGTBOL100  
IC : 22980-TBOL100  
EUT Voltage : 3.8V DC  
Applicable Standard : FCC CFR Title 47 Part 15 Subpart C  
ANSI C63.10:2013  
KDB558074 D01V04  
ISED RSS-Gen Issue 4 / RSS-247 Issue 2  
Test Result : Complied  
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.  
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,  
Jiangsu, China  
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098  
FCC Designation Number: CN1199; IC Lab Code: 4075B

Documented By :

*Kathy Feng*

(Project Assistant: Kathy Feng)

Reviewed By :

*Frank He*

(Senior Project Manager: Frank He )

Approved By :

*Harry Zhao*

(Engineering Manager: Harry Zhao )

## TABLE OF CONTENTS

| Description                                          | Page |
|------------------------------------------------------|------|
| 1. General Information .....                         | 6    |
| 1.1. EUT Description .....                           | 6    |
| 1.2. Antenna information .....                       | 8    |
| 1.3. Mode of Operation .....                         | 9    |
| 1.4. Tested System Details .....                     | 9    |
| 1.5. Configuration of Tested System .....            | 10   |
| 2. Technical Test .....                              | 12   |
| 2.1. Summary of Test Result .....                    | 12   |
| 2.2. Test Frequency configuration: .....             | 13   |
| 2.3. Test Environment .....                          | 14   |
| 2.4. Measurement Uncertainty .....                   | 14   |
| 3. AC Power Line Conducted Emission .....            | 15   |
| 3.1. Test Equipment .....                            | 15   |
| 3.2. Test Setup .....                                | 15   |
| 3.3. Limit .....                                     | 16   |
| 3.4. Test Procedure .....                            | 16   |
| 3.5. Test Result .....                               | 17   |
| 4. Emissions in restricted frequency bands .....     | 19   |
| 4.1. Test Equipment .....                            | 19   |
| 4.2. Test Setup .....                                | 20   |
| 4.3. Limit .....                                     | 21   |
| 4.4. Test Procedure .....                            | 24   |
| 4.5. EUT test Axis definition .....                  | 25   |
| 4.6. Test Result .....                               | 26   |
| 5. Emissions in non-restricted frequency bands ..... | 34   |
| 5.1. Test Equipment .....                            | 34   |
| 5.2. Test Setup .....                                | 34   |
| 5.3. Limit .....                                     | 35   |
| 5.4. Test Procedure .....                            | 36   |
| 5.5. EUT test Axis definition .....                  | 37   |
| 5.6. Test Result .....                               | 38   |
| 6. Radiated Emission Band Edge .....                 | 39   |
| 6.1. Test Equipment .....                            | 39   |
| 6.2. Test Setup .....                                | 40   |
| 6.3. Limit .....                                     | 40   |
| 6.4. Test Procedure .....                            | 41   |
| 6.5. EUT test definition .....                       | 42   |

|       |                                         |    |
|-------|-----------------------------------------|----|
| 6.6.  | Duty Cycle .....                        | 43 |
| 6.7   | Test Result.....                        | 44 |
| 7.    | Occupied Bandwidth .....                | 45 |
| 7.1.  | Test Equipment.....                     | 45 |
| 7.2.  | Test Setup.....                         | 45 |
| 7.3.  | Limit.....                              | 46 |
| 7.4.  | Test Procedure .....                    | 46 |
| 7.5.  | EUT test definition .....               | 47 |
| 7.6.  | Test Result.....                        | 48 |
| 8.    | Fundamental emission output power ..... | 49 |
| 8.1.  | Test Equipment.....                     | 49 |
| 8.2.  | Test Setup.....                         | 49 |
| 8.3.  | Limit.....                              | 50 |
| 8.4.  | Test Procedure .....                    | 51 |
| 8.5.  | EUT test definition .....               | 52 |
| 8.6.  | Test Result.....                        | 53 |
| 9.    | Power Spectral Density .....            | 54 |
| 9.1.  | Test Equipment.....                     | 54 |
| 9.2.  | Test Setup.....                         | 54 |
| 9.3.  | Limit.....                              | 54 |
| 9.4.  | Test Procedure .....                    | 55 |
| 9.5.  | EUT test definition .....               | 56 |
| 9.6.  | Test Result.....                        | 57 |
| 10.   | Antenna Requirement.....                | 58 |
| 10.1. | Limit.....                              | 58 |
| 10.2. | Antenna Connector Construction.....     | 58 |

## History of This Test Report

| REPORT NO.            | VERSION | DESCRIPTION                                                       | ISSUED DATE   |
|-----------------------|---------|-------------------------------------------------------------------|---------------|
| 1782120R-RF-US-P06V02 | V1.0    | Initial Issued Report                                             | Dec. 18, 2017 |
| 1782120R-RF-US-P06V02 | V2.0    | Modified the Model number,<br>Applicant and applicants<br>address | Dec. 22, 2017 |
|                       |         |                                                                   |               |
|                       |         |                                                                   |               |

## 1. General Information

### 1.1. EUT Description

|                    |                |
|--------------------|----------------|
| Product Name       | Object Locator |
| Model No.          | TBOL100-915    |
| EUT Voltage        | 3.8V DC        |
| Frequency Range    | 902~928MHz     |
| Channel Number     | 8              |
| Type of Modulation | LoRa           |
| Data Rate          | DR4:12500bps   |
| Channel Control    | Auto           |

| Working Frequency of Each Channel |           |         |           |         |           |         |           |
|-----------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel                           | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 00                                | 903 MHz   | 01      | 904.6 MHz | 02      | 906.2 MHz | 03      | 907.8 MHz |
| 04                                | 909.4 MHz | 05      | 911.0 MHz | 06      | 912.6 MHz | 07      | 914.2 MHz |

## 1.2. Antenna information

|                                          |                                     |           |                                     |                            |                          |           |
|------------------------------------------|-------------------------------------|-----------|-------------------------------------|----------------------------|--------------------------|-----------|
| Model No.                                | N/A                                 |           |                                     |                            |                          |           |
| Antenna manufacturer                     | N/A                                 |           |                                     |                            |                          |           |
| Antenna Delivery                         | <input checked="" type="checkbox"/> | 1*TX+1*RX | <input type="checkbox"/>            | 2*TX+2*RX                  | <input type="checkbox"/> | 3*TX+3*RX |
| Antenna technology                       | <input checked="" type="checkbox"/> | SISO      |                                     |                            |                          |           |
|                                          | <input type="checkbox"/>            | MIMO      | <input type="checkbox"/>            | Basic                      |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | CDD                        |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | Sectorized                 |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | Beam-forming               |                          |           |
| Antenna Type                             | <input type="checkbox"/>            | External  | <input type="checkbox"/>            | Dipole                     |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | Sectorized                 |                          |           |
|                                          | <input checked="" type="checkbox"/> | Internal  | <input checked="" type="checkbox"/> | PIFA                       |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | PCB                        |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | helical antenna            |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | Ceramic Chip Antenna       |                          |           |
|                                          |                                     |           | <input type="checkbox"/>            | Metal plate type F antenna |                          |           |
| Antenna Technology                       | Ant Gain (dBi)                      |           |                                     |                            |                          |           |
| <input checked="" type="checkbox"/> SISO | -4.63                               |           |                                     |                            |                          |           |



### 1.3. Mode of Operation

| Test Modes List  |
|------------------|
| Mode 1: Transmit |

Note:

1. For portable device, radiated spurious emission was verified over X, Y, Z Axis, and shown the worst case on this report.
2. Regards to the frequency band operation for systems using FHSS modulation: normal operation (hopping) was selected to test for conducted spurious test.
3. The extreme test condition for voltage and temperature were declared by the manufacturer.
4. The reading values of all the test items contain cable loss.


### 1.4. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:


| No. | Product      | Manufacturer | Model No.      | Serial No. | Power Cord       |
|-----|--------------|--------------|----------------|------------|------------------|
| 1   | Notebook     | Lenovo       | Think pad x220 | SUA0600195 | Power by adapter |
| A   | USB Cable    | N/A          | N/A            | N/A        | Shield, 0.75m    |
| B   | Serial Cable | N/A          | N/A            | N/A        | Shield, 0.75m    |
| C   | USB Cable    | N/A          | N/A            | N/A        | Shield, 10m      |
| D   | Serial Cable | N/A          | N/A            | N/A        | Shield, 10m      |

## 1.5. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

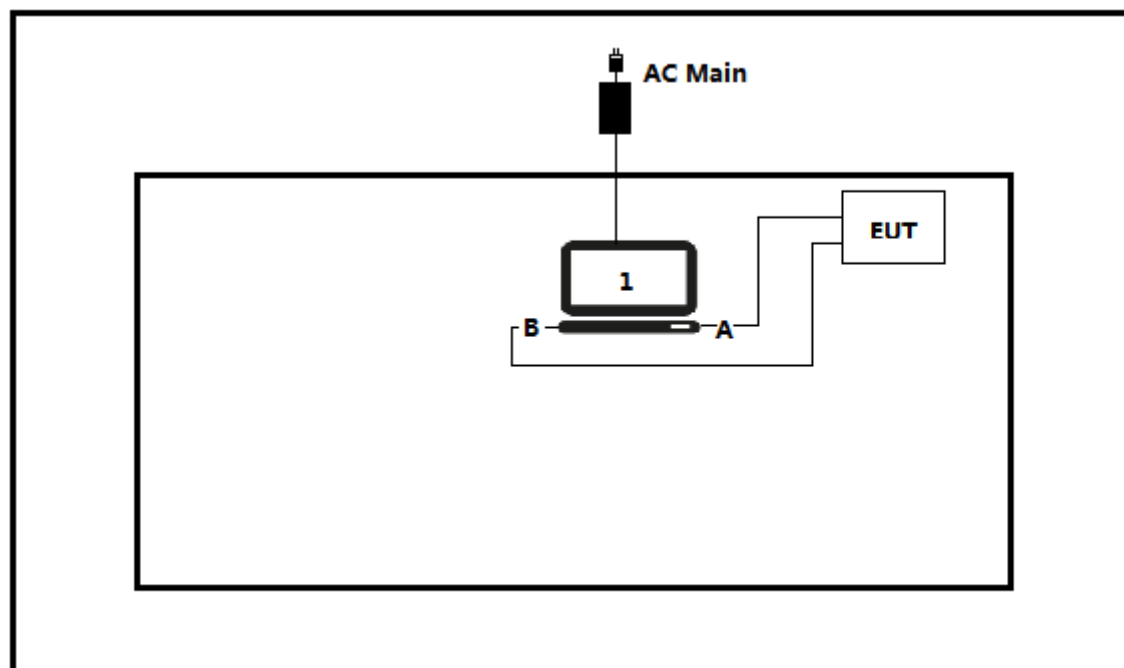

Test setup Diagram- Radiated Emission

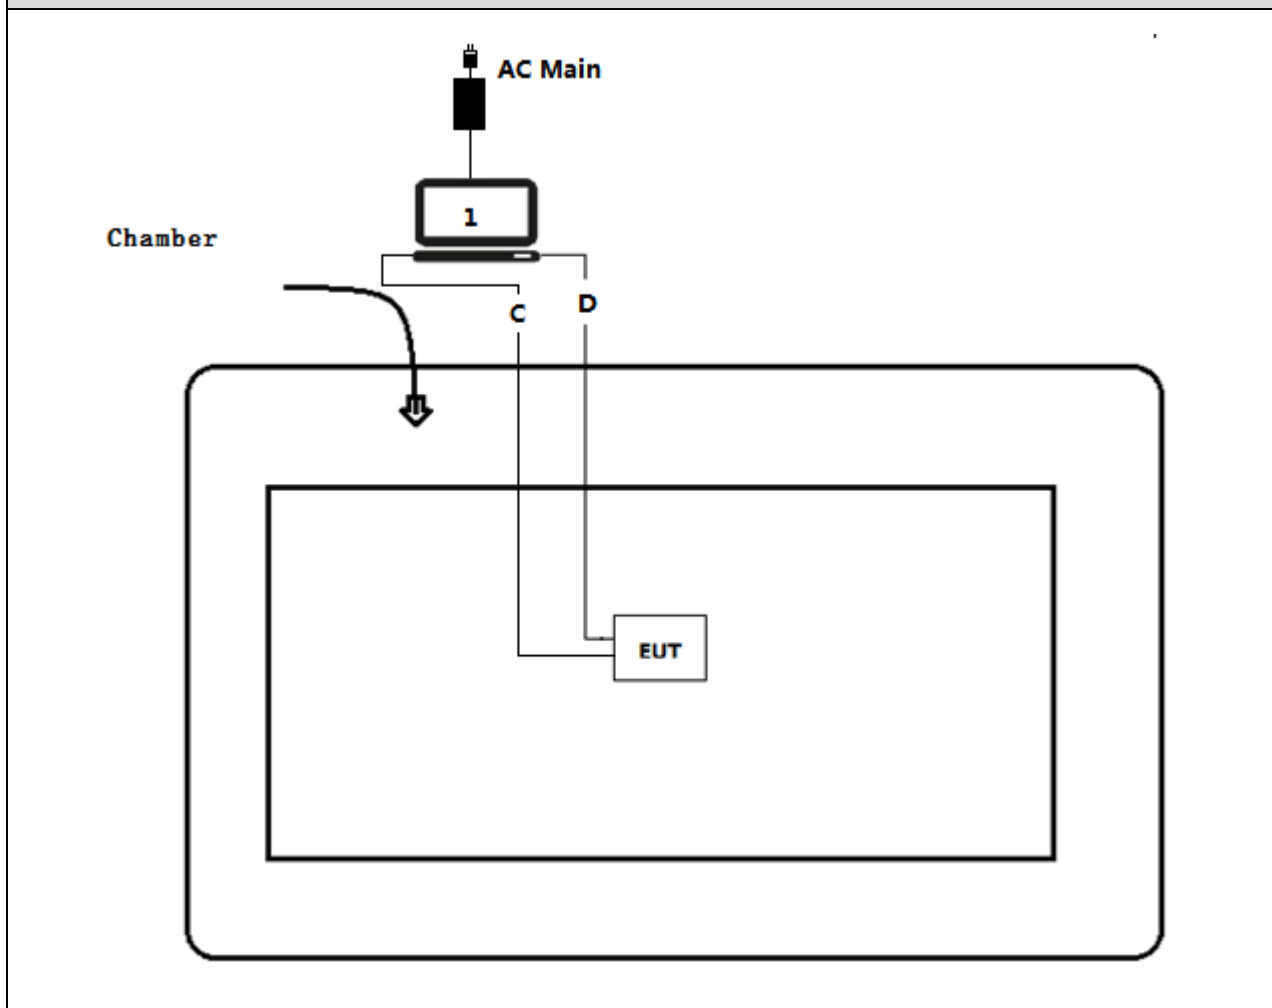

## 2. Technical Test

### 2.1. Summary of Test Result

#### For FCC:

| Performed Test Item                         | Normative References                                          | Limit                          | Result |
|---------------------------------------------|---------------------------------------------------------------|--------------------------------|--------|
| AC Power Line Conducted Emission            | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207       | FCC 15.207                     | PASS   |
| Emissions in restricted frequency bands     | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209       | FCC 15.209                     | PASS   |
| Emissions in non-restricted frequency bands | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)    | $\geq 20\text{dBc}$            | PASS   |
| Radiated Emission Band Edge                 | FCC CFR Title 47 Part 15 Subpart C: 2015 15.247(d)            | FCC 15.209                     | PASS   |
| Occupied Bandwidth                          | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2) | $\geq 500\text{kHz}$           | PASS   |
| Fundamental emission output power           | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3) | $\leq 30\text{dBm}$            | PASS   |
| Power Spectral Density                      | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)    | $\leq 8\text{dBm}/3\text{kHz}$ | PASS   |
| Antenna Requirement                         | FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203       | FCC 15.203                     | PASS   |

**For ISED:**

| Performed Test Item                         | Normative References                                                 | Limit                          | Result |
|---------------------------------------------|----------------------------------------------------------------------|--------------------------------|--------|
| AC Power Line Conducted Emission            | RSS-Gen Issue 4<br>Section 8.8                                       | RSS-Gen                        | PASS   |
| Emissions in restricted frequency bands     | RSS-Gen Issue 4<br>Section 8.9                                       | RSS-Gen                        | PASS   |
| Emissions in non-restricted frequency bands | RSS-247 Issue 2<br>Section A5.5                                      | $\geq 20\text{dBc}$            | PASS   |
| Radiated Emission Band Edge                 | RSS-247 Issue 2<br>Section A5.5                                      | RSS-247                        | PASS   |
| Occupied Bandwidth                          | RSS-Gen Issue 4<br>Section 6.6<br>RSS-247 Issue 2<br>Section A5.2(1) | $\geq 500\text{kHz}$           | PASS   |
| Fundamental emission output power           | RSS-247 Issue 2<br>Section A5.4(4)                                   | $\leq 30\text{dBm}$            | PASS   |
| Power Spectral Density                      | RSS-247 Issue 2<br>Section A5.2(2)                                   | $\leq 8\text{dBm}/3\text{kHz}$ | PASS   |
| Antenna Requirement                         | RSS-Gen Issue 4<br>Section 8.3                                       | RSS-Gen Issue 4                | PASS   |

**2.2. Test Frequency configuration:**

| Channel | Frequency | Channel | Frequency | Channel | Frequency |
|---------|-----------|---------|-----------|---------|-----------|
| Low     | 903 MHz   | Mid     | 907.8 MHz | High    | 914.2 MHz |

### 2.3. Test Environment

| Items                      | Required (IEC 68-1) | Actual   |
|----------------------------|---------------------|----------|
| Temperature (°C)           | 15-35               | 21       |
| Humidity (%RH)             | 25-75               | 50       |
| Barometric pressure (mbar) | 860-1060            | 950-1000 |

### 2.4. Measurement Uncertainty

| Test Items                         | Uncertainty                    |
|------------------------------------|--------------------------------|
| AC Power Line Conducted Emission   | $\pm 2.02\text{dB}$            |
| Radiated Emission                  | Below 1GHz $\pm 3.8\text{ dB}$ |
|                                    | Above 1GHz $\pm 3.9\text{ dB}$ |
| RF Antenna Port Conducted Emission | $\pm 1.27\text{dB}$            |
| Radiated Emission Band Edge        | $\pm 3.9\text{dB}$             |
| Occupied Bandwidth                 | $\pm 1\text{kHz}$              |
| Power Spectral Density             | $\pm 1.27\text{dB}$            |


### 3. AC Power Line Conducted Emission

#### 3.1. Test Equipment

| AC Power Line Conducted Emission / TR-1 |              |          |            |            |               |
|-----------------------------------------|--------------|----------|------------|------------|---------------|
| Instrument                              | Manufacturer | Type No. | Serial No. | Cal. Date  | Cal. Due Date |
| EMI Test Receiver                       | R&S          | ESCI     | 100906     | 2017.03.05 | 2018.03.04    |
| Two-Line V-Network                      | R&S          | ENV 216  | 101189     | 2017.07.16 | 2018.07.15    |
| Two-Line V-Network                      | R&S          | ENV 216  | 101044     | 2017.09.04 | 2018.09.03    |
| 50ohm Coaxial Switch                    | Anritsu      | MP59B    | 6200464462 | N/A        | N/A           |
| 50ohm Termination                       | SHX          | TF2      | 07081402   | 2017.09.04 | 2018.09.03    |
| Temperature/Humidity Meter              | Zhichen      | ZC1-2    | TR1-TH     | 2017.01.05 | 2018.01.04    |

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

#### 3.2. Test Setup

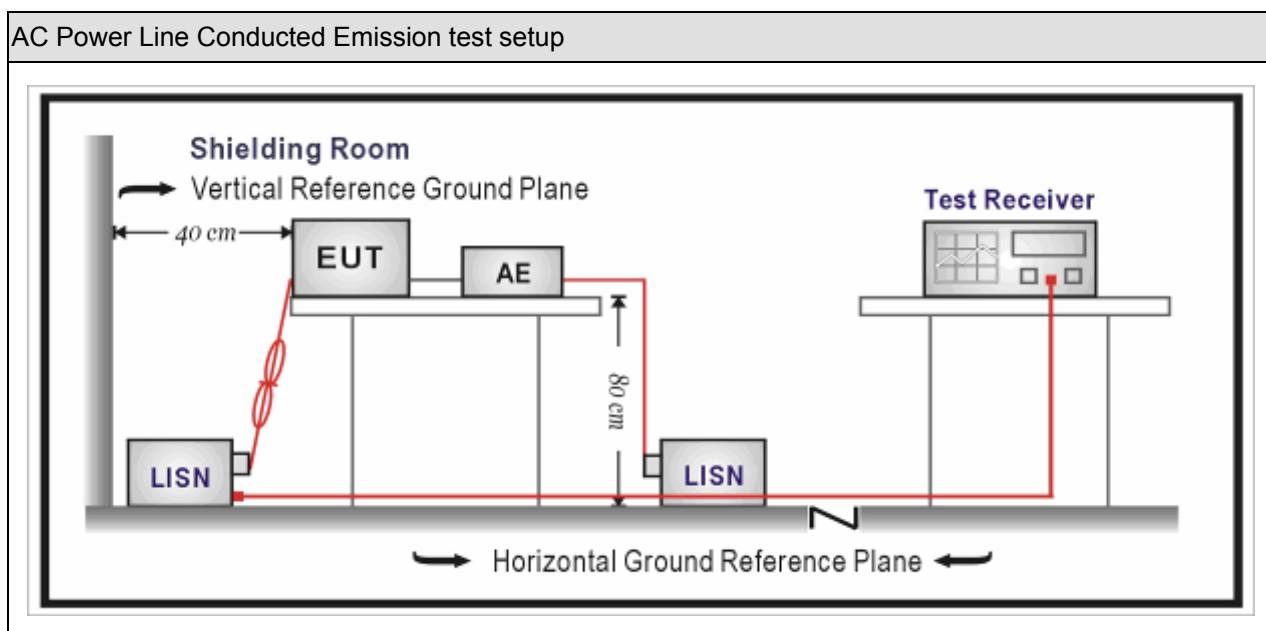

### 3.3. Limit

| Frequency of Emission<br>(MHz)                                                                             | Conducted Limit         |                      |
|------------------------------------------------------------------------------------------------------------|-------------------------|----------------------|
|                                                                                                            | Quasi-peak (dB $\mu$ V) | Average (dB $\mu$ V) |
| 0.15-0.5                                                                                                   | 66 to 56                | 56 to 46             |
| 0.5-5                                                                                                      | 56                      | 46                   |
| 5-30                                                                                                       | 60                      | 50                   |
| Note 1: The lower limit shall apply at the transition frequencies.                                         |                         |                      |
| Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz. |                         |                      |


### 3.4. Test Procedure

| Test Method                         |                  |         |                                                                                             |
|-------------------------------------|------------------|---------|---------------------------------------------------------------------------------------------|
|                                     | References Rule  | Chapter | Item                                                                                        |
| <input checked="" type="checkbox"/> | ANSI C63.10-2013 | 6.2     | Standard test method for ac power-line conducted emissions from unlicensed wireless devices |




### 3.5. Test Result

|                                   |                     |
|-----------------------------------|---------------------|
| Site: TR1                         | Time: 2017/09/15    |
| Limit: FCC_Part15.207_CE          | Margin: 0           |
| Probe: ENV216_101190(0.009-30MHz) | Polarity: Line      |
| EUT: Object Locator               | Power: AC 120V/60Hz |
| Note: Mode 1                      |                     |

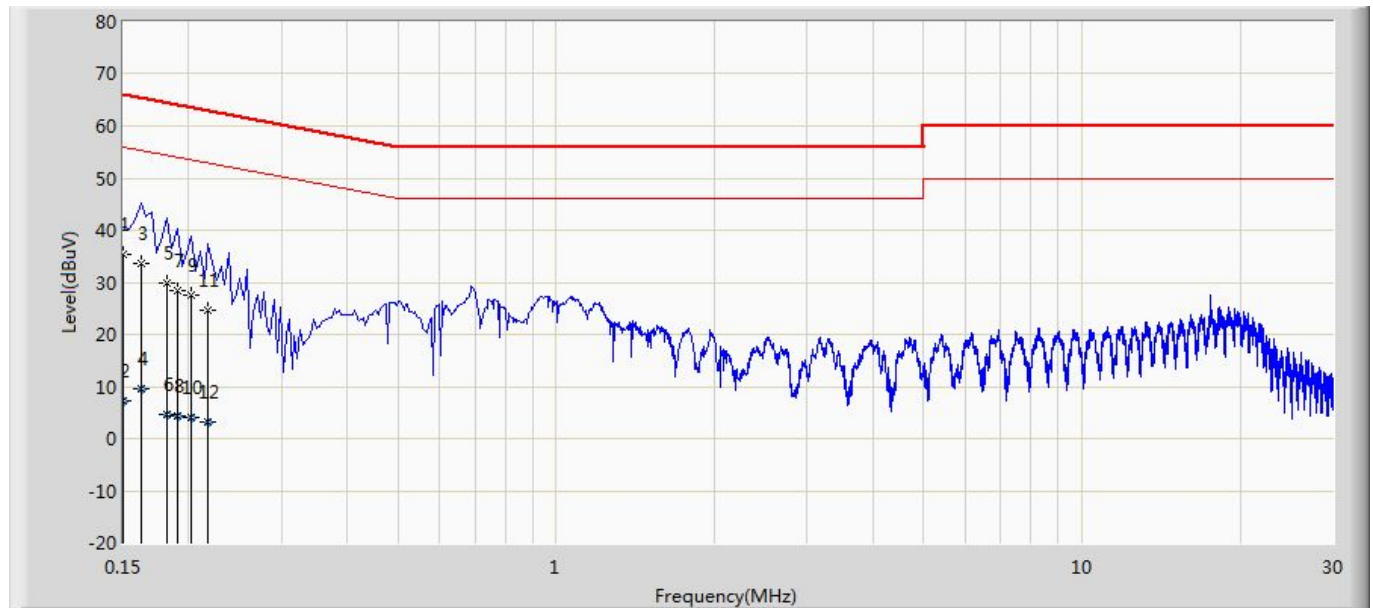

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1  | *    | 0.150           | 35.226               | 25.591               | -30.774         | 66.000       | 9.610      | 0.025      | 0.000    | QP   |
| 2  |      | 0.150           | 7.153                | -2.482               | -48.847         | 56.000       | 9.610      | 0.025      | 0.000    | AV   |
| 3  |      | 0.162           | 33.688               | 24.055               | -31.673         | 65.361       | 9.607      | 0.026      | 0.000    | QP   |
| 4  |      | 0.162           | 9.643                | 0.010                | -45.717         | 55.361       | 9.607      | 0.026      | 0.000    | AV   |
| 5  |      | 0.182           | 29.946               | 20.315               | -34.448         | 64.394       | 9.603      | 0.028      | 0.000    | QP   |
| 6  |      | 0.182           | 4.662                | -4.969               | -49.732         | 54.394       | 9.603      | 0.028      | 0.000    | AV   |
| 7  |      | 0.190           | 28.546               | 18.915               | -35.491         | 64.037       | 9.602      | 0.028      | 0.000    | QP   |
| 8  |      | 0.190           | 4.311                | -5.319               | -49.726         | 54.037       | 9.602      | 0.028      | 0.000    | AV   |
| 9  |      | 0.202           | 27.681               | 18.051               | -35.847         | 63.528       | 9.601      | 0.029      | 0.000    | QP   |
| 10 |      | 0.202           | 3.975                | -5.655               | -49.553         | 53.528       | 9.601      | 0.029      | 0.000    | AV   |
| 11 |      | 0.218           | 24.661               | 15.032               | -38.234         | 62.895       | 9.600      | 0.029      | 0.000    | QP   |
| 12 |      | 0.218           | 3.132                | -6.497               | -49.763         | 52.895       | 9.600      | 0.029      | 0.000    | AV   |

|                                   |                     |
|-----------------------------------|---------------------|
| Site: TR1                         | Time: 2017/09/15    |
| Limit: FCC_Part15.207_CE          | Margin: 0           |
| Probe: ENV216_101190(0.009-30MHz) | Polarity: Neutral   |
| EUT: Object Locator               | Power: AC 120V/60Hz |
| Note: Mode 1                      |                     |

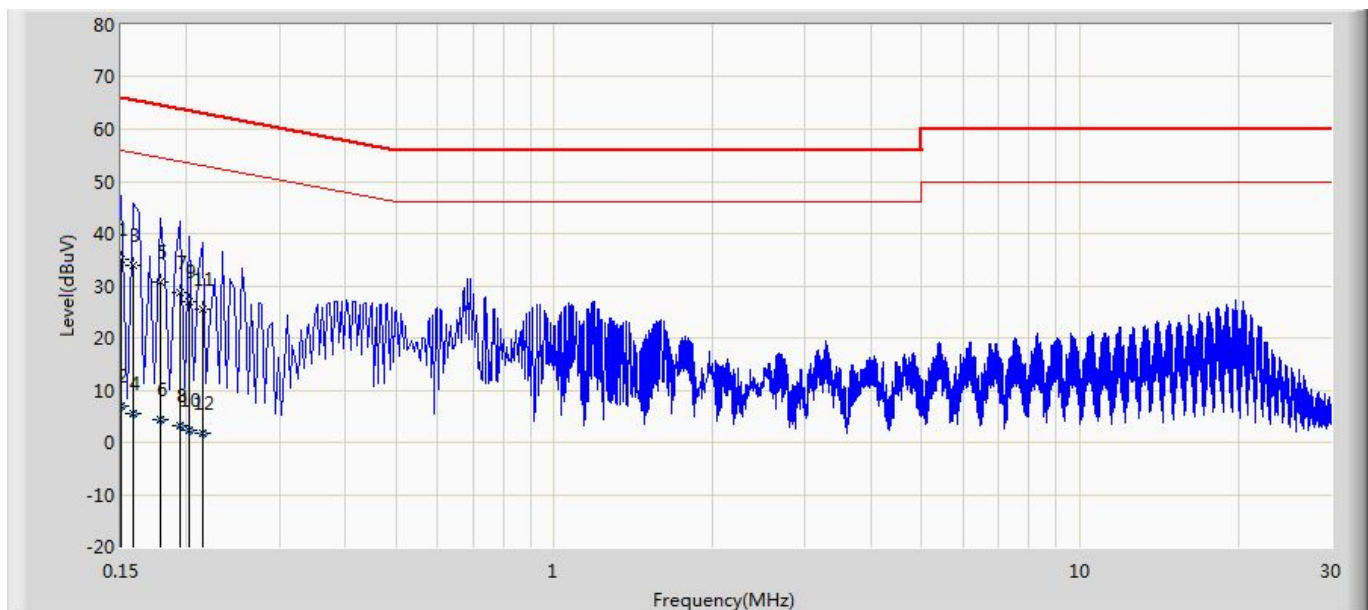

| No | Mark | Frequency (MHz) | Measure Level (dBuV) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV) | Probe (dB) | Cable (dB) | Amp (dB) | Type |
|----|------|-----------------|----------------------|----------------------|-----------------|--------------|------------|------------|----------|------|
| 1  | *    | 0.150           | 35.039               | 25.421               | -30.961         | 66.000       | 9.594      | 0.025      | 0.000    | QP   |
| 2  |      | 0.150           | 7.043                | -2.575               | -48.957         | 56.000       | 9.594      | 0.025      | 0.000    | AV   |
| 3  |      | 0.158           | 33.852               | 24.234               | -31.717         | 65.568       | 9.592      | 0.026      | 0.000    | QP   |
| 4  |      | 0.158           | 5.432                | -4.186               | -50.137         | 55.568       | 9.592      | 0.026      | 0.000    | AV   |
| 5  |      | 0.178           | 30.620               | 20.996               | -33.958         | 64.578       | 9.596      | 0.028      | 0.000    | QP   |
| 6  |      | 0.178           | 4.459                | -5.164               | -50.119         | 54.578       | 9.596      | 0.028      | 0.000    | AV   |
| 7  |      | 0.194           | 28.691               | 19.064               | -35.172         | 63.864       | 9.598      | 0.028      | 0.000    | QP   |
| 8  |      | 0.194           | 3.171                | -6.456               | -50.693         | 53.864       | 9.598      | 0.028      | 0.000    | AV   |
| 9  |      | 0.202           | 26.997               | 17.370               | -36.531         | 63.528       | 9.598      | 0.029      | 0.000    | QP   |
| 10 |      | 0.202           | 2.356                | -7.271               | -51.172         | 53.528       | 9.598      | 0.029      | 0.000    | AV   |
| 11 |      | 0.214           | 25.641               | 16.013               | -37.408         | 63.049       | 9.599      | 0.029      | 0.000    | QP   |
| 12 |      | 0.214           | 1.761                | -7.867               | -51.287         | 53.049       | 9.599      | 0.029      | 0.000    | AV   |

## 4. Emissions in restricted frequency bands


### 4.1. Test Equipment

| Radiated Emission(Below 1GHz) / AC-2                                                                                                      |              |              |            |            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|------------|------------|---------------|
| Instrument                                                                                                                                | Manufacturer | Type No.     | Serial No. | Cal. Date  | Cal. Due Date |
| EMI Test Receiver                                                                                                                         | R&S          | ESCI         | 100573     | 2017.03.05 | 2018.03.04    |
| Loop Antenna                                                                                                                              | R&S          | HFH2-Z2      | 833799/003 | 2017.11.07 | 2018.11.06    |
| Bilog Antenna                                                                                                                             | Teseq GmbH   | CBL6112D     | 27611      | 2017.08.10 | 2018.08.09    |
| Coaxial Cable                                                                                                                             | Huber+Suhner | SUCOFLEX 106 | AC2-C      | 2017.02.28 | 2018.02.27    |
| Temperature/Humidity Meter                                                                                                                | Zhichen      | ZC1-2        | AC2-TH     | 2017.01.05 | 2018.01.04    |
| Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. |              |              |            |            |               |


| Radiated Emission(Above 1GHz) / AC-5                                                                                                      |              |              |             |            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|-------------|------------|---------------|
| Instrument                                                                                                                                | Manufacturer | Type No.     | Serial No.  | Cal. Date  | Cal. Due Date |
| Spectrum Analyzer                                                                                                                         | Agilent      | E4446A       | MY45300103  | 2017.01.04 | 2018.01.03    |
| Preamplifier                                                                                                                              | Miteq        | NSP1800-25   | 1364185     | 2017.05.03 | 2018.05.02    |
| Preamplifier                                                                                                                              | QuieTek      | AP-040G      | CHM-0906001 | 2017.05.06 | 2018.05.05    |
| DRG Horn                                                                                                                                  | ETS-Lindgren | 3117         | 00123988    | 2017.01.22 | 2018.01.20    |
| Broad-Band Horn Antenna                                                                                                                   | Schwarzbeck  | BBHA9170     | 294         | 2017.11.25 | 2018.11.23    |
| Coaxial Cable                                                                                                                             | Huber+Suhner | SUCOFLEX 106 | AC5-C1      | 2017.03.02 | 2018.03.01    |
| Coaxial Cable                                                                                                                             | Huber+Suhner | SUCOFLEX 106 | AC5-C2      | 2017.03.02 | 2018.03.01    |
| Coaxial Cable                                                                                                                             | Huber+Suhner | SUCOFLEX 102 | AC5-C3      | 2017.03.02 | 2018.03.01    |
| EMI Receiver                                                                                                                              | Agilent      | N9038A       | MY51210196  | 2017.06.10 | 2018.06.09    |
| Temperature/Humidity Meter                                                                                                                | Zhichen      | ZC1-2        | AC5-TH      | 2017.01.04 | 2018.01.03    |
| Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. |              |              |             |            |               |

## 4.2. Test Setup


Below 30MHz Test Setup:

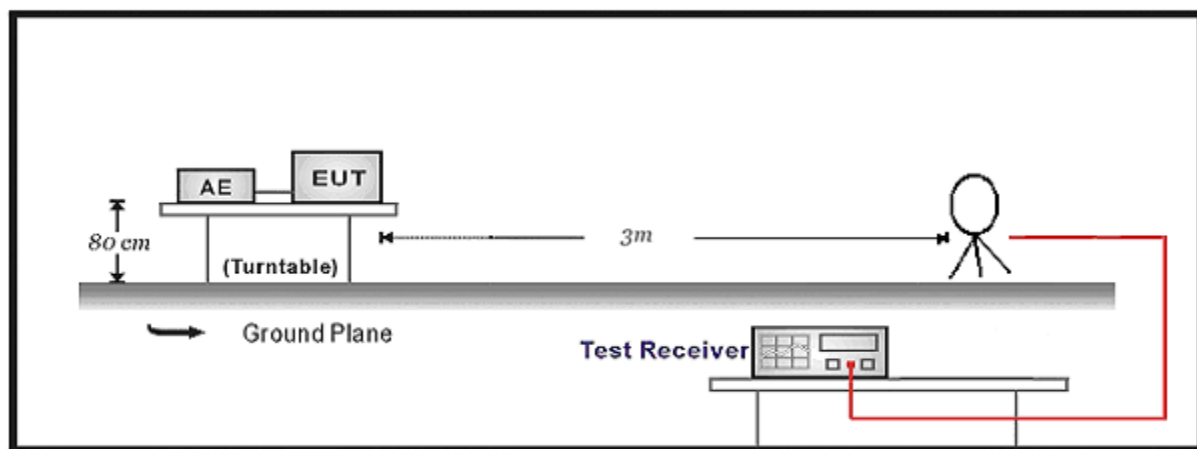

30MHz-1GHz Test Setup:

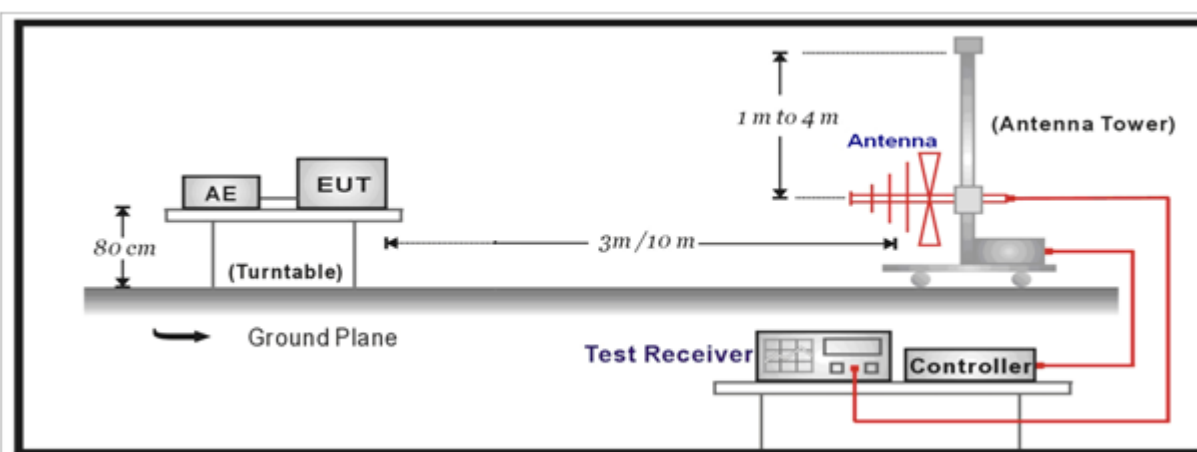

Above 1GHz Test Setup:

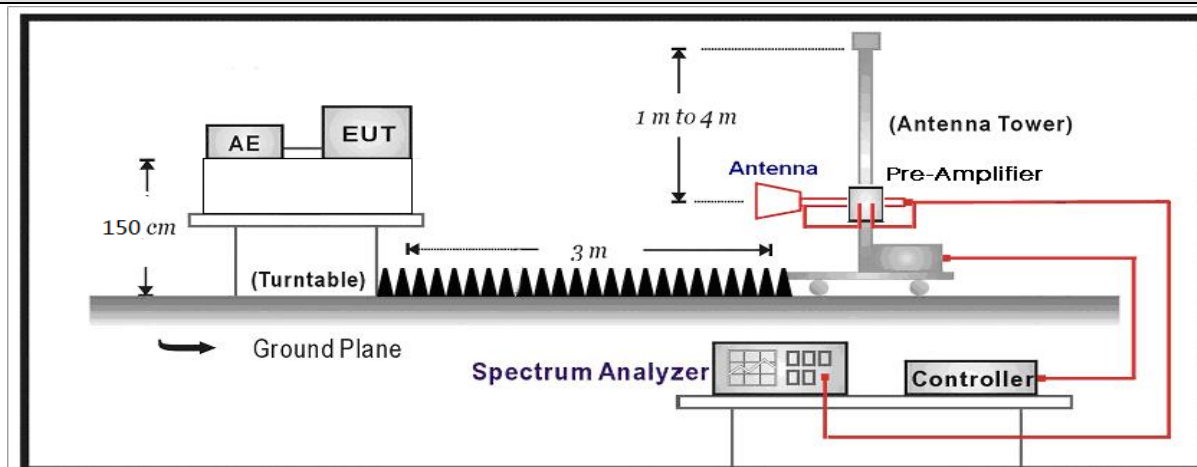

### 4.3. Limit

#### For FCC

| Restricted Bands of operation |                       |                 |                 |
|-------------------------------|-----------------------|-----------------|-----------------|
| Frequency (MHz)               | Frequency (MHz)       | Frequency (MHz) | Frequency (GHz) |
| 0.090 – 0.110                 | 16.42 – 16.423        | 399.9 – 410     | 4.5 – 5.15      |
| 0.495 – 0.505                 | 16.69475 – 16.69525   | 608 – 614       | 5.35 – 5.46     |
| 2.1735 – 2.1905               | 16.80425 – 16.80475   | 960 – 1240      | 7.25 – 7.75     |
| 4.125 – 4.128                 | 25.5 – 25.67          | 1300 – 1427     | 8.025 – 8.5     |
| 4.17725 – 4.17775             | 37.5 – 38.25          | 1435 – 1626.5   | 9.0 – 9.2       |
| 4.20725 – 4.20775             | 73 – 74.6             | 1645.5 – 1646.5 | 9.3 – 9.5       |
| 6.215 – 6.218                 | 74.8 – 75.2           | 1660 – 1710     | 10.6 – 12.7     |
| 6.26775 – 6.26825             | 108 – 121.94          | 1718.8 – 1722.2 | 13.25 – 13.4    |
| 6.31175 – 6.31225             | 123 – 138             | 2200 – 2300     | 14.47 – 14.5    |
| 8.291 – 8.294                 | 149.9 – 150.05        | 2310 – 2390     | 15.35 – 16.2    |
| 8.362 – 8.366                 | 156.52475 – 156.52525 | 2483.5 – 2500   | 17.7 – 21.4     |
| 8.37625 – 8.38675             | 156.7 – 156.9         | 2690 – 2900     | 22.01 – 23.12   |
| 8.81425 – 8.81475             | 162.0125 – 167.17     | 3260 – 3267     | 23.6 – 24.0     |
| 12.29 – 12.293                | 167.72 – 173.2        | 3332 – 3339     | 31.2 – 31.8     |
| 12.51975 – 12.52025           | 240 – 285             | 3345.8 – 3358   | 36.43 – 36.5    |
| 12.57675 – 12.57725           | 322 – 335.4           | 3600 – 4400     |                 |
| 13.36 – 13.41                 |                       |                 |                 |

**For ISED:**

| Restricted Bands of operation |                     |                 |                 |
|-------------------------------|---------------------|-----------------|-----------------|
| Frequency (MHz)               | Frequency (MHz)     | Frequency (MHz) | Frequency (GHz) |
| 0.090-0.110                   | 13.36-13.41         | 1645.5-1646.5   | 9.0-9.2         |
| 2.1735-2.1905                 | 16.42-16.423        | 1660-1710       | 9.3-9.5         |
| 3.020-3.026                   | 16.69475-16.69525   | 1718.8-1722.2   | 10.6-12.7       |
| 4.125-4.128                   | 16.80425-16.80475   | 2200-2300       | 13.25-13.4      |
| 4.17725-4.17775               | 25.5-25.67          | 2310-2390       | 14.47-14.5      |
| 4.20725-4.20775               | 37.5-38.25          | 2655-2900       | 15.35-16.2      |
| 5.677-5.683                   | 73-74.6             | 3260-3267       | 17.7-21.4       |
| 6.215-6.218                   | 74.8-75.2           | 3332-3339       | 22.01-23.12     |
| 6.26775-6.26825               | 108-138             | 3345.8-3358     | 23.6-24.0       |
| 6.31175-6.31225               | 156.52475-156.52525 | 3500-4400       | 31.2-31.8       |
| 8.291-8.294                   | 156.7-156.9         | 4500-5150       | 36.43-36.5      |
| 8.362-8.366                   | 240-285             | 5350-5460       | Above 38.6      |
| 8.37625-8.38675               | 322-335.4           | 7250-7750       |                 |
| 8.41425-8.41475               | 399.9-410           | 8025-8500       |                 |
| 12.29-12.293                  | 608-614             |                 |                 |
| 12.51975-12.52025             | 960-1427            |                 |                 |
| 12.57675-12.57725             | 1435-1626.5         |                 |                 |

| Restricted Band Emissions Limit |                             |                               |                          |
|---------------------------------|-----------------------------|-------------------------------|--------------------------|
| Frequency (MHz)                 | Field strength ( $\mu$ V/m) | Field strength (dB $\mu$ V/m) | Measurement distance (m) |
| 0.009 - 0.49                    | 2400/F(kHz)                 | 48.5 – 13.8                   | 300 <sub>(Note 1)</sub>  |
| 0.49 - 1.705                    | 24000/F(kHz)                | 33.8 - 23                     | 30 <sub>(Note 1)</sub>   |
| 1.705 - 30                      | 30                          | 29.5                          | 30 <sub>(Note 1)</sub>   |
| 30 - 88                         | 100                         | 40                            | 3 <sub>(Note 2)</sub>    |
| 88 - 216                        | 150                         | 43.5                          | 3 <sub>(Note 2)</sub>    |
| 216 - 960                       | 200                         | 46                            | 3 <sub>(Note 2)</sub>    |
| Above 960                       | 500                         | 54                            | 3 <sub>(Note 2)</sub>    |

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).




Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

#### 4.4. Test Procedure

| Test Method                         |                                     |                                                 |             |                                                                                                    |
|-------------------------------------|-------------------------------------|-------------------------------------------------|-------------|----------------------------------------------------------------------------------------------------|
|                                     | References Rule                     |                                                 | Chapter     | Description                                                                                        |
| <input type="checkbox"/>            | ANSI C63.10                         |                                                 | 11.11       | Emissions in non-restricted frequency bands                                                        |
|                                     | <input type="checkbox"/>            | ANSI C63.10                                     | 11.11.2     | Reference level measurement                                                                        |
|                                     | <input type="checkbox"/>            | ANSI C63.10                                     | 11.11.3     | Emission level measurement                                                                         |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                                 | 11.12       | Emissions in restricted frequency bands                                                            |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                                     | 11.12.1     | Radiated emission measurements                                                                     |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                                     | 11.12.2.7   | Radiated spurious emission test                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                                     | 6.4         | Radiated emissions from unlicensed wireless devices below 30 MHz                                   |
|                                     |                                     | ANSI C63.10                                     | 6.5         | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz   |
|                                     |                                     | ANSI C63.10                                     | 6.6         | Radiated emissions from unlicensed wireless devices above 1 GHz                                    |
|                                     | <input type="checkbox"/>            | ANSI C63.10                                     | 11.12.2.3   | Quasi-peak measurement procedure                                                                   |
|                                     |                                     | ANSI C63.10                                     | 11.12.2.4   | Peak power measurement procedure                                                                   |
|                                     |                                     | ANSI C63.10                                     | 11.12.2.5   | Average power measurement procedures                                                               |
|                                     | <input type="checkbox"/>            | ANSI C63.10                                     | 11.12.2.5.1 | Trace averaging with continuous EUT transmission at full power                                     |
|                                     |                                     | ANSI C63.10                                     | 11.12.2.5.2 | Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction |
|                                     |                                     | <input checked="" type="checkbox"/> ANSI C63.10 | 11.12.2.5.3 | Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold               |




#### 4.5. EUT test Axis definition

| Item            | Emissions in restricted frequency bands                                              |                                                                                      |                                                                                     |                                                                                     |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed position use                                                                   |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Mobile position use                                                                  |                                                                                     |                                                                                     |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                     |                                                                                     |
| Test method     | <input checked="" type="checkbox"/>                                                  | Radiated                                                                             |                                                                                     |                                                                                     |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                              | Z Axis                                                                              |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input checked="" type="checkbox"/>                                       | Worst Axis <input type="checkbox"/>                                                 | Worst Axis <input type="checkbox"/>                                                 |
|                 | <input type="checkbox"/>                                                             | Conducted                                                                            |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 1                                                                              |                                                                                     |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 1                                                                              | Chain 2                                                                             |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 1                                                                              | Chain 2                                                                             | Chain 3                                                                             |
|                 |  |                                                                                      |                                                                                     |                                                                                     |


## 4.6. Test Result

|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:51 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal     |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 903MHz    |                          |

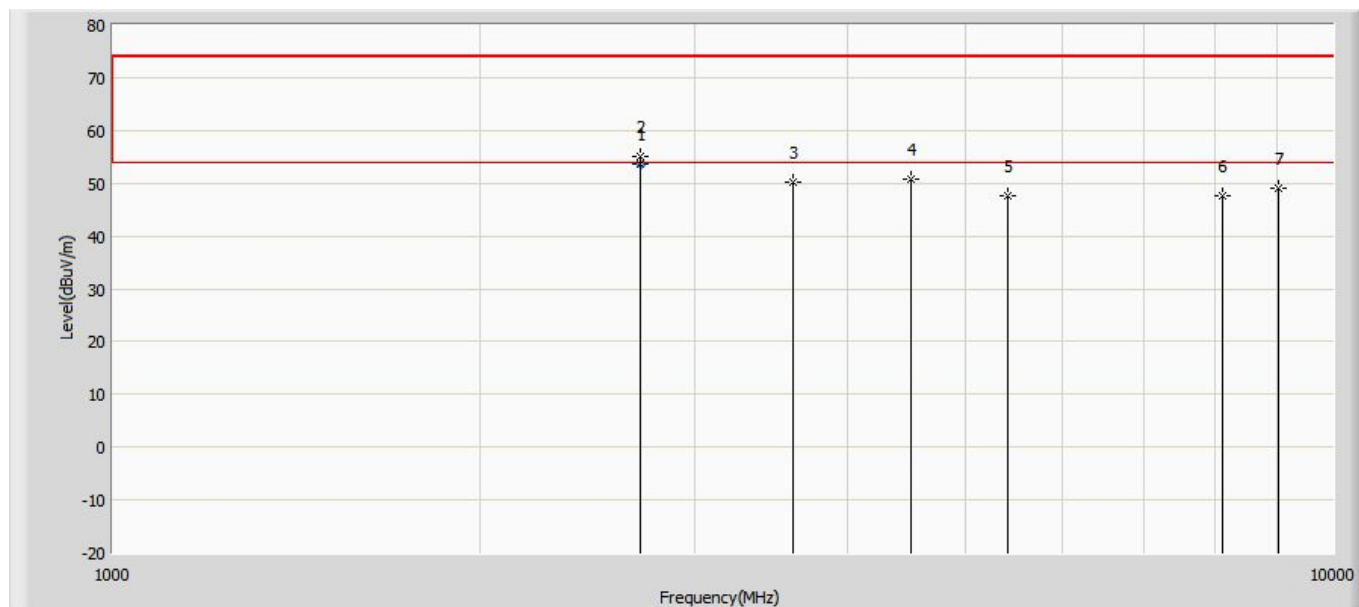


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  | *    | 2709.255        | 53.770                 | 70.720               | -0.230          | 54.000         | -16.950     | AV   |
| 2  |      | 2710.000        | 55.061                 | 72.011               | -18.939         | 74.000         | -16.950     | PK   |
| 3  |      | 3610.000        | 50.104                 | 64.744               | -23.896         | 74.000         | -14.640     | PK   |
| 4  |      | 4514.500        | 50.856                 | 63.866               | -23.144         | 74.000         | -13.010     | PK   |
| 5  |      | 5419.000        | 47.526                 | 59.756               | -26.474         | 74.000         | -12.230     | PK   |
| 6  |      | 8128.000        | 47.704                 | 52.604               | -26.296         | 74.000         | -4.900      | PK   |
| 7  |      | 9032.500        | 49.185                 | 51.025               | -24.815         | 74.000         | -1.840      | PK   |

|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical       |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 903MHz    |                          |

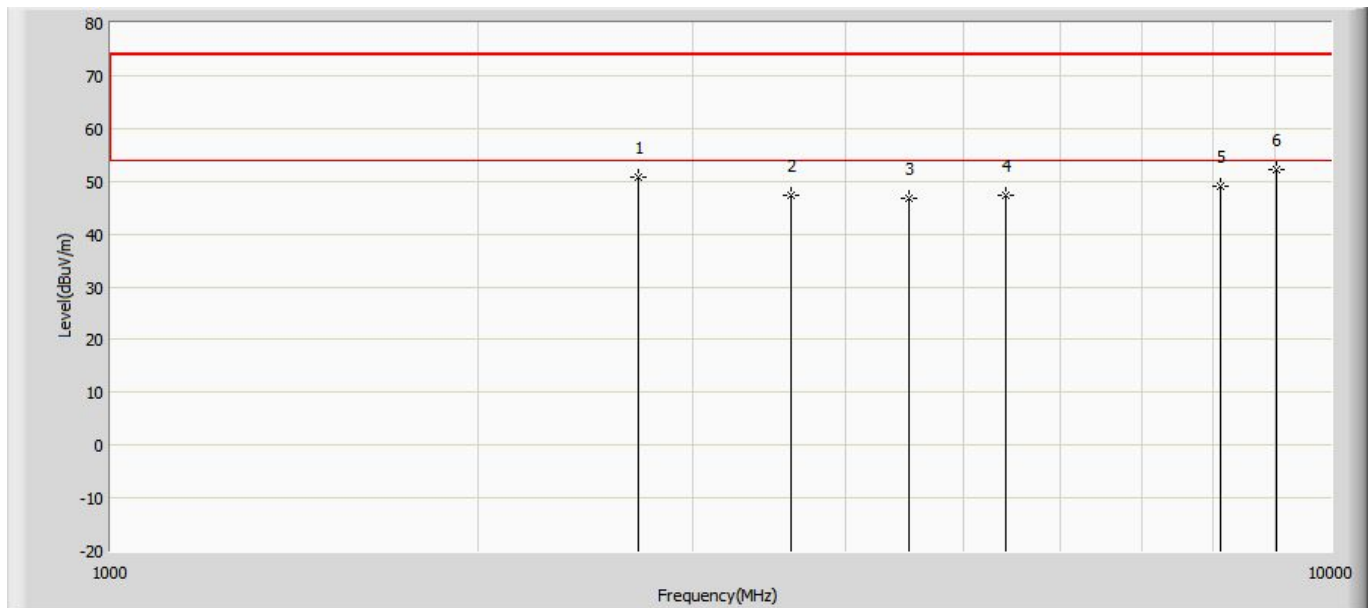


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2710.000        | 50.660                 | 67.610               | -23.340         | 74.000         | -16.950     | PK   |
| 2  |      | 3610.000        | 47.363                 | 62.003               | -26.637         | 74.000         | -14.640     | PK   |
| 3  |      | 4514.500        | 46.891                 | 59.901               | -27.109         | 74.000         | -13.010     | PK   |
| 4  |      | 5419.000        | 47.350                 | 59.580               | -26.650         | 74.000         | -12.230     | PK   |
| 5  |      | 8128.000        | 49.144                 | 54.044               | -24.856         | 74.000         | -4.900      | PK   |
| 6  | *    | 9032.500        | 52.098                 | 53.938               | -21.902         | 74.000         | -1.840      | PK   |

|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal     |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 907.8MHz  |                          |

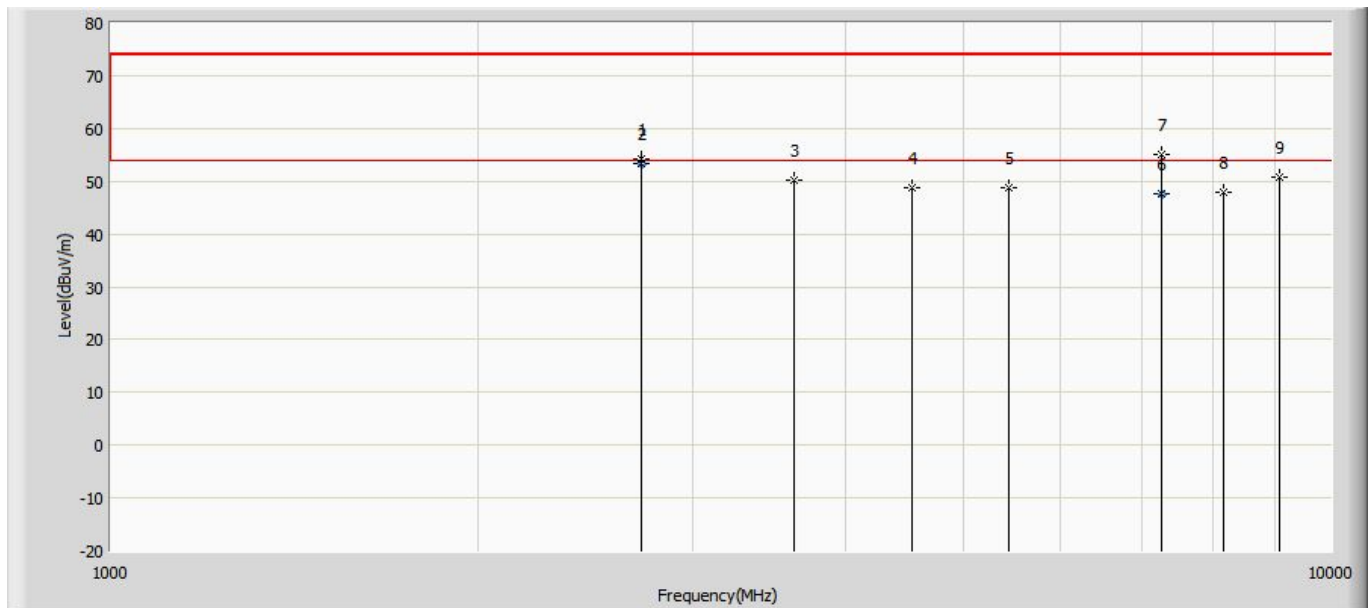


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2723.500        | 54.223                 | 71.173               | -19.777         | 74.000         | -16.950     | PK   |
| 2  | *    | 2723.722        | 53.351                 | 70.301               | -0.649          | 54.000         | -16.950     | AV   |
| 3  |      | 3632.500        | 50.205                 | 64.845               | -23.795         | 74.000         | -14.640     | PK   |
| 4  |      | 4541.500        | 48.901                 | 61.911               | -25.099         | 74.000         | -13.010     | PK   |
| 5  |      | 5446.000        | 48.638                 | 59.358               | -25.362         | 74.000         | -10.720     | PK   |
| 6  |      | 7261.976        | 47.586                 | 55.296               | -6.414          | 54.000         | -7.710      | AV   |
| 7  |      | 7264.000        | 55.155                 | 62.865               | -18.845         | 74.000         | -7.710      | PK   |
| 8  |      | 8173.000        | 47.875                 | 52.775               | -26.125         | 74.000         | -4.900      | PK   |
| 9  |      | 9077.500        | 50.829                 | 52.669               | -23.171         | 74.000         | -1.840      | PK   |

|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical       |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 907.8MHz  |                          |

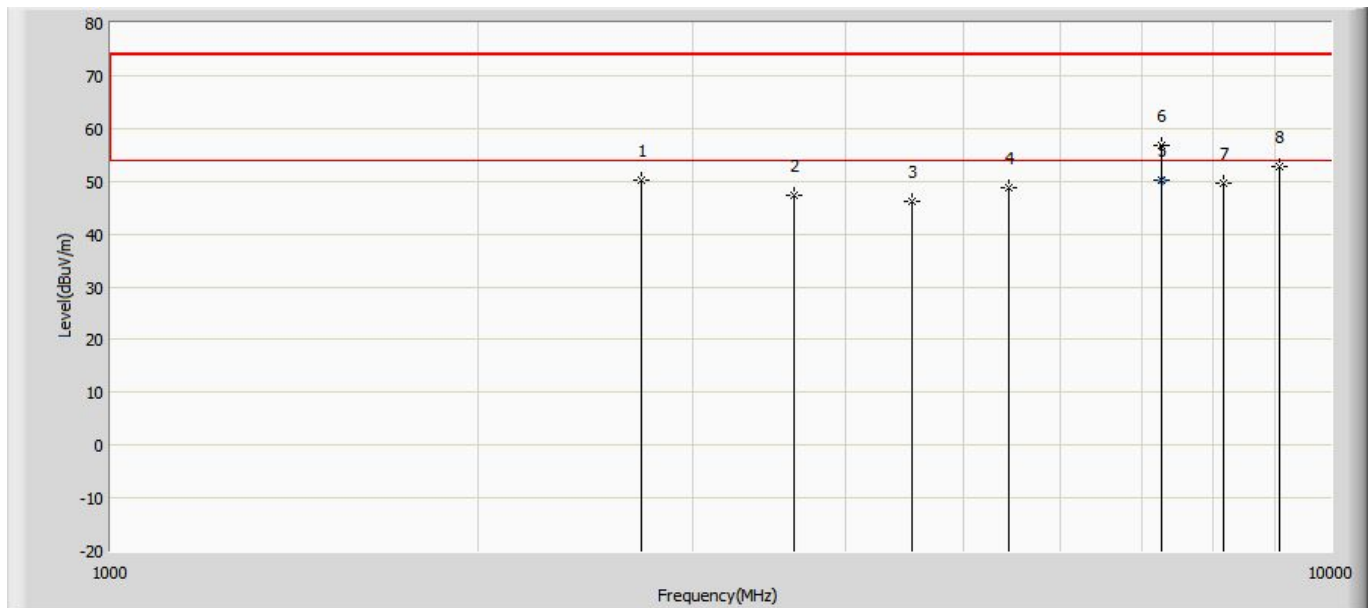


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2723.500        | 50.305                 | 67.255               | -23.695         | 74.000         | -16.950     | PK   |
| 2  |      | 3632.500        | 47.239                 | 61.879               | -26.761         | 74.000         | -14.640     | PK   |
| 3  |      | 4541.500        | 46.049                 | 59.059               | -27.951         | 74.000         | -13.010     | PK   |
| 4  |      | 5446.000        | 48.860                 | 59.580               | -25.140         | 74.000         | -10.720     | PK   |
| 5  | *    | 7263.678        | 50.110                 | 57.820               | -3.890          | 54.000         | -7.710      | AV   |
| 6  |      | 7264.000        | 56.655                 | 64.365               | -17.345         | 74.000         | -7.710      | PK   |
| 7  |      | 8173.000        | 49.653                 | 54.553               | -24.347         | 74.000         | -4.900      | PK   |
| 8  |      | 9077.500        | 52.663                 | 54.503               | -21.337         | 74.000         | -1.840      | PK   |

|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Horizontal     |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 914.2MHz  |                          |

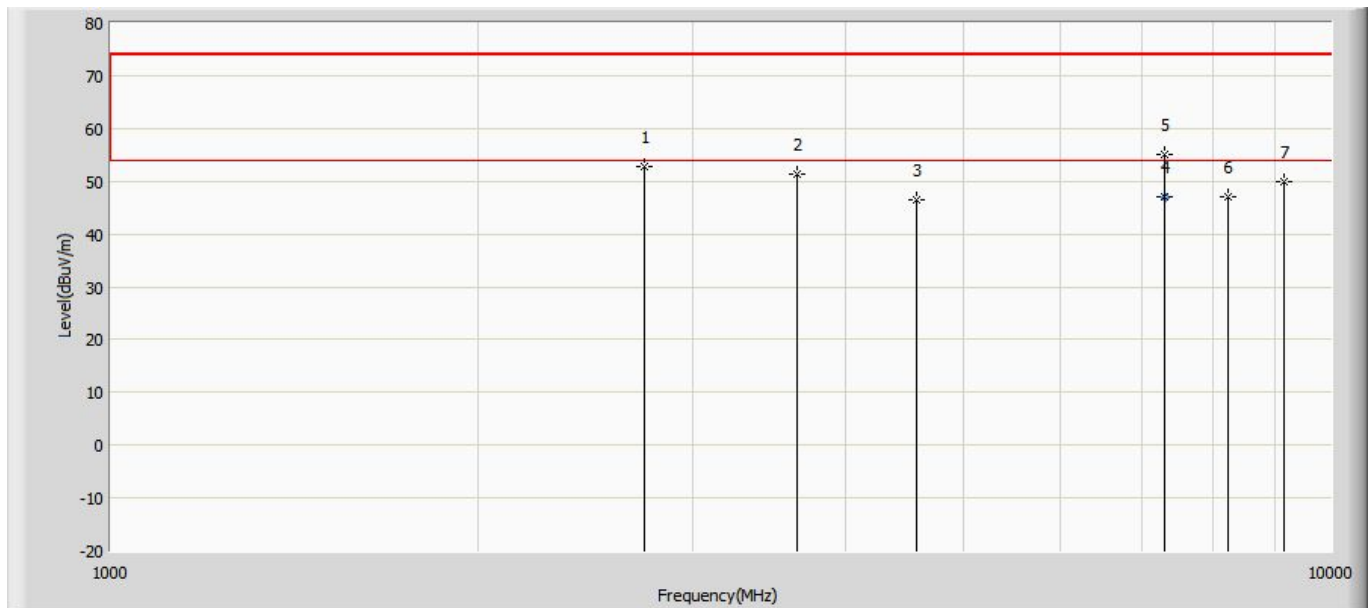

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2741.500        | 52.761                 | 69.711               | -21.239         | 74.000         | -16.950     | PK   |
| 2  |      | 3655.000        | 51.216                 | 65.856               | -22.784         | 74.000         | -14.640     | PK   |
| 3  |      | 4573.000        | 46.431                 | 59.441               | -27.569         | 74.000         | -13.010     | PK   |
| 4  | *    | 7313.156        | 46.976                 | 54.686               | -7.024          | 54.000         | -7.710      | AV   |
| 5  |      | 7313.500        | 55.016                 | 62.726               | -18.984         | 74.000         | -7.710      | PK   |
| 6  |      | 8227.000        | 46.939                 | 51.839               | -27.061         | 74.000         | -4.900      | PK   |
| 7  |      | 9140.500        | 49.846                 | 51.686               | -24.154         | 74.000         | -1.840      | PK   |


|                                    |                          |
|------------------------------------|--------------------------|
| Site: AC5                          | Time: 2017/10/13 - 13:52 |
| Limit: FCC_Part15.209_RE(3m)       | Margin: 0                |
| Probe: Horn_3117_00167055(1-18GHz) | Polarity: Vertical       |
| EUT: Object Locator                | Power: AC 120V/60Hz      |
| Note: Mode 1:Transmit at 914.2MHz  |                          |

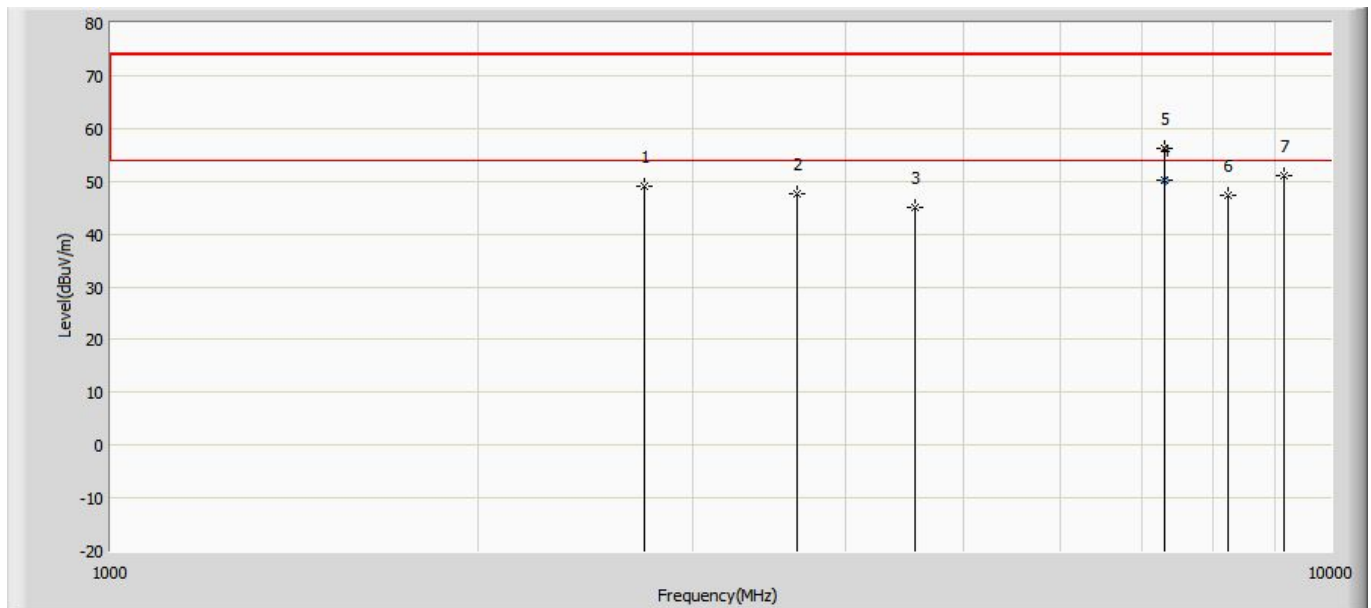

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Factor (dB) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|-------------|------|
| 1  |      | 2741.500        | 48.923                 | 65.873               | -25.077         | 74.000         | -16.950     | PK   |
| 2  |      | 3655.000        | 47.609                 | 62.249               | -26.391         | 74.000         | -14.640     | PK   |
| 3  |      | 4568.500        | 45.092                 | 58.102               | -28.908         | 74.000         | -13.010     | PK   |
| 4  | *    | 7313.221        | 50.292                 | 58.002               | -3.708          | 54.000         | -7.710      | AV   |
| 5  |      | 7313.500        | 56.246                 | 63.956               | -17.754         | 74.000         | -7.710      | PK   |
| 6  |      | 8227.000        | 47.363                 | 52.263               | -26.637         | 74.000         | -4.900      | PK   |
| 7  |      | 9140.500        | 51.047                 | 52.887               | -22.953         | 74.000         | -1.840      | PK   |

### The worst case of Radiated Emission below 1GHz:


|                                   |                      |
|-----------------------------------|----------------------|
| Site: AC3                         | Time: 2017/09/18     |
| Limit: FCC_Part15.209_RE(3m)      | Margin: 0            |
| Probe: AC3_3m (30-1000MHz)        | Polarity: Horizontal |
| EUT: Object Locator               | Power: AC 120V/60Hz  |
| Note: Mode 1:Transmit at 914.2MHz |                      |

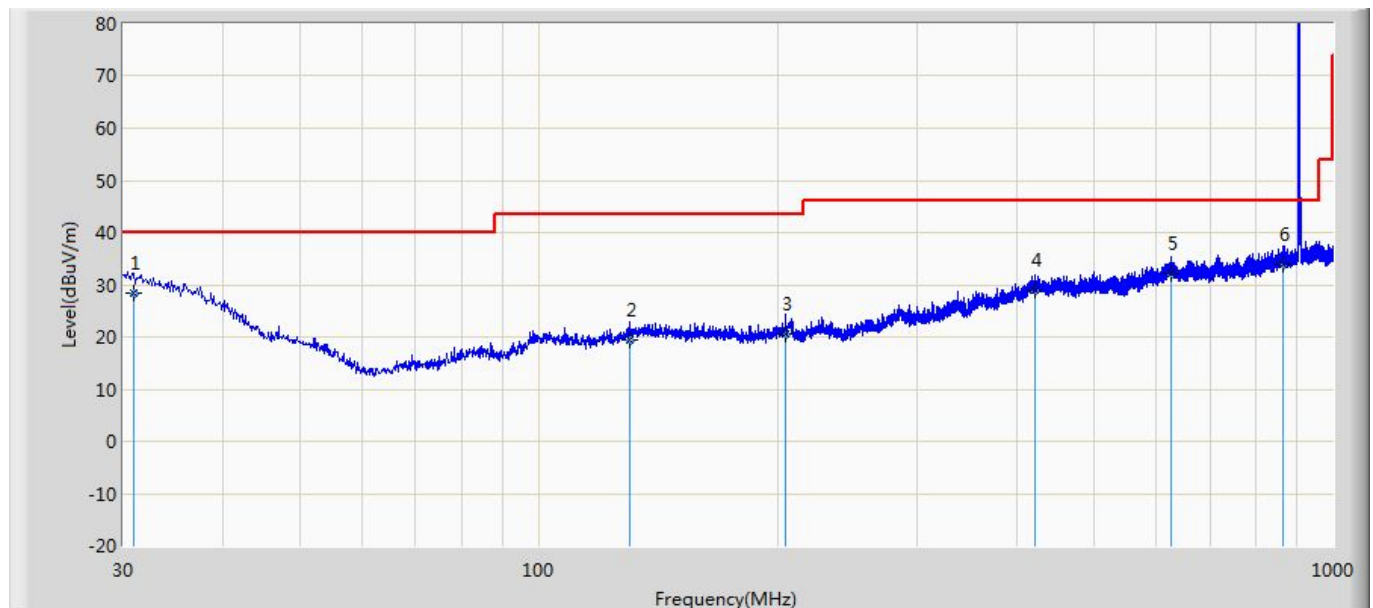

| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Probe (dB/m) | Cable (dB) | Amp (dB) | Ant Pos (cm) | Table Pos (deg) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|--------------|------------|----------|--------------|-----------------|------|
| 1  | *    | 30.947          | 28.513                 | 1.100                | -11.487         | 40.000         | 20.953       | 6.460      | 0.000    | 100          | 200             | QP   |
| 2  |      | 130.274         | 19.376                 | 2.100                | -24.124         | 43.500         | 10.285       | 6.991      | 0.000    | 100          | 351             | QP   |
| 3  |      | 204.479         | 20.506                 | 2.800                | -22.994         | 43.500         | 10.409       | 7.297      | 0.000    | 100          | 283             | QP   |
| 4  |      | 420.910         | 28.962                 | 1.800                | -17.038         | 46.000         | 19.202       | 7.960      | 0.000    | 193          | 360             | QP   |
| 5  |      | 626.186         | 32.140                 | 2.300                | -13.860         | 46.000         | 21.345       | 8.495      | 0.000    | 103          | 360             | QP   |
| 6  |      | 865.046         | 33.961                 | 2.100                | -12.039         | 46.000         | 22.832       | 9.029      | 0.000    | 200          | 312             | QP   |



|                                   |                     |
|-----------------------------------|---------------------|
| Site: AC3                         | Time: 2017/09/18    |
| Limit: FCC_Part15.209_RE(3m)      | Margin: 0           |
| Probe: AC3_3m (30-1000MHz)        | Polarity: Vertical  |
| EUT: Object Locator               | Power: AC 120V/60Hz |
| Note: Mode 1:Transmit at 914.2MHz |                     |

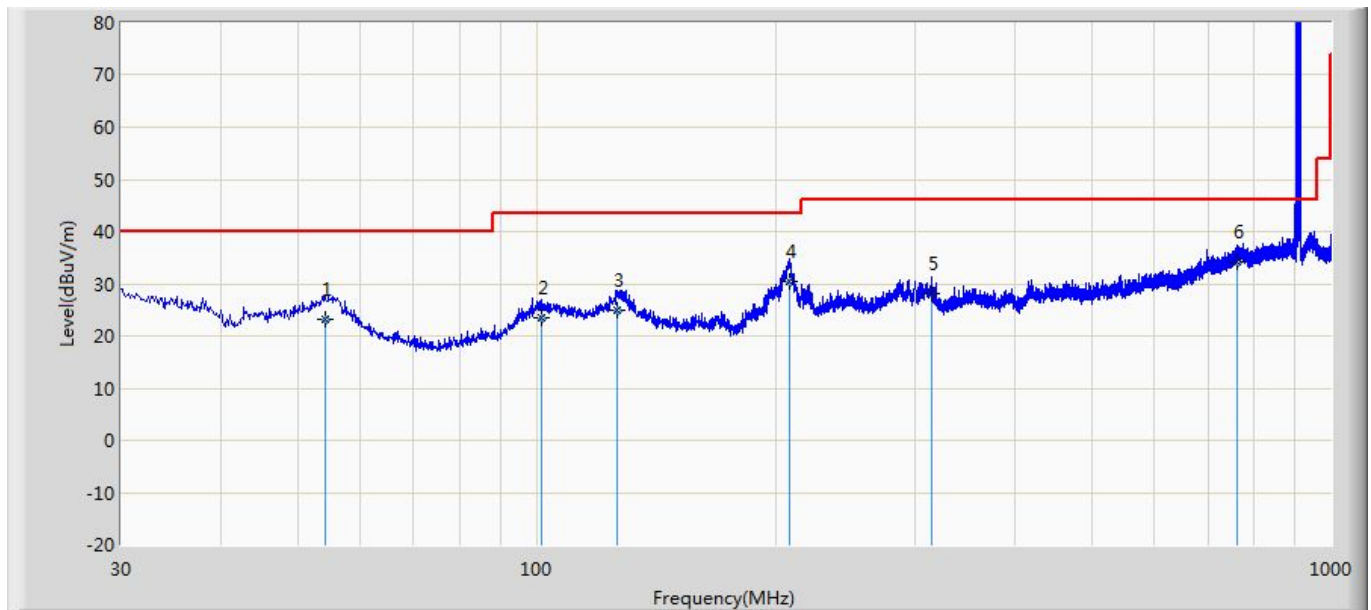


| No | Mark | Frequency (MHz) | Measure Level (dBuV/m) | Reading Level (dBuV) | Over Limit (dB) | Limit (dBuV/m) | Probe (dB/m) | Cable (dB) | Amp (dB) | Ant Pos (cm) | Table Pos (deg) | Type |
|----|------|-----------------|------------------------|----------------------|-----------------|----------------|--------------|------------|----------|--------------|-----------------|------|
| 1  |      | 54.129          | 23.056                 | 5.900                | -16.944         | 40.000         | 10.537       | 6.619      | 0.000    | 102          | 360             | QP   |
| 2  |      | 101.416         | 23.609                 | 1.500                | -19.891         | 43.500         | 15.247       | 6.862      | 0.000    | 200          | 38              | QP   |
| 3  |      | 126.151         | 24.930                 | 3.600                | -18.570         | 43.500         | 14.356       | 6.974      | 0.000    | 100          | 0               | QP   |
| 4  |      | 207.874         | 30.557                 | 7.300                | -12.943         | 43.500         | 15.947       | 7.310      | 0.000    | 100          | 99              | QP   |
| 5  |      | 314.331         | 28.114                 | 3.500                | -17.886         | 46.000         | 16.949       | 7.665      | 0.000    | 200          | 266             | QP   |
| 6  | *    | 761.983         | 34.201                 | 2.200                | -11.799         | 46.000         | 23.204       | 8.797      | 0.000    | 100          | 7               | QP   |

## 5. Emissions in non-restricted frequency bands

### 5.1. Test Equipment

| Occupied Bandwidth / TR-8                                                                                                                 |              |          |            |            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|------------|------------|---------------|
| Instrument                                                                                                                                | Manufacturer | Type No. | Serial No. | Cal. Date  | Cal. Due Date |
| Spectrum Analyzer                                                                                                                         | Agilent      | N9010A   | MY48030494 | 2017.02.04 | 2018.02.03    |
| EXA Spectrum Analyzer                                                                                                                     | Keysight     | N9010A   | MY55370495 | 2017.04.09 | 2018.04.08    |
| MXA Signal Analyzer                                                                                                                       | Keysight     | N9020A   | MY56060147 | 2017.04.09 | 2018.04.08    |
| Temperature/Humidity Meter                                                                                                                | zhichen      | ZC1-2    | TR8-TH     | 2017.04.10 | 2018.04.09    |
| Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. |              |          |            |            |               |

### 5.2. Test Setup

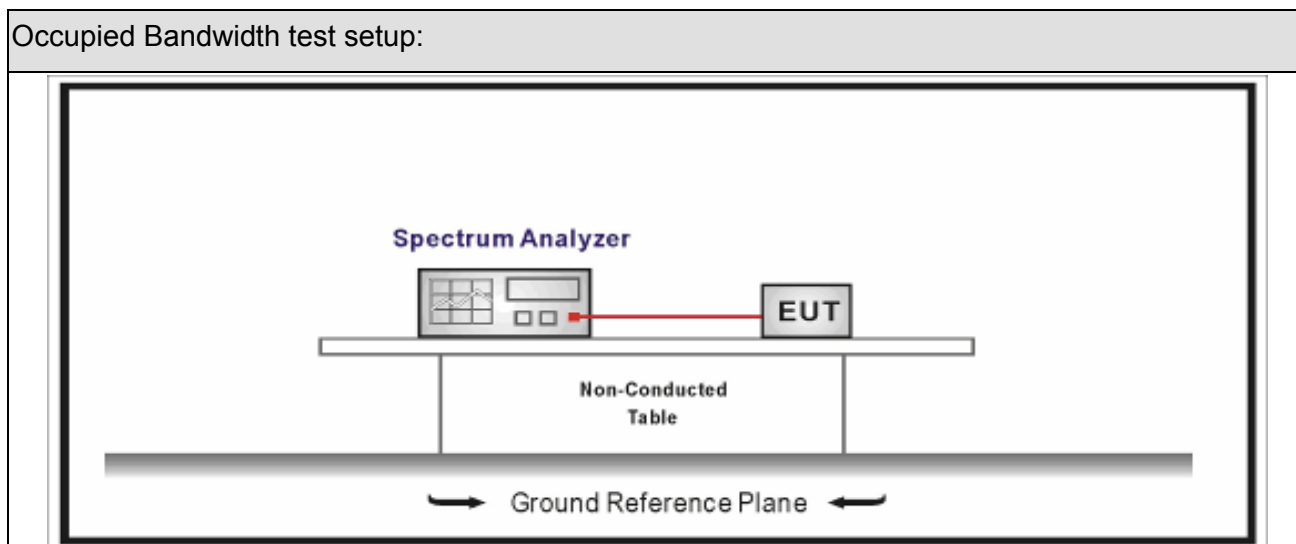







### 5.3. Limit

| Un-Restricted Band Emissions Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| RF Output power (Detection methods)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Limit(dB)  |
| RF Output power(Average detector)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 30c(Note1) |
| RF Output power(PK detector)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 20c(Note2) |
| <p>Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).</p> <p>Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).</p> |            |

## 5.4. Test Procedure

| Test Method                         |                                     |                                     |             |                                                                                                  |                                                                                                    |
|-------------------------------------|-------------------------------------|-------------------------------------|-------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                                     | References Rule                     |                                     | Chapter     | Description                                                                                      |                                                                                                    |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     | 11.11       | Emissions in non-restricted frequency bands                                                      |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         | 11.11.2     | Reference level measurement                                                                      |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         | 11.11.3     | Emission level measurement                                                                       |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     | 11.12       | Emissions in restricted frequency bands                                                          |                                                                                                    |
|                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.12.1     | Radiated emission measurements                                                                   |                                                                                                    |
|                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.12.2.7   | Radiated spurious emission test                                                                  |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     | 6.4         | Radiated emissions from unlicensed wireless devices below 30 MHz                                 |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     | 6.5         | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     | 6.6         | Radiated emissions from unlicensed wireless devices above 1 GHz                                  |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         |             | 11.12.2                                                                                          | Antenna-port conducted measurements                                                                |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.3                                                                                        | Quasi-peak measurement procedure                                                                   |
|                                     |                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 11.12.2.4                                                                                        | Peak power measurement procedure                                                                   |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5                                                                                        | Average power measurement procedures                                                               |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5.1                                                                                      | Trace averaging with continuous EUT transmission at full power                                     |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5.2                                                                                      | Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5.3                                                                                      | Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold               |


### 5.5. EUT test Axis definition

| Item            | Emissions in non-restricted frequency bands                                          |                                                                                      |                                                                                     |                                                                                     |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed position use                                                                   |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Mobile position use                                                                  |                                                                                     |                                                                                     |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                     |                                                                                     |
| Test method     | <input type="checkbox"/>                                                             | Radiated                                                                             |                                                                                     |                                                                                     |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                              | Z Axis                                                                              |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input type="checkbox"/>                                                  | Worst Axis <input type="checkbox"/>                                                 | Worst Axis <input type="checkbox"/>                                                 |
|                 | <input checked="" type="checkbox"/>                                                  | Conducted                                                                            |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Chain 0                                                                              |                                                                                     |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             | Chain 2                                                                             |
|                 |  |                                                                                      |                                                                                     |                                                                                     |


## 5.6. Test Result

|              |                  |           |                |
|--------------|------------------|-----------|----------------|
| Product Name | : Object Locator | Power     | : AC 120V/60Hz |
| Test Mode    | : Mode1          | Test Site | : TR8          |
| Test Date    | : 2017.10.10     |           |                |

Low Channel(903MHz)

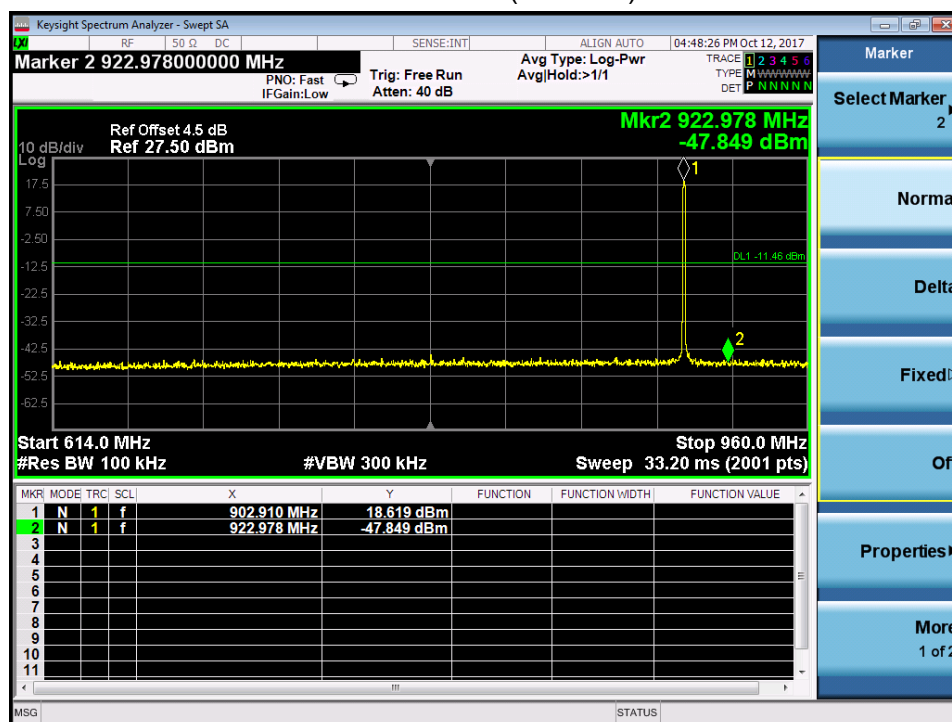

High Channel(914.2MHz)

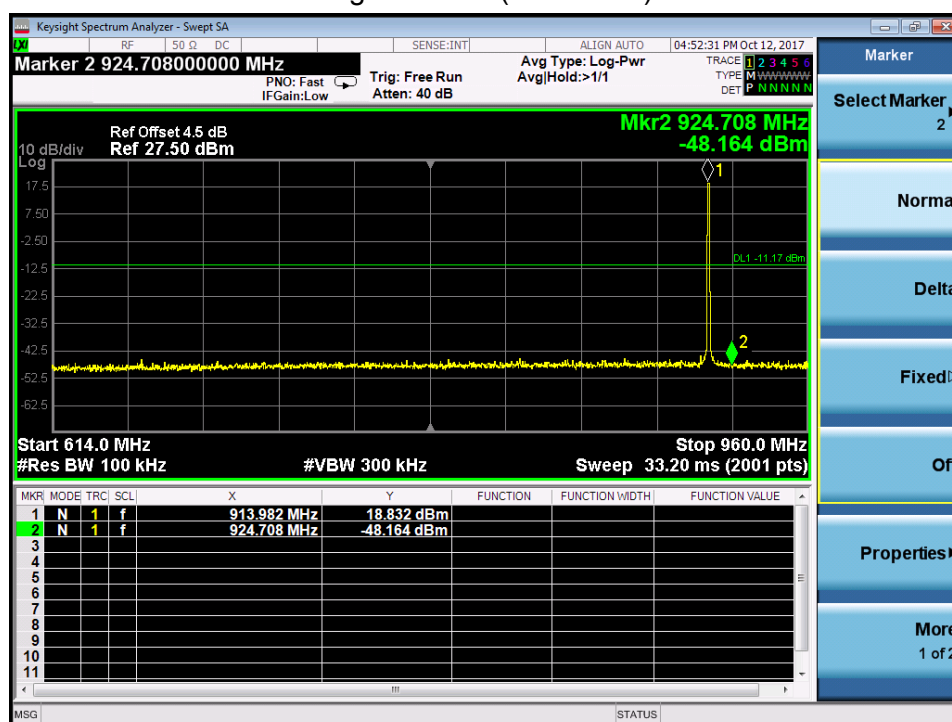


## 6. Radiated Emission Band Edge

### 6.1. Test Equipment

| Radiated Emission(Above 1GHz) / AC-5 |              |              |            |            |               |
|--------------------------------------|--------------|--------------|------------|------------|---------------|
| Instrument                           | Manufacturer | Type No.     | Serial No. | Cal. Date  | Cal. Due Date |
| EMI Receiver                         | Agilent      | N9038A       | MY51210196 | 2017.07.16 | 2018.07.15    |
| Pre-Amplifier                        | Miteq        | NSP1800-25   | 1364185    | 2017.05.03 | 2018.05.02    |
| DRG Horn Antenna                     | ETS-Lindgren | 3117         | 00167055   | 2017.07.12 | 2018.07.11    |
| Broad-Band Horn Antenna              | Schwarzbeck  | BBHA9170     | 294        | 2017.09.18 | 2018.09.17    |
| Coaxial Cable                        | Huber+Suhner | SUCOFLEX 106 | AC5-C1     | 2017.02.28 | 2018.02.27    |
| Coaxial Cable                        | Huber+Suhner | SUCOFLEX 106 | AC5-C2     | 2017.02.28 | 2018.02.27    |
| Temperature/Humidity Meter           | Zhichen      | ZC1-2        | AC5-TH     | 2017.01.05 | 2018.01.04    |

## 6.2. Test Setup

Above 1GHz Test Setup:

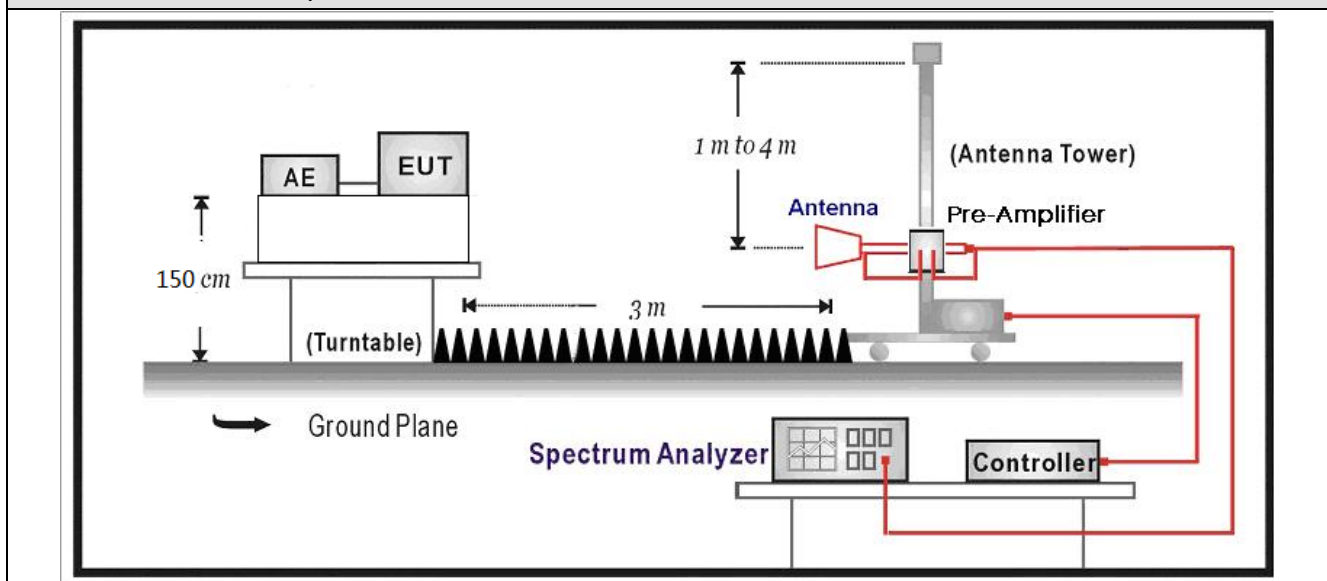

## 6.3. Limit

Band edge Limit

| Frequency bands (MHz) | Detector | Limit (dB $\mu$ V/m) | RBW (MHz) | Distance (m) |
|-----------------------|----------|----------------------|-----------|--------------|
| 2310-2390             | PK       | 74                   | 1         | 3            |
| 2483.5-2500           | AV       | 54                   | 1         | 3            |




Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.



## 6.4. Test Procedure

| Test Method                         |                                     |                                     |                                     |             |                                                                                                  |                                                                                                    |
|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|
|                                     | References Rule                     |                                     |                                     | Chapter     | Description                                                                                      |                                                                                                    |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     |                                     | 6.10        | Band-edge testing                                                                                |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     | 6.10.5      | Restricted-band band-edge measurements                                                           |                                                                                                    |
|                                     | <input type="checkbox"/>            | ANSI C63.10                         |                                     | 6.10.6      | Marker-delta method                                                                              |                                                                                                    |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     |                                     | 11.12       | Emissions in restricted frequency bands                                                          |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     | 11.12.1     | Radiated emission measurements                                                                   |                                                                                                    |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     | 11.12.2.7   | Radiated spurious emission test                                                                  |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     |                                     | 6.4         | Radiated emissions from unlicensed wireless devices below 30 MHz                                 |                                                                                                    |
| <input type="checkbox"/>            | ANSI C63.10                         |                                     |                                     | 6.5         | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |                                                                                                    |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     |                                     | 6.6         | Radiated emissions from unlicensed wireless devices above 1 GHz                                  |                                                                                                    |
|                                     |                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.12.2.3   | Quasi-peak measurement procedure                                                                 |                                                                                                    |
|                                     |                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         | 11.12.2.4   | Peak power measurement procedure                                                                 |                                                                                                    |
|                                     |                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         | 11.12.2.5   | Average power measurement procedures                                                             |                                                                                                    |
|                                     |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5.1                                                                                      | Trace averaging with continuous EUT transmission at full power                                     |
|                                     |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.12.2.5.2                                                                                      | Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction |
|                                     |                                     |                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 11.12.2.5.3                                                                                      | Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold               |
|                                     |                                     |                                     |                                     |             |                                                                                                  |                                                                                                    |


## 6.5. EUT test definition

| Item            | Radiated Emission Band Edge                                                          |                                                                                      |                                                                                      |                                                                                      |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed point-to-point                                                                 |                                                                                      |                                                                                      |
|                 | <input type="checkbox"/>                                                             | Emit multiple directional beams, simultaneously or sequentially                      |                                                                                      |                                                                                      |
|                 | <input checked="" type="checkbox"/>                                                  | Other cases                                                                          |                                                                                      |                                                                                      |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                      |                                                                                      |
| Test method     | <input checked="" type="checkbox"/>                                                  | Radiated                                                                             |                                                                                      |                                                                                      |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                               | Z Axis                                                                               |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input checked="" type="checkbox"/>                                       | Worst Axis <input type="checkbox"/>                                                  | Worst Axis <input type="checkbox"/>                                                  |
|                 | <input type="checkbox"/>                                                             | Conducted                                                                            |                                                                                      |                                                                                      |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              |                                                                                      |                                                                                      |
|                 |                                                                                      |  |                                                                                      |                                                                                      |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                              |                                                                                      |
|                 |                                                                                      |  |                                                                                      |                                                                                      |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                              | Chain 2                                                                              |
|                 |  |                                                                                      |                                                                                      |                                                                                      |

## 6.6. Duty Cycle

| Test Mode | Tx On (ms) | Tx Off (ms) | VBW  | Tx On + Tx Off (ms) | Duty Cycle |
|-----------|------------|-------------|------|---------------------|------------|
| 1         | -          | -           | 10Hz | -                   | 100%       |

### Frequency 914.2MHz

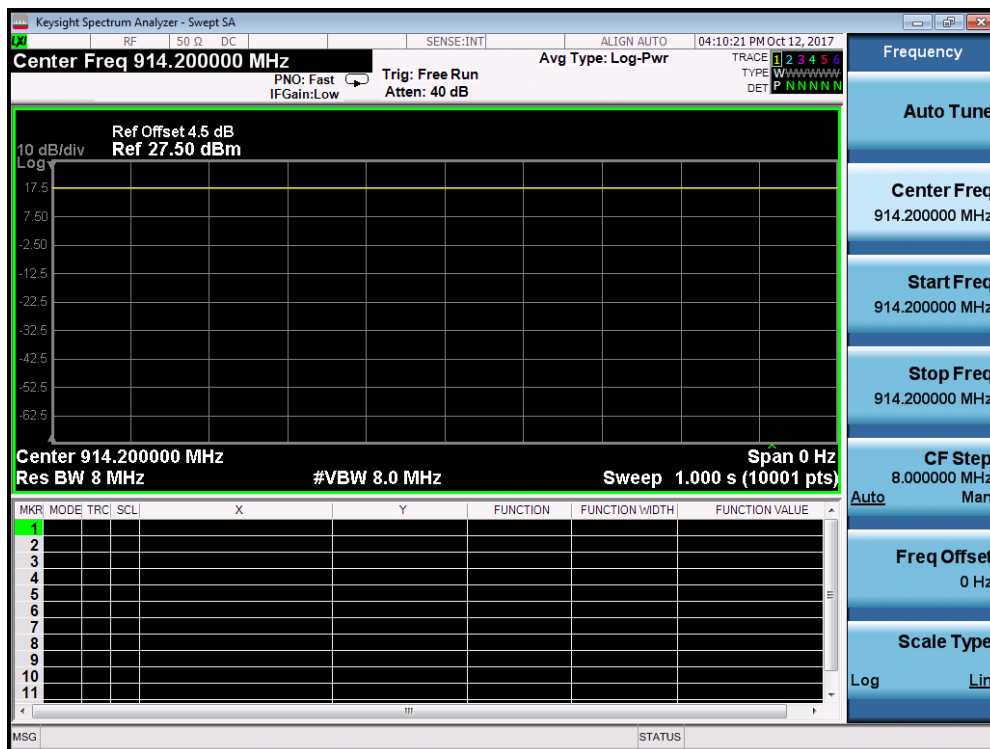

## 6.7 Test Result


No restricted band in the range  $\pm 2$  channel bandwidths of the Band-edges of the specified emission band! (608 MHz – 614 MHz and 960 MHz – 1240 MHz).

## 7. Occupied Bandwidth

### 7.1. Test Equipment

| Occupied Bandwidth / TR-8                                                                                                                 |              |          |            |            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|------------|------------|---------------|
| Instrument                                                                                                                                | Manufacturer | Type No. | Serial No. | Cal. Date  | Cal. Due Date |
| Spectrum Analyzer                                                                                                                         | Agilent      | N9010A   | MY48030494 | 2017.02.04 | 2018.02.03    |
| EXA Spectrum Analyzer                                                                                                                     | Keysight     | N9010A   | MY55370495 | 2017.04.09 | 2018.04.08    |
| MXA Signal Analyzer                                                                                                                       | Keysight     | N9020A   | MY56060147 | 2017.04.09 | 2018.04.08    |
| Temperature/Humidity Meter                                                                                                                | zhichen      | ZC1-2    | TR8-TH     | 2017.04.10 | 2018.04.09    |
| Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. |              |          |            |            |               |

### 7.2. Test Setup

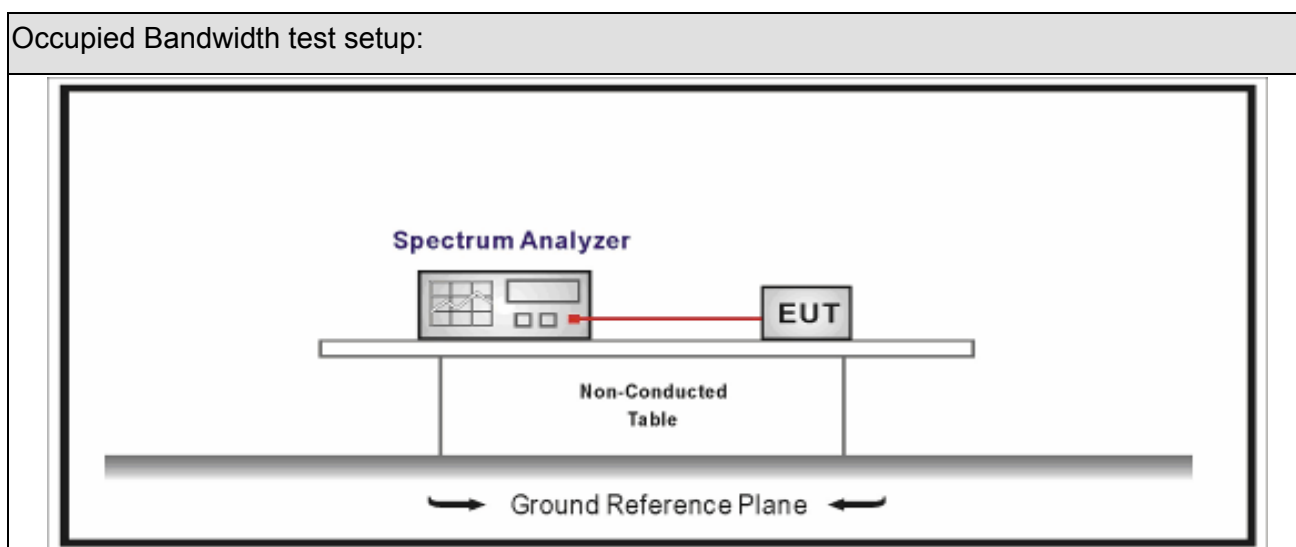

### 7.3. Limit






#### Occupied Bandwidth

Systems using digital modulation techniques operate in the 902-928 MHz .The minimum 6 dB bandwidth shall be at least 500 kHz

### 7.4. Test Procedure

| Test Method                         |                                     |             |         |               |
|-------------------------------------|-------------------------------------|-------------|---------|---------------|
|                                     | Reference Rule                      |             | Chapter | Description   |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |             | 11.8    | DTS bandwidth |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.8.1  | Option 1      |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 11.8.2  | Option 2      |

## 7.5. EUT test definition

| Item            | Occupied Bandwidth                                                                   |                                                                                      |                                                                                     |                                                                                     |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed position use                                                                   |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Mobile position use                                                                  |                                                                                     |                                                                                     |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                     |                                                                                     |
| Test method     | <input type="checkbox"/>                                                             | Radiated                                                                             |                                                                                     |                                                                                     |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                              | Z Axis                                                                              |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input type="checkbox"/>                                                  | Worst Axis <input type="checkbox"/>                                                 | Worst Axis <input type="checkbox"/>                                                 |
|                 | <input checked="" type="checkbox"/>                                                  | Conducted                                                                            |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Chain 0                                                                              |                                                                                     |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             | Chain 2                                                                             |
|                 |  |                                                                                      |                                                                                     |                                                                                     |


## 7.6. Test Result

|              |                  |           |                |
|--------------|------------------|-----------|----------------|
| Product Name | : Object Locator | Power     | : AC 120V/60Hz |
| Test Mode    | : Mode1          | Test Site | : TR8          |
| Test Date    | : 2017.10.12     |           |                |

| Mode | CH.  | Test Freq. (MHz) | 99% Occupied Bandwidth (kHz) | 6dB Occupied Bandwidth (kHz) | Limit (kHz) | Result |
|------|------|------------------|------------------------------|------------------------------|-------------|--------|
| 1    | Low  | 903              | 814.78                       | 780.9                        | >500        | Pass   |
| 1    | Mid  | 907.8            | 807.30                       | 767.4                        | >500        | Pass   |
| 1    | High | 914.2            | 832.86                       | 815.6                        | >500        | Pass   |

Note : The worst case of Occupied Bandwidth as below :

Mode 1 Mid Channel (907.8MHz)

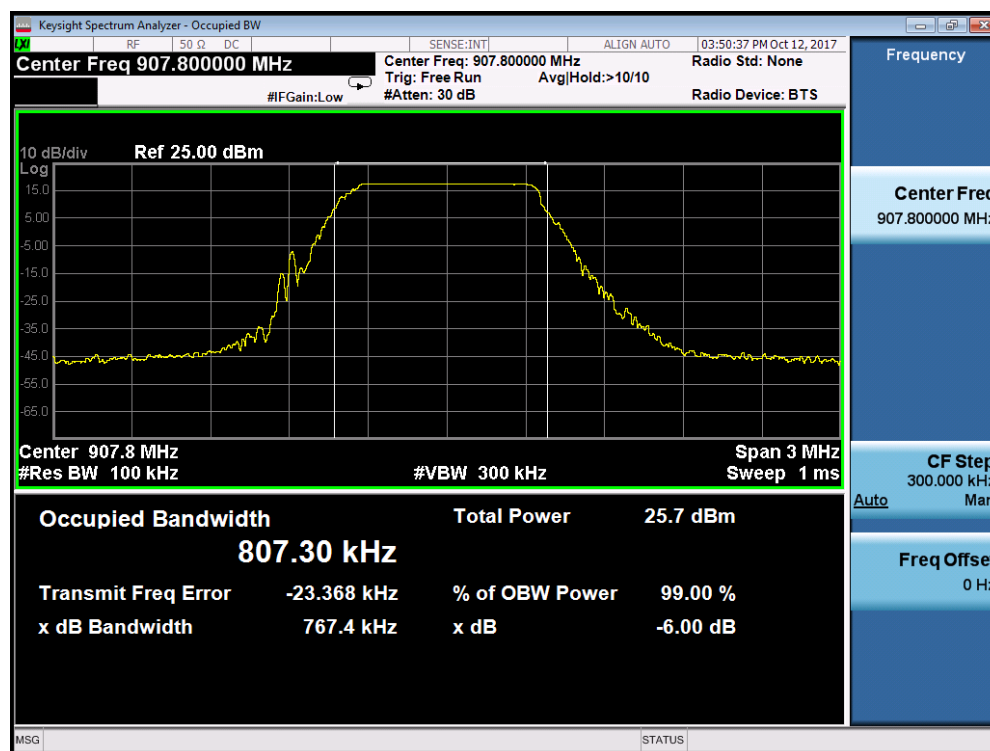




## 8. Fundamental emission output power

### 8.1. Test Equipment

| Fundamental emission output power/ TR-8 |              |          |            |            |               |
|-----------------------------------------|--------------|----------|------------|------------|---------------|
| Instrument                              | Manufacturer | Type No. | Serial No. | Cal. Date  | Cal. Due Date |
| Spectrum Analyzer                       | Agilent      | E4446A   | MY45300103 | 2017.01.04 | 2018.01.03    |
| Spectrum Analyzer                       | Agilent      | N9010A   | MY48030494 | 2017.02.04 | 2018.02.03    |
| Wideband Peak Power Meter               | Anritsu      | ML2495A  | 0905006    | 2017.10.14 | 2018.10.13    |
| Power Sensor                            | Anritsu      | MA2411B  | 0846014    | 2017.10.14 | 2018.10.13    |
| Temperature/Humidity Meter              | zhicheng     | ZC1-2    | TR8-TH     | 2017.04.10 | 2018.04.09    |

Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

### 8.2. Test Setup

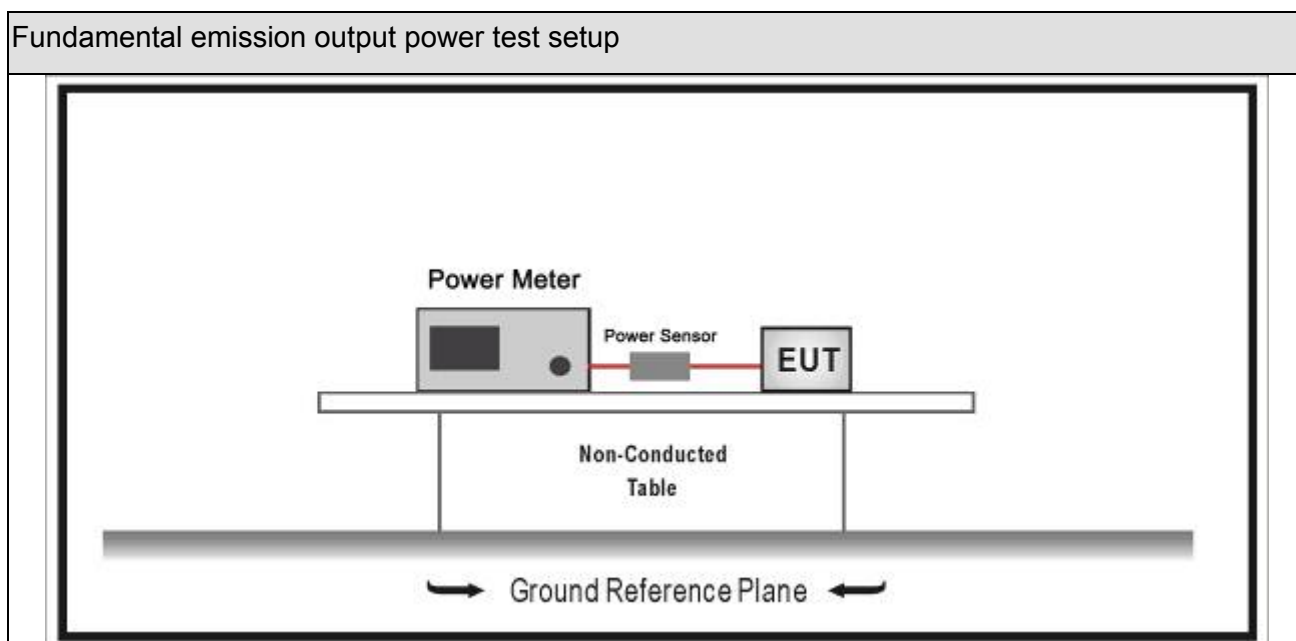





### 8.3. Limit

| Fundamental emission output power Limit                      |                                                         |                                                   |
|--------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------|
| <input checked="" type="checkbox"/>                          | $G_{TX} < 6\text{dBi}$                                  | $P_{out} \leq 30\text{dBm}$                       |
| <input type="checkbox"/>                                     | $G_{TX} > 6\text{dBi}$                                  |                                                   |
| <input type="checkbox"/>                                     | Non-Fix point-point                                     | $P_{out} \leq 30 - (G_{TX} - 6)$                  |
| <input type="checkbox"/>                                     | Fix point-point                                         | $P_{out} \leq 30 - [(G_{TX} - 6)]/3$              |
| <input type="checkbox"/>                                     | Point-to-multipoint                                     | $P_{out} \leq 30 - (G_{TX} - 6)$                  |
| <input type="checkbox"/>                                     | Overlap Beams                                           | $P_{out} \leq 30 - [(G_{TX} - 6)]/3$              |
| <input type="checkbox"/>                                     | Aggregate power transmitted simultaneously on all beams | $P_{out} \leq 30 - [(G_{TX} - 6)]/3$              |
| <input type="checkbox"/>                                     | single directional beam                                 | $P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$ |
| Note 1 : $G_{TX}$ directional gain of transmitting antennas. |                                                         |                                                   |
| Note 2 : $P_{out}$ is maximum peak conducted output power .  |                                                         |                                                   |

## 8.4. Test Procedure

| Fundamental emission output power Test Method |                                     |                                     |                                     |             |                                   |                                          |                                            |
|-----------------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------|-----------------------------------|------------------------------------------|--------------------------------------------|
|                                               | References Rule                     |                                     |                                     | Chapter     | Description                       |                                          |                                            |
| <input checked="" type="checkbox"/>           | ANSI C63.10                         |                                     |                                     | 11.9        | Fundamental emission output power |                                          |                                            |
|                                               | <input type="checkbox"/>            | ANSI C63.10                         |                                     |             | 11.9.1                            | Maximum peak conducted output power      |                                            |
|                                               |                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.9.1.1    | RBW ≥ DTS bandwidth               |                                          |                                            |
|                                               |                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.9.1.2    | Integrated band power method      |                                          |                                            |
|                                               |                                     | <input type="checkbox"/>            | ANSI C63.10                         | 11.9.1.3    | PKPM1 Peak power meter method     |                                          |                                            |
|                                               | <input checked="" type="checkbox"/> | ANSI C63.10                         |                                     |             | 11.9.2                            | Maximum conducted (average) output power |                                            |
|                                               |                                     | <input type="checkbox"/>            | ANSI C63.10                         |             |                                   | 11.9.2.2                                 | Measurement using a spectrum analyzer (SA) |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.2                        | Method AVGSA-1(Duty cycle ≥ 98%)         |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.3                        | Method AVGSA-1A(Duty cycle ≥ 98%)        |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.4                        | Method AVGSA-2(Duty cycle ≤ 98%)         |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.5                        | Method AVGSA-2A(Duty cycle ≤ 98%)        |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.4                        | Method AVGSA-3                           |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.2.5                        | Method AVGSA-3A                          |                                            |
|                                               |                                     | <input checked="" type="checkbox"/> | ANSI C63.10                         |             |                                   | 11.9.2.3                                 | Measurement using a power meter (PM)       |
|                                               |                                     |                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 11.9.2.3.1                        | Method AVGPM                             |                                            |
|                                               |                                     |                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.9.2.3.2                        | Method AVGPM-G                           |                                            |

## 8.5. EUT test definition

| Item            | Fundamental emission output power                                                    |                                                                                      |                                                                                     |                                                                                     |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed position use                                                                   |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Mobile position use                                                                  |                                                                                     |                                                                                     |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                     |                                                                                     |
| Test method     | <input type="checkbox"/>                                                             | Radiated                                                                             |                                                                                     |                                                                                     |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                              | Z Axis                                                                              |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input type="checkbox"/>                                                  | Worst Axis <input type="checkbox"/>                                                 | Worst Axis <input type="checkbox"/>                                                 |
|                 | <input checked="" type="checkbox"/>                                                  | Conducted                                                                            |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Chain 0                                                                              |                                                                                     |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             | Chain 2                                                                             |
|                 |  |                                                                                      |                                                                                     |                                                                                     |

## 8.6. Test Result

|              |   |                |           |   |              |
|--------------|---|----------------|-----------|---|--------------|
| Product Name | : | Object Locator | Power     | : | AC 120V/60Hz |
| Test Mode    | : | Mode1          | Test Site | : | TR8          |
| Test Date    | : | 2017.11.27     |           |   |              |


| Mode | Channel | Test Frequency (MHz) | Average Power Output (dBm) | Antenna Gain (dBi) | Limit (dBm) | Result |
|------|---------|----------------------|----------------------------|--------------------|-------------|--------|
| 1    | Low     | 903                  | 18.47                      | -4.63              | 30          | Pass   |
| 1    | Mid     | 907.8                | 18.49                      | -4.63              | 30          | Pass   |
| 1    | High    | 914.2                | 18.46                      | -4.63              | 30          | Pass   |

## 9. Power Spectral Density

### 9.1. Test Equipment

| Power Spectral Density / TR-8                                                                                                             |              |          |            |            |               |
|-------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------|------------|------------|---------------|
| Instrument                                                                                                                                | Manufacturer | Type No. | Serial No. | Cal. Date  | Cal. Due Date |
| Spectrum Analyzer                                                                                                                         | Agilent      | N9010A   | MY48030494 | 2017.02.04 | 2018.02.03    |
| EXA Spectrum Analyzer                                                                                                                     | Keysight     | N9010A   | MY55370495 | 2017.04.09 | 2018.04.08    |
| MXA Signal Analyzer                                                                                                                       | Keysight     | N9020A   | MY56060147 | 2017.04.09 | 2018.04.08    |
| Temperature/Humidity Meter                                                                                                                | zhichen      | ZC1-2    | TR8-TH     | 2017.04.10 | 2018.04.09    |
| Note: All equipment are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards. |              |          |            |            |               |

### 9.2. Test Setup

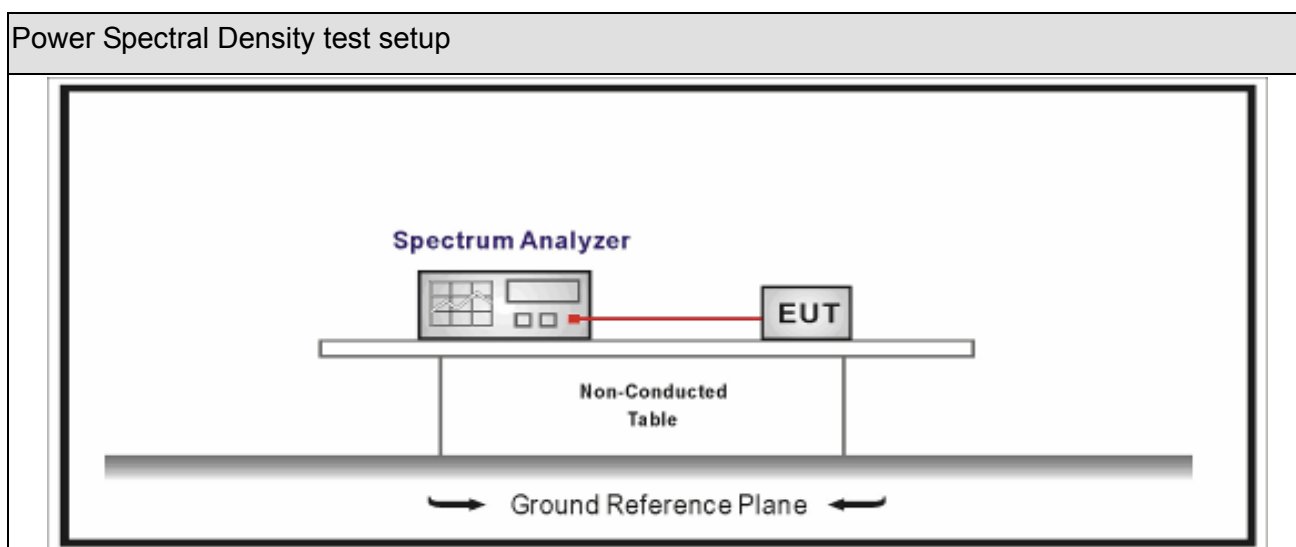






### 9.3. Limit

| Power Spectral Density Limit                          |
|-------------------------------------------------------|
| Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$ |

#### 9.4. Test Procedure

| Power Spectral Density Test Method  |                                     |             |         |                                                                  |
|-------------------------------------|-------------------------------------|-------------|---------|------------------------------------------------------------------|
|                                     | References Rule                     |             | Chapter | Description                                                      |
| <input checked="" type="checkbox"/> | ANSI C63.10                         |             | 11.10   | Maximum power spectral density level in the fundamental emission |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.2 | Method PKPSD (peak PSD)                                          |
|                                     | <input checked="" type="checkbox"/> | ANSI C63.10 | 11.10.3 | Method AVGPS-1(Duty cycle $\geq$ 98%)                            |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.4 | Method AVGPS-1A(Duty cycle $\geq$ 98%)                           |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.5 | Method AVGPS-2(Duty cycle $<$ 98%)                               |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.6 | Method AVGPS-2A(Duty cycle $<$ 98%)                              |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.7 | Method AVGPS-3                                                   |
|                                     | <input type="checkbox"/>            | ANSI C63.10 | 11.10.8 | Method AVGPS-3A                                                  |

## 9.5. EUT test definition

| Item            | Power Spectral Density Test Method                                                   |                                                                                      |                                                                                     |                                                                                     |
|-----------------|--------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| Device Category | <input type="checkbox"/>                                                             | Fixed position use                                                                   |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Mobile position use                                                                  |                                                                                     |                                                                                     |
| Test mode       | Mode 1                                                                               |                                                                                      |                                                                                     |                                                                                     |
| Test method     | <input type="checkbox"/>                                                             | Radiated                                                                             |                                                                                     |                                                                                     |
|                 |                                                                                      | X Axis                                                                               | Y Axis                                                                              | Z Axis                                                                              |
|                 |                                                                                      |     |  |  |
|                 |                                                                                      | Worst Axis <input type="checkbox"/>                                                  | Worst Axis <input type="checkbox"/>                                                 | Worst Axis <input type="checkbox"/>                                                 |
|                 | <input checked="" type="checkbox"/>                                                  | Conducted                                                                            |                                                                                     |                                                                                     |
|                 | <input checked="" type="checkbox"/>                                                  | Chain 0                                                                              |                                                                                     |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             |                                                                                     |
|                 |                                                                                      |  |                                                                                     |                                                                                     |
|                 | <input type="checkbox"/>                                                             | Chain 0                                                                              | Chain 1                                                                             | Chain 2                                                                             |
|                 |  |                                                                                      |                                                                                     |                                                                                     |




## 9.6. Test Result

|              |                  |           |                |
|--------------|------------------|-----------|----------------|
| Product Name | : Object Locator | Power     | : AC 120V/60Hz |
| Test Mode    | : Mode1          | Test Site | : TR8          |
| Test Date    | : 2017.10.12     |           |                |

| Mode | Channel | Test Frequency (MHz) | Measurement PSD (dBm/3kHz) | Antenna Gain (dBi) | Limit (dBm/3kHz) | Result |
|------|---------|----------------------|----------------------------|--------------------|------------------|--------|
| 1    | Low     | 903                  | 4.218                      | -4.63              | 8.0              | Pass   |
| 1    | Mid     | 907.8                | 4.499                      | -4.63              | 8.0              | Pass   |
| 1    | High    | 914.2                | 3.923                      | -4.63              | 8.0              | Pass   |

Mode 1 Mid Channel (907.8MHz)

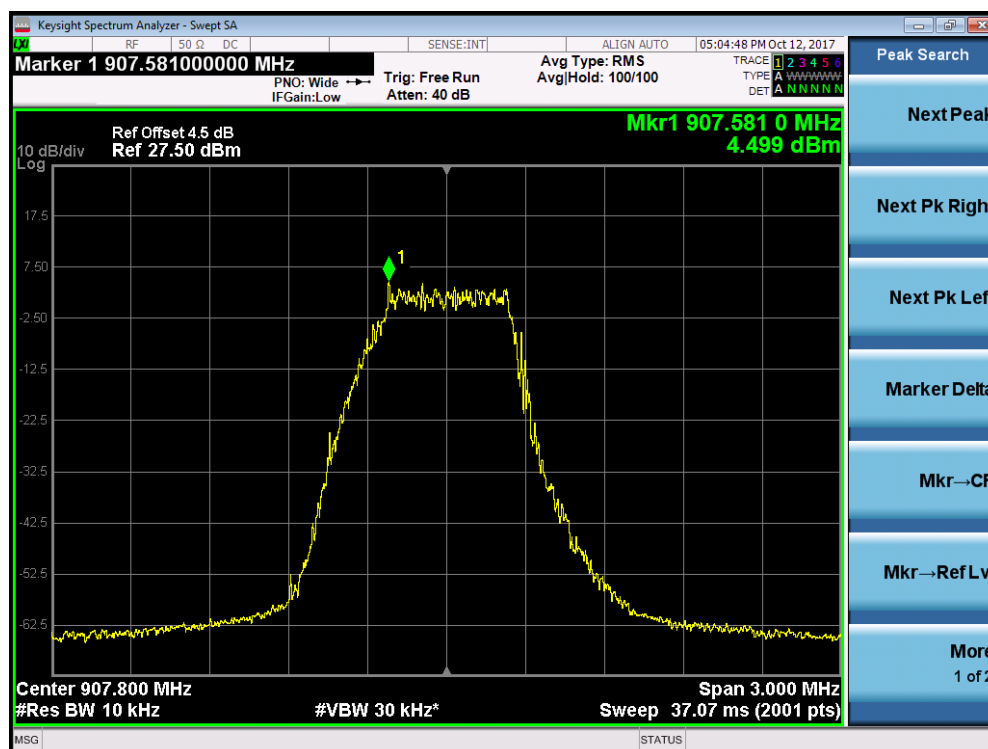

## 10. Antenna Requirement

### 10.1. Limit

| Antenna Requirement Limit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.</p> |  |

### 10.2. Antenna Connector Construction

| Antenna Connector Construction                                                             |                                                                  |
|--------------------------------------------------------------------------------------------|------------------------------------------------------------------|
| <input checked="" type="checkbox"/>                                                        | The use of a permanently attached antenna                        |
| <input type="checkbox"/>                                                                   | The antenna use of a unique coupling to the intentional radiator |
| <input type="checkbox"/>                                                                   | The use of a nonstandard antenna jack or electrical connector    |
| Please refer to the attached document "Internal Photograph" to show the antenna connector. |                                                                  |

\_\_\_\_\_ The End \_\_\_\_\_