

Bluetooth antenna specification

1, Index

Item	Content	Page	Remark
1	Index	1	
2	Spec Drawing	2	
3	Specification	2	
4	Antenna On Test Board	3	
5	Return Loss	3	
6	Radiation Pattern	3	

Document Type: 2.4GHz antenna of PCB on-board

Document Version: V1.0

Release Date: Dec. 15, 2024


Antenna manufacturer: Shenzhen Feasycom Co.,Ltd

address:

Rm 508, Building A, Fenghuang Zhigu, No.50, Tiezai Road, Xixiang, Baoan District, Shenzhen, 518102, China

2, Spec Drawing

Unit: mm

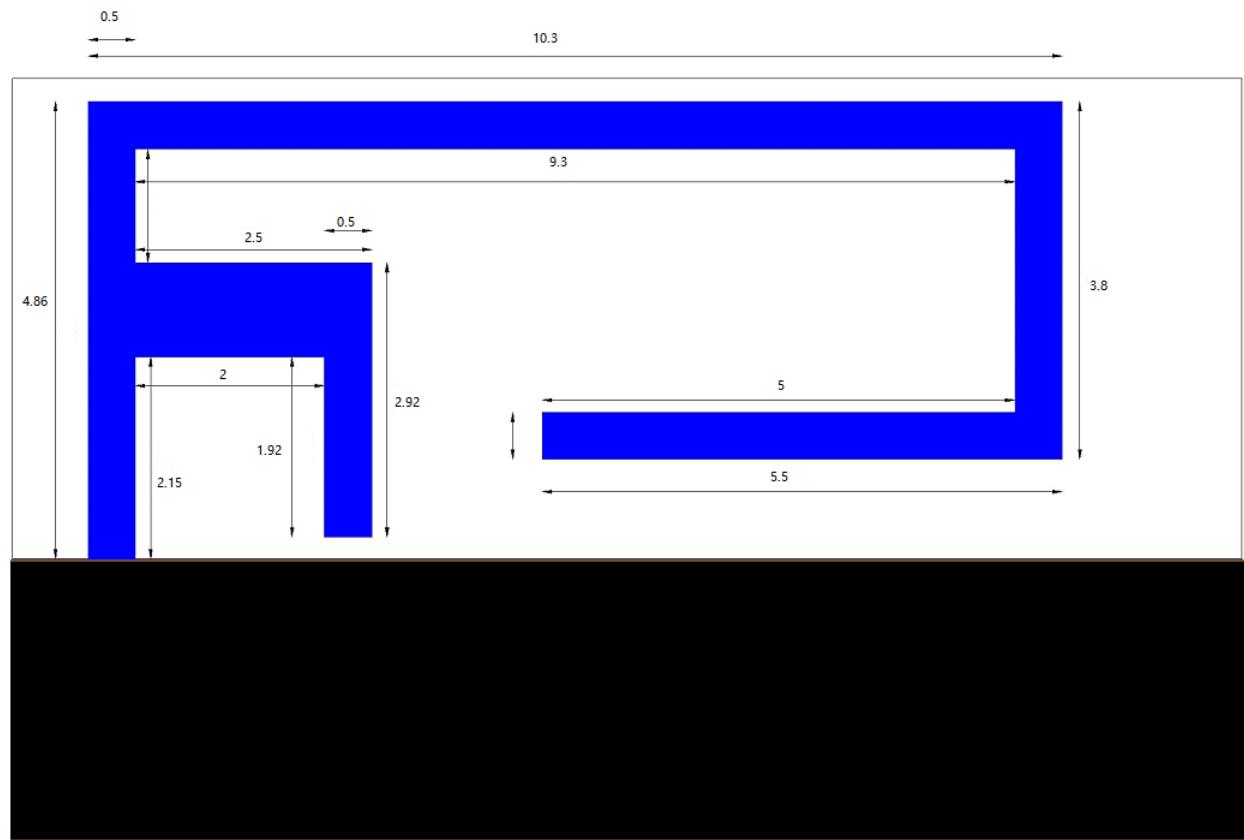

3, Specification

Product Number: 2.4GHZ FPC antenna

Sample Photo:



A. Electrical Characteristics

Frequency	2400 ~ 2500 MHz
S.W.R.	<=2.0
Gain	2.0 dBi
Efficiency	~ 40%
Polarization	Linear
Impedance	50 Ohm


B. Material & Mechanical Characteristics

Material of Radiator	copper
----------------------	--------


C. Environmental

Operation Temperature	- 40°C ~ + 85°C
Storage Temperature	- 40°C ~ + 105°C

4, Antenna On Test Board

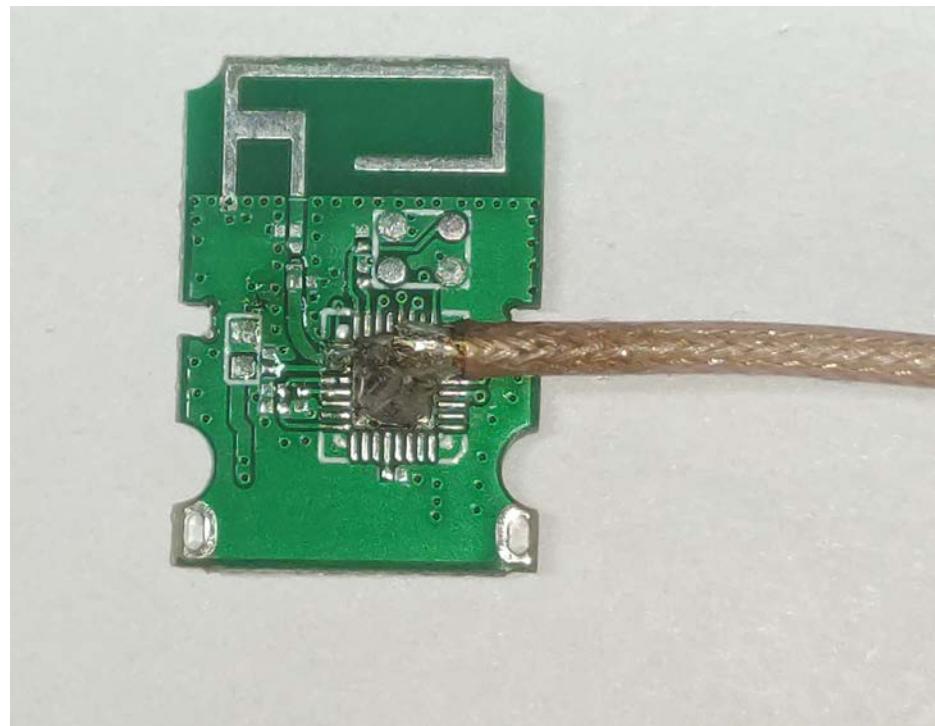


5, Return Loss

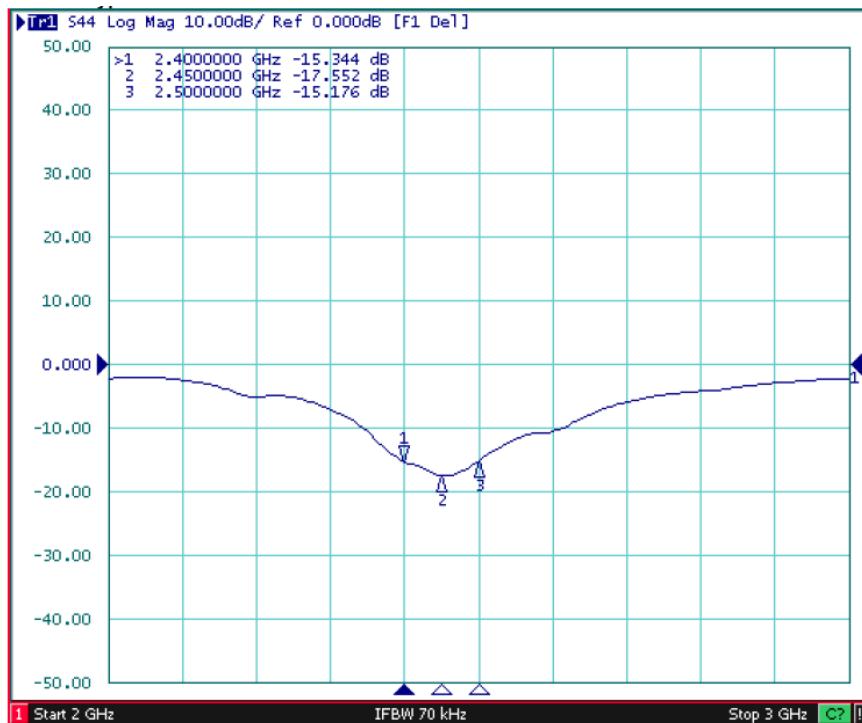

6, Radiation Pattern

Radiation Pattern and Gain were dependent on measurement board design. The specification of coil antenna was measured based on the PCB size and installation position as shown in the below figure Test Board.

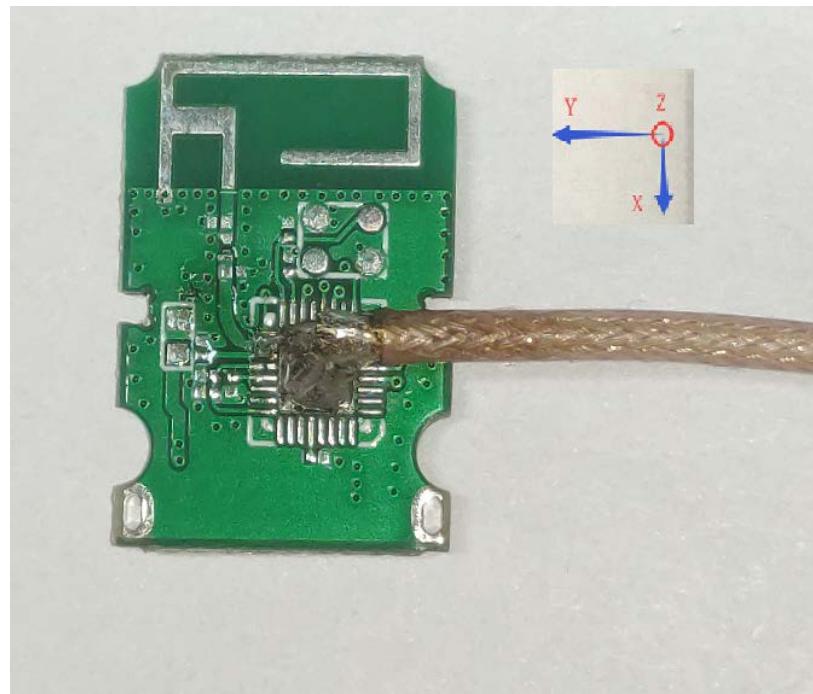

2400MHZ	Vertical	Horizontal
Y - Z Plane Average Gain=1.86 dBi		
Peak Gain = 2.00 dBi Average Gain = 0.71 dBi		Peak Gain= -1.37 dBi Average Gain= - 4.6 dBi

