



REPORT No.: SZ17070206W01

FCC RF TEST REPORT

APPLICANT : Golden Mark (HK) Limited

PRODUCT NAME : Wall Switch

MODEL NAME : HS-WS200+

TRADE NAME : N/A

BRAND NAME : N/A

FCC ID : 2AMY9HSWS200

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2017-08-21

SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Fax: 86-755-36698525
Http://www.morlab.com E-mail: service@morlab.cn



DIRECTORY

<u>TEST REPORT DECLARATION</u>	3
<u>1. TECHNICAL INFORMATION</u>	4
1.1 EUT DESCRIPTION	4
1.2 TEST STANDARDS AND RESULTS	4
1.2.1 TEST ENVIRONMENT CONDITIONS	5
<u>2. 47 CFR PART 15C REQUIREMENTS</u>	6
2.1 ANTENNA REQUIREMENT	6
2.1.1 APPLICABLE STANDARD	6
2.1.2 RESULT: COMPLIANT	6
2.2 BANDWIDTH	6
2.2.1 REQUIREMENT	6
2.2.2 TEST DESCRIPTION	6
2.2.3 TEST RESULT	7
2.3 CONDUCTED EMISSION	9
2.1.1 REQUIREMENT	9
2.1.2 TEST DESCRIPTION	9
2.1.3 TEST RESULT	10
2.4 FIELD STRENGTH OF FUNDAMENTAL	14
2.4.1 REQUIREMENT	14
2.4.2 TEST DESCRIPTION	14
2.1.1 TEST PROCEDURE	15
2.1.2 TEST RESULT	15
2.2 RADIATED EMISSION AND FIELD STRENGTH OF HARMONICS	17
2.4.1 REQUIREMENT	17
2.4.2 TEST DESCRIPTION	18
2.4.3 TEST RESULT	20
<u>ANNEX A GENERAL INFORMATION</u>	23

Change History		
Issue	Date	Reason for change
1.0	2017-08-21	First edition



REPORT No.: SZ17070206W01

TEST REPORT DECLARATION

Applicant	Golden Mark (HK) Limited
Applicant Address	6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer	Golden Mark (HK) Limited
Manufacturer Address	6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong
Product Name	Wall Switch
Model Name	HS-WS200+
Brand Name	N/A
HW Version	N/A
SW Version	N/A
Test Standards	47 CFR Part 15 Subpart C
Test Date	2017-08-15 to 2017-08-17
Test Result	PASS

Tested by : Li Jingzong
Li Jingzong (Test Engineer)

Approved by : Qiu Xiaojun
Qiu Xiaojun (Supervisor)



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 EUT Description

Product Name	Wall Switch
Serial No.	(N/A, marked #1 by test site)
Hardware Version	N/A
Software Version	N/A
Applicant	Golden Mark (HK) Limited 6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong
Manufacturer	Golden Mark (HK) Limited 6/F., Kimberley Plaza, 45-47 Kimberley Road, Tsim Sha Tsui, Kowloon, Hong Kong
Frequency	908.4MHz and 916MHz
Antenna Type	Wire type
Antenna Gain	2dBi

NOTE: The EUT is a Wall Switch, it only operating at 908.4MHz and 916MHz.

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices



Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N/A	<u>PASS</u>
2	15.215	Bandwidth	Aug 21, 2017	<u>PASS</u>
3	15.249(a)	Field strength	Aug 07, 2017	<u>PASS</u>
4	15.207	Conducted Emission	Aug 07, 2017	<u>PASS</u>
5	15.209 ,15.249(a)	Radiated Emission and field strength of harmonics	Aug 07, 2017	<u>PASS</u>

The tests of Conducted Emission and Radiated Emission were performed according to the method of measurements prescribed in ANSI C63.10:2013.

1.2.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Bandwidth

2.2.1 Requirement

Note: for reporting purpose only.

2.2.2 Test Description

A. Test Set:

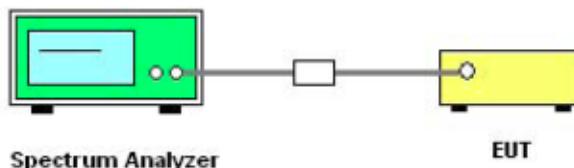

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz and (VBW) = 10 kHz. In order to make an accurate measurement, set the span greater than RBW.

B. Equipments List:

Please reference ANNEX A(1.5).




2.2.3 Test Result

The channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

Channel	Frequency (MHz)	20 dB Bandwidth (KHz)	Refer Plot
1	908.4	93.33	Plot A
2	916.0	143.70	Plot B

B. Test Plots

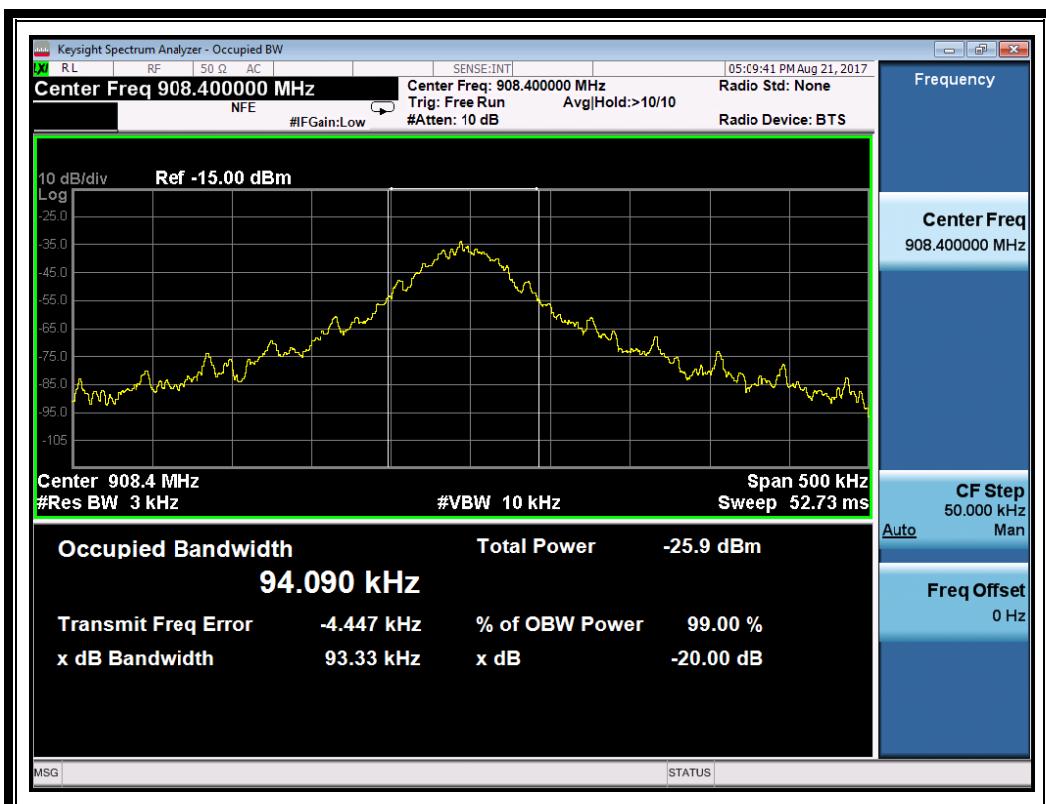

(Plot A, Channel 1: 908.4MHz)

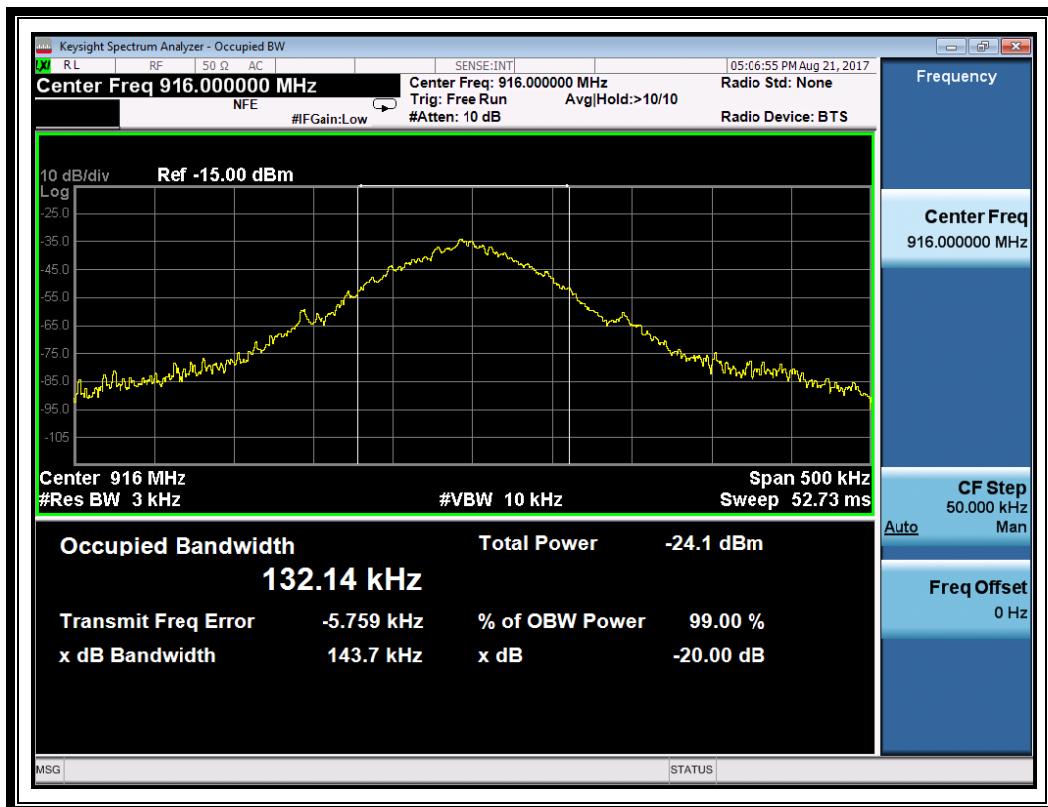

(Plot B, Channel 2: 916MHz)

2.3 Conducted Emission

2.3.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.3.2 Test Description

A. Test Setup:

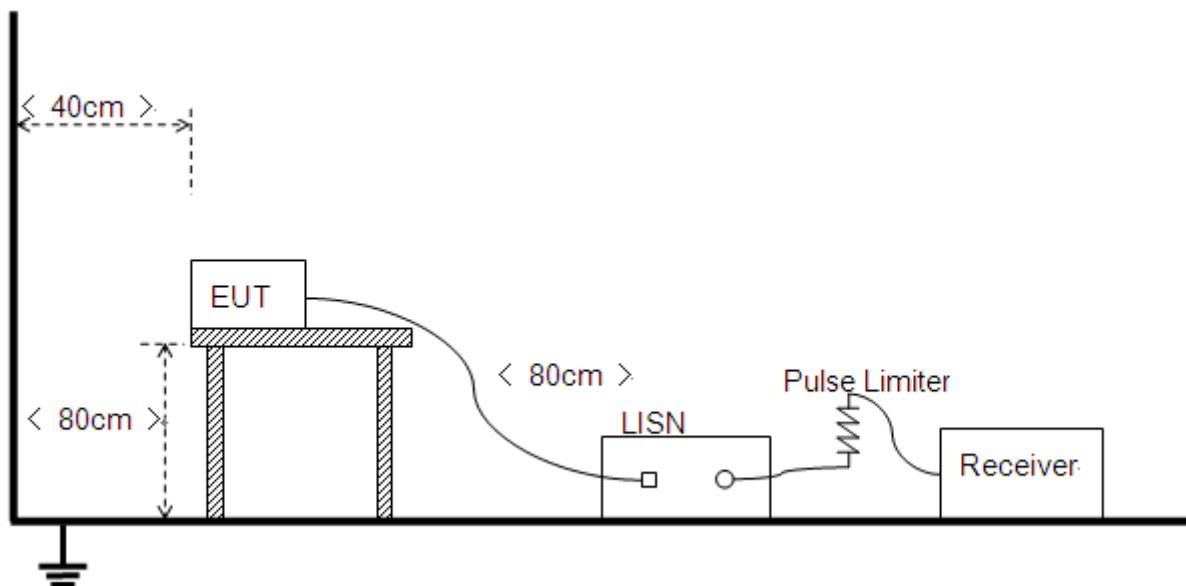

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10 2013.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result


The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

The EUT configuration of the emission tests is EUT + Link.


B. Test Plots:

Plot for 908.4 MHz

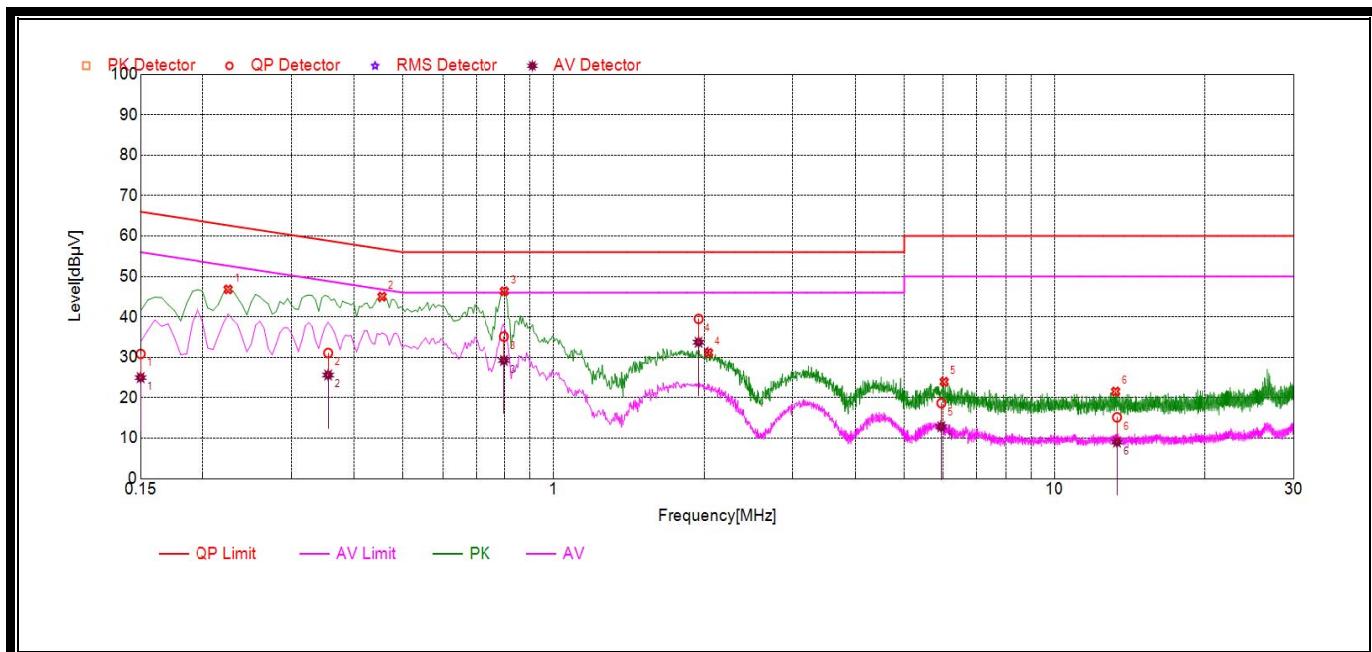

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	30.84	24.99	66.00	56.00	Line	PASS
2	0.355	31.08	25.63	60.14	50.14		PASS
3	0.7984	35.14	29.22	56	46		PASS
4	1.9484	39.51	33.73	56	46		PASS
5	5.9626	18.68	12.83	60	50		PASS
6	13.3134	15.17	9.05	60	50		PASS

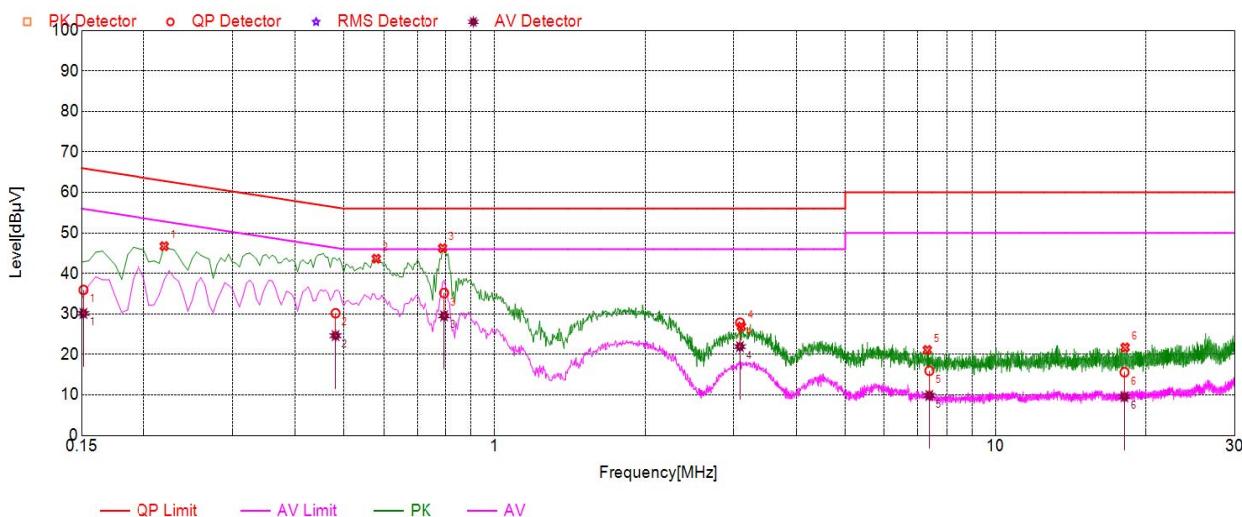


(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1512	35.93	30.13	65.97	55.97	Line	PASS
2	0.4816	30.17	24.64	56.53	46.53		PASS
3	0.7954	35.16	29.52	56	46		PASS
4	3.0938	27.83	21.93	56	46		PASS
5	7.388	15.98	9.89	60	50		PASS
6	18.0264	15.62	9.56	60	50		PASS




Plot for 916 MHz

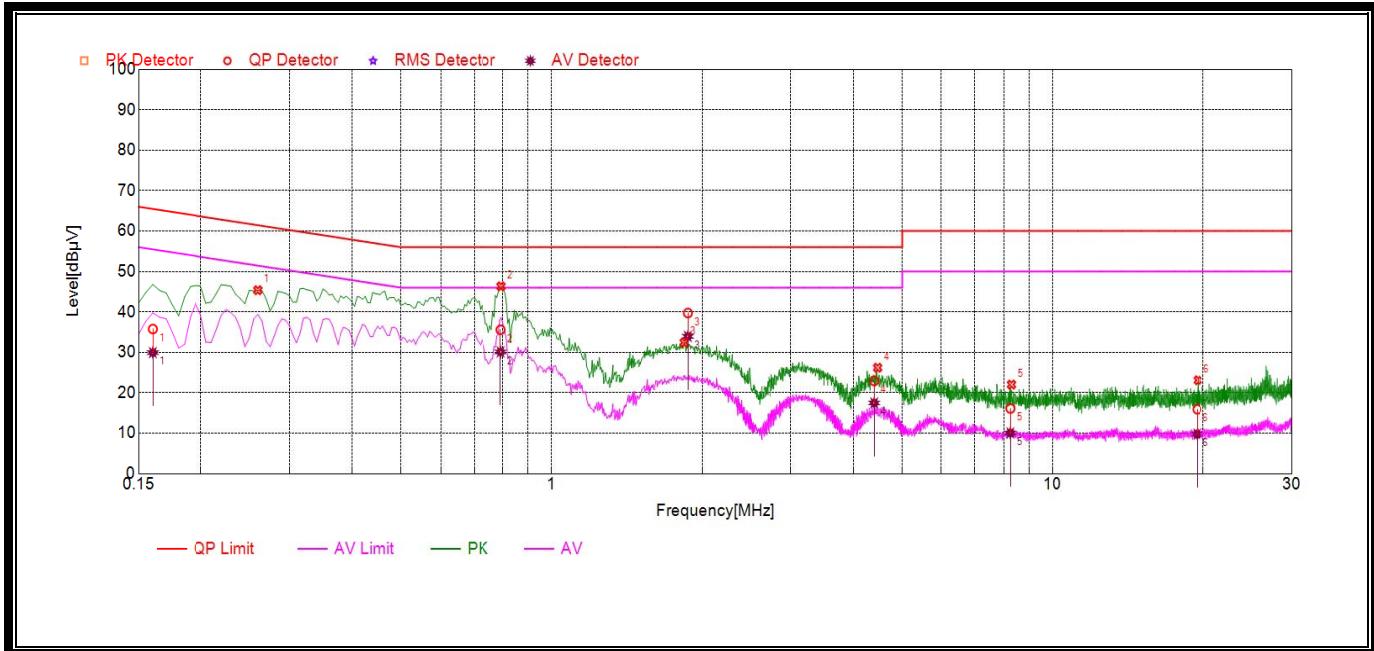

(Plot C: L Phase)

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.16	35.76	29.94	65.71	55.71	Line	PASS
2	0.7934	35.57	30.10	56	46		PASS
3	1.872	39.73	33.95	56	46		PASS
4	4.4	22.94	17.48	56	46		PASS
5	8.2432	16.11	10.06	60	50		PASS
6	19.3918	15.91	9.75	60	50		PASS

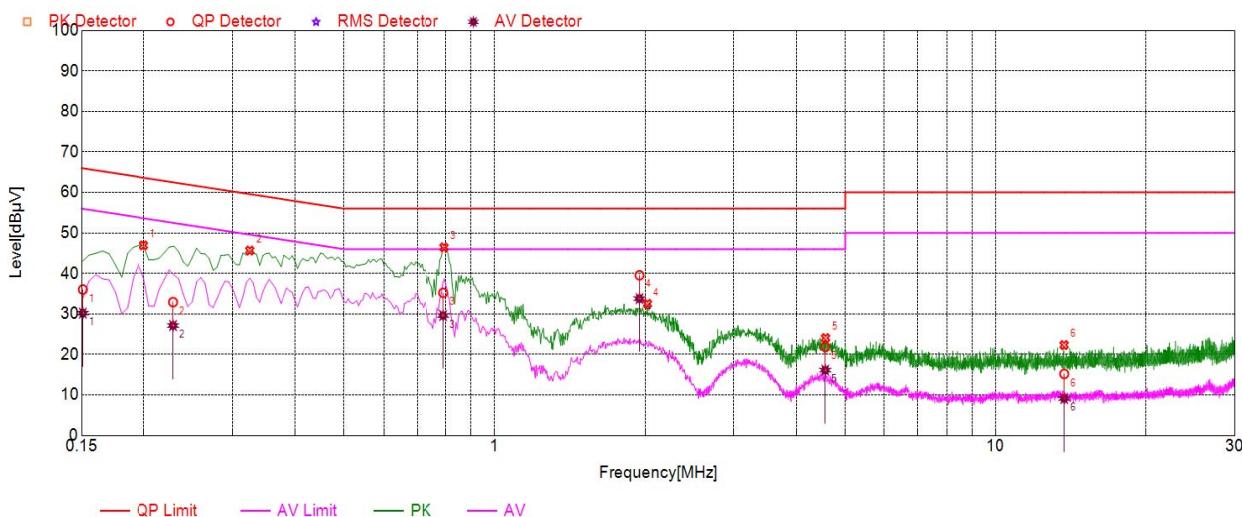

(Plot D: N Phase)

NO.	Fre. (MHz)	Emission Level (dB μ V)		Limit (dB μ V)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1508	36.02	30.20	65.98	55.98	Line	PASS
2	0.229	32.92	27.13	63.74	53.74		PASS
3	0.7918	35.22	29.61	56	46		PASS
4	1.9472	39.55	33.78	56	46		PASS
5	4.5642	21.88	16.13	56	46		PASS
6	13.6942	15.20	9.11	60	50		PASS

2.4 Field strength of fundamental


2.4.1 Requirement

According to FCC section 15.249(a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

2.4.2 Test Description

A. Test Setup

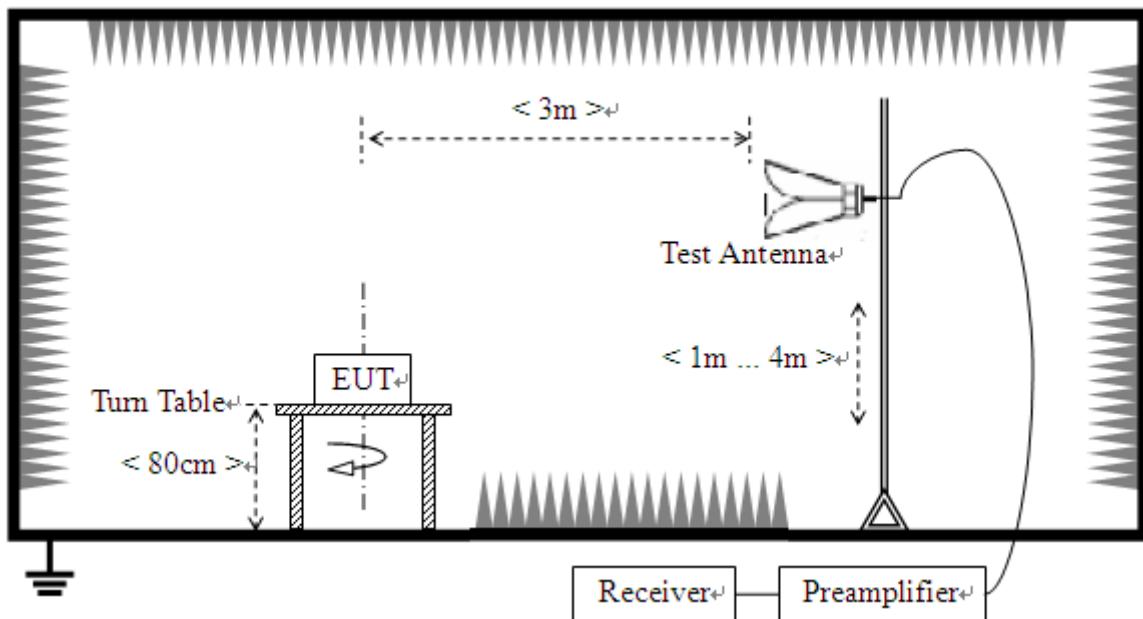

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the



ground to determine the maximum value of the field strength.

B. Equipments List:

Please reference ANNEX A(1.5).

2.1.1 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.1.2 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor AT and A_{Factor} were built in test software.


Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report

Test Verdict:


Channel	Frequency (MHz)	Detector	Receiver	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
			Reading U_R (dB μ V)					
1	908.4	PK	53.804	3.763	22.276	79.843	113.98	Pass
2	916.0	PK	54.164	3.798	22.392	80.354	113.98	Pass



Test Plots:

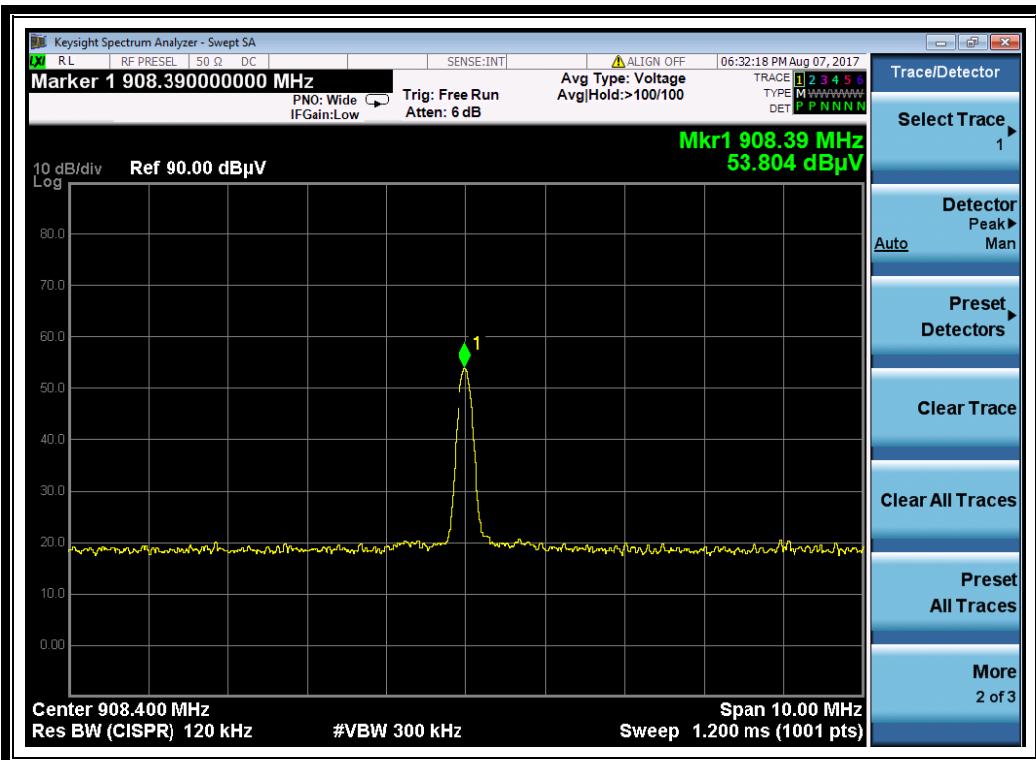

(Plot 1: PK, Channel 1: 908.4MHz)

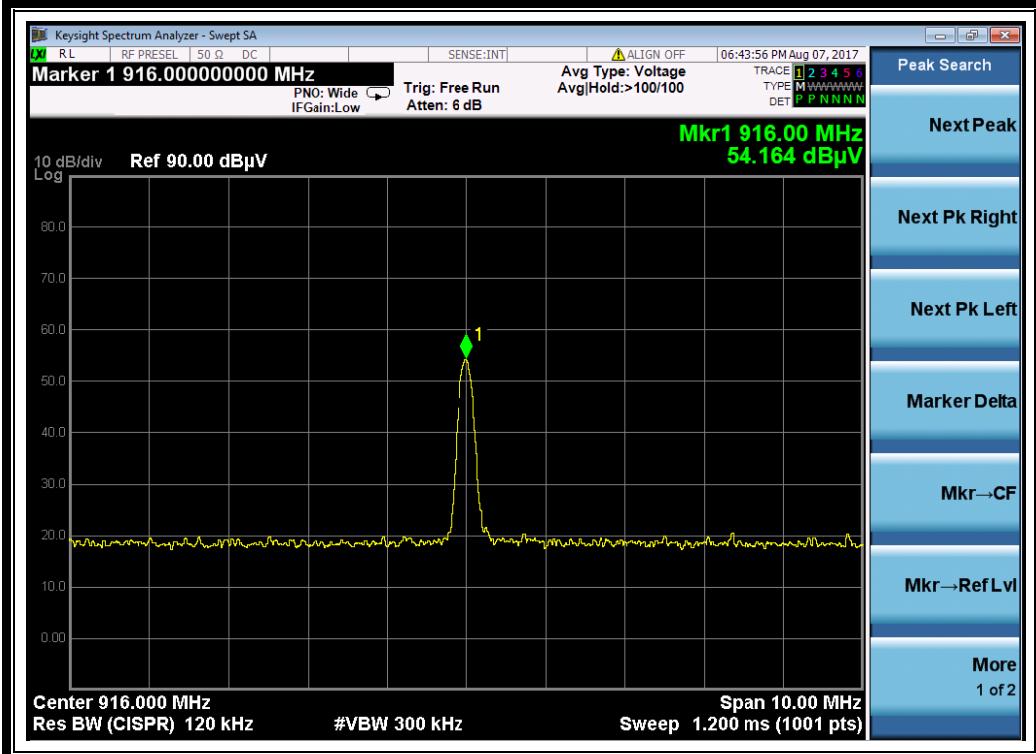

(Plot 2: PK, Channel 2: 916MHz)



2.2 Radiated Emission and field strength of harmonics

2.4.1 Requirement

According to section 15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

According to section 15.249(d), Emission Radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)	Field Strength Limitation at 3m Measurement Dist	
			(μ V/m)	(dBuV/m)
0.009 - 0.490	2400/F(kHz)	300	10000* 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 - 1.705	24000/F(kHz)	30	100* 2400/F(KHz)	20log 2400/F(KHz) + 40
1.705 - 30.0	30	30	100*30	20log 30 + 40
30 - 88	100	3	100	20log 100
88 - 216	150	3	150	20log 150
216 - 960	200	3	200	20log 200
Above 960	500	3	500	20log 500

According to section 15.249(e), for frequencies above 1000MHz, the above field strength limits are based on average limits. The peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20dB under any condition of modulation.

Note:

- 1) The tighter limit shall apply at the boundary between two frequency range.
- 2) Limitation expressed in dBuV/m is calculated by 20log Emission Level(μ V/m).
- 3) If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of $Ld1 = Ld2 * (d2/d1)^2$.


Example: F.S Limit at 30m distance is 30uV/m, then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30uV/m * (10)^2 = 100 * 30uV/m$$


2.4.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

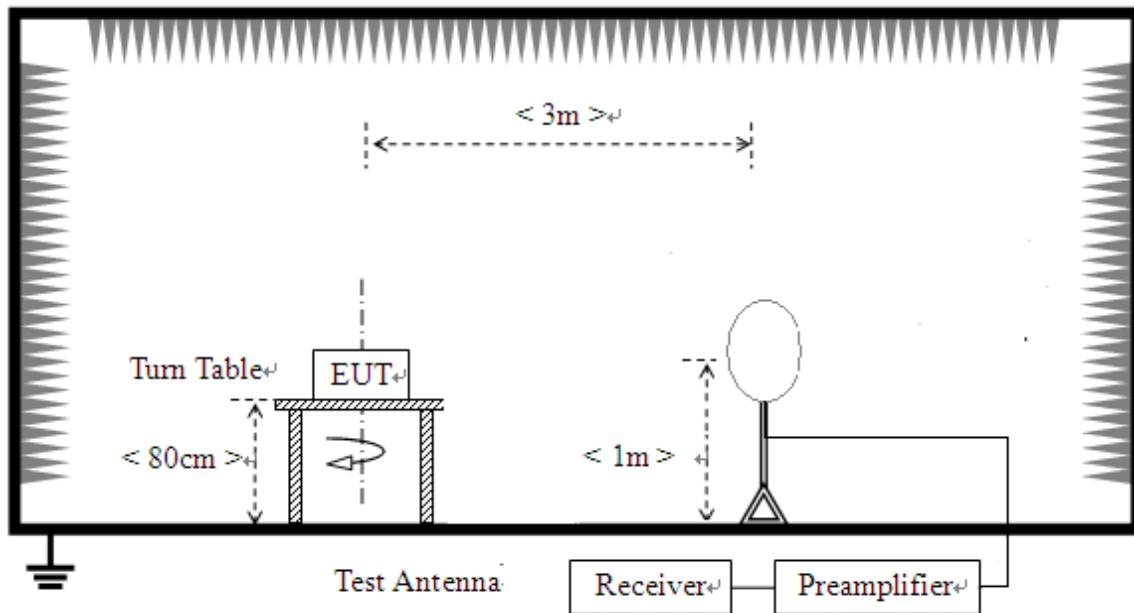

- 2) For radiated emissions from 30MHz to 1GHz

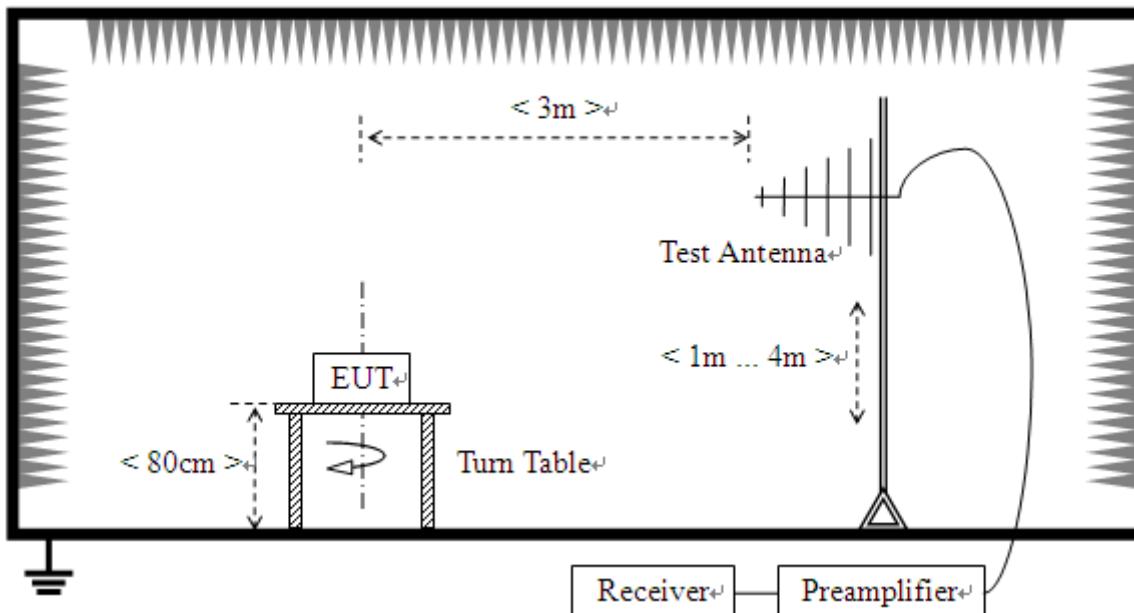

3) For radiated emissions above 1GHz

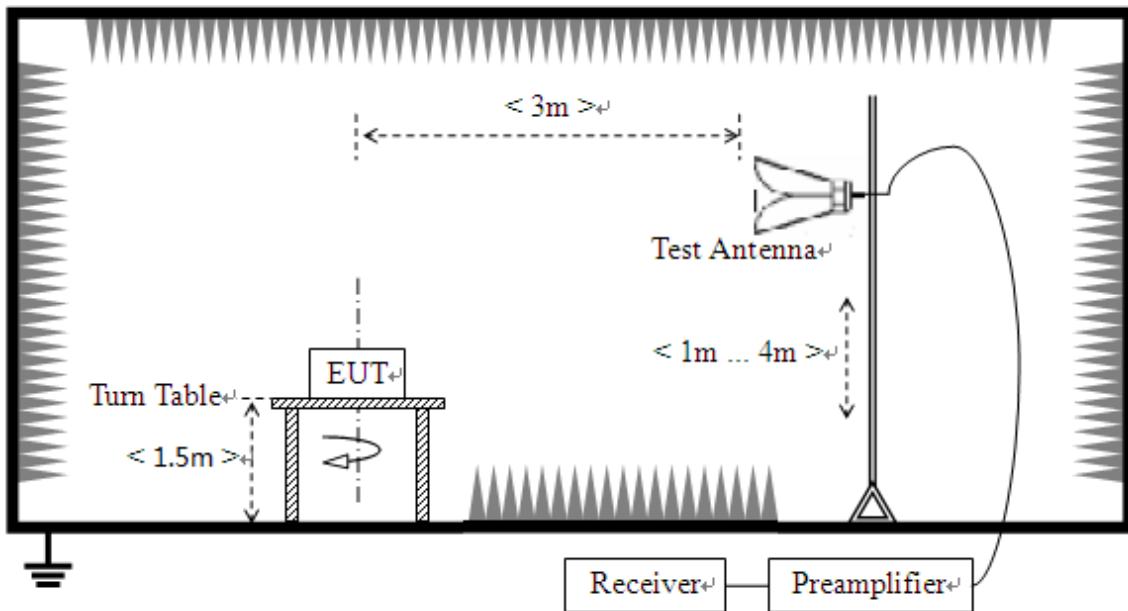

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).



2.4.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V}/\text{m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m


During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

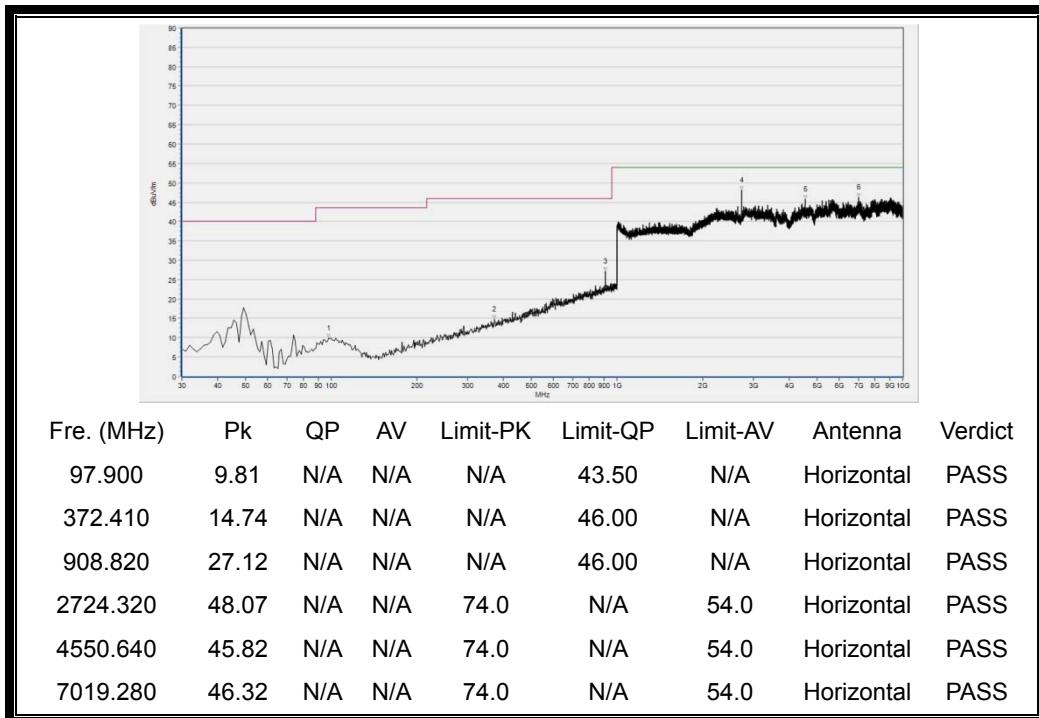**Plot for 908.4MHz**


(Antenna Horizontal, 30MHz to 10GHz)

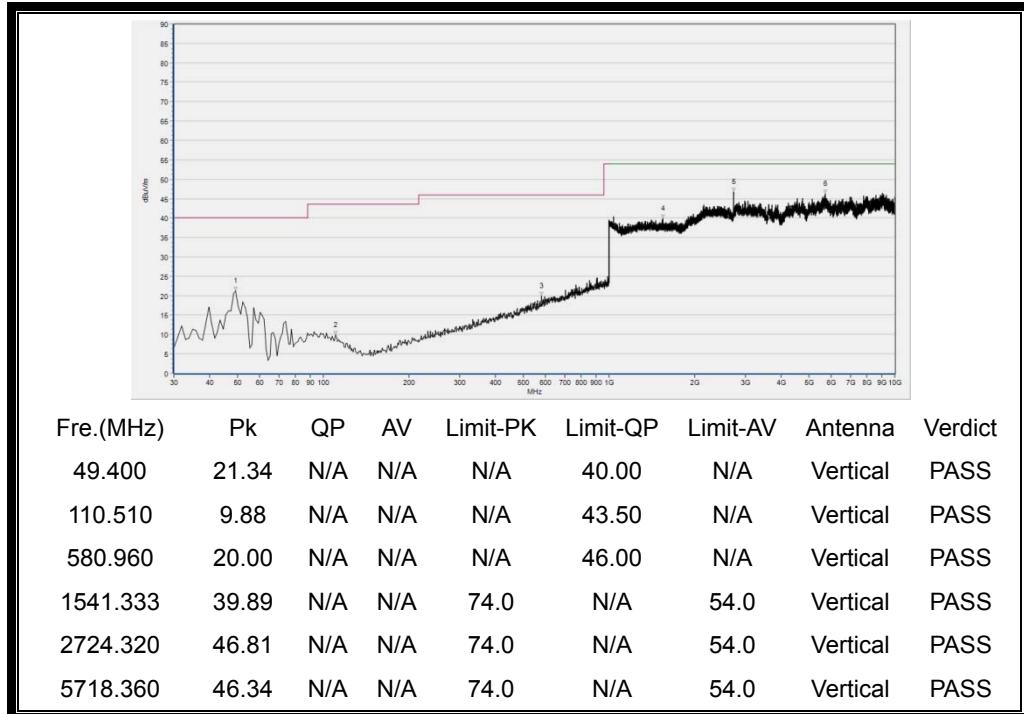

(Antenna Vertical, 30MHz to 10GHz)

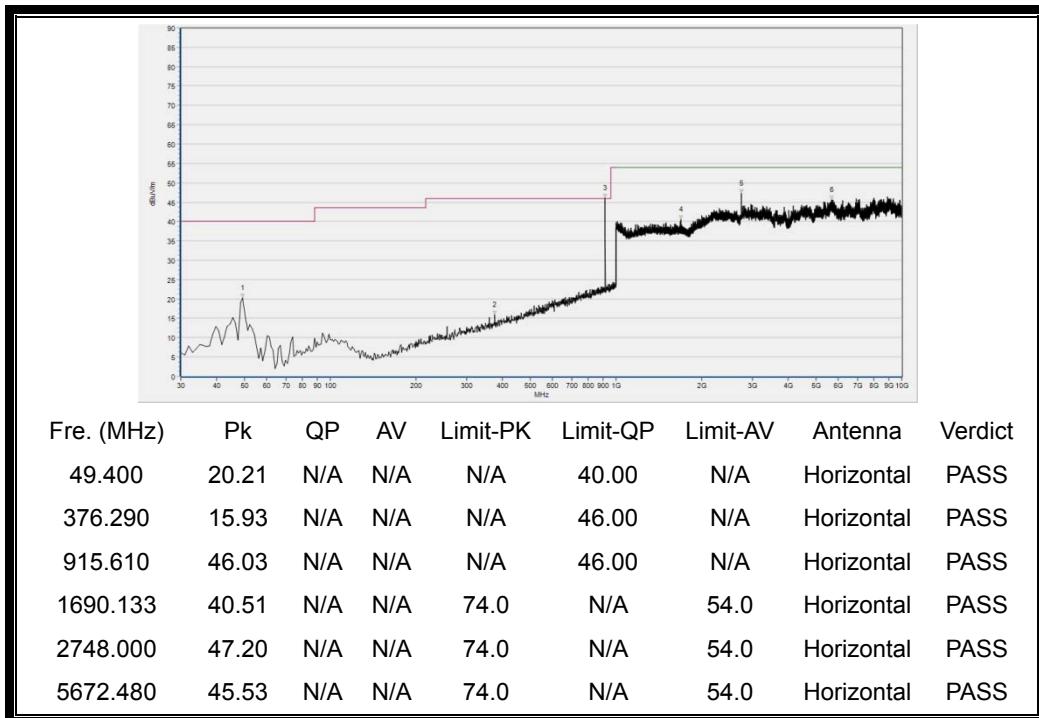**Plot for 916 MHz**

(Antenna Horizontal, 30MHz to 10GHz)

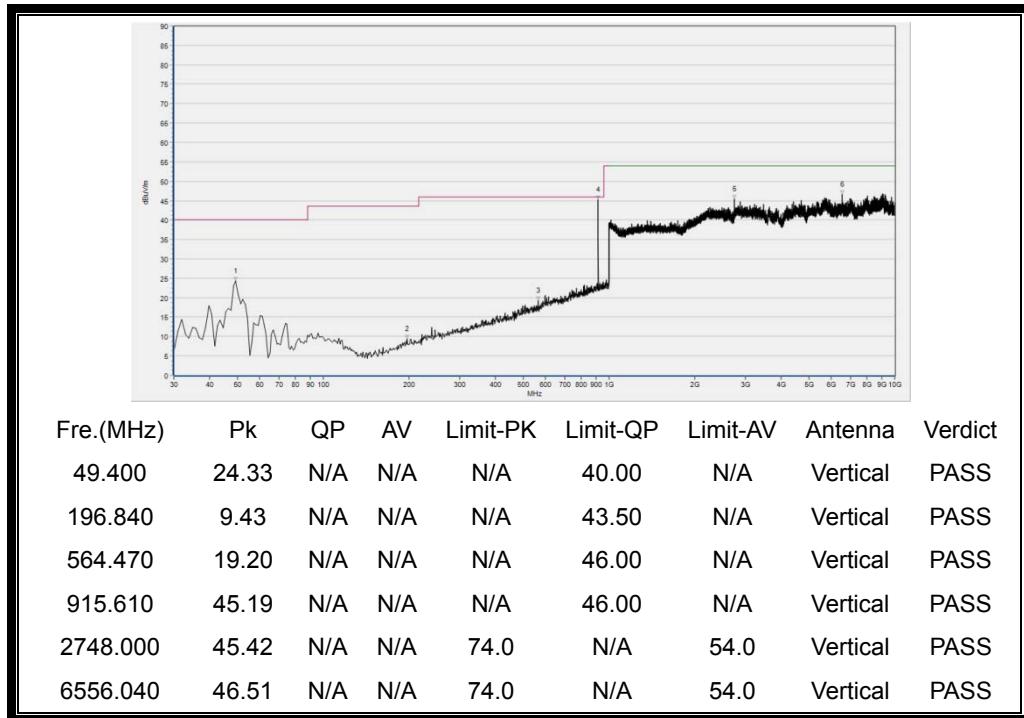

(Antenna Vertical, 30MHz to 10GHz)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Bandwidth	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



1.5 Test Equipments Utilized

1.5.1 Conducted Test Equipments

Conducted Test Equipment						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2017.05.24	2018.05.23
2	Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23
3	Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23
4	Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23
5	EXA Signal Analyzer	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06
6	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
7	Coaxial cable	CB02	RF02	Morlab	N/A	N/A
8	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A

1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	US44210471	E7405A	Agilent	2017.05.24	2018.05.23
2	LISN	812744	NSLK 8127	Schwarzbeck	2017.05.24	2018.05.23
3	Service Supplier	100448	CMU200	R&S	2017.05.24	2018.05.23
4	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2017.05.24	2018.05.23
5	Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment

Auxiliary Test Equipment						
No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A

**1.5.4 Radiated Test Equipments**

Radiated Test Equipments						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2017.05.17	2018.05.16
2	Receiver	MY54130016	N9038A	Agilent	2017.05.17	2018.05.16
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.12.09	2017.12.08
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2017.03.30	2018.03.29
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2017.03.30	2018.03.29
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2017.03.30	2018.03.29
7	Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
8	Coaxial cable (N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
10	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16
11	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde& Schwarz	2017.05.17	2018.05.16

1.5.5 Climate Chamber

Climate Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2017.01.11	2018.01.10

1.5.6 Vibration Table

Vibration Table						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2017.01.11	2018.01.10

1.5.7 Anechoic Chamber

Anechoic Chamber						
No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2017.01.11	2018.01.10

***** END OF REPORT *****