

FCC PART 15C TEST REPORT FOR CERTIFICATION
On Behalf of

CHOICE FORTUNE HOLDINGS LIMITED

LED TV

Model Number: SC-32HK700N

FCC ID: 2AMYC-SC-32HK700N

Prepared for:	CHOICE FORTUNE HOLDINGS LIMITED
	Room 1315, 13/F, Tin King Estate, Tin Lok House,
	Tuen Mun, N.T., HongKong
Prepared By:	EST Technology Co., Ltd.
	San Tun Management Zone, Houjie District, Dongguan, China
	Tel: 86-769-83081888-808

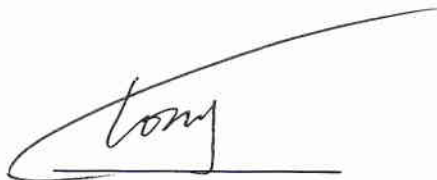
Report Number:	ESTE-R1708123
Date of Test:	June 21~June 29, 2017
Date of Report:	July 01, 2017

TABLE OF CONTENTS

Description	Page
TEST REPORT VERIFICATION	3
1. GENERAL INFORMATION.....	5
1.1. Description of Device (EUT)	5
2. SUMMARY OF TEST	6
2.1. Summary of test result.....	6
2.2. Test Facilities.....	7
2.3. Assistant equipment used for test	8
2.4. Block Diagram.....	8
2.5. Test mode	9
2.6. Channel List for wifi	9
2.7. Test Equipment.....	10
3 POWER LINE CONDUCTED EMISSION TEST	11
3.1. Limit	11
3.2. Test Procedure	11
3.3. Test Result	11
3.4. Test data.....	12
4 RADIATED EMISSION TEST.....	14
4.1 Limit.....	14
4.2. Block Diagram of Test setup	15
4.3. Test Procedure	16
4.4. Test Result	16
4.5. Test Data.....	17
5 BAND EDGE COMPLIANCE TEST	39
5.1 Limit	39
5.2 Block Diagram of Test setup	39
5.3 Test Procedure	39
5.4 Test Result	39
5.5 Test Data.....	40
6 6dB & 20dB Bandwidth Test.....	64
6.1 Limit	64
6.2 Test Procedure for 6dB.....	64
6.3 Test Procedure for 20dB.....	64
6.4 Test Result	66
6.5 6dB Test Data	67
6.6 20dB Test Data	83
7 OUTPUT POWER TEST	99
7.1 Limit	99
7.2 Test Procedure	99
7.3 Test Result	100
7.4 Test Data.....	101
8 POWER SPECTRAL DENSITY TEST	117
8.1 Limit	117
8.2 Test Procedure	117

8.3	Test Result.....	118
8.4	Test Data.....	119
9	ANTENNA REQUIREMENTS.....	135
9.1	Limit.....	135
9.2	Result.....	135
10	TEST SETUP PHOTO	136
11	PHOTOS OF EUT.....	138

EST Technology Co., Ltd.

Applicant:	CHOICE FORTUNE HOLDINGS LIMITED		
Address:	Room 1315, 13/F, Tin King Estate, Tin Lok House, Tuen Mun, N.T., HongKong		
Manufacturer	CHOICE FORTUNE HOLDINGS LIMITED		
Address:	Room 1315, 13/F, Tin King Estate, Tin Lok House, Tuen Mun, N.T., HongKong		
E.U.T:	LED TV		
Model Number:	SC-32HK700N		
Power Supply:	AC 120V~ 50/60Hz		
Test Voltage:	AC 120V/60Hz		
Trade Name:	SEIKI, SEIKI pro, SEIKI HOME	Serial No.:	-----
Date of Receipt:	June 20, 2017	Date of Test:	June 21~June 29, 2017
Test Specification:	FCC Rules and Regulations Part 15 Subpart C:2016 ANSI C63.10:2013		
Test Result:	The device described above is tested by EST Technology Co., Ltd.. The measurement results were contained in this test report and EST Technology Co., Ltd. was assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT to be technically compliance with the FCC Rules and Regulations Part 15 Subpart C requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of EST Technology Co., Ltd.		
		Date: July 01, 2017	
Prepared by:	Reviewed by:	Approved by:	
 Amy / Assistant	 Tony / Engineer	 Iceman Hu / Manager	
Other Aspects:			
None.			
<i>Abbreviations: OK/P=passed fail/F=failed n.a/N=not applicable E.U.T=equipment under tested</i>			
<i>This test report is based on a single evaluation of one sample of above mentioned products ,It is not permitted to be duplicated in extracts without written approval of EST Technology Co., Ltd.</i>			

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Product Name	:	LED TV		
Model Number	:	SC-32HK700N		
FCC ID	:	2AMYC-SC-32HK700N		
Modulation	:	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 mode: OFDM (BPSK/QPSK/16QAM/64QAM)		
Operation Frequency	:	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40: 2422 ~ 2452 MHz		
Number of channel	:	IEEE 802.11b 2412 ~ 2462 MHz: 11 Channels IEEE 802.11g 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT20 2412 ~ 2462 MHz: 11 Channels IEEE 802.11n HT40 2422 ~ 2452 MHz: 7 Channels		
Antenna	:	Internal antenna		
		Frequency Range	Antenna 0	Antenna 1
		2400~2483.5 MHz	2.94 dBi	2.94 dBi
		Directional gain	5.95dBi	
		Note: 11a,b,g,n uses Antenna 0 / Antenna 1 11n uses MIMO		
Sample Type	:	Prototype production		

2. SUMMARY OF TEST

2.1. Summary of test result

Description of Test Item	Standard	Results
Power Line Conducted Emission	FCC Part 15: 15.207 ANSI C63.10:2013	PASS
Radiated Emission	FCC Part 15: 15.209 ANSI C63.10:2013 KDB 558074	PASS
Band Edge Compliance	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Conducted spurious emissions	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
6dB Bandwidth	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Peak Output Power	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Power Spectral Density	FCC Part 15: 15.247 ANSI C63.10:2013 KDB 558074	PASS
Antenna requirement	FCC Part 15: 15.203	PASS
Note: KDB 558074 D01 DTS Meas Guidance v04		

2.2. Test Facilities


EMC Lab	:	Certificated by CNAS, CHINA Registration No.: L5288 Date of registration: November 13, 2014 Certificated by FCC, USA Registration No.: 989591 Date of registration: November 15, 2016 Certificated by Industry Canada Registration No.: 9405A-1 Date of registration: December 30, 2015 Certificated by VCCI, Japan Registration No.: R-3663 & C-4103 Date of registration: July 25, 2014 Certificated by TUV Rheinland, Germany Registration No.: UA 50195514 0001 Date of registration: February 07, 2015 Certificated by TUV/PS, Shenzhen Registration No.: SCN1017 Date of registration: January 27, 2011 Certificated by Intertek ETL SEMKO Registration No.: 2011-RTL-L1-18 Date of registration: April 28, 2011 Certificated by Siemic, Inc. Registration No.: SLCN021 Date of registration: November 8, 2011 Certificated by Nemko, Hong Kong Registration No.: 175193 Date of registration: May 4, 2011
Name of Firm	:	EST Technology Co., Ltd.
Site Location	:	San Tun Management Zone, Houjie Town, Dongguan, Guangdong, China

2.3. Assistant equipment used for test

2.3.1. N/A

2.4. Block Diagram

For radiated emissions test: EUT was placed on a turn table, which is 0.8 or 1.5 meter high above ground. EUT was be set into Wi-Fi test mode by software before test.



(EUT: LED TV)

2.5. Test mode

A special test software was used to control EUT work in Continuous TX mode, and select test channel, wireless mode and data rate.

Test mode	Lower channel	Center channel	Upper channel
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Transmitting	2412MHz	2437MHz	2462MHz
IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20 Receiving	2412MHz	2437MHz	2462MHz
IEEE 802.11n HT40 Transmitting	2422MHz	2437MHz	2452MHz
IEEE 802.11n HT40 Receiving	2422MHz	2437MHz	2452MHz

2.6. Channel List for wifi

IEEE 802.11b;IEEE 802.11g;IEEE 802.11n HT20					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	6	2437	11	2462
2	2417	7	2442		
3	2422	8	2447		
4	2427	9	2452		
5	2432	10	2457		
IEEE 802.11n HT40					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	6	2437	9	2452
4	2427	7	2442		
5	2432	8	2447		

2.7. Test Equipment

2.7.1. For conducted emission test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESHS30	832354	June 17,17	1 Year
Artificial Mains Network	Rohde & Schwarz	ENV216	101260	June 17,17	1 Year
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	101100	June 17,17	1 Year

2.7.2. For radiated emission test(9 kHz-30MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESCI	100435	June 17,17	1 Year
Loop Antenna	ETS-LINDGREN	6502	00071730	June 08,17	1 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

2.7.3. For radiated emissions test (30-1000MHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde & Schwarz	ESVS10	100004	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4411B	MY50140697	June 17,17	1 Year
Bilog Antenna	Teseq	CBL 6111D	27090	June 08,17	1 Year
Signal Amplifier	Agilent	310N	187037	June 17,17	1 Year
RF Cable	MIYAZAKI	5D-2W	966 Chamber No.1	June 17,17	1 Year

2.7.4. For radiated emission test(above 1GHz)

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9120 D	BBHA9120D1002	June 08,17	1 Year
Board-Band Antenna	Horn SCHWARZBECK	BBHA 9170	9170-497	June 08,17	1Year
Signal Amplifier	SCHWARZBECK	BBV9718	9718-212	June 17,17	1 Year
Spectrum Analyzer	Agilent	E4408B	MY44211139	June 17,17	1 Year
Spectrum Analyzer	Rohde &Schwarz	FSV	103173	June 17,17	1 Year
RF Cable	Hubersuhner	RG 214/U	513423	June 17,17	1 Year

3 POWER LINE CONDUCTED EMISSION TEST

3.1. Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μ V)	Average Level dB(μ V)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. * Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.2. Test Procedure

The EUT was placed on a non-metallic table, 10cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provides a 50 ohm coupling impedance for the EUT (Please refer the block diagram of the test setup and photographs). The AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to ANSI C63.10: 2013 on Conducted Emission Test.


The bandwidth of test receiver (R & S ESHS30) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked.

3.3. Test Result


PASS.

3.4. Test data

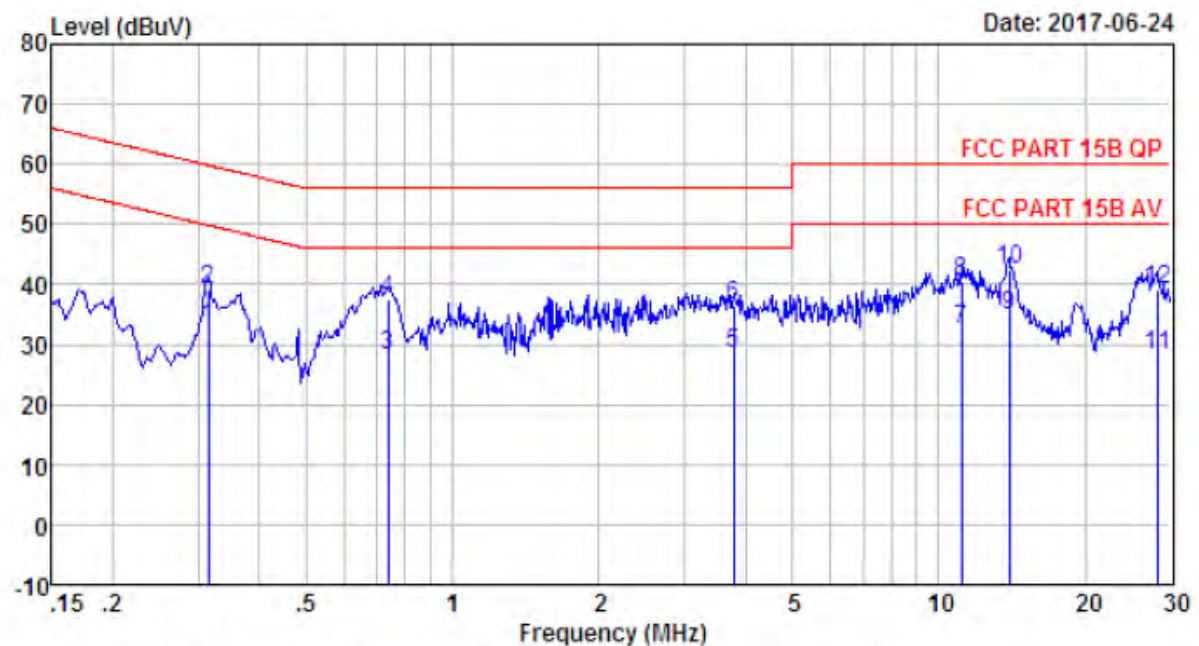

Site no : 2# Contuction Shield Room Data no. : 133
 Env. / Ins. : Temp:25.6'C Humi:54.0% Press:101.50kPa INE Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.31	9.60	9.83	13.53	32.96	49.84	16.88	Average
2	0.31	9.60	9.83	19.62	39.05	59.84	20.79	QP
3	0.74	9.63	9.81	8.71	28.15	46.00	17.85	Average
4	0.74	9.63	9.81	17.97	37.41	56.00	18.59	QP
5	3.78	9.64	9.84	9.00	28.48	46.00	17.52	Average
6	3.78	9.64	9.84	17.15	36.63	56.00	19.37	QP
7	11.14	9.71	9.90	12.98	32.59	50.00	17.41	Average
8	11.14	9.71	9.90	20.91	40.52	60.00	19.48	QP
9	13.99	9.73	9.91	15.08	34.72	50.00	15.28	Average
10	13.99	9.73	9.91	22.68	42.32	60.00	17.68	QP
11	28.15	9.82	10.05	8.28	28.15	50.00	21.85	Average
12	28.15	9.82	10.05	19.14	39.01	60.00	20.99	QP

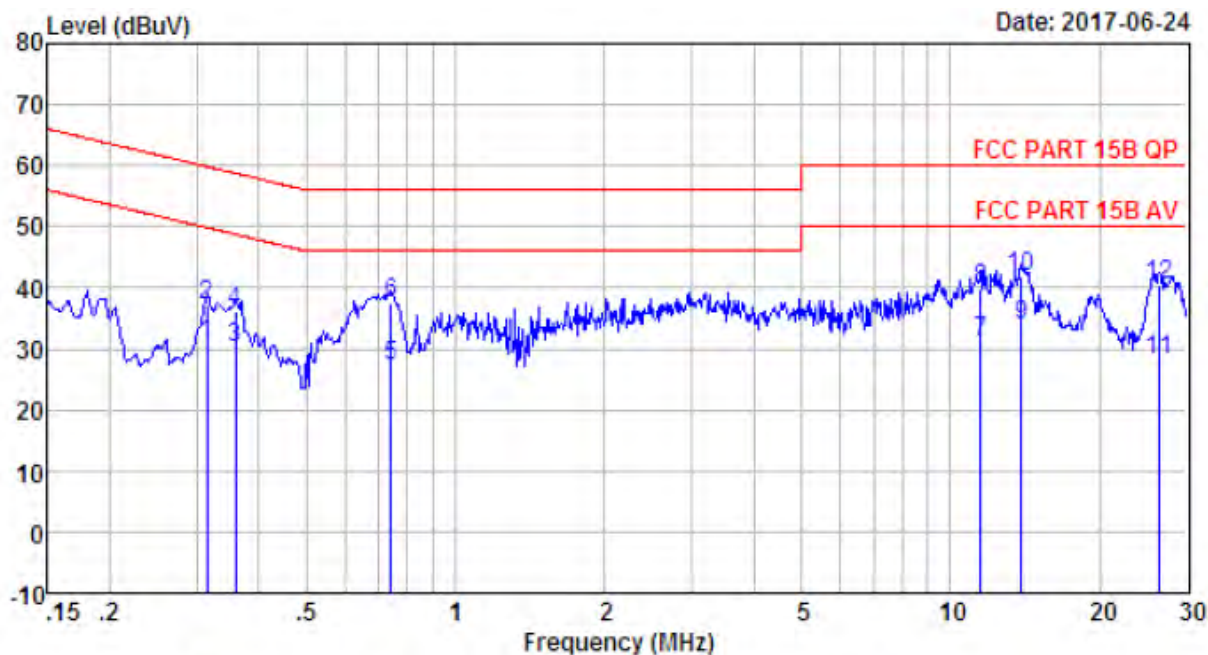

Site no : 2# Contuction Shield Room Data no. : 135
 Env. / Ins. : Temp:25.6'C Humi:54.0% Press:101.50kPa INE Phase : LINE
 Limit : FCC PART 15B QP
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : TX Mode

	Freq. (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.31	9.61	9.83	11.38	30.82	49.84	19.02	Average
2	0.31	9.61	9.83	17.55	36.99	59.84	22.85	QP
3	0.36	9.61	9.82	10.74	30.17	48.74	18.57	Average
4	0.36	9.61	9.82	16.76	36.19	58.74	22.55	QP
5	0.74	9.60	9.81	7.64	27.05	46.00	18.95	Average
6	0.74	9.60	9.81	18.09	37.50	56.00	18.50	QP
7	11.50	9.67	9.89	11.46	31.02	50.00	18.98	Average
8	11.50	9.67	9.89	20.33	39.89	60.00	20.11	QP
9	13.91	9.67	9.91	14.35	33.93	50.00	16.07	Average
10	13.91	9.67	9.91	22.23	41.81	60.00	18.19	QP
11	26.42	9.69	10.04	8.31	28.04	50.00	21.96	Average
12	26.42	9.69	10.04	20.65	40.38	60.00	19.62	QP

4 RADIATED EMISSION TEST

4.1 Limit

All the emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits.

15.205 Restricted frequency band

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)

15.209 Limit

Frequency (MHz)	Field Strength(μ V/m)	Distance(m)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3


Remark : (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$

(2) The smaller limit shall apply at the cross point between two frequency bands.


(3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

4.2. Block Diagram of Test setup


9kHz~30MHz

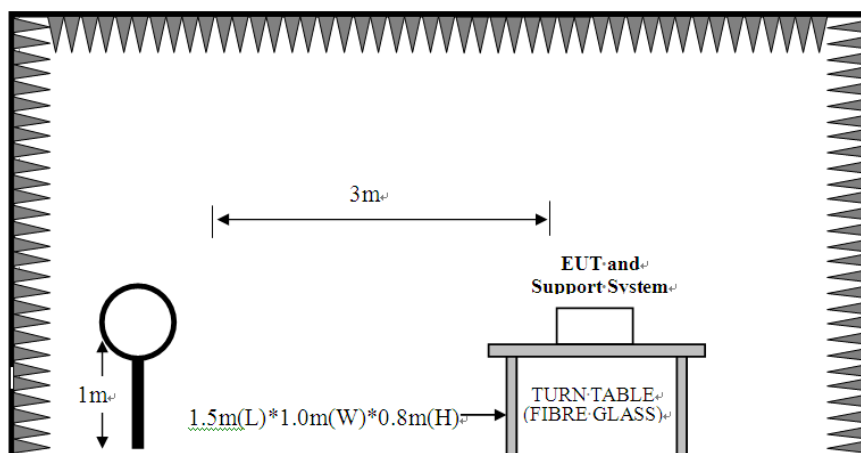

30~1000MHz

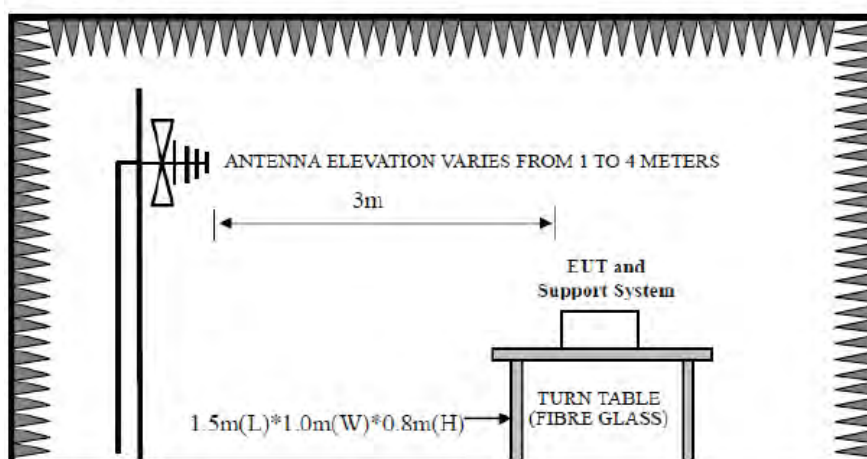

Above 1GHz

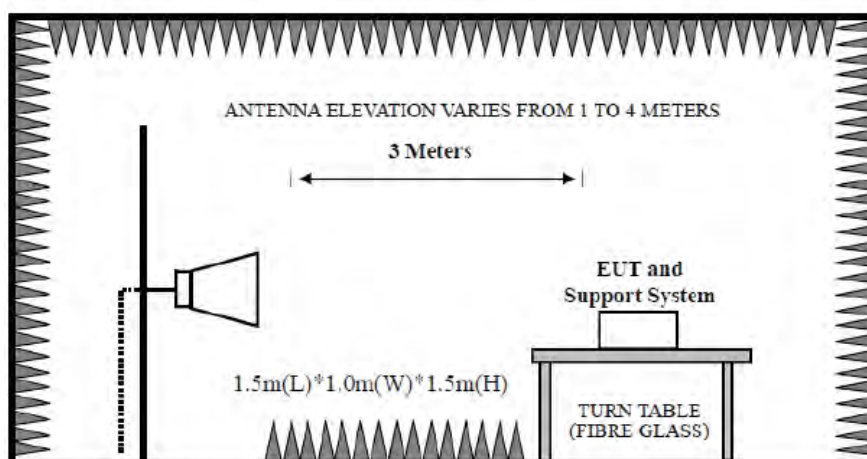

4.3. Test Procedure

EUT was placed on a turn table, which is 0.8 meter high above ground for 9kHz~1000MHz test, and which is 1.5 meter high above ground for above 1GHz test. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

The test frequency analyzer system was set to Peak Detect (300Hz RBW in 9kHz to 150kHz and 10kHz RBW in 150kHz to 30MHz) Function and Specified Bandwidth with Maximum Hold Mode.

The bandwidth of the EMI test receiver (R&S ESVS10) is set at 120kHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the Spectrum's VBW is set at 1MHz and RBW is set at 1MHz for peak emissions measurement above 1GHz and 1MHz RBW, 10Hz VBW for average emissions measure above 1GHz

PEAK detector, 1MHz/1MHz for PAEK measurement,

PEAK detector, 1MHz/10Hz for Average measurement

The frequency range from 30MHz to 10th harmonic (25GHz) are checked.

4.4. Test Result

PASS.

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412MHz、 2422MHz、 2437MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


4.5. Test Data

9 kHz – 30 MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

30-1000 MHz

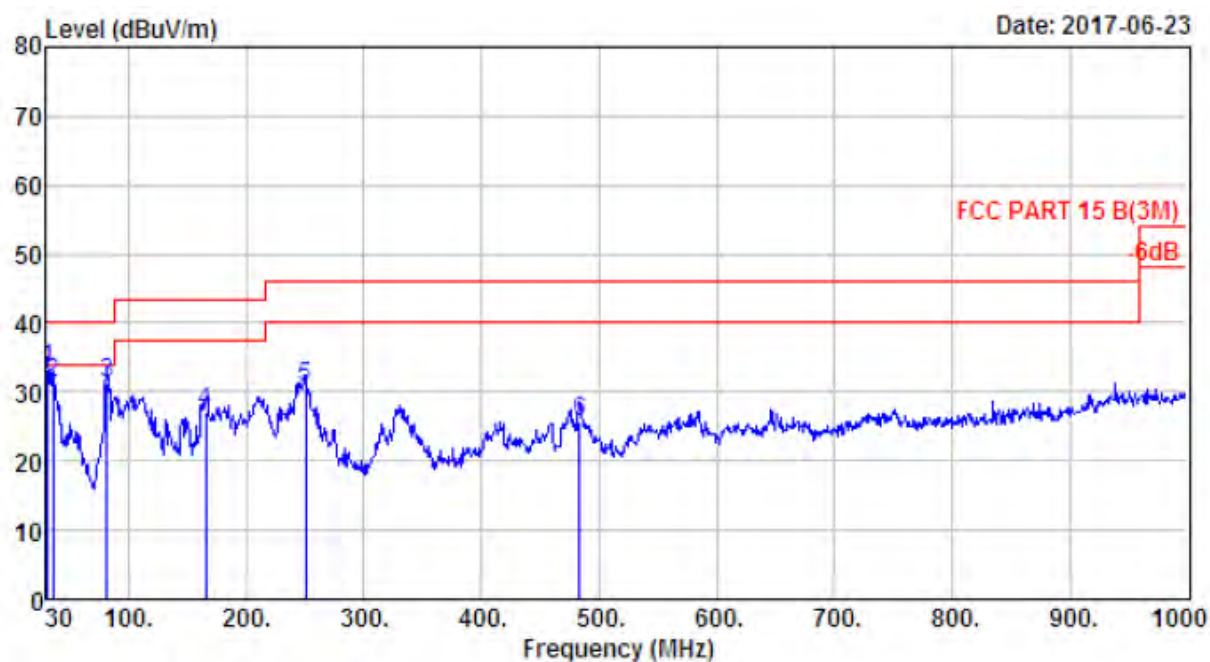

Site no. : 1# 966 Chamber Data no. : 185
 Dis. / Ant. : 3m 27137 Ant. pol. : VERTICAL
 Limit : FCC PART 15 B(3M)
 Env. / Ins. : Temp:25.2';Humi:53%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : TX Mode

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	30.970	17.72	0.67	14.86	33.25	40.00	6.75	QP
2	35.820	14.99	0.75	15.46	31.20	40.00	8.80	QP
3	81.410	7.20	1.25	22.76	31.21	40.00	8.79	QP
4	165.800	9.66	1.68	15.86	27.20	43.50	16.30	QP
5	250.190	11.82	2.11	16.68	30.61	46.00	15.39	QP
6	482.990	17.56	3.07	5.09	25.72	46.00	20.28	QP

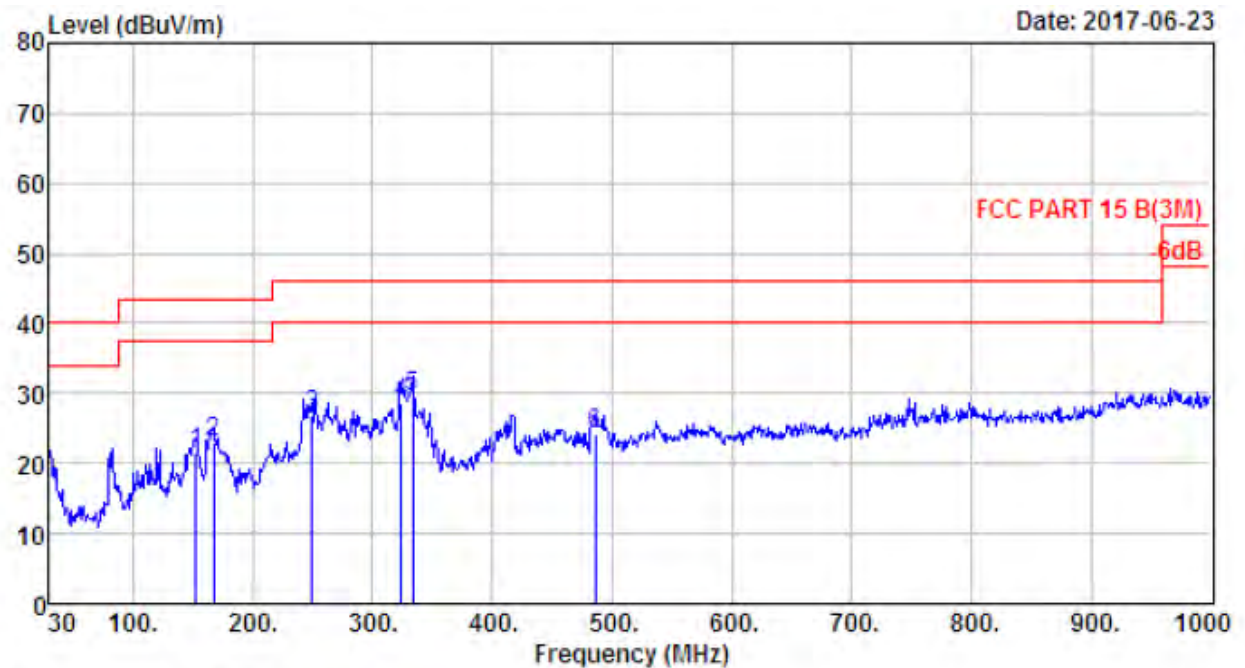

Site no. : 1# 966 Chamber	Data no. : 186
Dis. / Ant. : 3m 27137	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 B(3M)	
Env. / Ins. : Temp:25.2';Humi:53%;Press:101.52kPa	
Engineer : Viking	
EUT : LED TV	
Power : AC 120V/60Hz	
M/N : SC-32HK700N	
Test Mode : TX Mode	

	Freq. (MHz)	ANT Factor (dB/m)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	152.220	10.78	1.62	9.26	21.66	43.50	21.84	QP
2	166.770	9.54	1.69	11.77	23.00	43.50	20.50	QP
3	249.220	11.67	2.12	12.99	26.78	46.00	19.22	QP
4	323.910	13.68	2.43	12.54	28.65	46.00	17.35	QP
5	333.610	13.96	2.49	12.97	29.42	46.00	16.58	QP
6	485.900	17.67	3.10	3.48	24.25	46.00	21.75	QP

1000-18000 MHz

Site no. : 1# 966 Chamber Data no. : 121
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	90.71	90.80	74.00	-16.80	Peak
2	4824.00	31.28	11.84	31.83	33.38	44.67	74.00	29.33	Peak
3	7236.00	36.53	11.55	32.07	26.39	42.40	74.00	31.60	Peak
4	9874.00	38.15	11.62	31.77	25.39	43.39	74.00	30.61	Peak
5	14056.00	41.51	10.90	33.80	24.99	43.60	74.00	30.40	Peak
6	17235.00	40.65	10.90	33.66	24.83	42.72	74.00	31.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 122
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	93.25	93.34	74.00	-19.34	Peak
2	4824.00	31.28	11.84	31.83	34.03	45.32	74.00	28.68	Peak
3	7236.00	36.53	11.55	32.07	23.51	39.52	74.00	34.48	Peak
4	8004.00	37.01	11.40	31.22	23.45	40.64	74.00	33.36	Peak
5	10996.00	39.52	11.29	33.65	22.20	39.36	74.00	34.64	Peak
6	17796.00	44.45	11.14	33.54	19.13	41.18	74.00	32.82	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 123
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	92.11	92.26	74.00	-18.26	Peak
2	4874.00	31.37	12.07	31.90	35.60	47.14	74.00	26.86	Peak
3	7311.00	36.55	11.57	31.99	23.93	40.06	74.00	33.94	Peak
4	8004.00	37.01	11.40	31.22	24.34	41.53	74.00	32.47	Peak
5	10996.00	39.52	11.29	33.65	23.19	40.35	74.00	33.65	Peak
6	14515.00	41.89	10.93	33.14	22.00	41.68	74.00	32.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 124
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	96.07	96.22	74.00	-22.22	Peak
2	4874.00	31.37	12.07	31.90	33.03	44.57	74.00	29.43	Peak
3	7311.00	36.55	11.57	31.99	22.94	39.07	74.00	34.93	Peak
4	9466.00	38.02	11.69	31.95	21.90	39.66	74.00	34.34	Peak
5	14260.00	41.68	10.92	33.19	21.57	40.98	74.00	33.02	Peak
6	18000.00	46.45	11.38	27.85	14.24	44.22	74.00	29.78	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 125
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	96.58	96.79	74.00	-22.79	Peak
2	4924.00	31.45	12.29	31.95	35.77	47.56	74.00	26.44	Peak
3	7386.00	36.57	11.59	31.97	26.43	42.62	74.00	31.38	Peak
4	9534.00	37.97	11.70	31.92	24.68	42.43	74.00	31.57	Peak
5	14515.00	41.89	10.93	33.14	23.66	43.34	74.00	30.66	Peak
6	17235.00	40.65	10.90	33.66	25.61	43.50	74.00	30.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 126
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	91.42	91.63	74.00	-17.63	Peak
2	4924.00	31.45	12.29	31.95	34.15	45.94	74.00	28.06	Peak
3	7386.00	36.57	11.59	31.97	25.91	42.10	74.00	31.90	Peak
4	11030.00	39.50	11.27	33.71	22.86	39.92	74.00	34.08	Peak
5	14260.00	41.68	10.92	33.19	22.08	41.49	74.00	32.51	Peak
6	17235.00	40.65	10.90	33.66	21.67	39.56	74.00	34.44	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 127
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	92.78	92.87	74.00	-18.87	Peak
2	4824.00	31.28	11.84	31.83	33.82	45.11	74.00	28.89	Peak
3	7236.00	36.53	11.55	32.07	22.63	38.64	74.00	35.36	Peak
4	10214.00	38.48	11.47	32.17	22.74	40.52	74.00	33.48	Peak
5	14430.00	41.82	10.93	32.84	21.56	41.47	74.00	32.53	Peak
6	17150.00	40.32	10.93	33.13	21.33	39.45	74.00	34.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 128
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	88.97	89.06	74.00	-15.06	Peak
2	4824.00	31.28	11.84	31.83	36.83	48.12	74.00	25.88	Peak
3	7236.00	36.53	11.55	32.07	22.51	38.52	74.00	35.48	Peak
4	10214.00	38.48	11.47	32.17	22.03	39.81	74.00	34.19	Peak
5	14481.00	41.86	10.93	33.02	20.72	40.49	74.00	33.51	Peak
6	17915.00	45.62	11.28	30.22	12.27	38.95	74.00	35.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 129
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	90.75	90.90	74.00	-16.90	Peak
2	4874.00	31.37	12.07	31.90	34.68	46.22	74.00	27.78	Peak
3	7311.00	36.55	11.57	31.99	24.39	40.52	74.00	33.48	Peak
4	9466.00	38.02	11.69	31.95	21.79	39.55	74.00	34.45	Peak
5	14379.00	41.77	10.92	32.88	20.96	40.77	74.00	33.23	Peak
6	17490.00	41.55	10.81	35.13	22.27	39.50	74.00	34.50	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 130
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	87.37	87.52	74.00	-13.52	Peak
2	4874.00	31.37	12.07	31.90	36.47	48.01	74.00	25.99	Peak
3	7311.00	36.55	11.57	31.99	27.76	43.89	74.00	30.11	Peak
4	11030.00	39.50	11.27	33.71	25.17	42.23	74.00	31.77	Peak
5	14379.00	41.77	10.92	32.88	21.05	40.86	74.00	33.14	Peak
6	17150.00	40.32	10.93	33.13	22.98	41.10	74.00	32.90	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 131
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	89.48	89.69	74.00	-15.69	Peak
2	4924.00	31.45	12.29	31.95	37.00	48.79	74.00	25.21	Peak
3	7386.00	36.57	11.59	31.97	22.56	38.75	74.00	35.25	Peak
4	9772.00	38.16	11.64	31.86	22.86	40.80	74.00	33.20	Peak
5	14685.00	41.30	10.90	33.74	23.05	41.51	74.00	32.49	Peak
6	17949.00	45.95	11.32	29.27	15.90	43.90	74.00	30.10	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 132
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	93.11	93.32	74.00	-19.32	Peak
2	4924.00	31.45	12.29	31.95	36.63	48.42	74.00	25.58	Peak
3	7386.00	36.57	11.59	31.97	22.16	38.35	74.00	35.65	Peak
4	10996.00	39.52	11.29	33.65	19.25	36.41	74.00	37.59	Peak
5	14515.00	41.89	10.93	33.14	17.18	36.86	74.00	37.14	Peak
6	16980.00	39.69	10.97	33.32	18.54	35.88	74.00	38.12	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 133
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	93.64	93.73	74.00	-19.73	Peak
2	4824.00	31.28	11.84	31.83	31.67	42.96	74.00	31.04	Peak
3	7236.00	36.53	11.55	32.07	20.06	36.07	74.00	37.93	Peak
4	13104.00	39.13	11.44	34.44	24.84	40.97	74.00	33.03	Peak
5	14345.00	41.76	10.92	32.93	22.26	42.01	74.00	31.99	Peak
6	17711.00	43.62	11.04	35.92	20.86	39.60	74.00	34.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 134
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	100.47	100.56	74.00	-26.56	Peak
2	4824.00	31.28	11.84	31.83	35.12	46.41	74.00	27.59	Peak
3	7236.00	36.53	11.55	32.07	25.21	41.22	74.00	32.78	Peak
4	9925.00	38.14	11.61	31.76	22.96	40.95	74.00	33.05	Peak
5	14260.00	41.68	10.92	33.19	24.24	43.65	74.00	30.35	Peak
6	17150.00	40.32	10.93	33.13	23.34	41.46	74.00	32.54	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 135
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	92.57	92.72	74.00	-18.72	Peak
2	4874.00	31.37	12.07	31.90	33.92	45.46	74.00	28.54	Peak
3	7311.00	36.55	11.57	31.99	23.08	39.21	74.00	34.79	Peak
4	10435.00	38.86	11.35	32.59	24.12	41.74	74.00	32.26	Peak
5	14685.00	41.30	10.90	33.74	25.74	44.20	74.00	29.80	Peak
6	17915.00	45.62	11.28	30.22	16.91	43.59	74.00	30.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 136
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH6 2437TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	96.70	96.85	74.00	-22.85	Peak
2	4874.00	31.37	12.07	31.90	37.18	48.72	74.00	25.28	Peak
3	7311.00	36.55	11.57	31.99	26.53	42.66	74.00	31.34	Peak
4	9585.00	37.92	11.69	31.93	24.88	42.56	74.00	31.44	Peak
5	13546.00	40.21	11.44	35.35	24.31	40.61	74.00	33.39	Peak
6	17048.00	39.93	10.97	33.09	26.79	44.60	74.00	29.40	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 137
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	97.14	97.35	74.00	-23.35	Peak
2	4924.00	31.45	12.29	31.95	33.07	44.86	74.00	29.14	Peak
3	7386.00	36.57	11.59	31.97	26.28	42.47	74.00	31.53	Peak
4	10826.00	39.33	11.30	33.33	23.37	40.67	74.00	33.33	Peak
5	14464.00	41.85	10.93	32.96	21.59	41.41	74.00	32.59	Peak
6	17150.00	40.32	10.93	33.13	21.56	39.68	74.00	34.32	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 138
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	94.26	94.47	74.00	-20.47	Peak
2	4924.00	31.45	12.29	31.95	33.55	45.34	74.00	28.66	Peak
3	7386.00	36.57	11.59	31.97	22.19	38.38	74.00	35.62	Peak
4	10214.00	38.48	11.47	32.17	21.55	39.33	74.00	34.67	Peak
5	14294.00	41.71	10.92	33.08	21.21	40.76	74.00	33.24	Peak
6	17575.00	42.29	10.88	35.65	21.07	38.59	74.00	35.41	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 139
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	94.94	95.03	74.00	-21.03	Peak
2	4824.00	31.28	11.84	31.83	36.13	47.42	74.00	26.58	Peak
3	7236.00	36.53	11.55	32.07	29.77	45.78	74.00	28.22	Peak
4	10214.00	38.48	11.47	32.17	26.21	43.99	74.00	30.01	Peak
5	14413.00	41.80	10.92	32.78	24.18	44.12	74.00	29.88	Peak
6	18000.00	46.45	11.38	27.85	15.40	45.38	74.00	28.62	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 140
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	90.63	90.72	74.00	-16.72	Peak
2	4824.00	31.28	11.84	31.83	29.34	40.63	74.00	33.37	Peak
3	7236.00	36.53	11.55	32.07	20.52	36.53	74.00	37.47	Peak
4	10724.00	39.22	11.30	33.14	18.55	35.93	74.00	38.07	Peak
5	14430.00	41.82	10.93	32.84	20.03	39.94	74.00	34.06	Peak
6	17065.00	40.00	10.96	33.04	20.59	38.51	74.00	35.49	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 141
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	93.18	93.33	74.00	-19.33	Peak
2	4874.00	31.37	12.07	31.90	32.93	44.47	74.00	29.53	Peak
3	7311.00	36.55	11.57	31.99	22.74	38.87	74.00	35.13	Peak
4	11455.00	39.23	10.96	34.48	25.13	40.84	74.00	33.16	Peak
5	14039.00	41.49	10.90	33.85	23.74	42.28	74.00	31.72	Peak
6	17116.00	40.19	10.95	32.92	23.10	41.32	74.00	32.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 142
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH6 2437TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	90.16	90.31	74.00	-16.31	Peak
2	4874.00	31.37	12.07	31.90	33.73	45.27	74.00	28.73	Peak
3	7311.00	36.55	11.57	31.99	24.17	40.30	74.00	33.70	Peak
4	10214.00	38.48	11.47	32.17	25.44	43.22	74.00	30.78	Peak
5	14345.00	41.76	10.92	32.93	22.73	42.48	74.00	31.52	Peak
6	17847.00	44.95	11.20	32.12	18.11	42.14	74.00	31.86	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 143
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	89.98	90.19	74.00	-16.19	Peak
2	4924.00	31.45	12.29	31.95	33.49	45.28	74.00	28.72	Peak
3	7386.00	36.57	11.59	31.97	24.47	40.66	74.00	33.34	Peak
4	9874.00	38.15	11.62	31.77	21.85	39.85	74.00	34.15	Peak
5	14396.00	41.79	10.92	32.83	21.62	41.50	74.00	32.50	Peak
6	17065.00	40.00	10.96	33.04	22.66	40.58	74.00	33.42	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 144
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	94.38	94.59	74.00	-20.59	Peak
2	4924.00	31.45	12.29	31.95	34.03	45.82	74.00	28.18	Peak
3	7386.00	36.57	11.59	31.97	23.29	39.48	74.00	34.52	Peak
4	10860.00	39.37	11.30	33.39	21.77	39.05	74.00	34.95	Peak
5	14685.00	41.30	10.90	33.74	23.03	41.49	74.00	32.51	Peak
6	17286.00	40.78	10.88	33.87	22.53	40.32	74.00	33.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 145
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	93.41	93.50	74.00	-19.50	Peak
2	4824.00	31.28	11.84	31.83	35.66	46.95	74.00	27.05	Peak
3	7236.00	36.53	11.55	32.07	25.17	41.18	74.00	32.82	Peak
4	10197.00	38.45	11.48	32.14	24.25	42.04	74.00	31.96	Peak
5	14600.00	41.59	10.92	33.44	23.93	43.00	74.00	31.00	Peak
6	17235.00	40.65	10.90	33.66	24.06	41.95	74.00	32.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 146
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2412.00	27.60	6.64	34.15	99.29	99.38	74.00	-25.38	Peak
2	4824.00	31.28	11.84	31.83	35.88	47.17	74.00	26.83	Peak
3	7236.00	36.53	11.55	32.07	28.60	44.61	74.00	29.39	Peak
4	9568.00	37.94	11.69	31.93	21.83	39.53	74.00	34.47	Peak
5	14464.00	41.85	10.93	32.96	20.46	40.28	74.00	33.72	Peak
6	17133.00	40.26	10.94	33.03	21.52	39.69	74.00	34.31	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 147
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH6 2437TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	88.89	89.04	74.00	-15.04	Peak
2	4874.00	31.37	12.07	31.90	34.29	45.83	74.00	28.17	Peak
3	7311.00	36.55	11.57	31.99	24.29	40.42	74.00	33.58	Peak
4	10214.00	38.48	11.47	32.17	23.35	41.13	74.00	32.87	Peak
5	14294.00	41.71	10.92	33.08	21.40	40.95	74.00	33.05	Peak
6	17660.00	43.12	10.98	36.18	20.53	38.45	74.00	35.55	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 148
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH6 2437TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	100.87	101.02	74.00	-27.02	Peak
2	4874.00	31.37	12.07	31.90	36.64	48.18	74.00	25.82	Peak
3	7311.00	36.55	11.57	31.99	30.51	46.64	74.00	27.36	Peak
4	9874.00	38.15	11.62	31.77	23.64	41.64	74.00	32.36	Peak
5	14481.00	41.86	10.93	33.02	23.15	42.92	74.00	31.08	Peak
6	17320.00	40.91	10.87	34.08	23.02	40.72	74.00	33.28	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 149
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	98.26	98.47	74.00	-24.47	Peak
2	4924.00	31.45	12.29	31.95	34.45	46.24	74.00	27.76	Peak
3	7386.00	36.57	11.59	31.97	27.74	43.93	74.00	30.07	Peak
4	10214.00	38.48	11.47	32.17	23.01	40.79	74.00	33.21	Peak
5	14379.00	41.77	10.92	32.88	21.65	41.46	74.00	32.54	Peak
6	17065.00	40.00	10.96	33.04	21.60	39.52	74.00	34.48	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 150
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.00	27.58	6.69	34.06	88.51	88.72	74.00	-14.72	Peak
2	4924.00	31.45	12.29	31.95	34.24	46.03	74.00	27.97	Peak
3	7386.00	36.57	11.59	31.97	25.60	41.79	74.00	32.21	Peak
4	10265.00	38.56	11.44	32.27	23.33	41.06	74.00	32.94	Peak
5	14430.00	41.82	10.93	32.84	21.75	41.66	74.00	32.34	Peak
6	17286.00	40.78	10.88	33.87	21.74	39.53	74.00	34.47	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 151
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.15	97.92	98.03	74.00	-24.03	Peak
2	4844.00	31.31	11.92	31.85	38.81	50.19	74.00	23.81	Peak
3	7266.00	36.54	11.56	32.04	31.34	47.40	74.00	26.60	Peak
4	10180.00	38.42	11.49	32.11	26.32	44.12	74.00	29.88	Peak
5	13325.00	39.66	11.48	34.89	27.46	43.71	74.00	30.29	Peak
6	17116.00	40.19	10.95	32.92	24.32	42.54	74.00	31.46	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 152
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2422.00	27.60	6.66	34.15	91.09	91.20	74.00	-17.20	Peak
2	4844.00	31.31	11.92	31.85	35.24	46.62	74.00	27.38	Peak
3	7266.00	36.54	11.56	32.04	25.20	41.26	74.00	32.74	Peak
4	12526.00	38.76	10.94	35.10	27.26	41.86	74.00	32.14	Peak
5	14396.00	41.79	10.92	32.83	23.09	42.97	74.00	31.03	Peak
6	17320.00	40.91	10.87	34.08	24.25	41.95	74.00	32.05	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 153
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH6 2437TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	95.13	95.28	74.00	-21.28	Peak
2	4874.00	31.37	12.07	31.90	32.70	44.24	74.00	29.76	Peak
3	7311.00	36.55	11.57	31.99	24.07	40.20	74.00	33.80	Peak
4	10265.00	38.56	11.44	32.27	22.77	40.50	74.00	33.50	Peak
5	14090.00	41.54	10.91	33.69	22.67	41.43	74.00	32.57	Peak
6	16640.00	38.68	10.65	35.27	24.73	38.79	74.00	35.21	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 154
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH6 2437TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2437.00	27.60	6.67	34.12	86.98	87.13	74.00	-13.13	Peak
2	4874.00	31.37	12.07	31.90	33.75	45.29	74.00	28.71	Peak
3	7311.00	36.55	11.57	31.99	23.64	39.77	74.00	34.23	Peak
4	10180.00	38.42	11.49	32.11	24.94	42.74	74.00	31.26	Peak
5	14056.00	41.51	10.90	33.80	23.25	41.86	74.00	32.14	Peak
6	17014.00	39.80	10.98	33.17	22.62	40.23	74.00	33.77	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 155
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.59	6.67	34.09	84.20	84.37	74.00	-10.37	Peak
2	4904.00	31.42	12.22	31.93	32.72	44.43	74.00	29.57	Peak
3	7356.00	36.56	11.58	31.99	26.34	42.49	74.00	31.51	Peak
4	10180.00	38.42	11.49	32.11	23.48	41.28	74.00	32.72	Peak
5	14345.00	41.76	10.92	32.93	19.54	39.29	74.00	34.71	Peak
6	17116.00	40.19	10.95	32.92	21.95	40.17	74.00	33.83	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

Site no. : 1# 966 Chamber Data no. : 156
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2452.00	27.59	6.67	34.09	96.22	96.39	74.00	-22.39	Peak
2	4904.00	31.42	12.22	31.93	35.00	46.71	74.00	27.29	Peak
3	7356.00	36.56	11.58	31.99	26.93	43.08	74.00	30.92	Peak
4	10180.00	38.42	11.49	32.11	21.43	39.23	74.00	34.77	Peak
5	14413.00	41.80	10.92	32.78	19.58	39.52	74.00	34.48	Peak
6	17592.00	42.45	10.90	35.76	21.73	39.32	74.00	34.68	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

18000MHz – 25000MHz

Pass


Note: The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

5 BAND EDGE COMPLIANCE TEST

5.1 Limit

All the lower and upper band-edges emissions appearing within 2310MHz to 2390MHz and 2483.5MHz to 2500MHz restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions outside operation frequency band 2400MHz to 2483.5MHz shall be at least 20dB below the fundamental emissions, or comply with 15.209 limits

5.2 Block Diagram of Test setup

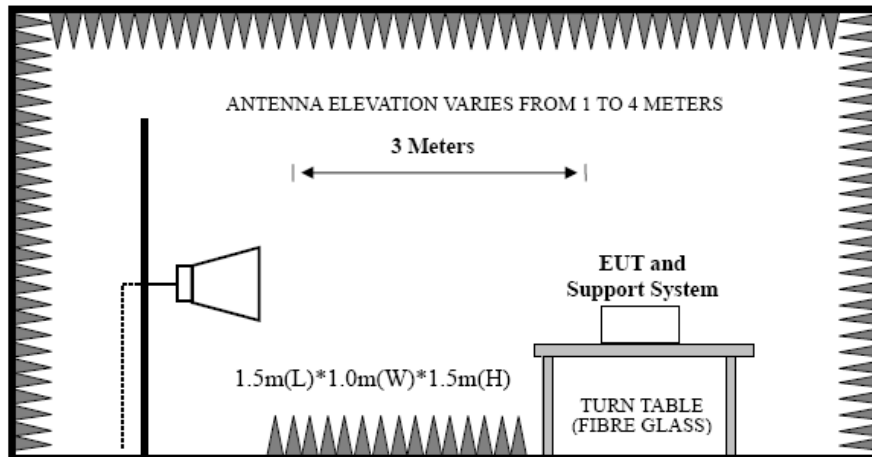

5.3 Test Procedure

EUT was placed on a turn table, which is 1.5 m high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. Power on the EUT and let it working in test mode, then test it. EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of emissions

Peak : RBW = 1MHz, VBW = 1MHz, Detector=PEAK detector, Sweep time = auto.

AV : RBW = 1MHz, VBW = 10Hz, Detector=PEAK detector, Sweep time = auto.


5.4 Test Result

Pass (The testing data was attached in the next pages.)

Note: 1、 For emissions above 1GHz, if peak level comply with average limit, then the average level is deemed to comply with average limit.

2、 The frequency 2412 MHz、 2422MHz、 2452MHz and 2462 MHz is fundamental frequency which no limit, the limit on plots is automatically generated by the software, it's not fundamental limit, we can't remove it.


5.5 Test Data

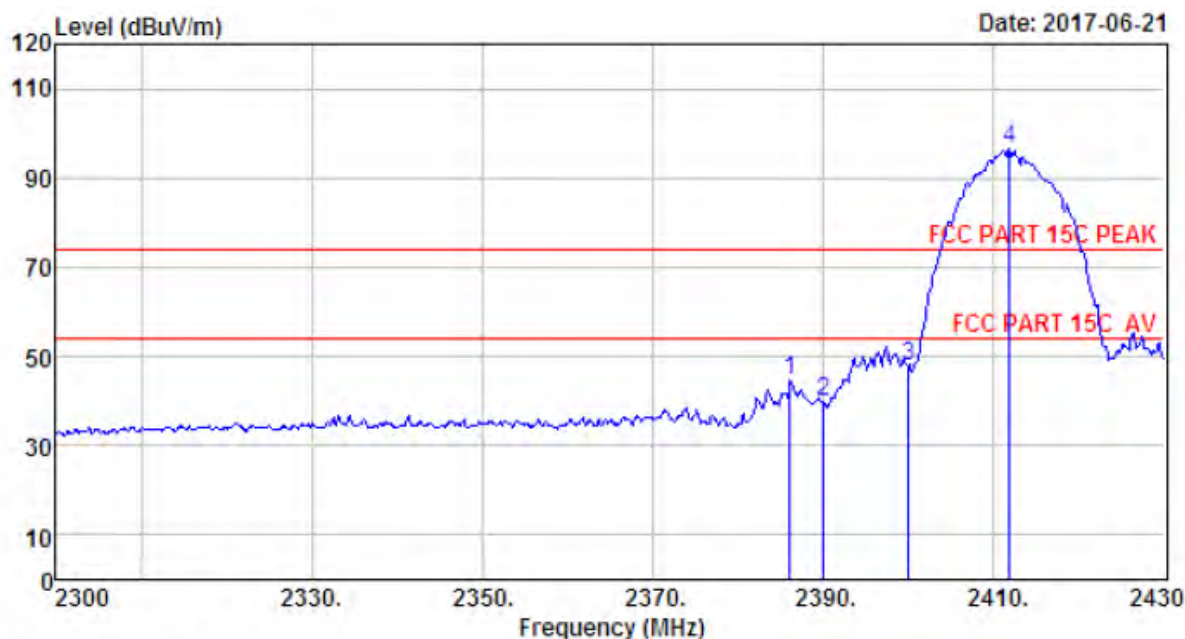

Site no. : 1# 966 Chamber Data no. : 157
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.06	27.64	6.62	34.19	44.52	44.59	74.00	29.41	Peak
2	2390.00	27.64	6.62	34.19	39.67	39.74	74.00	34.26	Peak
3	2400.00	27.61	6.62	34.18	47.96	48.01	74.00	25.99	Peak
4	2411.80	27.60	6.64	34.15	96.56	96.65	74.00	-22.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official
 limit are not reported.

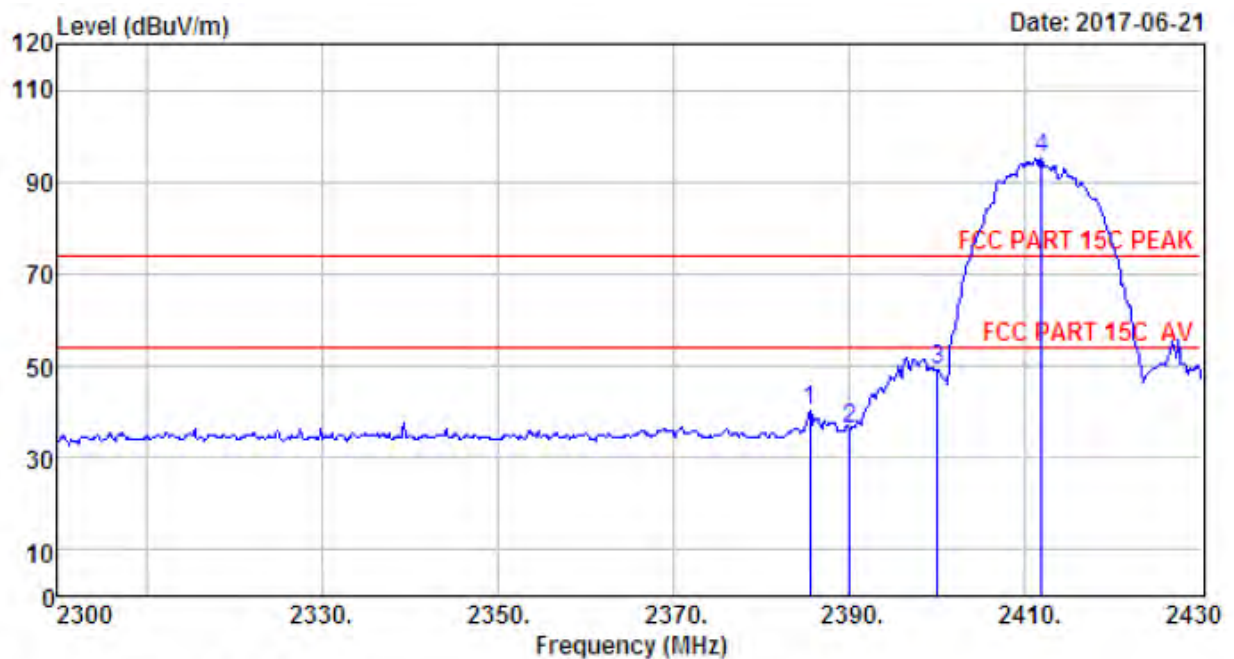

Site no. : 1# 966 Chamber Data no. : 158
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.54	27.64	6.62	34.19	40.10	40.17	74.00	33.83	Peak
2	2390.00	27.64	6.62	34.19	36.04	36.11	74.00	37.89	Peak
3	2400.00	27.61	6.62	34.18	49.10	49.15	74.00	24.85	Peak
4	2411.80	27.60	6.64	34.15	95.28	95.37	74.00	-21.37	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

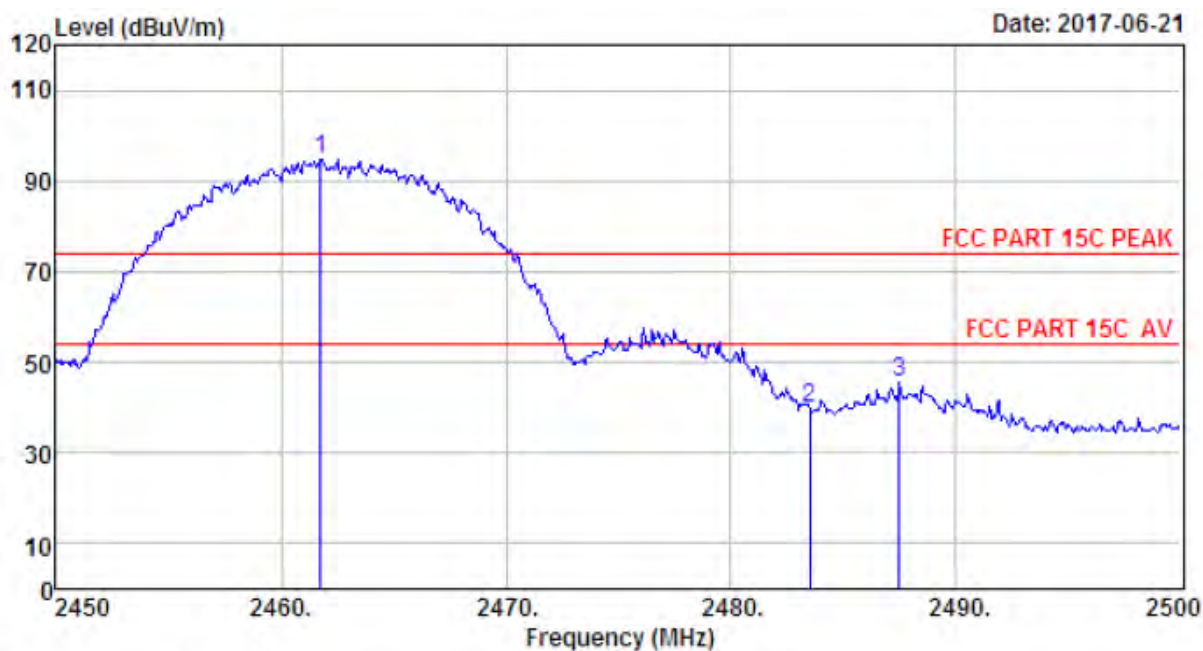

Site no. : 1# 966 Chamber Data no. : 159
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.75	27.58	6.69	34.06	94.67	94.88	74.00	-20.88	Peak
2	2483.50	27.58	6.71	34.03	39.77	40.03	74.00	33.97	Peak
3	2487.50	27.58	6.73	34.03	45.24	45.52	74.00	28.48	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

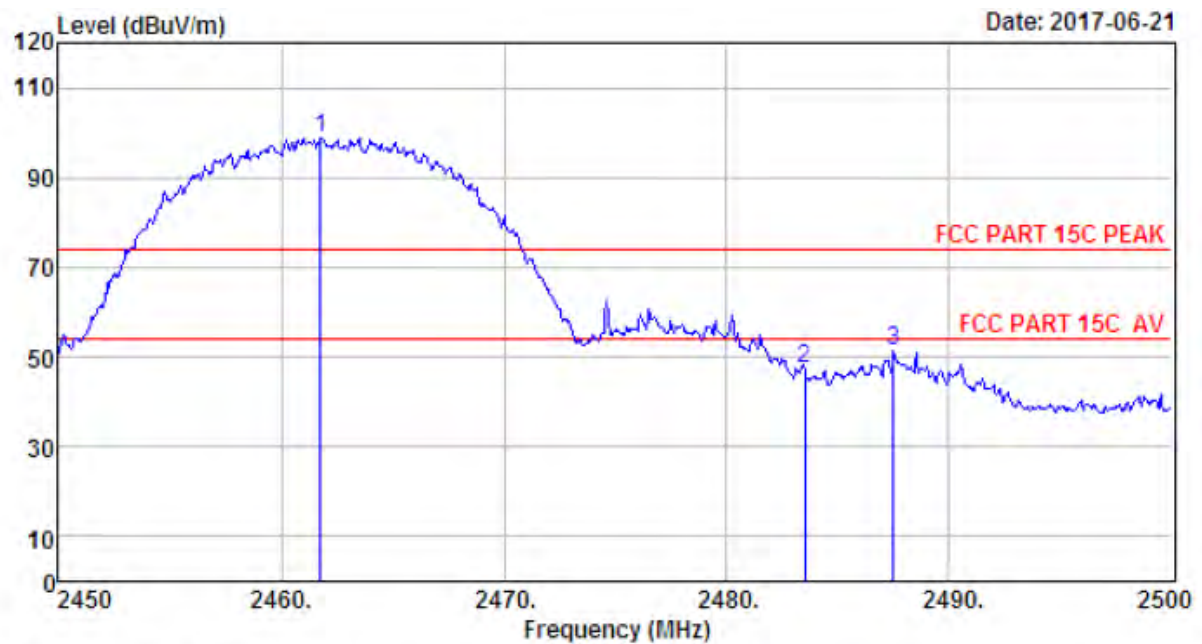

Site no. : 1# 966 Chamber Data no. : 160
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2461.75	27.58	6.69	34.06	98.69	98.90	74.00	-24.90	Peak
2	2483.50	27.58	6.71	34.03	46.95	47.21	74.00	26.79	Peak
3	2487.50	27.58	6.73	34.03	51.11	51.39	74.00	22.61	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

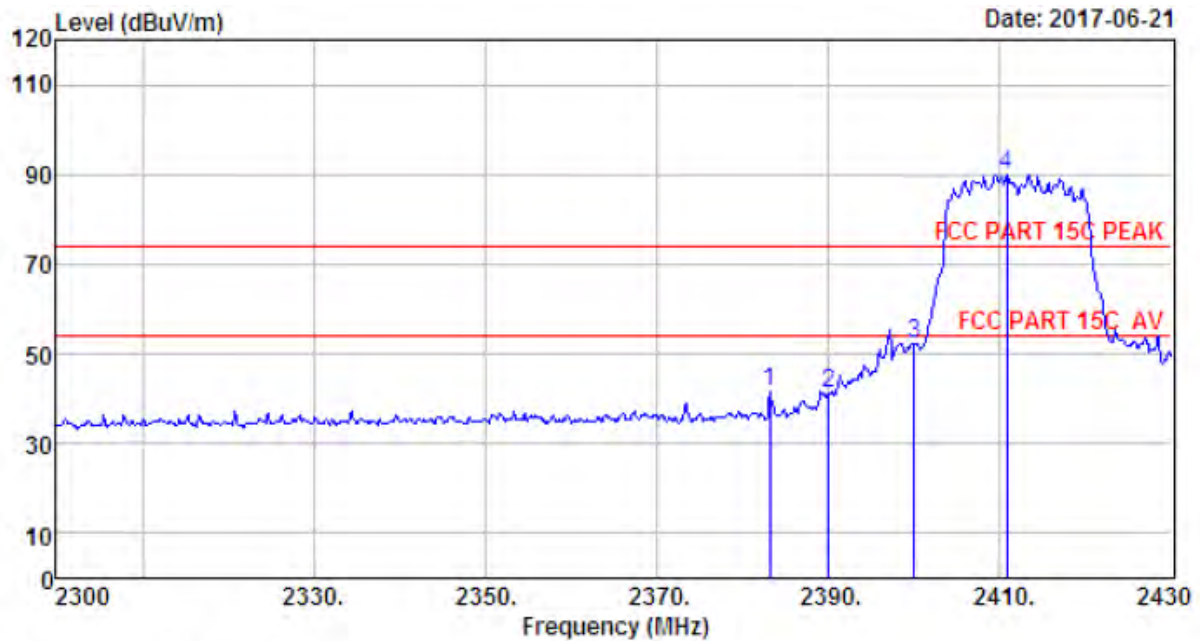

Site no. : 1# 966 Chamber Data no. : 161
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2383.20	27.64	6.60	34.19	41.76	41.81	74.00	32.19	Peak
2	2390.00	27.64	6.62	34.19	40.98	41.05	74.00	32.95	Peak
3	2400.00	27.61	6.62	34.18	52.19	52.24	74.00	21.76	Peak
4	2410.76	27.60	6.64	34.15	89.98	90.07	74.00	-16.07	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading,
 2. The emission levels that are 20dB below the official
 limit are not reported.

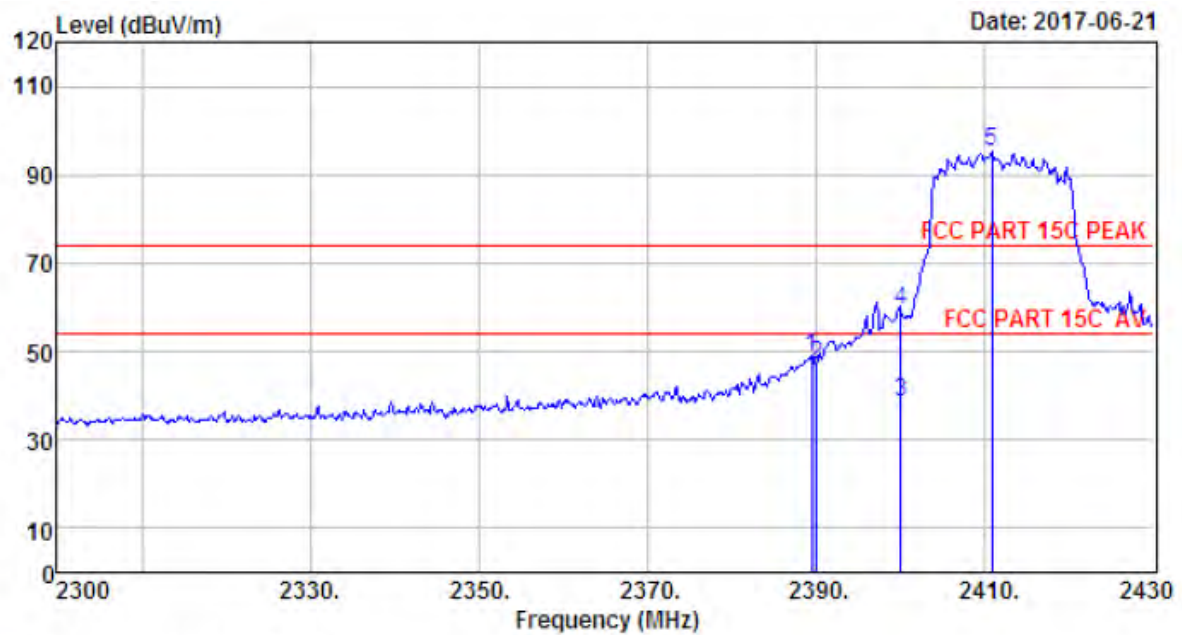

Site no. : 1# 966 Chamber Data no. : 162
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6'; Humi:50%; Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.44	27.64	6.62	34.19	48.46	48.53	74.00	25.47	Peak
2	2390.00	27.64	6.62	34.19	46.88	46.95	74.00	27.05	Peak
3	2400.00	27.61	6.62	34.18	38.40	38.45	54.00	15.55	Average
4	2400.00	27.61	6.62	34.18	59.08	59.13	74.00	14.87	Peak
5	2410.76	27.60	6.64	34.15	95.08	95.17	74.00	-21.17	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

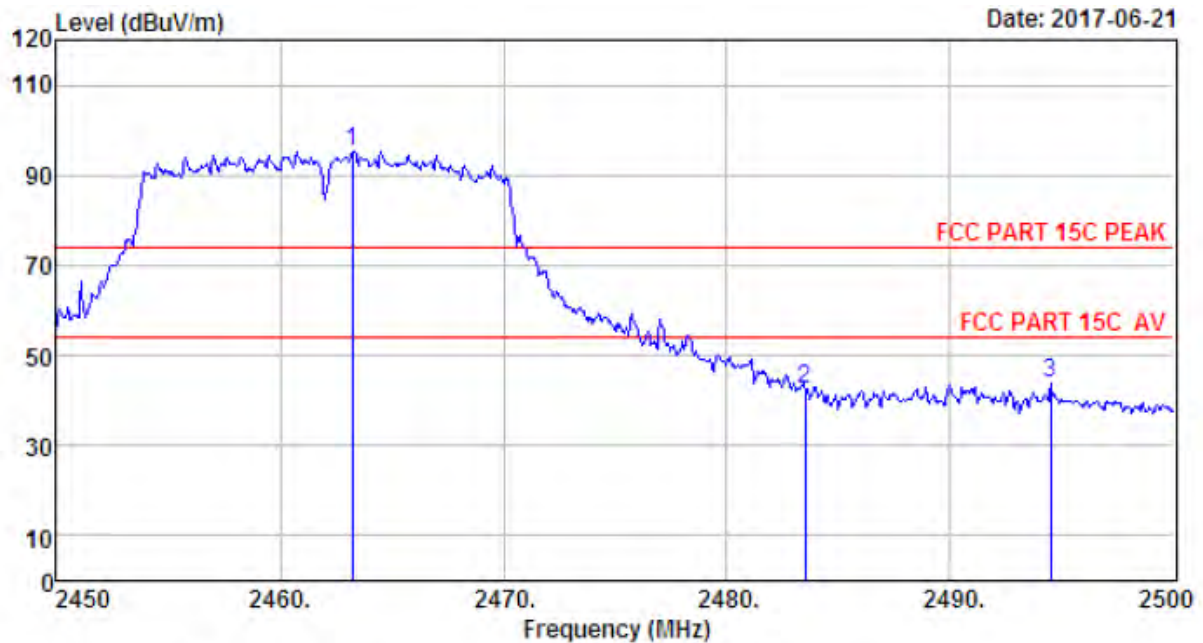

Site no. : 1# 966 Chamber Data no. : 163
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.58	6.69	34.06	95.13	95.34	74.00	-21.34	Peak
2	2483.50	27.58	6.71	34.03	42.25	42.51	74.00	31.49	Peak
3	2494.50	27.57	6.73	34.00	43.32	43.62	74.00	30.38	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

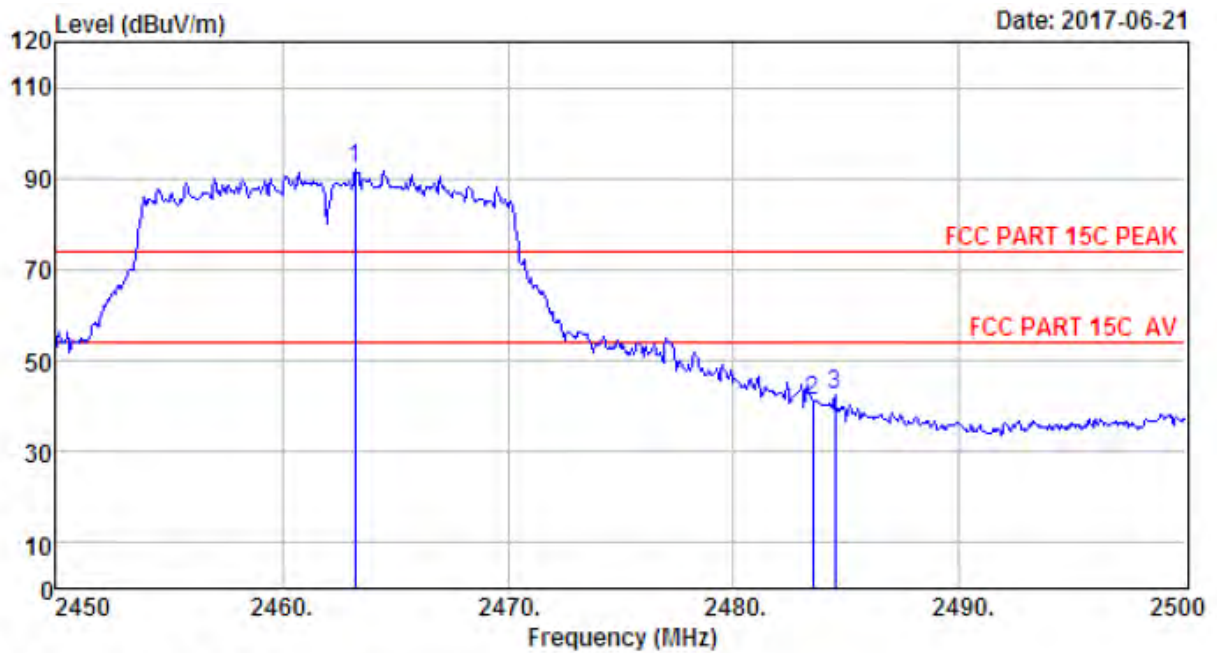

Site no. : 1# 966 Chamber Data no. : 164
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 0

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.58	6.69	34.06	91.68	91.89	74.00	-17.89	Peak
2	2483.50	27.58	6.71	34.03	41.04	41.30	74.00	32.70	Peak
3	2484.50	27.58	6.71	34.03	42.45	42.71	74.00	31.29	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

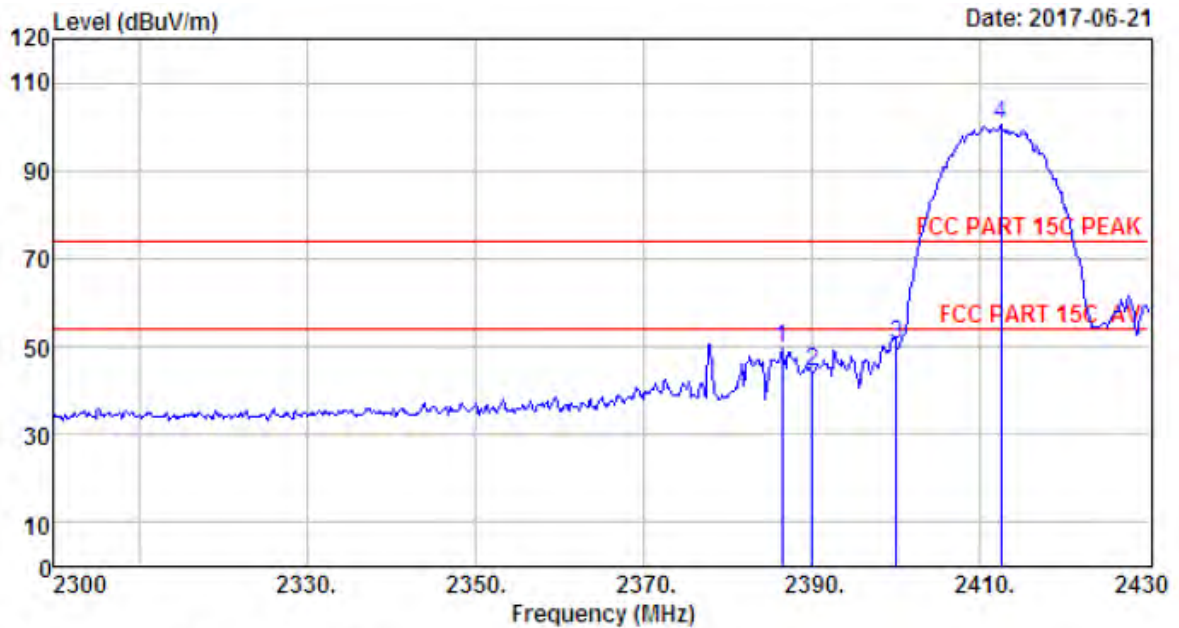

Site no. : 1# 966 Chamber Data no. : 165
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.45	27.64	6.62	34.19	49.42	49.49	74.00	24.51	Peak
2	2390.00	27.64	6.62	34.19	44.31	44.38	74.00	29.62	Peak
3	2400.00	27.61	6.62	34.18	50.56	50.61	74.00	23.39	Peak
4	2412.45	27.60	6.64	34.15	100.27	100.36	74.00	-26.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

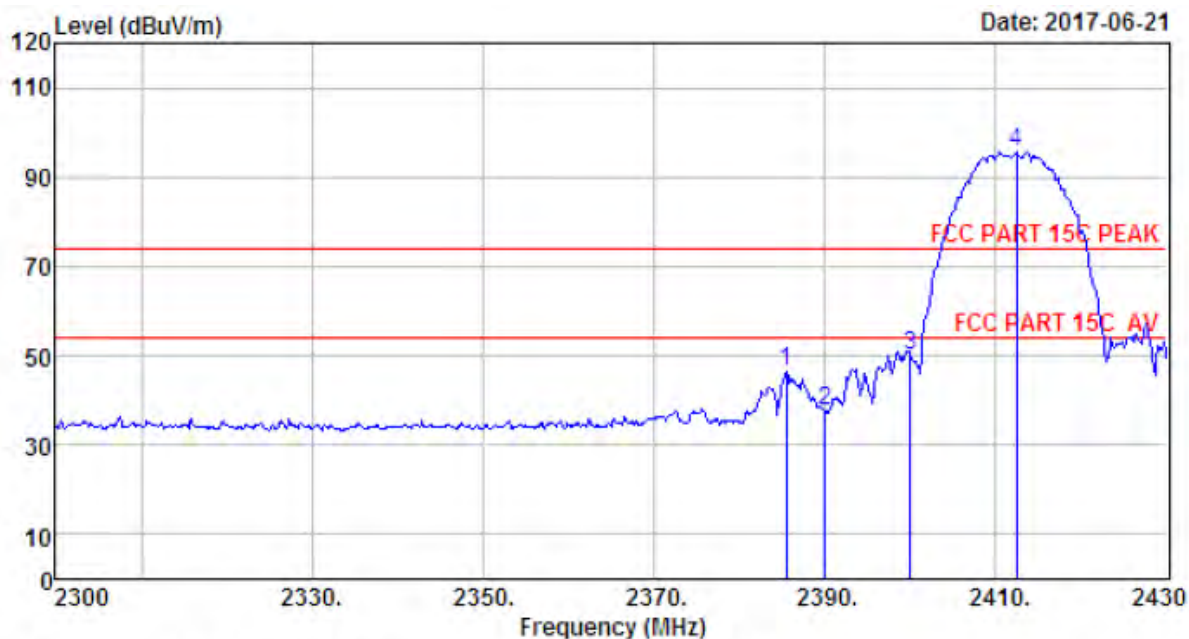

Site no. : 1# 966 Chamber Data no. : 166
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.54	27.64	6.62	34.19	46.23	46.30	74.00	27.70	Peak
2	2390.00	27.64	6.62	34.19	37.70	37.77	74.00	36.23	Peak
3	2400.00	27.61	6.62	34.18	50.20	50.25	74.00	23.75	Peak
4	2412.45	27.60	6.64	34.15	95.61	95.70	74.00	-21.70	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

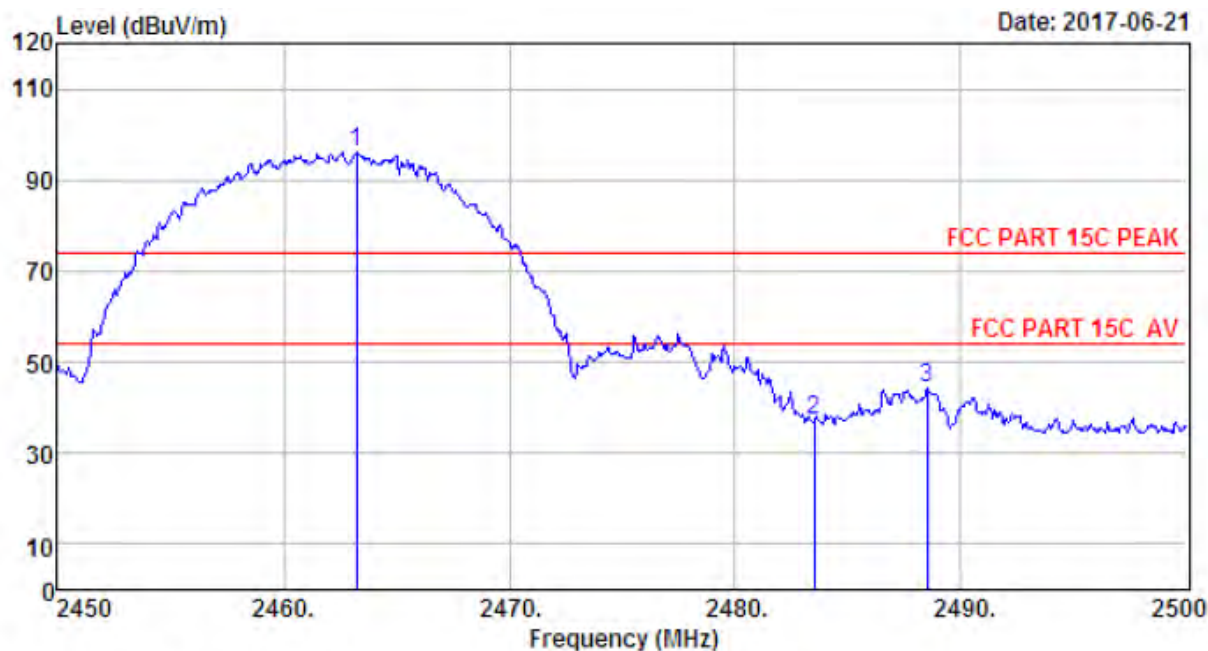

Site no. : 1# 966 Chamber Data no. : 167
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.58	6.69	34.06	95.89	96.10	74.00	-22.10	Peak
2	2483.50	27.58	6.71	34.03	37.02	37.28	74.00	36.72	Peak
3	2488.50	27.58	6.73	34.03	43.96	44.24	74.00	29.76	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

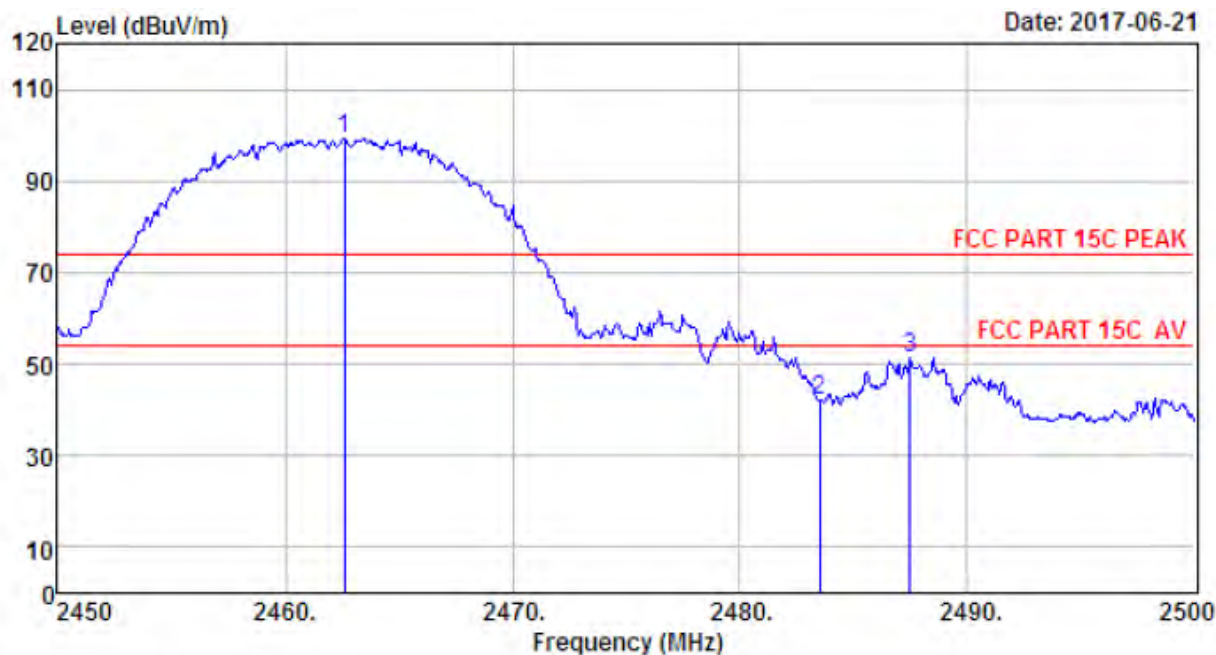

Site no. : 1# 966 Chamber Data no. : 168
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11b CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2462.60	27.58	6.69	34.06	99.12	99.33	74.00	-25.33	Peak
2	2483.50	27.58	6.71	34.03	41.80	42.06	74.00	31.94	Peak
3	2487.50	27.58	6.73	34.03	51.19	51.47	74.00	22.53	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

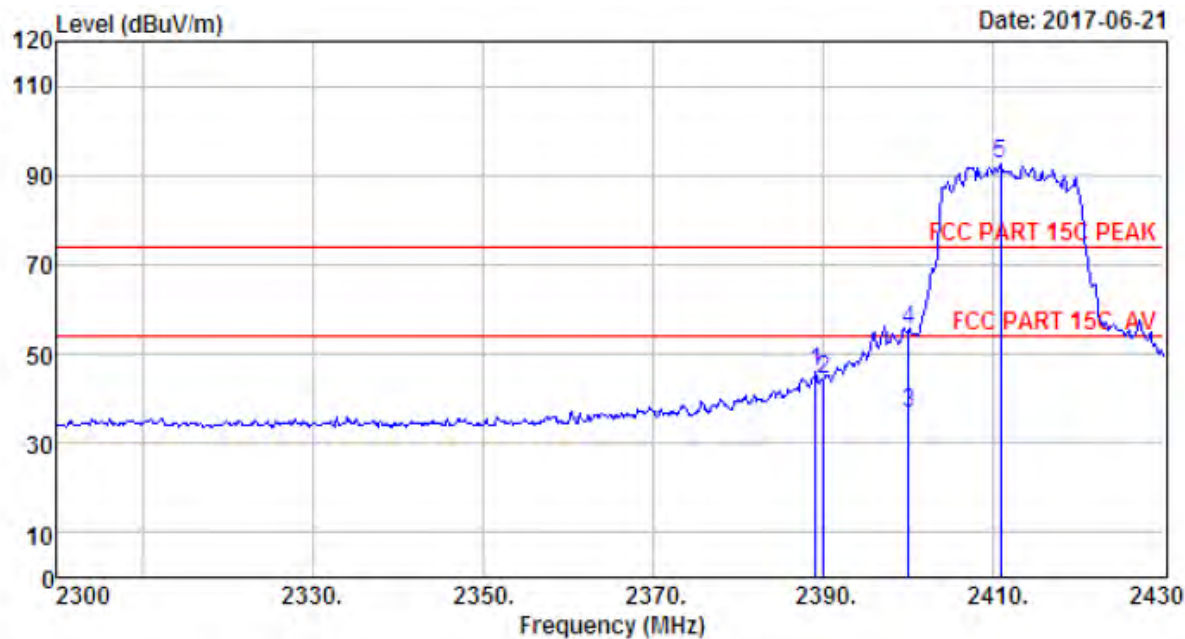

Site no. : 1# 966 Chamber Data no. : 169
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.05	27.64	6.62	34.19	45.76	45.83	74.00	28.17	Peak
2	2390.00	27.64	6.62	34.19	44.32	44.39	74.00	29.61	Peak
3	2400.00	27.61	6.62	34.18	36.60	36.65	54.00	17.35	Average
4	2400.00	27.61	6.62	34.18	55.09	55.14	74.00	18.86	Peak
5	2410.76	27.60	6.64	34.15	92.43	92.52	74.00	-18.52	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

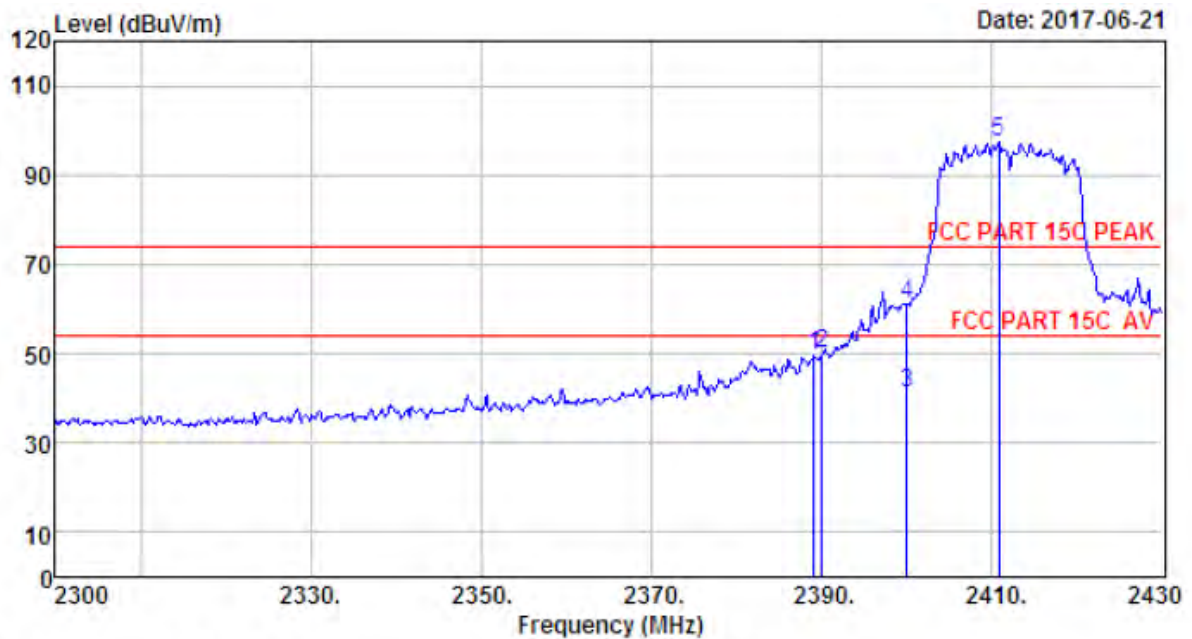

Site no. : 1# 966 Chamber Data no. : 170
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH1 2412TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2389.05	27.64	6.62	34.19	49.33	49.40	74.00	24.60	Peak
2	2390.00	27.64	6.62	34.19	49.86	49.93	74.00	24.07	Peak
3	2400.00	27.61	6.62	34.18	41.10	41.15	54.00	12.85	Average
4	2400.00	27.61	6.62	34.18	61.02	61.07	74.00	12.93	Peak
5	2410.76	27.60	6.64	34.15	97.27	97.36	74.00	-23.36	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

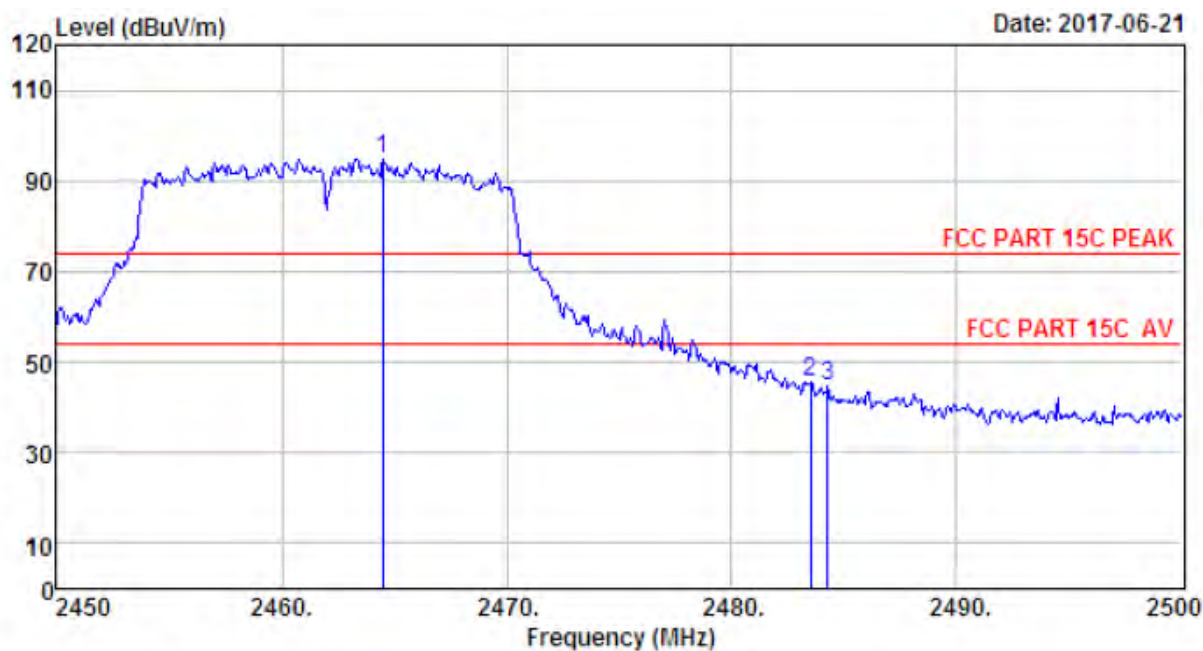

Site no. : 1# 966 Chamber Data no. : 171
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2464.50	27.58	6.69	34.06	94.70	94.91	74.00	-20.91	Peak
2	2483.50	27.58	6.71	34.03	45.37	45.63	74.00	28.37	Peak
3	2484.25	27.58	6.71	34.03	44.39	44.65	74.00	29.35	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

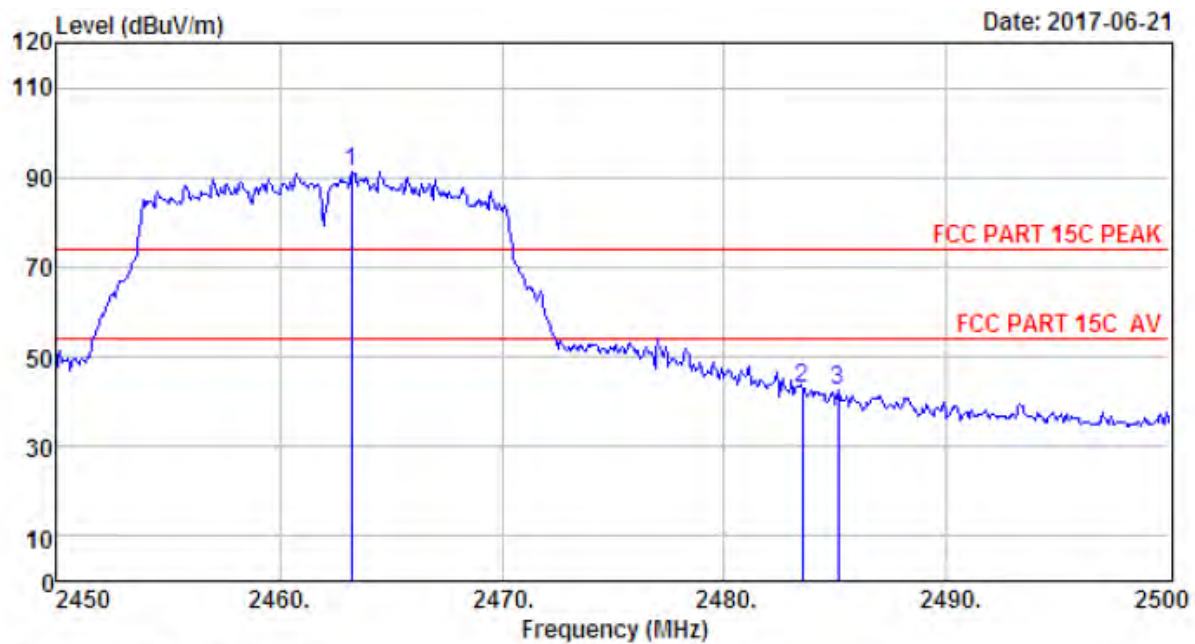

Site no. : 1# 966 Chamber Data no. : 172
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11g CH11 2462TX
 Antenna 1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.58	6.69	34.06	91.13	91.34	74.00	-17.34	Peak
2	2483.50	27.58	6.71	34.03	42.49	42.75	74.00	31.25	Peak
3	2485.10	27.58	6.71	34.03	42.44	42.70	74.00	31.30	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

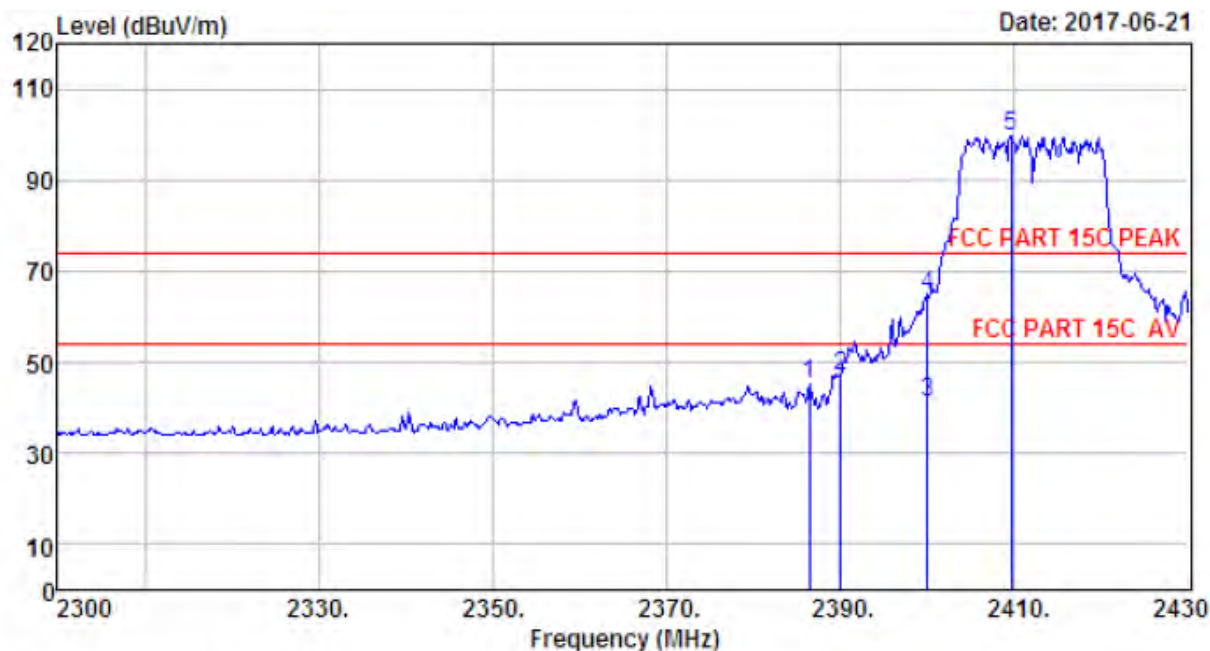


Site no. : 1# 966 Chamber Data no. : 173
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2386.45	27.64	6.62	34.19	44.96	45.03	74.00	28.97	Peak
2	2390.00	27.64	6.62	34.19	46.81	46.88	74.00	27.12	Peak
3	2400.00	27.61	6.62	34.18	41.35	41.40	54.00	12.60	Average
4	2400.00	27.61	6.62	34.18	64.48	64.53	74.00	9.47	Peak
5	2409.59	27.60	6.64	34.15	99.76	99.85	74.00	-25.85	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.


2. The emission levels that are 20dB below the official limit are not reported.

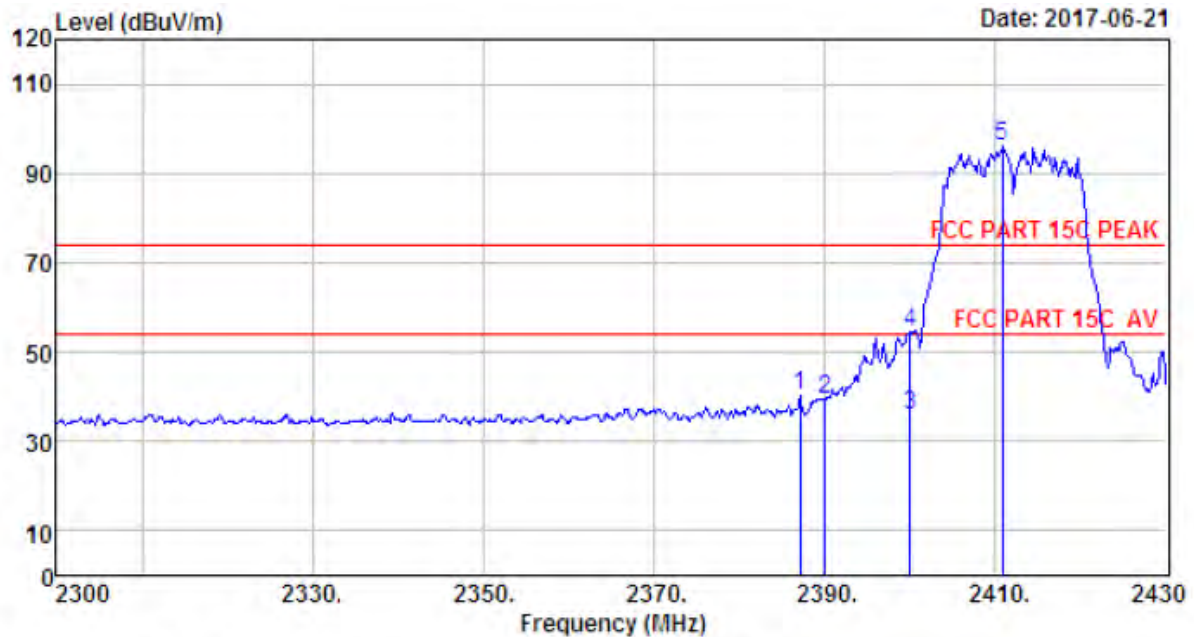

Site no. : 1# 966 Chamber Data no. : 174
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH1 2412TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2387.10	27.64	6.62	34.19	40.28	40.35	74.00	33.65	Peak
2	2390.00	27.64	6.62	34.19	39.37	39.44	74.00	34.56	Peak
3	2400.00	27.61	6.62	34.18	35.90	35.95	54.00	18.05	Average
4	2400.00	27.61	6.62	34.18	54.29	54.34	74.00	19.66	Peak
5	2410.76	27.60	6.64	34.15	95.80	95.89	74.00	-21.89	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

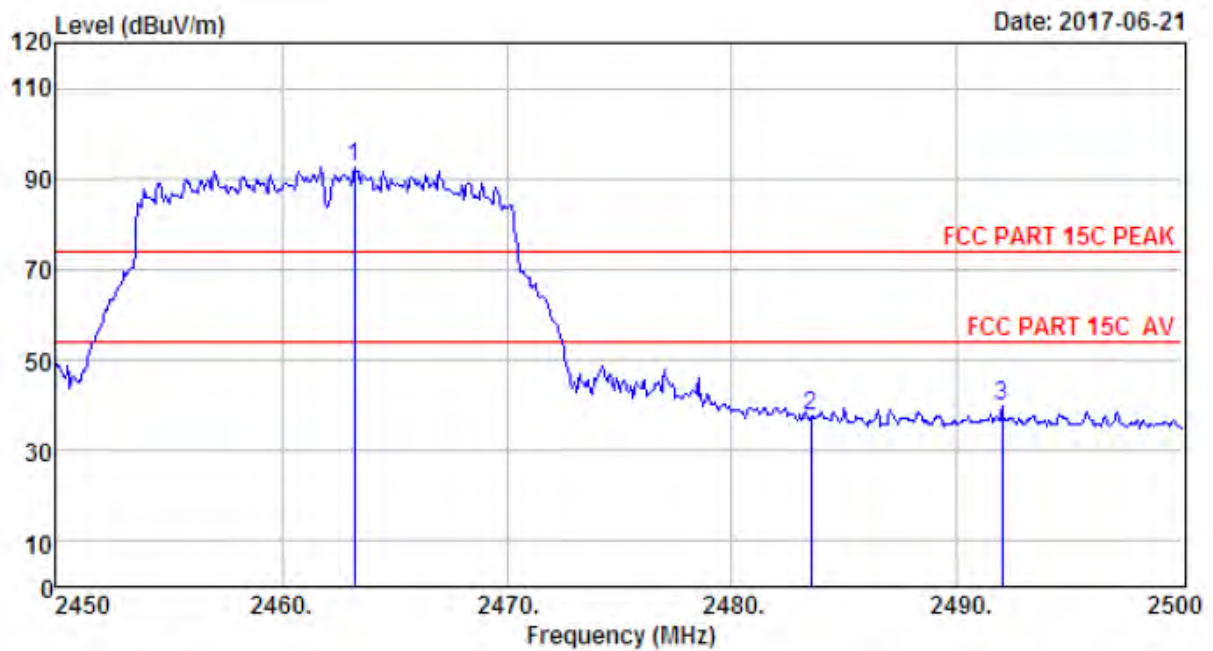

Site no. : 1# 966 Chamber Data no. : 175
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2463.25	27.58	6.69	34.06	92.23	92.44	74.00	-18.44	Peak
2	2483.50	27.58	6.71	34.03	37.20	37.46	74.00	36.54	Peak
3	2492.00	27.58	6.73	34.03	39.40	39.68	74.00	34.32	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

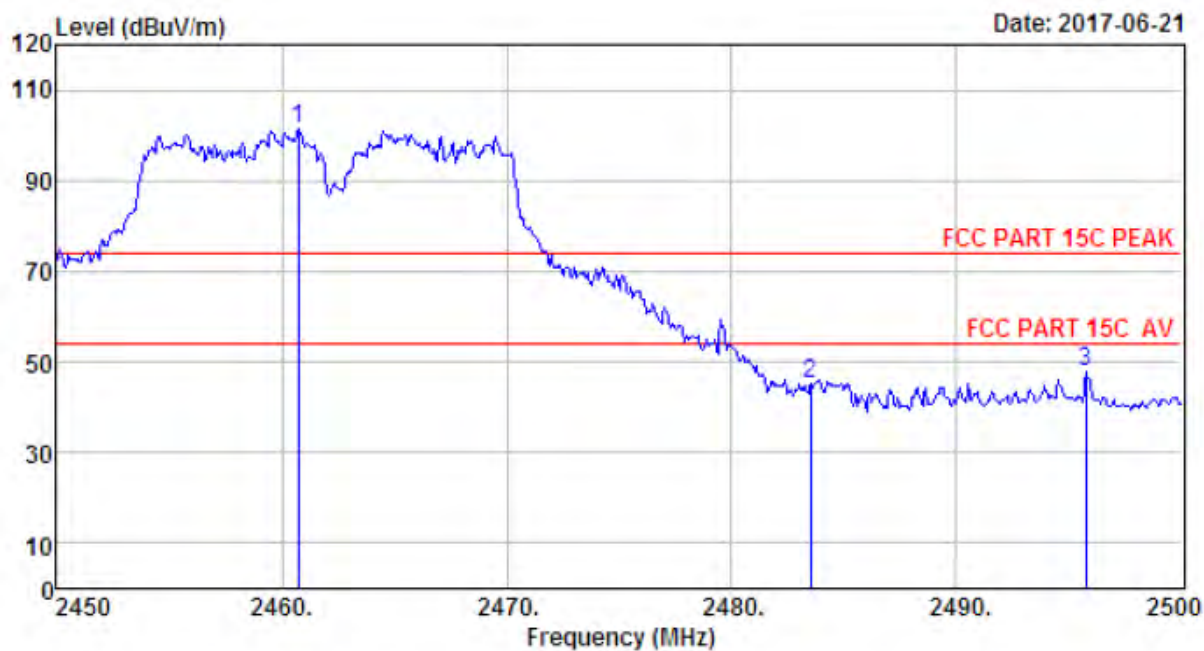

Site no. : 1# 966 Chamber Data no. : 176
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT20 CH11 2462TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2460.75	27.58	6.69	34.06	101.11	101.32	74.00	-27.32	Peak
2	2483.50	27.58	6.71	34.03	44.98	45.24	74.00	28.76	Peak
3	2495.75	27.57	6.73	34.00	47.39	47.69	74.00	26.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

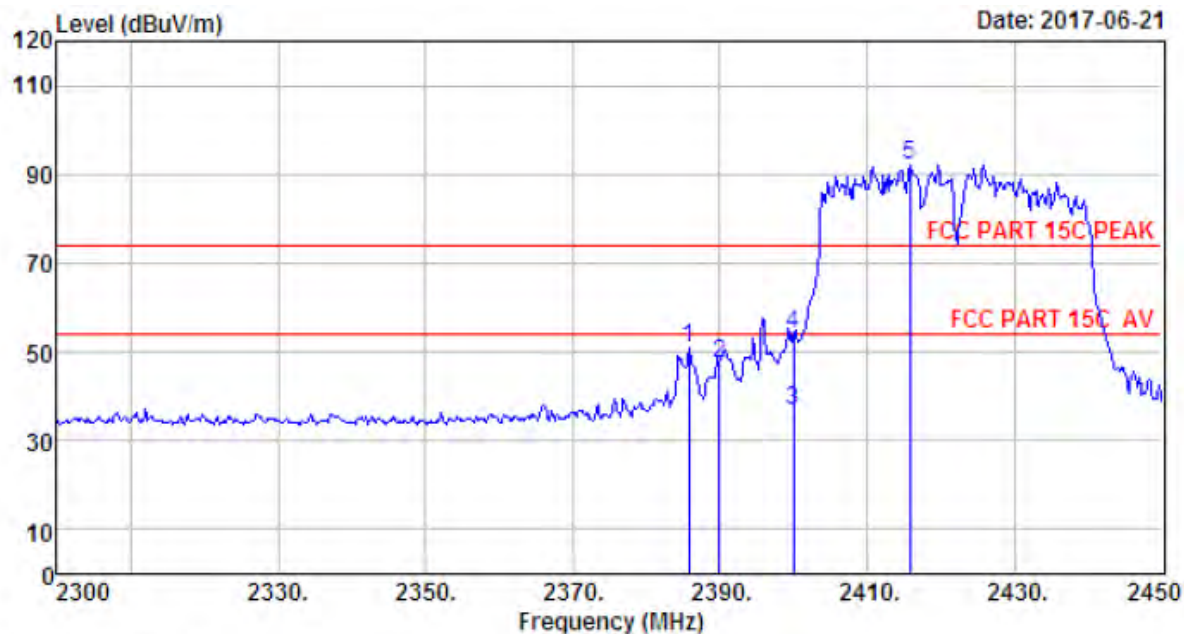

Site no. : 1# 966 Chamber Data no. : 177
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.80	27.64	6.62	34.19	50.93	51.00	74.00	23.00	Peak
2	2390.00	27.64	6.62	34.19	47.32	47.39	74.00	26.61	Peak
3	2400.00	27.61	6.62	34.18	36.72	36.77	54.00	17.23	Average
4	2400.00	27.61	6.62	34.18	54.08	54.13	74.00	19.87	Peak
5	2415.80	27.60	6.64	34.15	92.22	92.31	74.00	-18.31	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

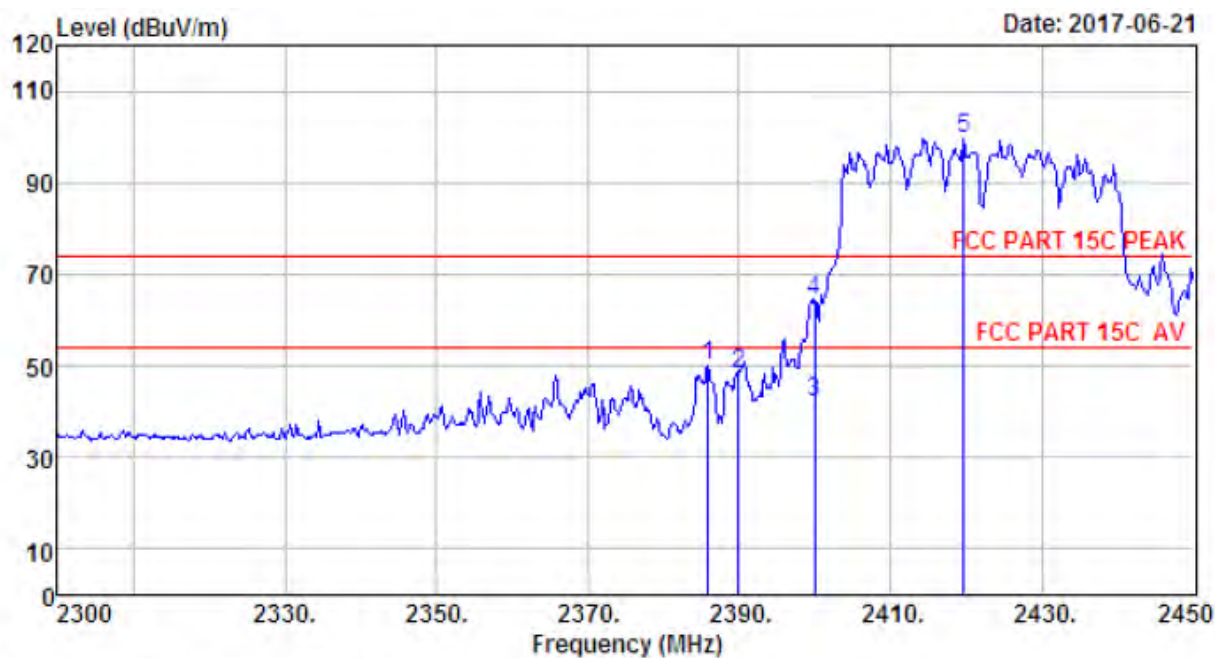

Site no. : 1# 966 Chamber Data no. : 178
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH3 2422TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2385.95	27.64	6.62	34.19	49.81	49.88	74.00	24.12	Peak
2	2390.00	27.64	6.62	34.19	48.04	48.11	74.00	25.89	Peak
3	2400.00	27.61	6.62	34.18	42.20	42.25	54.00	11.75	Average
4	2400.00	27.61	6.62	34.18	64.24	64.29	74.00	9.71	Peak
5	2419.70	27.60	6.66	34.15	99.54	99.65	74.00	-25.65	Peak


Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

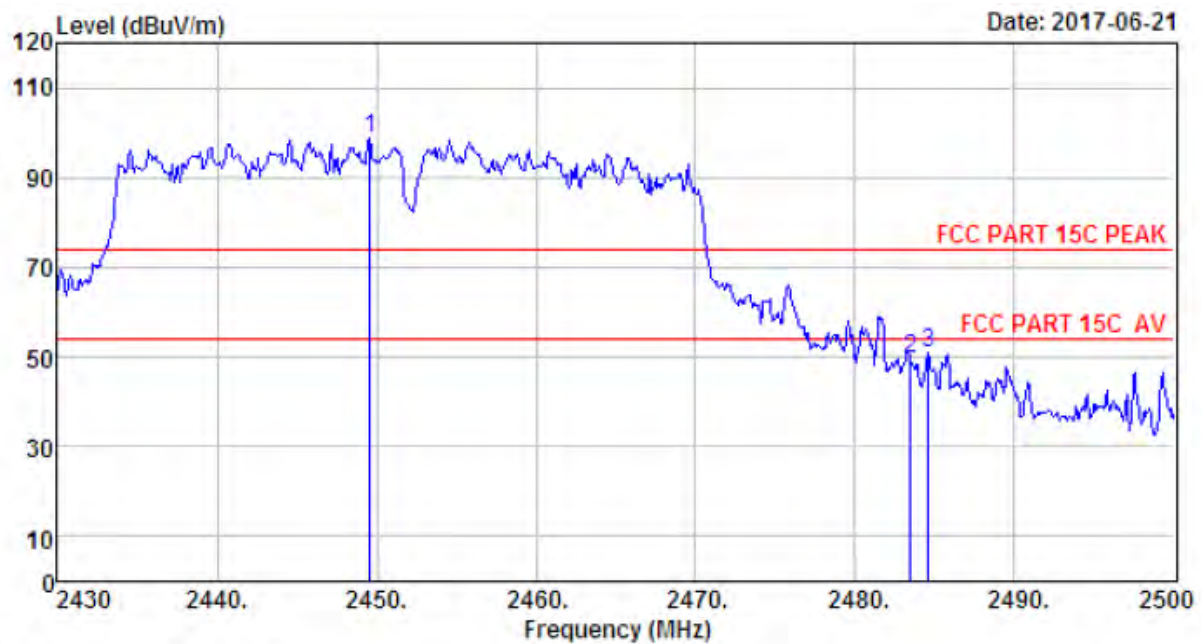

Site no. : 1# 966 Chamber Data no. : 179
 Dis. / Ant. : 3m ANT 1-18G Ant. pol. : HORIZONTAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2449.60	27.59	6.67	34.09	98.71	98.88	74.00	-24.88	Peak
2	2483.50	27.58	6.71	34.03	49.47	49.73	74.00	24.27	Peak
3	2484.60	27.58	6.71	34.03	50.74	51.00	74.00	23.00	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

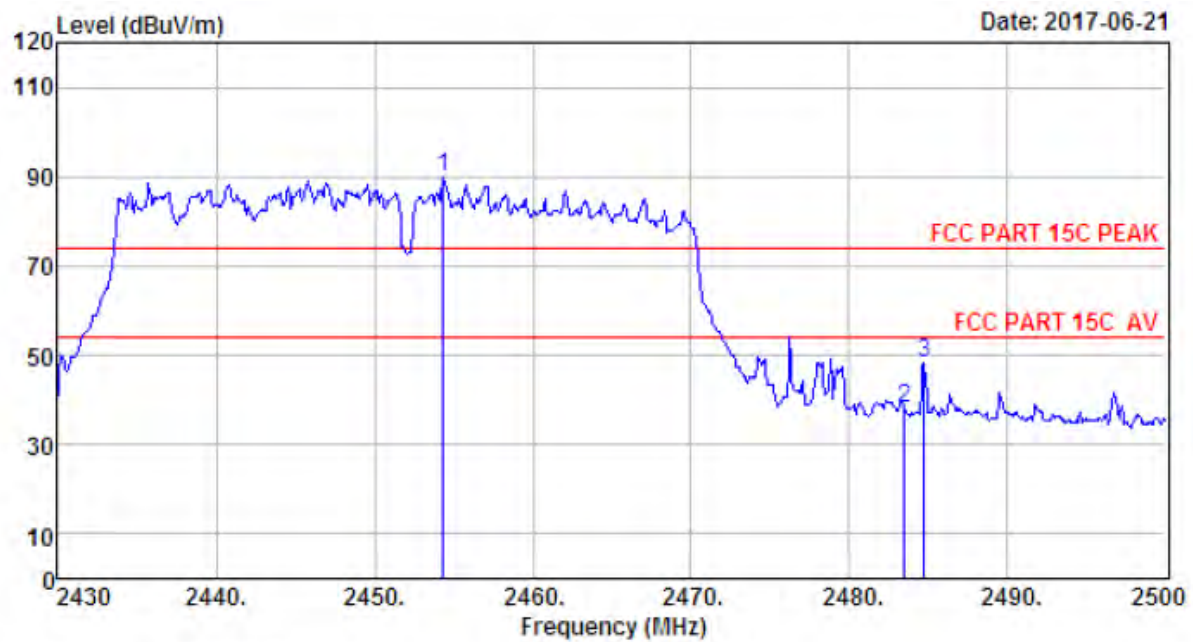

Site no. : 1# 966 Chamber Data no. : 180
 Dis. / Ant. : 3m ANI 1-18G Ant. pol. : VERTICAL
 Limit : FCC PART 15C PEAK
 Env. / Ins. : Temp:28.6';Humi:50%;Press:101.52kPa
 Engineer : Viking
 EUT : LED TV
 Power : AC 120V/60Hz
 M/N : SC-32HK700N
 Test Mode : IEEE 802.11n HT40 CH9 2452TX
 Antenna 0+1

	Freq. (MHz)	Ant. Factor (dB/m)	Cable Loss (dB)	Amp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2454.36	27.59	6.69	34.09	89.80	89.99	74.00	-15.99	Peak
2	2483.50	27.58	6.71	34.03	37.93	38.19	74.00	35.81	Peak
3	2484.74	27.58	6.71	34.03	48.22	48.48	74.00	25.52	Peak

Remarks: 1. Emission Level= Antenna Factor + Cable Loss - Amp Factor + Reading.
 2. The emission levels that are 20dB below the official limit are not reported.

6 6dB & 20dB Bandwidth Test

6.1 Limit

For direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz

6.2 Test Procedure for 6dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set resolution bandwidth (RBW) = 100 kHz.
 - (2). Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - (3). Detector = Peak.
 - (4). Trace mode = max hold.
 - (5). Sweep = auto couple.
 - (6). Allow the trace to stabilize.
 - (7). Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.3 Test Procedure for 20dB

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in C63.10
 - (1). The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
 - (2). The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
 - (3). Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
 - (4). Steps a) through c) might require iteration to adjust within the specified tolerances.
 - (5). The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
 - (6). Set detection mode to peak and trace mode to max hold.
 - (7). Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - (8). Determine the “-xx dB down amplitude” using $[(\text{reference value}) - xx]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
 - (9). If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).
 - (10). Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value,

then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “_xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.

(11). The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


6.4 Test Result

EUT: LED TV					
M/N: SC-32HK700N					
Test date: 2017-06-28		Test site: RF Site		Tested by: Viking	
Test Mode	CH	6dB bandwidth (MHz)	20dB bandwidth (MHz)	Limit	
				6dB BW (KHz)	20dB BW
Antenna 0					
IEEE 802.11 b	CH1	9.586	16.338	>500	/
	CH6	9.838	16.394	>500	/
	CH11	9.602	16.171	>500	/
IEEE 802.11 g	CH1	15.791	18.658	>500	/
	CH6	15.783	18.347	>500	/
	CH11	15.699	18.315	>500	/
IEEE 802.11 n HT 20	CH1	15.508	18.626	>500	/
	CH6	15.564	18.246	>500	/
	CH11	15.803	18.374	>500	/
IEEE 802.11 n HT 40	CH3	35.113	39.696	>500	/
	CH6	35.120	39.736	>500	/
	CH9	35.104	39.813	>500	/
Antenna 1					
IEEE 802.11 b	CH1	9.577	16.179	>500	/
	CH6	9.567	16.231	>500	/
	CH11	9.522	16.258	>500	/
IEEE 802.11 g	CH1	15.748	18.657	>500	/
	CH6	15.782	18.369	>500	/
	CH11	15.729	18.307	>500	/
IEEE 802.11 n HT 20	CH1	15.154	18.426	>500	/
	CH6	15.205	18.432	>500	/
	CH11	15.222	18.445	>500	/
IEEE 802.11 n HT 40	CH3	35.118	39.518	>500	/
	CH6	35.128	39.676	>500	/
	CH9	35.121	39.719	>500	/
Conclusion : PASS					


6.5 6dB Test Data

Antenna 0


Test Mode: IEEE 802.11b 2412MHz

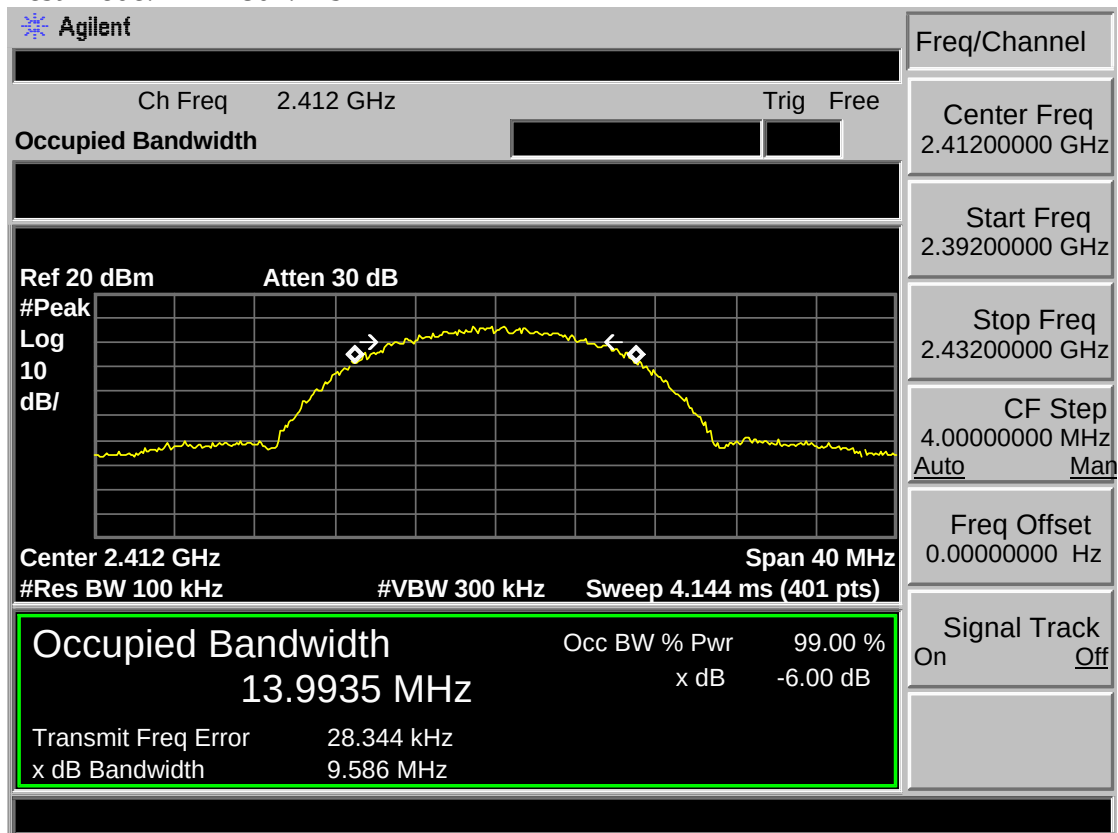


Test Mode: IEEE 802.11b 2437MHz

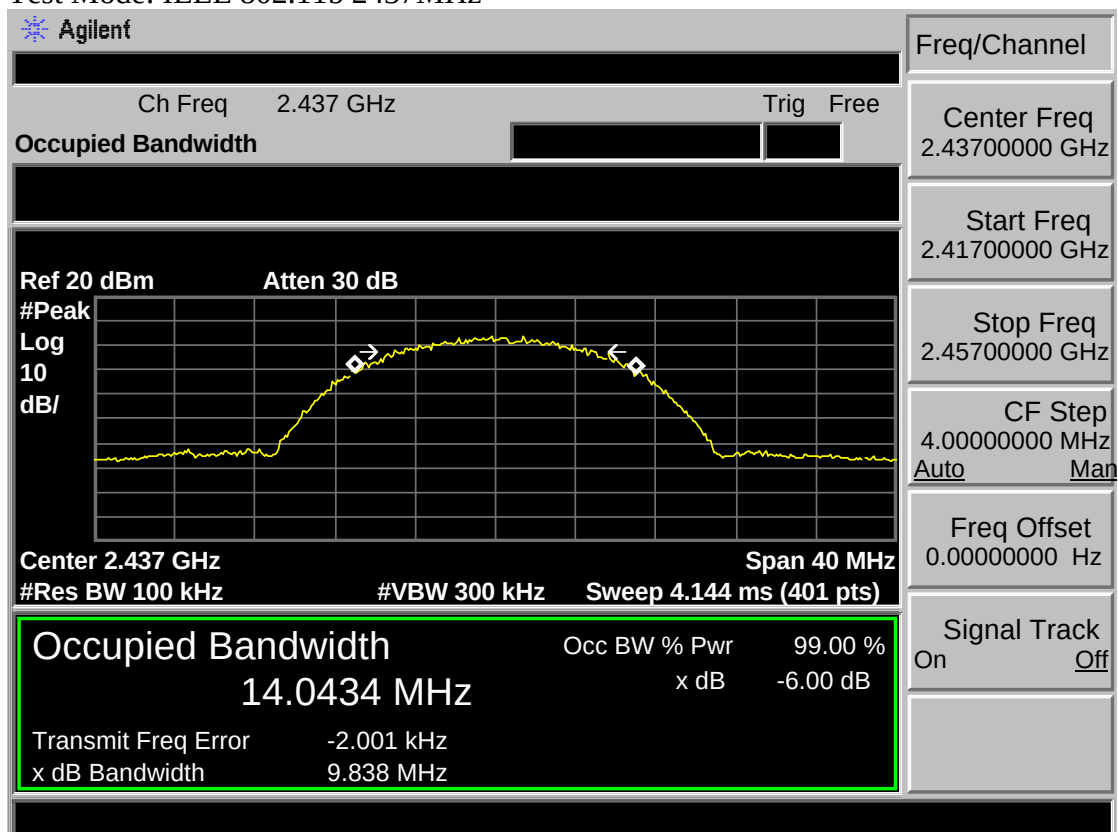


Test Mode: IEEE 802.11b 2462MHz

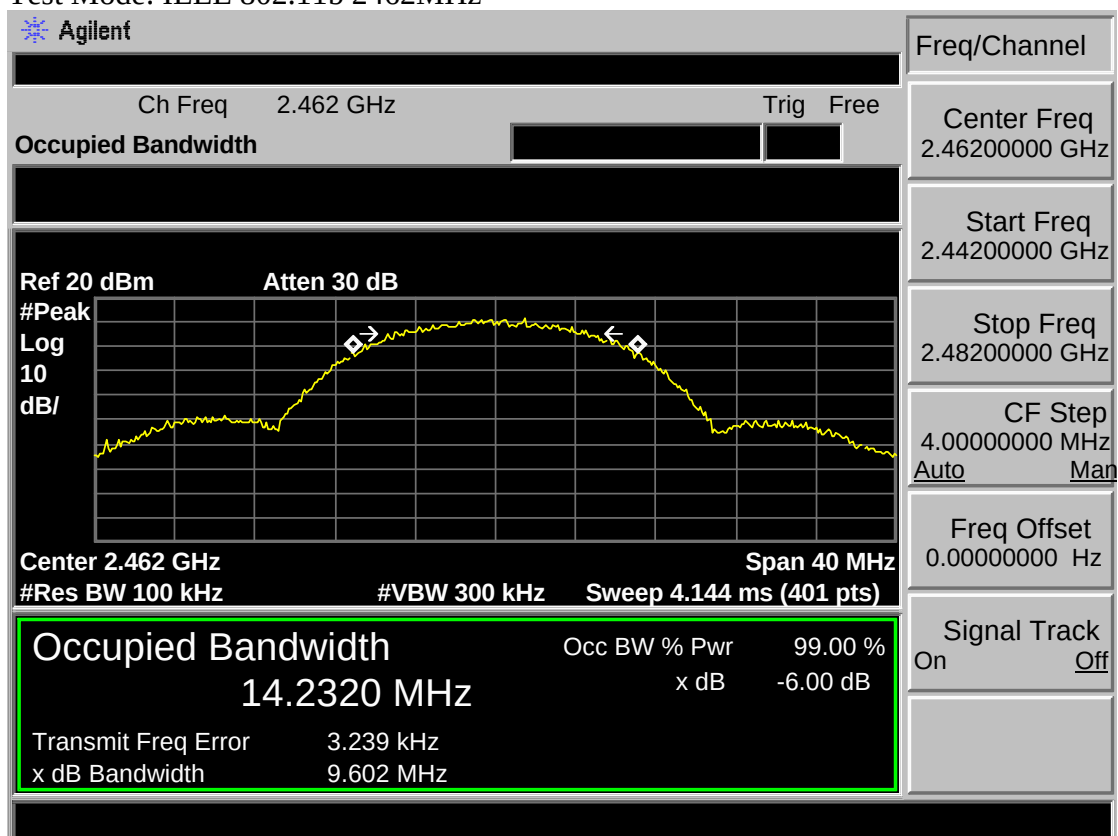


Test Mode: IEEE 802.11g 2412MHz

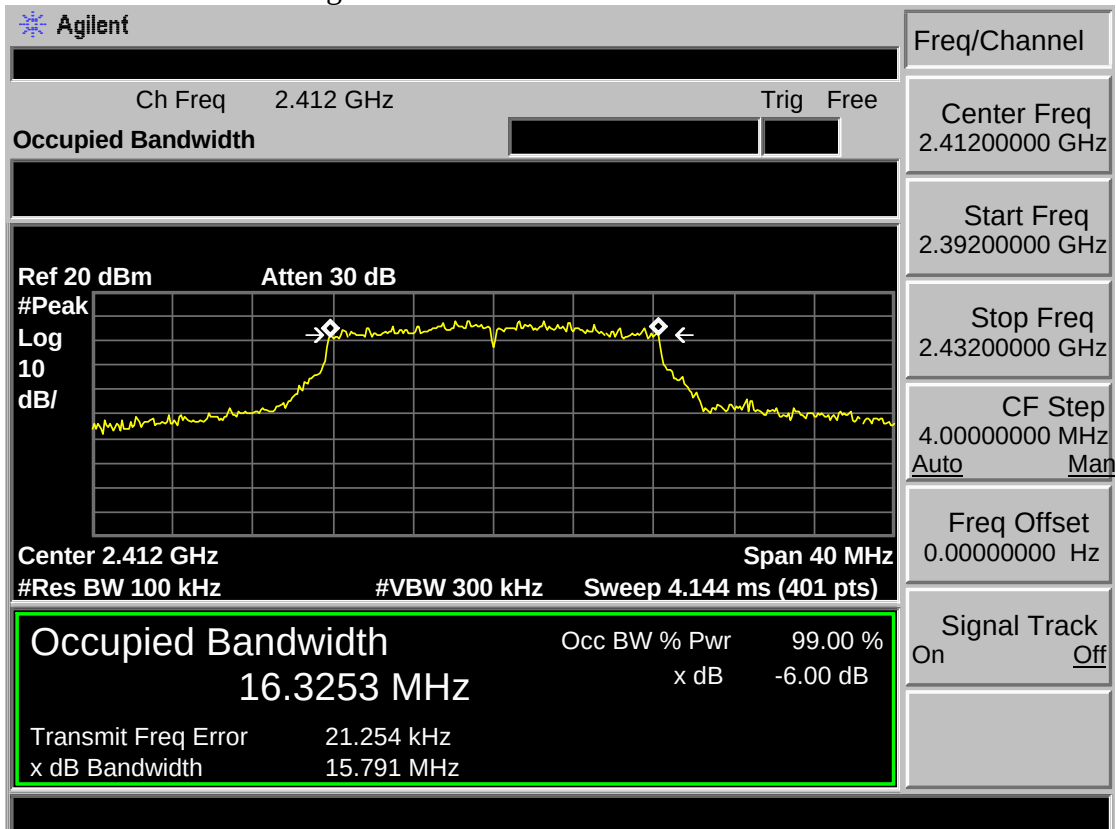


Test Mode: IEEE 802.11g 2437MHz

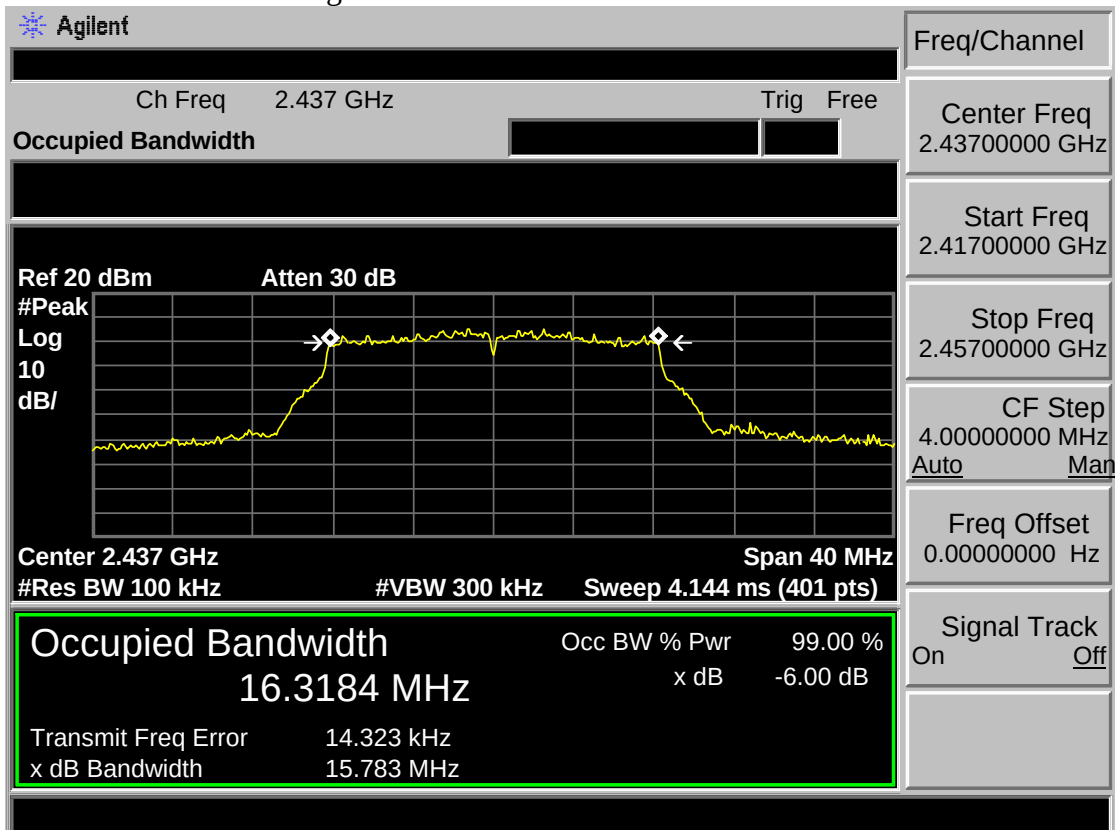


Test Mode: IEEE 802.11g 2462MHz

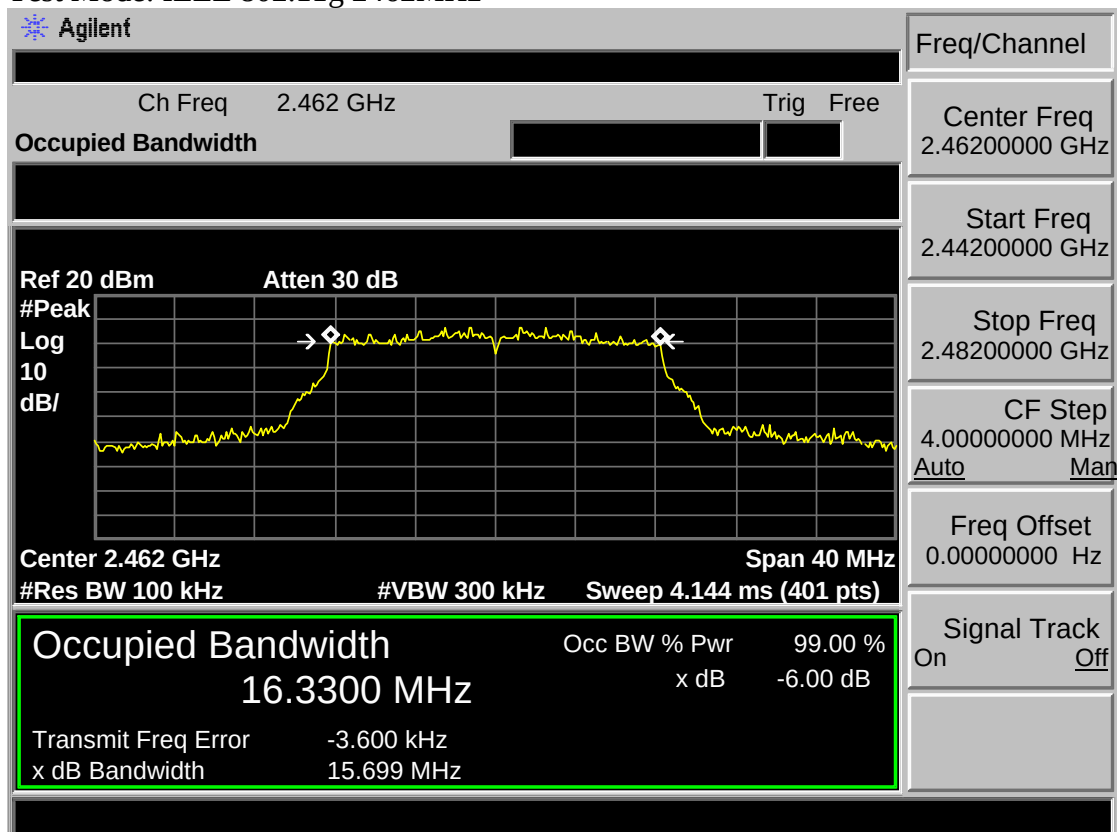


Test Mode: IEEE 802.11n HT20 2412MHz

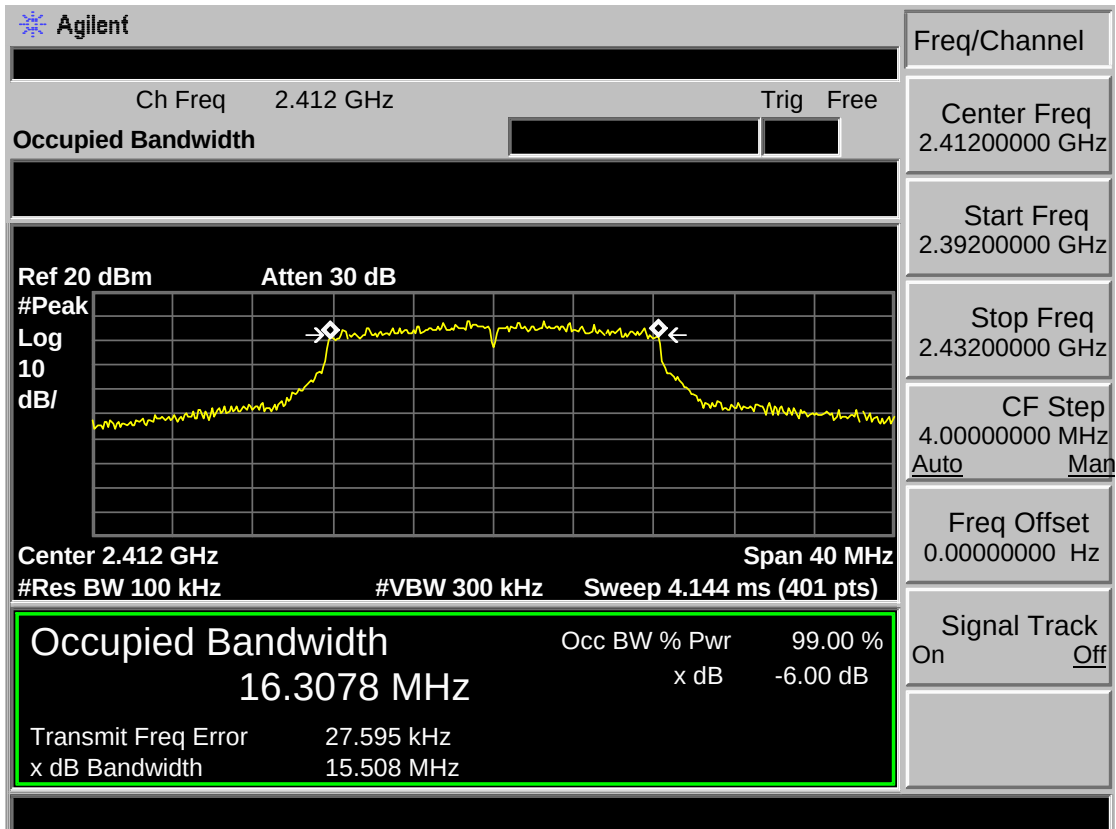


Test Mode: IEEE 802.11n HT20 2437MHz

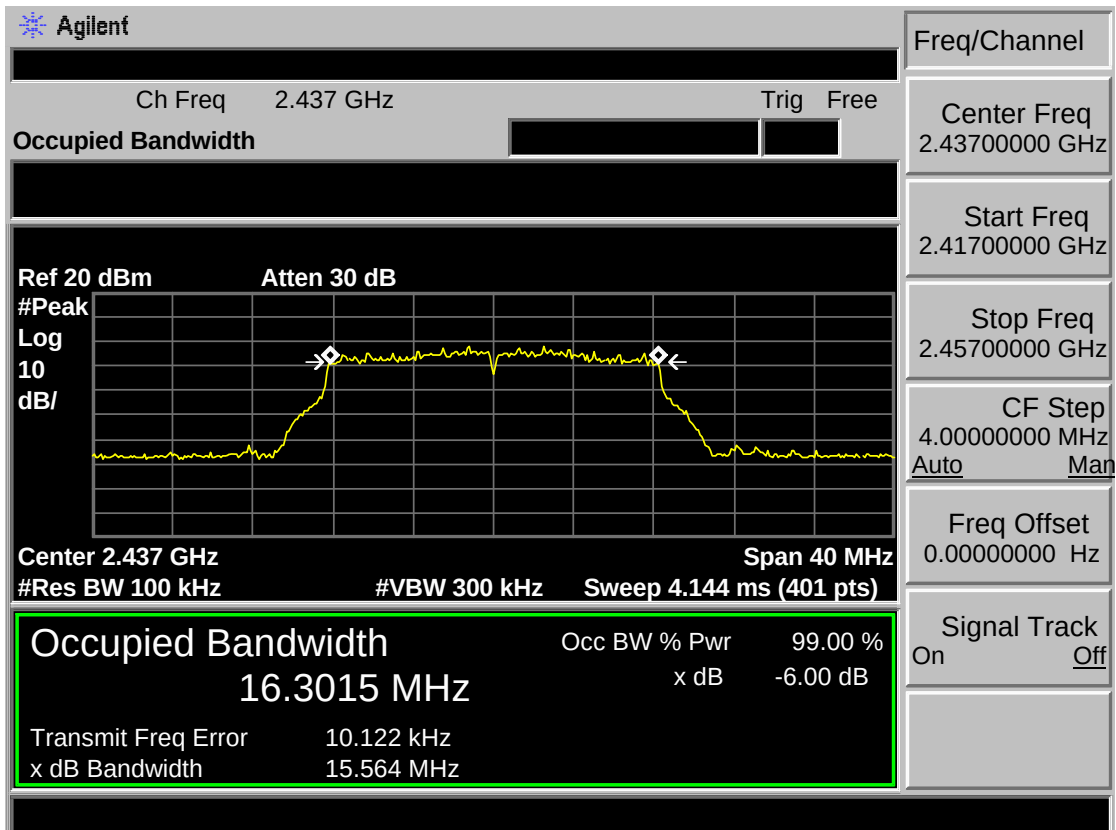


Test Mode: IEEE 802.11n HT20 2462MHz

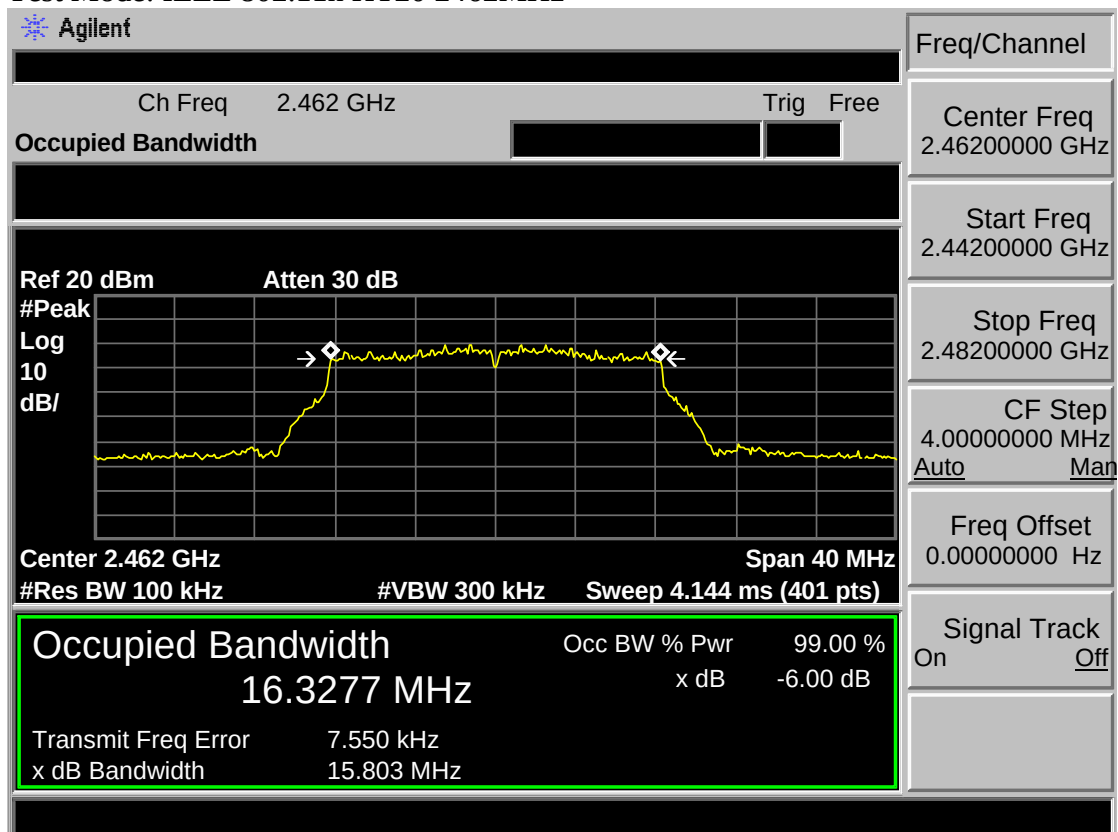


Test Mode: IEEE 802.11n HT40 2422MHz

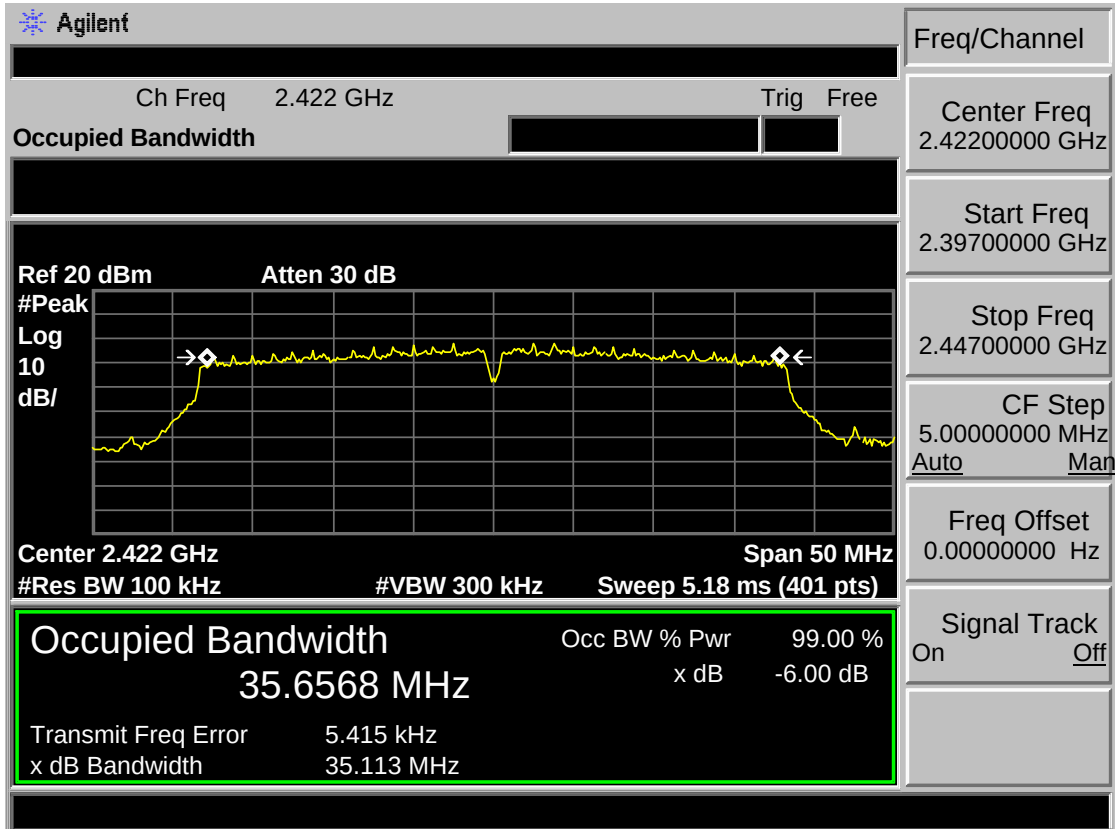

Test Mode: IEEE 802.11n HT40 2437MHz

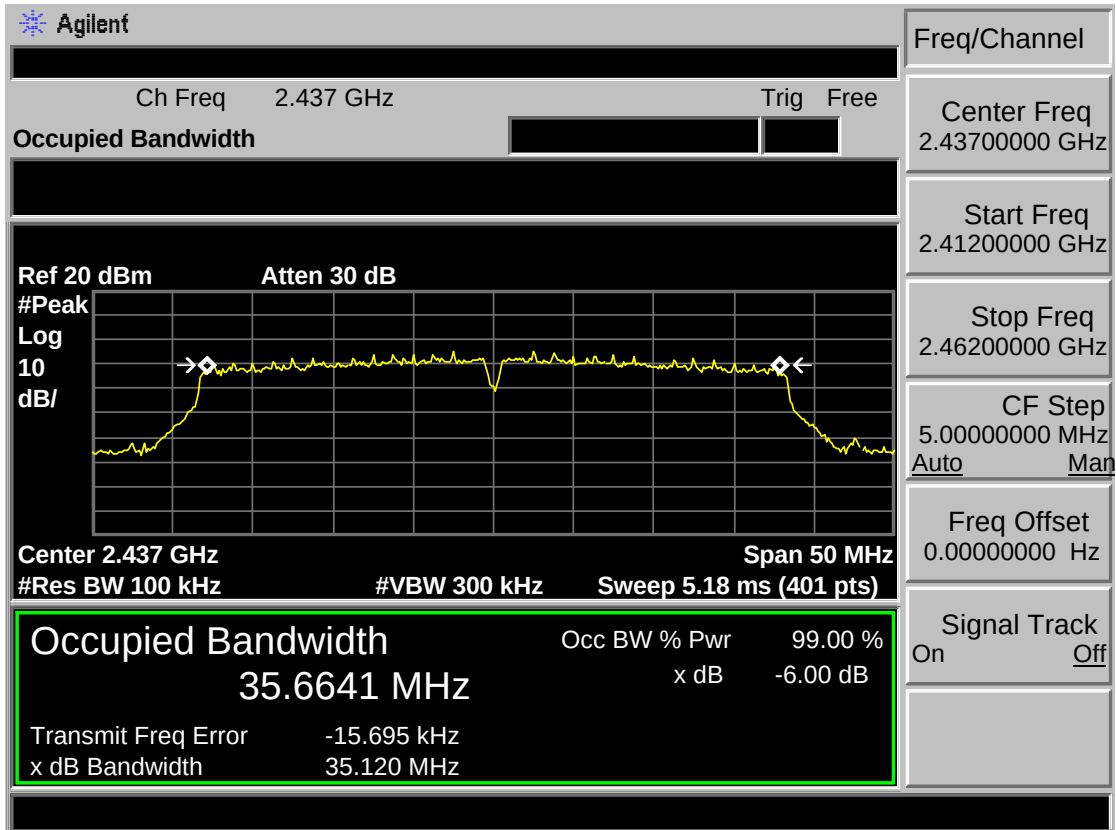


Test Mode: IEEE 802.11n HT40 2452MHz

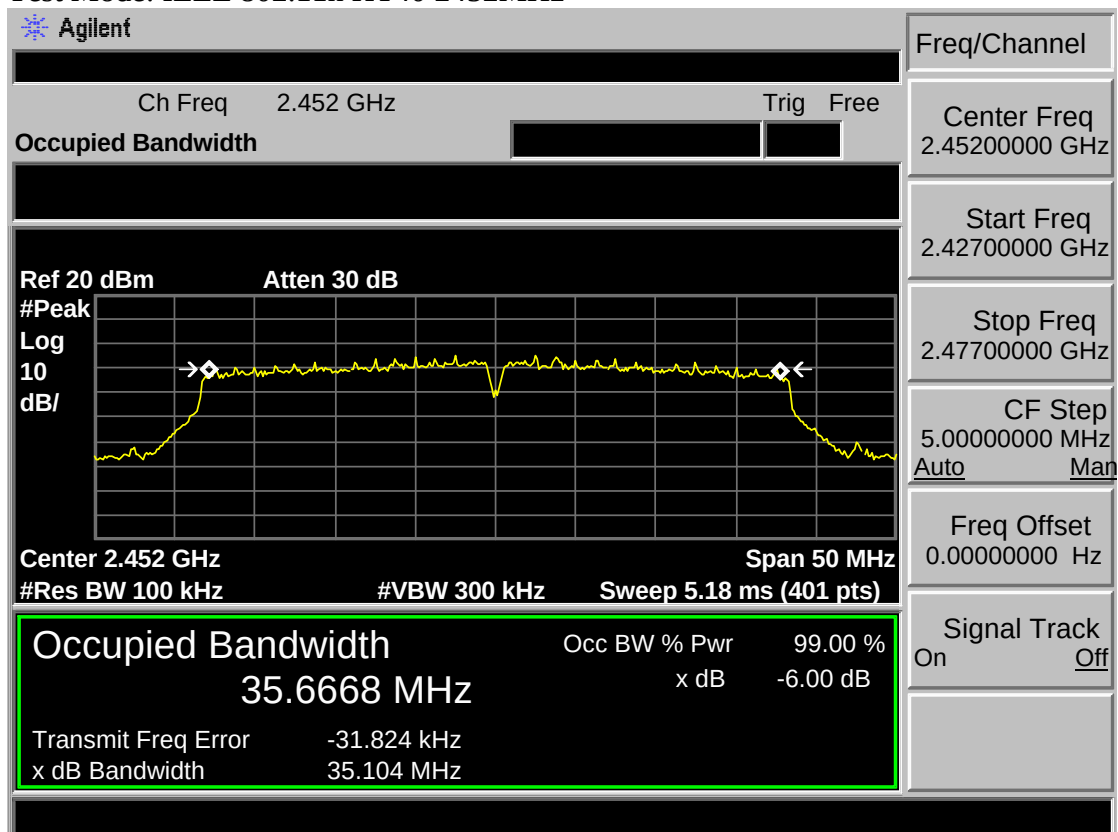

Antenna 1


Test Mode: IEEE 802.11b 2412MHz

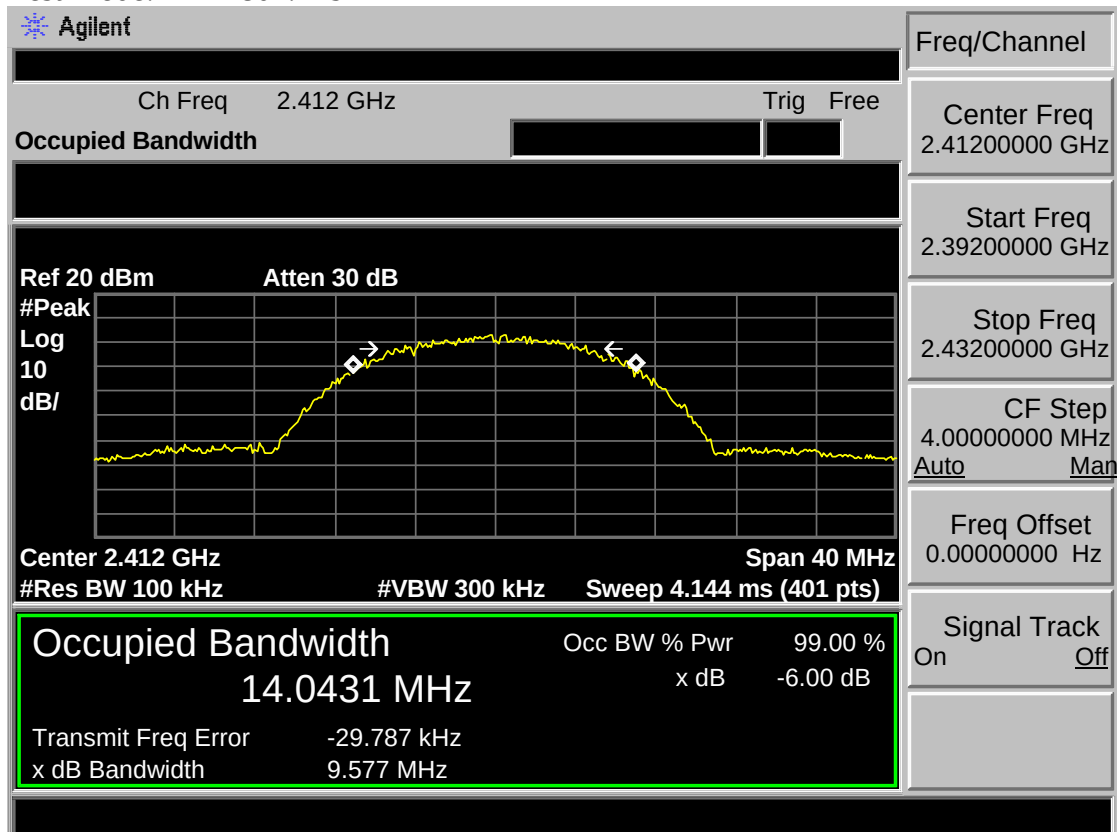


Test Mode: IEEE 802.11b 2437MHz




Test Mode: IEEE 802.11b 2462MHz

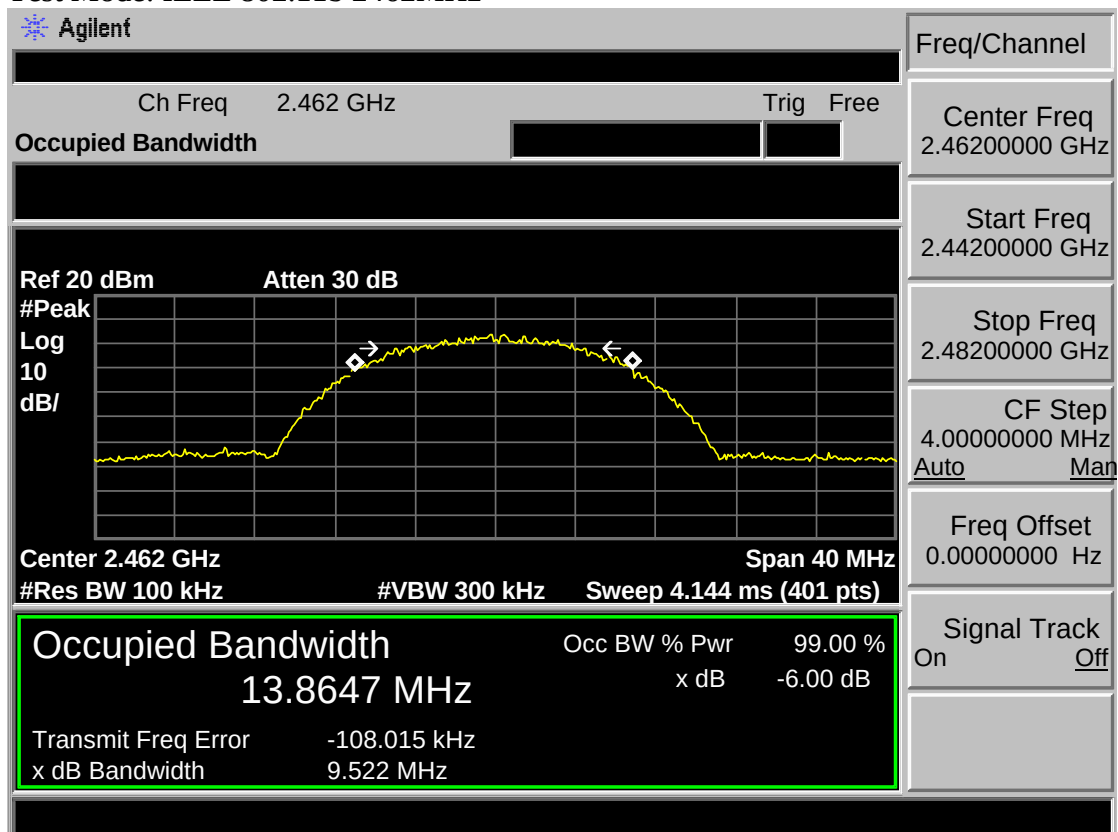


Test Mode: IEEE 802.11g 2412MHz

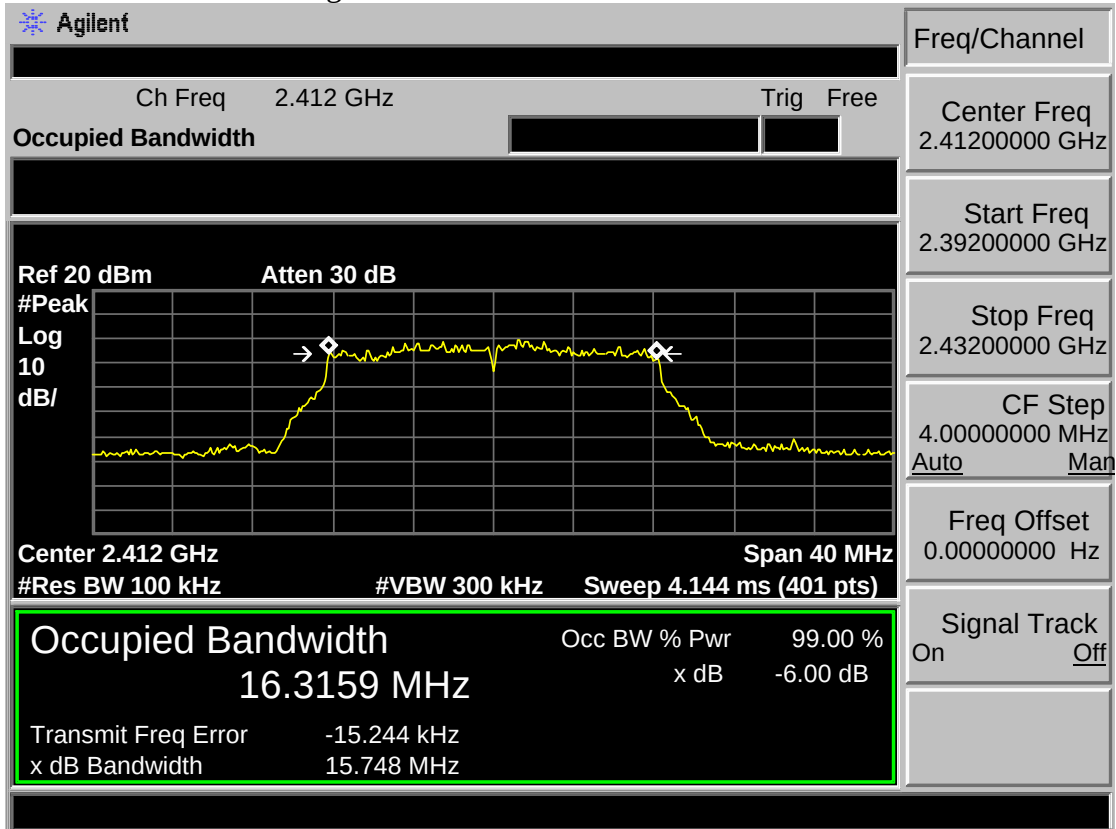


Test Mode: IEEE 802.11g 2437MHz

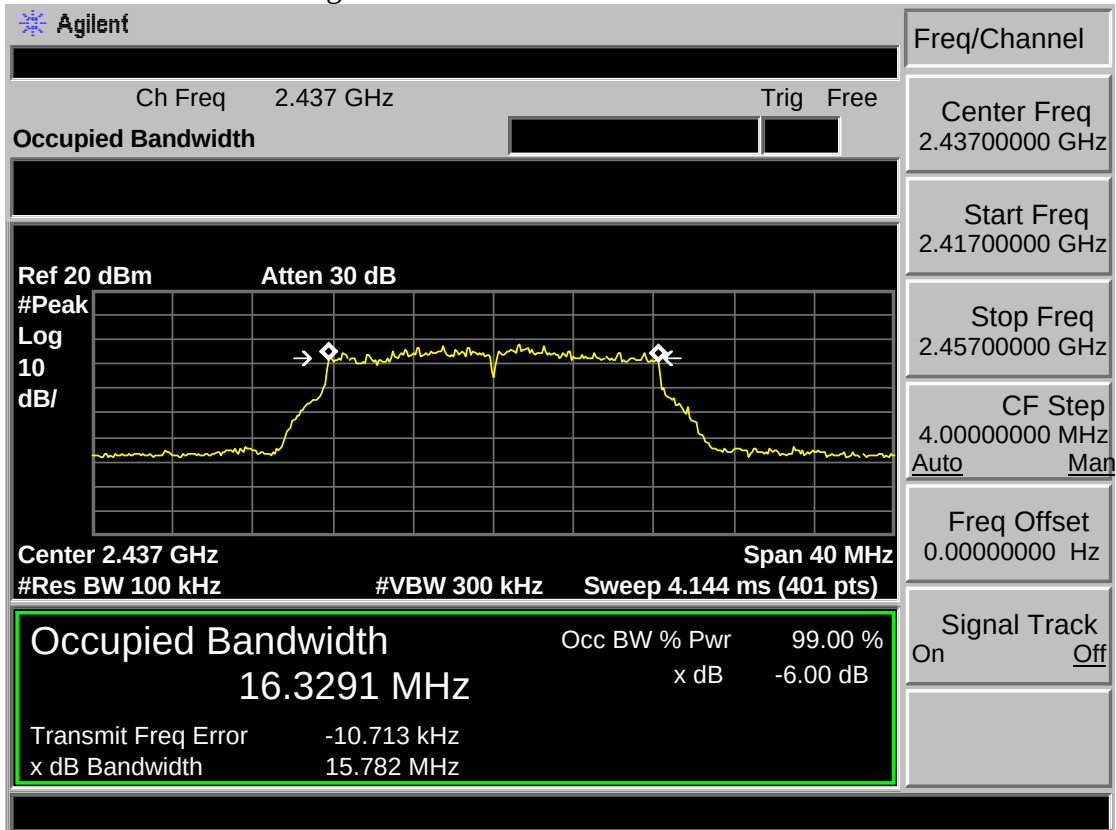


Test Mode: IEEE 802.11g 2462MHz

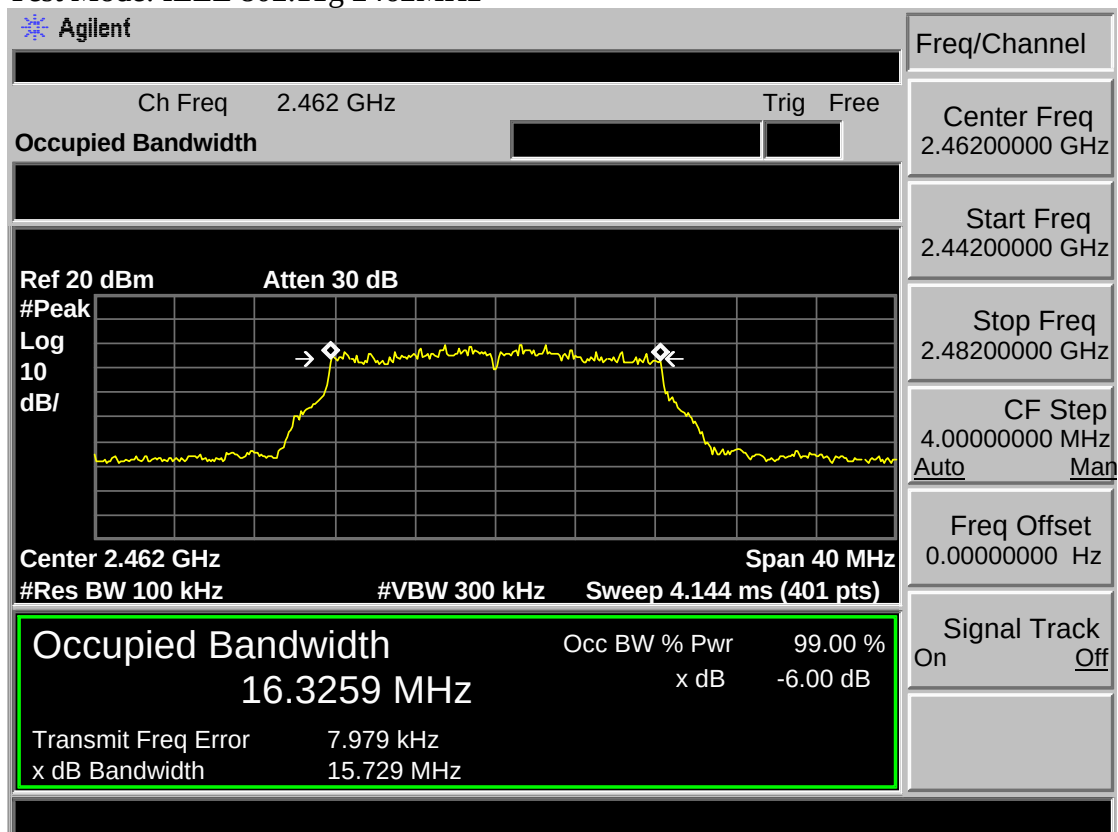


Test Mode: IEEE 802.11n HT20 2412MHz

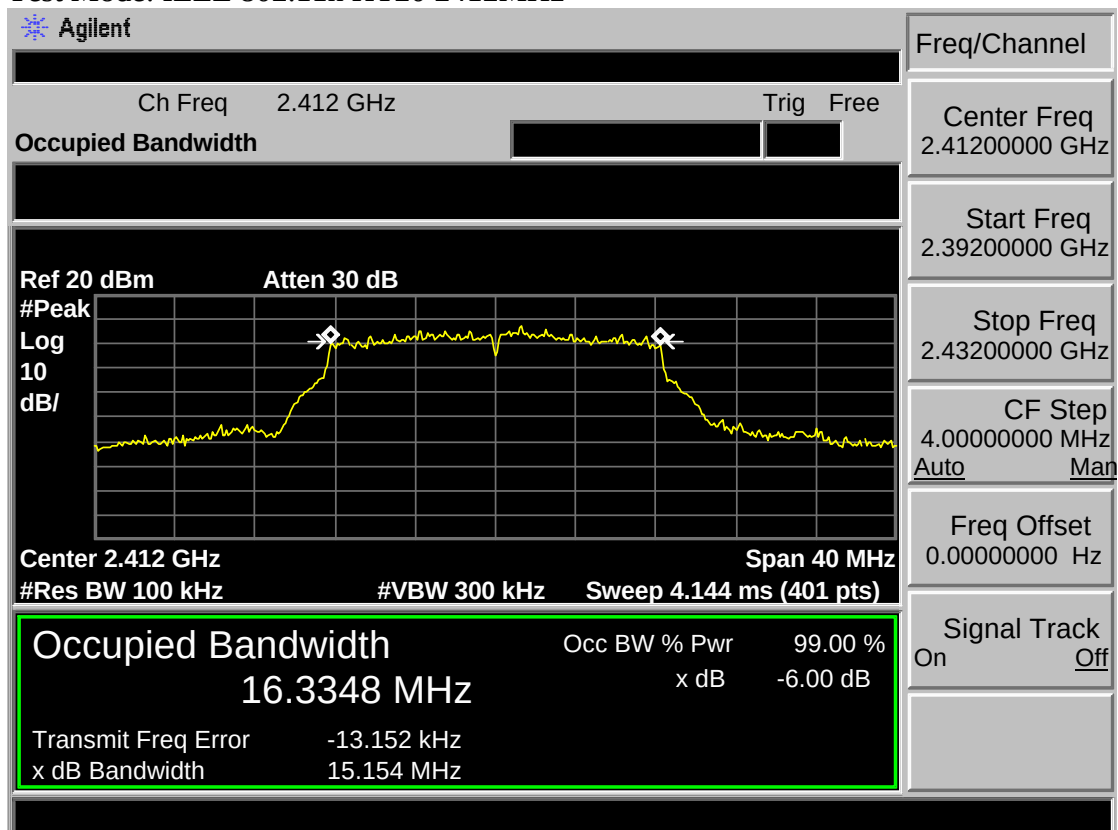


Test Mode: IEEE 802.11n HT20 2437MHz

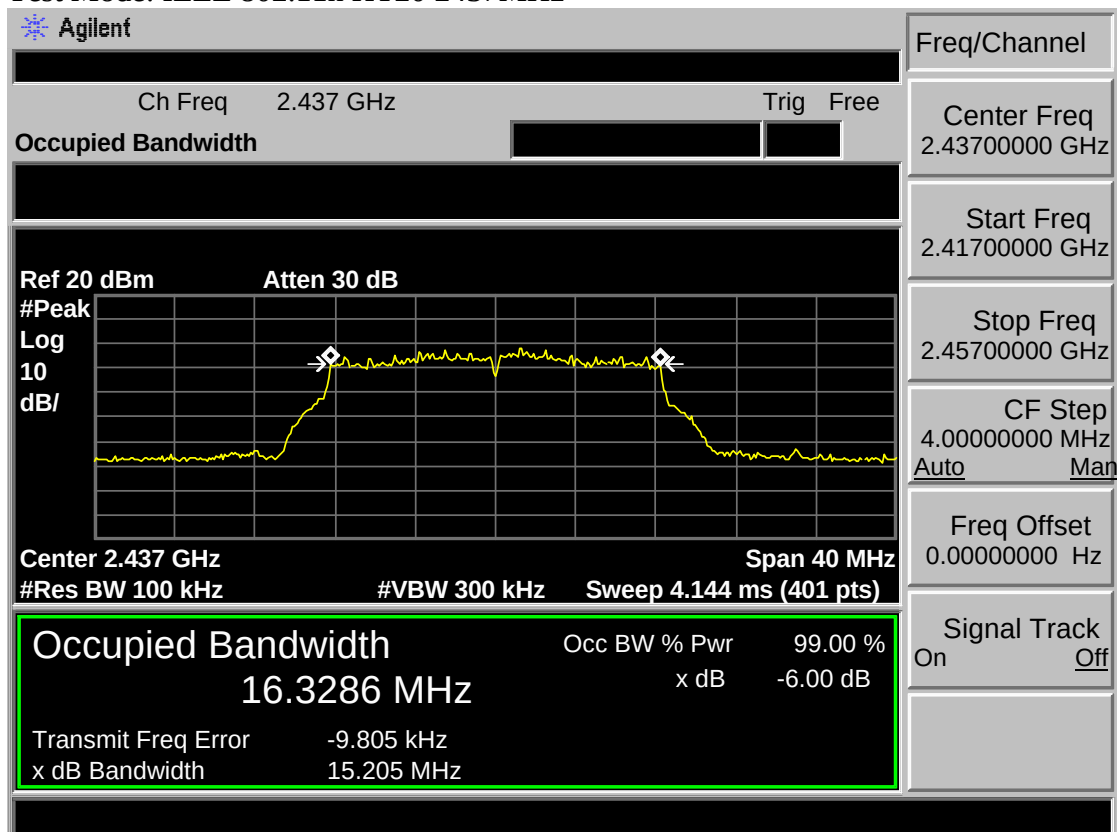


Test Mode: IEEE 802.11n HT20 2462MHz

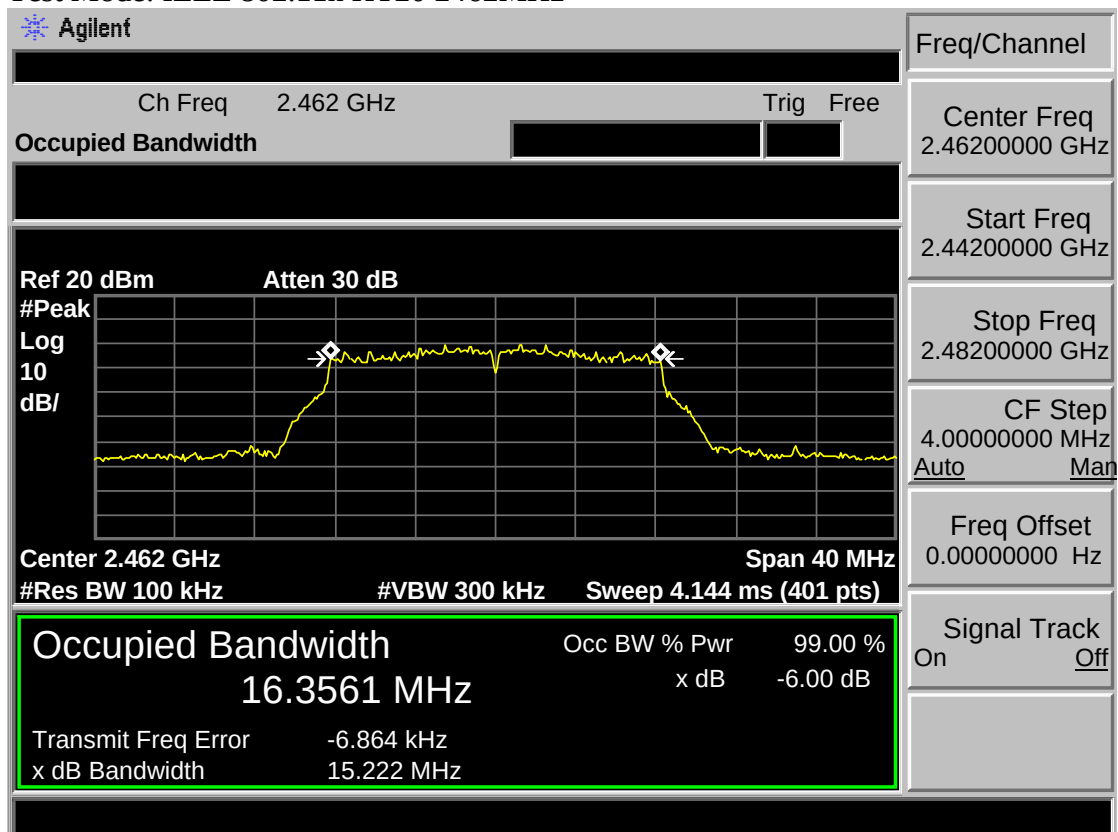


Test Mode: IEEE 802.11n HT40 2422MHz

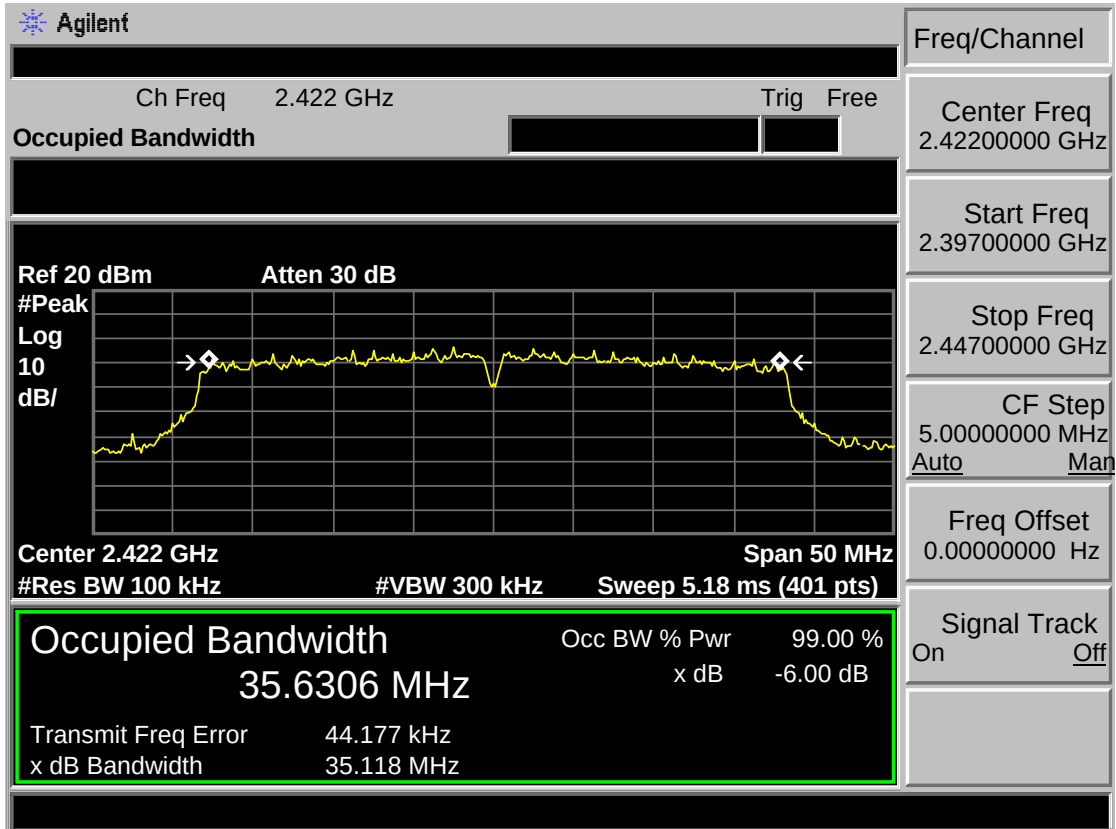

Test Mode: IEEE 802.11n HT40 2437MHz

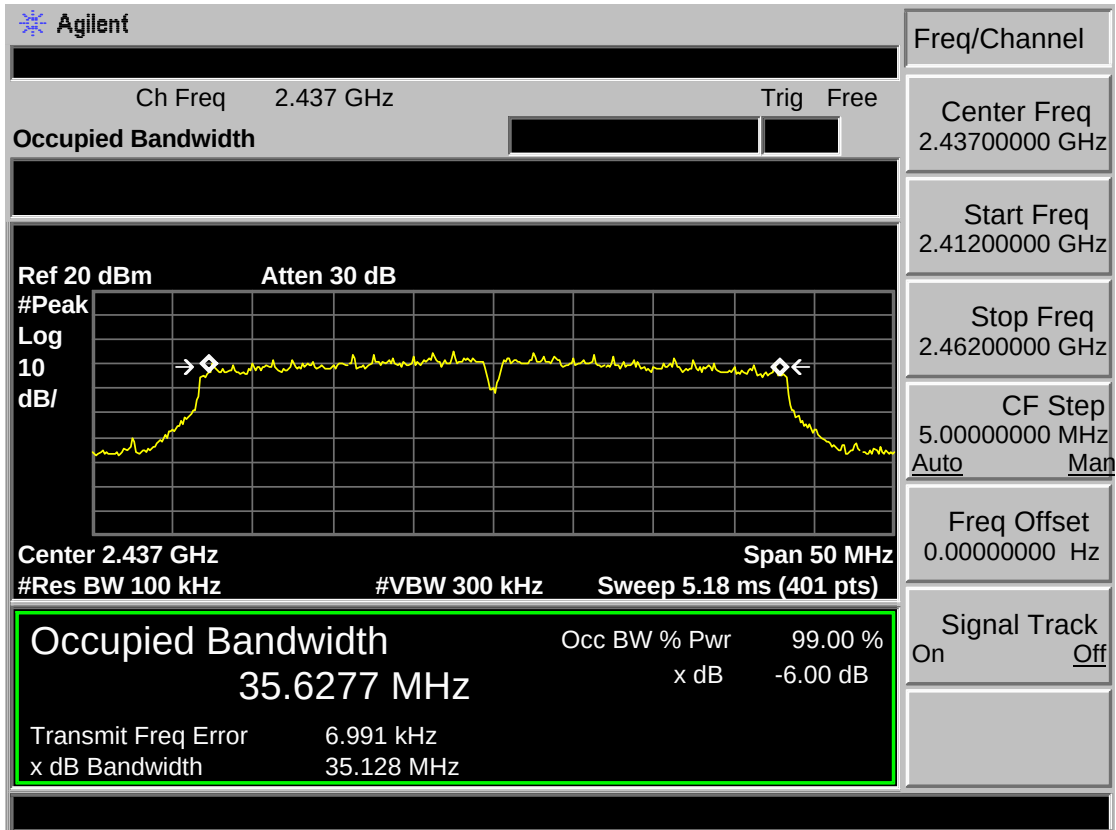


Test Mode: IEEE 802.11n HT40 2452MHz

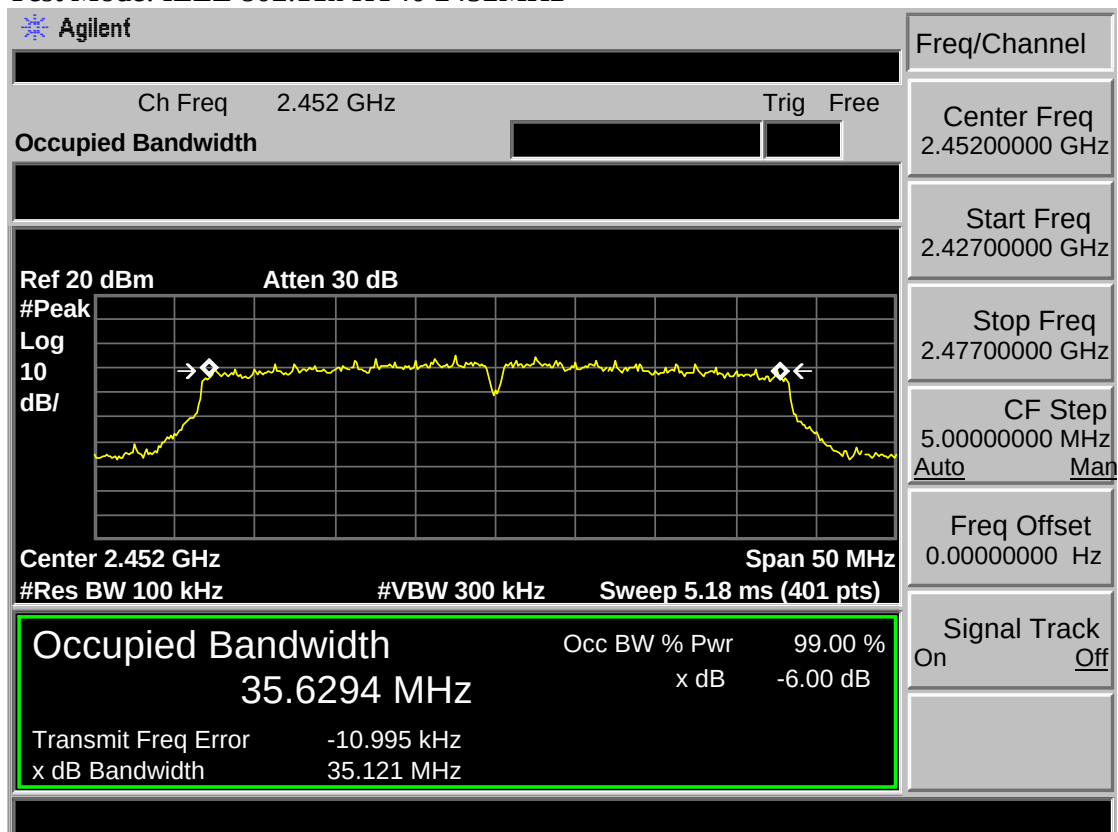

6.6 20dB Test Data

Antenna 0


Test Mode: IEEE 802.11b 2412MHz

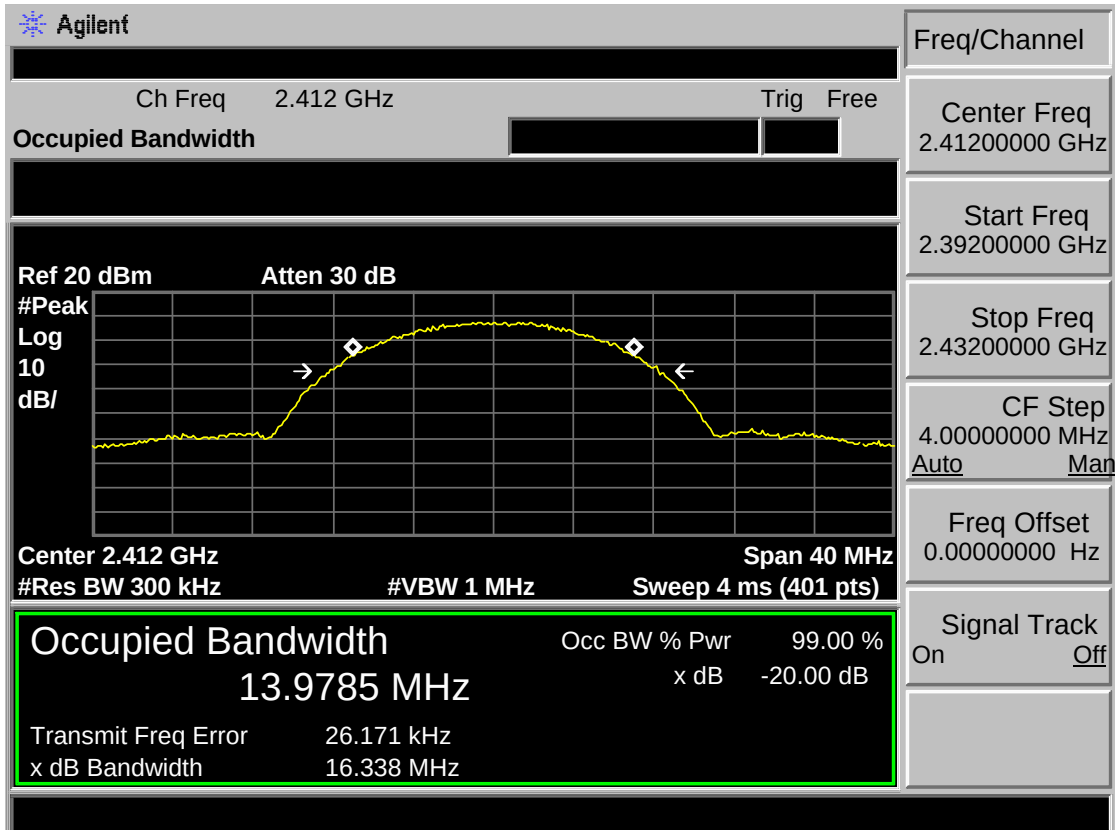


Test Mode: IEEE 802.11b 2437MHz




Test Mode: IEEE 802.11b 2462MHz

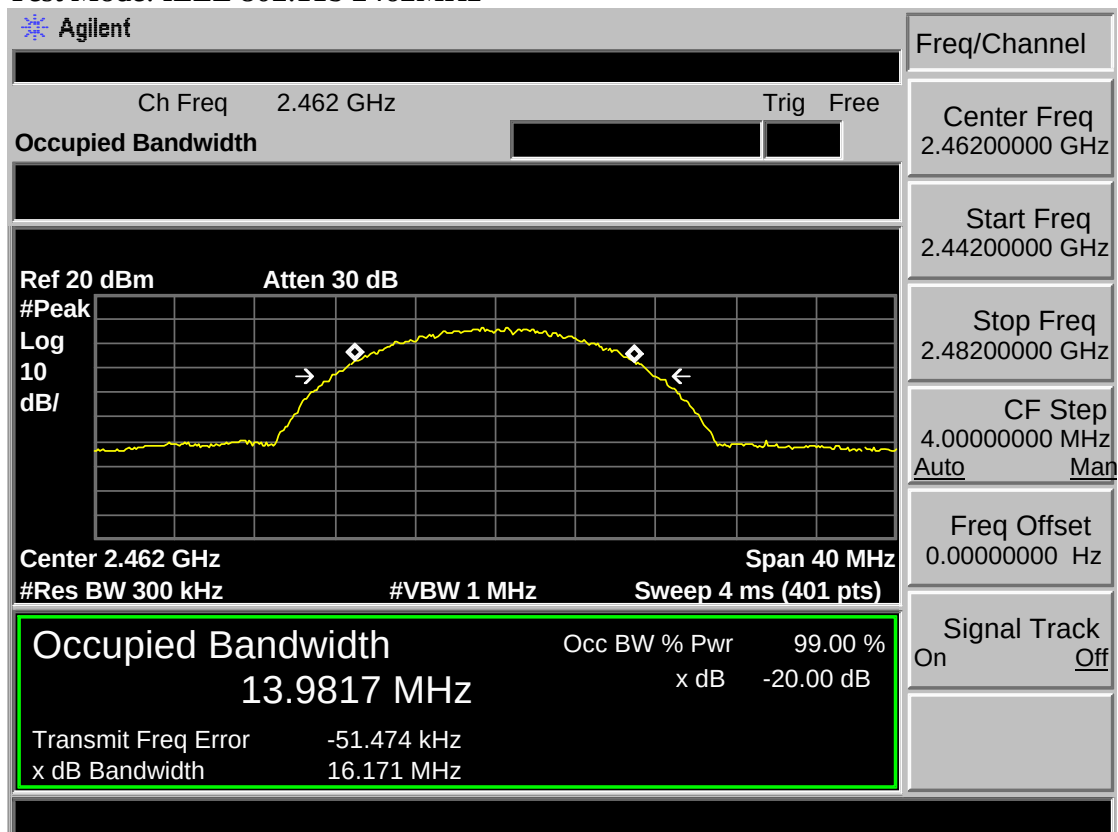


Test Mode: IEEE 802.11g 2412MHz

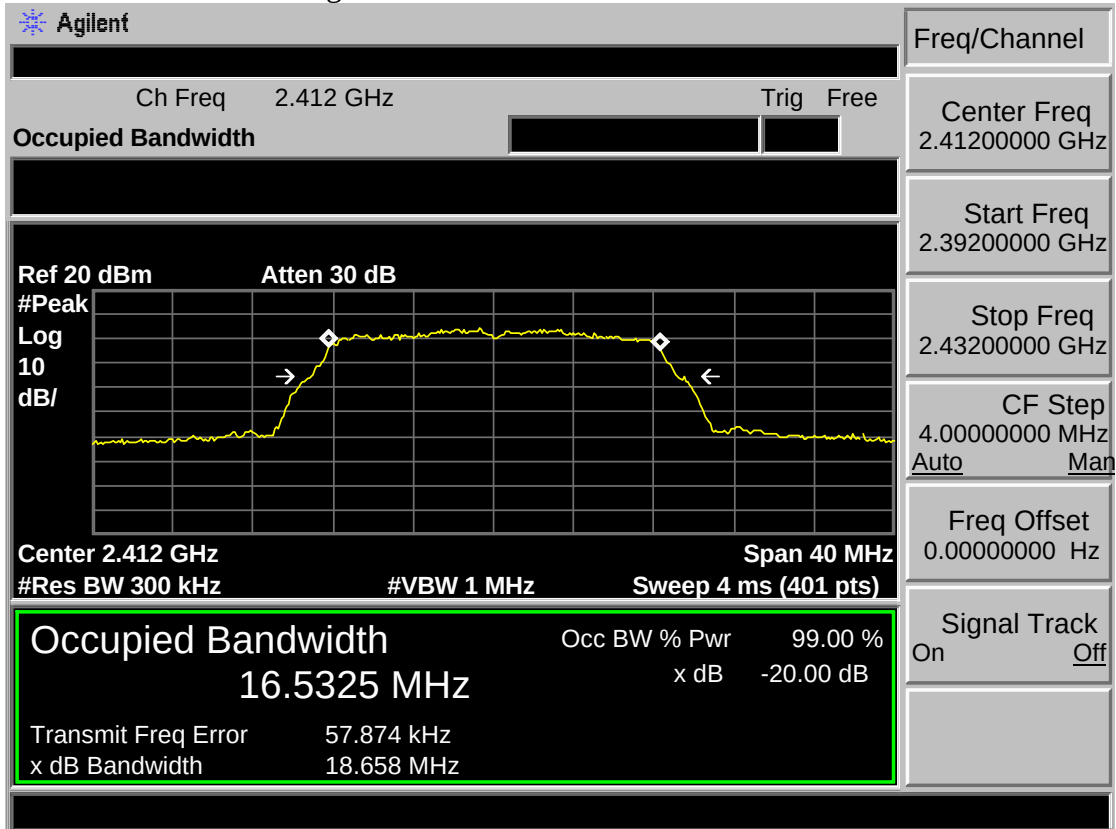


Test Mode: IEEE 802.11g 2437MHz

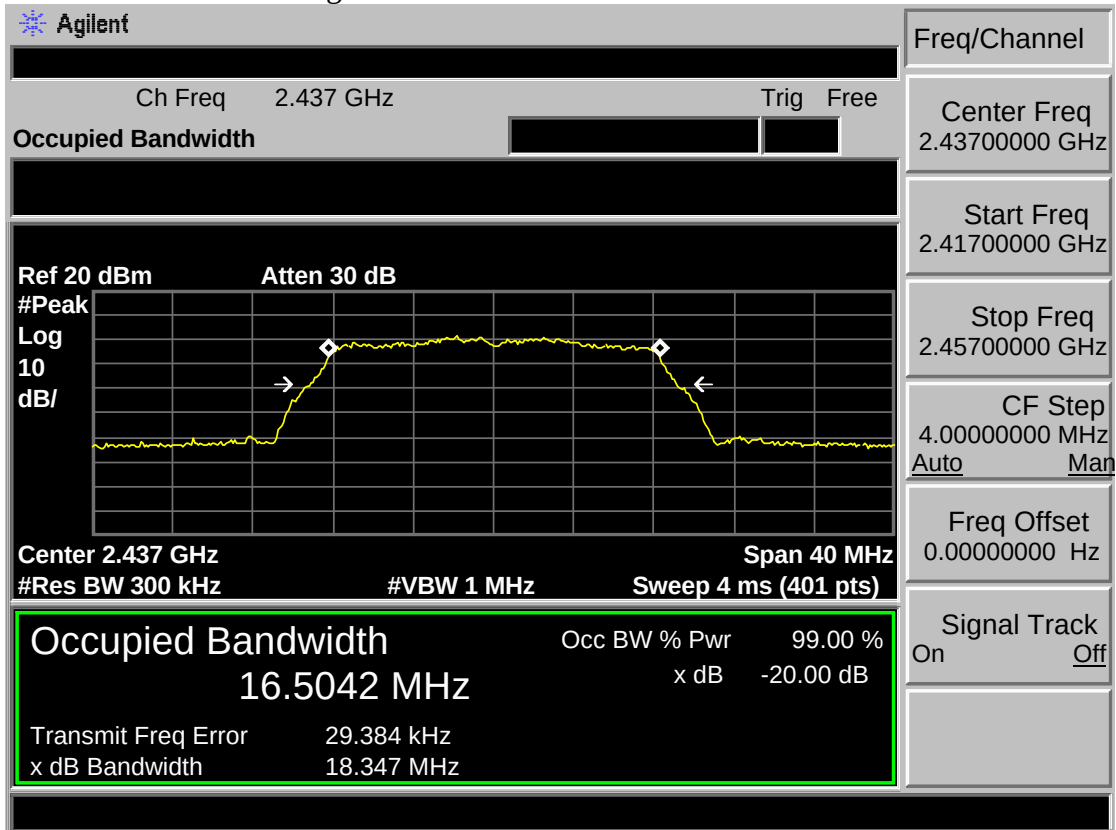


Test Mode: IEEE 802.11g 2462MHz

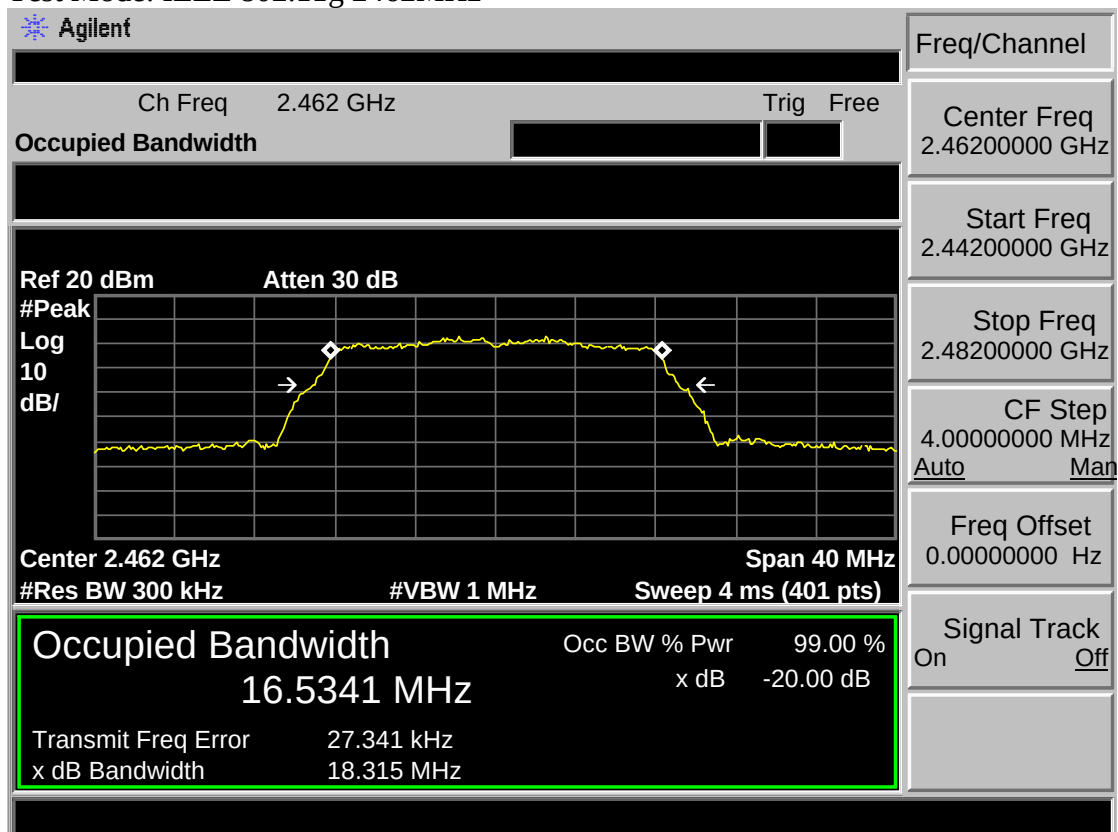


Test Mode: IEEE 802.11n HT20 2412MHz

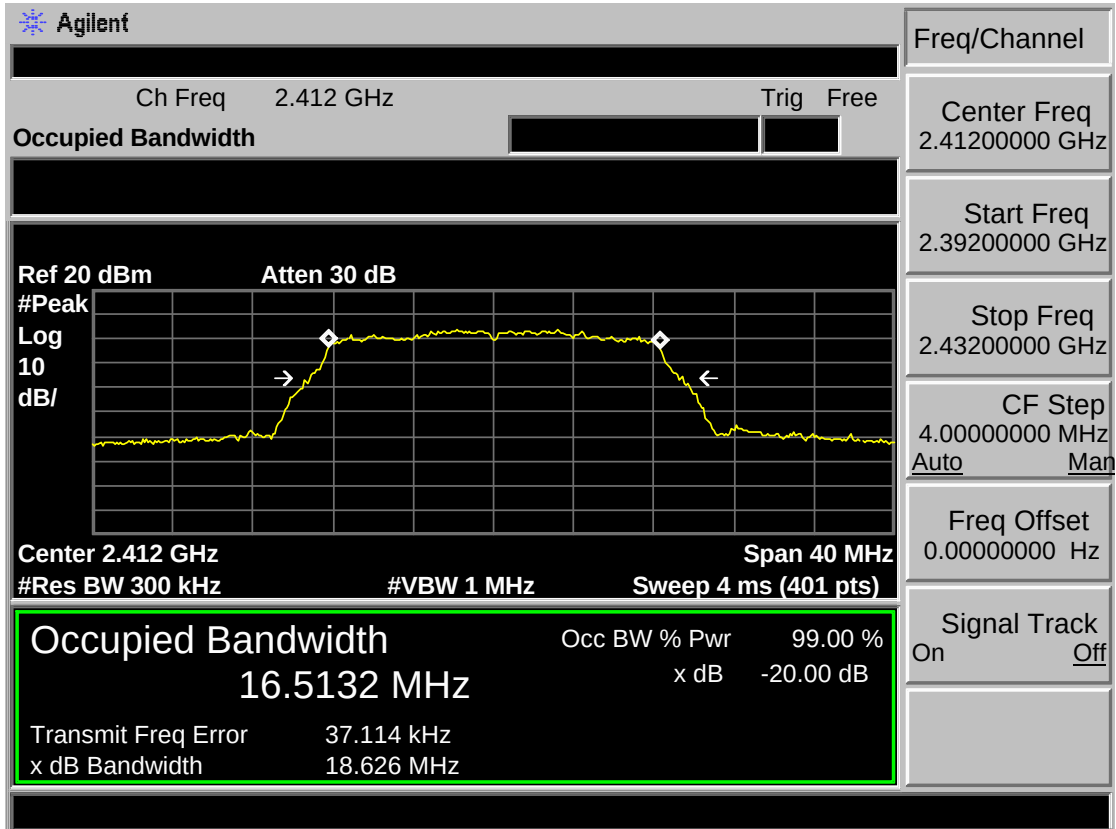

Test Mode: IEEE 802.11n HT20 2437MHz

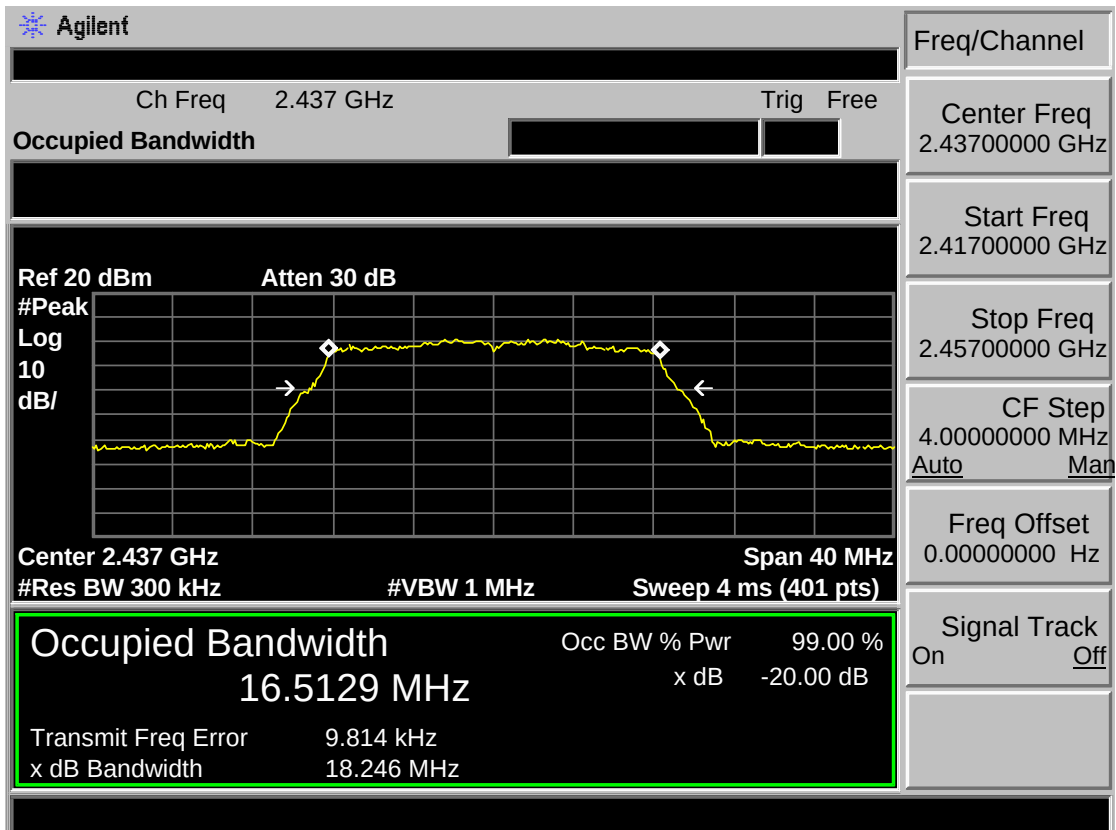


Test Mode: IEEE 802.11n HT20 2462MHz

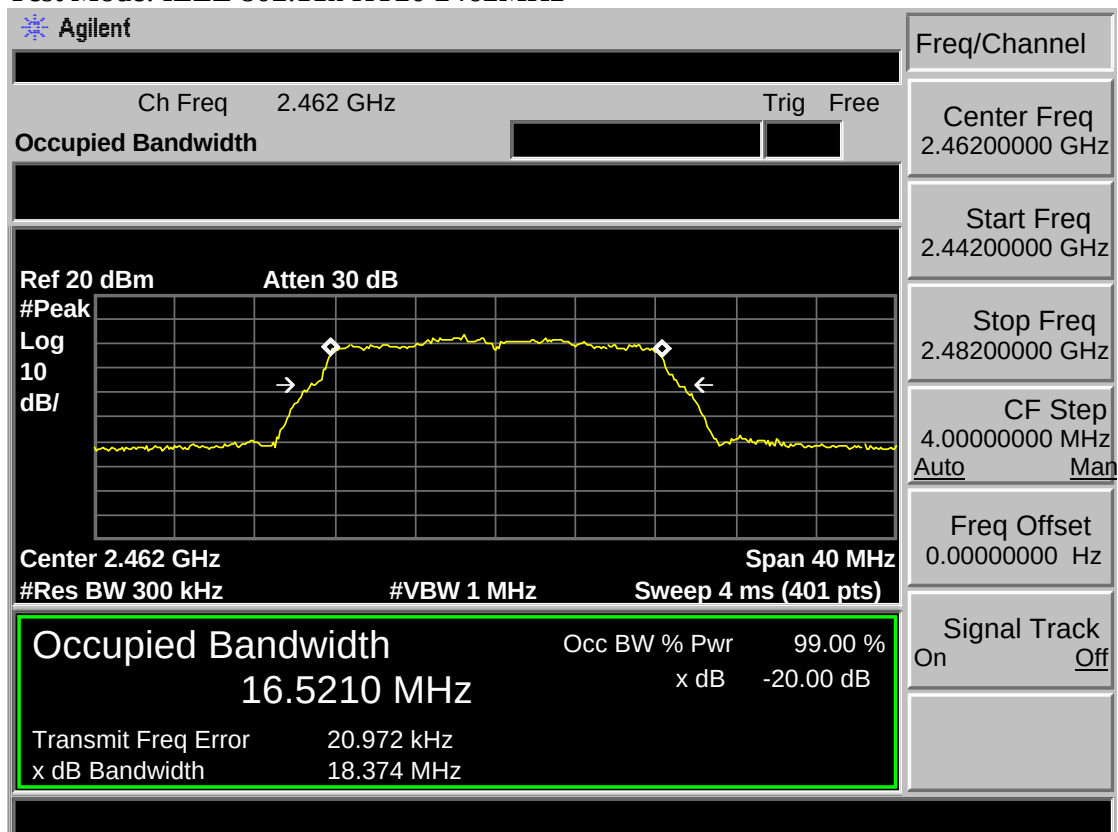


Test Mode: IEEE 802.11n HT40 2422MHz



Test Mode: IEEE 802.11n HT40 2437MHz

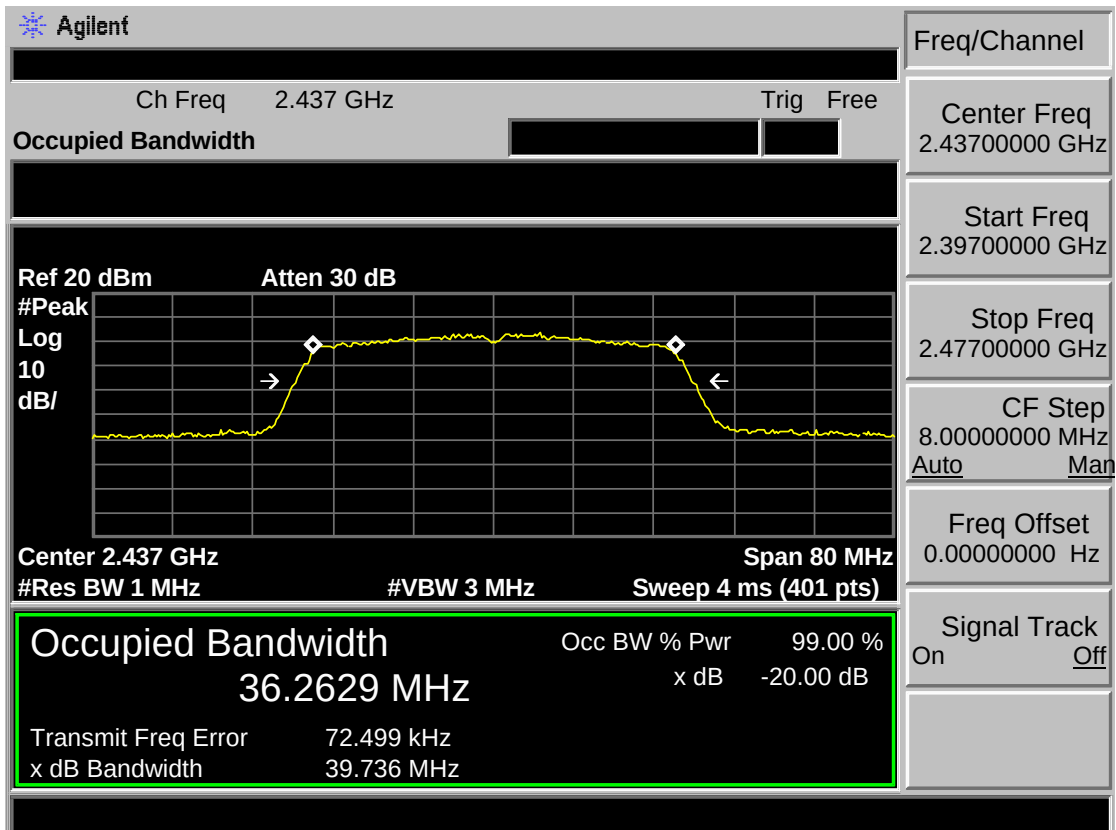


Test Mode: IEEE 802.11n HT40 2452MHz

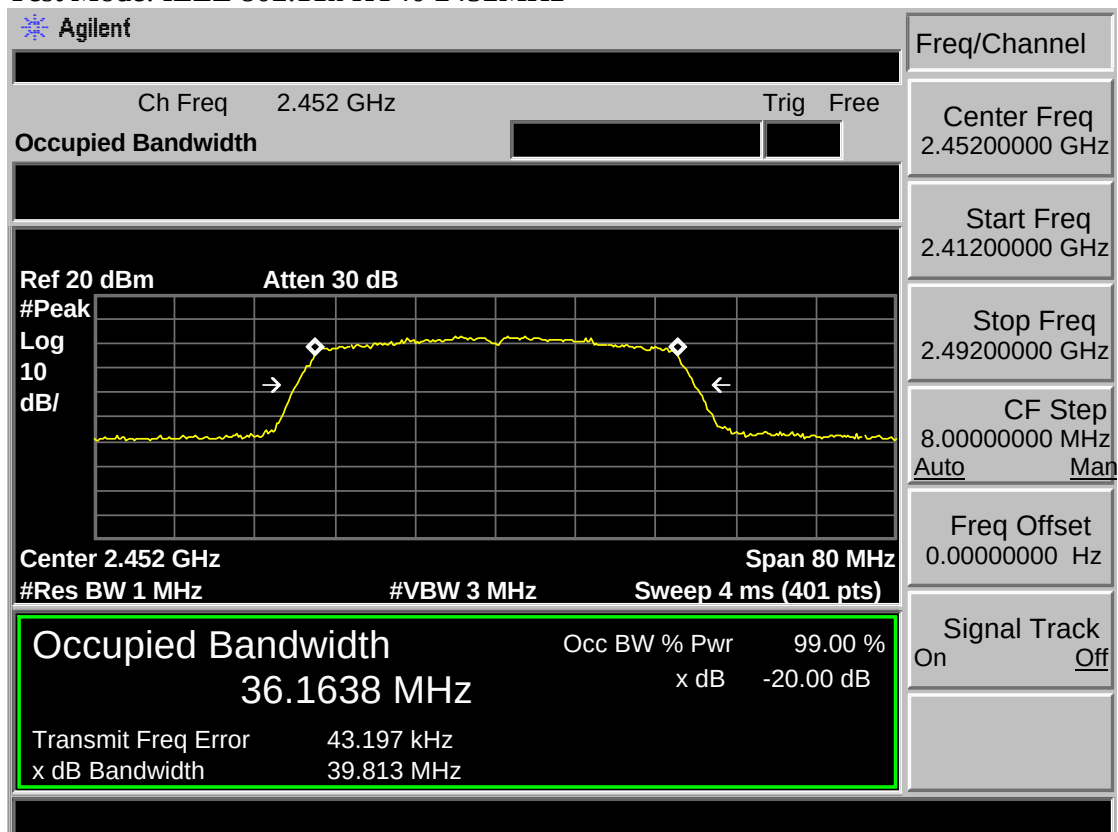


Antenna 1


Test Mode: IEEE 802.11b 2412MHz

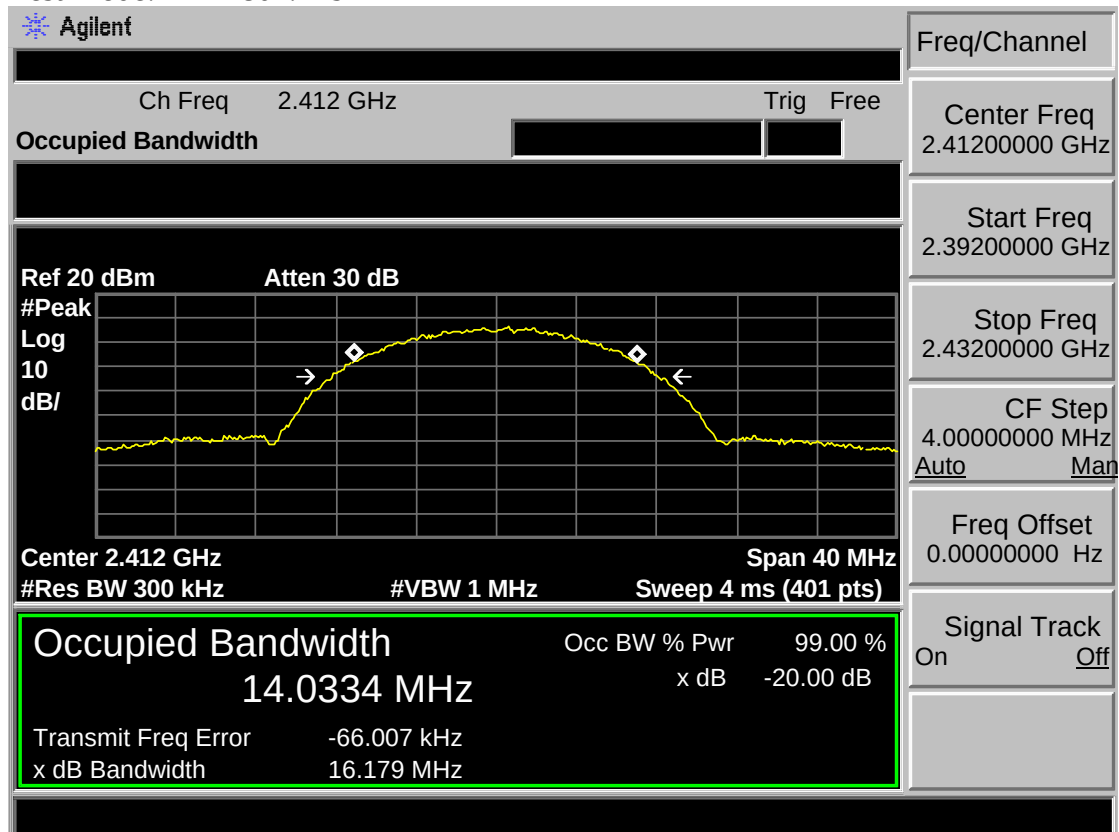


Test Mode: IEEE 802.11b 2437MHz

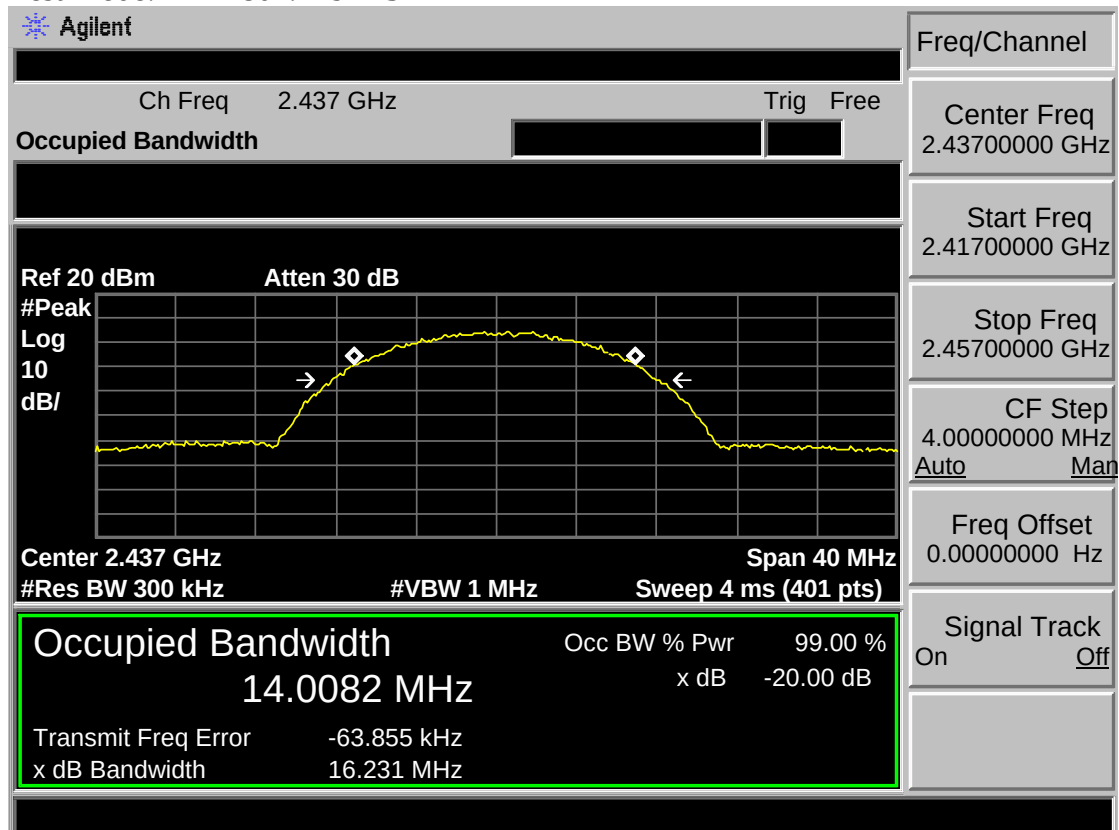


Test Mode: IEEE 802.11b 2462MHz

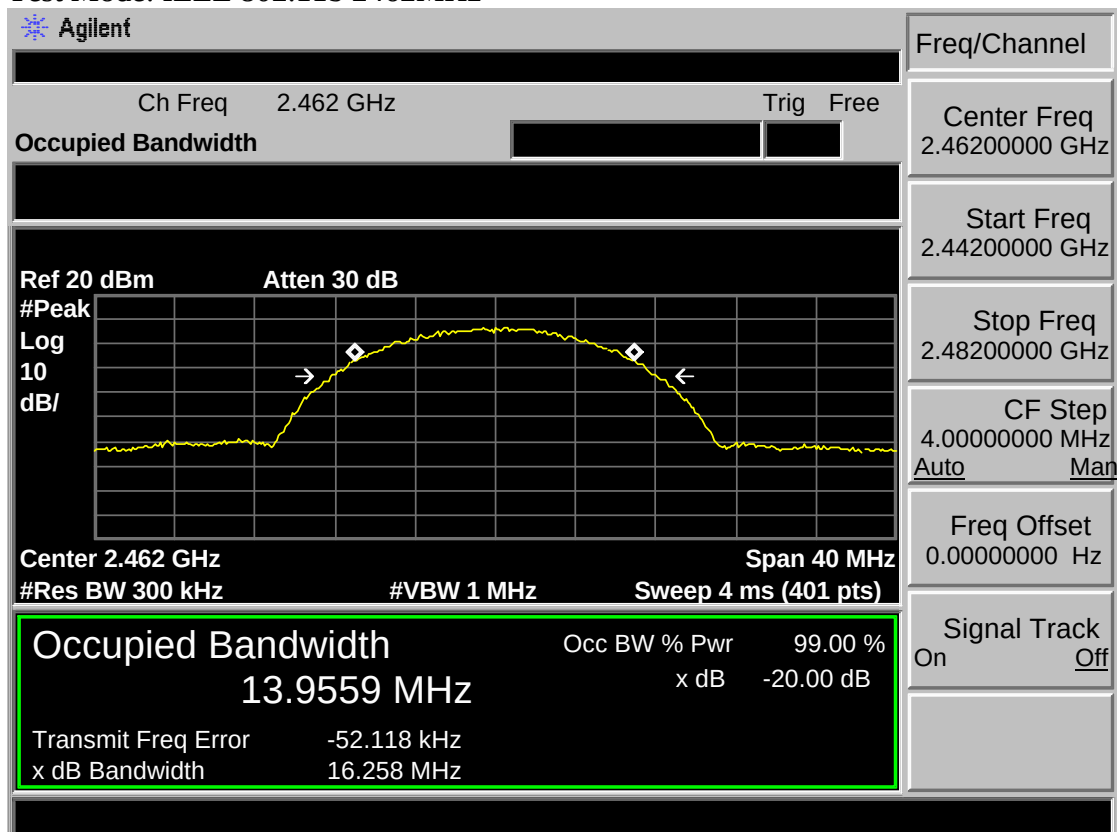


Test Mode: IEEE 802.11g 2412MHz

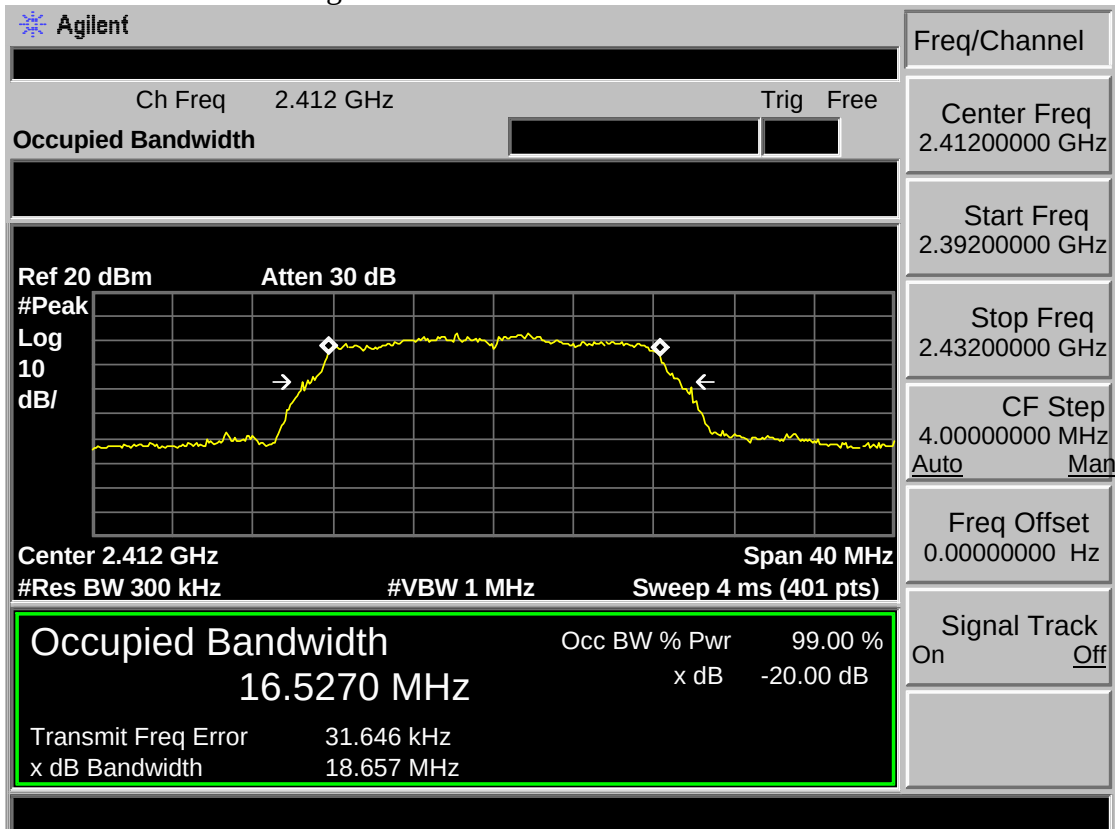


Test Mode: IEEE 802.11g 2437MHz

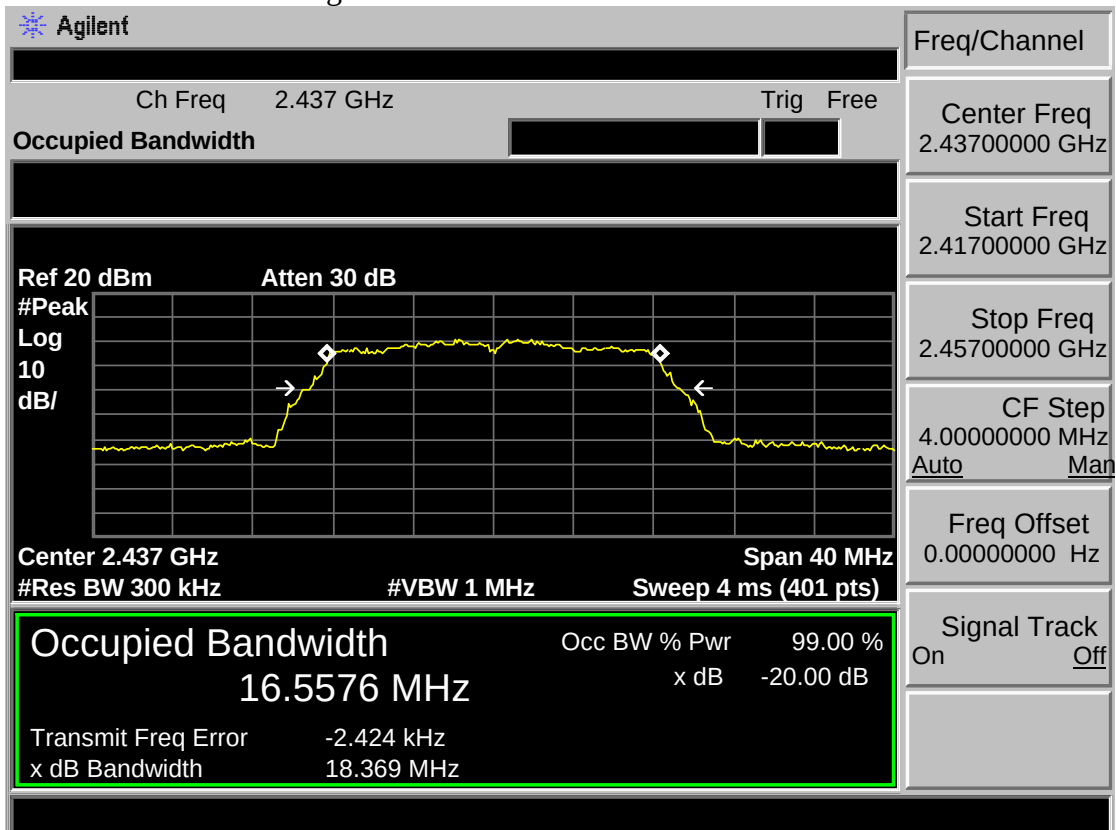


Test Mode: IEEE 802.11g 2462MHz

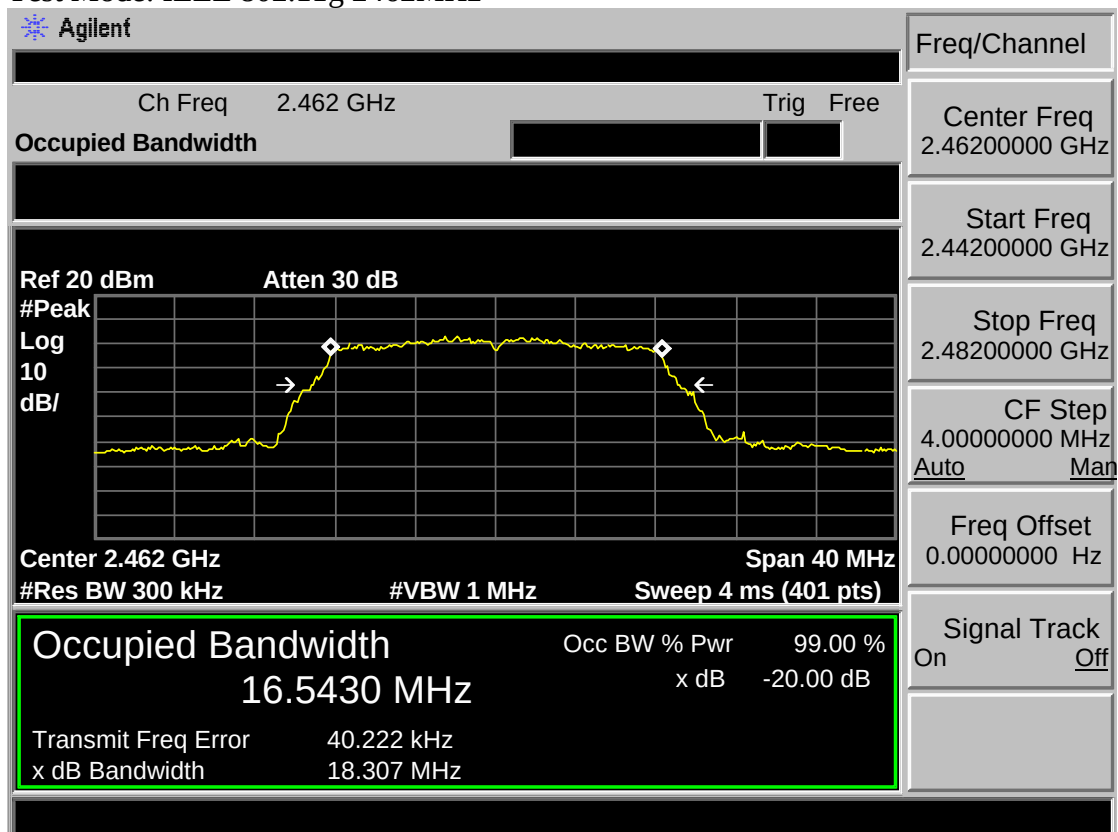


Test Mode: IEEE 802.11n HT20 2412MHz

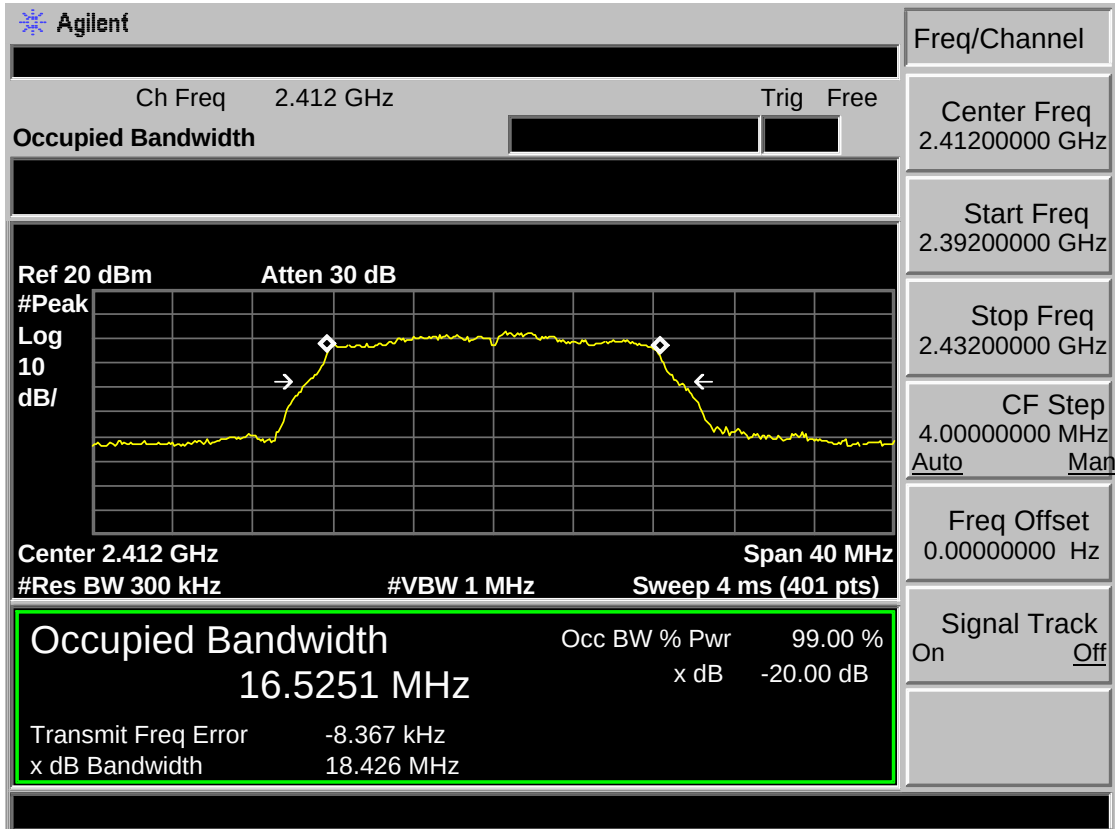


Test Mode: IEEE 802.11n HT20 2437MHz

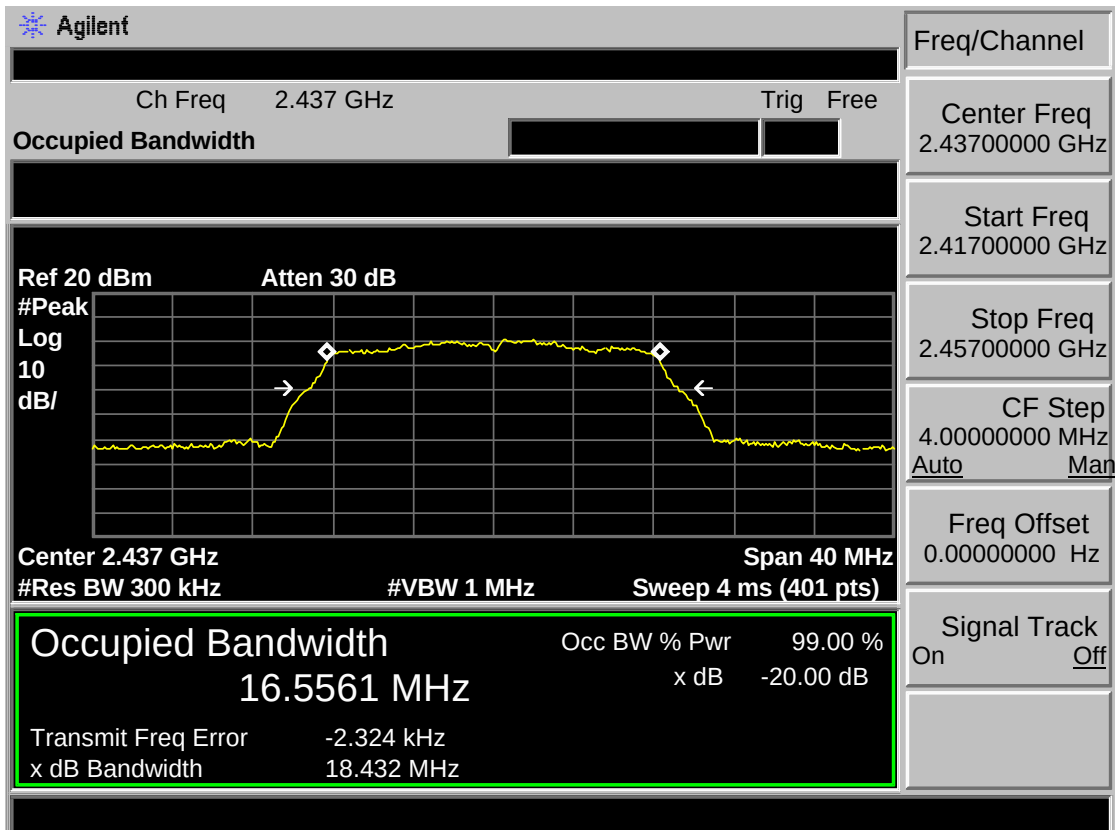


Test Mode: IEEE 802.11n HT20 2462MHz

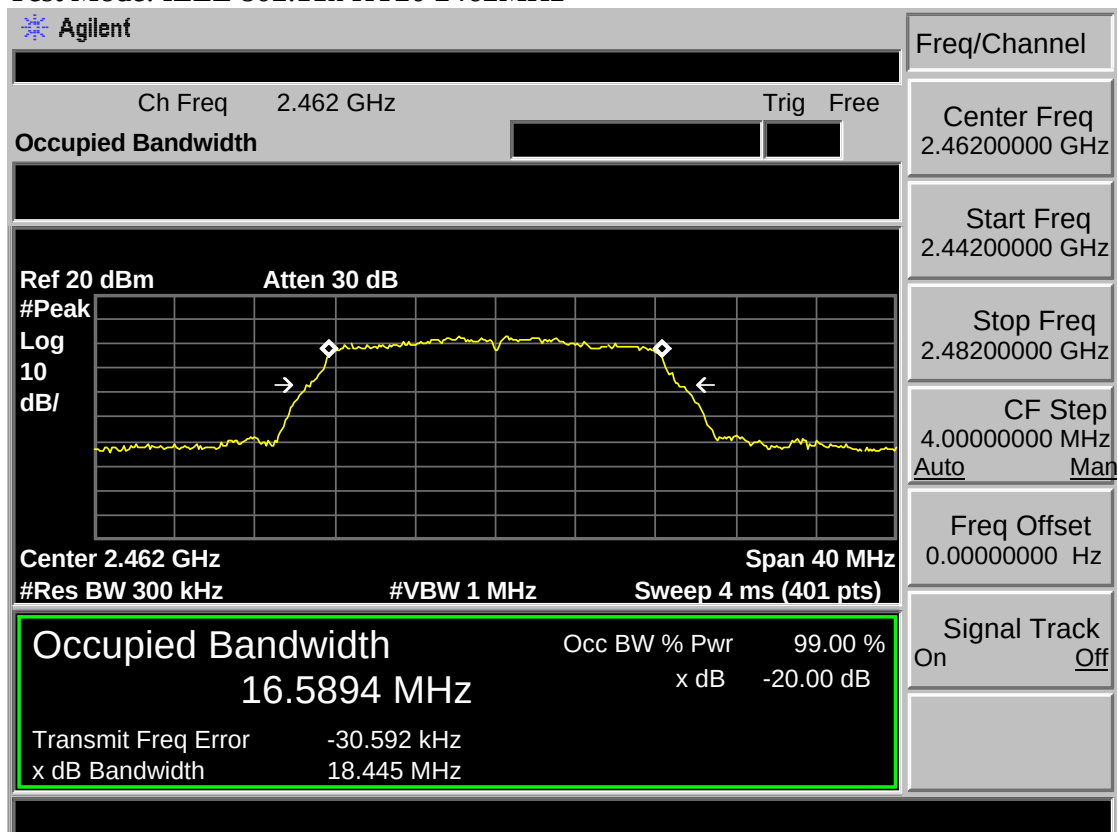


Test Mode: IEEE 802.11n HT40 2422MHz

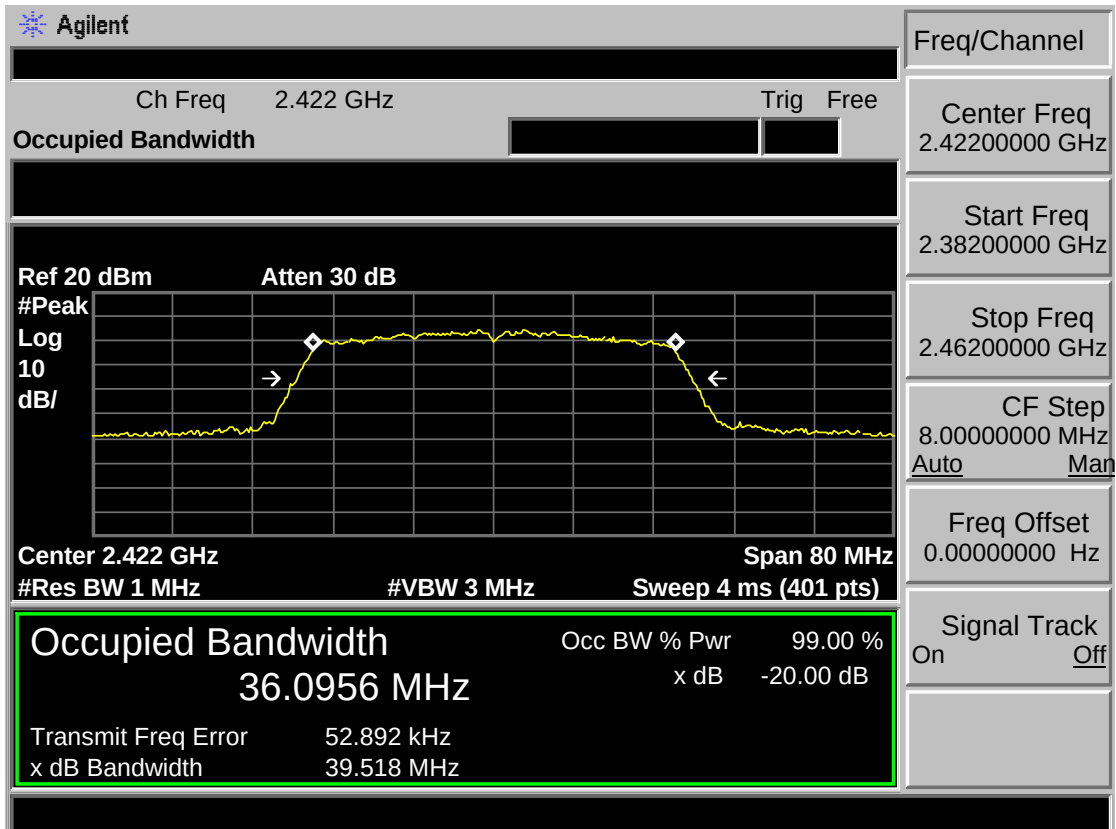

Test Mode: IEEE 802.11n HT40 2437MHz

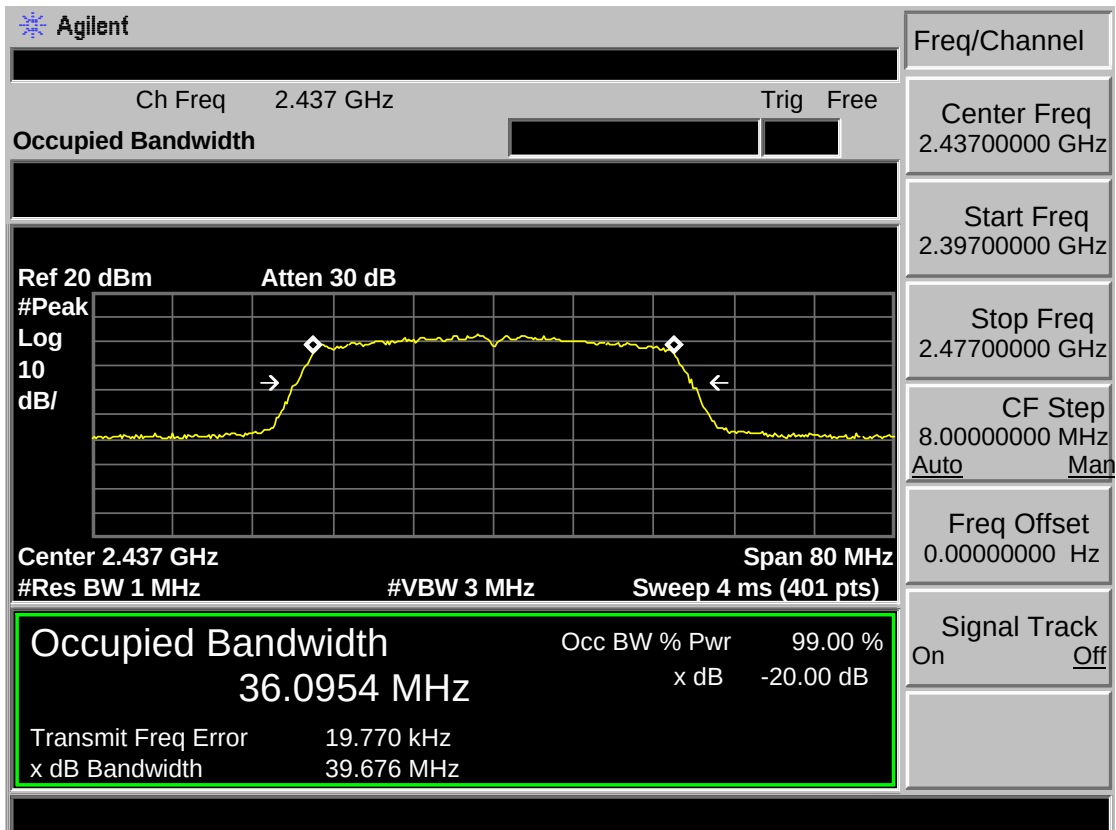

Test Mode: IEEE 802.11n HT40 2452MHz

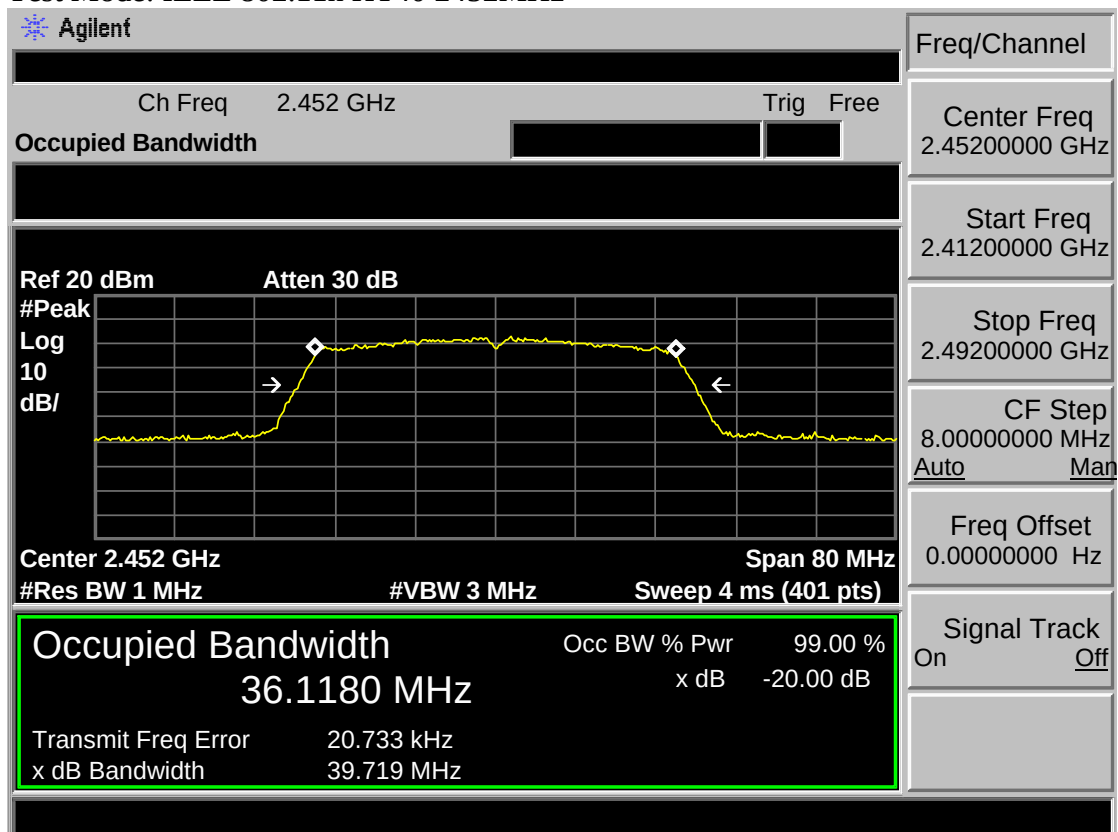

7 OUTPUT POWER TEST

7.1 Limit

For systems using digital modulation in the 2400—2483.5MHz, The Peak out put Power shall not exceed 1W(30dBm)

7.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1)Set span to at least 1.5 times the OBW.
 - (2)Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
 - (3)Set VBW $\geq 3 \times$ RBW.
 - (4)Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
 - (4)Sweep time = auto.
 - (5)Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
 - (6)If transmit duty cycle $< 98\%$, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle $\geq 98\%$, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
 - (7)Trace average at least 100 traces in power averaging (i.e., RMS) mode.
 - (8)Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.


7.3 Test Result

EUT: LED TV					
M/N: SC-32HK700N					
Test date: 2017-06-28		Test site: RF Site			Tested by: Viking
Pass					
Test Mode	CH	Conducted Power (dBm)			Limit (dBm)
		Ant 0	Ant 1	Total	
IEEE 802.11 b	CH1	12.20	11.42	/	30
	CH6	10.09	9.96	/	30
	CH11	11.76	11.79	/	30
IEEE 802.11 g	CH1	9.02	7.22	/	30
	CH6	6.35	5.52	/	30
	CH11	7.74	7.60	/	30
IEEE 802.11 n HT 20	CH1	8.94	7.05	11.10	30
	CH6	6.07	5.60	8.90	30
	CH11	7.53	7.35	10.50	30
IEEE 802.11 n HT 40	CH3	7.08	5.21	9.30	30
	CH6	3.74	3.50	6.60	30
	CH9	4.11	3.93	7.00	30
Conclusion : PASS					


7.4 Test Data

Antenna 0


Test Mode: IEEE 802.11b 2412MHz

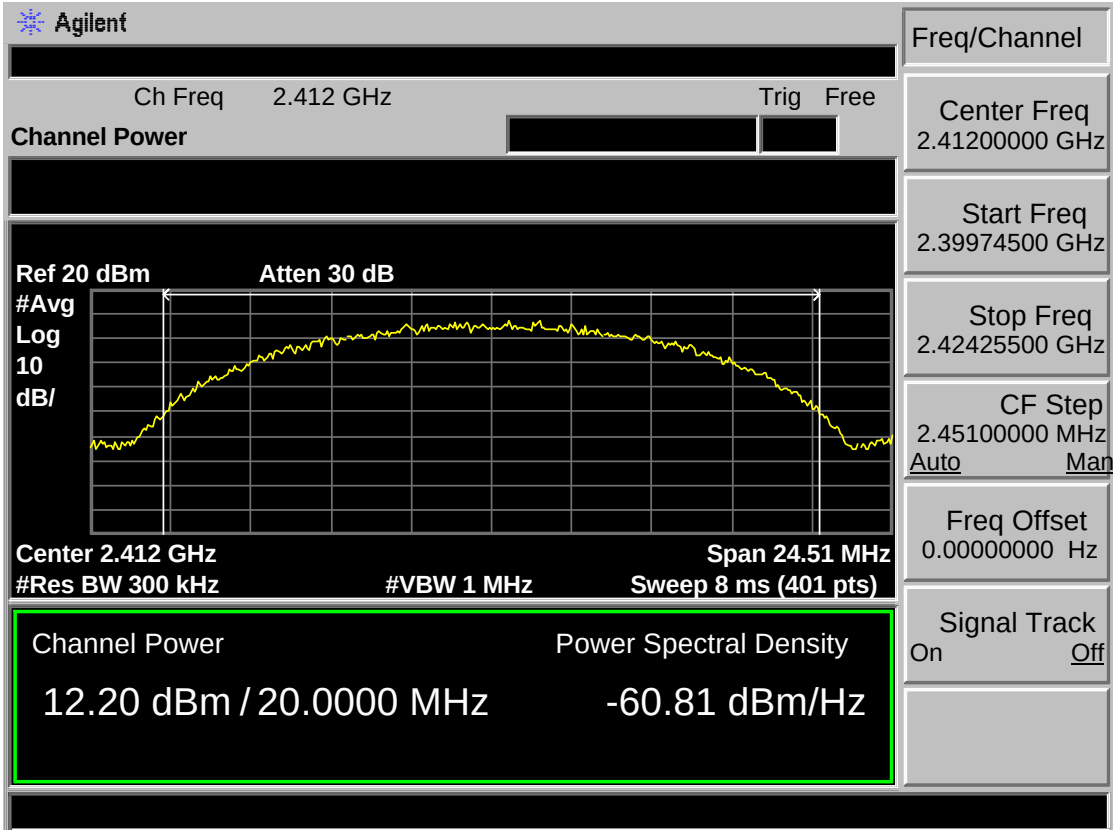


Test Mode: IEEE 802.11b 2437MHz

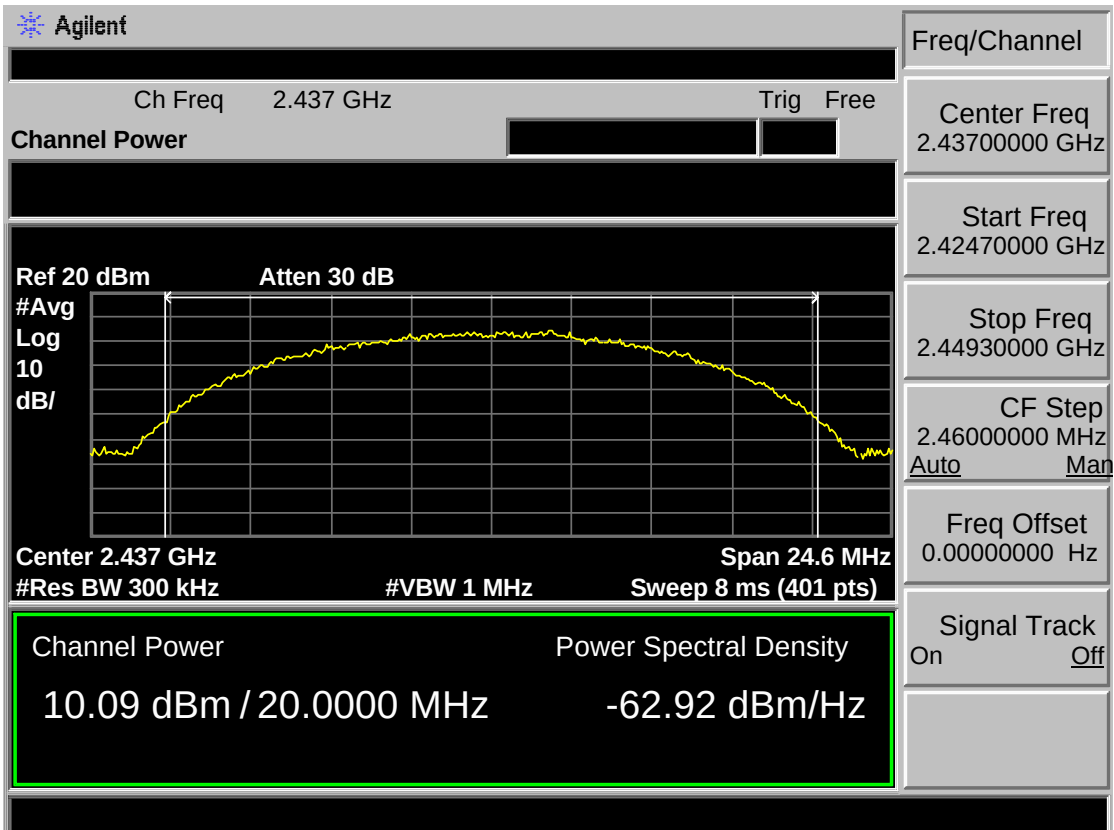


Test Mode: IEEE 802.11b 2462MHz

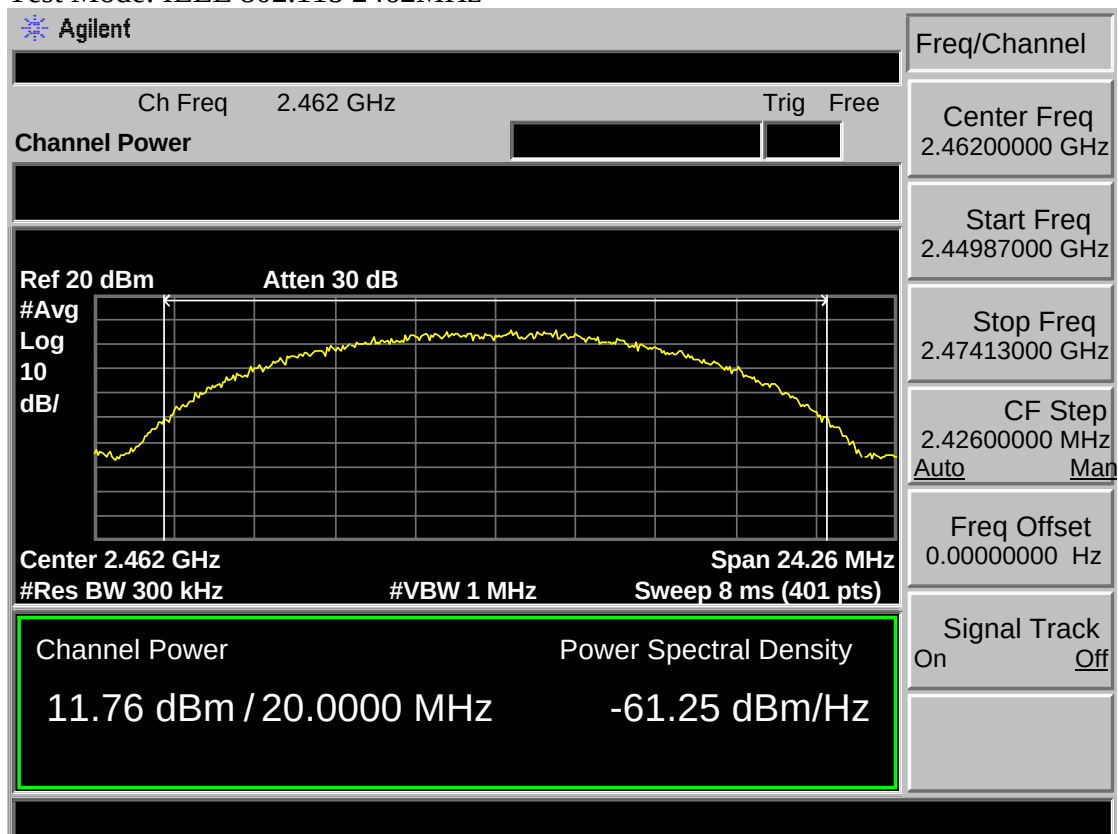


Test Mode: IEEE 802.11g 2412MHz

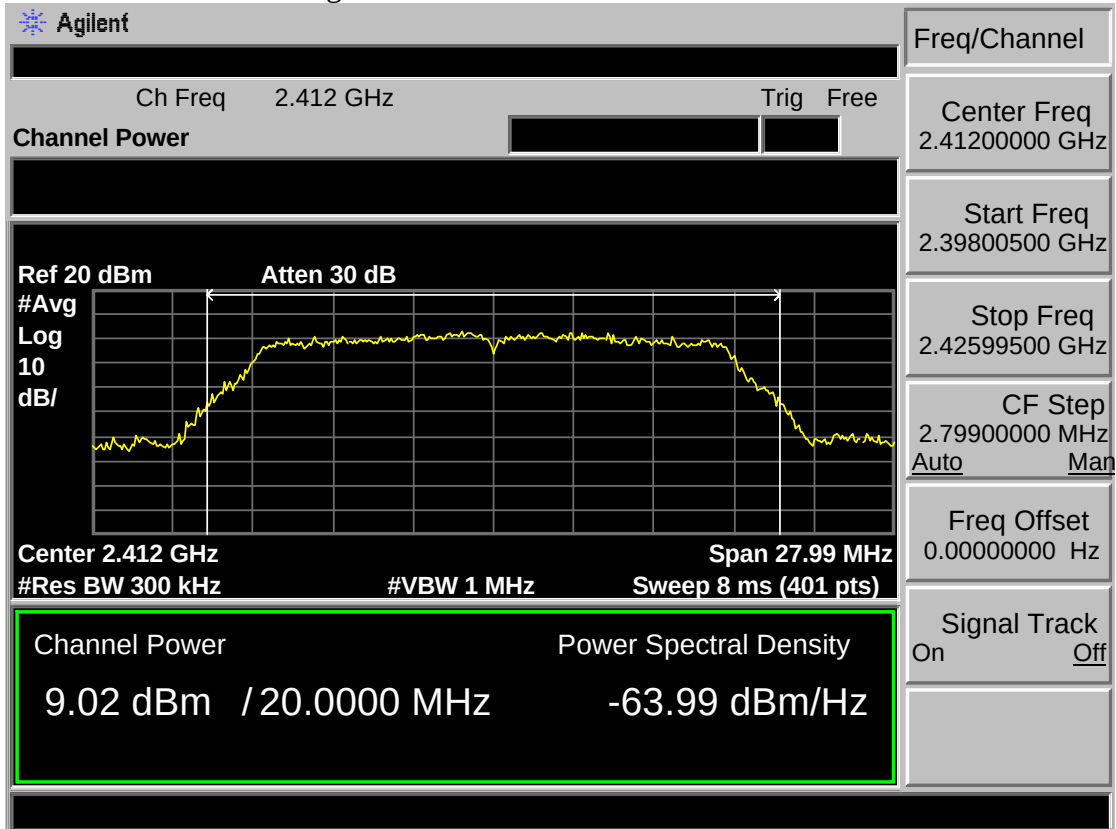


Test Mode: IEEE 802.11g 2437MHz

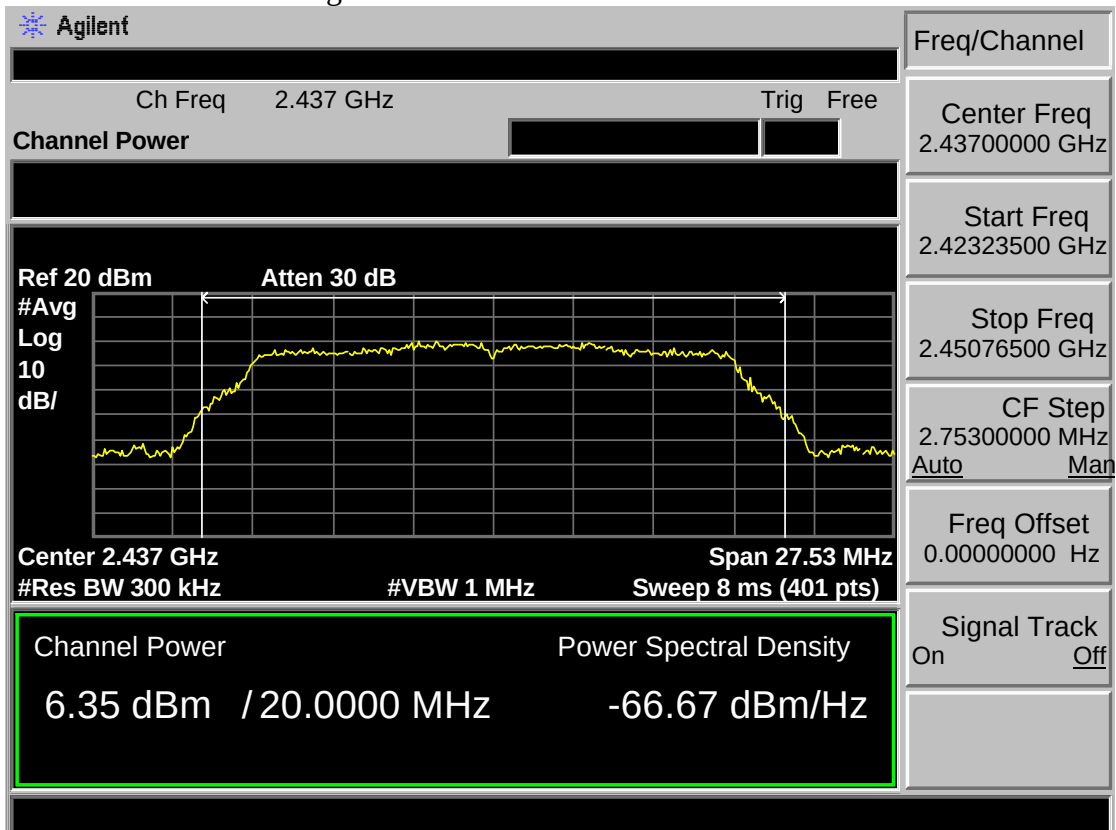


Test Mode: IEEE 802.11g 2462MHz

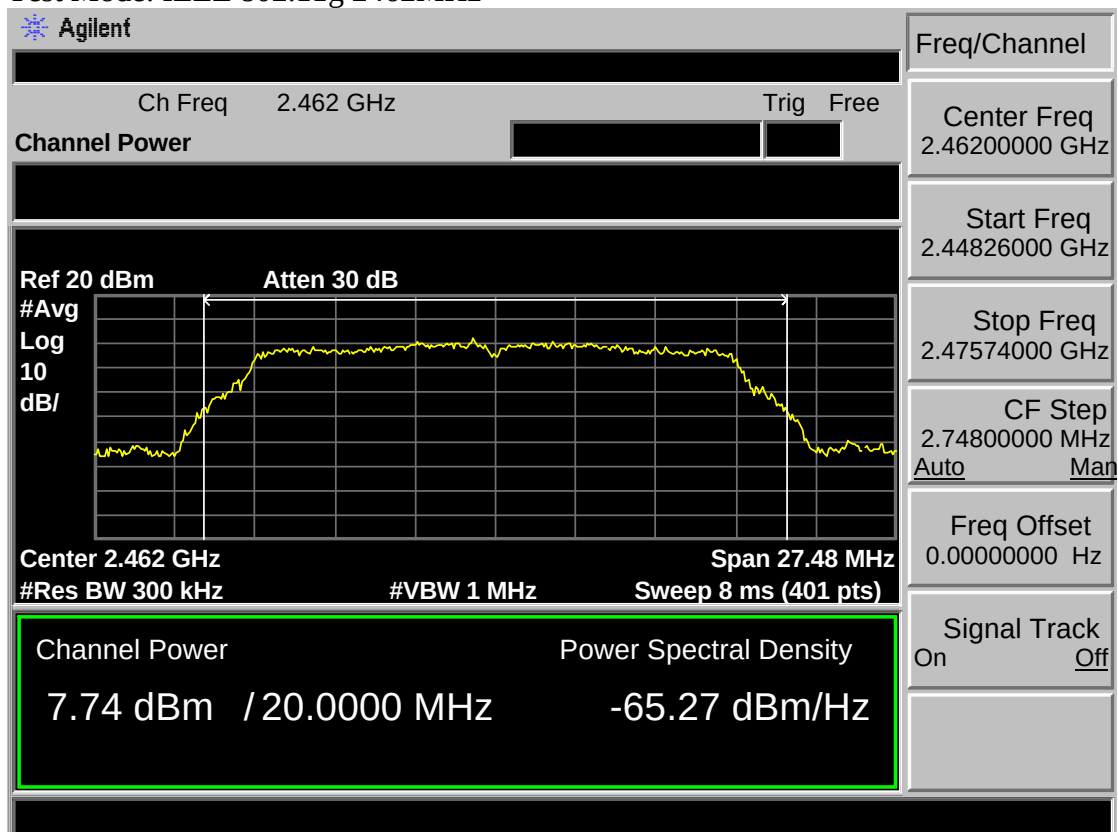


Test Mode: IEEE 802.11n HT20 2412MHz

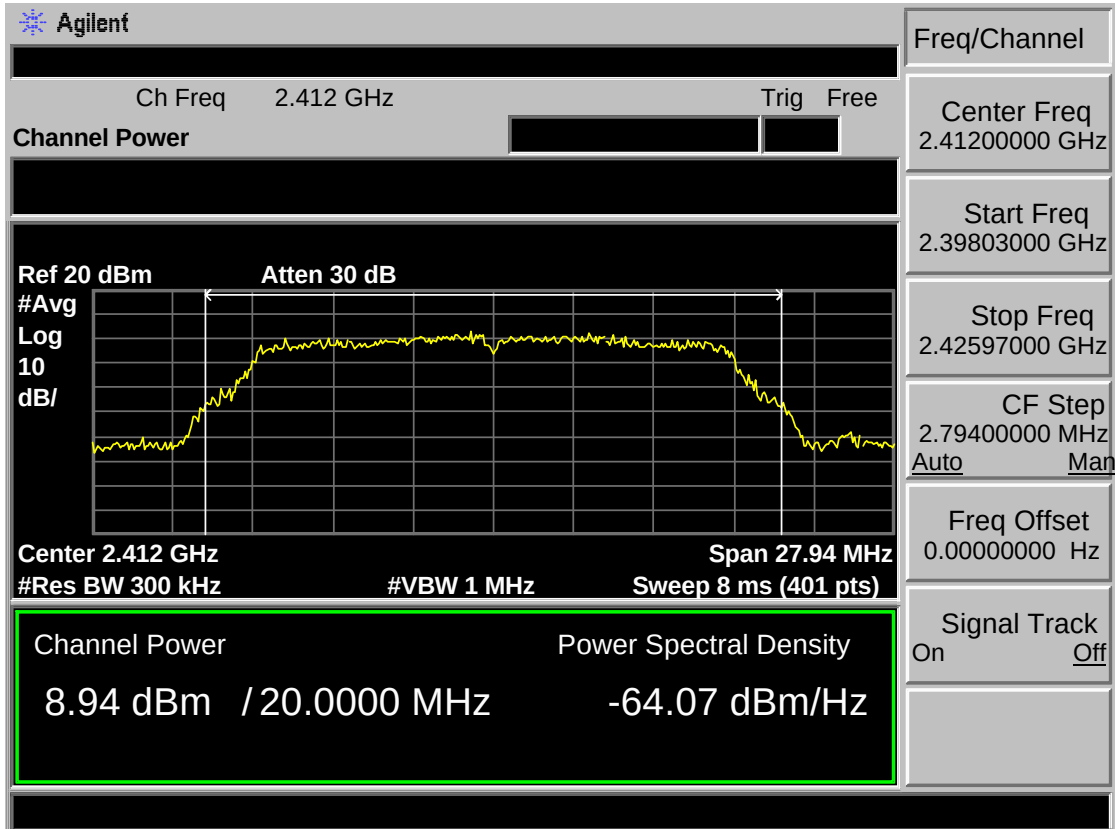


Test Mode: IEEE 802.11n HT20 2437MHz

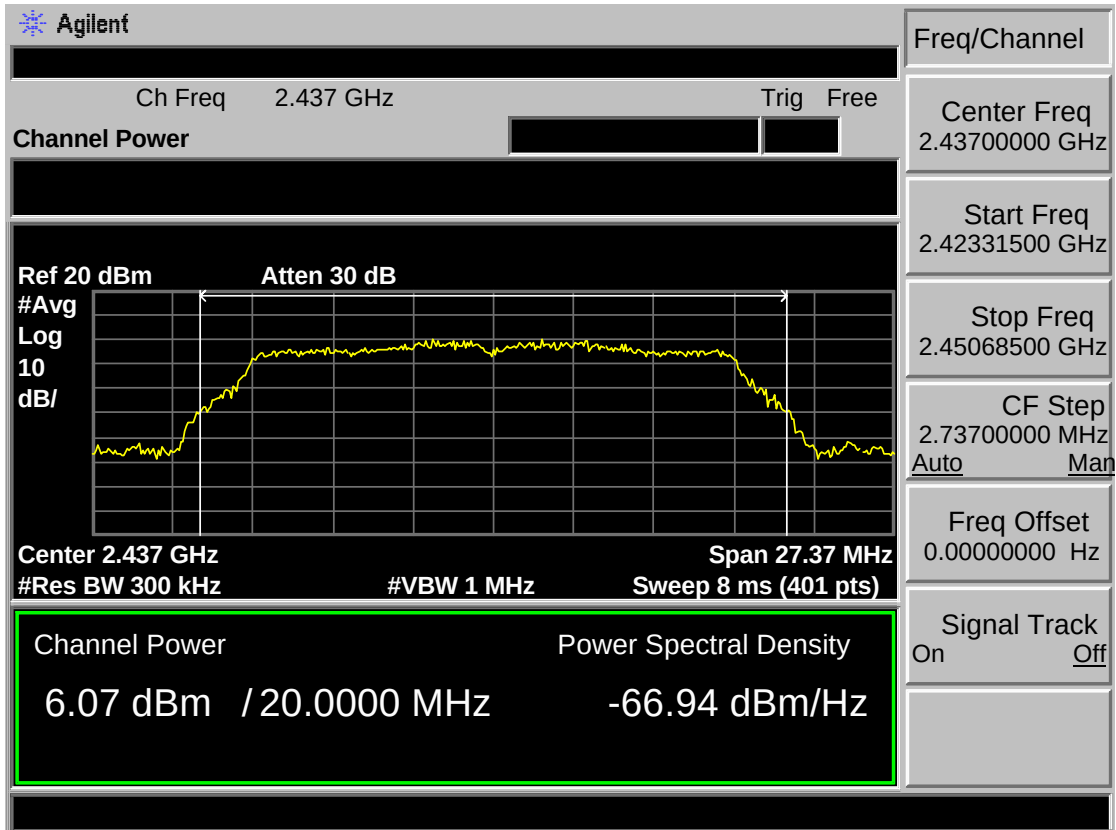


Test Mode: IEEE 802.11n HT20 2462MHz

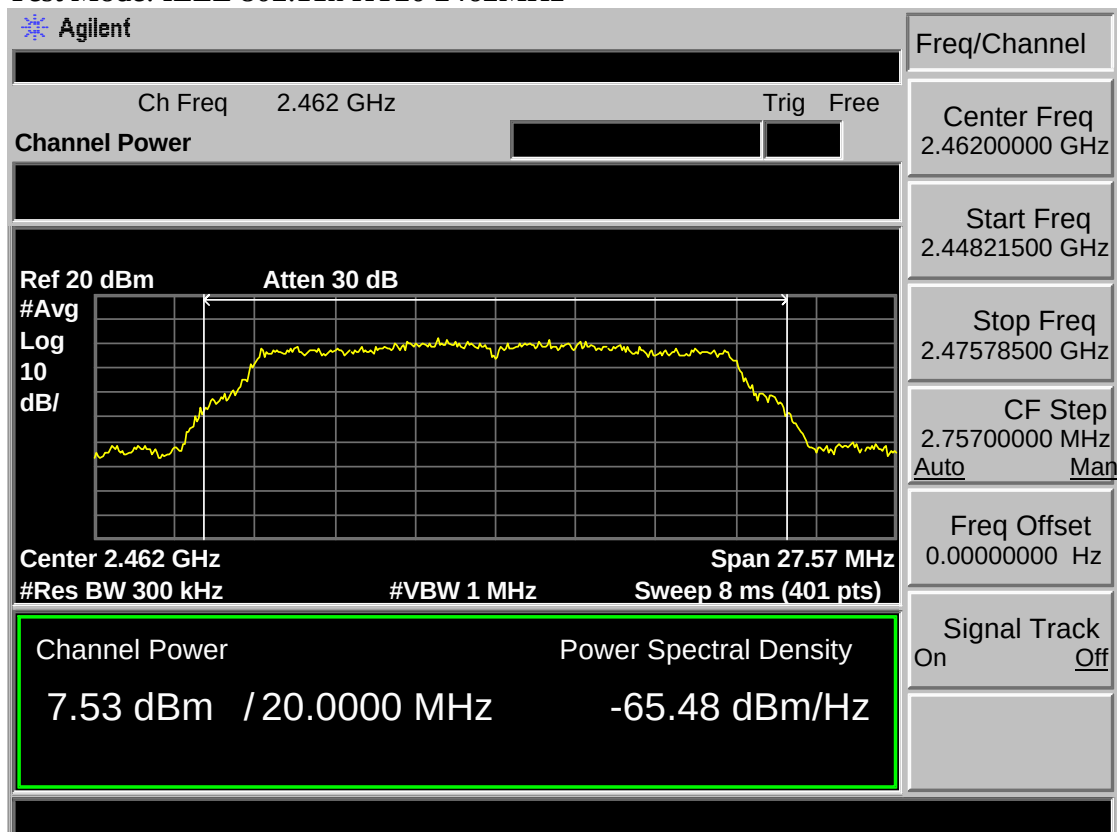


Test Mode: IEEE 802.11n HT40 2422MHz

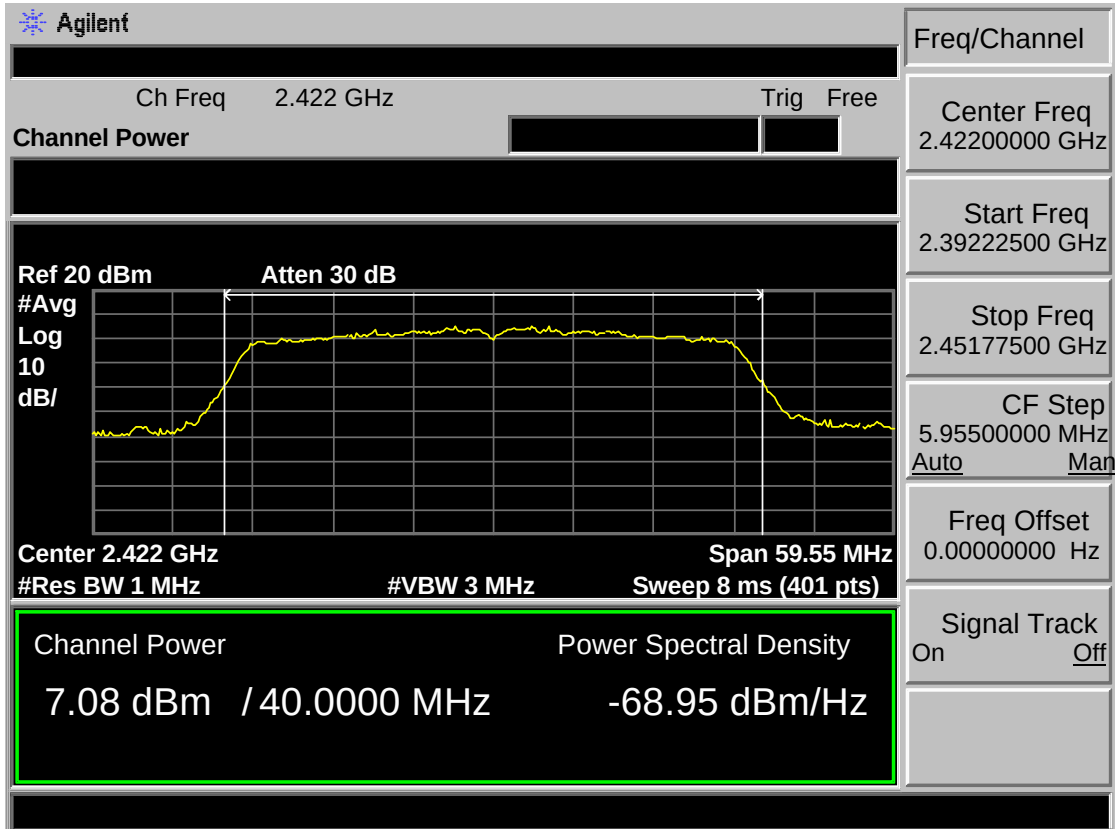

Test Mode: IEEE 802.11n HT40 2437MHz

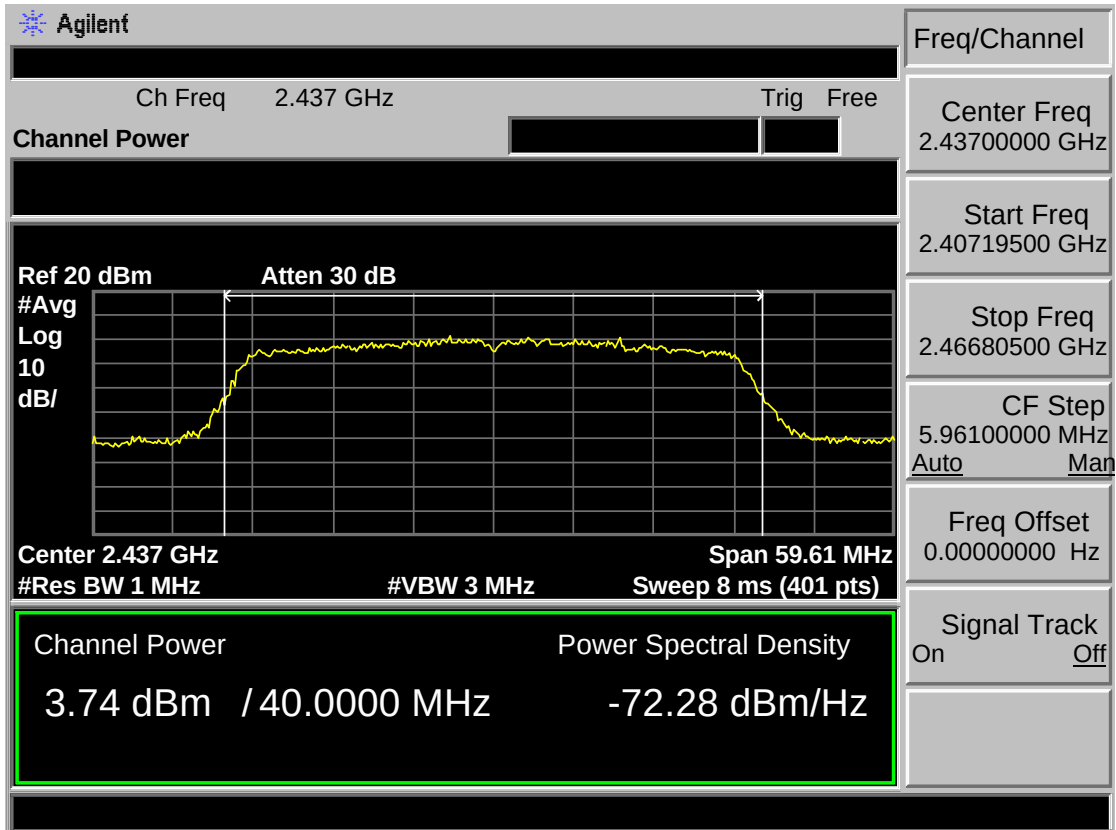


Test Mode: IEEE 802.11n HT40 2452MHz

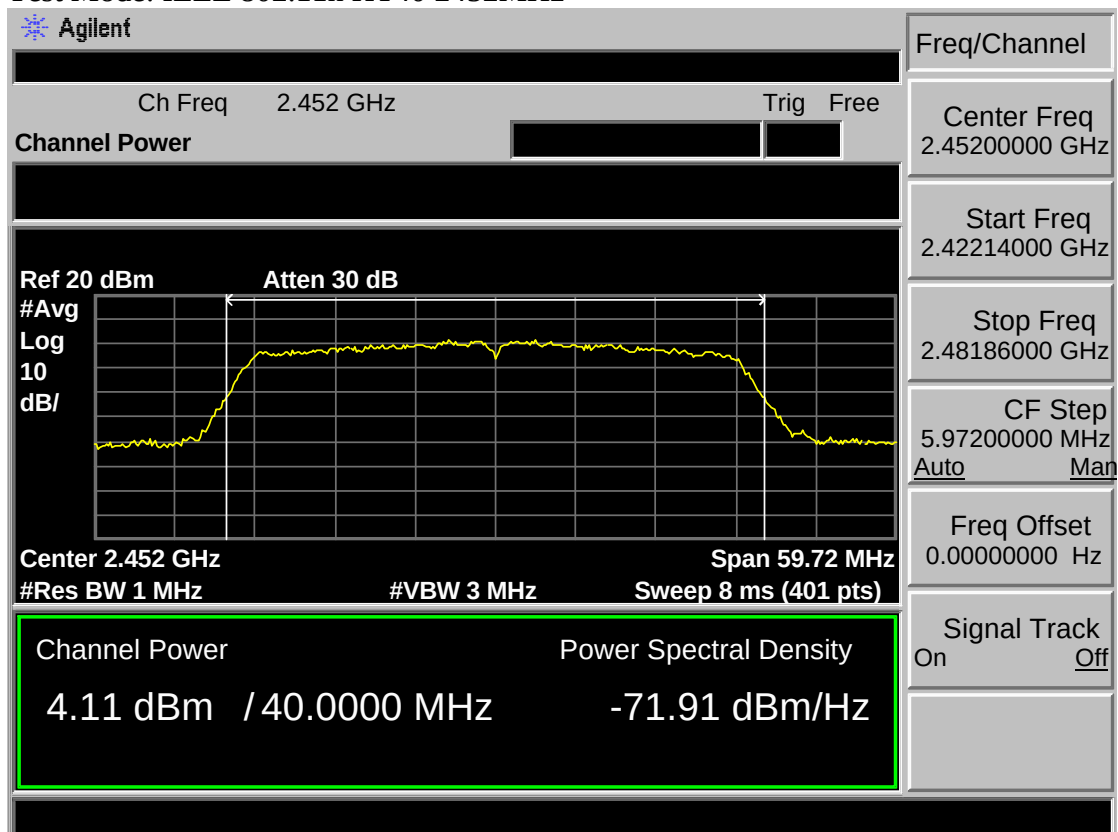


Antenna 1


Test Mode: IEEE 802.11b 2412MHz

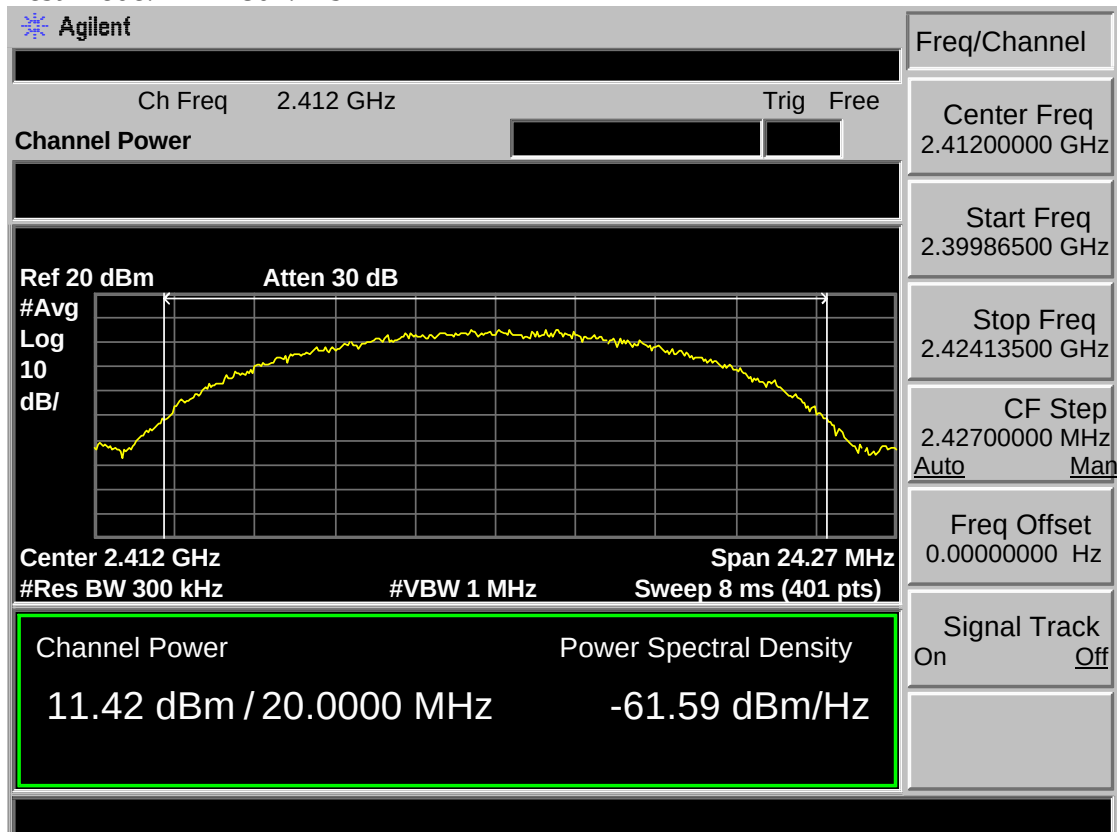


Test Mode: IEEE 802.11b 2437MHz

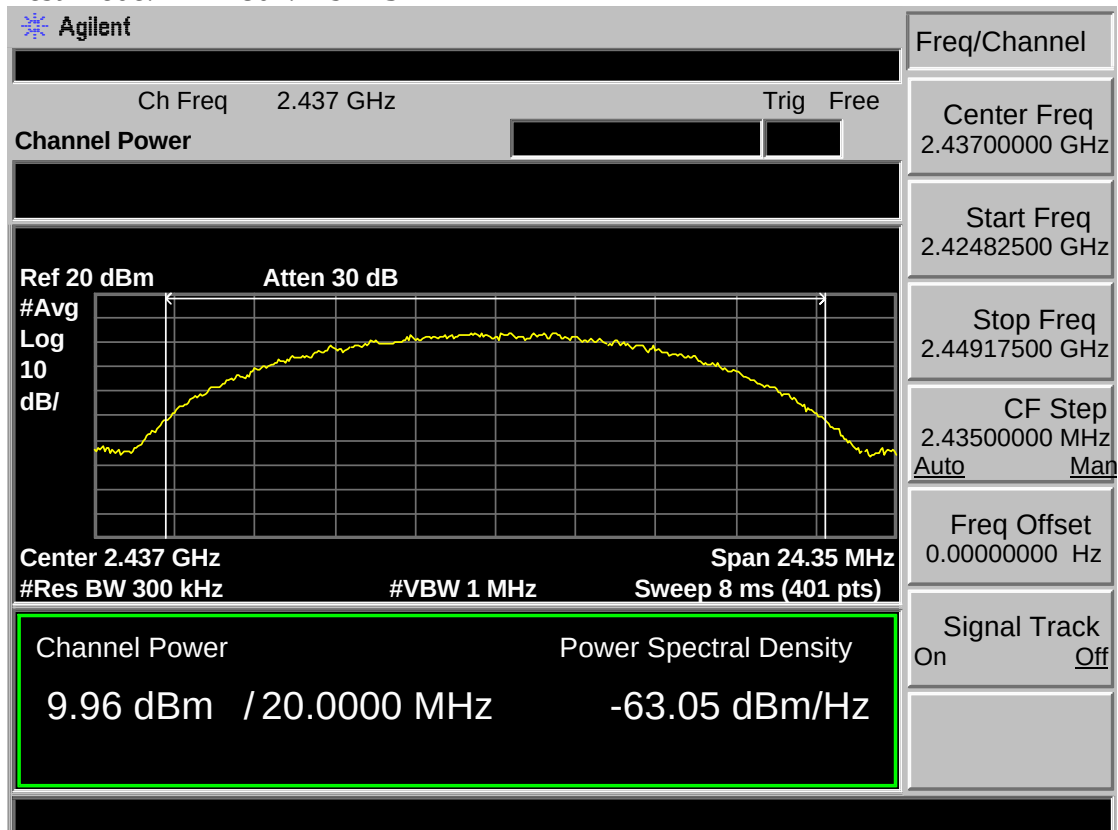


Test Mode: IEEE 802.11b 2462MHz

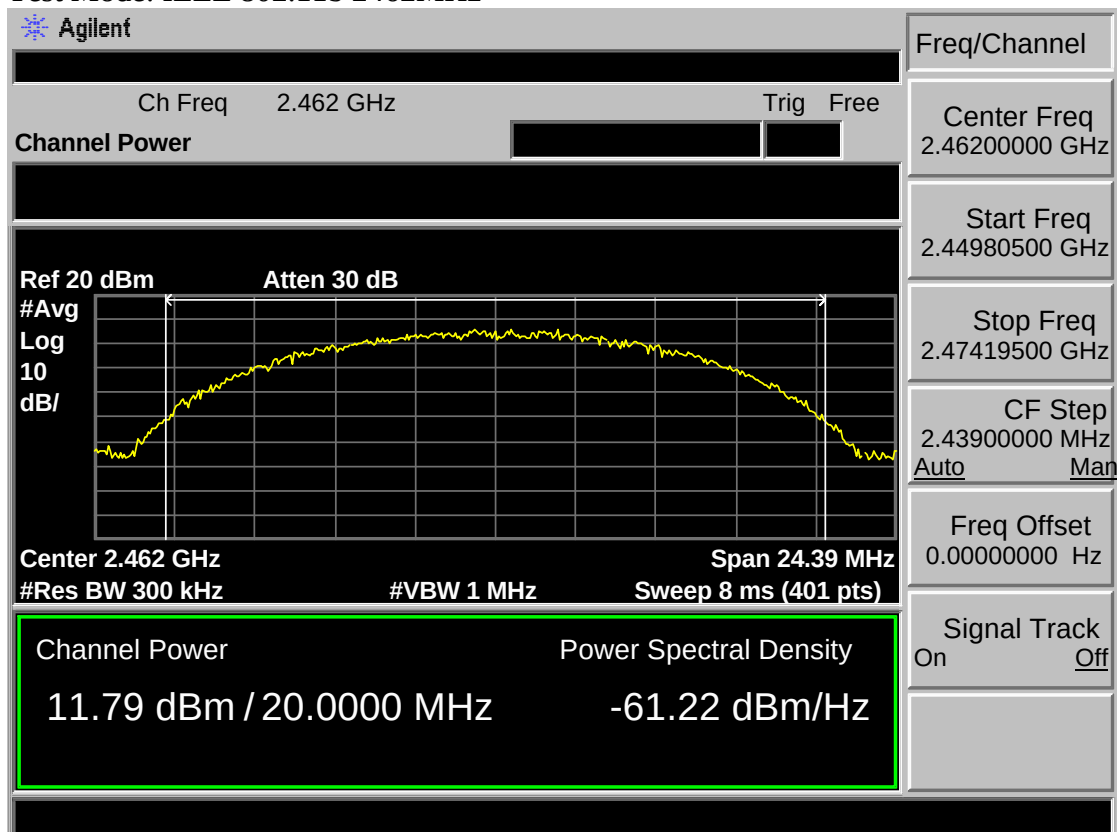


Test Mode: IEEE 802.11g 2412MHz

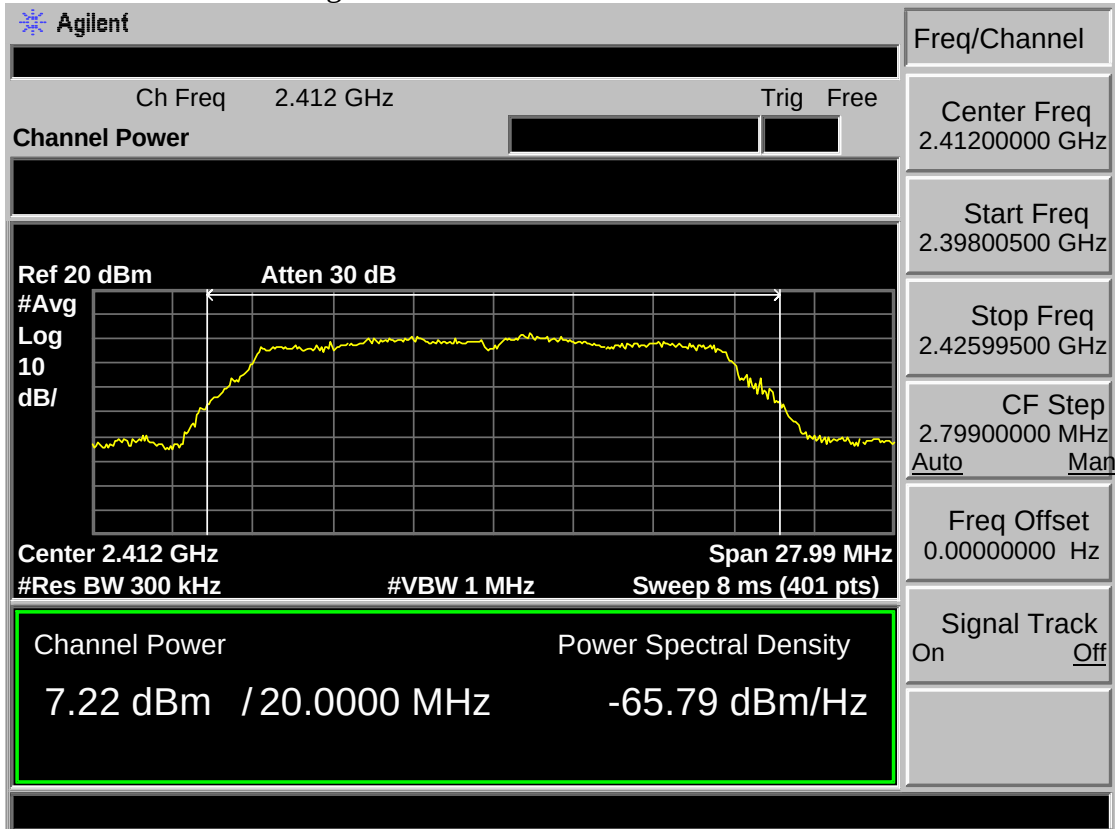


Test Mode: IEEE 802.11g 2437MHz

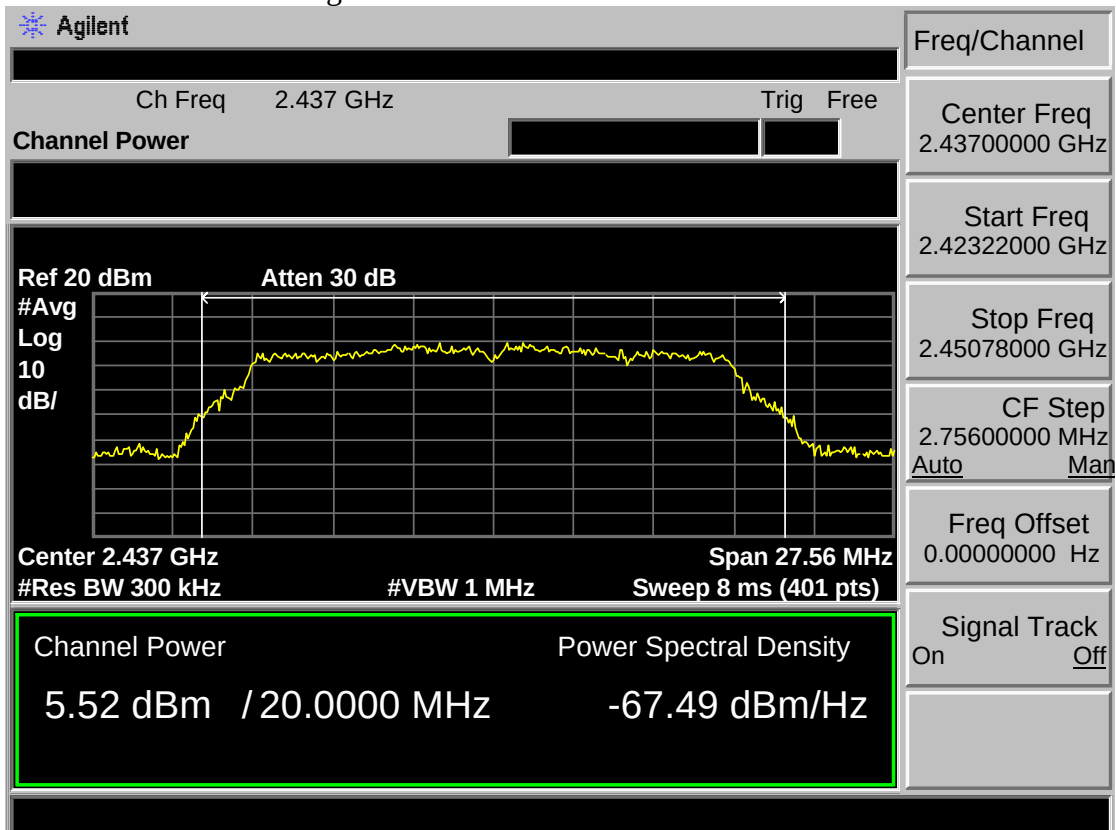


Test Mode: IEEE 802.11g 2462MHz

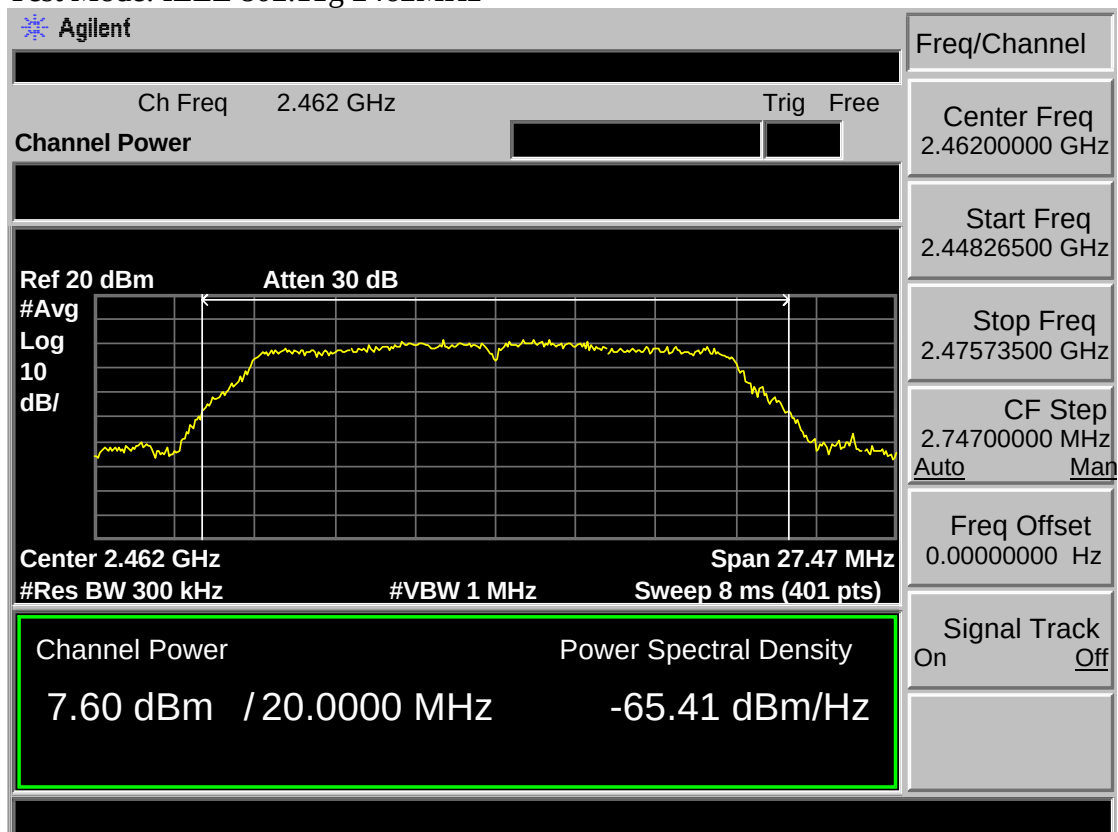


Test Mode: IEEE 802.11n HT20 2412MHz

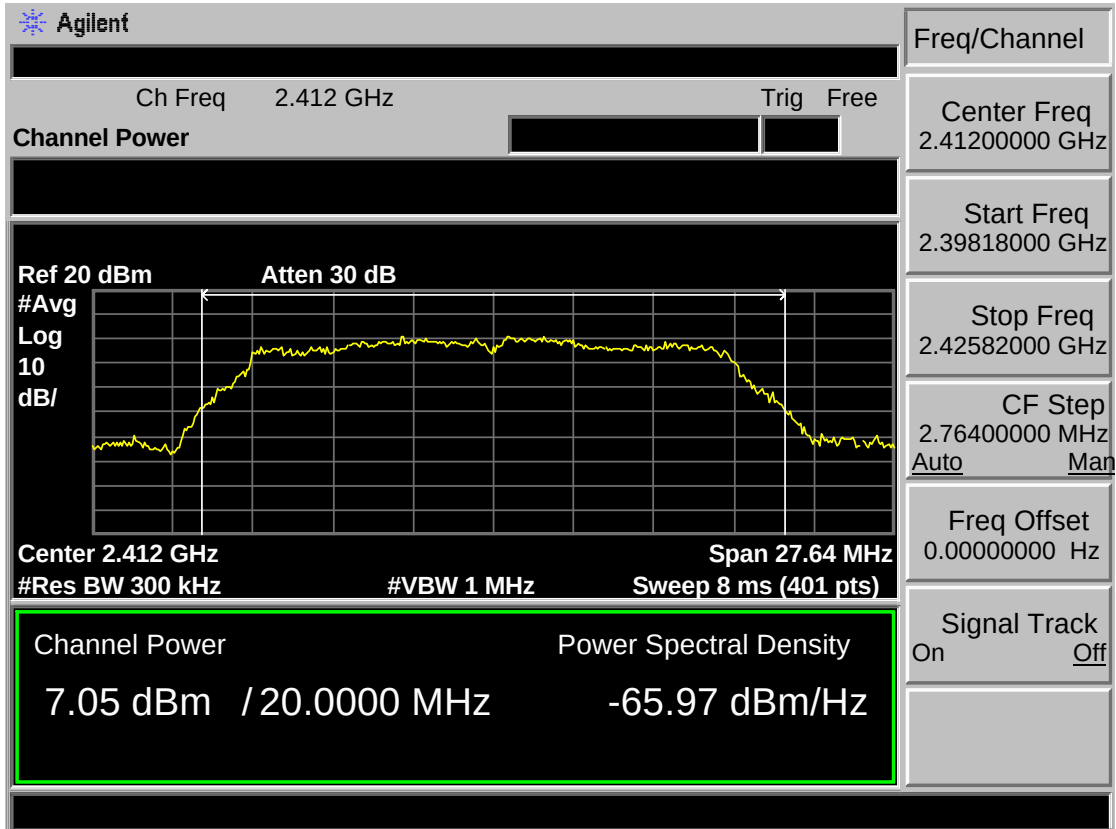


Test Mode: IEEE 802.11n HT20 2437MHz

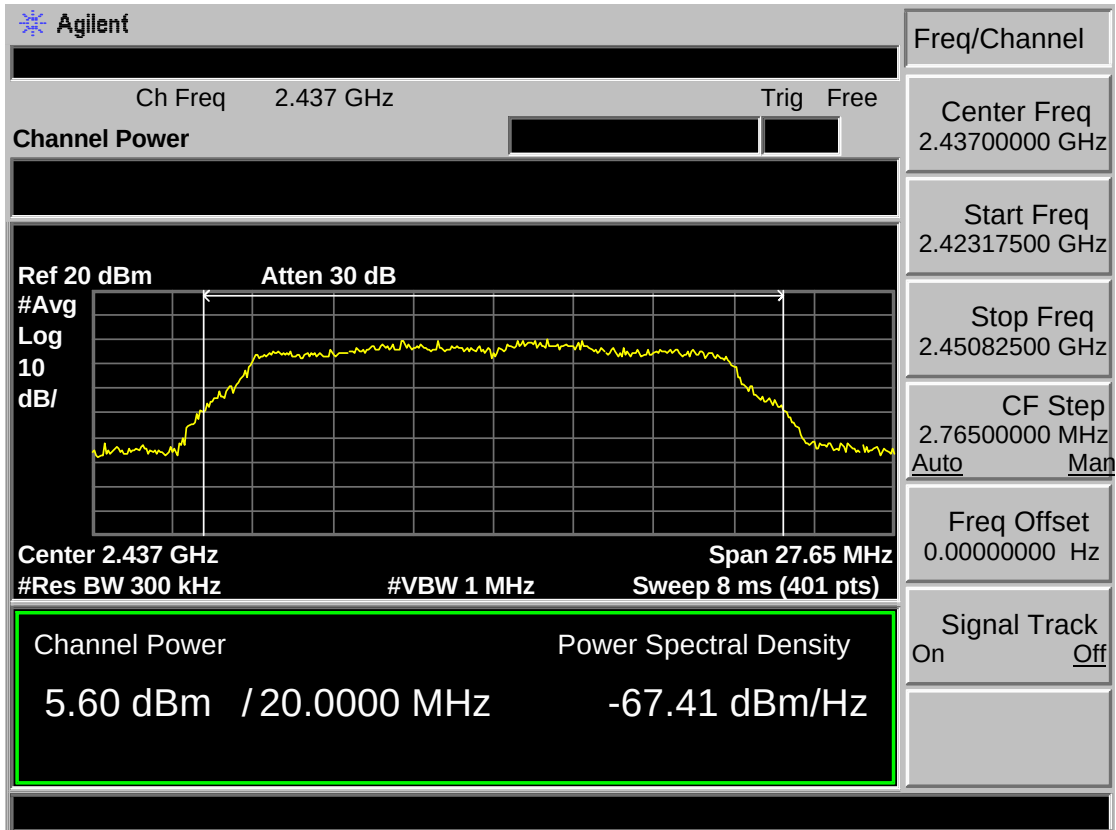


Test Mode: IEEE 802.11n HT20 2462MHz

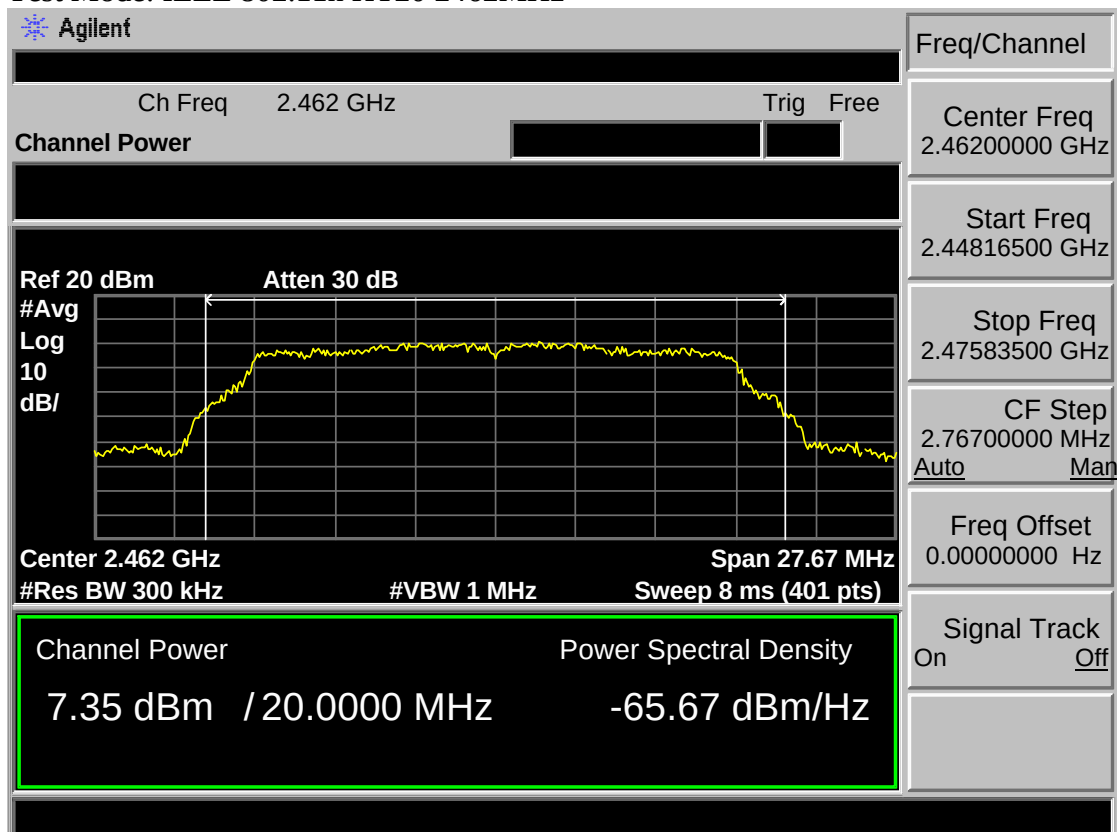


Test Mode: IEEE 802.11n HT40 2422MHz

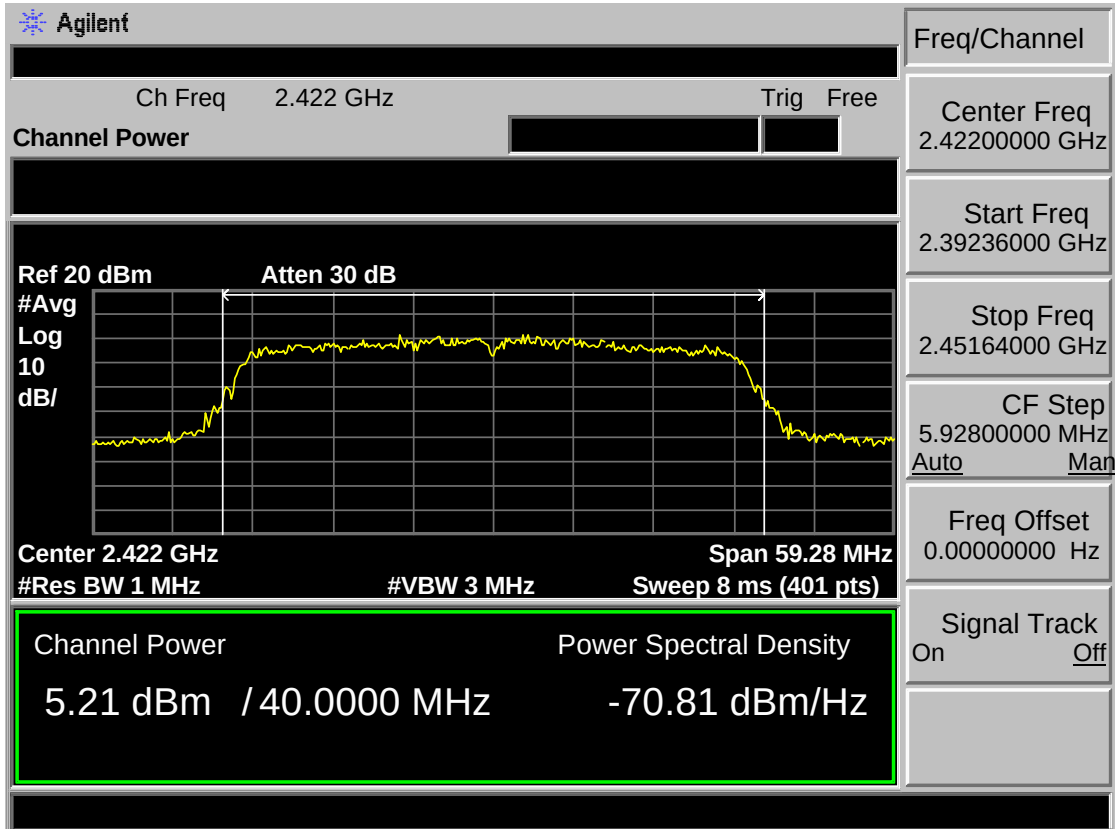

Test Mode: IEEE 802.11n HT40 2437MHz

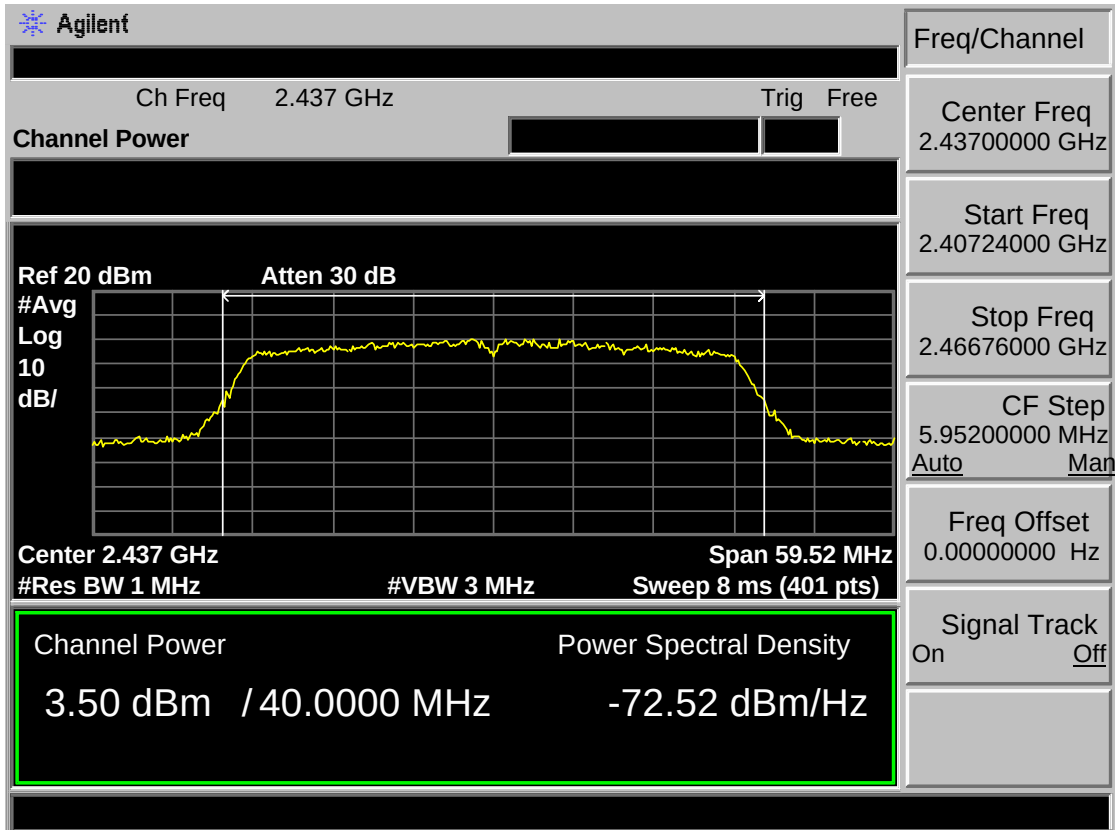

Test Mode: IEEE 802.11n HT40 2452MHz

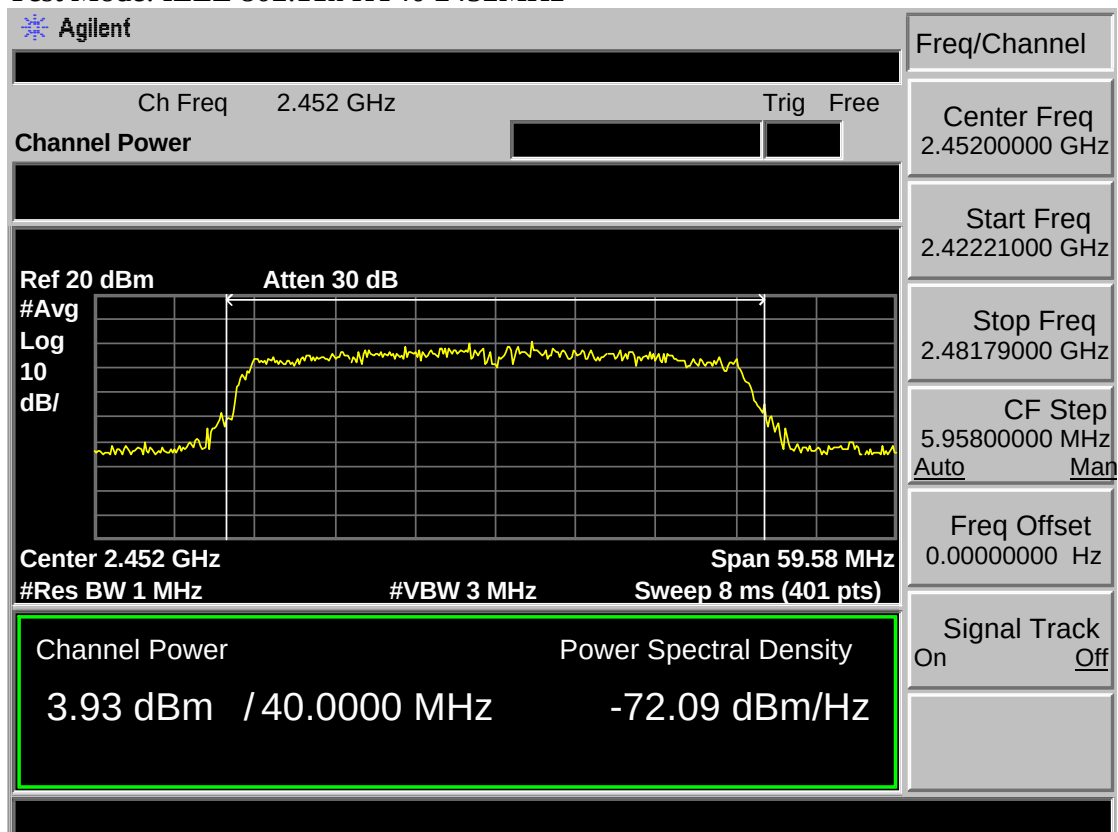

8 POWER SPECTRAL DENSITY TEST

8.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

8.2 Test Procedure

- 1, The transmitter output (antenna port) was connected to the spectrum analyzer. Connect EUT antenna terminal to the spectrum analyzer with a low loss SMA cable.
- 2, Follow the test procedure as described in KDB 558074
 - (1). Set analyzer center frequency to DTS channel center frequency.
 - (2). Set the span to 1.5 times the DTS bandwidth.
 - (3). Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - (4). Set the VBW $\geq 3 \text{ RBW}$.
 - (5). Detector = peak.
 - (6). Sweep time = auto couple.
 - (7). Trace mode = max hold.
 - (8). Allow trace to fully stabilize.
 - (9). Use the peak marker function to determine the maximum amplitude level.
 - (10). If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.


8.3 Test Result

EUT: LED TV					
M/N: SC-32HK700N					
Test date: 2017-06-28		Test site: RF Site			Tested by: Viking
Pass					
Test Mode	CH	Power density (dBm/3kHz)			Limit (dBm/3kHz)
		Ant 0	Ant 1	Total	
IEEE 802.11 b	CH1	-9.45	-10.87	/	8
	CH6	-12.28	-11.60	/	8
	CH11	-10.58	-10.66	/	8
IEEE 802.11 g	CH1	-14.38	-16.06	/	8
	CH6	-17.41	-17.53	/	8
	CH11	-16.30	-15.26	/	8
IEEE 802.11 n HT 20	CH1	-14.33	-15.41	-11.83	8
	CH6	-17.00	-17.56	-14.26	8
	CH11	-16.34	-15.78	-13.04	8
IEEE 802.11 n HT 40	CH3	-16.64	-19.71	-14.90	8
	CH6	-20.54	-20.85	-17.68	8
	CH9	-19.50	-21.37	-17.32	8
Conclusion : PASS					


8.4 Test Data

Antenna 0


Test Mode: IEEE 802.11b 2412MHz

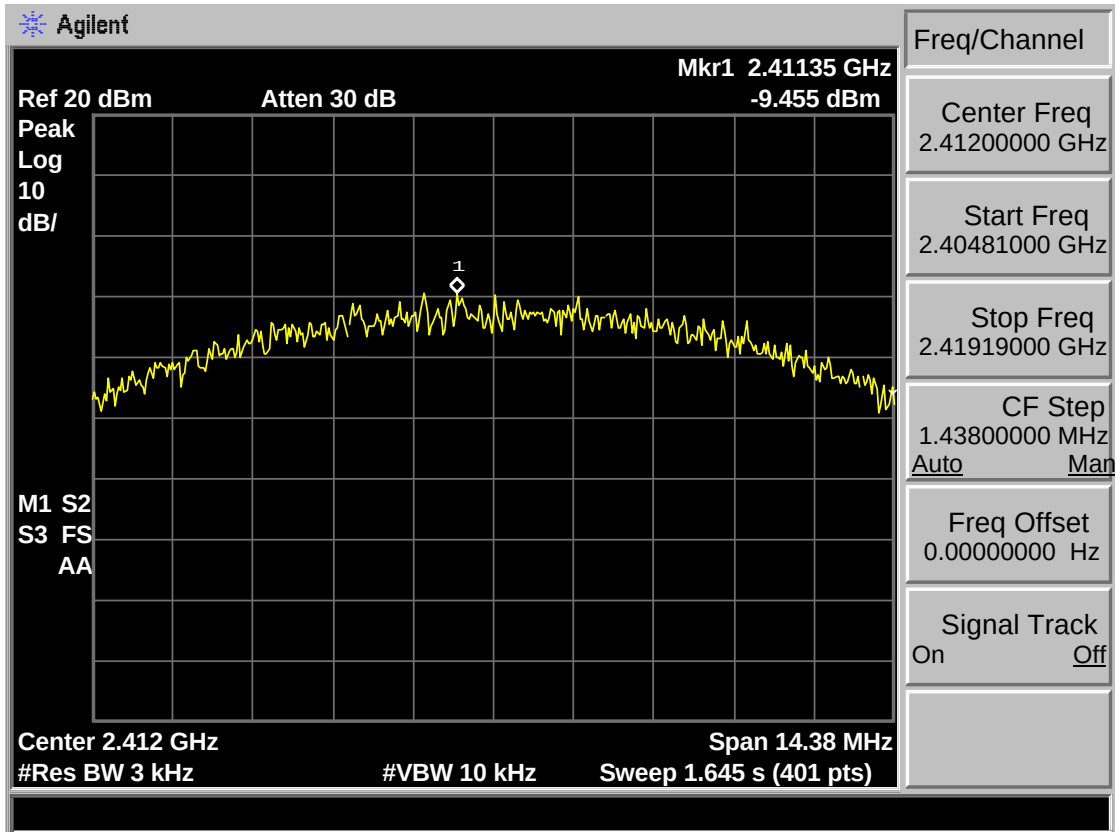


Test Mode: IEEE 802.11b 2437MHz

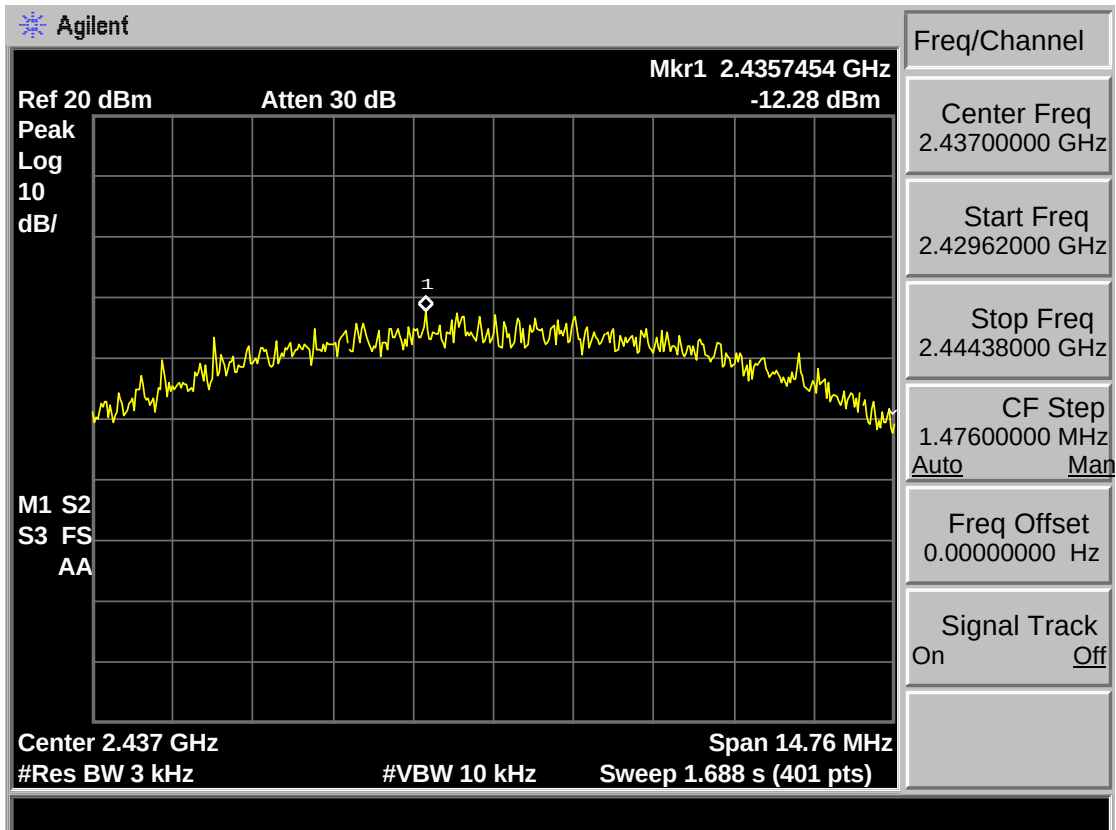


Test Mode: IEEE 802.11b 2462MHz

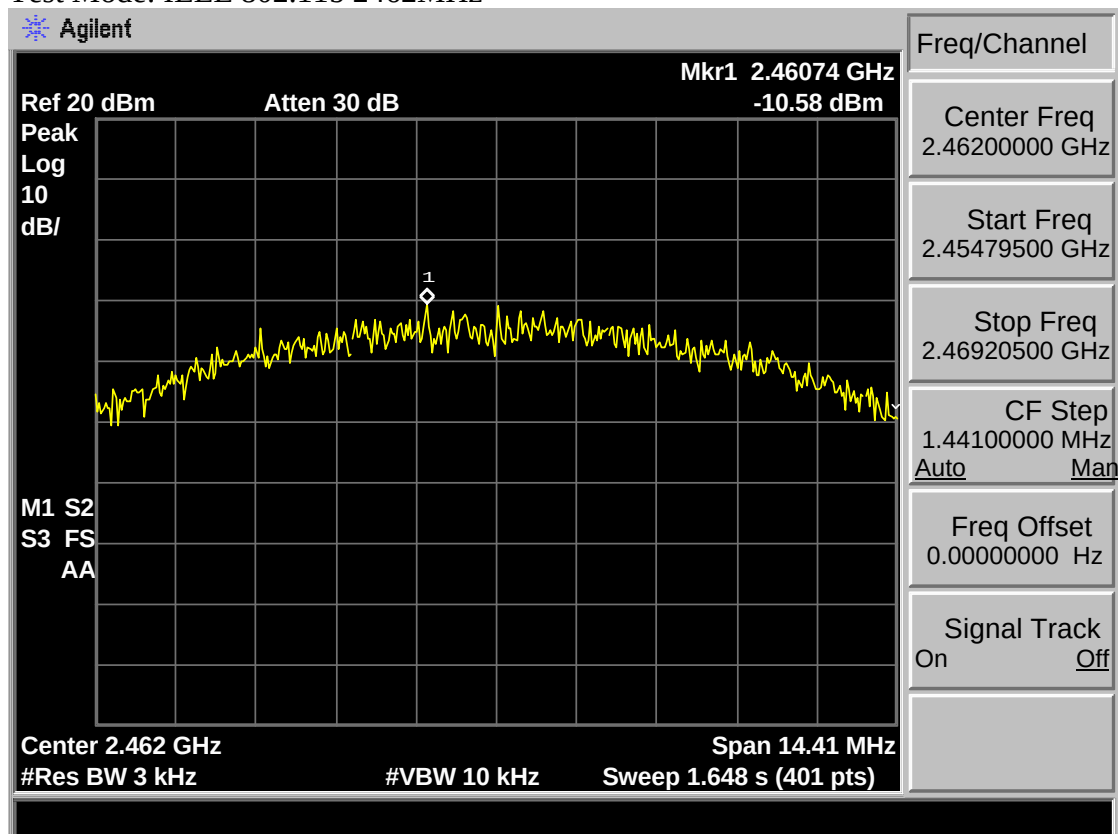


Test Mode: IEEE 802.11g 2412MHz

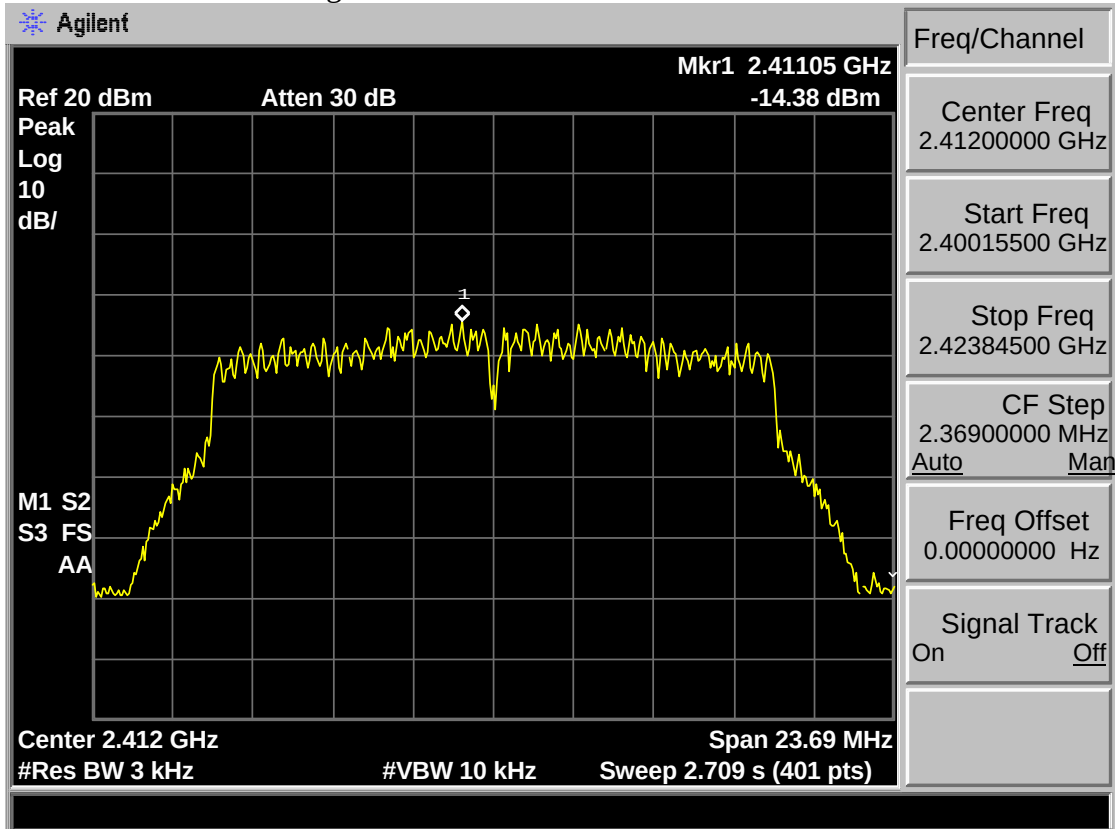


Test Mode: IEEE 802.11g 2437MHz

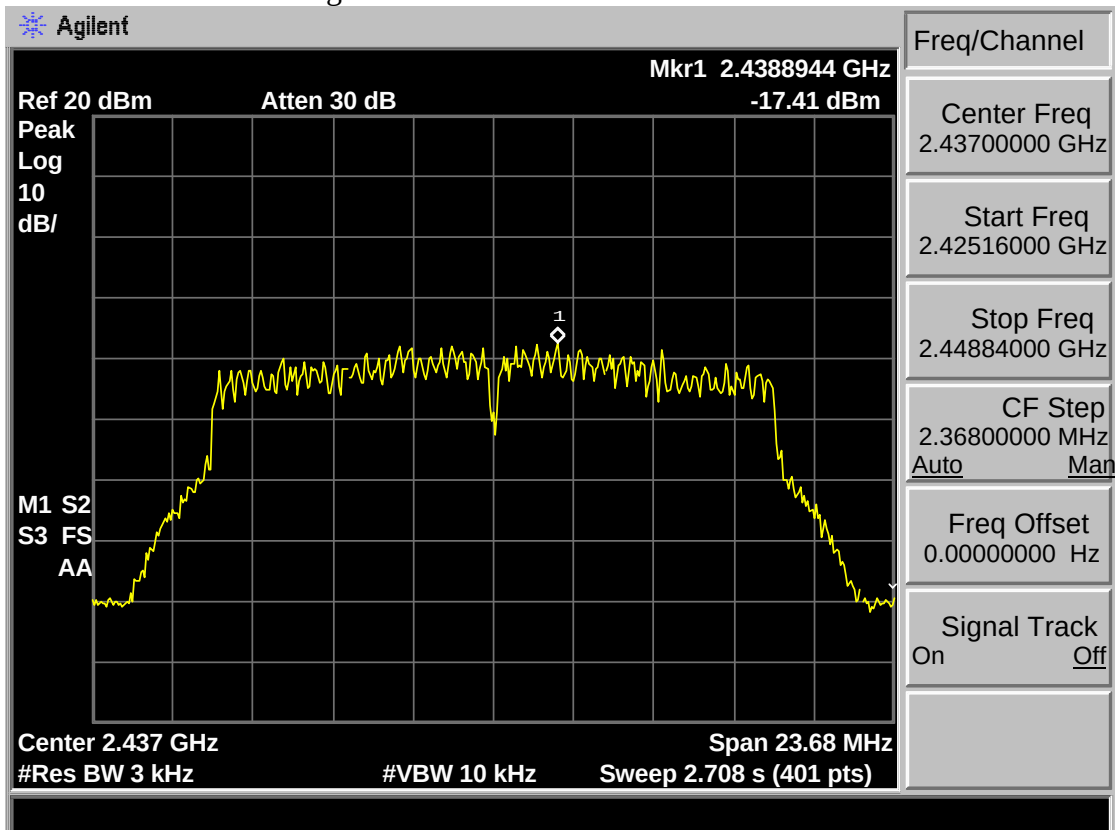


Test Mode: IEEE 802.11g 2462MHz

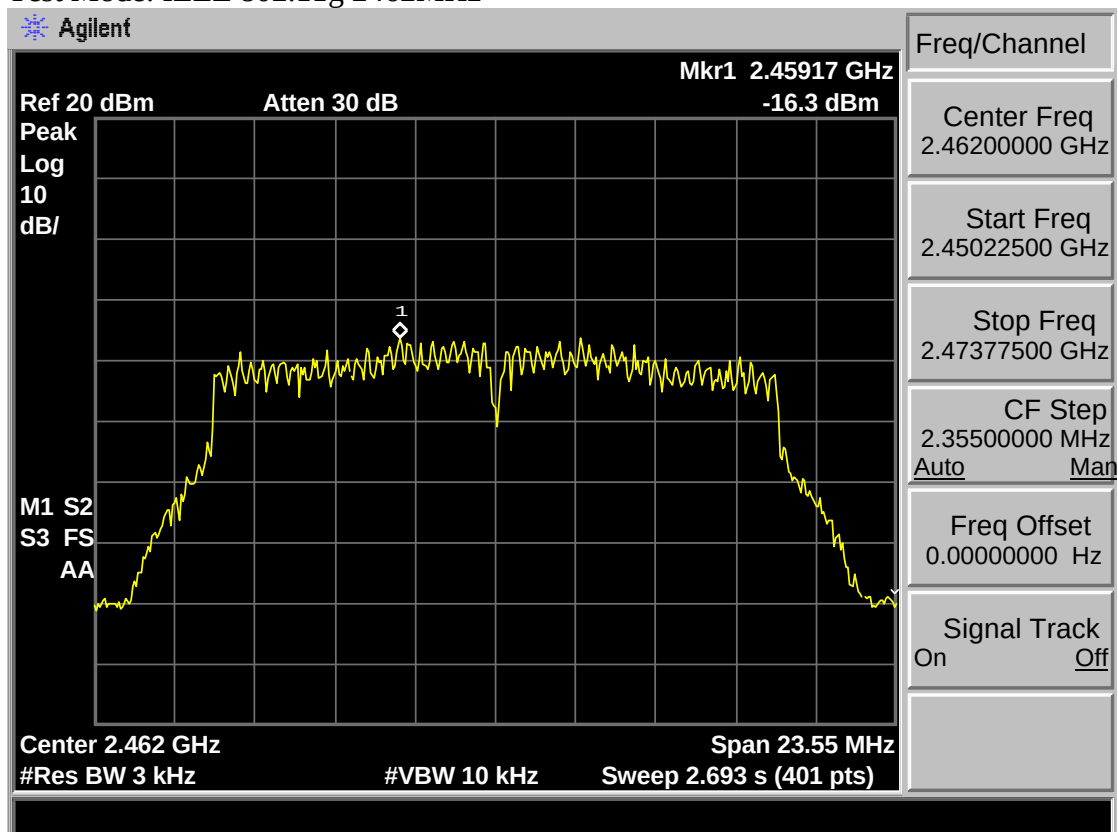


Test Mode: IEEE 802.11n HT20 2412MHz

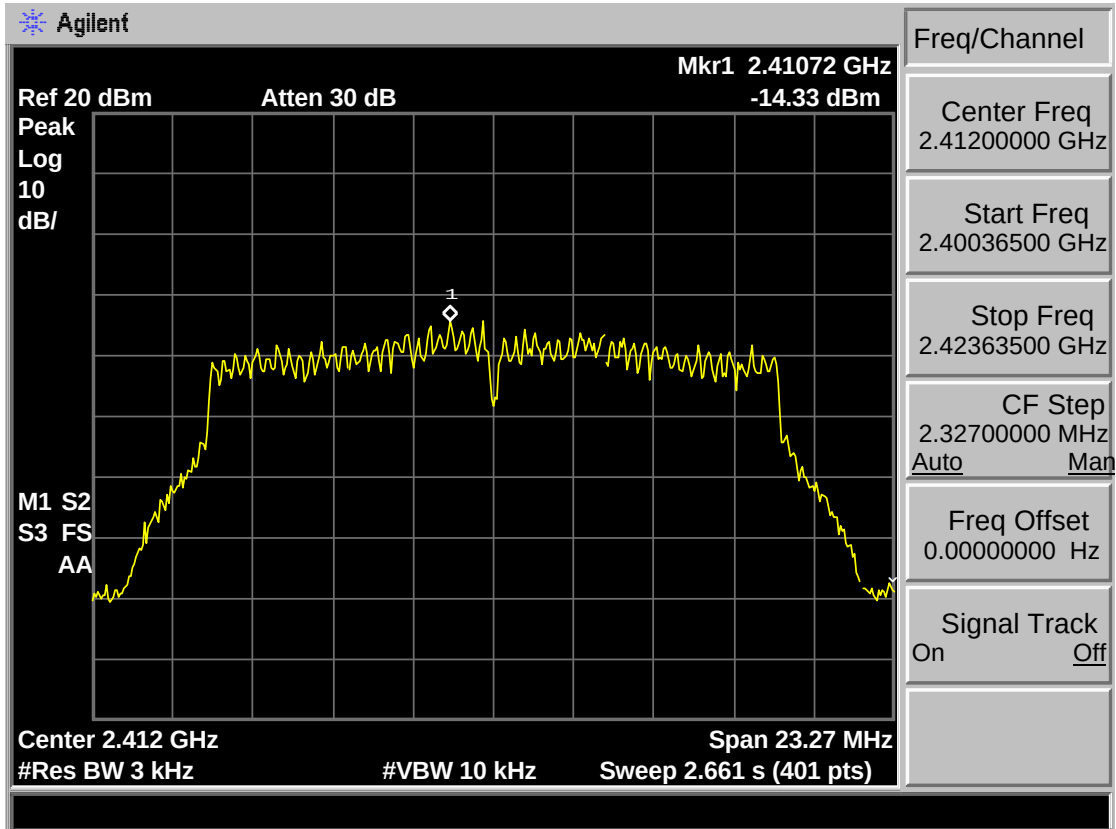


Test Mode: IEEE 802.11n HT20 2437MHz

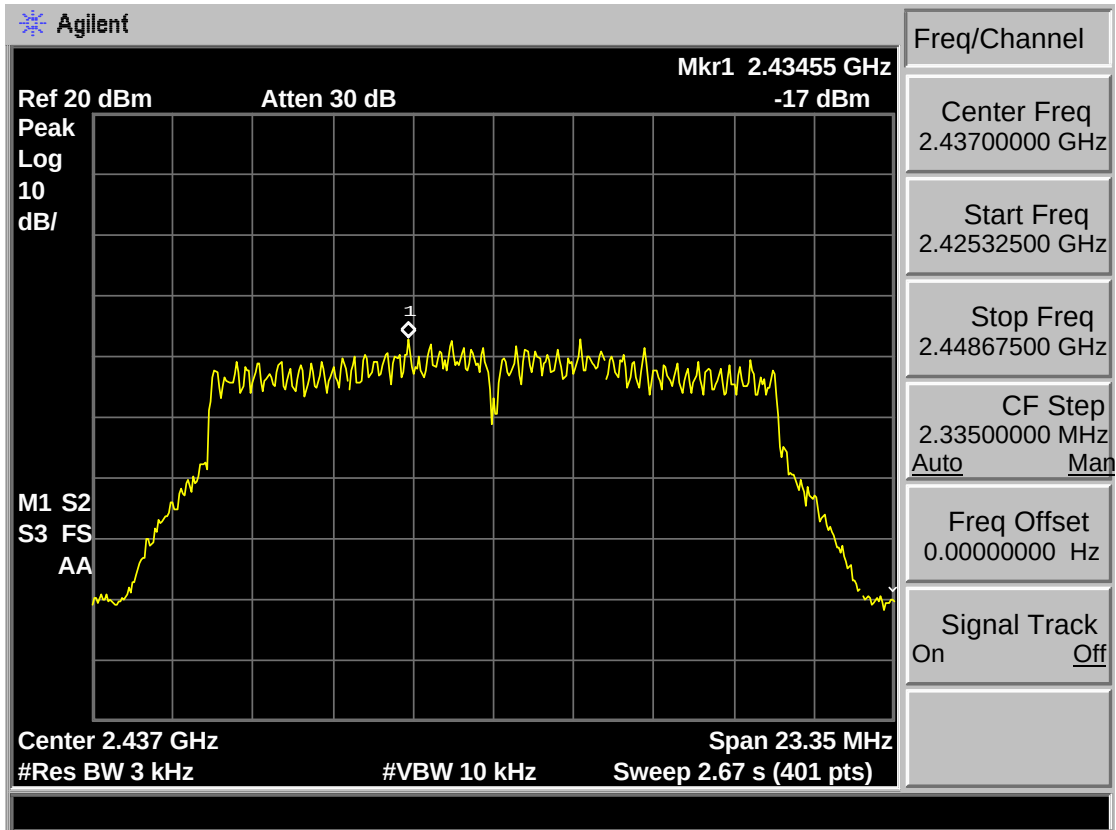


Test Mode: IEEE 802.11n HT20 2462MHz

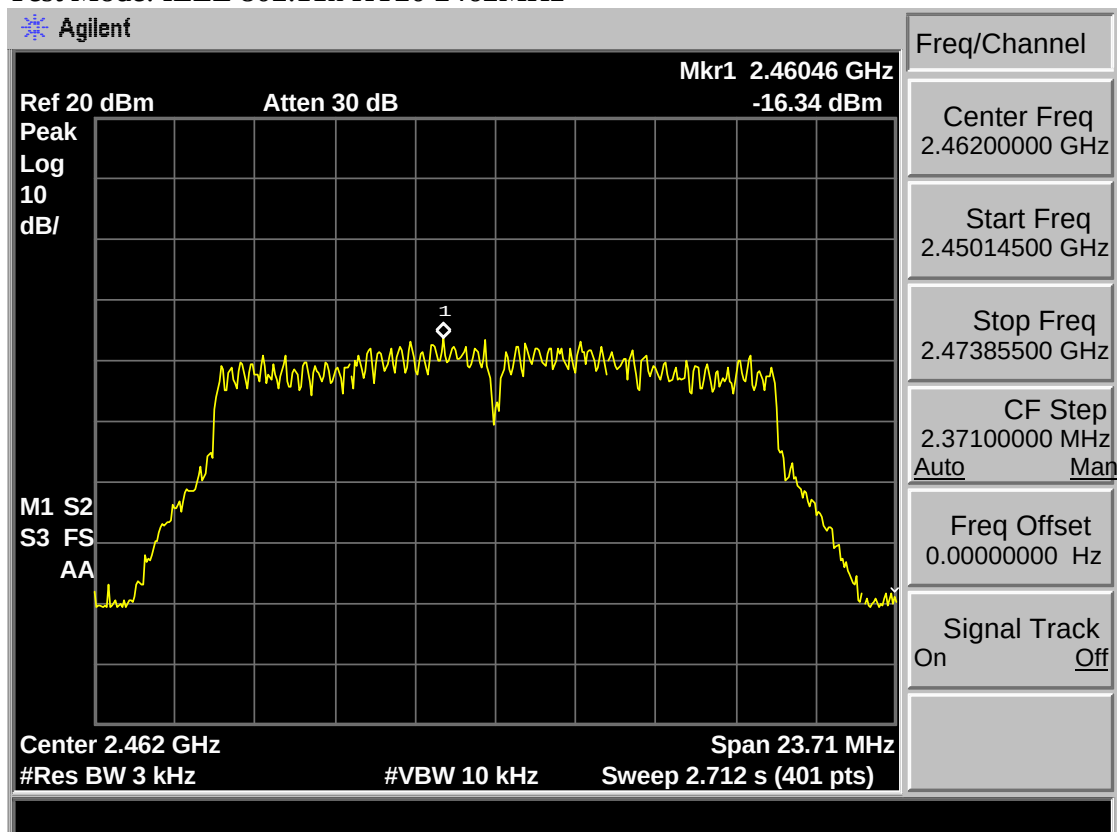


Test Mode: IEEE 802.11n HT40 2422MHz

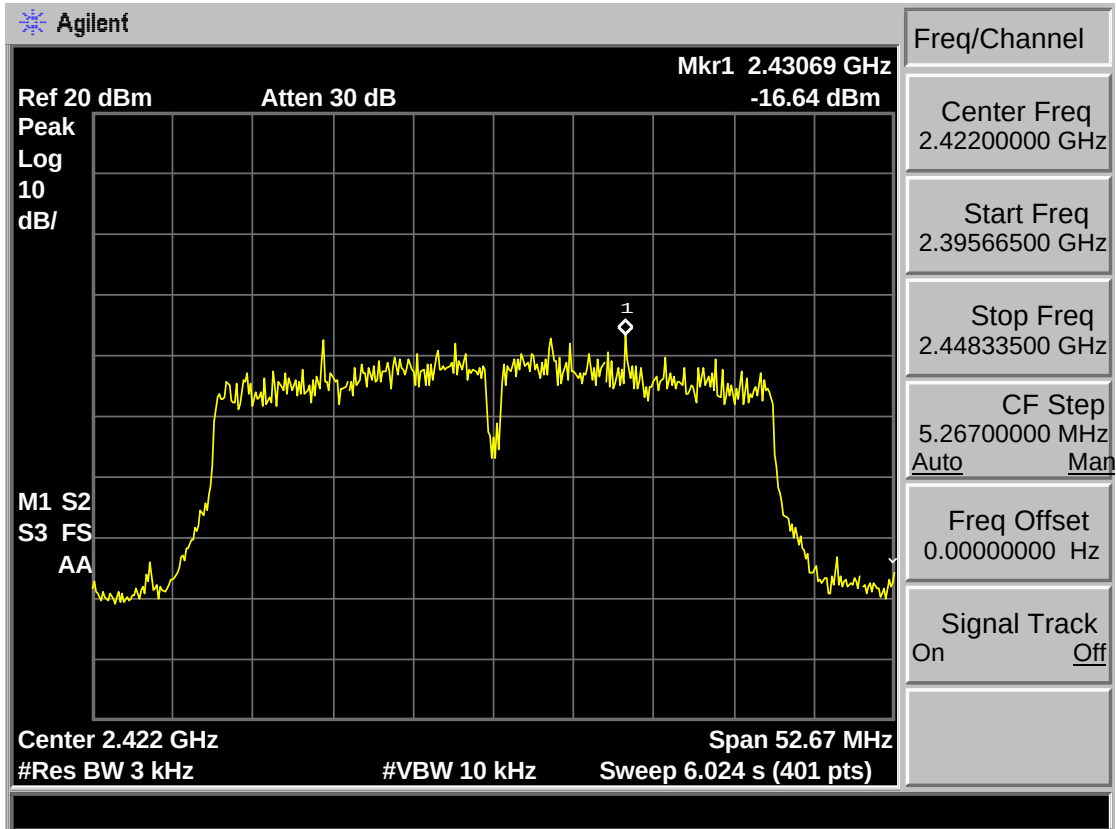

Test Mode: IEEE 802.11n HT40 2437MHz

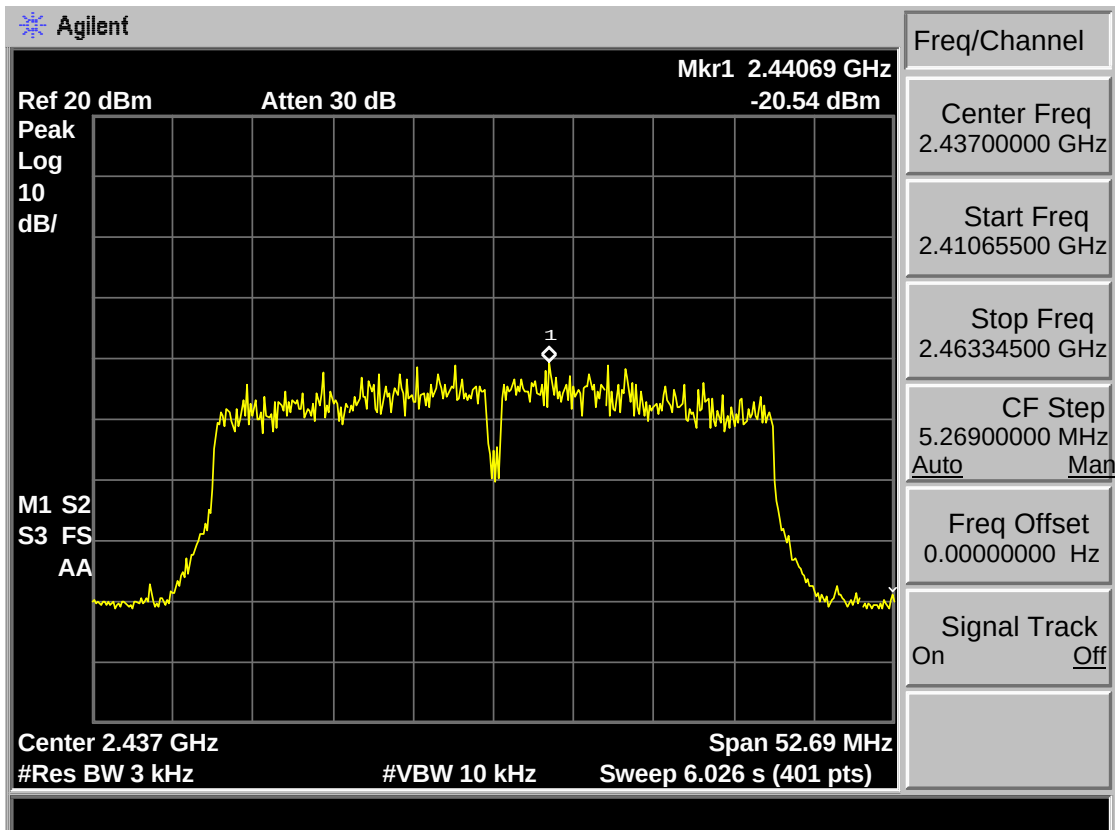


Test Mode: IEEE 802.11n HT40 2452MHz

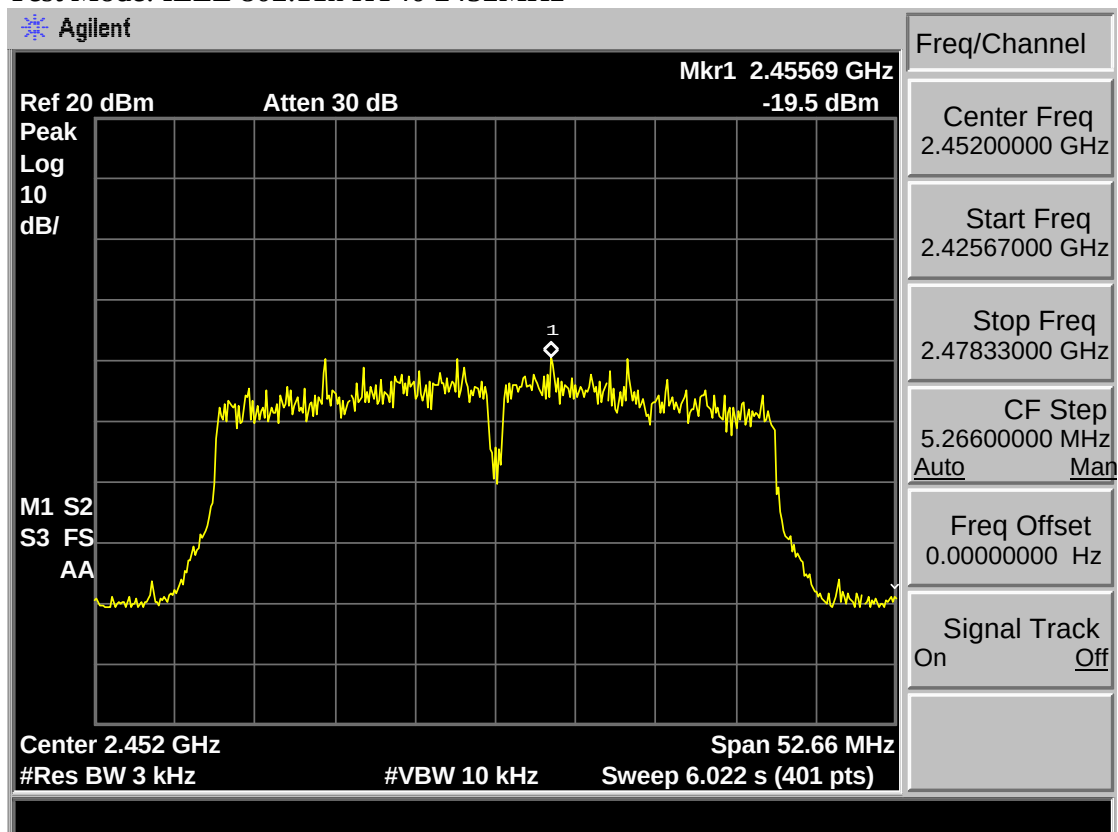


Antenna 1


Test Mode: IEEE 802.11b 2412MHz

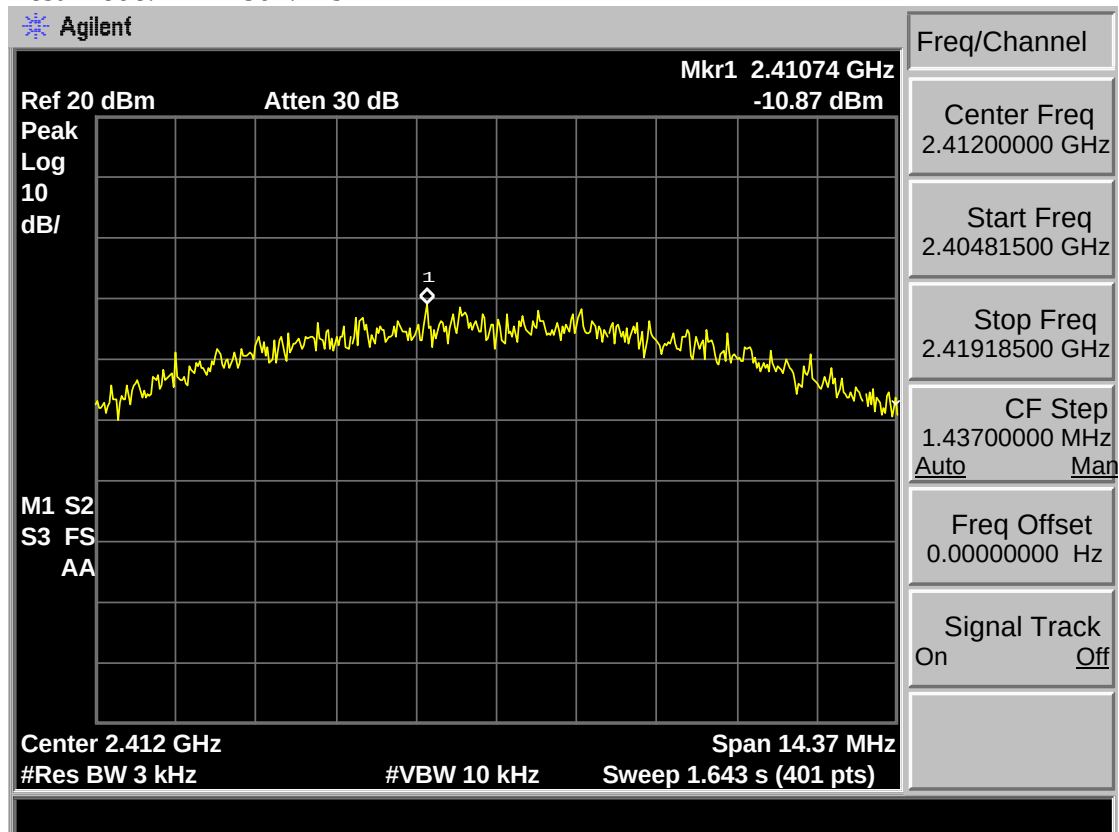


Test Mode: IEEE 802.11b 2437MHz

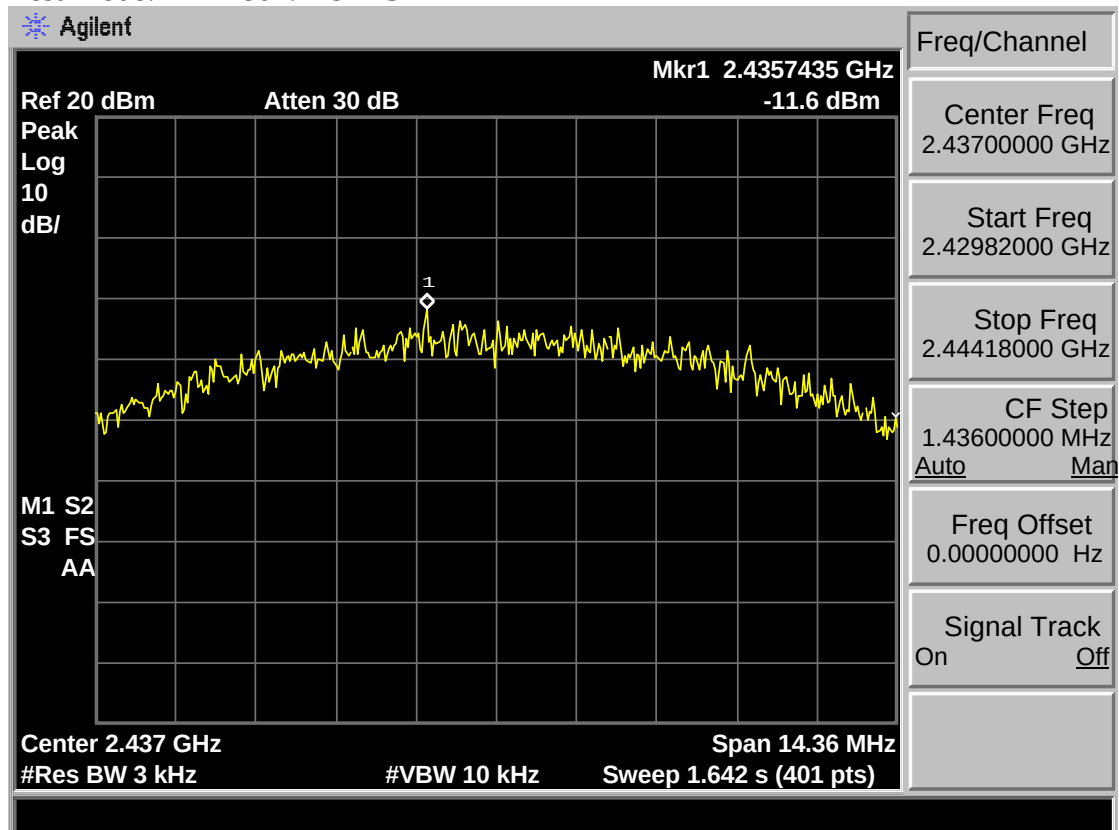


Test Mode: IEEE 802.11b 2462MHz

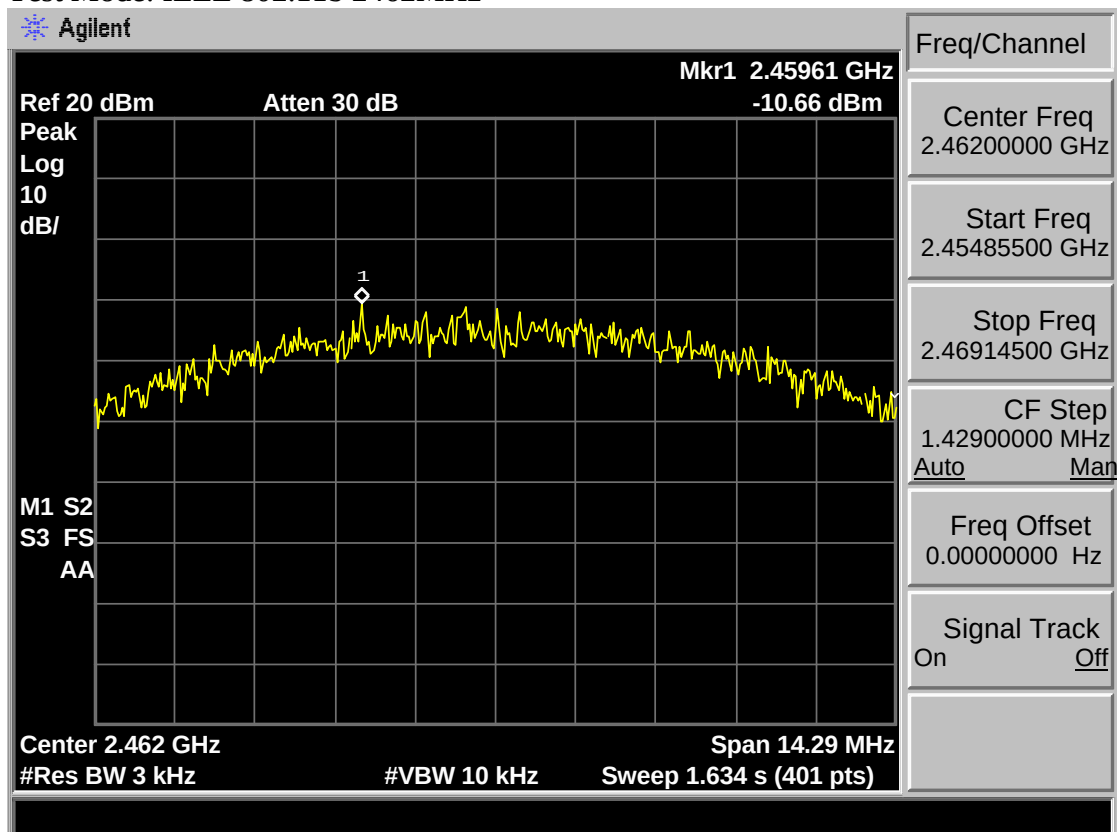


Test Mode: IEEE 802.11g 2412MHz

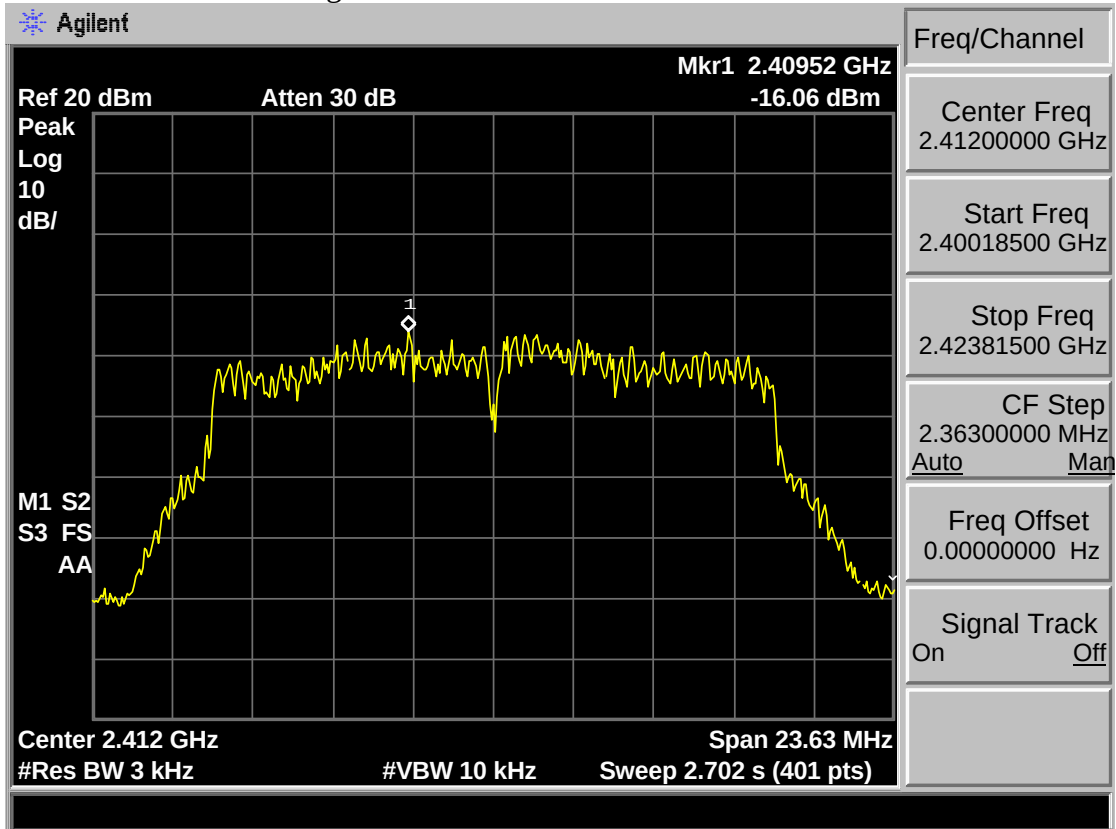


Test Mode: IEEE 802.11g 2437MHz

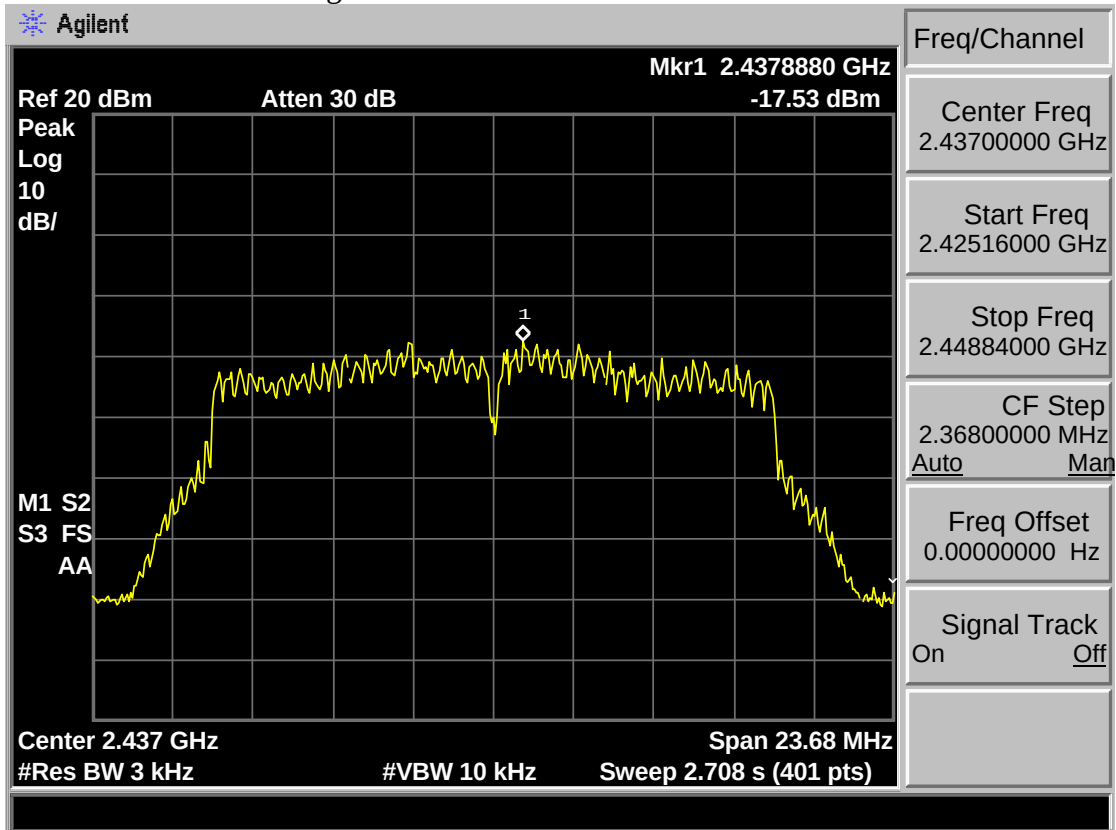


Test Mode: IEEE 802.11g 2462MHz

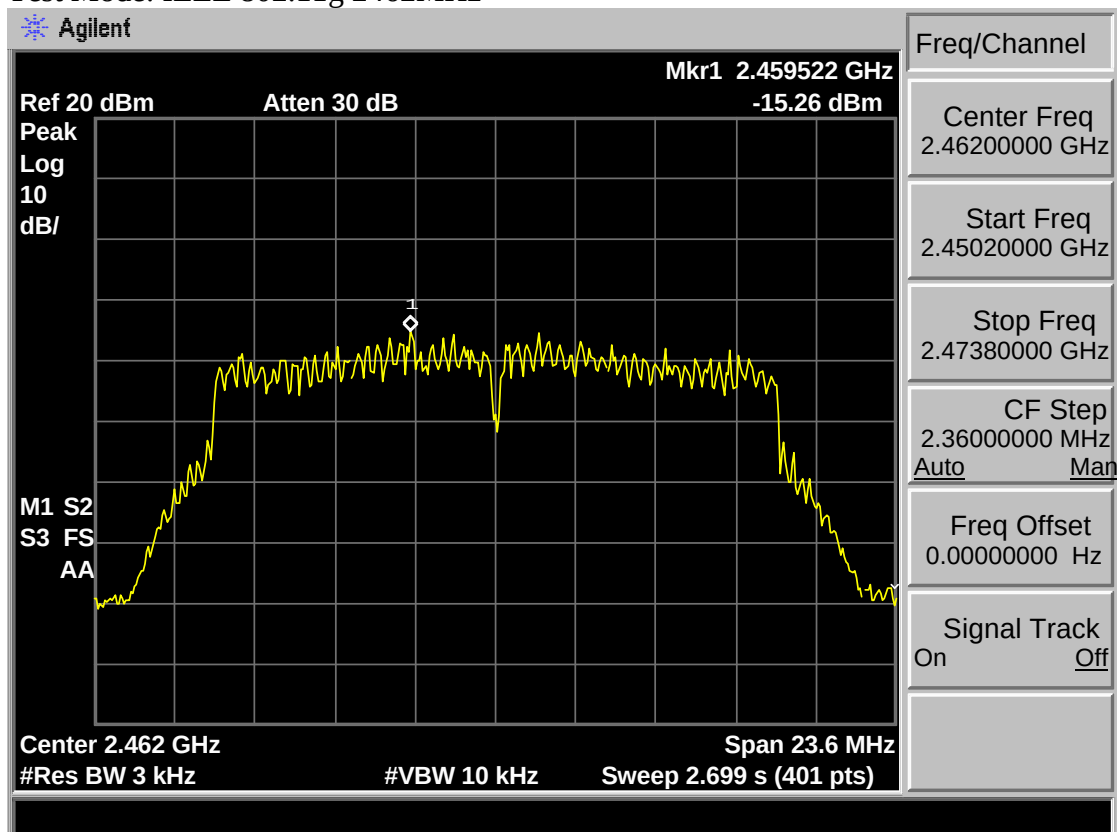


Test Mode: IEEE 802.11n HT20 2412MHz

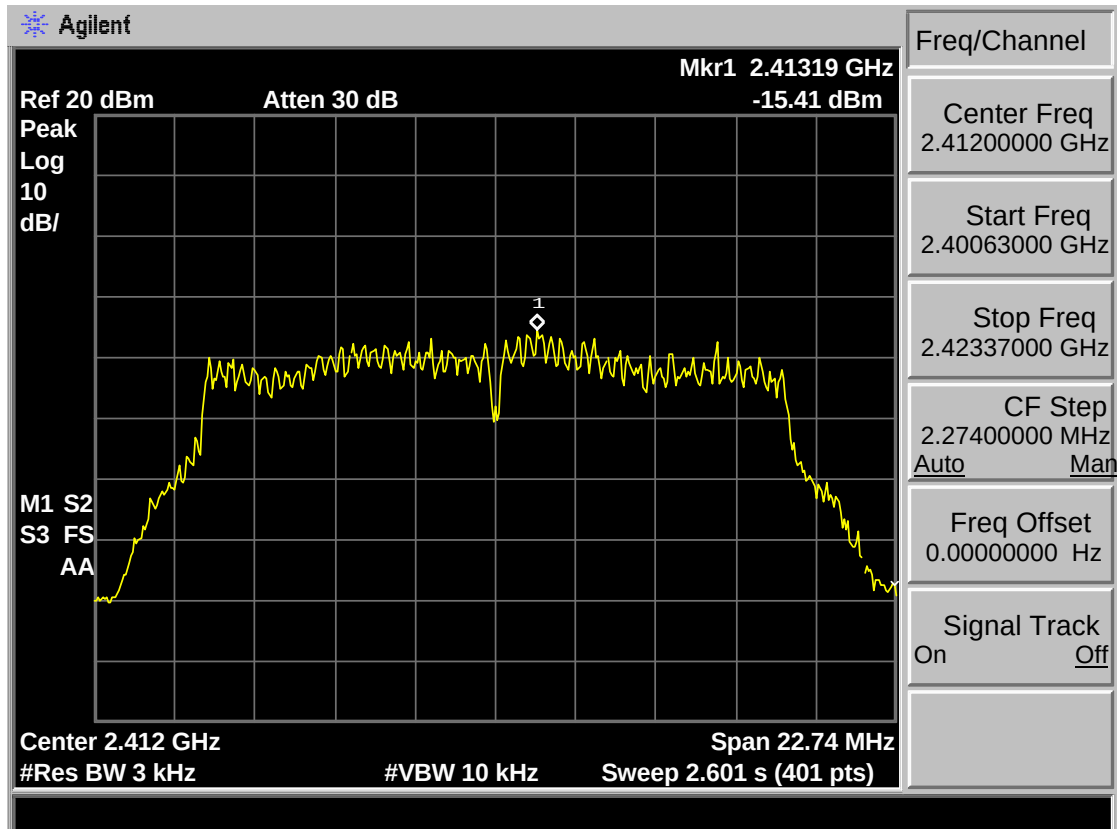


Test Mode: IEEE 802.11n HT20 2437MHz

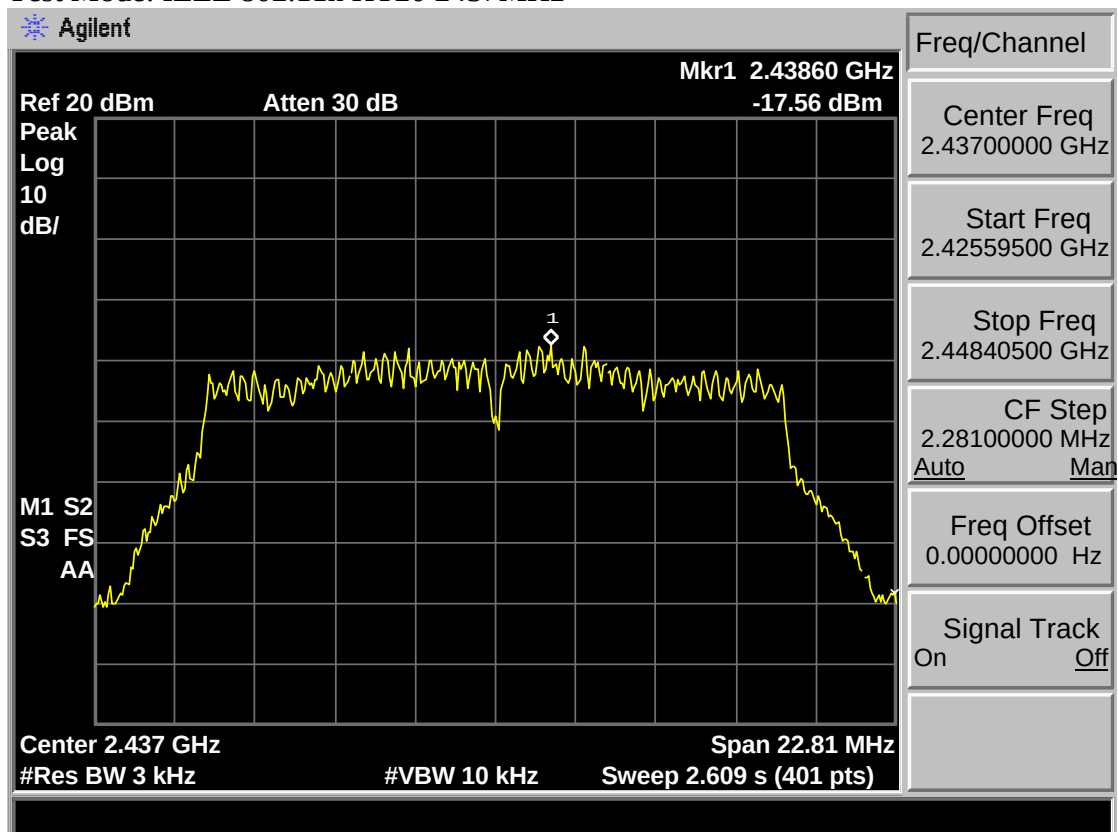


Test Mode: IEEE 802.11n HT20 2462MHz

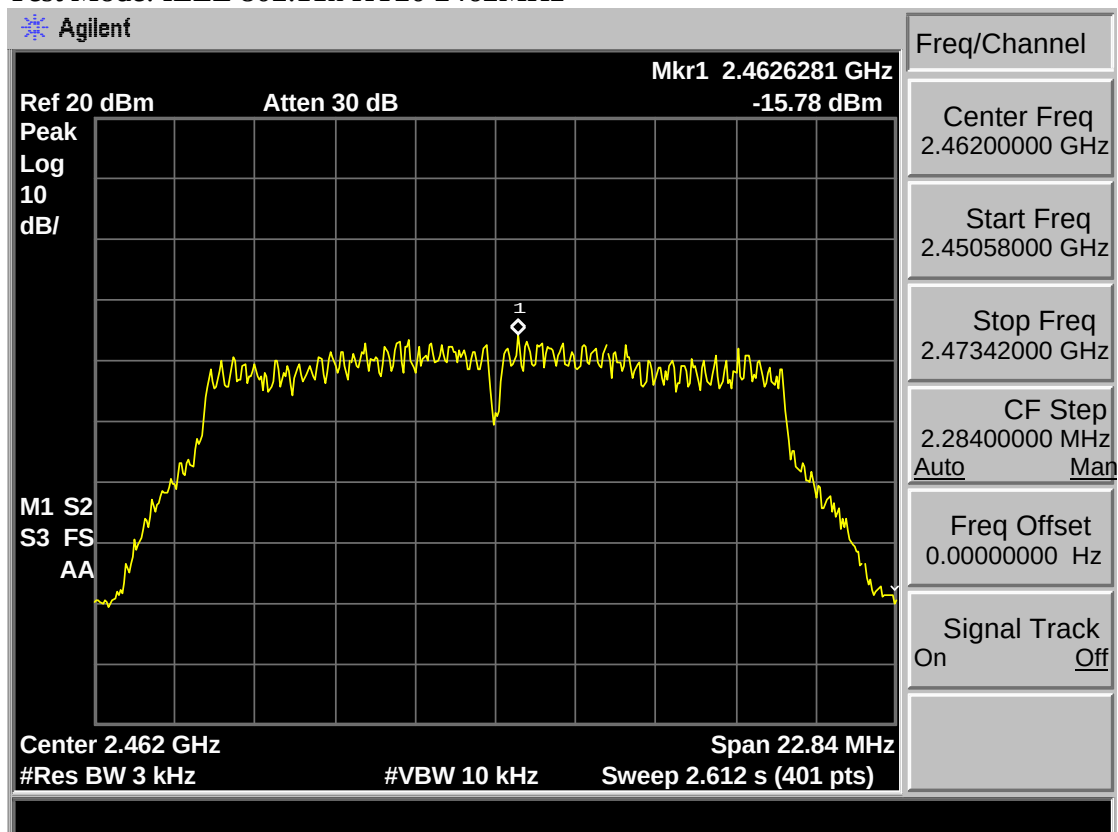


Test Mode: IEEE 802.11n HT40 2422MHz

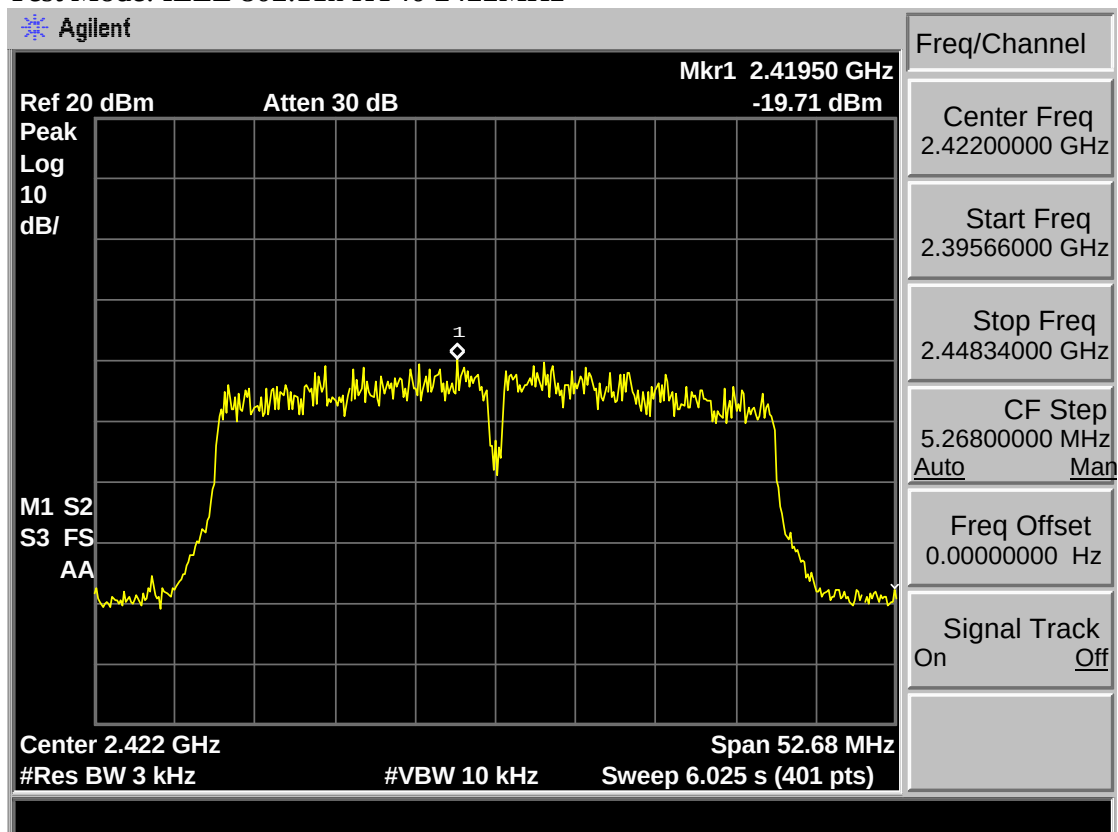

Test Mode: IEEE 802.11n HT40 2437MHz

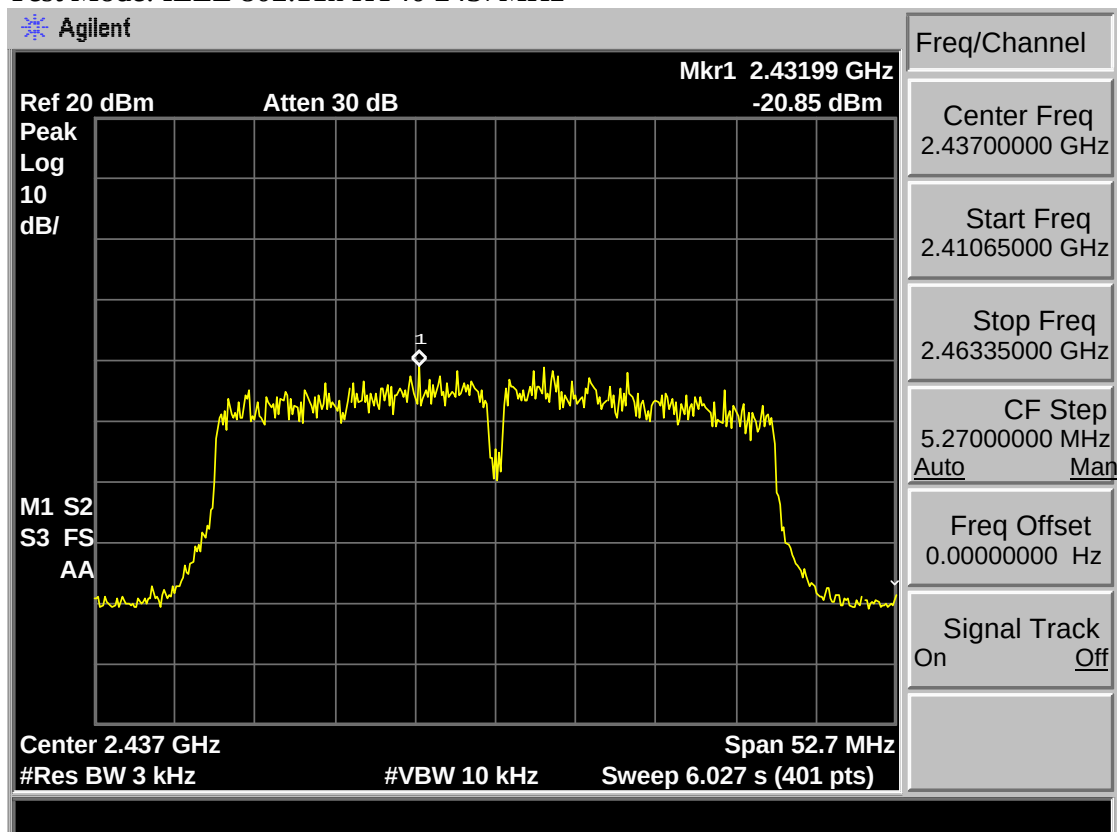

Test Mode: IEEE 802.11n HT40 2452MHz

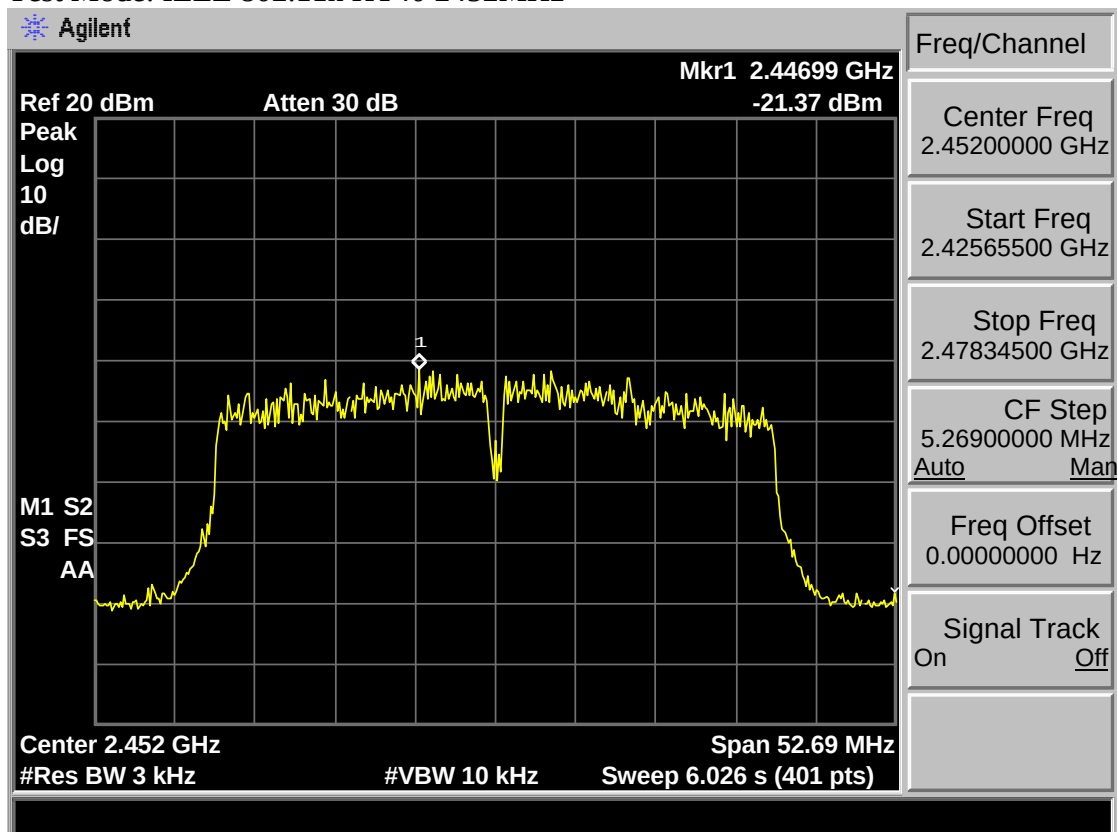

9 ANTENNA REQUIREMENTS

9.1 Limit


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 Result


The antennas used for this product are Internal antenna and that no antenna other than that furnished by the responsible party shall be used with the device, the maximum peak gain of the transmit antenna is only 2.94 dBi.

10 TEST SETUP PHOTO


Conducted Test

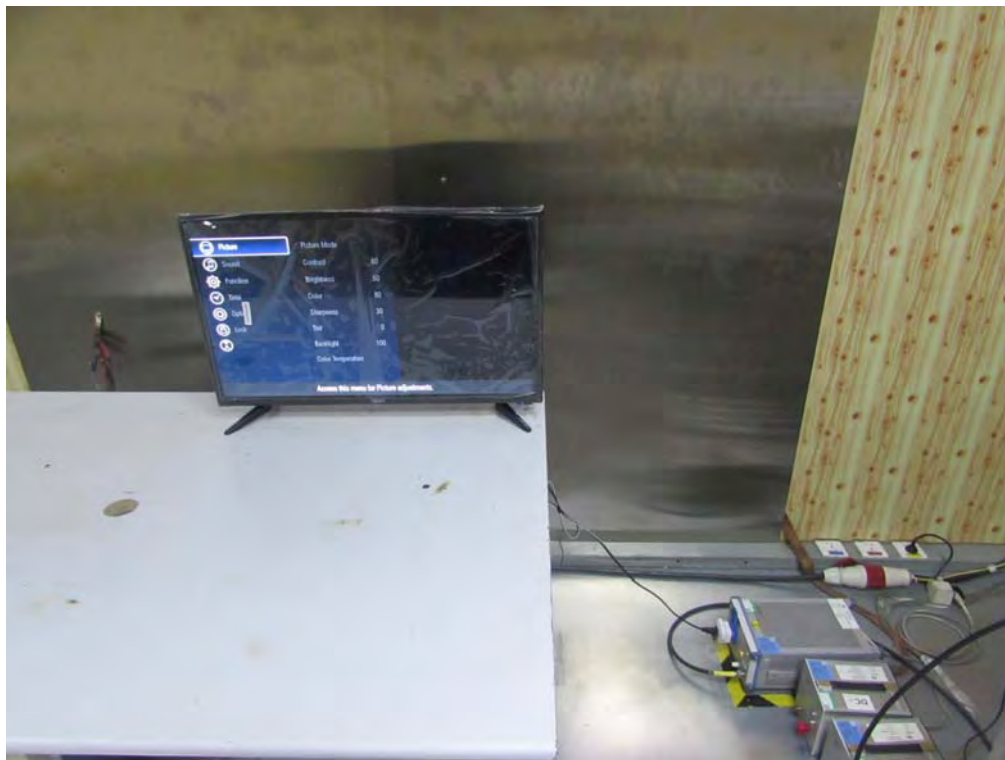

Radiated Test (30-1000 MHz)

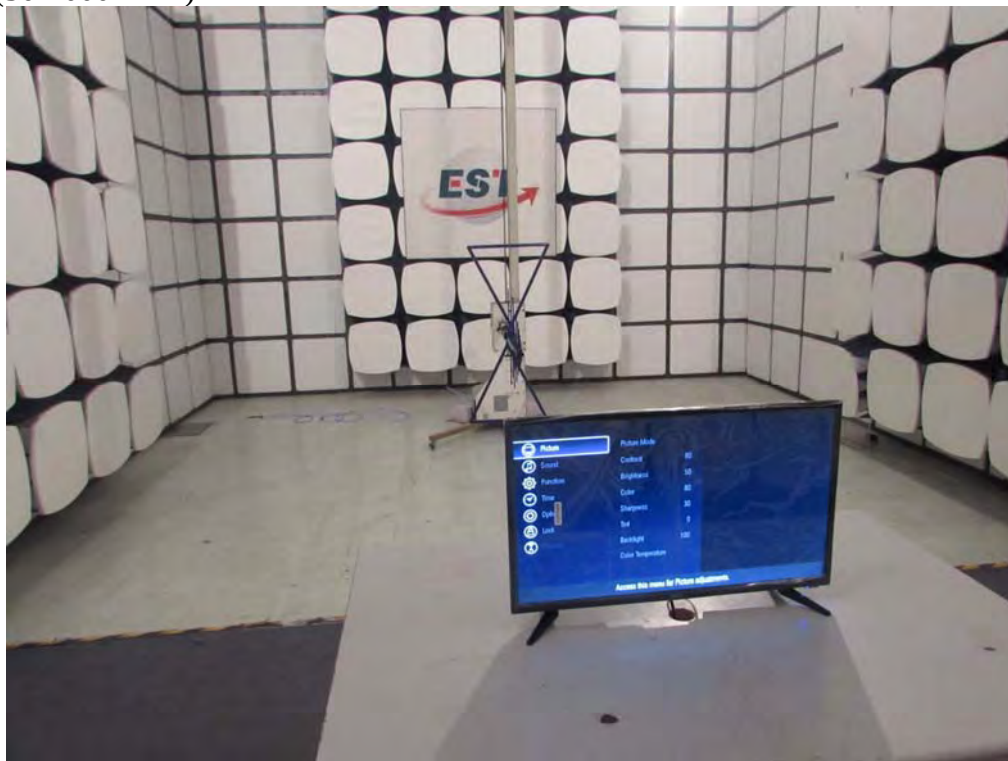

Radiated Test (Above 1000 MHz)

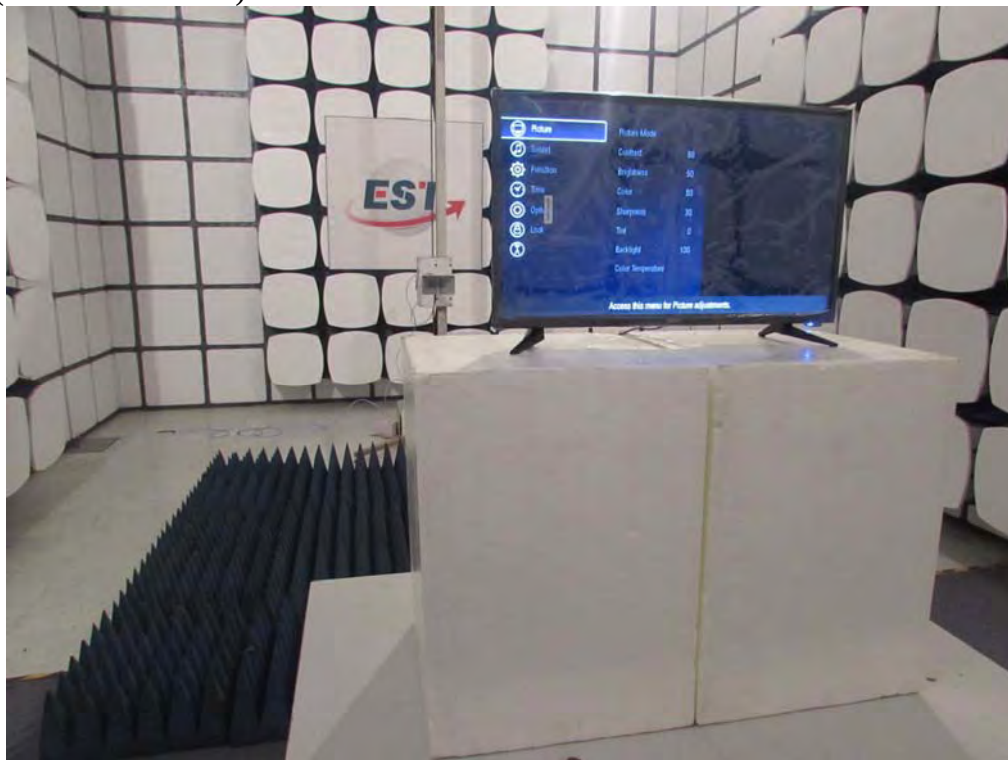

11 PHOTOS OF EUT

External Photos
M/N: SC-32HK700N



External Photos
M/N: SC-32HK700N




External Photos
M/N: SC-32HK700N




External Photos
M/N: SC-32HK700N





Internal Photos
M/N: SC-32HK700N

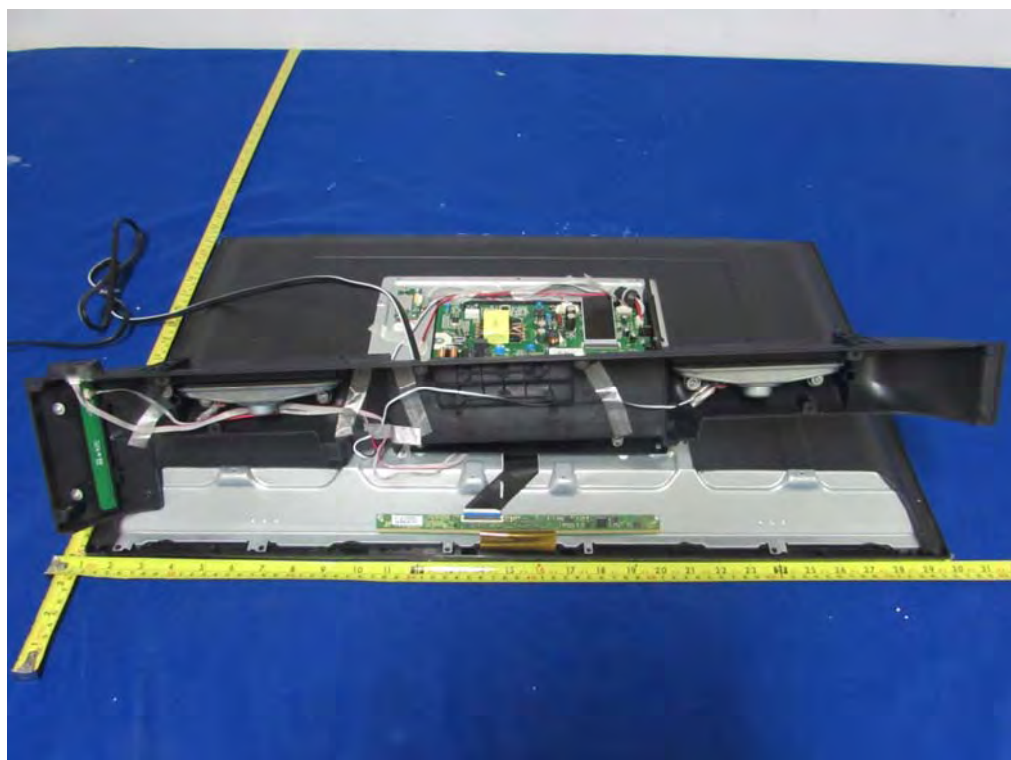

Internal Photos
M/N: SC-32HK700N

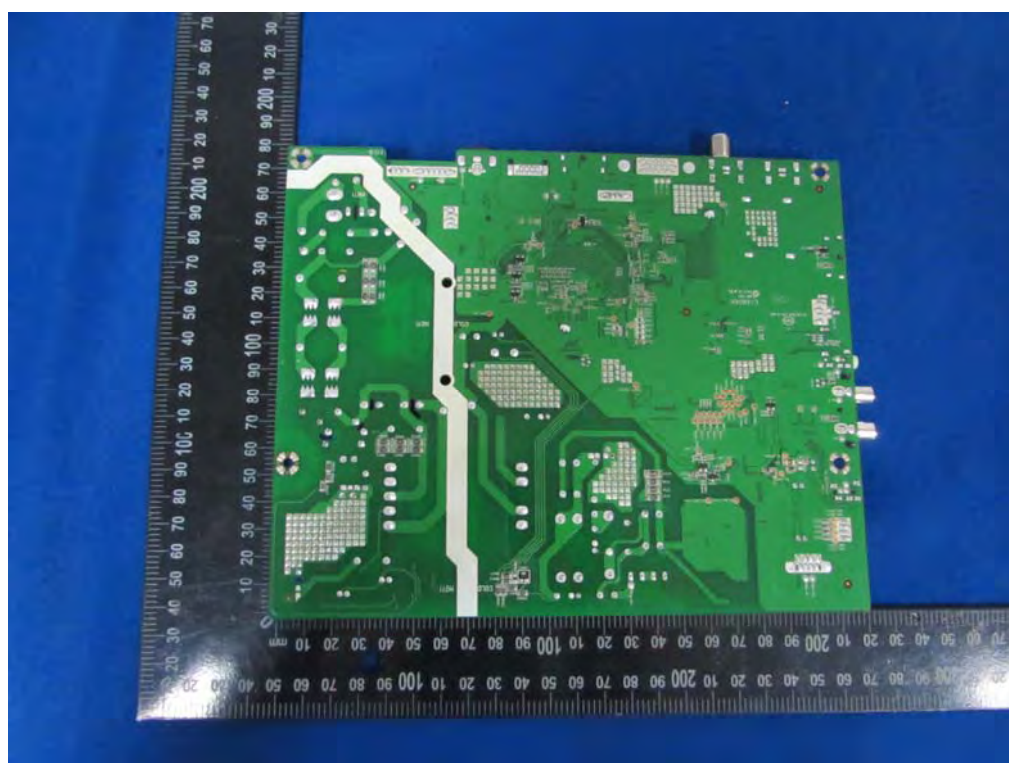

Internal Photos
M/N: SC-32HK700N

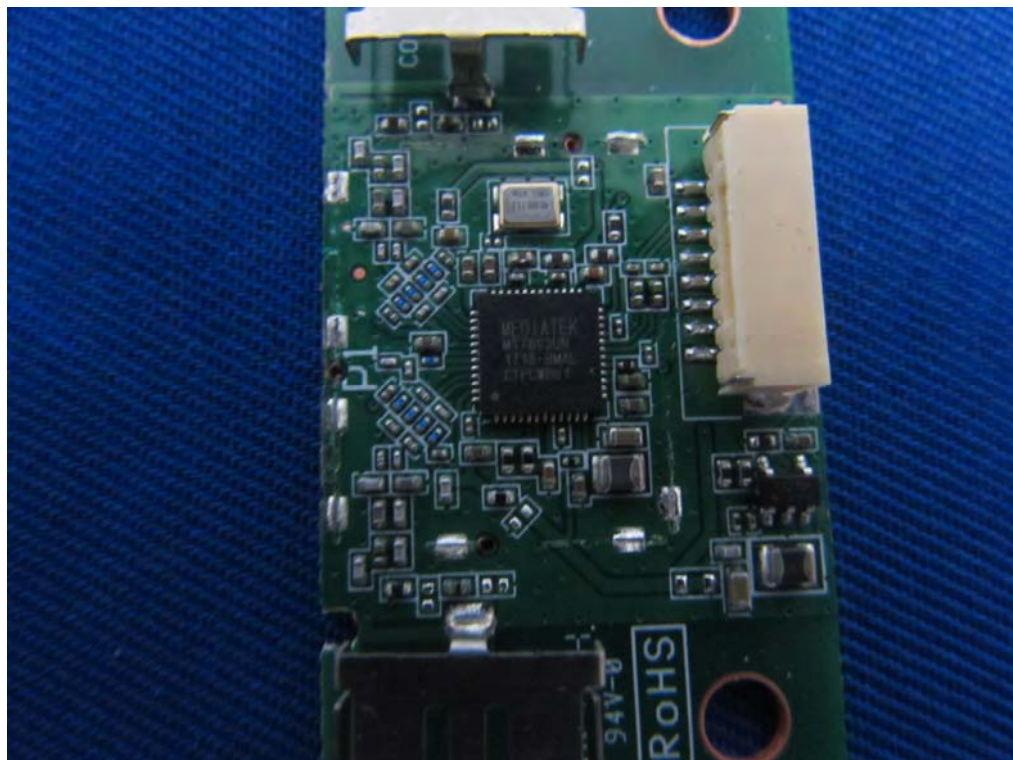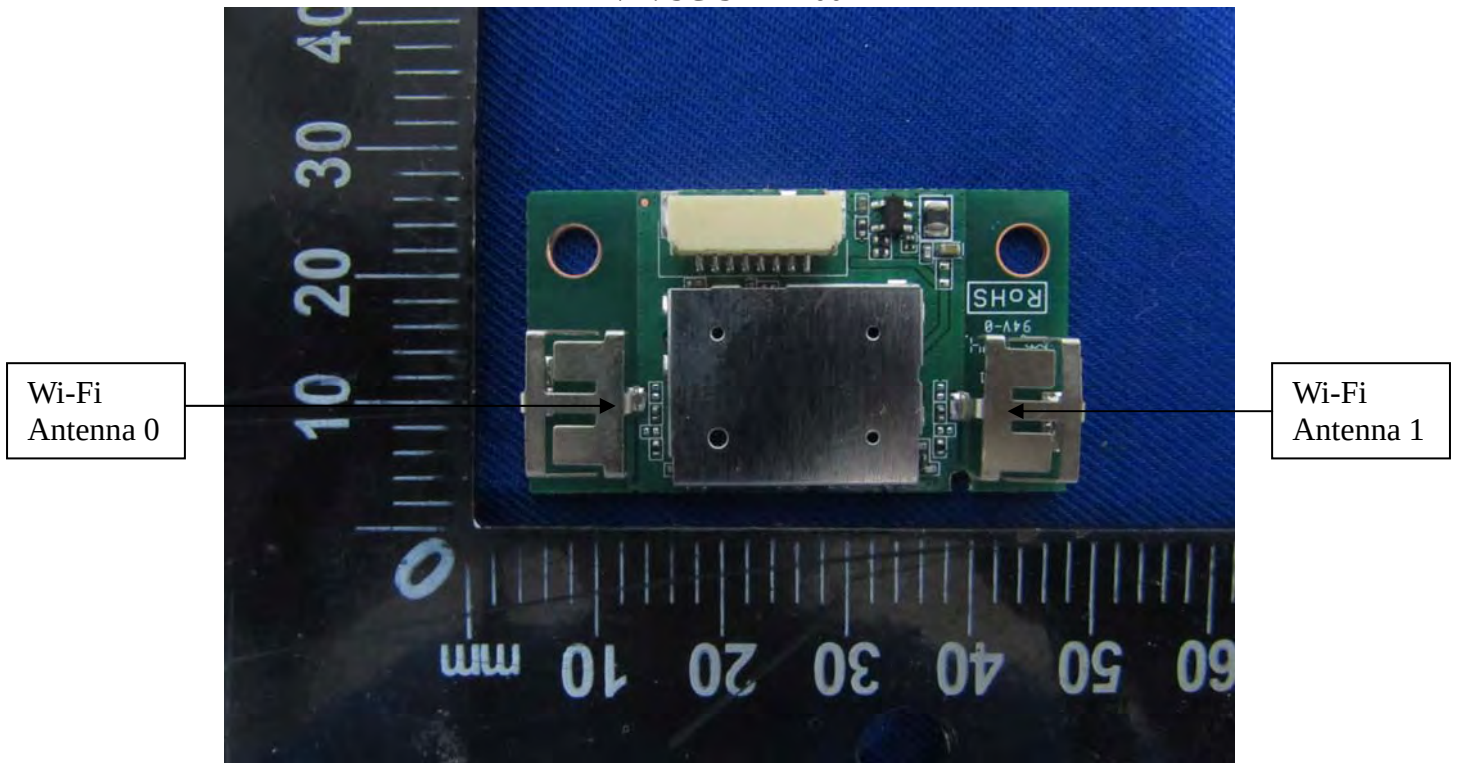

Internal Photos
M/N: SC-32HK700N

