



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 E-mail: ctl@ctl-lab.com

TEST REPORT

FOR FCC PART 15 SUBPART C 15.239

Report Reference No.: **CTL1706231101-WF-03**

Compiled by: (position+printed name+signature)	Allen Wang (File administrators)	<i>Allen Wang</i>
Tested by: (position+printed name+signature)	Nice Nong (Test Engineer)	<i>Nice Nong</i>
Approved by: (position+printed name+signature)	Ivan Xie (Manager)	<i>Ivan Xie</i>

Product Name	Smart Pillow
Model/Type reference	SP01
Trade Mark	Tracebird
FCC ID	2AMYF-SP01
Applicant's name	Tracebird Intelligent Tech. Limited
Address of applicant	2112 Room, Bai Yun Building, 111 Bai Yun Road, Yue Xiu District, Guangzhou, Guangdong, China
Test Firm	Shenzhen CTL Testing Technology Co., Ltd.
Address of Test Firm	Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055
Test specification	
Standard.....	FCC Part 15.239: Operation in the band 88–108 MHz.
TRF Originator	Shenzhen CTL Testing Technology Co., Ltd.
Master TRF	Dated 2011-01
Date of Receipt	July 01, 2017
Date of Test Date	July 01, 2017 –July 12, 2017
Date of Issue	July 12, 2017
Result	Pass
Shenzhen CTL Testing Technology Co., Ltd. All rights reserved.	
This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	

TEST REPORT

Test Report No. :	CTL1706231101-WF-03	July 12, 2017
		Date of issue

Equipment under Test : Smart Pillow

Model /Type : SP01

Applicant : **Tracebird Intelligent Tech. Limited**

Address : 2112 Room, Bai Yun Building, 111 Bai Yun Road, Yue Xiu District, Guangzhou, Guangdong, China

Manufacturer : **Tracebird Intelligent Tech. Limited**

Address : 2112 Room, Bai Yun Building, 111 Bai Yun Road, Yue Xiu District, Guangzhou, Guangdong, China

Test result	Pass *
--------------------	---------------

* In the configuration tested, the EUT complied with the standards specified page 5.

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.


** Modified History **



T able of Contents

Page

1. SUMMARY.....	5
1.1. TEST STANDARDS.....	5
1.2. TEST DESCRIPTION.....	5
1.3. TEST FACILITY	6
1.4. STATEMENT OF THE MEASUREMENT UNCERTAINTY.....	6
2. GENERAL INFORMATION.....	7
2.1. ENVIRONMENTAL CONDITIONS	7
2.2. GENERAL DESCRIPTION OF EUT	7
2.3. DESCRIPTION OF TEST MODES AND TEST FREQUENCY.....	7
2.4. EQUIPMENTS USED DURING THE TEST	8
2.5. RELATED SUBMITTAL(S) / GRANT(S).....	8
2.6. MODIFICATIONS.....	8
3. TEST CONDITIONS AND RESULTS	9
3.1. CONDUCTED EMISSIONS TEST	9
3.2. RADIATED EMISSIONS.....	12
3.3. OCCUPIED BANDWIDTH.....	16
3.4. ANTENNA REQUIREMENT.....	18
4. TEST SETUP PHOTOS OF THE EUT	19
5. EXTERNAL AND INTERNAL PHOTOS OF THE EUT.....	19

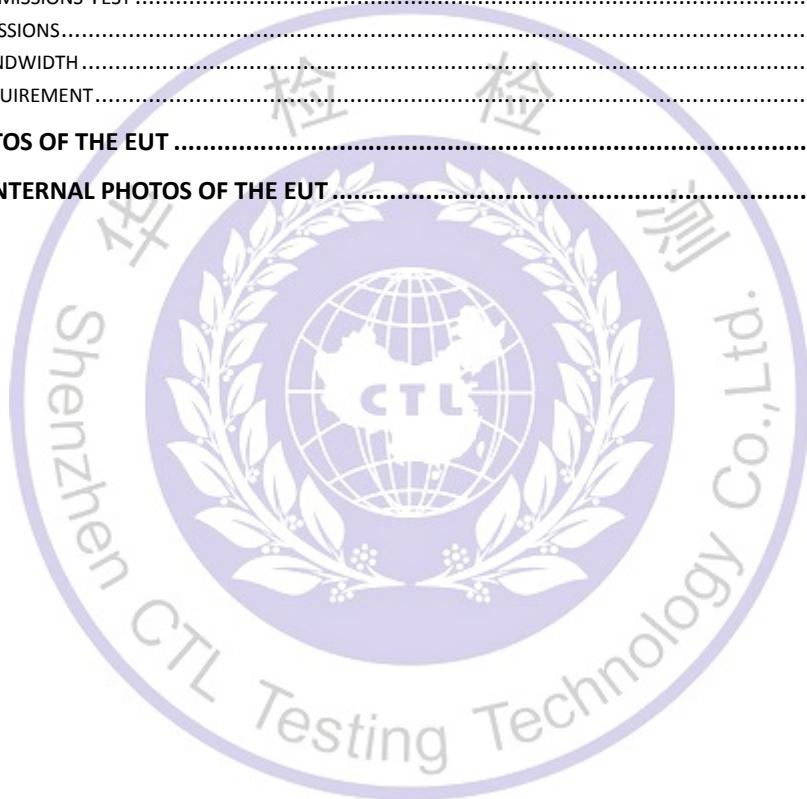

1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:


[**FCC Rules Part 15.239:**](#) Operation in the band 88–108 MHz.

[**ANSI C63.10:2013 :**](#) American National Standard for Testing Unlicensed Wireless Devices

[**ANSI C63.4: 2014:**](#) –American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz Range of 9 kHz to 40GHz

1.2. Test Description

FCC PART 15.239		
FCC Part 15.239(a)	Field Strength of Fundamental	PASS
FCC Part 15.209/15.239(c)	Spurious Emission	PASS
FCC Part 15.239(a)	20dB bandwidth	PASS
FCC Part 15.207	Conducted Emission	PASS
FCC Part 15.203	Antenna Requirement	PASS

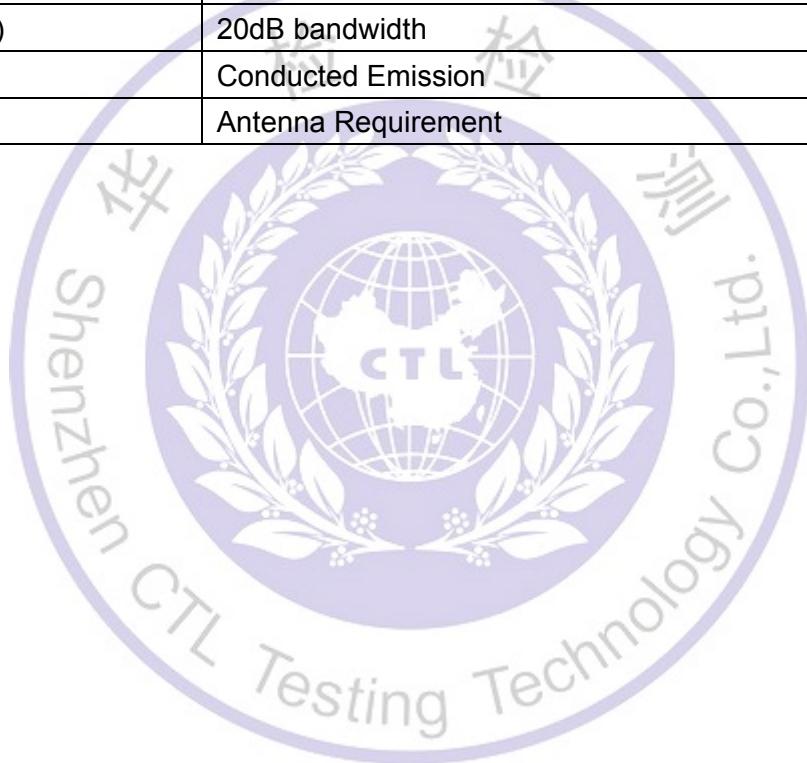

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.
Floor 1-A, Baisha Technology Park, No. 3011, Shahexi Road, Nanshan, Shenzhen 518055 China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 22/EN 55022 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 9618B

The 3m alternate test site of Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 9618B on November 13, 2013.

FCC-Registration No.: 970318

Shenzhen CTL Testing Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 970318, December 19, 2013.

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	Above 1GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.20dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Smart Pillow
Model/Type reference:	SP01
Power supply:	DC 5V from USB
FM	
Modulation:	FM
Operation frequency:	88.1-107.9MHz
Channel number:	199
Channel separation:	100KHz
Antenna type:	FPC Antenna
Antenna gain:	1.0dBi

Note: For more details, please refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting (Duty Cycle more than 98%) and receiving mode for testing .

In section 15.31(m), regards to the operating frequency range over 10 MHz, the lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Operation Frequency List :

Channel	Frequency (MHz)
01	88.1
02	88.2
:	:
100	98.0
101	98.1
102	98.2
:	:
198	107.8
199	107.9

Note: The line display in grey is the channel selected to perform test.

2.4. Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Due Date
LISN	R&S	ENV216	3560.6550.12	2017/05/20	2018/05/19
LISN	R&S	ESH2-Z5	860014/010	2017/05/20	2018/05/19
Bilog Antenna	Sunol Sciences Corp.	JB1	A061713	2017/05/20	2018/05/19
EMI Test Receiver	R&S	ESCI	103710	2017/05/20	2018/05/19
Spectrum Analyzer	Agilent	E4407B	MY41440676	2017/05/20	2018/05/19
Spectrum Analyzer	Agilent	N9020	US46220290	2017/05/20	2018/05/19
Controller	EM Electronics	Controller EM 1000	N/A	2017/05/20	2018/05/19
Horn Antenna	Sunol Sciences Corp.	DRH-118	A062013	2017/05/20	2018/05/19
Active Loop Antenna	SCHWARZBECK	FMZB1519	1519-037	2017/05/20	2018/05/19
Amplifier	Agilent	8349B	3008A02306	2017/05/20	2018/05/19
Amplifier	Agilent	8447D	2944A10176	2017/05/20	2018/05/19
Temperature/Humidity Meter	Gangxing	CTH-608	02	2017/05/20	2018/05/19
High-Pass Filter	K&L	9SH10-2700/X1 2750-O/O	N/A	2017/05/20	2018/05/19
High-Pass Filter	K&L	41H10-1375/U1 2750-O/O	N/A	2017/05/20	2018/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-10M	10m	2017/05/20	2018/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2017/05/20	2018/05/19
Coaxial Cables	HUBER+SUHN ER	SUCOFLEX 104PEA-3M	3m	2017/05/20	2018/05/19
RF Cable	Megalon	RF-A303	N/A	2017/05/20	2018/05/19

The calibration interval was one year

2.5. Related Submittal(s) / Grant(s)

This submittal(s) (test report) is intended to comply with Section 15.239 of the FCC Part 15, Subpart C Rules.

2.6. Modifications

No modifications were implemented to meet testing criteria.

3. TEST CONDITIONS AND RESULTS

3.1. Conducted Emissions Test


LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST CONFIGURATION

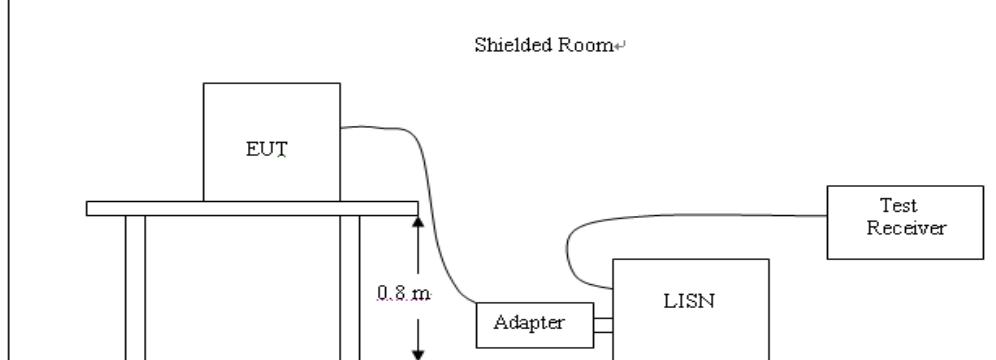


TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10:2013.
2. Support equipment, if needed, was placed as per ANSI C63.10:2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10:2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

TEST RESULTS

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

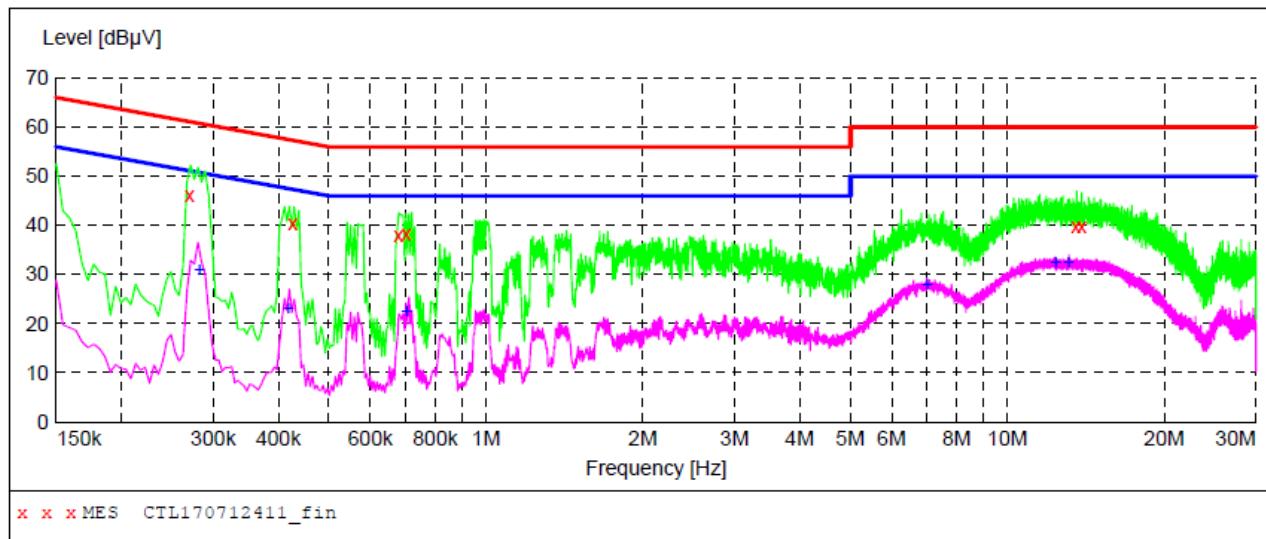

MEASUREMENT RESULT: "CTL170712411_fin"

7/14/2017 3:30PM


Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.270000	46.10	10.2	61	15.0	QP	L1	GND
0.426000	40.30	10.2	57	17.0	QP	L1	GND
0.680000	38.00	10.2	56	18.0	QP	L1	GND
0.704000	38.40	10.2	56	17.6	QP	L1	GND
13.538000	39.70	10.6	60	20.3	QP	L1	GND
13.880000	39.90	10.6	60	20.1	QP	L1	GND

MEASUREMENT RESULT: "CTL170712411_fin2"

7/14/2017 3:30PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.282000	31.20	10.2	51	19.6	AV	L1	GND
0.418000	23.20	10.2	48	24.3	AV	L1	GND
0.704000	22.60	10.2	46	23.4	AV	L1	GND
7.010000	27.90	10.4	50	22.1	AV	L1	GND
12.386000	32.70	10.6	50	17.3	AV	L1	GND
13.100000	32.60	10.6	50	17.4	AV	L1	GND

SCAN TABLE: "Voltage (9K-30M) FIN"
 Short Description: 150K-30M Voltage

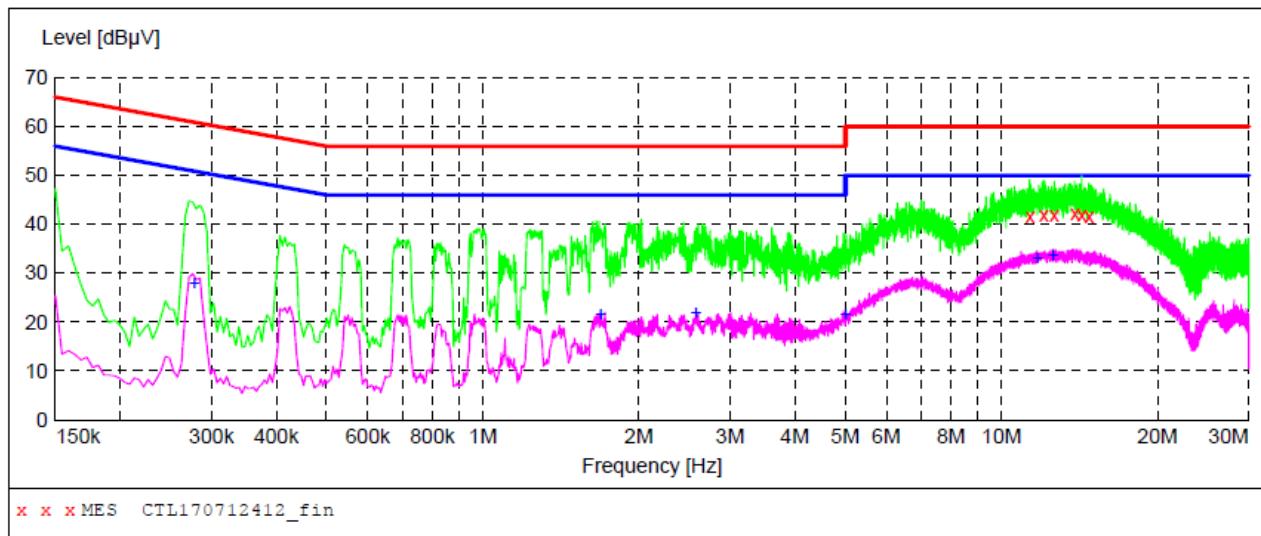

MEASUREMENT RESULT: "CTL170712412_fin"

7/14/2017 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
11.342000	41.60	10.6	60	18.4	QP	N	GND
12.080000	41.80	10.6	60	18.2	QP	N	GND
12.632000	41.80	10.6	60	18.2	QP	N	GND
13.862000	42.10	10.6	60	17.9	QP	N	GND
14.288000	41.80	10.7	60	18.2	QP	N	GND
14.7786000	41.50	10.7	60	18.5	QP	N	GND

MEASUREMENT RESULT: "CTL170712412_fin2"

7/14/2017 3:34PM

Frequency MHz	Level dB μ V	Transd dB	Limit dB μ V	Margin dB	Detector	Line	PE
0.278000	27.90	10.2	51	23.0	AV	N	GND
1.688000	21.70	10.3	46	24.3	AV	N	GND
2.576000	21.90	10.4	46	24.1	AV	N	GND
5.000000	21.80	10.4	46	24.2	AV	N	GND
11.726000	33.30	10.6	50	16.7	AV	N	GND
12.578000	33.80	10.6	50	16.2	AV	N	GND

3.2. Radiated Emissions

Limit

15.239(b) The field strength of any emissions within the permitted 200 KHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

Unless otherwise specified, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.


The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in § 15.209 as table below:

Radiated emission limits


Frequency (MHz)	Distance (Meters)	Radiated (dB μ V/m)	Radiated (μ V/m)
0.009-0.49	3	20log(2400/F(KHz))+40log(300/3)	2400/F(KHz)
0.49-1.705	3	20log(24000/F(KHz))+ 40log(30/3)	24000/F(KHz)
1.705-30	3	20log(30)+ 40log(30/3)	30
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500

TEST CONFIGURATION


(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

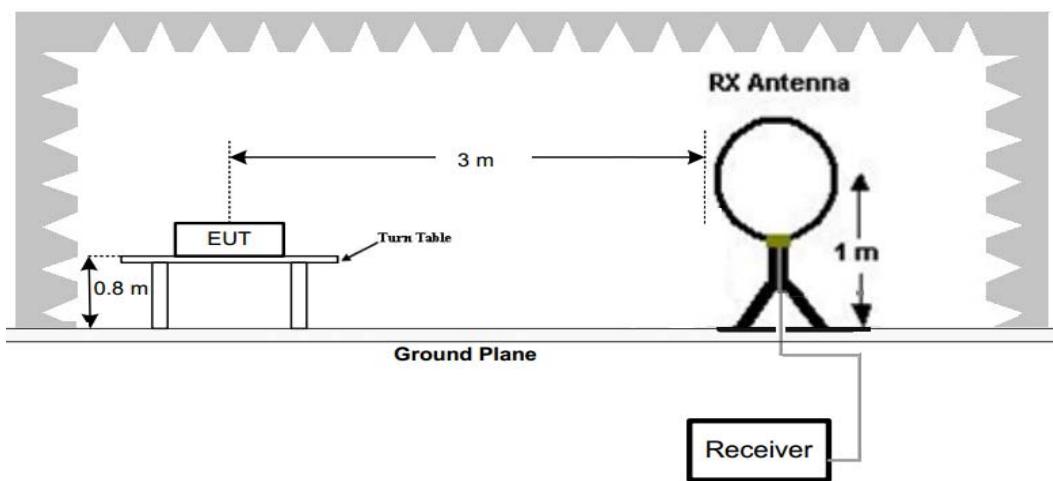

(B) Radiated Emission Test Set-Up, Frequency below 1000MHz

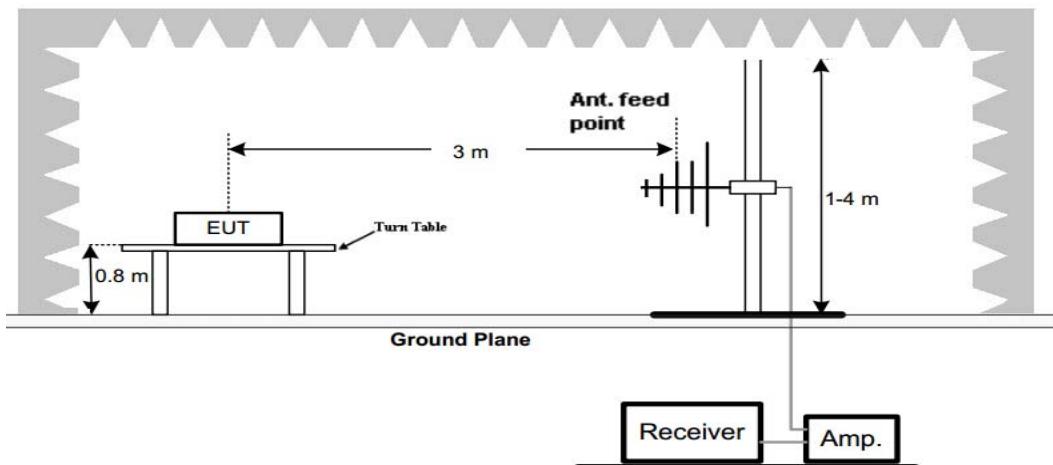

(C) Radiated Emission Test Set-Up, Frequency above 1000MHz

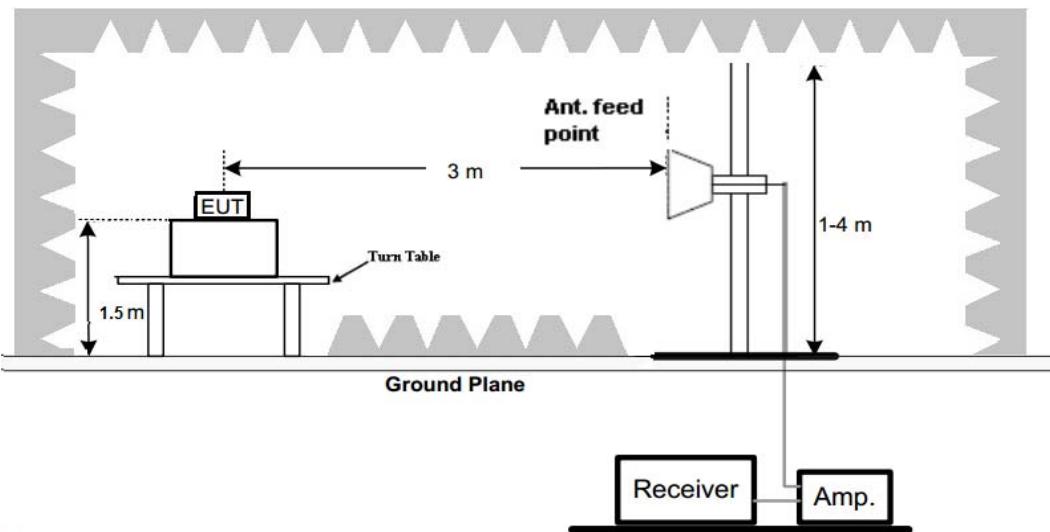**Test Procedure**

1. Below 1GHz measurement the EUT is placed on a turntable which is 0.8m above ground plane, and above 1GHz measurement EUT was placed on a low permittivity and low loss tangent turn table which is 1.5m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.

TEST RESULTS

Remark: Radiated emission test from 9 KHz to 10th harmonic of fundamental was verified, and no emission found except system noise floor in 9KHz to 30MHz and not recorded in this report.

30MHz- 10th Harmonic of Fundamental

Frequency(MHz): 88.1					Polarity: HORIZONTAL				
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
88.10	53.29	PK	68.00	14.71	72.82	8.72	0.56	28.81	-19.53
88.10	46.14	AV	48.00	1.86	65.67	8.72	0.56	28.81	-19.53
88.00	38.12	QP	40.00	1.88	57.68	8.70	0.55	28.81	-19.56
176.20	42.06	QP	43.50	1.44	57.72	11.95	1.05	28.66	-15.66
264.30	43.58	QP	46.00	2.42	57.98	12.86	1.48	28.74	-14.40
352.40	40.17	QP	46.00	5.83	52.22	14.32	1.95	28.32	-12.05
440.50	42.22	QP	46.00	3.78	52.43	16.57	2.18	28.96	-10.21
616.70	41.83	QP	46.00	4.17	50.14	18.32	2.24	28.87	-8.31

Frequency(MHz): 88.1					Polarity: VERTICAL				
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
88.10	53.12	PK	68.00	14.88	72.65	8.72	0.56	28.81	-19.53
88.10	46.45	AV	48.00	1.55	65.98	8.72	0.56	28.81	-19.53
88.00	36.01	QP	40.00	3.99	55.57	8.70	0.55	28.81	-19.56
176.20	40.87	QP	43.50	2.63	56.53	11.95	1.05	28.66	-15.66
264.30	42.46	QP	46.00	3.54	56.86	12.86	1.48	28.74	-14.40
352.40	42.15	QP	46.00	3.85	54.20	14.32	1.95	28.32	-12.05
440.50	40.67	QP	46.00	5.33	50.88	16.57	2.18	28.96	-10.21
616.70	42.08	QP	46.00	3.92	50.39	18.32	2.24	28.87	-8.31

Frequency(MHz): 98.1					Polarity: HORIZONTAL				
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
98.10	53.92	PK	68.00	14.08	73.42	8.78	0.57	28.85	-19.50
98.10	44.76	AV	48.00	3.24	64.26	8.78	0.57	28.85	-19.50
196.20	36.01	QP	40.00	3.99	51.80	11.98	1.11	28.88	-15.79
294.30	41.16	QP	43.50	2.34	55.42	13.11	1.54	28.91	-14.26
490.50	42.87	QP	46.00	3.13	55.14	14.58	2.20	29.05	-12.27
588.60	38.02	QP	46.00	7.98	49.25	15.64	2.23	29.10	-11.23
686.70	42.66	QP	46.00	3.34	50.84	18.69	2.28	29.15	-8.18
882.90	41.72	QP	46.00	4.28	46.49	21.59	3.26	29.62	-4.77

Frequency(MHz): 98.1					Polarity: VERTICAL				
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)	
98.10	54.06	PK	68.00	13.94	73.56	8.78	0.57	28.85	-19.50
98.10	47.29	AV	48.00	0.71	66.79	8.78	0.57	28.85	-19.50
196.20	38.42	QP	40.00	1.58	54.21	11.98	1.11	28.88	-15.79
294.30	40.72	QP	43.50	2.78	54.98	13.11	1.54	28.91	-14.26
490.50	41.09	QP	46.00	4.91	53.36	14.58	2.20	29.05	-12.27
588.60	39.43	QP	46.00	6.57	50.66	15.64	2.23	29.10	-11.23
686.70	41.55	QP	46.00	4.45	49.73	18.69	2.28	29.15	-8.18
882.90	40.68	QP	46.00	5.32	45.45	21.59	3.26	29.62	-4.77

Frequency(MHz):107.9					Polarity: HORIZONTAL				
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
107.90	52.62	PK	68.00	15.38	71.91	9.04	0.65	28.98	-19.29
107.90	46.81	AV	48.00	1.19	66.10	9.04	0.65	28.98	-19.29
108.00	35.47	QP	40.00	4.53	54.75	9.05	0.65	28.98	-19.28
215.80	40.52	QP	43.50	2.98	55.93	12.14	1.35	28.9	-15.41
323.70	42.04	QP	46.00	3.96	55.73	13.58	1.68	28.95	-13.69
431.60	38.16	QP	46.00	7.84	50.89	14.25	2.04	29.02	-12.73
539.50	41.39	QP	46.00	4.61	52.87	15.47	2.13	29.08	-11.48
755.30	42.05	QP	46.00	3.95	49.77	19.11	2.39	29.22	-7.72

Frequency(MHz):107.9					Polarity: VERTICAL				
Frequency (MHz)	Emission Level (dBuV/m)		Limit (dBuV/m)	Margin (dB)	Raw Value (dBuV)	Antenna Factor (dB/m)	Cable Factor (dB)	Pre- amplifier (dB)	Correction Factor (dB/m)
107.90	54.08	PK	68.00	13.92	73.37	9.04	0.65	28.98	-19.29
107.90	45.86	AV	48.00	2.14	65.15	9.04	0.65	28.98	-19.29
108.00	37.81	QP	40.00	2.19	57.09	9.05	0.65	28.98	-19.28
215.80	40.27	QP	43.50	3.23	55.68	12.14	1.35	28.9	-15.41
323.70	41.05	QP	46.00	4.95	54.74	13.58	1.68	28.95	-13.69
431.60	38.49	QP	46.00	7.51	51.22	14.25	2.04	29.02	-12.73
539.50	41.22	QP	46.00	4.78	52.70	15.47	2.13	29.08	-11.48
755.30	42.43	QP	46.00	3.57	50.15	19.11	2.39	29.22	-7.72

REMARKS:


1. Emission level (dBuV/m) = Raw Value (dBuV)+Correction Factor (dB/m)
2. Correction Factor (dB/m) =Antenna Factor (dB/m)+Cable Factor (dB)-Pre-amplifier Factor
3. Margin value = Limit value- Emission level
4. -- Mean the PK detector measured value is below QP limit
5. The other emission levels were very low against the limit
6. For fundamental frequency, RBW 100KHz VBW 300 Hz Peak detectors is for PK Value

3.3. Occupied Bandwidth

Limit

Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88–108 MHz.

Test Configuration



Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30 KHz RBW and 100 KHz VBW.

The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Test Results

Modulation	Channel	20dB bandwidth (KHz)	Result
FM	CH01	55.060	Pass
	CH101	56.255	
	CH199	54.597	

Test plot as follows:



3.4. Antenna Requirement

Standard Applicable


For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Refer to statement below for compliance.


The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction

The antenna used in this product is an internal Antenna, The directional gains of antenna used for transmitting is 1.0dBi.

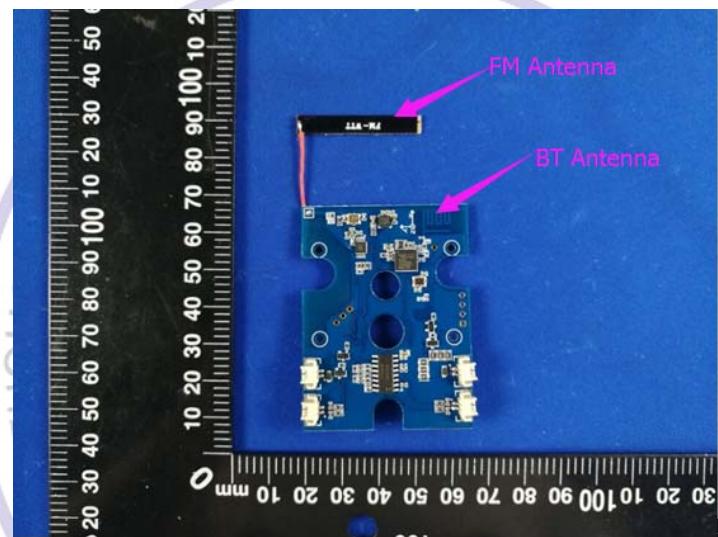


4. Test Setup Photos of the EUT

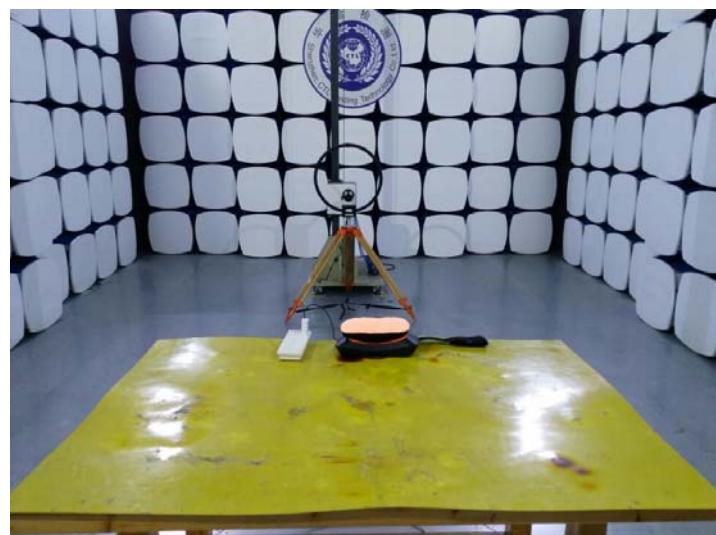



5. External and Internal Photos of the EUT


External photos



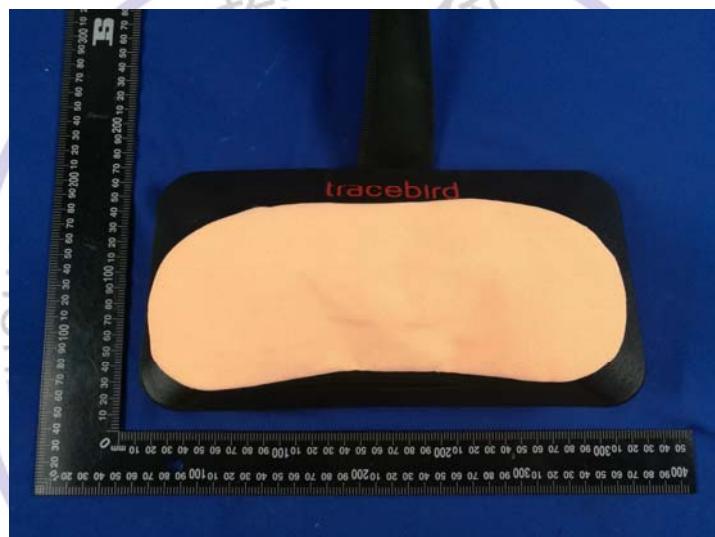






Internal photos

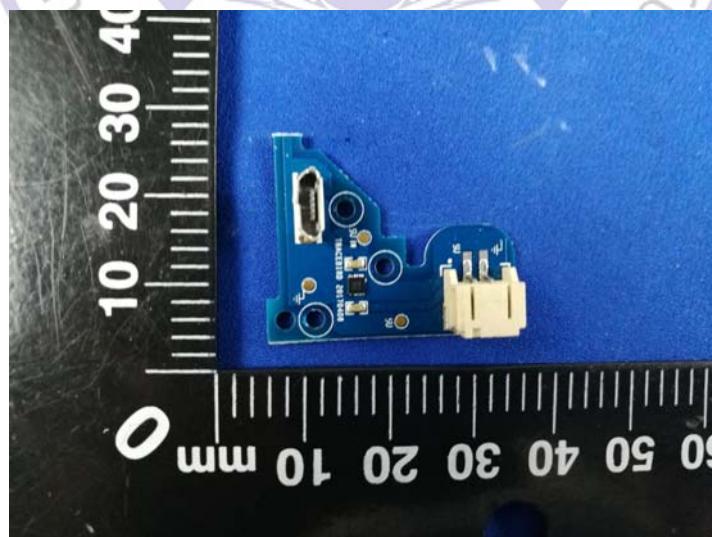

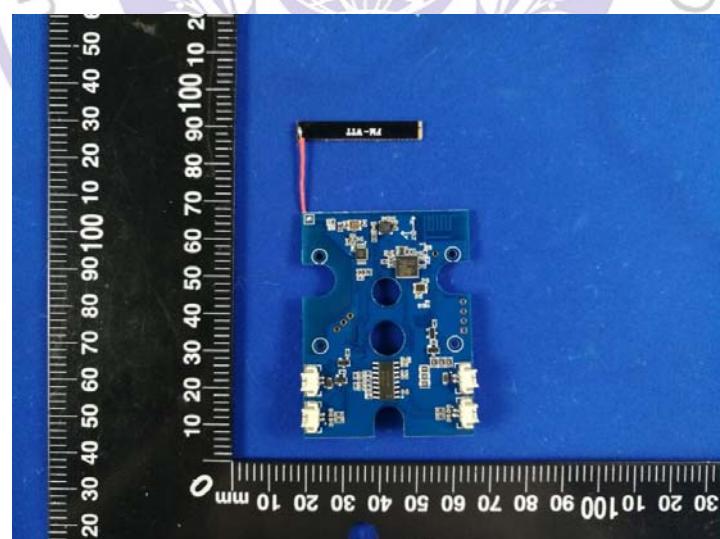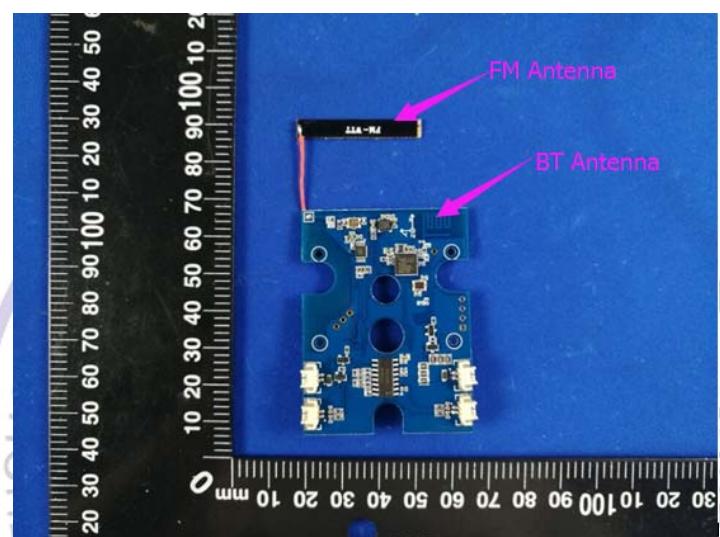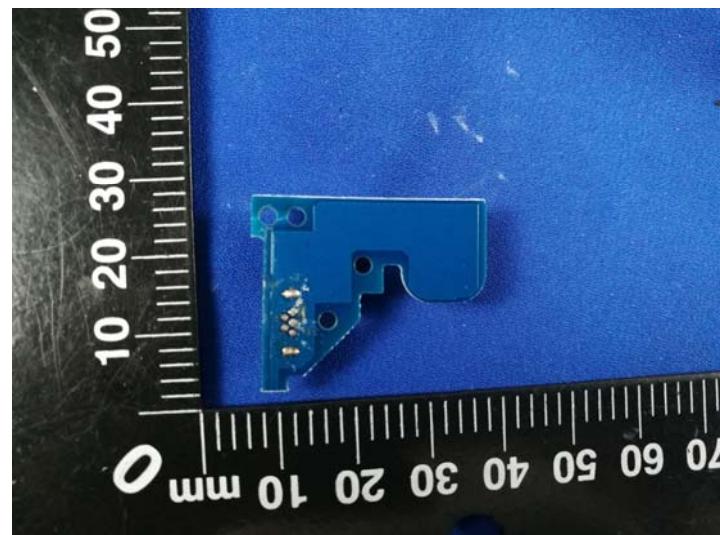

***** End of Report *****