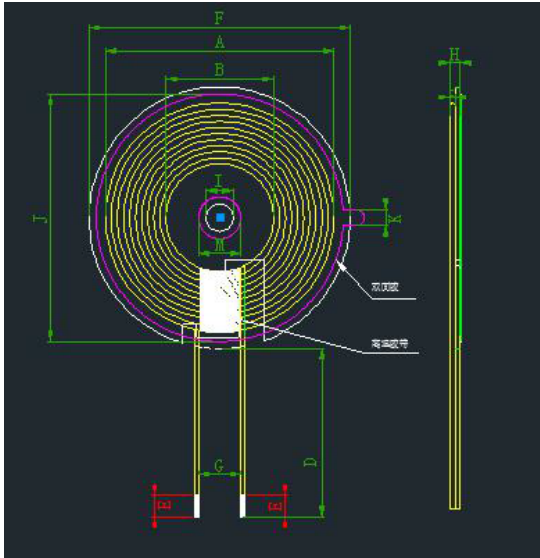
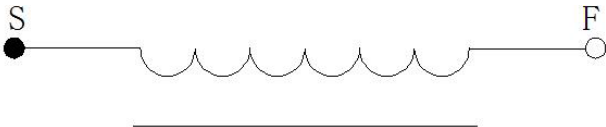


SPECIFICATION

产 品 型 号: DESC		Φ 20.5x39-6.5uH-0.08x24P*2P-15mm		版本 Rev: A.0	客 户 CUST: 客户料号 CUST P/N:	
						ZLGD-A1-0355
一、尺寸 DIMENSION:(mm) 					A	39±1.0
					B	20.5±0.5
					D	15±2
					E	3±1
					F	41.5±0.5
					G	8.0±1.0
					H	1.8 ±0.2
					I	5.0±0.3
					M	7.0±1.0
					J	40±1
					K	3.0±1
二、原理图 SCHEMATIC DIAGRAM: 					注:	
					1.Cross outlet;	
					2.Wrap 8mm(ref) high width at the outlet	
					Warm adhesive paper 1-2Ts;	
					3.Coil attached to circular hard disk with magnetic	
					The size of the piece is 41.5±0.5mm, the inner hole is 5.3mm, and the thickness is 0.8±0.1mm。	
					4.Operating temperature ≤100°C	
三、绕线参数 Winding Specification:						
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction	
1	S	F	热风线 0.08*24P	10Ts	CCW	
四、电气特性 ELECTRICAL CHARACTERISTICS:						
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%						
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS	
1	IND.	S-F	4.0uH ±0.3 单独线圈	100KHz/1.0V	LCZ METER 1062B	
2	IND.	S-F	6.5uH ±0.3 磁片	100KHz/1.0V	LCZ METER 1062B	
3	DCR	S-F	≤98m Ω	100KHz/1.0V	LCZ METER 502B	
4	Q	S-F	≤42	100KHz/1.0V	LCZ METER 502B	
拟制/日期 PREPARED BY/DATE				审核/日期 CHECKED BY/DATE		
郭柳 2024.07.18				安帅印 2024.07.18		