



中国认可
国际互认
检测
TESTING
CNAS L5313



DEKRA

Test Report

FCC Part15 Subpart C

Product Name : 915MHz LoRa Module

Model No. : LTRF8888A1

FCC ID : 2AN2J-LTRF8888A1

Applicant : Yueqing Blue Sky Hi-Tech CO.,LTD

Address : Sulv industry zone, Liushi Town, Yueqing, Zhejiang
province, China

Date of Receipt : Aug. 23, 2017

Test Date : Aug. 23, 2017~ Oct. 20, 2017

Issued Date : Aug. 24, 2018

Report No. : 1782106R-RF-US-P06V01

Report Version : V1.1

The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by CNAS, TAF, A2LA or any agency of the

The test report shall not be reproduced without the written approval of DEKRA Testing & Certification (Suzhou) Co., Ltd.

Test Report Certification

Issued Date : Aug. 24, 2018
Report No. : 1782106R-RF-US-P06V01



Product Name : 915MHz LoRa Module
Applicant : Yueqing Blue Sky Hi-Tech CO.,LTD
Address : Sulv industry zone, Liushi Town, Yueqing, Zhejiang province, China
Manufacturer : Shanghai Coremoon Electronic & Technology Co., Ltd
Address : No. 165, Lane 111, Sunjian Road, Pudong District Shanghai
Model No. : LTRF8888A1
FCC ID : 2AN2J-LTRF8888A1
EUT Voltage : 2.8V-3.7VDC, 130mA
Brand Name :




Applicable Standard : FCC CFR Title 47 Part 15 Subpart C
ANSI C63.4:2014; ANSI C63.10:2013;
Test Result : Complied
Performed Location : DEKRA Testing & Certification (Suzhou) Co., Ltd.
No.99 Hongye Rd., Suzhou Industrial Park, Suzhou, 215006,
Jiangsu, China
TEL: +86-512-6251-5088 / FAX: +86-512-6251-5098
FCC Registration Number: CN1199;

Documented By : 

(Project Assistant: Kathy Feng)

Reviewed By : 

(Senior Project Manager: Frank He)

Approved By : 

(Engineering Manager: Harry Zhao)

TABLE OF CONTENTS

Description	Page
1. General Information.....	6
1.1. EUT Description.....	6
1.2. Antenna information.....	7
1.3. Mode of Operation.....	8
1.4. Tested System Details.....	8
1.5. Configuration of Tested System.....	9
2. Technical Test.....	11
2.1. Summary of Test Result.....	11
2.2. Test Frequency configuration:.....	11
2.3. Duty Cycle.....	12
2.4. Test Environment.....	13
2.5. Measurement Uncertainty.....	13
3. AC Power Line Conducted Emission.....	14
3.1. Test Equipment.....	14
3.2. Test Setup.....	14
3.3. Limit.....	15
3.4. Test Procedure.....	15
3.5. Test Result.....	16
4. Emissions in restricted frequency bands.....	18
4.1. Test Equipment.....	18
4.2. Test Setup.....	19
4.3. Limit.....	20
4.4. Test Procedure.....	22
4.5. EUT test Axis definition.....	23
4.6. Test Result.....	24
5. Emissions in non-restricted frequency bands.....	32
5.1. Test Equipment.....	32
5.2. Test Setup.....	32
5.3. Limit.....	33
5.4. Test Procedure.....	34
5.5. EUT test Axis definition.....	35
5.6. Test Result.....	36
6. Occupied Bandwidth.....	37
6.1. Test Equipment.....	37
6.2. Test Setup.....	37
6.3. Limit.....	38
6.4. Test Procedure.....	38

6.5.	EUT test definition.....	39
6.6.	Test Result.....	40
7.	Fundamental emission output power.....	41
7.1.	Test Equipment.....	41
7.2.	Test Setup.....	41
7.3.	Limit.....	42
7.4.	Test Procedure.....	43
7.5.	EUT test definition.....	44
7.6.	Test Result.....	45
8.	Power Spectral Density.....	46
8.1.	Test Equipment.....	46
8.2.	Test Setup.....	46
8.3.	Limit.....	46
8.4.	Test Procedure.....	47
8.5.	EUT test definition.....	48
8.6.	Test Result.....	49
9.	Antenna Requirement.....	50
9.1.	Limit.....	50
9.2.	Antenna Connector Construction.....	50

History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
1782106R-RF-US-P06V01	V1.0	Initial Issued Report	Nov. 15, 2017
1782106R-RF-US-P06V01	V1.1	1. Modified the Type of Modulation information 2. Modified the antenna gain	Aug. 24, 2018

1. General Information

1.1. EUT Description

Product Name	915MHz LoRa Module
Model No.	LTRF8888A1
EUT Voltage	2.8V-3.7VDC, 130mA
Frequency Range	902~928MHz
Channel Number	25
Type of Modulation	LoRaTM
Channel Control	Auto

1.2. Antenna information

Model No.	N/A					
Antenna manufacturer	N/A					
Antenna Delivery	☒	1*TX+1*RX	☐	2*TX+2*RX	☐	3*TX+3*RX
Antenna technology	☒	SISO				
	☐	MIMO	☐	Basic		
			☐	CDD		
			☐	Sectorized		
			☐	Beam-forming		
Antenna Type	☐	External	☐	Dipole		
☐			Sectorized			
	☒	Internal	☐	PIFA		
			☐	PCB		
			☒	helical antenna		
			☐	Ceramic Chip Antenna		
			☐	Metal plate type F antenna		
Antenna Technology	Ant Gain (dBi)		Directional Gain (dBi)			
			For Power		For PSD	
☒ SISO	-1		-1		-1	

1.3. Mode of Operation

Test Modes List
Mode 1: Transmit


1.4. Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:


No.	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook	Lenovo	Think pad x220	SUA0600195	Non-shielded

1.5. Configuration of Tested System

Test setup Diagram- AC Line Conducted Emission Test

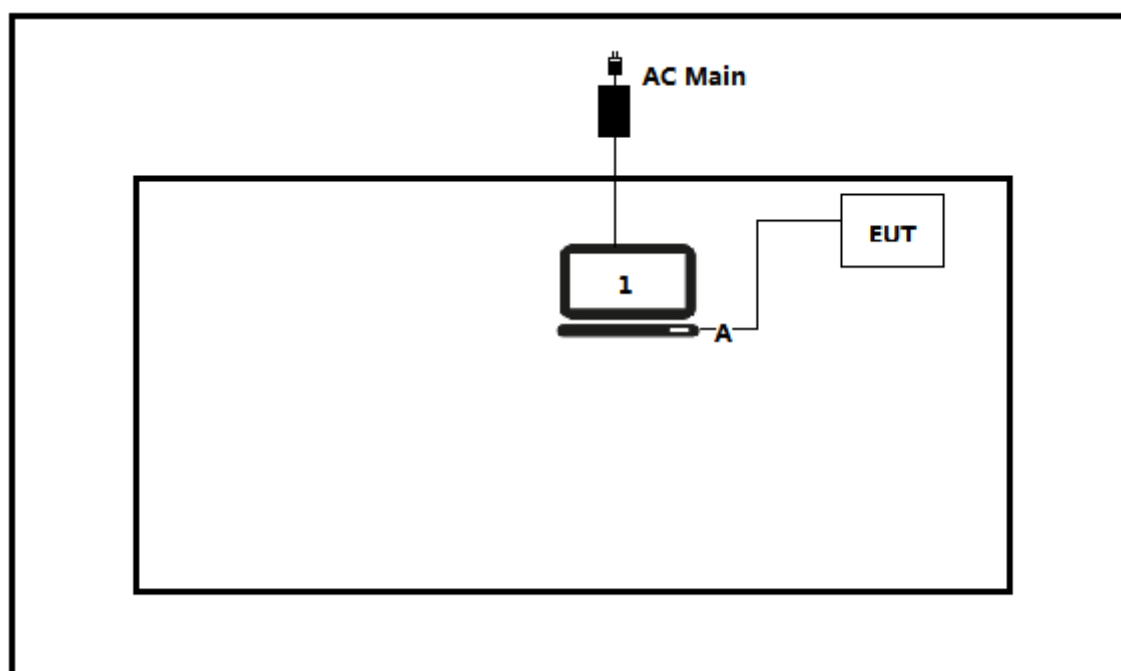

Test setup Diagram- Radiated Emission

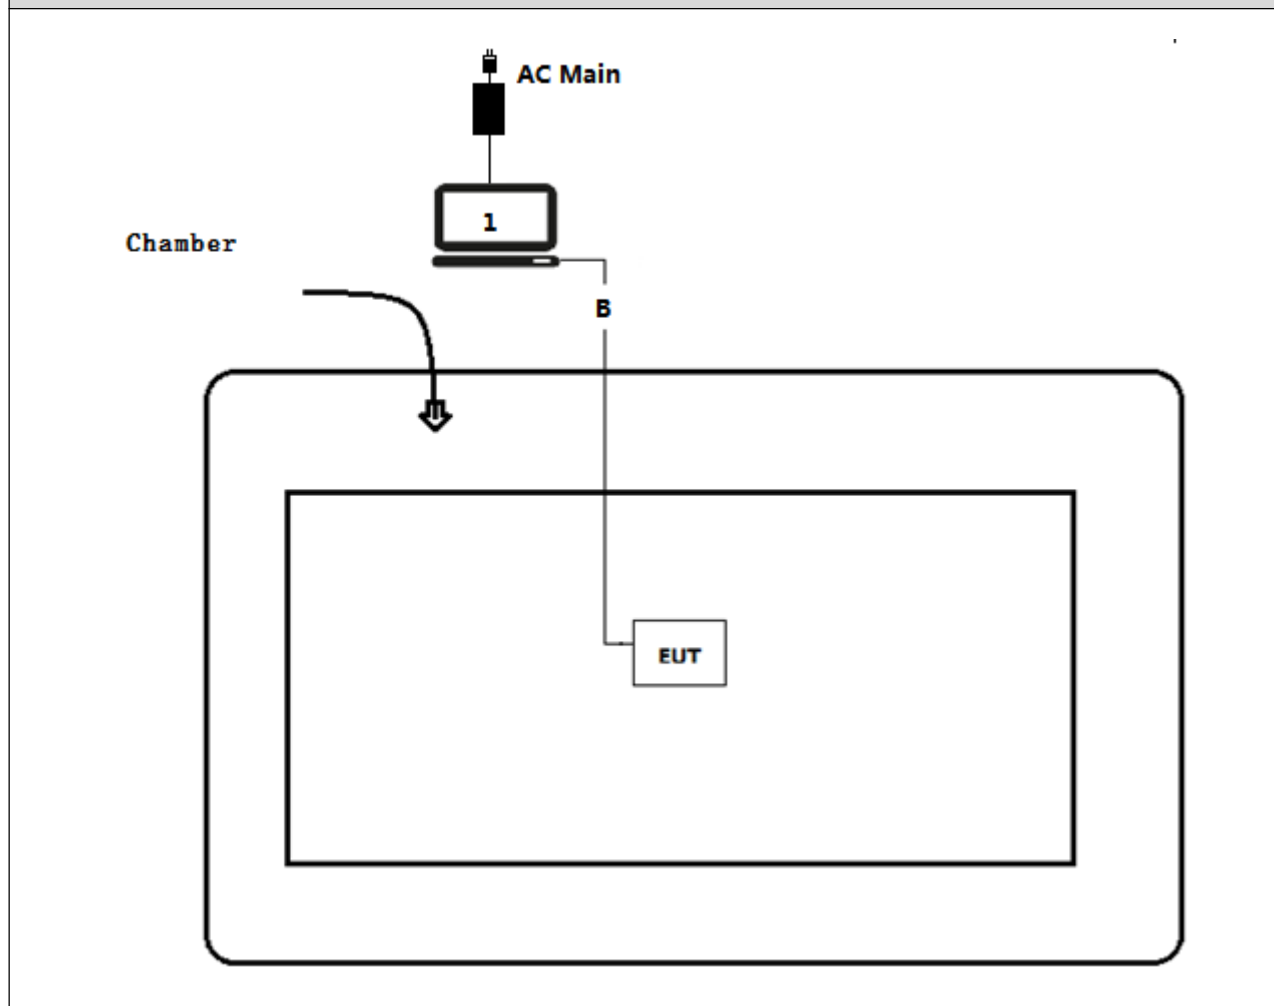

2. Technical Test

2.1. Summary of Test Result

Performed Test Item	Normative References	Limit	Result
AC Power Line Conducted Emission	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.207	FCC 15.207	PASS
Emissions in restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.209	FCC 15.209	PASS
Emissions in non-restricted frequency bands	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(d)	$\geq 20\text{dBc}$	PASS
Occupied Bandwidth	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(a)(2)	$\geq 500\text{kHz}$	PASS
Fundamental emission output power	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(b)(3)	$\leq 30\text{dBm}$	PASS
Power Spectral Density	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.247(e)	$\leq 8\text{dBm}/3\text{kHz}$	PASS
Antenna Requirement	FCC CFR Title 47 Part 15 Subpart C: 2015 Section 15.203	FCC 15.203	PASS


2.2. Test Frequency configuration:

Channel	Frequency	Channel	Frequency	Channel	Frequency
Low	903 MHz	Mid	915 MHz	High	927MHz

2.3. Duty Cycle

Test Mode	Tx On (ms)	Tx Off (ms)	VBW	Tx On + Tx Off (ms)	Duty Cycle
1	26	992	39Hz	1018	2.55%

Frequency 915MHz

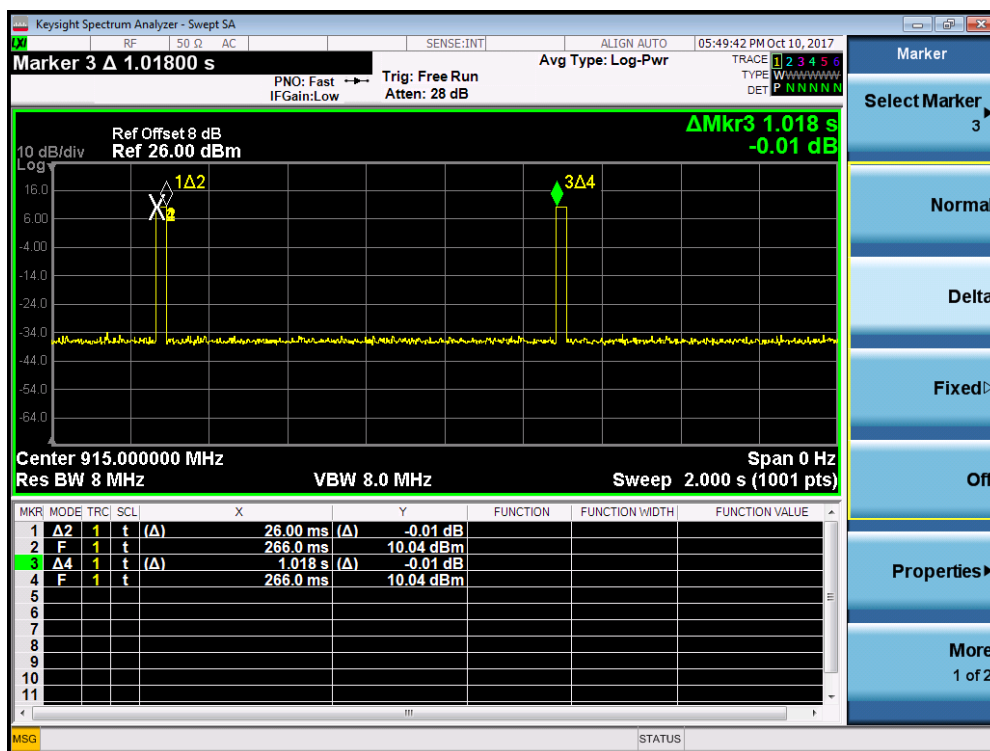

2.4. Test Environment

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	21
Humidity (%RH)	25-75	50
Barometric pressure (mbar)	860-1060	950-1000

2.5. Measurement Uncertainty

Test Items	Uncertainty
AC Power Line Conducted Emission	$\pm 2.02\text{dB}$
Radiated Emission	Below 1GHz $\pm 3.8\text{ dB}$
	Above 1GHz $\pm 3.9\text{ dB}$
RF Antenna Port Conducted Emission	$\pm 1.27\text{dB}$
Radiated Emission Band Edge	$\pm 3.9\text{dB}$
Occupied Bandwidth	$\pm 1\text{kHz}$
Power Spectral Density	$\pm 1.27\text{dB}$


3. AC Power Line Conducted Emission

3.1. Test Equipment

AC Power Line Conducted Emission / TR-1					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100906	2017.03.05	2018.03.04
Two-Line V-Network	R&S	ENV 216	101189	2017.07.16	2018.07.15
Two-Line V-Network	R&S	ENV 216	101044	2017.09.04	2018.09.03
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
50ohm Termination	SHX	TF2	07081402	2017.09.04	2018.09.03
Temperature/Humidity Meter	Zhichen	ZC1-2	TR1-TH	2017.01.05	2018.01.04

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

3.2. Test Setup

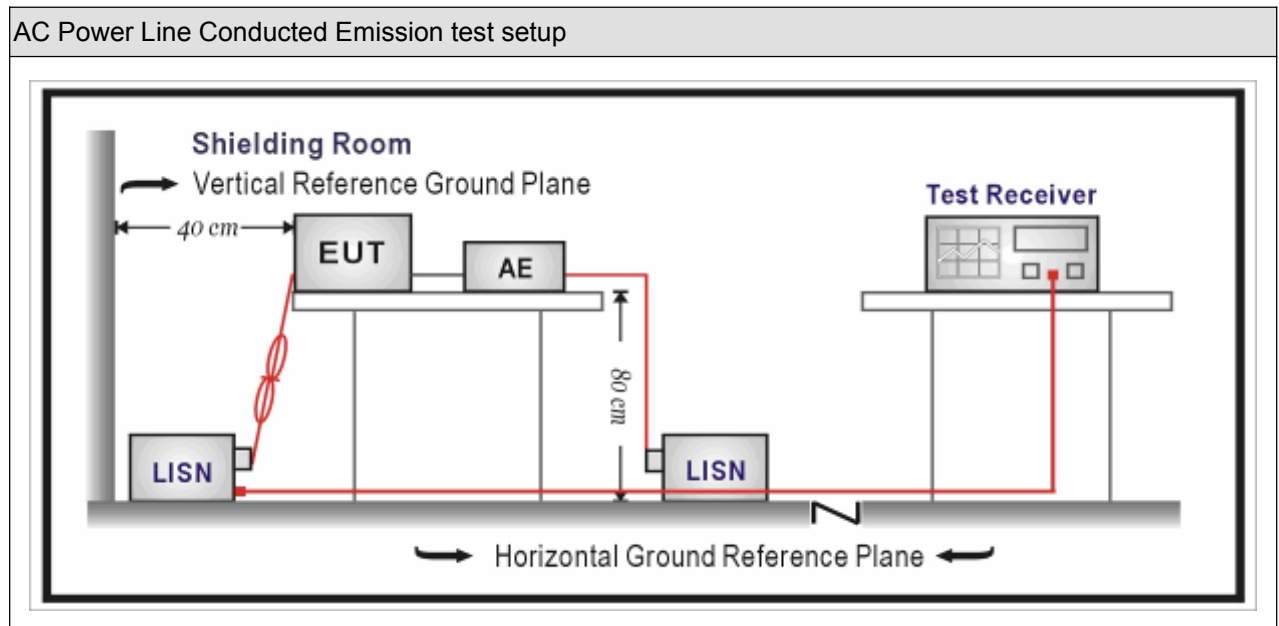

3.3. Limit


Frequency of Emission (MHz)	Conducted Limit	
	Quasi-peak (dB μ V)	Average (dB μ V)
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50
Note 1: The lower limit shall apply at the transition frequencies.		
Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.		

3.4. Test Procedure

Test Method			
	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices
☒	ANSI C63.4-2014	7	AC power-line conducted emission measurements


3.5. Test Result

Site: TR1	Time: 2017/10/20 - 09:00
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Line
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1	

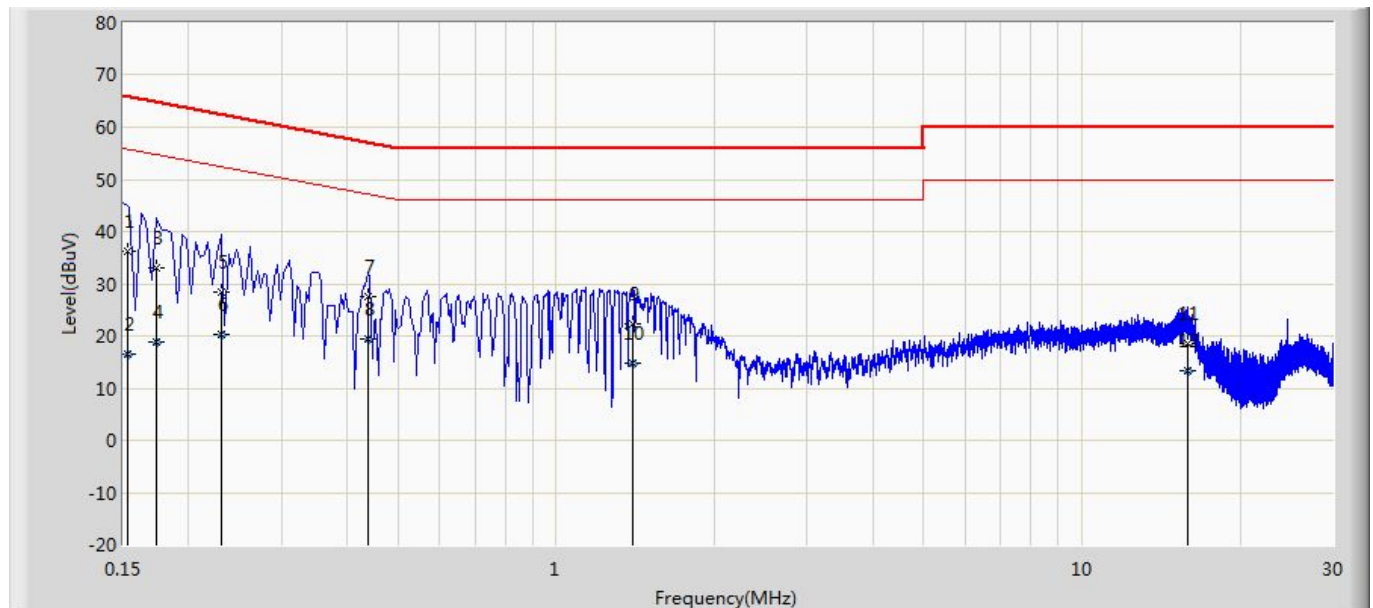

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.153	36.179	26.545	-29.656	65.836	9.634	QP
2		0.153	16.383	6.749	-39.452	55.836	9.634	AV
3		0.174	33.015	23.383	-31.752	64.767	9.632	QP
4		0.174	18.788	9.156	-35.979	54.767	9.632	AV
5		0.230	28.412	18.783	-34.037	62.450	9.630	QP
6		0.230	20.354	10.724	-32.096	52.450	9.630	AV
7		0.438	27.479	17.839	-29.620	57.100	9.640	QP
8	*	0.438	19.377	9.736	-27.723	47.100	9.640	AV
9		1.402	22.407	12.727	-33.593	56.000	9.680	QP
10		1.402	14.664	4.984	-31.336	46.000	9.680	AV
11		15.846	18.616	8.419	-41.384	60.000	10.197	QP
12		15.846	13.271	3.074	-36.729	50.000	10.197	AV

Site: TR1	Time: 2017/10/20 - 09:03
Limit: FCC_Part15.207_CE_AC Power	Margin: 0
Probe: ENV216_101190(0.009-30MHz)	Polarity: Neutral
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1	

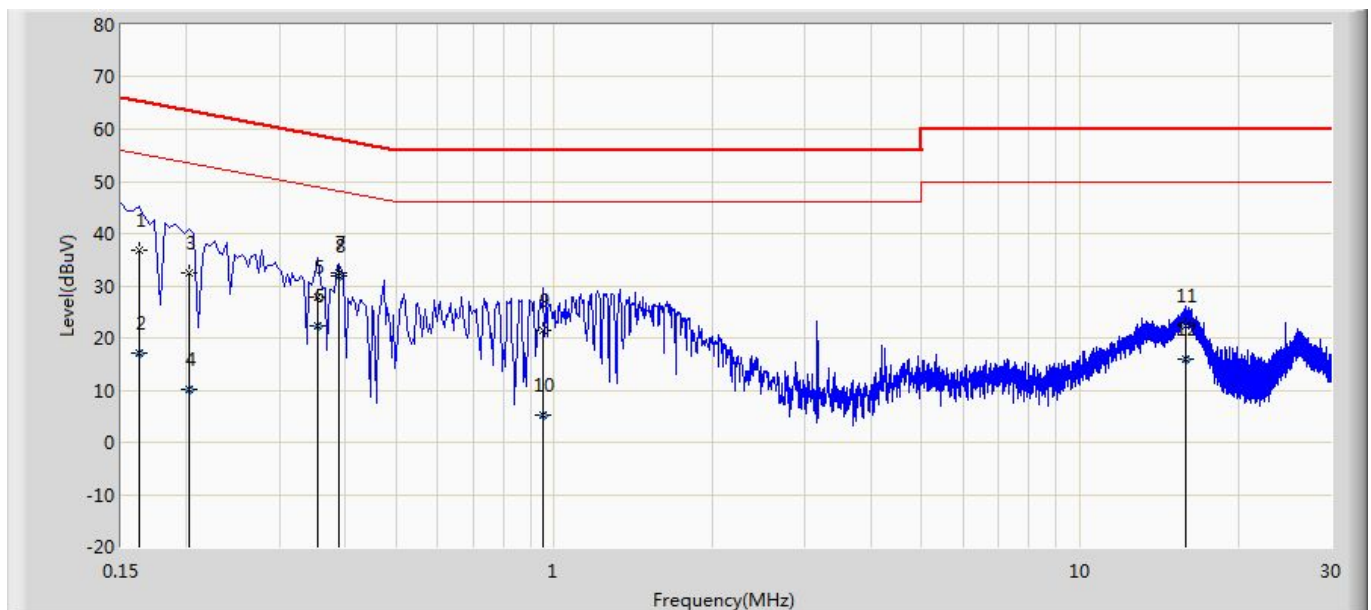

No	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV)	Factor (dB)	Type
1		0.162	36.681	27.063	-28.679	65.361	9.619	QP
2		0.162	17.078	7.459	-38.283	55.361	9.619	AV
3		0.202	32.428	22.801	-31.100	63.528	9.627	QP
4		0.202	10.261	0.633	-43.267	53.528	9.627	AV
5		0.354	27.722	18.092	-31.146	58.868	9.630	QP
6		0.354	22.268	12.638	-26.600	48.868	9.630	AV
7		0.390	32.560	22.928	-25.504	58.064	9.631	QP
8	*	0.390	32.027	22.396	-16.036	48.064	9.631	AV
9		0.954	21.417	11.768	-34.583	56.000	9.649	QP
10		0.954	5.264	-4.385	-40.736	46.000	9.649	AV
11		15.834	22.302	12.050	-37.698	60.000	10.252	QP
12		15.834	16.013	5.761	-33.987	50.000	10.252	AV

4. Emissions in restricted frequency bands


4.1. Test Equipment

Radiated Emission(Below 1GHz) / AC-2					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
EMI Test Receiver	R&S	ESCI	100573	2017.03.05	2018.03.04
Loop Antenna	R&S	HFH2-Z2	833799/003	2016.11.07	2017.11.06
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2017.08.10	2018.08.09
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC2-C	2017.02.28	2018.02.27
Temperature/Humidity Meter	Zhichen	ZC1-2	AC2-TH	2017.01.05	2018.01.04
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					


Radiated Emission(Above 1GHz) / AC-5					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Preamplifier	Miteq	NSP1800-25	1364185	2017.05.03	2018.05.02
Preamplifier	QuieTek	AP-040G	CHM-0906001	2017.05.06	2018.05.05
DRG Horn	ETS-Lindgren	3117	00123988	2017.01.22	2018.01.20
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2016.11.25	2017.11.23
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2017.03.02	2018.03.01
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2017.03.02	2018.03.01
EMI Receiver	Agilent	N9038A	MY51210196	2017.06.10	2018.06.09
Temperature/Humidity Meter	Zhichen	ZC1-2	AC5-TH	2017.01.04	2018.01.03
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

4.2. Test Setup


Below 30MHz Test Setup:

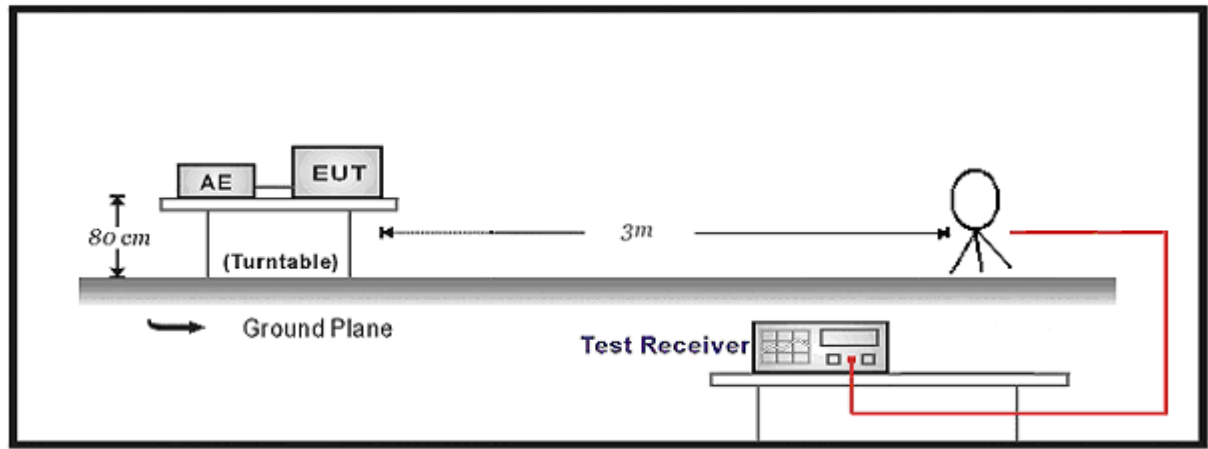

30MHz-1GHz Test Setup:

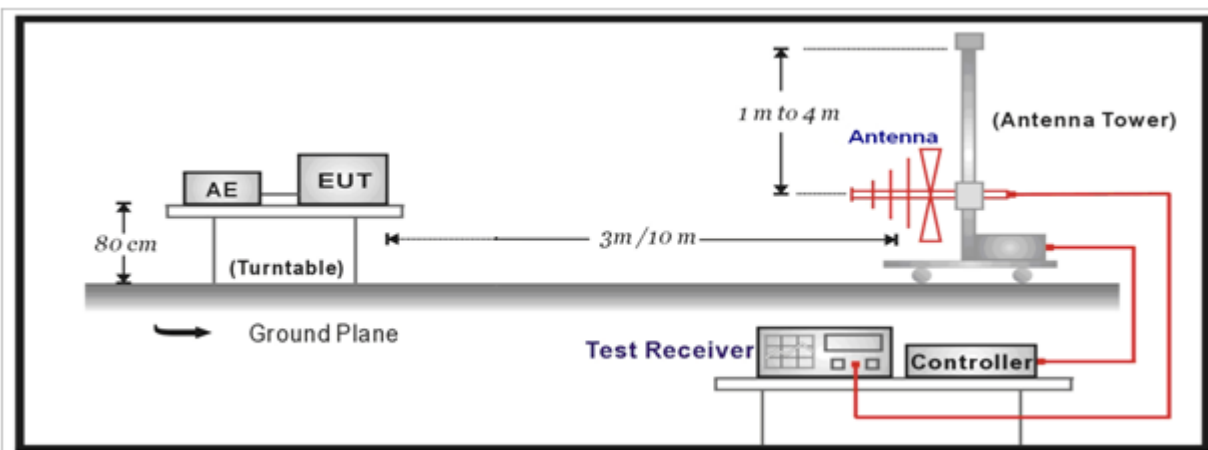

Above 1GHz Test Setup:

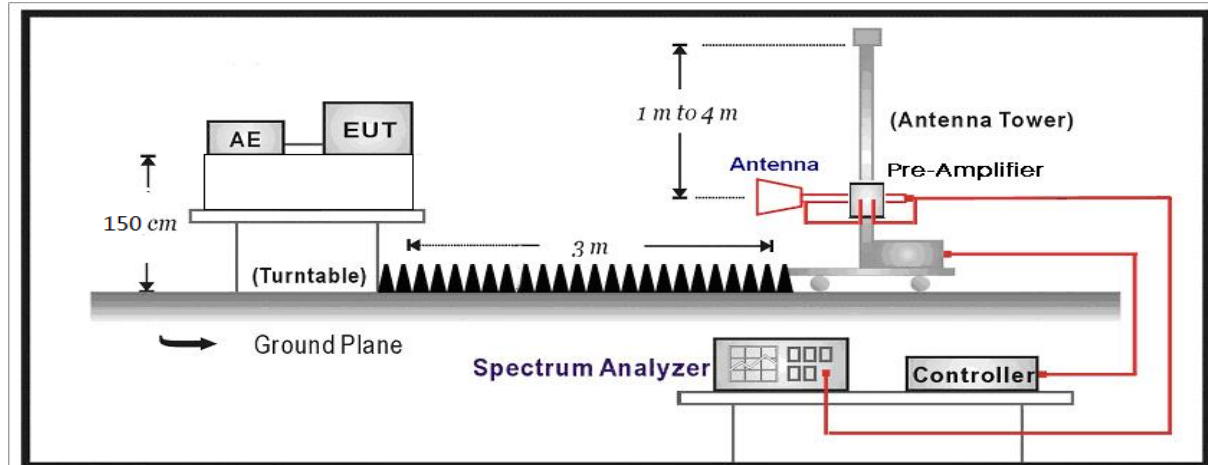

4.3. Limit

Restricted Bands of operation			
Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Band Emissions Limit			
Frequency (MHz)	Field strength (μ V/m)	Field strength (dB μ V/m)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88 - 216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)





Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.4. Test Procedure


Test Method				
	References Rule		Chapter	Description
☐	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☐	ANSI C63.10	11.11.2	Reference level measurement
	☐	ANSI C63.10	11.11.3	Emission level measurement
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
	☒	ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
		ANSI C63.10	11.12.2.4	Peak power measurement procedure
		ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
		ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
		ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold

4.5. EUT test Axis definition

Item	Emissions in restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☒	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☒	Worst Axis ☐	Worst Axis ☐
	☐	Conducted		
	☐	Chain 1		
				
	☐	Chain 1	Chain 2	
				
	☐	Chain 1	Chain 2	Chain 3
				


4.6. Test Result

Site: AC5	Time: 2017/10/19 - 16:04
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 903MHz by LoRa	

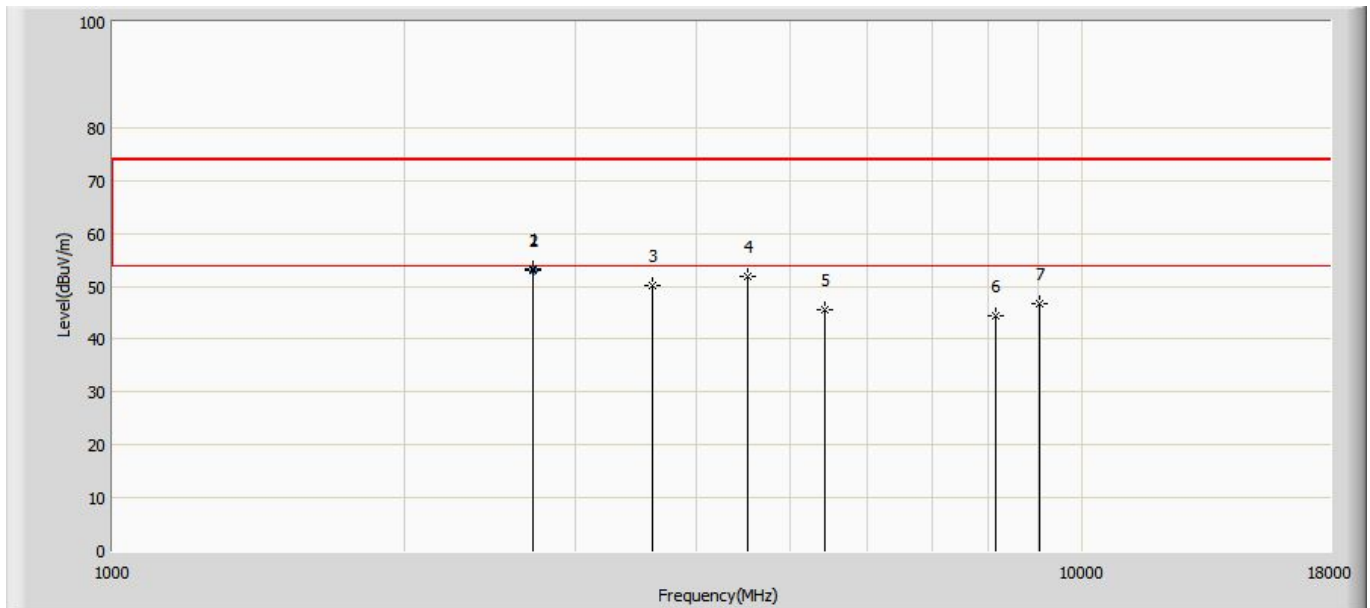


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2708.500	53.159	70.109	-20.841	74.000	-16.950	PK
2	*	2709.115	53.050	70.000	-0.950	54.000	-16.950	AV
3		3609.500	50.021	64.661	-23.979	74.000	-14.640	PK
4		4519.000	51.744	64.754	-22.256	74.000	-13.010	PK
5		5420.000	45.582	57.812	-28.418	74.000	-12.230	PK
6		8127.000	44.443	49.343	-29.557	74.000	-4.900	PK
7		9030.000	46.808	48.648	-27.192	74.000	-1.840	PK

Site: AC5	Time: 2017/10/19 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 903MHz by LoRa	

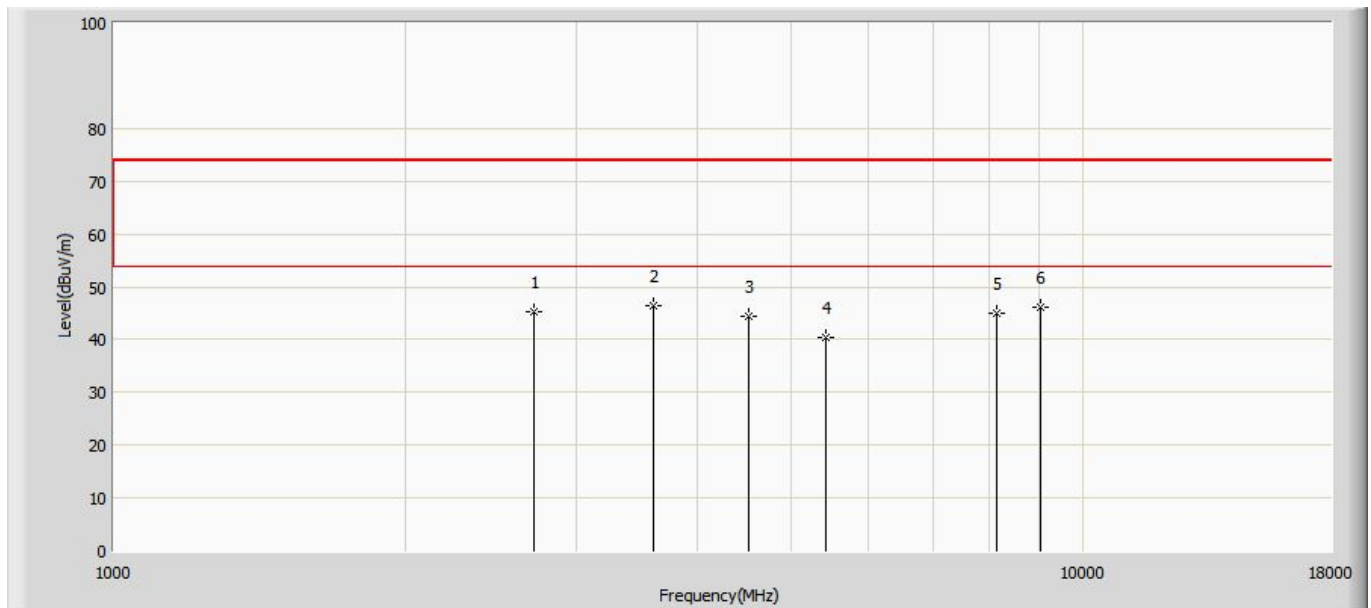


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2708.500	45.134	62.084	-28.866	74.000	-16.950	PK
2	*	3609.500	46.457	61.097	-27.543	74.000	-14.640	PK
3		4510.500	44.425	57.435	-29.575	74.000	-13.010	PK
4		5418.000	40.290	52.520	-33.710	74.000	-12.230	PK
5		8127.000	44.883	49.783	-29.117	74.000	-4.900	PK
6		9030.000	46.102	47.942	-27.898	74.000	-1.840	PK

Site: AC5	Time: 2017/10/19 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 915MHz by LoRa	

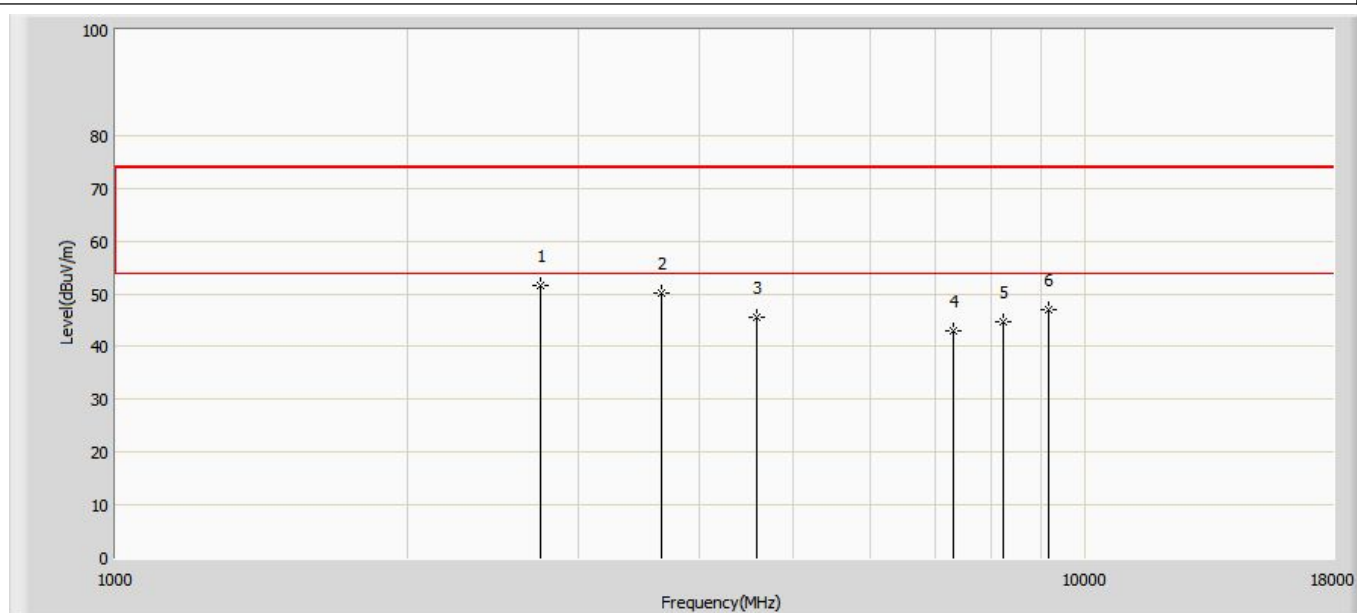


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2742.500	51.656	68.606	-22.344	74.000	-16.950	PK
2		3660.500	50.007	64.647	-23.993	74.000	-14.640	PK
3		4578.500	45.524	58.534	-28.476	74.000	-13.010	PK
4		7320.000	42.911	50.621	-31.089	74.000	-7.710	PK
5		8235.000	44.572	49.472	-29.428	74.000	-4.900	PK
6		9150.000	46.898	48.738	-27.102	74.000	-1.840	PK

Site: AC5	Time: 2017/10/19 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 915MHz by LoRa	

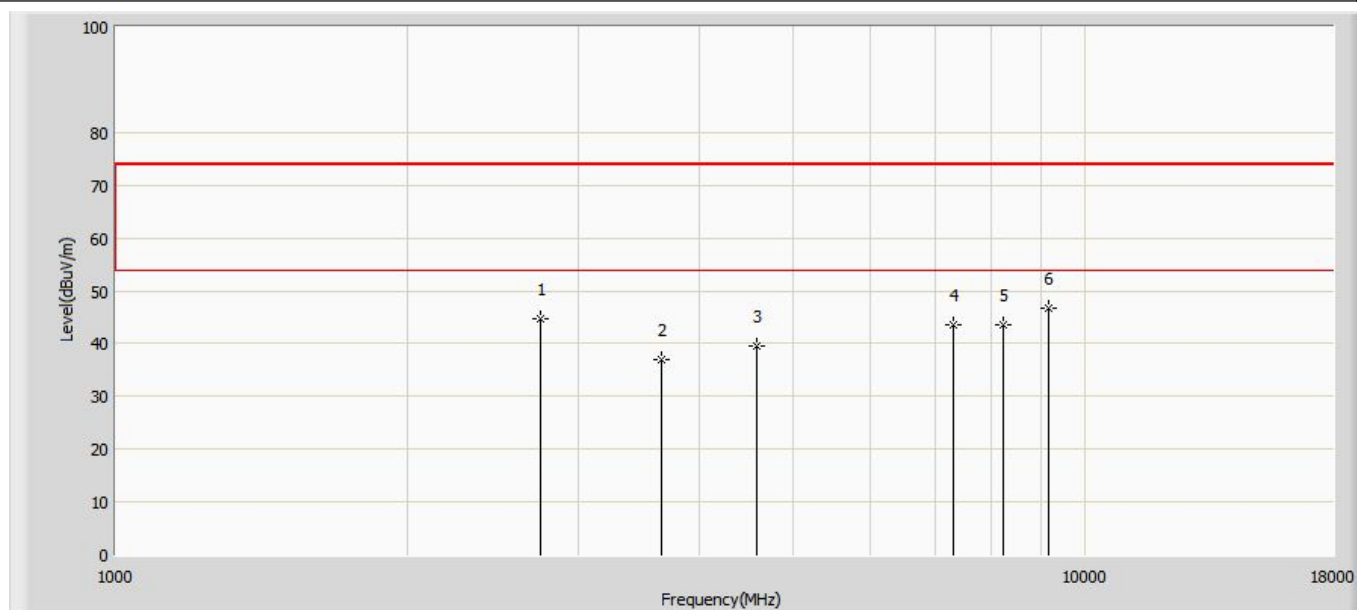


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2742.500	44.824	61.774	-29.176	74.000	-16.950	PK
2		3660.000	36.836	51.476	-37.164	74.000	-14.640	PK
3		4575.000	39.625	52.635	-34.375	74.000	-13.010	PK
4		7320.000	43.630	51.340	-30.370	74.000	-7.710	PK
5		8235.000	43.692	48.592	-30.308	74.000	-4.900	PK
6	*	9150.000	46.627	48.467	-27.373	74.000	-1.840	PK

Site: AC5	Time: 2017/10/19 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Horizontal
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 927MHz by LoRa	

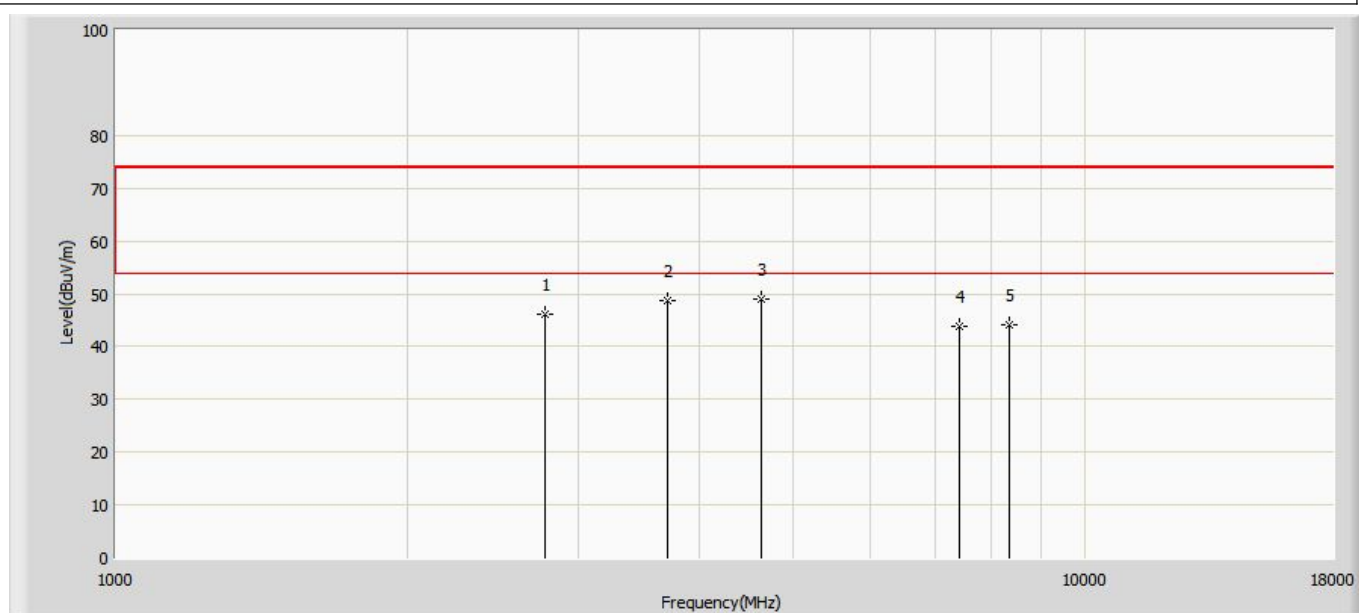

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		2776.500	46.073	63.023	-27.927	74.000	-16.950	PK
2		3711.500	48.718	63.358	-25.282	74.000	-14.640	PK
3	*	4638.000	48.927	61.937	-25.073	74.000	-13.010	PK
4		7416.000	43.853	50.513	-30.147	74.000	-6.660	PK
5		8343.000	44.082	48.982	-29.918	74.000	-4.900	PK


Site: AC5	Time: 2017/10/19 - 16:05
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)	Polarity: Vertical
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1: Transmit at 927MHz by LoRa	

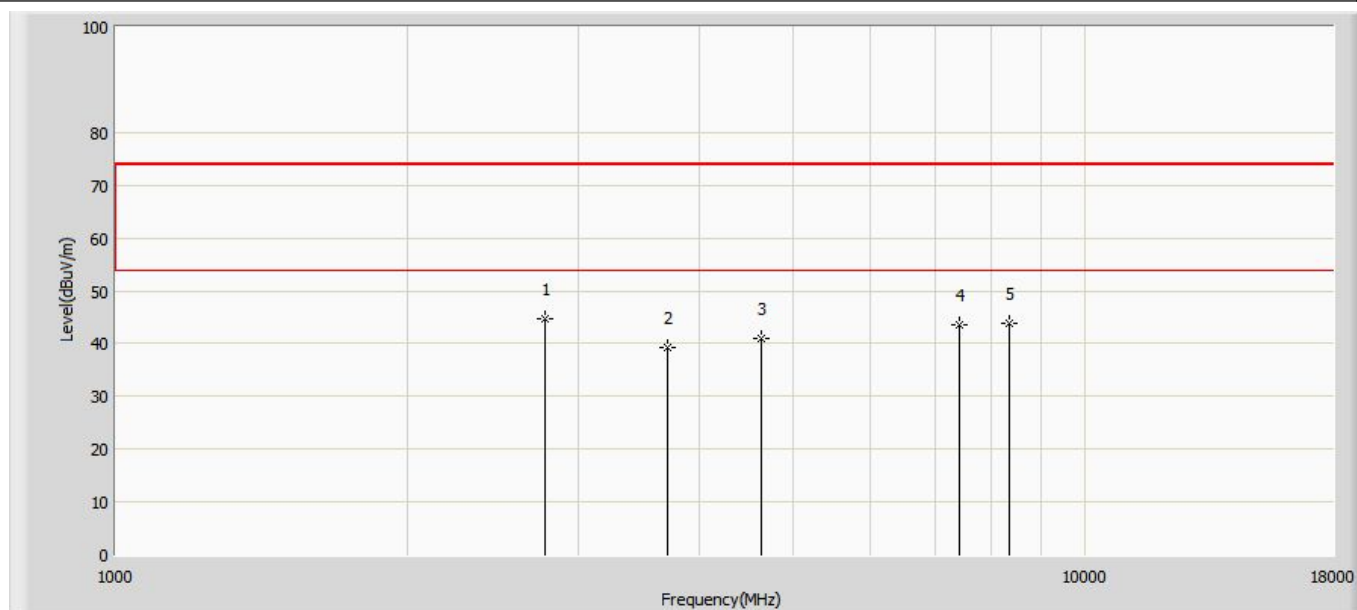

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2776.500	44.767	61.717	-29.233	74.000	-16.950	PK
2		3708.000	39.132	53.772	-34.868	74.000	-14.640	PK
3		4635.000	40.966	53.976	-33.034	74.000	-13.010	PK
4		7416.000	43.621	50.281	-30.379	74.000	-6.660	PK
5		8343.000	43.764	48.664	-30.236	74.000	-4.900	PK


The worst case of Radiated Emission below 1GHz:

Site: AC3	Time: 2017/10/20 - 09:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Horizontal
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1	

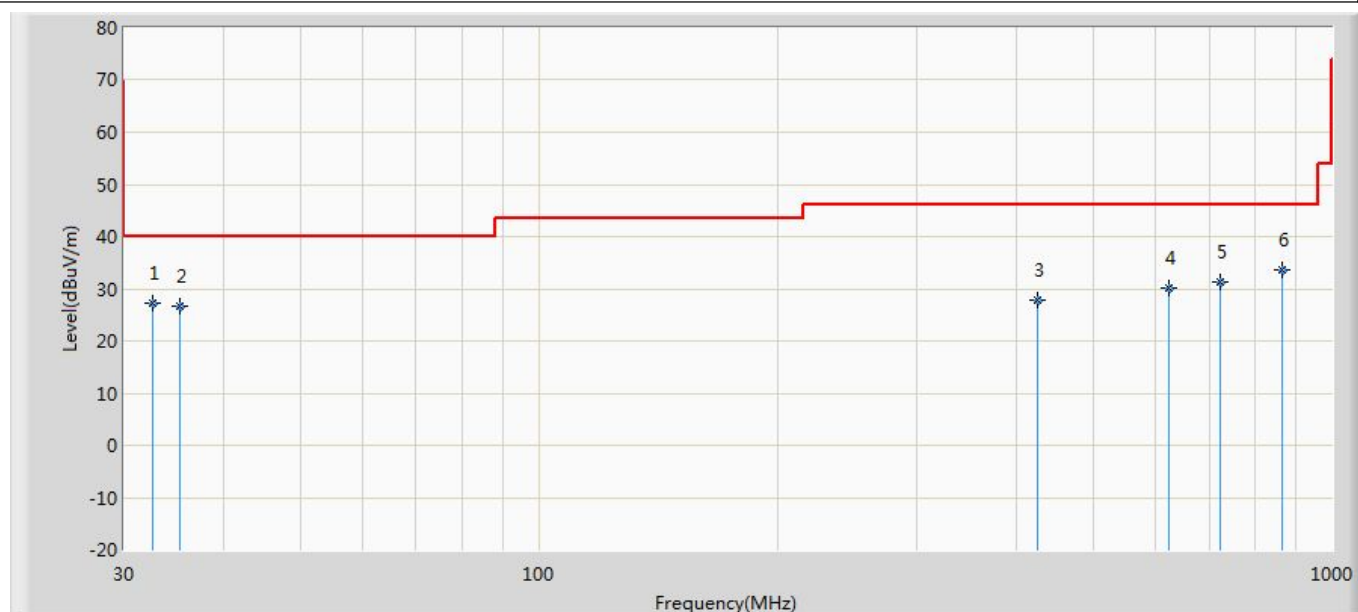

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		32.546	27.147	0.600	-12.853	40.000	26.547	QP
2		35.335	26.747	1.100	-13.253	40.000	25.648	QP
3		425.154	27.796	0.400	-18.204	46.000	27.396	QP
4		621.821	30.185	0.500	-15.815	46.000	29.685	QP
5		722.580	31.202	1.700	-14.798	46.000	29.502	QP
6	*	866.746	33.557	1.700	-12.443	46.000	31.857	QP

Site: AC3	Time: 2017/10/20 - 09:43
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC3_3m (30-1000MHz)	Polarity: Vertical
EUT: 915MHz LoRa Module	Power: 127V/60Hz
Note: Mode 1	

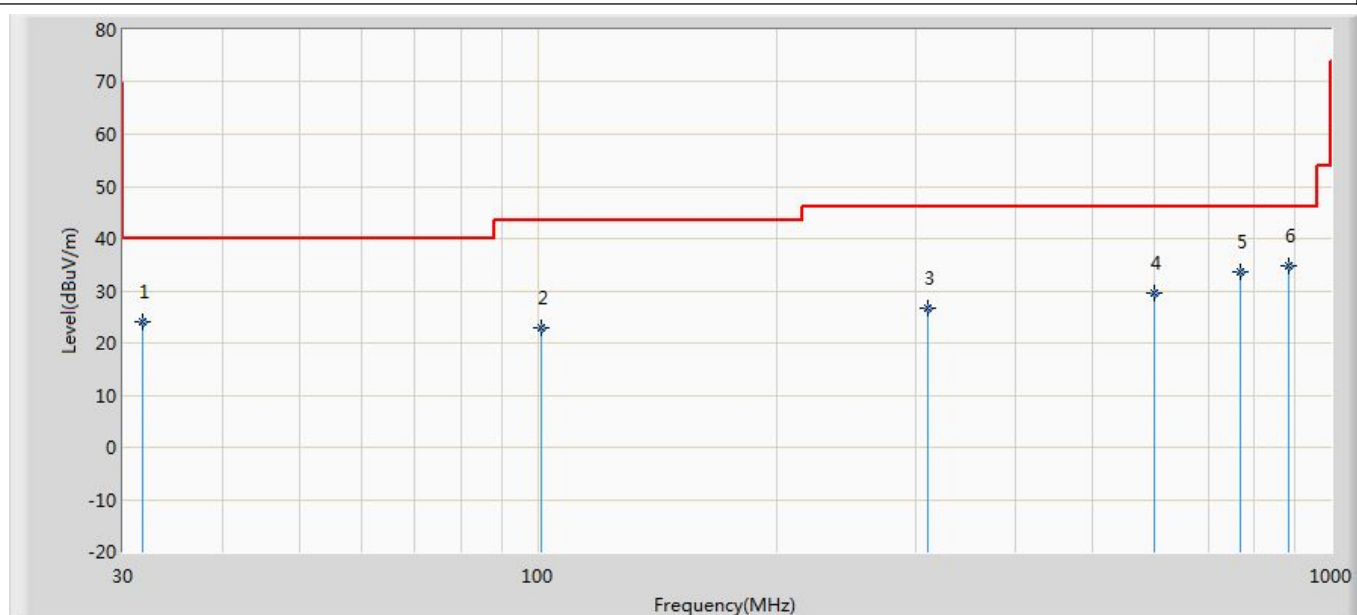


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		31.698	24.154	0.600	-15.846	40.000	23.554	QP
2		100.810	22.919	0.800	-20.581	43.500	22.119	QP
3		310.209	26.727	1.300	-19.273	46.000	25.427	QP
4		599.754	29.461	2.200	-16.539	46.000	27.261	QP
5		770.110	33.756	1.400	-12.244	46.000	32.356	QP
6	*	886.389	34.898	1.700	-11.102	46.000	33.199	QP

5. Emissions in non-restricted frequency bands

5.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

5.2. Test Setup

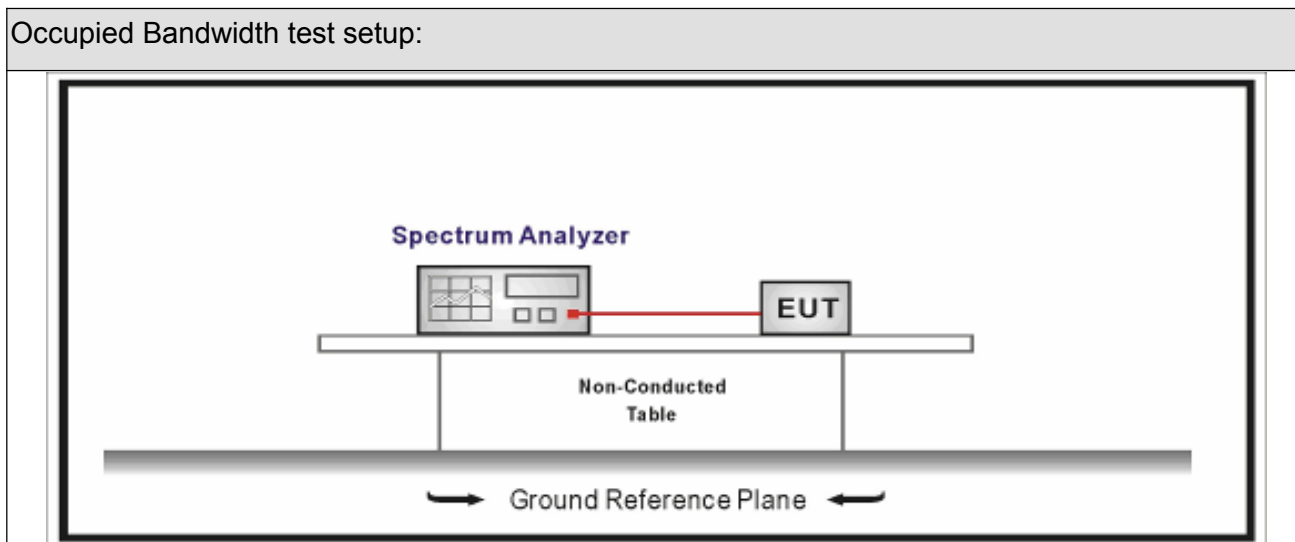






5.3. Limit

Un-Restricted Band Emissions Limit	
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30c(Note1)
RF Output power(PK detector)	20c(Note2)
Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc). Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).	

5.4. Test Procedure

Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.11	Emissions in non-restricted frequency bands
	☒	ANSI C63.10	11.11.2	Reference level measurement
	☒	ANSI C63.10	11.11.3	Emission level measurement
☐	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☐	ANSI C63.10	11.12.1	Radiated emission measurements
	☐	ANSI C63.10	11.12.2.7	Radiated spurious emission test
☐	ANSI C63.10		6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
☐	ANSI C63.10		6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
☒	ANSI C63.10		6.6	Radiated emissions from unlicensed wireless devices above 1 GHz
	☒	ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐	ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	☒	ANSI C63.10	11.12.2.4	Peak power measurement procedure
	☐	ANSI C63.10	11.12.2.5	Average power measurement procedures
	☐	ANSI C63.10	11.12.2.5.1	Trace averaging with continuous EUT transmission at full power
	☐	ANSI C63.10	11.12.2.5.2	Trace averaging across ON and OFF times of the EUT transmissions followed by duty cycle correction
	☐	ANSI C63.10	11.12.2.5.3	Reduced VBW averaging across ON and OFF times of the EUT transmissions with max hold


5.5. EUT test Axis definition

Item	Emissions in non-restricted frequency bands			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1 ~ Mode 4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


5.6. Test Result

Product Name	: 915MHz LoRa Module	Power	: AC 127V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2017.10.10		

Mode 1 Channel(902MHz)

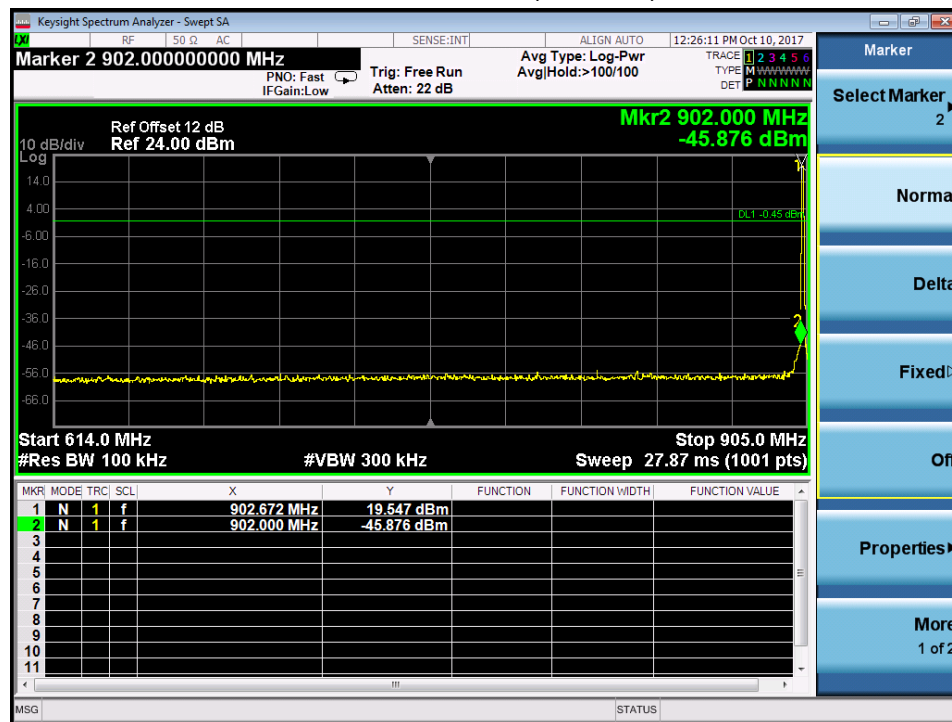

Mode 1 Channel(928MHz)

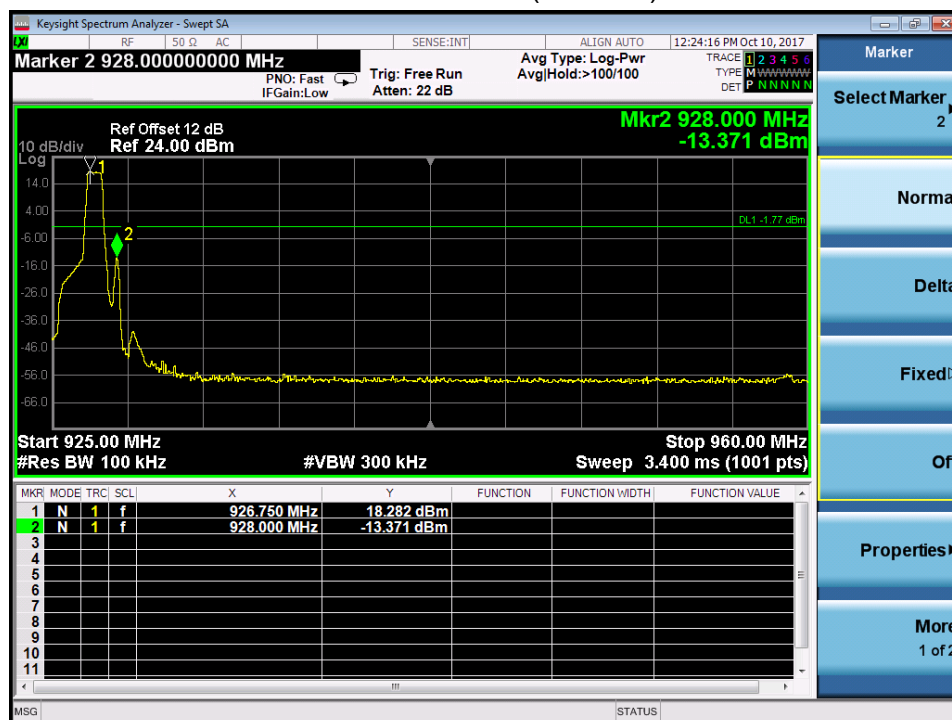


6. Occupied Bandwidth

6.1. Test Equipment

Occupied Bandwidth / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

6.2. Test Setup

Occupied Bandwidth test setup:

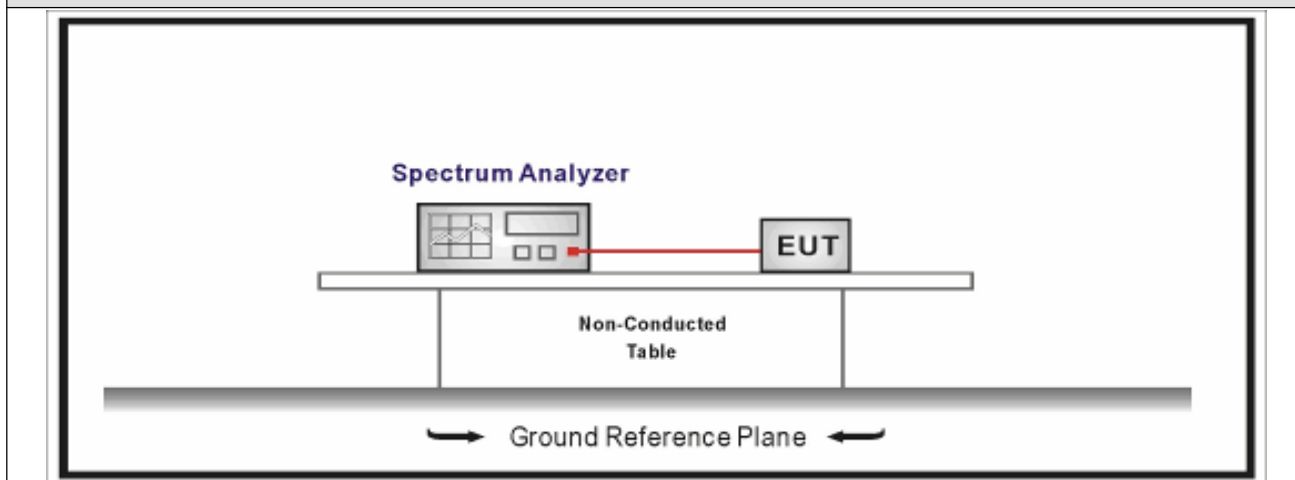

6.3. Limit





Occupied Bandwidth

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

6.4. Test Procedure

Test Method				
	Reference Rule		Chapter	Description
☒	ANSI C63.10		11.8	DTS bandwidth
	☐	ANSI C63.10	11.8.1	Option 1
	☒	ANSI C63.10	11.8.2	Option 2

6.5. EUT test definition

Item	Occupied Bandwidth			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				


6.6. Test Result

Product Name	: 915MHz LoRa Module	Power	: AC 127V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2017.10.09		

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (KHz)	6dB Occupied Bandwidth (KHz)	Limit (kHz)	Result
1	Low	903	736.56	700.3	>500	Pass
1	Mid	915	785.19	739.1	>500	Pass
1	High	927	773.15	724.2	>500	Pass

Note : The worst case of Occupied Bandwidth as below :

Mode 1 Low Channel (903MHz)

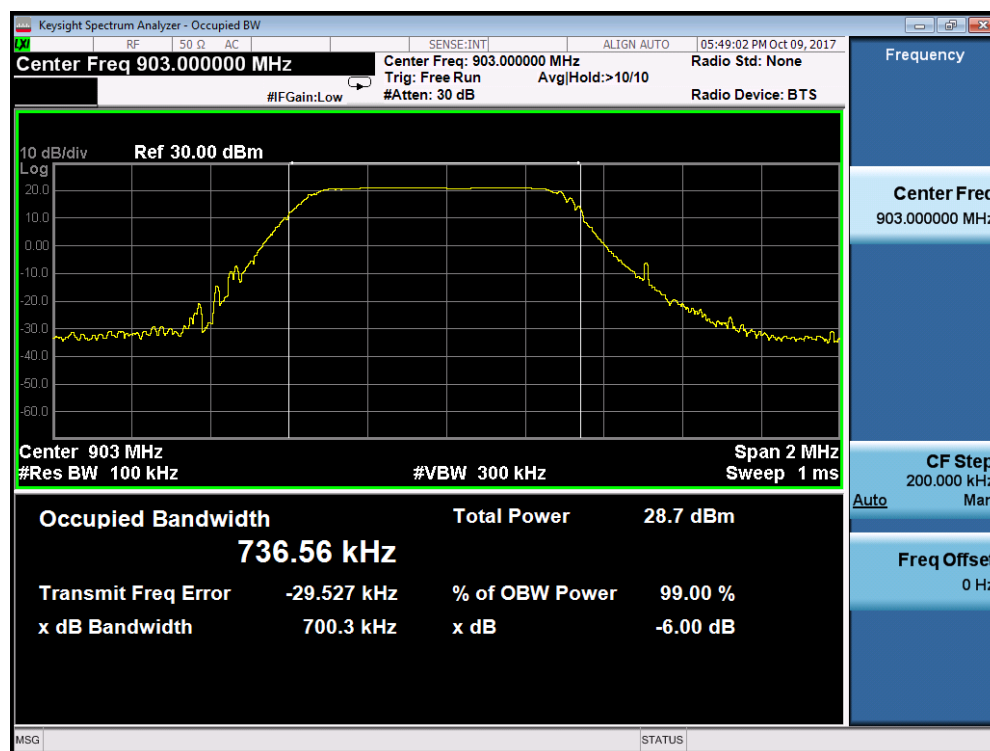


7. Fundamental emission output power

7.1. Test Equipment

Fundamental emission output power/ TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	E4446A	MY45300103	2017.01.04	2018.01.03
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
Wideband Peak Power Meter	Anritsu	ML2495A	0905006	2017.10.14	2018.10.13
Power Sensor	Anritsu	MA2411B	0846014	2017.10.14	2018.10.13
Temperature/Humidity Meter	zhicheng	ZC1-2	TR8-TH	2017.04.10	2018.04.09

Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.

7.2. Test Setup

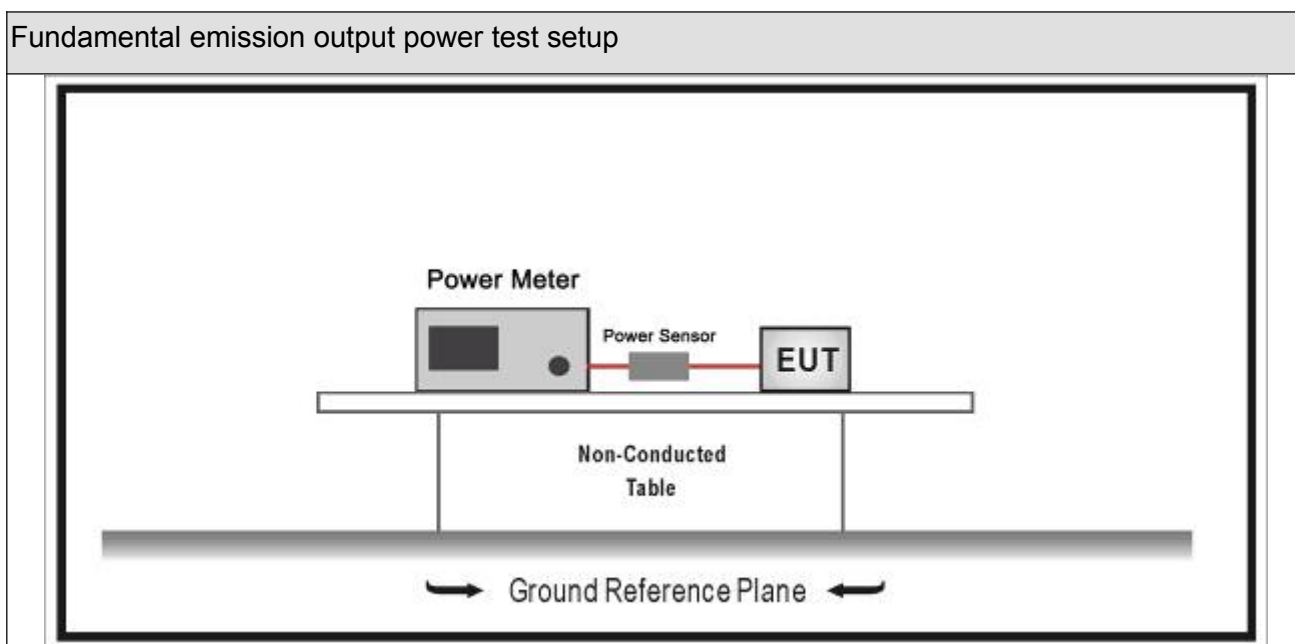





7.3. Limit

Fundamental emission output power Limit		
☒	$G_{TX} < 6\text{dBi}$	$P_{out} \leq 30\text{dBm}$
☐	$G_{TX} > 6\text{dBi}$	
☐	Non-Fix point-point	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Fix point-point	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Point-to-multipoint	$P_{out} \leq 30 - (G_{TX} - 6)$
☐	Overlap Beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	Aggregate power transmitted simultaneously on all beams	$P_{out} \leq 30 - [(G_{TX} - 6)]/3$
☐	single directional beam	$P_{out} \leq 30 - [(G_{TX} - 6)]/3 + 8\text{dB}$
Note 1 : G_{TX} directional gain of transmitting antennas. Note 2 : P_{out} is maximum peak conducted output power .		

7.4. Test Procedure

Fundamental emission output power Test Method						
	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10		11.9.1	Maximum peak conducted output power	
		☐	ANSI C63.10	11.9.1.1	RBW ≥ DTS bandwidth	
		☐	ANSI C63.10	11.9.1.2	Integrated band power method	
		☒	ANSI C63.10	11.9.1.3	PKPM1 Peak power meter method	
	☐	ANSI C63.10		11.9.2	Maximum conducted (average) output power	
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
			☐	ANSI C63.10	11.9.2.3.1	Method AVGPM
			☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G

7.5. EUT test definition

Item	Fundamental emission output power			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1~4			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

7.6. Test Result

Product Name	:	915MHz LoRa Module	Power	:	AC 127V/60Hz
Test Mode	:	Mode1	Test Site	:	TR8
Test Date	:	2017.10.19			


Mode	Channel	Test Frequency (MHz)	Peak Power Output (dBm)	Antenna Gain (dBi)	Limit (dBm)	Result
1	Low	903	15.96	2.0	30	Pass
1	Mid	915	15.89	2.0	30	Pass
1	High	927	15.92	2.0	30	Pass

8. Power Spectral Density

8.1. Test Equipment

Power Spectral Density / TR-8					
Instrument	Manufacturer	Type No.	Serial No.	Cal. Date	Cal. Due Date
Spectrum Analyzer	Agilent	N9010A	MY48030494	2017.02.04	2018.02.03
EXA Spectrum Analyzer	Keysight	N9010A	MY55370495	2017.04.09	2018.04.08
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2017.04.09	2018.04.08
Temperature/Humidity Meter	zhichen	ZC1-2	TR8-TH	2017.04.10	2018.04.09
Note: All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.					

8.2. Test Setup

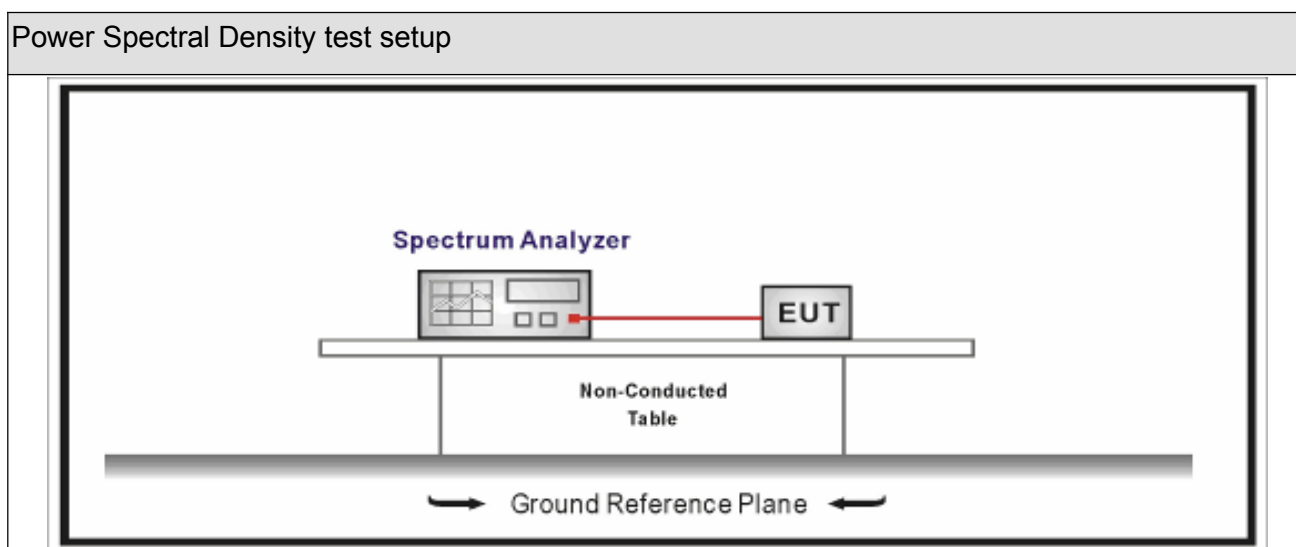




8.3. Limit

Power Spectral Density Limit
Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

8.4. Test Procedure

Power Spectral Density Test Method				
	References Rule		Chapter	Description
☒	ANSI C63.10		11.10	Maximum power spectral density level in the fundamental emission
	☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
	☐	ANSI C63.10	11.10.3	Method AVGPSD-1(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.4	Method AVGPSD-1A(Duty cycle $\geq$ 98%)
	☐	ANSI C63.10	11.10.5	Method AVGPSD-2(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.6	Method AVGPSD-2A(Duty cycle $<$ 98%)
	☐	ANSI C63.10	11.10.7	Method AVGPSD-3
	☐	ANSI C63.10	11.10.8	Method AVGPSD-3A

8.5. EUT test definition


Item	Power Spectral Density Test Method			
Device Category	☒	Fixed position use		
	☐	Mobile position use		
Test mode	Mode 1			
Test method	☐	Radiated		
		X Axis	Y Axis	Z Axis
				
		Worst Axis ☐	Worst Axis ☐	Worst Axis ☐
	☒	Conducted		
	☒	Chain 0		
				
	☐	Chain 0	Chain 1	
				
	☐	Chain 0	Chain 1	Chain 2
				

8.6. Test Result

Product Name	: 915MHz LoRa Module	Power	: AC 127V/60Hz
Test Mode	: Mode1	Test Site	: TR8
Test Date	: 2017.10.19		

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Directional Gain (dBi)	Limit (dBm/3kHz)	Result
1	Low	903	2.947	2.0	8.0	Pass
1	Mid	915	3.316	2.0	8.0	Pass
1	High	927	3.425	2.0	8.0	Pass

Mode 1 High Channel (927MHz)

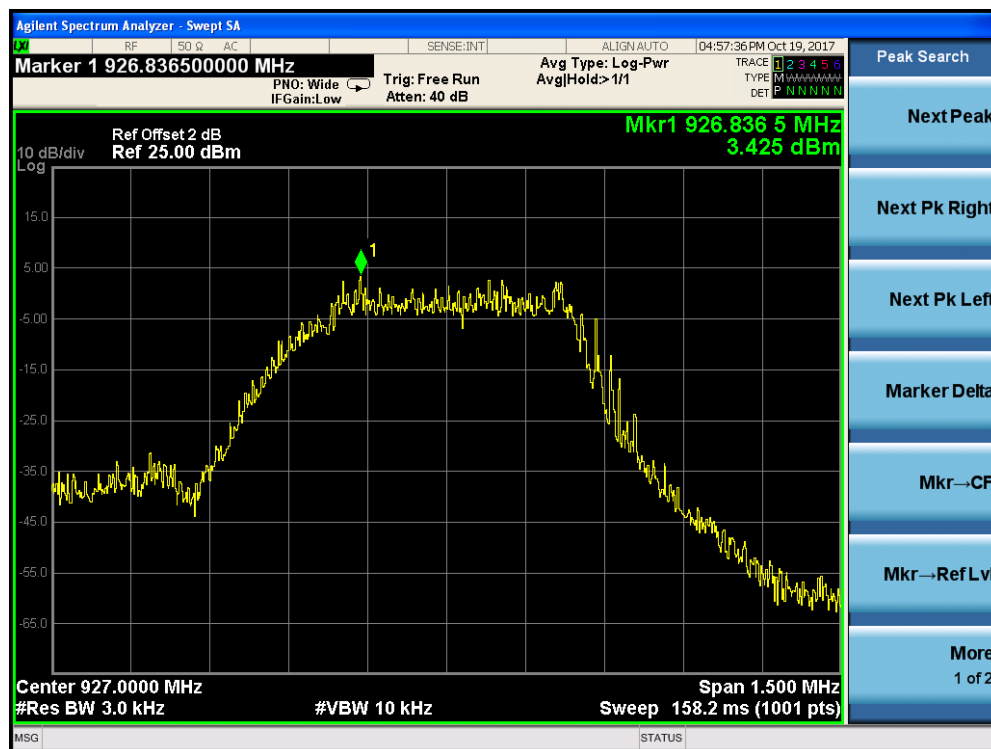

9. Antenna Requirement

9.1. Limit

Antenna Requirement Limit

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

9.2. Antenna Connector Construction

Antenna Connector Construction

- | | |
|-------------------------------------|--|
| ☒ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

_____ The End _____