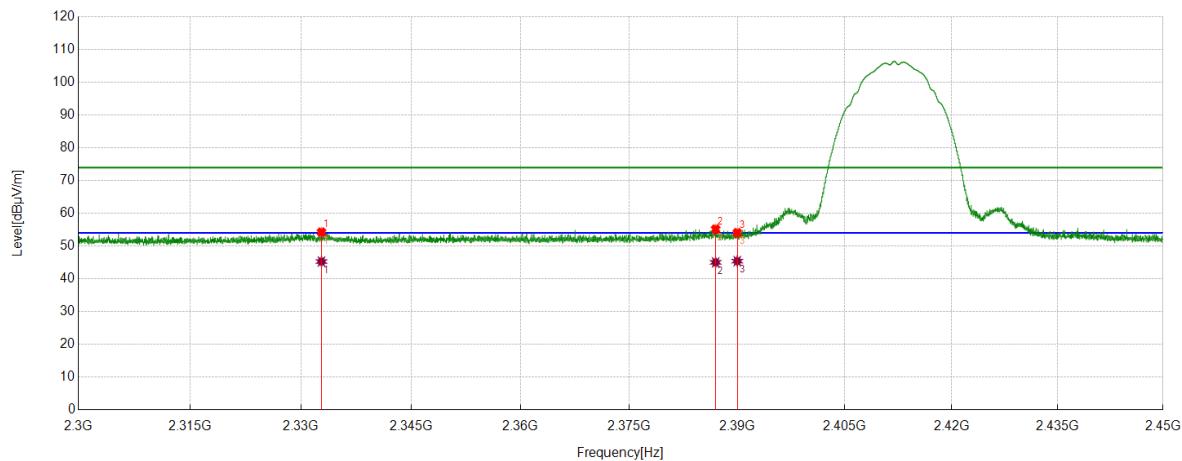


Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


PK Result:

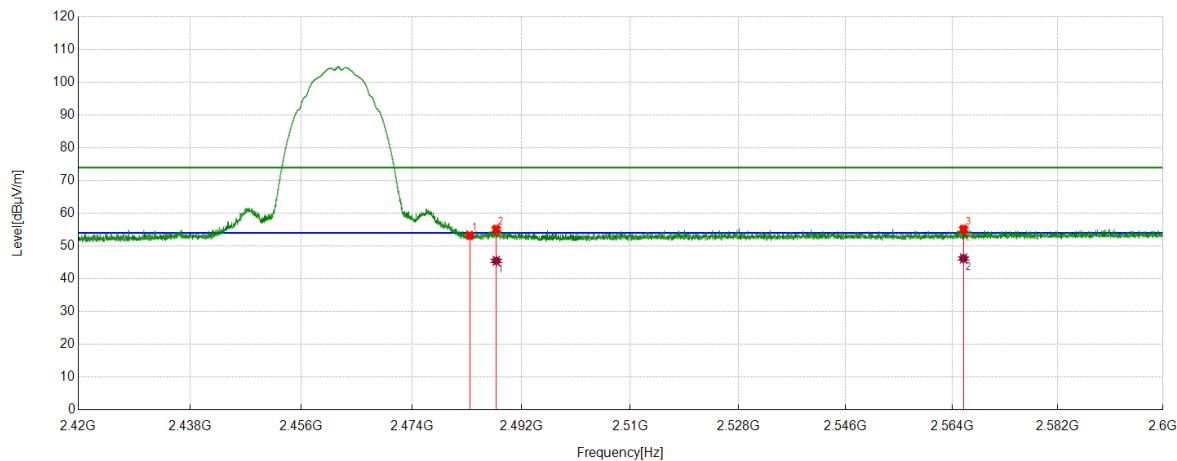
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.8166	40.86	13.38	54.24	74.00	-19.76	Vertical
2	2386.9921	41.44	13.74	55.18	74.00	-18.82	Vertical
3	2390.0000	40.36	13.72	54.08	74.00	-19.92	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.8166	31.89	13.38	45.27	54.00	-8.73	Vertical
2	2386.9921	31.27	13.74	45.01	54.00	-8.99	Vertical
3	2390.0000	31.67	13.72	45.39	54.00	-8.61	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


PK Result:

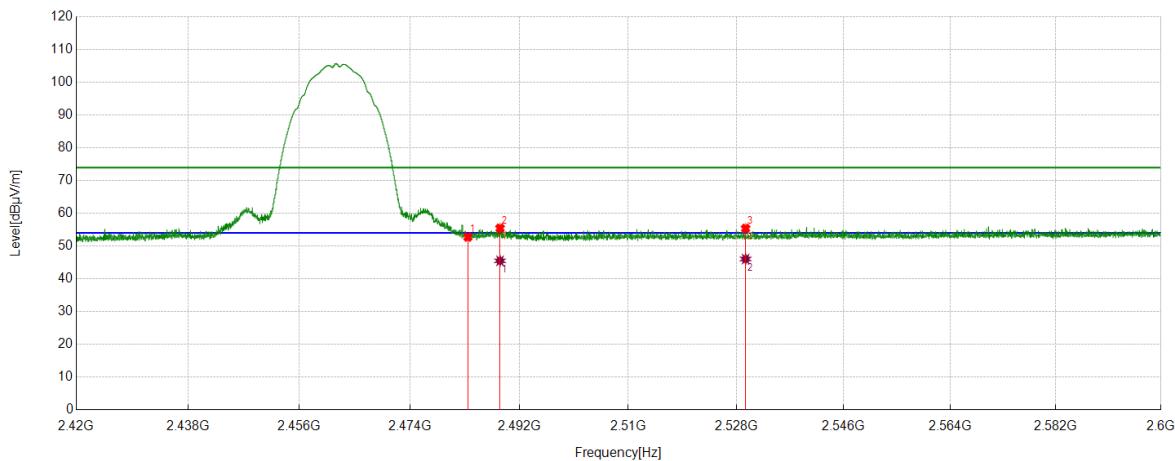
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	39.09	14.12	53.21	74.00	-20.79	Horizontal
2	2487.8460	40.92	14.20	55.12	74.00	-18.88	Horizontal
3	2565.9307	40.32	14.81	55.13	74.00	-18.87	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2487.8460	31.27	14.20	45.47	54.00	-8.53	Horizontal
2	2565.9307	31.39	14.81	46.20	54.00	-7.80	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


PK Result:

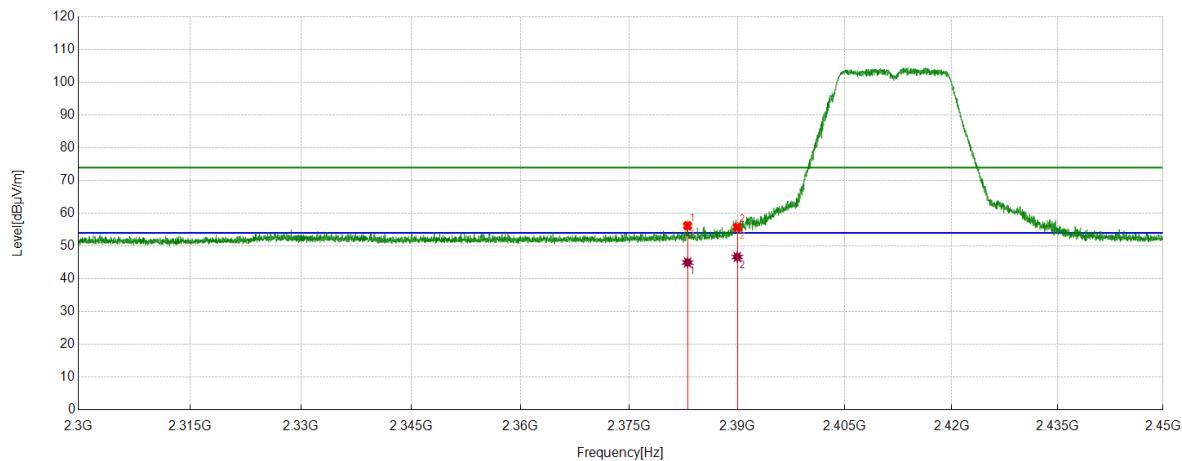
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	38.62	14.12	52.74	74.00	-21.26	Vertical
2	2488.7911	41.22	14.23	55.45	74.00	-18.55	Vertical
3	2529.5437	40.91	14.48	55.39	74.00	-18.61	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2488.7911	31.26	14.23	45.49	54.00	-8.51	Vertical
2	2529.5437	31.56	14.48	46.04	54.00	-7.96	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


PK Result:

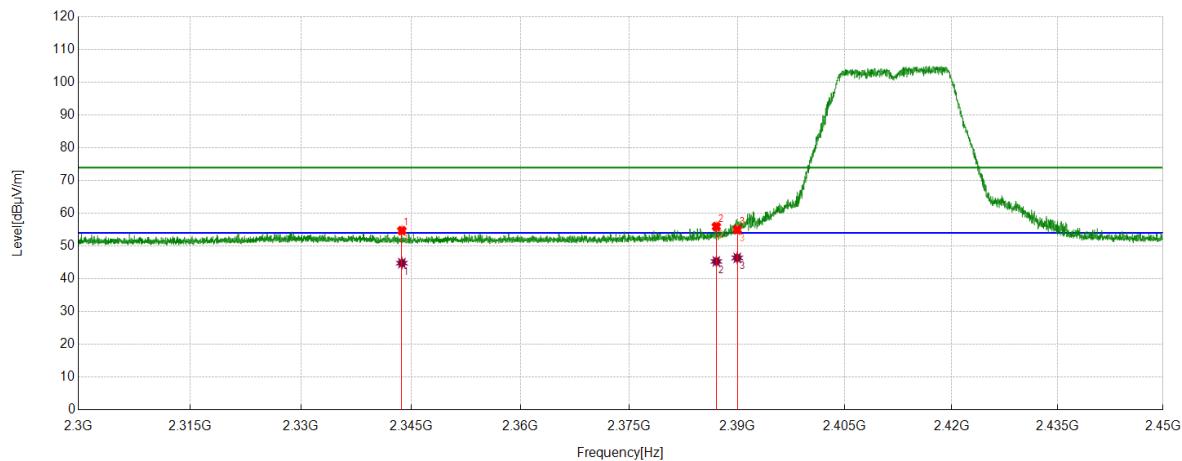
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2383.0916	42.47	13.76	56.23	74.00	-17.77	Horizontal
2	2390.0000	42.03	13.72	55.75	74.00	-18.25	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2383.0916	31.22	13.76	44.98	54.00	-9.02	Horizontal
2	2390.0000	32.94	13.72	46.66	54.00	-7.34	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


PK Result:

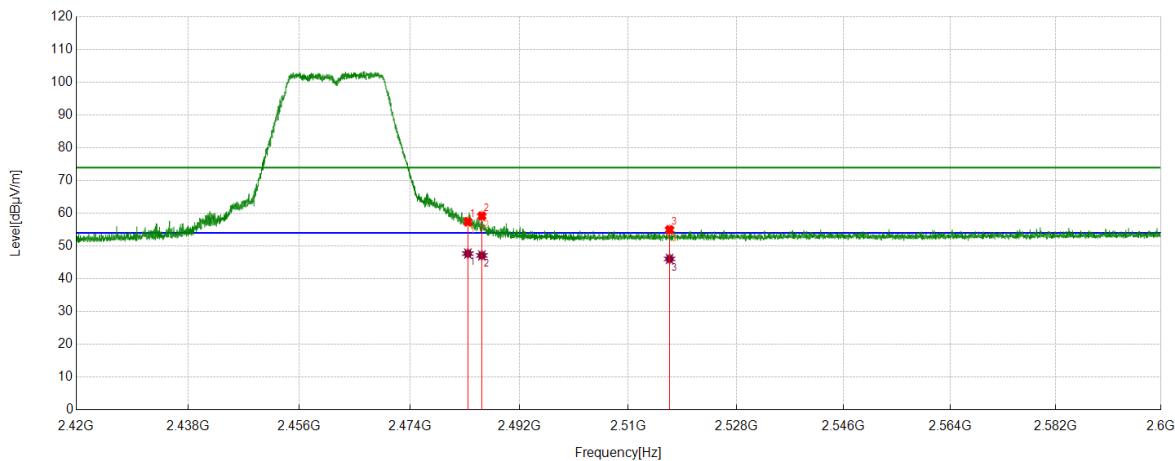
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2343.7680	41.27	13.45	54.72	74.00	-19.28	Vertical
2	2387.0859	42.22	13.74	55.96	74.00	-18.04	Vertical
3	2390.0000	41.27	13.72	54.99	74.00	-19.01	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2343.7680	31.33	13.45	44.78	54.00	-9.22	Vertical
2	2387.0859	31.57	13.74	45.31	54.00	-8.69	Vertical
3	2390.0000	32.66	13.72	46.38	54.00	-7.62	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


PK Result:

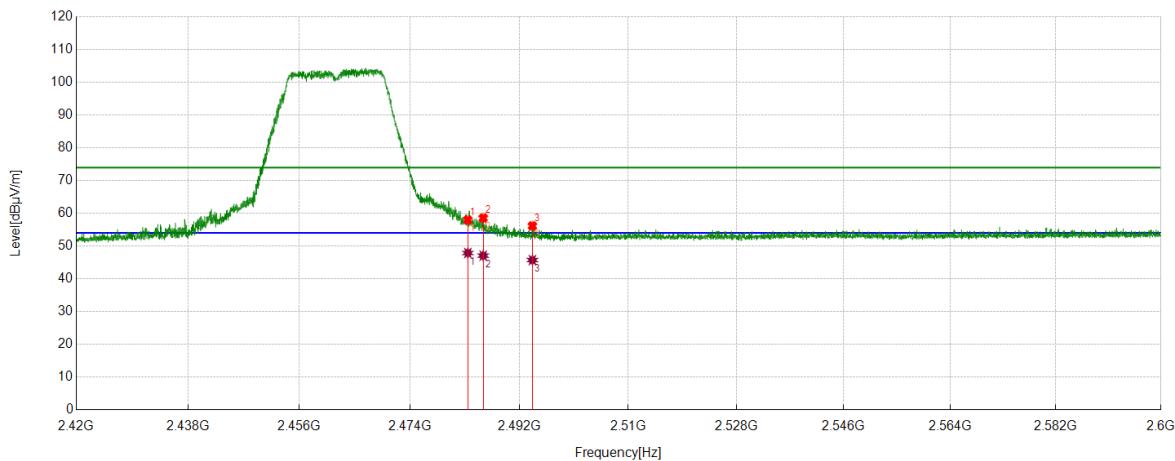
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.29	14.12	57.41	74.00	-16.59	Horizontal
2	2485.7982	45.01	14.17	59.18	74.00	-14.82	Horizontal
3	2516.8521	40.51	14.48	54.99	74.00	-19.01	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	33.58	14.12	47.70	54.00	-6.30	Horizontal
2	2485.7982	32.96	14.17	47.13	54.00	-6.87	Horizontal
3	2516.8521	31.60	14.48	46.08	54.00	-7.92	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


PK Result:

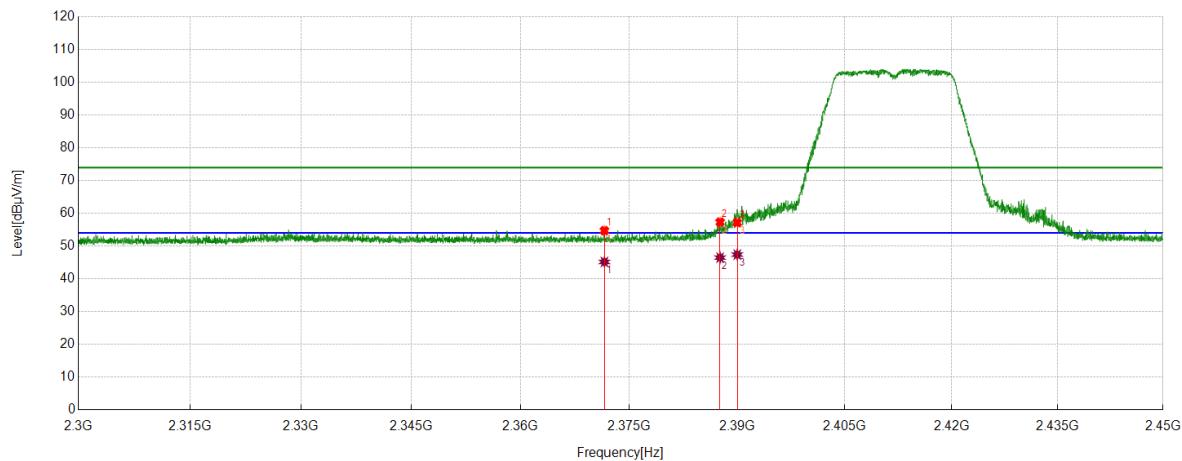
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.87	14.12	57.99	74.00	-16.01	Vertical
2	2486.0233	44.39	14.17	58.56	74.00	-15.44	Vertical
3	2494.1243	41.95	14.22	56.17	74.00	-17.83	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	33.75	14.12	47.87	54.00	-6.13	Vertical
2	2486.0233	32.89	14.17	47.06	54.00	-6.94	Vertical
3	2494.1243	31.49	14.22	45.71	54.00	-8.29	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


PK Result:

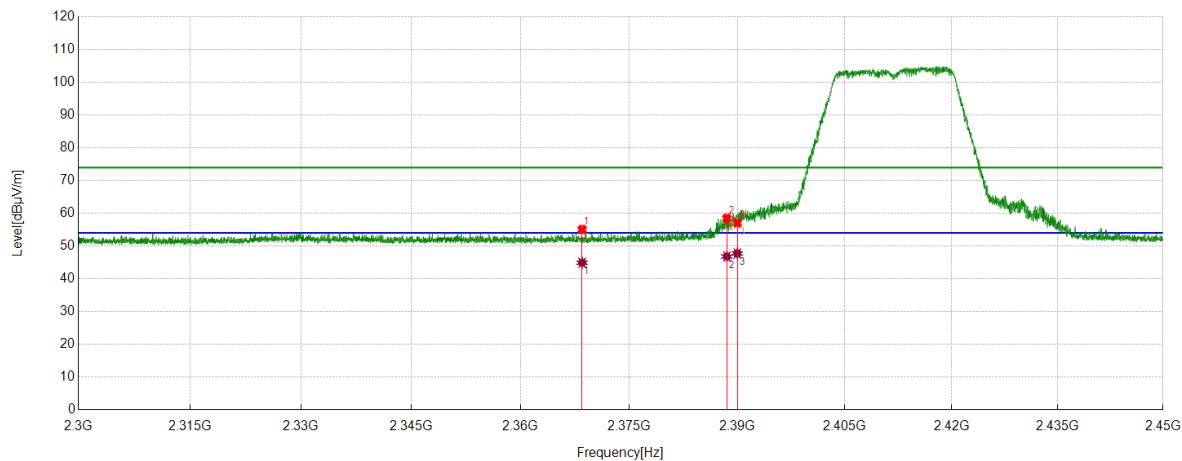
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2371.5777	41.02	13.69	54.71	74.00	-19.29	Horizontal
2	2387.6110	43.60	13.73	57.33	74.00	-16.67	Horizontal
3	2390.0000	43.45	13.72	57.17	74.00	-16.83	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2371.5777	31.46	13.69	45.15	54.00	-8.85	Horizontal
2	2387.6110	32.74	13.73	46.47	54.00	-7.53	Horizontal
3	2390.0000	33.67	13.72	47.39	54.00	-6.61	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


PK Result:

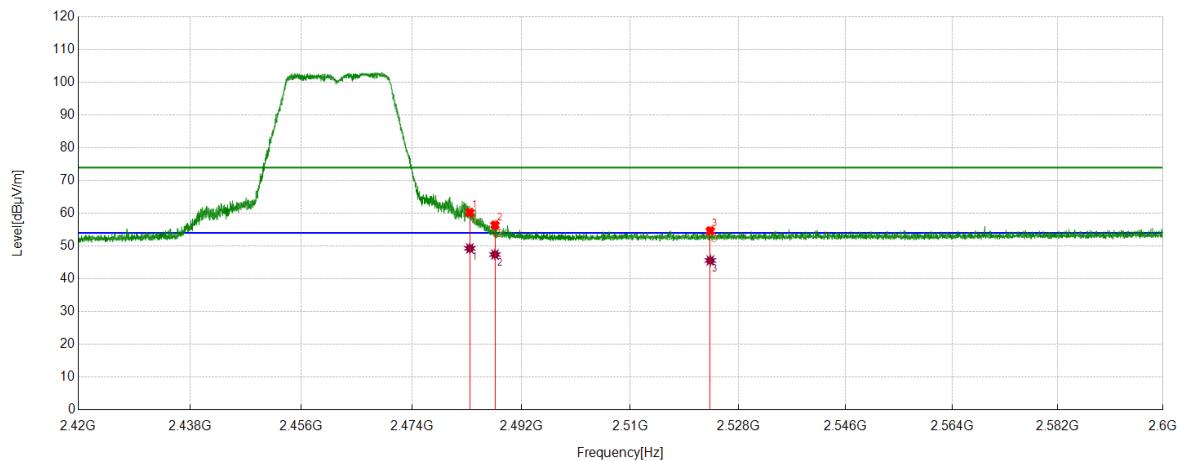
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2368.5023	41.44	13.64	55.08	74.00	-18.92	Vertical
2	2388.5486	44.79	13.72	58.51	74.00	-15.49	Vertical
3	2390.0000	43.34	13.72	57.06	74.00	-16.94	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2368.5023	31.27	13.64	44.91	54.00	-9.09	Vertical
2	2388.5486	33.08	13.72	46.80	54.00	-7.20	Vertical
3	2390.0000	34.01	13.72	47.73	54.00	-6.27	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


PK Result:

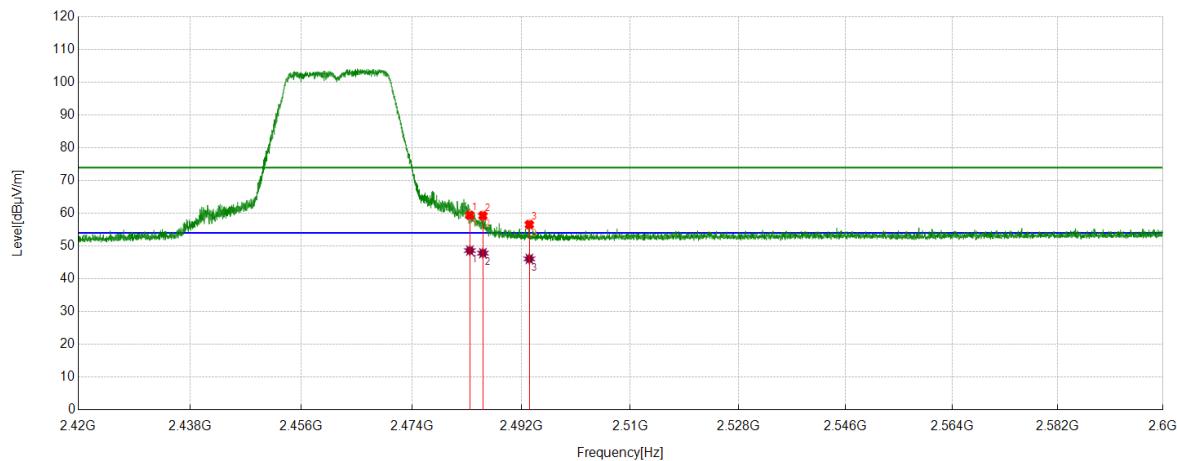
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	46.14	14.12	60.26	74.00	-13.74	Horizontal
2	2487.6210	42.20	14.20	56.40	74.00	-17.60	Horizontal
3	2523.3104	40.14	14.50	54.64	74.00	-19.36	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	35.17	14.12	49.29	54.00	-4.71	Horizontal
2	2487.6210	33.21	14.20	47.41	54.00	-6.59	Horizontal
3	2523.3104	31.09	14.50	45.59	54.00	-8.41	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


PK Result:

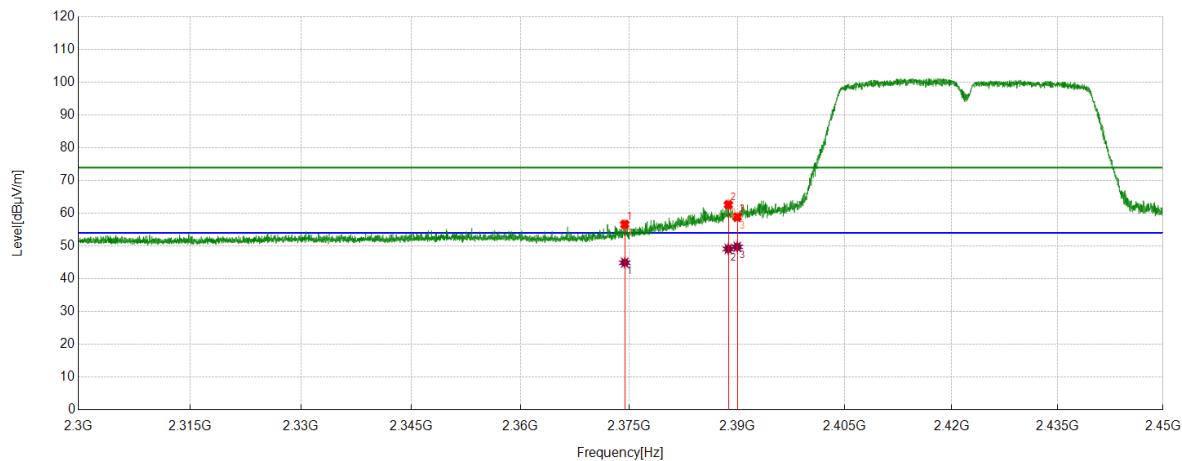
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	45.30	14.12	59.42	74.00	-14.58	Vertical
2	2485.6407	45.11	14.17	59.28	74.00	-14.72	Vertical
3	2493.2917	42.34	14.23	56.57	74.00	-17.43	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	34.51	14.12	48.63	54.00	-5.37	Vertical
2	2485.6407	33.67	14.17	47.84	54.00	-6.16	Vertical
3	2493.2917	31.86	14.23	46.09	54.00	-7.91	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


PK Result:

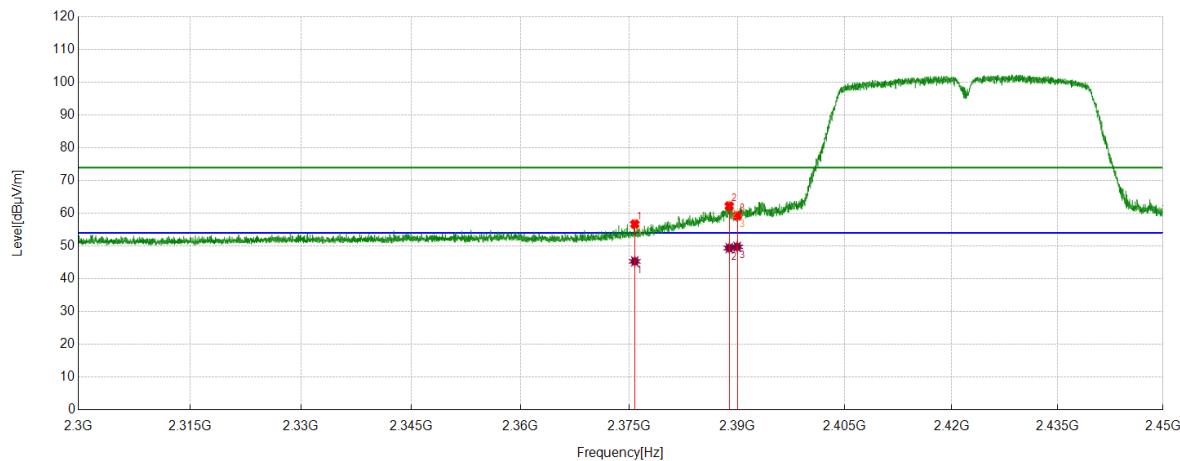
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2374.3905	42.92	13.72	56.64	74.00	-17.36	Horizontal
2	2388.7548	48.91	13.73	62.64	74.00	-11.36	Horizontal
3	2390.0000	45.11	13.72	58.83	74.00	-15.17	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2374.3905	31.19	13.72	44.91	54.00	-9.09	Horizontal
2	2388.7548	35.40	13.73	49.13	54.00	-4.87	Horizontal
3	2390.0000	36.04	13.72	49.76	54.00	-4.24	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


PK Result:

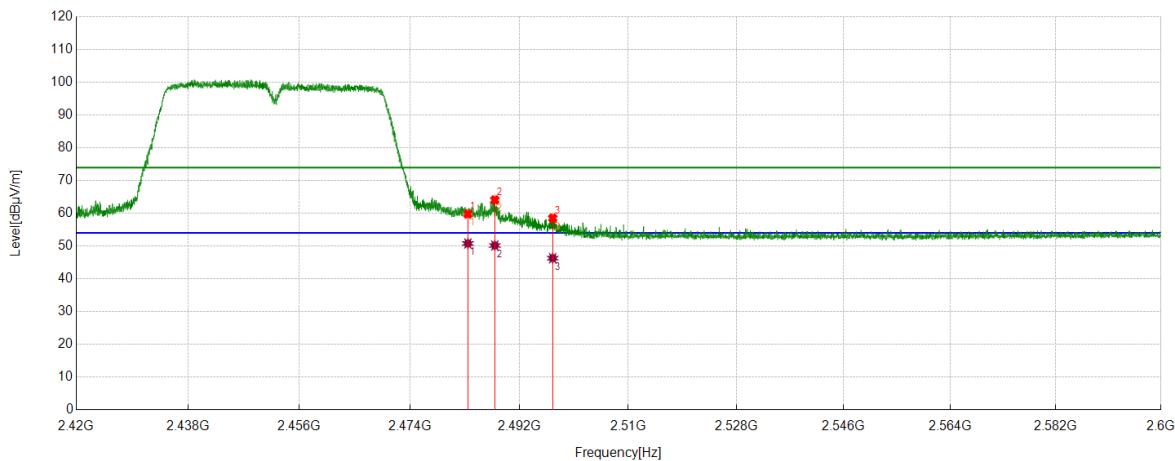
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2375.7782	42.99	13.73	56.72	74.00	-17.28	Vertical
2	2388.8861	48.51	13.73	62.24	74.00	-11.76	Vertical
3	2390.0000	45.56	13.72	59.28	74.00	-14.72	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2375.7782	31.59	13.73	45.32	54.00	-8.68	Vertical
2	2388.8861	35.66	13.73	49.39	54.00	-4.61	Vertical
3	2390.0000	36.04	13.72	49.76	54.00	-4.24	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS


PK Result:

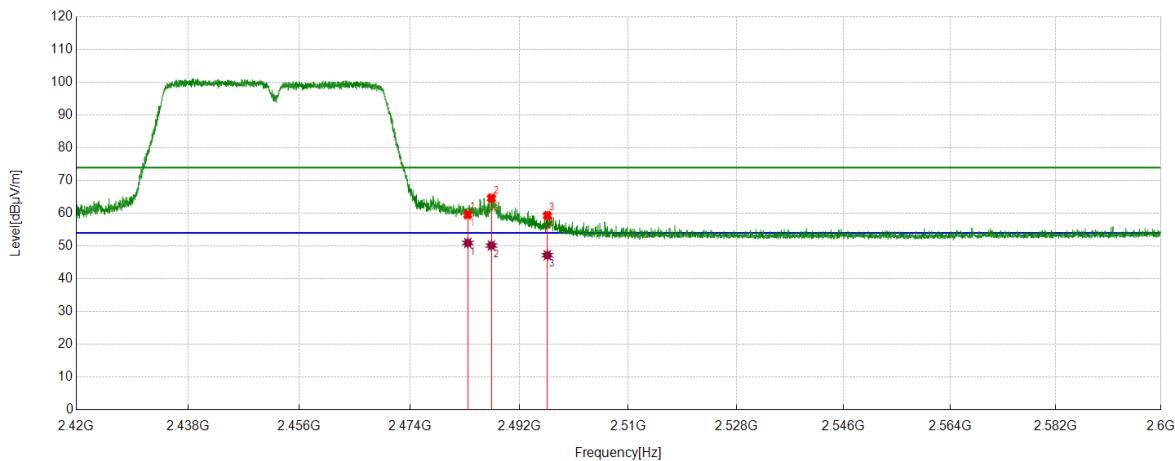
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	45.65	14.12	59.77	74.00	-14.23	Horizontal
2	2487.9360	49.87	14.21	64.08	74.00	-9.92	Horizontal
3	2497.4772	44.33	14.20	58.53	74.00	-15.47	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	36.67	14.12	50.79	54.00	-3.21	Horizontal
2	2487.9360	35.96	14.21	50.17	54.00	-3.83	Horizontal
3	2497.4772	32.09	14.20	46.29	54.00	-7.71	Horizontal

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	45.47	14.12	59.59	74.00	-14.41	Vertical
2	2487.3734	50.45	14.20	64.65	74.00	-9.35	Vertical
3	2496.5996	45.12	14.20	59.32	74.00	-14.68	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	36.84	14.12	50.96	54.00	-3.04	Vertical
2	2487.3734	35.97	14.20	50.17	54.00	-3.83	Vertical
3	2496.5996	33.01	14.20	47.21	54.00	-6.79	Vertical

- Note:
1. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 2. Average detector: RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Attenuator) - Amplifier Gain.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

8.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11G	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT20	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
11N HT40	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz

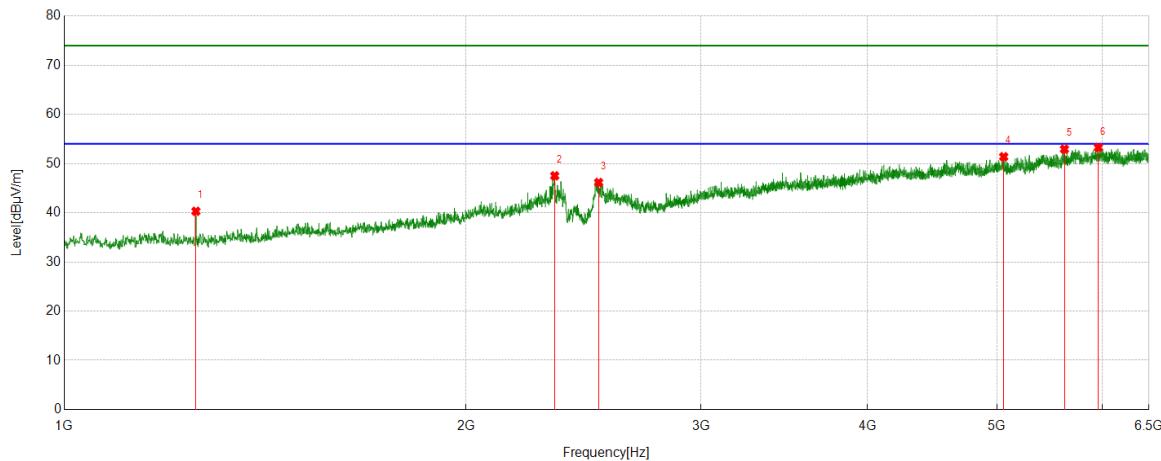
Test Mode	Channel	Puw(dBm)	Verdict
11B	MCH	<Limit	PASS

Remark:

- 1) Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~6.5GHz
HARMONICS AND SPURIOUS EMISSIONS

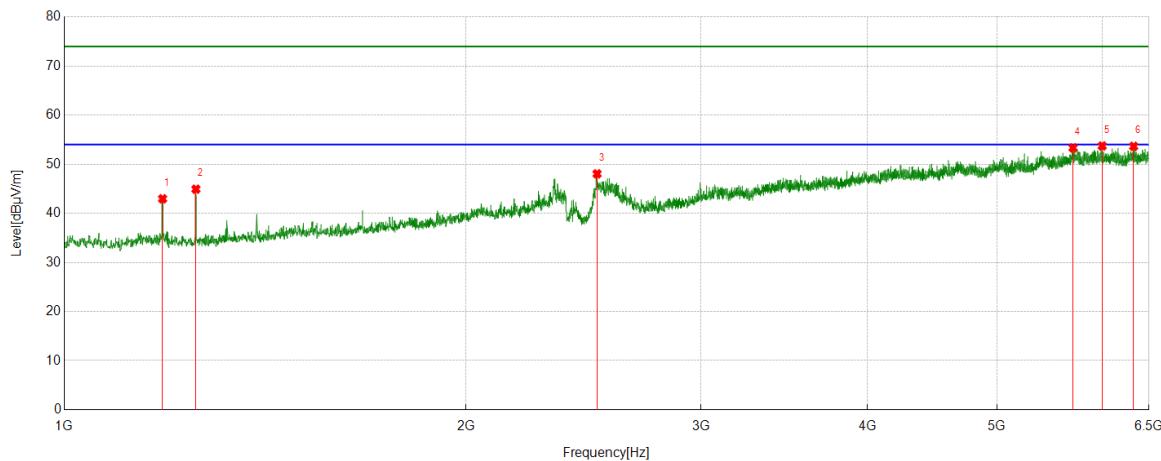
Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	42.29	-1.98	40.31	74.00	-33.69	Horizontal
2	2331.1664	42.55	4.96	47.51	74.00	-26.49	Horizontal
3	2514.7518	40.38	5.77	46.15	74.00	-27.85	Horizontal
4	5058.8199	35.50	15.89	51.39	74.00	-22.61	Horizontal
5	5617.8272	35.66	17.28	52.94	74.00	-21.06	Horizontal
6	5956.1195	34.74	18.53	53.27	74.00	-20.73	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

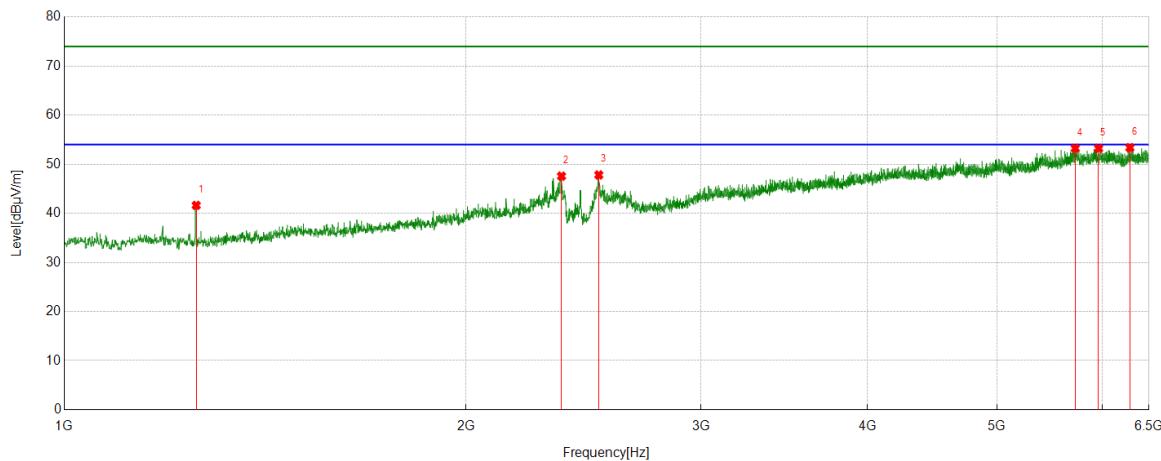
Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	44.90	-1.93	42.97	74.00	-31.03	Vertical
2	1255.0944	46.90	-1.98	44.92	74.00	-29.08	Vertical
3	2507.8760	42.20	5.84	48.04	74.00	-25.96	Vertical
4	5701.7127	35.68	17.66	53.34	74.00	-20.66	Vertical
5	5995.9995	35.37	18.36	53.73	74.00	-20.27	Vertical
6	6330.1663	34.23	19.43	53.66	74.00	-20.34	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

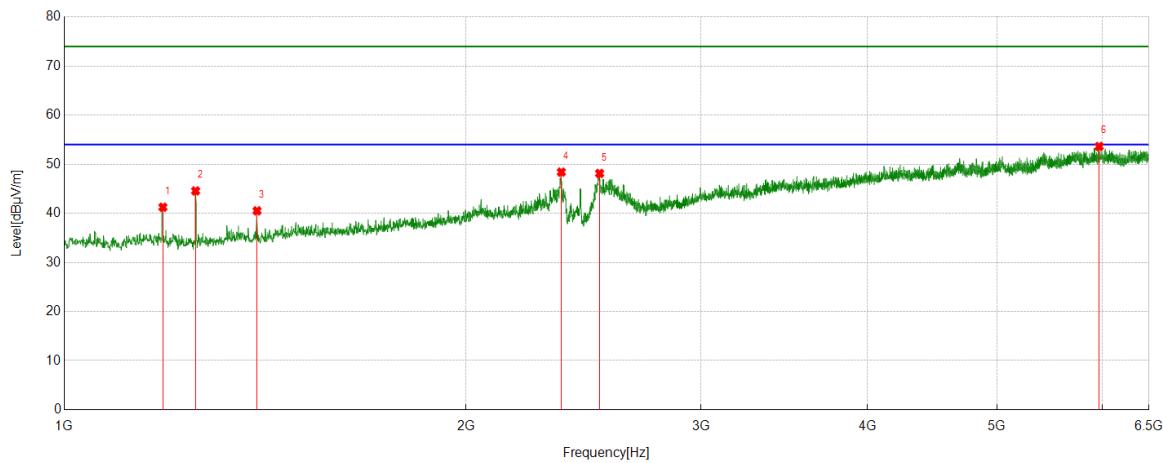
Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.7820	43.60	-1.98	41.62	74.00	-32.38	Horizontal
2	2358.6698	42.75	4.83	47.58	74.00	-26.42	Horizontal
3	2515.4394	42.07	5.75	47.82	74.00	-26.18	Horizontal
4	5723.0279	35.48	17.76	53.24	74.00	-20.76	Horizontal
5	5958.8699	34.65	18.57	53.22	74.00	-20.78	Horizontal
6	6289.5987	34.62	18.76	53.38	74.00	-20.62	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

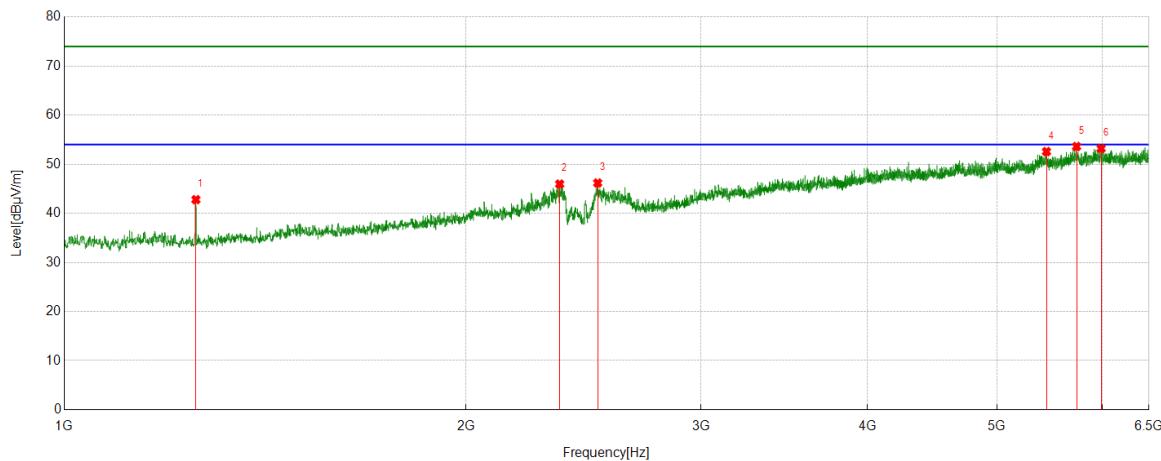
Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	43.20	-1.95	41.25	74.00	-32.75	Vertical
2	1254.4068	46.54	-1.97	44.57	74.00	-29.43	Vertical
3	1394.6743	41.96	-1.45	40.51	74.00	-33.49	Vertical
4	2357.9822	43.58	4.82	48.40	74.00	-25.60	Vertical
5	2518.8774	42.43	5.70	48.13	74.00	-25.87	Vertical
6	5964.3705	35.34	18.28	53.62	74.00	-20.38	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

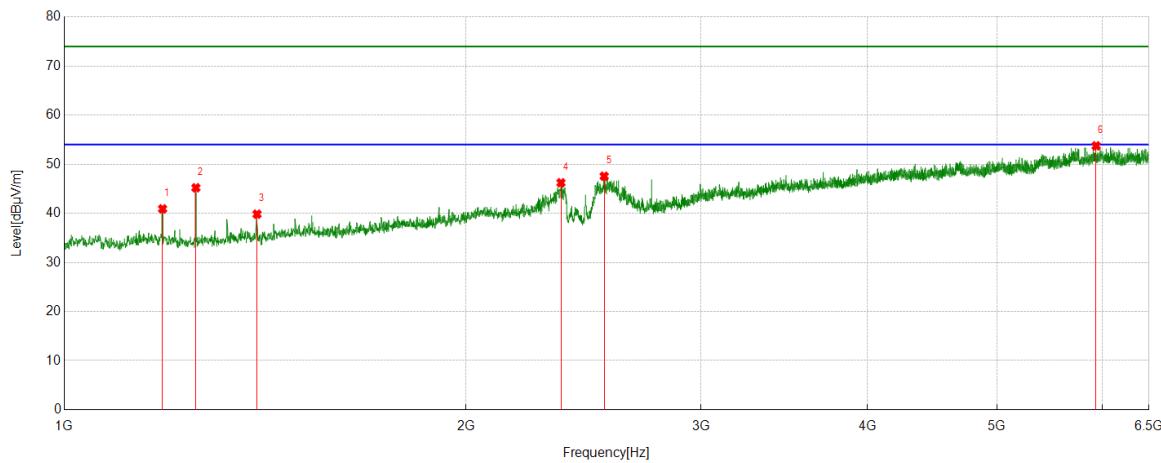
Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	44.77	-1.98	42.79	74.00	-31.21	Horizontal
2	2351.1064	41.19	4.77	45.96	74.00	-28.04	Horizontal
3	2510.6263	40.34	5.84	46.18	74.00	-27.82	Horizontal
4	5445.9307	35.09	17.49	52.58	74.00	-21.42	Horizontal
5	5736.7796	35.73	17.88	53.61	74.00	-20.39	Horizontal
6	5984.9981	34.74	18.47	53.21	74.00	-20.79	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

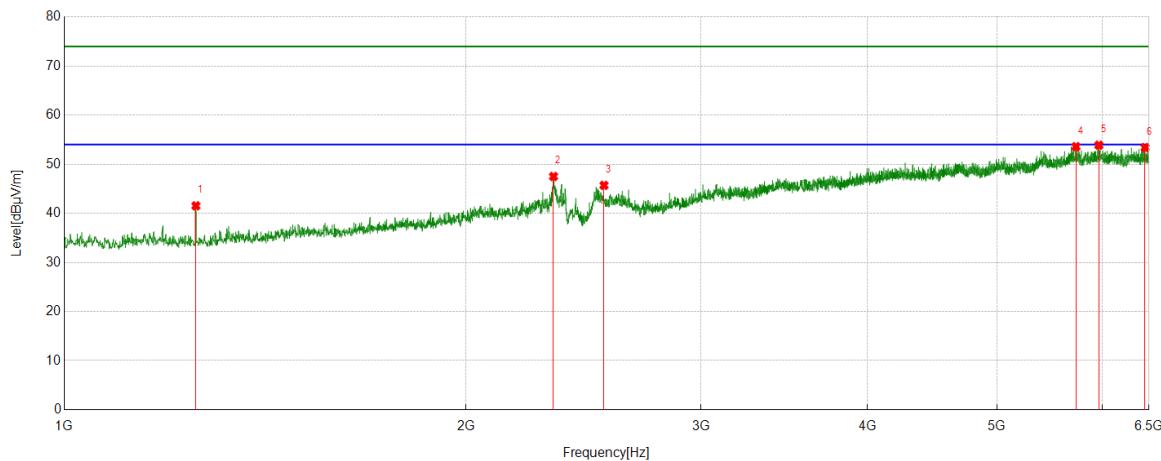
Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	42.84	-1.93	40.91	74.00	-33.09	Vertical
2	1255.0944	47.19	-1.98	45.21	74.00	-28.79	Vertical
3	1394.6743	41.28	-1.45	39.83	74.00	-34.17	Vertical
4	2356.6071	41.41	4.82	46.23	74.00	-27.77	Vertical
5	2538.8174	41.55	6.01	47.56	74.00	-26.44	Vertical
6	5933.4292	35.03	18.72	53.75	74.00	-20.25	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

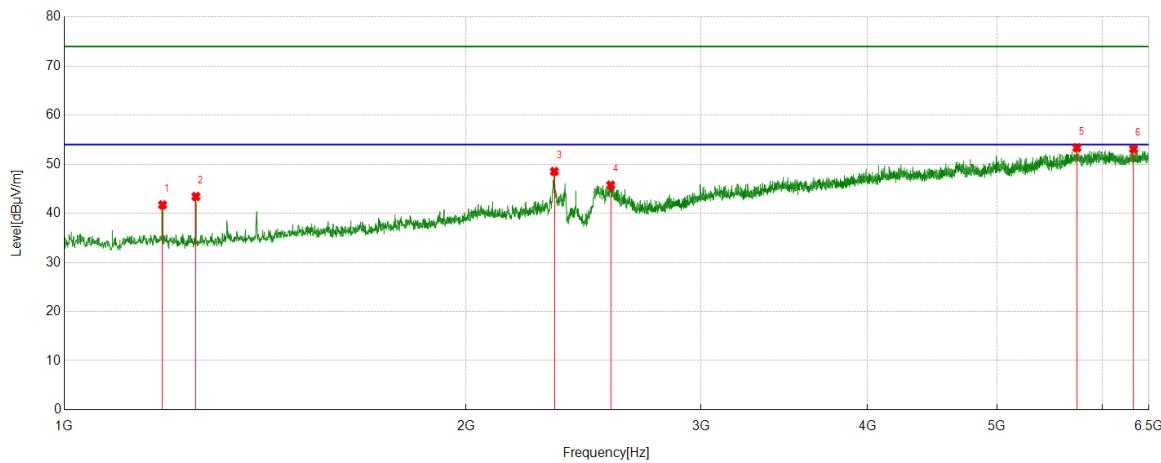
Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.51	-1.98	41.53	74.00	-32.47	Horizontal
2	2326.3533	42.64	4.87	47.51	74.00	-26.49	Horizontal
3	2538.1298	39.72	5.98	45.70	74.00	-28.30	Horizontal
4	5730.5913	36.03	17.55	53.58	74.00	-20.42	Horizontal
5	5961.6202	35.41	18.47	53.88	74.00	-20.12	Horizontal
6	6455.9945	34.33	19.07	53.40	74.00	-20.60	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

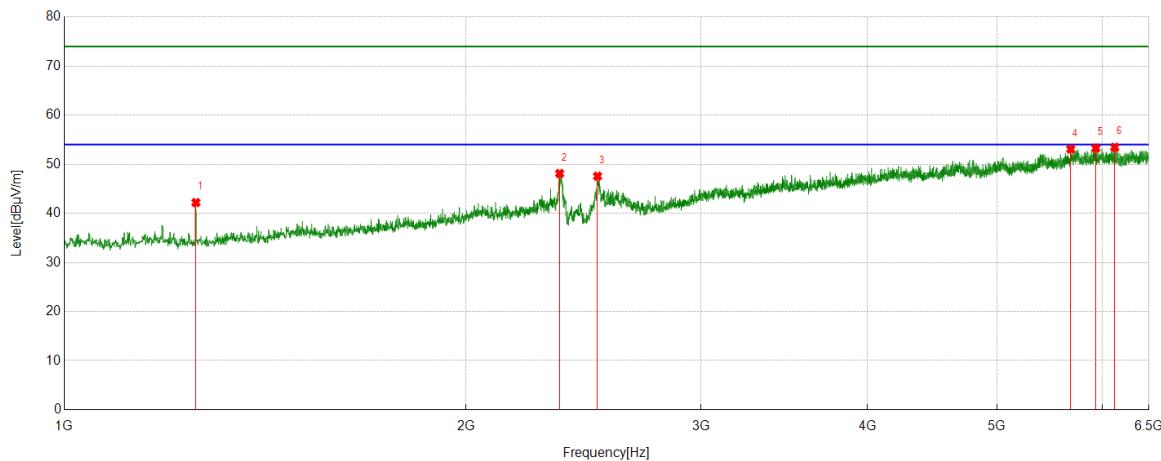
Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	43.64	-1.93	41.71	74.00	-32.29	Vertical
2	1255.0944	45.41	-1.98	43.43	74.00	-30.57	Vertical
3	2329.7912	43.56	4.96	48.52	74.00	-25.48	Vertical
4	2567.6960	39.92	5.83	45.75	74.00	-28.25	Vertical
5	5739.5299	35.32	18.03	53.35	74.00	-20.65	Vertical
6	6329.4787	33.69	19.42	53.11	74.00	-20.89	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

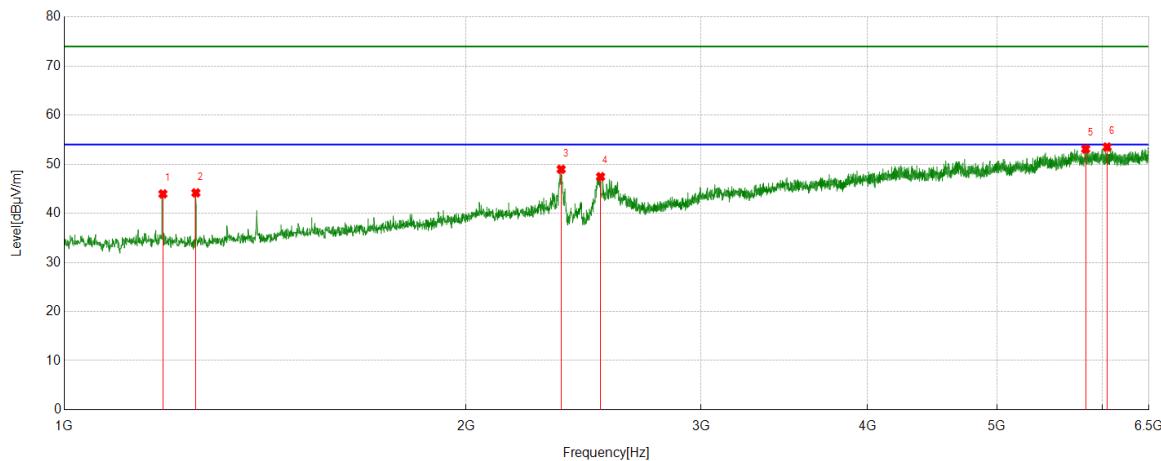
Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	44.17	-1.98	42.19	74.00	-31.81	Horizontal
2	2351.1064	43.34	4.77	48.11	74.00	-25.89	Horizontal
3	2509.9387	41.71	5.85	47.56	74.00	-26.44	Horizontal
4	5679.0224	35.57	17.51	53.08	74.00	-20.92	Horizontal
5	5930.6788	34.43	18.85	53.28	74.00	-20.72	Horizontal
6	6127.3284	34.99	18.46	53.45	74.00	-20.55	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

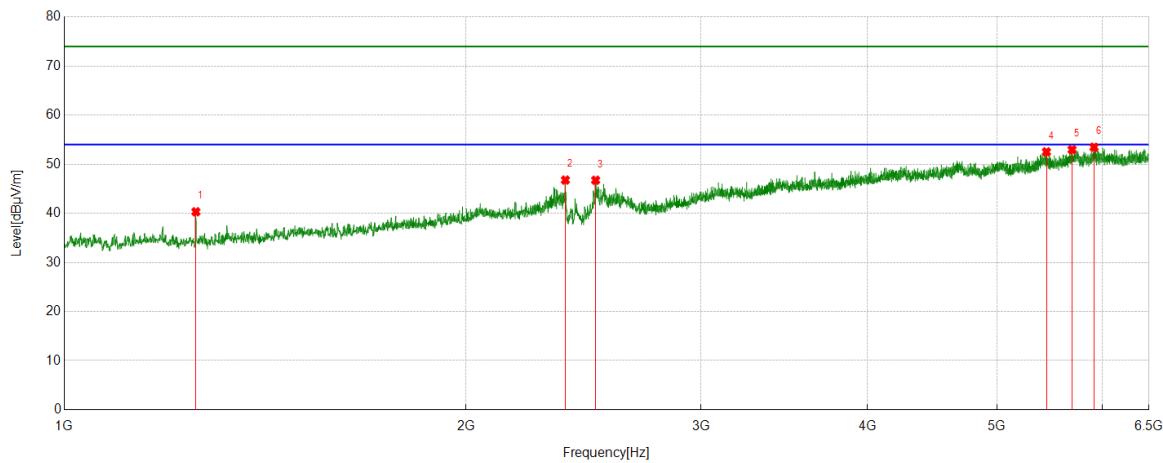
Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1185.6482	45.90	-1.95	43.95	74.00	-30.05	Vertical
2	1255.0944	46.15	-1.98	44.17	74.00	-29.83	Vertical
3	2357.2947	44.15	4.82	48.97	74.00	-25.03	Vertical
4	2523.0029	41.82	5.64	47.46	74.00	-26.54	Vertical
5	5827.5409	34.13	18.98	53.11	74.00	-20.89	Vertical
6	6046.8809	35.18	18.32	53.50	74.00	-20.50	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

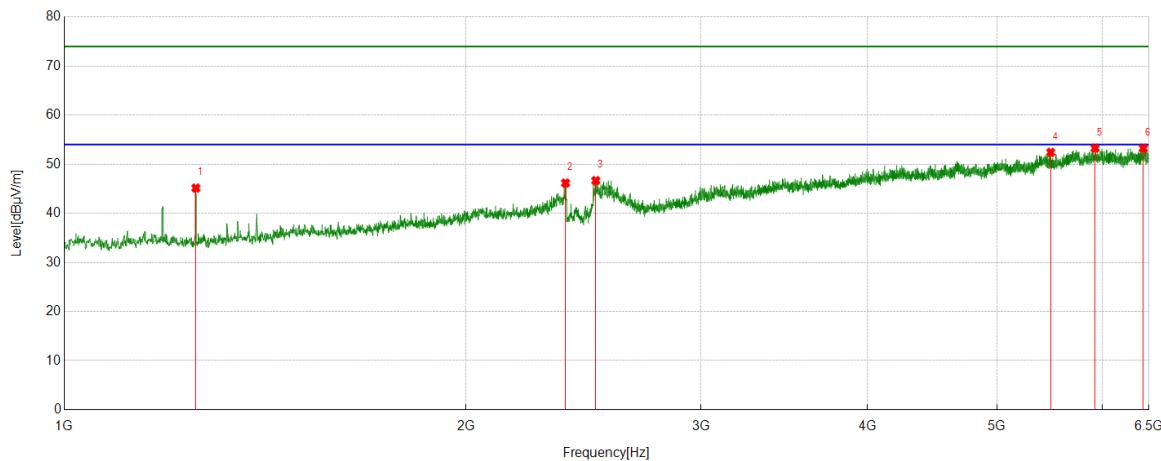
Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	42.30	-1.98	40.32	74.00	-33.68	Horizontal
2	2374.4843	41.81	4.97	46.78	74.00	-27.22	Horizontal
3	2501.6877	40.96	5.79	46.75	74.00	-27.25	Horizontal
4	5445.9307	35.03	17.49	52.52	74.00	-21.48	Horizontal
5	5692.0865	35.41	17.55	52.96	74.00	-21.04	Horizontal
6	5912.1140	35.25	18.21	53.46	74.00	-20.54	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

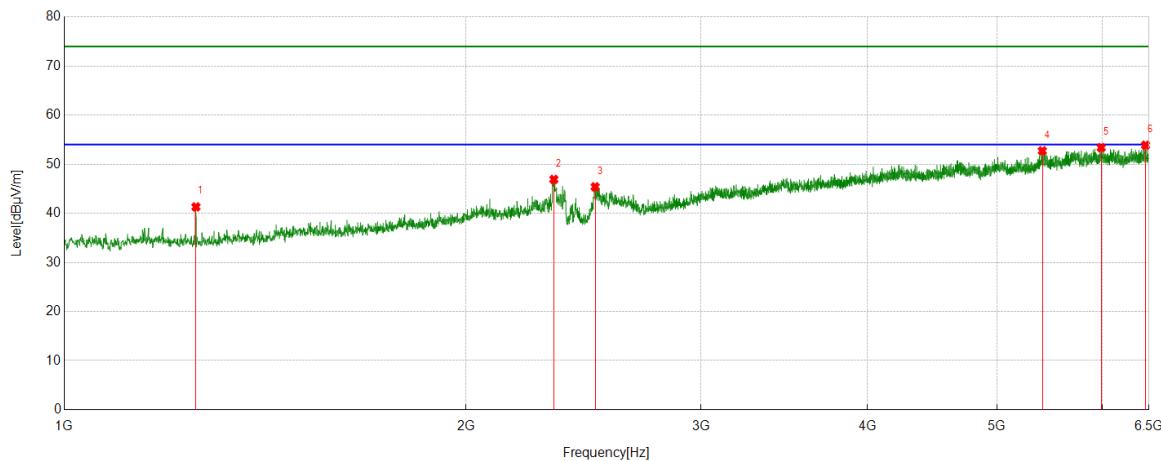
Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	47.13	-1.98	45.15	74.00	-28.85	Vertical
2	2375.1719	41.19	4.98	46.17	74.00	-27.83	Vertical
3	2502.3753	40.87	5.79	46.66	74.00	-27.34	Vertical
4	5486.4983	35.75	16.66	52.41	74.00	-21.59	Vertical
5	5922.4278	34.58	18.69	53.27	74.00	-20.73	Vertical
6	6437.4297	34.32	18.95	53.27	74.00	-20.73	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

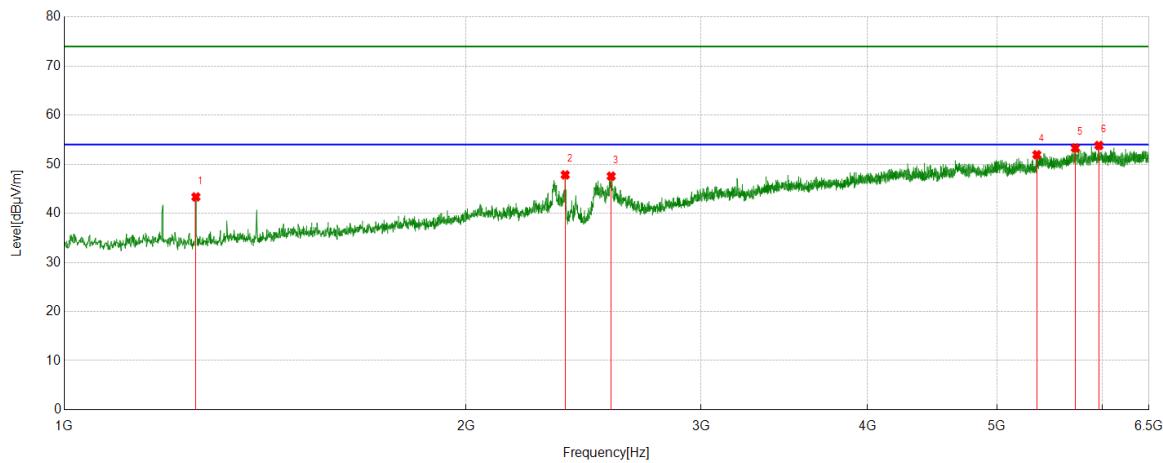
Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.29	-1.98	41.31	74.00	-32.69	Horizontal
2	2327.7285	42.01	4.90	46.91	74.00	-27.09	Horizontal
3	2499.6250	39.62	5.78	45.40	74.00	-28.60	Horizontal
4	5407.4259	35.79	16.94	52.73	74.00	-21.27	Horizontal
5	5985.6857	34.92	18.46	53.38	74.00	-20.62	Horizontal
6	6462.1828	34.86	19.02	53.88	74.00	-20.12	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

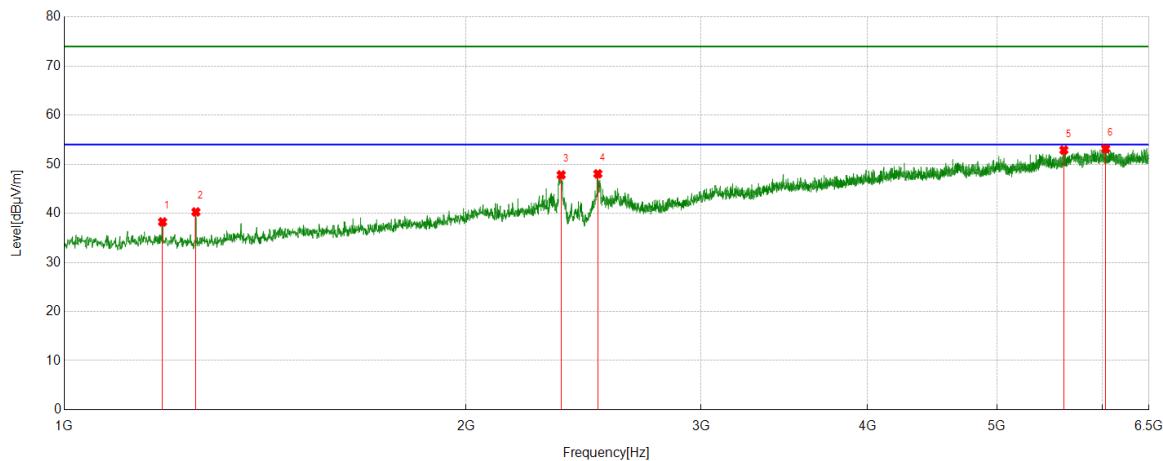
Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	45.32	-1.98	43.34	74.00	-30.66	Vertical
2	2373.7967	42.86	4.97	47.83	74.00	-26.17	Vertical
3	2569.7587	41.70	5.87	47.57	74.00	-26.43	Vertical
4	5356.5446	35.85	16.09	51.94	74.00	-22.06	Vertical
5	5723.7155	35.57	17.74	53.31	74.00	-20.69	Vertical
6	5961.6202	35.35	18.47	53.82	74.00	-20.18	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

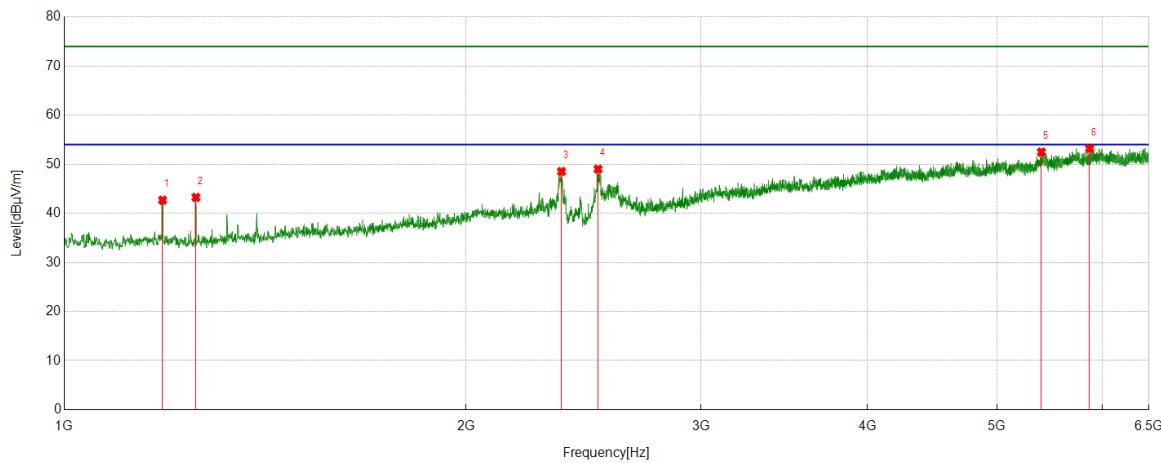
Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	40.18	-1.93	38.25	74.00	-35.75	Horizontal
2	1255.0944	42.27	-1.98	40.29	74.00	-33.71	Horizontal
3	2357.2947	43.01	4.82	47.83	74.00	-26.17	Horizontal
4	2511.3139	42.22	5.83	48.05	74.00	-25.95	Horizontal
5	5612.3265	35.59	17.30	52.89	74.00	-21.11	Horizontal
6	6031.7540	35.00	18.16	53.16	74.00	-20.84	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

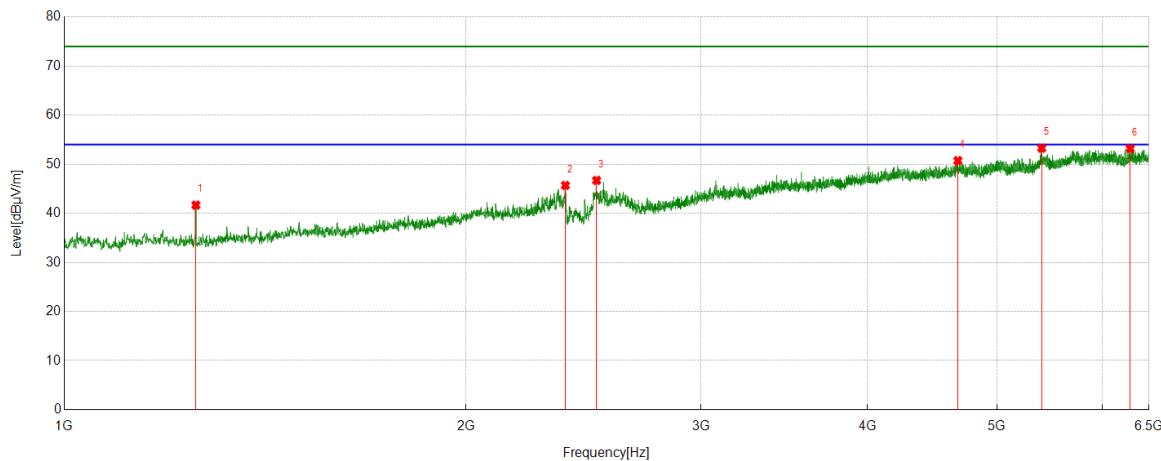
Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	44.61	-1.93	42.68	74.00	-31.32	Vertical
2	1255.0944	45.23	-1.98	43.25	74.00	-30.75	Vertical
3	2358.6698	43.69	4.83	48.52	74.00	-25.48	Vertical
4	2512.0015	43.20	5.81	49.01	74.00	-24.99	Vertical
5	5398.4873	35.62	16.85	52.47	74.00	-21.53	Vertical
6	5867.4209	35.23	17.98	53.21	74.00	-20.79	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

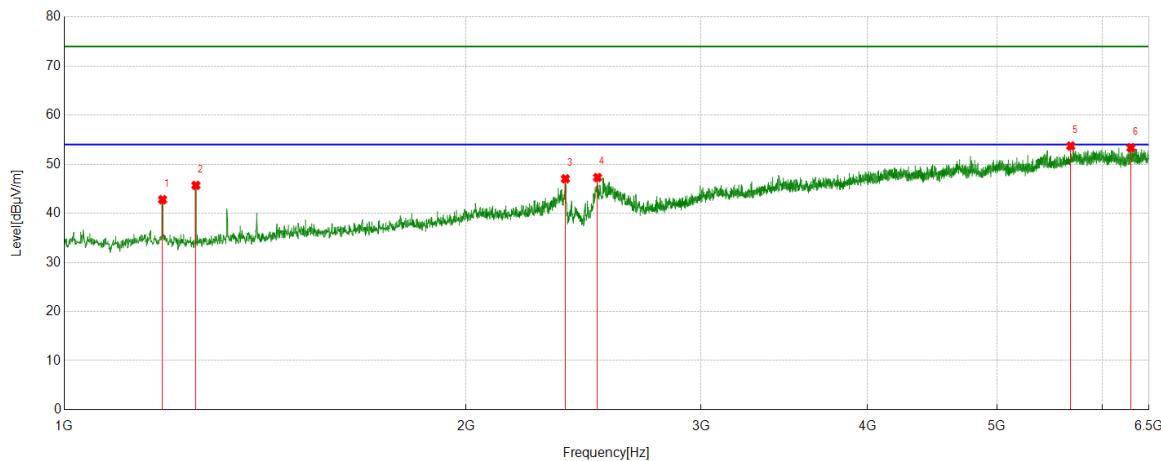
Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.66	-1.98	41.68	74.00	-32.32	Horizontal
2	2374.4843	40.72	4.97	45.69	74.00	-28.31	Horizontal
3	2505.8132	40.89	5.82	46.71	74.00	-27.29	Horizontal
4	4673.7717	35.50	15.24	50.74	74.00	-23.26	Horizontal
5	5401.9252	36.37	16.91	53.28	74.00	-20.72	Horizontal
6	6292.3490	34.40	18.81	53.21	74.00	-20.79	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

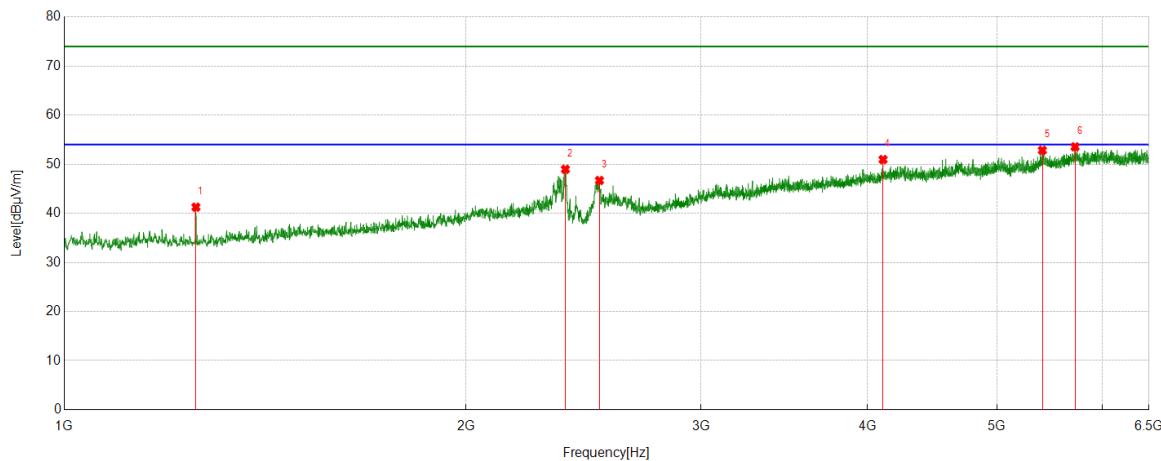
Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	1184.9606	44.72	-1.93	42.79	74.00	-31.21	Vertical
2	1255.0944	47.68	-1.98	45.70	74.00	-28.30	Vertical
3	2374.4843	42.06	4.97	47.03	74.00	-26.97	Vertical
4	2509.9387	41.45	5.85	47.30	74.00	-26.70	Vertical
5	5679.7100	36.19	17.52	53.71	74.00	-20.29	Vertical
6	6299.9125	34.38	18.98	53.36	74.00	-20.64	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

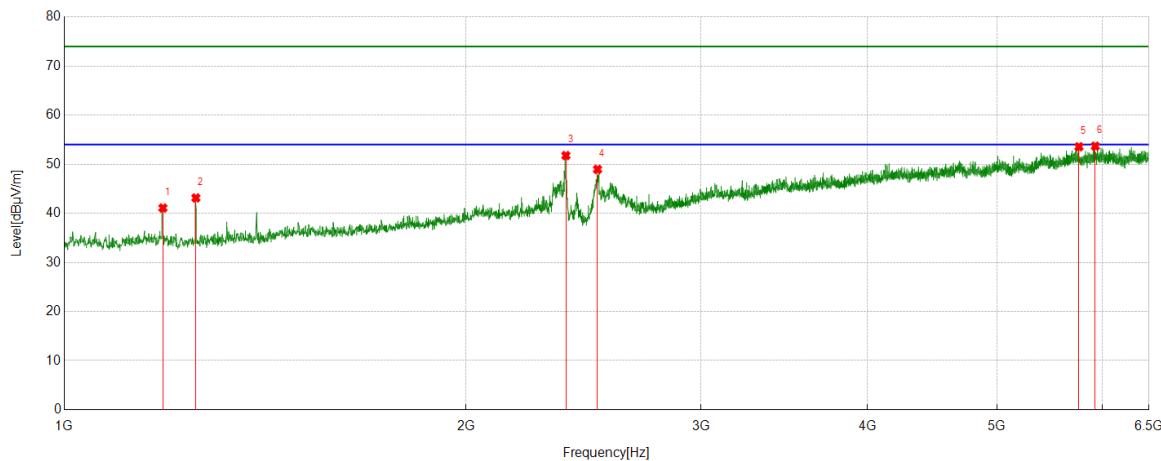
Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.24	-1.98	41.26	74.00	-32.74	Horizontal
2	2374.4843	44.00	4.97	48.97	74.00	-25.03	Horizontal
3	2518.1898	40.99	5.71	46.70	74.00	-27.30	Horizontal
4	4107.8885	37.58	13.38	50.96	74.00	-23.04	Horizontal
5	5407.4259	35.90	16.94	52.84	74.00	-21.16	Horizontal
6	5721.6527	35.73	17.81	53.54	74.00	-20.46	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

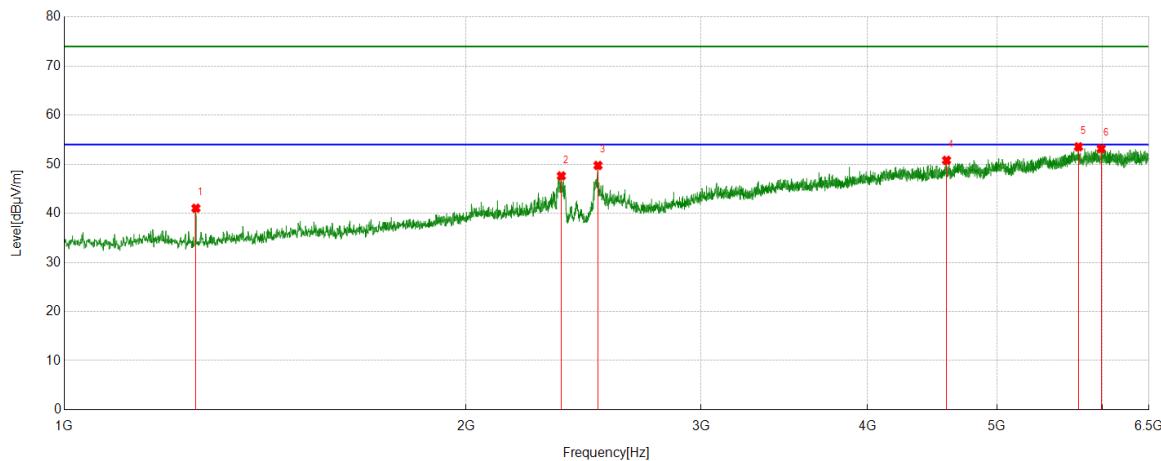
Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	43.04	-1.95	41.09	74.00	-32.91	Vertical
2	1255.0944	45.12	-1.98	43.14	74.00	-30.86	Vertical
3	2376.5471	46.78	4.99	51.77	74.00	-22.23	Vertical
4	2509.9387	43.11	5.85	48.96	74.00	-25.04	Vertical
5	5760.1575	35.31	18.25	53.56	74.00	-20.44	Vertical
6	5925.1781	34.92	18.76	53.68	74.00	-20.32	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

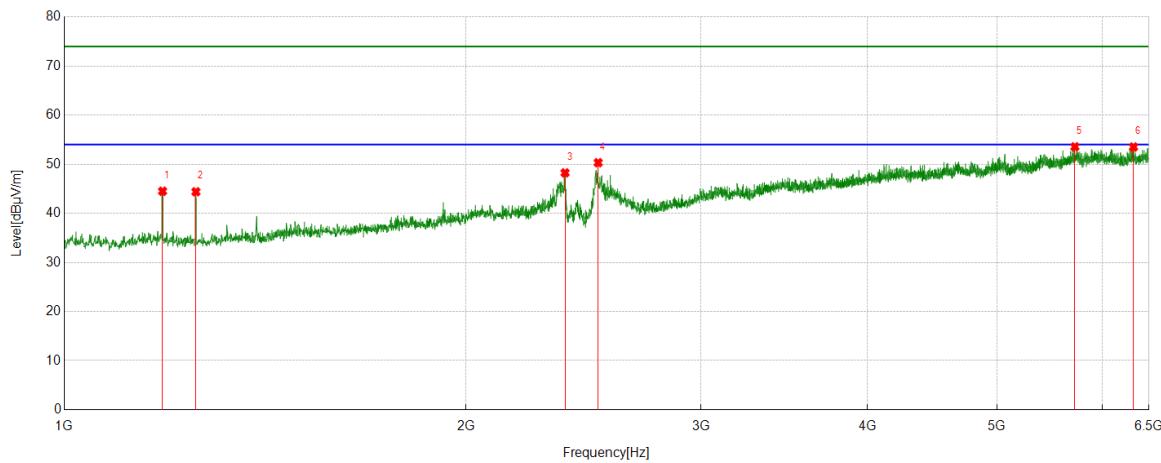
Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.02	-1.98	41.04	74.00	-32.96	Horizontal
2	2357.9822	42.80	4.82	47.62	74.00	-26.38	Horizontal
3	2512.0015	43.95	5.81	49.76	74.00	-24.24	Horizontal
4	4583.6980	36.36	14.44	50.80	74.00	-23.20	Horizontal
5	5755.3444	35.48	18.07	53.55	74.00	-20.45	Horizontal
6	5985.6857	34.71	18.46	53.17	74.00	-20.83	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

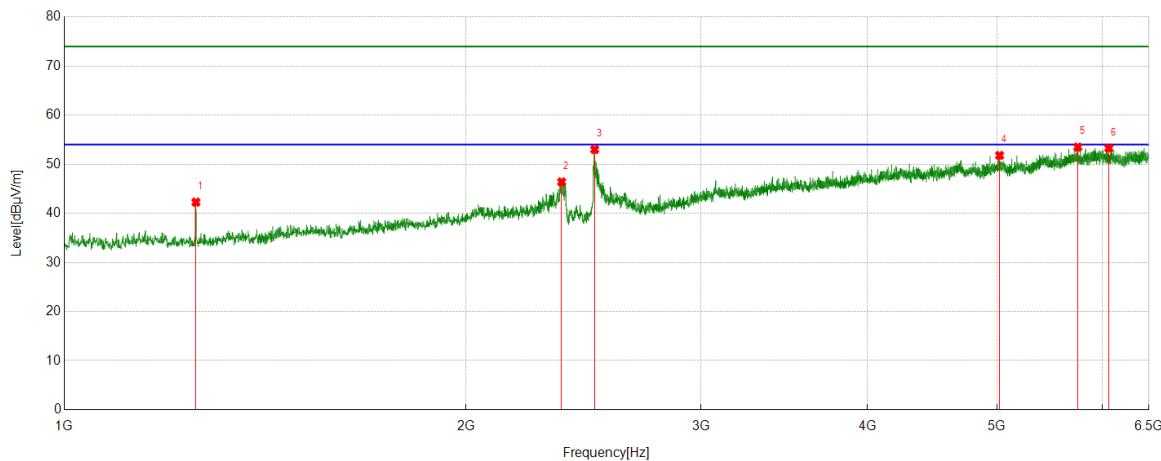
Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1184.9606	46.44	-1.93	44.51	74.00	-29.49	Vertical
2	1255.0944	46.37	-1.98	44.39	74.00	-29.61	Vertical
3	2373.1091	43.29	4.96	48.25	74.00	-25.75	Vertical
4	2512.6891	44.51	5.81	50.32	74.00	-23.68	Vertical
5	5720.2775	35.69	17.86	53.55	74.00	-20.45	Vertical
6	6328.7911	34.11	19.40	53.51	74.00	-20.49	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

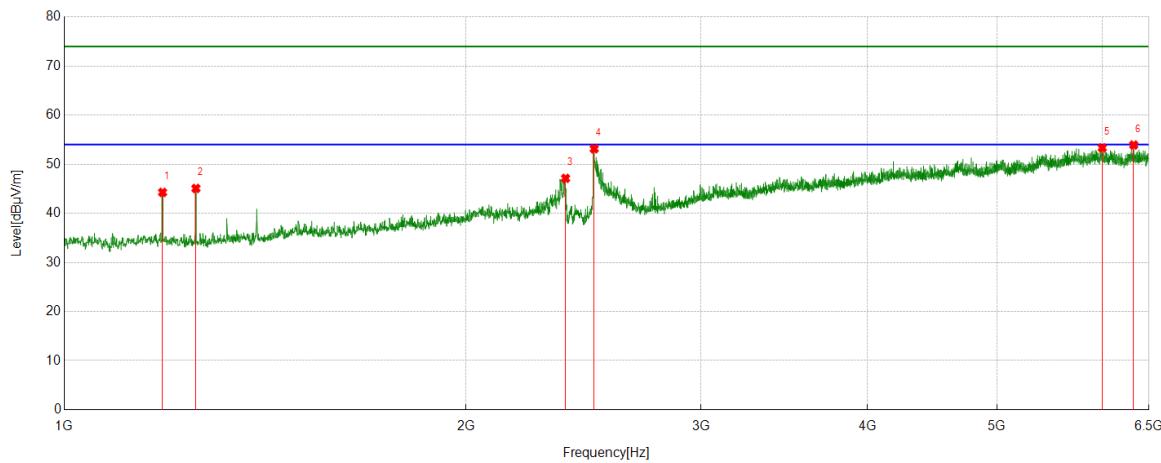
Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	44.25	-1.98	42.27	74.00	-31.73	Horizontal
2	2359.3574	41.55	4.84	46.39	74.00	-27.61	Horizontal
3	2497.5622	47.25	5.76	53.01	74.00	-20.99	Horizontal
4	5023.0654	36.09	15.70	51.79	74.00	-22.21	Horizontal
5	5748.4686	35.60	17.89	53.49	74.00	-20.51	Horizontal
6	6065.4457	35.05	18.21	53.26	74.00	-20.74	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Vertical	PASS

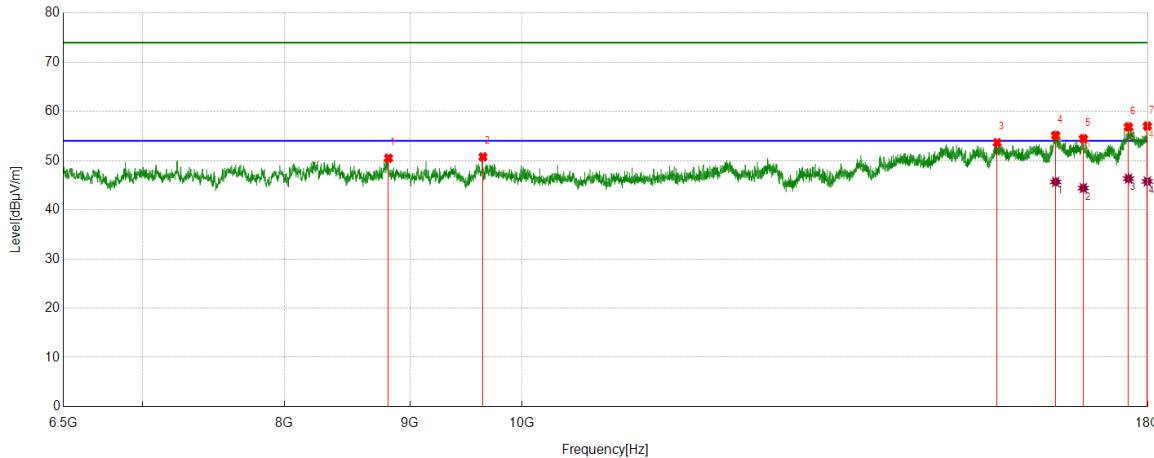

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV} /m]	[dB _{BuV} /m]	[dB]	
1	1184.9606	46.20	-1.93	44.27	74.00	-29.73	Vertical
2	1255.0944	47.05	-1.98	45.07	74.00	-28.93	Vertical
3	2375.1719	42.15	4.98	47.13	74.00	-26.87	Vertical
4	2495.4994	47.41	5.74	53.15	74.00	-20.85	Vertical
5	5996.6871	34.97	18.37	53.34	74.00	-20.66	Vertical
6	6330.8539	34.51	19.41	53.92	74.00	-20.08	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 2: 6.5GHz~18GHz
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	LCH	Horizontal	PASS


PK Result:

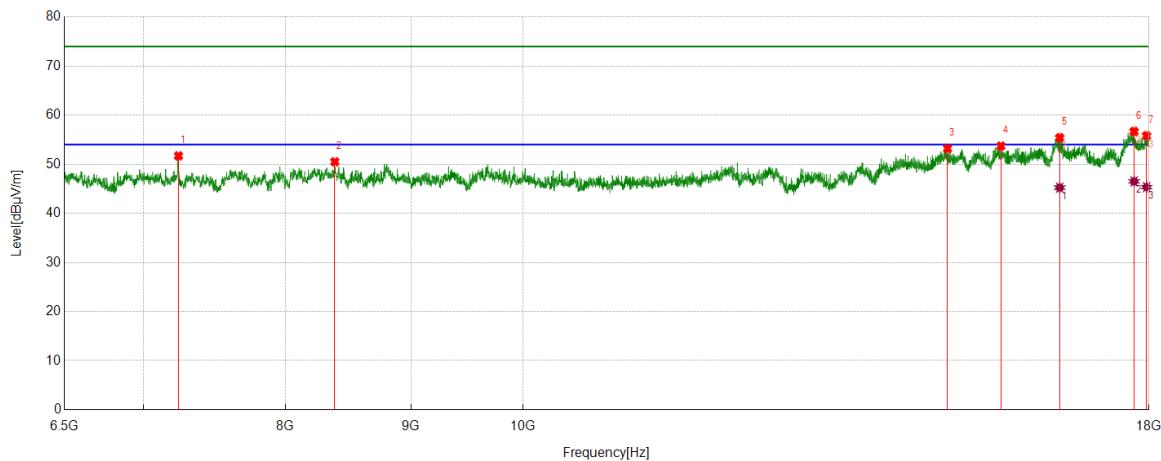
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8821.8527	44.19	6.30	50.49	74.00	-23.51	Horizontal
2	9639.8925	44.42	6.33	50.75	74.00	-23.25	Horizontal
3	15623.5154	39.96	13.69	53.65	74.00	-20.35	Horizontal
4	16504.8131	38.51	16.62	55.13	74.00	-18.87	Horizontal
5	16940.4301	37.63	16.82	54.45	74.00	-19.55	Horizontal
6	17673.6467	37.90	18.95	56.85	74.00	-17.15	Horizontal
7	17989.9362	36.40	20.63	57.03	74.00	-16.97	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16504.8131	29.06	16.62	45.68	54.00	-8.32	Horizontal
2	16940.4301	27.59	16.82	44.41	54.00	-9.59	Horizontal
3	17673.6467	27.38	18.95	46.33	54.00	-7.67	Horizontal
4	17989.9362	25.13	20.63	45.76	54.00	-8.24	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	LCH	Vertical	PASS


PK Result:

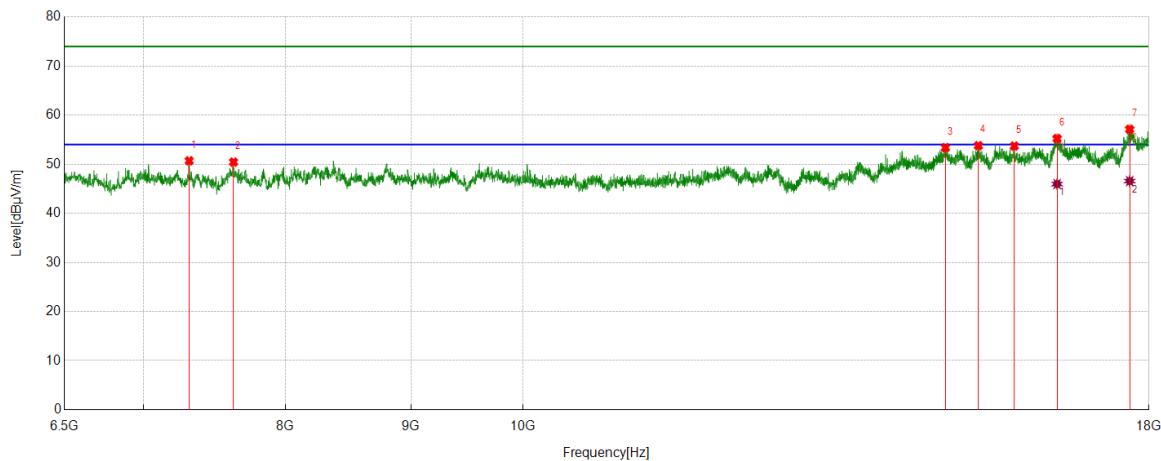
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7236.0920	47.57	4.14	51.71	74.00	-22.29	Vertical
2	8380.4851	44.39	6.11	50.50	74.00	-23.50	Vertical
3	14897.4872	40.47	12.74	53.21	74.00	-20.79	Vertical
4	15663.7705	39.82	13.89	53.71	74.00	-20.29	Vertical
5	16552.2565	38.85	16.55	55.40	74.00	-18.60	Vertical
6	17749.8437	37.06	19.61	56.67	74.00	-17.33	Vertical
7	17959.7450	35.25	20.55	55.80	74.00	-18.20	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16552.2565	28.68	16.55	45.23	54.00	-8.77	Vertical
2	17749.8437	26.89	19.61	46.50	54.00	-7.50	Vertical
3	17959.7450	24.80	20.55	45.35	54.00	-8.65	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Horizontal	PASS


PK Result:

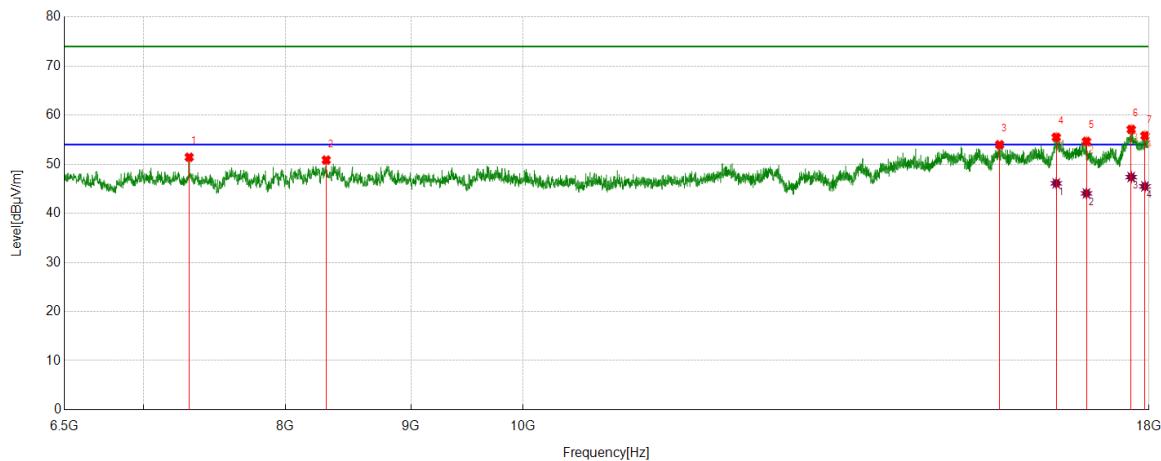
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7309.4137	46.67	4.03	50.70	74.00	-23.30	Horizontal
2	7619.9525	45.15	5.29	50.44	74.00	-23.56	Horizontal
3	14868.7336	40.64	12.74	53.38	74.00	-20.62	Horizontal
4	15335.9795	40.38	13.41	53.79	74.00	-20.21	Horizontal
5	15862.1703	38.89	14.83	53.72	74.00	-20.28	Horizontal
6	16512.0015	38.52	16.72	55.24	74.00	-18.76	Horizontal
7	17676.5221	38.13	18.98	57.11	74.00	-16.89	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16512.0015	29.25	16.72	45.97	54.00	-8.03	Horizontal
2	17676.5221	27.59	18.98	46.57	54.00	-7.43	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	MCH	Vertical	PASS


PK Result:

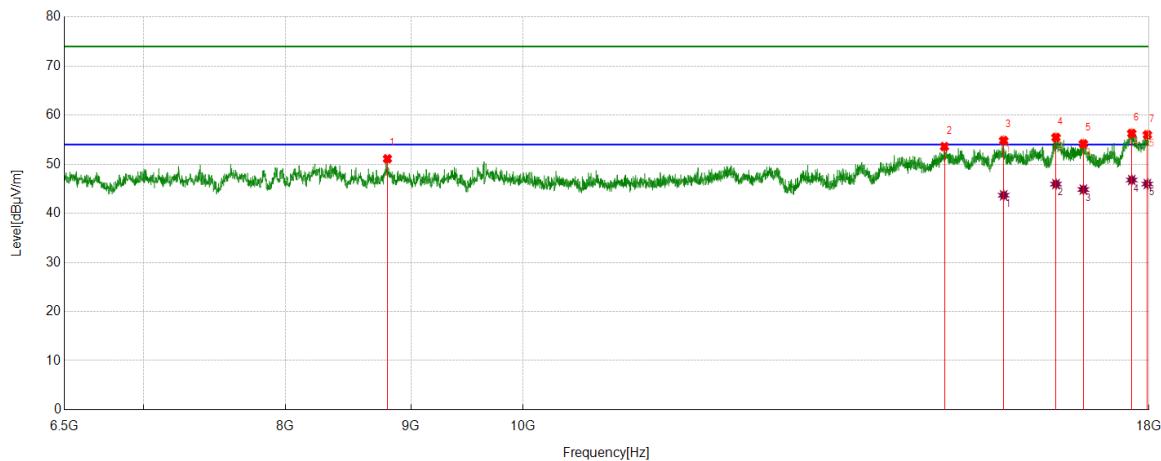
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7309.4137	47.40	4.03	51.43	74.00	-22.57	Vertical
2	8312.9141	44.65	6.21	50.86	74.00	-23.14	Vertical
3	15645.0806	40.23	13.75	53.98	74.00	-20.02	Vertical
4	16499.0624	38.97	16.53	55.50	74.00	-18.50	Vertical
5	16973.4967	37.81	16.84	54.65	74.00	-19.35	Vertical
6	17702.4003	37.81	19.29	57.10	74.00	-16.90	Vertical
7	17932.4291	35.61	20.21	55.82	74.00	-18.18	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16499.0624	29.58	16.53	46.11	54.00	-7.89	Vertical
2	16973.4967	27.22	16.84	44.06	54.00	-9.94	Vertical
3	17702.4003	28.10	19.29	47.39	54.00	-6.61	Vertical
4	17932.4291	25.28	20.21	45.49	54.00	-8.51	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8804.6006	44.77	6.34	51.11	74.00	-22.89	Horizontal
2	14854.3568	40.82	12.77	53.59	74.00	-20.41	Horizontal
3	15704.0255	40.65	14.17	54.82	74.00	-19.18	Horizontal
4	16494.7493	38.85	16.61	55.46	74.00	-18.54	Horizontal
5	16924.6156	37.37	16.79	54.16	74.00	-19.84	Horizontal
6	17711.0264	36.92	19.37	56.29	74.00	-17.71	Horizontal
7	17972.6841	35.44	20.56	56.00	74.00	-18.00	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15704.0255	29.51	14.17	43.68	54.00	-10.32	Horizontal
2	16494.7493	29.35	16.61	45.96	54.00	-8.04	Horizontal
3	16924.6156	28.06	16.79	44.85	54.00	-9.15	Horizontal
4	17711.0264	27.42	19.37	46.79	54.00	-7.21	Horizontal
5	17972.6841	25.42	20.56	45.98	54.00	-8.02	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

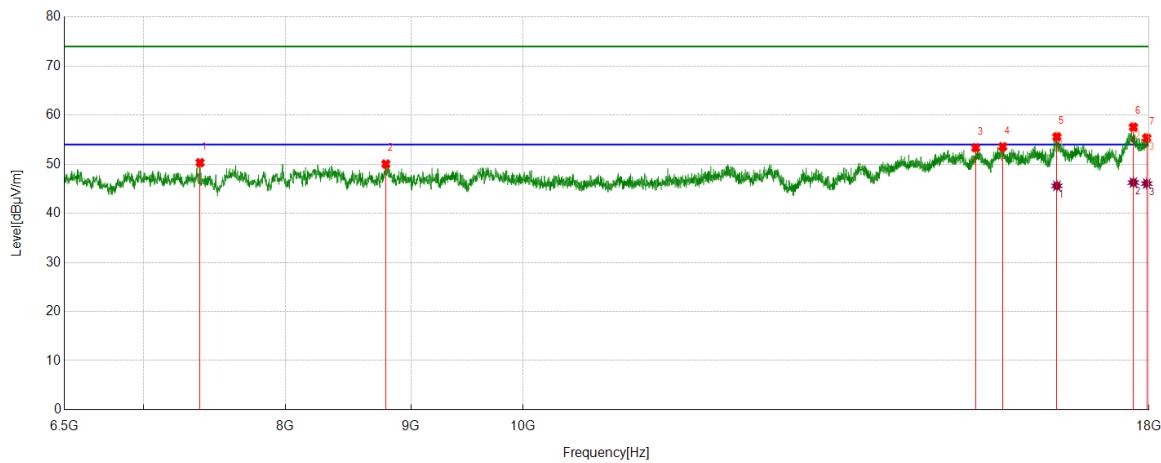
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.

4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	HCH	Vertical	PASS


PK Result:

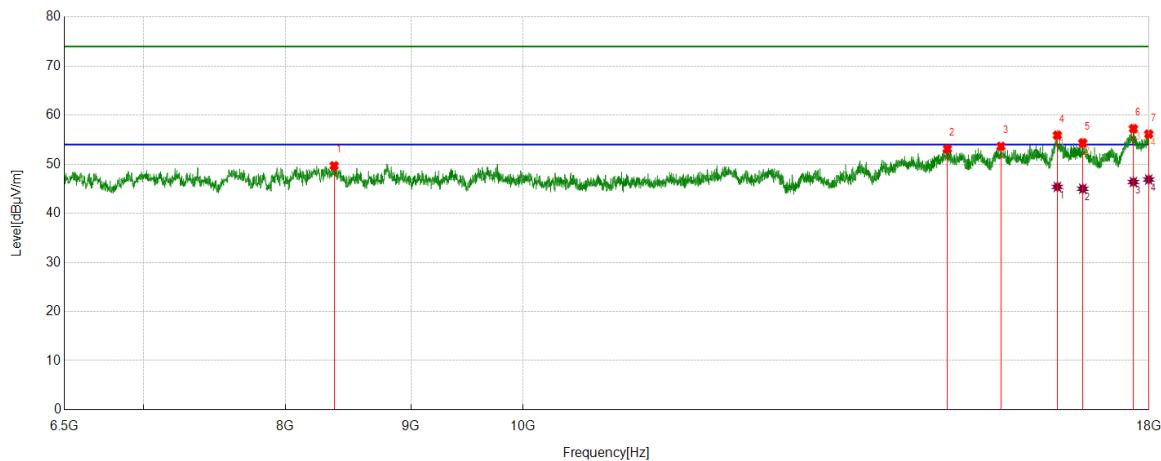
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7384.1730	46.13	4.19	50.32	74.00	-23.68	Vertical
2	8791.6615	43.73	6.32	50.05	74.00	-23.95	Vertical
3	15297.1621	40.13	13.23	53.36	74.00	-20.64	Vertical
4	15691.0864	39.53	14.04	53.57	74.00	-20.43	Vertical
5	16509.1261	38.87	16.72	55.59	74.00	-18.41	Vertical
6	17738.3423	38.02	19.54	57.56	74.00	-16.44	Vertical
7	17962.6203	34.82	20.54	55.36	74.00	-18.64	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16509.1261	28.88	16.72	45.60	54.00	-8.40	Vertical
2	17738.3423	26.73	19.54	46.27	54.00	-7.73	Vertical
3	17962.6203	25.52	20.54	46.06	54.00	-7.94	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Horizontal	PASS


PK Result:

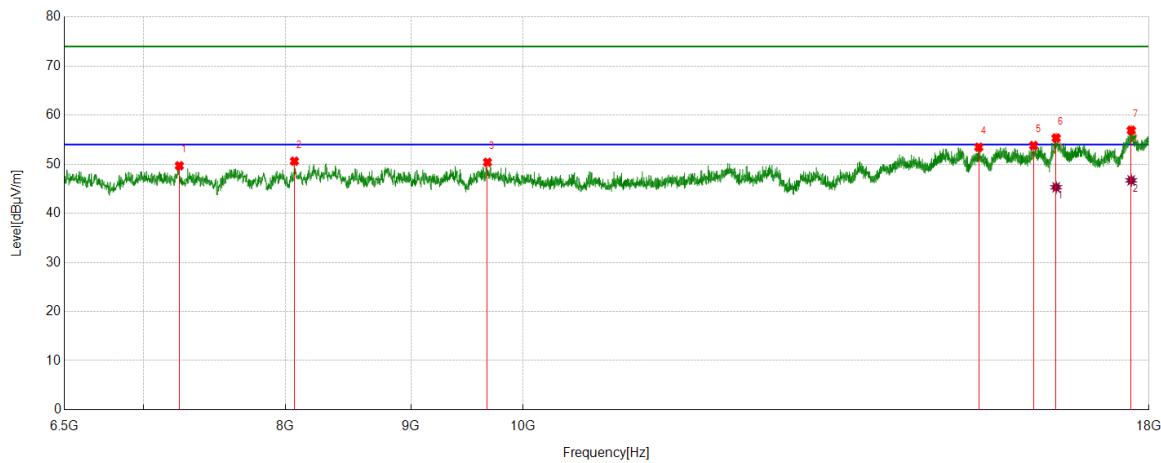
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8374.7343	43.64	6.06	49.70	74.00	-24.30	Horizontal
2	14896.0495	40.38	12.75	53.13	74.00	-20.87	Horizontal
3	15665.2082	39.76	13.89	53.65	74.00	-20.35	Horizontal
4	16516.3145	39.23	16.68	55.91	74.00	-18.09	Horizontal
5	16914.5518	37.66	16.69	54.35	74.00	-19.65	Horizontal
6	17738.3423	37.71	19.54	57.25	74.00	-16.75	Horizontal
7	17995.6870	35.56	20.58	56.14	74.00	-17.86	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16516.3145	28.70	16.68	45.38	54.00	-8.62	Horizontal
2	16914.5518	28.32	16.69	45.01	54.00	-8.99	Horizontal
3	17738.3423	26.84	19.54	46.38	54.00	-7.62	Horizontal
4	17995.6870	26.31	20.58	46.89	54.00	-7.11	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	LCH	Vertical	PASS


PK Result:

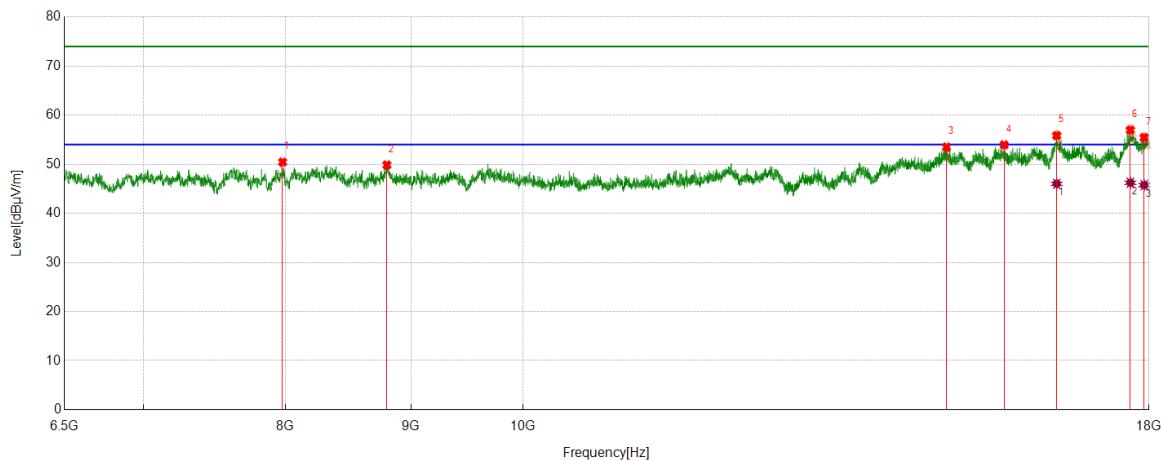
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7241.8427	45.59	4.10	49.69	74.00	-24.31	Vertical
2	8068.5086	44.74	5.88	50.62	74.00	-23.38	Vertical
3	9671.5214	43.96	6.44	50.40	74.00	-23.60	Vertical
4	15341.7302	40.05	13.42	53.47	74.00	-20.53	Vertical
5	16151.1439	38.43	15.38	53.81	74.00	-20.19	Vertical
6	16497.6247	38.80	16.55	55.35	74.00	-18.65	Vertical
7	17702.4003	37.63	19.29	56.92	74.00	-17.08	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16497.6247	28.76	16.55	45.31	54.00	-8.69	Vertical
2	17702.4003	27.43	19.29	46.72	54.00	-7.28	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Horizontal	PASS


PK Result:

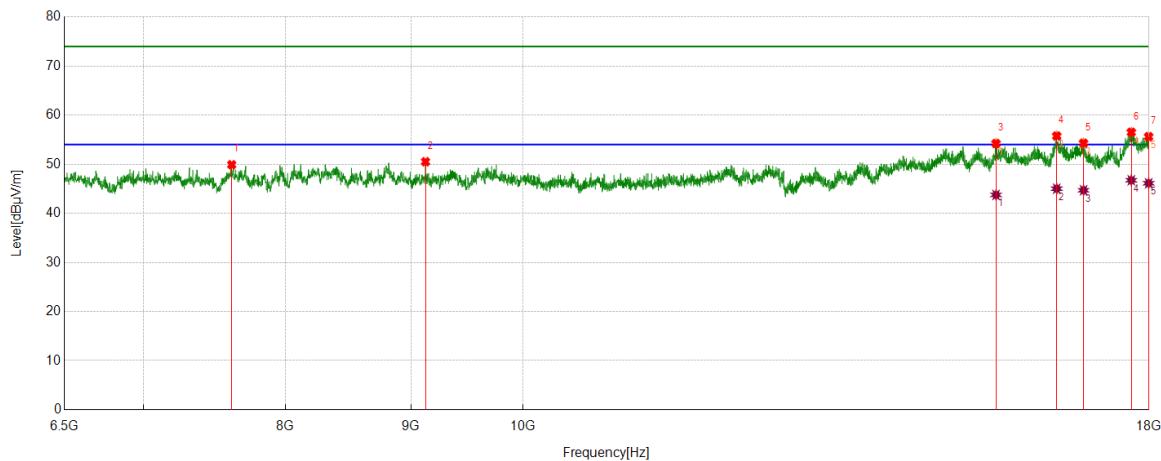
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7979.3724	44.99	5.44	50.43	74.00	-23.57	Horizontal
2	8800.2875	43.55	6.30	49.85	74.00	-24.15	Horizontal
3	14883.1104	40.78	12.72	53.50	74.00	-20.50	Horizontal
4	15711.2139	39.67	14.28	53.95	74.00	-20.05	Horizontal
5	16506.2508	39.20	16.65	55.85	74.00	-18.15	Horizontal
6	17688.0235	37.87	19.11	56.98	74.00	-17.02	Horizontal
7	17919.4899	35.35	20.09	55.44	74.00	-18.56	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16506.2508	29.37	16.65	46.02	54.00	-7.98	Horizontal
2	17688.0235	27.12	19.11	46.23	54.00	-7.77	Horizontal
3	17919.4899	25.66	20.09	45.75	54.00	-8.25	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	MCH	Vertical	PASS


PK Result:

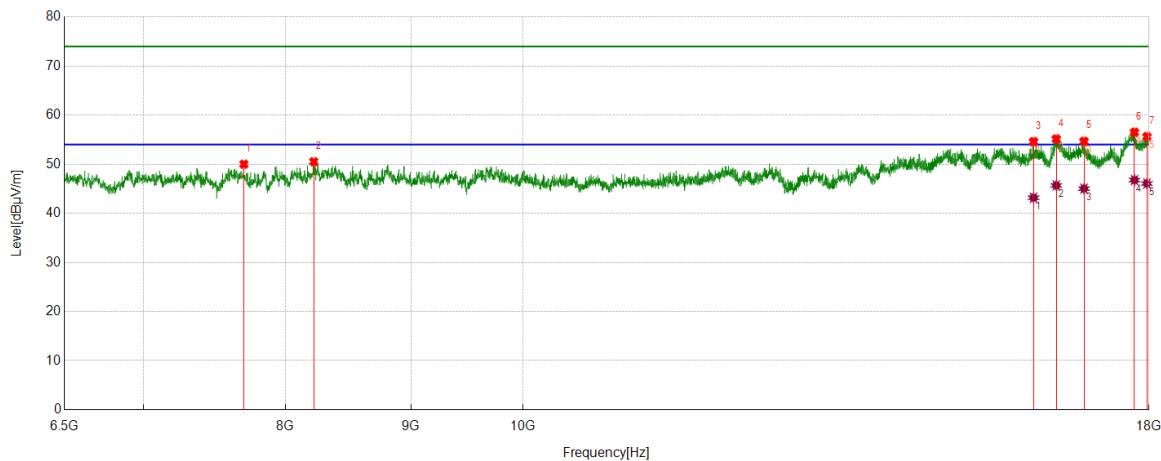
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7607.0134	44.90	5.01	49.91	74.00	-24.09	Vertical
2	9125.2032	44.60	5.91	50.51	74.00	-23.49	Vertical
3	15591.8865	40.75	13.48	54.23	74.00	-19.77	Vertical
4	16506.2508	39.11	16.65	55.76	74.00	-18.24	Vertical
5	16927.4909	37.51	16.78	54.29	74.00	-19.71	Vertical
6	17703.8380	37.21	19.31	56.52	74.00	-17.48	Vertical
7	17994.2493	35.03	20.59	55.62	74.00	-18.38	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15591.8865	30.27	13.48	43.75	54.00	-10.25	Vertical
2	16506.2508	28.37	16.65	45.02	54.00	-8.98	Vertical
3	16927.4909	27.92	16.78	44.70	54.00	-9.30	Vertical
4	17703.8380	27.43	19.31	46.74	54.00	-7.26	Vertical
5	17994.2493	25.54	20.59	46.13	54.00	-7.87	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7694.7118	44.55	5.46	50.01	74.00	-23.99	Horizontal
2	8216.5896	44.48	6.04	50.52	74.00	-23.48	Horizontal
3	16151.1439	39.23	15.38	54.61	74.00	-19.39	Horizontal
4	16499.0624	38.61	16.53	55.14	74.00	-18.86	Horizontal
5	16934.6793	37.88	16.79	54.67	74.00	-19.33	Horizontal
6	17757.0321	37.02	19.50	56.52	74.00	-17.48	Horizontal
7	17965.4957	35.11	20.53	55.64	74.00	-18.36	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16151.1439	27.80	15.38	43.18	54.00	-10.82	Horizontal
2	16499.0624	29.15	16.53	45.68	54.00	-8.32	Horizontal
3	16934.6793	28.24	16.79	45.03	54.00	-8.97	Horizontal
4	17757.0321	27.28	19.50	46.78	54.00	-7.22	Horizontal
5	17965.4957	25.55	20.53	46.08	54.00	-7.92	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor,

Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

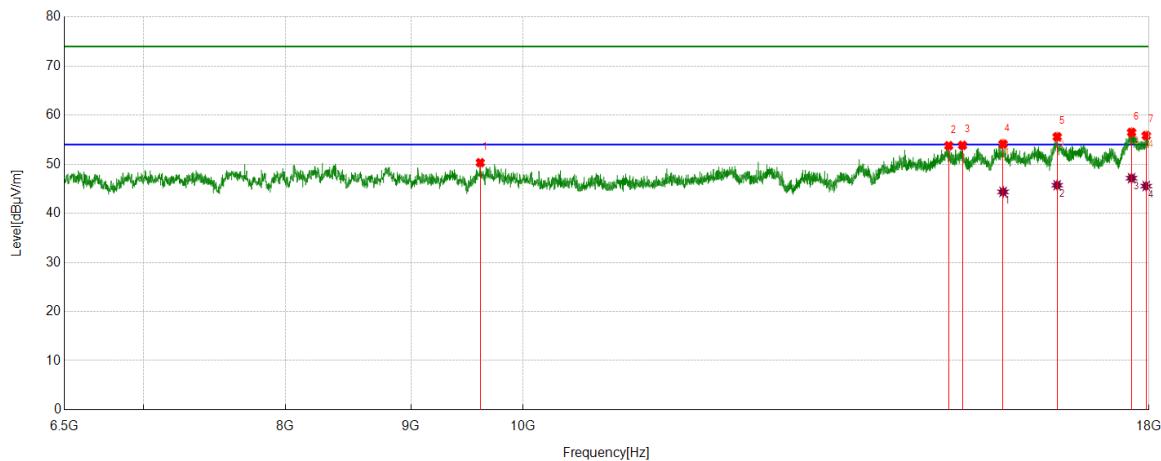
3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.

4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).

5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.

6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	HCH	Vertical	PASS


PK Result:

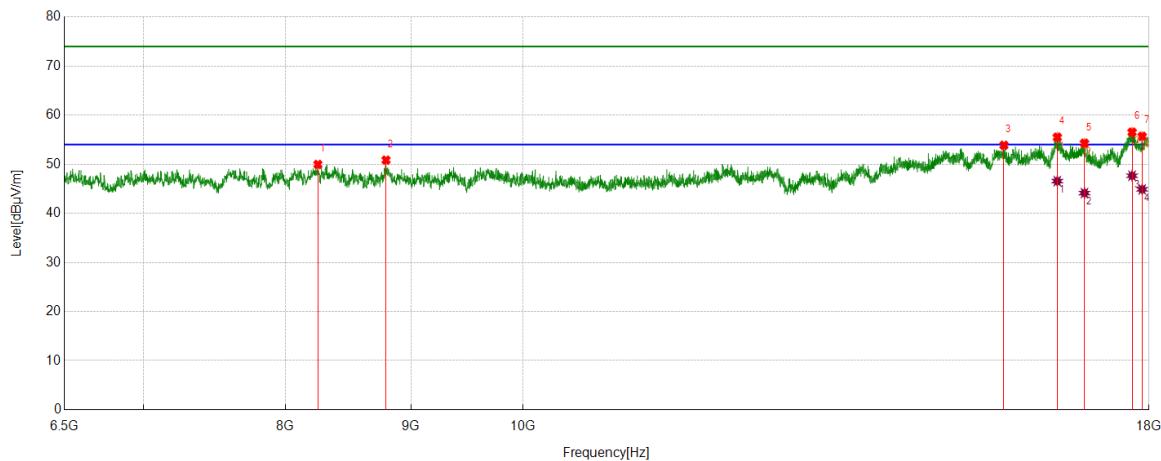
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	9606.8259	43.94	6.38	50.32	74.00	-23.68	Vertical
2	14914.7393	41.04	12.74	53.78	74.00	-20.22	Vertical
3	15108.8261	40.67	13.19	53.86	74.00	-20.14	Vertical
4	15695.3994	40.06	14.06	54.12	74.00	-19.88	Vertical
5	16513.4392	38.89	16.71	55.60	74.00	-18.40	Vertical
6	17708.1510	37.15	19.35	56.50	74.00	-17.50	Vertical
7	17953.9942	35.36	20.48	55.84	74.00	-18.16	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15695.3994	30.31	14.06	44.37	54.00	-9.63	Vertical
2	16513.4392	29.02	16.71	45.73	54.00	-8.27	Vertical
3	17708.1510	27.81	19.35	47.16	54.00	-6.84	Vertical
4	17953.9942	25.07	20.48	45.55	54.00	-8.45	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Horizontal	PASS


PK Result:

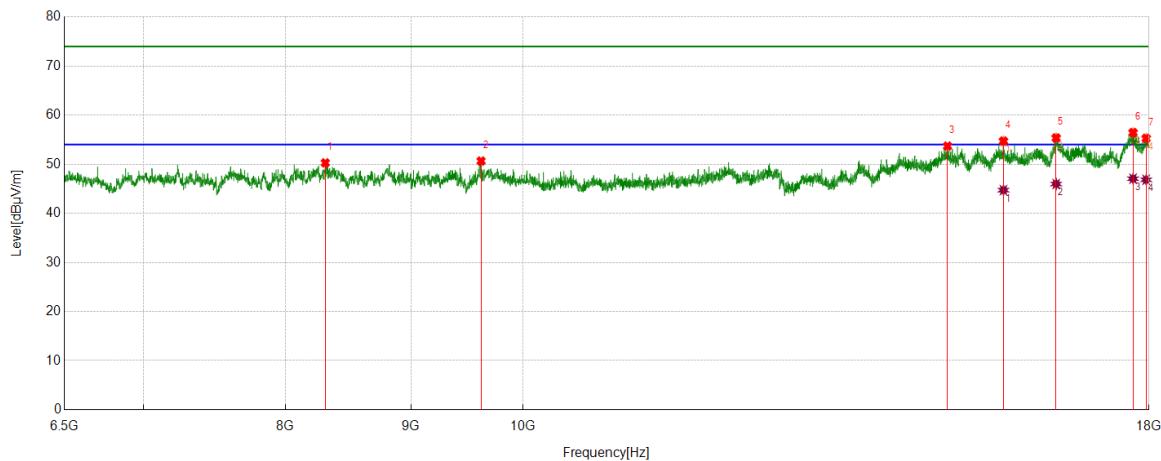
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8248.2185	43.72	6.24	49.96	74.00	-24.04	Horizontal
2	8793.0991	44.53	6.31	50.84	74.00	-23.16	Horizontal
3	15708.3385	39.61	14.26	53.87	74.00	-20.13	Horizontal
4	16514.8769	38.81	16.70	55.51	74.00	-18.49	Horizontal
5	16941.8677	37.45	16.83	54.28	74.00	-19.72	Horizontal
6	17716.7771	37.09	19.44	56.53	74.00	-17.47	Horizontal
7	17884.9856	35.82	19.86	55.68	74.00	-18.32	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16514.8769	29.86	16.70	46.56	54.00	-7.44	Horizontal
2	16941.8677	27.30	16.83	44.13	54.00	-9.87	Horizontal
3	17716.7771	28.22	19.44	47.66	54.00	-6.34	Horizontal
4	17884.9856	25.03	19.86	44.89	54.00	-9.11	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	LCH	Vertical	PASS


PK Result:

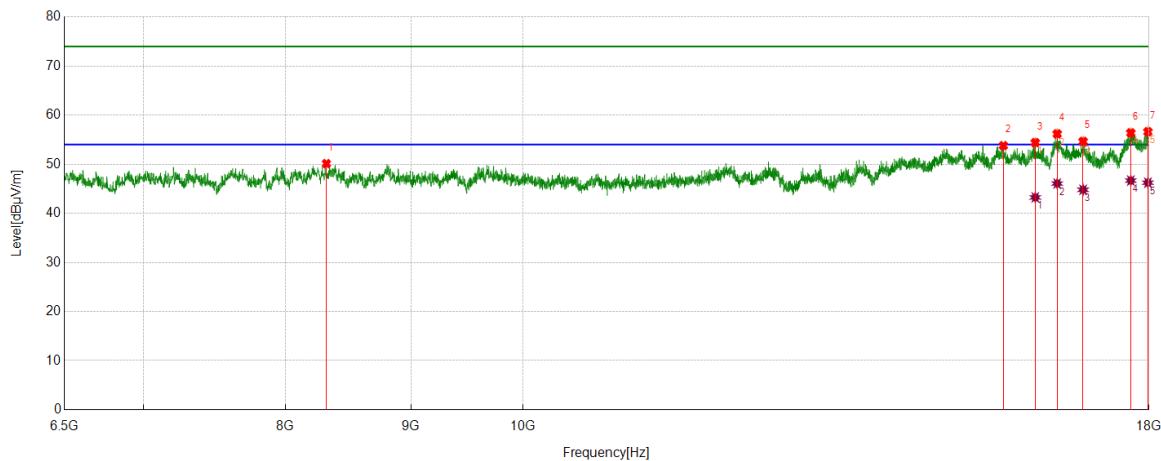
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8305.7257	44.02	6.26	50.28	74.00	-23.72	Vertical
2	9614.0143	44.28	6.37	50.65	74.00	-23.35	Vertical
3	14897.4872	40.96	12.74	53.70	74.00	-20.30	Vertical
4	15701.1501	40.62	14.10	54.72	74.00	-19.28	Vertical
5	16497.6247	38.82	16.55	55.37	74.00	-18.63	Vertical
6	17732.5916	36.91	19.54	56.45	74.00	-17.55	Vertical
7	17952.5566	34.82	20.47	55.29	74.00	-18.71	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15701.1501	30.63	14.10	44.73	54.00	-9.27	Vertical
2	16497.6247	29.43	16.55	45.98	54.00	-8.02	Vertical
3	17732.5916	27.52	19.54	47.06	54.00	-6.94	Vertical
4	17952.5566	26.36	20.47	46.83	54.00	-7.17	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Horizontal	PASS


PK Result:

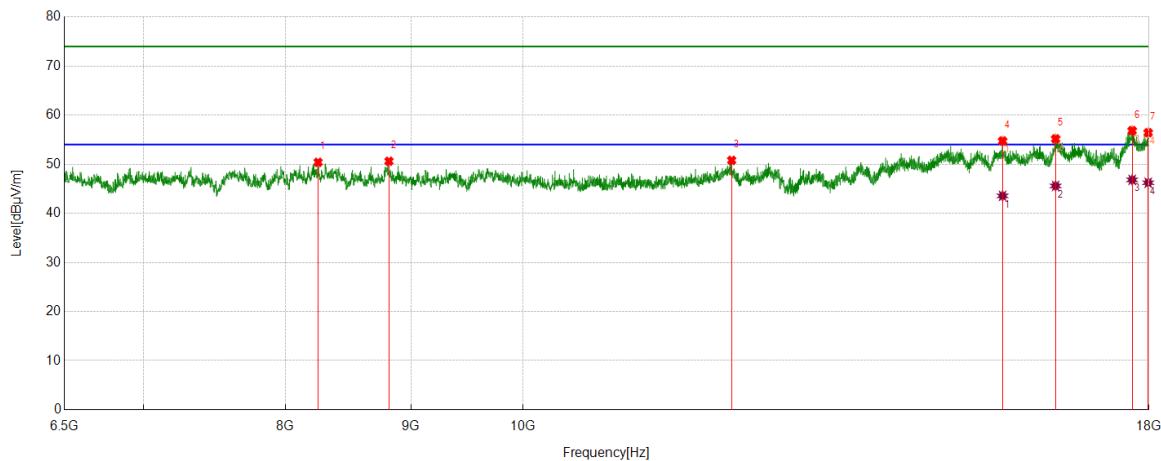
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8314.3518	43.97	6.16	50.13	74.00	-23.87	Horizontal
2	15699.7125	39.71	14.08	53.79	74.00	-20.21	Horizontal
3	16177.0221	38.90	15.51	54.41	74.00	-19.59	Horizontal
4	16513.4392	39.48	16.71	56.19	74.00	-17.81	Horizontal
5	16920.3025	37.85	16.80	54.65	74.00	-19.35	Horizontal
6	17695.2119	37.19	19.20	56.39	74.00	-17.61	Horizontal
7	17981.3102	35.97	20.66	56.63	74.00	-17.37	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16177.0221	27.73	15.51	43.24	54.00	-10.76	Horizontal
2	16513.4392	29.36	16.71	46.07	54.00	-7.93	Horizontal
3	16920.3025	28.00	16.80	44.80	54.00	-9.20	Horizontal
4	17695.2119	27.47	19.20	46.67	54.00	-7.33	Horizontal
5	17981.3102	25.58	20.66	46.24	54.00	-7.76	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	MCH	Vertical	PASS


PK Result:

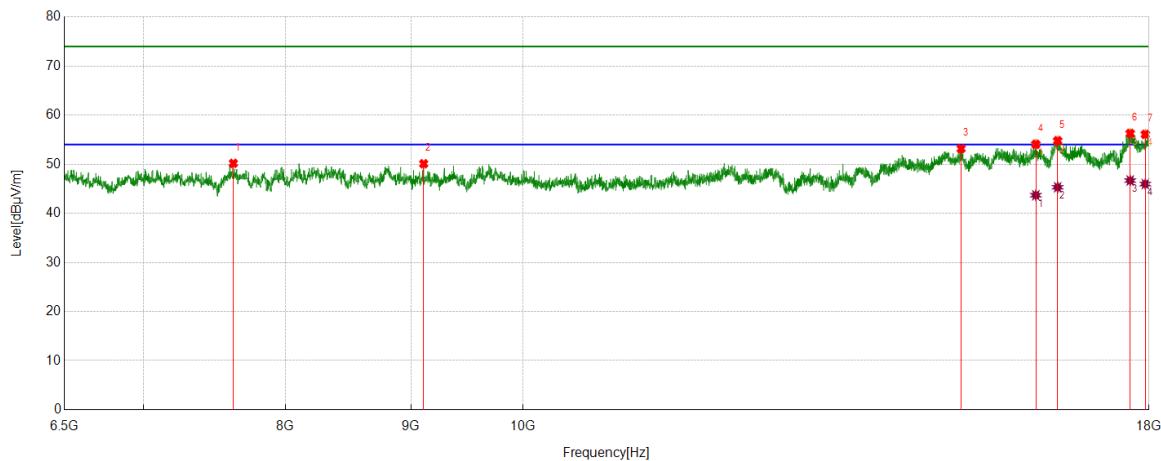
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8249.6562	44.10	6.30	50.40	74.00	-23.60	Vertical
2	8817.5397	44.30	6.32	50.62	74.00	-23.38	Vertical
3	12164.4581	42.31	8.48	50.79	74.00	-23.21	Vertical
4	15688.2110	40.71	14.03	54.74	74.00	-19.26	Vertical
5	16488.9986	38.50	16.68	55.18	74.00	-18.82	Vertical
6	17718.2148	37.39	19.46	56.85	74.00	-17.15	Vertical
7	17987.0609	35.79	20.64	56.43	74.00	-17.57	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	15688.2110	29.53	14.03	43.56	54.00	-10.44	Vertical
2	16488.9986	28.90	16.68	45.58	54.00	-8.42	Vertical
3	17718.2148	27.36	19.46	46.82	54.00	-7.18	Vertical
4	17987.0609	25.59	20.64	46.23	54.00	-7.77	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Horizontal	PASS


PK Result:

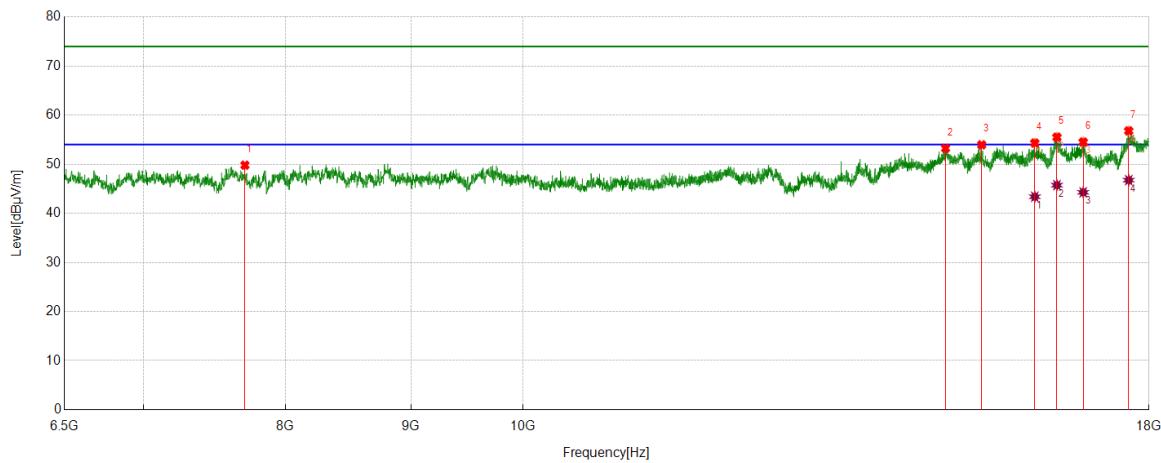
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	7618.5148	44.95	5.24	50.19	74.00	-23.81	Horizontal
2	9109.3887	44.14	5.96	50.10	74.00	-23.90	Horizontal
3	15088.6986	39.97	13.21	53.18	74.00	-20.82	Horizontal
4	16185.6482	38.47	15.60	54.07	74.00	-19.93	Horizontal
5	16520.6276	38.16	16.63	54.79	74.00	-19.21	Horizontal
6	17685.1481	37.22	19.07	56.29	74.00	-17.71	Horizontal
7	17938.1798	35.79	20.30	56.09	74.00	-17.91	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB _{BuV}]	[dB/m]	[dB _{BuV/m}]	[dB _{BuV/m}]	[dB]	
1	16185.6482	28.09	15.60	43.69	54.00	-10.31	Horizontal
2	16520.6276	28.68	16.63	45.31	54.00	-8.69	Horizontal
3	17685.1481	27.61	19.07	46.68	54.00	-7.32	Horizontal
4	17938.1798	25.67	20.30	45.97	54.00	-8.03	Horizontal

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	HCH	Vertical	PASS


PK Result:

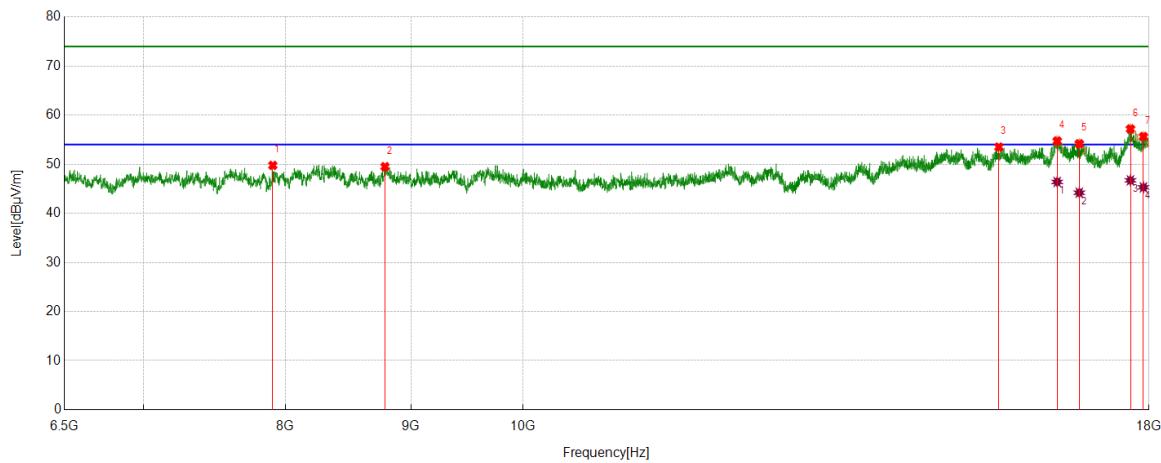
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7701.9002	44.17	5.64	49.81	74.00	-24.19	Vertical
2	14870.1713	40.51	12.74	53.25	74.00	-20.75	Vertical
3	15383.4229	40.47	13.49	53.96	74.00	-20.04	Vertical
4	16169.8337	38.64	15.68	54.32	74.00	-19.68	Vertical
5	16509.1261	38.80	16.72	55.52	74.00	-18.48	Vertical
6	16921.7402	37.72	16.80	54.52	74.00	-19.48	Vertical
7	17660.7076	37.93	18.87	56.80	74.00	-17.20	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16169.8337	27.70	15.68	43.38	54.00	-10.62	Vertical
2	16509.1261	29.02	16.72	45.74	54.00	-8.26	Vertical
3	16921.7402	27.48	16.80	44.28	54.00	-9.72	Vertical
4	17660.7076	27.89	18.87	46.76	54.00	-7.24	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Horizontal	PASS


PK Result:

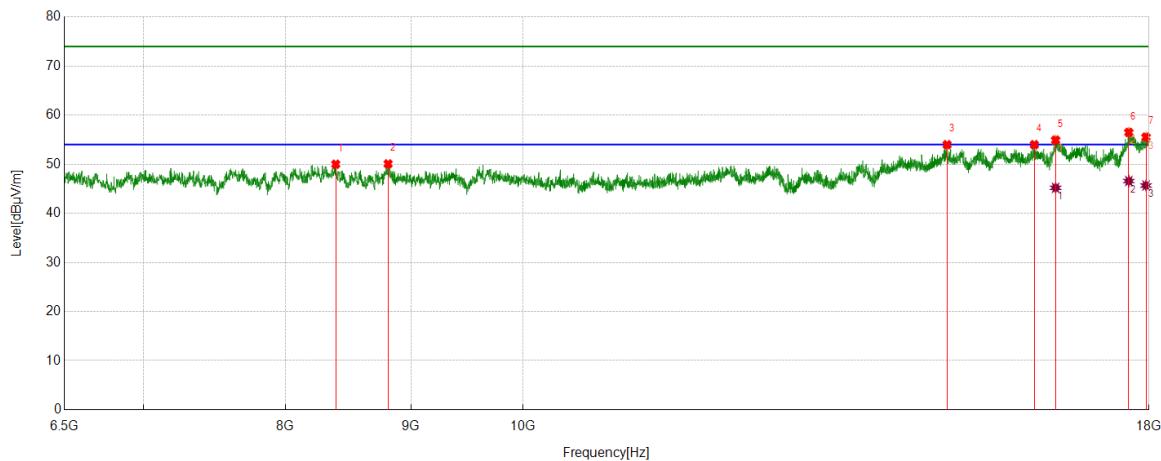
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7906.0508	44.11	5.66	49.77	74.00	-24.23	Horizontal
2	8784.4731	43.24	6.26	49.50	74.00	-24.50	Horizontal
3	15633.5792	39.83	13.67	53.50	74.00	-20.50	Horizontal
4	16513.4392	38.03	16.71	54.74	74.00	-19.26	Horizontal
5	16859.9200	37.11	17.06	54.17	74.00	-19.83	Horizontal
6	17689.4612	38.06	19.13	57.19	74.00	-16.81	Horizontal
7	17906.5508	35.76	19.88	55.64	74.00	-18.36	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16513.4392	29.69	16.71	46.40	54.00	-7.60	Horizontal
2	16859.9200	27.14	17.06	44.20	54.00	-9.80	Horizontal
3	17689.4612	27.59	19.13	46.72	54.00	-7.28	Horizontal
4	17906.5508	25.41	19.88	45.29	54.00	-8.71	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	LCH	Vertical	PASS


PK Result:

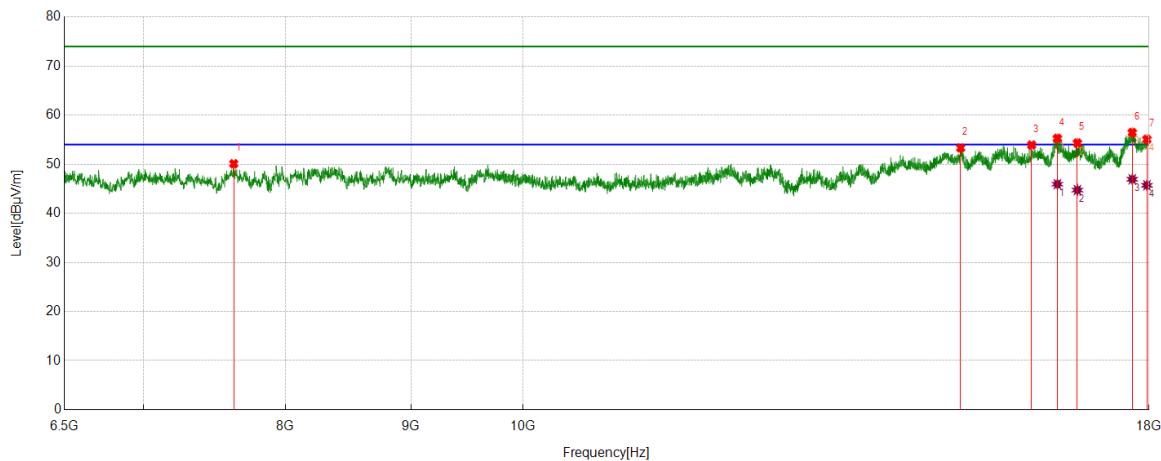
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	8387.6735	43.69	6.31	50.00	74.00	-24.00	Vertical
2	8810.3513	43.68	6.39	50.07	74.00	-23.93	Vertical
3	14891.7365	41.21	12.77	53.98	74.00	-20.02	Vertical
4	16162.6453	38.52	15.47	53.99	74.00	-20.01	Vertical
5	16488.9986	38.24	16.68	54.92	74.00	-19.08	Vertical
6	17662.1453	37.61	18.88	56.49	74.00	-17.51	Vertical
7	17949.6812	35.09	20.44	55.53	74.00	-18.47	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16488.9986	28.52	16.68	45.20	54.00	-8.80	Vertical
2	17662.1453	27.70	18.88	46.58	54.00	-7.42	Vertical
3	17949.6812	25.23	20.44	45.67	54.00	-8.33	Vertical

- Note: 1. Measurement = Reading Level + Correct Factor,
 Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Horizontal	PASS


PK Result:

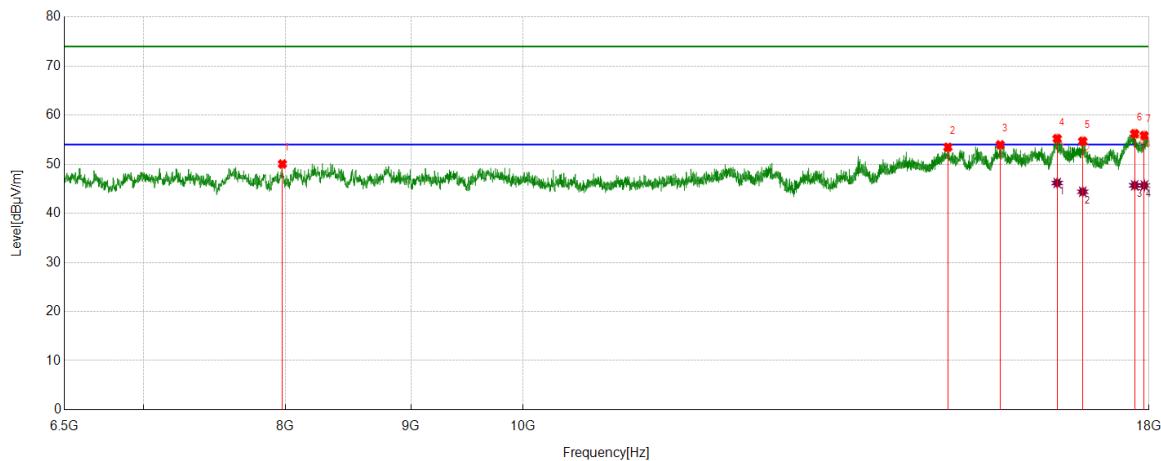
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7621.3902	44.81	5.29	50.10	74.00	-23.90	Horizontal
2	15082.9479	40.19	13.13	53.32	74.00	-20.68	Horizontal
3	16122.3903	38.58	15.34	53.92	74.00	-20.08	Horizontal
4	16516.3145	38.59	16.68	55.27	74.00	-18.73	Horizontal
5	16829.7287	37.22	17.10	54.32	74.00	-19.68	Horizontal
6	17719.6525	36.98	19.48	56.46	74.00	-17.54	Horizontal
7	17965.4957	34.54	20.53	55.07	74.00	-18.93	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16516.3145	29.26	16.68	45.94	54.00	-8.06	Horizontal
2	16829.7287	27.64	17.10	44.74	54.00	-9.26	Horizontal
3	17719.6525	27.46	19.48	46.94	54.00	-7.06	Horizontal
4	17965.4957	25.18	20.53	45.71	54.00	-8.29	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	MCH	Vertical	PASS


PK Result:

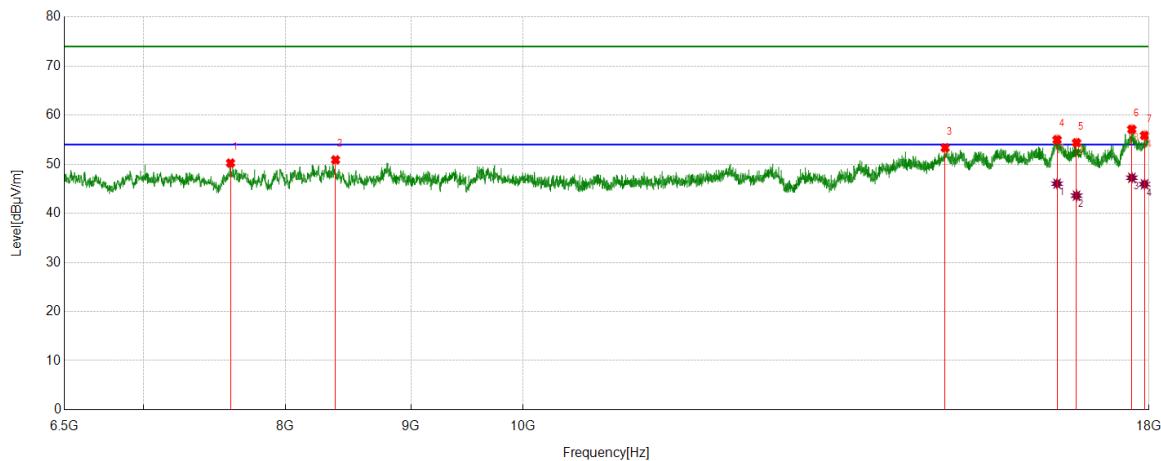
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7977.9347	44.61	5.44	50.05	74.00	-23.95	Vertical
2	14903.2379	40.74	12.73	53.47	74.00	-20.53	Vertical
3	15653.7067	40.13	13.83	53.96	74.00	-20.04	Vertical
4	16513.4392	38.51	16.71	55.22	74.00	-18.78	Vertical
5	16914.5518	38.01	16.69	54.70	74.00	-19.30	Vertical
6	17759.9075	36.77	19.45	56.22	74.00	-17.78	Vertical
7	17920.9276	35.73	20.11	55.84	74.00	-18.16	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16513.4392	29.47	16.71	46.18	54.00	-7.82	Vertical
2	16914.5518	27.71	16.69	44.40	54.00	-9.60	Vertical
3	17759.9075	26.25	19.45	45.70	54.00	-8.30	Vertical
4	17920.9276	25.56	20.11	45.67	54.00	-8.33	Vertical

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT40	HCH	Horizontal	PASS


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	7598.3873	45.18	5.06	50.24	74.00	-23.76	Horizontal
2	8386.2358	44.62	6.27	50.89	74.00	-23.11	Horizontal
3	14864.4206	40.59	12.75	53.34	74.00	-20.66	Horizontal
4	16512.0015	38.28	16.72	55.00	74.00	-19.00	Horizontal
5	16816.7896	37.59	16.79	54.38	74.00	-19.62	Horizontal
6	17712.4641	37.74	19.38	57.12	74.00	-16.88	Horizontal
7	17925.2407	35.73	20.14	55.87	74.00	-18.13	Horizontal

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV]	[dB/m]	[dBuV/m]	[dBuV/m]	[dB]	
1	16512.0015	29.31	16.72	46.03	54.00	-7.97	Horizontal
2	16816.7896	26.81	16.79	43.60	54.00	-10.40	Horizontal
3	17712.4641	27.86	19.38	47.24	54.00	-6.76	Horizontal
4	17925.2407	25.79	20.14	45.93	54.00	-8.07	Horizontal

- Note:
1. Measurement = Reading Level + Correct Factor,
Correct Factor = Antenna Factor + Loss (Cable + Filter) - Amplifier Gain.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Peak detector: RBW: 1 MHz, VBW: 3 MHz.
 4. Average detector: RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
 5. For above 6.5GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.