

Prüfbericht-Nr.: Test report no.:	CN25ZZ28 001	Auftrags-Nr.: Order no.:	326093524	Seite 1 von 35 Page 1 of 35
Kunden-Referenz-Nr.: Client reference no.:	P01810375	Auftragsdatum: Order date:	2025-01-23	
Auftraggeber: Client:	Beijing Roborock Technology Co., Ltd. Room 1001, Floor 10, Building 3, Yard 17, Anju Road, Changping District, Beijing, P.R. China			
Prüfgegenstand: Test item:	Robotic Vacuum Cleaner			
Bezeichnung / Typ-Nr.: Identification / Type no.:	S91COP			
Auftrags-Inhalt: Order content:	Test Report			
Prüfgrundlage: Test specification:	FCC CFR47 Part 15, Subpart C Section 15.247 RSS-Gen Issue 5, Amendment 2, February 2021 RSS-247 Issue 3, August 2023 ANSI C63.10: 2013			
Wareneingangsdatum: Date of sample receipt:	2025-02-19	Refer to photo document.		
Prüfmuster-Nr.: Test sample no:	A003927758-001, 002			
Prüfzeitraum: Testing period:	Refer to test report			
Ort der Prüfung: Place of testing:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüflaboratorium: Testing laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.			
Prüfergebnis*: Test result*:	Pass			
geprüft von: tested by:	☒ Yanli Fan	genehmigt von: authorized by:	☒ Hongfei Wu	
Datum: Date:	2025-04-01	Datum: Date:	2025-04-01	
Stellung / Position:	Sachverständige(r)/Expert	Stellung / Position:	Sachverständige(r)/Expert	
Sonstiges / Other:	FCC ID: 2AN2O-S91COP01 IC: 23317-S91COP01 HVIN: S91COP-FNF8 This report is for Class II permission change application due to modify to robotic vacuum cleaner's main board and adding alternative motors, So, only the RF power & radiated emission were performed and recorded in the report.			
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:	Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet			
* Legend:	P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested			
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.				

Prüfbericht-Nr.: CN25ZZ28 001
Test report no.:

Seite 2 von 35
Page 2 of 35

Anmerkungen Remarks

1	Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden. <i>The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request.</i>
2	Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben. Informationen zur Verifizierung der Authentizität unserer Dokumente erhalten Sie auf folgender Webseite: go.tuv.com/digital-signature <i>As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. For information on verifying the authenticity of our documents, please visit the following website: go.tuv.com/digital-signature</i>
3	Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt. <i>Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report.</i> <i>Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report.</i>
4	Die Entscheidungsregel für Konformitätserklärungen basierend auf numerischen Messergebnissen in diesem Prüfbericht basiert auf der "Null-Grenzwert-Regel" und der "Einfachen Akzeptanz" gemäß ILAC G8:2019 und IEC Guide 115:2021, es sei denn, in der auf Seite 1 dieses Berichts genannten angewandten Norm ist etwas anderes festgelegt oder vom Kunden gewünscht. Dies bedeutet, dass die Messunsicherheit nicht berücksichtigt wird und daher auch nicht im Prüfbericht angegeben wird. Zu weiteren Informationen bezüglich des Risikos durch diese Entscheidungsregel siehe ILAC G8:2019. <i>The decision rule for statements of conformity, based on numerical measurement results, in this test report is based on the "Zero Guard Band Rule" and "Simple Acceptance" in accordance with ILAC G8:2019 and IEC Guide 115:2021, unless otherwise specified in the applied standard mentioned on Page 1 of this report or requested by the customer. This means that measurement uncertainty is not taken in account and hence also not declared in the test report. For additional information to the resulting risk based of this decision rule please refer to ILAC G8:2019.</i>

Prüfbericht - Nr.: CN25ZZ28 001
Test Report No.

Seite 3 von 35
Page 3 of 35

TEST SUMMARY

5.1.1 ANTENNA REQUIREMENT

RESULT: Pass

5.1.2 PEAK OUTPUT POWER

RESULT: Pass

5.2.1 RADIATED BAND-EDGE

RESULT: Pass

5.2.2 RADIATED SPURIOUS EMISSION

RESULT: Pass

Contents

1.	GENERAL REMARKS	5
1.1	COMPLEMENTARY MATERIALS.....	5
2.	TEST SITES	5
2.1	TEST FACILITIES	5
2.2	LIST OF TEST AND MEASUREMENT INSTRUMENTS.....	6
2.3	TRACEABILITY	6
2.4	CALIBRATION	7
2.5	MEASUREMENT UNCERTAINTY	7
3.	GENERAL PRODUCT INFORMATION.....	8
3.1	PRODUCT FUNCTION AND INTENDED USE	8
3.2	RATINGS AND SYSTEM DETAILS.....	8
3.3	INDEPENDENT OPERATION MODES.....	9
3.4	NOISE GENERATING AND NOISE SUPPRESSING PARTS	9
4.	TEST SET-UP AND OPERATION MODES.....	10
4.1	PRINCIPLE OF CONFIGURATION SELECTION	10
4.2	TEST OPERATION AND TEST SOFTWARE.....	10
4.3	SPECIAL ACCESSORIES AND AUXILIARY EQUIPMENT	10
4.4	COUNTERMEASURES TO ACHIEVE EMC COMPLIANCE.....	10
5.	TEST RESULTS	11
5.1	CONDUCTED TESTING AT ANTENNA PORT	11
5.1.1	<i>Antenna Requirement</i>	<i>11</i>
5.1.2	<i>Peak Output Power</i>	<i>13</i>
5.2	EMISSION IN THE FREQUENCY RANGE ABOVE 30MHZ	15
5.2.1	<i>Radiated Band-Edge.....</i>	<i>15</i>
5.2.2	<i>Radiated Spurious Emission.....</i>	<i>32</i>
6.	LIST OF TABLES	35
7.	LIST OF FIGURES	35

1. General Remarks

1.1 Complementary Materials

Null.

2. Test Sites

2.1 Test Facilities

TÜV Rheinland (Shanghai) Co., Ltd.

Workshop14, North Half of Workshop 10 and Workshop 16, Pingqian (Taicang) Modern Industrial Park, No.525, Yuewang Lingang South Road, Shaxi, Taicang, Jiangsu, China

The used test equipment is in accordance with CISPR 16 for measurement of radio interference.

The Federal Communications Commission has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance with the requirements of section 2.948 of the FCC rules. The description of the test facility is listed under FCC registration number 930979.

The Innovation, Science and Economic Development Canada has reviewed the technical characteristics of the radiated and conducted emission facility, and has found these test facilities to be in compliance. The description of the test facility is listed under chambers filing number 33038.

2.2 List of Test and Measurement Instruments

Table 1: List of Test and Measurement Equipment

Equip.	Description	Model	Manufacturer	Due Date
EMC-S-036	RF measurement software	WMS32-WB (11.40.00)	Rohde & Schwarz	N/A
EMC-C-317	Thermohygrometer	608-H1	testo	2025-06-28
EMC-C-304	OSP	OSP-B157W8	Rohde & Schwarz	2025-12-10
EMC-S-032	EMI measurement software	EMC32-MEB (10.60.20)	Rohde & Schwarz	N/A
EMC-C-175	Preamplifier	EMC051845SE	EMCI Taiwan	2025-07-24
EMC-C-176	Preamplifier	EMC051845SE	EMCI Taiwan	2025-07-24
EMC-C-161	Spectrum analyser	FSV40	Rohde & Schwarz	2025-07-15
EMC-C-155	BiLog antenna	CBL 6112D	Teseq	2026-04-20
EMC-C-121	Thermohygrometer	608-H1	testo	2025-06-25
EMC-C-068	Broadband horn antenna	BBHA 9170	Schwarzbeck	2028-06-18
EMC-C-066	EMI test receiver	ESCI	Rohde & Schwarz	2025-10-17
EMC-C-018	Double ridged horn antenna	BBHA 9120 D	Schwarzbeck	2026-03-24
EMC-C-001	3 m semi-anechoic chamber	SAC3	Frankonia	2026-12-03

2.3 Traceability

All measurement equipment calibrations are traceable to NIST or where calibration is performed outside the United States, to equivalent nationally recognized standards organizations.

2.4 Calibration

Equipment requiring calibration is calibrated periodically by the manufacturer or according to manufacturer's specifications. Additionally all equipment is verified for proper performance on a regular basis using in house standards or comparisons.

2.5 Measurement Uncertainty

Table 2: Measurement Uncertainty

Measurement Type	Frequency	Uncertainty
Antenna Port Conducted Emission	< 1GHz	±0.39dB
	> 1GHz	±0.68dB
Conducted Emission	150kHz - 30MHz	±3.39dB
Radiated Emission	9kHz - 30MHz	±2.93dB
	30MHz - 1GHz	±5.34dB
	> 1GHz	±5.40dB

3. General Product Information

3.1 Product Function and Intended Use

The EUT (Equipment Under Test) is a Robotic Vacuum Cleaner which supports 2.4GHz Wi-Fi.

3.2 Ratings and System Details

Table 3: Technical Specification of EUT

General Description of EUT	
Product Name:	Robotic Vacuum Cleaner
Model No.:	S91COP
Rated Voltage:	DC 20V@2.5A input via Docking Station DC 14.4V@6400mAh(TYP) input via Lithium-ion battery
Test Voltage:	DC 14.4V
Technical Specification of W-LAN (Wireless module: F89FTSM13)	
Frequency Range:	2412 to 2472MHz for 802.11b/g/n-HT20 2422 to 2462MHz for 802.11n-HT40
Modulation Type:	DSSS (CCK, DQPSK, DBPSK) OFDM (QPSK/BPSK/16QAM/64QAM)
Antenna Type:	PCB Antenna
Antenna Gain:	2.22dBi (provided by client)

Table 4: RF Channel List

Wi-Fi 802.11 b/g/n-HT20/n-HT40

RF Channel	Frequency [MHz]	RF Channel	Frequency [MHz]	RF Channel	Frequency [MHz]
1	2412	5	2432	9	2452
2	2417	6	2437	10	2457
3	2422	7	2442	11	2462
4	2427	8	2447	-	-

3.3 Independent Operation Modes

Test frequencies are lowest channel: 2412 MHz/2422 MHz, middle channel: 2437 MHz, highest channel: 2462 MHz/2452 MHz.

A. On, Wi-Fi mode

3.4 Noise Generating and Noise Suppressing Parts

Refer to the Circuit Diagram.

4. Test Set-up and Operation Modes

4.1 Principle of Configuration Selection

The equipment under test (EUT) was configured to measure its maximum power level. The test modes were adapted accordingly in reference to the instructions for use.

4.2 Test Operation and Test Software

Test operation refers to test setup in chapter 5. All testing were performed according to the procedures in ANSI C63.10: 2013.

Software: adb.exe

Table 5: Power parameter value

Operating Mode	Channel Frequency [MHz]	Power Parameter Value	Operating Mode	Channel Frequency [MHz]	Power Parameter Value
802.11b	2412	30	802.11n-HT20	2412	38
	2437	32		2437	43
	2462	35		2462	42
802.11g	2412	40	802.11n-HT40	2422	35
	2437	43		2437	42
	2462	45		2452	36

4.3 Special Accessories and Auxiliary Equipment

Table 6: Auxiliary Equipment

Product Name	Model Name	Manufactory
Laptop	TP00135A	Lenovo

4.4 Countermeasures to achieve EMC Compliance

Null.

5. Test Results

5.1 Conducted Testing at Antenna Port

5.1.1 Antenna Requirement

RESULT:**Pass**

According to the manufacturer declared, the EUT has one PCB antenna, the directional gain of antenna is 2.22 dBi and the antenna is designed with permanent attachment and no consideration of replacement. Therefore the EUT is considered sufficient to comply with the provision.

Table 7: Antenna Requirement**FCC 15.203 – Antenna Requirement 1**

Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	Antenna type:	PCB antenna
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2

Requirement:	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.	
Results:	Only one PCB antenna can be used	
Verdict:	Pass	

RSS-Gen 6.4 – External Control

Requirement:	The device shall not have any external controls accessible to the user that enable it to be adjusted, selected or programmed to operate in violation of the regulatory requirements, including RSS-Gen and the applicable RSSs	
Results:	The device does not have any transmitter external controls accessible to the user that can be adjusted and operated in violation of the limits of this standard.	
Verdict:	PASS	

RSS-Gen 6.8 – Antenna Requirement

Requirement: When measurements at the antenna port are used to determine the RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna's manufacturer.

Results:

a) Antenna Type:	PCB Antenna
b) Manufacture:	N/A
c) Model No.:	N/A
d) Gain with reference to an isotropic radiator:	2.22 dBi

Verdict: PASS

5.1.2 Peak Output Power

RESULT:**Pass**

Date of testing	: 2025-02-27
Ambient temperature	: 20.3°C
Relative humidity	: 57.4%
Atmospheric pressure	: 101kPa
Test requirement	: FCC Part 15.247(b)(3) RSS-247 Issue 3, August 2023, Clause 5.4(d)
Test procedure	: ANSI C63.10: 2013
Test voltage	: DC 14.4V
Test modes applied	: A

Table 8: Original Peak Output Power

Test Mode	Data rate/ MCS	CH.	Freq. [MHz]	Peak Conducted Output Power [dBm]	Peak Conducted Output Power Limit [dBm]	Maximum EIRP [dBm]	EIRP Limit [dBm]
b	1Mbps	1	2412	19.75	30	21.97	36
	1Mbps	6	2437	19.68	30	21.9	36
	1Mbps	11	2462	19.64	30	21.86	36
g	6Mbps	1	2412	23.91	30	26.13	36
	6Mbps	6	2437	23.82	30	26.04	36
	6Mbps	11	2462	23.97	30	26.19	36
n- HT20	MCS0	1	2412	23.89	30	26.11	36
	MCS0	6	2437	23.85	30	26.07	36
	MCS0	11	2462	23.92	30	26.14	36
n- HT40	MCS0	3	2422	24.01	30	26.23	36
	MCS0	6	2437	23.96	30	26.18	36
	MCS0	9	2452	24.13	30	26.35	36

Note:

Peak Output Power: Refer to CN24HTPO 001 issued by TUV Rheinland Taiwan Ltd.

Table 9: Peak Output Power

Test Mode	Data rate/ MCS	CH.	Freq. [MHz]	Peak Conducted Output Power [dBm]	Peak Conducted Output Power Limit [dBm]	Maximum EIRP [dBm]	EIRP Limit [dBm]
b	1Mbps	1	2412	19.01	30	21.23	36
	1Mbps	6	2437	19.03	30	21.25	36
	1Mbps	11	2462	18.85	30	21.07	36
g	6Mbps	1	2412	22.43	30	24.65	36
	6Mbps	6	2437	22.35	30	24.57	36
	6Mbps	11	2462	22.20	30	24.42	36
n- HT20	MCS0	1	2412	21.74	30	23.96	36
	MCS0	6	2437	23.10	30	25.32	36
	MCS0	11	2462	20.87	30	23.09	36
n- HT40	MCS0	3	2422	19.94	30	22.16	36
	MCS0	6	2437	22.62	30	24.84	36
	MCS0	9	2452	18.78	30	21.00	36

Note:

1. The cable loss=0.5dB was provided by the client, and was factored in the result Conducted Output Power
2. EIRP=Conducted Output Power + Antenna Gain (2.22 dBi)

5.2 Emission in the Frequency Range above 30MHz

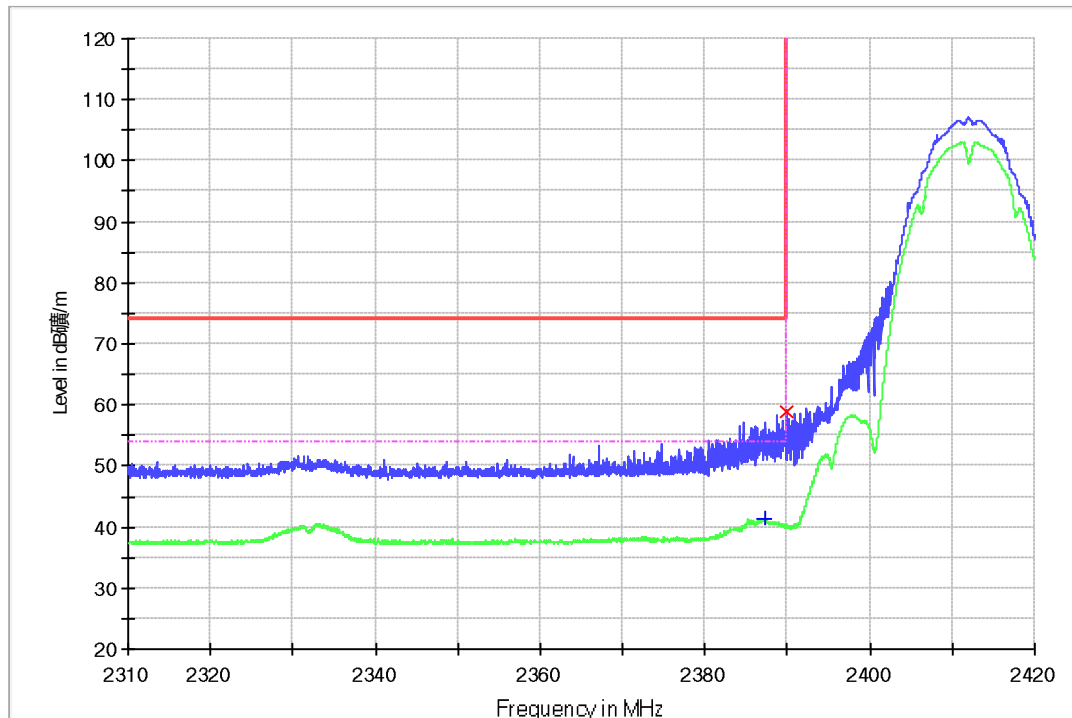
5.2.1 Radiated Band-Edge

RESULT:**Pass**

Date of testing	:	2025-03-11
Ambient temperature	:	21.9°C
Relative humidity	:	56.2%
Atmospheric pressure	:	101kPa
Test requirement	:	FCC Part 15.247(d) FCC Part 15.205(a) FCC Part 15.209(a) RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9 RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.10 RSS-247 Issue 3, August 2023, Clause 5.5
Test procedure	:	ANSI C63.10: 2013
Test voltage	:	DC 14.4V
Test modes applied	:	A

Figure 1: Radiated Band-Edge, b-2412MHz, H

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

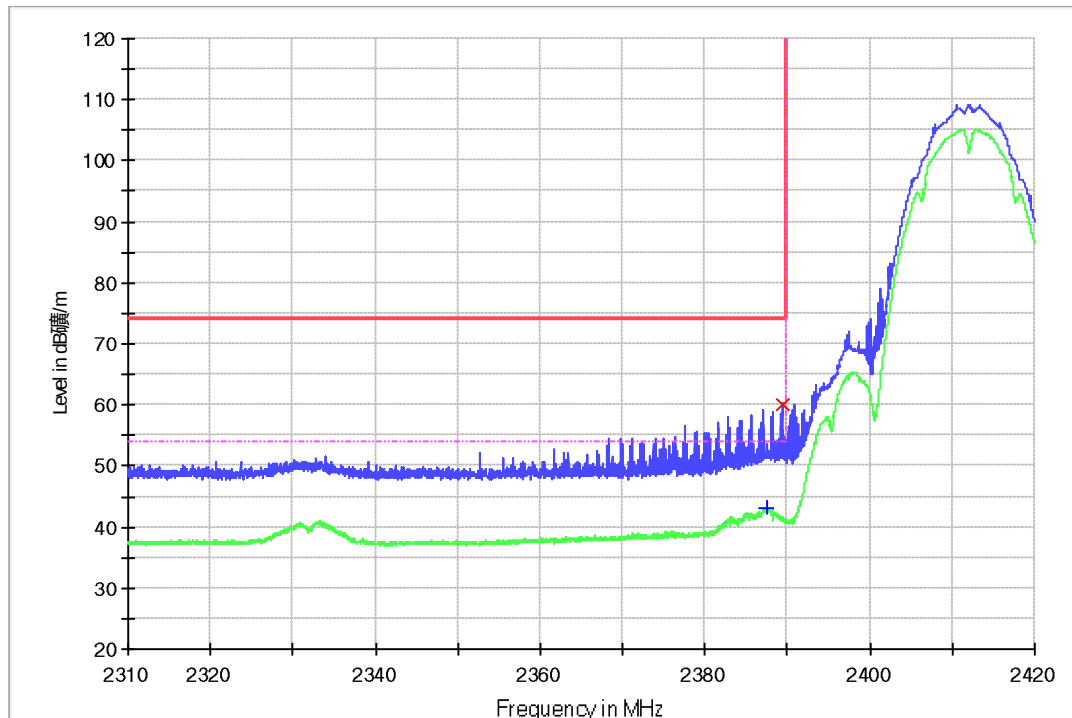
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2389.970000	59.0	H	-6.0	15.0	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2387.385000	41.2	H	-6.1	12.8	54.0

Figure 2: Radiated Band-Edge, b-2412MHz, V

2310 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

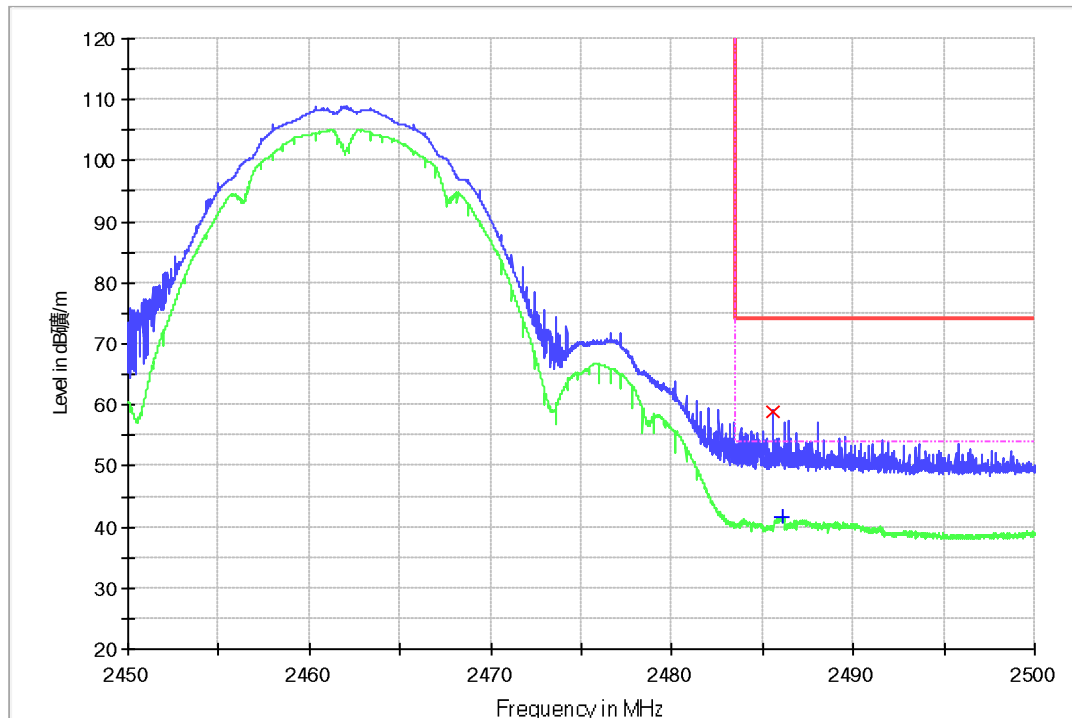
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2389.310000	60.2	v	-6.0	13.8	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2387.440000	43.0	v	-6.1	11.0	54.0

Figure 3: Radiated Band-Edge, b-2462MHz, H

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

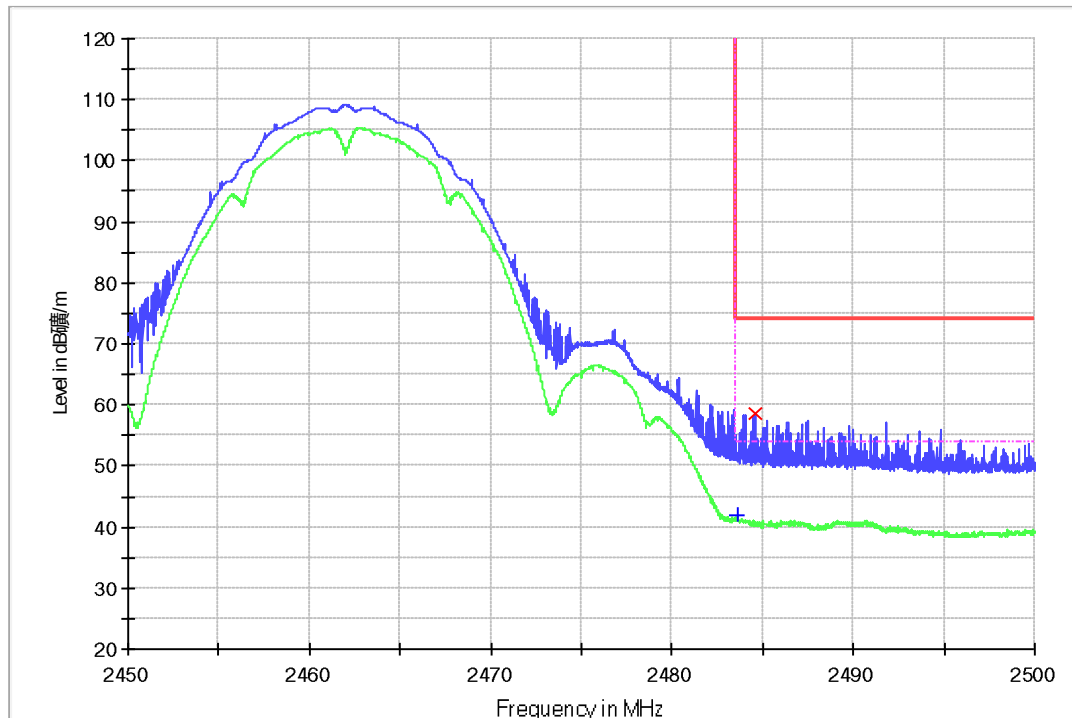
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2485.600000	59.0	H	-6.2	15.0	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2486.075000	41.5	H	-6.2	12.5	54.0

Figure 4: Radiated Band-Edge, b-2462MHz, V

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

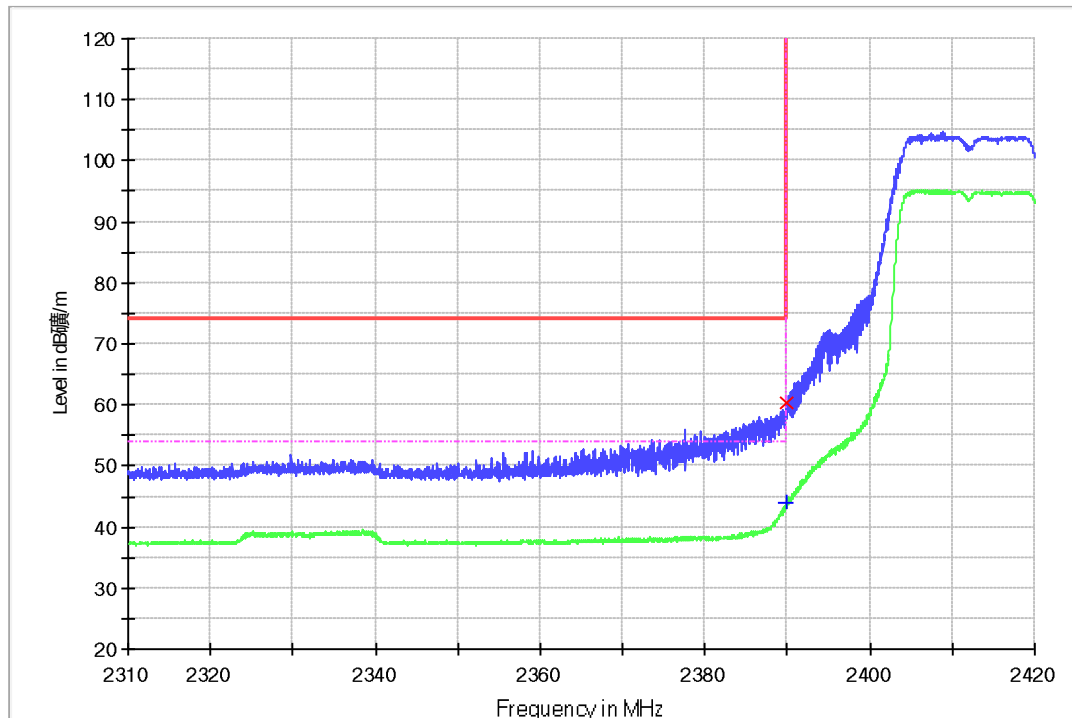
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2484.550000	58.6	v	-6.2	15.4	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2483.612500	41.8	v	-6.2	12.2	54.0

Figure 5: Radiated Band-Edge, g-2412MHz, H

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

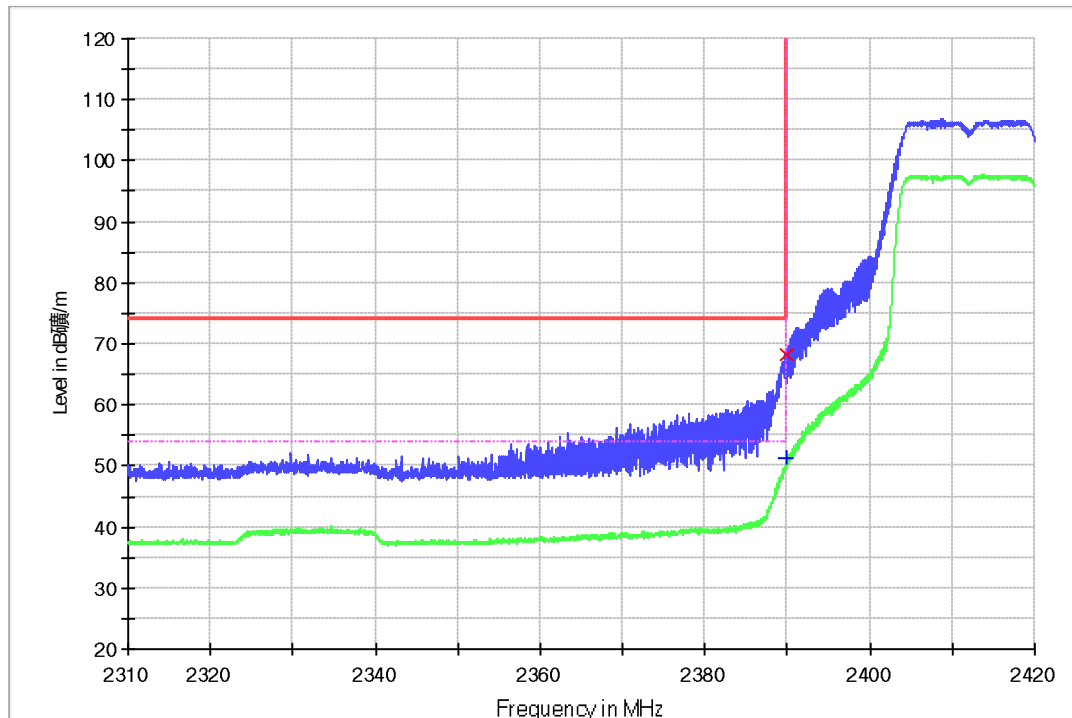
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2389.970000	60.4	H	-6.0	13.6	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2389.970000	43.9	H	-6.0	10.1	54.0

Figure 6: Radiated Band-Edge, g-2412MHz, V

2310 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

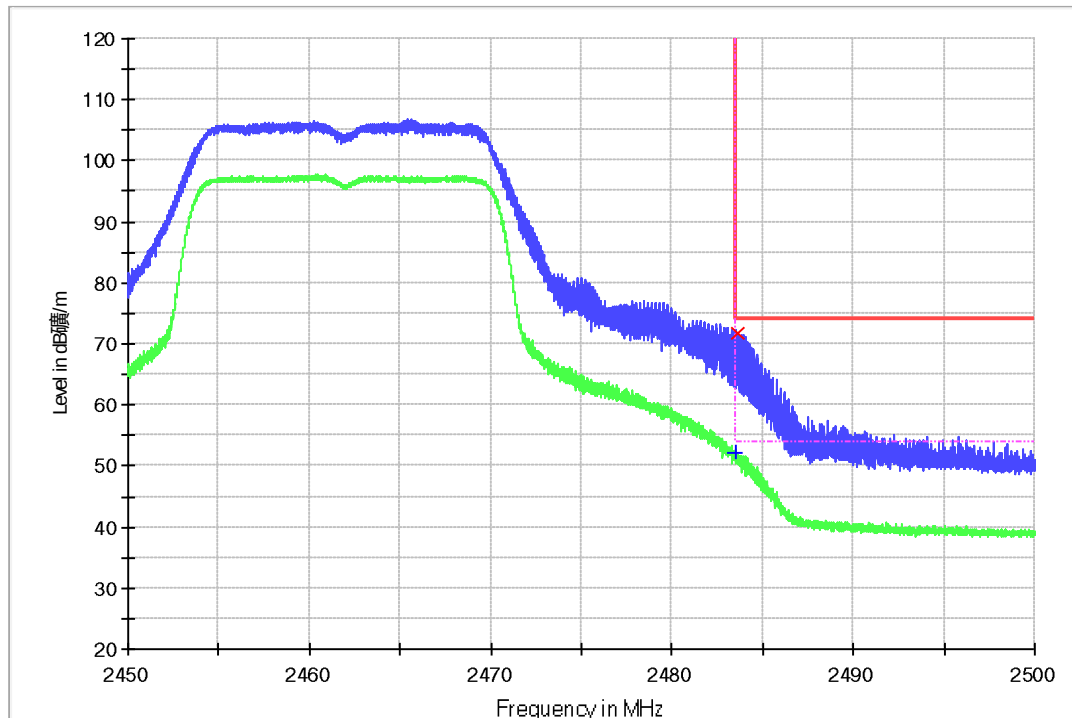
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2389.970000	68.1	v	-6.0	5.9	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2389.970000	51.4	v	-6.0	2.6	54.0

Figure 7: Radiated Band-Edge, g-2462MHz, H

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

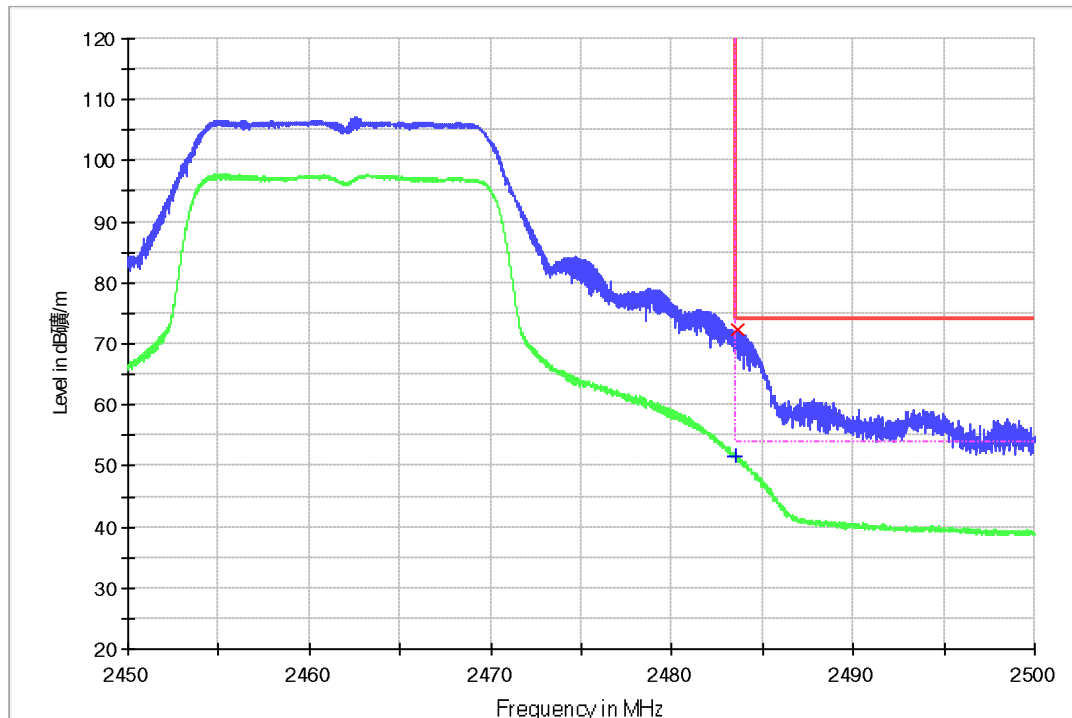
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2483.668750	71.7	H	-6.2	2.3	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2483.543750	52.2	H	-6.2	1.8	54.0

Figure 8: Radiated Band-Edge, g-2462MHz, V

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

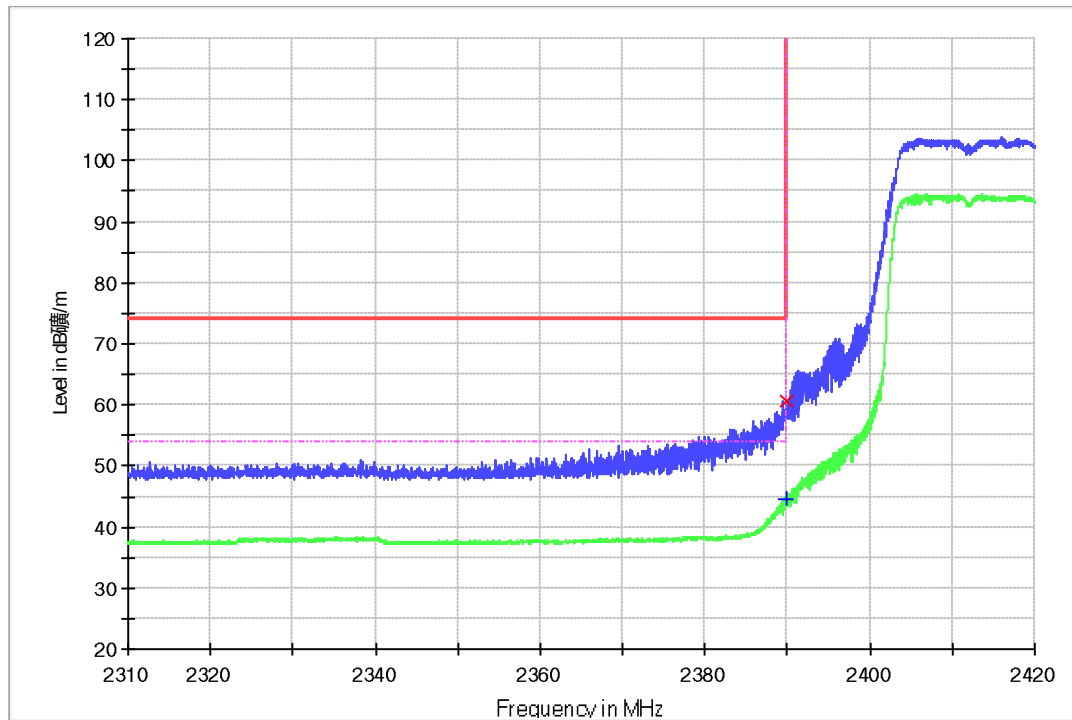
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2483.575000	72.2	v	-6.2	1.8	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2483.525000	51.7	v	-6.2	2.3	54.0

Figure 9: Radiated Band-Edge, n-HT20-2412MHz, H

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

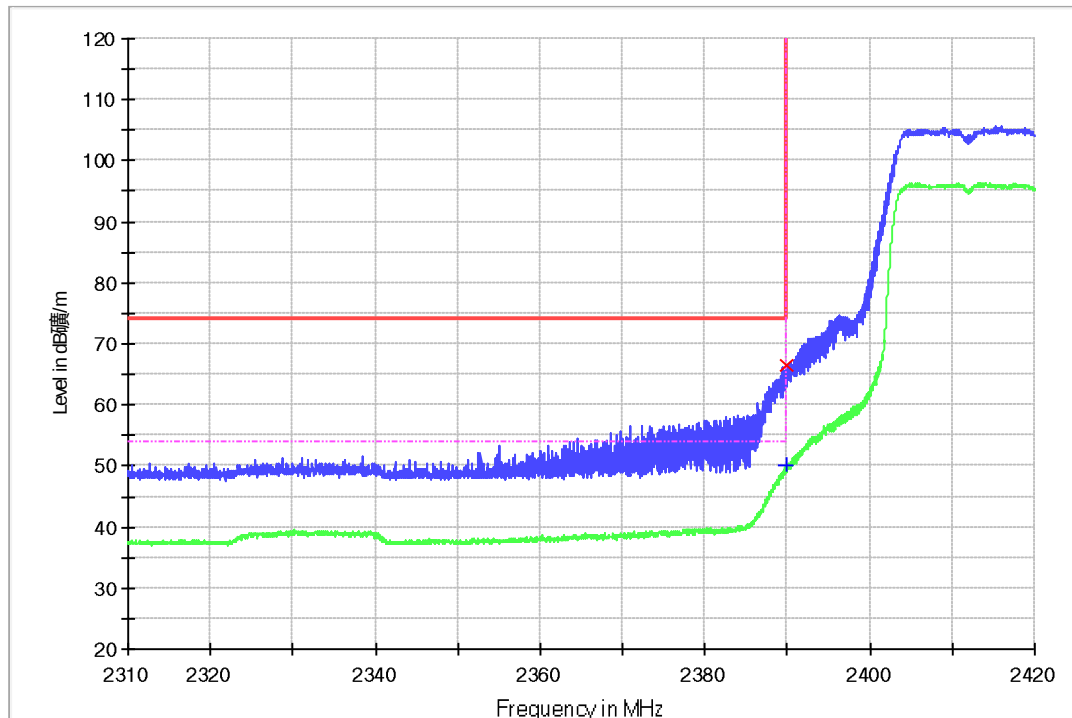
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2389.887500	60.7	H	-6.0	13.3	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2389.887500	44.7	H	-6.0	9.3	54.0

Figure 10: Radiated Band-Edge, n-HT20-2412MHz, V

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

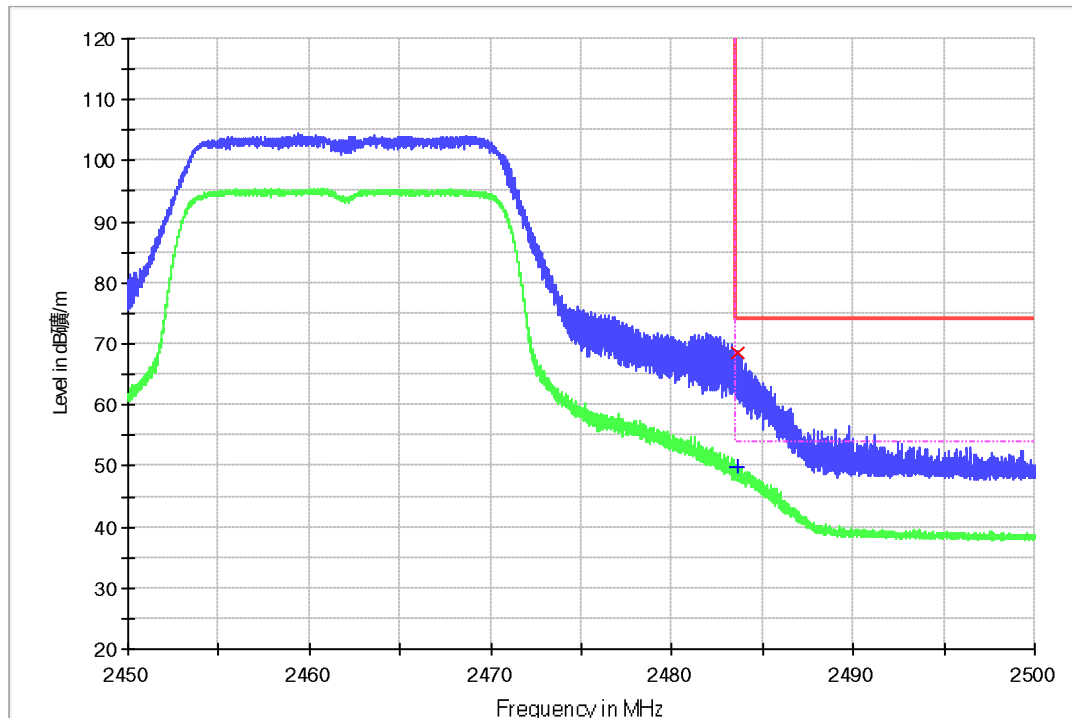
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2389.942500	66.4	v	-6.0	7.6	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2389.942500	50.0	v	-6.0	4.0	54.0

Figure 11: Radiated Band-Edge, n-HT20-2462MHz, H

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

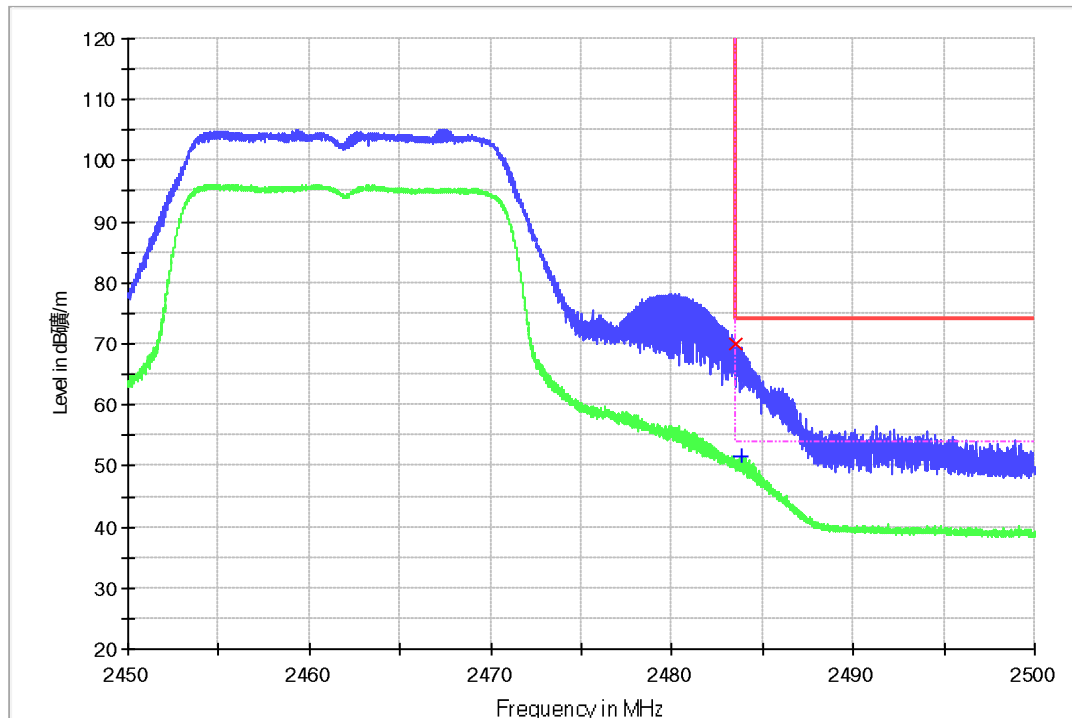
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2483.637500	68.6	H	-6.2	5.4	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2483.637500	49.8	H	-6.2	4.2	54.0

Figure 12: Radiated Band-Edge, n-HT20-2462MHz, V

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

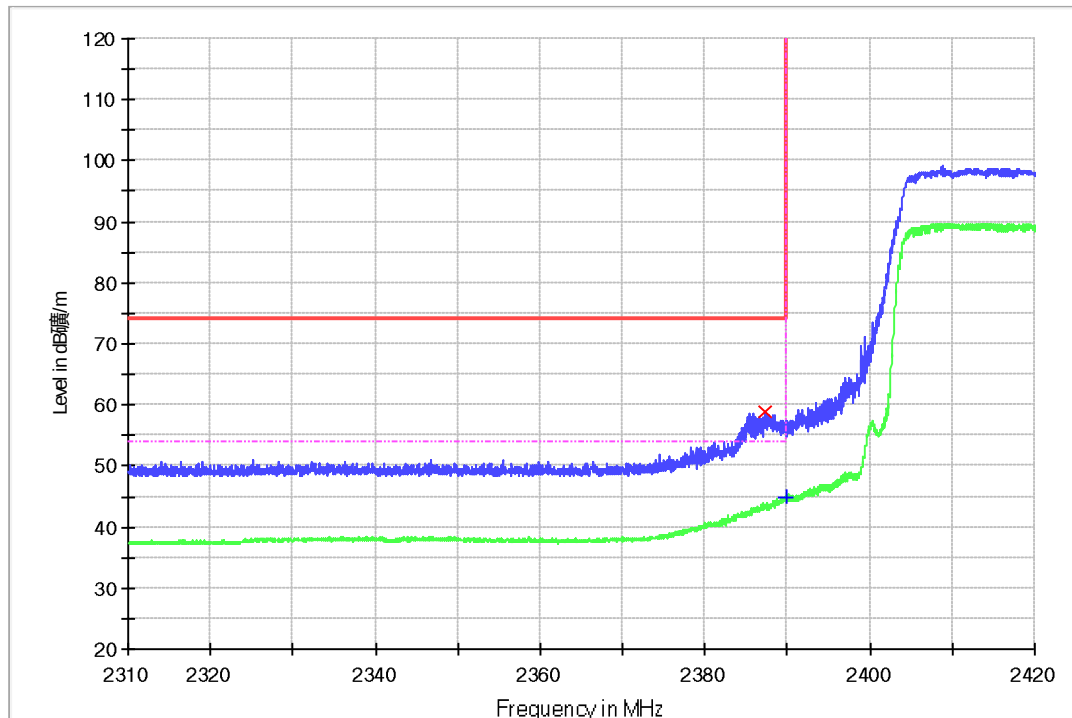
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2483.512500	70.1	v	-6.2	3.9	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2483.856250	51.7	v	-6.2	2.3	54.0

Figure 13: Radiated Band-Edge, n-HT40-2422MHz, H

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

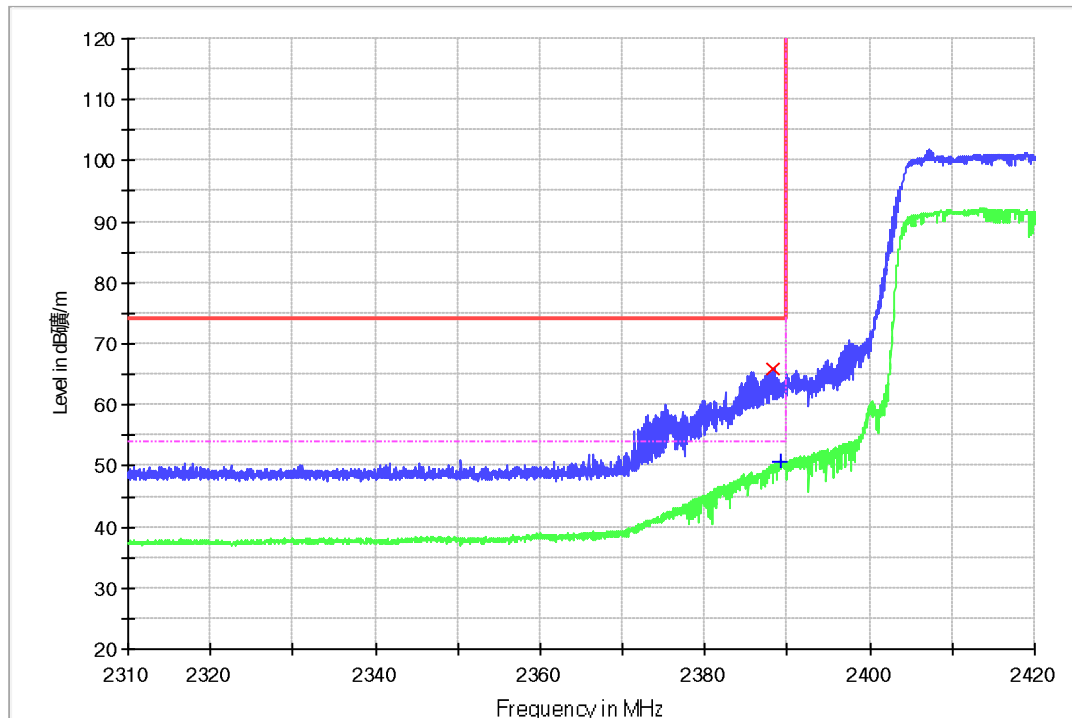
Frequency (MHz)	MaxPeak (dBμV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
2387.385000	58.9	H	-6.0	15.1	74.0

AV

Frequency (MHz)	Average (dBμV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
2389.915000	45.0	H	-6.0	9.0	54.0

Figure 14: Radiated Band-Edge, n-HT40-2422MHz, V

2310~ 2410 BE 1-18GHz_HL050_FSV40_Pre


PK

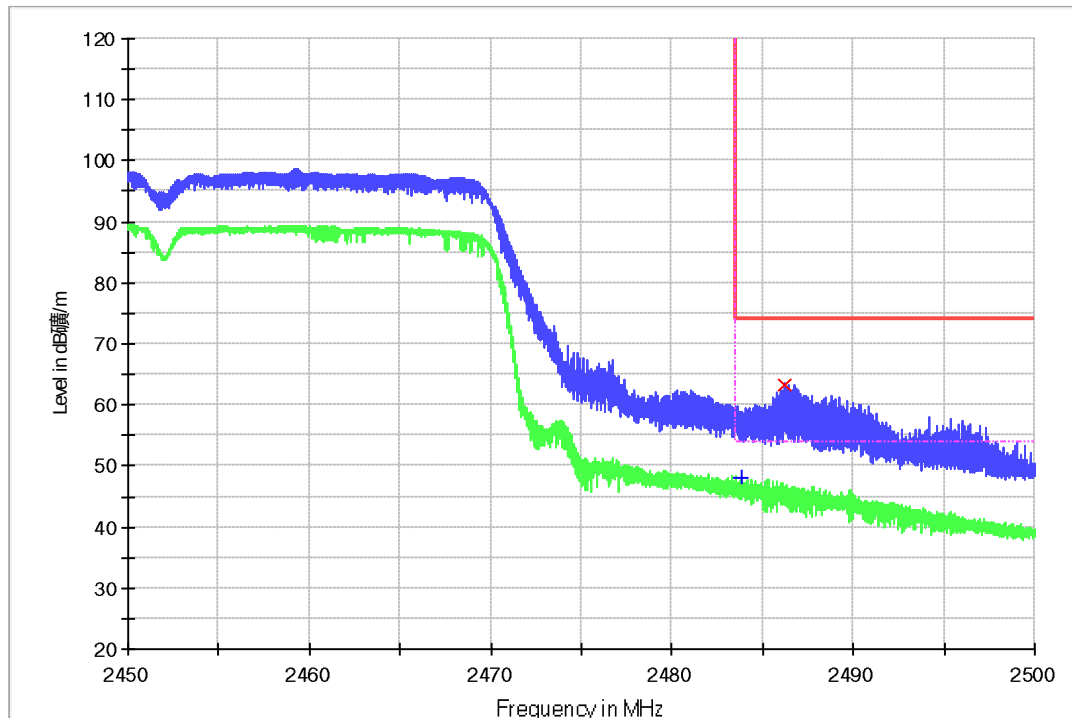
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2388.237500	65.9	v	-6.1	8.1	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2389.200000	50.6	v	-6.0	3.4	54.0

Figure 15: Radiated Band-Edge, n-HT40-2452MHz, H

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

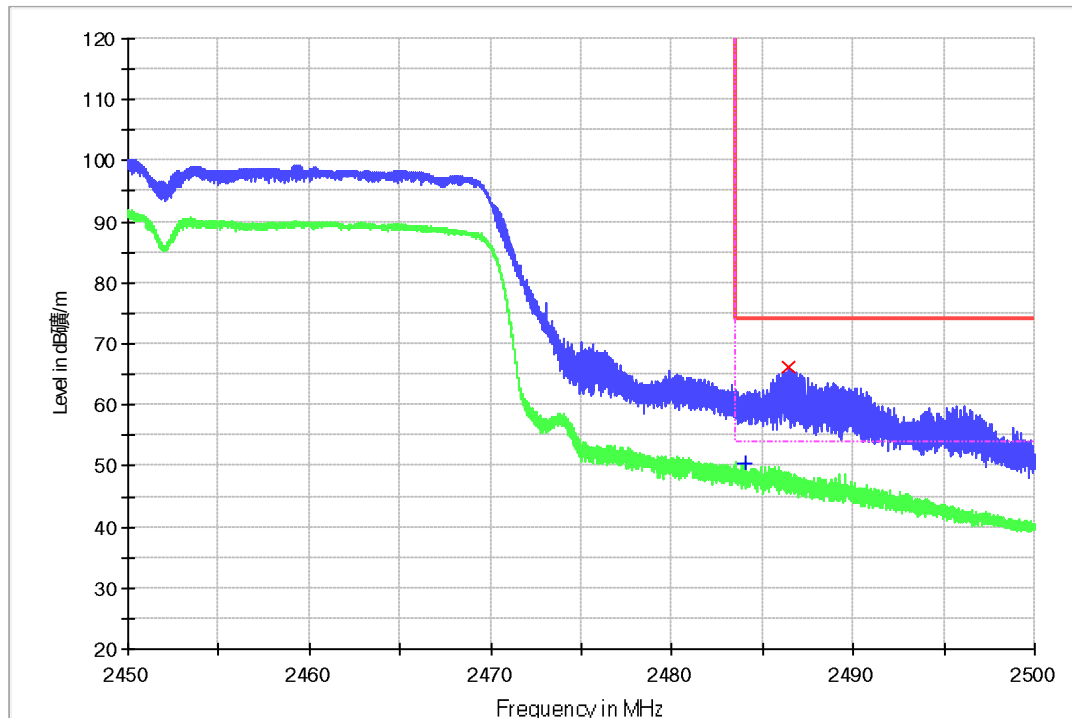
Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2486.250000	63.4	H	-6.2	10.6	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2483.800000	48.0	H	-6.2	6.0	54.0

Figure 16: Radiated Band-Edge, n-HT40-2452MHz, V

2470° 2500 BE_1-18GHz_HL050_FSV40_Pre


PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
2486.431250	66.1	v	-6.2	7.9	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
2484.093750	50.3	v	-6.2	3.7	54.0

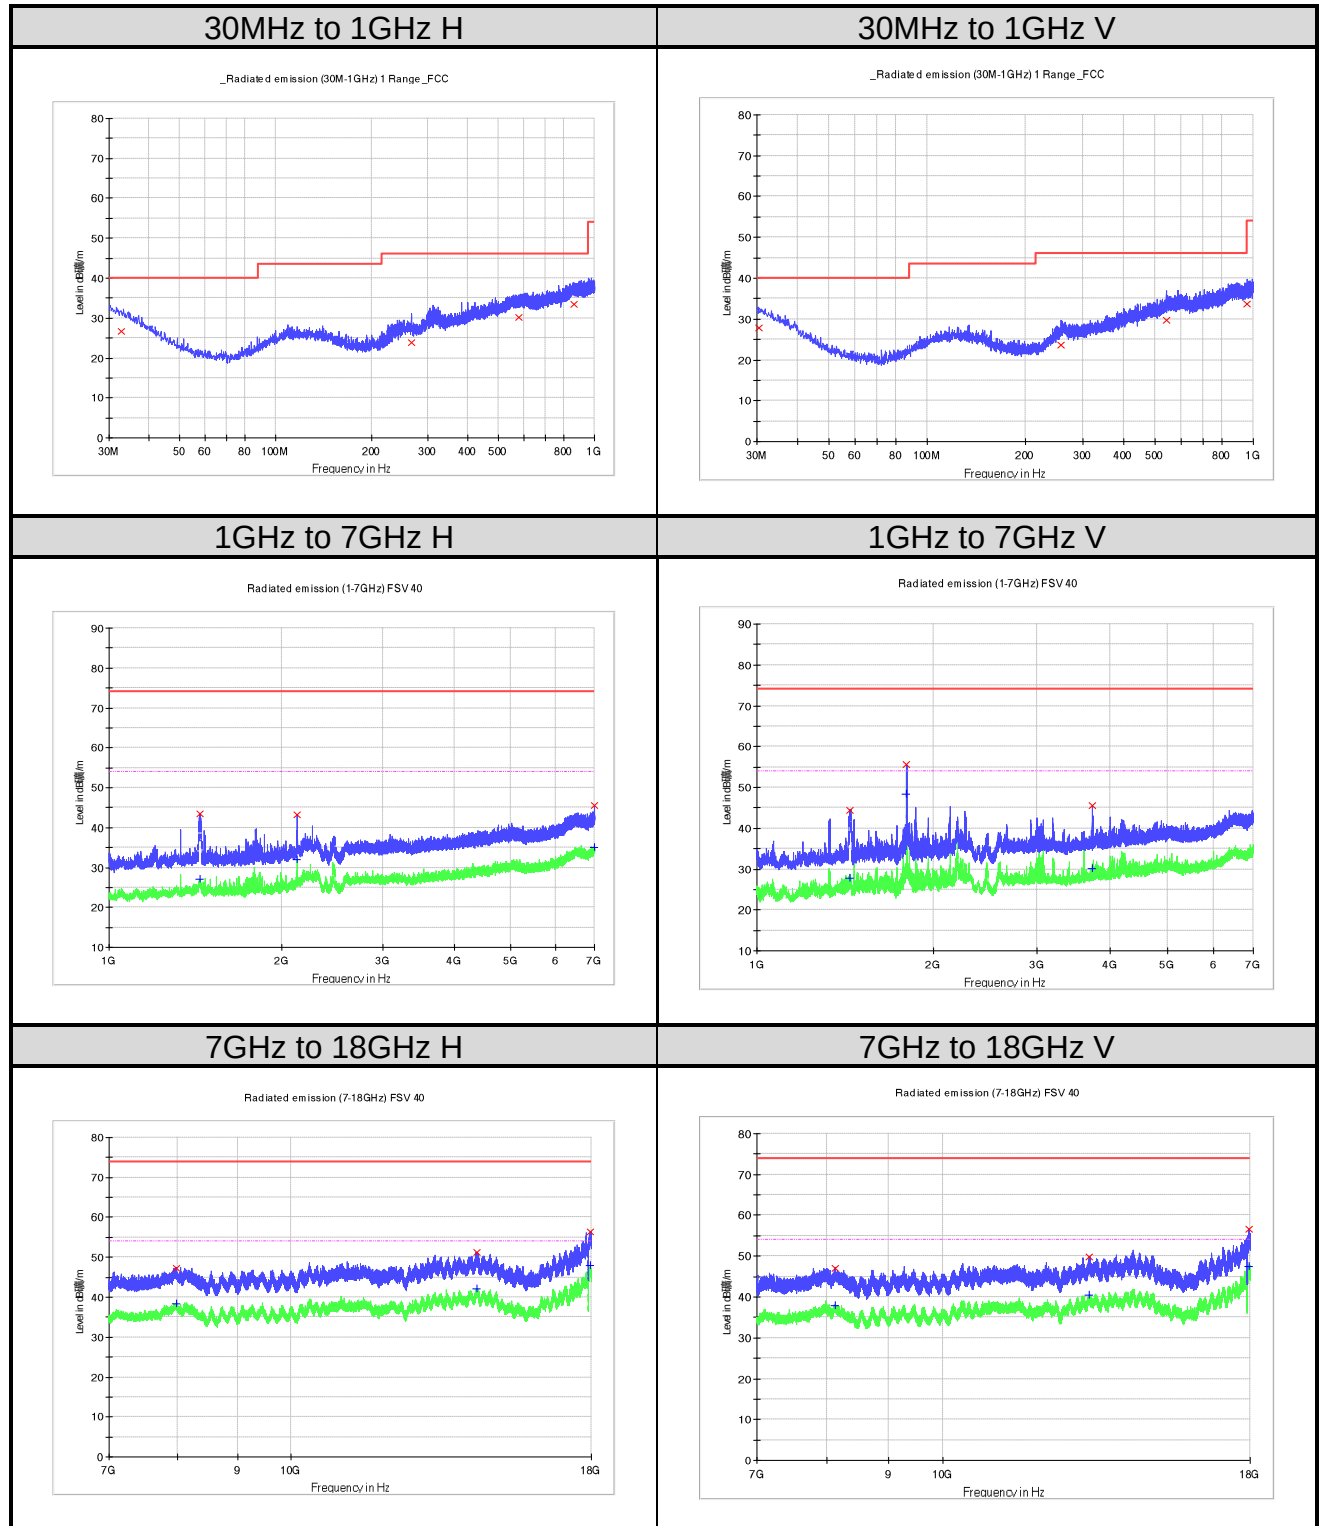
5.2.2 Radiated Spurious Emission

RESULT:**Pass**

Date of testing : 2025-03-11
Ambient temperature : 21.9°C
Relative humidity : 56.2%
Atmospheric pressure : 101kPa
Test requirement : FCC Part 15.247(d)
FCC Part 15.209(a)
RSS-Gen Issue 5, Amendment 2, February 2021, Clause 8.9
RSS-247 Issue 3, August 2023, Clause 5.5
Test procedure : ANSI C63.10: 2013
Test voltage : DC 14.4V
Test modes applied : A

Note:

1. All the test modes were applied, only the worst case were shown in this report.
2. For the frequency range from 18GHz to 25GHz, no emission was found.

Figure 17: Radiated Spurious Emission, g-2462MHz


Prüfbericht - Nr.: CN25ZZ28 001
Test Report No.
Seite 34 von 35
Page 34 of 35
Limit and Margin
QP

Frequency (MHz)	QuasiPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBµV/m)
32.667500	26.8	H	23.6	13.2	40.0
265.831250	23.8	H	20.6	22.2	46.0
580.111250	30.2	H	26.5	15.8	46.0
860.077500	33.3	H	28.9	12.7	46.0
30.363750	27.9	V	24.6	12.1	40.0
257.707500	23.7	V	20.5	22.3	46.0
539.977500	29.7	V	26.1	16.3	46.0
960.108750	33.7	V	29.5	20.3	54.0

PK

Frequency (MHz)	MaxPeak (dBµV/m)	Pol	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBµV/m)
1438.545455	43.4	H	-18.6	30.6	74.0
2125.545455	43.2	H	-16.6	30.8	74.0
6989.636364	45.5	H	-6.6	28.5	74.0
7982.781250	47.3	H	-3.6	26.7	74.0
14374.468750	51.2	H	2.3	22.8	74.0
17971.812500	56.3	H	11.9	17.7	74.0
1439.363636	44.5	V	-18.6	29.5	74.0
1799.636364	55.6	V	-18.8	18.4	74.0
3718.000000	45.5	V	-13.9	28.5	74.0
8134.031250	47.1	V	-4.3	26.9	74.0
13230.812500	49.9	V	0.1	24.1	74.0
17968.718750	56.5	V	11.8	17.5	74.0

AV

Frequency (MHz)	Average (dBµV/m)	Pol	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBµV/m)
1438.545455	27.0	H	-18.6	27.0	54.0
2125.545455	32.1	H	-16.6	21.9	54.0
6989.636364	35.1	H	-6.6	18.9	54.0
7982.781250	38.4	H	-3.6	15.6	54.0
14374.468750	42.0	H	2.3	12.0	54.0
17971.812500	48.0	H	11.9	6.0	54.0
1439.363636	27.7	V	-18.6	26.3	54.0
1799.636364	48.3	V	-18.8	5.7	54.0
3718.000000	30.1	V	-13.9	23.9	54.0
8134.031250	37.8	V	-4.3	16.2	54.0
13230.812500	40.4	V	0.1	13.6	54.0
17968.718750	47.5	V	11.8	6.5	54.0

6. List of Tables

Table 1: List of Test and Measurement Equipment	6
Table 2: Measurement Uncertainty	7
Table 3: Technical Specification of EUT	8
Table 4: RF Channel List.....	9
Table 5: Power parameter value	10
Table 6: Auxiliary Equipment.....	10
Table 7: Antenna Requirement	11
Table 8: Original Peak Output Power	14
Table 9: Peak Output Power	14

7. List of Figures

Figure 1: Radiated Band-Edge, b-2412MHz, H	16
Figure 2: Radiated Band-Edge, b-2412MHz, V.....	17
Figure 3: Radiated Band-Edge, b-2462MHz, H	18
Figure 4: Radiated Band-Edge, b-2462MHz, V.....	19
Figure 5: Radiated Band-Edge, g-2412MHz, H	20
Figure 6: Radiated Band-Edge, g-2412MHz, V.....	21
Figure 7: Radiated Band-Edge, g-2462MHz, H	22
Figure 8: Radiated Band-Edge, g-2462MHz, V.....	23
Figure 9: Radiated Band-Edge, n-HT20-2412MHz, H	24
Figure 10: Radiated Band-Edge, n-HT20-2412MHz, V.....	25
Figure 11: Radiated Band-Edge, n-HT20-2462MHz, H	26
Figure 12: Radiated Band-Edge, n-HT20-2462MHz, V.....	27
Figure 13: Radiated Band-Edge, n-HT40-2422MHz, H	28
Figure 14: Radiated Band-Edge, n-HT40-2422MHz, V.....	29
Figure 15: Radiated Band-Edge, n-HT40-2452MHz, H	30
Figure 16: Radiated Band-Edge, n-HT40-2452MHz, V.....	31
Figure 17: Radiated Spurious Emission, g-2462MHz	33