

FCC PART 15.247 TEST REPORT

For

M5Stack Technology Co., Ltd

106, 1st Floor, Building 1, Bright Technology Park, 88 Zhuguang North Road, Xili Taoyuan Street,
Nanshan District, Shenzhen, Guangdong, China

FCC ID: 2AN3WM5TIMERCAM

Report Type: Original Report	Product Type: Timer Camera F
Test Engineer:	CK Huang
Report Number:	RSHD200804002-00B
Report Date:	2020-08-23
Reviewed By:	Oscar Ye EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES.....	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)	12
FCC §15.203 - ANTENNA REQUIREMENT.....	14
APPLICABLE STANDARD	14
ANTENNA CONNECTOR CONSTRUCTION	14
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	15
TEST PROCEDURE	15
FACTOR & OVER LIMIT CALCULATION.....	16
TEST RESULTS SUMMARY	16
TEST DATA	16
FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS.....	19
APPLICABLE STANDARD	19
EUT SETUP	19
EMI TEST RECEIVER SETUP.....	20
TEST PROCEDURE	20
CORRECTED AMPLITUDE & MARGIN CALCULATION	20
TEST RESULTS SUMMARY	20
TEST DATA	21
FCC §15.247(a) (1)-CHANNEL SEPARATION TEST	32
APPLICABLE STANDARD	32
TEST PROCEDURE	32
TEST DATA	32
FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH.....	38
APPLICABLE STANDARD	38
TEST PROCEDURE	38
TEST DATA	38

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST	44
APPLICABLE STANDARD	44
TEST PROCEDURE	44
TEST DATA	44
FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME).....	47
APPLICABLE STANDARD	47
TEST PROCEDURE	47
TEST DATA	47
FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT	63
APPLICABLE STANDARD	63
TEST PROCEDURE	63
TEST DATA	63
FCC §15.247(d) - BAND EDGES TESTING	69
APPLICABLE STANDARD	69
TEST PROCEDURE	69
TEST DATA	69

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	M5Stack Technology Co., Ltd
Tested Model	Timer Camera F
Series Model	Timer Camera X, ESP32 TimerCAM
Product Type	Timer Camera F
Power Supply	DC 3.7V from battery and DC 5V
RF Function	Classic BT
Operating Band/Frequency	2402-2480MHz
Channel Number	79
Channel Separation	1 MHz
Modulation Type	GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Type	PIFA Antenna
Maximum Antenna Gain	2.0 dBi

Note: The model difference was explained in the attached declaration letter. Pre-scan these three models, the data of model Timer Camera F is the worst, only the worst data was record in report .

**All measurement and test data in this report was gathered from production sample serial number: 20200804002. (Assigned by the BACL. The EUT supplied by the applicant was received on 2020-08-04)*

Objective

This test report is prepared on behalf of *M5Stack Technology Co., Ltd* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commissions rules.

The tests were performed in order to determine Compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS Submittal with FCC ID: 2AN3WM5TIMERCAM

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0℃
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel list for Bluetooth:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	...	...
...	...	...	...
...	...	78	2480
39	2441	/	/

EUT was tested with Channel 0, 39 and 78.

EUT Exercise Software

RF test software: espRFTool

GFSK, $\pi/4$ -DQPSK, 8DPSK Power level: 6

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
DELL	Notebook	GX620	D65874152
DELL	Adapter	LA65NS0-00	DF263

External I/O Cable


Cable Description	Length (m)	From Port	To
USB Cable	1.0	EUT	Notebook
Power Cable	1.0	Notebook	Adapter
Power Cable	1.0	Adapter	LISN/AC source

Block Diagram of Test Setup


For Conducted Emissions:

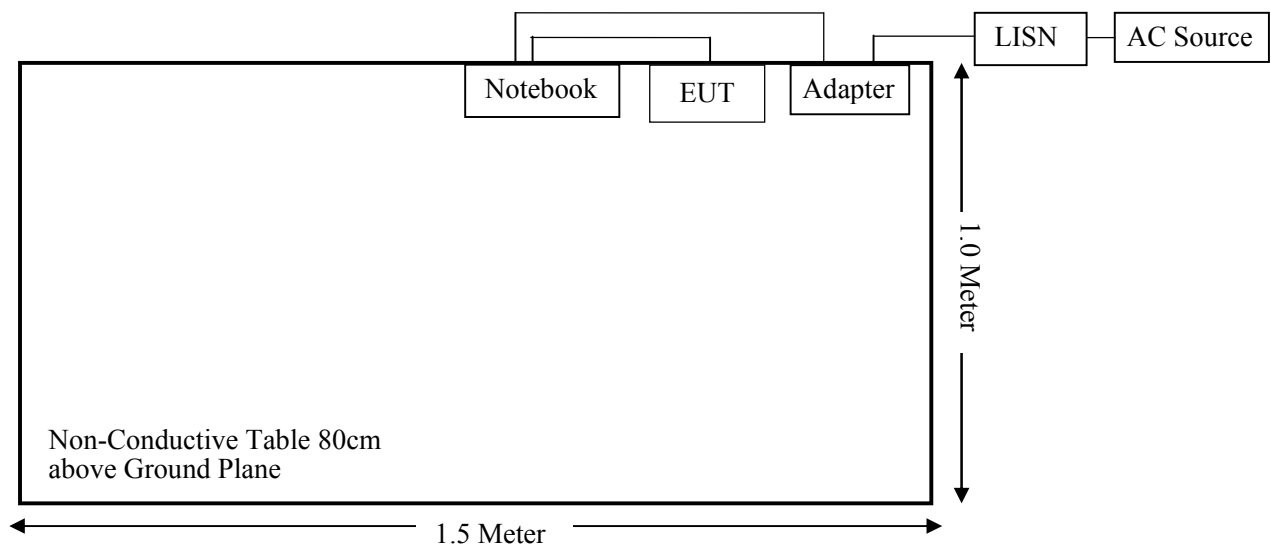

For Radiated Emissions (Below 1GHz):

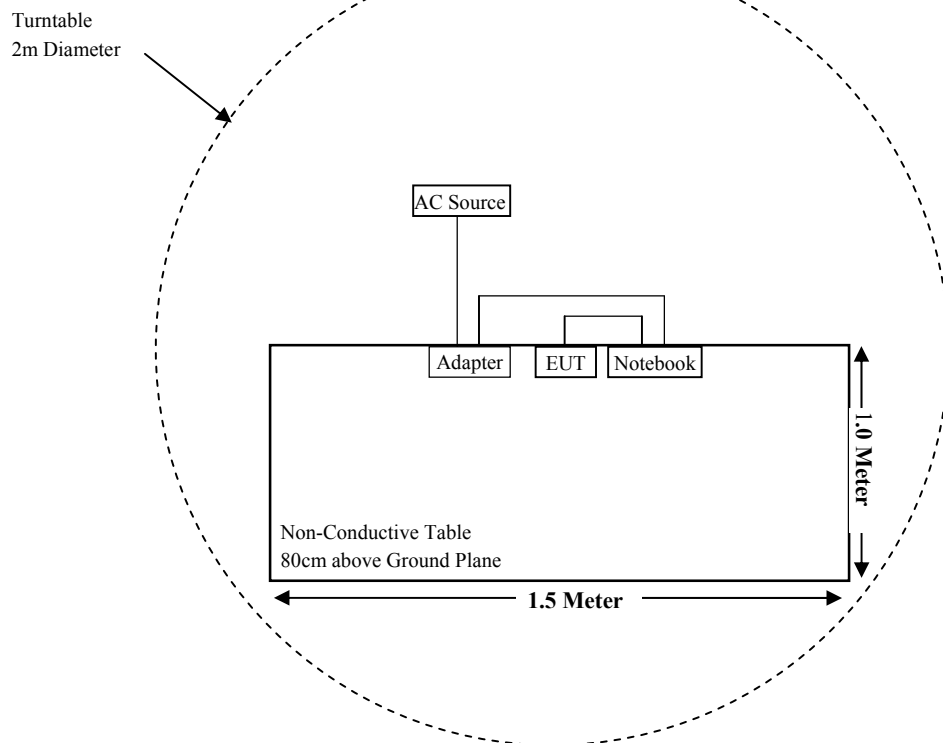

For Radiated Emissions (Above 1GHz):

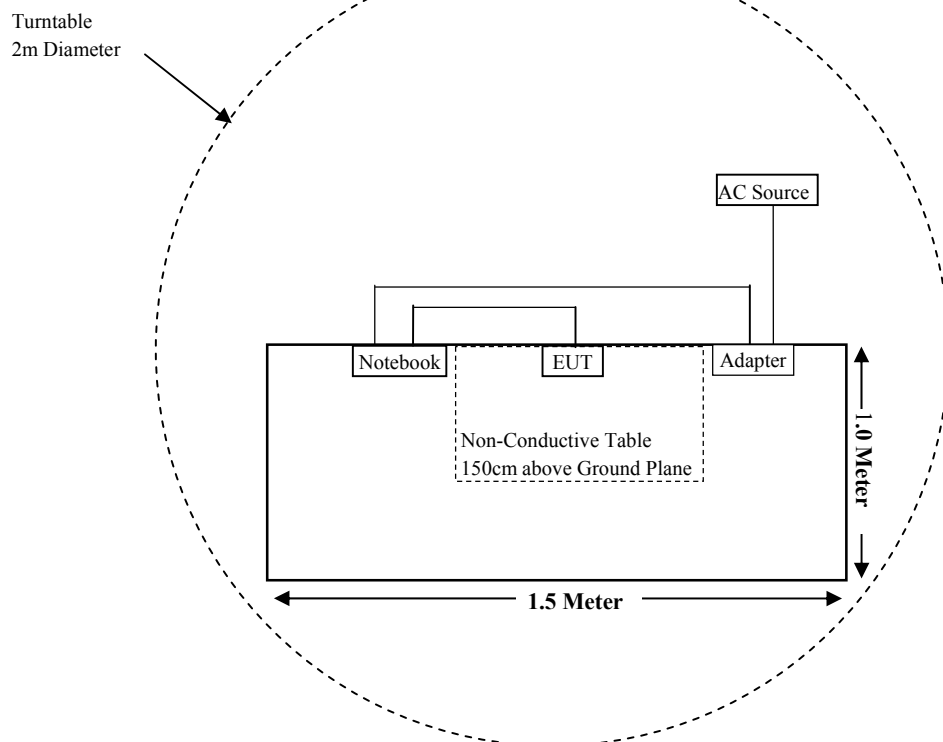

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (I), §1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions & Restricted Bands Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-12-14	2020-12-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2017-12-26	2020-12-25
Sonoma Instrument	Pre-amplifier	310N	171205	2019-08-14	2020-08-13
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2019-12-12	2022-12-11
A.H.Systems,inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
EM Electronics Corporation	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Rohde & Schwarz	Auto test Software	EMC32	100361	/	/
MICRO-COAX	Coaxial Cable	Cable-6	006	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-11	011	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2019-12-14	2020-12-13
Rohde & Schwarz	Signal Analyzer	FSV40	101116	2020-08-05	2021-08-04
Narda	Attenuator	10dB	010	2019-08-15	2020-08-14
M5Stack	RF Cable	M5Stack C01	C01	Each Time	/

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K0 3-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2019-12-14	2020-12-13
Audix	Test Software	e3	V9	/	/
Rohde & Schwarz	Pulse limiter	ESH3-Z2	357.8810.52	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 1.1310, 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/		f/1500	30
1500-100,000	/		1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data (worst case):

Mode	Frequency Range (MHz)	Maximum Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
Wi-Fi 802.11b	2412-2462	2.0	1.58	23.50	223.87	20	0.0704	1.00
Wi-Fi 802.11g		2.0	1.58	23.50	223.87	20	0.0704	1.00
Wi-Fi 802.11n-HT20		2.0	1.58	23.50	223.87	20	0.0704	1.00
Wi-Fi 802.11n-HT40	2422-2452	2.0	1.58	23.50	223.87	20	0.0704	1.00
BLE	2402-2480	2.0	1.58	4.50	2.82	20	0.0009	1.00
Bluetooth	2402-2480	2.0	1.58	7.50	5.62	20	0.0018	1.00

Note: Wi-Fi and BT/BLE cannot transmit simultaneously.

Conclusion: The device meets MPE at distance 20cm.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine Compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
 - b. Antenna must use a unique type of connector to attach to the EUT.
- Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PIFA antenna for Bluetooth, and the antenna gain is 2.0 dBi, which is permanently attached to the unit, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

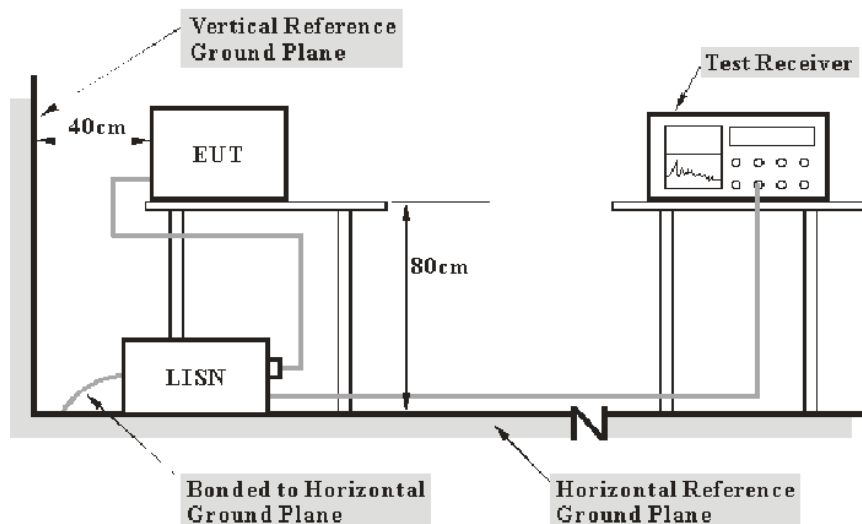

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the notebook adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.

Test Data


Environmental Conditions

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa

The testing was performed by CK Huang on 2020-08-19.


EUT operation mode: Transmitting in high channel of EDR(8DPSK) mode (Worst case)

AC 120V/60 Hz, Line

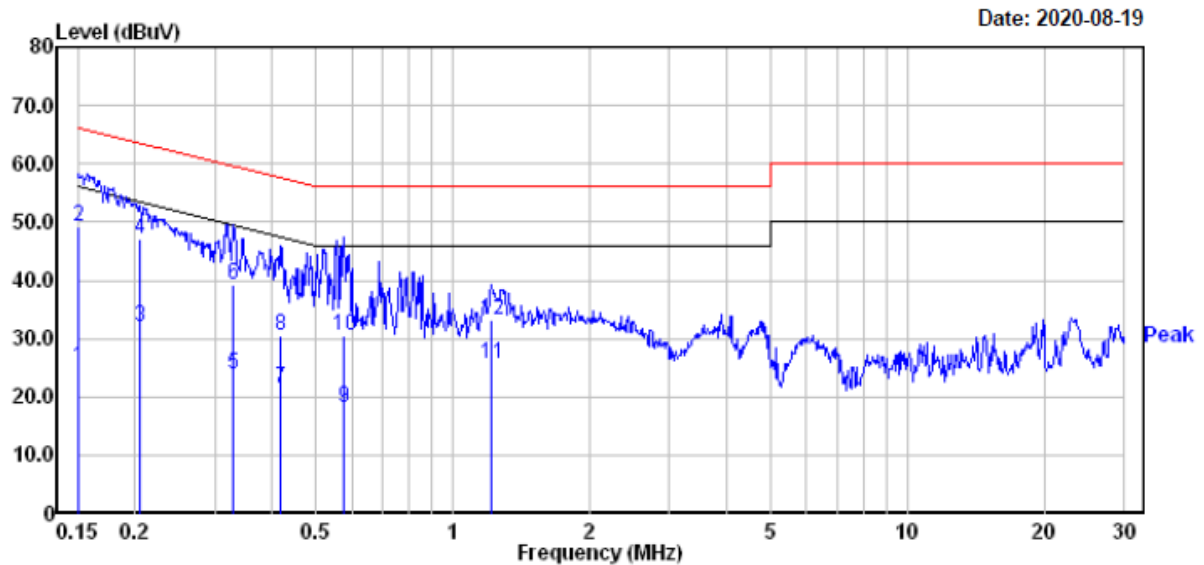

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.150	5.20	19.82	25.02	56.00	-30.98	Average
2	0.150	29.30	19.82	49.12	66.00	-16.88	QP
3	0.205	12.20	19.82	32.02	53.40	-21.38	Average
4	0.205	27.30	19.82	47.12	63.40	-16.28	QP
5	0.329	3.89	19.82	23.71	49.49	-25.78	Average
6	0.329	19.29	19.82	39.11	59.49	-20.38	QP
7	0.419	1.70	19.74	21.44	47.46	-26.02	Average
8	0.419	10.80	19.74	30.54	57.46	-26.92	QP
9	0.576	-1.60	19.75	18.15	46.00	-27.85	Average
10	0.576	10.80	19.75	30.55	56.00	-25.45	QP
11	1.216	6.00	19.81	25.81	46.00	-20.19	Average
12	1.216	13.50	19.81	33.31	56.00	-22.69	QP

AC 120V/60 Hz, Neutral

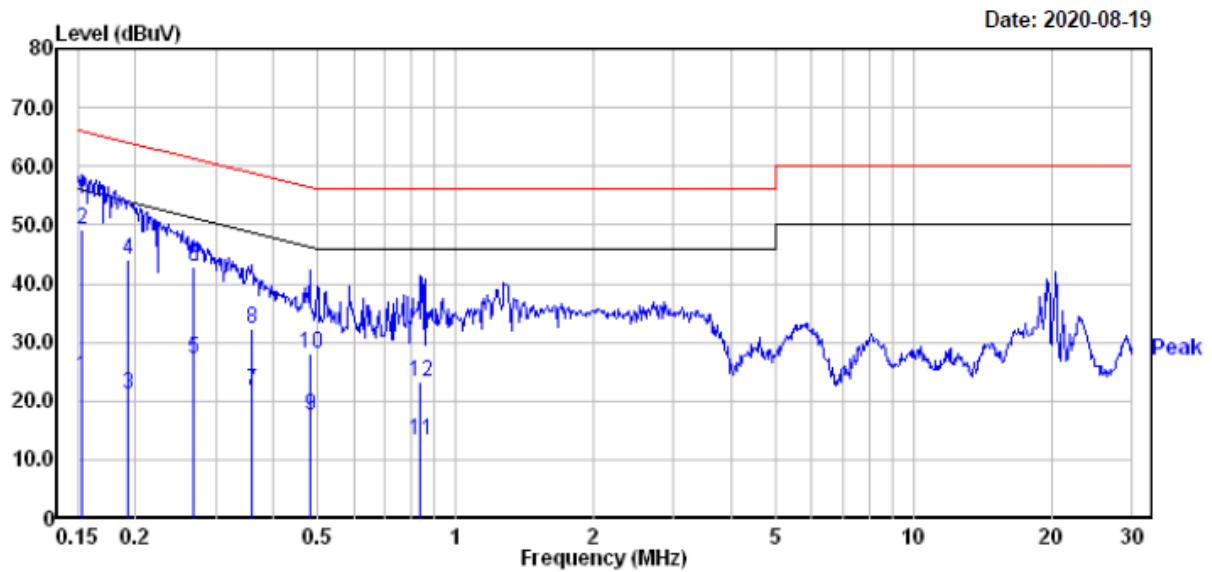

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.153	4.30	19.82	24.12	55.82	-31.70	Average
2	0.153	29.40	19.82	49.22	65.82	-16.60	QP
3	0.192	1.40	19.82	21.22	53.93	-32.71	Average
4	0.192	24.40	19.82	44.22	63.93	-19.71	QP
5	0.267	7.20	19.82	27.02	51.20	-24.18	Average
6	0.267	23.00	19.82	42.82	61.20	-18.38	QP
7	0.360	1.79	19.80	21.59	48.74	-27.15	Average
8	0.360	12.49	19.80	32.29	58.74	-26.45	QP
9	0.481	-2.30	19.76	17.46	46.32	-28.86	Average
10	0.481	8.30	19.76	28.06	56.32	-28.26	QP
11	0.839	-6.30	19.71	13.41	46.00	-32.59	Average
12	0.839	3.50	19.71	23.21	56.00	-32.79	QP



Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS**Applicable Standard**

FCC §15.205; §15.209; §15.247(d)

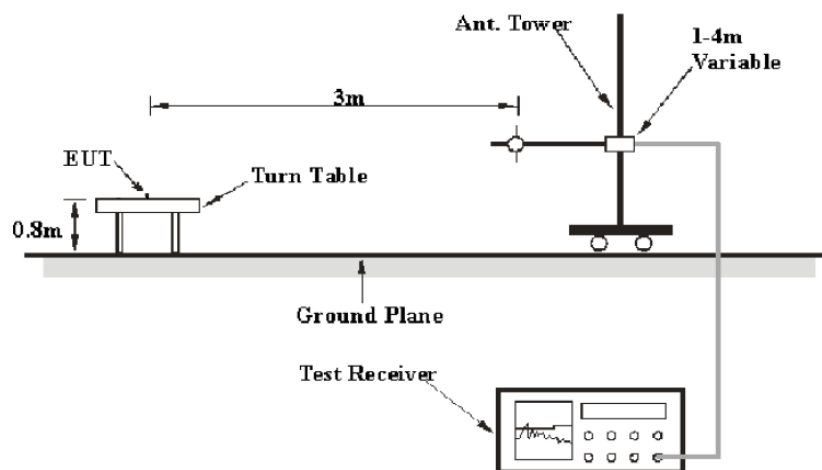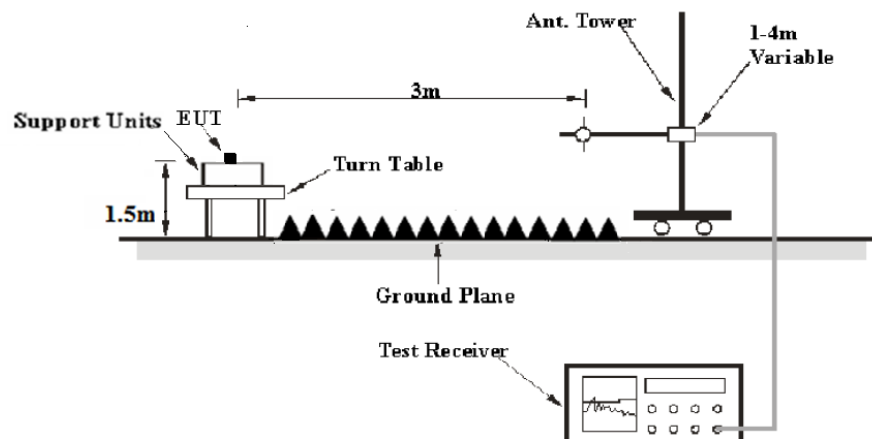EUT Setup**Below 1 GHz:****Above 1GHz:**

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1GHz	1MHz	3 MHz	/	PK
	1MHz	3 MHz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude (dB μ V /m) = Meter Reading (dB μ V) + Antenna Factor (dB/m) + Cable Loss (dB) - Amplifier Gain (dB)

The “**Margin**” column of the following data tables indicates the degree of Compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V /m)

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**


Temperature:	24.1~25.5 °C
Relative Humidity:	50~52 %
ATM Pressure:	101.1~101.5 kPa

The testing was performed by CK Huang from 2020-08-10 to 2020-08-22.

EUT operation mode: Transmitting

Spurious Emission Test:**30MHz-1GHz:**

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case **high channel of EDR(8DPSK) Mode in Z-axis of orientation** was recorded

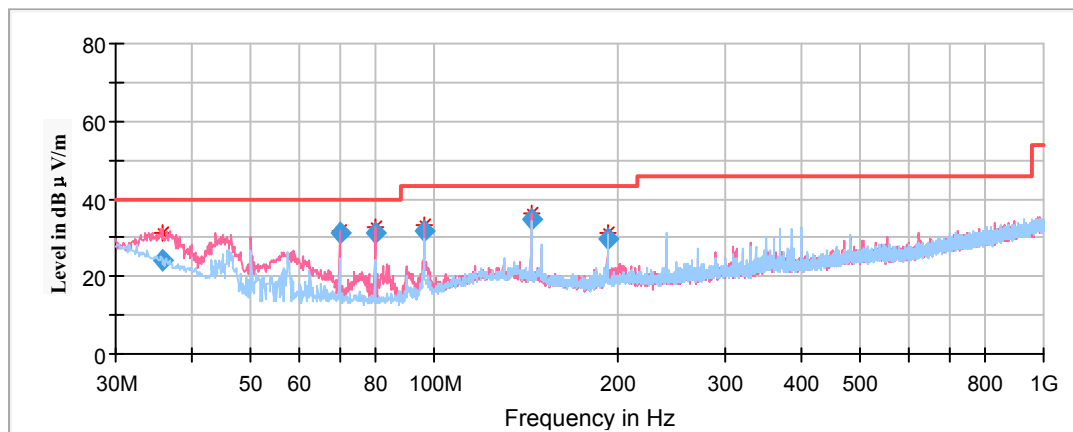

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	Quasi-peak (dBμV/m)	Height (cm)	Polar (H/V)				
35.830200	24.31	100.0	V	299.0	-8.3	40.00	15.69
70.003750	30.96	100.0	V	202.0	-17.7	40.00	9.04
79.982600	31.09	100.0	V	294.0	-18.2	40.00	8.91
96.265500	31.61	100.0	V	150.0	-16.3	43.50	11.89
144.423700	34.86	100.0	V	192.0	-12.6	43.50	8.64
192.604800	29.52	100.0	V	310.0	-13.3	43.50	13.98

1GHz-18GHz:


Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case EDR(8DPSK) Mode in Z-axis of orientation was recorded

Note:

1. This test was performed with the 2.4-2.5 GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

Low Channel: 2402MHz


Full Spectrum

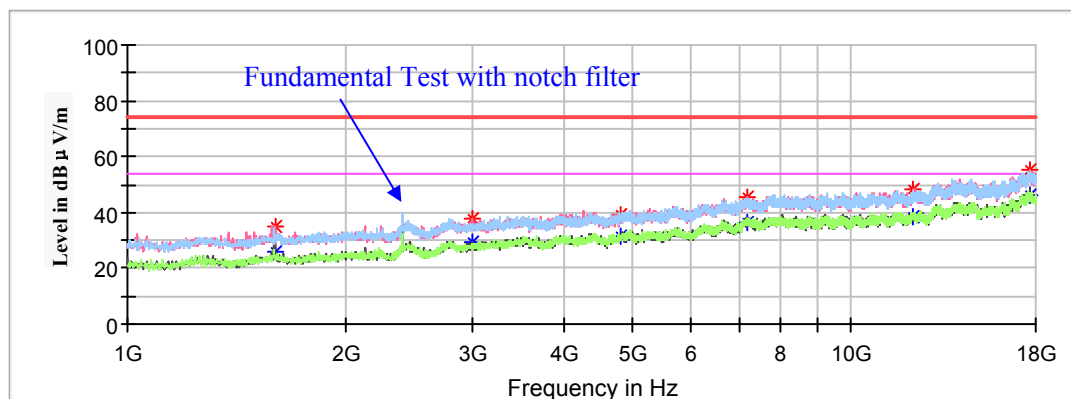

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1598.400000	---	25.75	150.0	V	224.0	-16.0	54.00	28.25
1598.400000	35.31	---	150.0	V	224.0	-16.0	74.00	38.69
2995.800000	---	29.60	150.0	V	35.0	-10.1	54.00	24.40
2995.800000	37.53	---	150.0	V	35.0	-10.1	74.00	36.47
4804.000000	39.23	---	200.0	H	0.0	-5.6	74.00	34.77
4804.000000	---	31.47	200.0	H	0.0	-5.6	54.00	22.53
7206.000000	---	36.23	150.0	H	270.0	0.4	54.00	17.77
7206.000000	45.79	---	150.0	H	270.0	0.4	74.00	28.21
12194.500000	48.24	---	150.0	V	323.0	3.5	74.00	25.76
12194.500000	---	38.69	150.0	V	323.0	3.5	54.00	15.31
17705.900000	---	45.93	150.0	H	217.0	8.9	54.00	8.07
17705.900000	55.43	---	150.0	H	217.0	8.9	74.00	18.57

Middle Channel: 2441MHz


Full Spectrum

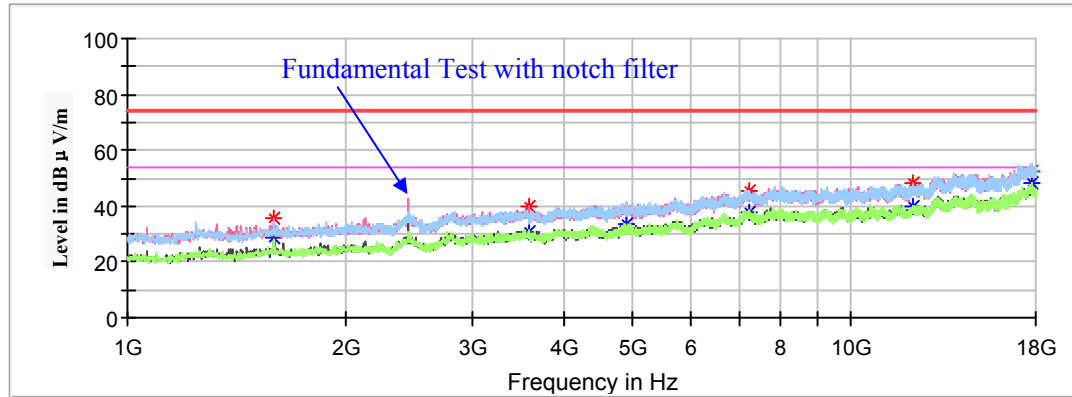

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1595.000000	---	28.46	150.0	V	67.0	-16.0	54.00	25.54
1595.000000	36.01	---	150.0	V	67.0	-16.0	74.00	37.99
3594.200000	---	30.51	150.0	V	248.0	-8.5	54.00	23.49
3594.200000	39.69	---	150.0	V	248.0	-8.5	74.00	34.31
4882.000000	38.59	---	150.0	V	273.0	-5.4	74.00	35.41
4882.000000	---	33.23	150.0	V	273.0	-5.4	54.00	20.77
7323.000000	45.56	---	150.0	V	90.0	0.4	74.00	28.44
7323.000000	---	37.99	150.0	V	90.0	0.4	54.00	16.01
12150.300000	47.95	---	200.0	V	359.0	3.5	74.00	26.05
12150.300000	---	39.69	200.0	V	359.0	3.5	54.00	14.31
17739.900000	52.59	---	150.0	H	335.0	8.8	74.00	21.41
17739.900000	---	47.97	150.0	H	335.0	8.8	54.00	6.03

High Channel: 2480MHz


Full Spectrum

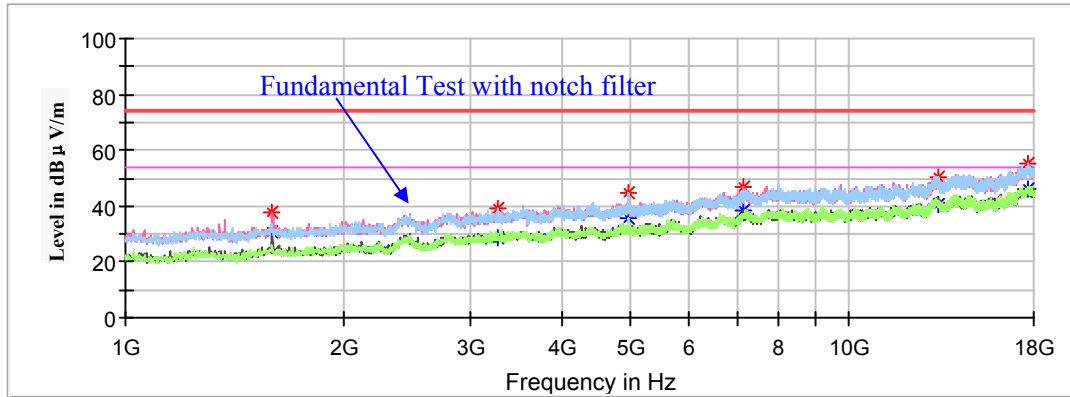


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1596.700000	37.54	---	150.0	V	224.0	-16.0	74.00	36.46
1596.700000	---	30.53	150.0	V	224.0	-16.0	54.00	23.47
3269.500000	---	28.52	150.0	V	2.0	-9.4	54.00	25.48
3269.500000	39.14	---	150.0	V	2.0	-9.4	74.00	34.86
4960.000000	---	35.34	200.0	H	225.0	-5.3	54.00	18.66
4960.000000	44.42	---	200.0	H	225.0	-5.3	74.00	29.58
7440.000000	---	38.31	150.0	H	249.0	0.3	54.00	15.69
7440.000000	46.79	---	150.0	H	249.0	0.3	74.00	27.21
13309.700000	---	40.28	150.0	H	161.0	5.5	54.00	13.72
13309.700000	50.48	---	150.0	H	161.0	5.5	74.00	23.52
17673.600000	---	45.91	200.0	H	97.0	8.9	54.00	8.09
17673.600000	55.01	---	200.0	H	97.0	8.9	74.00	18.99

18GHz-25GHz:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation,, the worst case high channel of EDR(8DPSK) Mode in Z-axis of orientation was recorded

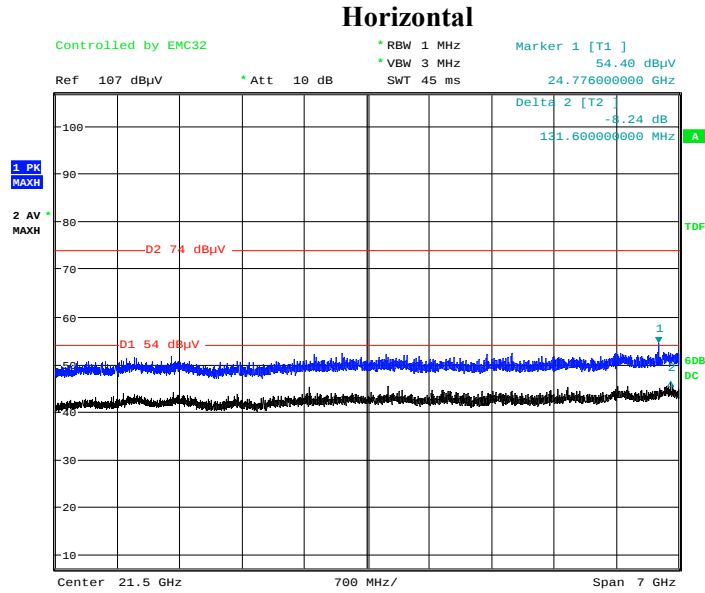

Date: 10.AUG.2020 18:26:53

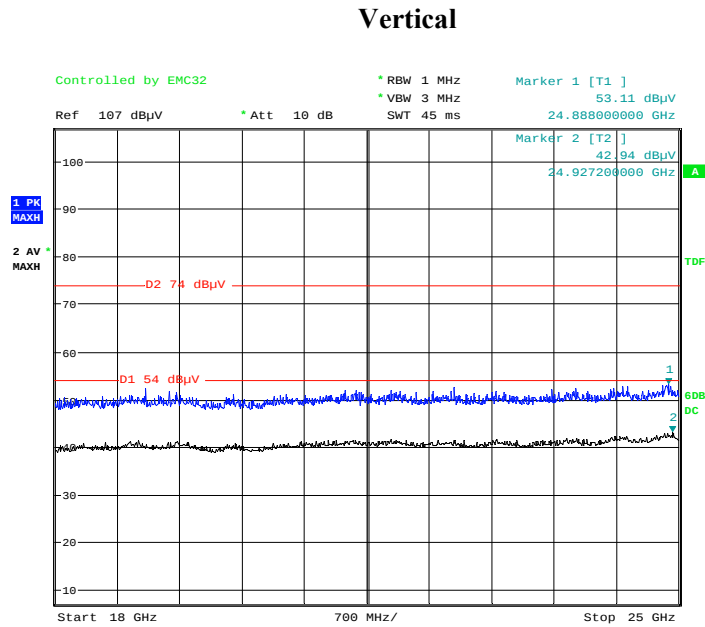

Date: 22.AUG.2020 22:49:22

Restricted Bands Emissions:

Pre-Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK modes of operation in the X,Y and Z axes of orientation, the worst case EDR(8DPSK) Mode in Z-axis of orientation was recorded



Note:

1. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)


Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)

Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.000000	43.11	---	200.0	V	223.0	-2.9	74.00	30.89
2390.000000	---	36.83	200.0	V	223.0	-2.9	54.00	17.17
High Channel: 2480MHz								
2483.500000	46.72	---	150.0	V	257.0	-2.5	74.00	27.28
2483.500000	---	42.27	150.0	V	257.0	-2.5	54.00	11.73

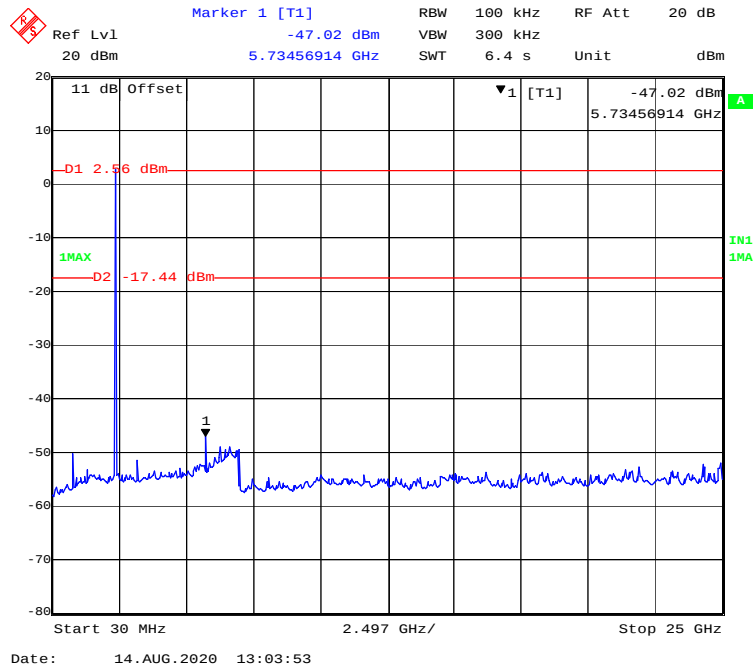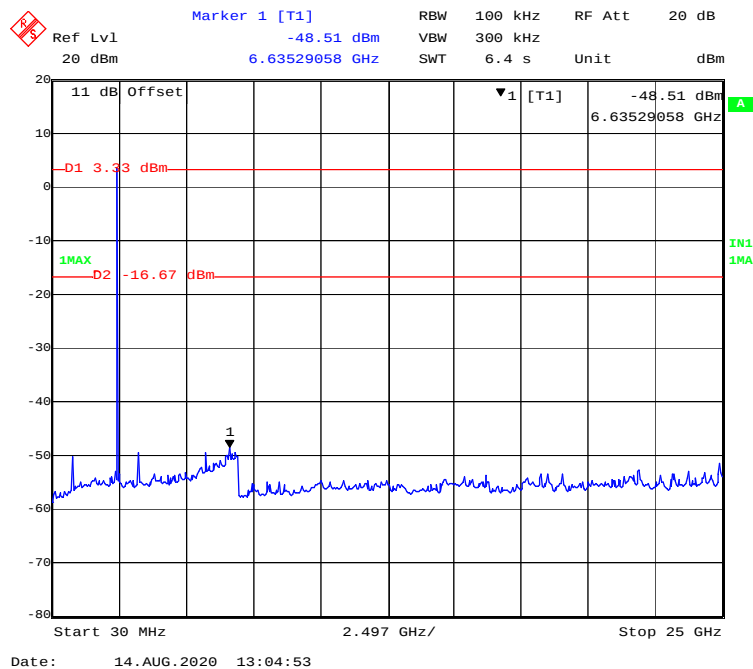Conducted Spurious Emissions at Antenna Port**BDR (GFSK): Low Channel****BDR (GFSK): Middle Channel**

BDR (GFSK): High Channel

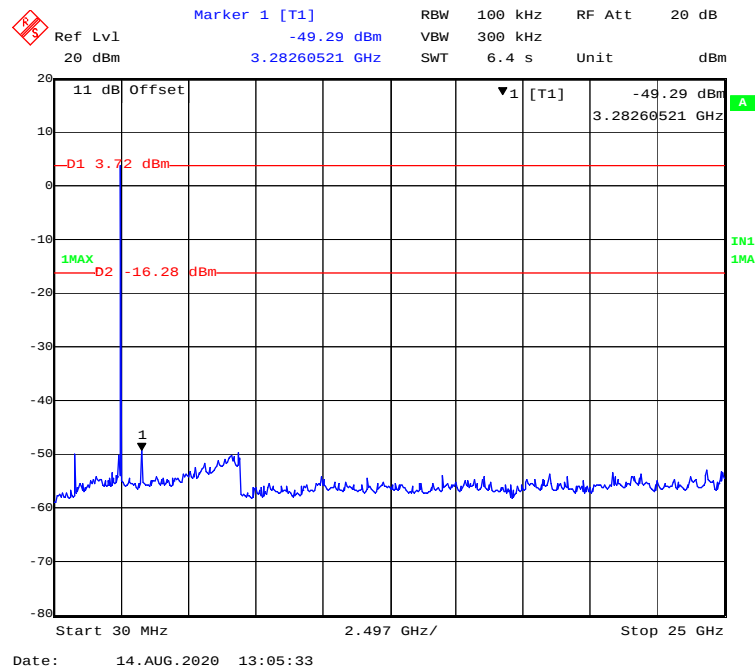

EDR ($\pi/4$ -DQPSK): Low Channel

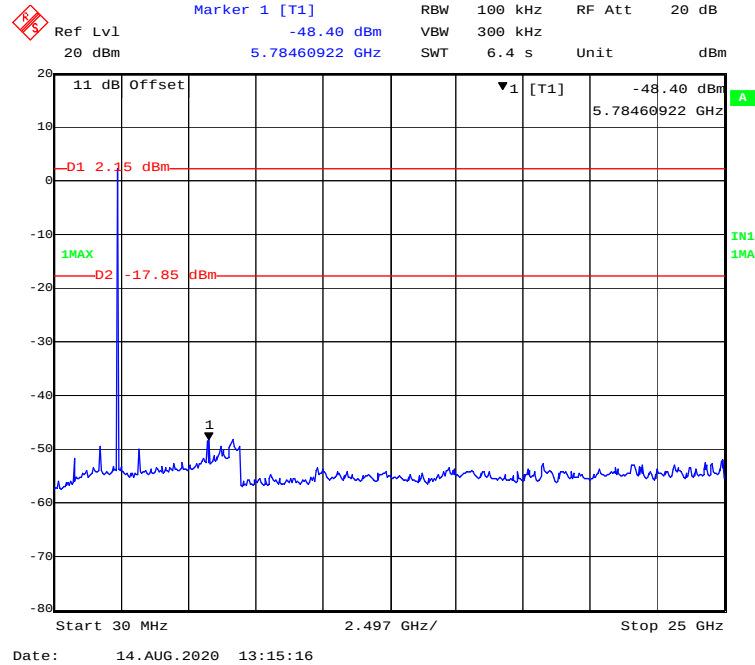

Marker 1 [T1]
 -45.35 dBm
 5.73456914 GHz

RBW 100 kHz RF Att 20 dB
 VBW 300 kHz
 SWT 6.4 s Unit dBm

Ref Lvl 20 dBm

11 dB Offset

▼1 [T1] -45.35 dBm
 5.73456914 GHz

D1 2.76 dBm
 D2 -17.24 dBm

1MAX

Start 30 MHz 2.497 GHz/ Stop 25 GHz

Date: 14. AUG. 2020 13:17:35

A
 Ref Lvl 20 dBm
 RBW 100 kHz
 RF Att 20 dB
 Marker 1 [T1] -46.70 dBm
 VBW 300 kHz
 SWT 6.4 s
 Unit dBm
 11 dB Offset
 -46.70 dBm
 5.73456914 GHz
 -16.6 dBm
 1
 Start 30 MHz
 Stop 25 GHz
 Date: 14. AUG. 2020 13:25:23

Marker 1 [T1]
 -48.66 dBm
 5.78460922 GHz

RBW 100 kHz
 VBW 300 kHz
 SWT 6.4 s

Ref Lvl 20 dBm
 RF Att 20 dB
 Unit dBm

11 dB Offset
 ▼1 [T1]
 -48.66 dBm
 5.78460922 GHz

-D1 2.41 dBm
 -D2 -17.59 dBm

1MAX
 IN1
 1MA

Start 30 MHz
 2.497 GHz/
 Stop 25 GHz

Date: 14.AUG.2020 13:28:26

Marker 1 [T1]
-49.54 dBm
6.58525050 GHz

Ref Lvl
20 dBm

RBW
100 kHz

RF Att
20 dB

SWT
6.4 s

Unit
dBm

11 dB Offset

D1 3.75 dBm

D2 -16.25 dBm

1MAX

IN1

1


Start 30 MHz

2.497 GHz/

Stop 25 GHz

Date: 14.AUG.2020 13:38:10

EDR (8DPSK): High Channel

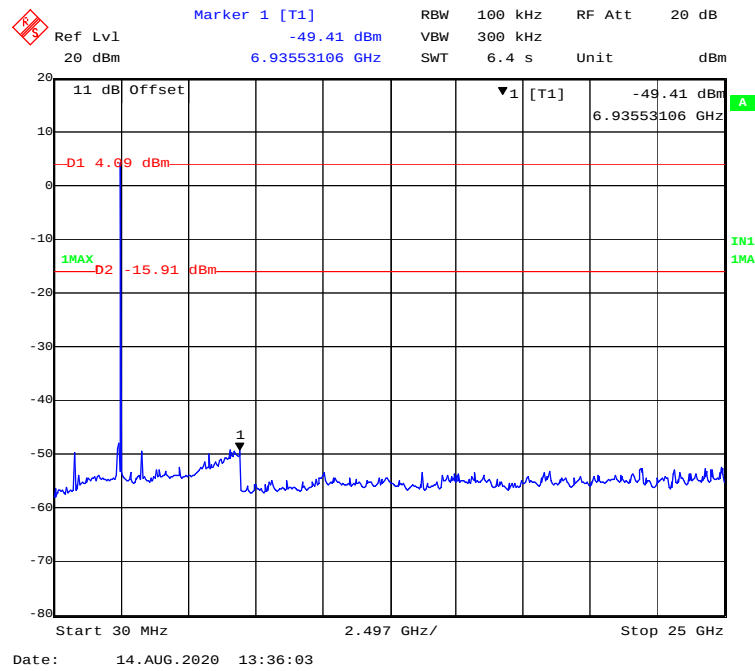

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST**Applicable Standard**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: Wide enough to capture the peaks of two adjacent channels.
- b. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c. Video (or average) bandwidth (VBW) $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Test Data**Environmental Conditions**

Temperature:	25.4 °C
Relative Humidity:	50 %
ATM Pressure:	101.1 kPa

The testing was performed by CK Huang on 2020-08-14.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Channel	Frequency (MHz)	Channel Separation (MHz)	Limit (MHz)	Result
BDR (GFSK)	Low	2402	1.007	0.950	Pass
	Adjacent	2403			
	Middle	2441	0.994	0.950	Pass
	Adjacent	2442			
	High	2480	0.999	0.950	Pass
	Adjacent	2479			
EDR ($\pi/4$ -DQPSK)	Low	2402	1.003	0.874	Pass
	Adjacent	2403			
	Middle	2441	1.003	0.878	Pass
	Adjacent	2442			
	High	2480	0.999	0.878	Pass
	Adjacent	2479			
EDR (8DPSK)	Low	2402	0.999	0.874	Pass
	Adjacent	2403			
	Middle	2441	1.012	0.874	Pass
	Adjacent	2442			
	High	2480	0.999	0.874	Pass
	Adjacent	2479			

Note: For BDR mode, Limit = 20 dB bandwidth; For EDR mode, Limit = 20 dB bandwidth*2/3

BDR (GFSK): Low Channel

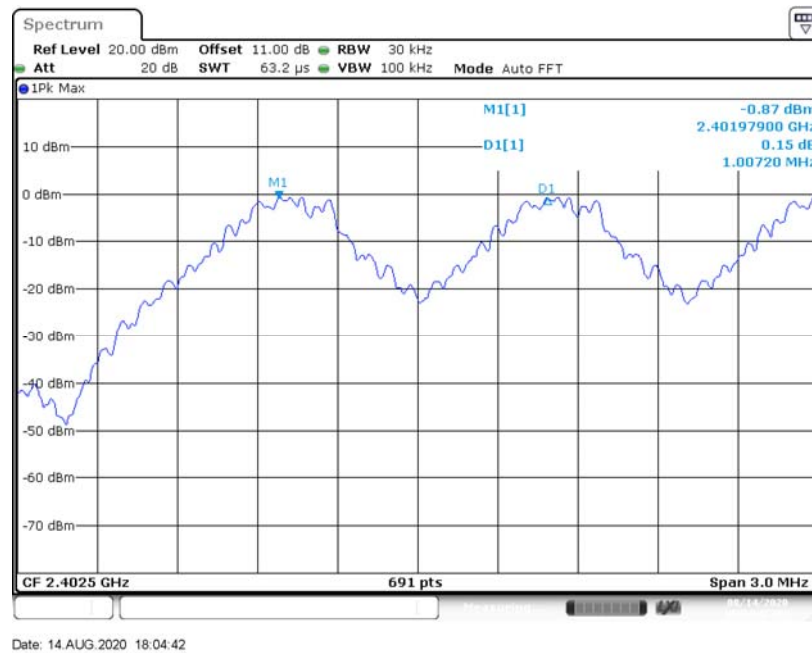


BDR (GFSK): Middle Channel

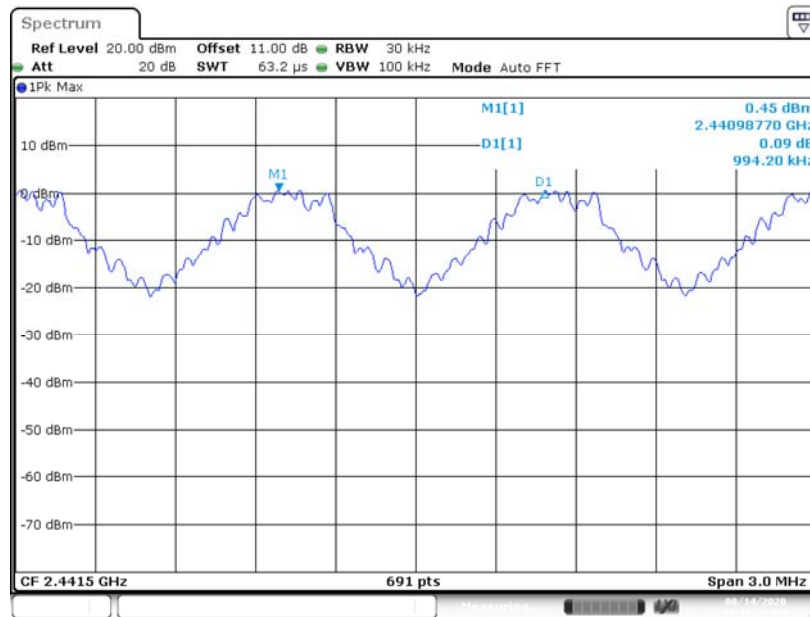


Date: 14.AUG.2020 18:13:29

BDR (GFSK): High Channel

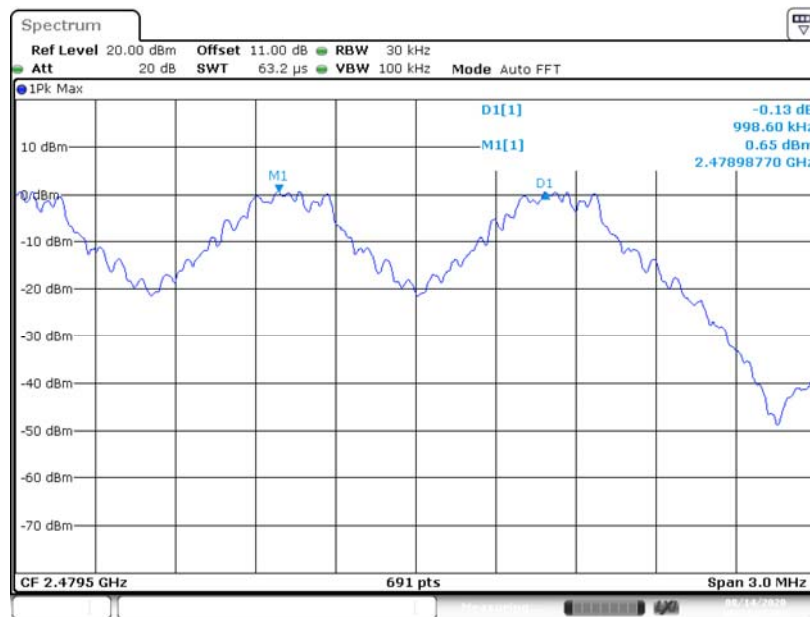


Date: 14.AUG.2020 18:14:23

EDR ($\pi/4$ -DQPSK): Low Channel

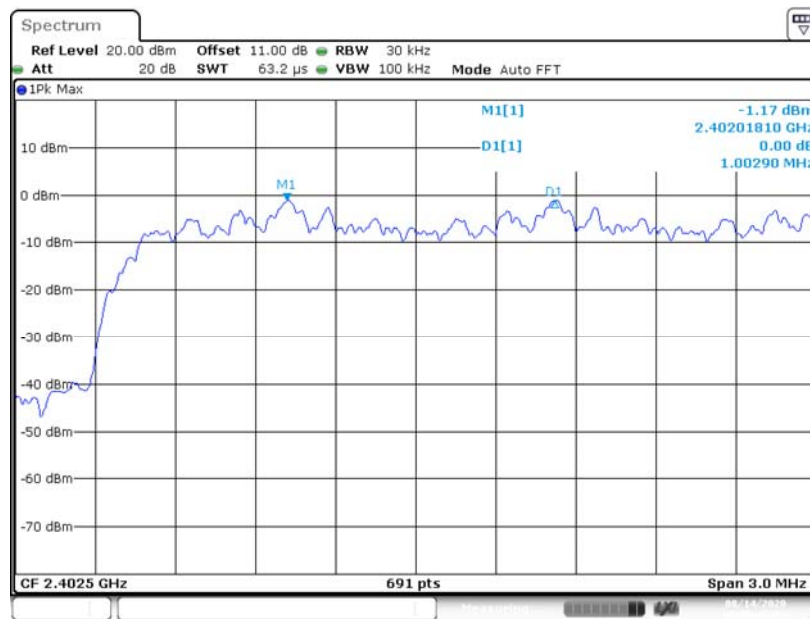


Date: 14.AUG.2020 18:06:49

EDR ($\pi/4$ -DQPSK): Middle Channel

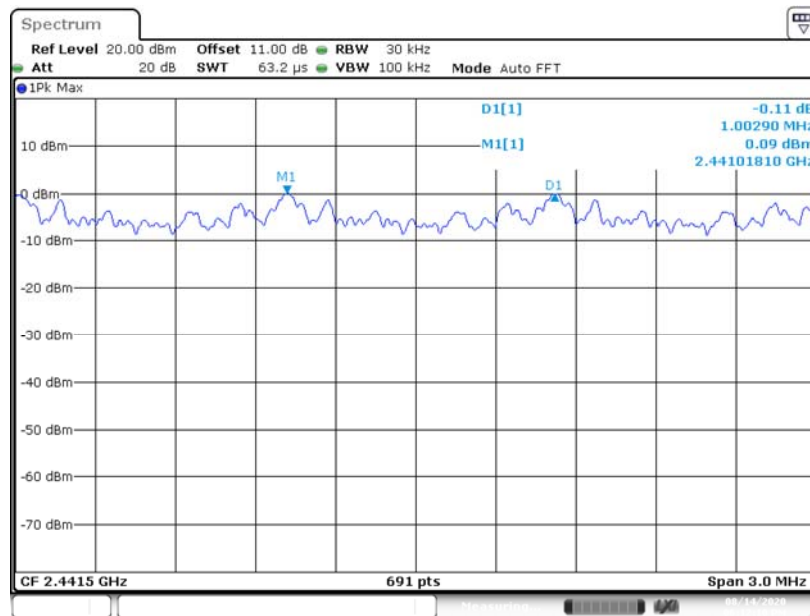


Date: 14.AUG.2020 18:12:10


EDR ($\pi/4$ -DQPSK): High Channel

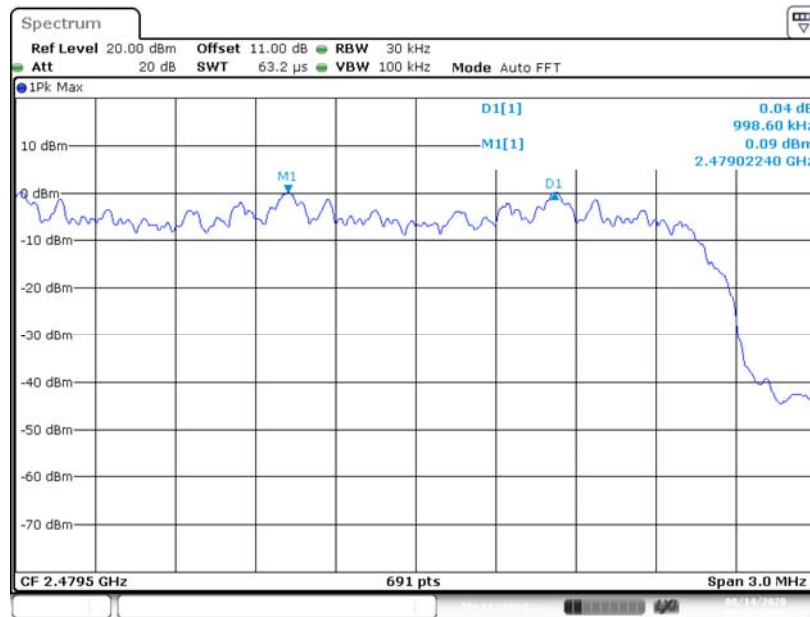


EDR (8DPSK): Low Channel

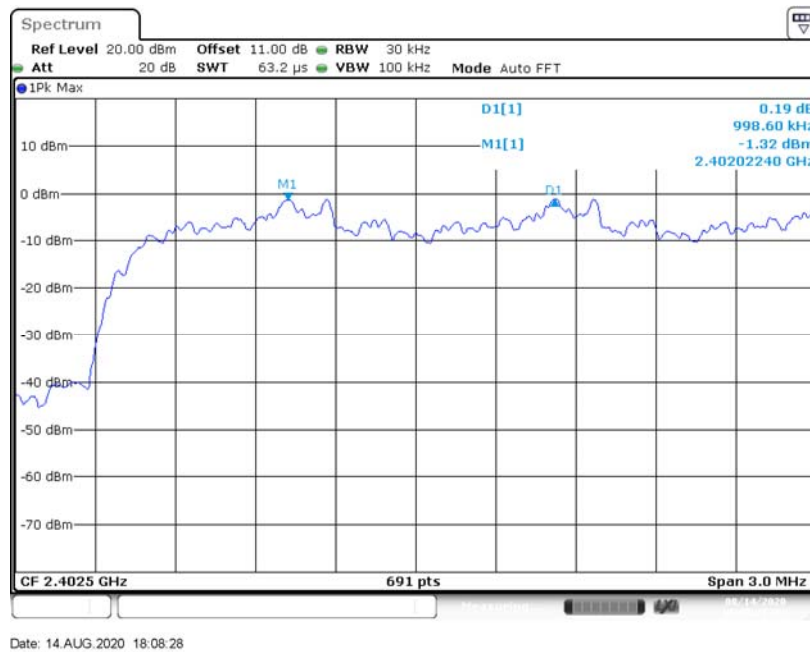

EDR (8DPSK): Middle Channel

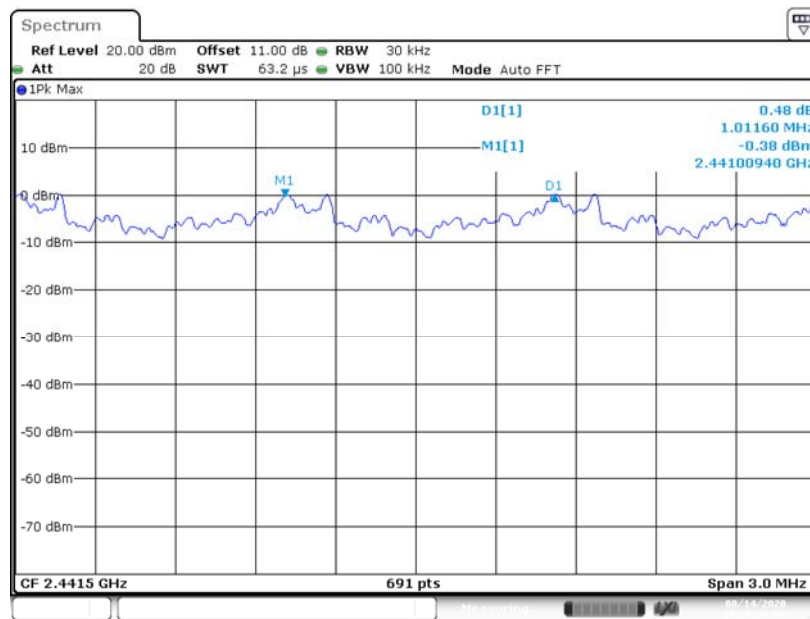

EDR (8DPSK): High Channel

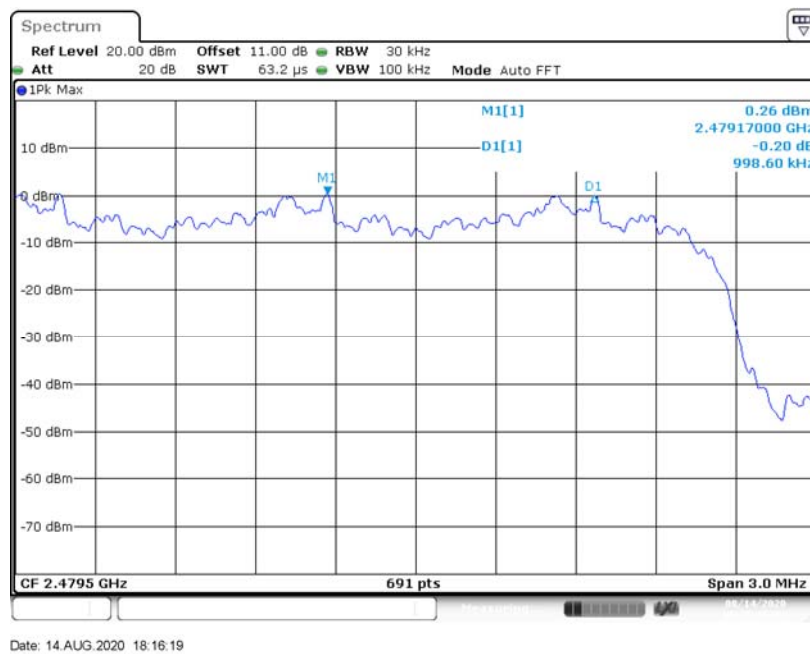

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH**Applicable Standard**

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.3 kPa


The testing was performed by CK Huang on 2020-08-14.

EUT operation mode: Transmitting

Test Result: Compliant.

Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.950
	Middle	2441	0.950
	High	2480	0.950
EDR ($\pi/4$-DQPSK)	Low	2402	1.311
	Middle	2441	1.317
	High	2480	1.317
EDR (8DPSK)	Low	2402	1.311
	Middle	2441	1.311
	High	2480	1.311

BDR (GFSK): Low Channel

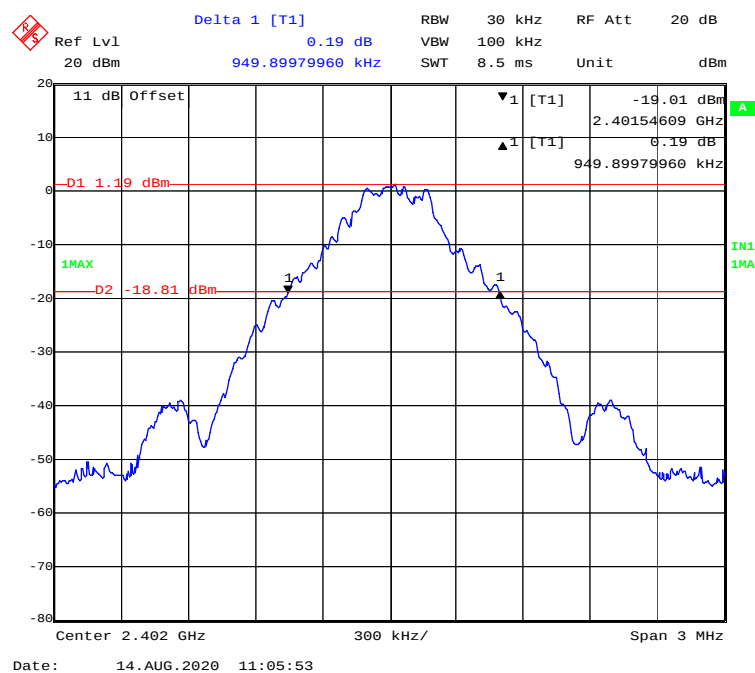

Delta 1 [T1] 0.60 dB

RBW 30 kHz RF Att 20 dB

Ref Lvl 20 dBm VBW 100 kHz

20 dBm 949.89979960 kHz SWT 8.5 ms Unit dBm

11 dB Offset

▼1 [T1] -17.90 dBm

▲1 [T1] 0.60 dB

-D1 2.25 dBm

1MAX

-D2 -17.75 dBm

1

IN1 IMA

Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 14.AUG.2020 10:53:49

Delta 1 [T1] 0.17 dB

RBW 30 kHz VBW 100 kHz SWT 8.5 ms RF Att 20 dB

Ref Lvl 20 dBm

Unit dBm

11 dB Offset

-D1 2.43 dBm

▼1 [T1] -17.69 dBm

▲1 [T1] 2.47954609 GHz

0.17 dB

949.89979960 kHz

1MAX

-D2 -17.57 dBm

IN1 1MA

Center 2.48 GHz 300 kHz/ Span 3 MHz

Date: 14. AUG. 2020 10:54:53

Delta 1 [T1] 0.97 dB RBW 30 kHz RF Att 20 dB
 Ref Lvl 20 dBm 1.31062124 MHz VBW 100 kHz Unit dBm
 20 dBm 8.5 ms

11 dB Offset
 D1 0.9 dBm
 1MAX
 D2 -19.1 dBm
 1
 -19.30 dBm
 2.40135972 GHz
 0.97 dB
 1.31062124 MHz
 IN1
 1MA

Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 14. AUG. 2020 10:58:04

Delta 1 [T1] 0.21 dB RBW 30 kHz RF Att 20 dB

Ref Lvl 20 dBm VBW 100 kHz Unit dBm

20 dBm 1.31663327 MHz

11 dB Offset

D1 1.91 dBm

1 [T1] -18.24 dBm

2.44035972 GHz

0.21 dB

1.31663327 MHz

1MAX

D2 -18.09 dBm

1


IN1

1MA


Center 2.441 GHz 300 kHz/ Span 3 MHz

Date: 14. AUG. 2020 10:58:53


EDR ($\pi/4$ -DQPSK): High Channel

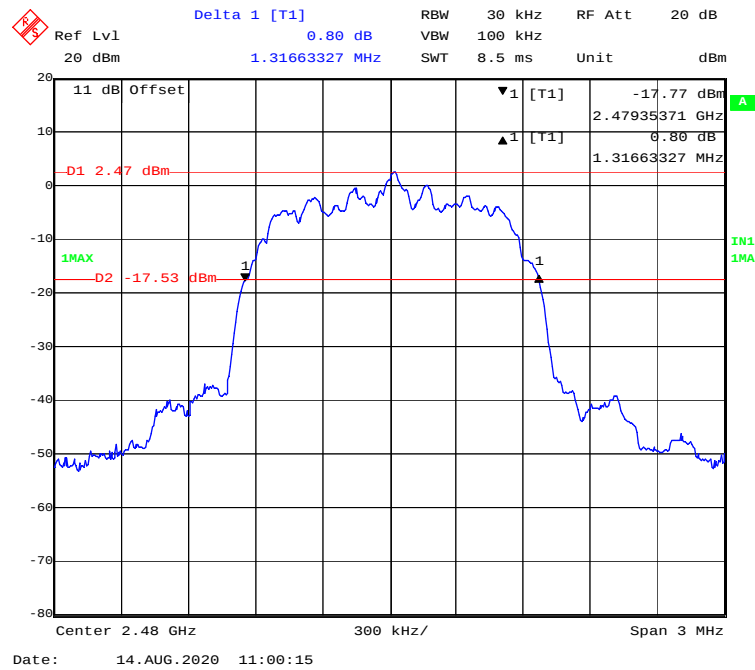


EDR (8DPSK): Low Channel

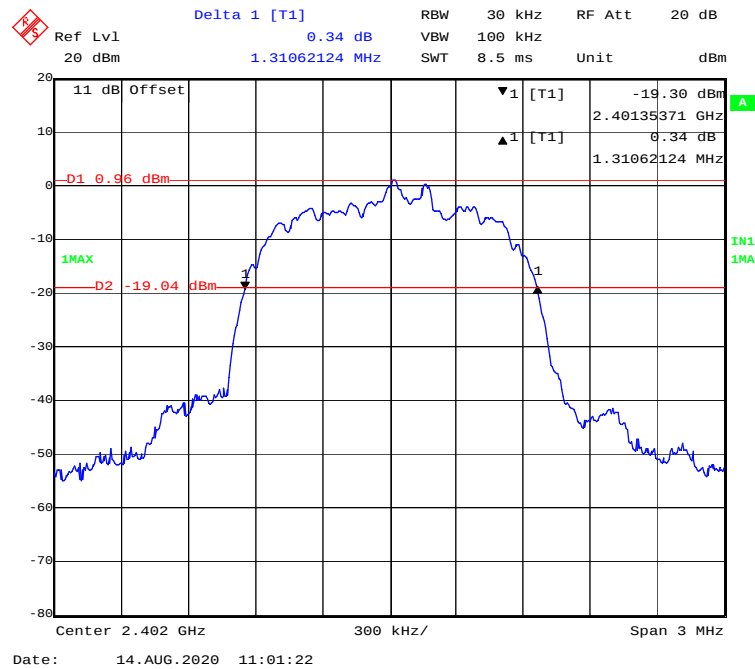

EDR (8DPSK): Middle Channel

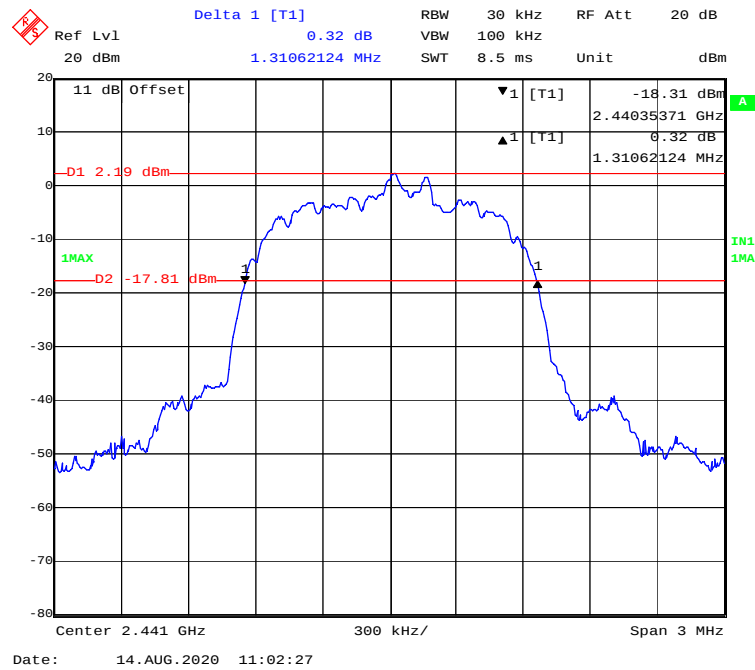

EDR (8DPSK): High Channel

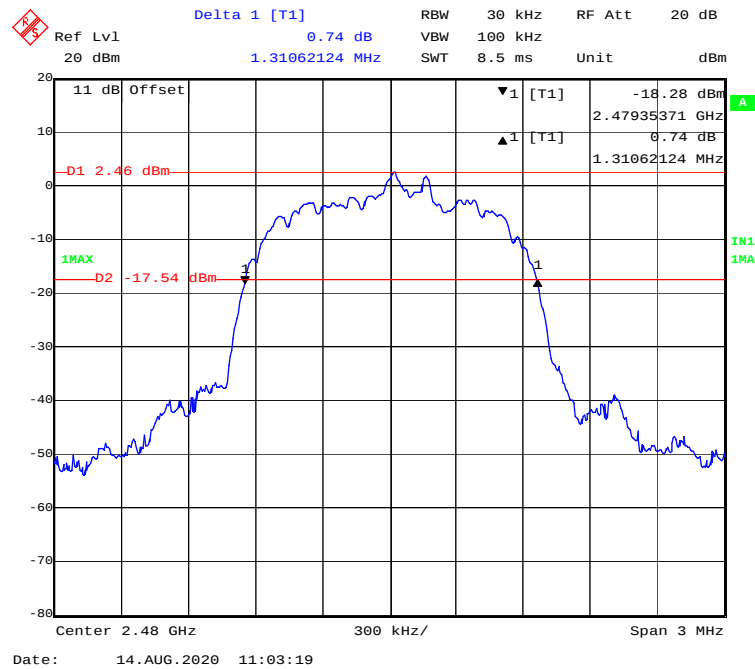

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST**Applicable Standard**

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c. VBW $\geq$ RBW.
- d. Sweep: Auto.
- e. Detector function: Peak.
- f. Trace: Max hold.
- g. Allow the trace to stabilize.

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies.

Test Data**Environmental Conditions**

Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.5 kPa


The testing was performed by CK Huang on 2020-08-14.

EUT operation mode: Hopping


Test Result: Compliant.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR ($\pi/4$ -DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15


BDR (GFSK): Number of Hopping Channels

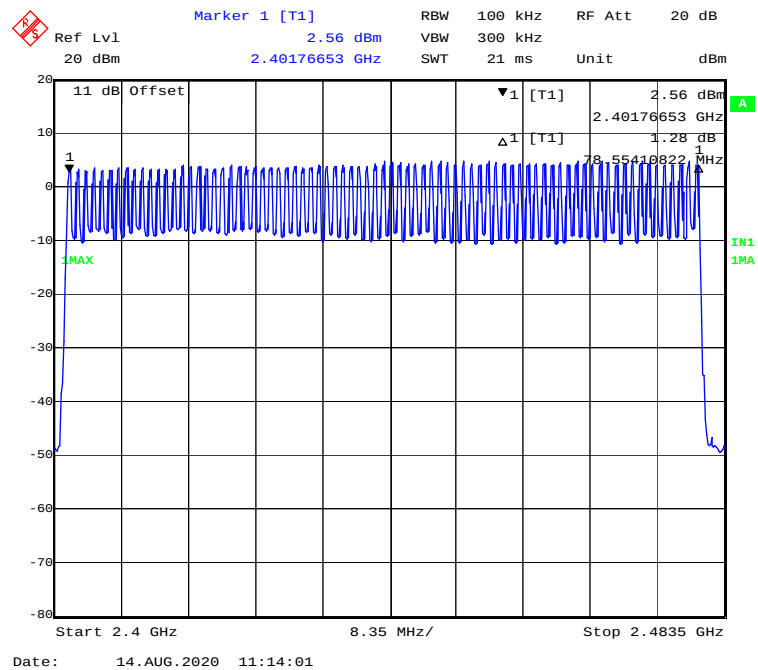

EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

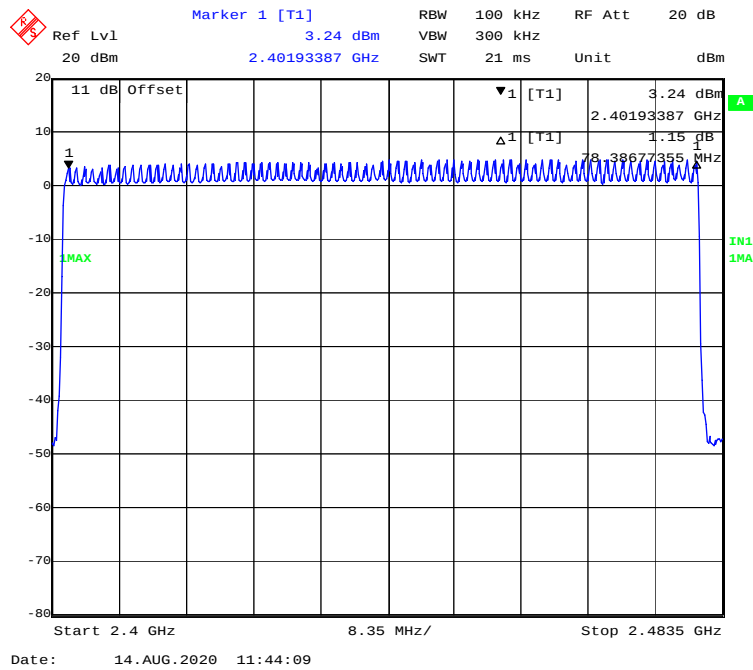

EDR (8DPSK): Number of Hopping Channels

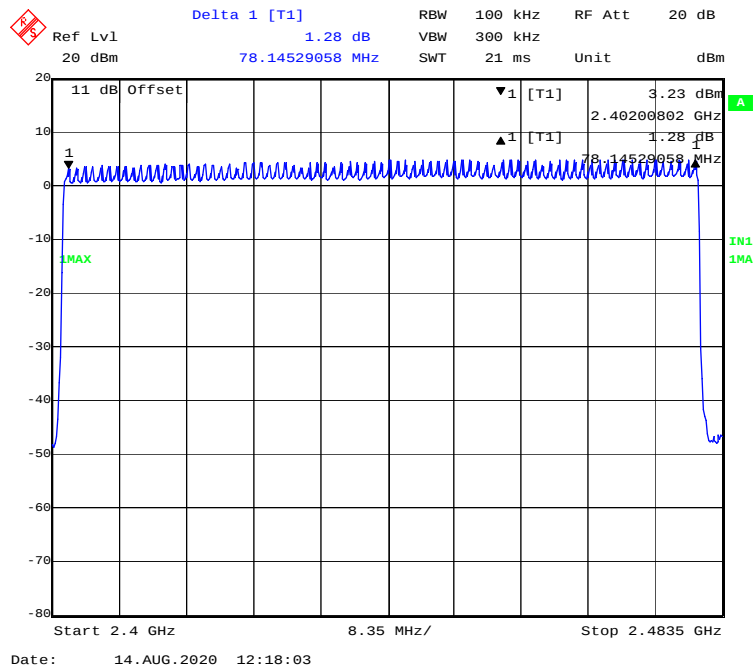

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)**Applicable Standard**

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a Span: Zero span, centered on a hopping channel.
- b RBW shall be $\leq$ channel spacing and where possible RBW should be set $\geq 1 / T$, where T is the expected dwell time per channel.
- c Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d Detector function: Peak.
- e Trace: Max hold.

Test Data**Environmental Conditions**


Temperature:	25.4 °C
Relative Humidity:	51 %
ATM Pressure:	101.2 kPa

The testing was performed by CK Huang on 2020-8-14.


EUT operation mode: Hopping

Mode		Channel	Pulse Width (ms)	Dwell Time (s)	Limit (s)	Result
BDR (GFSK)	DH1	Low	0.393	0.126	0.4	Pass
		Middle	0.389	0.124	0.4	Pass
		High	0.389	0.124	0.4	Pass
		Note: DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	DH3	Low	1.649	0.264	0.4	Pass
		Middle	1.673	0.268	0.4	Pass
		High	1.655	0.265	0.4	Pass
		Note: DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	DH5	Low	2.918	0.311	0.4	Pass
		Middle	2.926	0.312	0.4	Pass
		High	2.910	0.310	0.4	Pass
		Note: DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR ($\pi/4$ -DQPSK)	2DH1	Low	0.403	0.129	0.4	Pass
		Middle	0.401	0.128	0.4	Pass
		High	0.407	0.130	0.4	Pass
		Note: 2DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	2DH3	Low	1.661	0.266	0.4	Pass
		Middle	1.703	0.272	0.4	Pass
		High	1.667	0.267	0.4	Pass
		Note: 2DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	2DH5	Low	2.934	0.313	0.4	Pass
		Middle	2.950	0.315	0.4	Pass
		High	2.934	0.313	0.4	Pass
		Note: 2DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				
EDR (8DPSK)	3DH1	Low	0.411	0.132	0.4	Pass
		Middle	0.403	0.129	0.4	Pass
		High	0.405	0.130	0.4	Pass
		Note:3 DH1:Dwell time = Pulse time*(1600/2/79)*31.6S				
	3DH3	Low	1.709	0.273	0.4	Pass
		Middle	1.673	0.268	0.4	Pass
		High	1.667	0.267	0.4	Pass
		Note: 3DH3:Dwell time = Pulse time*(1600/4/79)*31.6S				
	3DH5	Low	2.942	0.314	0.4	Pass
		Middle	2.950	0.315	0.4	Pass
		High	2.926	0.312	0.4	Pass
		Note: 3DH5:Dwell time = Pulse time*(1600/6/79)*31.6S				


BDR (GFSK): Pulse time, Low Channel, DH1

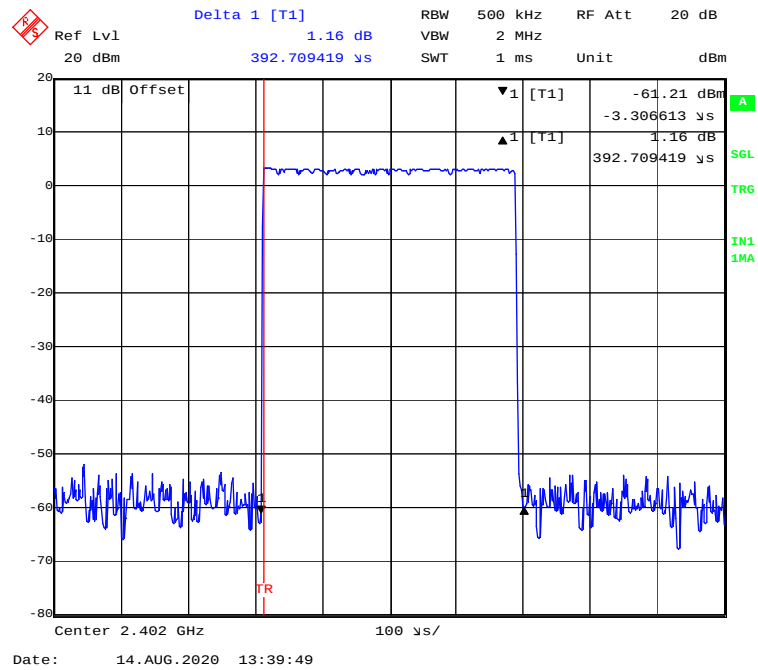


BDR (GFSK): Pulse time, Middle Channel, DH1

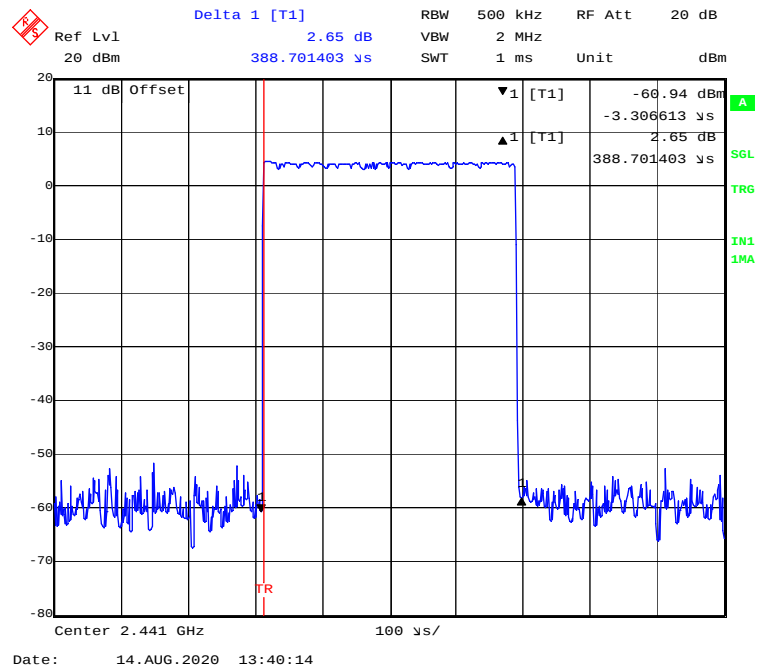


BDR (GFSK): Pulse time, High Channel, DH1

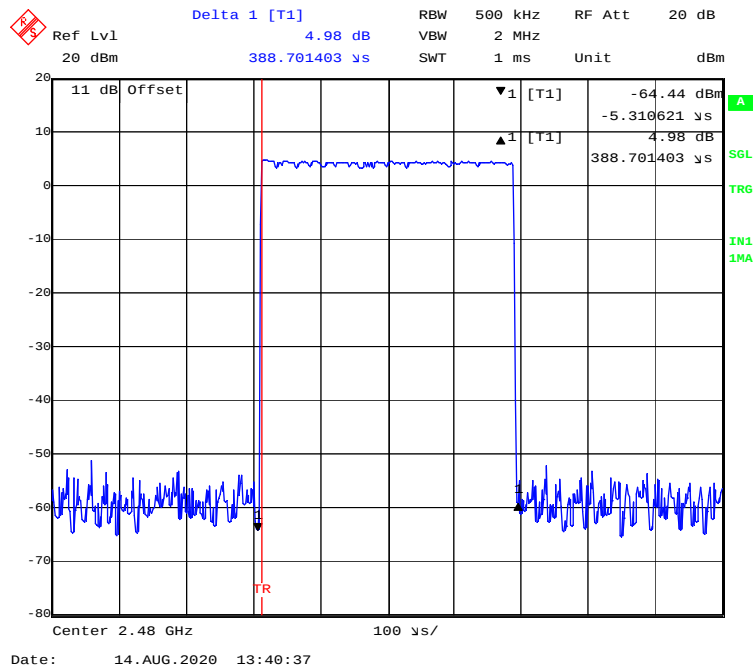


BDR (GFSK): Pulse time, Low Channel, DH3

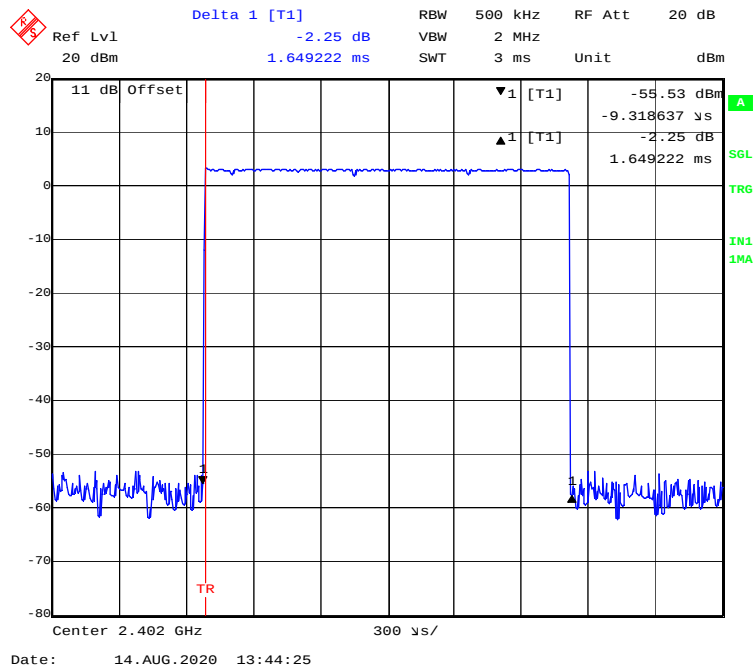


BDR (GFSK): Pulse time, Middle Channel, DH3

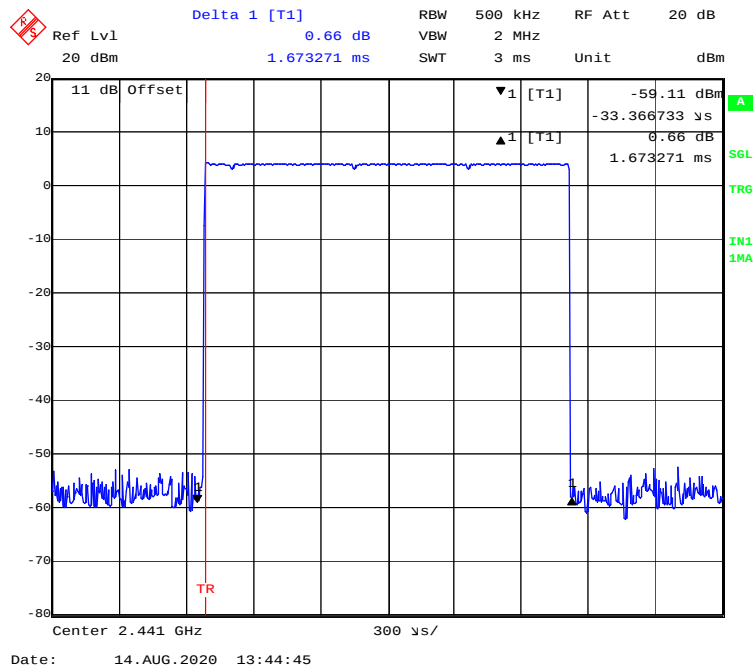


BDR (GFSK): Pulse time, High Channel, DH3

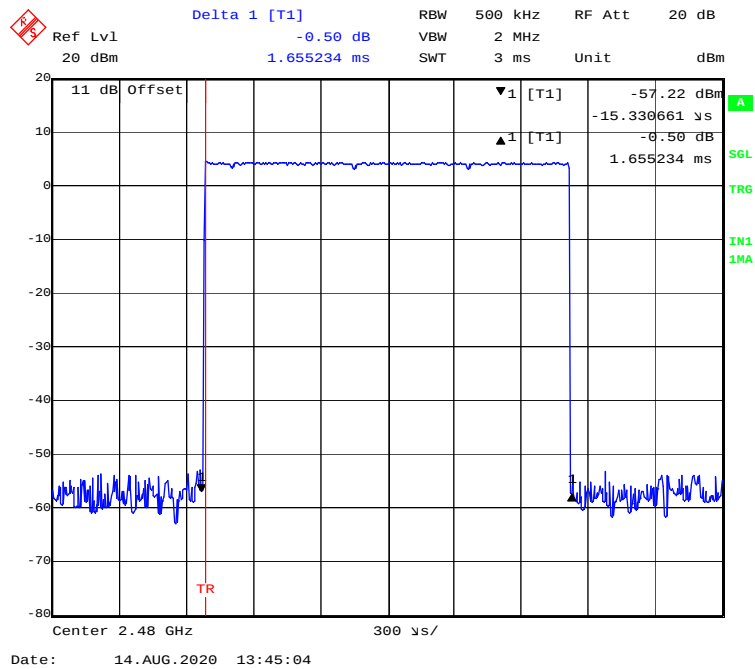


BDR (GFSK): Pulse time, Low Channel, DH5

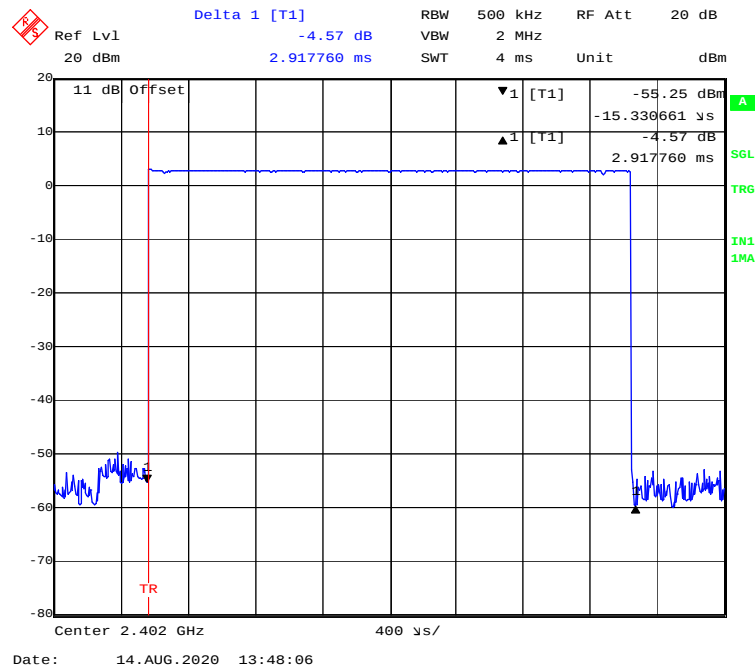


BDR (GFSK): Pulse time, Middle Channel, DH5

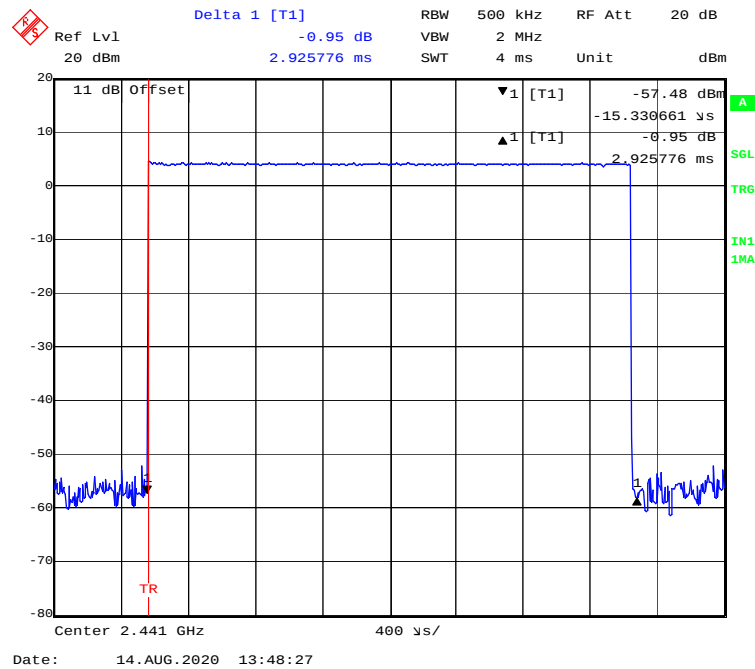


BDR (GFSK): Pulse time, High Channel, DH5

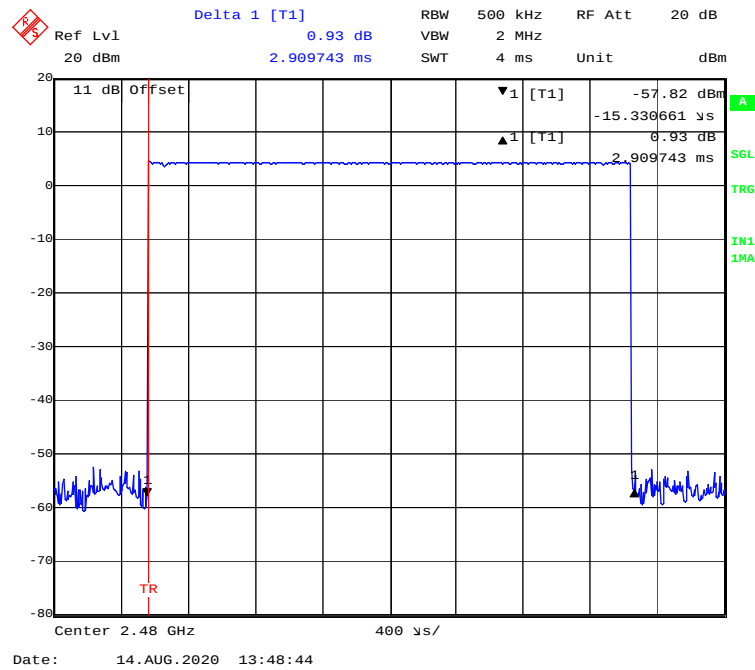


EDR ($\pi/4$ -DQPSK): Pulse time, Low Channel, 2DH1

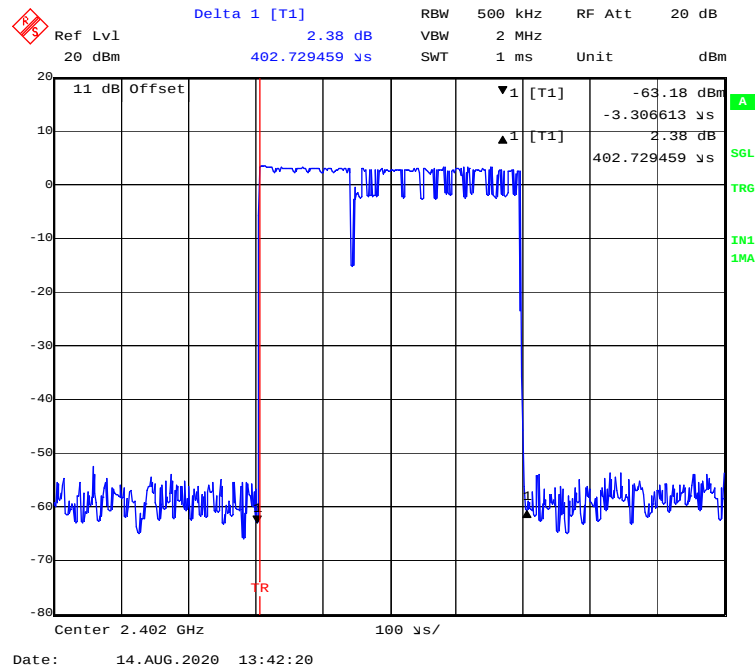


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH1

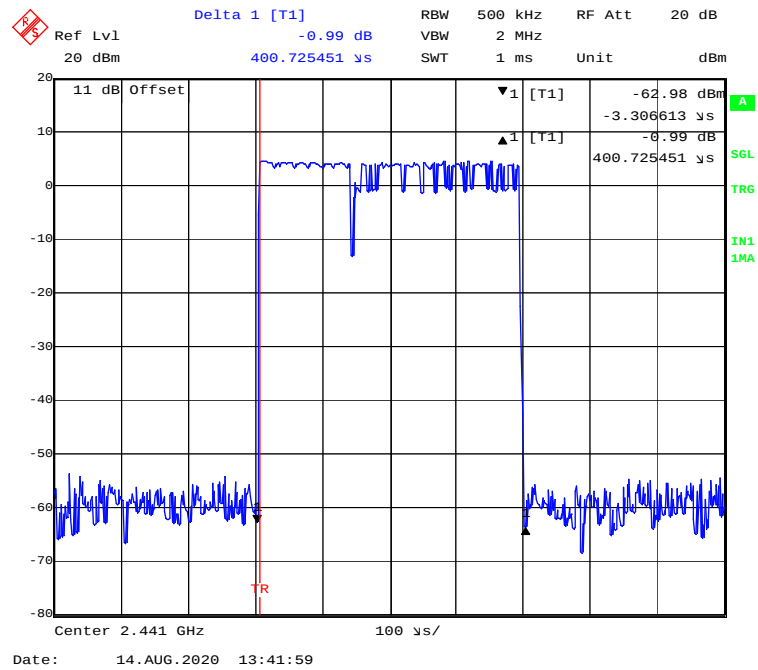


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH1


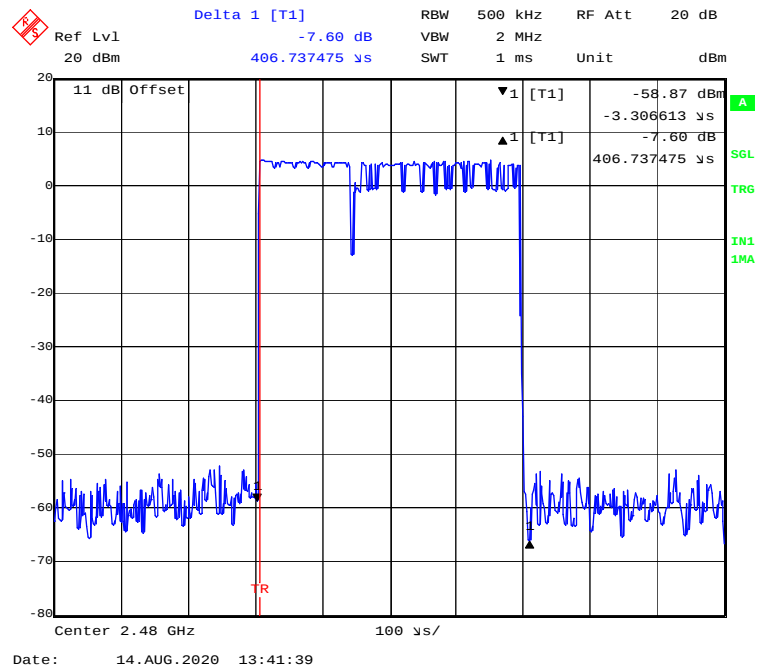


EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH3

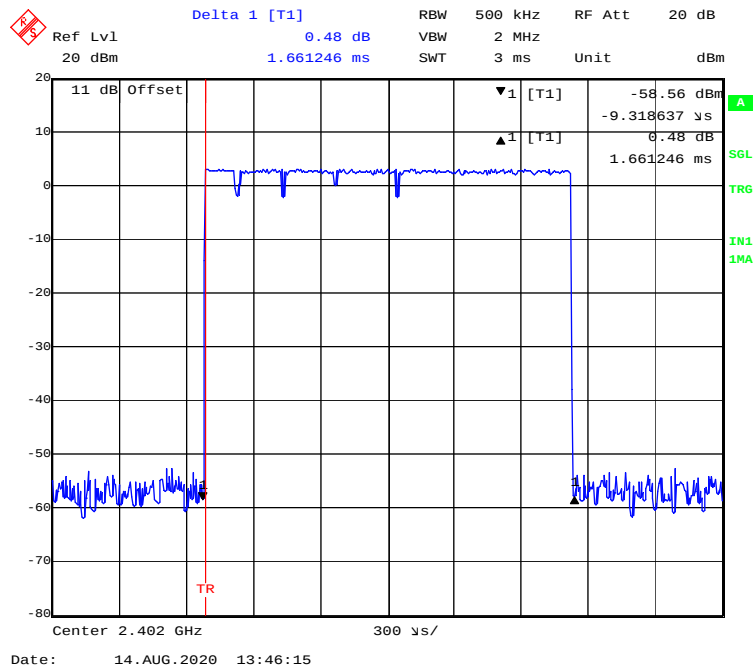


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH3

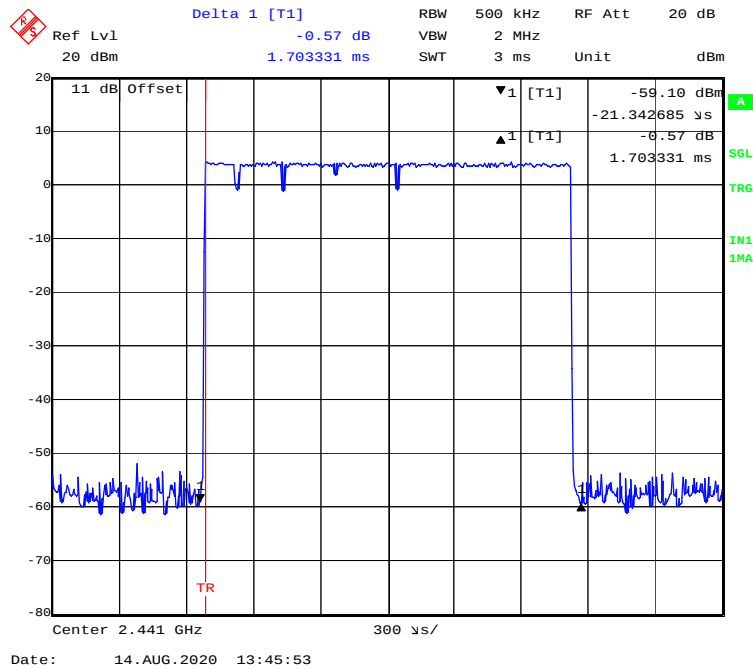


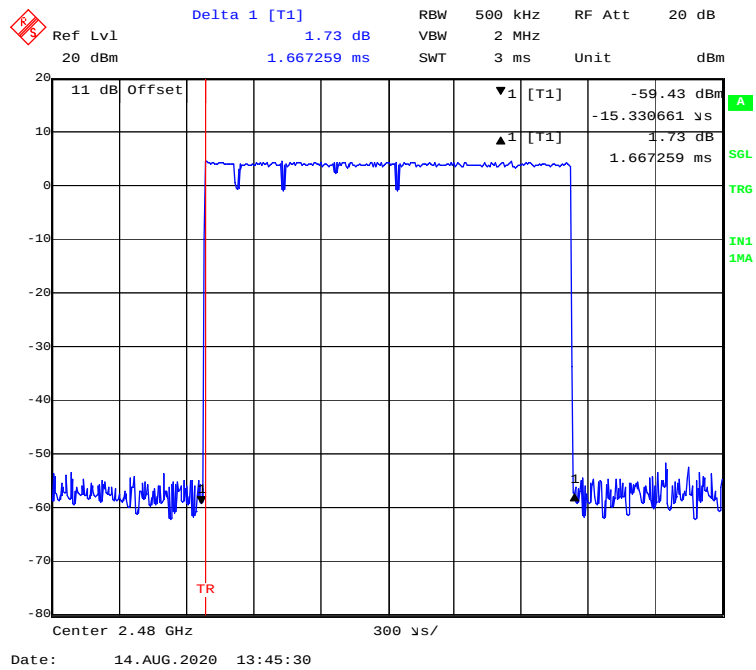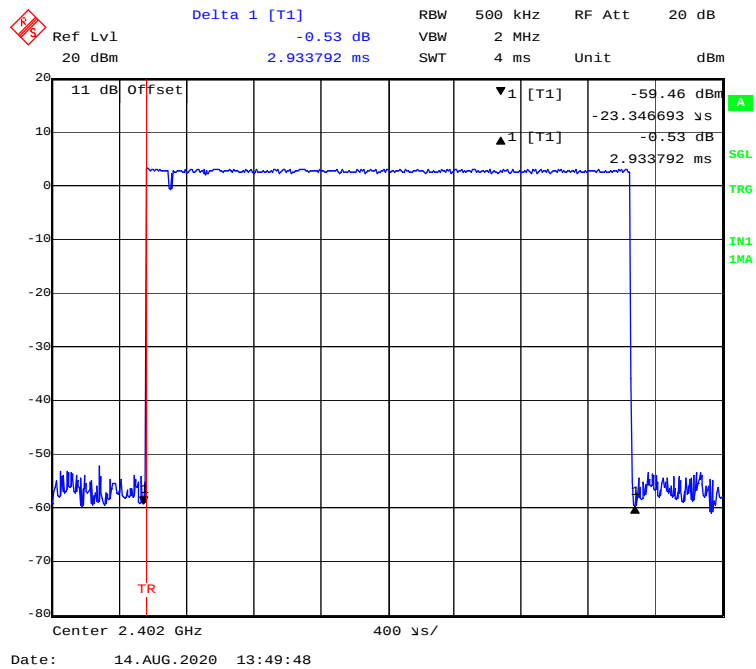EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH3**EDR ($\pi/4$ -DQPSK):Pulse time, Low Channel, 2DH5**


EDR ($\pi/4$ -DQPSK):Pulse time, Middle Channel, 2DH5

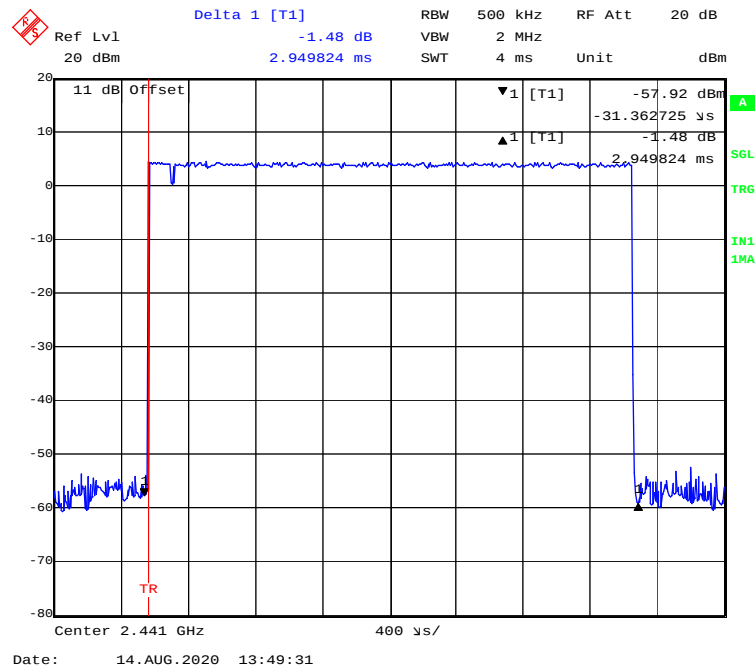


EDR ($\pi/4$ -DQPSK):Pulse time, High Channel, 2DH5


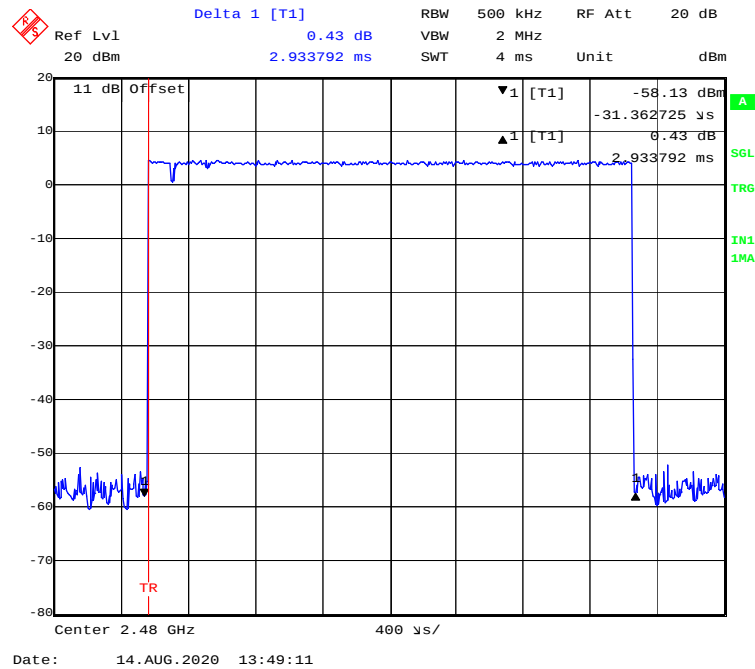




EDR (8DPSK): Pulse time, Low Channel, 3DH1

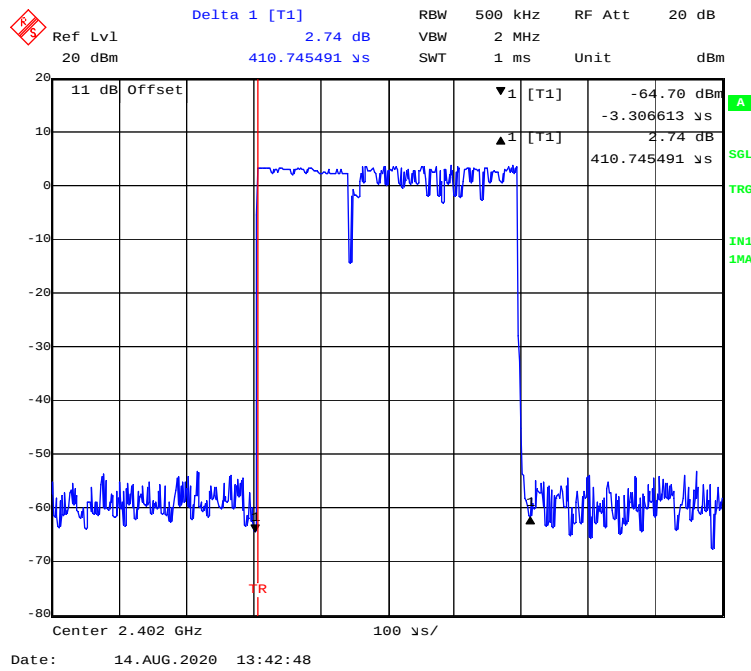


EDR (8DPSK): Pulse time, Middle Channel, 3DH1

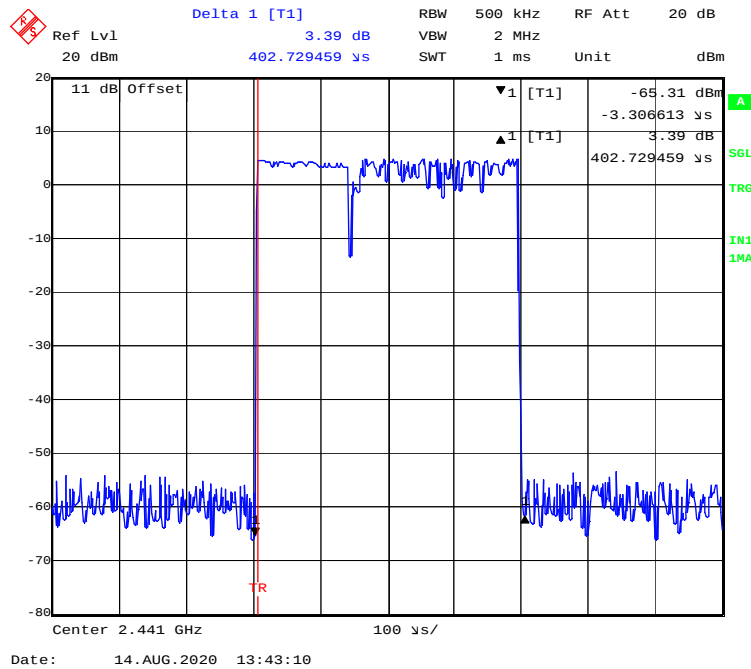

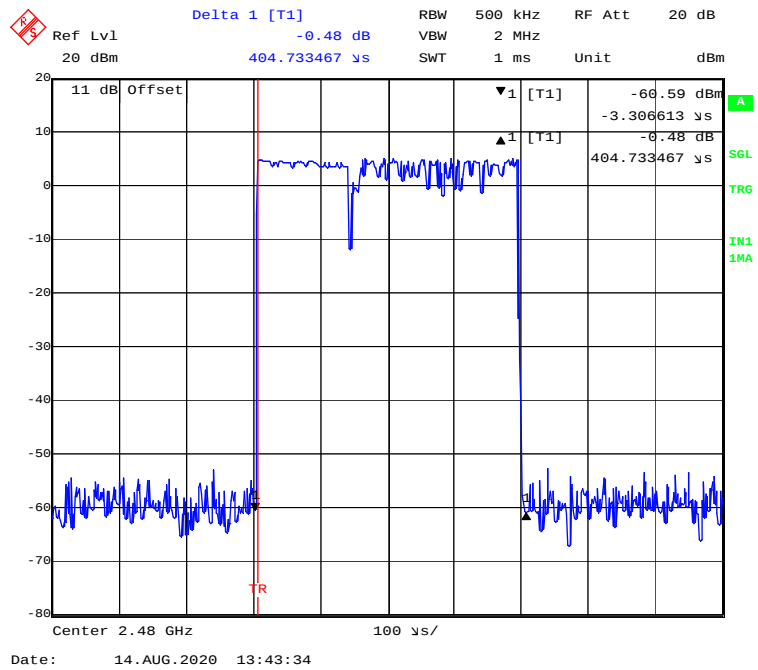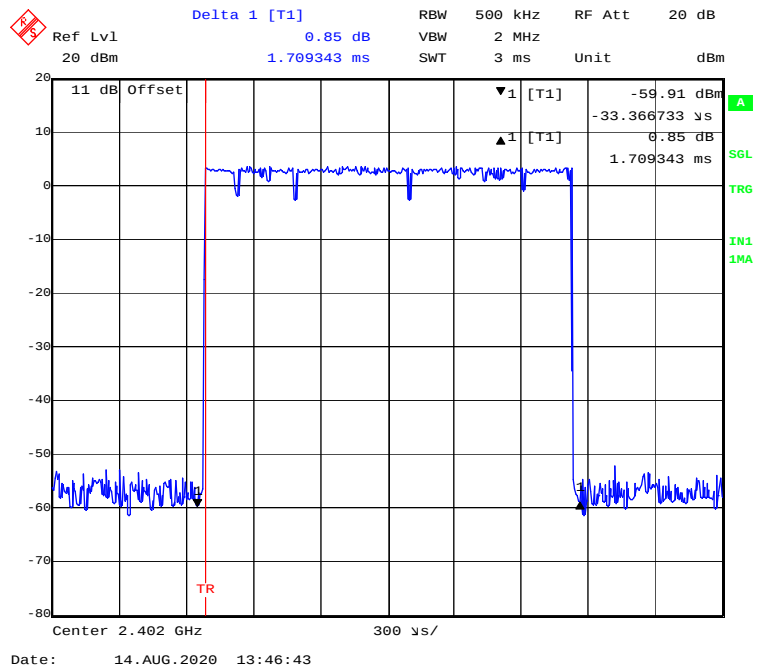
EDR (8DPSK): Pulse time, High Channel, 3DH1**EDR (8DPSK): Pulse time, Low Channel, 3DH3**

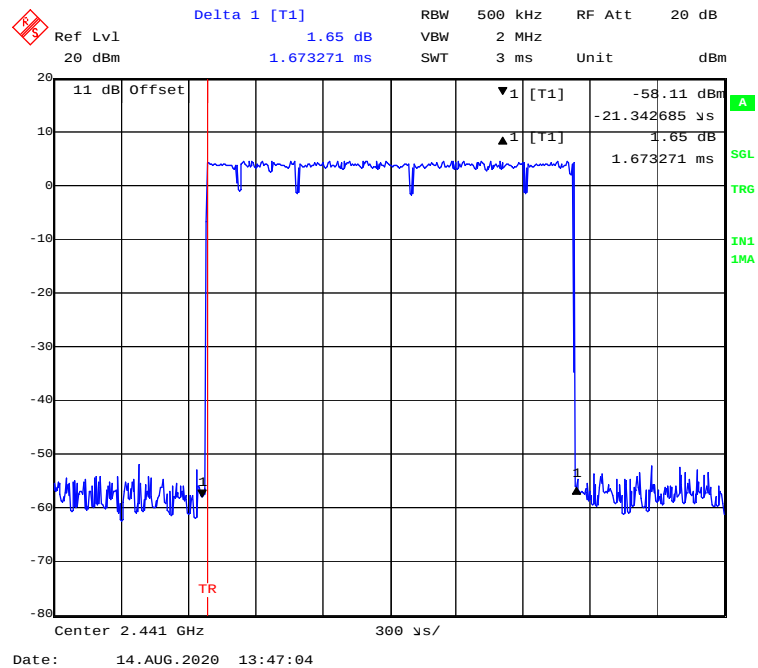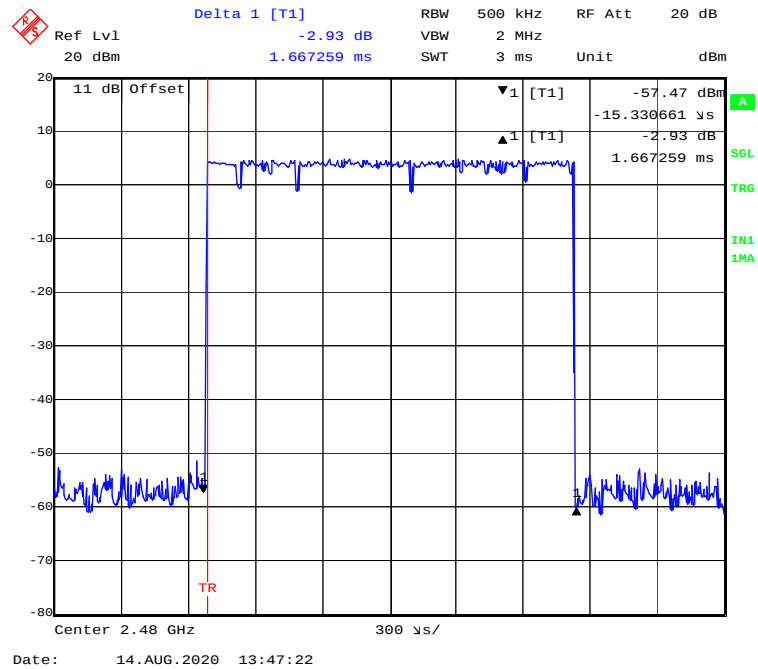EDR (8DPSK): Pulse time, Middle Channel, 3DH3**EDR (8DPSK): Pulse time, High Channel, 3DH3**


EDR (8DPSK): Pulse time, Low Channel, 3DH5

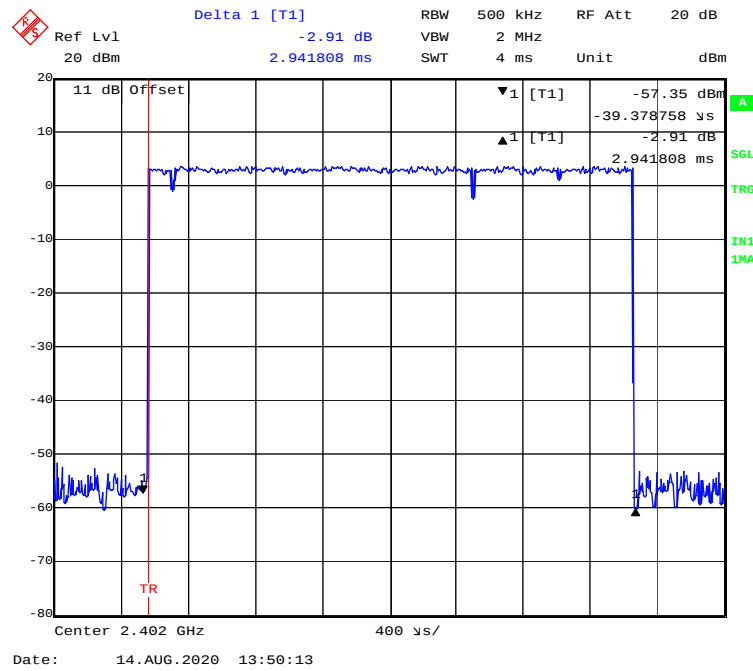

EDR (8DPSK): Pulse time, Middle Channel, 3DH5

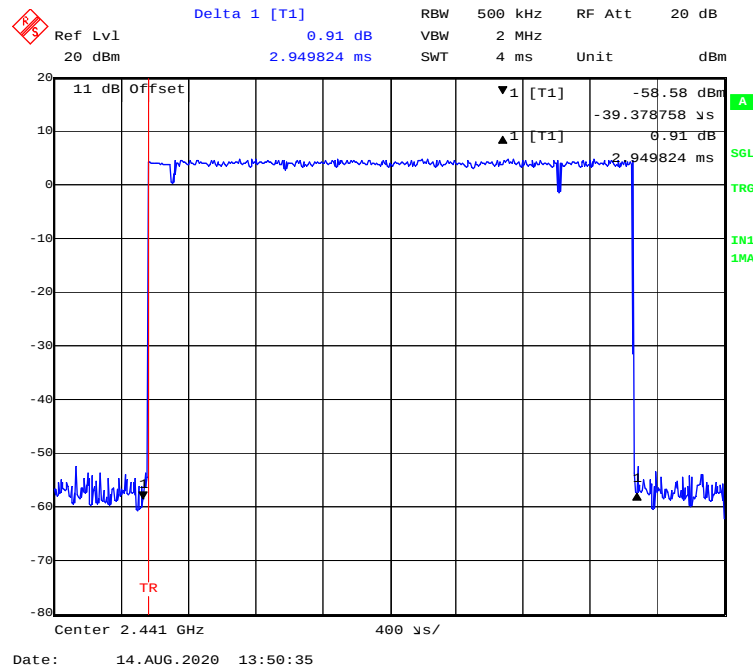

EDR (8DPSK): Pulse time, High Channel, 3DH5

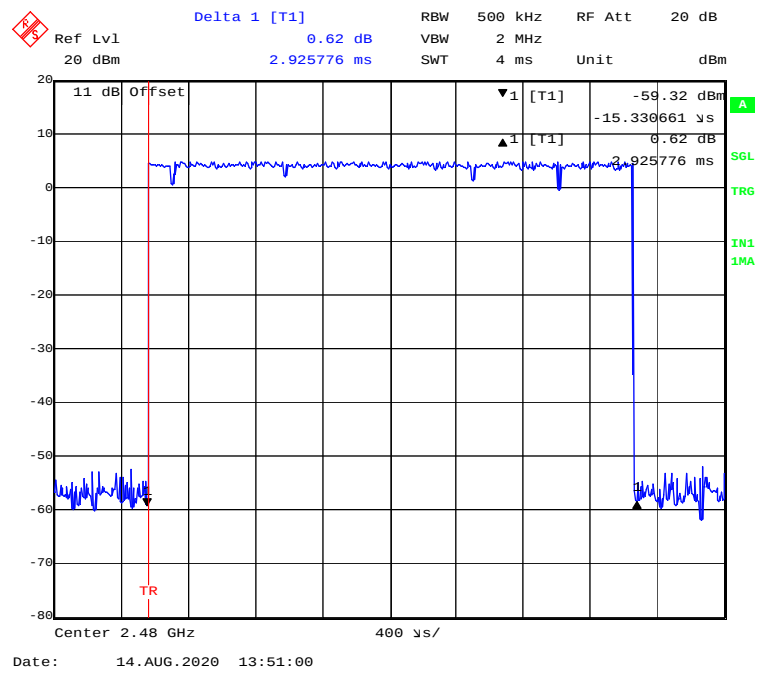

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT**Applicable Standard**

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

- a. Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW $\geq$ RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b. Allow trace to stabilize.
- c. Use the marker-to-peak function to set the marker to the peak of the emission.
- d. The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e. A plot of the test results and setup description shall be included in the test report.

Test Data**Environmental Conditions**


Temperature:	25.2 °C
Relative Humidity:	50 %
ATM Pressure:	101.2 kPa

The testing was performed by CK Huang on 2020-08-14.


EUT operation mode: Transmitting

Test Result: Compliant.


Mode	Frequency (MHz)	Output Power		Limit (mW)
		(dBm)	(mW)	
BDR (GFSK)	2402	3.48	2.23	1000
	2441	4.62	2.90	1000
	2480	4.81	3.03	1000
EDR ($\pi/4$-DQPSK)	2402	5.74	3.75	125
	2441	6.88	4.88	125
	2480	7.12	5.15	125
EDR (8DPSK)	2402	6.19	4.16	125
	2441	7.35	5.43	125
	2480	7.47	5.58	125

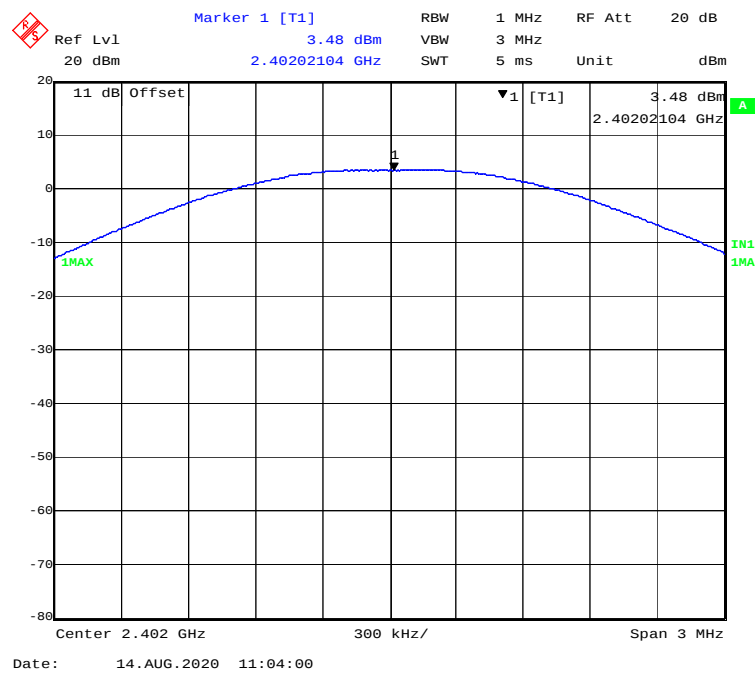BDR (GFSK): 2402MHz


BDR (GFSK): 2441MHz

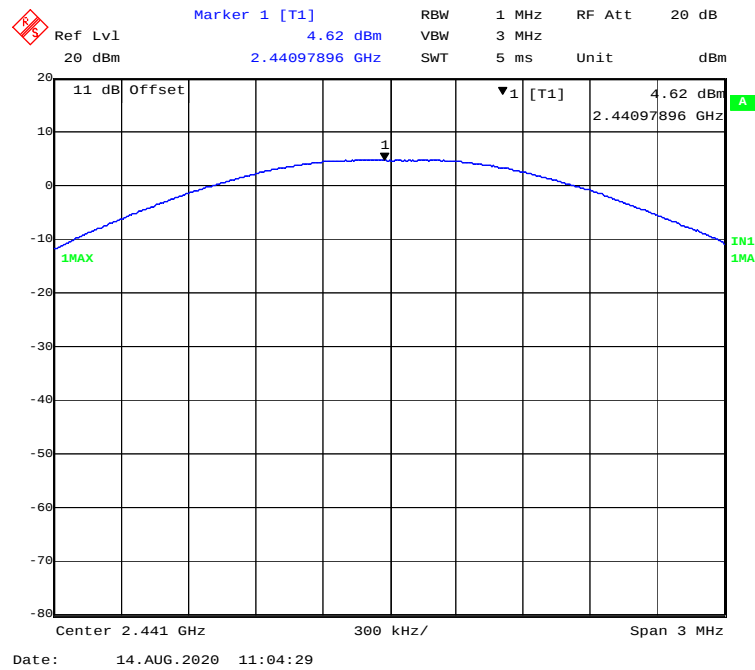


BDR (GFSK): 2480MHz

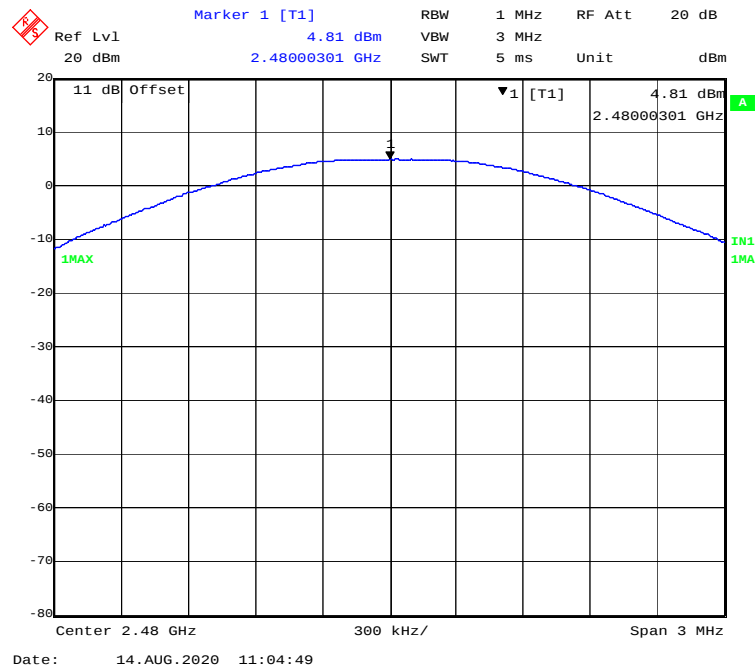


EDR($\pi/4$ -DQPSK): 2402MHz

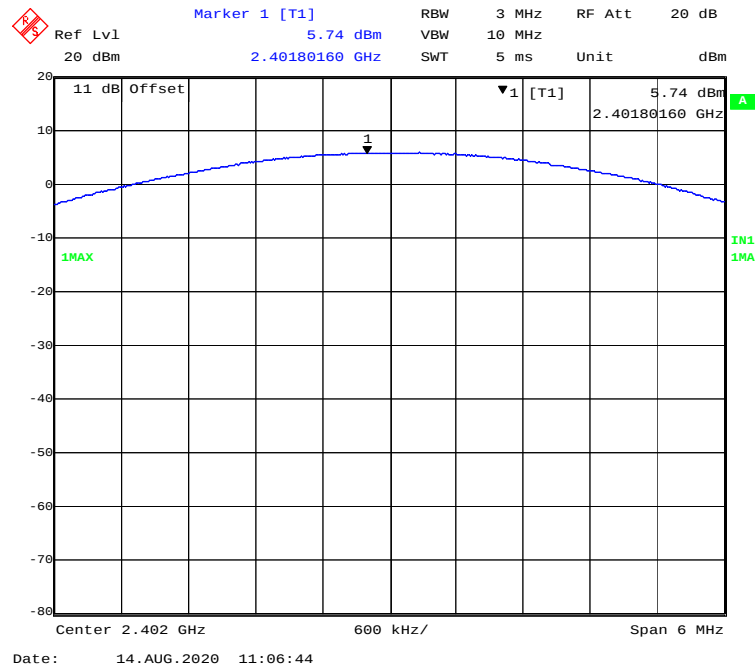


EDR($\pi/4$ -DQPSK): 2441MHz

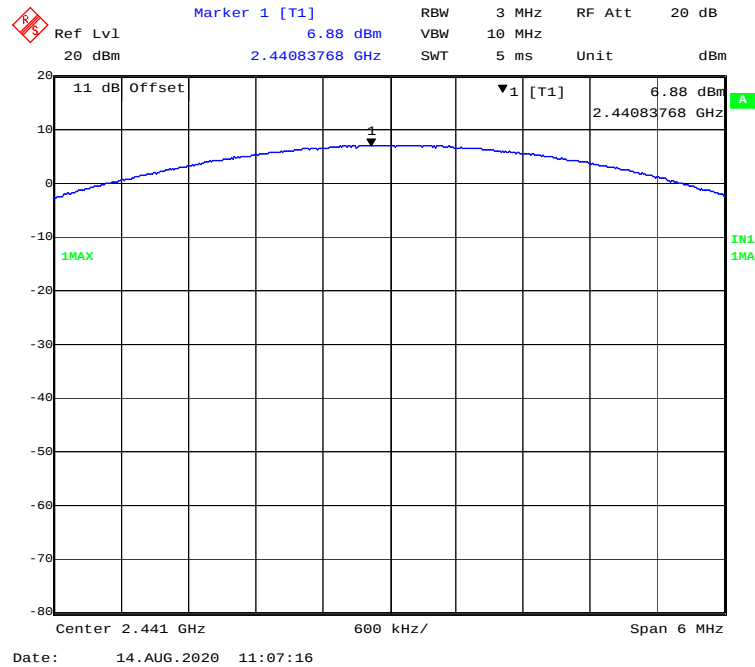


EDR($\pi/4$ -DQPSK): 2480MHz

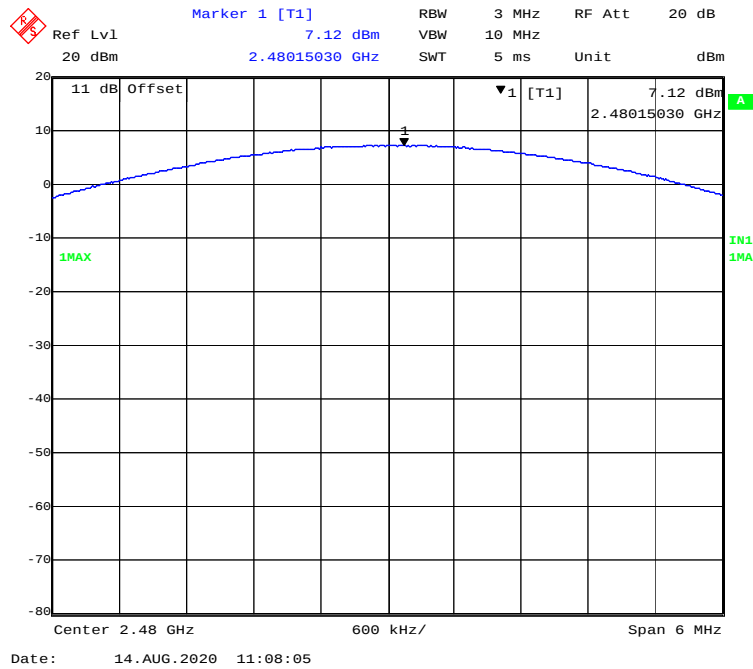


EDR(8DPSK): 2402MHz

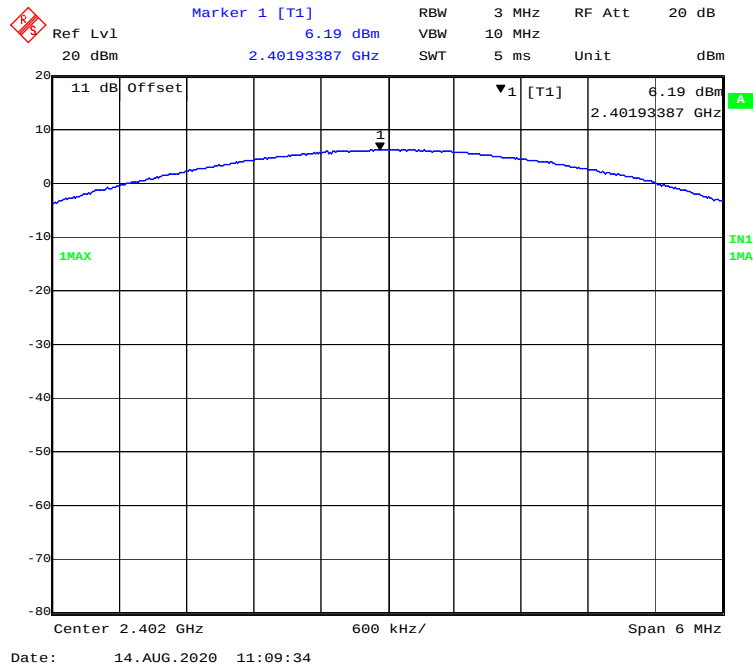

EDR(8DPSK): 2441MHz

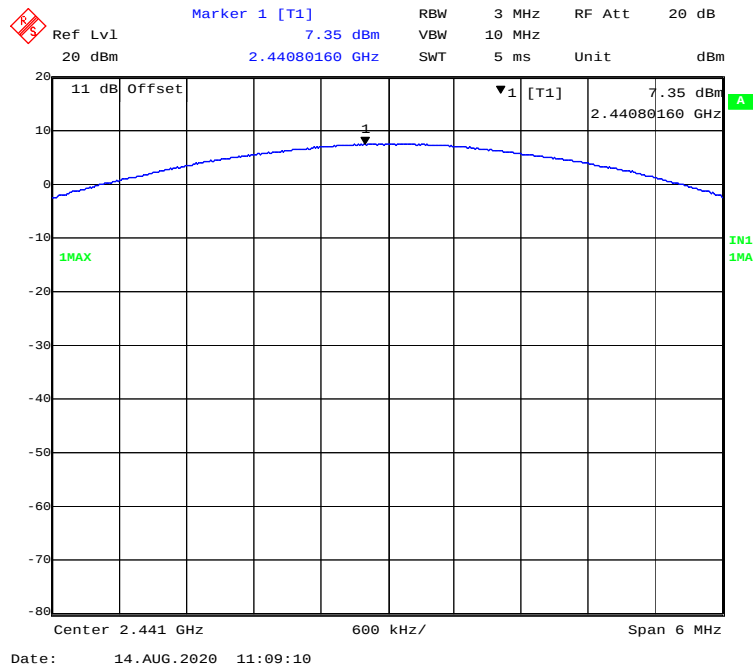

EDR(8DPSK): 2480MHz

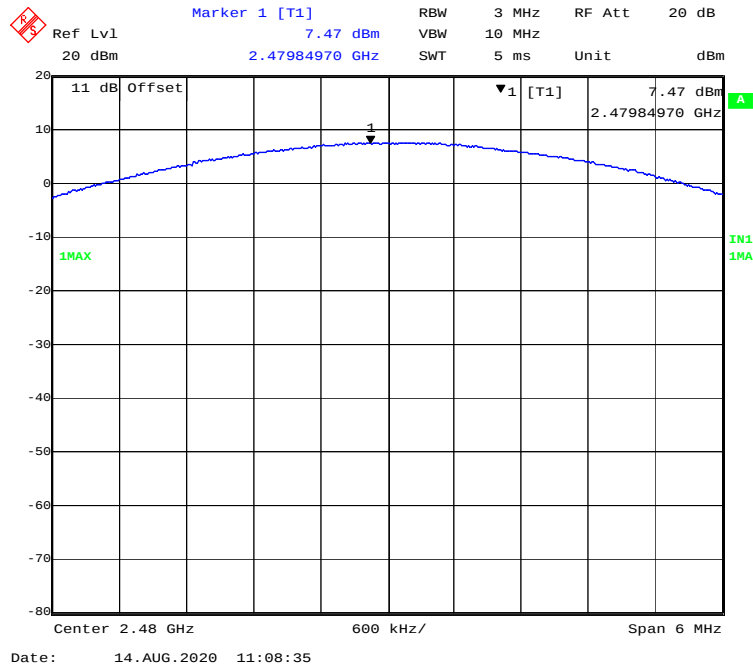

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates Compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	50 %
ATM Pressure:	101.6 kPa


The testing was performed by CK Huang on 2020-08-14.

EUT operation mode: Transmitting & Hopping


Test Result: Compliant.

Band Edge


BDR (GFSK): Left Side

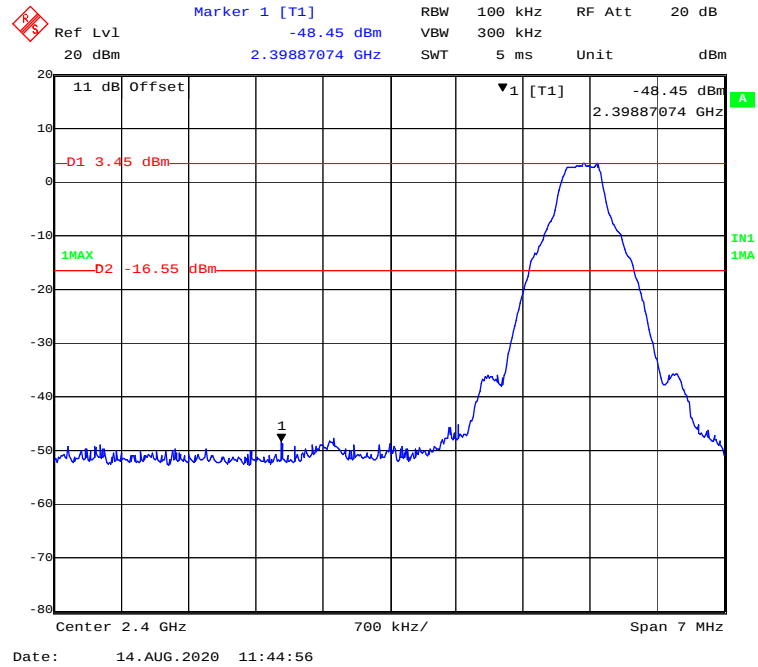


BDR (GFSK): Right Side

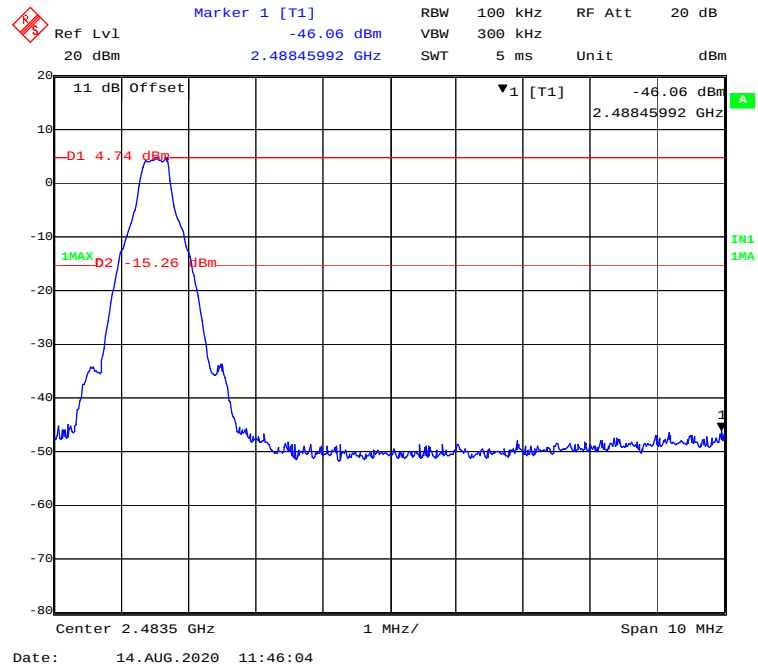


EDR ($\pi/4$ -DQPSK): Left Side

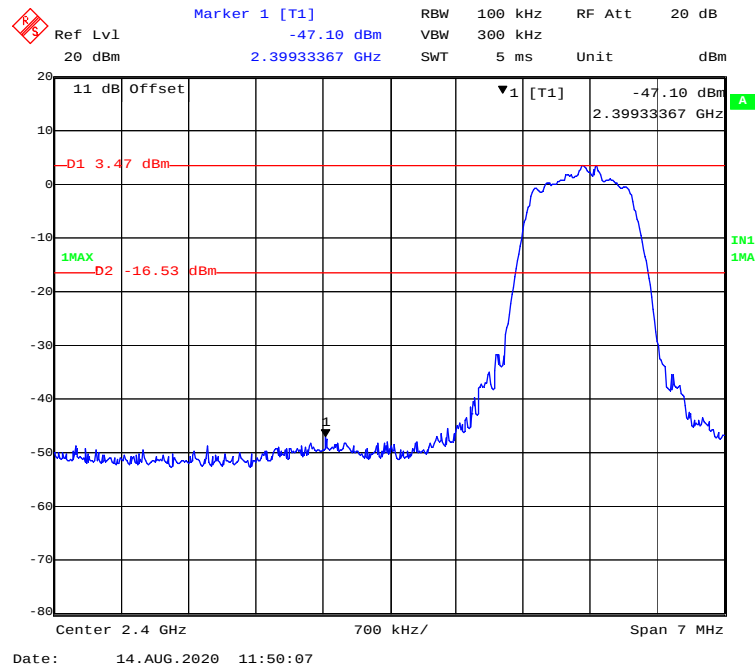


EDR ($\pi/4$ -DQPSK): Right Side

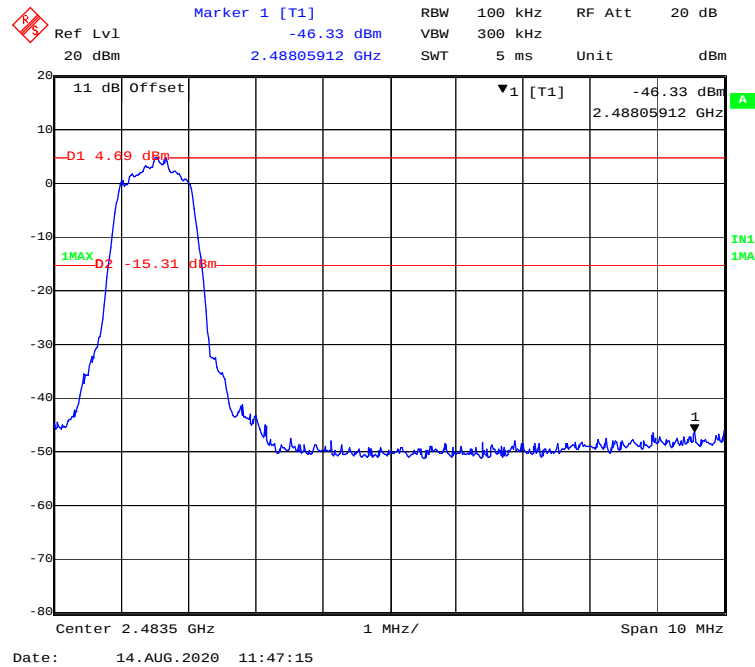

EDR (8DPSK): Left Side

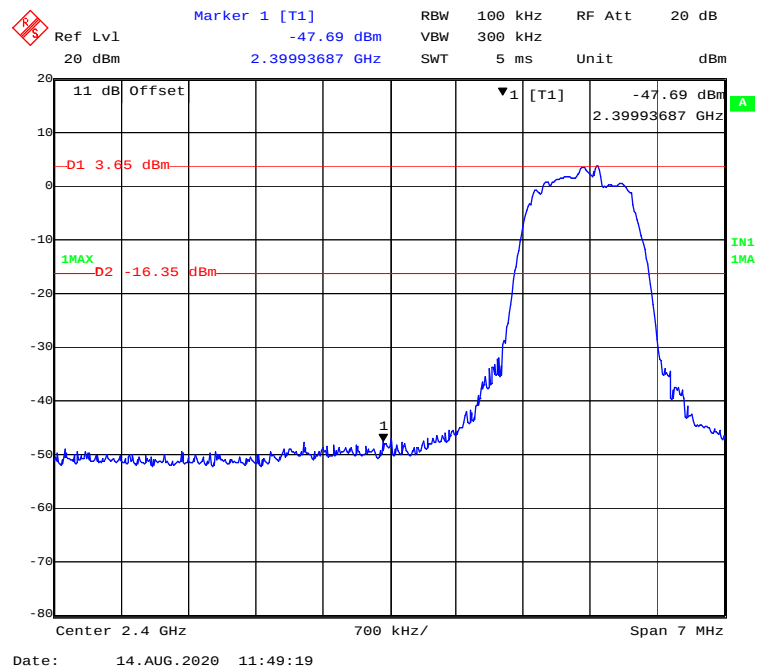

EDR (8DPSK): Right Side

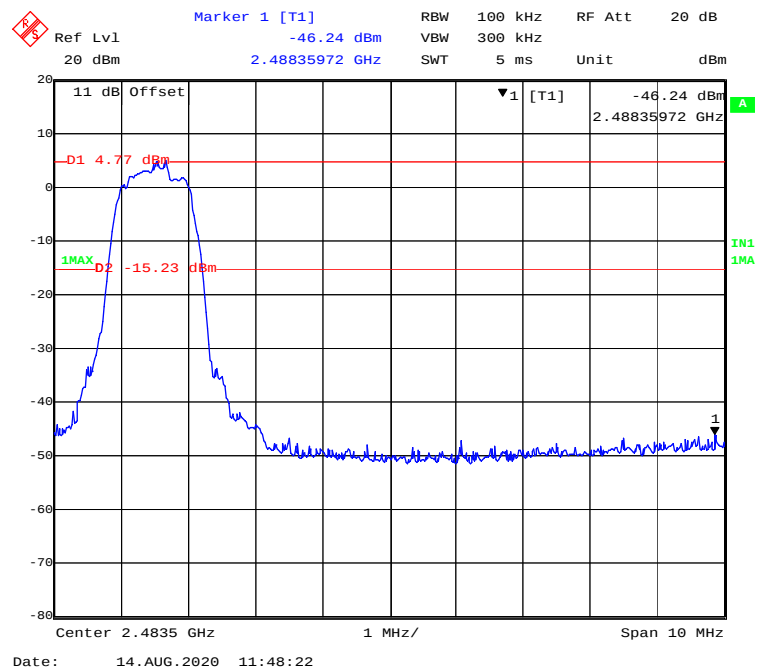

Spectrum

Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz
 Att 20 dB SWT 37.9 μ s VBW 300 kHz Mode Auto FFT

1Pk Max

M1[1] -48.37 dBm 2.3960780 GHz

D1 2.160 dBm
 D2 -17.840 dBm

CF 2.4 GHz 691 pts Span 10.0 MHz

Spectrum

Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz
Att 20 dB SWT 38 μ s VBW 300 kHz Mode Auto FFT

1Pk Max

10 dBm
0 dBm
-10 dBm
-20 dBm
-30 dBm
-40 dBm
-50 dBm
-60 dBm
-70 dBm

D1 3.620 dBm
D2 -16.380 dBm

M1[1] -47.67 dBm
2.4874510 GHz

M1

CF 2.4835 GHz 691 pts Span 15.0 MHz

Page 73 of 76

Spectrum

Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz
 Att 20 dB SWT 37.9 μs VBW 300 kHz Mode Auto FFT

● 1Pk Max

M1[1] -47.28 dBm
 2.3985820 GHz

D1 2.010 dBm
 D2 -17.990 dBm

M1

CF 2.4 GHz 691 pts Span 10.0 MHz

Spectrum

Ref Level 20.00 dBm Offset 11.00 dB RBW 100 kHz
 Att 20 dB SWT 38 μ s VBW 300 kHz Mode Auto FFT

1Pk Max

M1[1] -47.80 dBm 2.4841300 GHz


D1 3.490 dBm
 D2 -16.510 dBm

M1

CF 2.4835 GHz 691 pts Span 15.0 MHz


Page 74 of 76

EDR (8DPSK): Left Side- Hopping

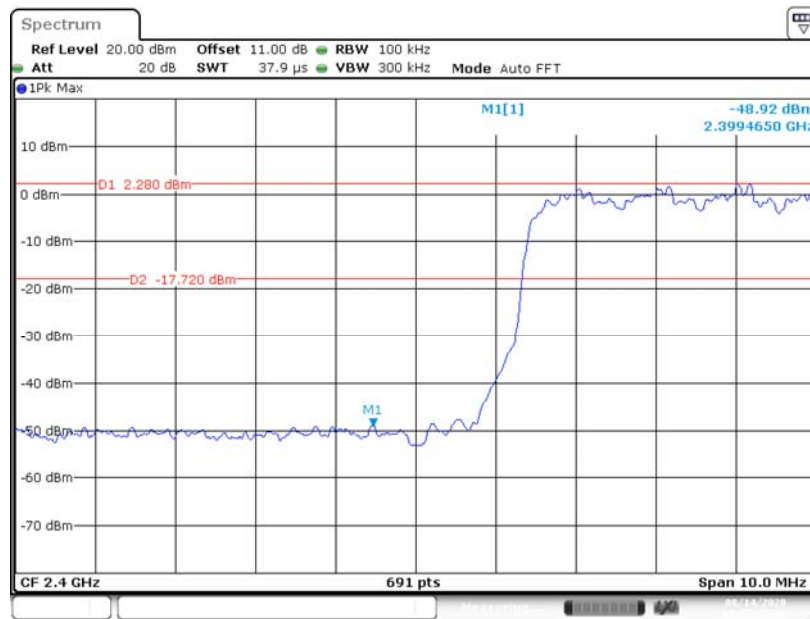

Date: 14.AUG.2020 17:53:37

EDR (8DPSK): Right Side- Hopping

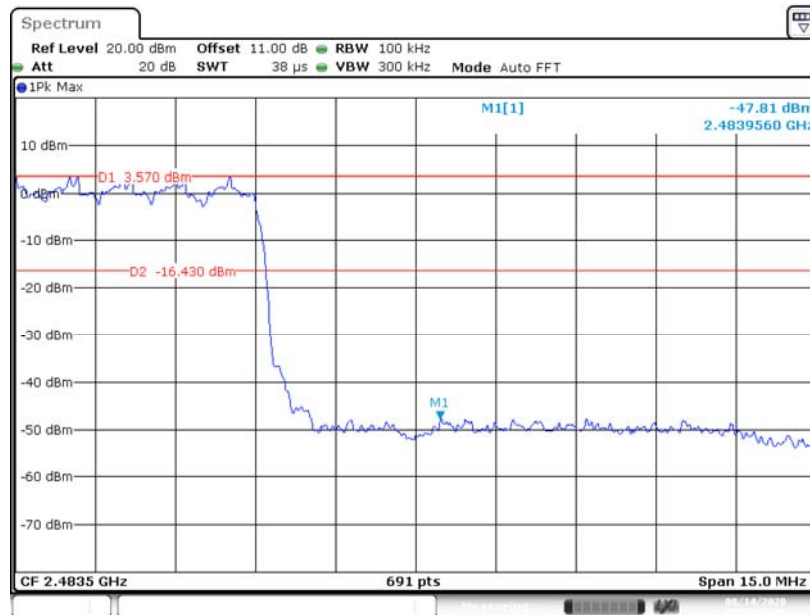

Date: 14.AUG.2020 17:57:57

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******