

# FCC 47 CFR PART 15 SUBPART C

## TEST REPORT

For

**Product Name:** Intelligent Biometric Identification Terminal

**Brand Name:** opzoon

**Model No.:** OFR-D1

**Series Model.:** N/A

**FCC ID:** 2AN4A-OPD1AA001

**Test Report Number:**  
**C170929R01-RPW**

Issued for

Opzoon Technology Co., Ltd.

11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022

Issued by

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China

TEL: 86-512-57355888

FAX: 86-512-57370818



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1. TEST RESULT CERTIFICATION.....</b>	<b>4</b>
<b>2. EUT DESCRIPTION.....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
3.1. EUT CONFIGURATION .....	6
3.2. EUT EXERCISE .....	6
3.3. GENERAL TEST PROCEDURES.....	6
3.4. FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5. DESCRIPTION OF TEST MODES.....	8
3.6. ANTENNA DESCRIPTION .....	8
<b>4. INSTRUMENT CALIBRATION.....</b>	<b>9</b>
4.1. MEASURING INSTRUMENT CALIBRATION .....	9
<b>5. FACILITIES AND ACCREDITATIONS .....</b>	<b>11</b>
5.1. FACILITIES .....	11
5.2. EQUIPMENT .....	11
5.3. LABORATORY ACCREDITATIONS AND LISTING .....	11
5.4. TABLE OF ACCREDITATIONS AND LISTINGS .....	12
<b>6. SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>13</b>
6.1. SETUP CONFIGURATION OF EUT .....	13
6.2. SUPPORT EQUIPMENT.....	13
<b>7. FCC PART 15.247 REQUIREMENTS.....</b>	<b>14</b>
7.1. 6DB BANDWIDTH .....	14
7.2. PEAK POWER .....	25
7.3. PEAK POWER SPECTRAL DENSITY .....	27
7.4. SPURIOUS EMISSIONS .....	38
7.5. RADIATED EMISSIONS .....	72
7.6. POWERLINE CONDUCTED EMISSIONS .....	88

## **Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	November 21, 2017	C170929R01-RPW	ALL	N/A

## 1. TEST RESULT CERTIFICATION

<b>Product Name:</b>	Intelligent Biometric Identification Terminal
<b>Trade Name:</b>	opzoon
<b>Model Name.:</b>	OFR-D1
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	mobile unit
<b>Date of Test:</b>	October 10,2017~November 19, 2017
<b>Applicant:</b>	<b>Opzoon Technology Co., Ltd.</b> 11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022
<b>Manufacturer:</b>	<b>Opzoon Technology Co., Ltd.</b> 11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

### We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.


The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**



Jeff.Fang  
RF Manager  
Compliance Certification Service Inc.

**Tested by:**



Lily.Wang  
Test Engineer  
Compliance Certification Service Inc.

## 2. EUT DESCRIPTION

<b>Product Name:</b>	Intelligent Biometric Identification Terminal		
<b>Brand Name:</b>	opzoom		
<b>Model Name:</b>	OFR-D1		
<b>Series Model:</b>	N/A		
<b>Model Discrepancy:</b>	N/A		
<b>Power Adapter:</b>	Power Adapter: Model :FSP050-DIBAN2 Input: 100-240V~,1.5A ,50-60Hz Output: 12.0V—4.16A MAX(50W MAX)		
<b>Frequency Range:</b>	IEEE 802.11b/g: 2412MHz to 2462 MHz IEEE 802.11n HT20: 2412MHz to 2462 MHz		
<b>Transmit Power:</b>	IEEE 802.11b mode: 21.65dBm IEEE 802.11g mode: 27.29dBm IEEE 802.11n HT20 mode: 26.24dBm		
<b>Modulation Technique:</b>	IEEE802.11b mode: DSSS (1,2,5.5 and 11 Mbps) IEEE802.11g mode: DSSS /OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11n HT20 mode: OFDM (MCS0~MCS15)		
<b>Number of Channels:</b>	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT20 : 11 Channels		
<b>Antenna Specification :</b>	Slot Antenna		
<b>Antenna Specification:</b>		Gain(dBi)	
		2.4G	BandI
		Antenna 1	3.96
<b>Beamforming Function:</b>	<input type="checkbox"/> With beamforming	2.04	3.40
		<input checked="" type="checkbox"/> Without beamforming	3.96
<b>Beamforming Function:</b>	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming	

**Remark:**

- 1.The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
- 2.This submittal(s) (test report) is intended for FCC ID: 2AN4A-OPD1AA001 filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

### **3. TEST METHODOLOGY**

The tests documented in this report were performed in accordance with ANSI C63.10 2013 and FCC CFR 47 15.207, 15.209 and 15.247.

#### **3.1. EUT CONFIGURATION**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

#### **3.2. EUT EXERCISE**

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

#### **3.3. GENERAL TEST PROCEDURES**

##### **Conducted Emissions**

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.10 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

##### **Radiated Emissions**

###### **Under 1GHz**

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

###### **Above 1GHz**

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

### 3.4.FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5.DESCRIPTION OF TEST MODES

The worst-case data rates:

IEEE802.11b mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 1Mbps data rate was chosen for full testing.

IEEE802.11g mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)

Channel High (2462MHz) with 6Mbps data rate was chosen for full testing.

IEEE 802.11n HT20 MHz Channel mode:

Channel Low (2412MHz)

Channel Mid (2437MHz)


Channel High (2462MHz) with MCS0data rate was chosen for full testing.

### 3.6.ANTENNA DESCRIPTION

**According to FCC 47 CFR 15.203**

“an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section”

As the photo below, the EUT use a unique coupling to the intentional radiator attached antenna, so the EUT complies with the requirement of 15.203.

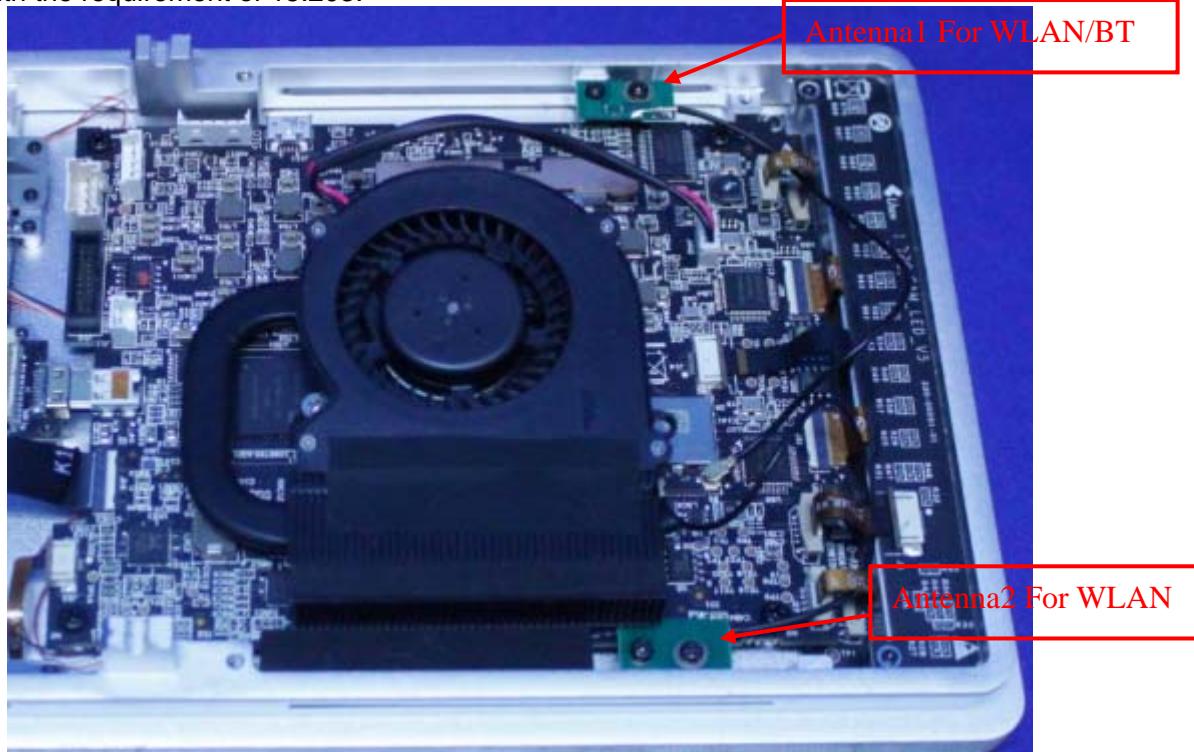

## 4. INSTRUMENT CALIBRATION

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

#### Equipment Used for Emissions Measurement

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
Power meter	Anritsu	ML2495A	1445010	2017-4-26	2018-4-25
Power sensor	Anritsu	MA2411B	1339220	2017-4-26	2018-4-25
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Gauge	Anymetre	TH603	CCS007	2017-10-24	2018-10-23
Test Software			EZ-EMC		

#### 977 Chamber

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
EMI Test Receiver	R&S	ESCI	101378	2017-1-5	2018-1-4
Amplifier	COM-POWER	PAM-840A	461332	2017-8-30	2018-8-29
Amplifier	MITEQ	JS41-00101800-32-10P	1675713	2017-7-20	2018-7-19
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-515	2017-3-6	2018-3-5
Bilog Antenna	Sunol	JB1	A062604	2017-5-27	2018-5-26
Bilog Antenna	Sunol	JB1	A110204-1	2017-5-27	2018-5-26
Loop Antenna	Hengweiyi	39501C	2014012	2017-1-5	2018-1-4
Horn-antenna	SCHWARZBECK	9120D	D:266	2017-2-28	2018-2-27
Horn-antenna	SCHWARZBECK	9120D	D:267	2017-11-5	2018-11-4
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT1OO	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2017-2-28	2018-2-27
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	2017-10-29	2018-10-28
TWO-LINE V-NETWORK	R&S	ENV216	101604	2017-10-29	2018-10-28
Pulse LIMITER	R&S	ESH3-Z2	100524	2017-1-5	2018-1-4
Test Software			EZ-EMC		

**Remark:** The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Expanded Uncertainty (95% CONFIDENCE INTERVAL): K=2

## 5. FACILITIES AND ACCREDITATIONS

### 5.1. FACILITIES

All measurement facilities used to collect the measurement data are located at CCS China Kunshan Lab at 10#Weiye Rd, Innovation Park Eco. & Tec. Development Zone Kunshan city JiangSu, (215300), CHINA.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 2013 and CISPR Publication 22.

### 5.2. EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3. LABORATORY ACCREDITATIONS AND LISTING

FCC –Designation Number: CN1172.

Compliance Certification Services Inc. Kun shan Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Designation Number: CN1172.

**5.4. TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707 G-216

*\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

## 6. SETUP OF EQUIPMENT UNDER TEST

### 6.1. SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2. SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID
1.	Notebook	DELL	E5430	CN8YYW1	N/A

**Remark:**

2. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
3. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*


## 7. FCC PART 15.247 REQUIREMENTS

### 7.1.6DB BANDWIDTH

#### LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, and 2400 - 2483.5 MHz bands, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500kHz.

#### Test Configuration



#### TEST PROCEDURE

Set the spectrum analyzer as RBW = 100 kHz, VBW = 300 kHz, Sweep = auto couple.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

##### IEEE 802.11b mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.064	>500	PASS
Mid	2437	10.128		PASS
High	2462	10.128		PASS

##### IEEE 802.11b mode /Chain 1

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	10.064	>500	PASS
Mid	2437	10.064		PASS
High	2462	10.128		PASS

##### IEEE 802.11g mode /Chain 0

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.538	>500	PASS
Mid	2437	16.538		PASS
High	2462	16.538		PASS

##### IEEE 802.11g mode /Chain 1



Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	16.603	>500	PASS
Mid	2437	16.538		PASS
High	2462	16.474		PASS



**IEEE 802.11n HT20 mode / Chain 0**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.692	>500	PASS
Mid	2437	17.692		PASS
High	2462	17.692		PASS


**IEEE 802.11n HT20 mode / Chain 1**

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	17.692	>500	PASS
Mid	2437	17.756		PASS
High	2462	17.628		PASS

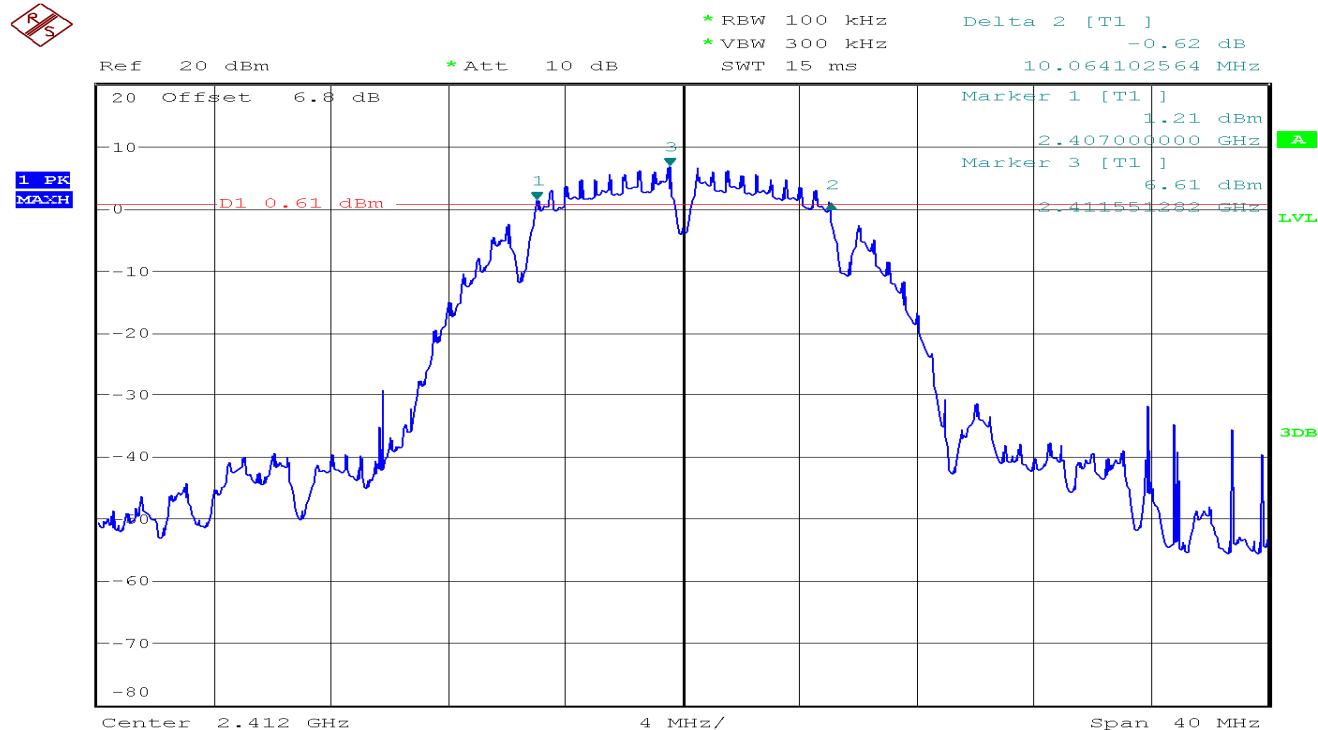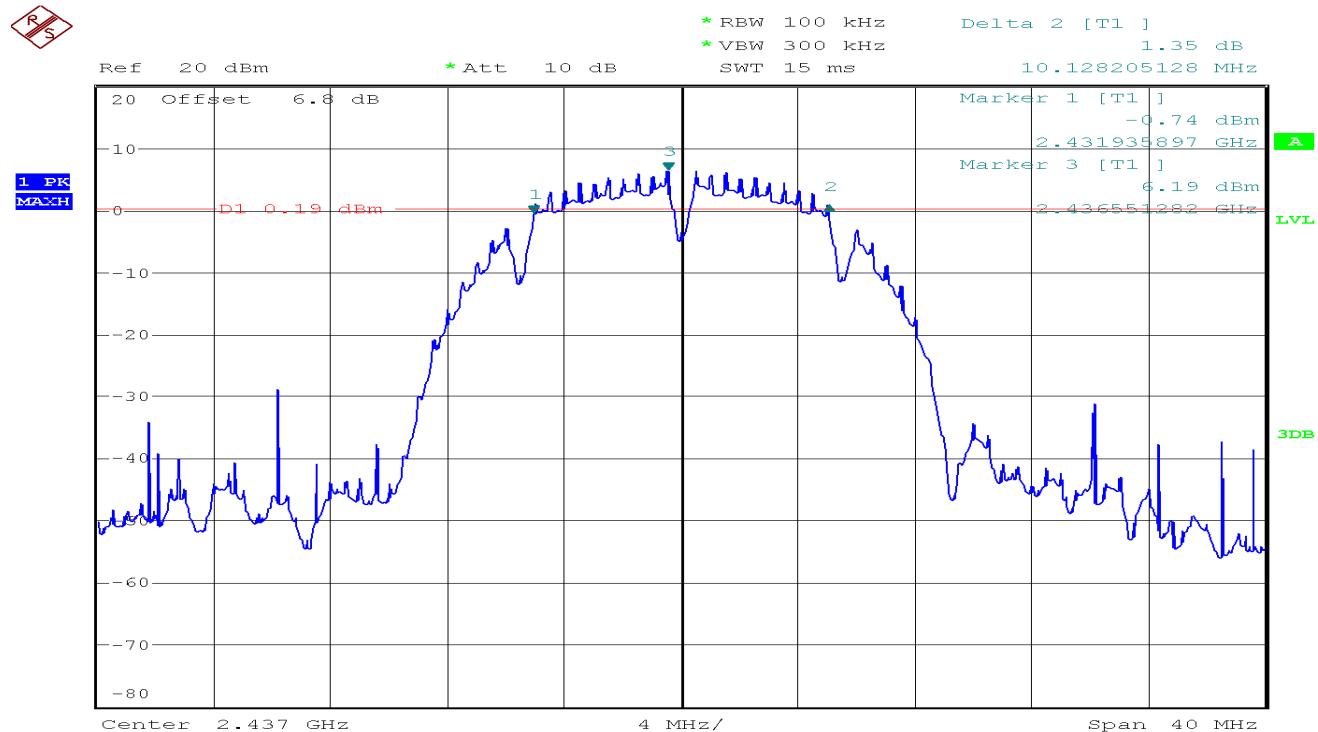
**Test Plot****IEEE 802.11b MODE /Chain 0****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

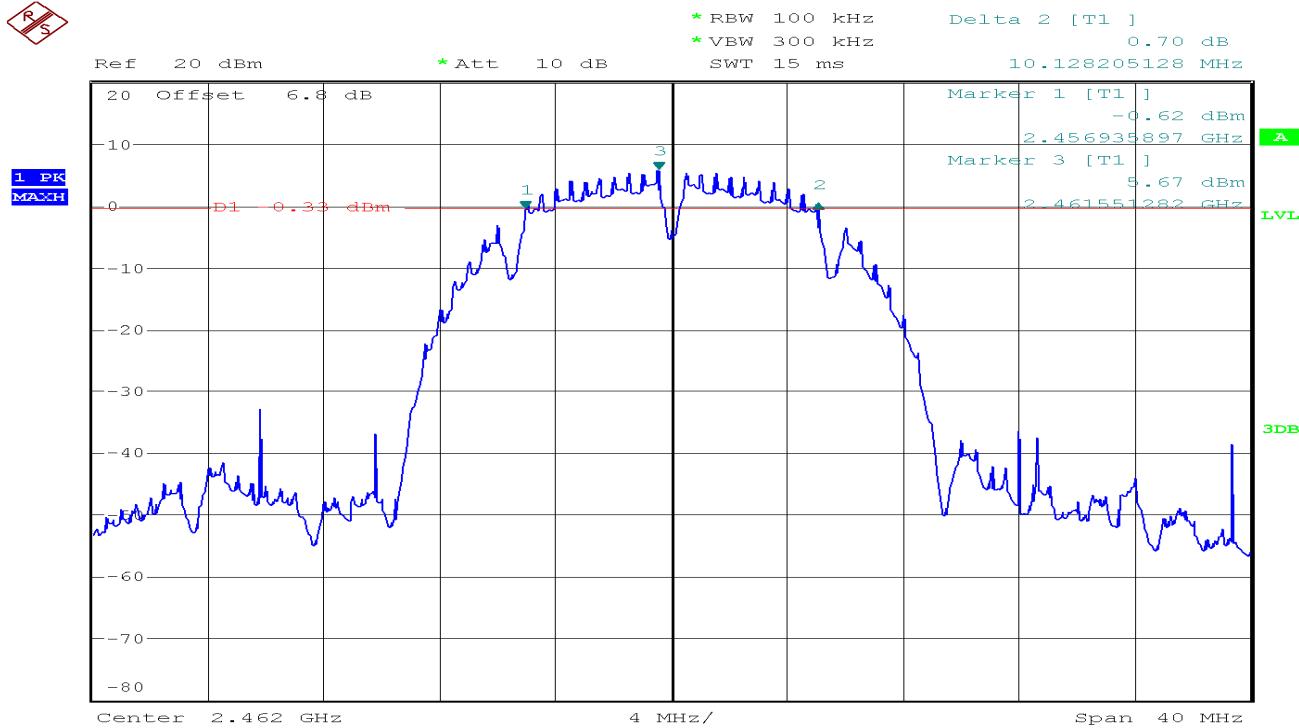
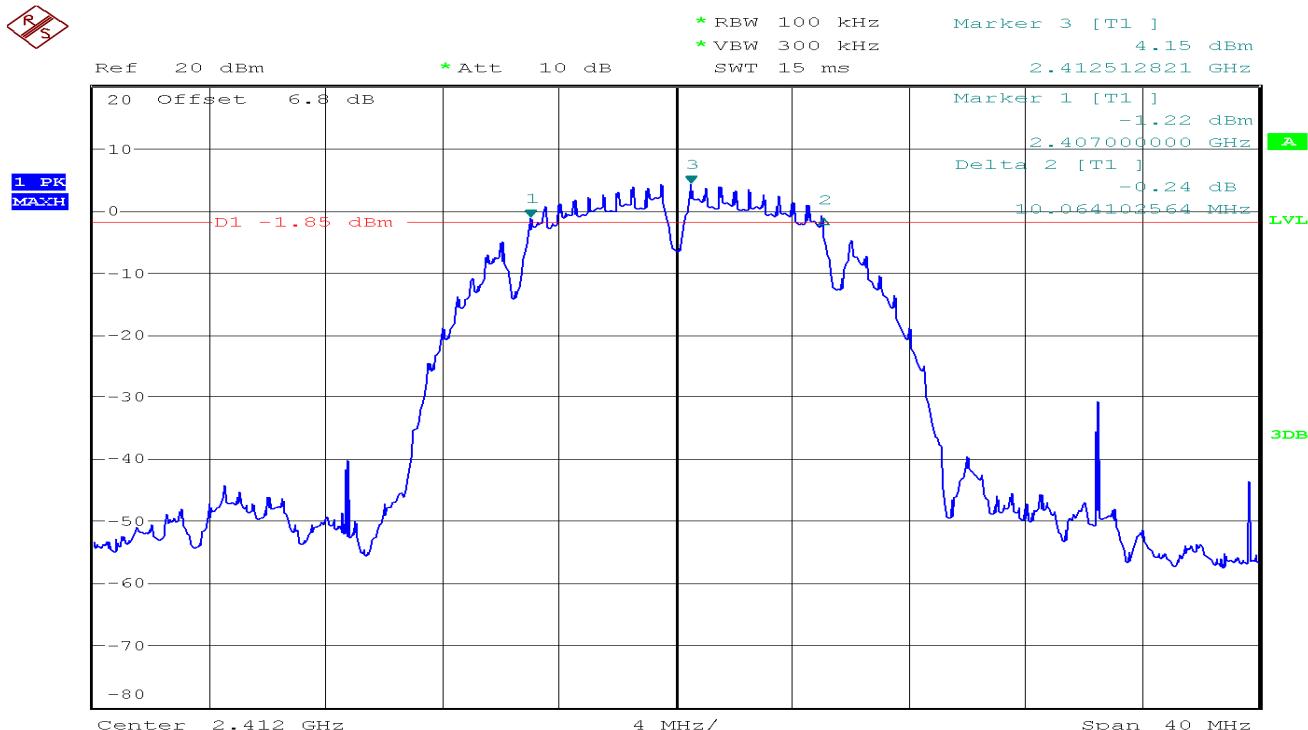
**6dB Bandwidth (CH High)****IEEE 802.11b MODE /Chain 1****6dB Bandwidth (CH Low)**

## 6dB Bandwidth (CH Mid)

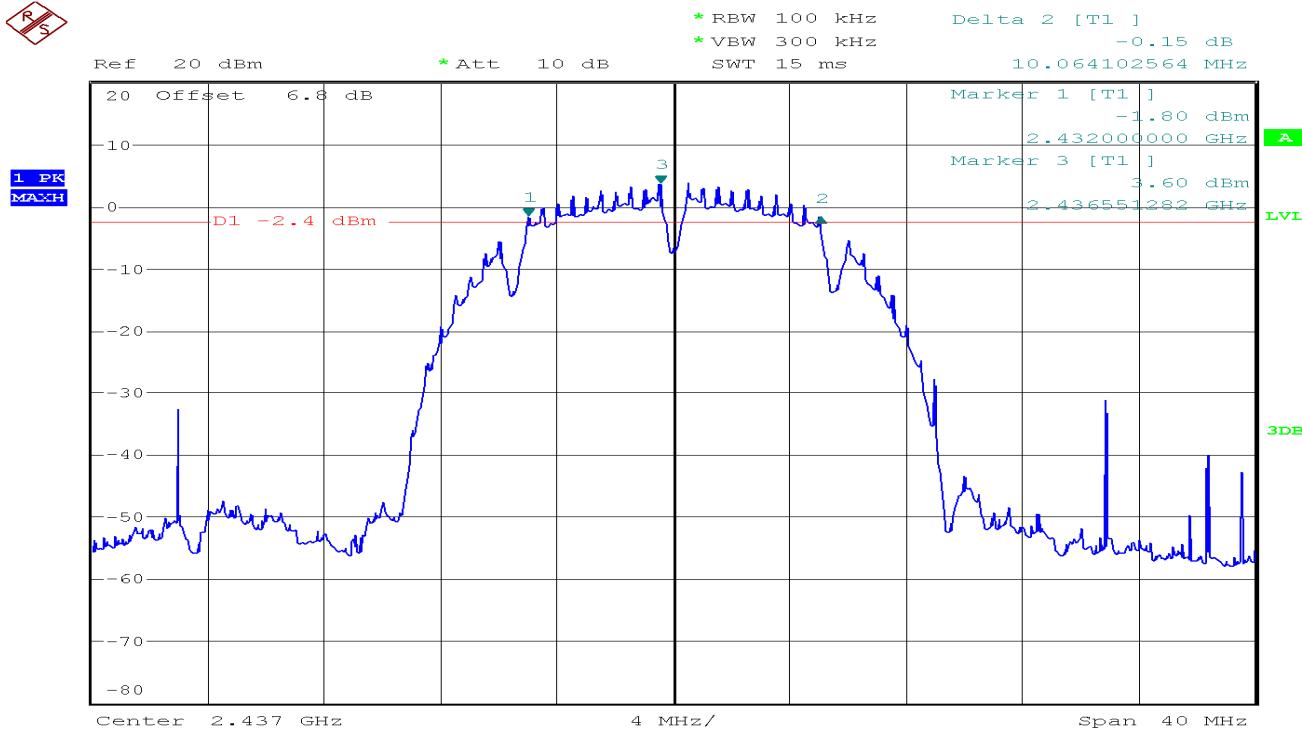


## 6dB Bandwidth (CH High)

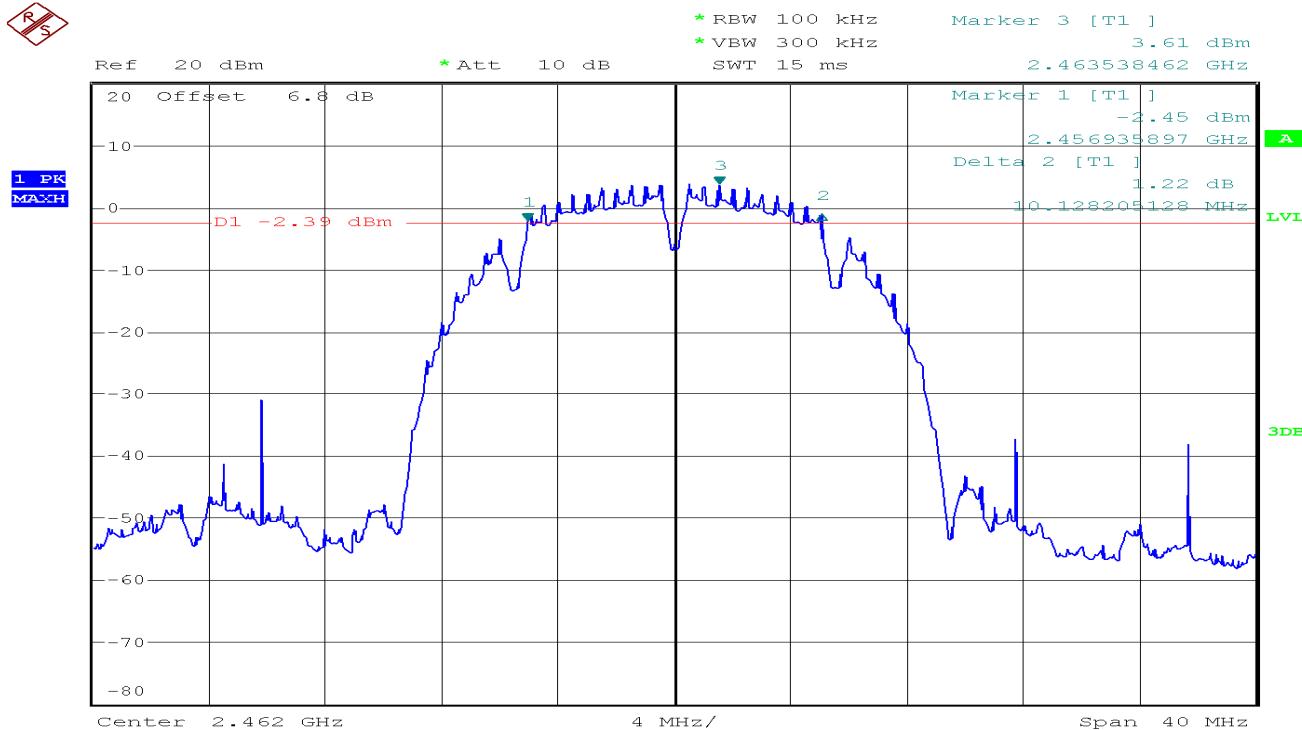

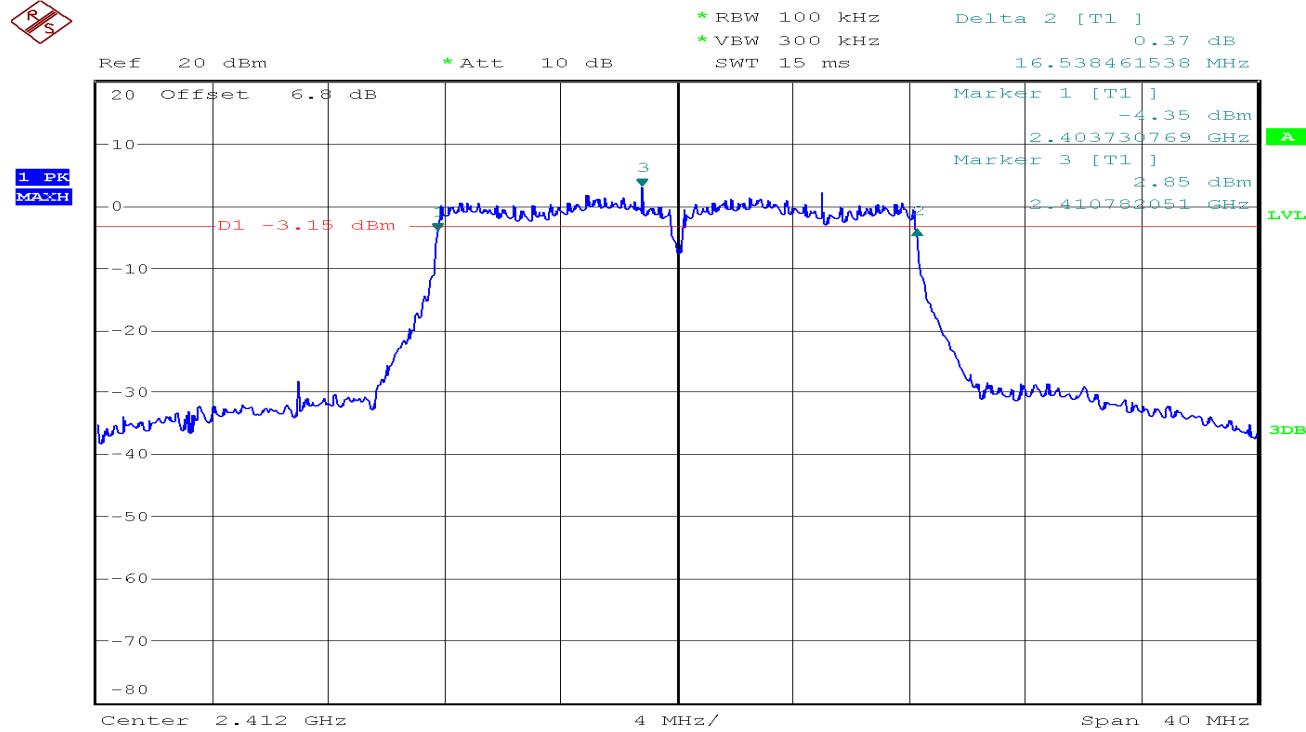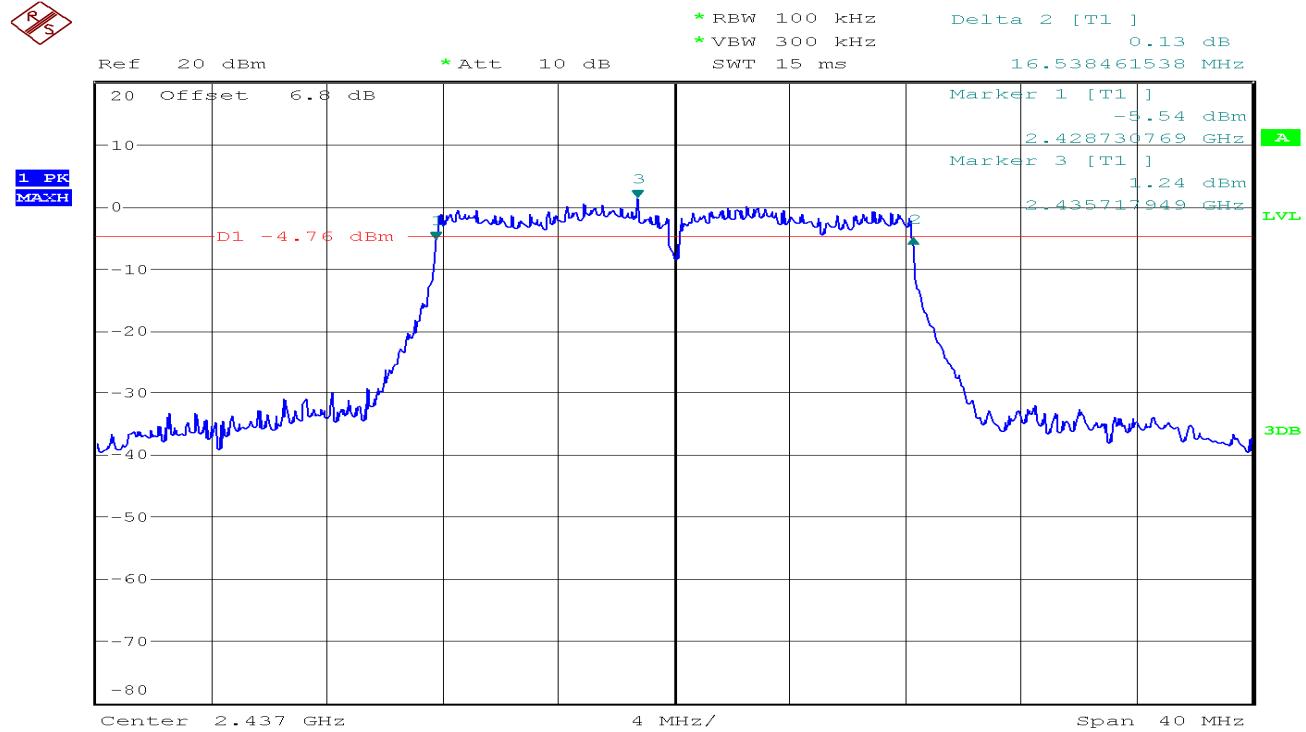
**IEEE 802.11g MODE /Chain 0****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

## 6dB Bandwidth (CH High)

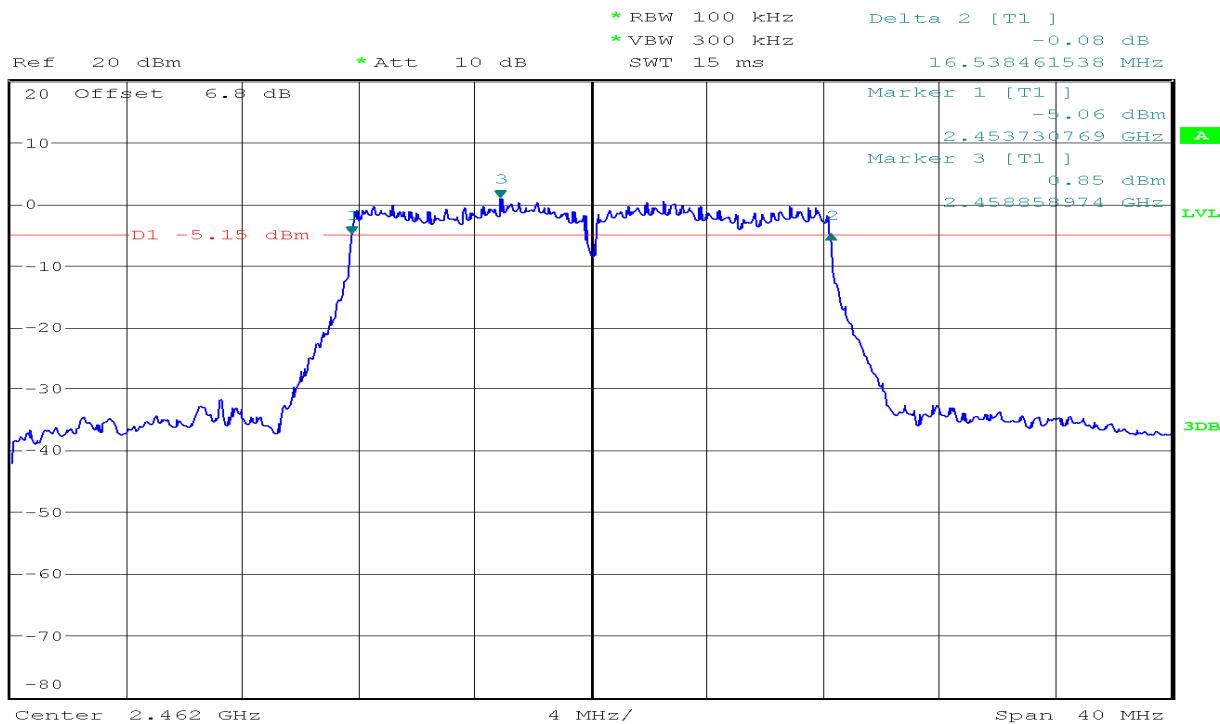
1 PK  
MAXH

## IEEE 802.11g MODE /Chain 1


## 6dB Bandwidth (CH Low)


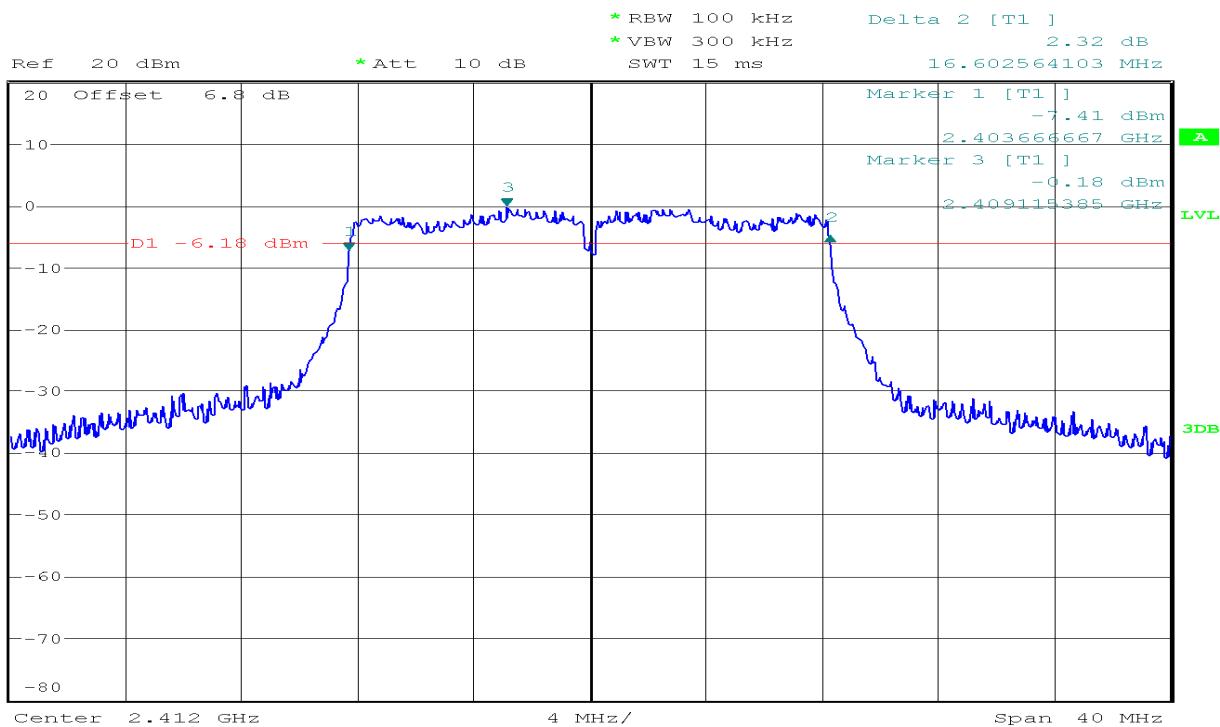
1 PK  
MAXH



## 6dB Bandwidth (CH Mid)

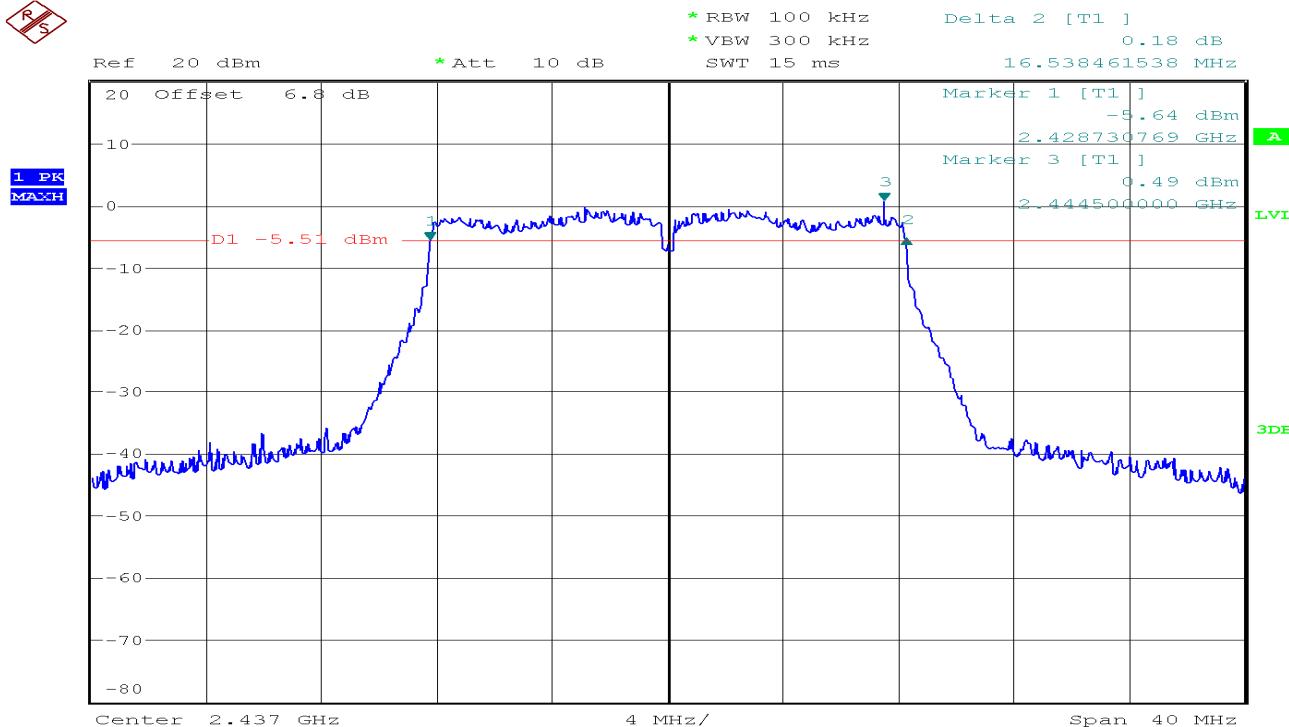


## 6dB Bandwidth (CH High)

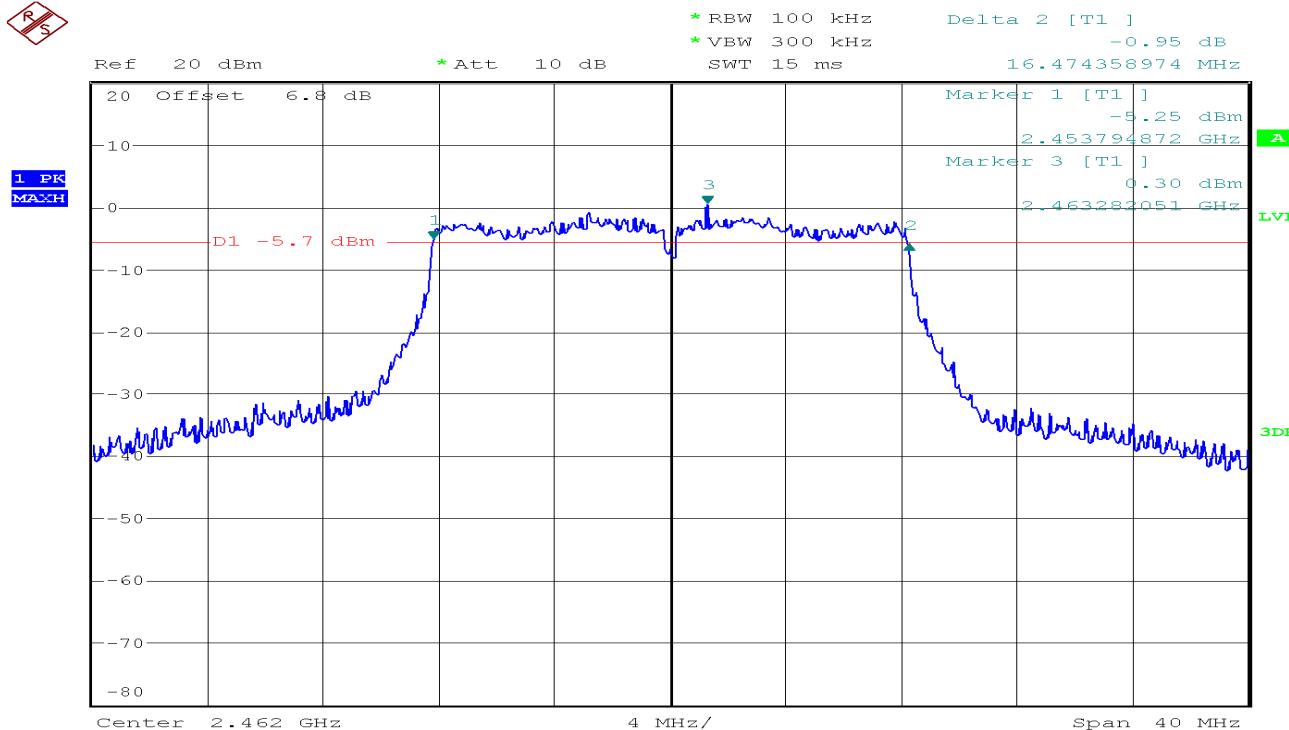

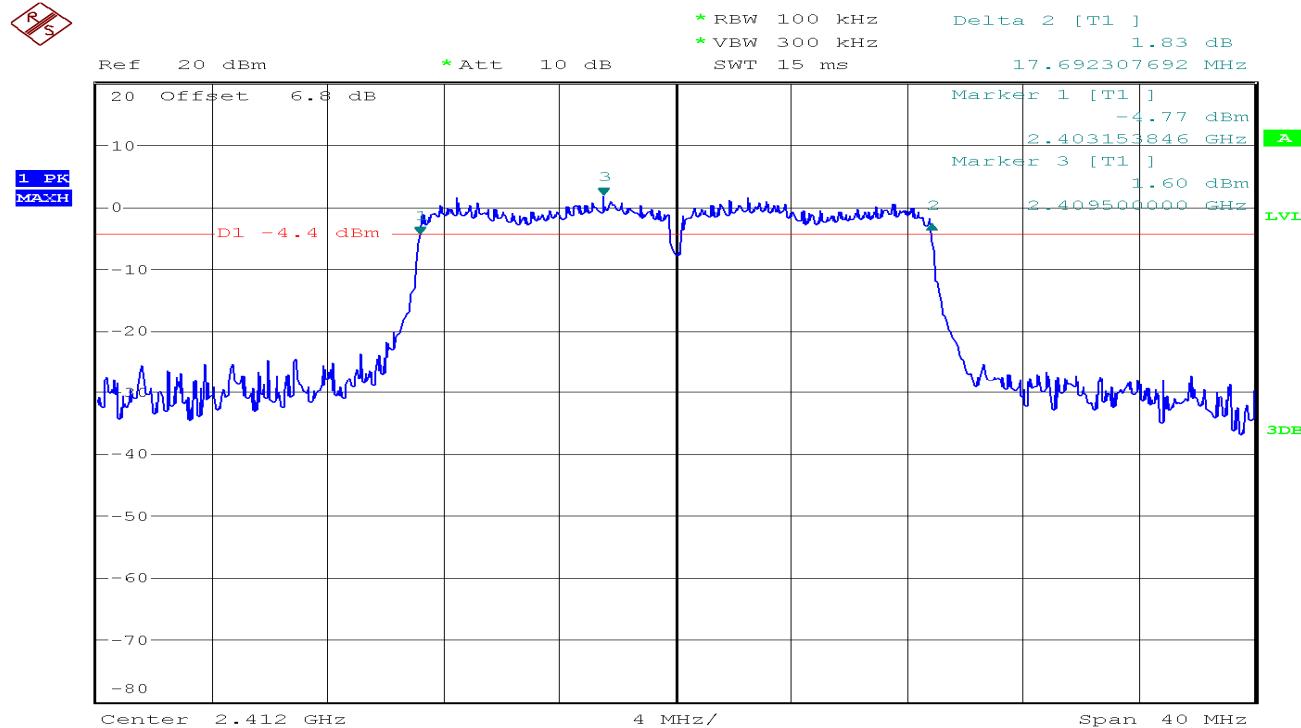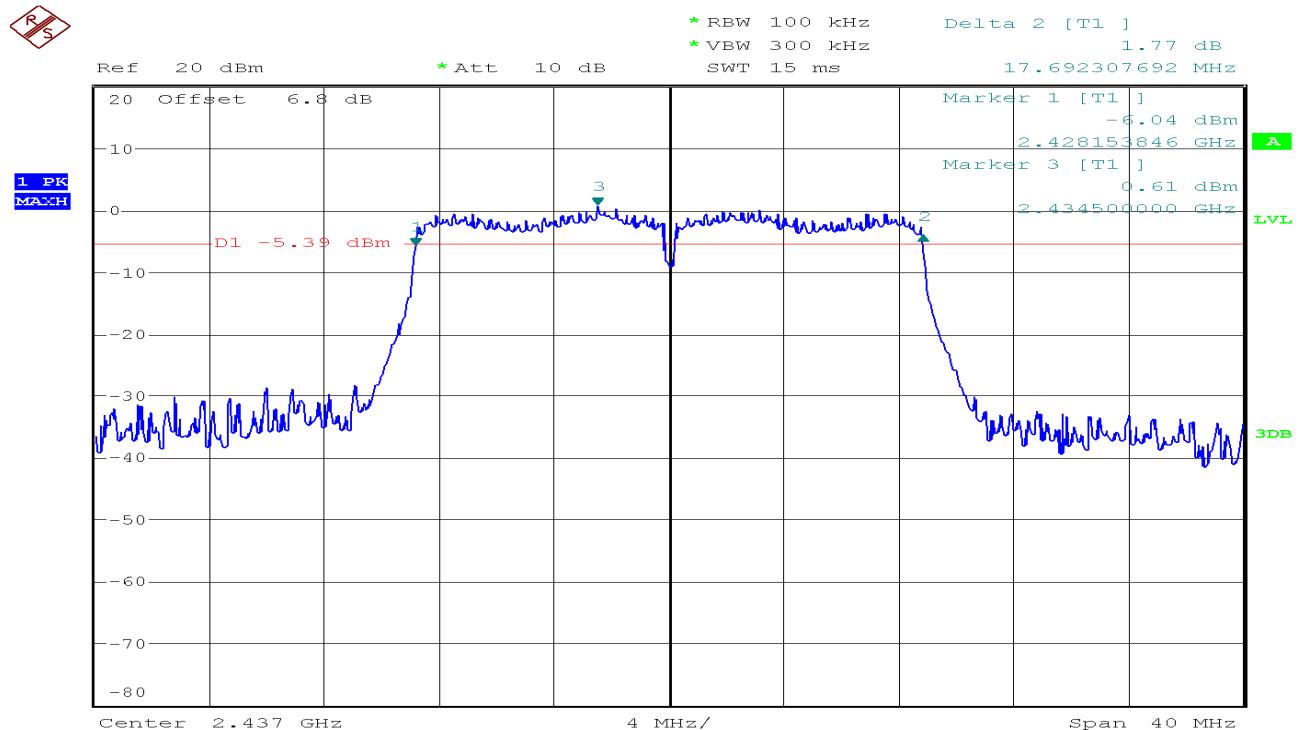
**IEEE 802.11n HT20 mode / Chain 0****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

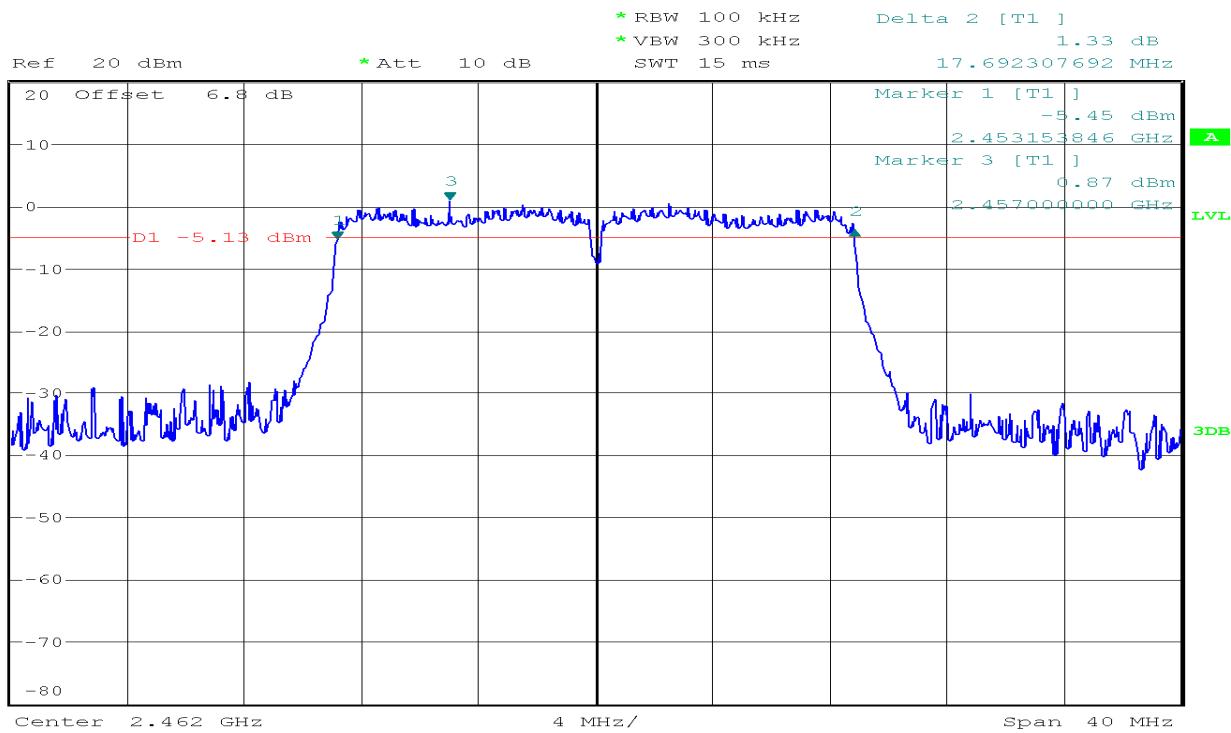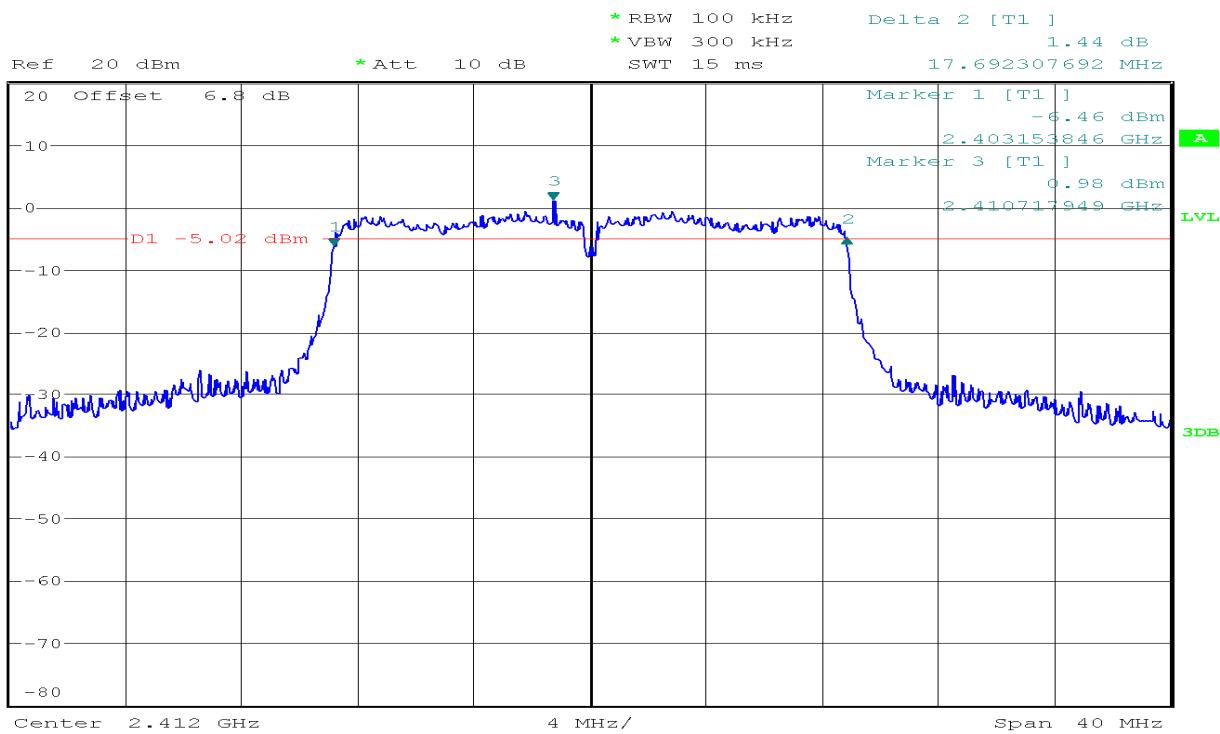**6dB Bandwidth (CH High)****IEEE 802.11n HT20 mode / Chain 1****6dB Bandwidth (CH Low)**

## 6dB Bandwidth (CH Mid)

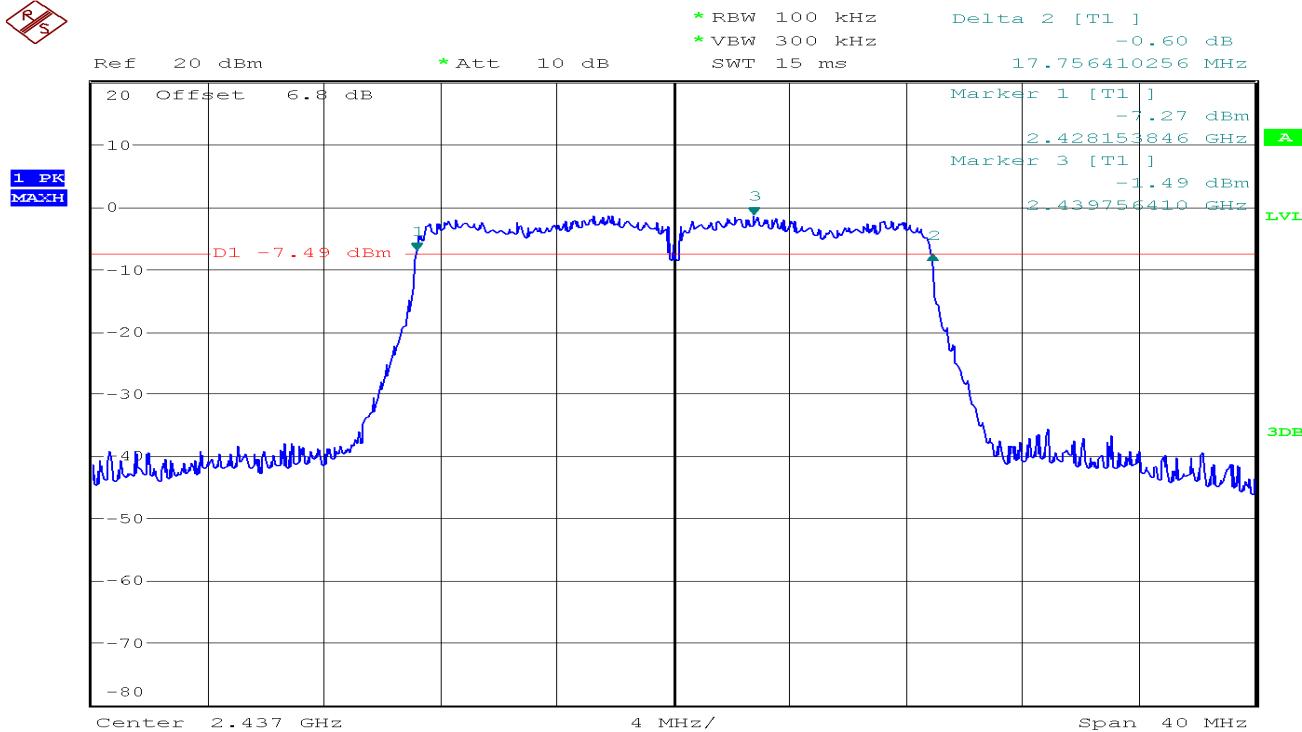

## 6dB Bandwidth (CH High)

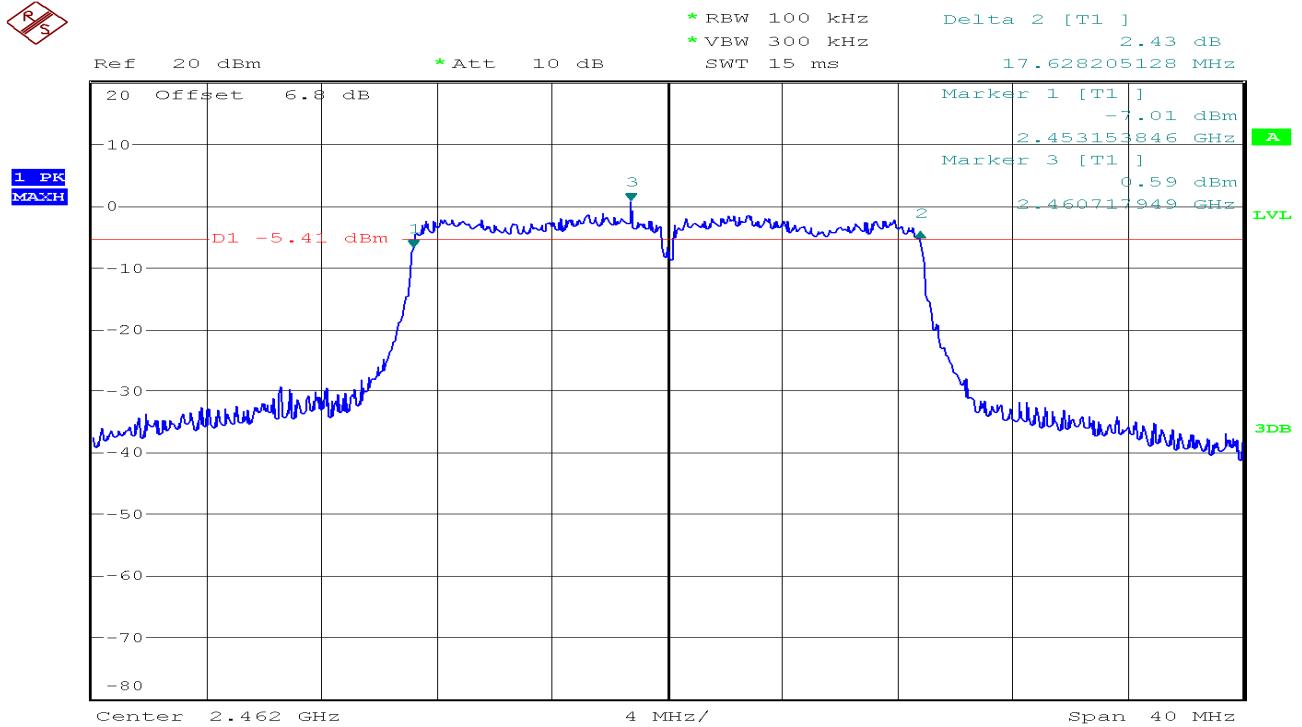

## 7.2. PEAK POWER


### LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, and 2400-2483.5 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Directional Gain=G<sub>ANT</sub>=2.04dBi<6dBi

### Test Configuration

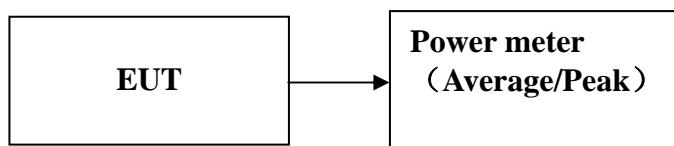

### TEST PROCEDURE

1. The EUT transmitter output is connected to the Power meter.  
The Power meter is set to the peak power detection.
2. The testing follows the Measurement Procedure FCC KDB No. 558074 D01 DTS Meas.  
Guidance v04. 9.1.3 PKPM1 Peak-reading power meter method.

### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	19.43	17.68	21.65	30
Mid	2437	19.56	16.98	21.47	30
High	2462	18.85	17.23	21.13	30

**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	24.15	24.11	27.14	30
Mid	2437	24.26	23.20	26.77	30
High	2462	23.95	24.58	27.29	30

**Test mode: IEEE 802.11n HT20 mode**

Channel	Frequency (MHz)	Chain 0 Output Power (dBm)	Chain 1 Output Power (dBm)	Total Maximum Conducted Output Power (dBm)	Limit (dBm)
Low	2412	24.09	24.28	27.20	30
Mid	2437	24.33	22.80	26.64	30
High	2462	24.22	24.57	27.41	30

**Remark:** 1. Total Output Power (dBm) =  $10 \cdot \log(10^{\text{Chain 0 Output Power} / 10} + 10^{\text{Chain 1 Output Power} / 10})$


## 7.3. PEAK POWER SPECTRAL DENSITY

### LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Directional Gain=G<sub>ANT</sub>=2.04dBi<6dBi

### Test Configuration

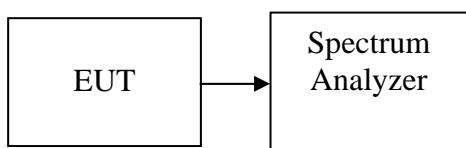

### TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.  
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 1.5 times the DTS bandwidth, Sweep = auto
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### TEST RESULTS

*No non-compliance noted*

**Test Data****Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-8.05	-9.69	-5.78	8.00	PASS
Mid	2437	-8.03	-10.07	-5.92	8.00	PASS
High	2462	-7.84	-9.97	-5.77	8.00	PASS



**Test mode: IEEE 802.11g mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.98	-12.89	-8.82	8.00	PASS
Mid	2437	-11.77	-13.52	-9.55	8.00	PASS
High	2462	-12.67	-14.73	-10.57	8.00	PASS


**Test mode: IEEE 802.11n HT20 mode**

Channel	Frequency (MHz)	Chain 0 PPSD (dBm)	Chain 1 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.12	-12.83	-8.26	8.00	PASS
Mid	2437	-10.50	-13.70	-8.80	8.00	PASS
High	2462	-11.38	-11.39	-8.37	8.00	PASS


**Remark:**1. Total PPSD(dBm) =  $10 \cdot \log(10^{(Chain\ 0\ PPSD/10)} + 10^{(Chain\ 1\ PPSD/10)})$

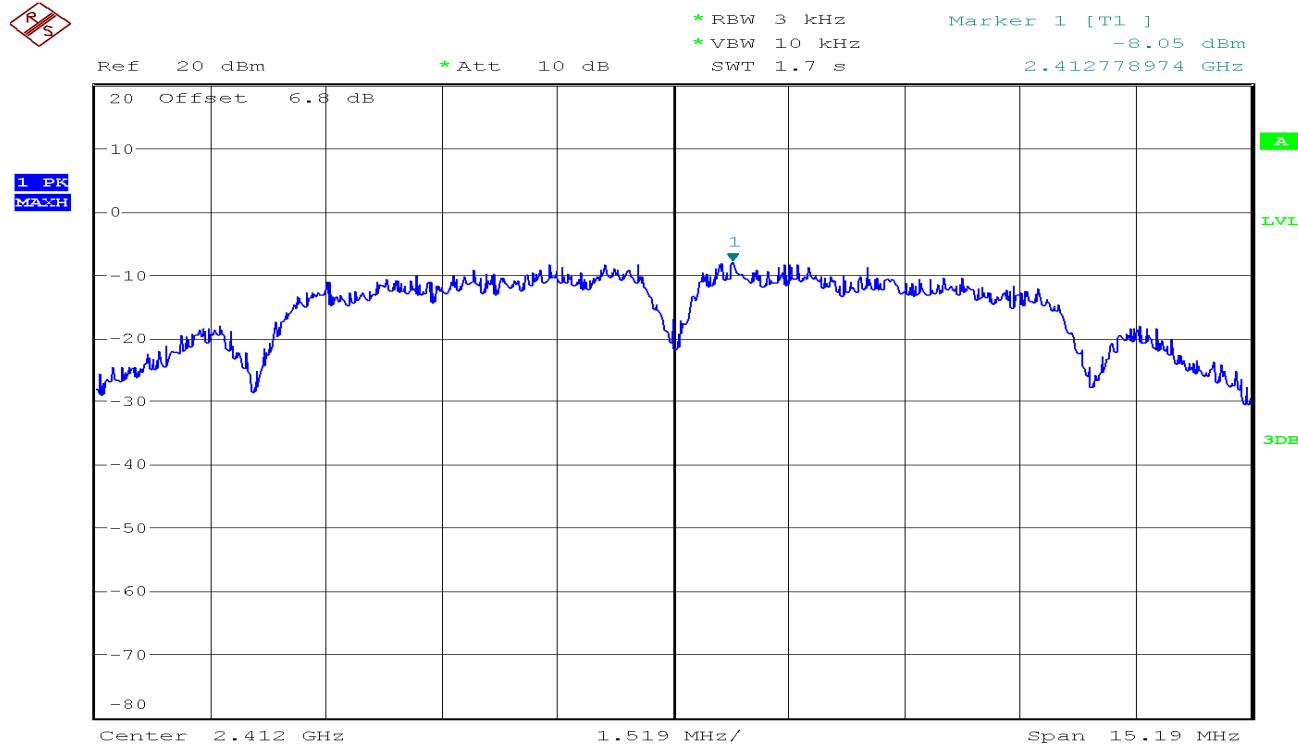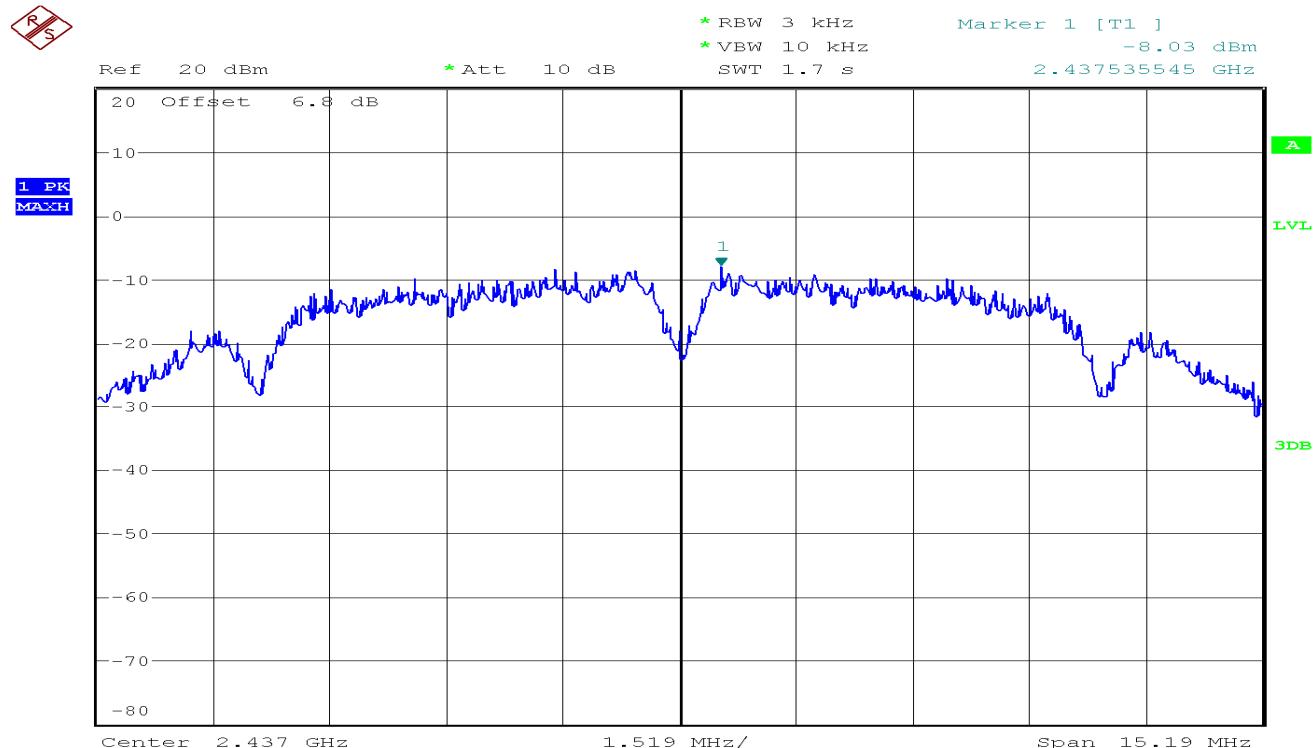**Test Plot****IEEE 802.11b mode/Chain 0****PPSD (CH Low)****PPSD(CH Mid)**


## PPSD (CH High)

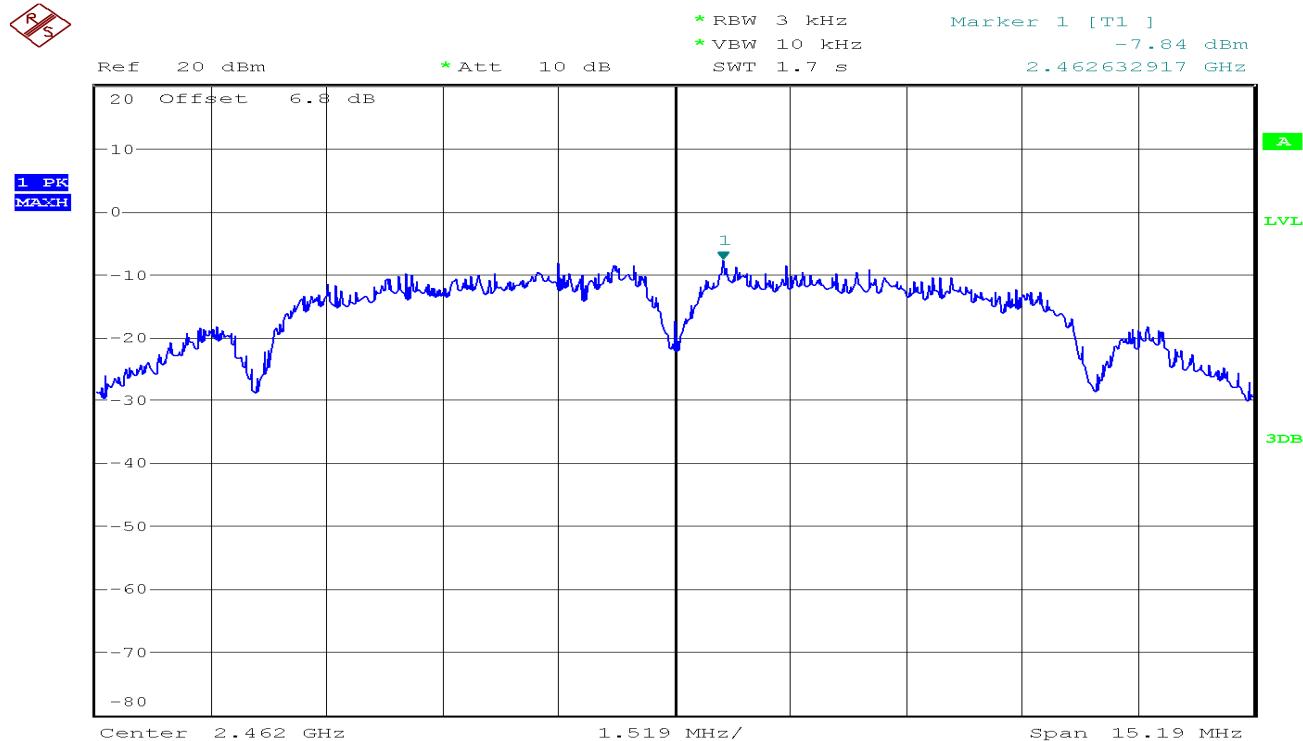IEEE 802.11b mode/Chain 1


## PPSD (CH Low)


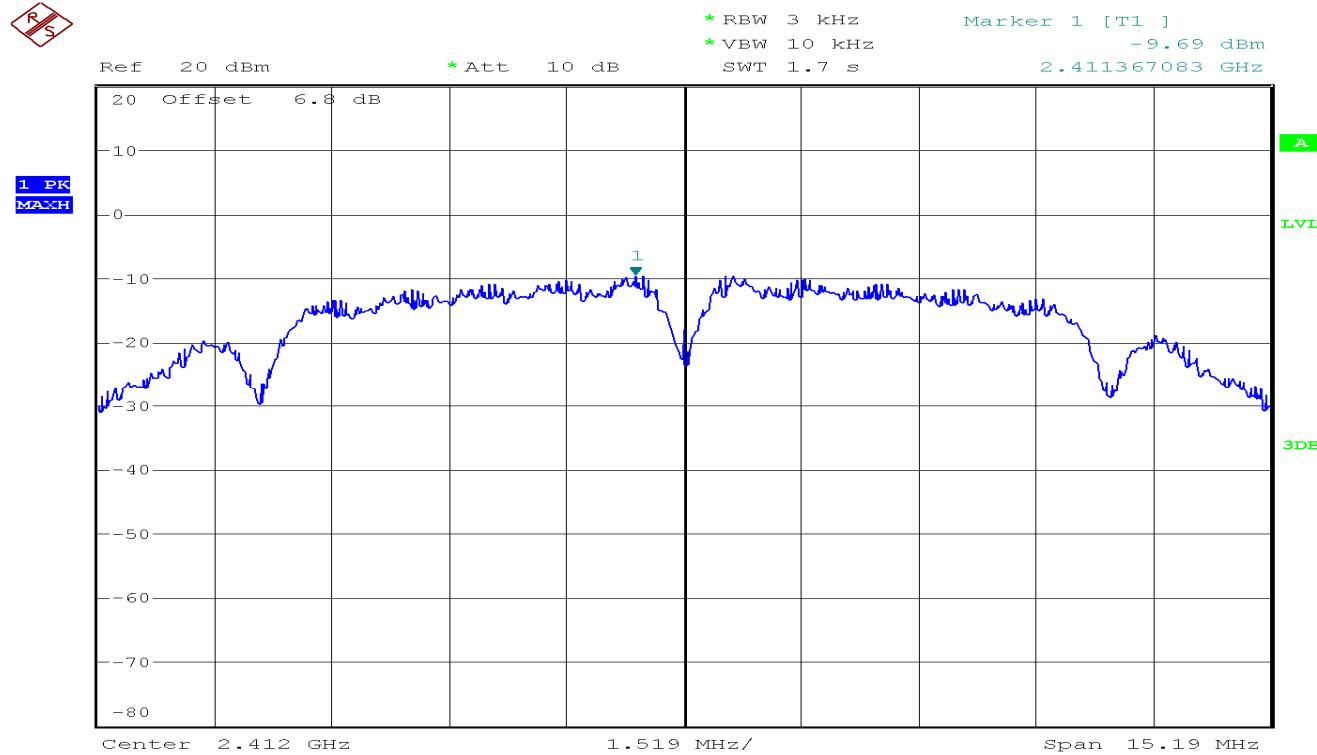


## PPSD(CH Mid)

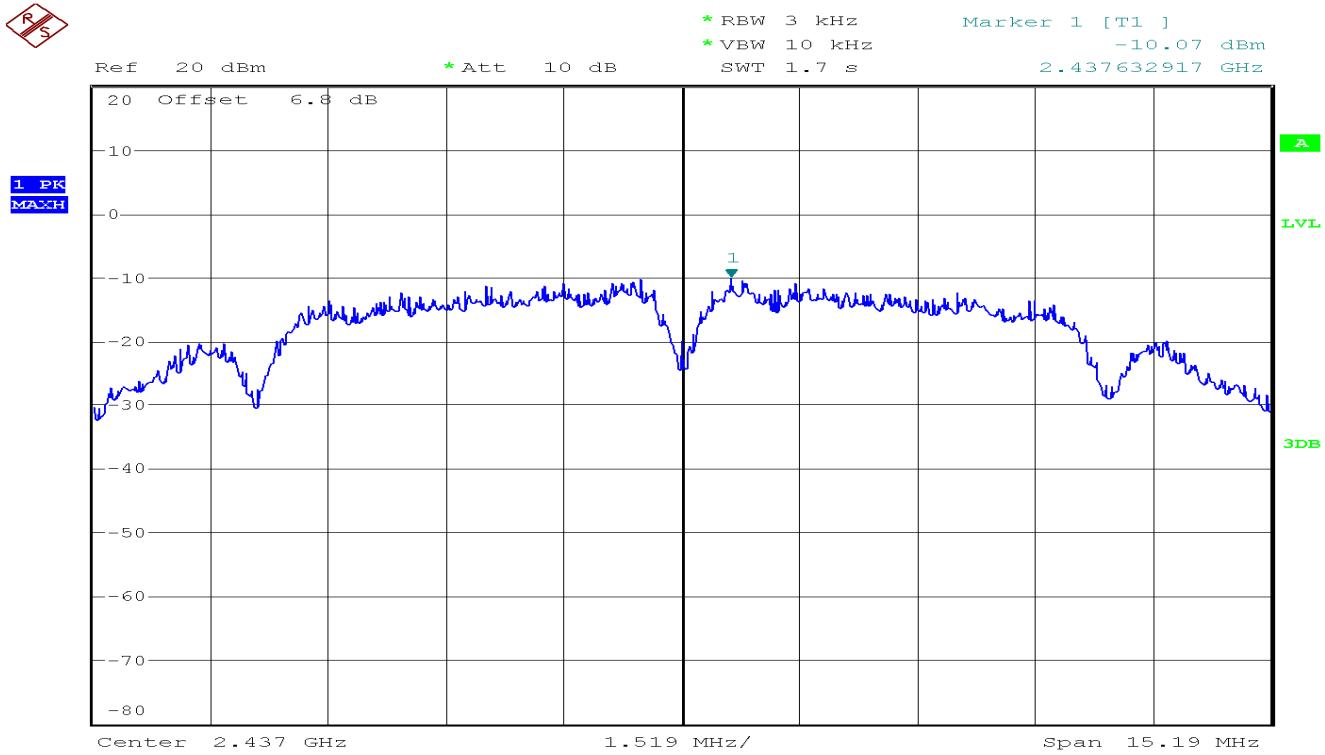


## PPSD (CH High)

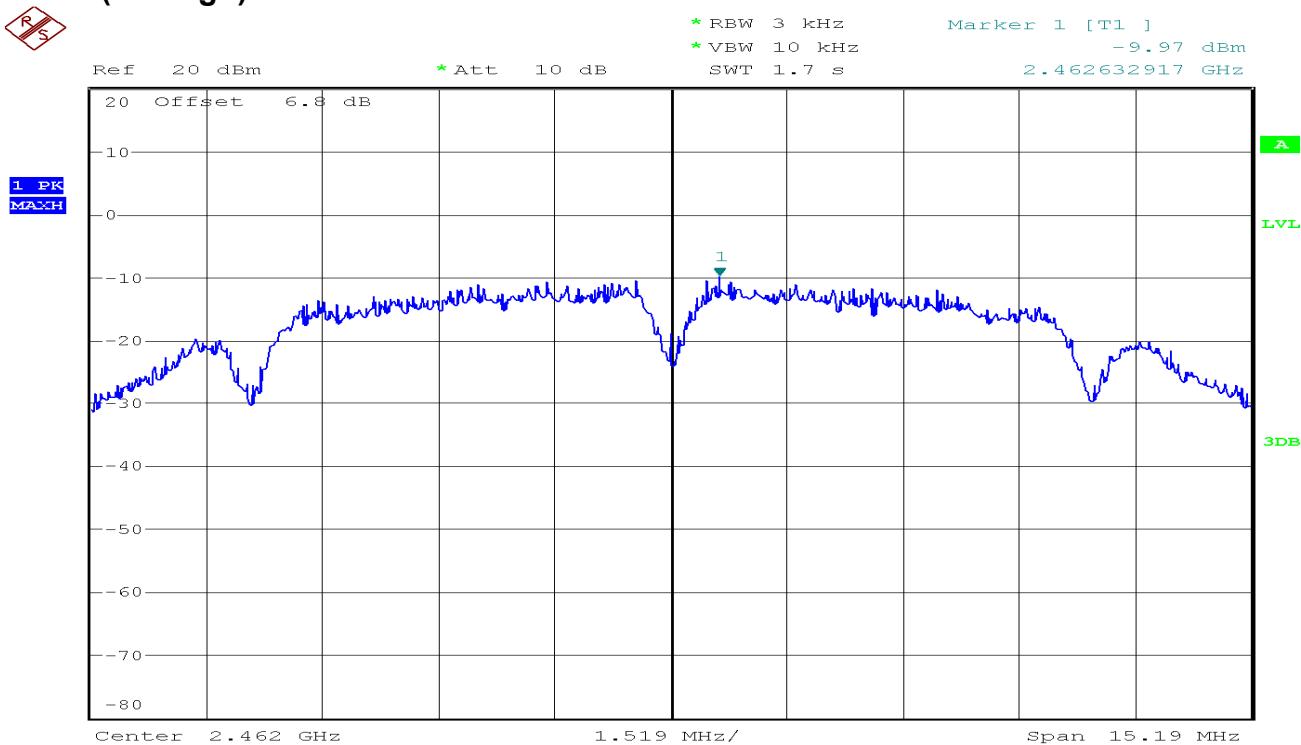


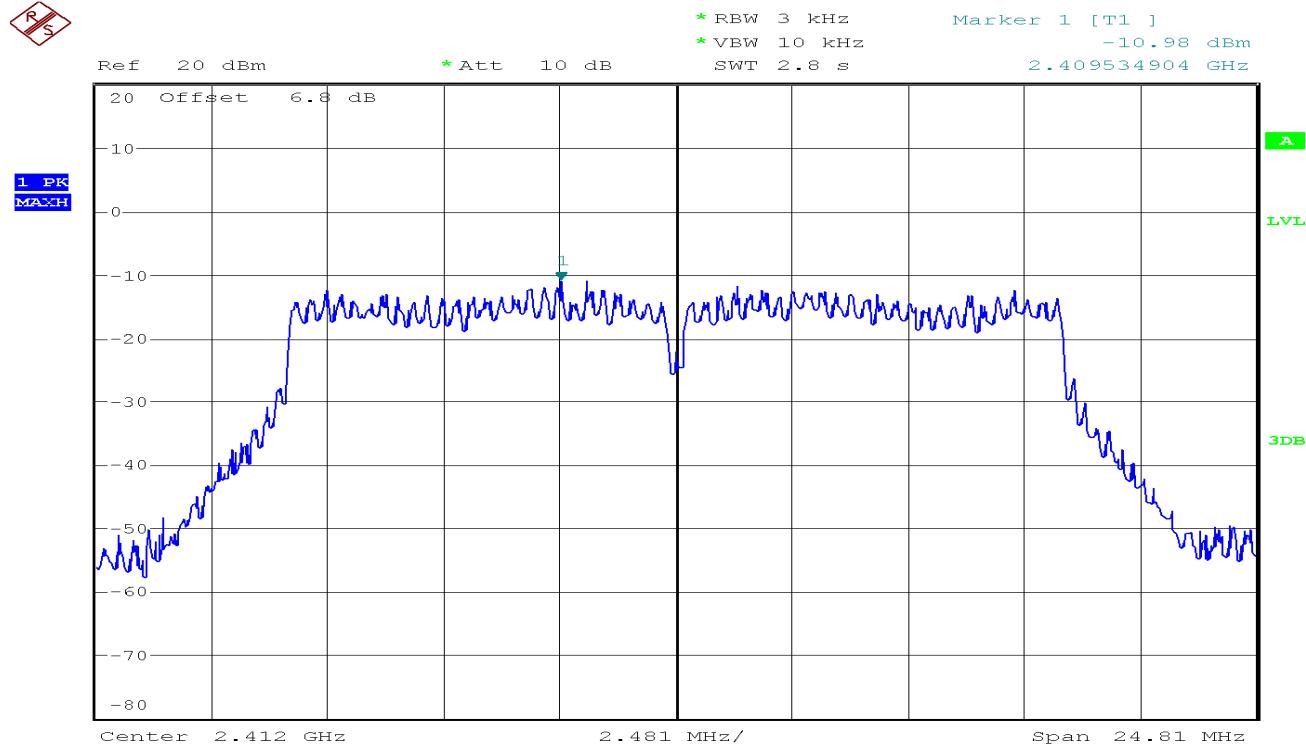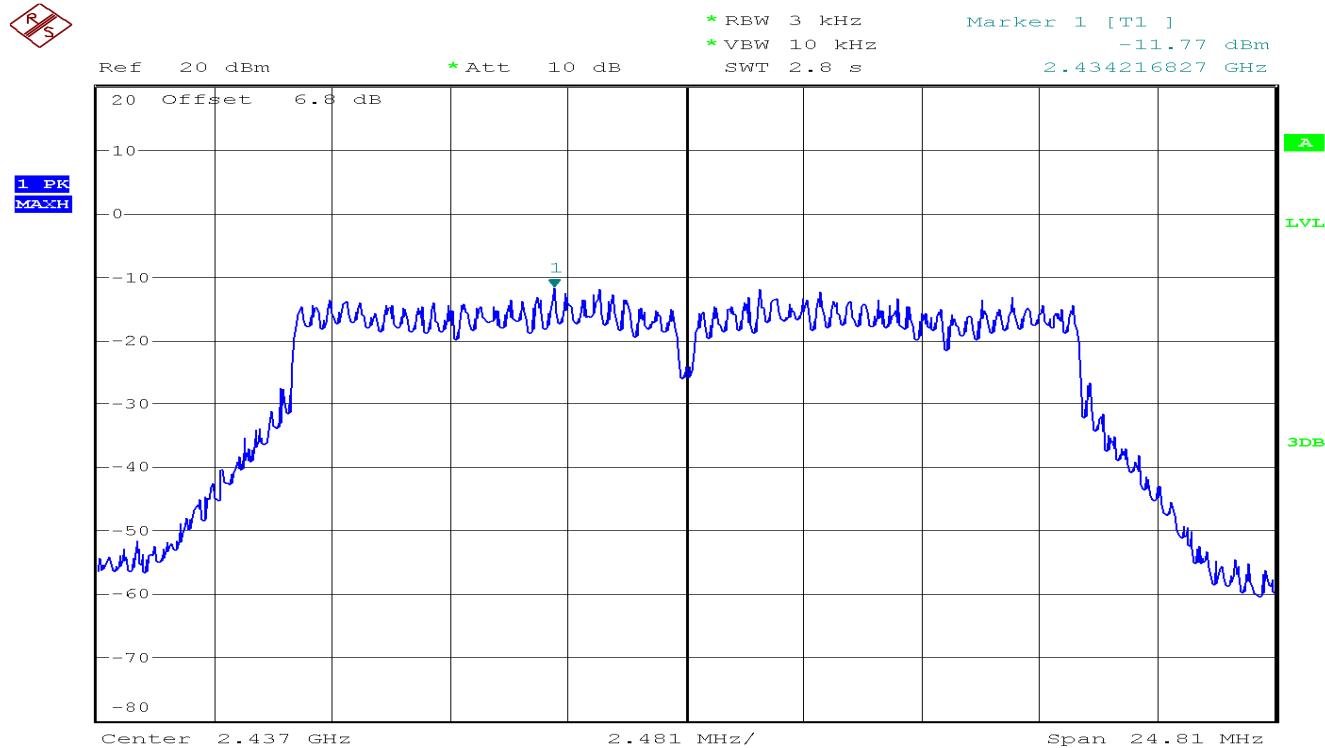**IEEE 802.11g mode/Chain 0****PPSD (CH Low)****PPSD (CH Mid)**


## PPSD (CH High)

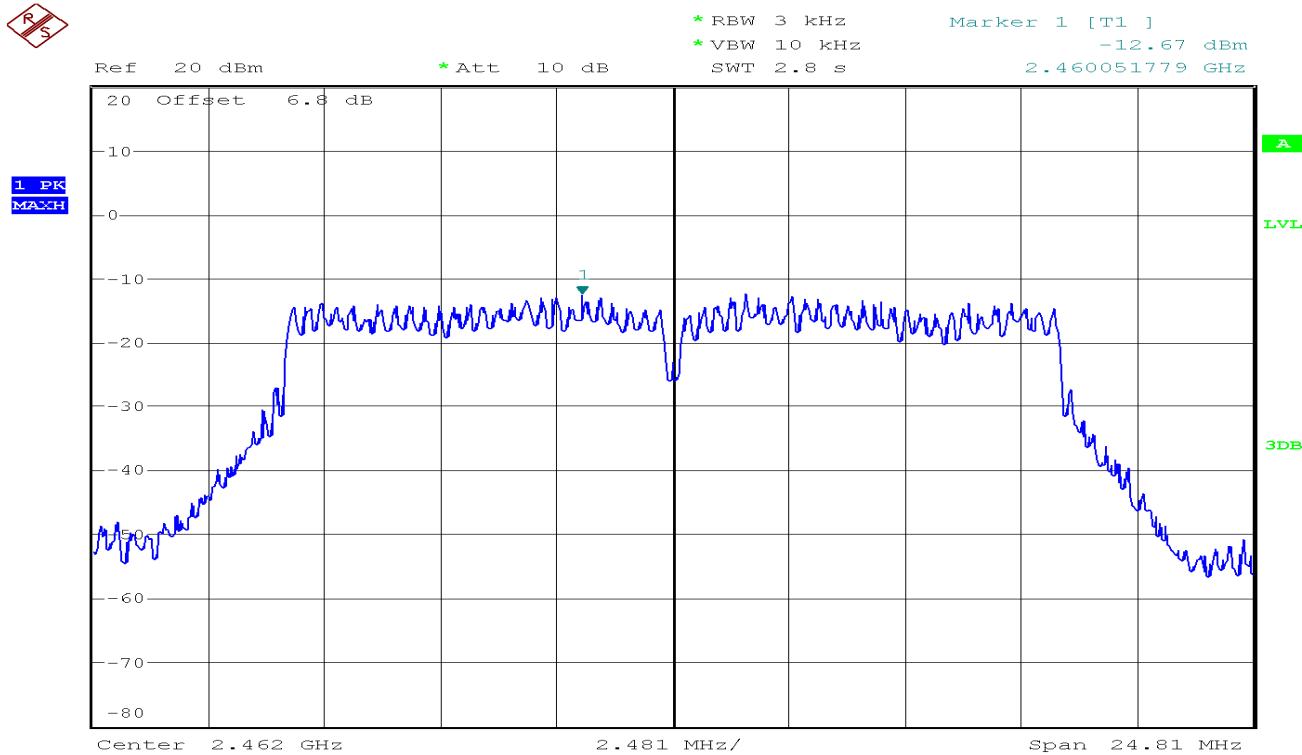IEEE 802.11g mode/Chain 1


## PPSD (CH Low)

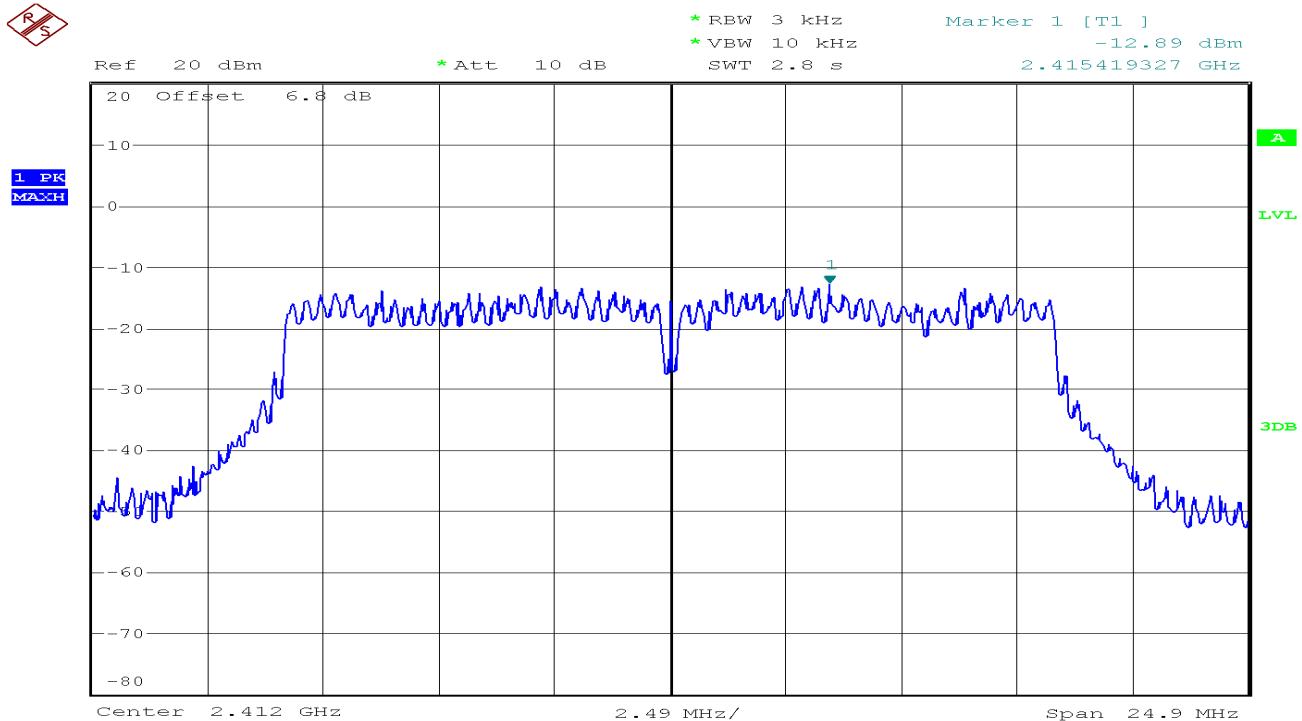

## PPSD (CH Mid)

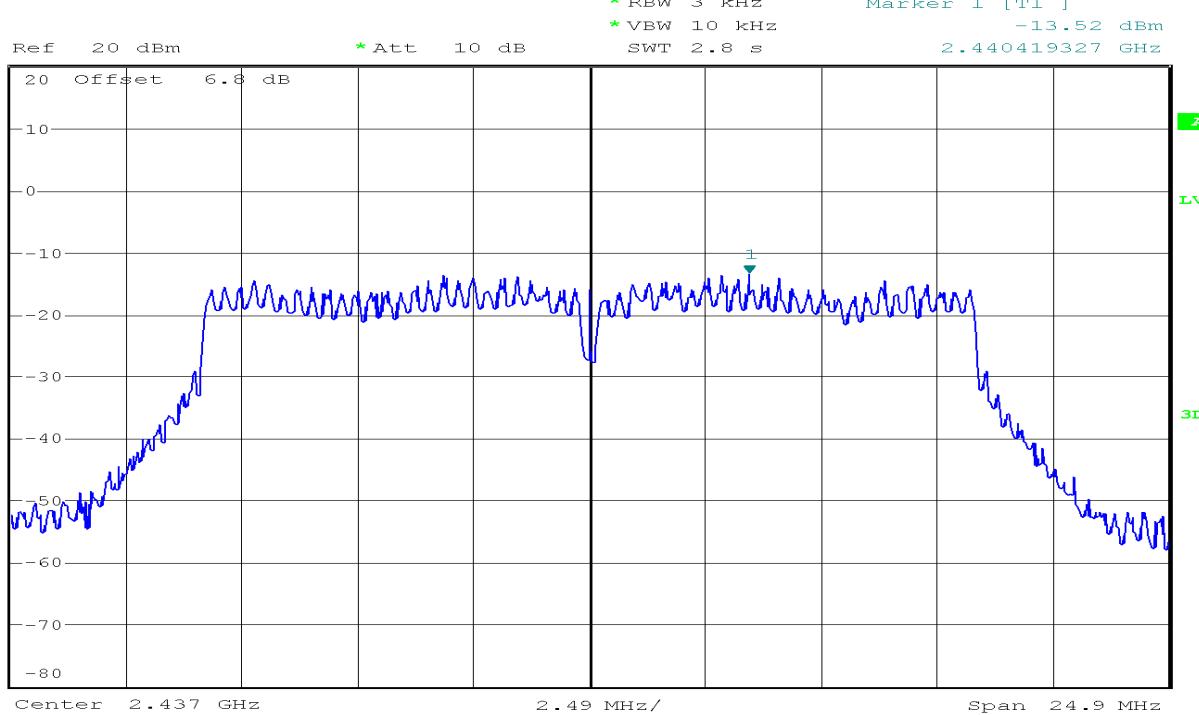


## PPSD (CH High)

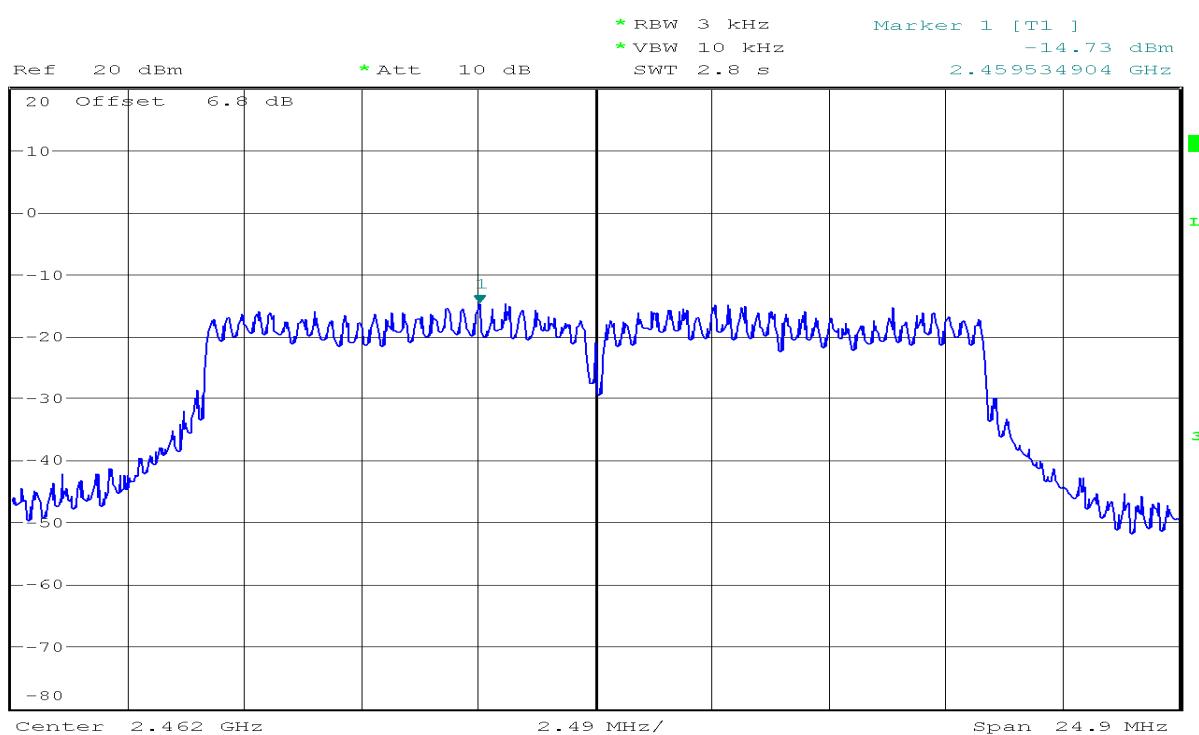


IEEE 802.11n HT20 mode/Chain 0


## PPSD (CH Low)

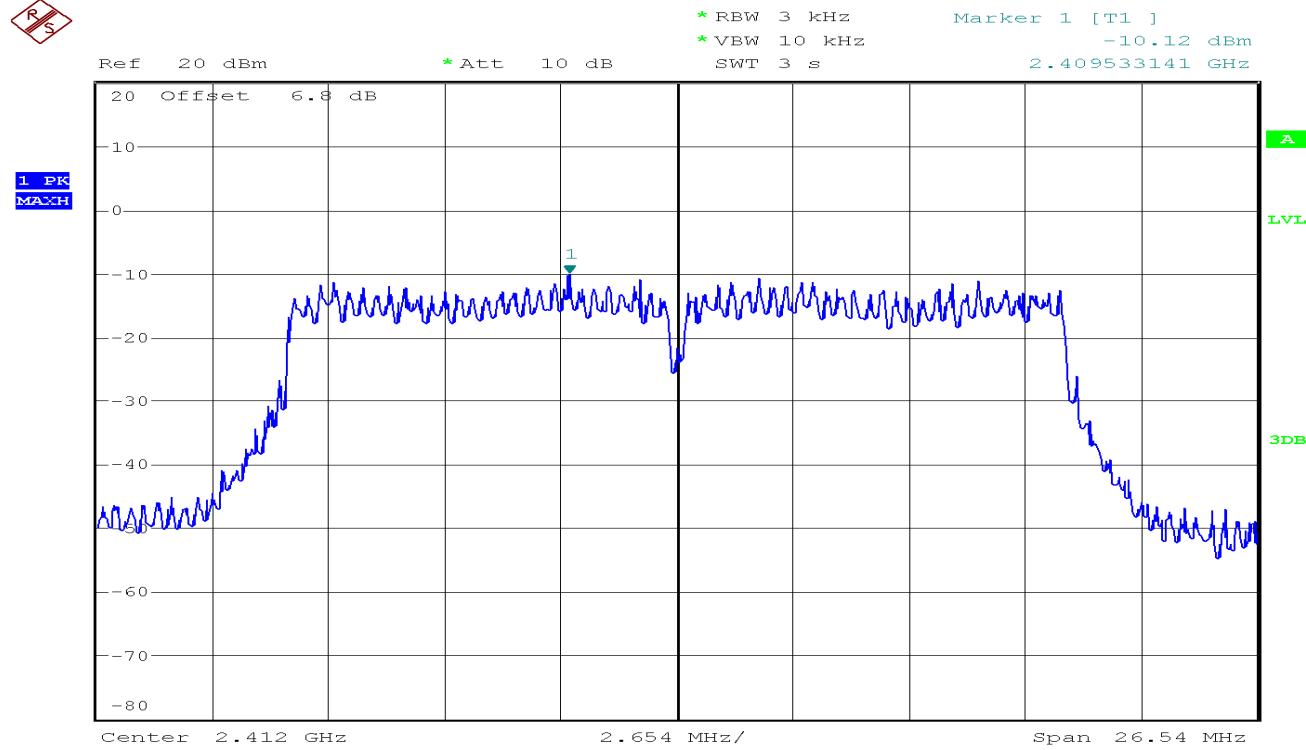


## PPSD (CH Mid)

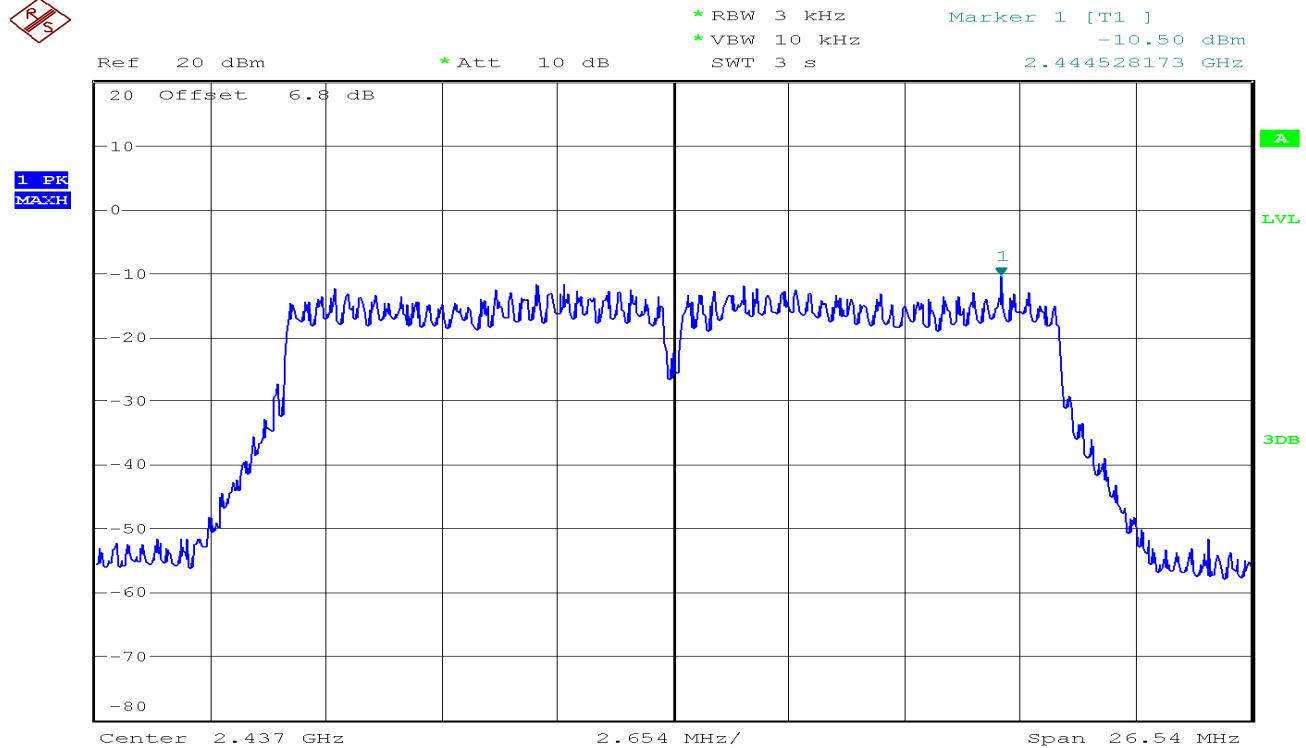


## PPSD (CH High)

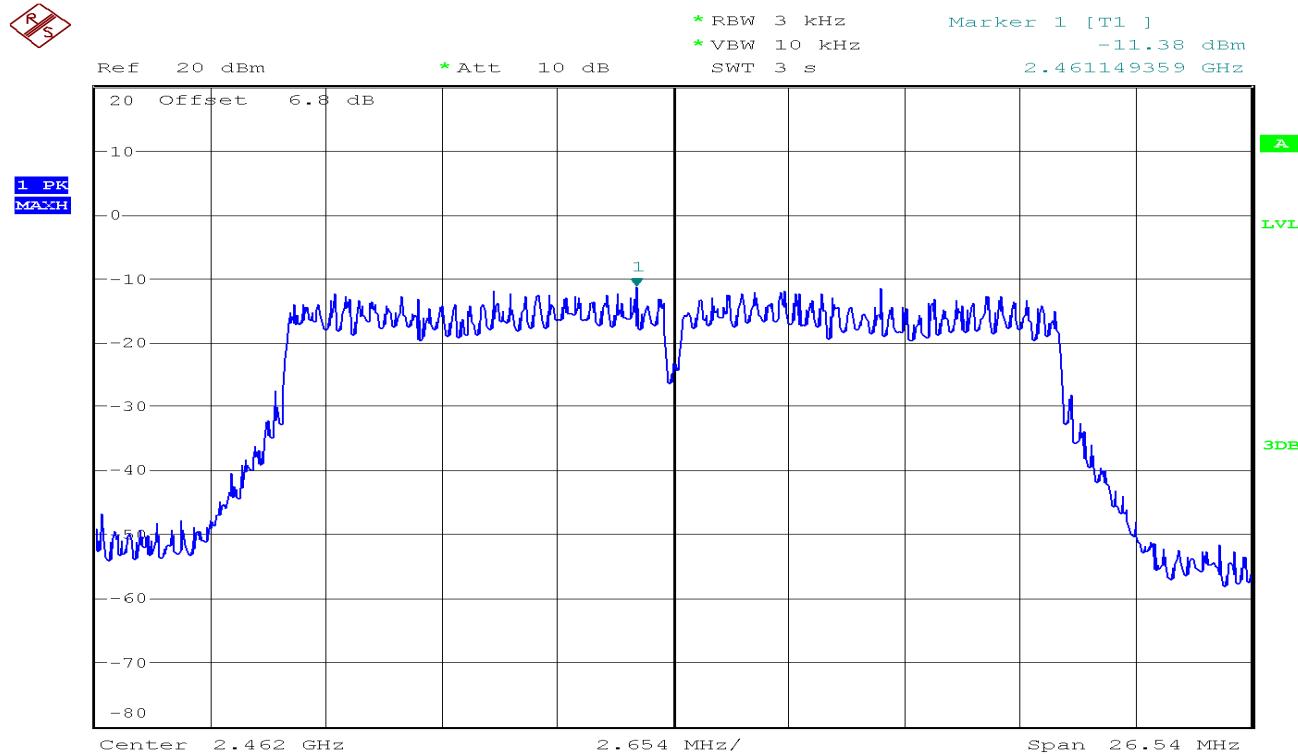IEEE 802.11n HT20 mode/Chain 1


## PPSD (CH Low)

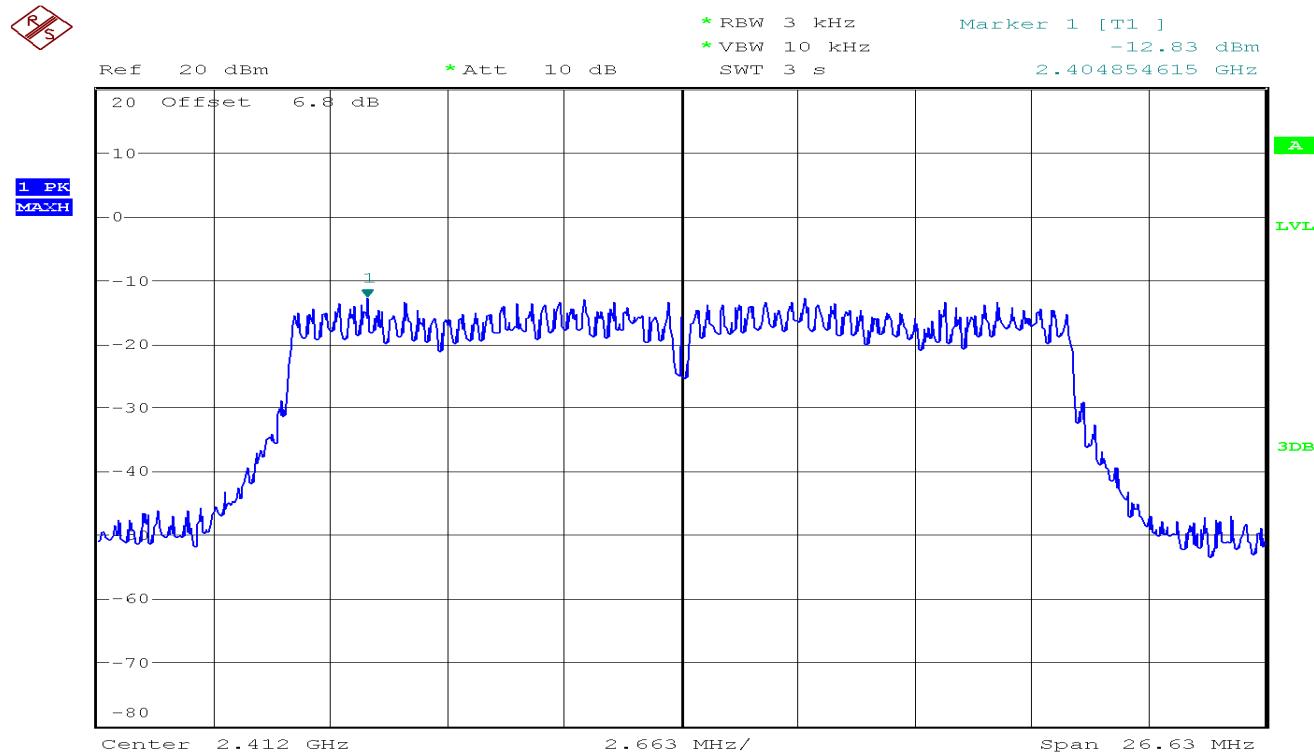

## PPSD (CH Mid)

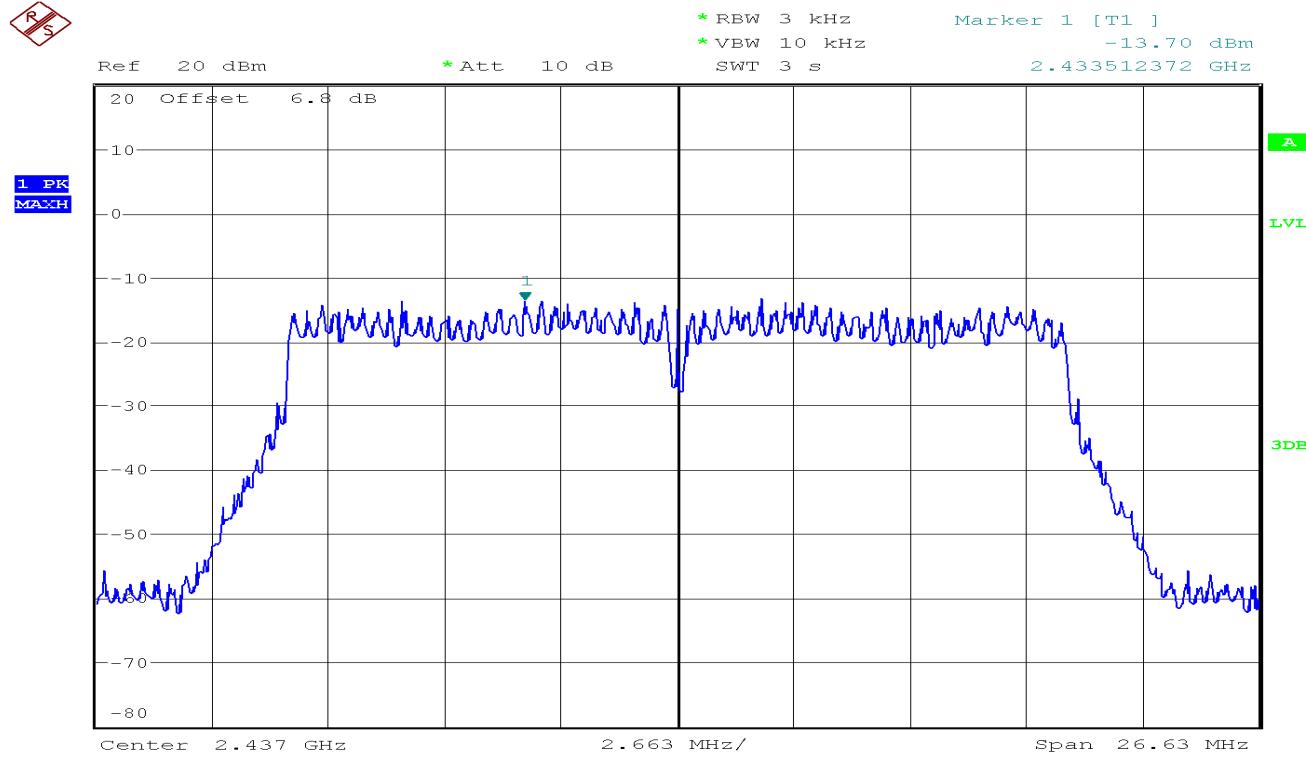

## PPSD (CH High)

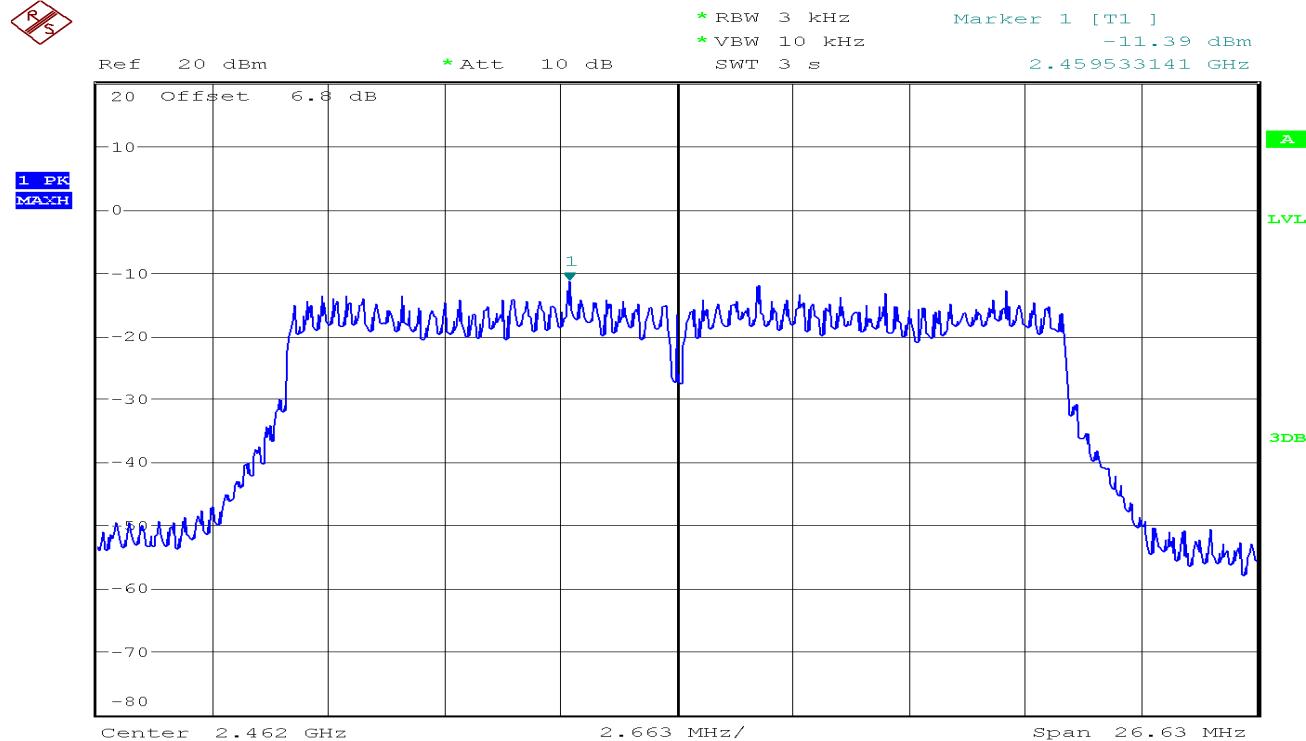


## 7.4. SPURIOUS EMISSIONS

### Conducted Measurement

#### LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

#### Test Configuration



#### TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

Measurements are made over the 30MHz to 40GHz range with the transmitter set to the lowest, middle, and highest channels.

#### TEST RESULTS



*No non-compliance noted*



## Test Plot

## **OUT-OF-BAND SPURIOUS EMISSIONS-CONDUCTED MEASUREMENT**



## IEEE 802.11b mode/Chain 0

**CH Low**

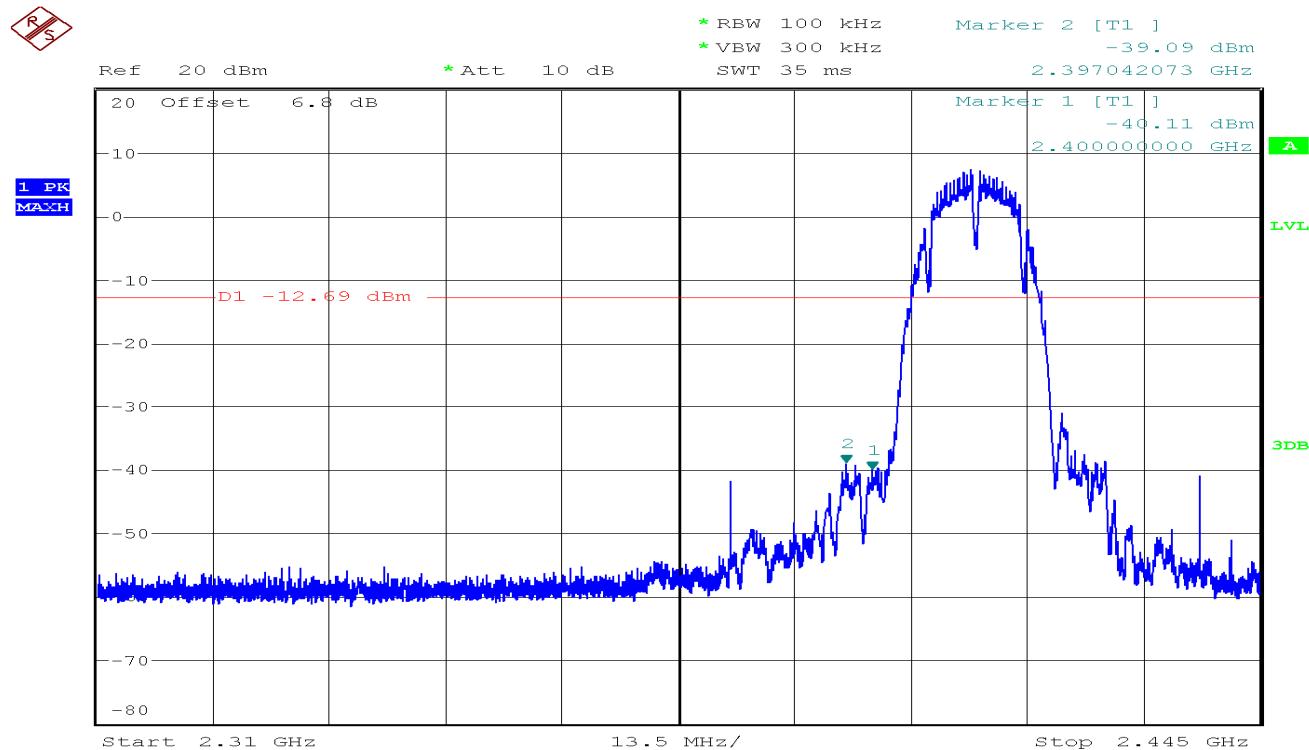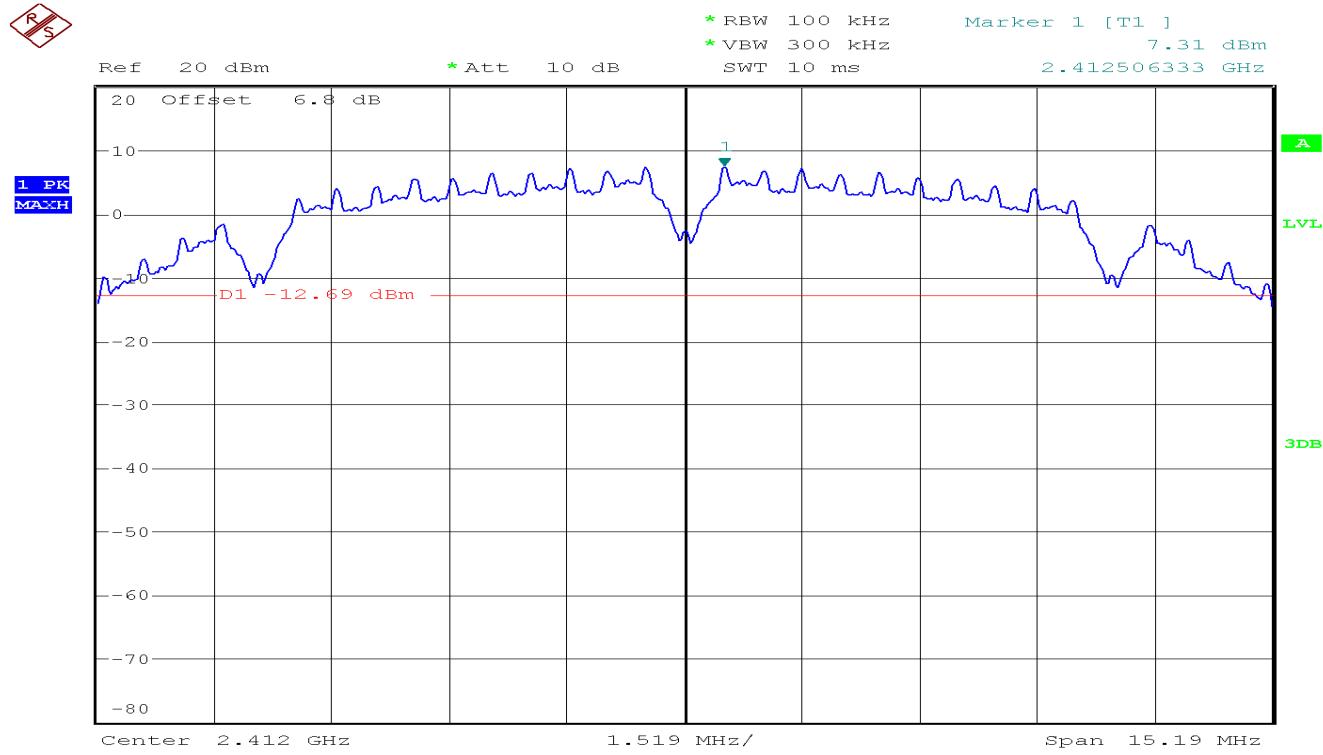

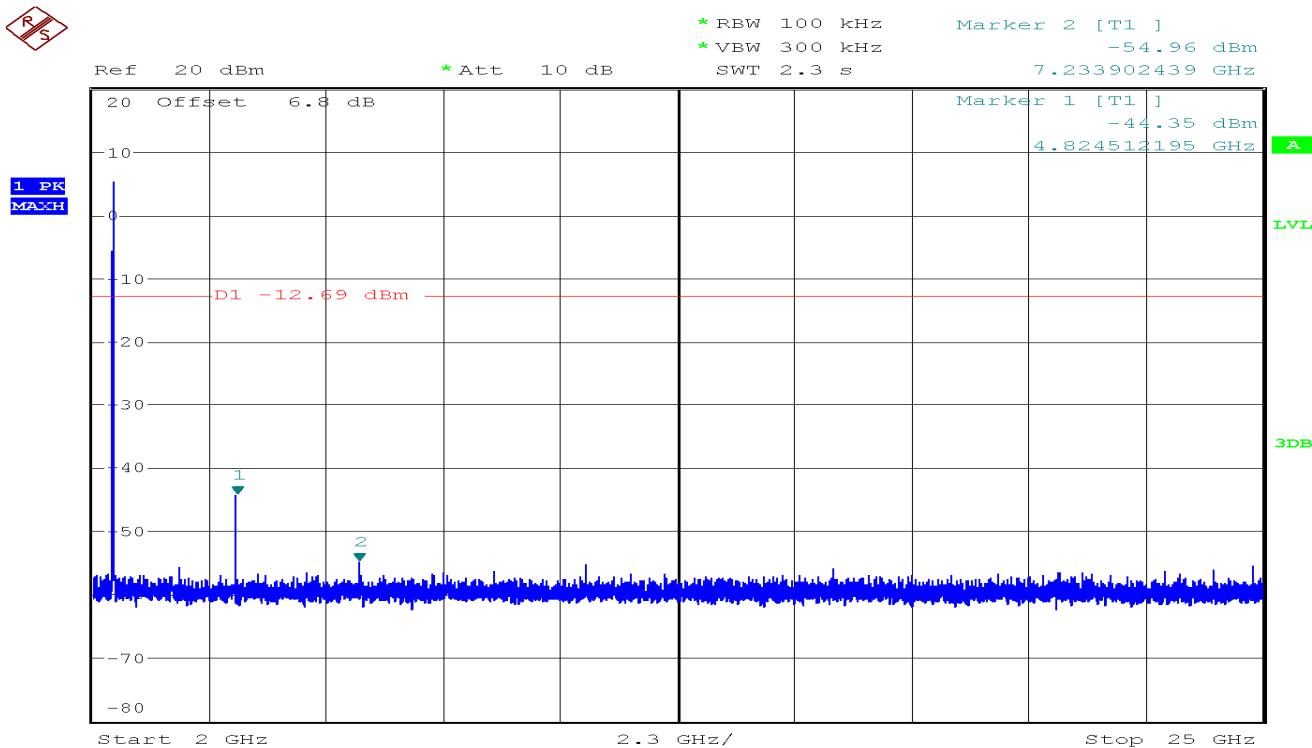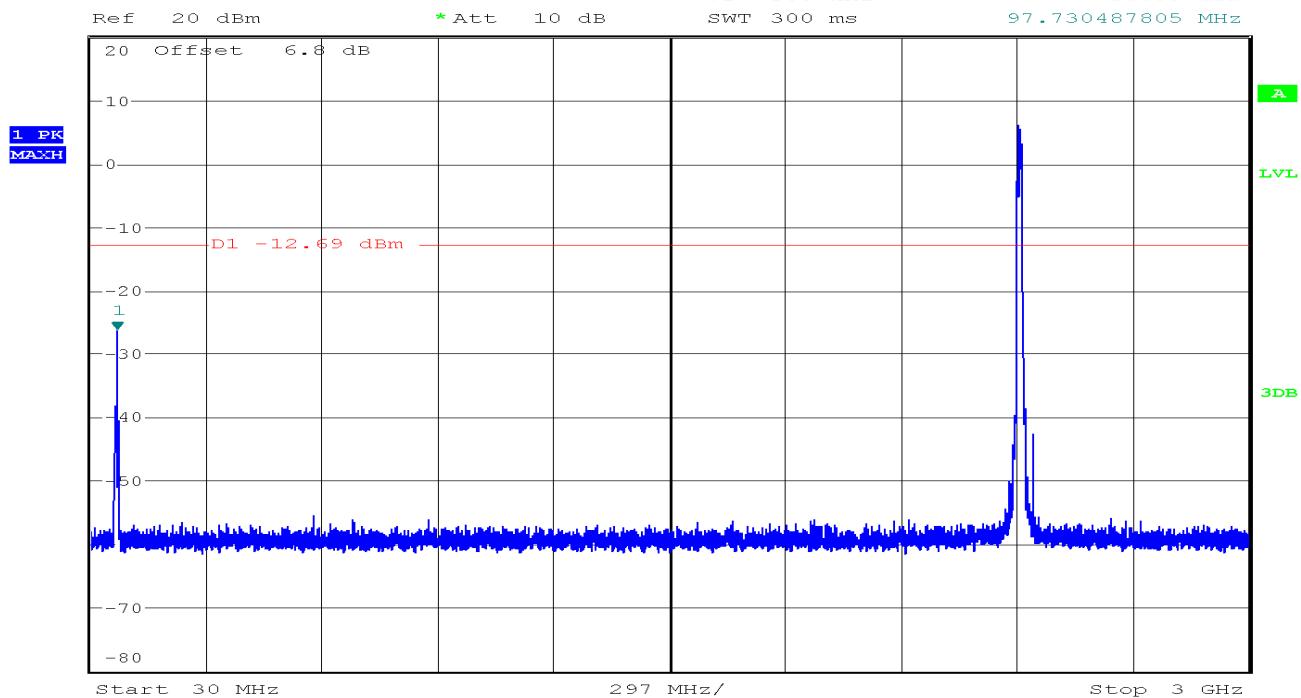


## CH Mid

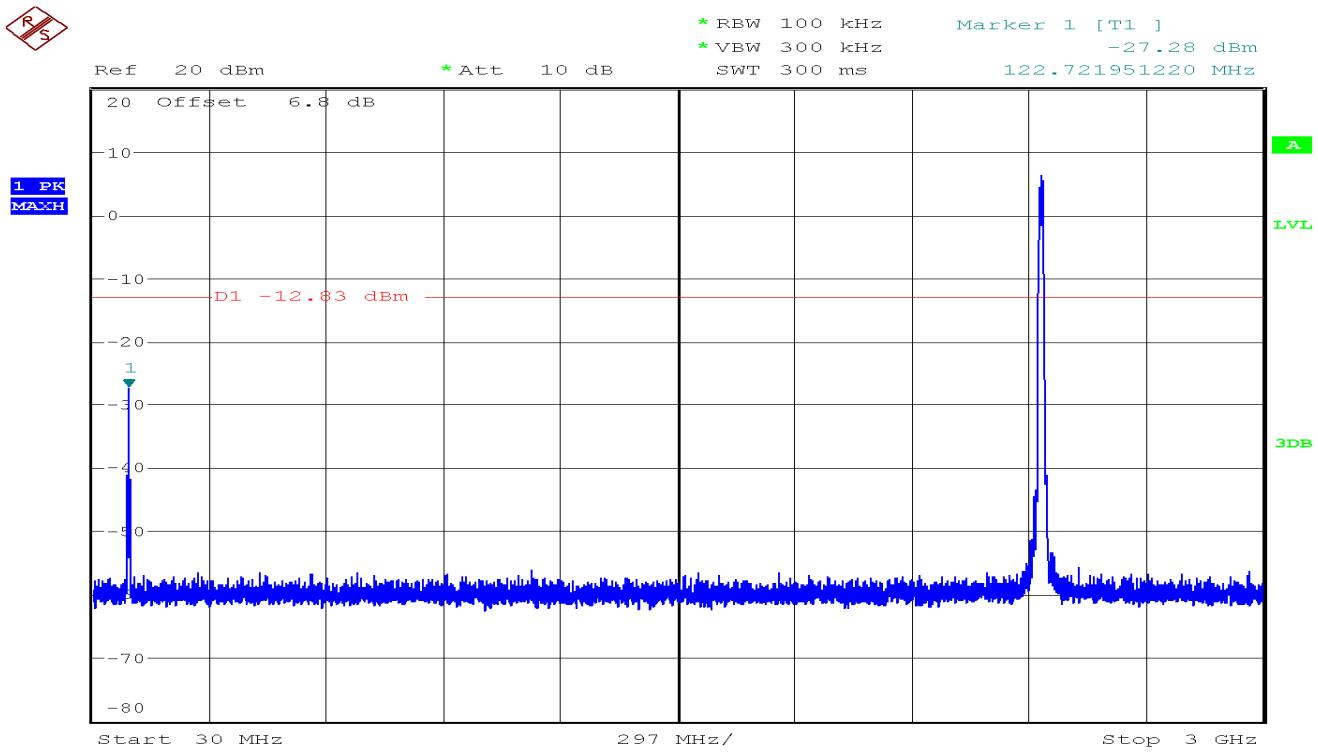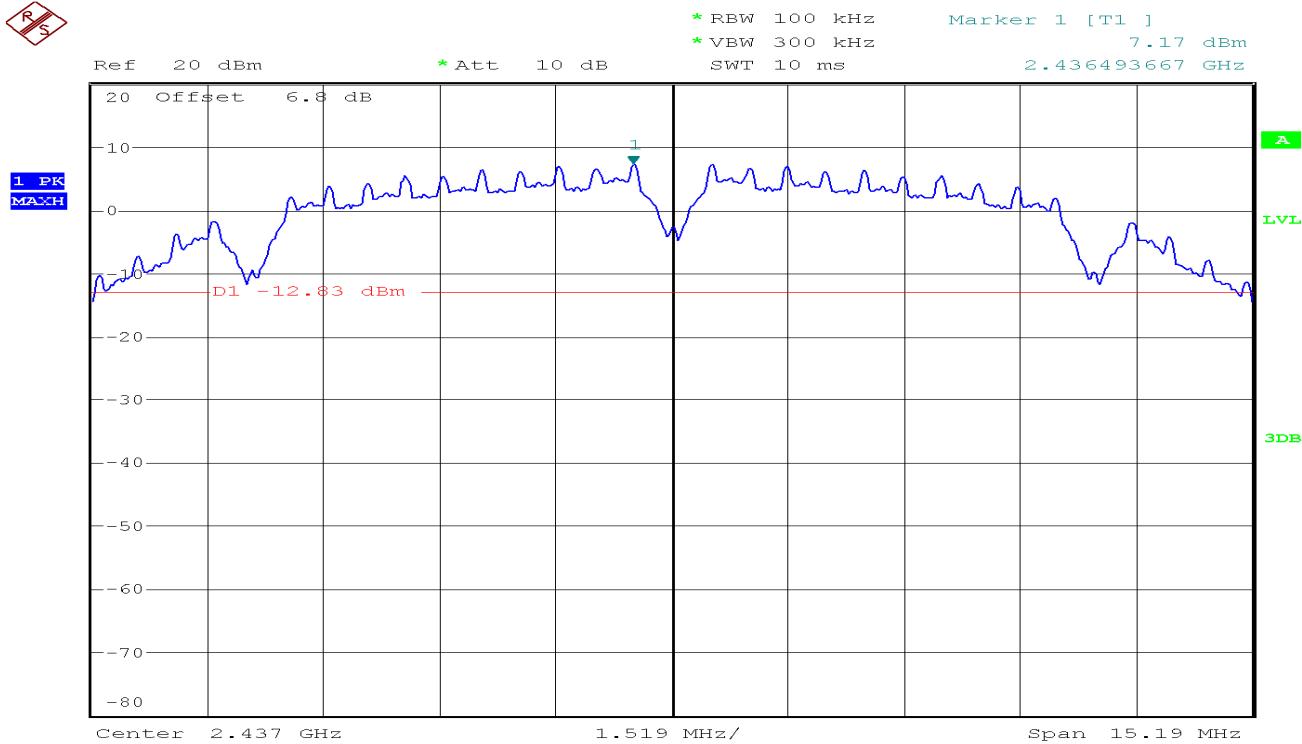

RS

1 PK  
MAXH


\* Att 10 dB


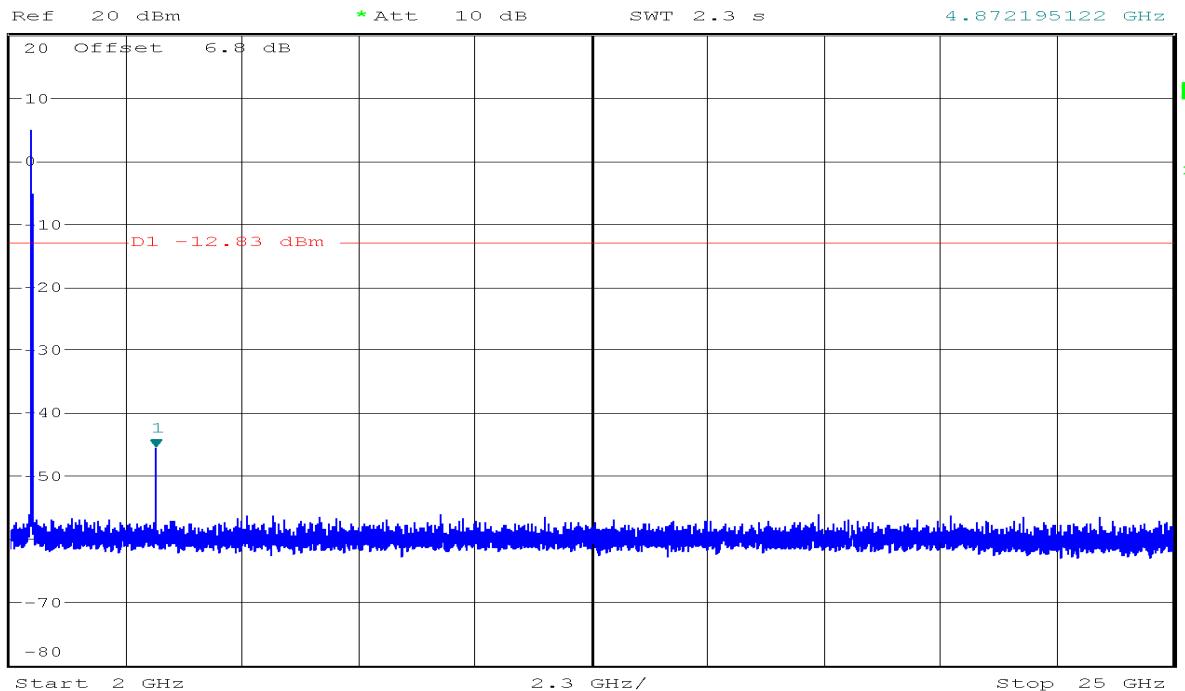
\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 2.3 sMarker 1 [T1 ]  
-45.68 dBm  
4.872195122 GHz**CH High**


RS

1 PK  
MAXH

\* Att 10 dB

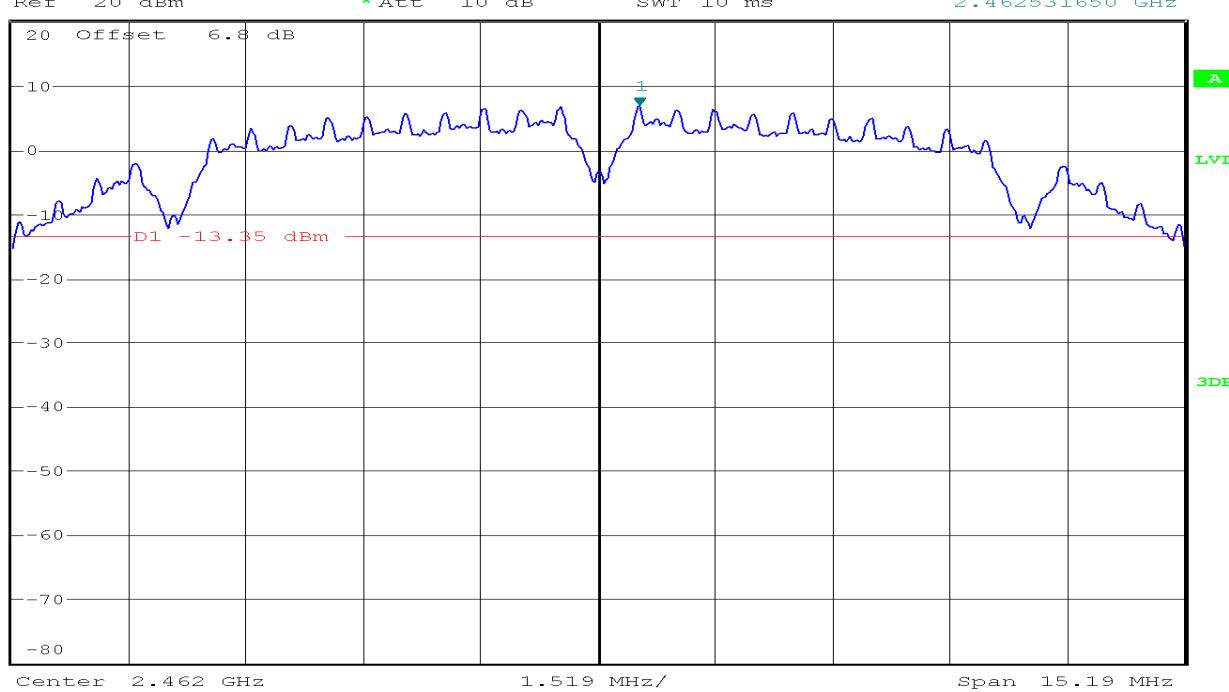
\* RBW 100 kHz  
\* VBW 300 kHz  
SWT 10 msMarker 1 [T1 ]  
6.65 dBm  
2.462531650 GHz

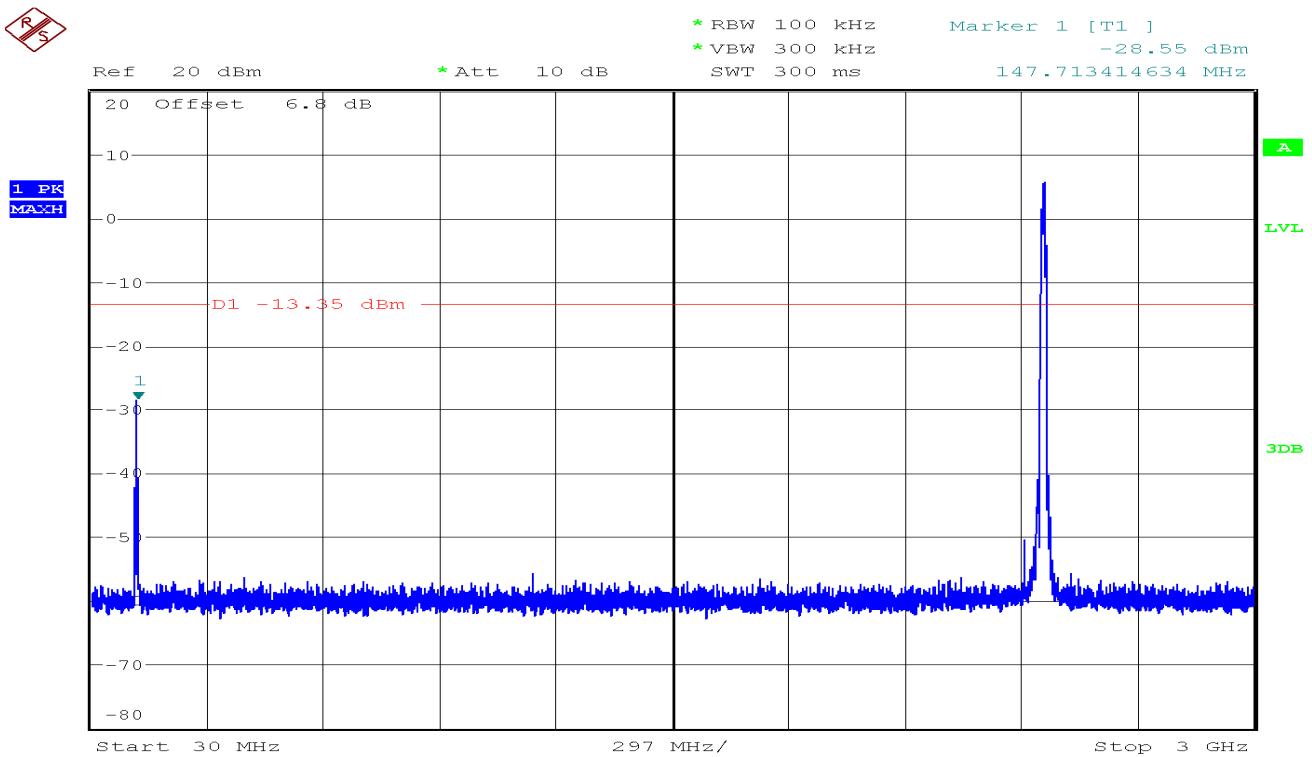
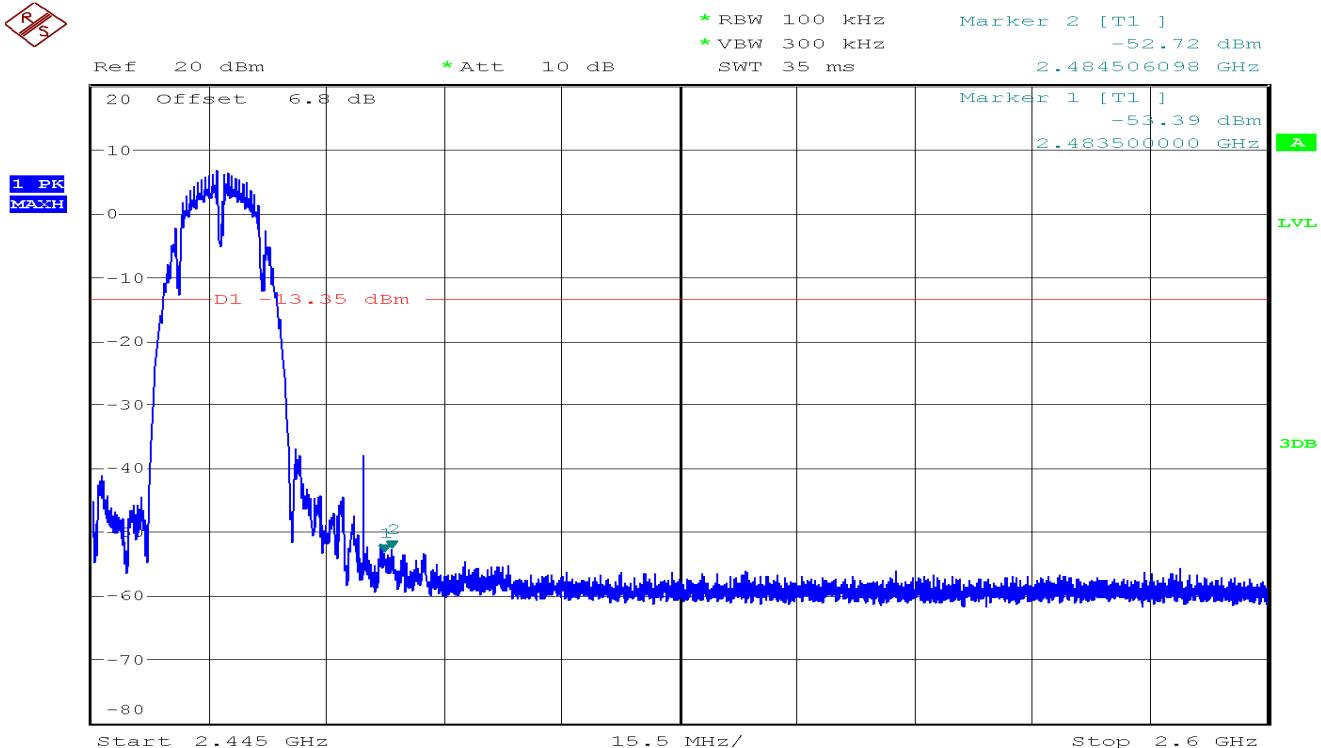


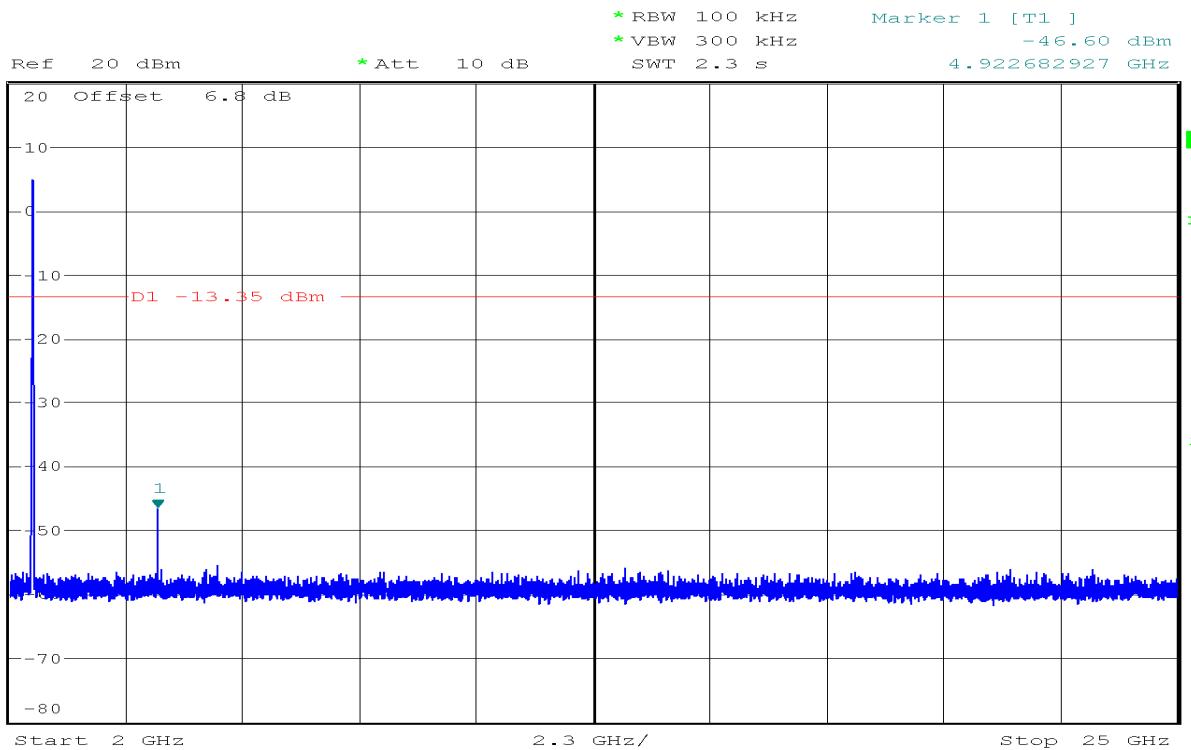


### IEEE 802.11b mode/Chain 1


#### CH Low


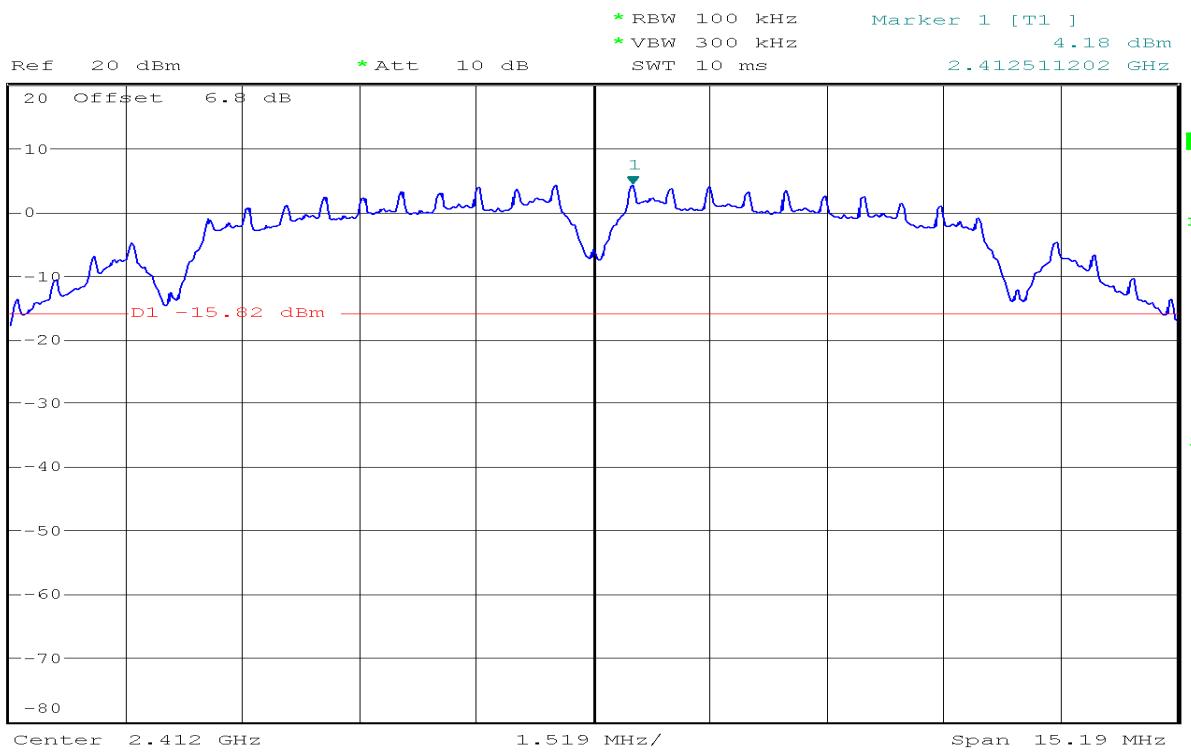


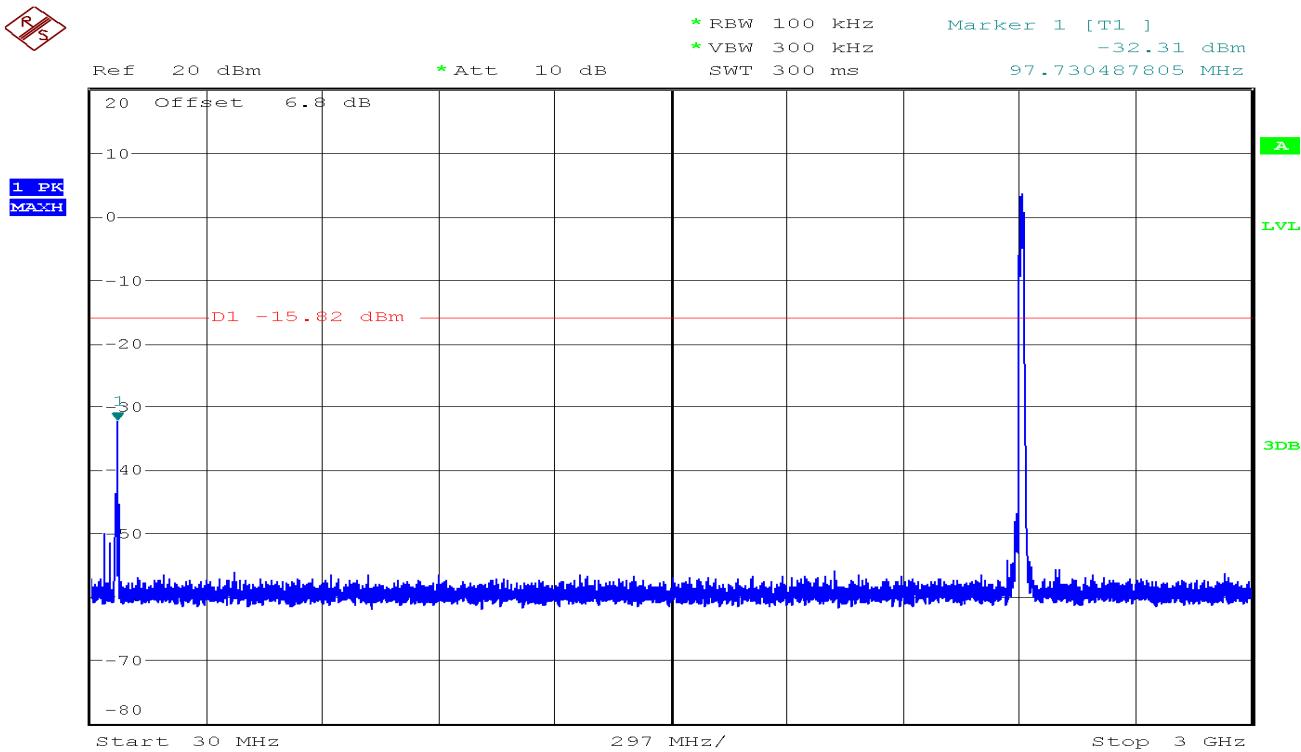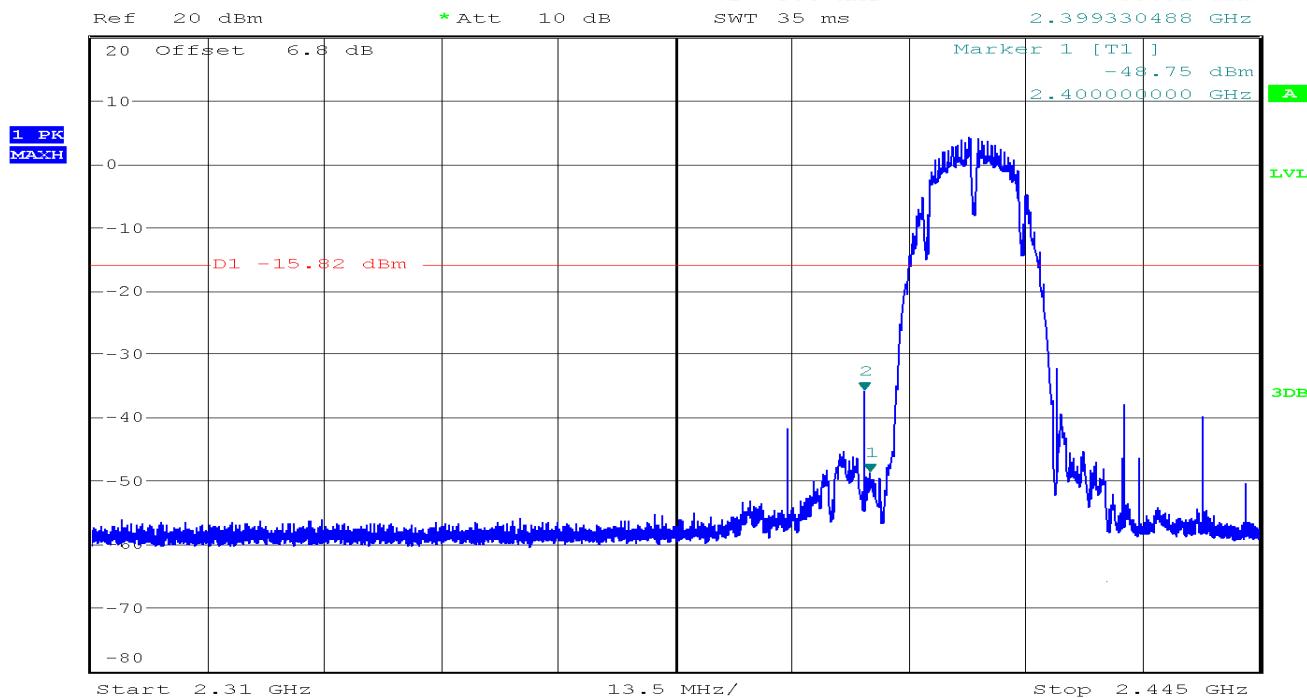


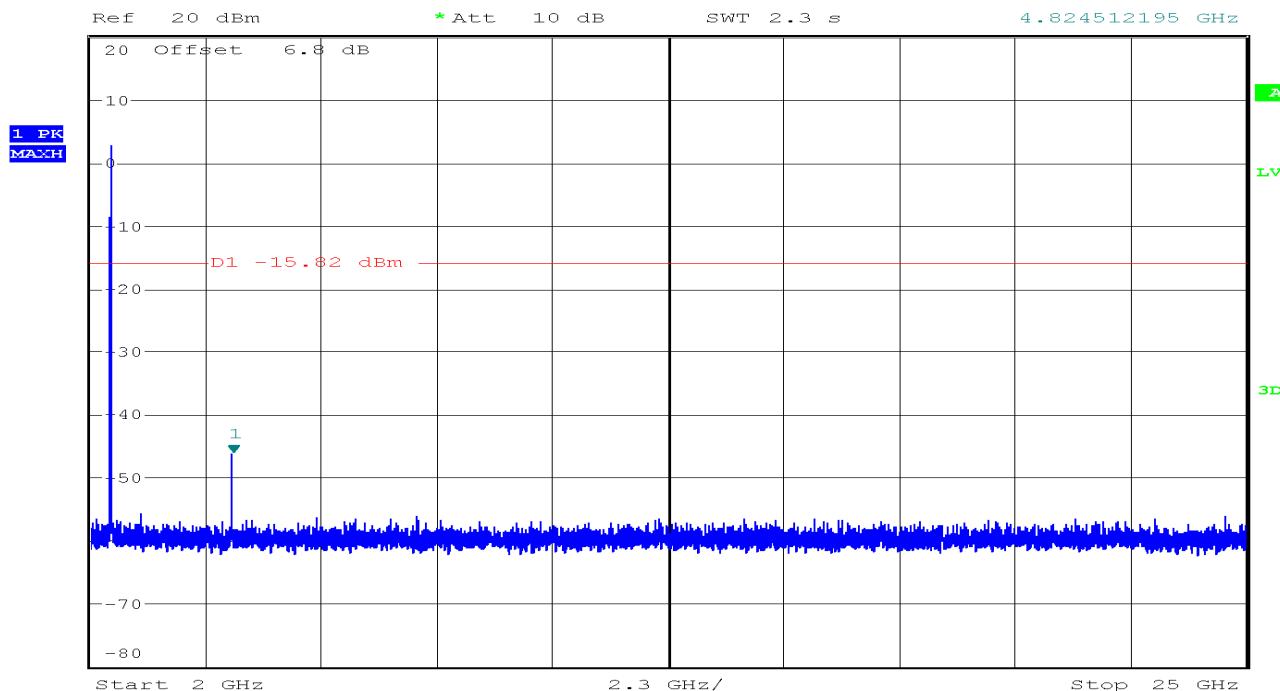




## CH Mid

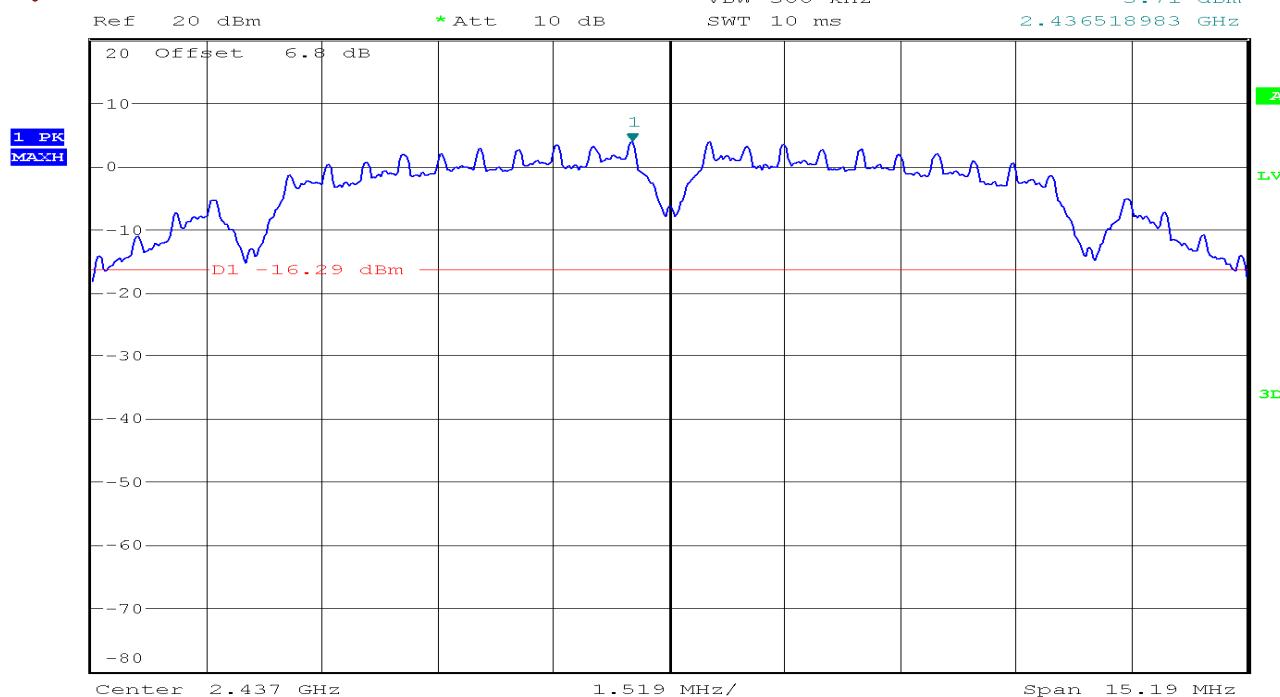

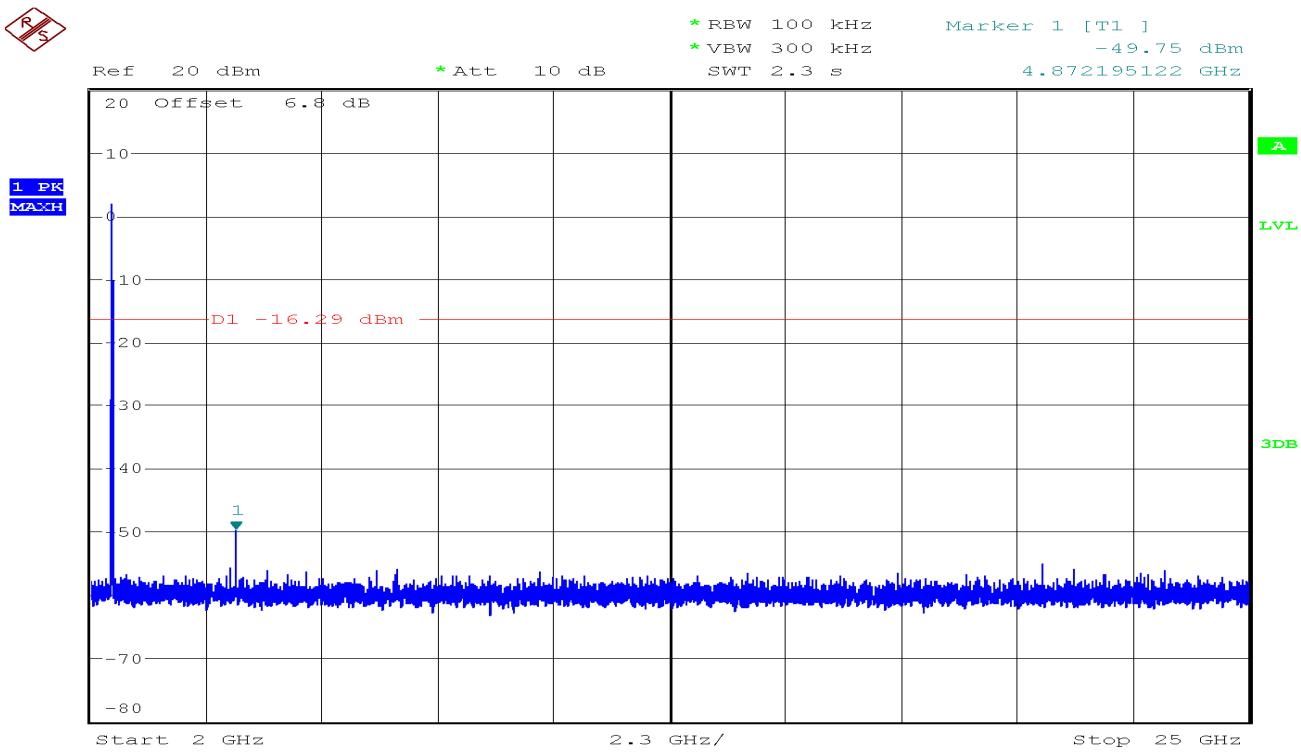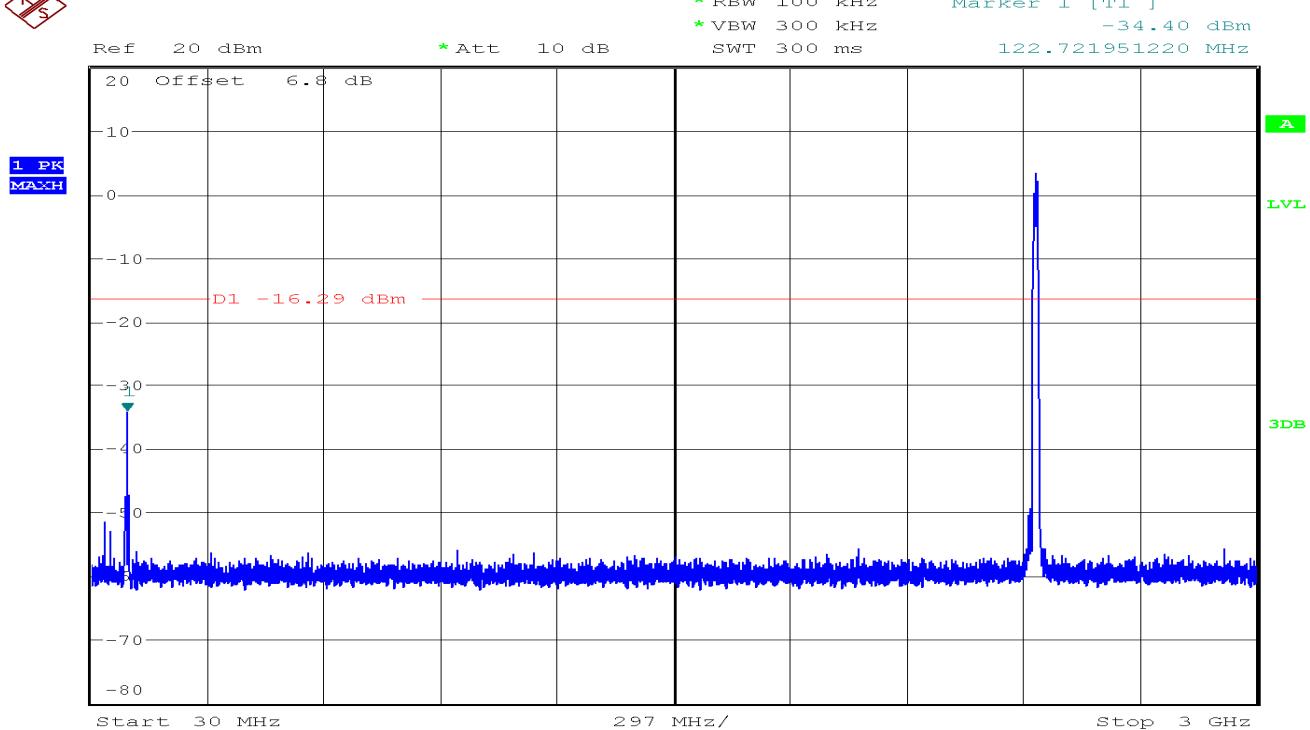



## CH High

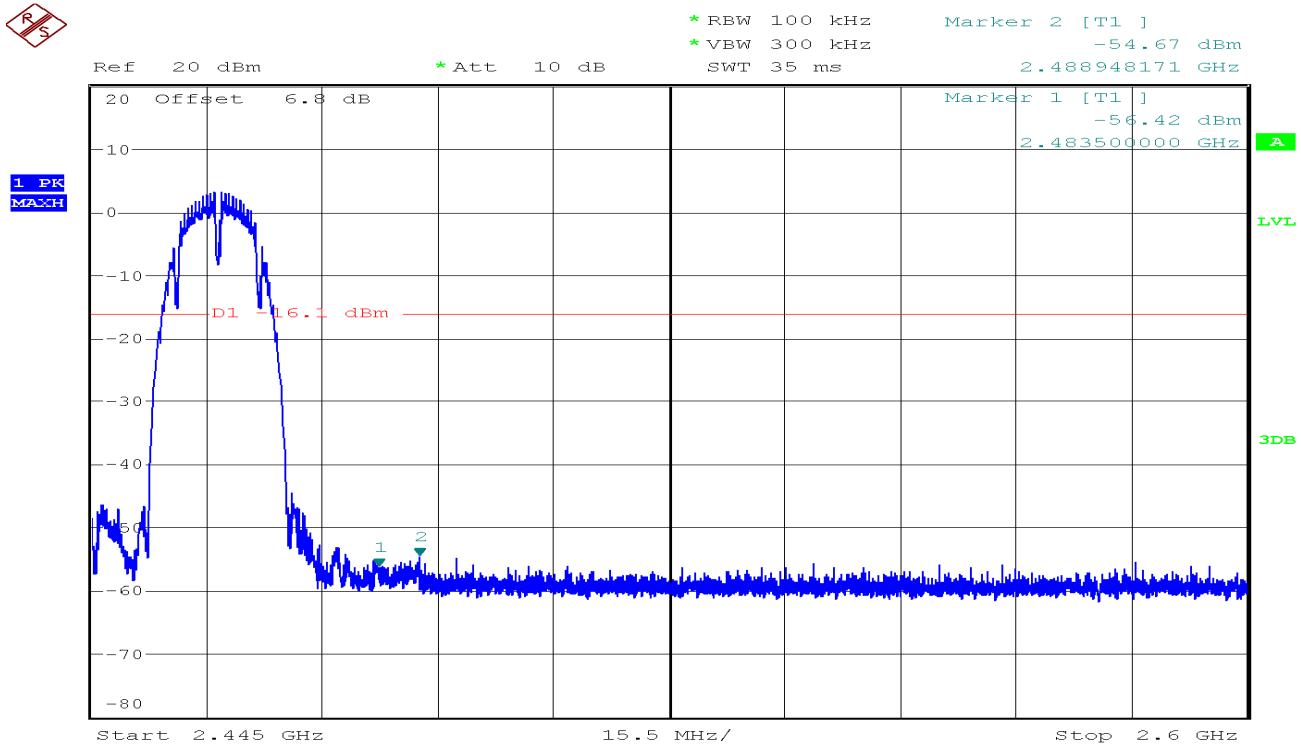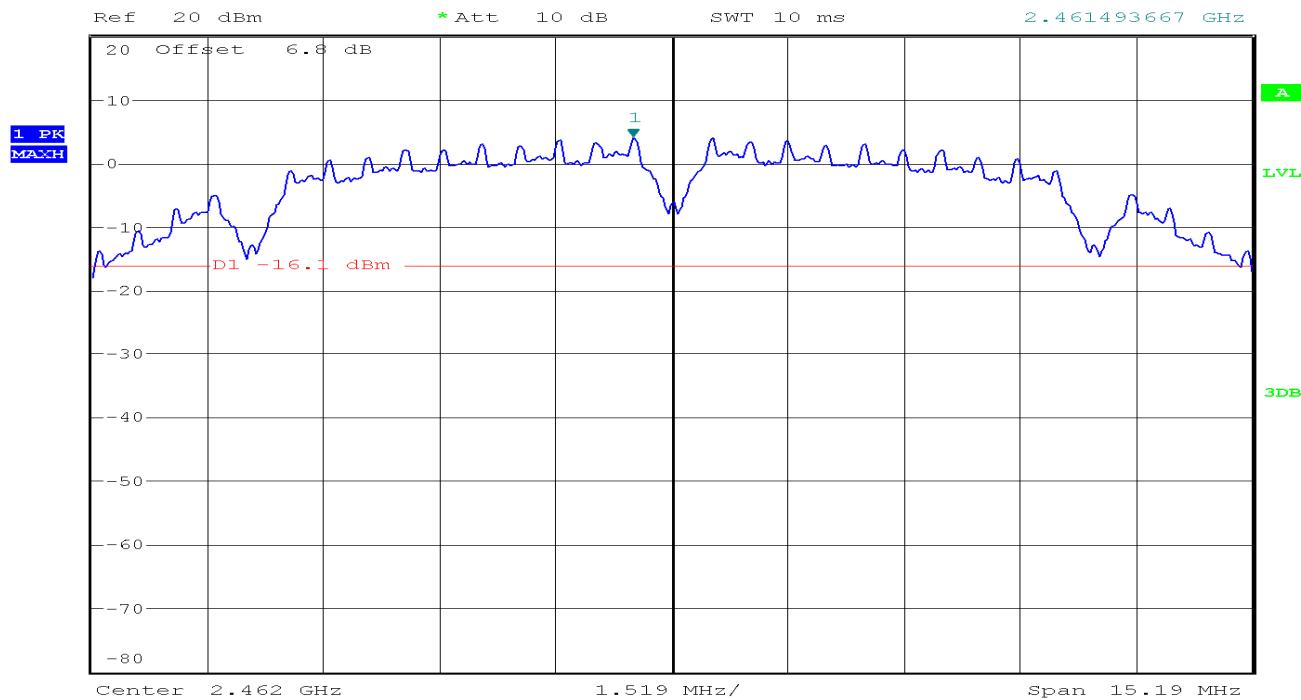

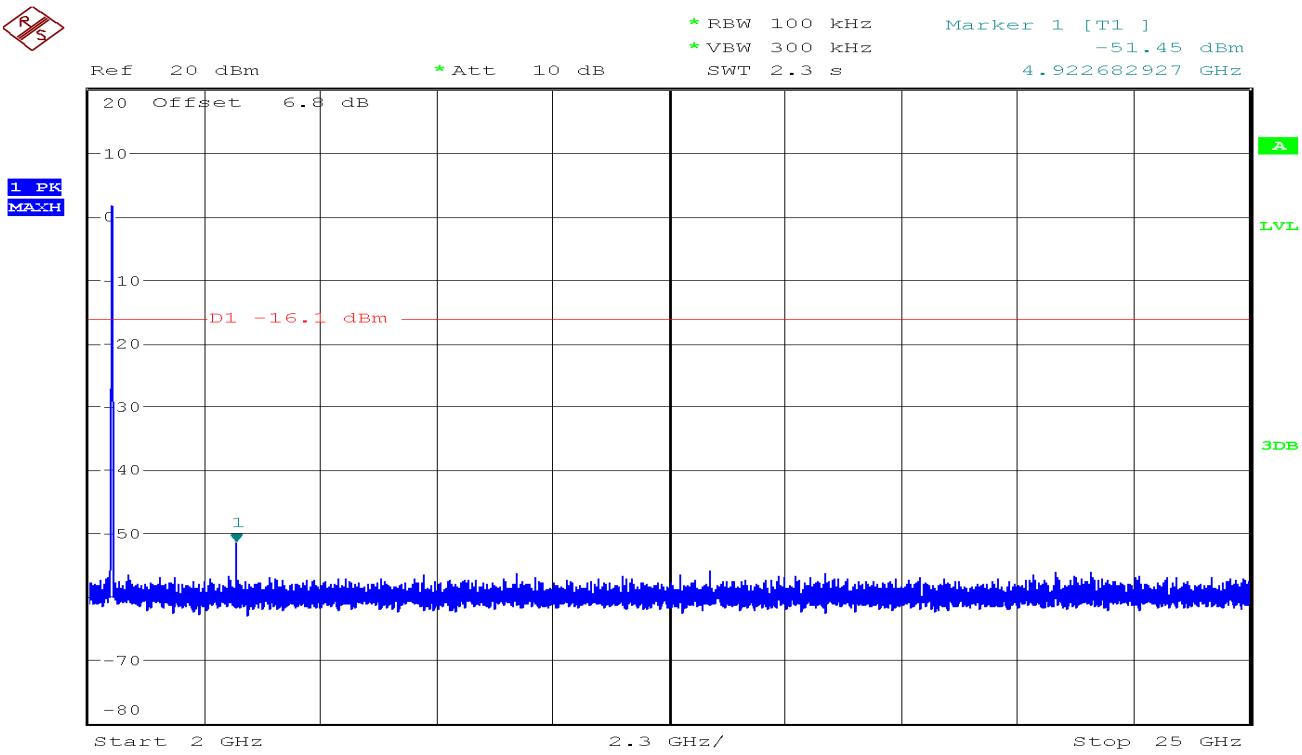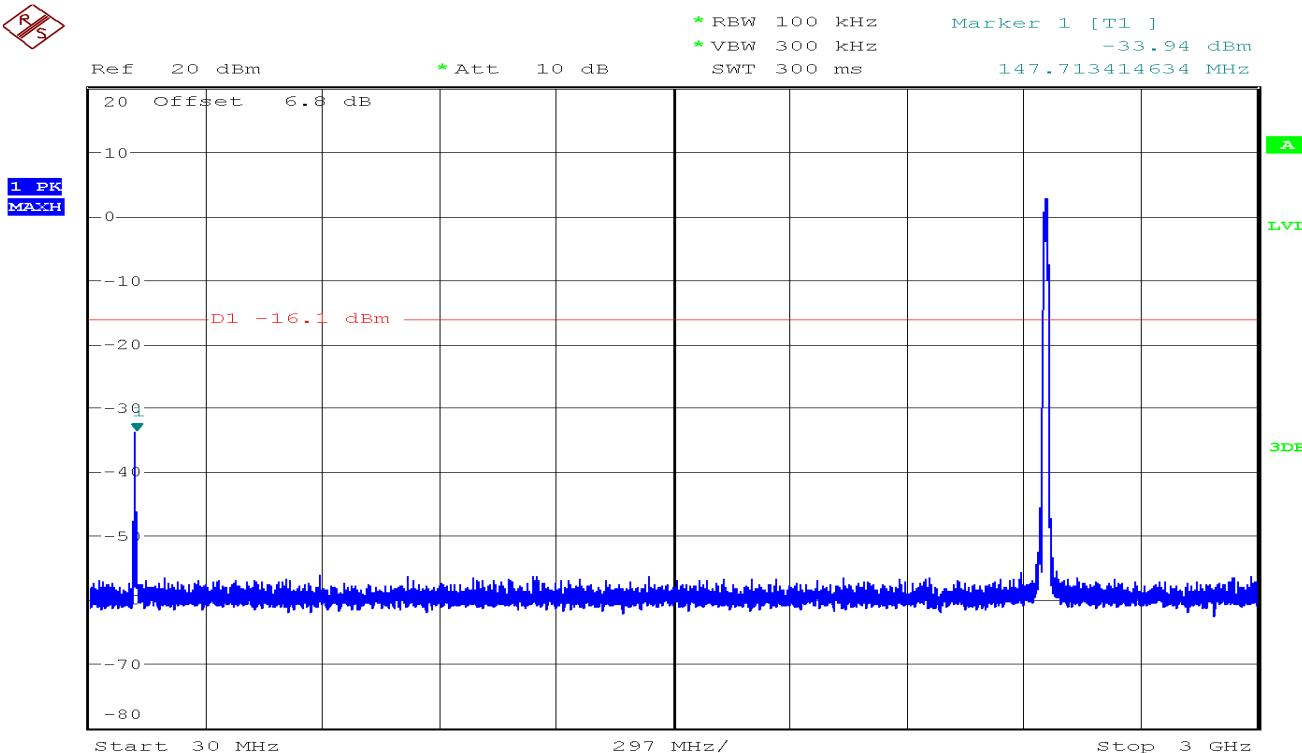


IEEE 802.11g mode/Chain 0


## CH Low

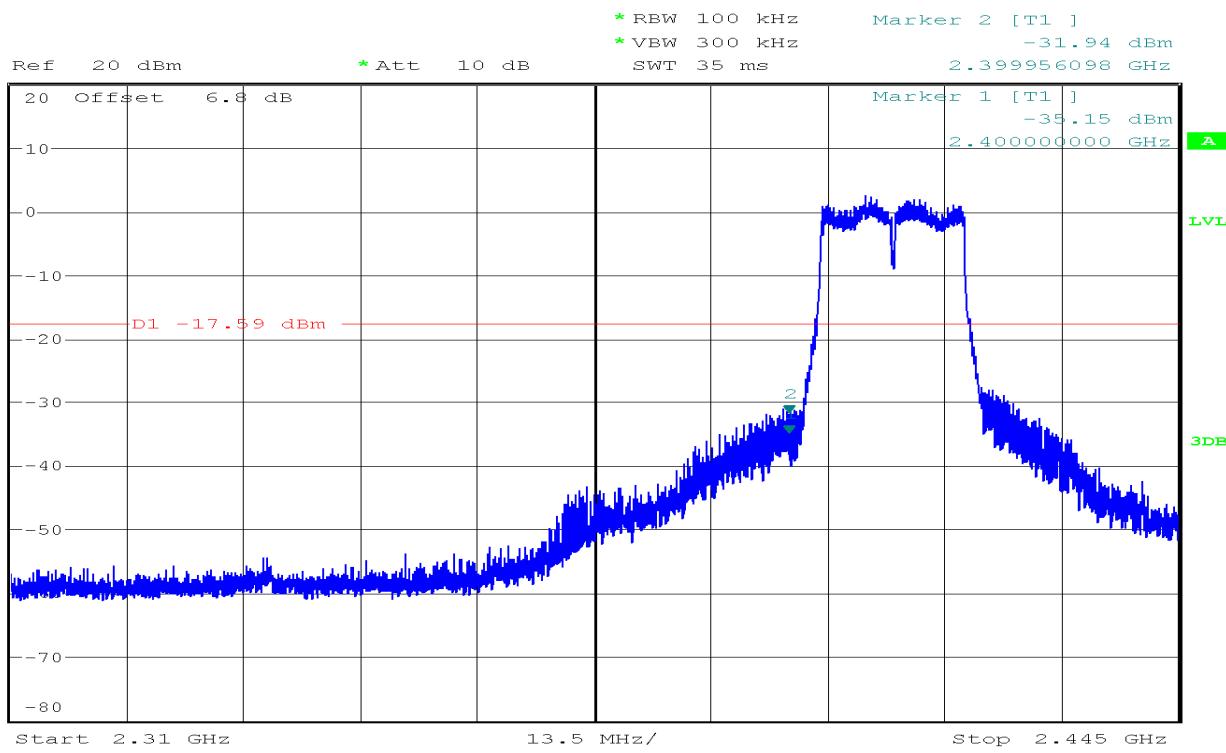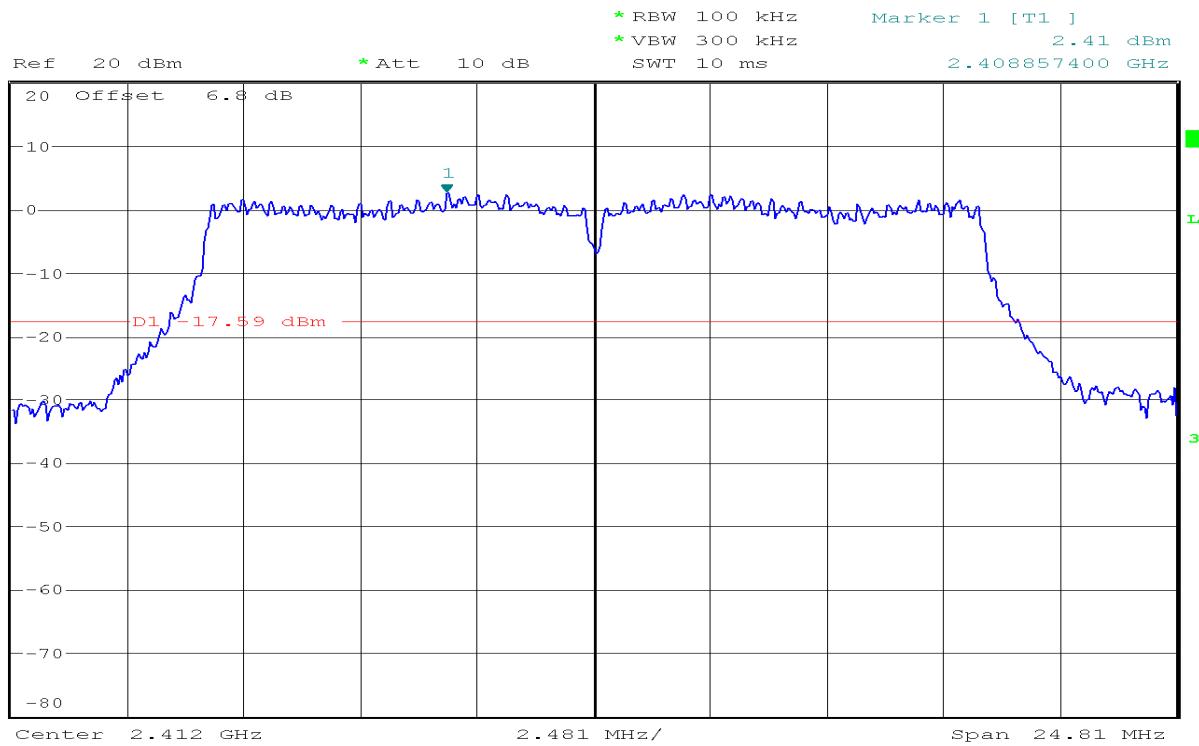



R/S

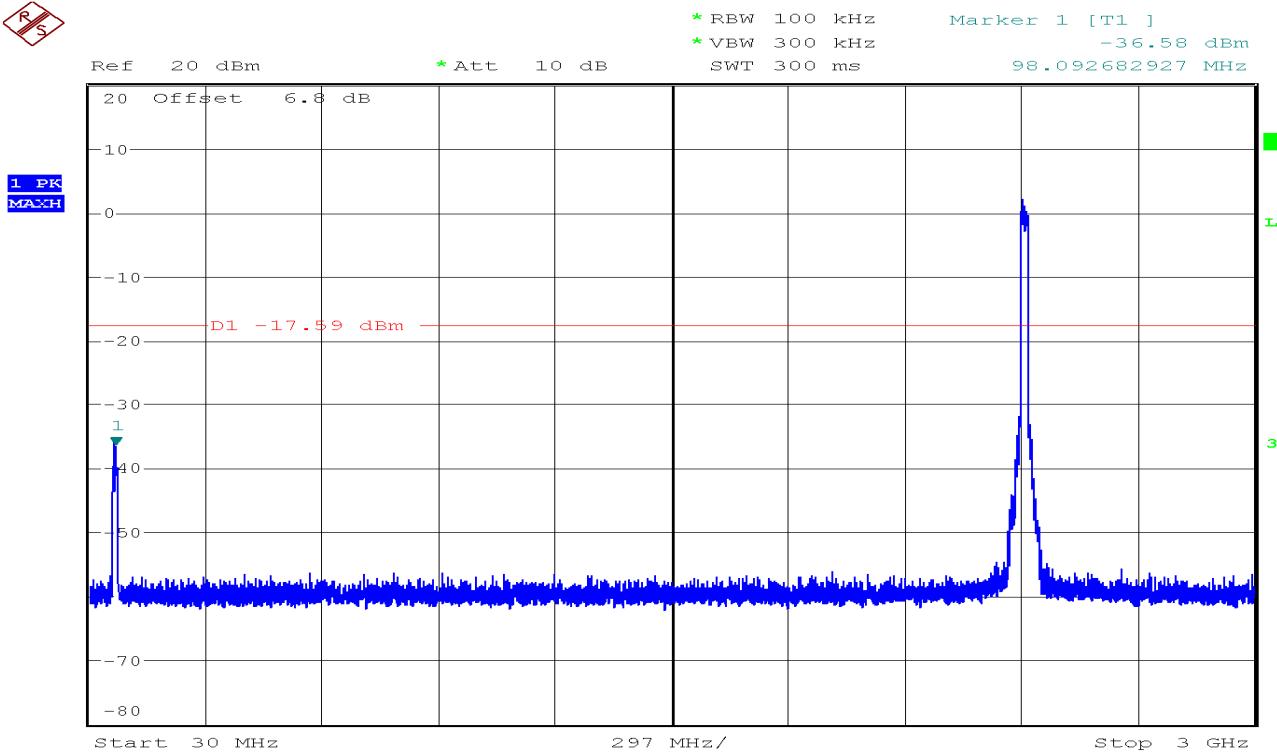


R/S

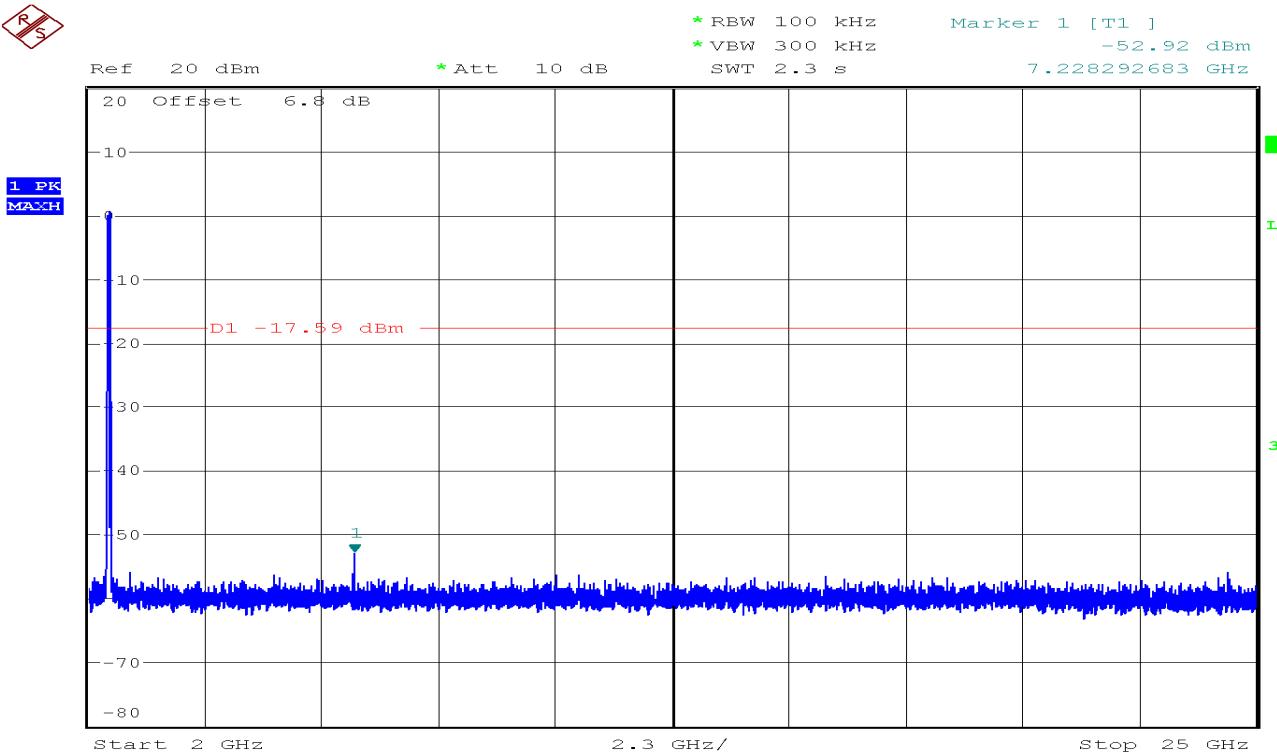

CH Mid

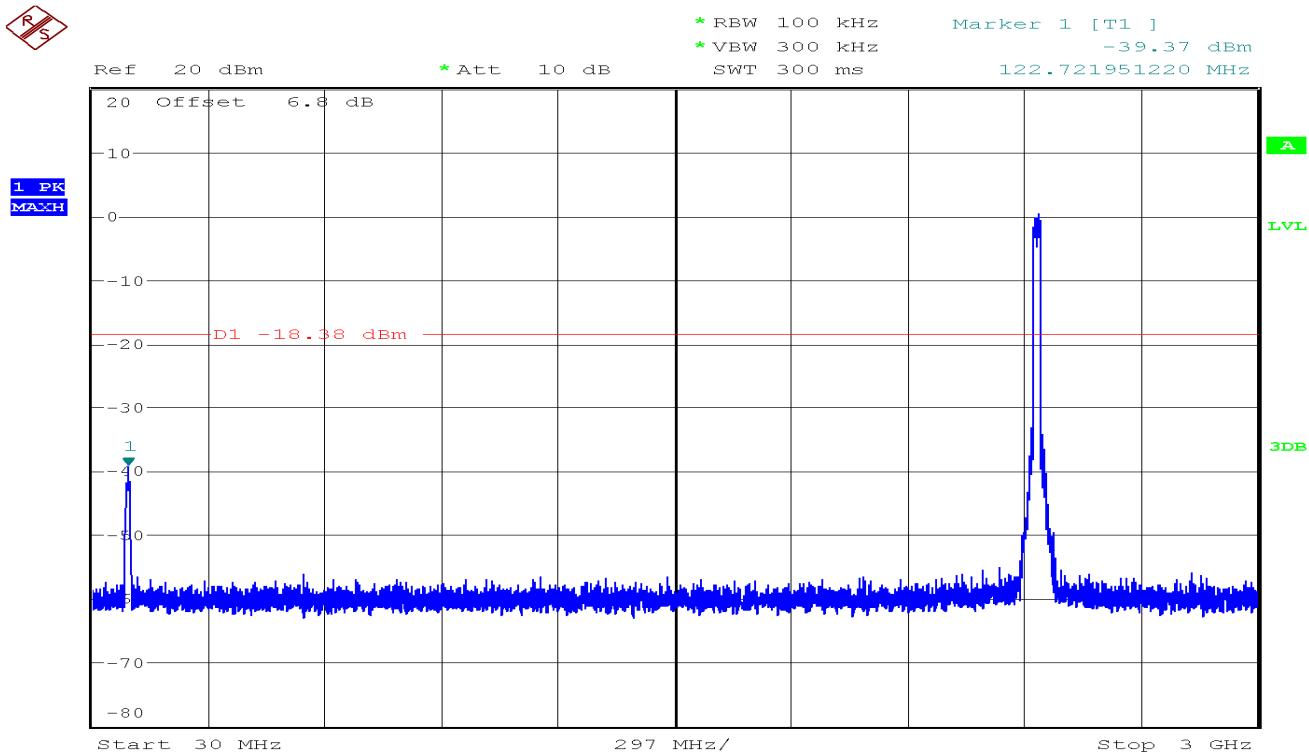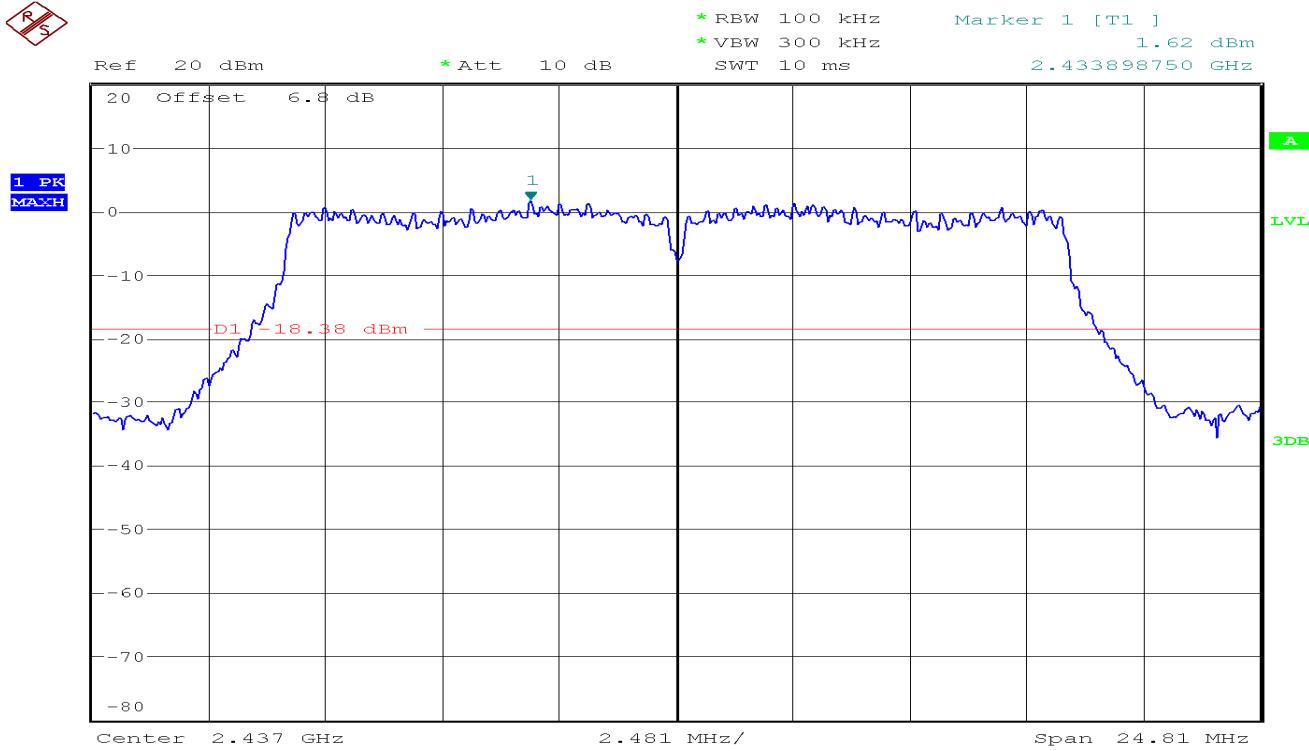


RS

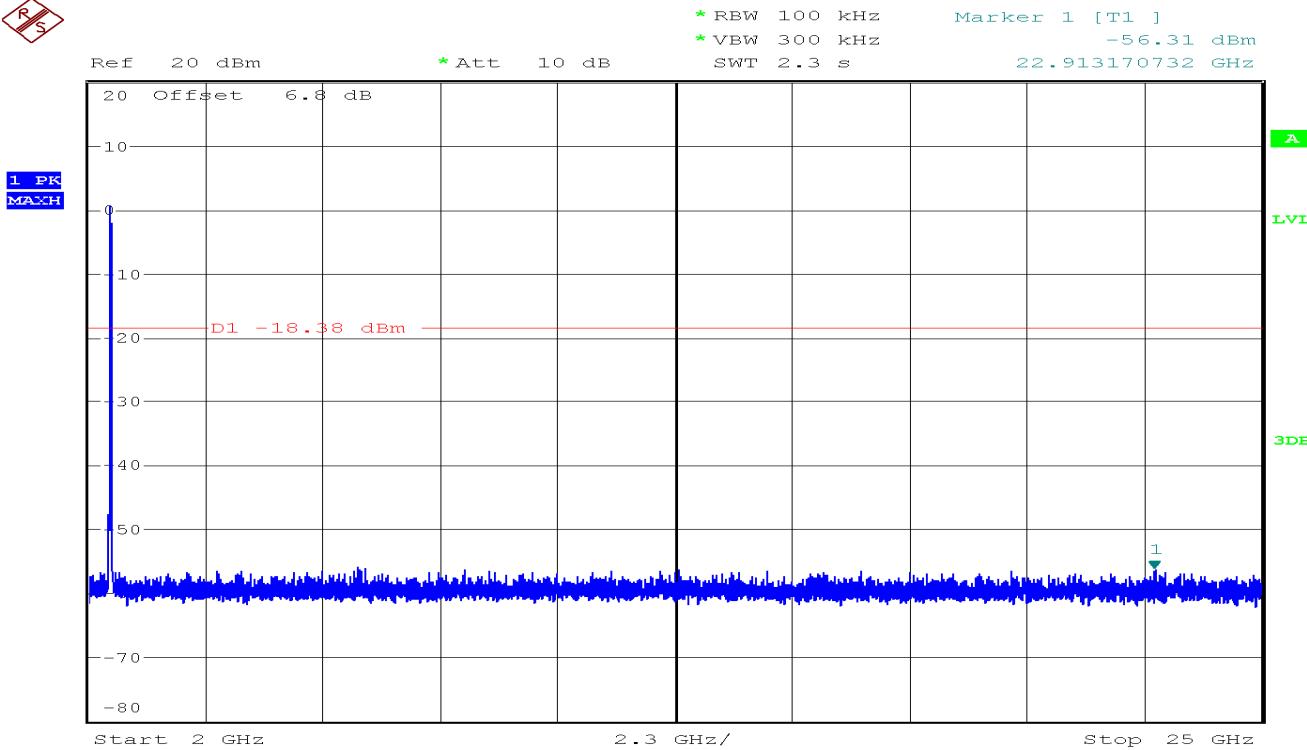


## CH High


RS


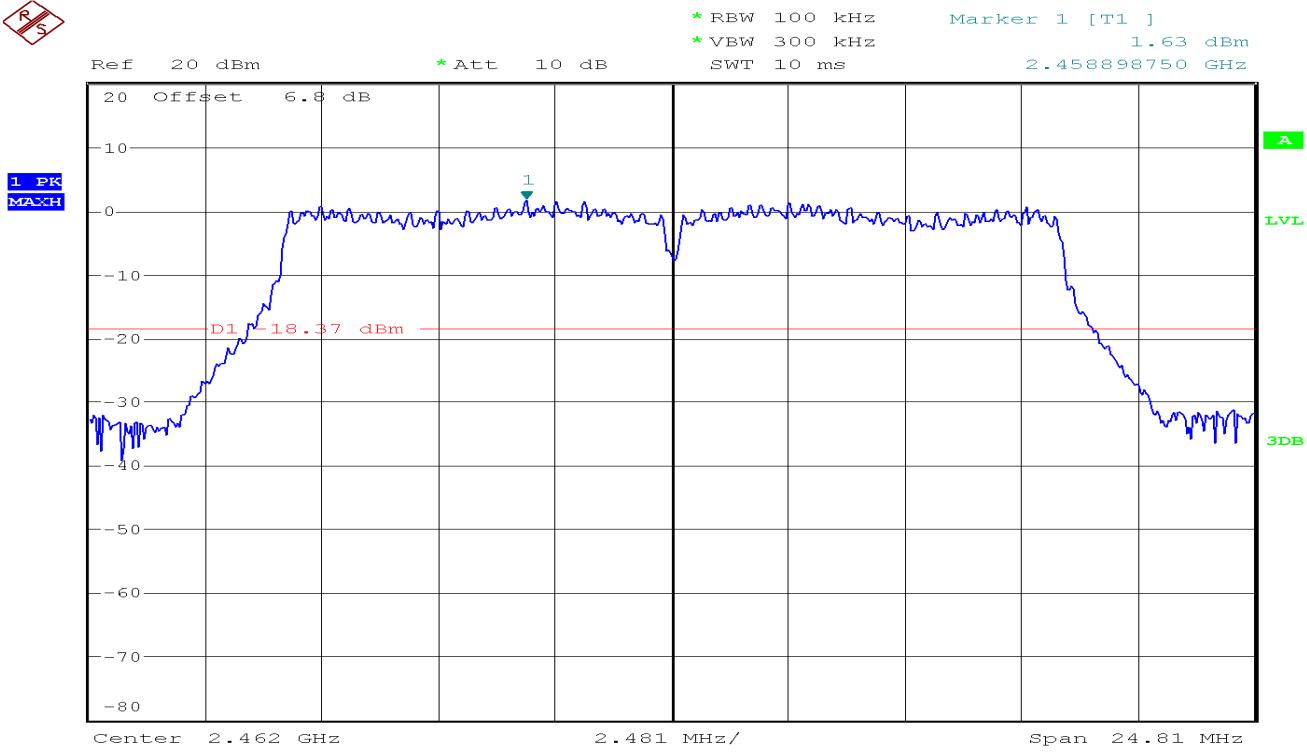


RS

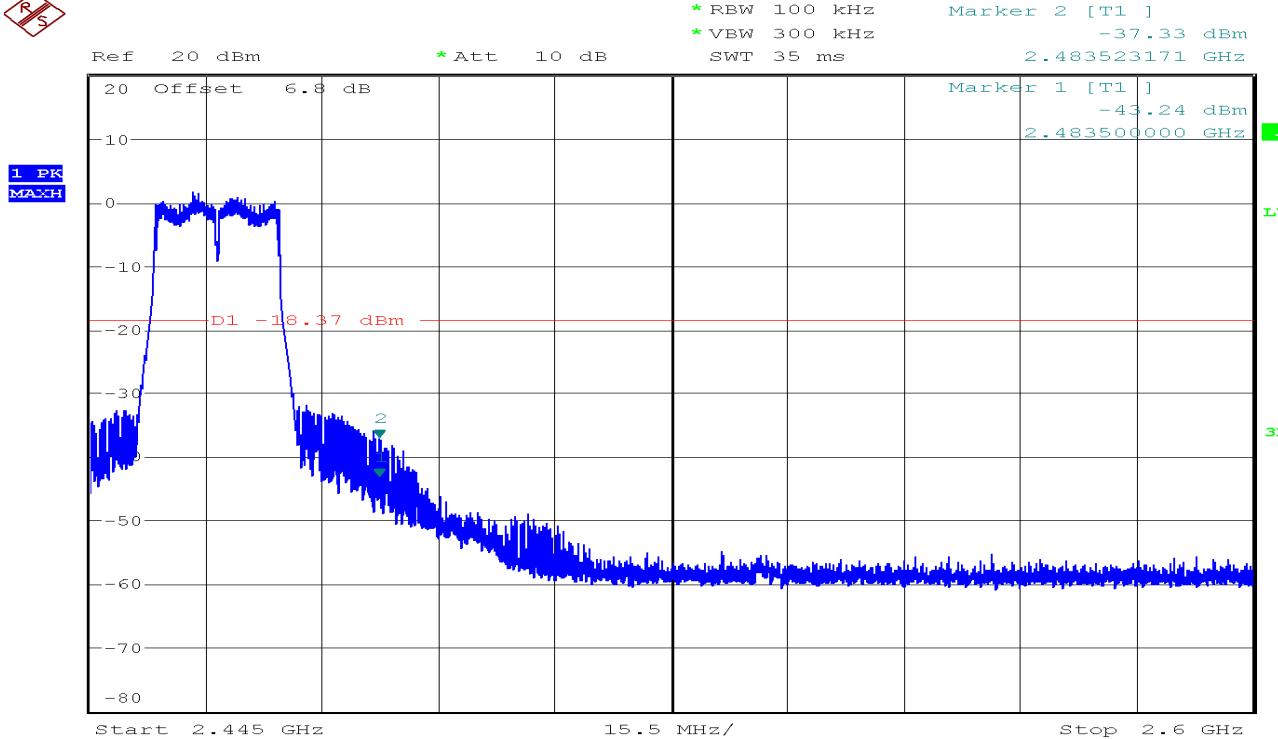


RS

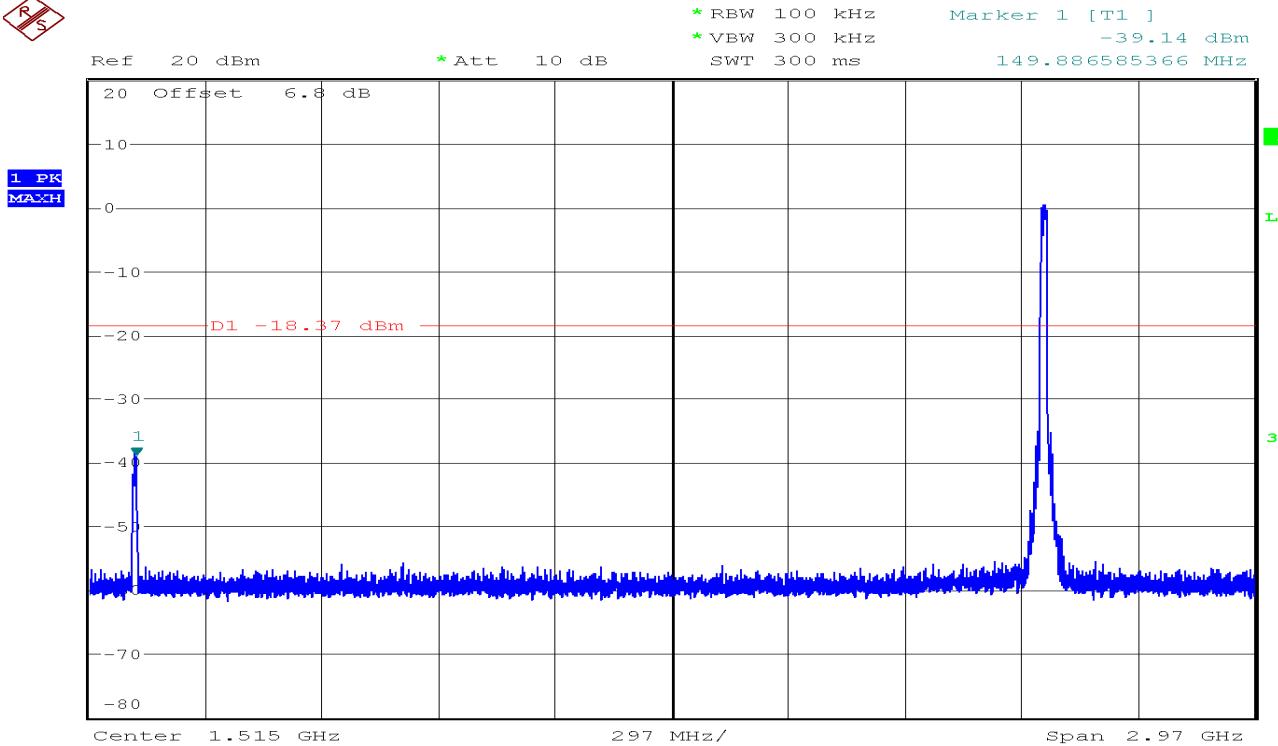


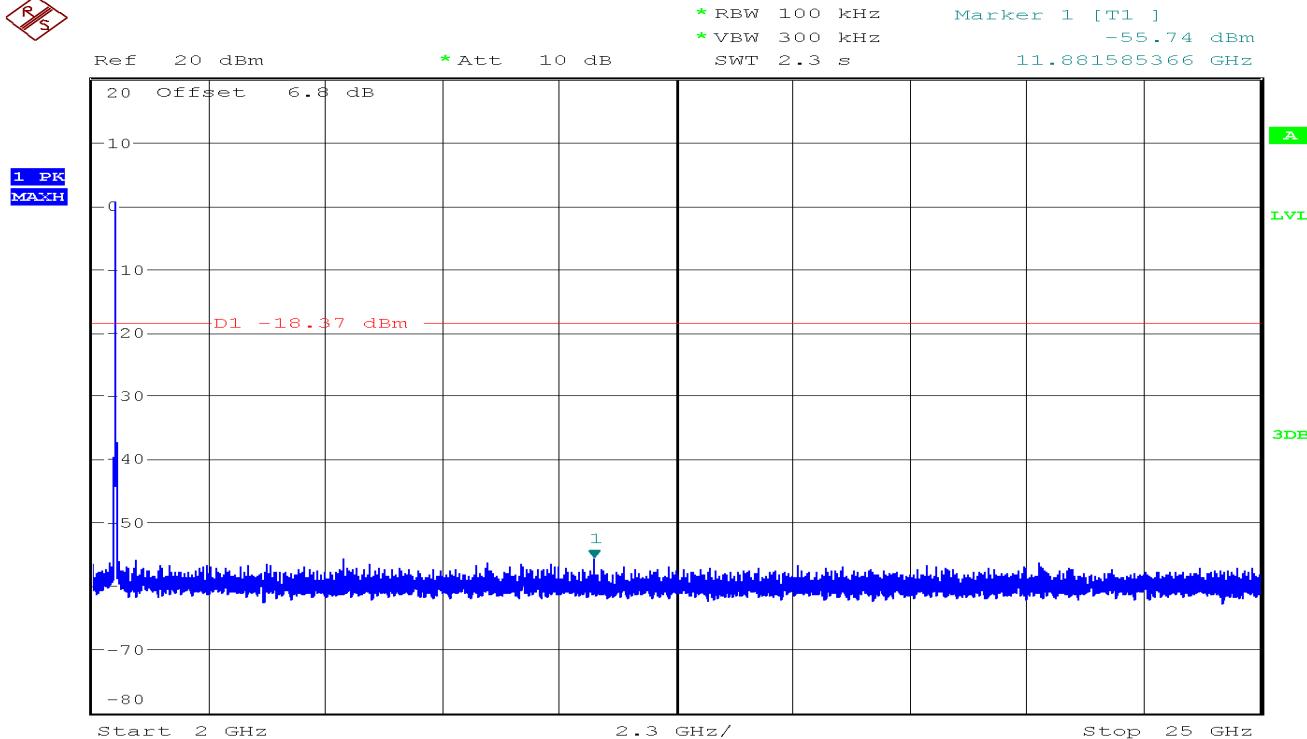
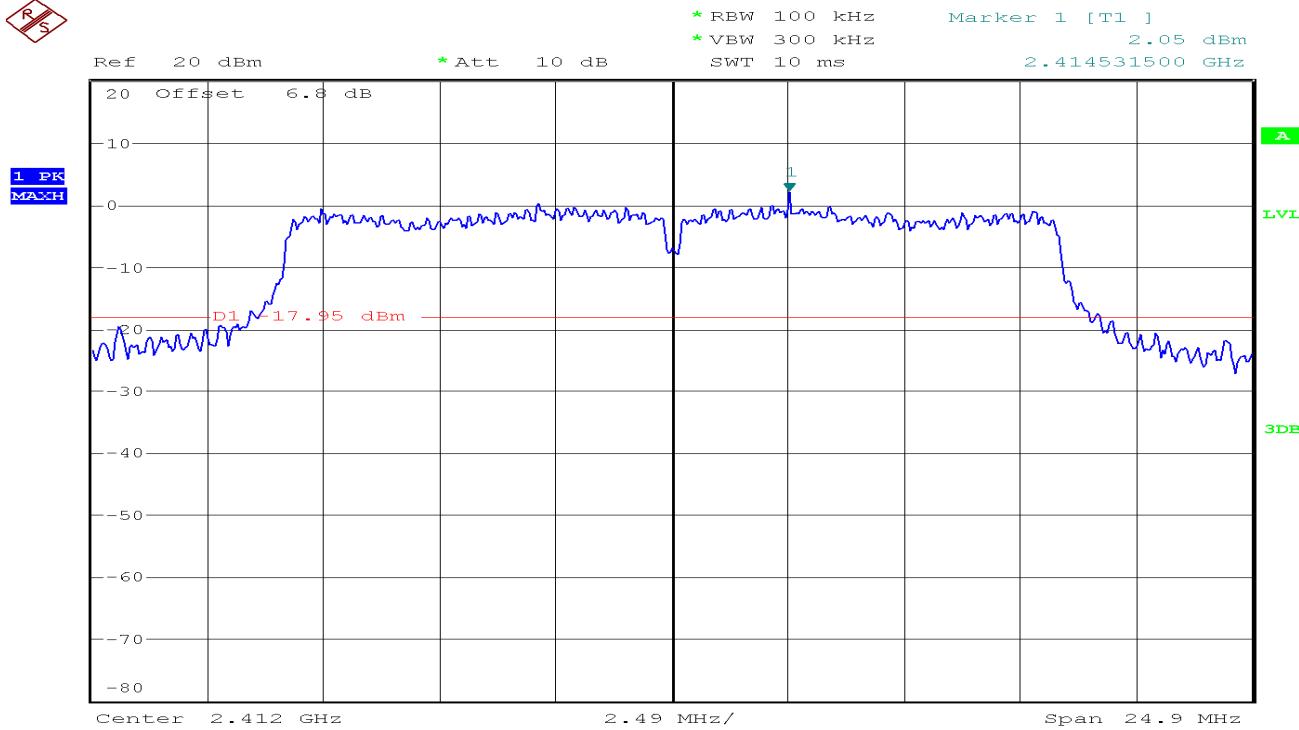
R  
S**IEEE 802.11g mode/Chain 1****CH Low**R  
S

R/S

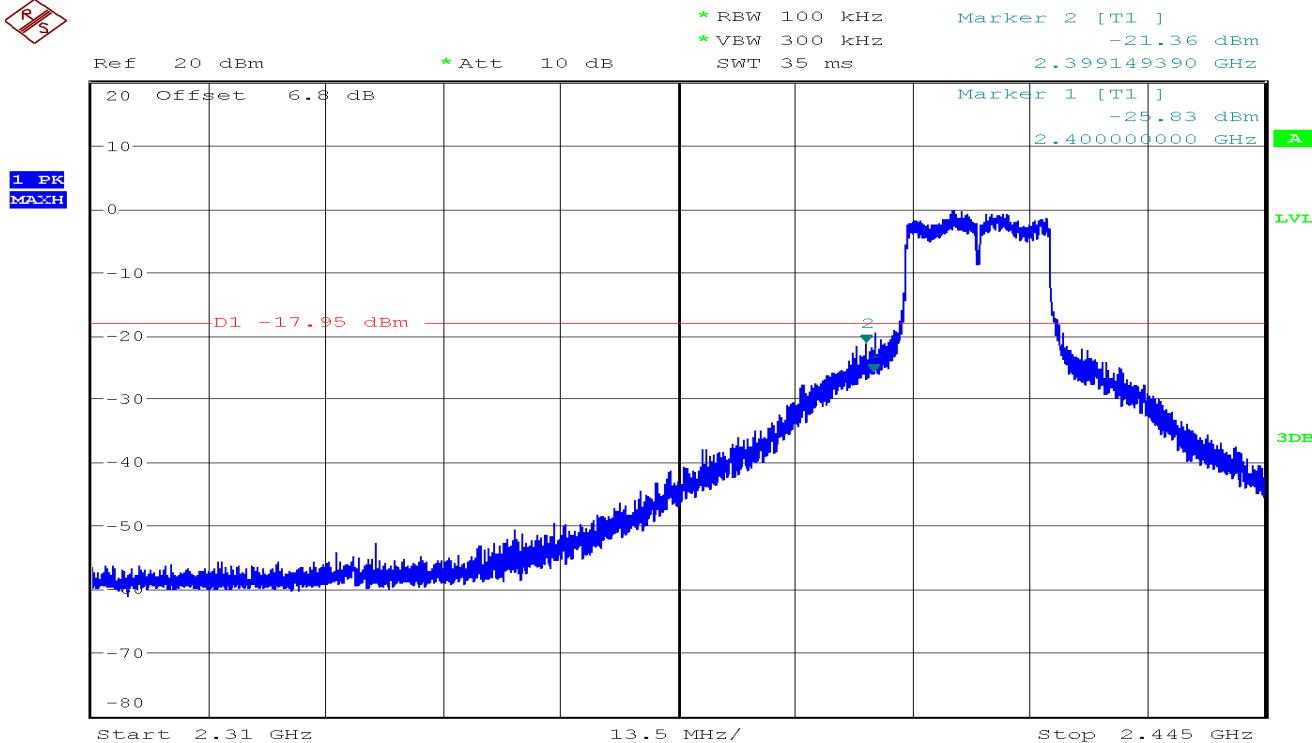


R/S

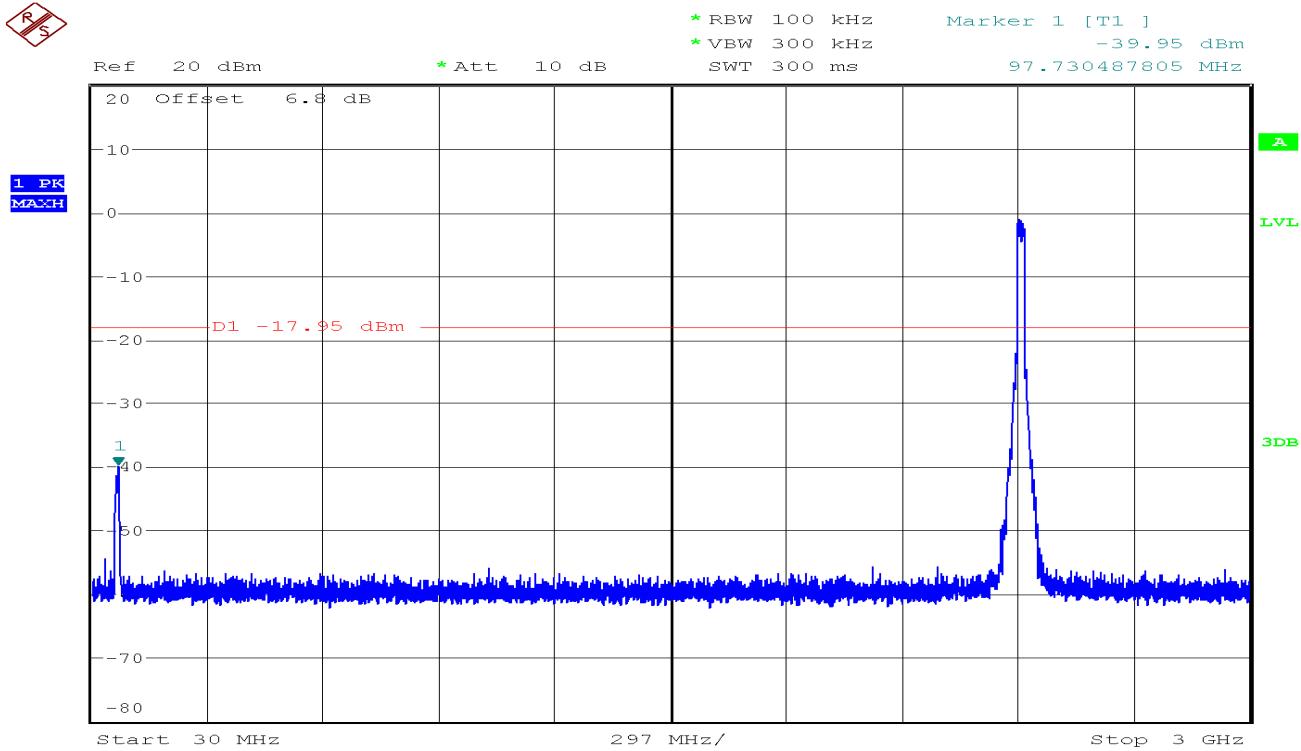


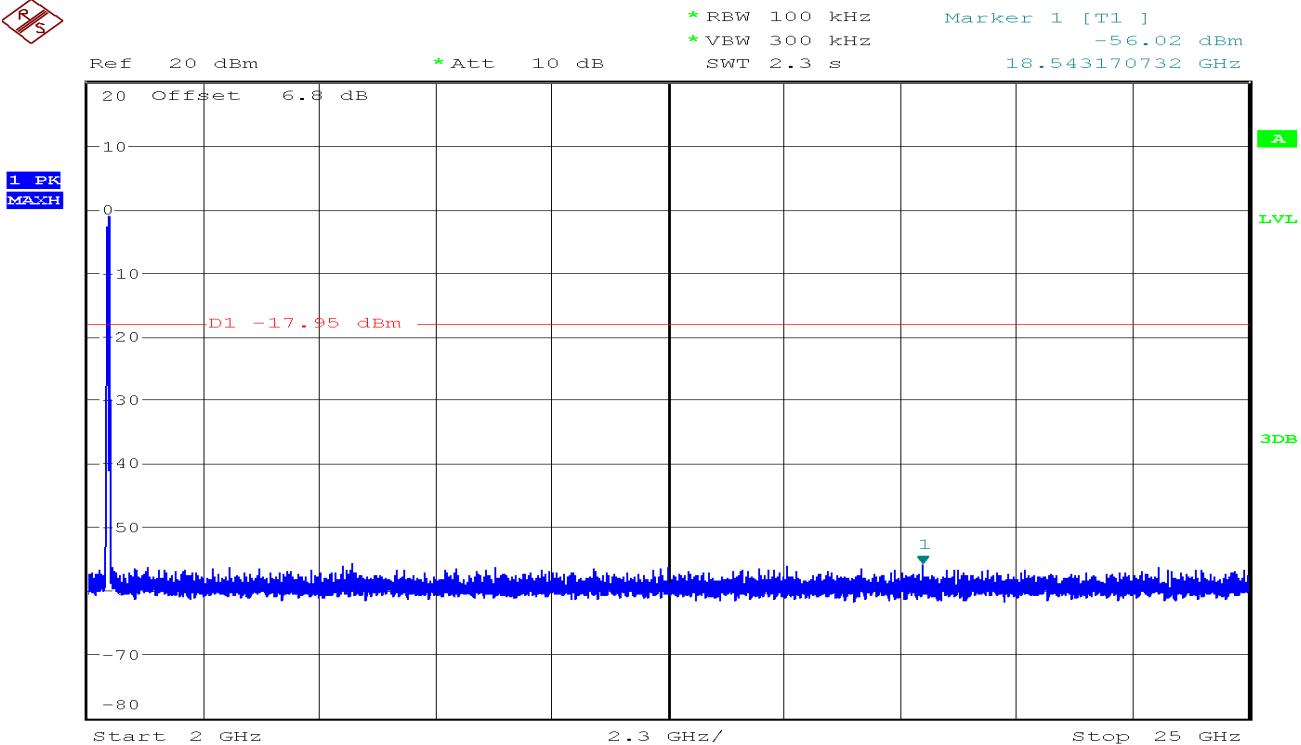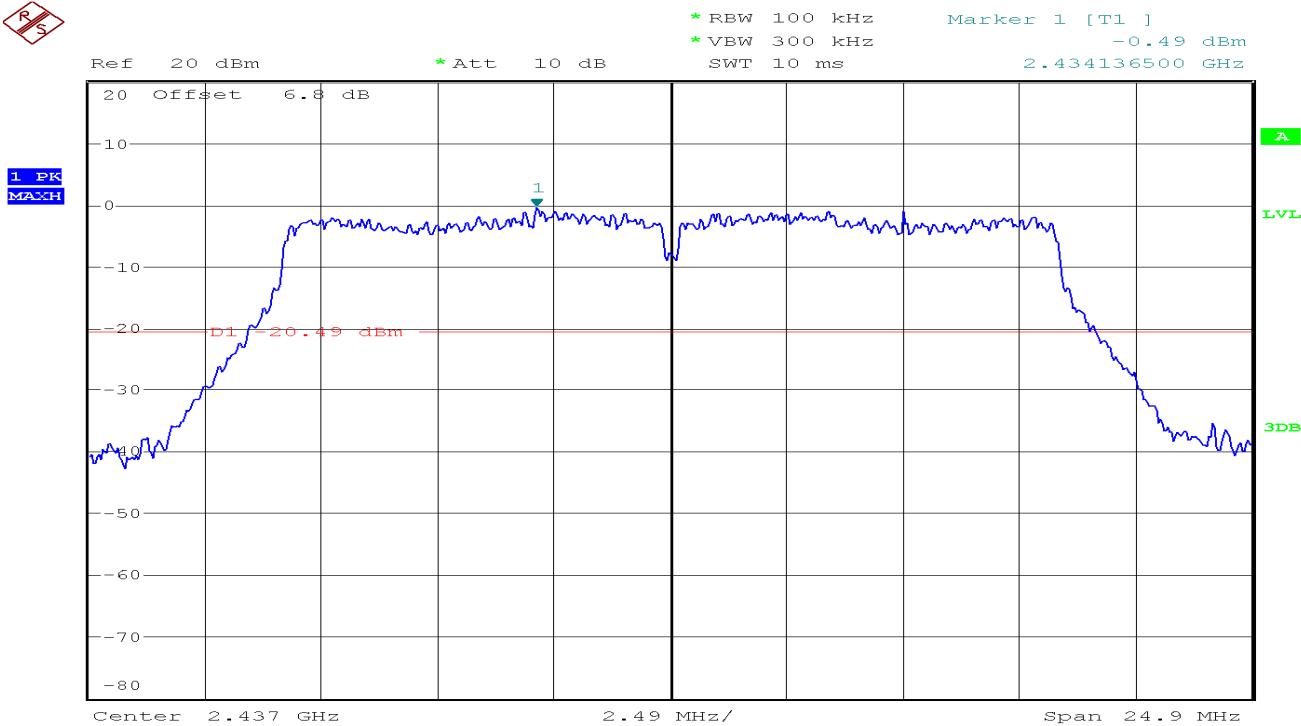**CH Mid**



RS

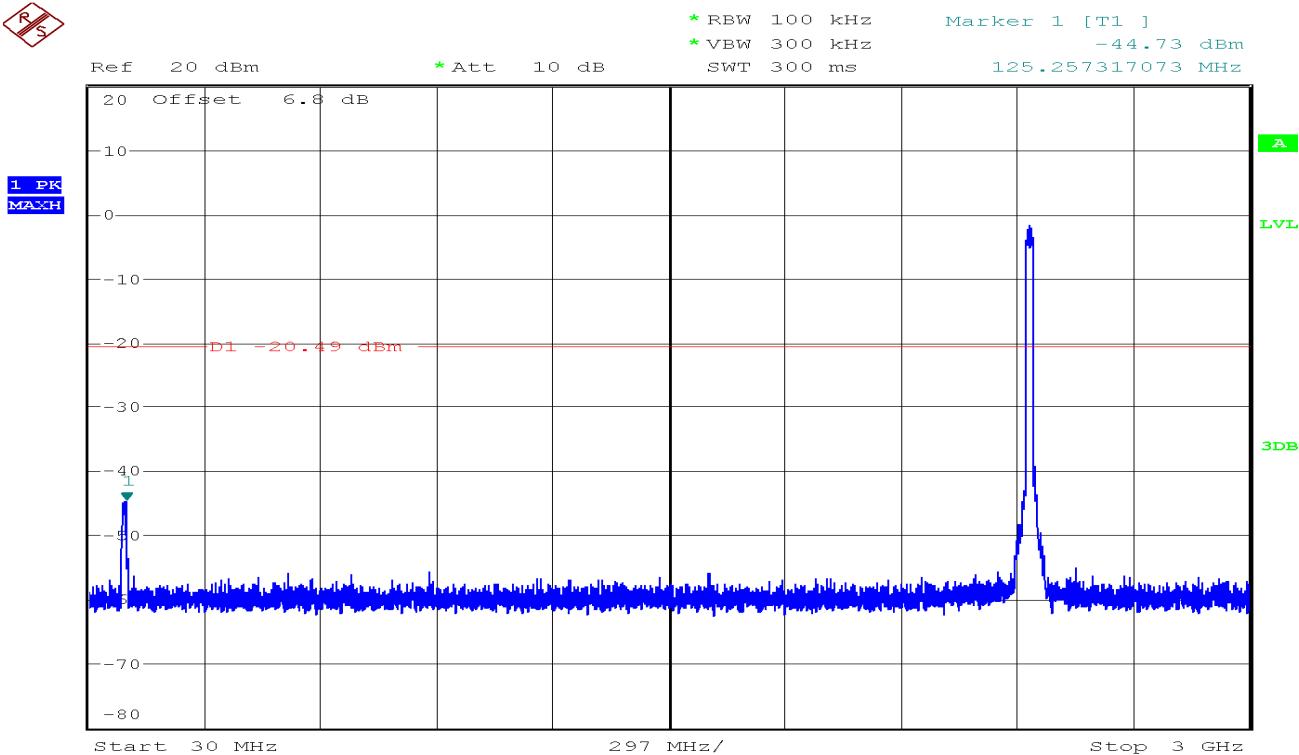


RS

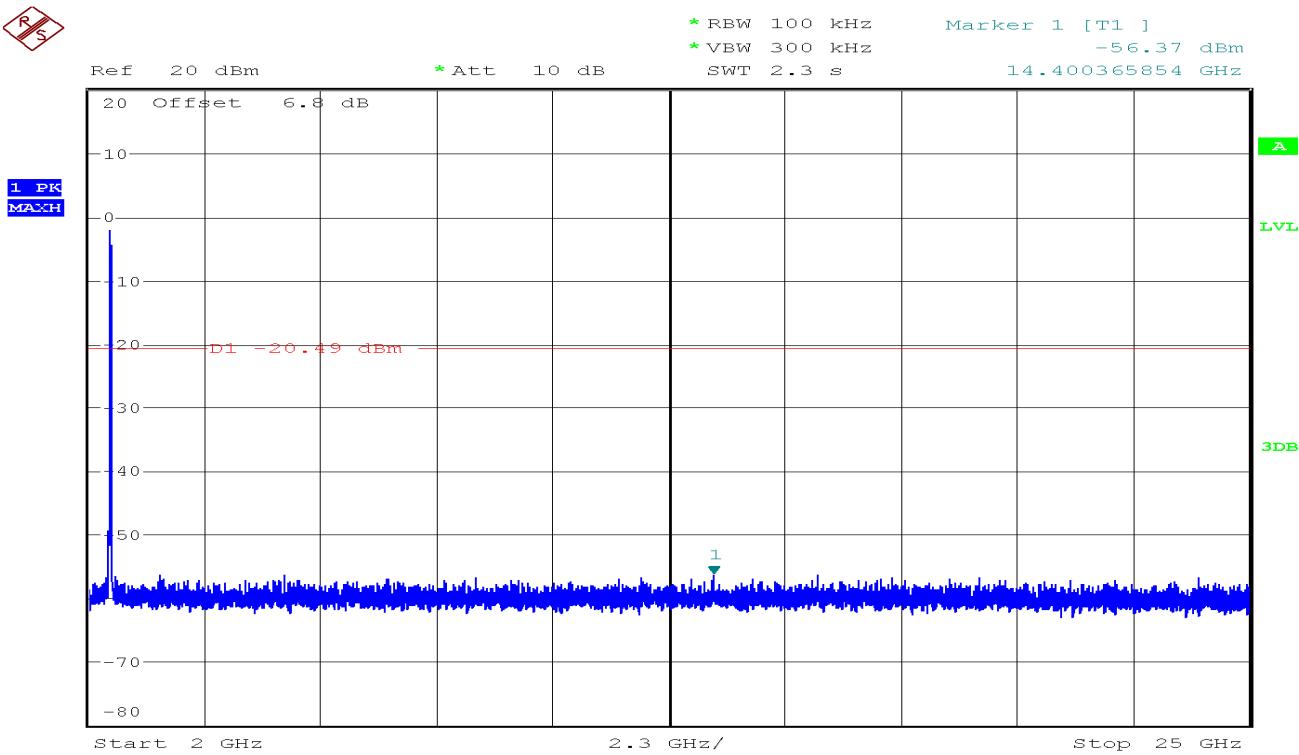


## CH High

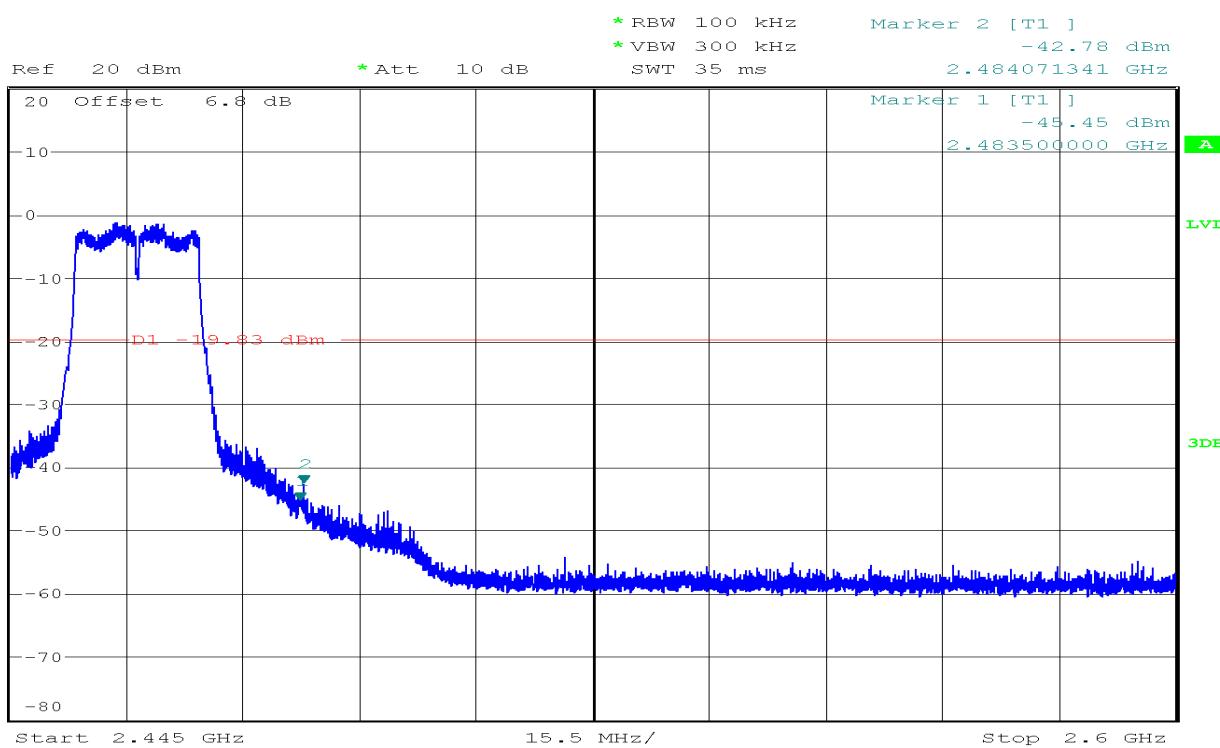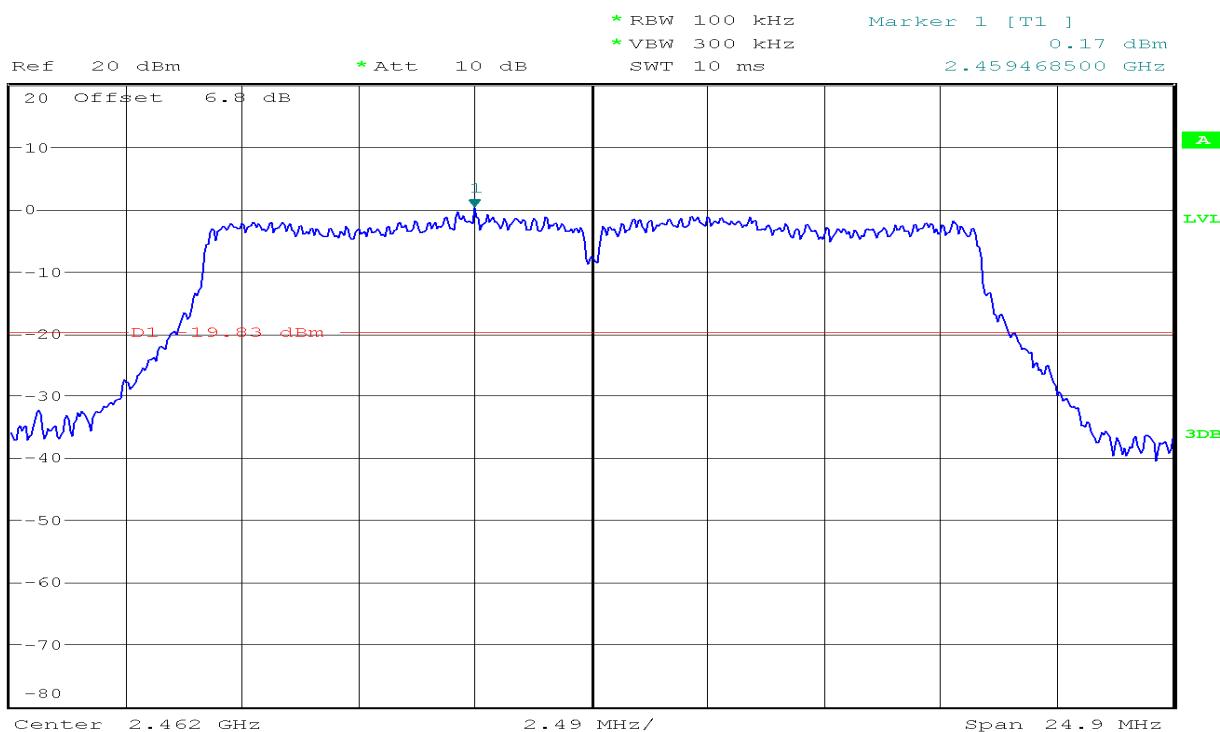

RS


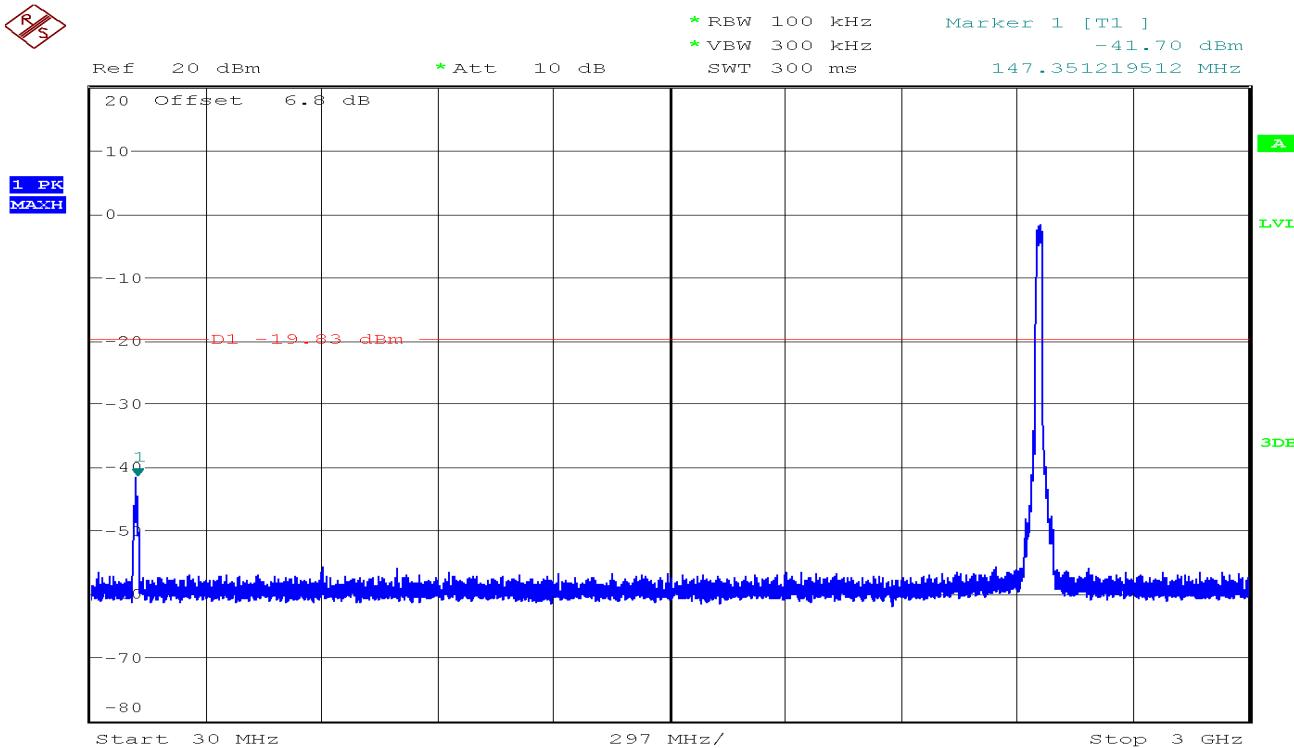


RS

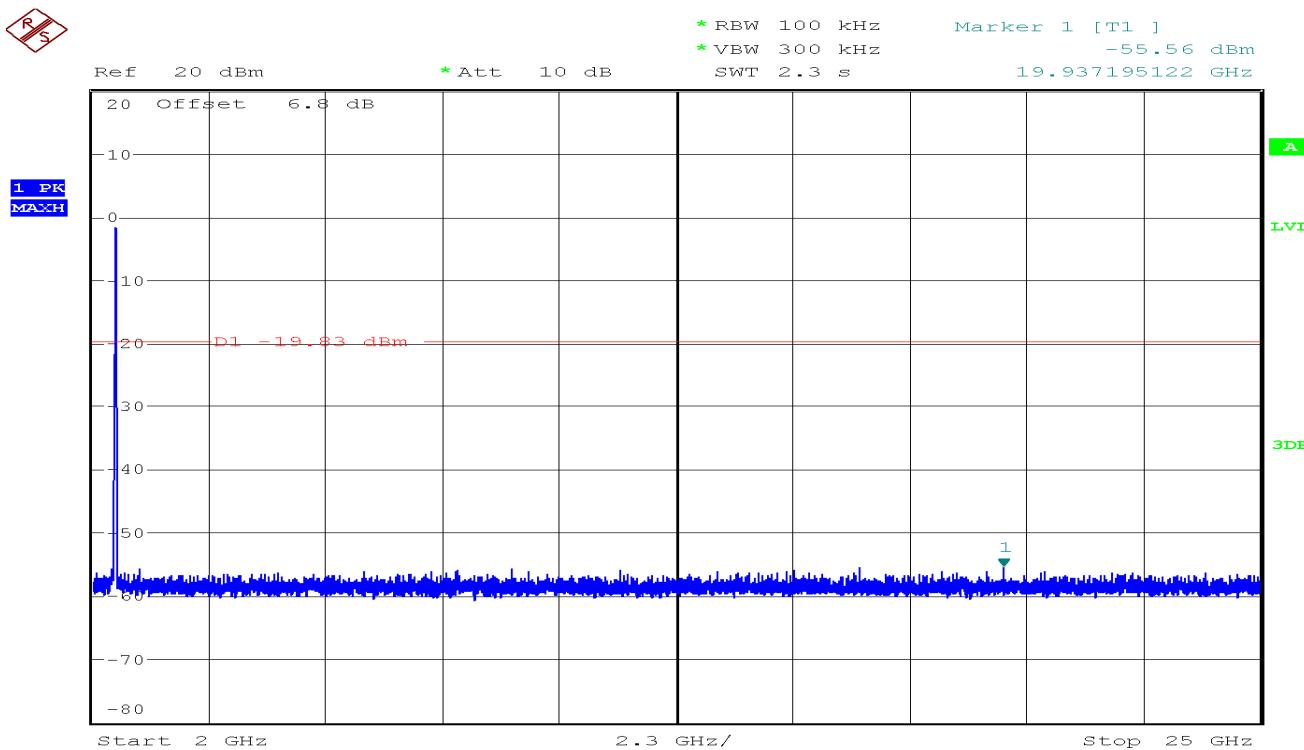


IEEE 802.11n HT20 mode/Chain 0


## CH Low

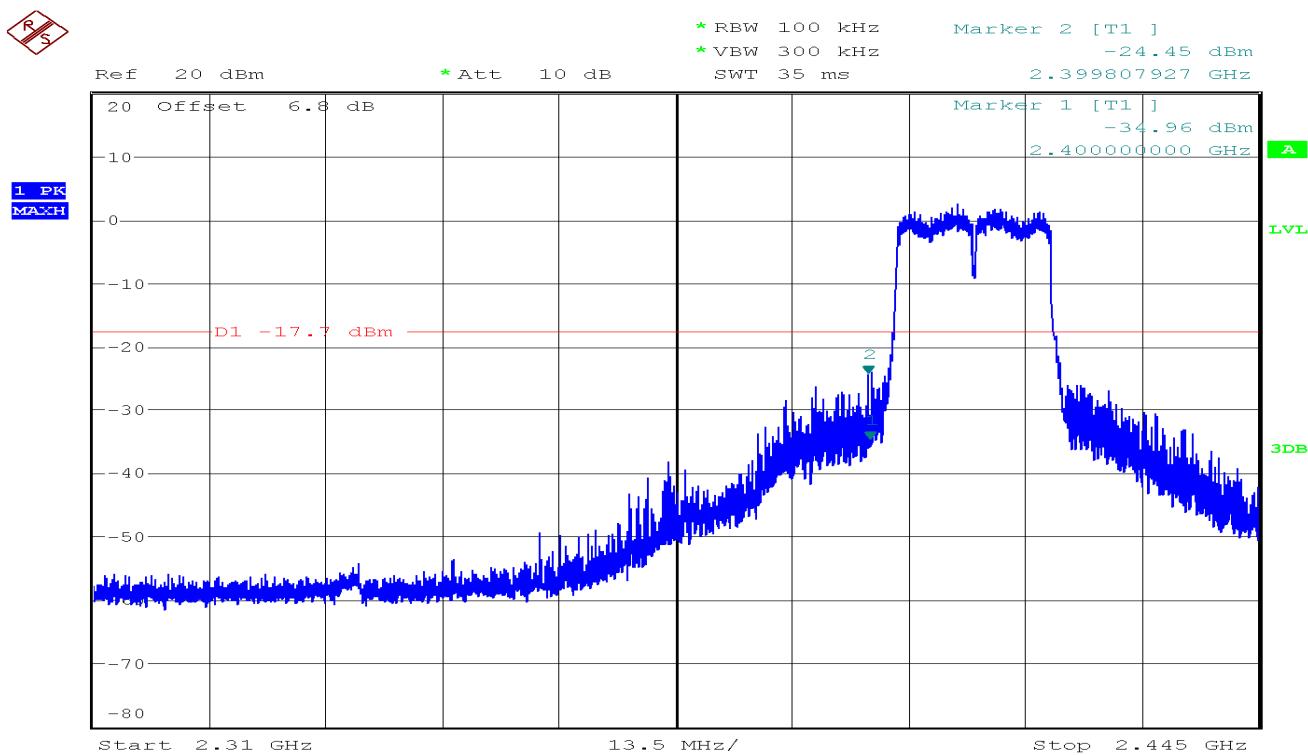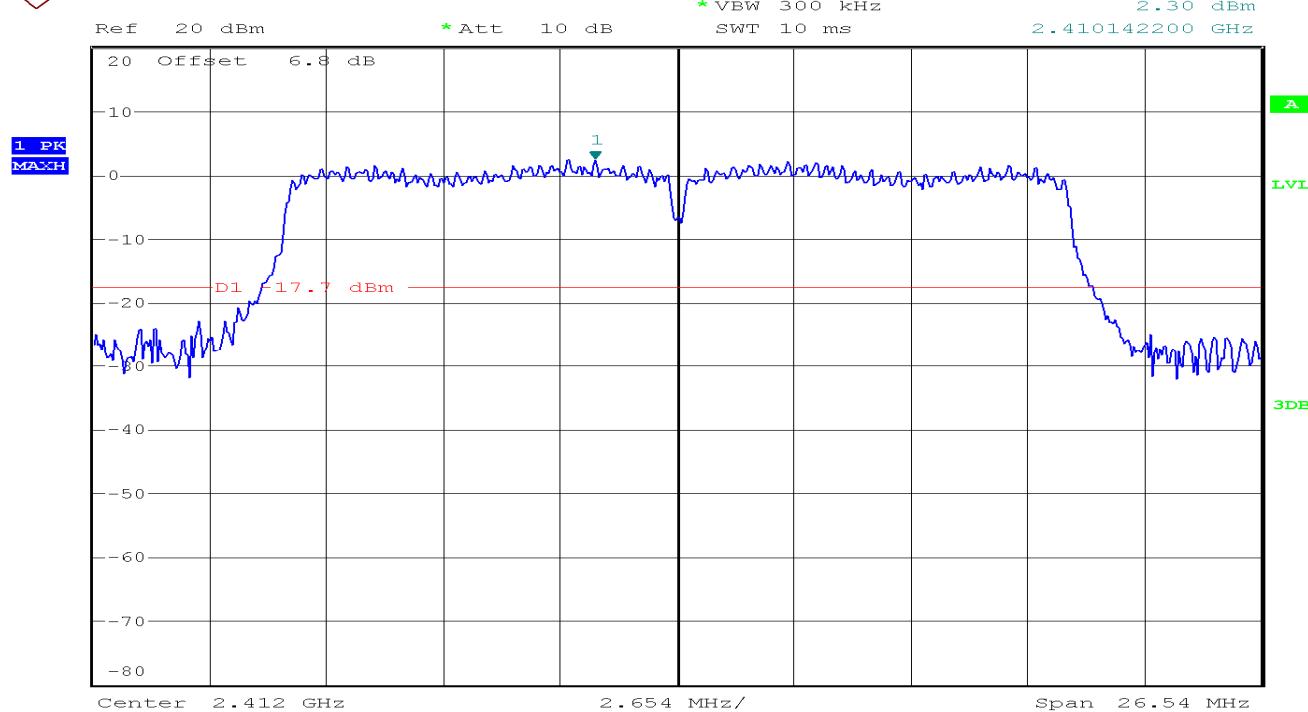



R/S

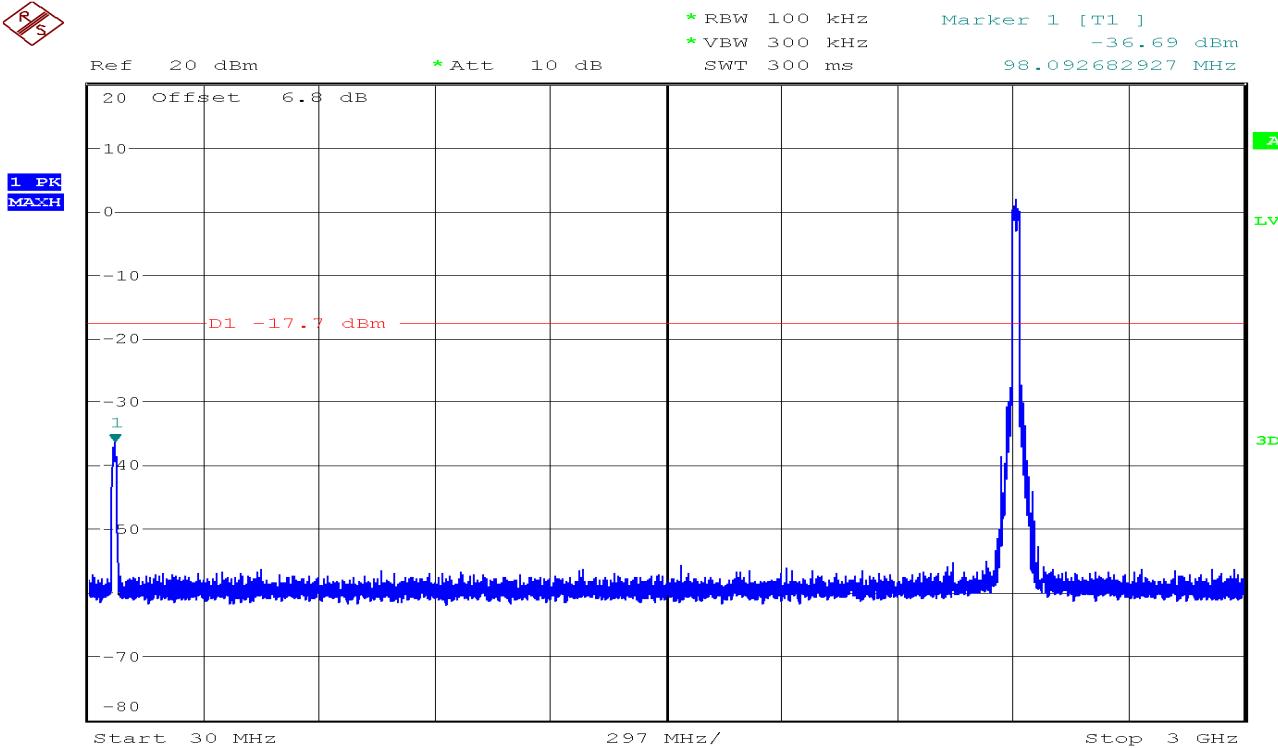


R/S

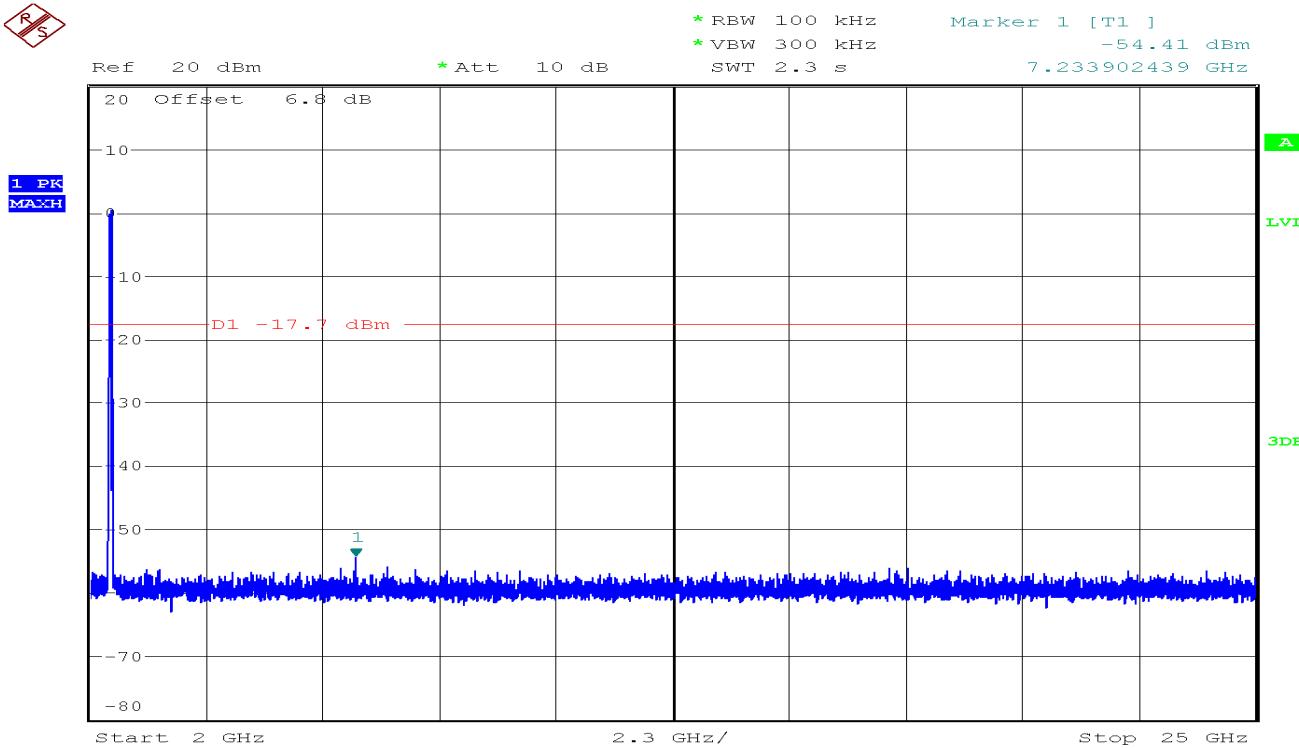

## CH Mid

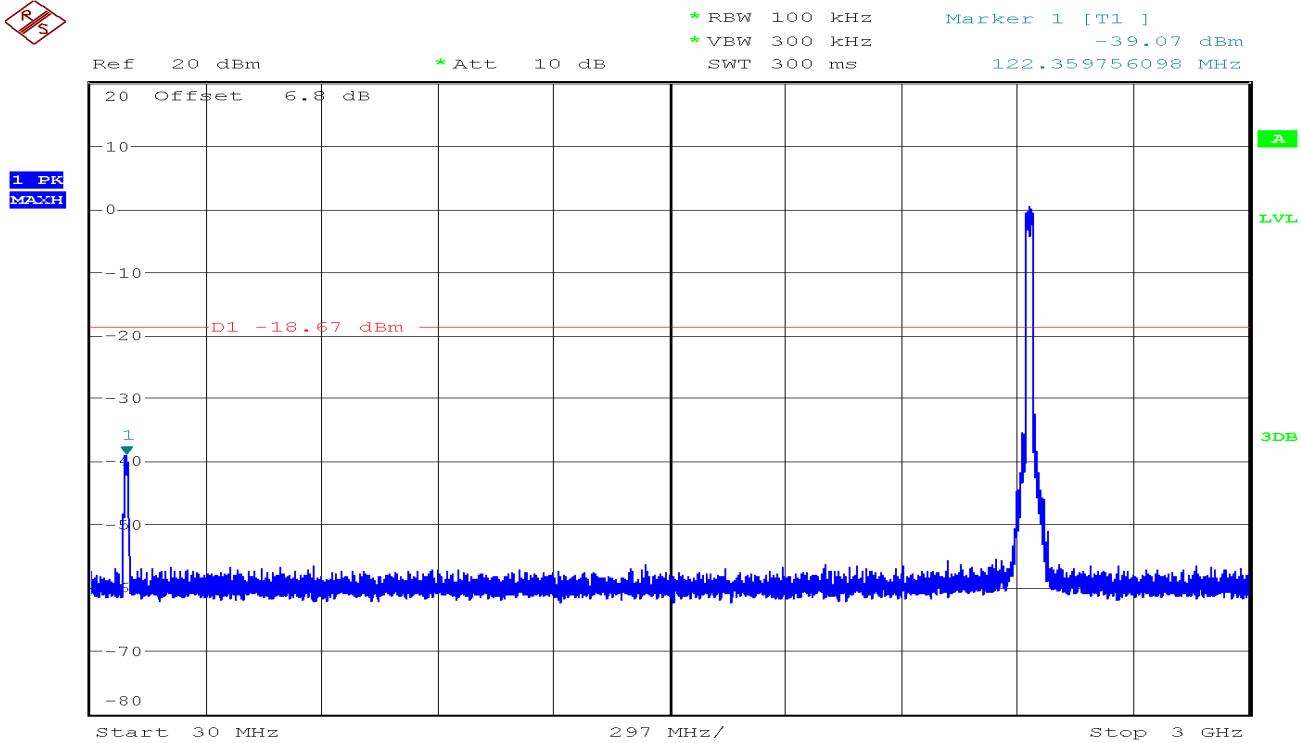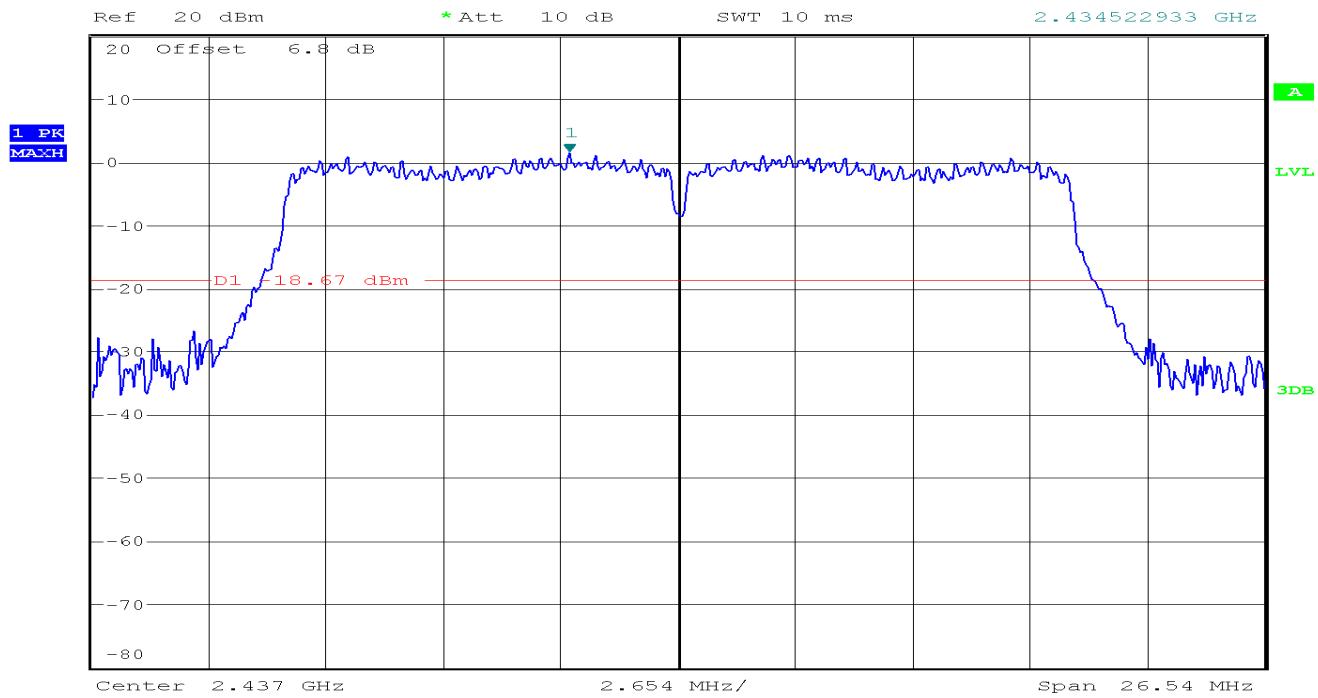


RS

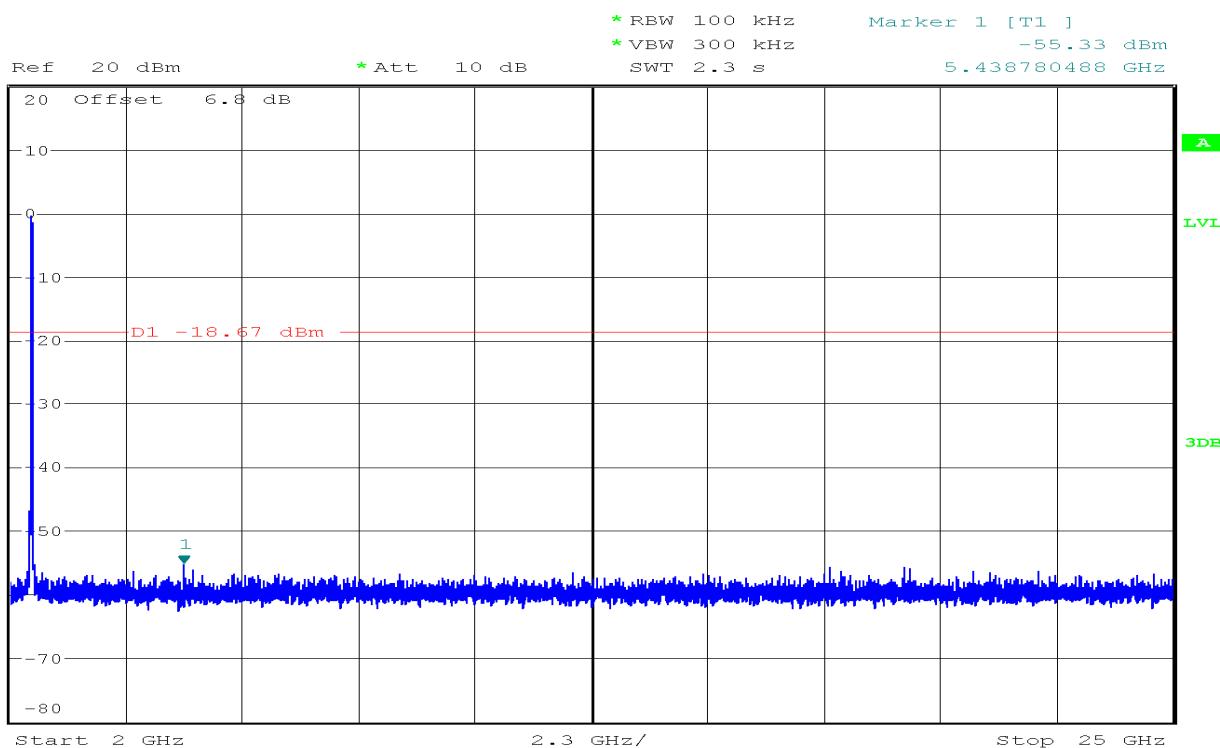


## CH High


RS

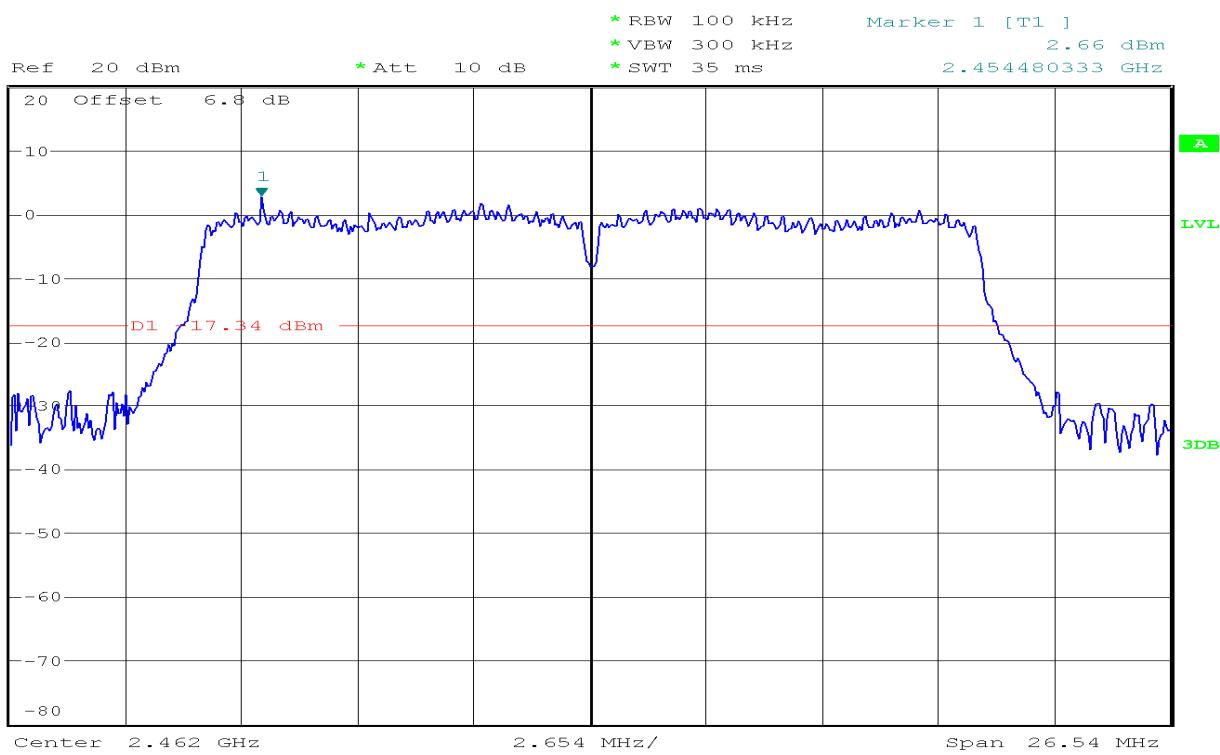


RS

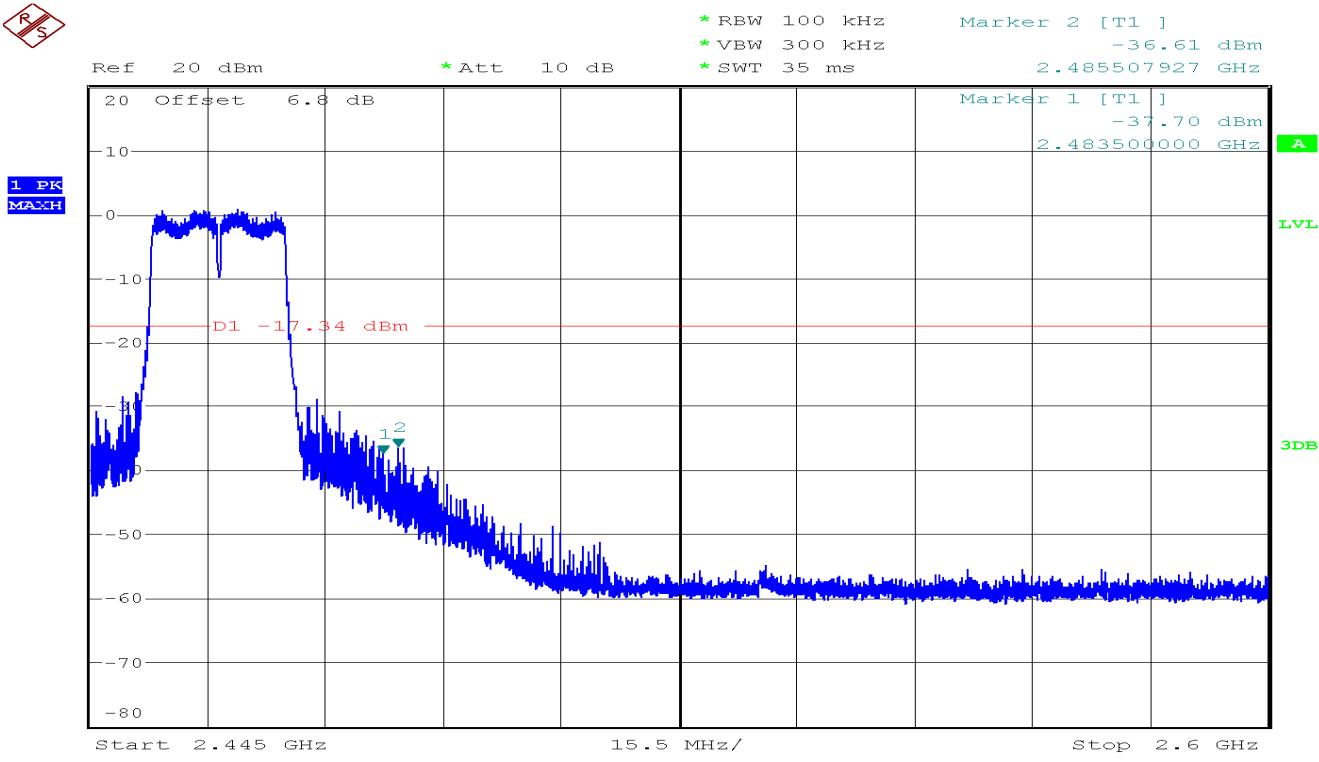

RS

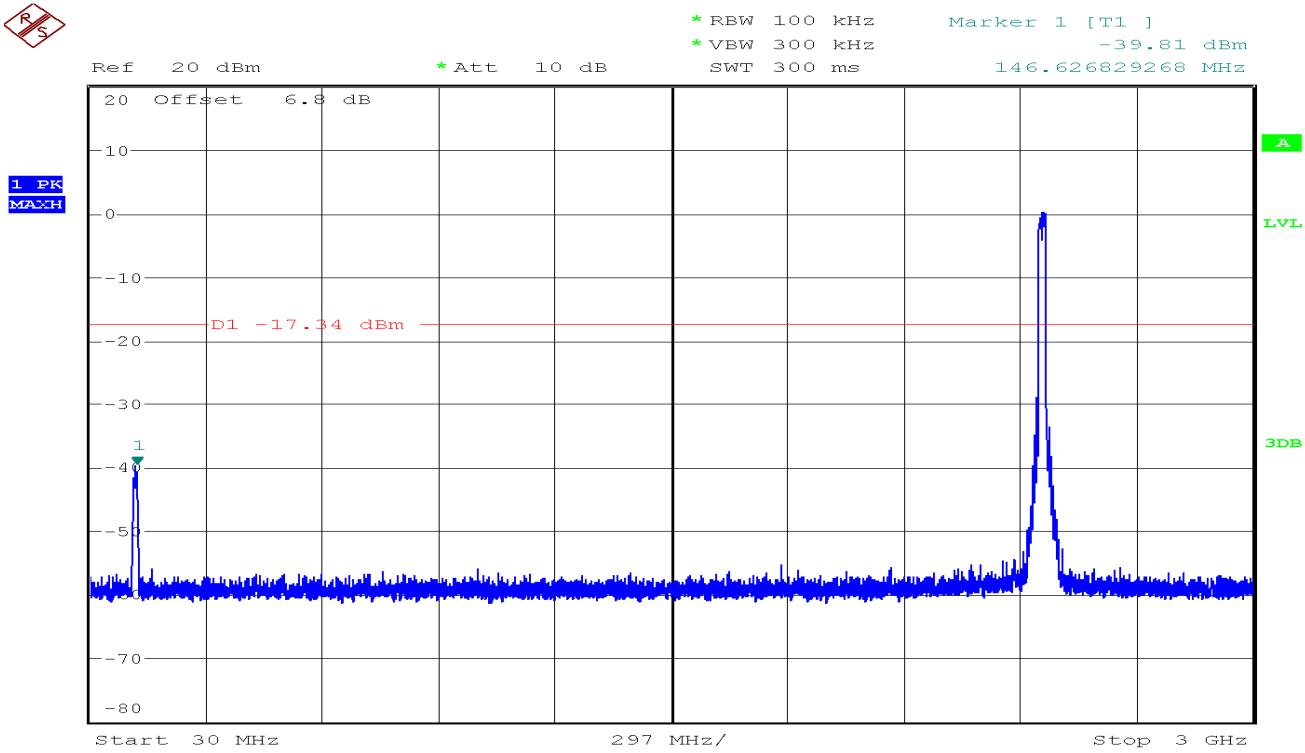




RS

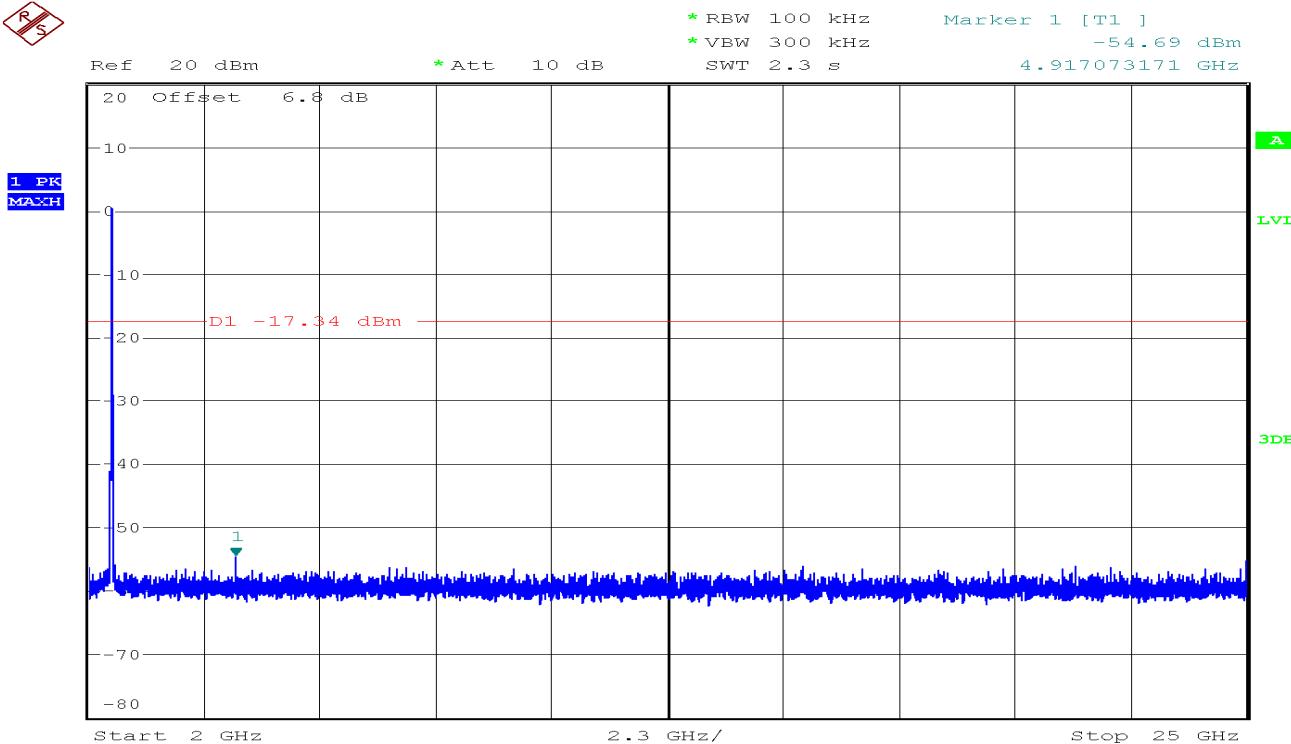
IEEE 802.11n HT20 mode/Chain 1

## CH Low


RS

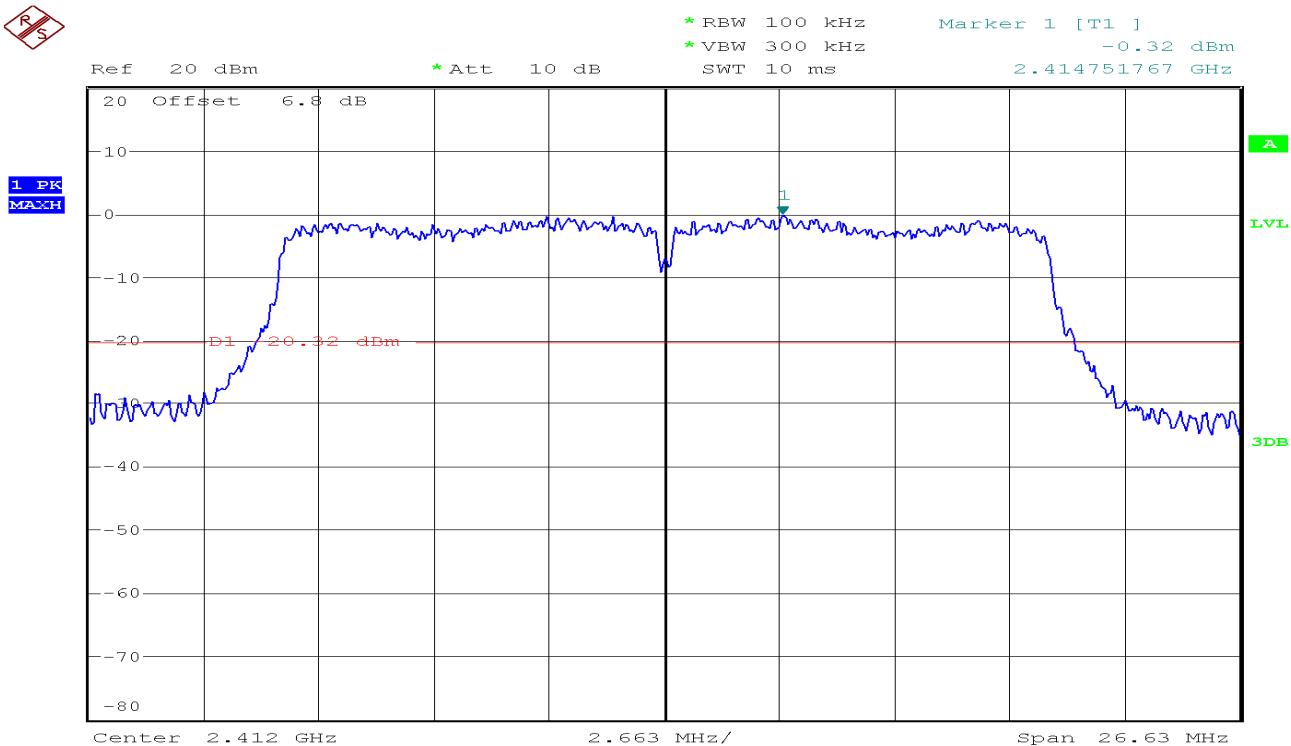

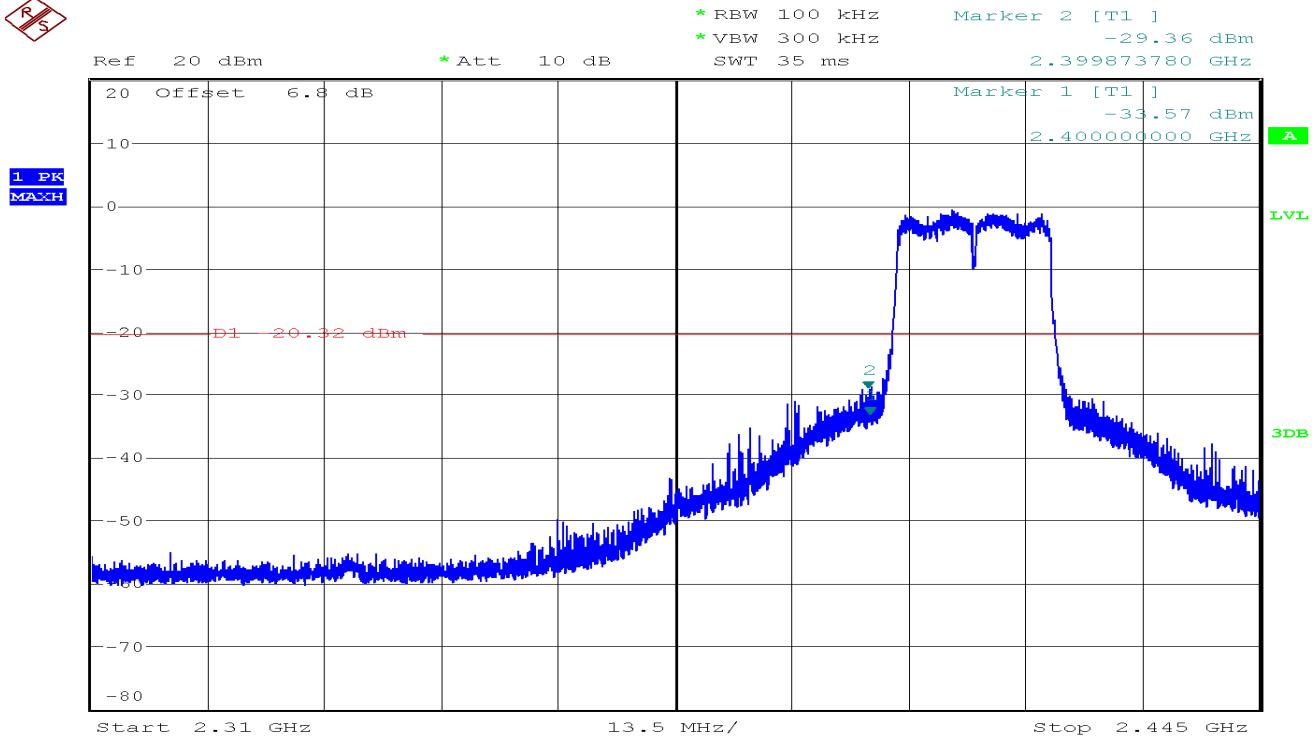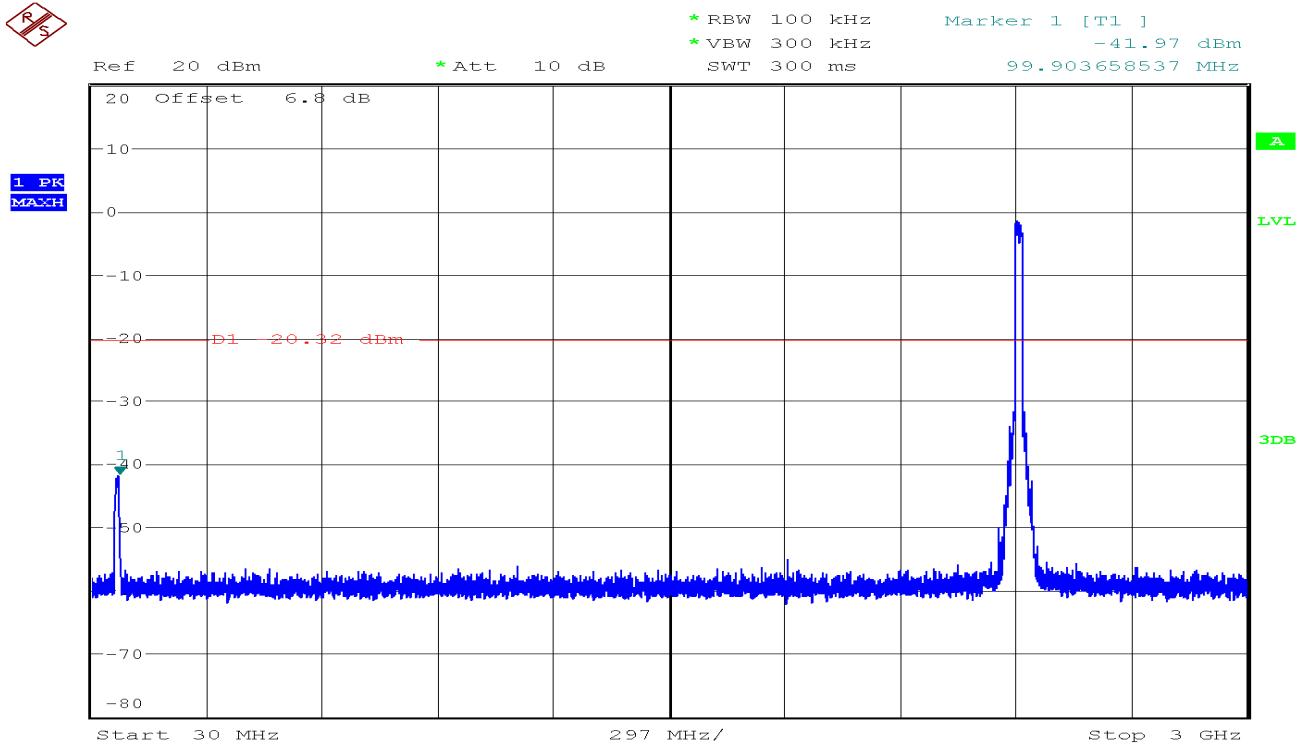
R  
SR  
S

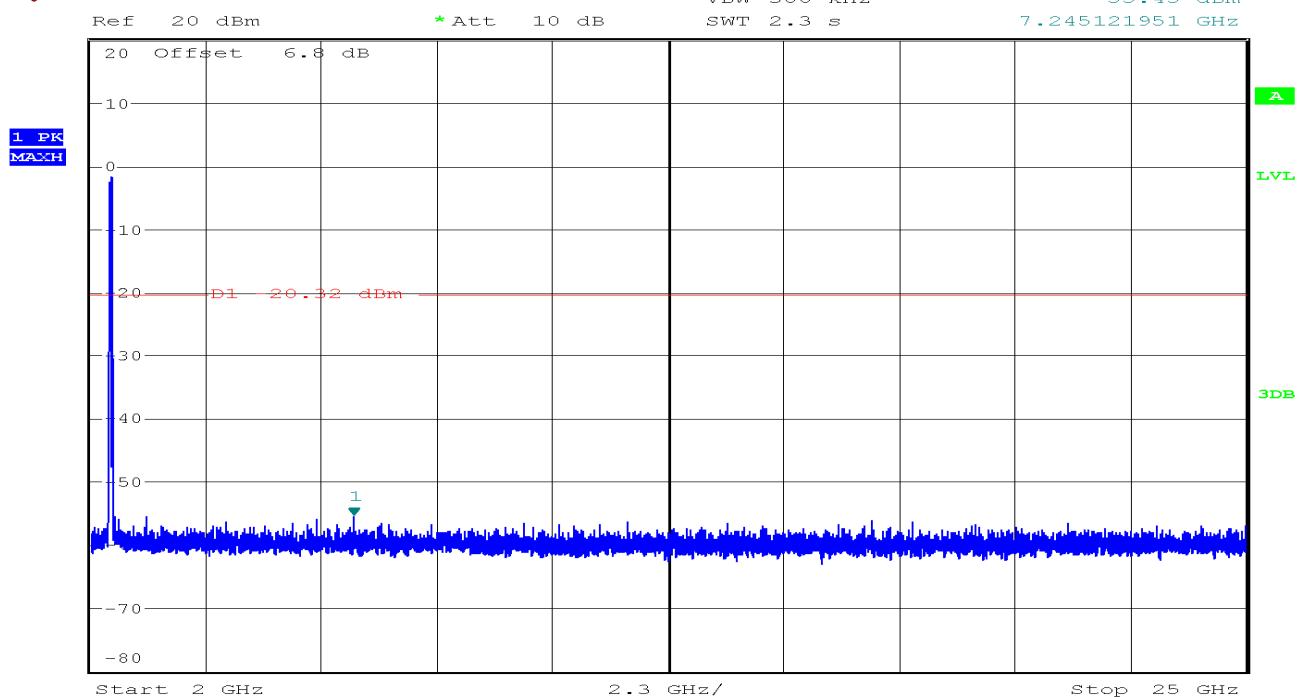


## CH Mid

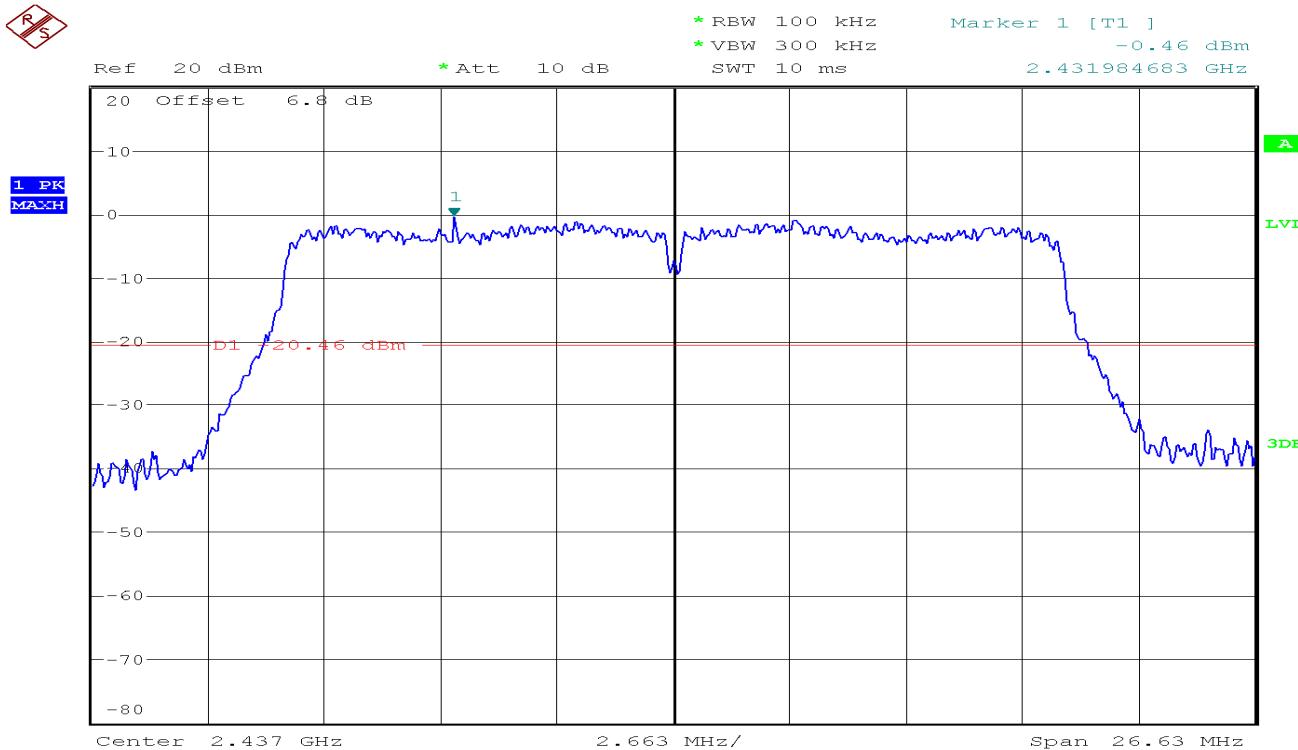



R/S


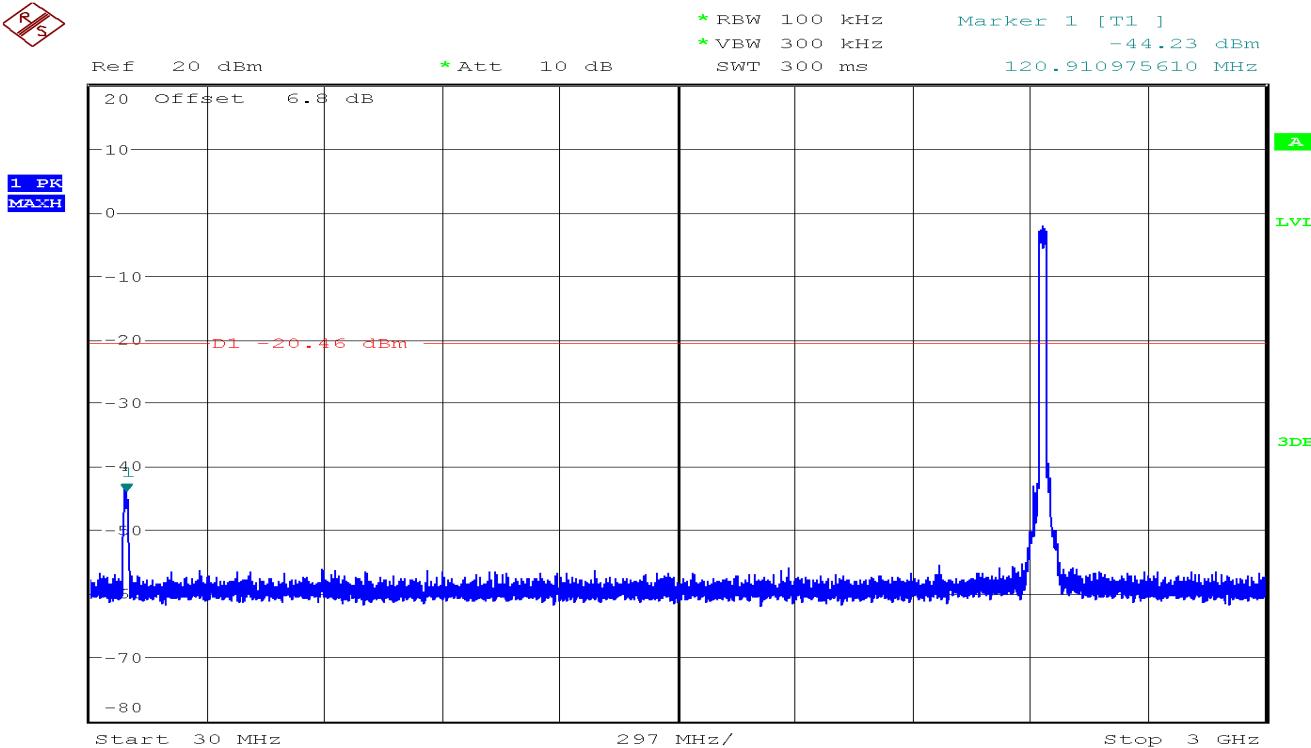


R/S

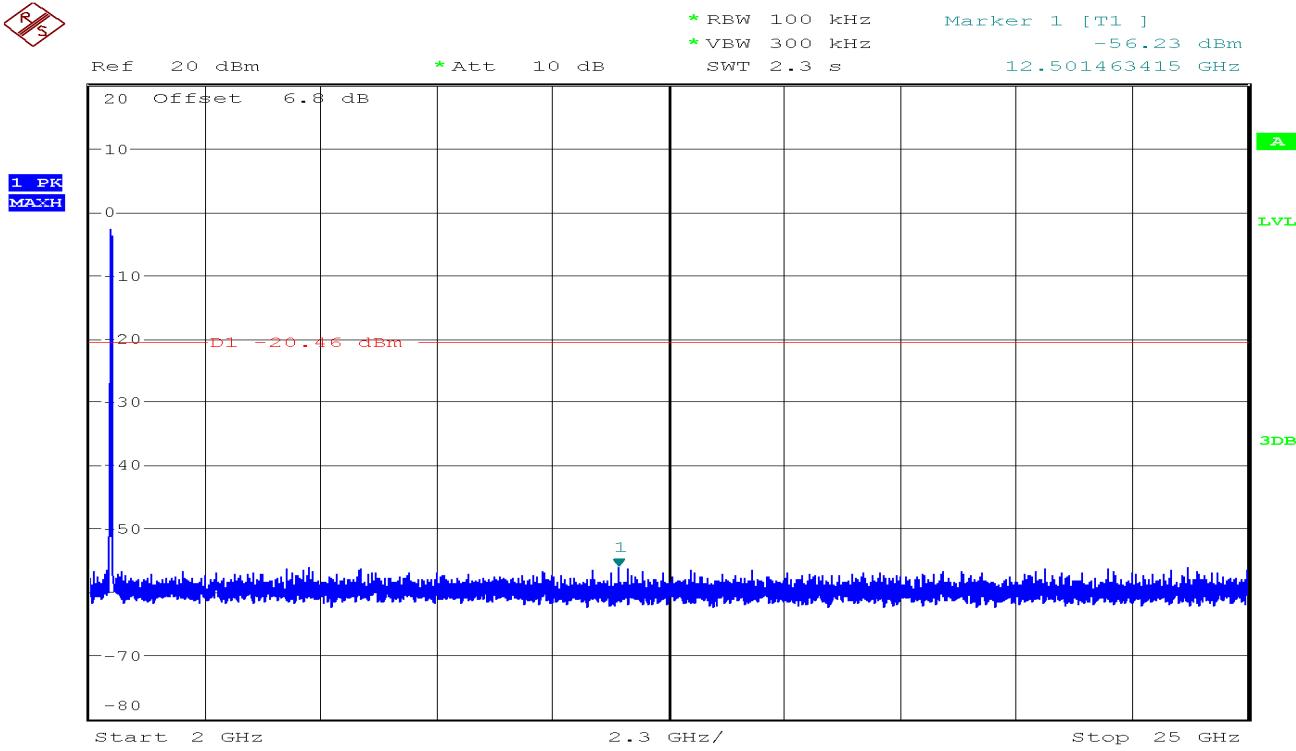

## CH High

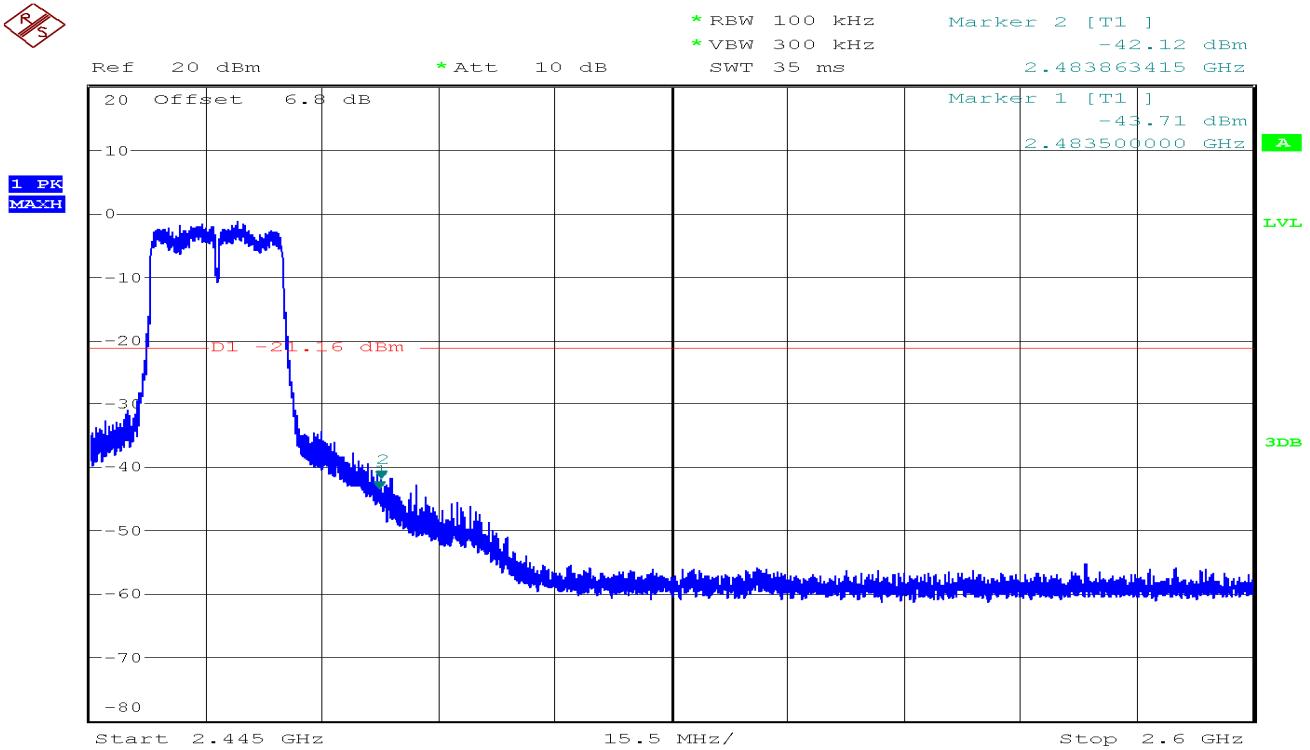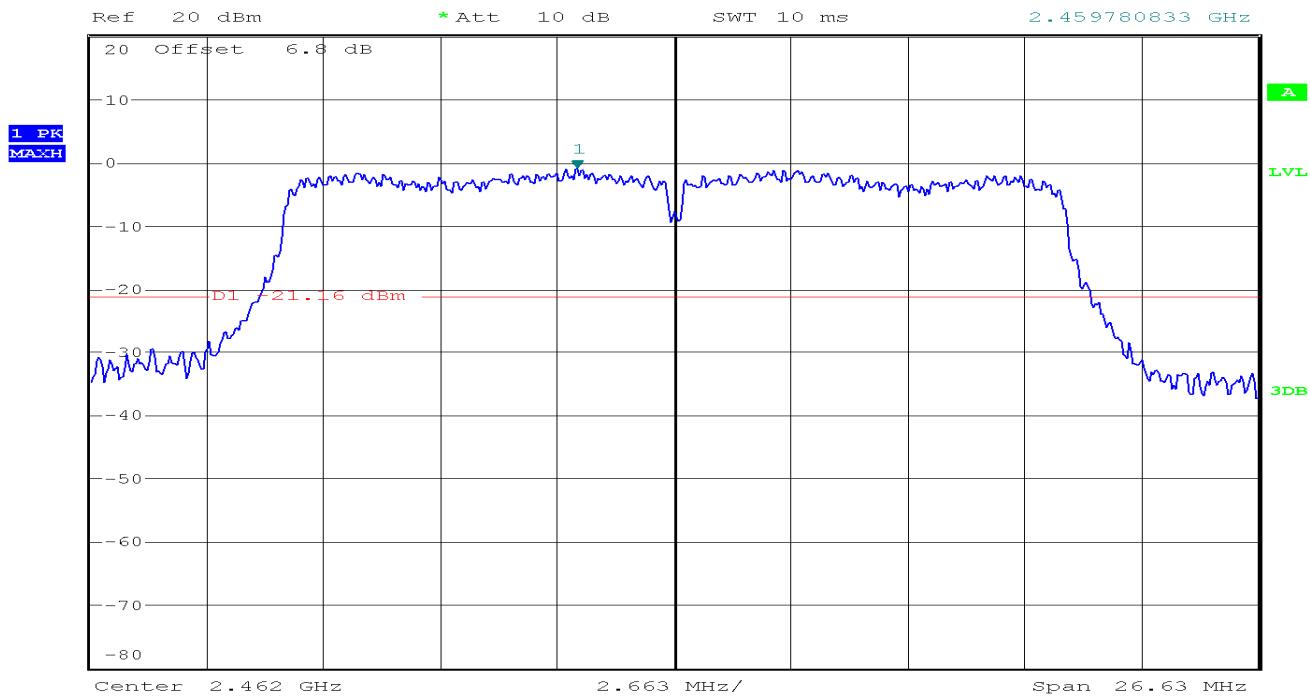

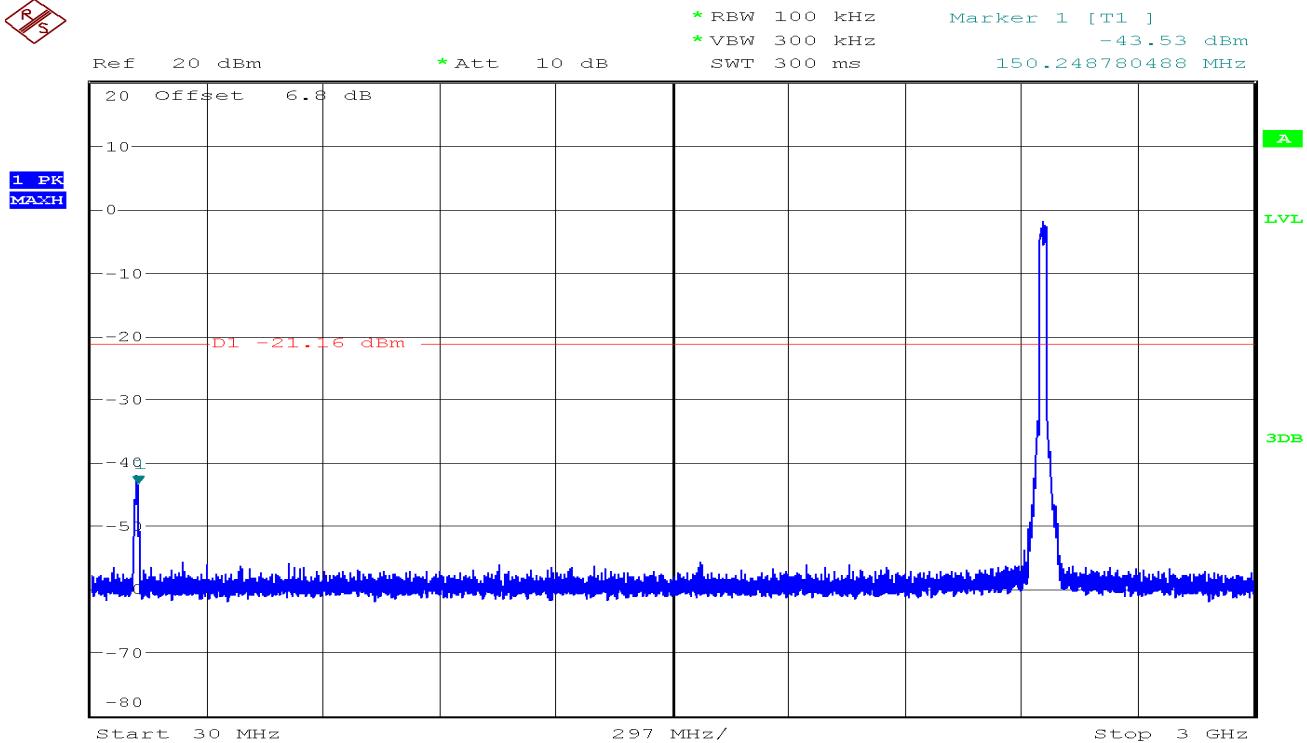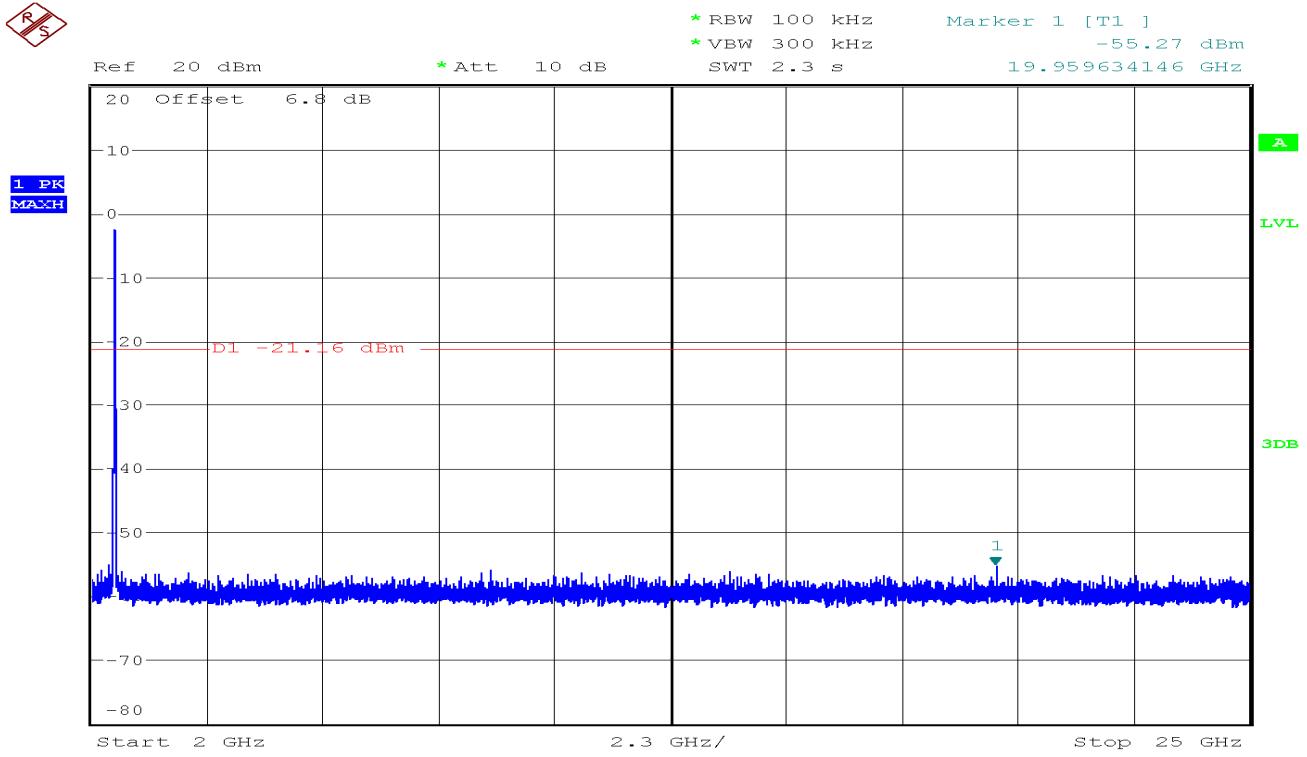R  
SR  
S

## 7.5. RADIATED EMISSIONS

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:



FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3


**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

### Test Configuration

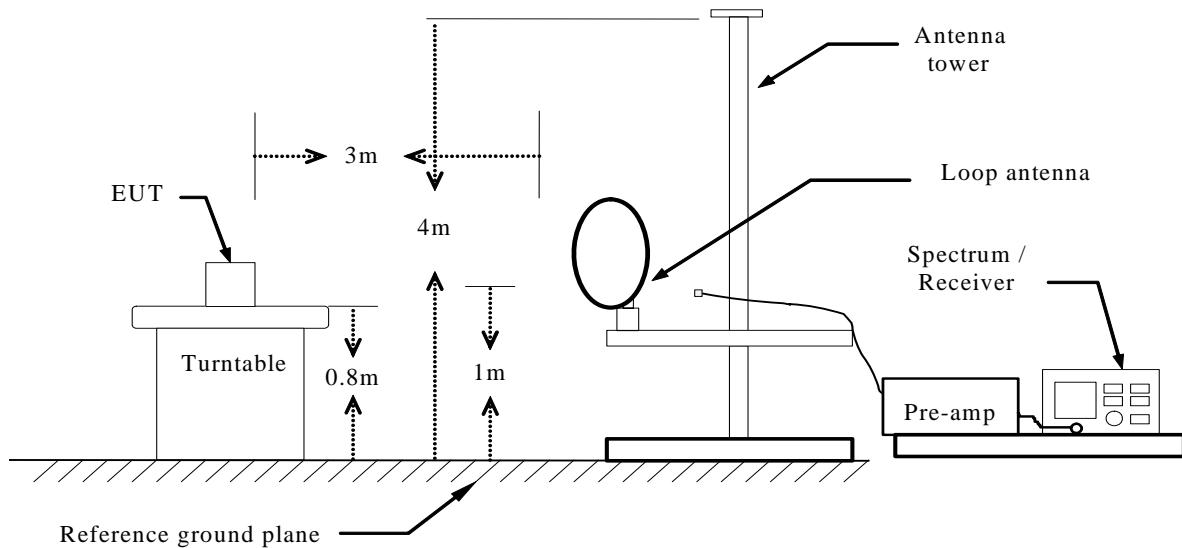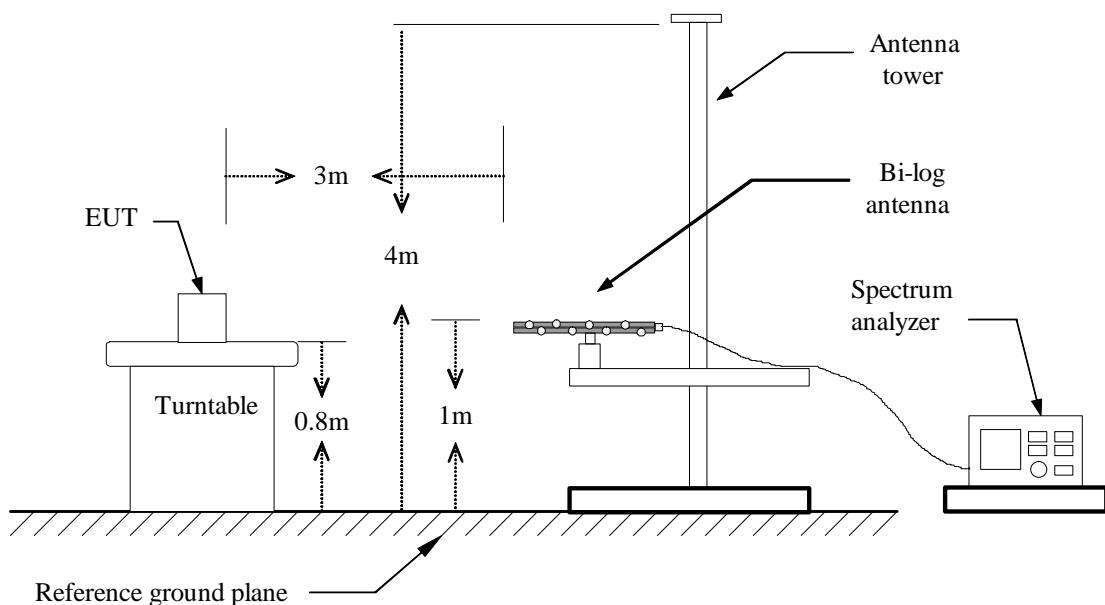**Below 30MHz****Below 1 GHz**

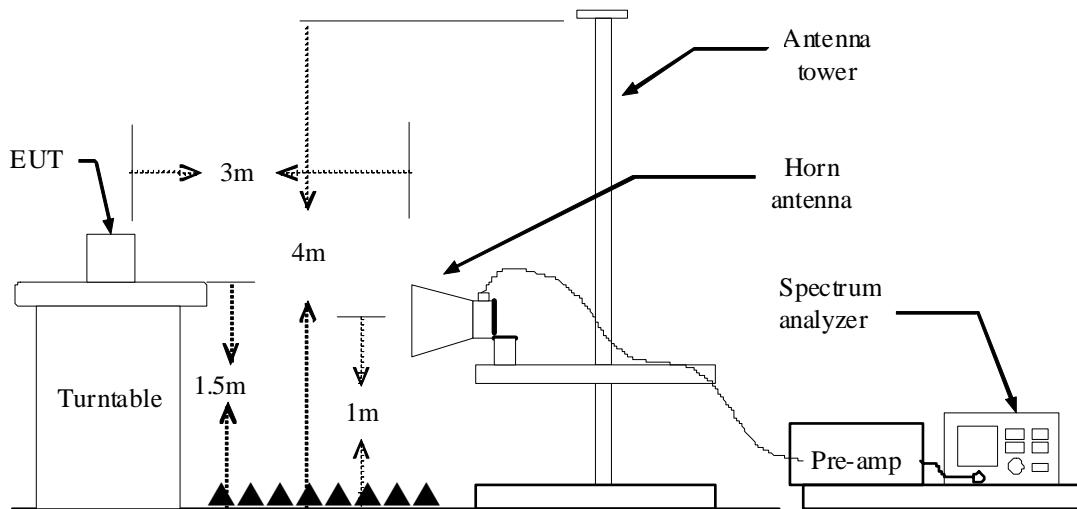**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

PEAK: RBW=VBW=1MHz / Sweep=AUTO

AVERAGE: RBW=1MHz / Sweep=AUTO

VBW=10Hz,when duty cycle is no less than 98 percent.

$VBW \geq 1/T$ ,when duty cycle is less than 98 percent,where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


Band	Duty Cycle(%)	T(s)	1/T(kHz)	VBW Setting
IEEE 802.11 b	97.67	1.006	0.001	10Hz
IEEE 802.11 g	97.67	1.005	0.001	10Hz
IEEE 802.11n HT20	97.20	1.005	0.001	10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.

**TEST RESULTS**


## RESTRICTED BANDEDGE (b Mode, Low Channel, Horizontal)

120.0 dBuV/m

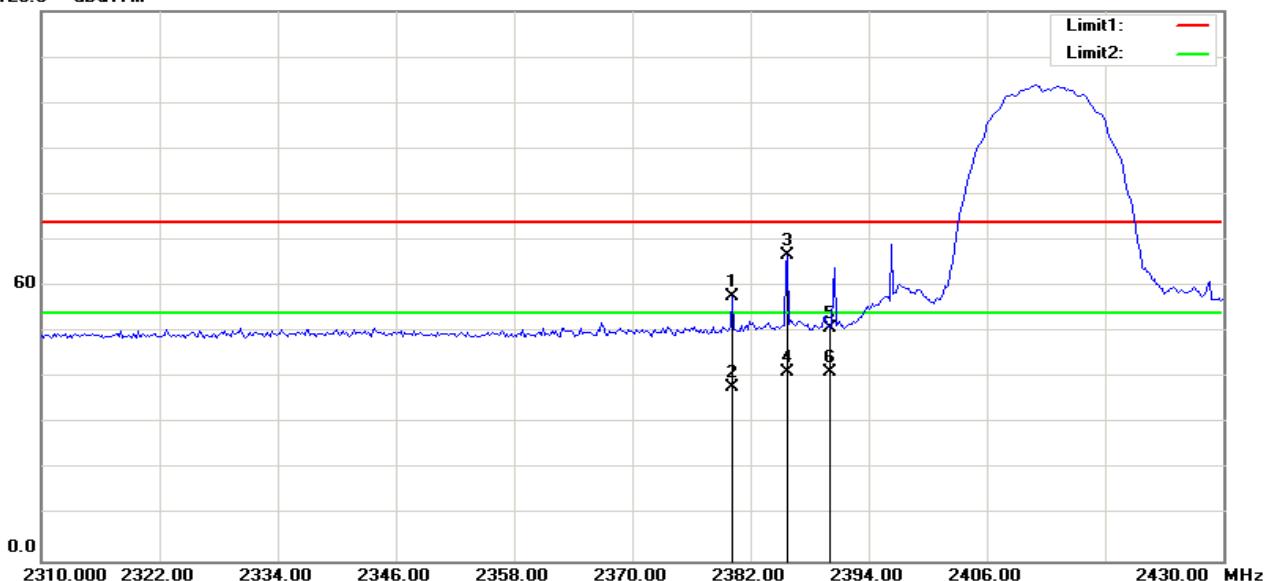


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2380.192	65.25	-7.40	57.85	74.00	-16.15	200	260	peak
2	2380.192	45.33	-7.40	37.93	54.00	-16.07	100	283	AVG
3	2385.769	74.07	-7.35	66.72	74.00	-7.28	200	280	peak
4	2385.769	48.61	-7.35	41.26	54.00	-12.74	200	272	AVG
5	2390.000	58.12	-7.31	50.81	74.00	-23.19	200	275	peak
6	2390.000	48.59	-7.31	41.28	54.00	-12.72	100	269	AVG

## RESTRICTED BANDEDGE (b Mode, Low Channel, Vertical)

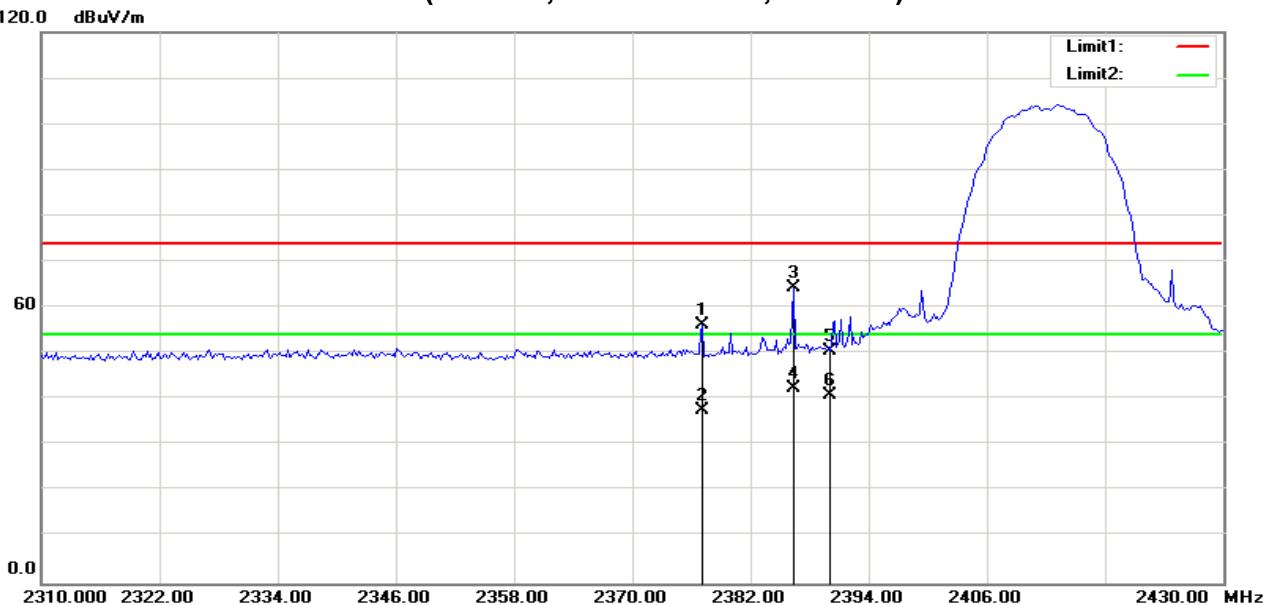


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2377.115	63.68	-7.43	56.25	74.00	-17.75	200	149	peak
2	2377.115	45.06	-7.43	37.63	54.00	-16.37	100	134	AVG
3	2386.346	71.80	-7.34	64.46	74.00	-9.54	100	112	peak
4	2386.346	49.83	-7.34	42.49	54.00	-11.51	200	127	AVG
5	2390.000	57.98	-7.31	50.67	74.00	-23.33	200	120	peak
6	2390.000	48.39	-7.31	41.08	54.00	-12.92	100	144	AVG

## RESTRICTED BANDEDGE (b Mode, High Channel, Horizontal)

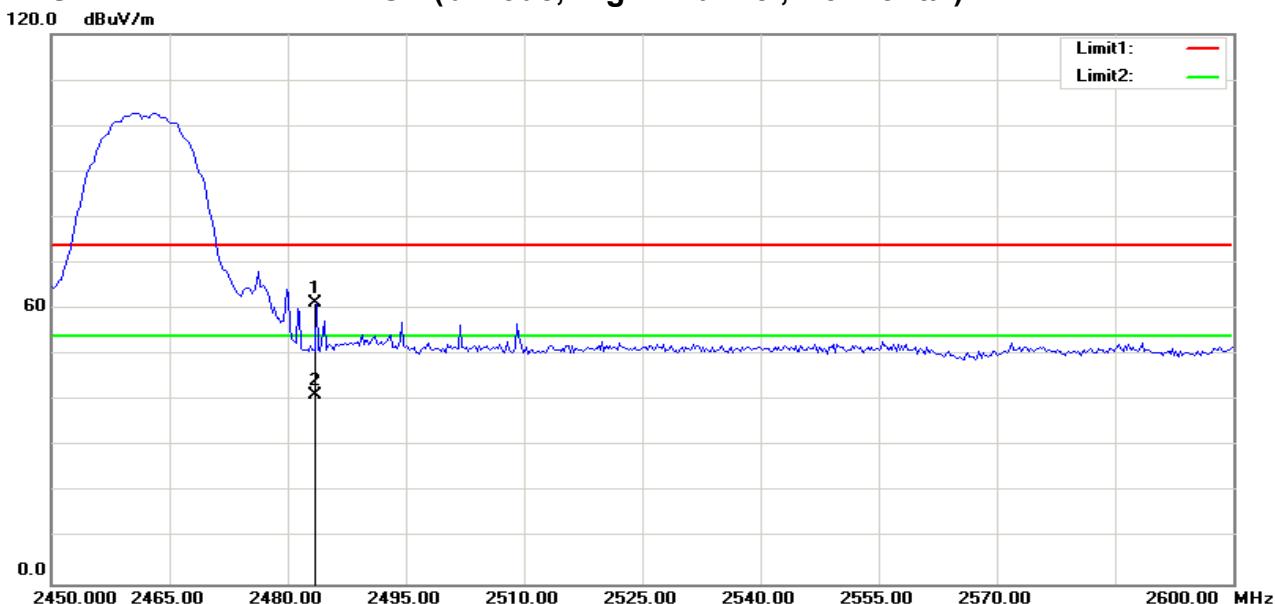

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2483.500	67.81	-6.44	61.37	74.00	-12.63	200	180	peak
2	2483.500	47.70	-6.44	41.26	54.00	-12.74	100	48	AVG


## RESTRICTED BANDEDGE (b Mode, High Channel, Vertical)

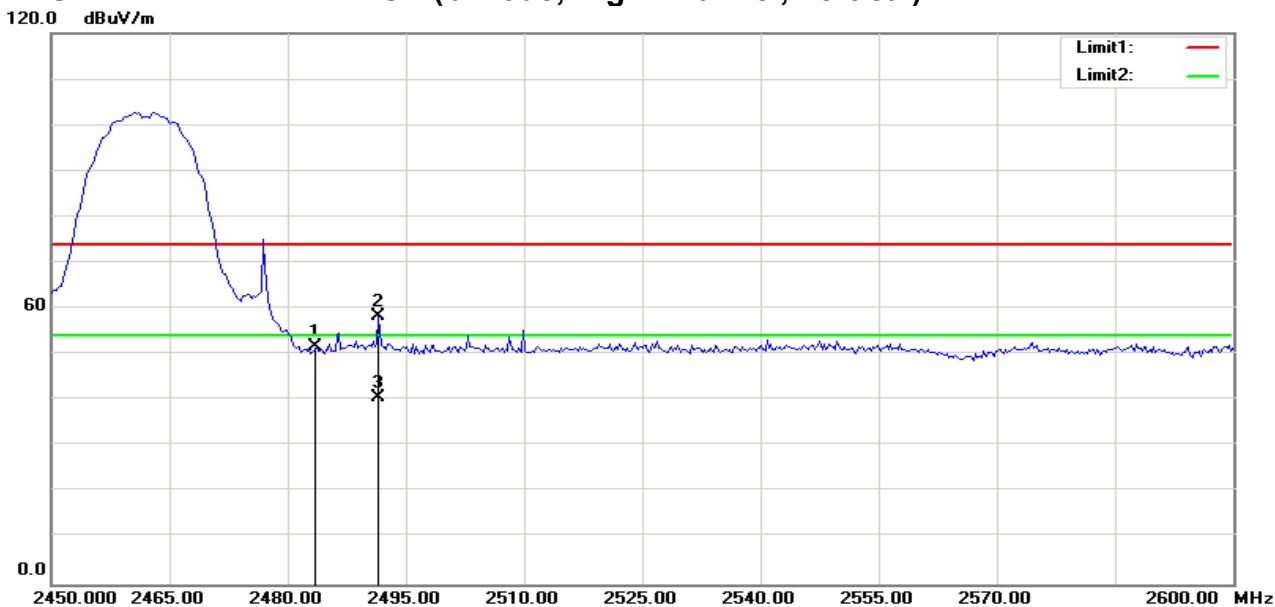

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2481.586	58.14	-6.44	51.70	74.00	-22.30	200	323	peak
2	2491.586	64.66	-6.37	58.29	74.00	-15.71	200	360	peak
3	2491.586	47.15	-6.37	40.78	54.00	-13.22	100	360	AVG

## RESTRICTED BANDEDGE (g Mode, Low Channel, Horizontal)


120.0 dBuV/m

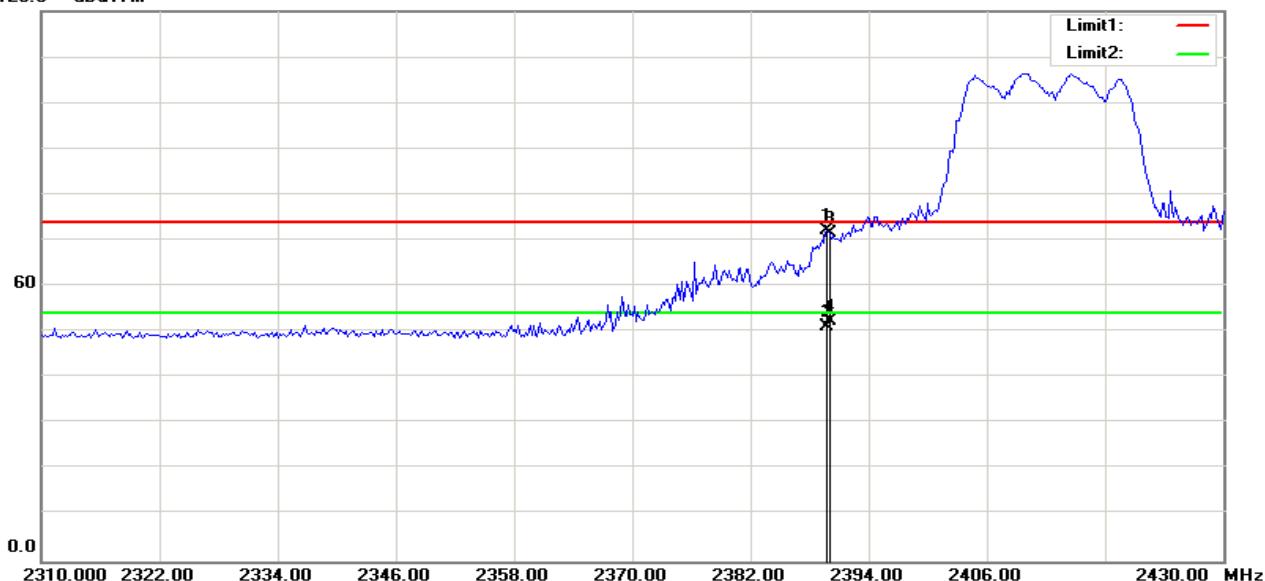

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2389.808	79.38	-7.31	72.07	74.00	-1.93	200	262	peak
2	2389.808	58.49	-7.31	51.18	54.00	-2.82	100	253	AVG
3	2390.000	78.88	-7.31	71.57	74.00	-2.43	200	253	peak
4	2390.000	59.77	-7.31	52.46	54.00	-1.54	100	301	AVG


## RESTRICTED BANDEDGE (g Mode, Low Channel, Vertical)

120.0 dBuV/m

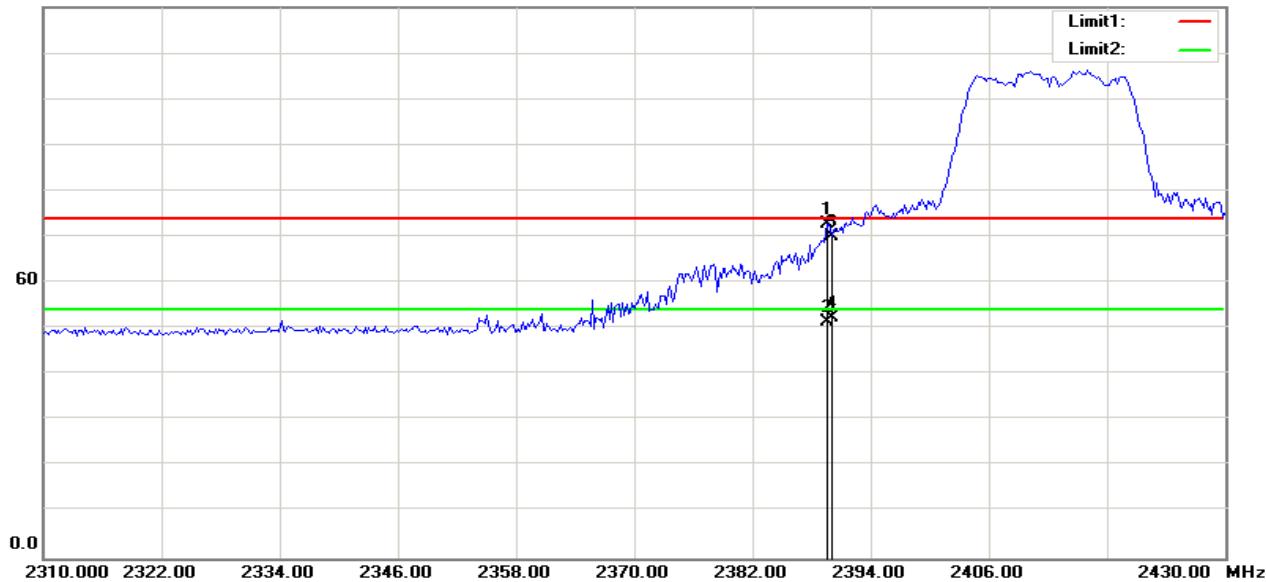


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2389.615	80.03	-7.31	72.72	74.00	-1.28	100	155	peak
2	2389.615	58.69	-7.31	51.38	54.00	-2.62	100	146	AVG
3	2390.000	77.47	-7.31	70.16	74.00	-3.84	200	148	peak
4	2390.000	59.60	-7.31	52.29	54.00	-1.71	100	129	AVG

## RESTRICTED BANDEDGE (g Mode, High Channel, Horizontal)

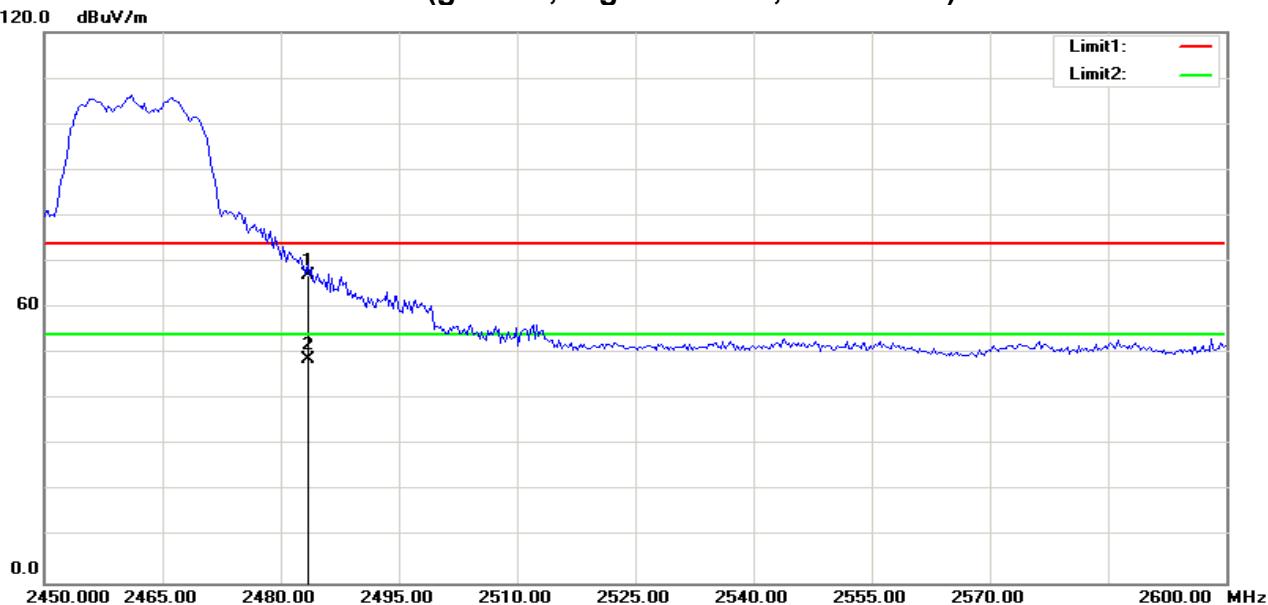

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	73.55	-6.44	67.11	74.00	-6.89	200	324	peak
2	2483.500	55.34	-6.44	48.90	54.00	-5.10	100	291	AVG


## RESTRICTED BANDEDGE (g Mode, High Channel, Vertical)

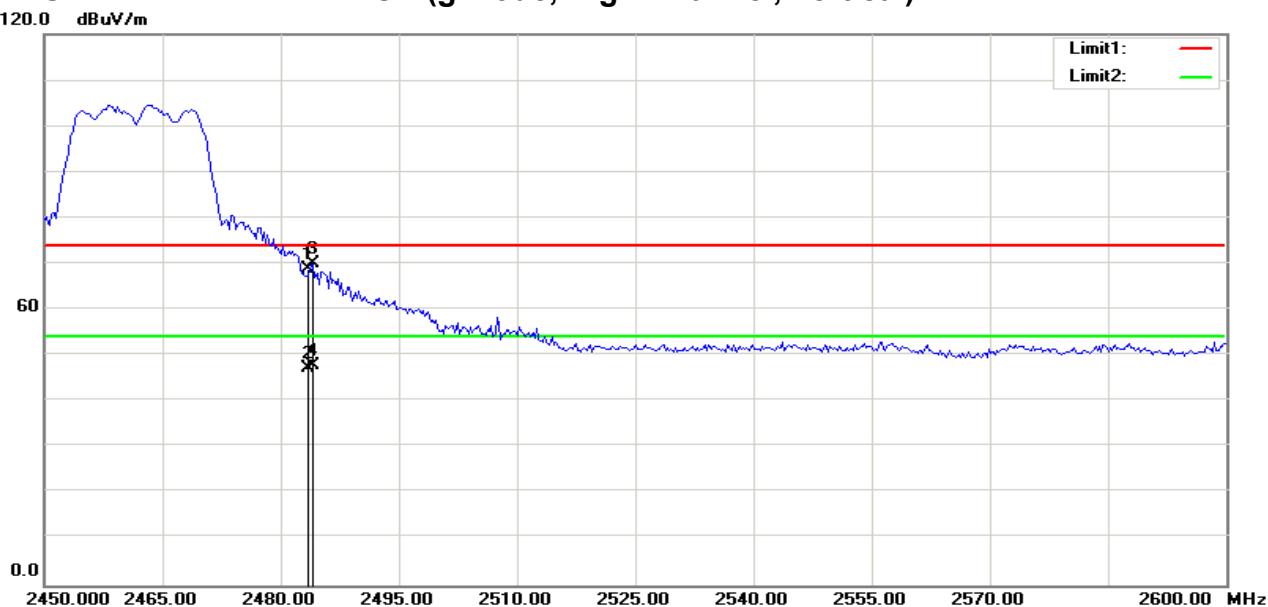

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	75.21	-6.44	68.77	74.00	-5.23	200	332	peak
2	2483.500	53.79	-6.44	47.35	54.00	-6.65	100	340	AVG
3	2484.135	76.39	-6.44	69.95	74.00	-4.05	100	156	peak
4	2484.135	54.22	-6.44	47.78	54.00	-6.22	100	154	AVG

## RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Horizontal)


120.0 dBuV/m

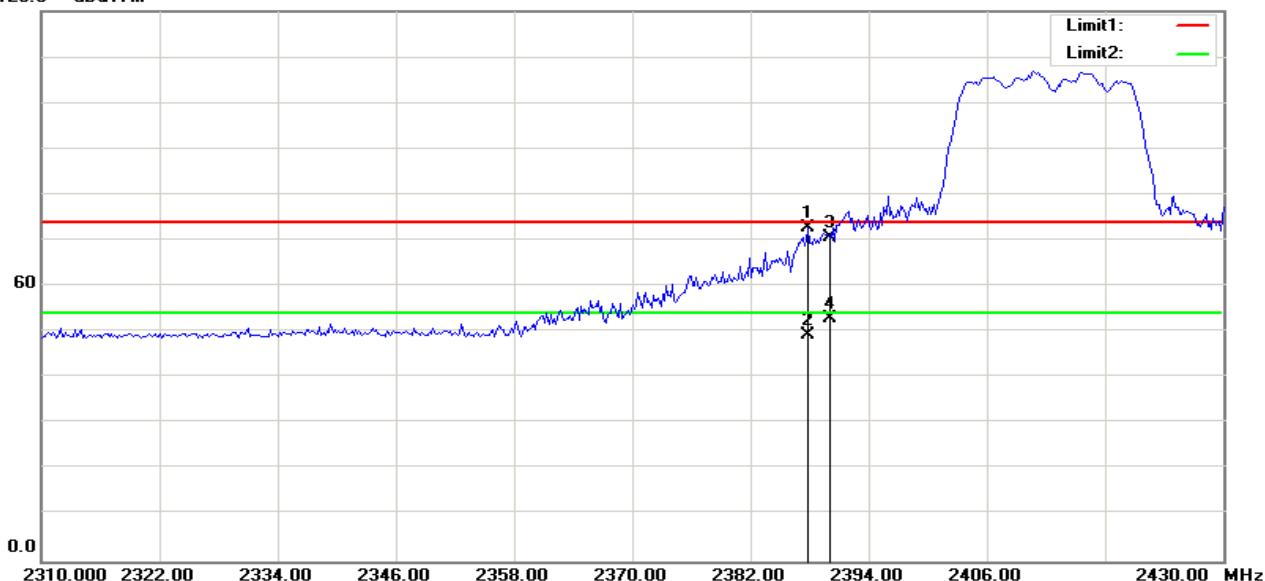

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2387.885	79.94	-7.33	72.61	74.00	-1.39	200	123	peak
2	2387.885	56.82	-7.33	49.49	54.00	-4.51	100	304	AVG
3	2390.000	78.09	-7.31	70.78	74.00	-3.22	200	105	peak
4	2390.000	60.20	-7.31	52.89	54.00	-1.11	100	68	AVG


## RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, Low Channel, Vertical)

120.0 dBuV/m

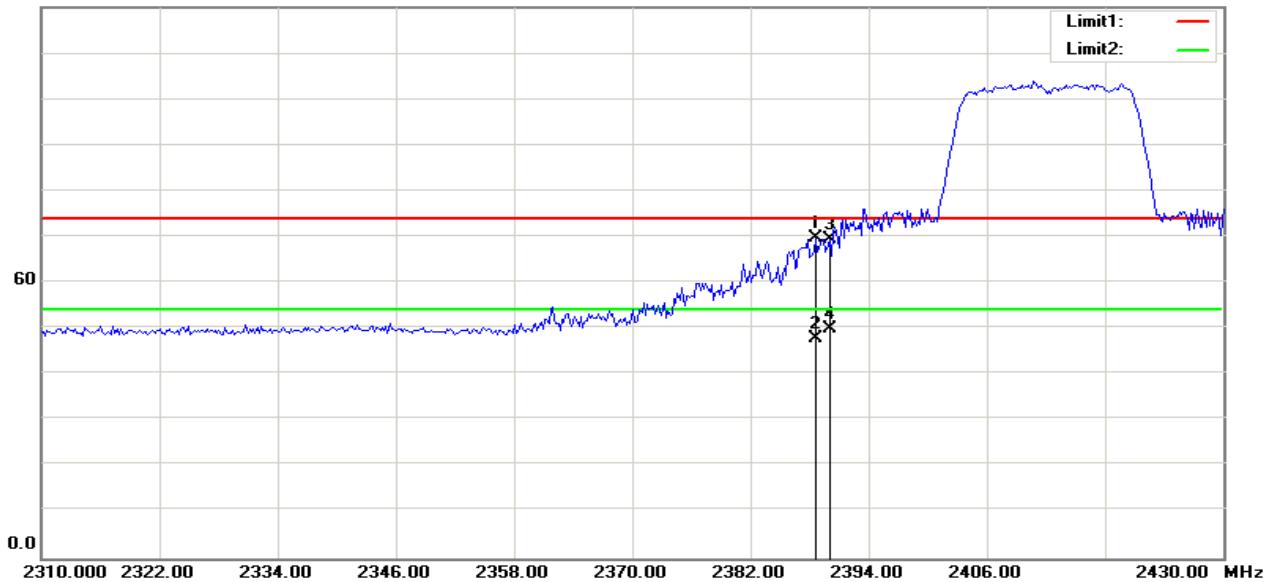

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	2388.654	77.14	-7.32	69.82	74.00	-4.18	100	323	peak
2	2388.654	55.12	-7.32	47.80	54.00	-6.20	200	327	AVG
3	2390.000	76.63	-7.31	69.32	74.00	-4.68	200	207	peak
4	2390.000	57.19	-7.31	49.88	54.00	-4.12	100	275	AVG

## RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Horizontal)

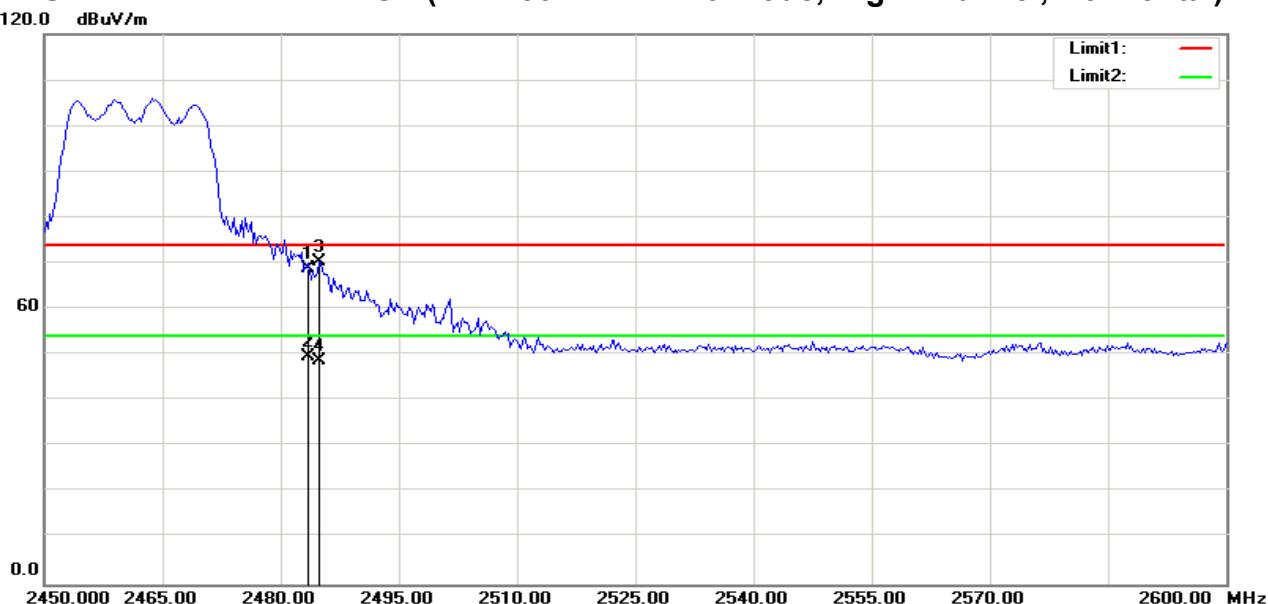

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	75.26	-6.44	68.82	74.00	-5.18	200	299	peak
2	2483.500	56.04	-6.44	49.60	54.00	-4.40	100	308	AVG
3	2484.856	76.90	-6.43	70.47	74.00	-3.53	200	309	peak
4	2484.856	55.20	-6.43	48.77	54.00	-5.23	100	34	AVG

## RESTRICTED BANDEDGE (IEEE 802.11n HT20 mode, High Channel, Vertical)



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	2483.500	76.53	-6.44	70.09	74.00	-3.91	200	163	peak
2	2483.500	51.01	-6.44	44.57	54.00	-9.43	100	360	AVG

**Test Result of Radiated Emission****Below 30MHz**

The interference of the frequency value is lower than the limit below 20 db, measured as the background noise values and will not be recorded.

**30MHz-1GHz**

<b>Operation Mode:</b>	Normal Link	<b>Test Date:</b>	2017-10-27
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	48% RH	<b>Polarity:</b>	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
242.4300	V	17.51	15.99	33.50	46.00	-12.50	peak
291.0260	V	20.25	17.30	37.55	46.00	-8.45	QP
319.0600	V	20.21	17.97	38.18	46.00	-7.82	peak
792.0030	V	16.13	27.21	43.34	46.00	-2.66	QP
960.2300	V	12.08	29.27	41.35	54.00	-12.65	peak
1000.0000	V	12.74	30.24	42.98	54.00	-11.02	QP
<hr/>							
30.9700	H	6.48	23.51	29.99	40.00	-10.01	peak
242.4300	H	16.48	15.99	32.47	46.00	-13.53	peak
290.9300	H	19.36	17.30	36.66	46.00	-9.34	peak
436.4300	H	12.63	22.36	34.99	46.00	-11.01	peak
792.4200	H	10.54	27.21	37.75	46.00	-8.25	peak
800.1800	H	10.63	27.21	37.84	46.00	-8.16	peak

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz (No emission found between lowest internal used/generated frequency to 30 MHz).
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
4. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	47.16	-5.25	41.91	74.00	-32.09	100	60	peak
2	7094.500	39.14	6.20	45.34	74.00	-28.66	100	265	peak
N/A									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4825.000	44.88	-5.25	39.63	74.00	-34.37	100	310	peak
2	7732.000	40.67	6.77	47.44	74.00	-26.56	100	68	peak
N/A									

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4876.000	45.39	-5.21	40.18	74.00	-33.82	100	85	peak
2	7757.500	40.18	6.79	46.97	74.00	-27.03	100	38	peak
N/A									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4876.000	42.97	-5.21	37.76	74.00	-36.24	100	280	peak
2	7987.000	40.06	7.00	47.06	74.00	-26.94	100	138	peak
N/A									

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5182.000	38.96	-4.24	34.72	74.00	-39.28	100	260	peak
2	7273.000	40.04	6.36	46.40	74.00	-27.60	100	7	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5233.000	39.88	-4.00	35.88	74.00	-38.12	100	230	peak
2	7426.000	40.00	6.49	46.49	74.00	-27.51	100	184	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4799.500	40.43	-5.27	35.16	74.00	-38.84	100	296	peak
2	7630.000	39.51	6.68	46.19	74.00	-27.81	100	248	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4774.000	41.85	-5.29	36.56	74.00	-37.44	100	126	peak
2	7783.000	40.19	6.81	47.00	74.00	-27.00	100	115	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4876.000	44.94	-5.21	39.73	74.00	-34.27	100	70	peak
2	8063.500	39.72	7.01	46.73	74.00	-27.27	100	17	peak
N/A									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4876.000	43.20	-5.21	37.99	74.00	-36.01	100	287	peak
2	7757.500	39.80	6.79	46.59	74.00	-27.41	100	1	peak
N/A									

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	4952.500	40.57	-5.15	35.42	74.00	-38.58	100	54	peak
2	7426.000	40.30	6.49	46.79	74.00	-27.21	100	1	peak
N/A									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5309.500	39.27	-3.64	35.63	74.00	-38.37	100	335	peak
2	7757.500	39.67	6.79	46.46	74.00	-27.54	100	38	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Low**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4825.000	44.06	-5.25	38.81	74.00	-35.19	100	85	peak
2	7732.000	40.24	6.77	47.01	74.00	-26.99	100	1	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4774.000	52.60	-5.29	47.31	74.00	-26.69	100	1	peak
2	7222.000	41.69	6.31	48.00	74.00	-26.00	100	138	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH Mid**Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	45.26	-5.21	40.05	74.00	-33.95	100	73	peak
2	7732.000	39.54	6.77	46.31	74.00	-27.69	100	310	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	4876.000	43.73	-5.21	38.52	74.00	-35.48	100	276	peak
2	7732.000	40.11	6.77	46.88	74.00	-27.12	100	192	peak
N/A									

**Operation Mode:** TX / IEEE 802.11n HT20 mode / CH High **Test Date:** 2017-11-12**Temperature:** 24°C**Tested by:** Lily.Wang**Humidity:** 48 % RH**Polarity:** Ver. / Hor.**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5335.000	39.36	-3.52	35.84	74.00	-38.16	100	269	peak
2	7732.000	39.36	6.77	46.13	74.00	-27.87	100	27	peak
N/A									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5309.500	39.53	-3.64	35.89	74.00	-38.11	100	92	peak
2	7961.500	39.42	6.98	46.40	74.00	-27.60	100	218	peak
N/A									

## 7.6. POWERLINE CONDUCTED EMISSIONS

### LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### Test Configuration

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE


1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

### TEST DATA


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	17:00:07
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	

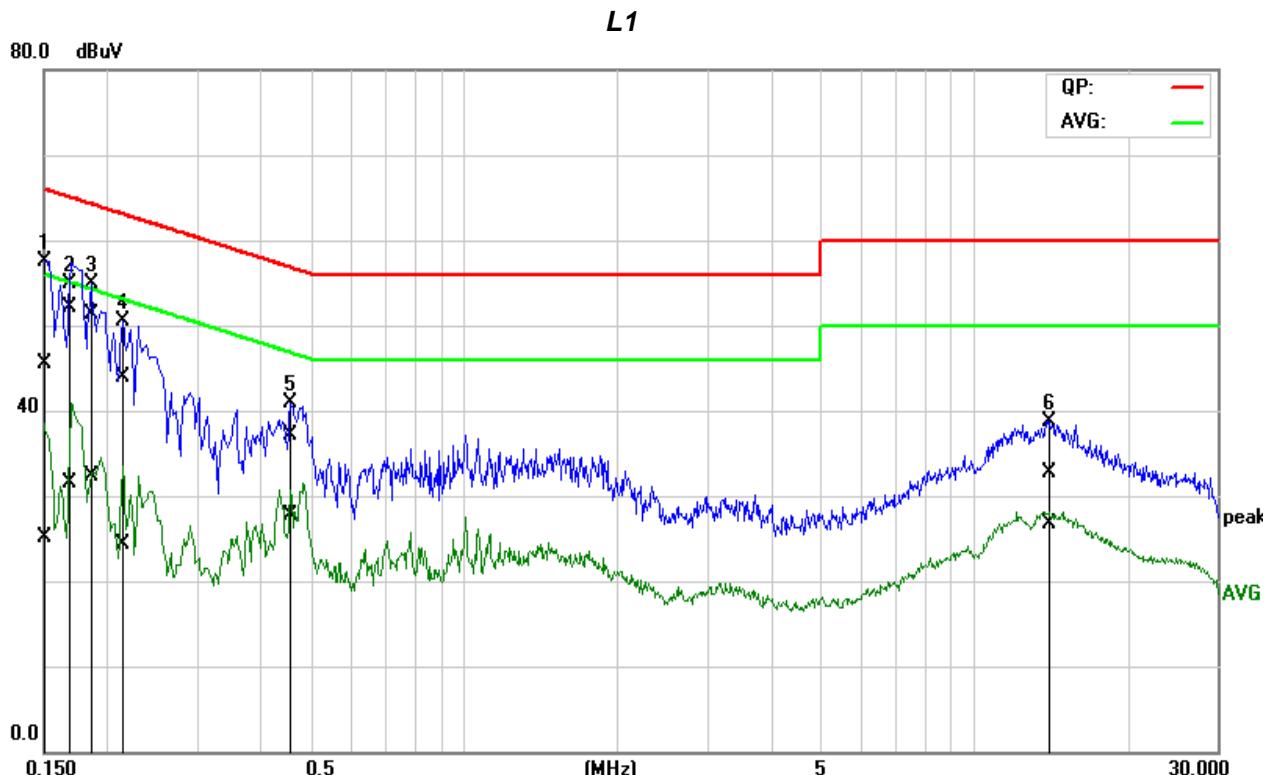

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1515	24.85	4.47	20.59	45.44	25.06	65.92	55.92	-20.48	-30.86	Pass
2	0.1663	31.61	10.87	20.57	52.18	31.44	65.14	55.14	-12.96	-23.70	Pass
3	0.1832	30.86	11.77	20.54	51.40	32.31	64.34	54.34	-12.94	-22.03	Pass
4	0.2147	23.44	3.79	20.49	43.93	24.28	63.02	53.02	-19.09	-28.74	Pass
5	0.4595	16.53	7.28	20.49	37.02	27.77	56.70	46.70	-19.68	-18.93	Pass
6	14.0647	11.94	5.86	20.79	32.73	26.65	60.00	50.00	-27.27	-23.35	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:53:27
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

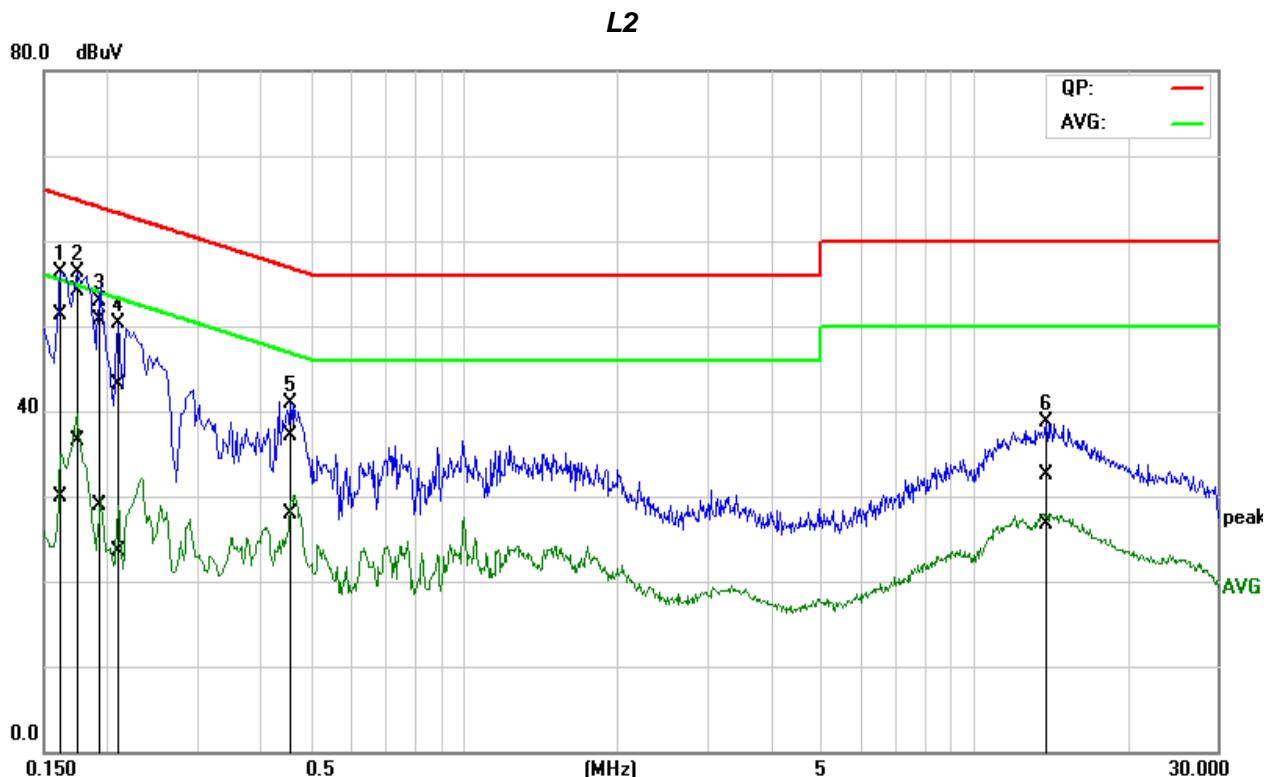

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1633	30.96	9.57	20.37	51.33	29.94	65.29	55.29	-13.96	-25.35	Pass
2	0.1727	33.71	16.07	20.38	54.09	36.45	64.83	54.83	-10.74	-18.38	Pass
3	0.1893	30.26	8.57	20.39	50.65	28.96	64.07	54.07	-13.42	-25.11	Pass
4	0.2080	22.60	3.07	20.41	43.01	23.48	63.28	53.28	-20.27	-29.80	Pass
5	0.4600	16.64	7.47	20.45	37.09	27.92	56.69	46.69	-19.60	-18.77	Pass
6	13.9377	11.74	5.91	20.83	32.57	26.74	60.00	50.00	-27.43	-23.26	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:46:30
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 240V/60Hz
Model:		Description:	

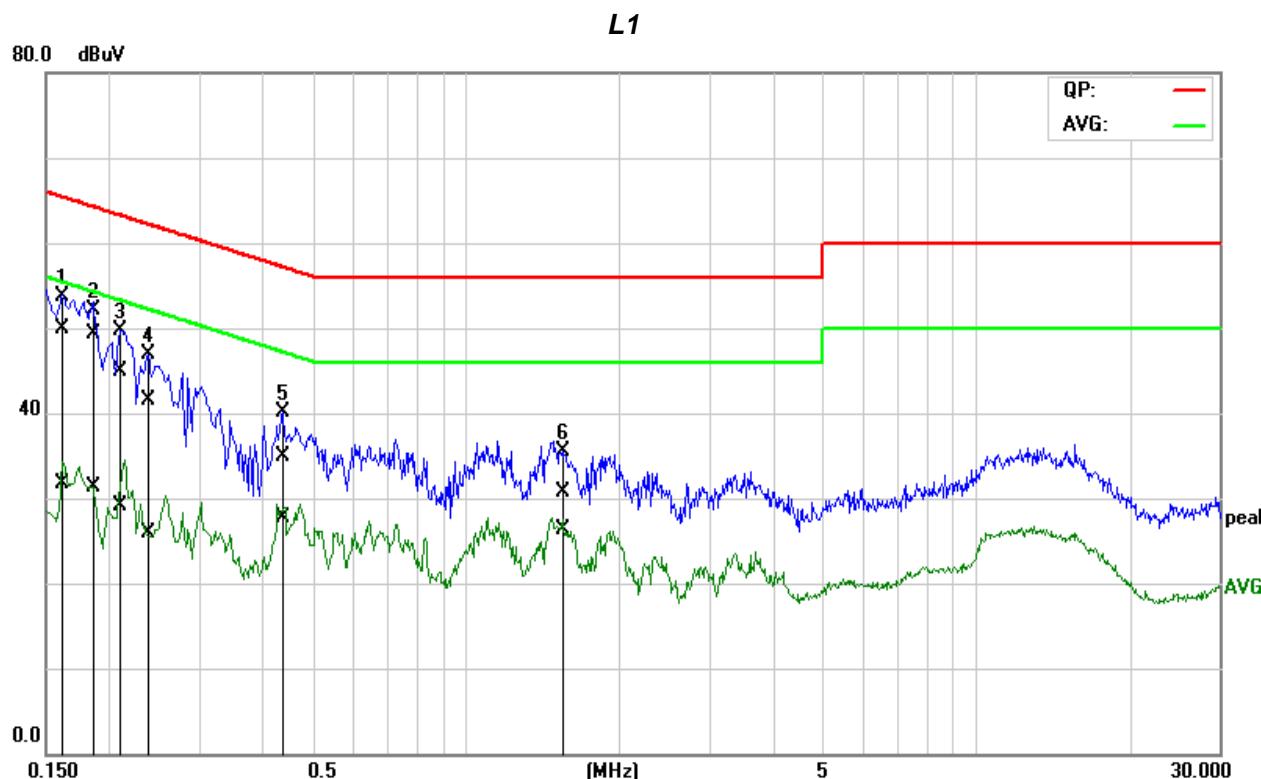

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1636	29.32	11.11	20.57	49.89	31.68	65.28	55.28	-15.39	-23.60	Pass
2	0.1872	28.70	10.77	20.53	49.23	31.30	64.16	54.16	-14.93	-22.86	Pass
3	0.2079	24.38	8.66	20.50	44.88	29.16	63.29	53.29	-18.41	-24.13	Pass
4	0.2343	21.01	5.54	20.46	41.47	26.00	62.30	52.30	-20.83	-26.30	Pass
5	0.4403	14.41	7.15	20.50	34.91	27.65	57.06	47.06	-22.15	-19.41	Pass
6*	1.5245	10.26	5.76	20.45	30.71	26.21	56.00	46.00	-25.29	-19.79	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:39:38
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 240V/60Hz
Model:		Description:	

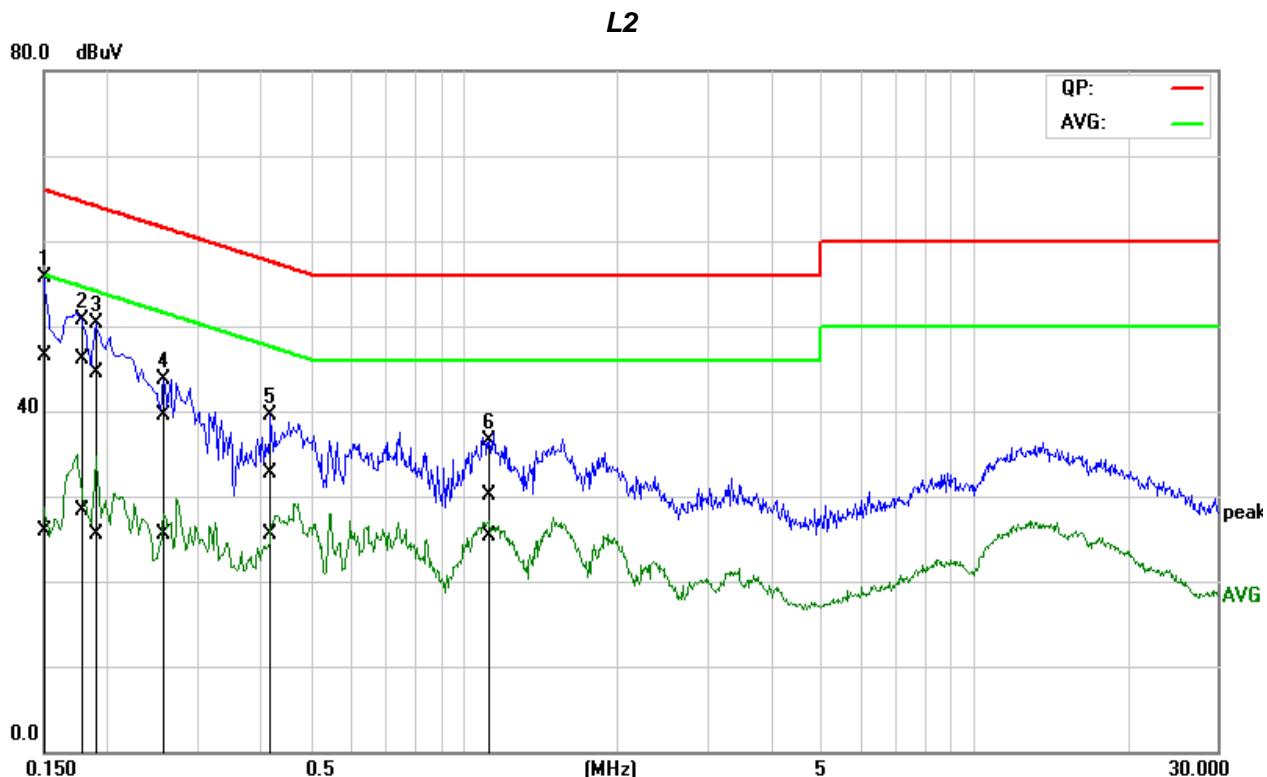

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1508	26.05	5.45	20.36	46.41	25.81	65.96	55.96	-19.55	-30.15	Pass
2	0.1794	25.63	8.02	20.38	46.01	28.40	64.51	54.51	-18.50	-26.11	Pass
3	0.1883	24.10	5.21	20.39	44.49	25.60	64.11	54.11	-19.62	-28.51	Pass
4	0.2544	19.04	5.05	20.44	39.48	25.49	61.61	51.61	-22.13	-26.12	Pass
5	0.4202	12.15	4.95	20.46	32.61	25.41	57.44	47.44	-24.83	-22.03	Pass
6*	1.1022	9.62	4.82	20.46	30.08	25.28	56.00	46.00	-25.92	-20.72	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**END OF REPORT**