

# FCC 47 CFR PART15 SUBPART E

## Test Report

For

**Product Name:** Intelligent Biometric Identification Terminal

**Brand Name:** opzoon

**Model No.:** OFR-D1

**Series Model.:** N/A

**FCC ID:** 2AN4A-OPD1AA001

**Test Report Number:**

**C170929R01-RPW2**

**Issued for**

Opzoon Technology Co., Ltd.

11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022

**Issued by**

Compliance Certification Services Inc.

Kun shan Laboratory

No.10 Weiye Rd., Innovation park, Eco&Tec,  
Development Zone, Kunshan City, Jiangsu, China

**TEL:** 86-512-57355888

**FAX:** 86-512-57370818



**Note:** This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by A2LA or any government agencies. The test results in the report only apply to the tested sample.

## TABLE OF CONTENTS

<b>1 TEST RESULT CERTIFICATION .....</b>	<b>4</b>
<b>2 EUT DESCRIPTION.....</b>	<b>5</b>
<b>3 TEST METHODOLOGY.....</b>	<b>6</b>
3.1 EUT CONFIGURATION .....	6
3.2 EUT EXERCISE.....	6
3.3 GENERAL TEST PROCEDURES.....	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS .....	7
3.5 DESCRIPTION OF TEST MODES.....	8
3.6 ANTENNA DESCRIPTION.....	9
<b>4 INSTRUMENT CALIBRATION .....</b>	<b>9</b>
4.1 MEASUREMENT EQUIPMENT USED .....	10
4.2 MEASUREMENT UNCERTAINTY .....	11
<b>5 FACILITIES AND ACCREDITATIONS .....</b>	<b>12</b>
5.1 FACILITIES.....	12
5.2 EQUIPMENT.....	12
5.3 TABLE OF ACCREDITATIONS AND LISTINGS .....	12
5.4 TABLE OF ACCREDITATIONS AND LISTINGS.....	13
<b>6 SETUP OF EQUIPMENT UNDER TEST .....</b>	<b>14</b>
6.1 SETUP CONFIGURATION OF EUT.....	14
6.2 SUPPORT EQUIPMENT.....	14
<b>7 FCC PART 15 REQUIREMENTS .....</b>	<b>15</b>
7.1 6 DB BANDWIDTH MEASUREMENT .....	15
7.2 MAXIMUM CONDUCTED OUTPUT POWER .....	32
7.3 BAND EDGES MEASUREMENT .....	35
7.4 POWER SPECTRAL DENSITY.....	43
7.5 FREQUENCY STABILITY MEASUREMENT.....	60
7.6 RADIATED UNDESIRABLE EMISSION .....	62
7.7 POWERLINE CONDUCTED EMISSIONS .....	74

## Revision History

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	November 21, 2017	C170929R01-RPW2	ALL	N/A

## 1 TEST RESULT CERTIFICATION

<b>Product Name:</b>	Intelligent Biometric Identification Terminal
<b>Trade Name:</b>	opzoon
<b>Model Name.:</b>	OFR-D1
<b>Series Model:</b>	N/A
<b>Applicant Discrepancy:</b>	Initial
<b>Device Category:</b>	mobile unit
<b>Date of Test:</b>	October 10,2017~November 19, 2017
<b>Applicant:</b>	<b>Opzoon Technology Co., Ltd.</b> 11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022
<b>Manufacturer:</b>	<b>Opzoon Technology Co., Ltd.</b> 11th floor, Tower B, Yintai Center 2 Jianguomenwai St., Beijing, China 100022
<b>Application Type:</b>	Certification

### APPLICABLE STANDARDS

STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart E	No non-compliance noted

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.407 and KDB 789033.


The test results of this report relate only to the tested sample EUT identified in this report.

**Approved by:**



Jeff.Fang  
RF Manager  
Compliance Certification Service Inc.

**Tested by:**



Lily.Wang  
Test Engineer  
Compliance Certification Service Inc.

## 2 EUT DESCRIPTION

<b>Product Name:</b>	Intelligent Biometric Identification Terminal		
<b>Brand Name:</b>	opzoon		
<b>Model Name:</b>	OFR-D1		
<b>Series Model:</b>	N/A		
<b>Model Discrepancy:</b>	N/A		
<b>Power Adapter:</b>	Power Adapter: Model :FSP050-DIBAN2 Input: 100-240V~,1.5A ,50-60Hz Output: 12.0V—4.16A MAX(50W MAX)		
<b>Frequency Range :</b>	5725MHz-5850MHz		
<b>Transmit Power :</b>	IEEE802.11a mode: 15.87dBm IEEE802.11an HT20 mode: 15.96dBm IEEE802.11an HT40 mode: 15.05dBm IEEE802.11ac VHT20 mode: 16.07dBm IEEE802.11ac VHT40 mode: 14.98dBm IEEE802.11ac VHT80 mode: 14.98dBm		
<b>Modulation Technique :</b>	IEEE802.11a mode: OFDM (6,9,12,18,24,36,48 and 54 Mbps) IEEE802.11an HT20 mode: OFDM (MCS0~MCS15) IEEE802.11an HT40 mode: OFDM (MCS0~MCS15) IEEE802.11ac VHT20 mode: OFDM (VHTMCS0~VHTMCS9) IEEE802.11ac VHT40 mode: OFDM (VHTMCS0~VHTMCS9) IEEE802.11ac VHT80 mode: OFDM (VHTMCS0~VHTMCS9)		
<b>Number of Channels :</b>	IEEE 802.11a/n HT20/ac VHT20 mode: 5 Channels IEEE 802.11n HT40/ac VHT40 Mode:2 Channels IEEE 802.11ac VHT80 MHz Mode:1 Channel		
<b>Antenna Specification:</b>		Gain(dBi)	
		2.4G	BandI
	Antenna 1	2.04	3.96
Antenna 2	2.04	3.96	3.40
<b>Beamforming Function:</b>	<input type="checkbox"/> With beamforming	<input checked="" type="checkbox"/> Without beamforming	

### Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: 2AN4A-OPD1AA001 filing to comply with FCC Part 15, Subpart E Rules.

### 3 TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10:2013 and FCC CFR 47 15.207, 15.209 and 15.407.

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed for RF field strength measurement to meet the Commissions requirement, and is operated in a manner intended to generate the maximum emission in a continuous normal application.

#### 3.2 EUT EXERCISE

The EUT is operated in the engineering mode to fix the Tx frequency for the purposes of measurement.

According to its specifications, the EUT must comply with the requirements of Section 15.407 under the FCC Rules Part 15 Subpart E.

#### 3.3 GENERAL TEST PROCEDURES

##### Conducted Emissions

The EUT is placed on the turntable, which is positioned at 0.8 m above the ground plane. According to the requirements in Section 13.3 of ANSI C63.10:2013, the conducted emission from the EUT is measured in the frequency range between 0.15 MHz and 30MHz, using the CISPR Quasi-Peak detector mode.

##### Radiated Emissions

###### Under 1GHz

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

###### Above 1GHz

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.10:2013.

### 3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.50 - 5.15
0.495 - 0.505 <sup>(1)</sup>	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960.0 - 1240	7.25 - 7.75
4.125 - 4.128	25.50 - 25.67	1300 - 1427	8.025 - 8.500
4.17725 - 4.17775	37.50 - 38.25	1435.0 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73.00 - 74.60	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.80 - 75.20	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108.00 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.90 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500.0	17.7 - 21.4
8.37625 - 8.38675	156.70 - 156.90	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.1700	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.20	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358.0	36.43 - 36.5 <sup>(2)</sup>
12.57675 - 12.57725	322.0 - 335.4	3600 - 4400	
13.36 - 13.41			

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

### 3.5 DESCRIPTION OF TEST MODES

Description	Modulation Technology	Modulation Type
6dB Bandwidth	OFDM	BPSK
Maximum conducted output power	OFDM	BPSK
Band edges measurement	OFDM	BPSK
Peak Power Spectral Density	OFDM	BPSK
Radiated undesirable emission	OFDM	BPSK
Conducted undesirable emission	OFDM	BPSK
Powerline conducted emission	OFDM	BPSK

**IEEE 802.11a mode:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with 6Mbps data rate were chosen for full testing.

**IEEE 802.11n HT20 mode:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with MCS0 data rate were chosen for full testing.

**IEEE 802.11n HT40 mode:**

Channel Low (5755MHz) and Channel High (5795MHz) with MCS0 data rate were chosen for full testing.

**IEEE 802.11ac VHT20 mode:**

Channel Low (5745MHz), Channel Mid (5785MHz) and Channel High (5825MHz) with VHTMCS0 data rate were chosen for full testing.

**IEEE 802.11ac VHT40 mode:**

Channel Low (5755MHz) and Channel High (5795MHz) with VHTMCS0 data rate were chosen for full testing.

**IEEE 802.11ac VHT80 mode:**

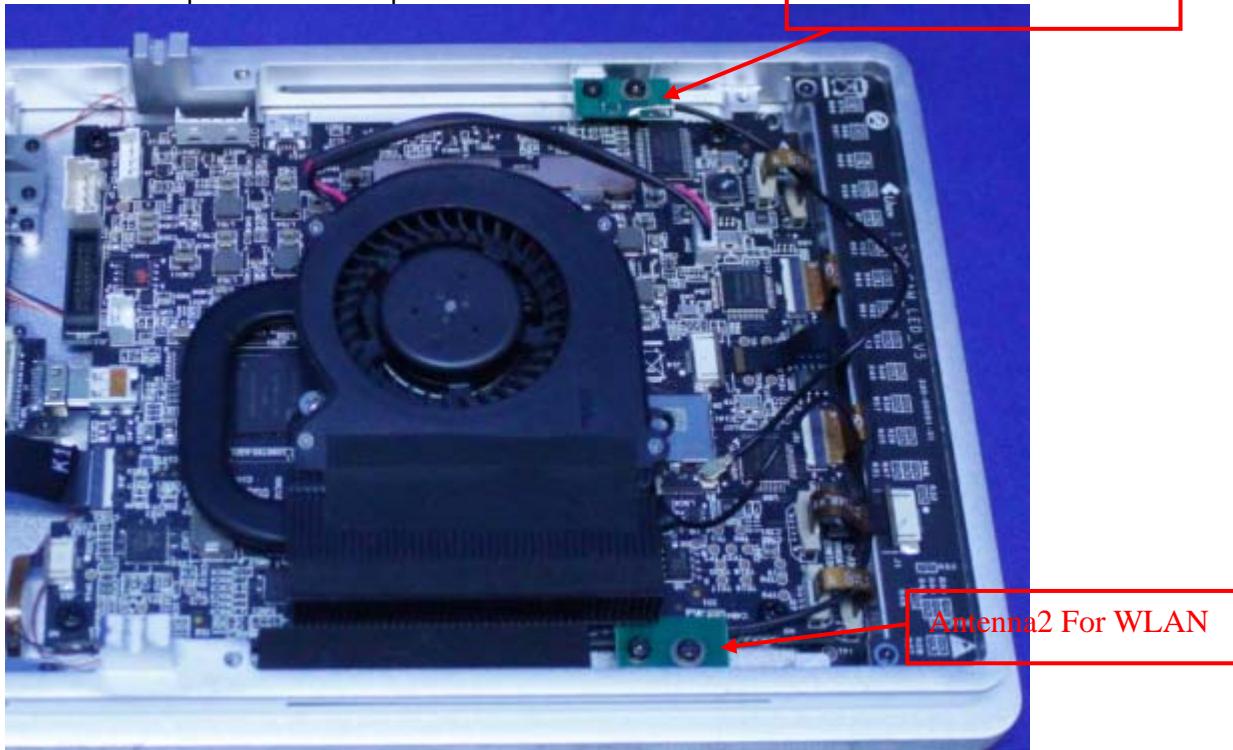
Channel Mid (5775MHz) with VHTMCS0 data rate were chosen for full testing.

### 3.6 ANTENNA DESCRIPTION

an intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section"

\* the antenna of this EUT is a unique(Slot Antenna for WLAN)

\* the EUT complies with the requirement of 15.203.



### 4 INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

## 4.1 MEASUREMENT EQUIPMENT USED

Conducted Emissions Test Site					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
Power meter	Anritsu	ML2495A	1445010	2017-4-26	2018-4-25
Power sensor	Anritsu	MA2411B	1339220	2017-4-26	2018-4-25
Power SPLITTER	Mini-Circuits	ZN2PD-9G	SF078500430	N.C.R	N.C.R
DC Power Supply	AGILENT	E3632A	MY50340053	N.C.R	N.C.R
Temp. / Humidity Gauge	Anymetre	TH603	CCS007	2017-10-24	2018-10-23
Test Software			EZ-EMC		

977 Chamber					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY44020154	2017-9-4	2018-9-3
Spectrum Analyzer	RS	FSU26	200789	2017-7-20	2018-7-19
EMI Test Receiver	R&S	ESCI	101378	2017-1-5	2018-1-4
Amplifier	COM-POWER	PAM-840A	461332	2017-8-30	2018-8-29
Amplifier	MITEQ	JS41-00101800-32-10P	1675713	2017-7-20	2018-7-19
Broad-Band Horn Antenna	SCHWARZBECK	BBHA 9170	9170-515	2017-3-6	2018-3-5
Bilog Antenna	Sunol	JB1	A062604	2017-5-27	2018-5-26
Bilog Antenna	Sunol	JB1	A110204-1	2017-5-27	2018-5-26
Loop Antenna	Hengweiyi	39501C	2014012	2017-1-5	2018-1-4
Horn-antenna	SCHWARZBECK	9120D	D:266	2017-2-28	2018-2-27
Horn-antenna	SCHWARZBECK	9120D	D:267	2017-11-5	2018-11-4
Turn Table	CT	CT123	4165	N.C.R	N.C.R
Antenna Tower	CT	CTERG23	3256	N.C.R	N.C.R
Controller	CT	CT1OO	95637	N.C.R	N.C.R
Test Software			EZ-EMC		

Conducted Emission					
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Data	Calibration Due
EMI TEST RECEIVER	R&S	ESCI	100781	2017-2-28	2018-2-27
V (V-LISN)	SCHWARZBECK	NNLK 8129	8129-143	2017-10-29	2018-10-28
TWO-LINE V-NETWORK	R&S	ENV216	101604	2017-10-29	2018-10-28
Pulse LIMITER	R&S	ESH3-Z2	100524	2017-1-5	2018-1-4
Test Software			EZ-EMC		

*Remark:* Each piece of equipment is scheduled for calibration once a year.

## 4.2 MEASUREMENT UNCERTAINTY

For the test methods, according to the present document, the measurement uncertainty figures shall be calculated in accordance with TR 100 028-1 [2] and shall correspond to an expansion factor (coverage factor)  $k = 1,96$  or  $k = 2$  (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 6 is based on such expansion factors.

**Table 6: Maximum measurement uncertainty**

Parameter	<u>UNCERTAINTY</u>
Radio frequency	$\pm 0.8 \times 10^{-7}$
RF power, conducted	0.2054
Maximum frequency deviation: -within 300 Hz and 6 kHz of audio frequency -within 6 kHz and 25 kHz of audio frequency	1.3% 0.65 dB
Adjacent channel power	0.2054
Conducted spurious emission of transmitter, valid up to 6 GHz	0.2892
Conducted emission of receivers	+1.2/-1.1 dB
Radiated emission of transmitter, valid up to 6 GHz	$\pm 3.94$ dB
Radiated emission of receiver, valid up to 6 GHz	$\pm 3.94$ dB
RF level uncertainty for a given BER	$\pm 0.3$ dB
Temperature	0.1979
Humidity	$\pm 1$ %

## 5 FACILITIES AND ACCREDITATIONS

### 5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

**No.10Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China.**

The sites are constructed in conformance with the requirements of ANSI C63.10:2013 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

### 5.3 TABLE OF ACCREDITATIONS AND LISTINGS

FCC –Designation Number: CN1172.

Compliance Certification Services Inc. Kun shan Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Designation Number: CN1172.

**5.4 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	47 CFR FCC Part 15/18 (using ANSI C63.10 :2013); VCCI V3; CNS 13438; CNS 13439; CNS 13803; CISPR 11; EN 55011; CISPR 13; EN 55013; CISPR 22:2005; CISPR 22:1997 +A1 :2000+A2 :2002; EN 55022:2006; EN55022 :1998 +A1 :2001+A2 :2003; EN 61000-6-3 (excluding discontinuous interference); EN 61000-6-4; AS/NZS CISPR 22; CAN/CSA-CEI/IEC CISPR 22; EN 61000-3-2; EN 61000-3-3; EN550024; EN 61000-4-2; EN 61000-4-3; EN61000-4-4; EN 61000-4-5; EN 61000-4-6; IEC 61000-4-8; EN 61000-4-11; IEC61000-3-2; IEC61000-3-3; IEC 61000-4-2; IEC 61000-4-3; IEC 61000-4-4; IEC 61000-4-5; IEC 61000-4-6; IEC 61000-4-8; IEC 61000-4-11; EN 300 220-3; EN 300 328; EN 300 330-2; EN 300 440-1; EN 300-440-2; EN 300 893; EN 301 489-01; EN 301 489-3; EN 301 489-07; EN 301 489-17; 47 CFR FCC Part 15, 22, 24	
USA	FCC	3/10 meter Sites to perform FCC Part 15/18 measurements	
Japan	VCCI	3/10 meter Sites and conducted test sites to perform radiated/conducted measurements	<b>VCCI</b> R-1600 C-1707 G-216

\* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.

## 6 SETUP OF EQUIPMENT UNDER TEST

### 6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### 6.2 SUPPORT EQUIPMENT

No.	Equipment	Model No.	Serial No.
	Notebook	E5430	CN8YYW1

**Remark:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.


## 7 FCC PART 15 REQUIREMENTS

### 7.1 6 DB BANDWIDTH MEASUREMENT

#### LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz.
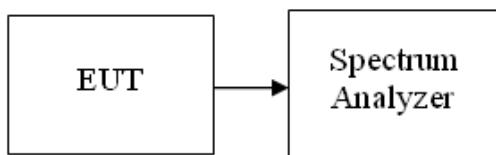
#### Test Configuration



#### TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low-loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW =100KHz, VBW $\geq$  3RBW, Detector = Peak. Trace mode = max hold.
4. Measure the maximum width of the emission that is 6 dB down from the peak of the emission.
5. Measure and record the results in the test report.

#### TEST RESULTS

*No non-compliance noted*

#### Test Data

**Test mode: IEEE 802.11a mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	16.587	0.5
Mid	5785	16.587	0.5
High	5825	16.587	0.5

**Test mode: IEEE 802.11a mode/ Chain 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	16.587	0.5
Mid	5785	16.587	0.5
High	5825	16.587	0.5

**Test mode: IEEE 802.11n HT20 mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	17.708	0.5
Mid	5785	17.788	0.5
High	5825	17.788	0.5

**Test mode: IEEE 802.11n HT20 mode/ Chain 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	17.869	0.5
Mid	5785	17.788	0.5
High	5825	17.788	0.5

**Test mode: IEEE 802.11n HT40 mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5755	36.538	0.5
High	5795	36.538	0.5

**Test mode: IEEE 802.11n HT40 mode/ Chain 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5755	36.442	0.5
High	5795	36.442	0.5

**Test mode: IEEE 802.11ac VHT20 mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	17.708	0.5
Mid	5785	17.708	0.5
High	5825	17.788	0.5

**Test mode: IEEE 802.11ac VHT20 mode/ Chain 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5745	17.869	0.5
Mid	5785	17.788	0.5
High	5825	17.788	0.5

**Test mode: IEEE 802.11ac VHT40 mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5755	36.442	0.5
High	5795	36.538	0.5

**Test mode: IEEE 802.11ac VHT40 mode/ Chain 1**

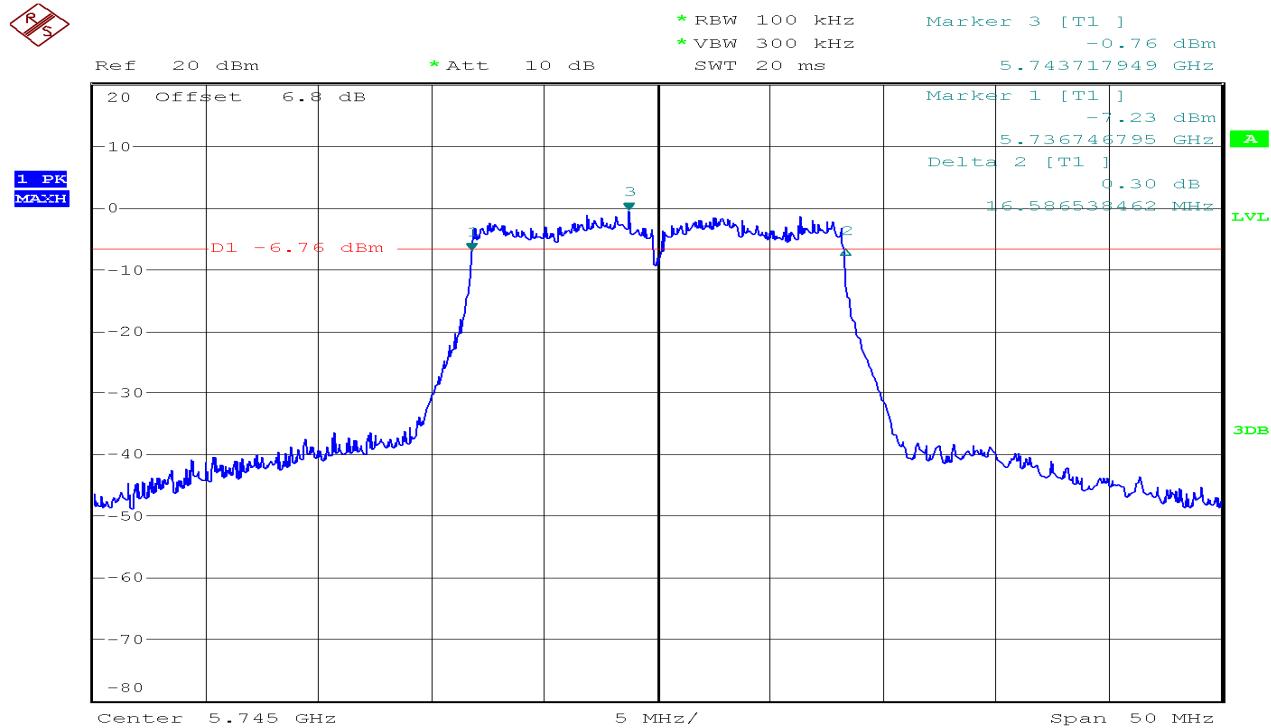
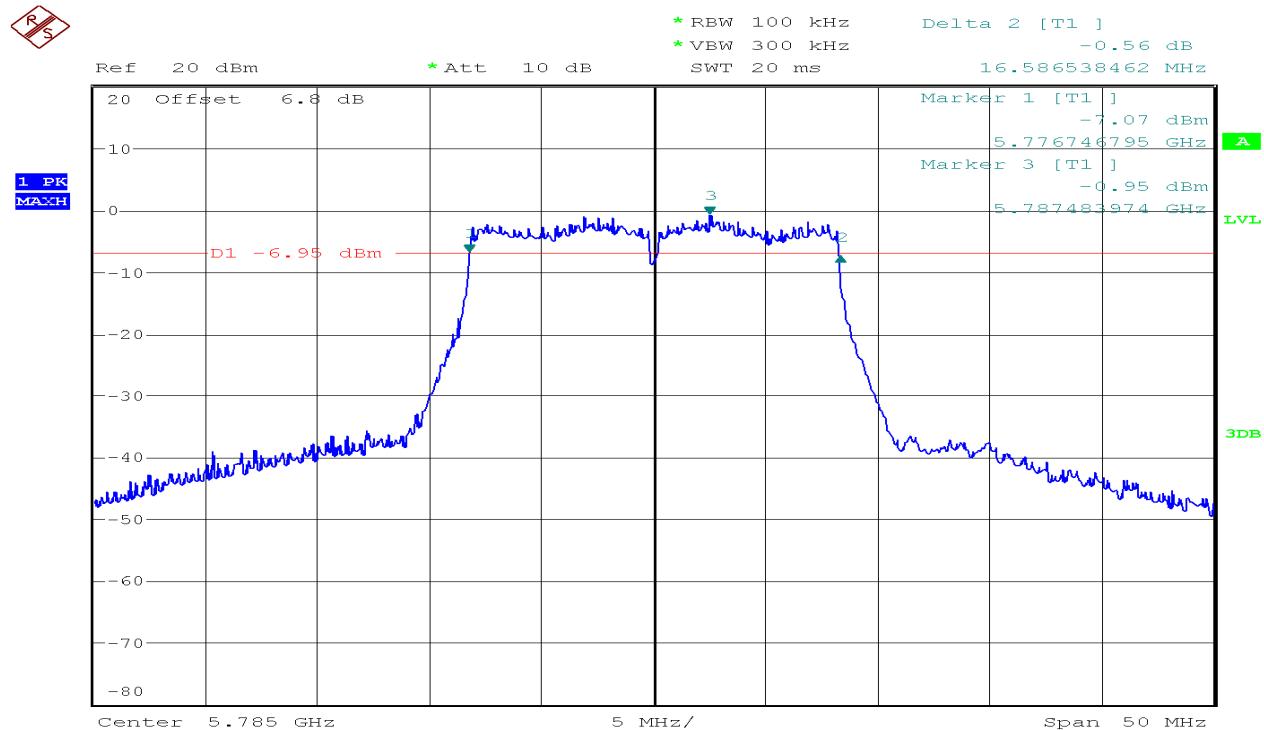
Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Low	5755	36.442	0.5
High	5795	36.538	0.5



**Test mode: IEEE 802.11ac VHT80 mode/ Chain 0**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Mid	5775	76.538	0.5


**Test mode: IEEE 802.11ac VHT80 mode/ Chain 1**

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	FCC 6 dB Bandwidth Min. Limit (MHz)
Mid	5775	76.731	0.5


**Test Plot****IEEE 802.11a mode/Chain 0:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**

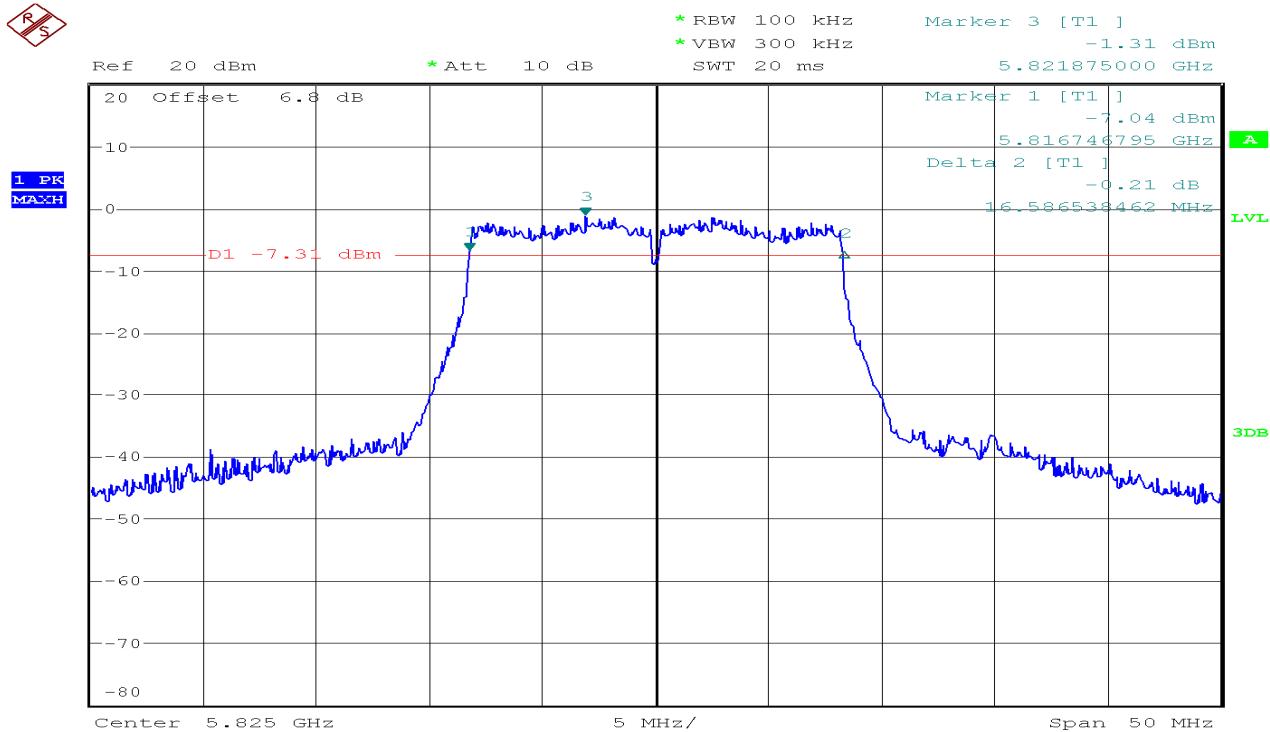
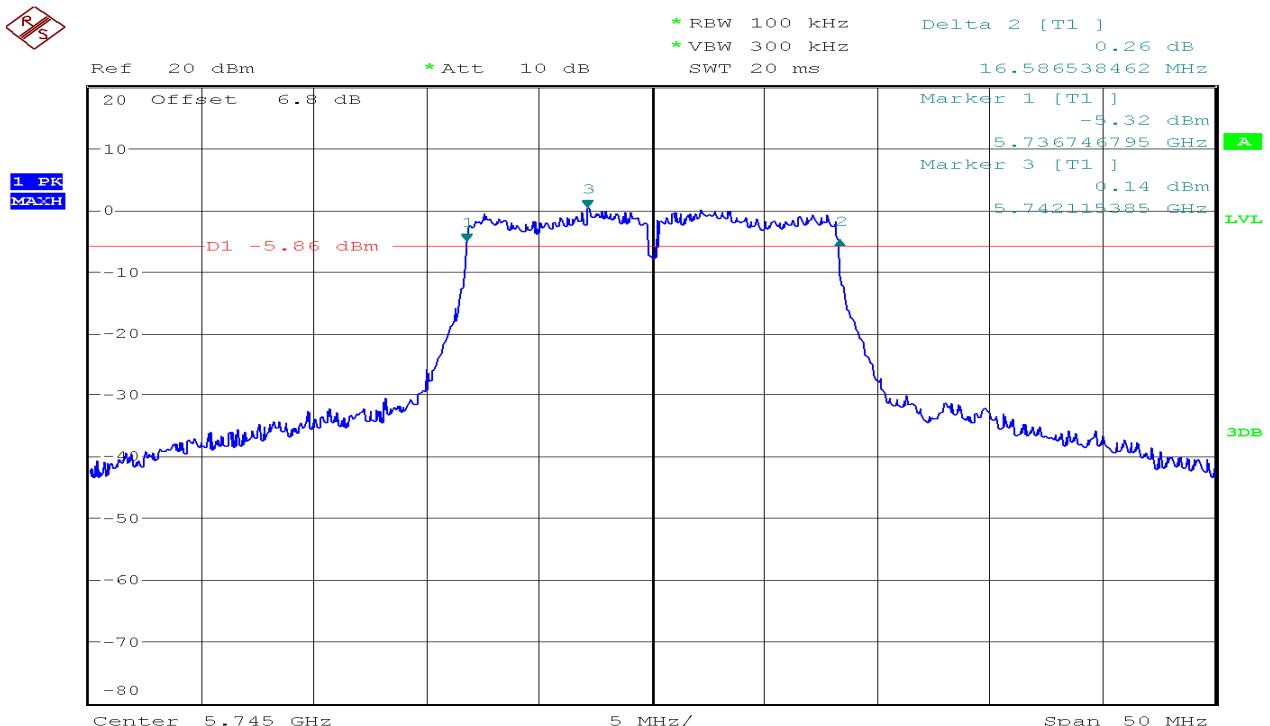
**6dB Bandwidth (CH High)****IEEE 802.11a mode/Chain 1:****6dB Bandwidth (CH Low)**

## 6dB Bandwidth (CH Mid)

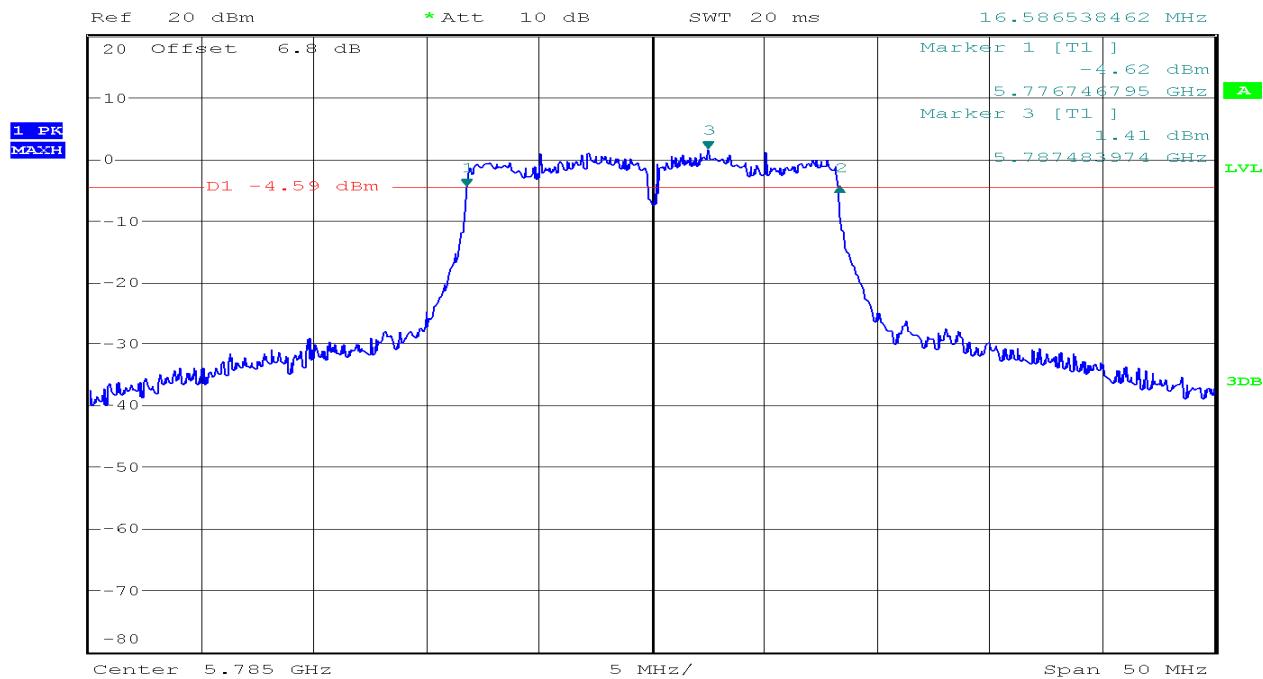


## 6dB Bandwidth (CH High)

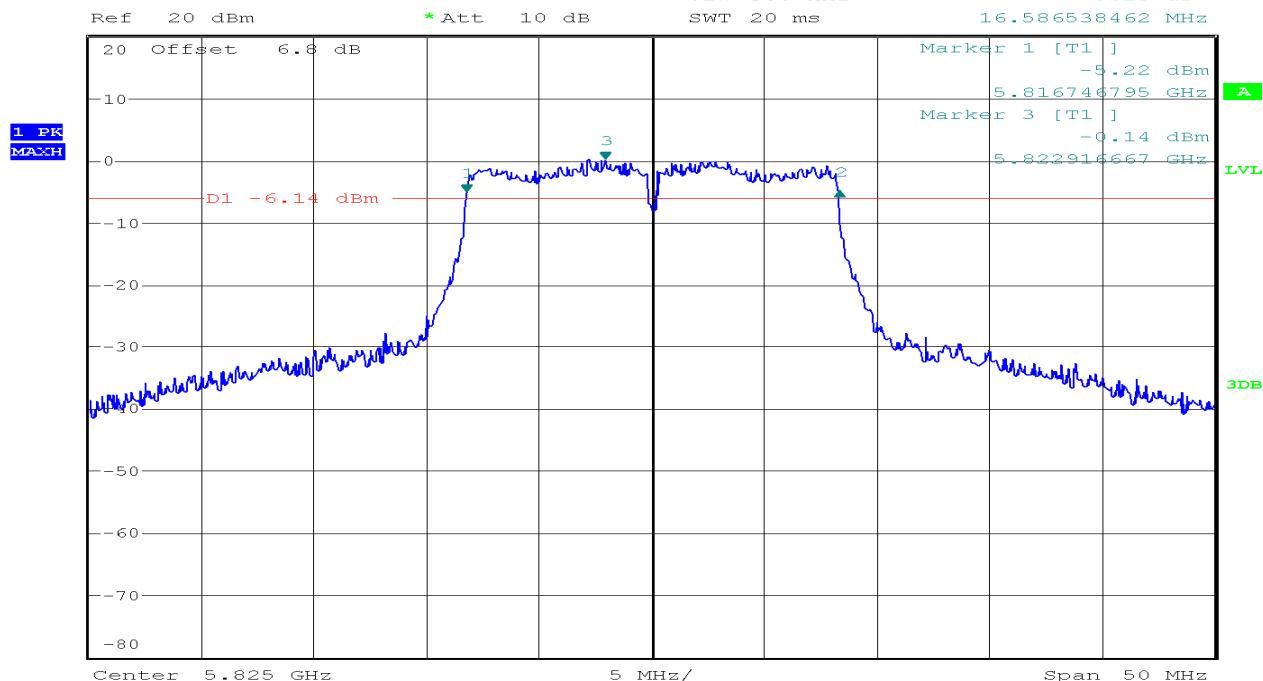


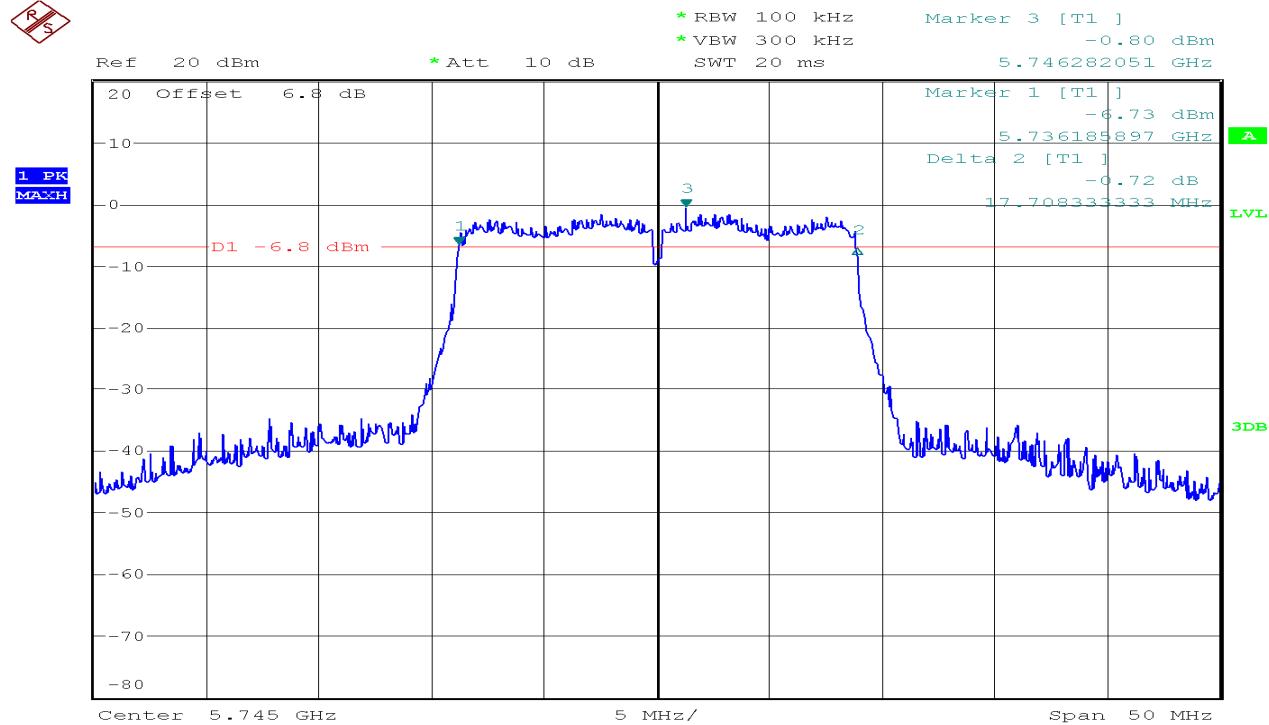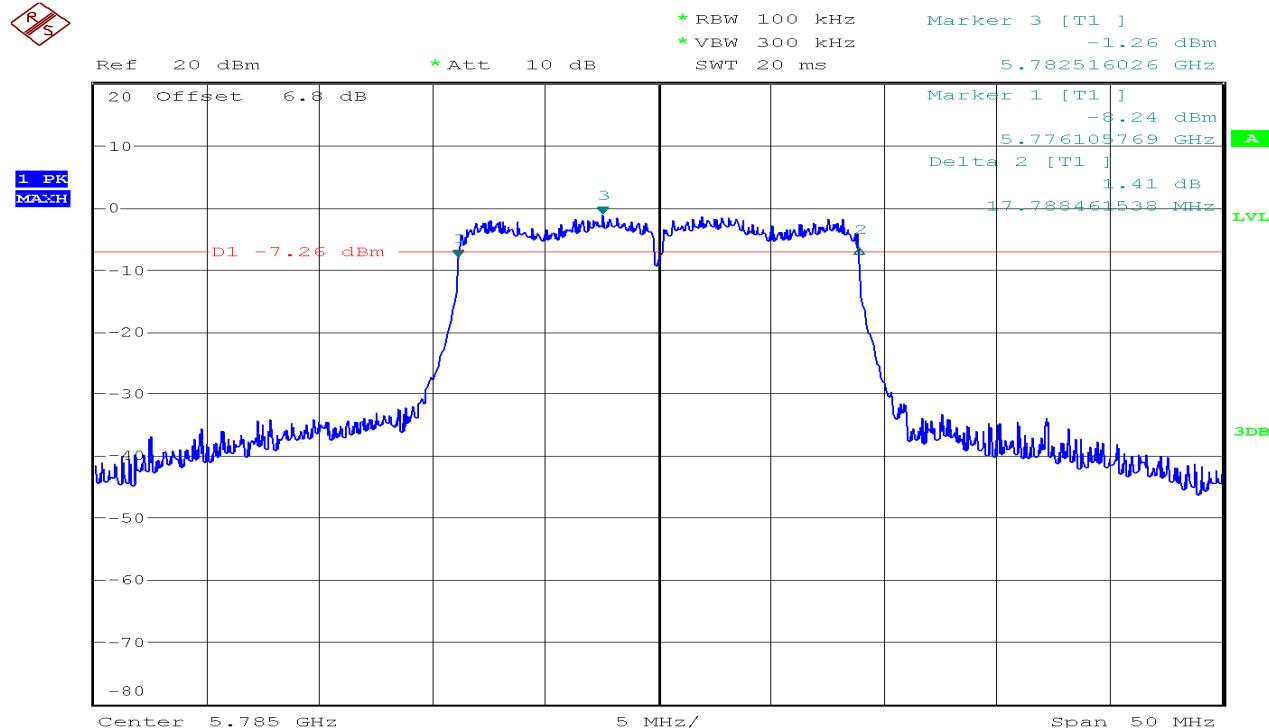**IEEE 802.11n HT20 mode/Chain 0:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH Mid)**


## 6dB Bandwidth (CH High)

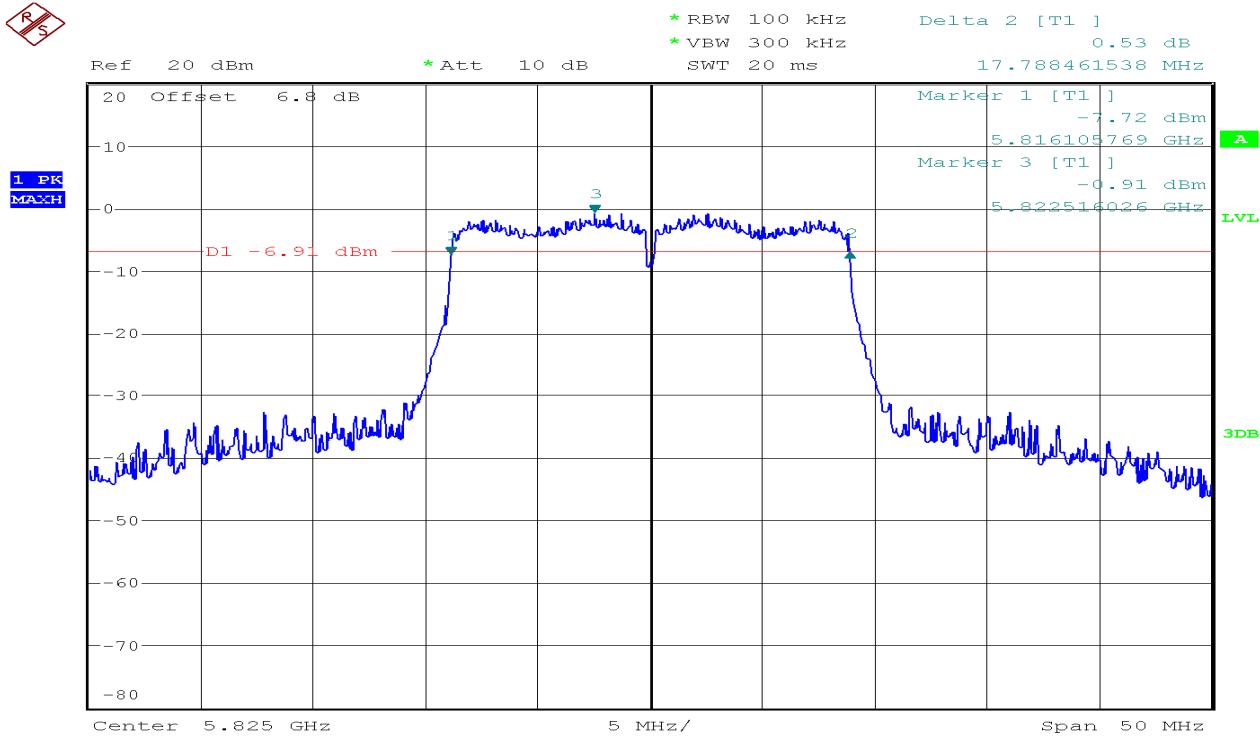IEEE 802.11n HT20 mode/Chain 1:


## 6dB Bandwidth (CH Low)


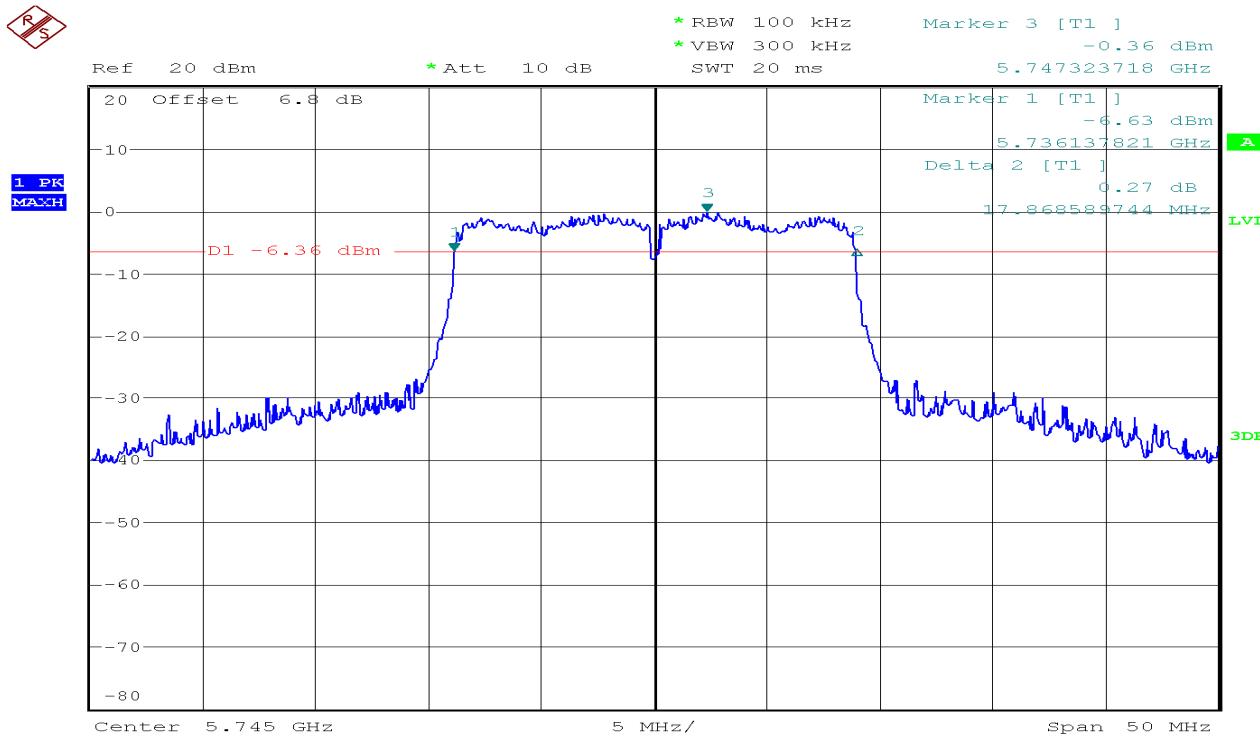




## 6dB Bandwidth (CH Mid)

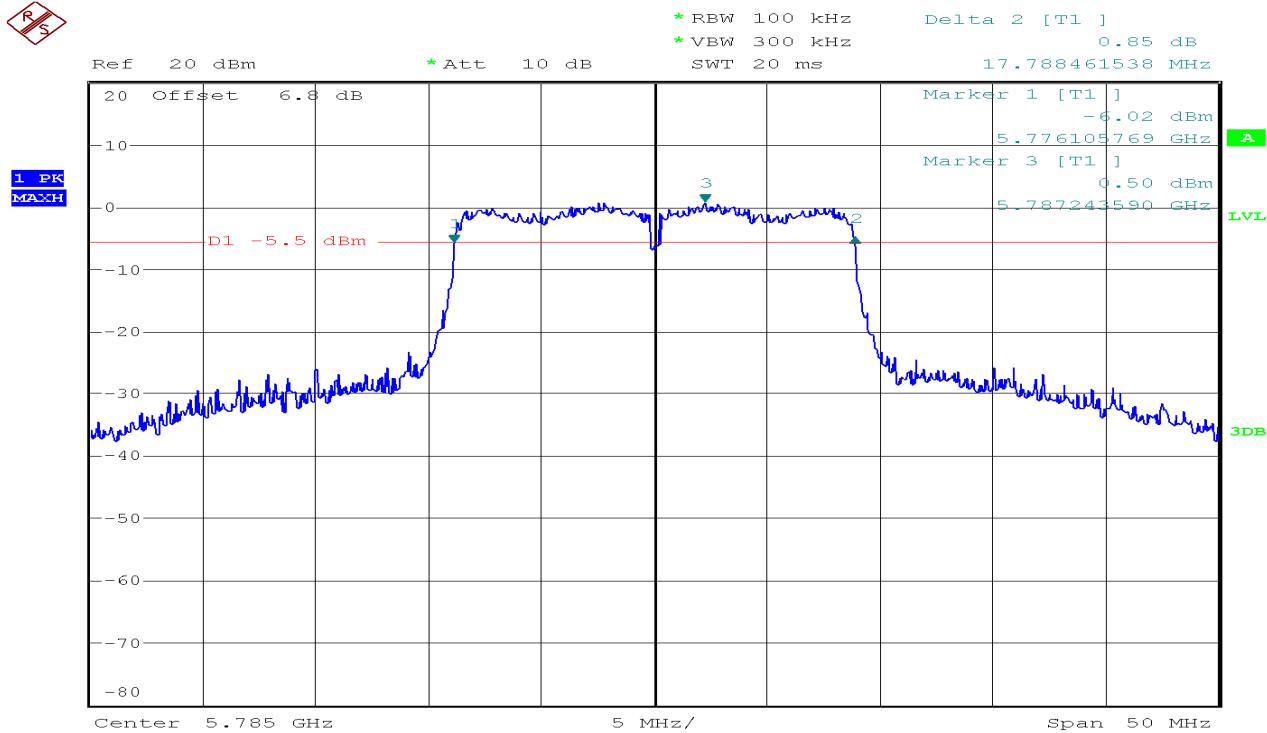

## 6dB Bandwidth (CH High)

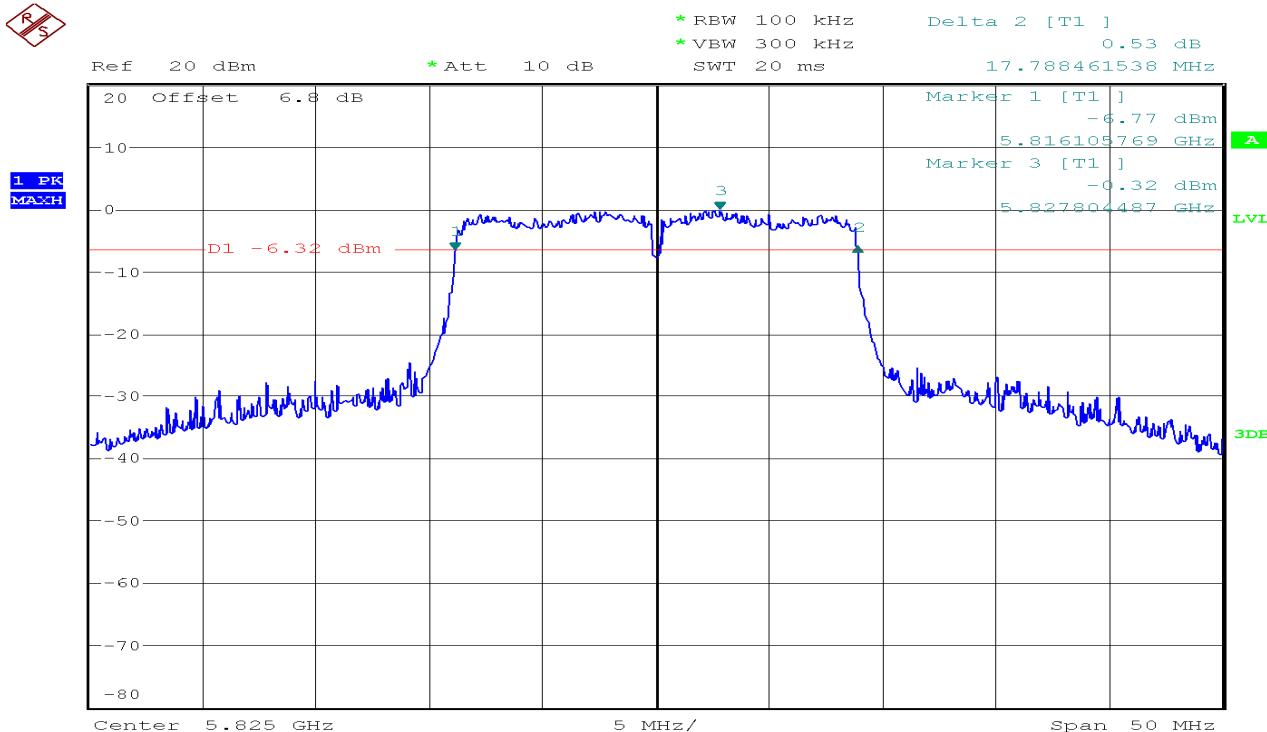


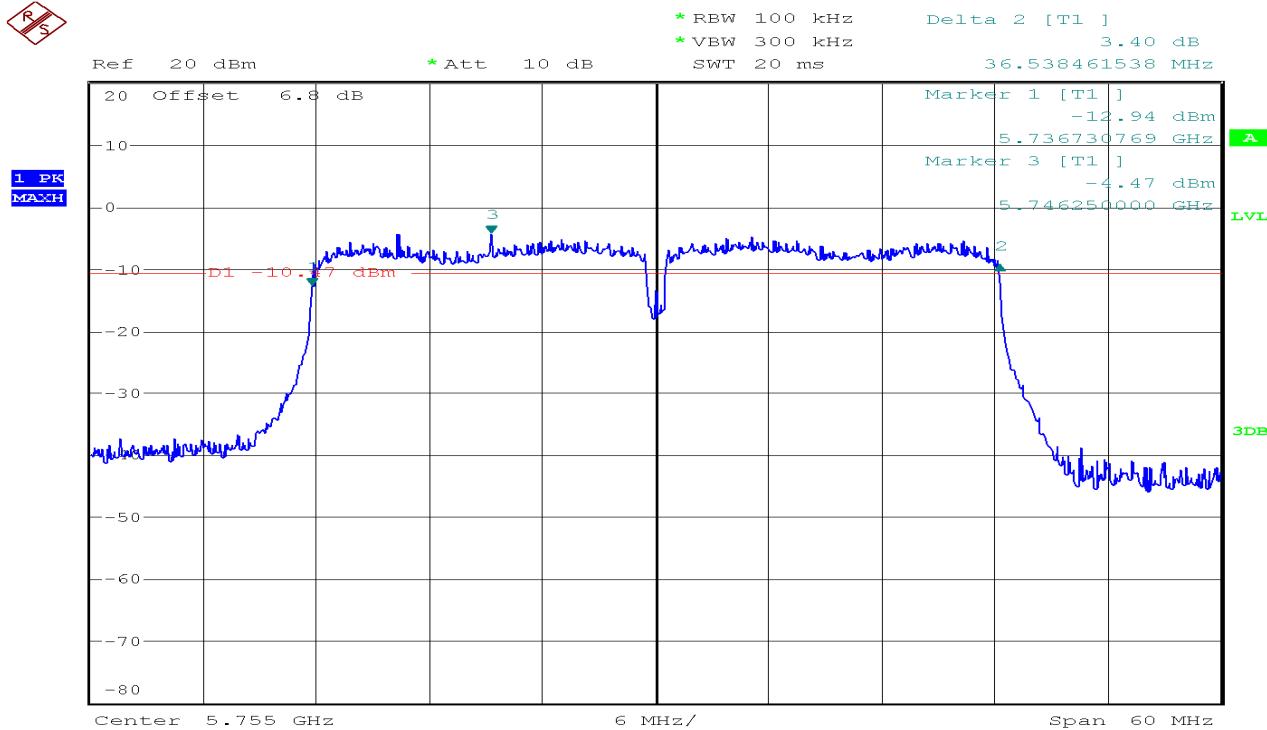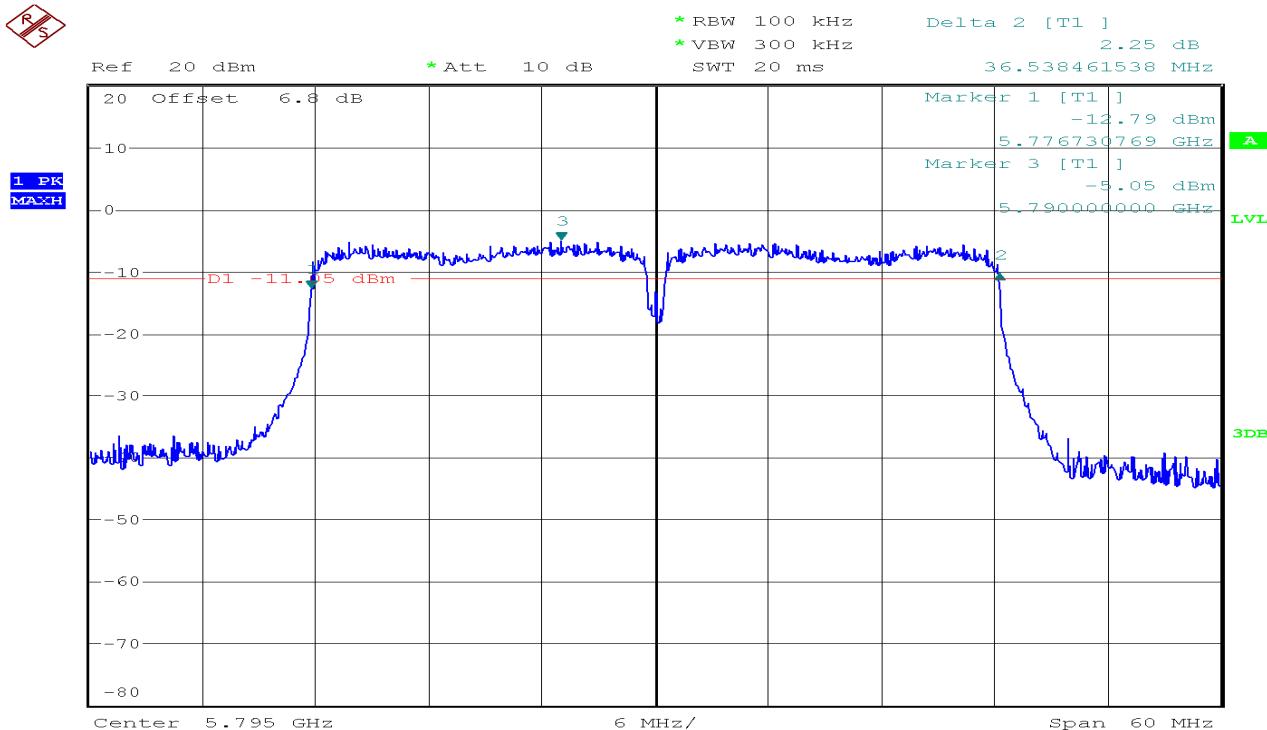**IEEE 802.11n HT40 mode/Chain 0:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

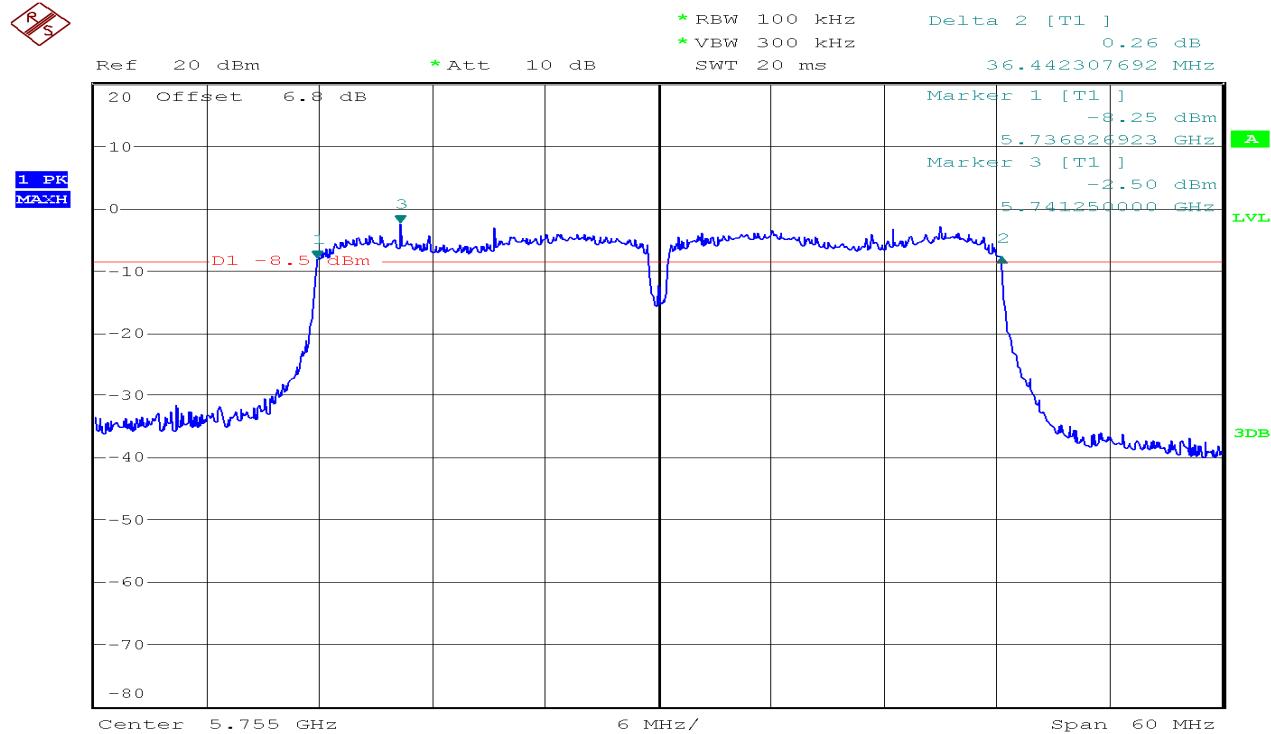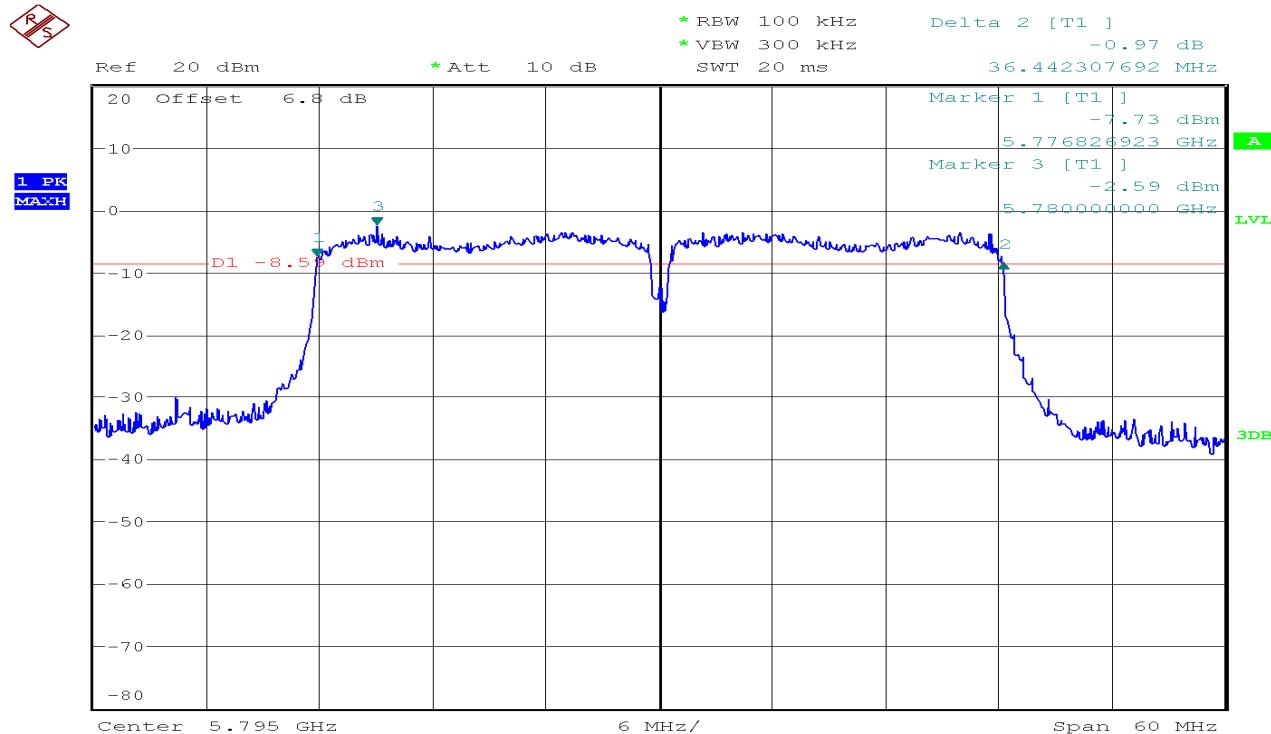
**IEEE 802.11n HT40 mode/Chain 1:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**



## IEEE 802.11ac VHT20 mode/Chain 0:
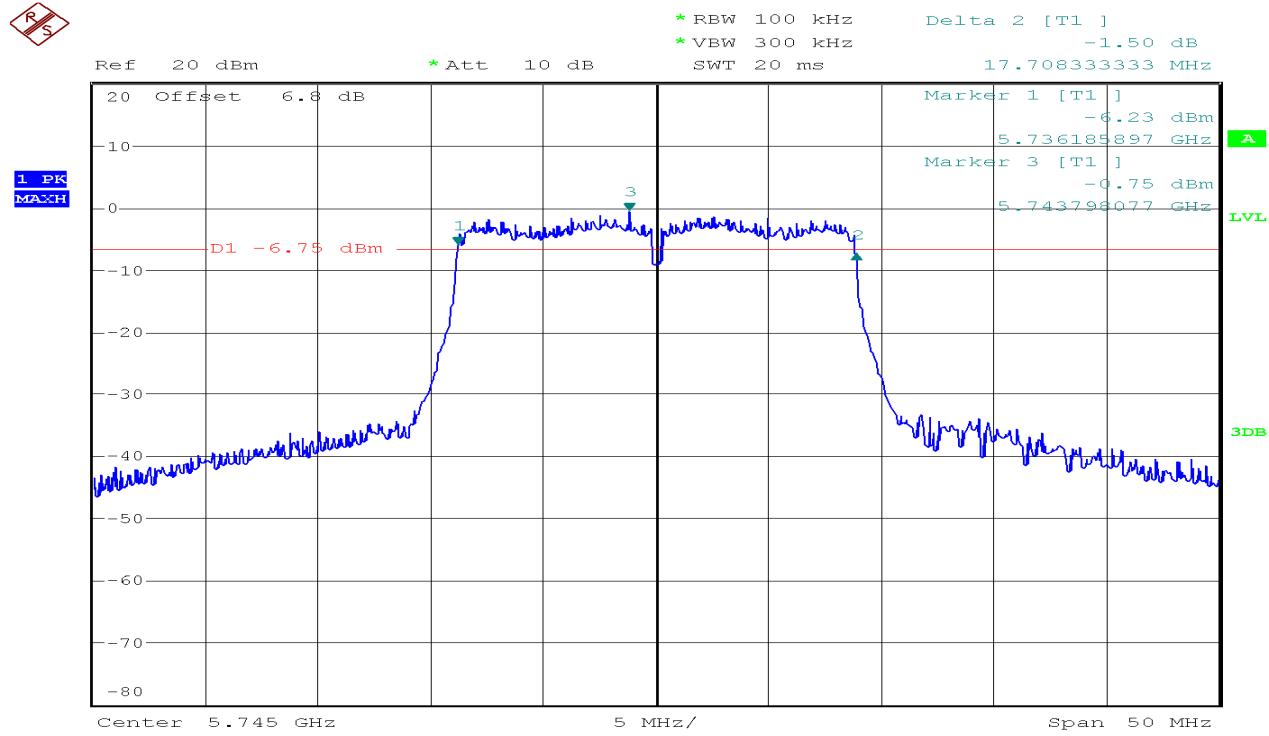
## 6dB Bandwidth (CH Low)




## 6dB Bandwidth (CH Mid)

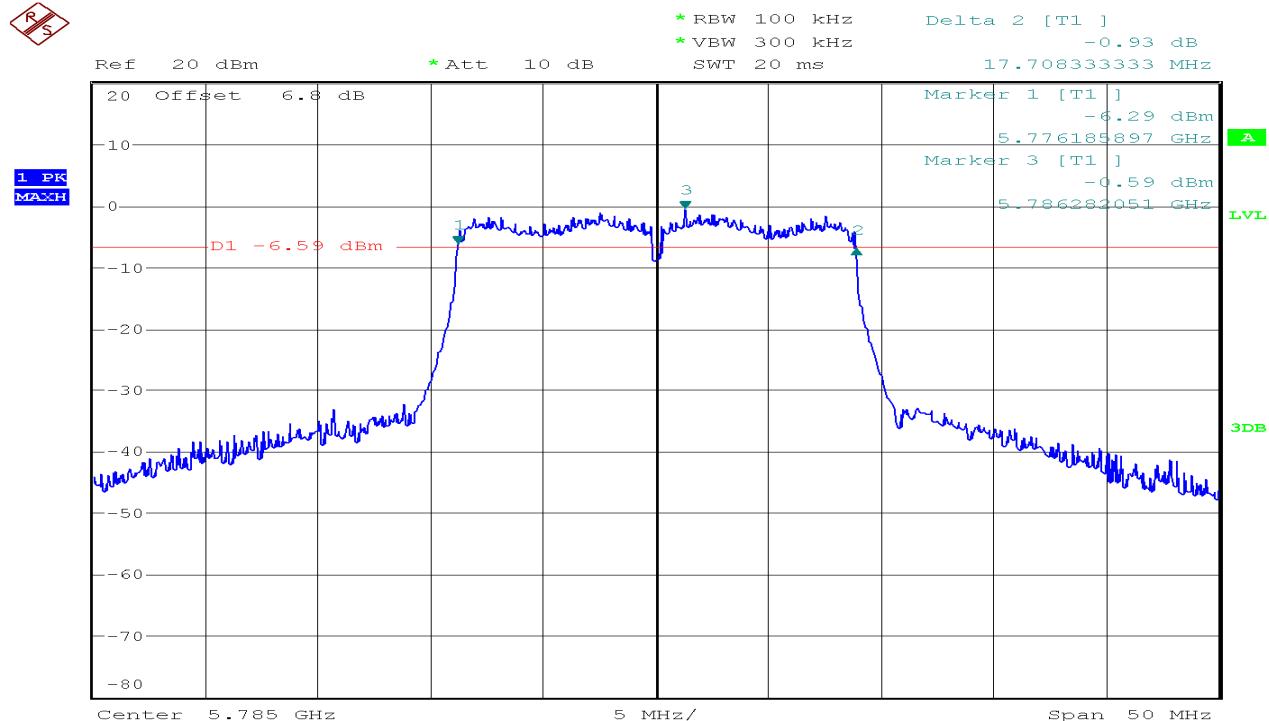

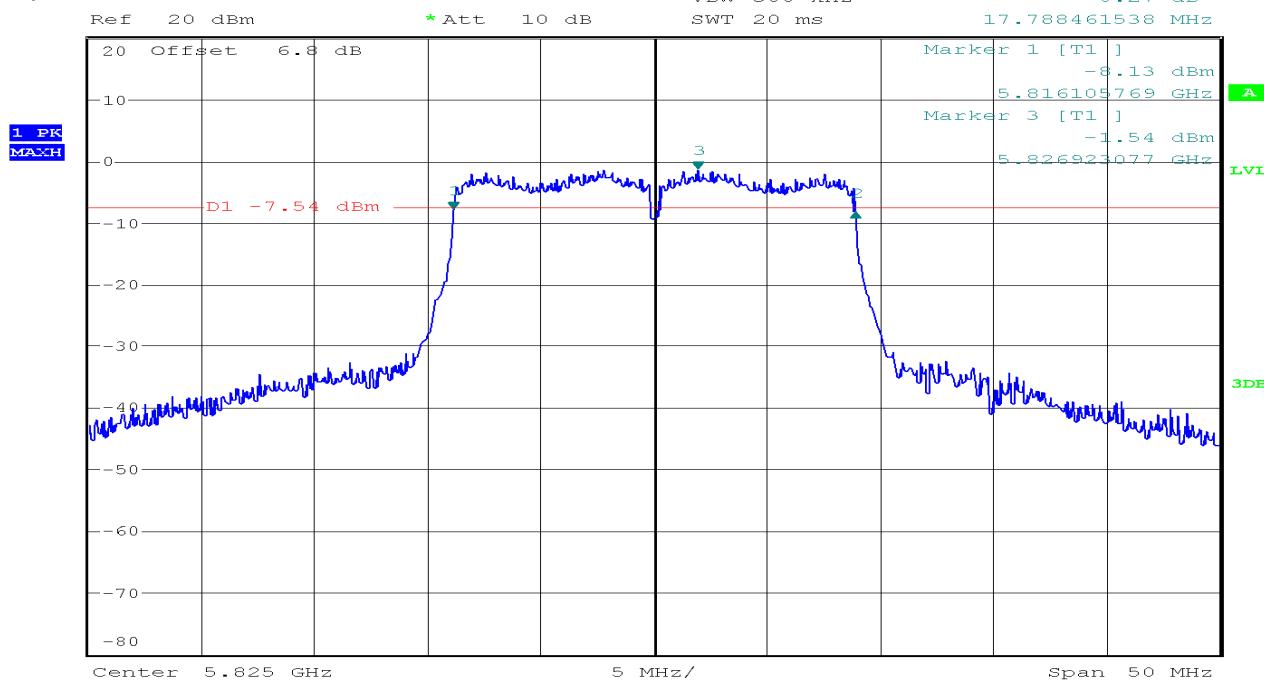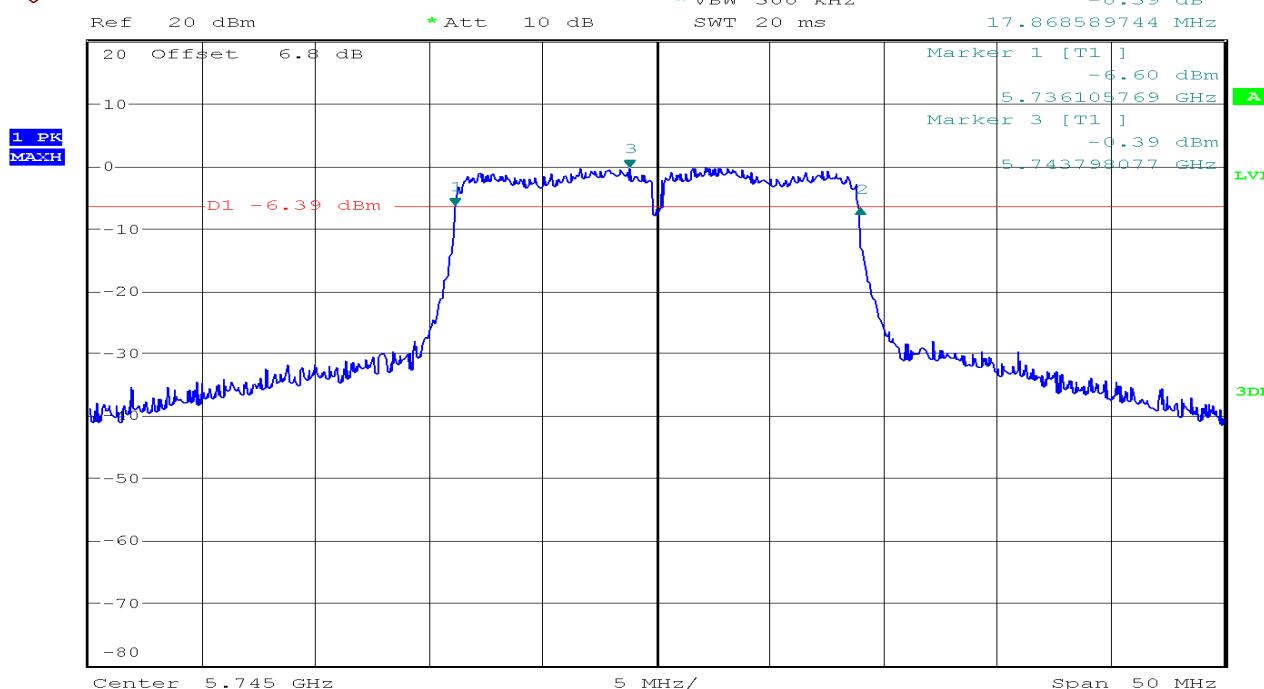**6dB Bandwidth (CH High)****IEEE 802.11ac VHT20 mode/Chain 1:****6dB Bandwidth (CH Low)**


## 6dB Bandwidth (CH Mid)


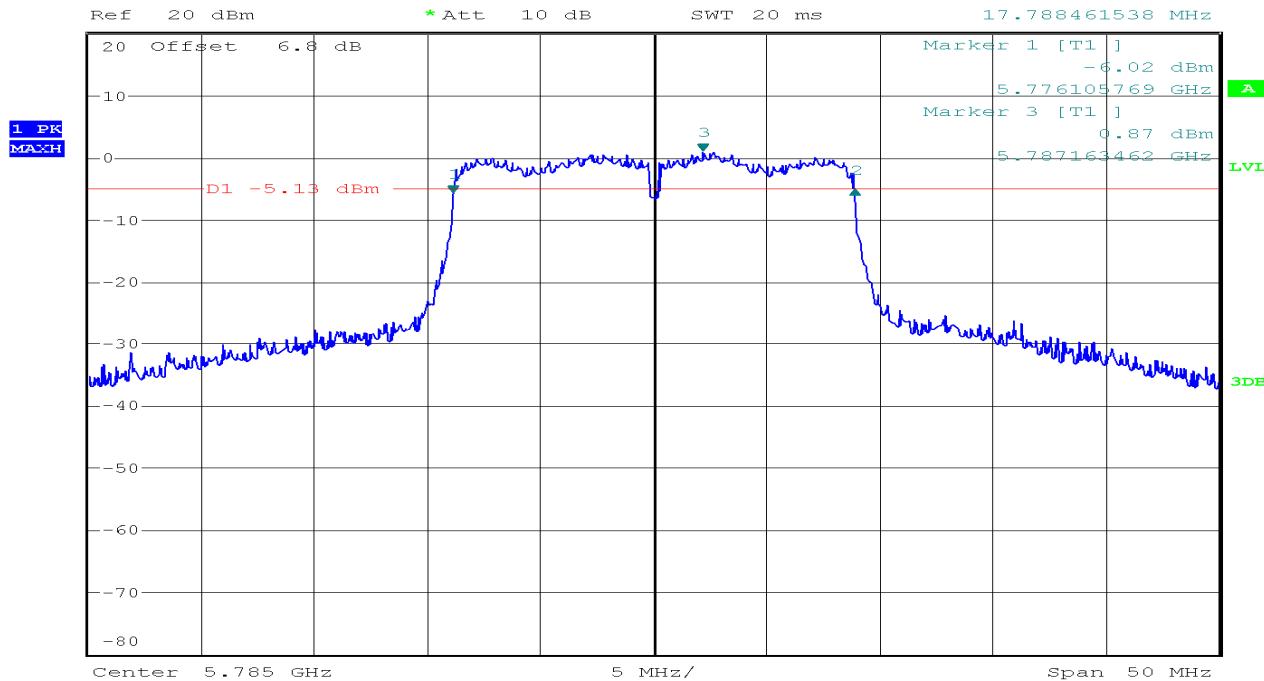
RS







## 6dB Bandwidth (CH High)

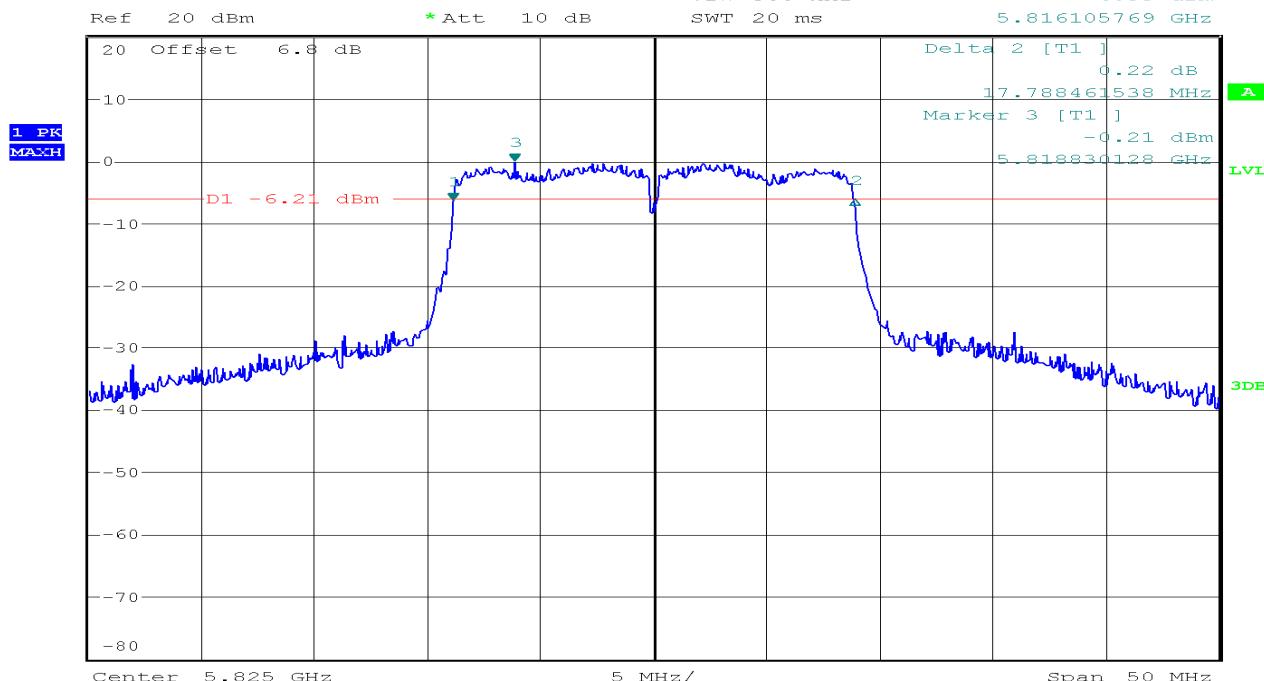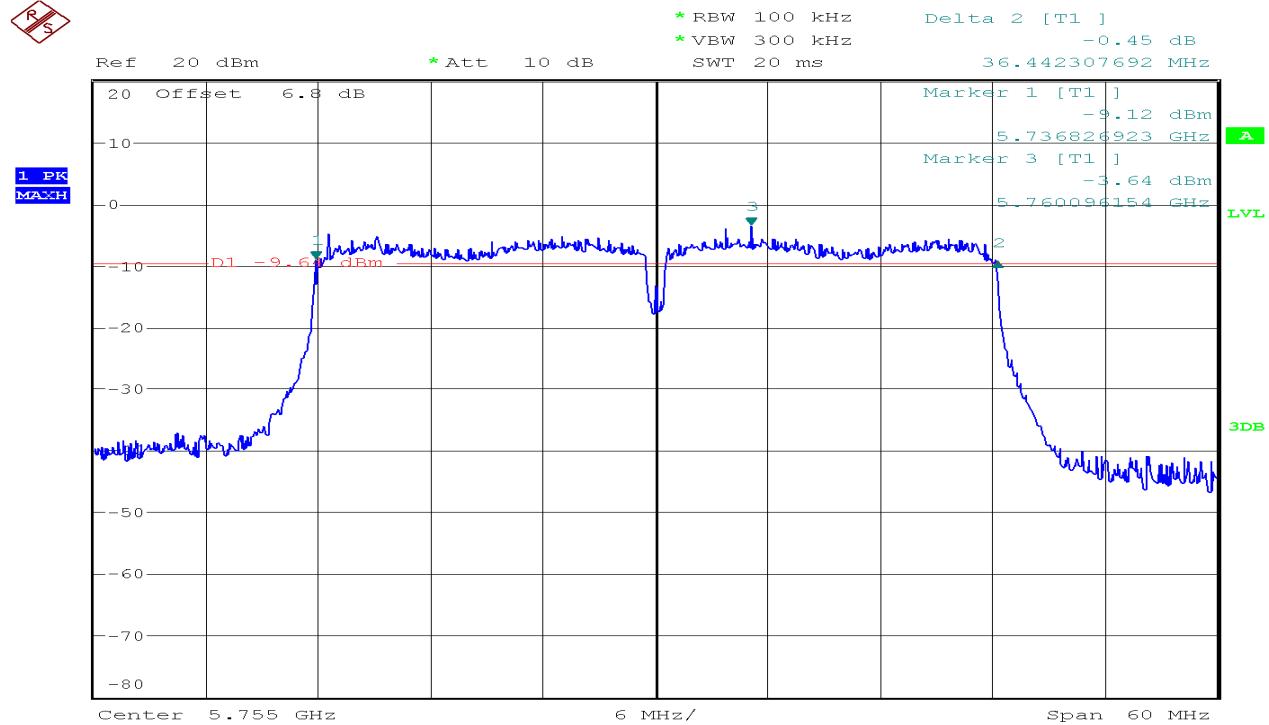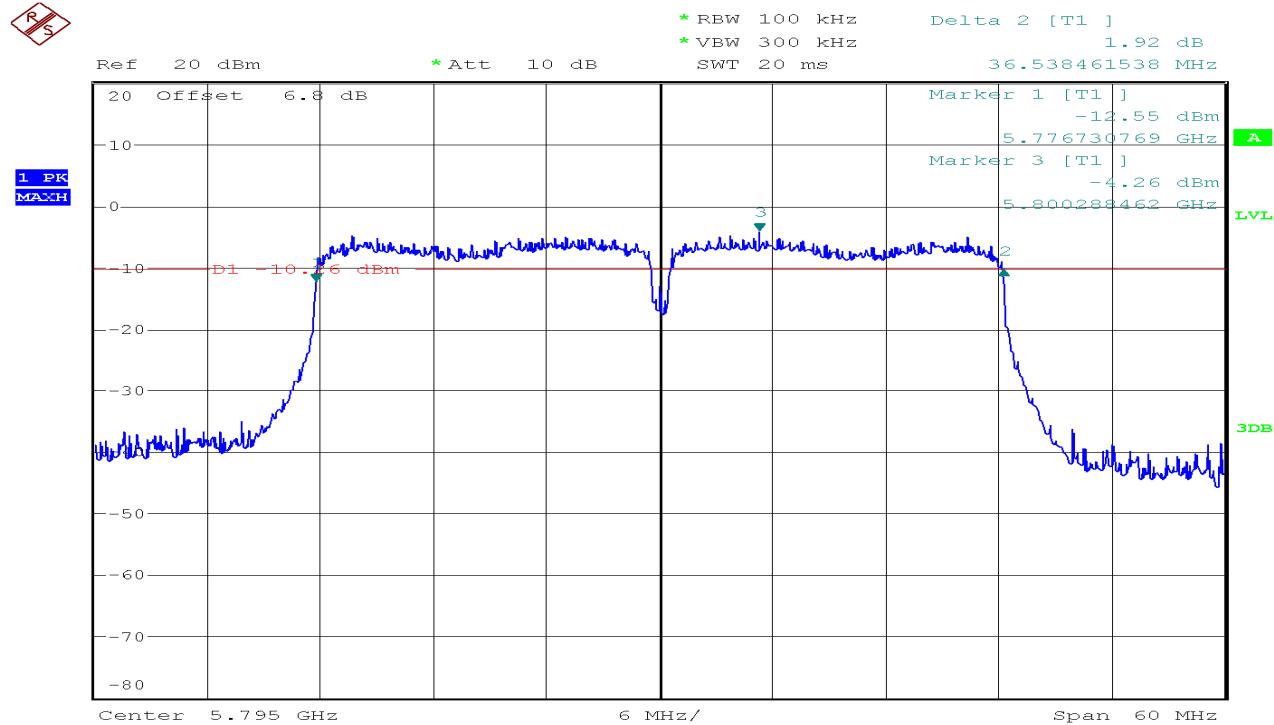RS



**IEEE 802.11ac VHT40 mode/Chain 0:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

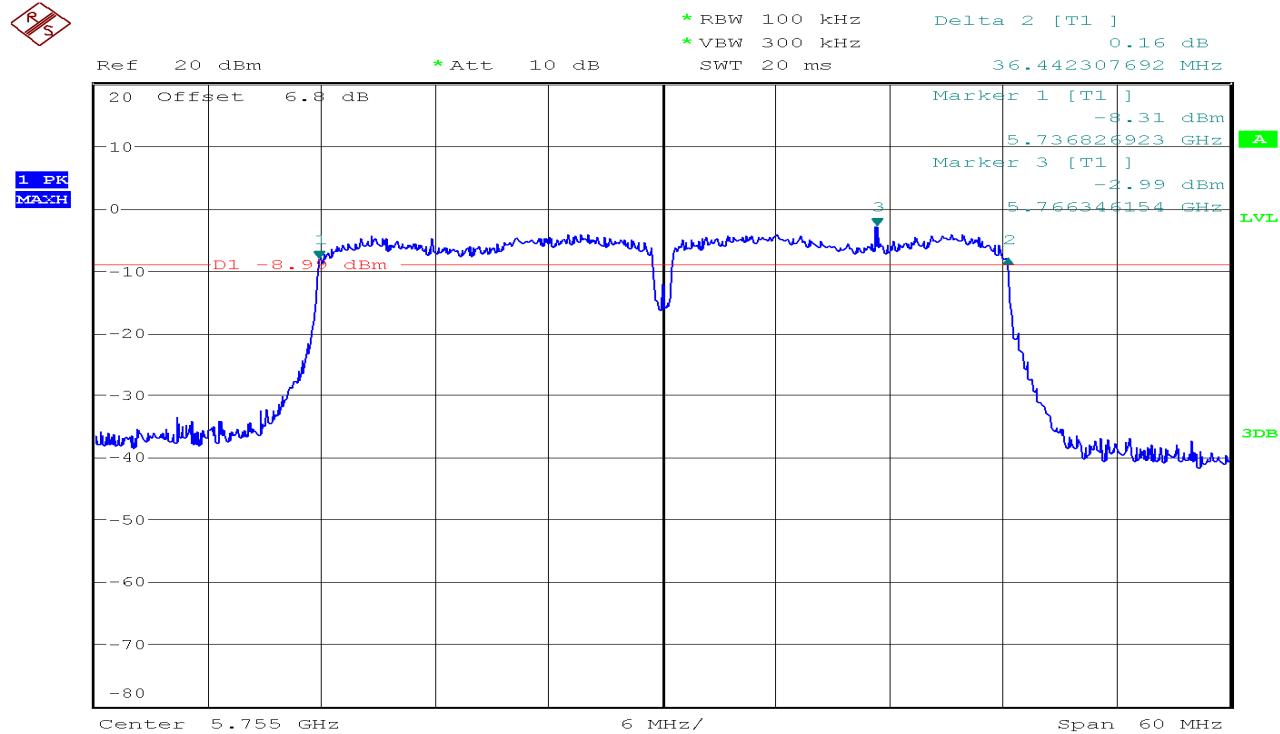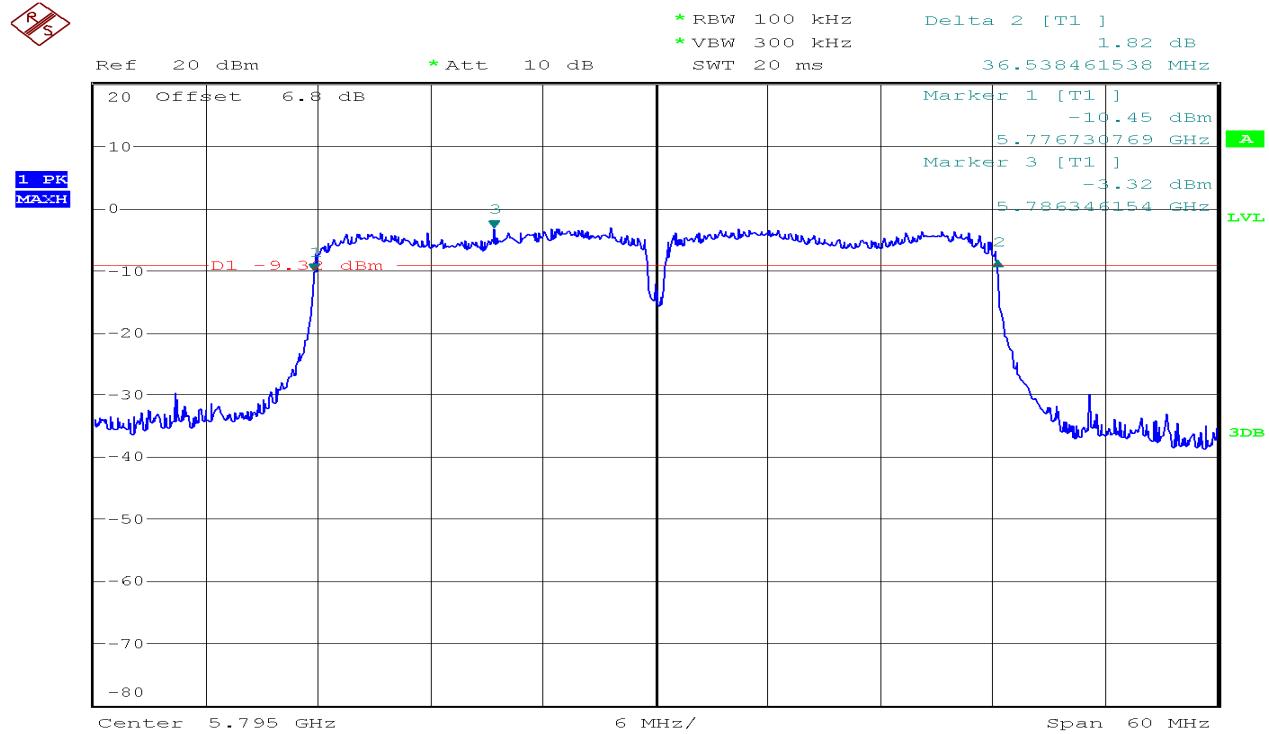**IEEE 802.11ac VHT40 mode/Chain 1:****6dB Bandwidth (CH Low)****6dB Bandwidth (CH High)**

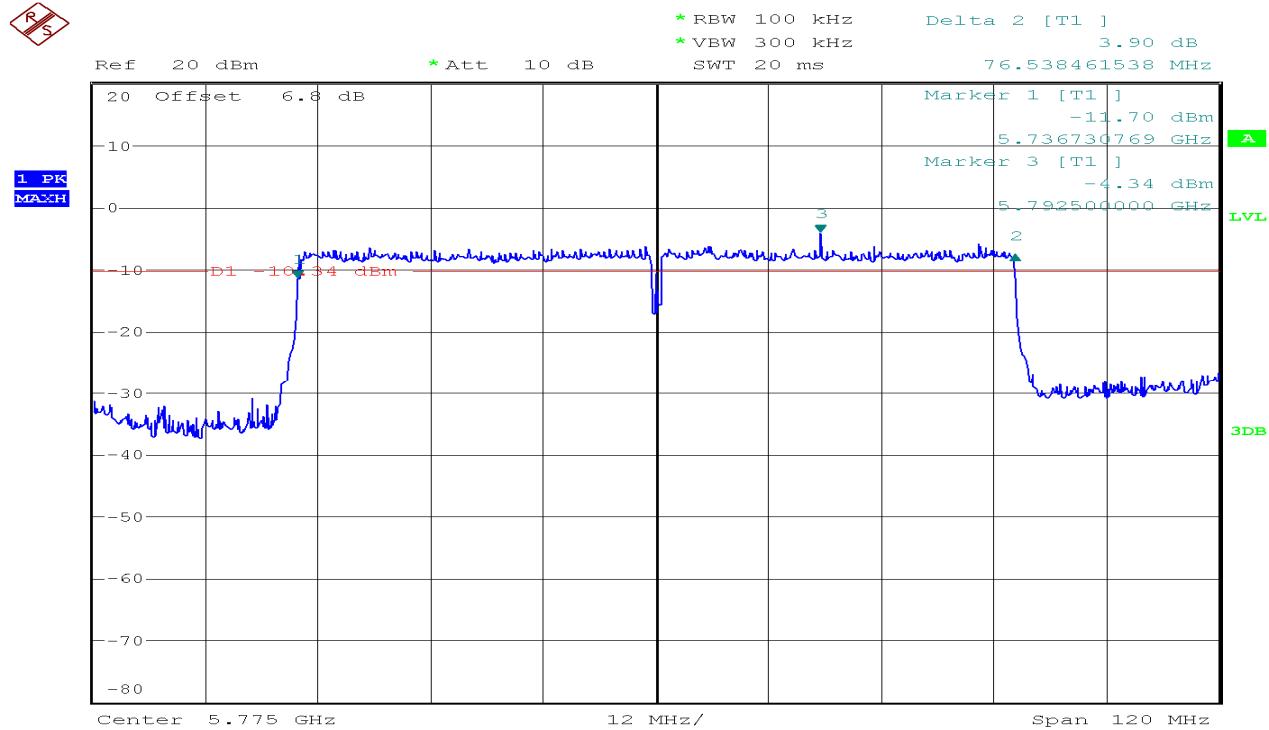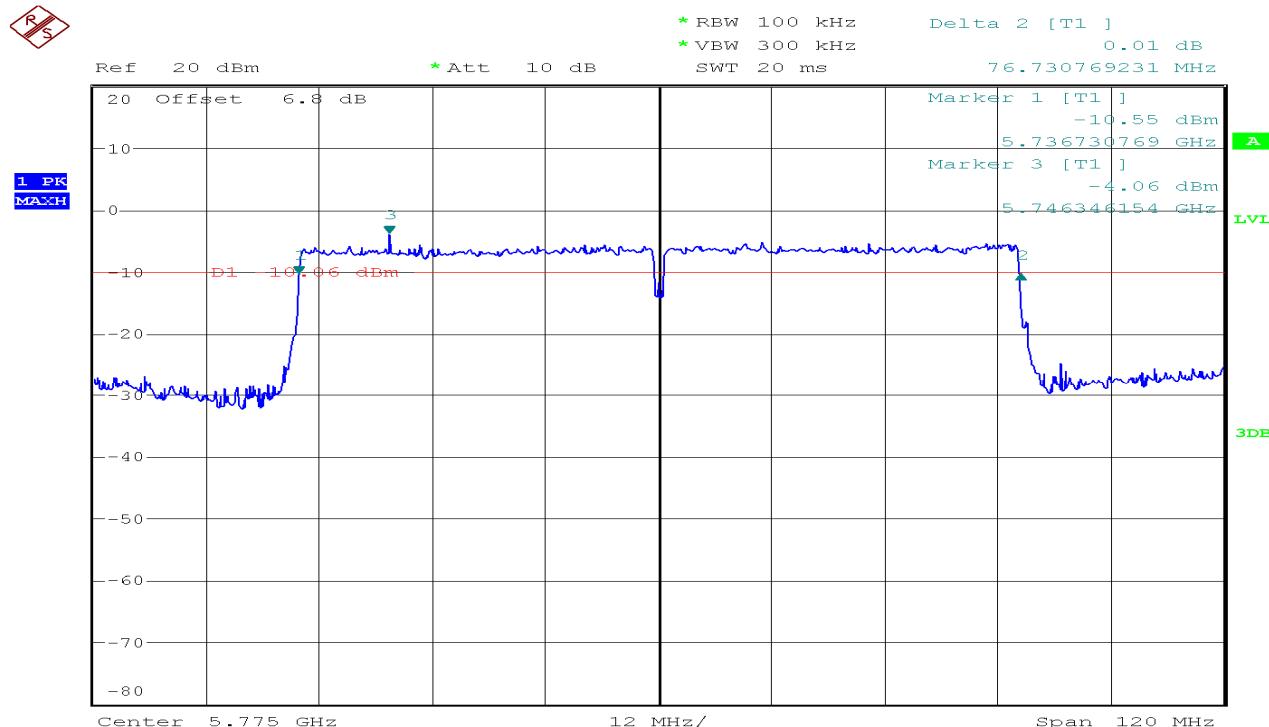**IEEE 802.11ac VHT80 mode/Chain 0:****6dB Bandwidth (CH Mid)****IEEE 802.11ac VHT80 mode/Chain 1:****6dB Bandwidth (CH Mid)**

## 7.2 MAXIMUM CONDUCTED OUTPUT POWER

### LIMIT

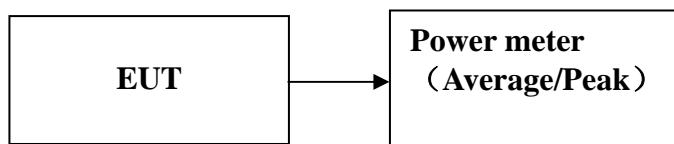
According to §15.407(a),

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

*If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

Directional Gain=G<sub>ANT</sub>=3.40dBi<6dBi

### Test Configuration



*The EUT was connected to a spectrum analyzer through a 50Ω RF cable.*

### TEST PROCEDURE

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01. Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where x is the duty cycle.

### TEST RESULTS

*No non-compliance noted*

### Test Data

## Test mode: IEEE 802.11a mode

5725~5850MHz

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Low	5745	11.28	12.84	15.14	30
Mid	5785	11.67	13.80	15.87	30
High	5825	11.98	13.50	15.82	30

## Test mode: IEEE 802.11n HT20 mode

5725~5850MHz

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Low	5745	11.20	13.34	15.41	30
Mid	5785	11.74	13.89	15.96	30
High	5825	11.65	13.48	15.67	30

## Test mode: IEEE 802.11n HT40 mode

5725~5850MHz

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Low	5755	10.93	12.92	15.05	30
High	5795	11.06	12.36	14.77	30

## Test mode: IEEE 802.11ac VHT20 mode

5725~5850MHz

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Low	5745	11.18	13.10	15.26	30
Mid	5785	11.45	14.23	16.07	30
High	5825	11.55	13.41	15.59	30

**Test mode: IEEE 802.11ac VHT40 mode****5725~5850MHz**

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Low	5755	10.67	12.43	14.65	30
High	5795	11.04	12.73	14.98	30

**Test mode: IEEE 802.11ac VHT80 mode****5725~5850MHz**

Channel	Frequency (MHz)	Chain 0 AV Output Power (dBm)	Chain 1 AV Output Power (dBm)	Total Maximum Conducted AV Output Power (dBm)	Limit (dBm)
Mid	5775	12.08	11.85	14.98	30

**Remark:** 1. Total Output Power (dBm) =  $10 * \text{LOG}(10^{(\text{Chain 0 Output Power} / 10)} + 10^{(\text{Chain 1 Output Power} / 10)})$ 

2. Duty factor has been offseted with cableloss

## 7.3 BAND EDGES MEASUREMENT

### LIMIT

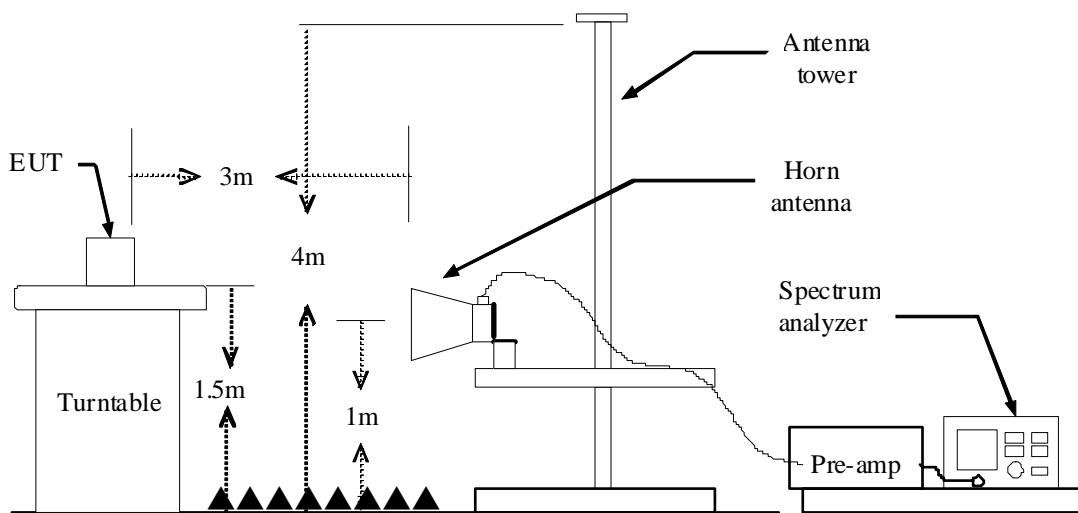
According to §15.407(b)(4)(i),

(1) The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

(2) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency block edges as the design of the equipment permits.

All emissions shall be limited to a level of  $-27 \text{ dBm/MHz}$  at  $75 \text{ MHz}$  or more above or below the band edge increasing linearly to  $10 \text{ dBm/MHz}$  at  $25 \text{ MHz}$  above or below the band edge, and from  $25 \text{ MHz}$  above or below the band edge increasing linearly to a level of  $15.6 \text{ dBm/MHz}$  at  $5 \text{ MHz}$  above or below the band edge, and from  $5 \text{ MHz}$  above or below the band edge increasing linearly to a level of  $27 \text{ dBm/MHz}$  at the band edge.

### Test Configuration



### TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
  - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
  - (b) AVERAGE: RBW=1MHz / Sweep=AUTO
 

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW $\geq 1/T$ , when duty cycle is less than 98 percent, where T is the minimum

transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
IEEE 802.11 a	96.4	993.3	0.001	10Hz
IEEE 802.11n HT20	96.4	993.3	0.001	10Hz
IEEE 802.11n HT40	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT20	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT40	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT80	95.8	996.7	0.001	10Hz

5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

**TEST RESULTS**

Refer to attach spectrum analyzer data chart.

<b>Operation Mode:</b>	Tx / IEEE 802.11a mode CH/ Low	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5667.668	57.74	-1.93	55.81	81.27	-25.46	200	49	peak
2	5712.740	61.43	-1.72	59.71	108.77	-49.06	100	32	peak
3	N/A								

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5702.524	60.22	-1.77	58.45	105.91	-47.46	100	19	peak
2	5715.745	69.28	-1.70	67.58	109.61	-42.03	100	22	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11a mode/ CH High	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5856.370	62.07	-1.03	61.04	110.42	-49.38	100	57	peak
2	5872.596	58.06	-0.96	57.10	105.87	-48.77	200	170	peak
3	N/A								

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	5900.240	56.18	-0.82	55.36	86.52	-31.16	100	204	peak
2	5932.692	56.66	-0.67	55.99	68.20	-12.21	200	132	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11n HT20 mode/ CH Low	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5708.534	60.64	-1.74	58.90	107.59	-48.69	100	45	peak
2	5728.365	74.57	-1.64	72.93	135.00	-62.07	100	34	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5667.067	57.66	-1.93	55.73	80.83	-25.10	100	351	peak
2	5716.346	71.72	-1.70	70.02	109.78	-39.76	100	17	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11n HT20 mode/ CH High	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5861.779	60.02	-1.01	59.01	108.90	-49.89	100	360	peak
2	5913.462	56.50	-0.76	55.74	76.74	-21.00	200	360	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5867.188	68.31	-0.98	67.33	107.39	-40.06	100	360	peak
2	5875.601	62.33	-0.94	61.39	104.76	-43.37	100	7	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11n HT40 mode/ CH Low	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5702.524	60.83	-1.77	59.06	105.91	-46.85	100	342	peak
2	5712.740	64.31	-1.72	62.59	108.77	-46.18	100	55	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5683.894	60.81	-1.85	58.96	93.28	-34.32	100	24	peak
2	5697.115	65.54	-1.79	63.75	103.07	-39.32	100	27	peak
3	N/A								
4									

<b>Operation Mode:</b>	Tx / IEEE 802.11n HT40 mode/ CH High	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5858.774	60.52	-1.02	59.50	109.74	-50.24	100	45	peak
2	5930.288	56.56	-0.68	55.88	68.20	-12.32	100	265	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5873.798	61.25	-0.95	60.30	105.54	-45.24	100	360	peak
2	5879.808	60.86	-0.92	59.94	101.64	-41.70	100	360	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11ac VHT20 mode/ CH Low	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5712.139	62.59	-1.72	60.87	108.60	-47.73	100	51	peak
2	5716.346	63.35	-1.70	61.65	109.78	-48.13	100	30	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5634.014	58.06	-2.09	55.97	68.20	-12.23	200	351	peak
2	5698.918	61.26	-1.78	59.48	104.40	-44.92	100	26	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11ac VHT20 mode/ CH High	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5859.976	62.01	-1.02	60.99	109.41	-48.42	100	237	peak
2	5903.245	56.36	-0.81	55.55	84.30	-28.75	200	336	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5874.399	64.12	-0.95	63.17	105.37	-42.20	100	8	peak
2	5878.606	61.95	-0.93	61.02	102.53	-41.51	100	6	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11ac VHT40 mode/ CH Low	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5658.654	57.51	-1.97	55.54	74.60	-19.06	100	0	peak
2	5713.942	67.65	-1.71	65.94	109.10	-43.16	100	36	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5685.697	60.95	-1.85	59.10	94.62	-35.52	100	22	peak
2	5706.130	69.08	-1.75	67.33	106.92	-39.59	100	16	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11ac VHT40 mode/ CH High	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5899.038	56.39	-0.83	55.56	87.41	-31.85	200	361	peak
2	5981.971	57.49	-0.44	57.05	68.20	-11.15	100	360	peak
3	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5876.202	63.10	-0.94	62.16	104.31	-42.15	100	6	peak
2	5947.115	56.19	-0.60	55.59	68.20	-12.61	200	62	peak
3	N/A								

<b>Operation Mode:</b>	Tx / IEEE 802.11ac VHT80 mode/ CH Mid	<b>Test Date:</b>	2017-11-2
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5635.216	59.68	-2.09	57.59	68.20	-10.61	100	332	peak
2	5640.625	60.87	-2.06	58.81	68.20	-9.39	100	360	peak
3	5917.668	57.80	-0.74	57.06	73.63	-16.57	100	53	peak
4	5967.548	57.20	-0.50	56.70	68.20	-11.50	100	251	peak
5	N/A								

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	5637.019	68.14	-2.08	66.06	68.20	-2.14	100	27	peak
2	5647.837	66.61	-2.03	64.58	68.20	-3.62	100	28	peak
3	5965.144	62.40	-0.52	61.88	68.20	-6.32	100	358	peak
4	5971.755	62.87	-0.48	62.39	68.20	-5.81	100	345	peak
5	N/A								

## 7.4 POWER SPECTRAL DENSITY

### LIMIT

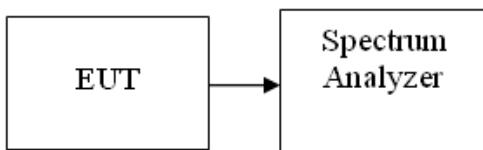
According to §15.407(a),

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

*If transmitting antennas of directional gain greater than 6dBi are used, both the maximum transmit power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.*

Directional Gain=G<sub>ANT</sub>=3.40dBi<6dBi

### Test Configuration



### TEST PROCEDURE

1. The testing follows Method SA-2 of FCC KDB 789033 D02 General UNII Test Procedures v01r04.
2. Measure the duty cycle, Set span to encompass the entire emission bandwidth (EBW) of the signal. Set RBW = 300 kHz. Set VBW  $\geq$  1 MHz. Number of points in sweep  $\geq$  2 Span / RBW. Sweep time = auto. Detector = RMS, Trace average at least 100 traces in power averaging mode. Add  $10 \log(500\text{kHz}/\text{RBW})$  to the test result. Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.
3. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
4. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (1): Measure and sum the spectra across the outputs. The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

### TEST RESULTS

*No non-compliance noted*

Test Data

Test mode: IEEE 802.11a mode

5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Low	5745	-2.21	-0.75	2.22	0.01	1.47	3.81	30.00	PASS
Mid	5785	-1.90	0.00	2.22	0.32	2.22	4.38	30.00	PASS
High	5825	-2.03	-0.39	2.22	0.19	1.83	4.10	30.00	PASS

Test mode: IEEE 802.11n HT20 mode

5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Low	5745	-2.27	-0.62	2.22	-0.05	1.60	3.86	30.00	PASS
Mid	5785	-2.02	0.05	2.22	0.20	2.27	4.37	30.00	PASS
High	5825	-1.92	-0.23	2.22	0.30	1.99	4.24	30.00	PASS

Test mode: IEEE 802.11n HT40 mode

5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Low	5755	-6.07	-4.50	2.22	-3.85	-2.28	0.02	30.00	PASS
High	5795	-5.33	-3.62	2.22	-3.11	-1.40	0.84	30.00	PASS

## Test mode: IEEE 802.11ac VHT20 mode

## 5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Low	5745	-2.20	-0.84	2.22	0.02	1.38	3.76	30.00	PASS
Mid	5785	-2.23	-0.19	2.22	-0.01	2.03	4.14	30.00	PASS
High	5825	-1.73	-0.88	2.22	0.49	1.34	3.95	30.00	PASS

## Test mode: IEEE 802.11ac VHT40 mode

## 5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Low	5755	-5.80	-4.48	2.22	-3.58	-2.26	0.14	30.00	PASS
High	5795	-5.31	-3.84	2.22	-3.09	-1.62	0.72	30.00	PASS

## Test mode: IEEE 802.11ac VHT80 mode

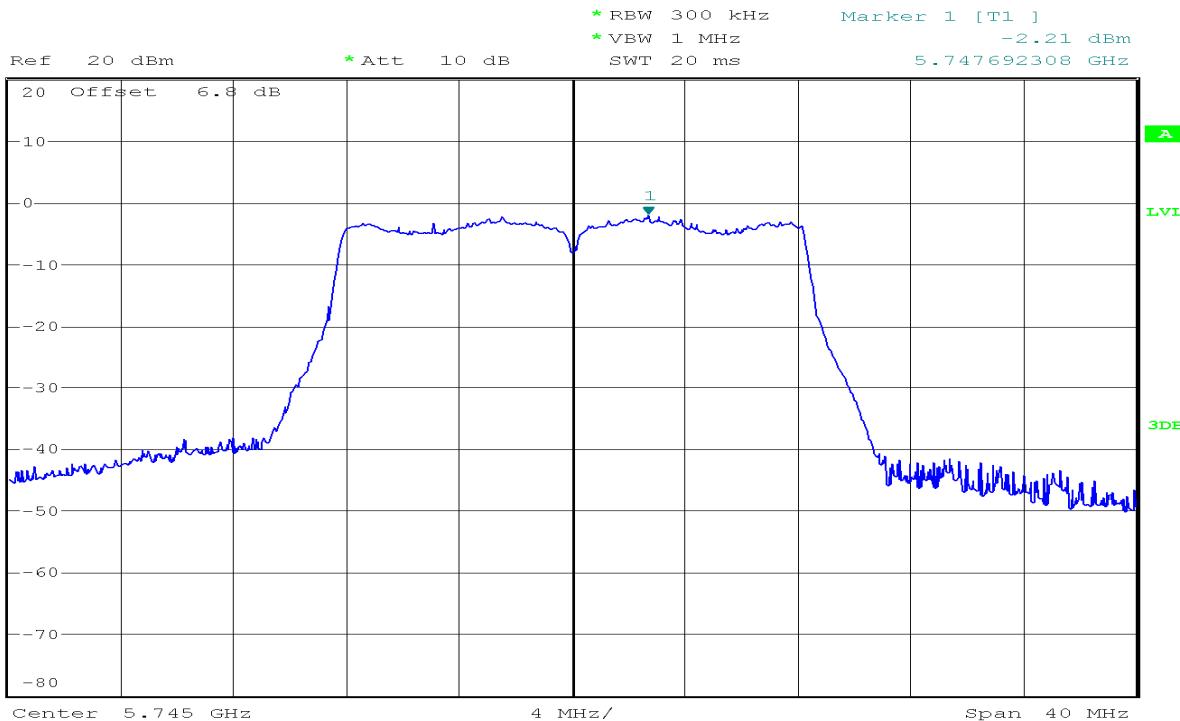
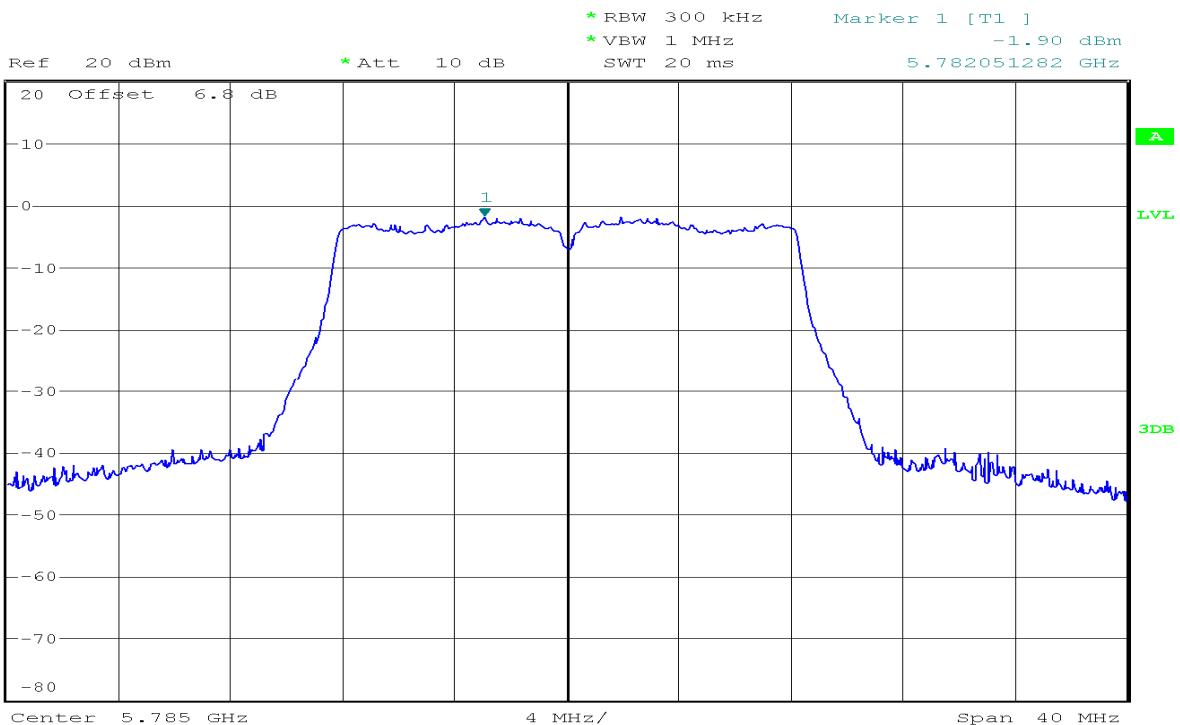
## 5725~5850MHz

Channel	Frequency (MHz)	Average PSD (dBm/300kHz)		10log (500kHz/ RBW) Factor (dB)	Average PSD (dBm/500kHz)		Total Average PSD (dBm/500kHz)	Average PSD Limit (dBm/ 500kHz)	Result
		Chain 0	Chain 1		Chain 0	Chain 1			
Mid	5775	-6.15	-6.15	2.22	-3.93	-3.93	-0.92	30.00	PASS


**Remark:** 1. Total PSD(dBm) =  $10 \cdot \text{LOG}(10^{\text{Chain 0 PSD}/10} + 10^{\text{Chain 1 PSD}/10})$ ,

PSD:500kHz

2. Duty factor has been offseted with cable/loss


Test Plot**IEEE 802.11a mode/chain 0****5725~5850MHz****CH Low****CH Mid**

## CH High

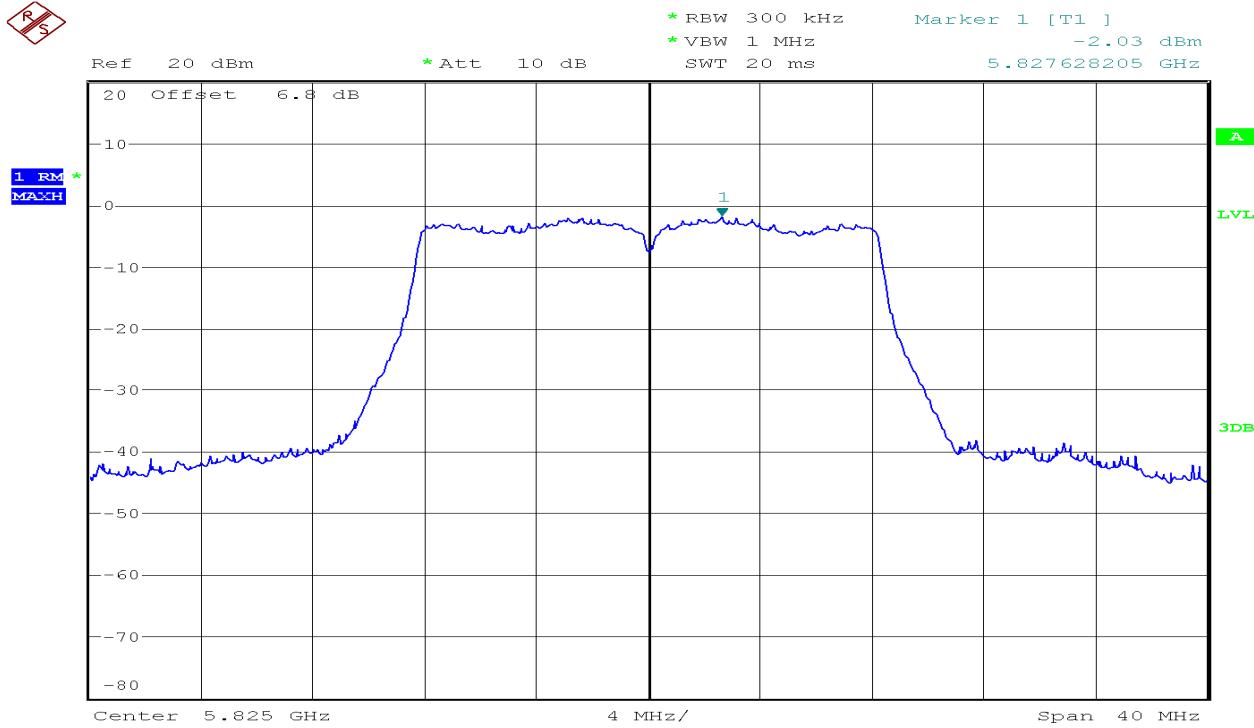
IEEE 802.11a mode/chain 1

5725~5850MHz


## CH Low


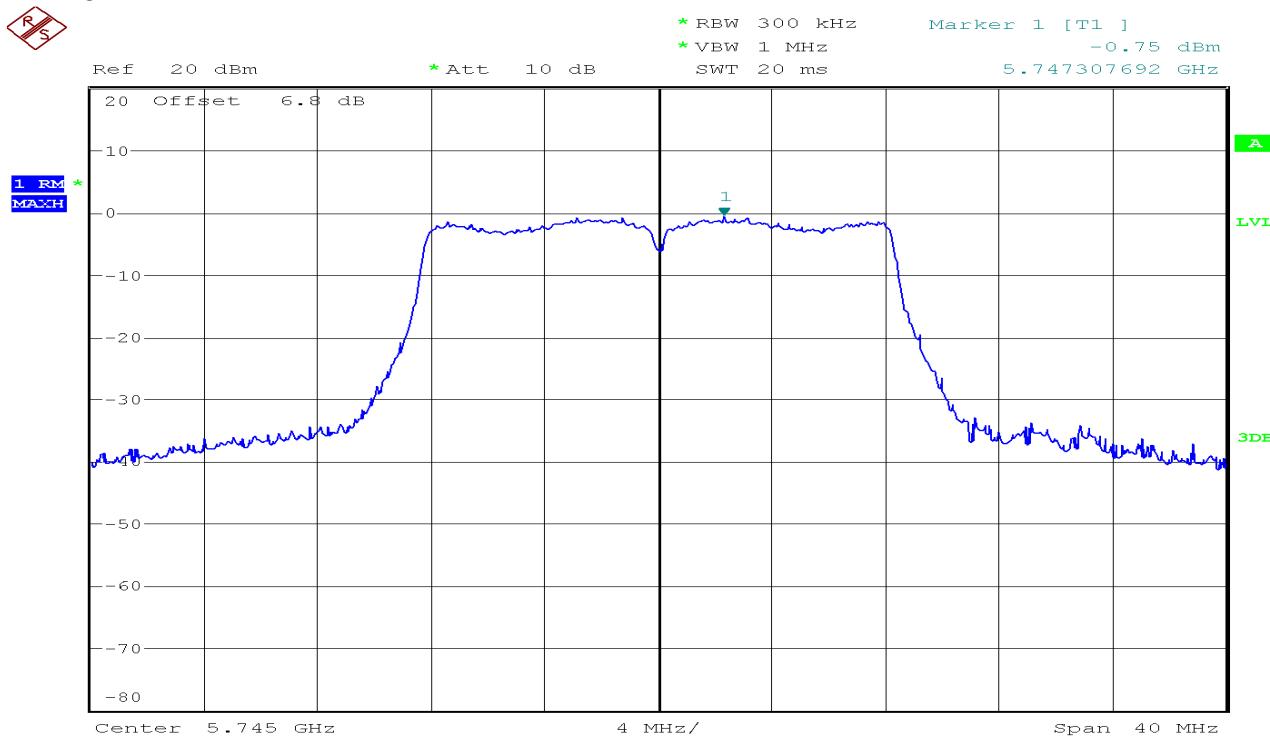


## CH Mid

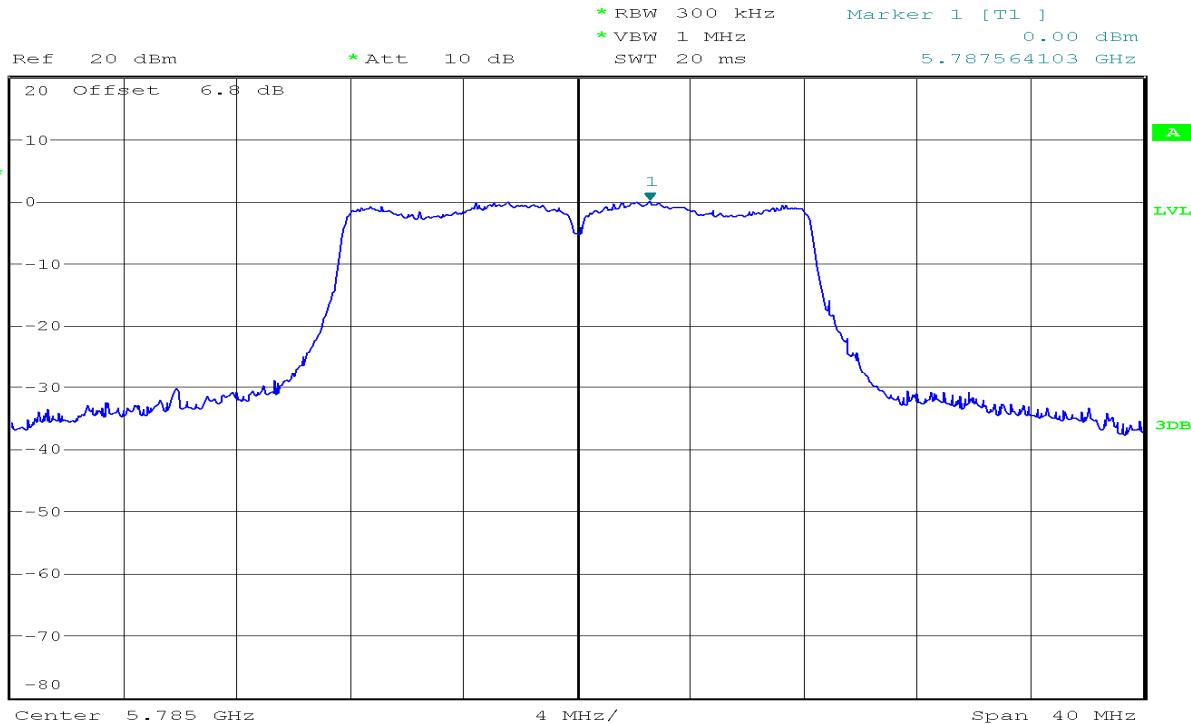


## CH High

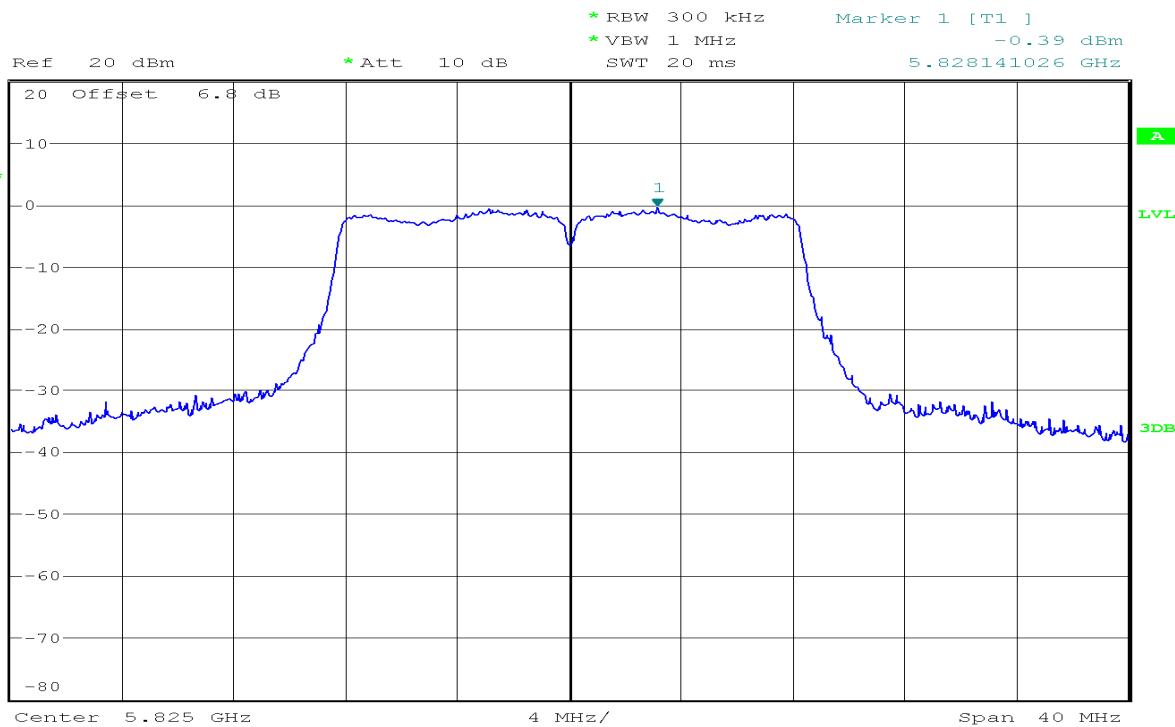

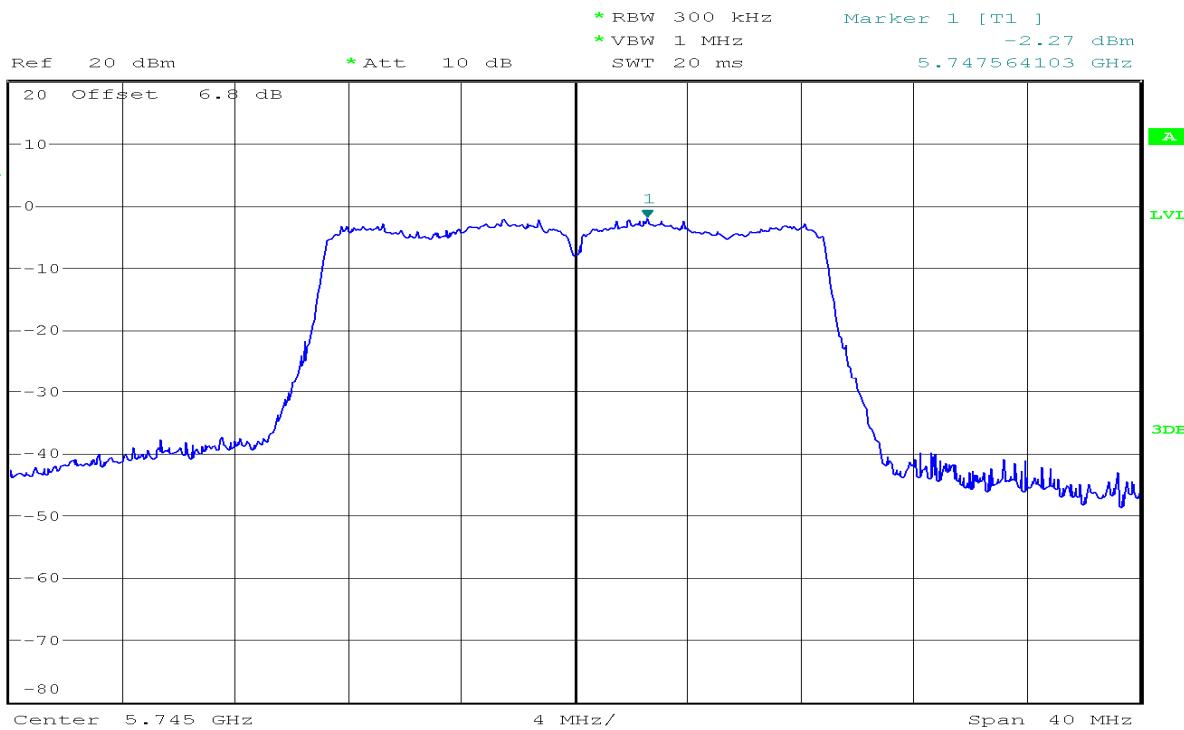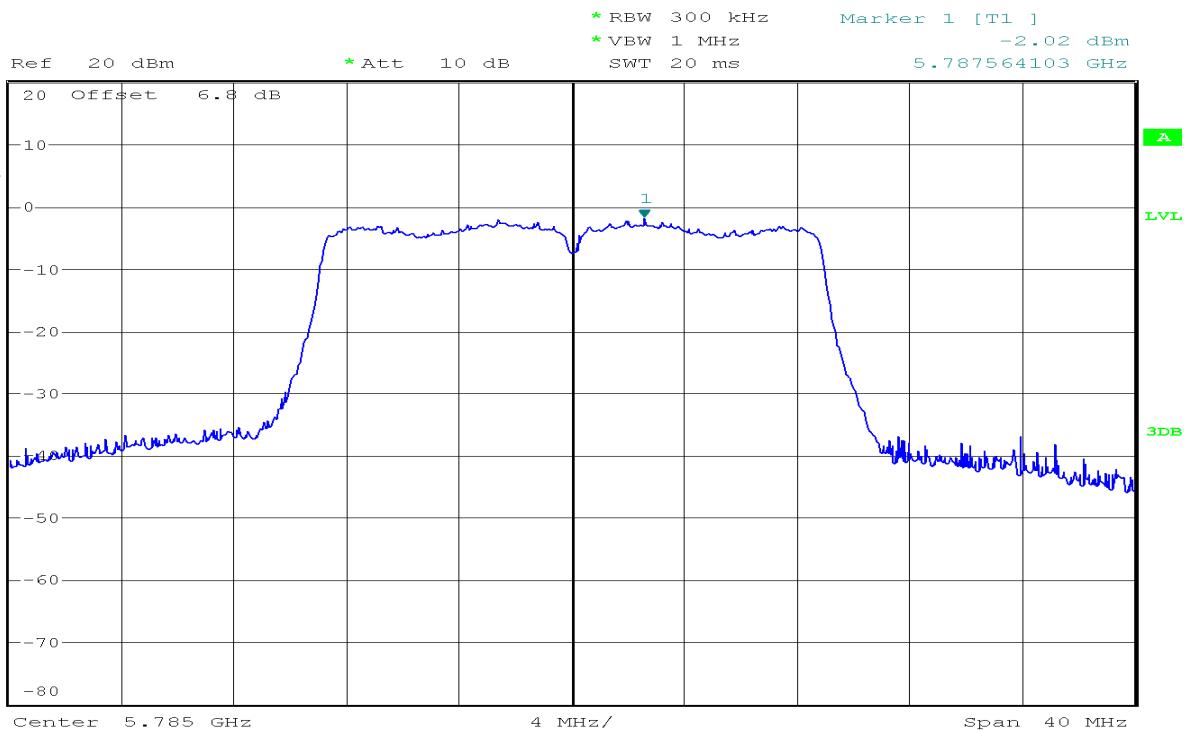
**IEEE 802.11n HT20 mode/chain 0**  
**5725~5850MHz****CH Low****CH Mid**

## CH High

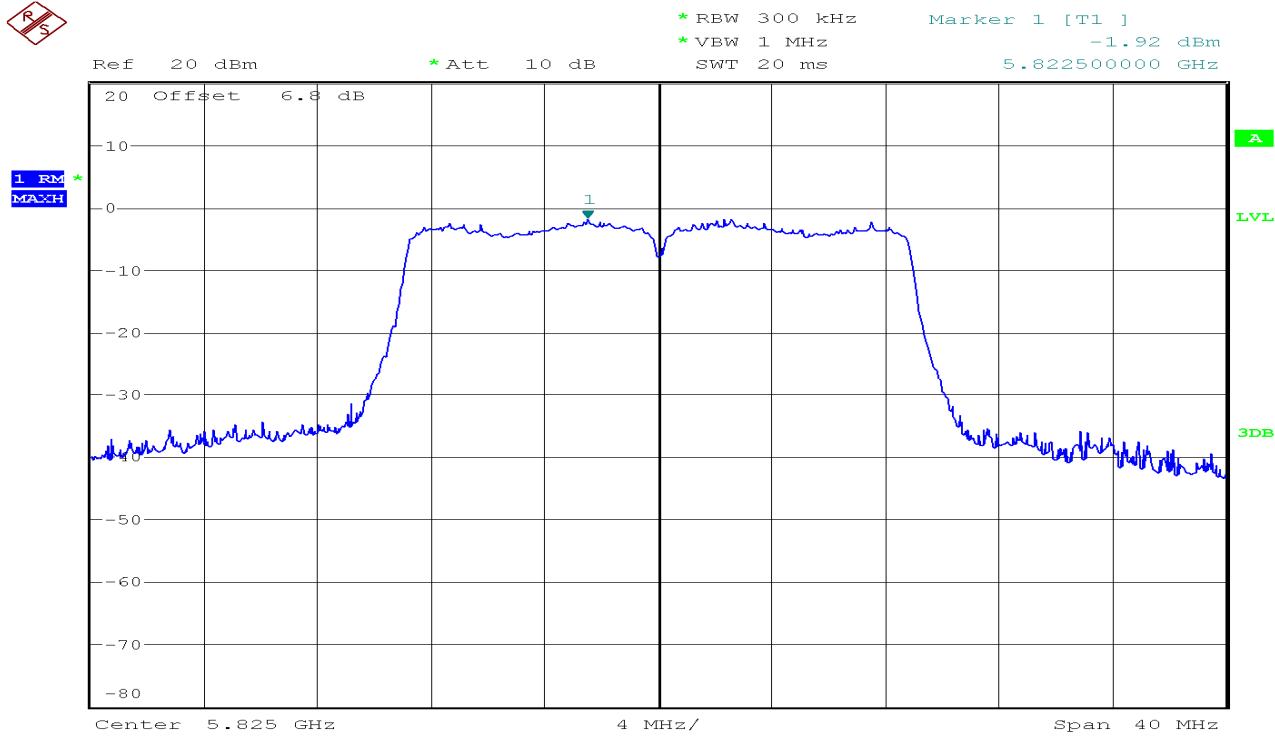
IEEE 802.11n HT20 mode/chain 1

5725~5850MHz


## CH Low


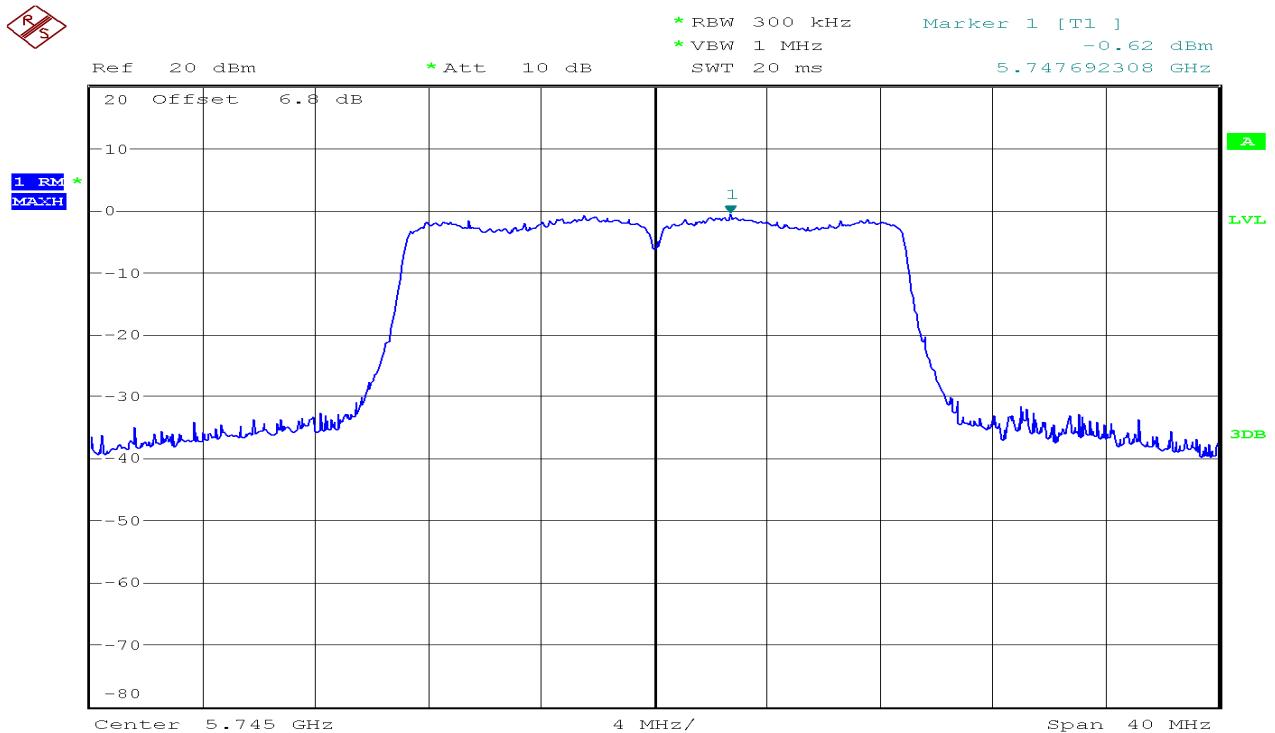


## CH Mid

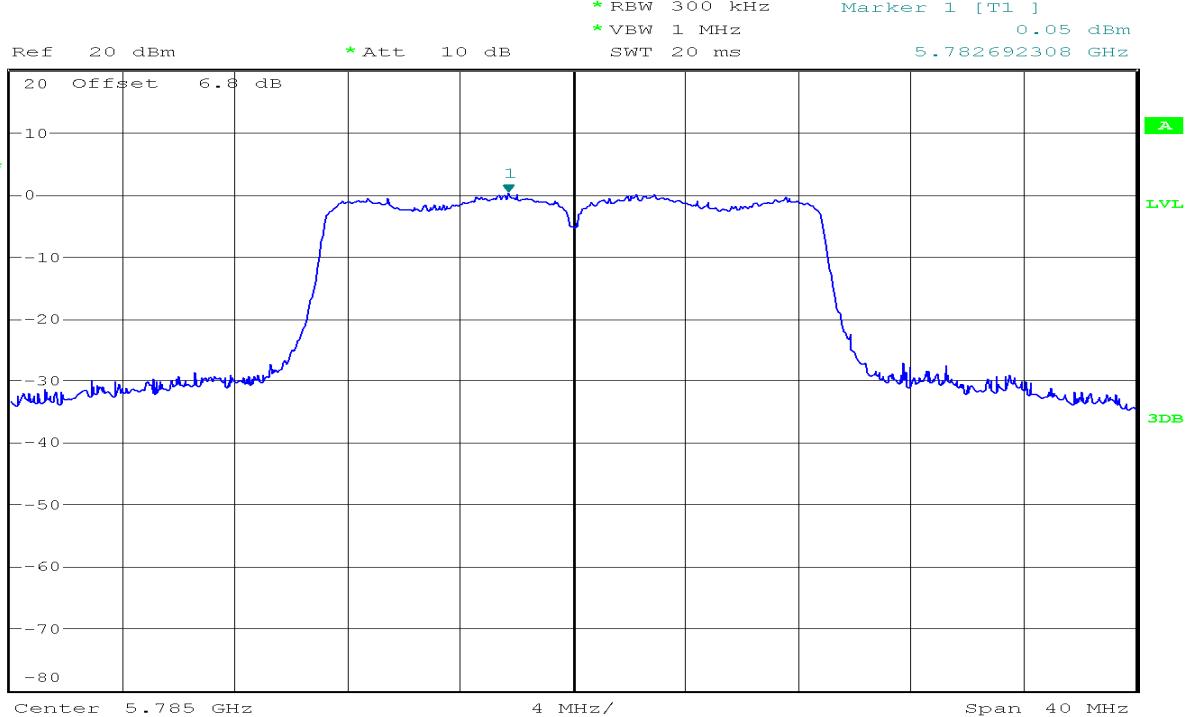


## CH High

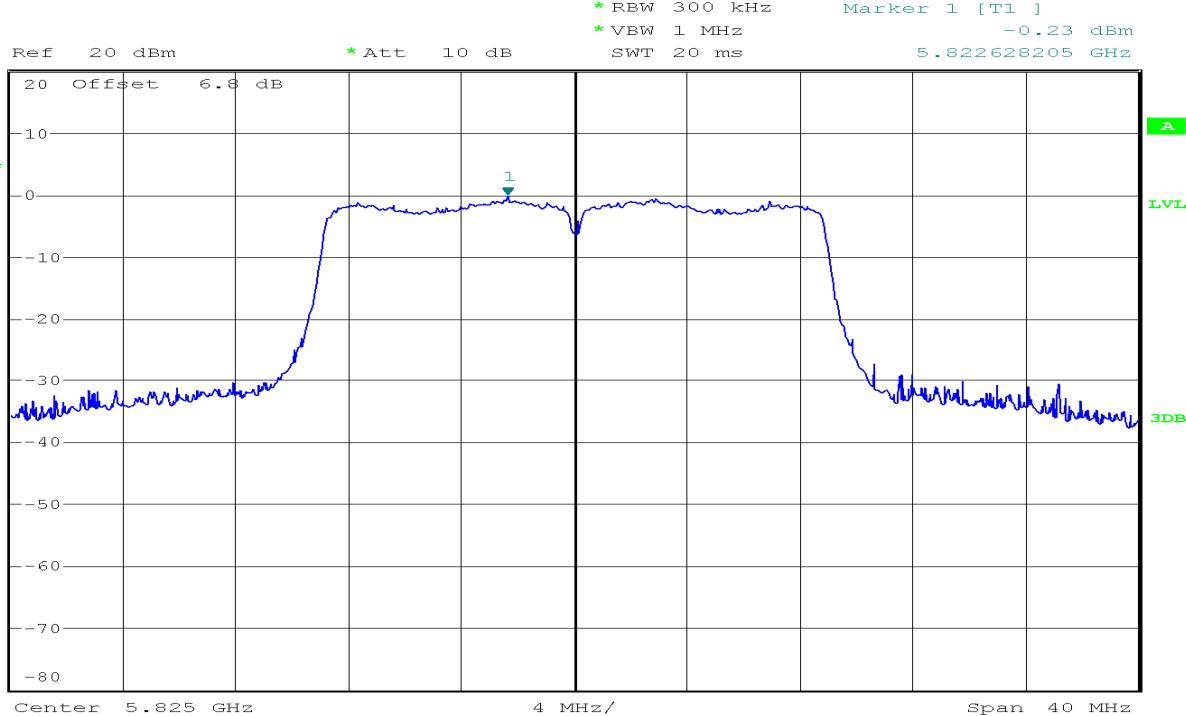

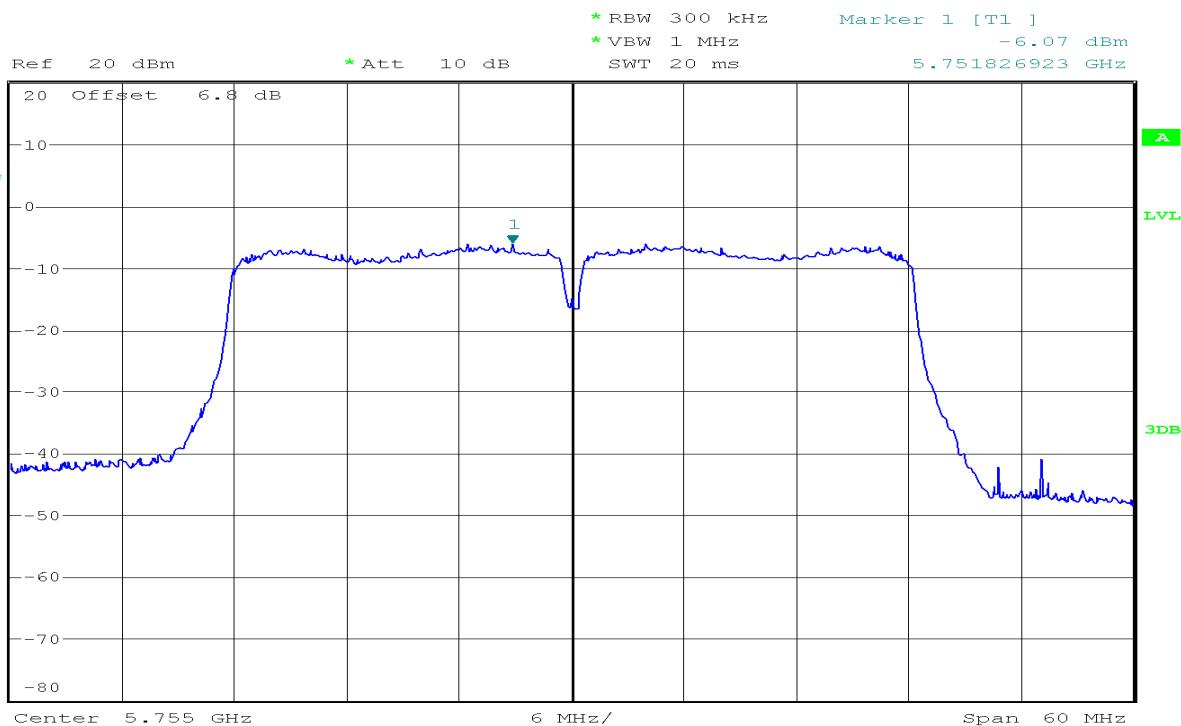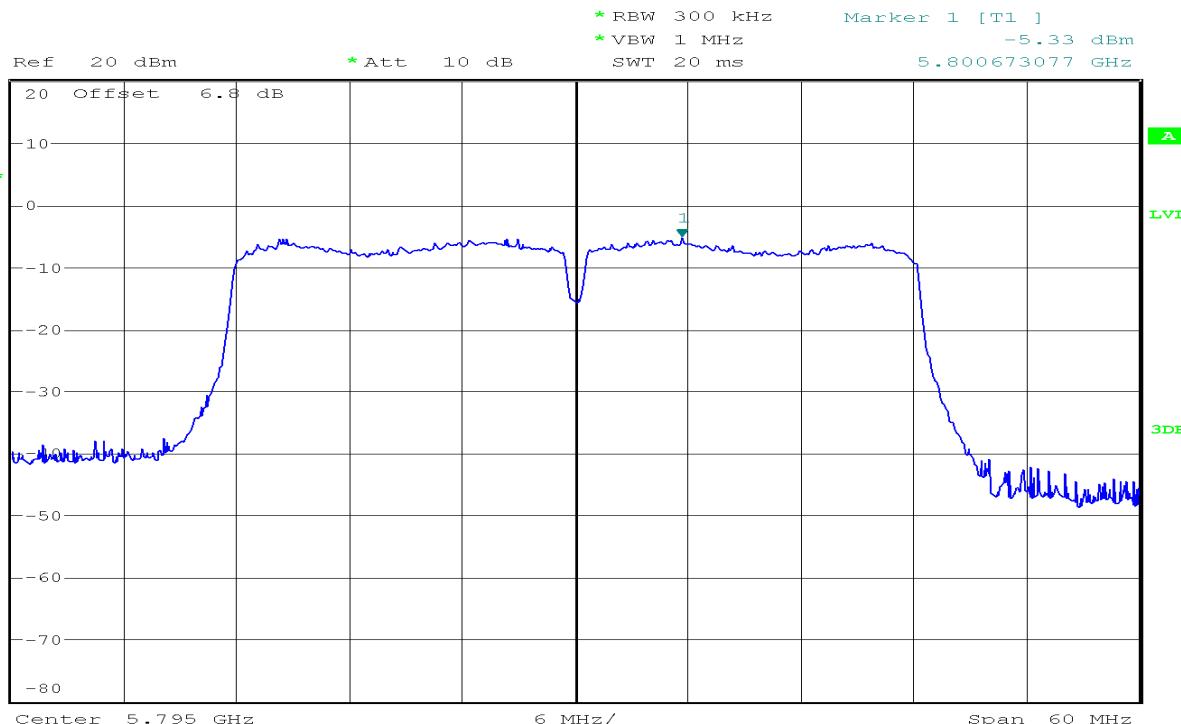
**IEEE 802.11n HT40 mode/chain 0**  
**5725~5850MHz****CH Low****CH High**



IEEE 802.11n HT40 mode/chain 1  
5725~5850MHz

## CH Low

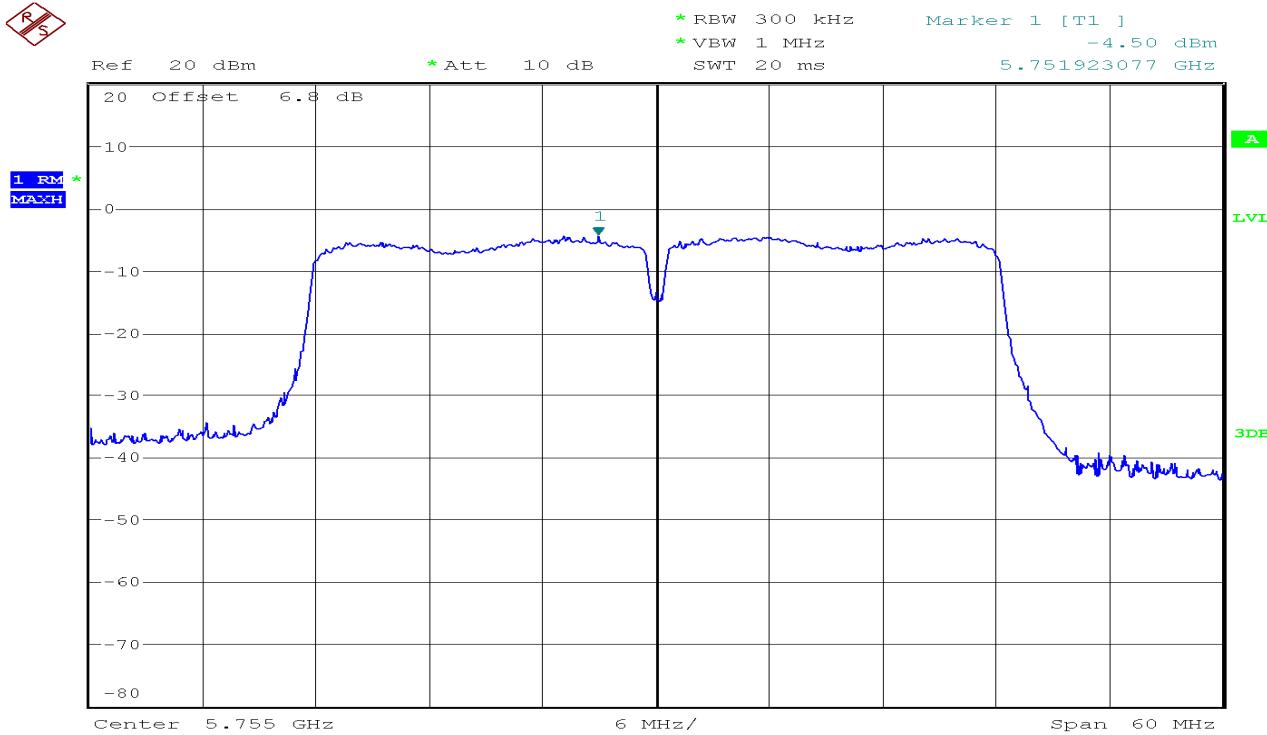


## CH High

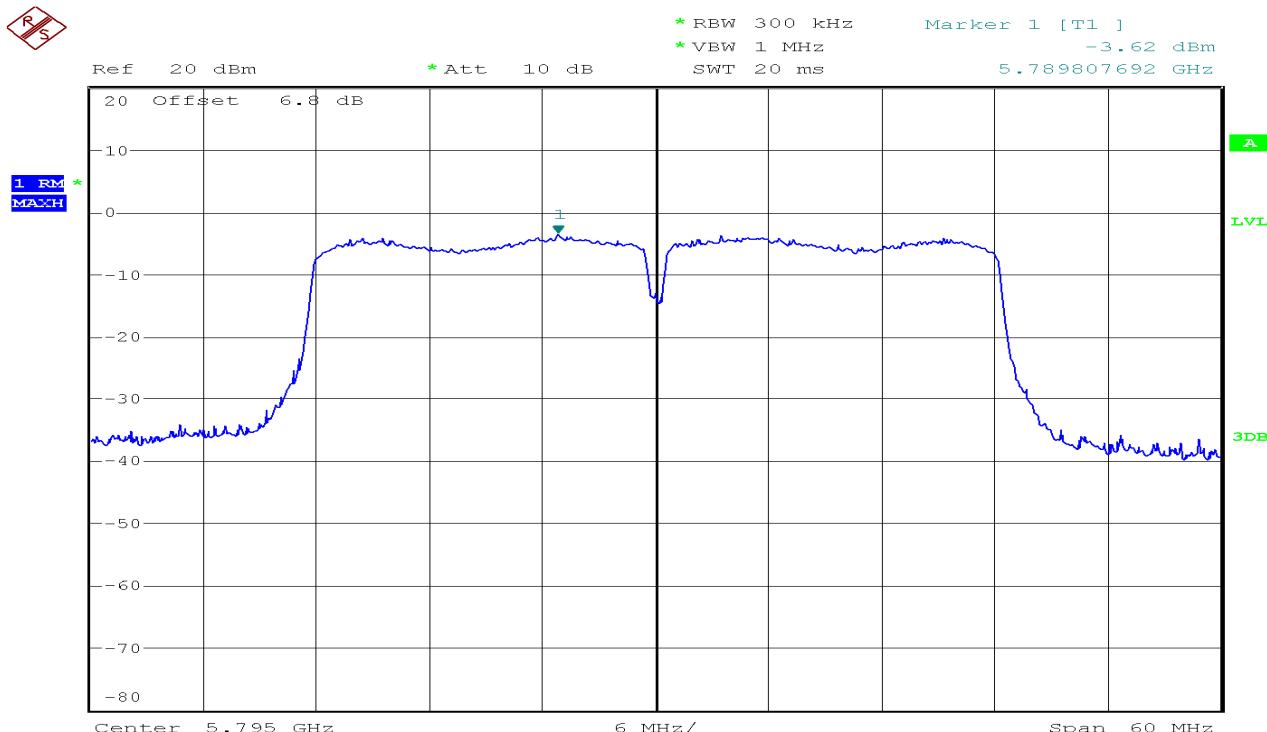

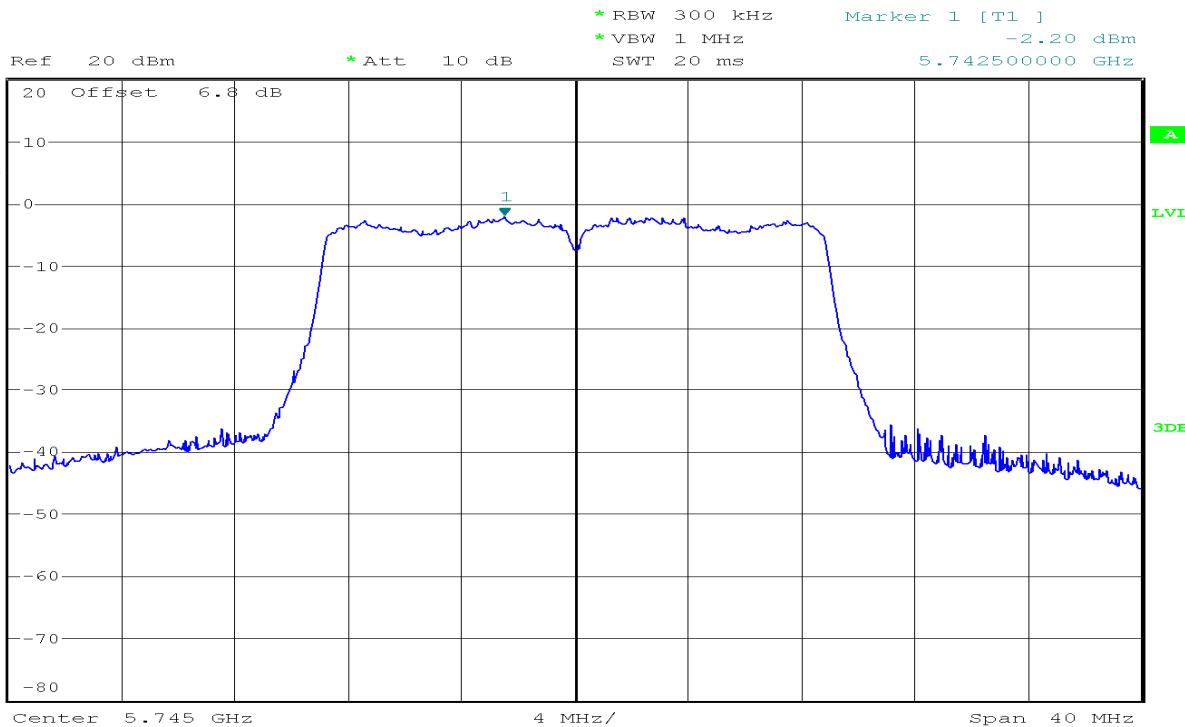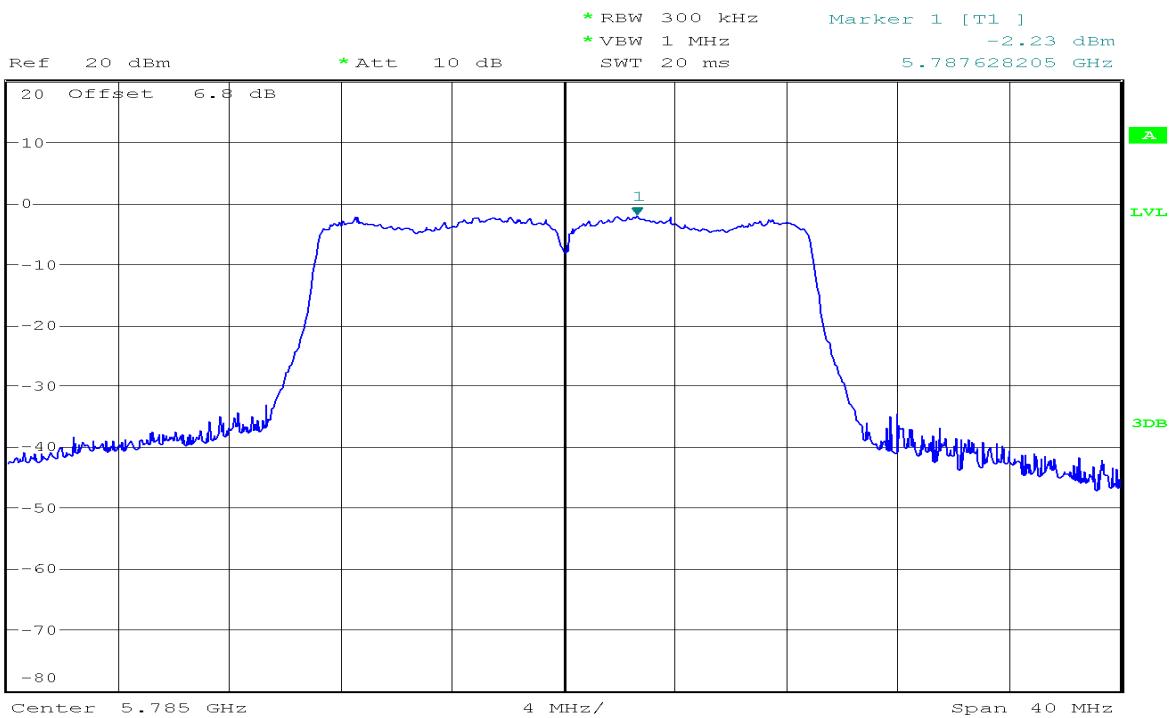
**IEEE 802.11ac VHT20 mode/chain 0**  
**5725~5850MHz****CH Low****CH Mid**

## CH High

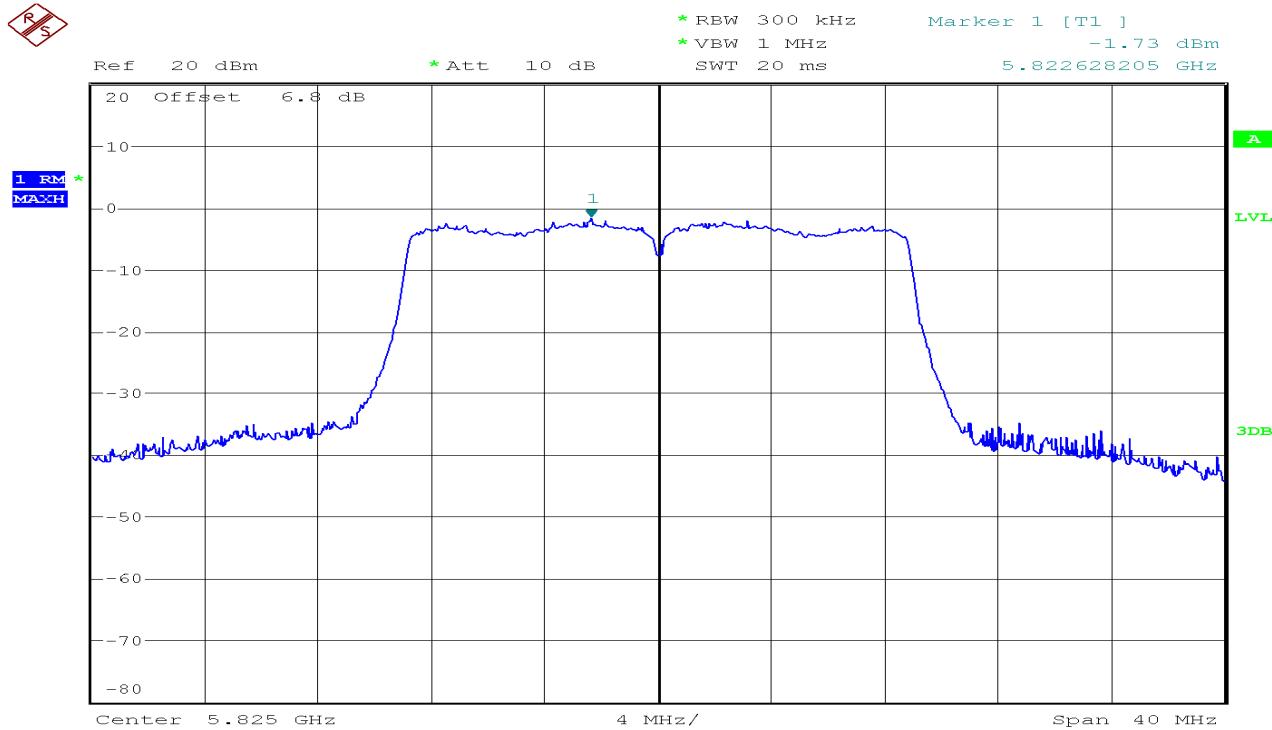


IEEE 802.11ac VHT20 mode/chain 1  
5725~5850MHz


## CH Low


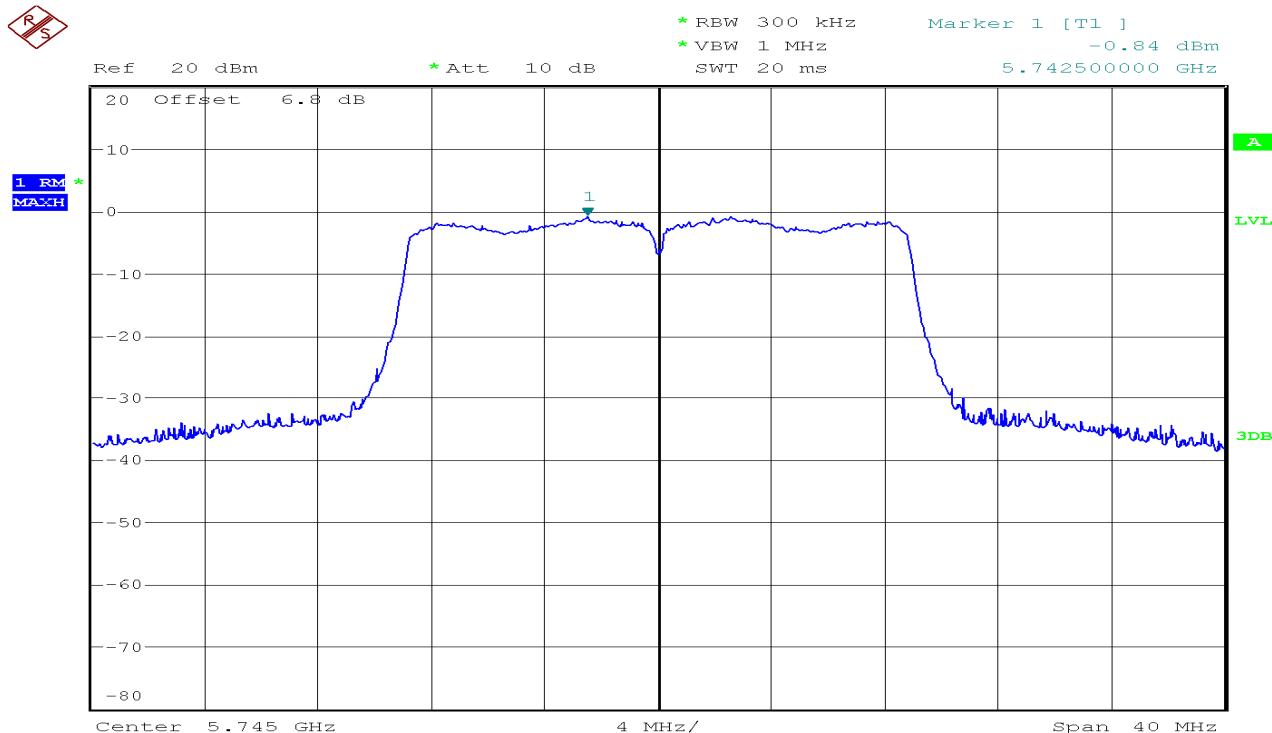


## CH Mid

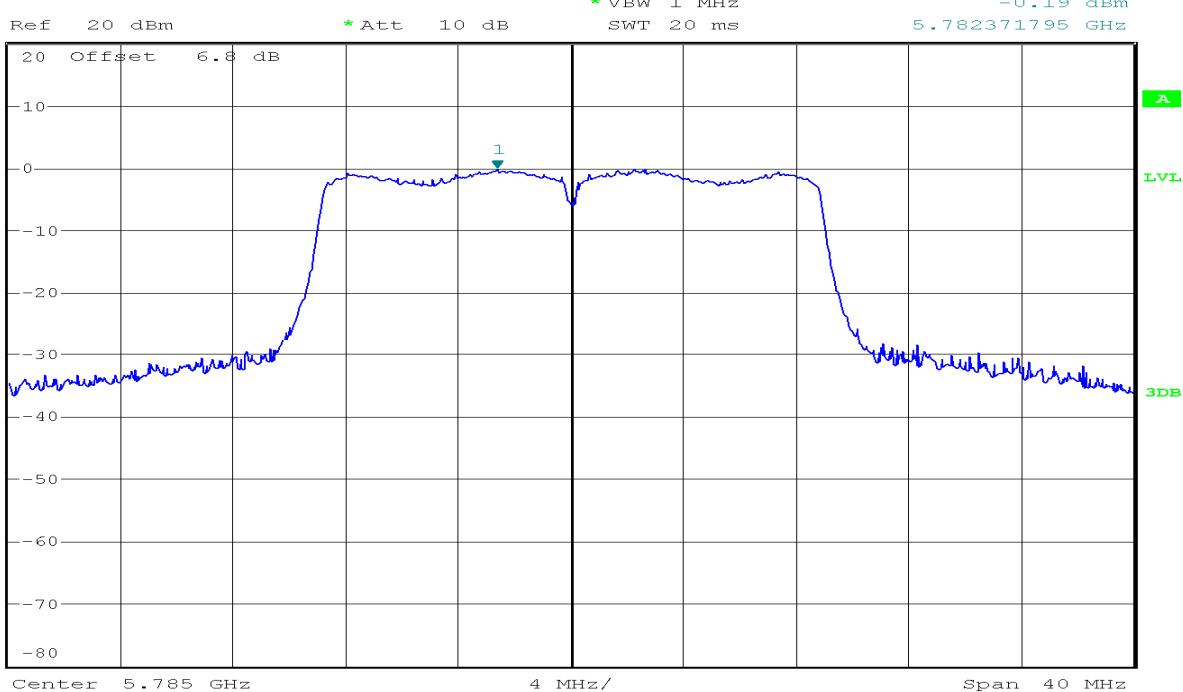


## CH High

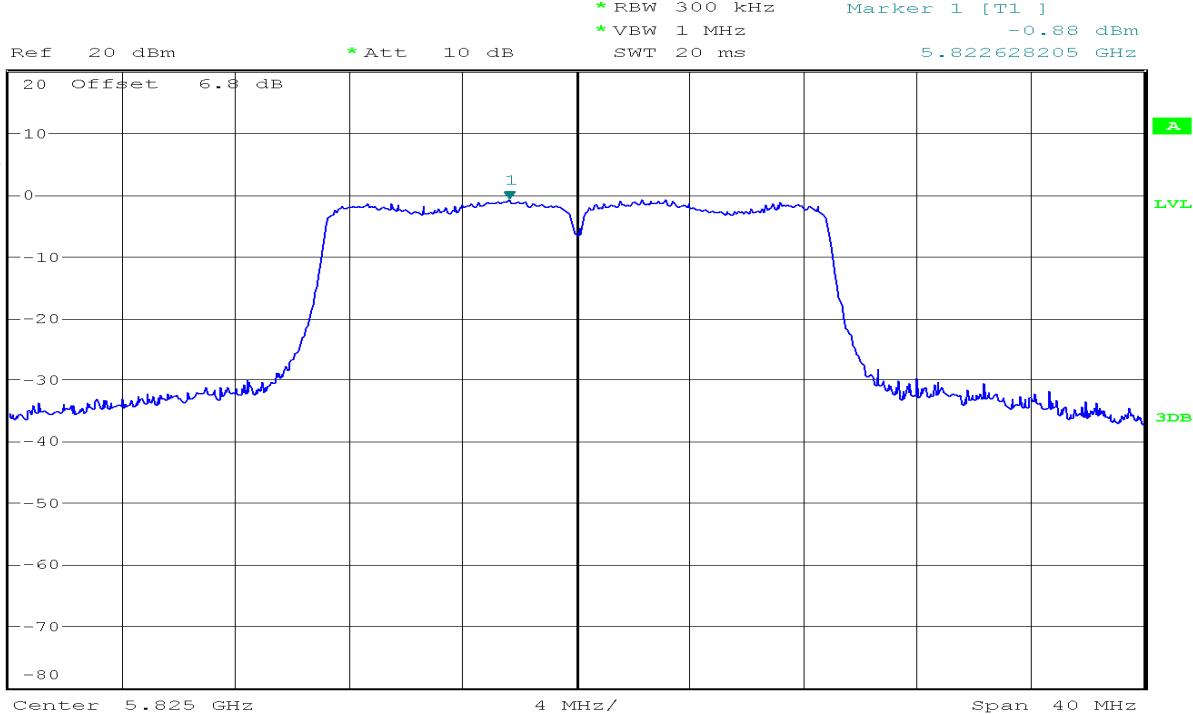

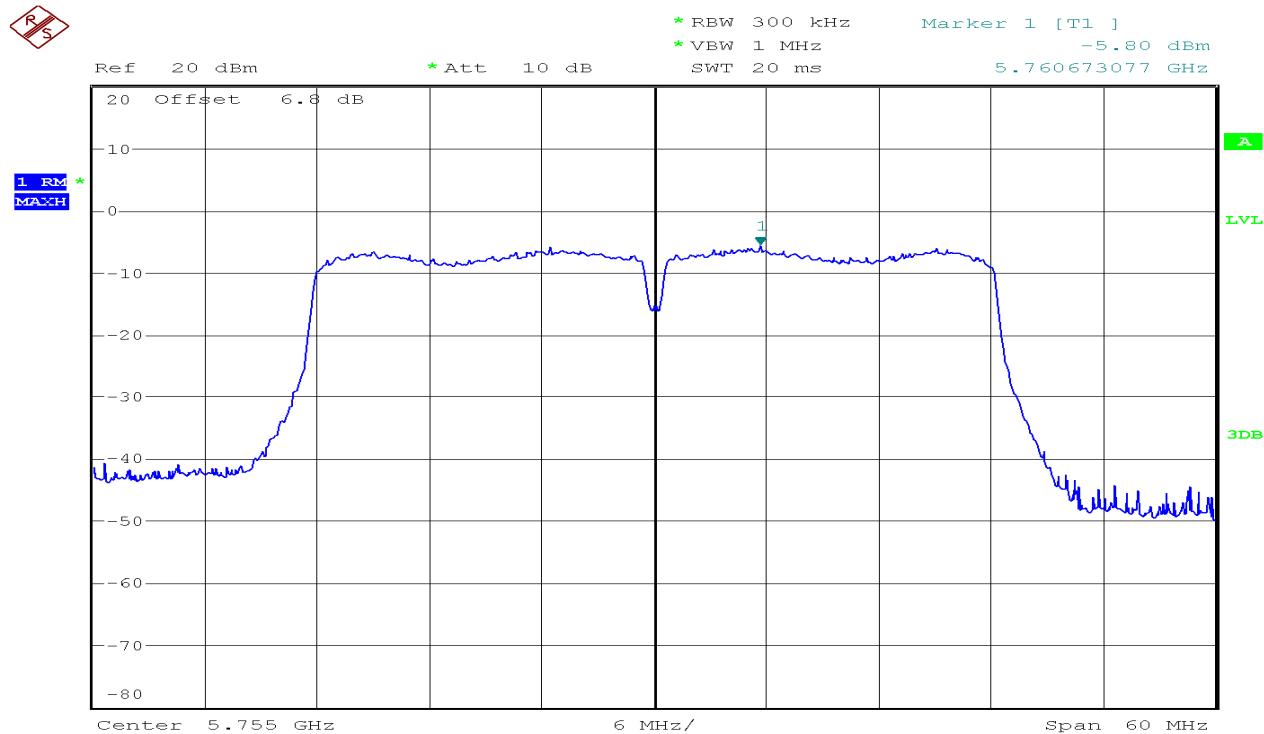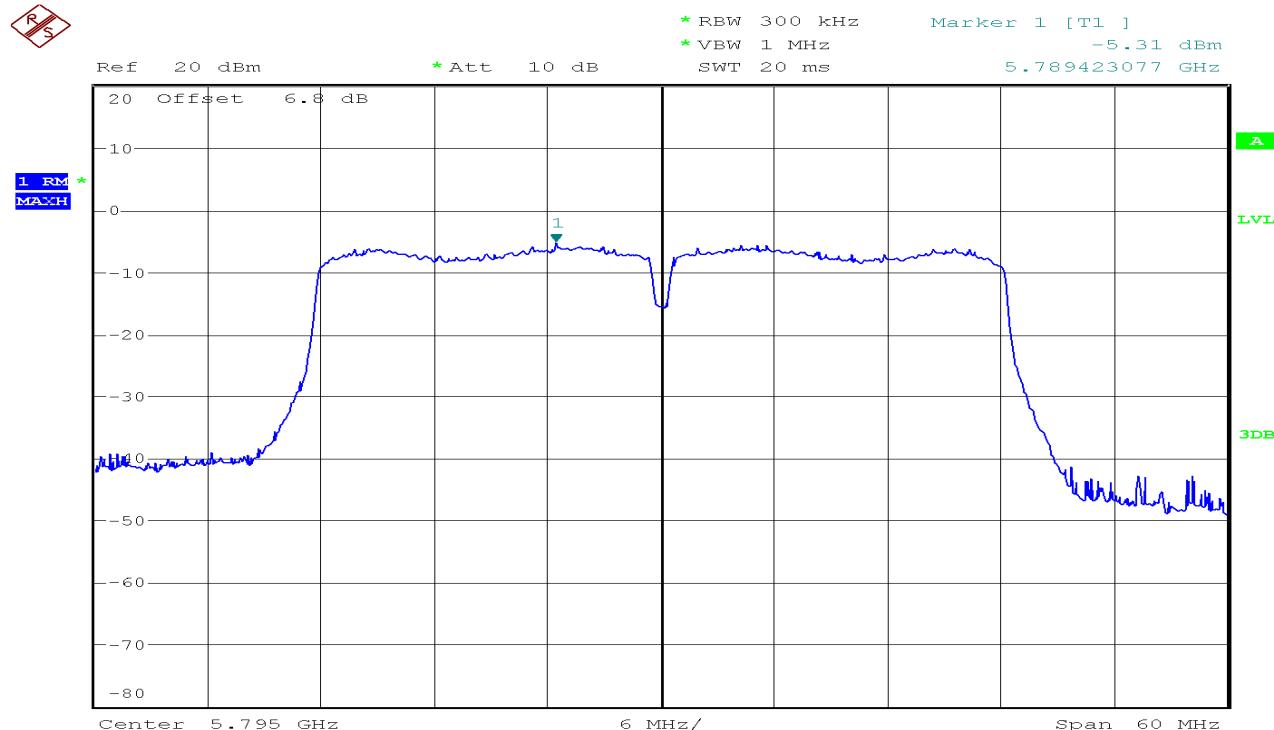
**IEEE 802.11ac VHT40 mode/chain 0**  
**5725~5850MHz****CH Low****CH High**



IEEE 802.11ac VHT40 mode/chain 1  
5725~5850MHz

## CH Low

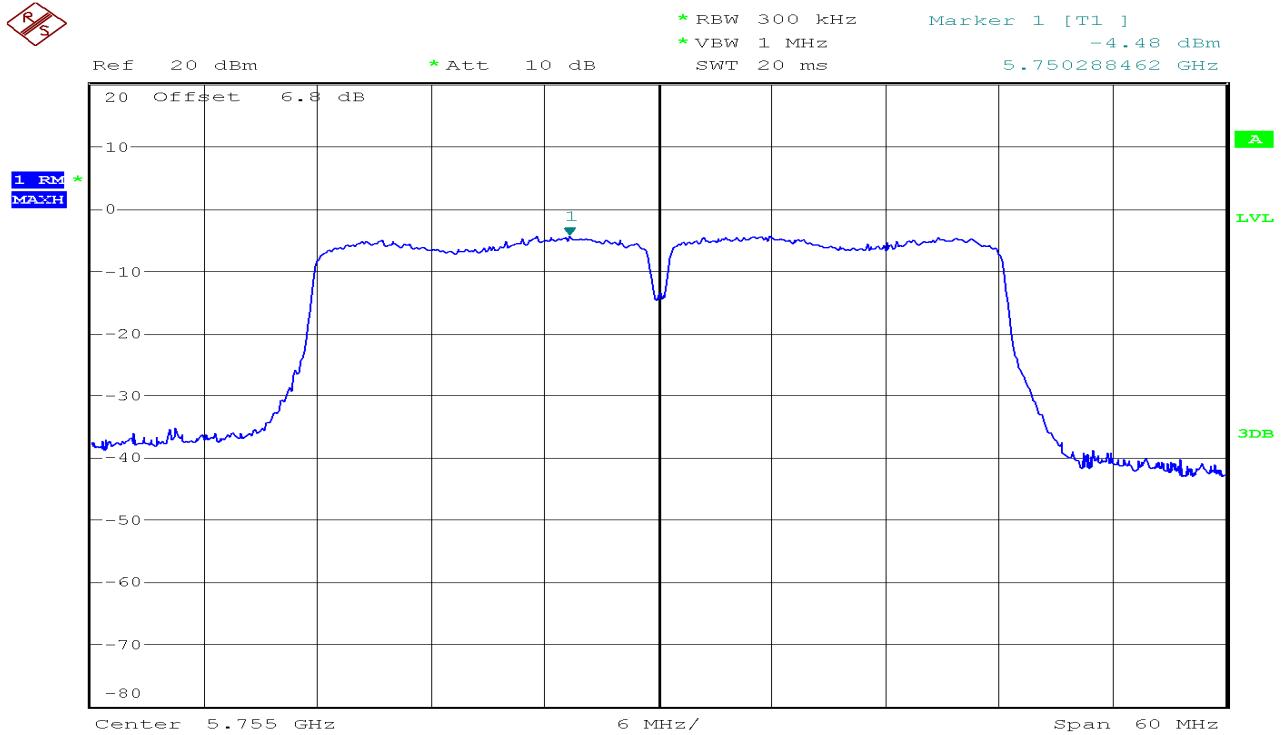

## CH High

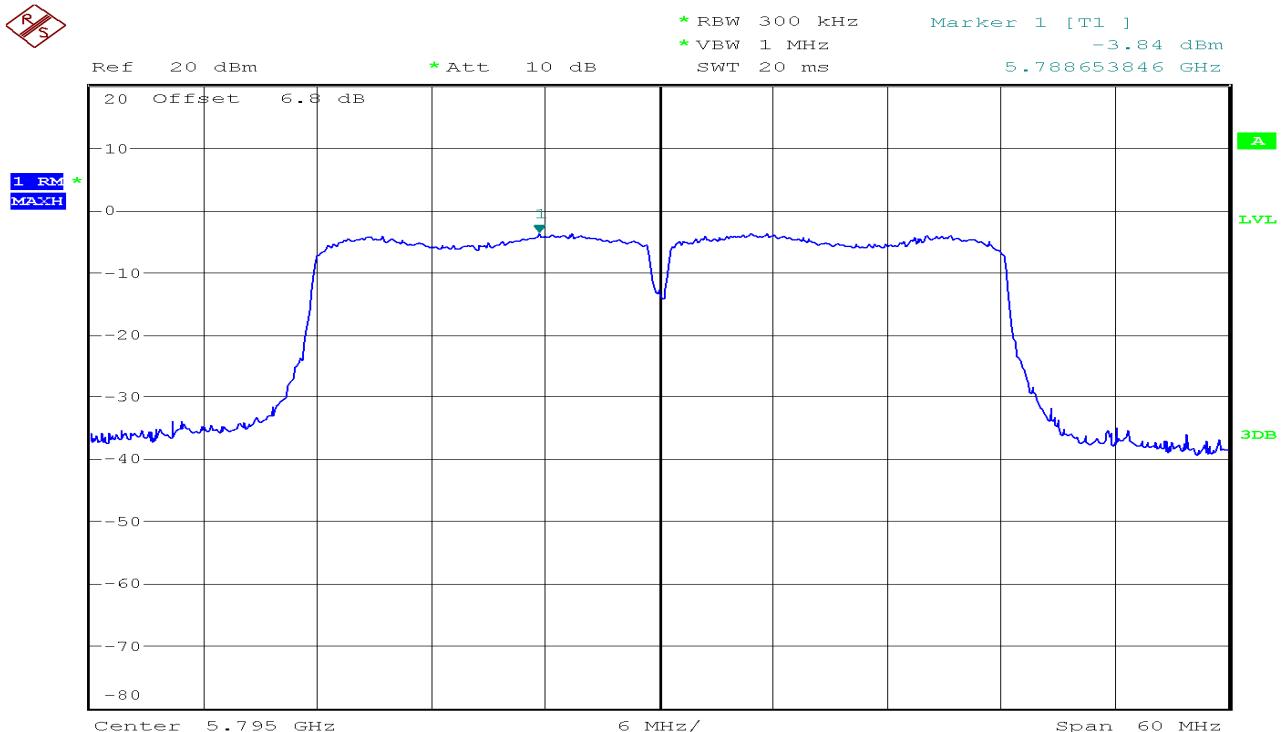

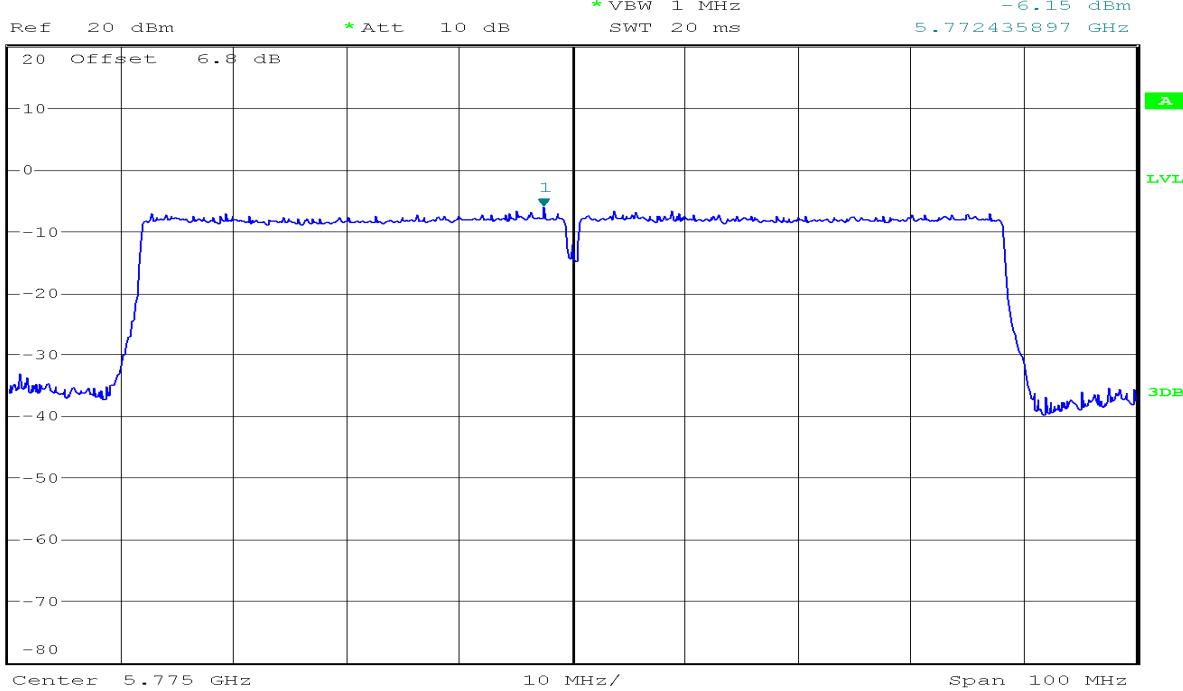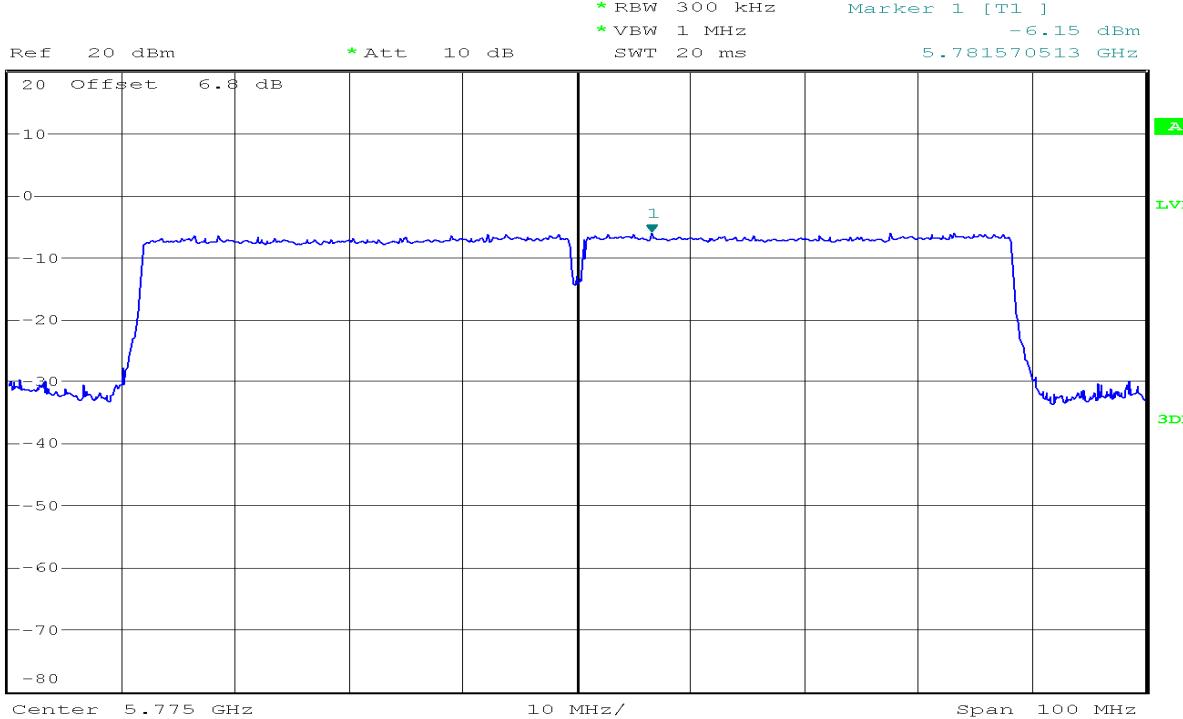
**IEEE 802.11ac VHT80 mode/chain 0****5725~5850MHz****CH Mid****IEEE 802.11ac VHT80 mode/chain 1****5725~5850MHz****CH Mid**

## 7.5 FREQUENCY STABILITY MEASUREMENT
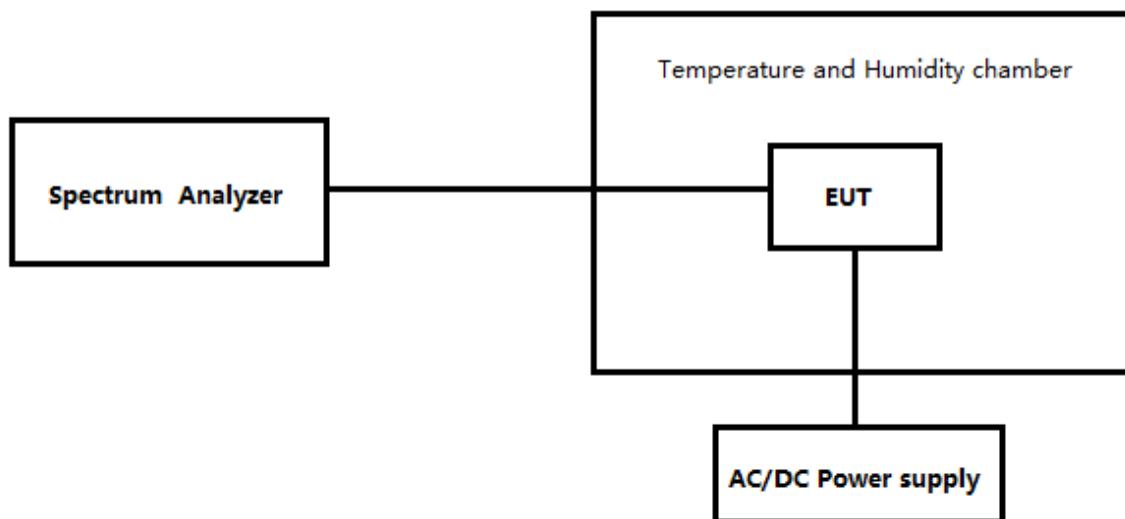
### LIMIT

According to §15.407(g), Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

### TEST CONFIGURATION



### TEST PROCEDURE

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

**TEST RESULTS**

U-NII-3-(5725MHz-5850MHz)					
Freq.(MHz)	Center Frequency (MHz)	Frequency Deviation (MHz)	Frequency Stability (ppm)	Temperature (°C)	Voltage (V)
5745	5745.028	0.028	4.87	25	V <sub>min</sub>
5745	5745.019	0.019	3.31	25	V <sub>max</sub>
5745	5745.011	0.011	1.91	25	V <sub>nor</sub>
5745	5745.040	0.040	6.96	-10	V <sub>nor</sub>
5745	5745.037	0.037	6.44	50	V <sub>nor</sub>

## 7.6 RADIATED UNDESIRABLE EMISSION

### LIMIT

Radiated emissions from 9 kHz to 25 GHz were measured according to the methods defines in ANSI C63.10-2013. The EUT was placed above the ground plane, 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

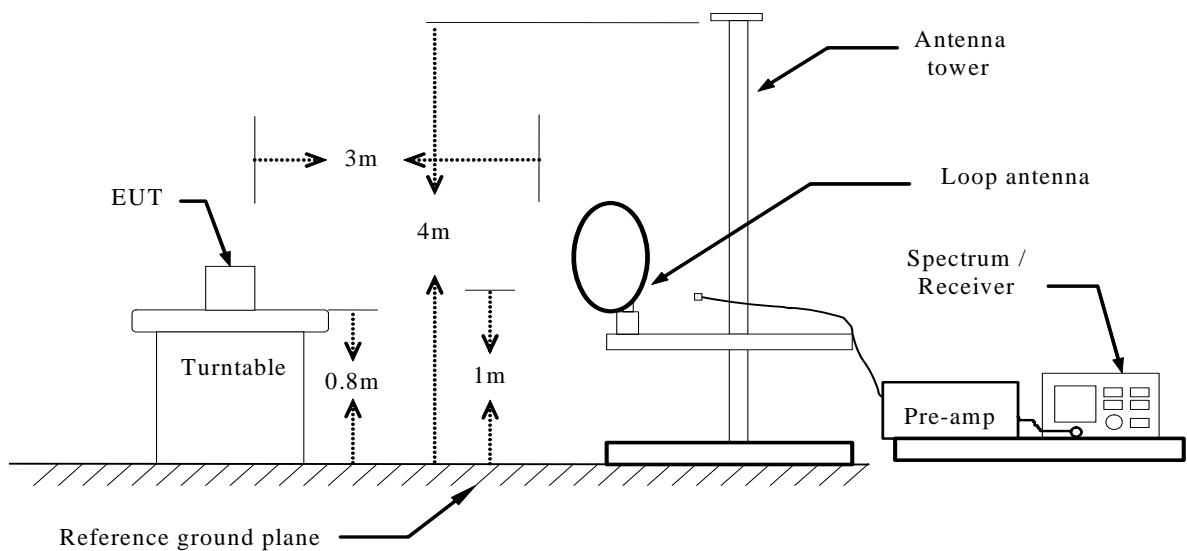
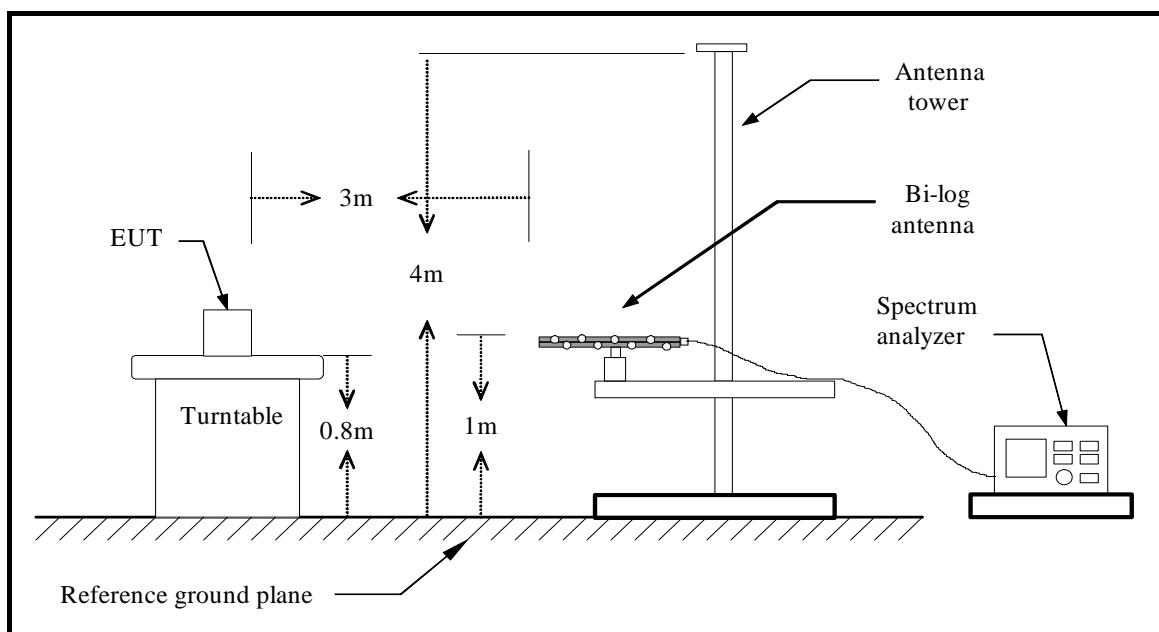
1. For transmitters operating in the 5725-5850 MHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dB $\mu$ V/m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dB $\mu$ V/m).
2. KDB789033 v01 G2)c) As specified in 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in 15.407(b)(4)). However, an out-of-band emission that complies with both the average and peak limits of 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz peak emission limit.
3. According to APPENDIX A Final Rules of FCC-16-24A1, For transmitters operating in the 5.725-5.85 GHz band:  
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
4. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


FREQUENCIES(MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE(meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

**Remark:** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

5. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

**Test Configuration****Below 30MHz****Below 1 GHz**

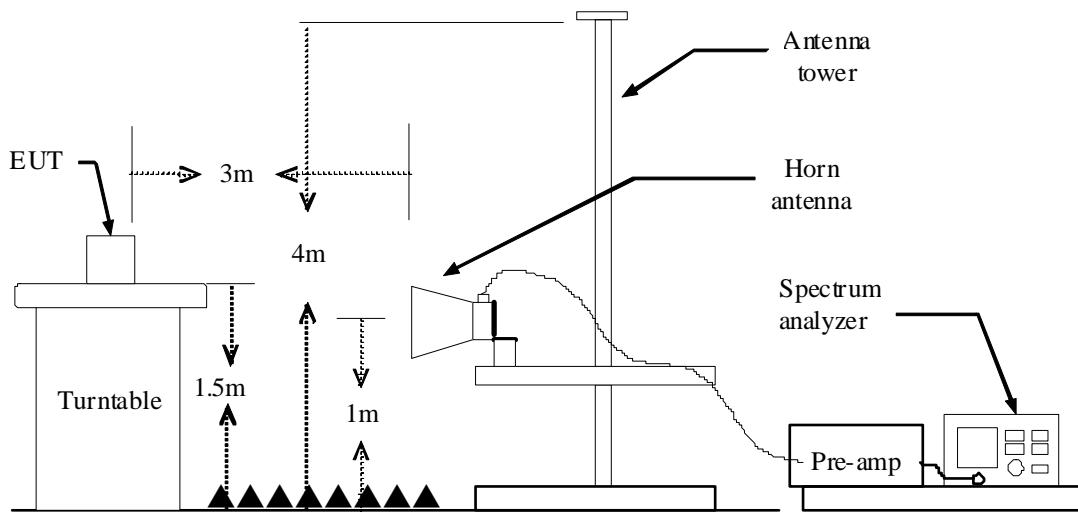**Above 1 GHz****TEST PROCEDURE**

1. The EUT is placed on a turntable above ground plane, which is 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

- (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
- (b) AVERAGE: RBW=1MHz / Sweep=AUTO

VBW=10Hz, when duty cycle is no less than 98 percent.

VBW  $\geq 1/T$ , when duty cycle is less than 98 percent, where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
IEEE 802.11 a	96.4	993.3	0.001	10Hz
IEEE 802.11n HT20	96.4	993.3	0.001	10Hz
IEEE 802.11n HT40	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT20	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT40	96.4	993.3	0.001	10Hz
IEEE 802.11ac VHT80	95.8	996.7	0.001	10Hz

7. Repeat above procedures until the measurements for all frequencies are complete.

**Test Result of Radiated Emission****Below 30MHz**

The interference of the frequency value is lower than the limit below 20 dB, measured as the background noise values and will not be recorded.

**30MHz-1GHz**

<b>Operation Mode:</b>	Normal Link	<b>Test Date:</b>	2017-10-27
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	48% RH	<b>Polarity:</b>	Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
242.4300	V	17.51	15.99	33.50	46.00	-12.50	peak
291.0260	V	20.25	17.30	37.55	46.00	-8.45	QP
319.0600	V	20.21	17.97	38.18	46.00	-7.82	peak
792.0030	V	16.13	27.21	43.34	46.00	-2.66	QP
960.2300	V	12.08	29.27	41.35	54.00	-12.65	peak
1000.0000	V	12.74	30.24	42.98	54.00	-11.02	QP
<hr/>							
30.9700	H	6.48	23.51	29.99	40.00	-10.01	peak
242.4300	H	16.48	15.99	32.47	46.00	-13.53	peak
290.9300	H	19.36	17.30	36.66	46.00	-9.34	peak
436.4300	H	12.63	22.36	34.99	46.00	-11.01	peak
792.4200	H	10.54	27.21	37.75	46.00	-8.25	peak
800.1800	H	10.63	27.21	37.84	46.00	-8.16	peak

**Remark:**

1. Measuring frequencies from 30 MHz to the 1GHz.(no emission found from the lowest internal used/generated frequency to 30MHz)
2. Radiated emissions measured were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).

Above 1 GHz

<b>Operation Mode:</b>	Tx / IEEE 802.11a mode CH Low	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11812.000	39.65	10.74	50.39	74.00	-23.61	100	148	peak
2	15994.000	36.95	13.39	50.34	74.00	-23.66	100	223	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	10333.000	42.40	10.05	52.45	74.00	-21.55	100	341	peak
2	15331.000	36.86	13.06	49.92	74.00	-24.08	100	210	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	Tx / IEEE 802.11a mode CH Mid	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11378.500	38.06	11.85	49.91	74.00	-24.09	100	301	peak
2	14540.500	35.83	15.57	51.40	74.00	-22.60	100	5	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11735.500	38.58	10.93	49.51	74.00	-24.49	100	116	peak
2	14719.000	36.65	15.51	52.16	74.00	-21.84	100	92	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	Tx / IEEE 802.11a mode CH High	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11761.000	38.95	10.86	49.81	74.00	-24.19	100	71	peak
2	16861.000	35.24	15.32	50.56	74.00	-23.44	100	140	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11888.500	38.03	10.55	48.58	74.00	-25.42	100	328	peak
2	15433.000	36.32	12.34	48.66	74.00	-25.34	100	158	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11n HT20 mode /CH Low	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	10945.000	39.78	12.71	52.49	74.00	-21.51	100	8	peak
2	16733.500	34.48	15.52	50.00	74.00	-24.00	100	38	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	10945.000	39.53	12.71	52.24	74.00	-21.76	100	2	peak
2	14413.000	37.01	15.28	52.29	74.00	-21.71	100	2	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11n HT20 mode /CH Mid	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11021.500	39.17	12.86	52.03	74.00	-21.97	100	6	peak
2	14540.500	36.09	15.57	51.66	74.00	-22.34	100	148	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11429.500	38.40	11.71	50.11	74.00	-23.89	100	360	peak
2	15407.500	36.25	12.52	48.77	74.00	-25.23	100	360	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11n HT20 mode /CH High	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11761.000	39.10	10.86	49.96	74.00	-24.04	100	9	peak
2	15101.500	34.73	14.69	49.42	74.00	-24.58	100	32	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11429.500	37.75	11.71	49.46	74.00	-24.54	100	3	peak
2	16427.500	36.13	15.52	51.65	74.00	-22.35	100	261	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11n HT40 mode /CH Low	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11429.500	37.64	11.71	49.35	74.00	-24.65	100	294	peak
2	17294.500	34.09	16.59	50.68	74.00	-23.32	100	244	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11327.500	38.69	12.00	50.69	74.00	-23.31	100	6	peak
2	15407.500	35.55	12.52	48.07	74.00	-25.93	100	233	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11n HT40 mode /CH High	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11888.500	38.12	10.55	48.67	74.00	-25.33	100	4	peak
2	17345.500	36.39	16.84	53.23	74.00	-20.77	100	4	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11353.000	38.29	11.92	50.21	74.00	-23.79	100	254	peak
2	16453.000	34.81	15.65	50.46	74.00	-23.54	100	106	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT20 mode /CH Low	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	12220.000	38.96	11.22	50.18	74.00	-23.82	100	76	peak
2	16223.500	34.56	14.51	49.07	74.00	-24.93	100	115	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11480.500	42.12	11.56	53.68	74.00	-20.32	100	9	peak
2	16325.500	35.70	15.02	50.72	74.00	-23.28	100	137	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT20 mode /CH Mid	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	12194.500	37.51	11.11	48.62	74.00	-25.38	100	120	peak
2	16810.000	34.43	15.40	49.83	74.00	-24.17	100	359	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11557.000	41.59	11.37	52.96	74.00	-21.04	100	360	peak
2	16861.000	34.69	15.32	50.01	74.00	-23.99	100	128	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT20 mode /CH High	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11659.000	38.23	11.12	49.35	74.00	-24.65	100	11	peak
2	17677.000	32.88	17.90	50.78	74.00	-23.22	100	285	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11659.000	42.48	11.12	53.60	74.00	-20.40	100	360	peak
2	16631.500	33.74	15.68	49.42	74.00	-24.58	100	309	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT40 mode /CH Low	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	12296.500	37.00	11.55	48.55	74.00	-25.45	100	3	peak
2	16580.500	34.40	15.76	50.16	74.00	-23.84	100	3	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (deg.)	Remark
1	11506.000	39.83	11.50	51.33	74.00	-22.67	100	31	peak
2	16555.000	35.36	15.80	51.16	74.00	-22.84	100	213	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT40 mode /CH High	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	12220.000	37.79	11.22	49.01	74.00	-24.99	100	225	peak
2	17422.000	33.80	17.23	51.03	74.00	-22.97	100	331	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11557.000	42.22	11.37	53.59	74.00	-20.41	100	359	peak
2	16580.500	33.58	15.76	49.34	74.00	-24.66	100	294	peak
3	N/A								
4									
5									
6									

<b>Operation Mode:</b>	TX / IEEE 802.11ac VHT80 mode /CH Mid	<b>Test Date:</b>	2017-11-12
<b>Temperature:</b>	25°C	<b>Tested by:</b>	Lily.Wang
<b>Humidity:</b>	55% RH	<b>Polarity:</b>	Ver. / Hor.

**Horizontal**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	10537.000	39.57	11.11	50.68	74.00	-23.32	100	136	peak
2	16861.000	35.81	15.32	51.13	74.00	-22.87	100	130	peak
3	N/A								
4									
5									
6									

**Vertical**

No.	Frequency	Reading	Correct	Result	Limit	Margin	Height	Degree	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(deg.)	
1	11353.000	38.57	11.92	50.49	74.00	-23.51	100	89	peak
2	16937.500	34.46	15.21	49.67	74.00	-24.33	100	123	peak
3	N/A								
4									
5									
6									

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 3 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

## 7.7 POWERLINE CONDUCTED EMISSIONS

### LIMIT

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency Range (MHz)	Limits (dB $\mu$ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

### TEST PROCEDURE

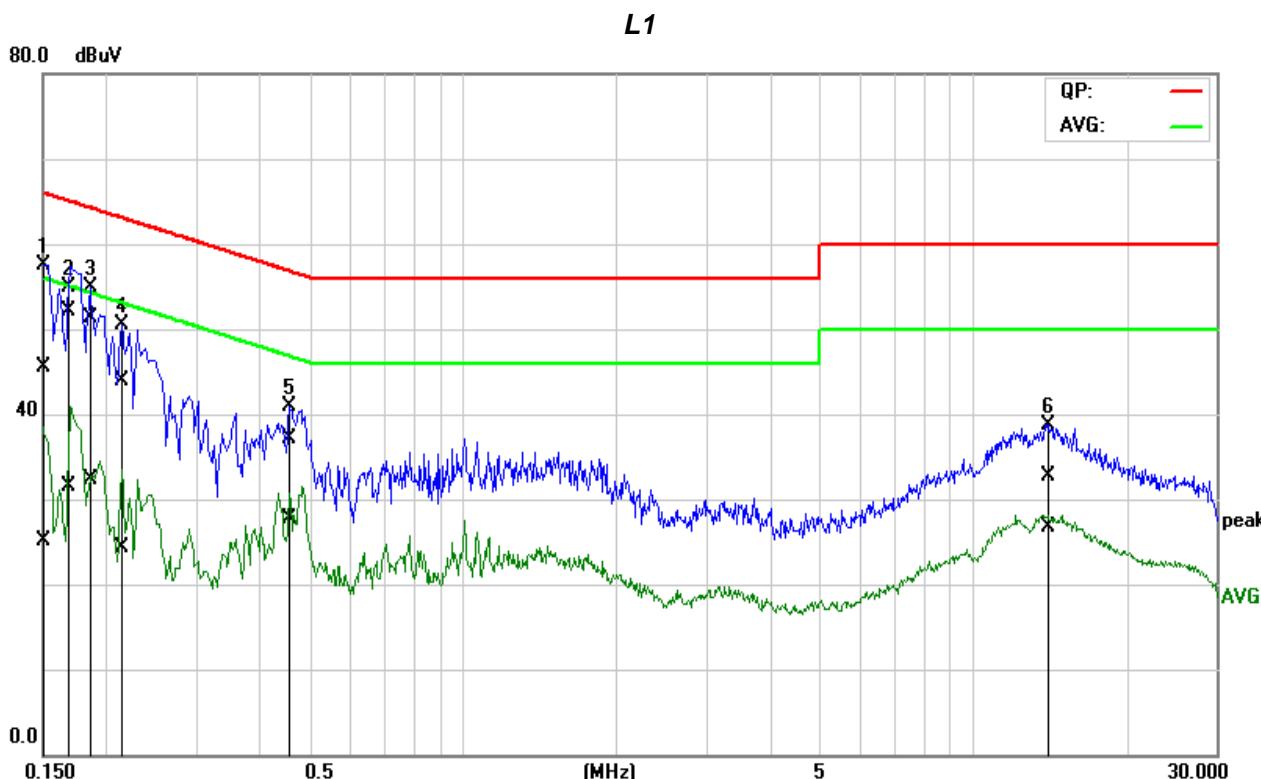
1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

**Test Data**


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	17:00:07
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 120V/60Hz
Model:		Description:	



No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1*	0.1515	24.85	4.47	20.59	45.44	25.06	65.92	55.92	-20.48	-30.86	Pass
2	0.1663	31.61	10.87	20.57	52.18	31.44	65.14	55.14	-12.96	-23.70	Pass
3	0.1832	30.86	11.77	20.54	51.40	32.31	64.34	54.34	-12.94	-22.03	Pass
4	0.2147	23.44	3.79	20.49	43.93	24.28	63.02	53.02	-19.09	-28.74	Pass
5	0.4595	16.53	7.28	20.49	37.02	27.77	56.70	46.70	-19.68	-18.93	Pass
6	14.0647	11.94	5.86	20.79	32.73	26.65	60.00	50.00	-27.27	-23.35	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:53:27
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 120V/60Hz
Model:		Description:	

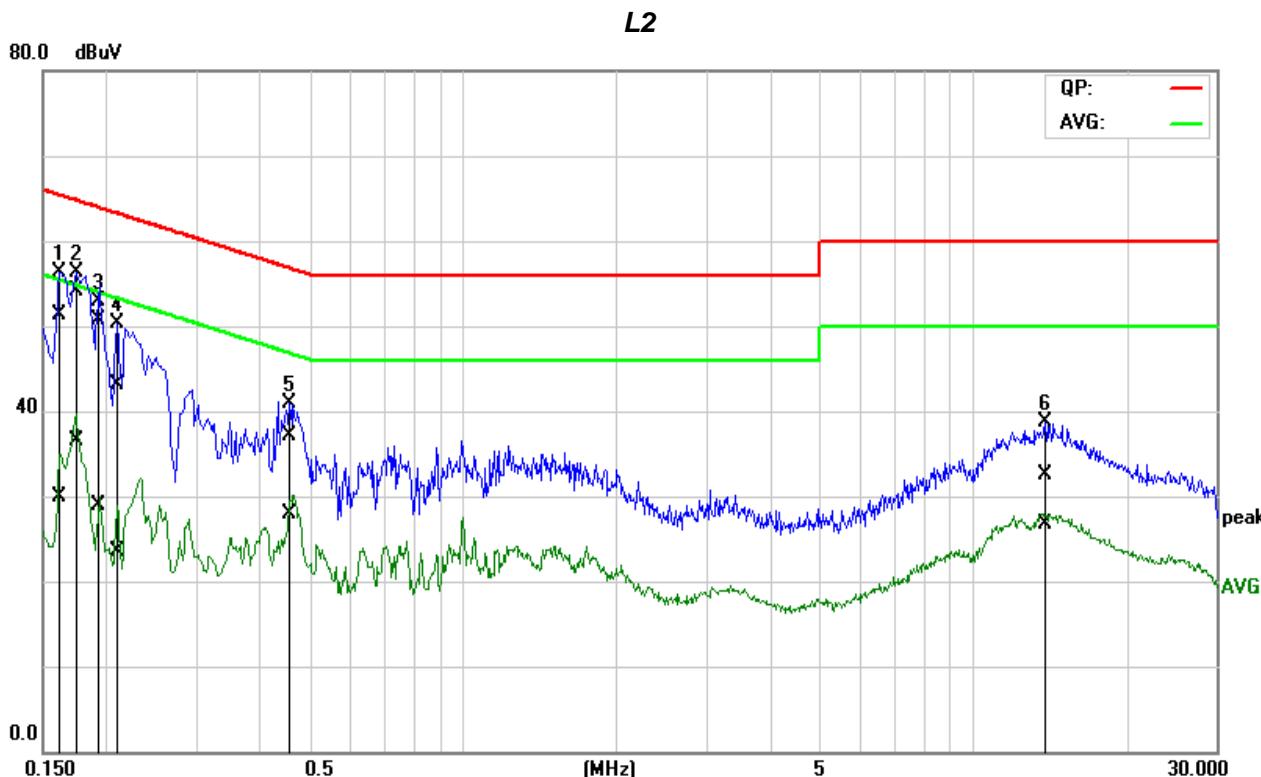

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1*	0.1633	30.96	9.57	20.37	51.33	29.94	65.29	55.29	-13.96	-25.35	Pass
2	0.1727	33.71	16.07	20.38	54.09	36.45	64.83	54.83	-10.74	-18.38	Pass
3	0.1893	30.26	8.57	20.39	50.65	28.96	64.07	54.07	-13.42	-25.11	Pass
4	0.2080	22.60	3.07	20.41	43.01	23.48	63.28	53.28	-20.27	-29.80	Pass
5	0.4600	16.64	7.47	20.45	37.09	27.92	56.69	46.69	-19.60	-18.77	Pass
6	13.9377	11.74	5.91	20.83	32.57	26.74	60.00	50.00	-27.43	-23.26	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).


Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:46:30
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L1	Test Voltage:	AC 240V/60Hz
Model:		Description:	

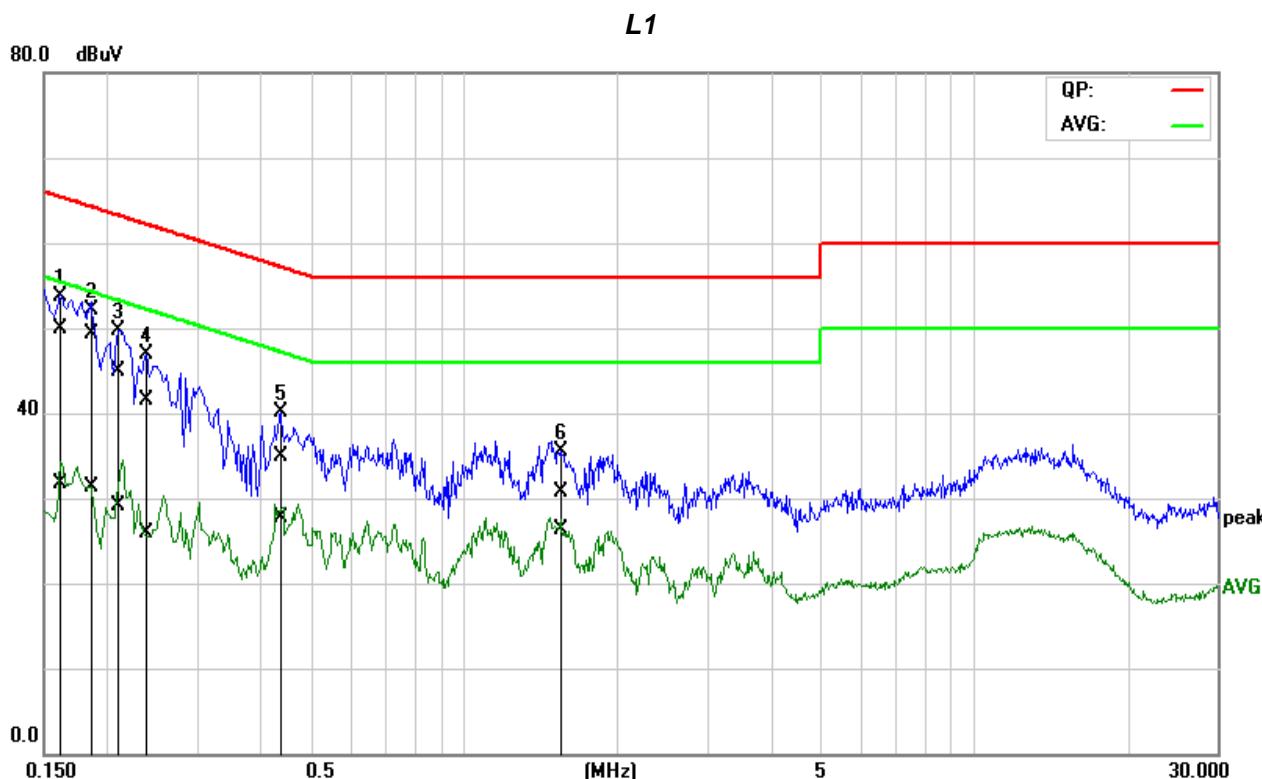

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1636	29.32	11.11	20.57	49.89	31.68	65.28	55.28	-15.39	-23.60	Pass
2	0.1872	28.70	10.77	20.53	49.23	31.30	64.16	54.16	-14.93	-22.86	Pass
3	0.2079	24.38	8.66	20.50	44.88	29.16	63.29	53.29	-18.41	-24.13	Pass
4	0.2343	21.01	5.54	20.46	41.47	26.00	62.30	52.30	-20.83	-26.30	Pass
5	0.4403	14.41	7.15	20.50	34.91	27.65	57.06	47.06	-22.15	-19.41	Pass
6*	1.5245	10.26	5.76	20.45	30.71	26.21	56.00	46.00	-25.29	-19.79	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

Job No.:	C170929R01	Date:	2017/10/25
Model No.:	OFR-D1	Time:	16:39:38
Standard:	FCC Class B	Temp.(C)/Hum.(%):	22(C)/48%
Test item:	Conduction test	Test By:	Lily.Wang
Line:	L2	Test Voltage:	AC 240V/60Hz
Model:		Description:	

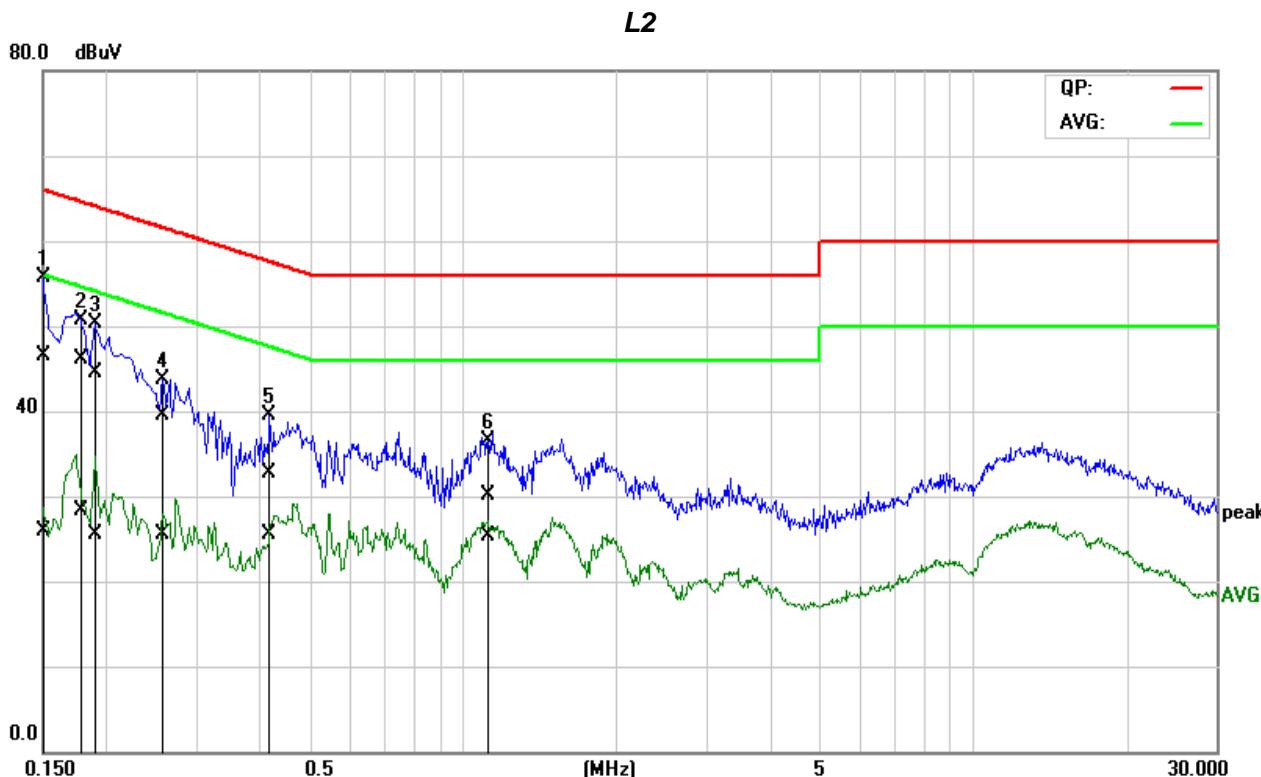

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1508	26.05	5.45	20.36	46.41	25.81	65.96	55.96	-19.55	-30.15	Pass
2	0.1794	25.63	8.02	20.38	46.01	28.40	64.51	54.51	-18.50	-26.11	Pass
3	0.1883	24.10	5.21	20.39	44.49	25.60	64.11	54.11	-19.62	-28.51	Pass
4	0.2544	19.04	5.05	20.44	39.48	25.49	61.61	51.61	-22.13	-26.12	Pass
5	0.4202	12.15	4.95	20.46	32.61	25.41	57.44	47.44	-24.83	-22.03	Pass
6*	1.1022	9.62	4.82	20.46	30.08	25.28	56.00	46.00	-25.92	-20.72	Pass

**Note:** 1. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).

**Remark:**

1. The measuring frequencies range between 0.15 MHz and 30 MHz.
2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.
3. “--” denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.
4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9kHz.

**END OF REPORT**