



ANTENNA PASSIVE TEST REPORT
(On Head)


Applicant: Grandsun
Product Name: Trip II
Model No.(EUT): Trip II (EV)
Date of Receipt: 2022-09-22
Date of Test: 2022-09-22

Tested by: Max.Chen
Made by: Max.Chen
Checked by: Noki.Ho



REVISION HISTORY

Revision Record		
Version	Date	Reason for change
V0.1	2017-05-20	First edition

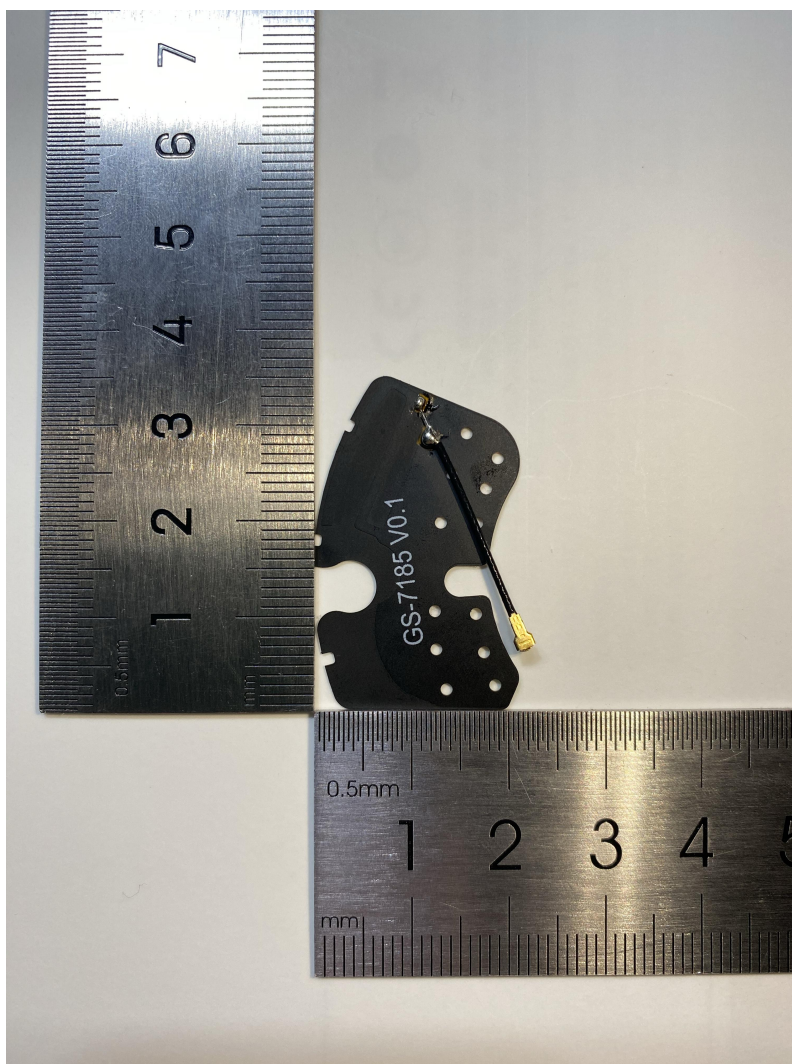



CONTENTS

1. GENERAL INFORMATION.....	4
1.1 Test Location.....	4
1.2 Test item and results.....	4
1.3 Laboratory Environment.....	4
1.4 Test Equipments List.....	4
1.5 Measurement Uncertainty.....	4
2. OTA MEASUREMENTS SYSTEM CONFIGURATION.....	5
3. TEST RESULTS.....	6
3.1 Efficiency & Gain.....	6
3.2 2-D antenna pattern.....	6
3.3 3-D antenna pattern.....	7
3.4 Passive pattern.....	8
4. APPENDIX A THE EUT AND TEST CONFIGURATION.....	10



1. GENERAL INFORMATION

1.1 Test Location

Company: Shenzhen Grandsun Electronics Co.,Ltd.
Address: Gaoqiao Industry Zone,Pingdi Town,Longgang District,Shenzhen,China
Post code: 518117
Telephone: +86-755-89234568

1.2 Test item and results

Test detailed items/section as below:

NO	Items
1	Gain
2	Efficiency
3	2-D/3-D pattern

1.3 Laboratory Environment

Temperature	Min.=18℃ Max.=24℃	
Relative humidity	Min.=30% Max.=70℃	
Shield effect	0.5-10GHZ	> 100dB
Ground resistance	<0.4 Ω	

1.4 Test Equipments List

Equipment Name	Model NO.	Manufacture	Calibration	Valid Period
Network Analyzer	E5071C	Keysight	2022-04-20	One year
Chamber	AMS-8923-195	ETS-LINDGERN	2022-04-20	One year


1.5 Measurement Uncertainty

Item	2.4GHZ-2.5GHZ(dB)
Gain	0.3
Efficiency	0.3



2. OTA MEASUREMENTS SYSTEM CONFIGURATION

The system is designed for fully-compliant radiated wireless antenna measurements over the frequency range from 700 MHz to 6 GHz with a 1.95-meter path length. The system includes a multi-antenna array with twenty-three (23) dual-polarized measurement antennas spaced every 15° , The chamber size is 5m*5m*5m

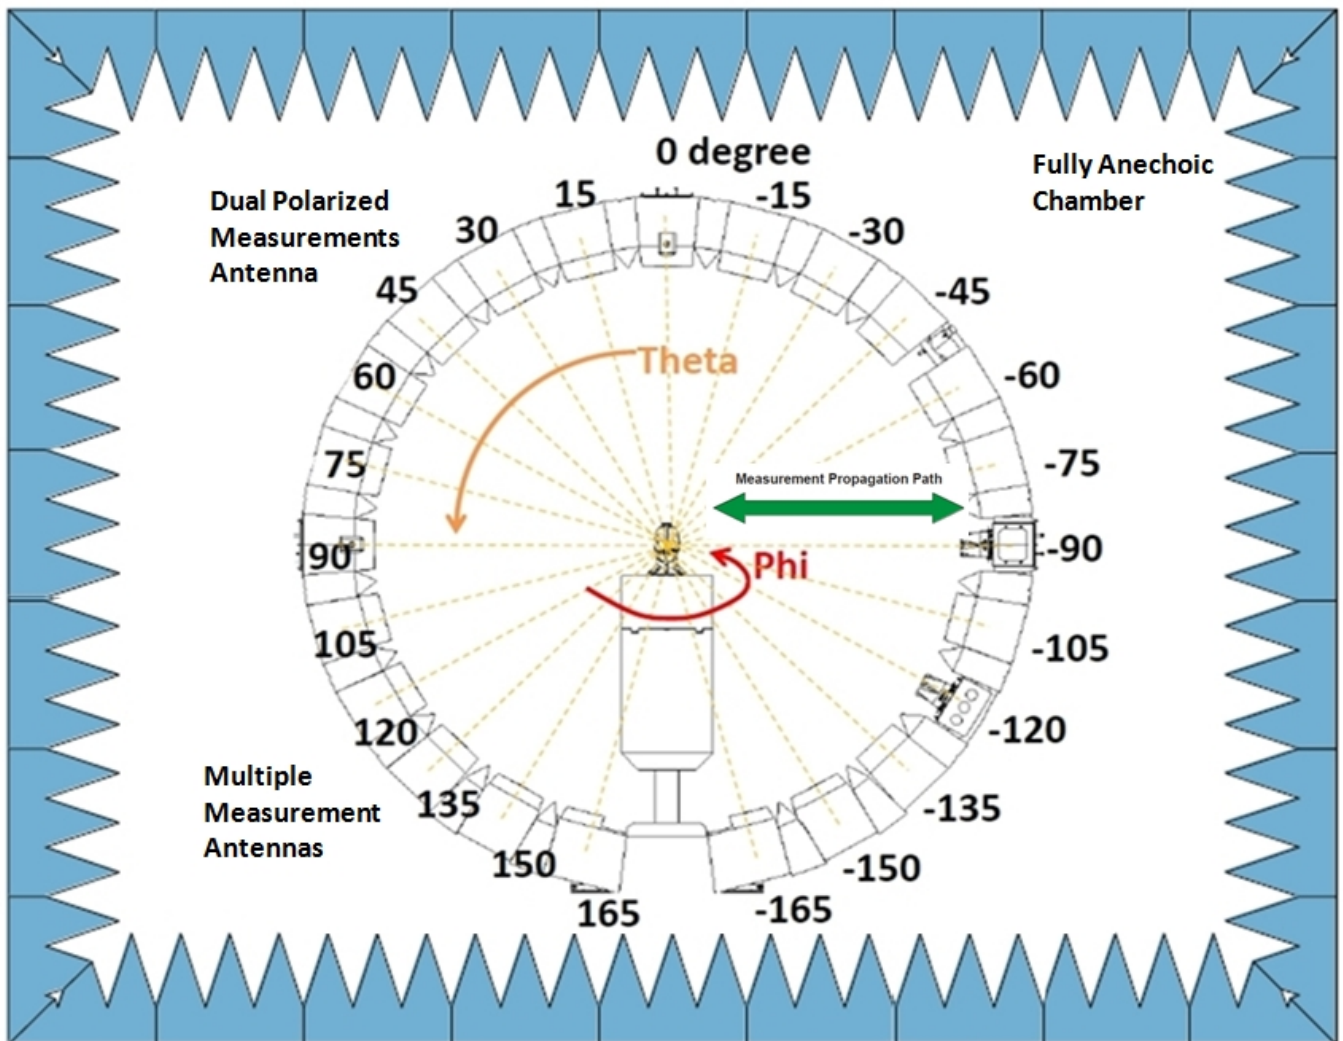

OTA measurement System Configuration

Note: Phi(The turntable) is from $0^\circ \sim 180^\circ$,Theta(the ring, multiple antennas) is from $-165^\circ \sim 165^\circ$, Rotate the AUT and multi-antenna array record the data ,the step of rotation is 15 degree.




3. TEST RESULTS

3.1 Efficiency & Gain


Frequency (Mhz)	Efficiency (dB)	Efficiency (%)	Gain (dBi)
2400	-2.86	51.7	2.96
2410	-2.82	52.2	2.90
2420	-2.82	52.1	2.91
2430	-2.93	50.8	2.84
2440	-2.83	52.0	2.86
2450	-2.72	53.3	2.86
2460	-2.76	52.8	2.77
2470	-2.70	53.6	2.83
2480	-2.72	53.3	2.75
2490	-2.73	53.3	2.74
2500	-2.75	53.0	2.69


3.2 2-D antenna pattern (Phi=90°)

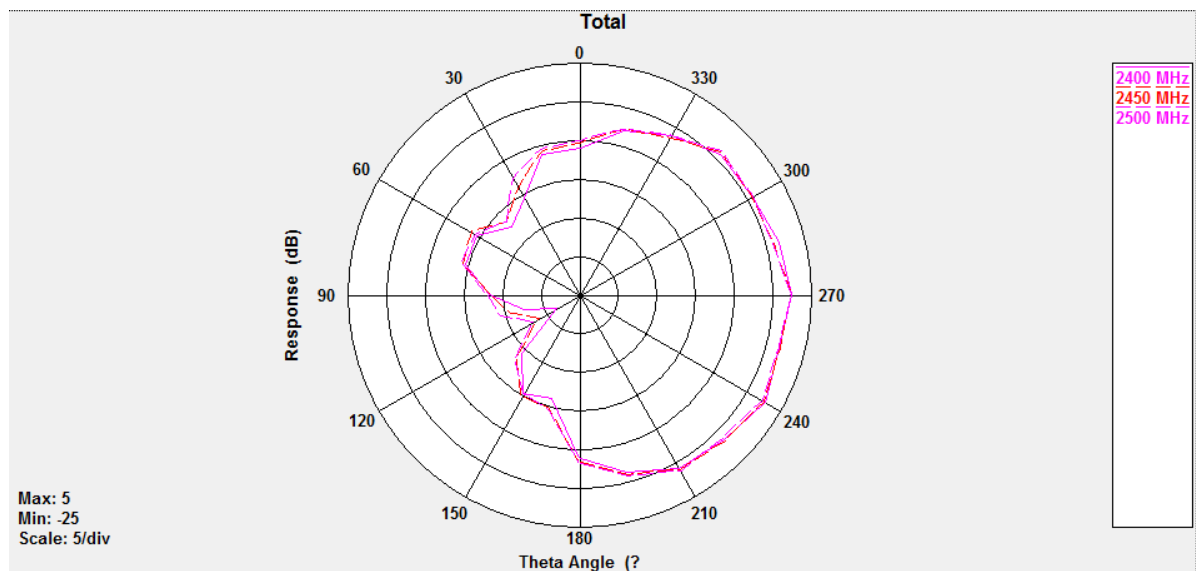




3.3 3-D antenna pattern

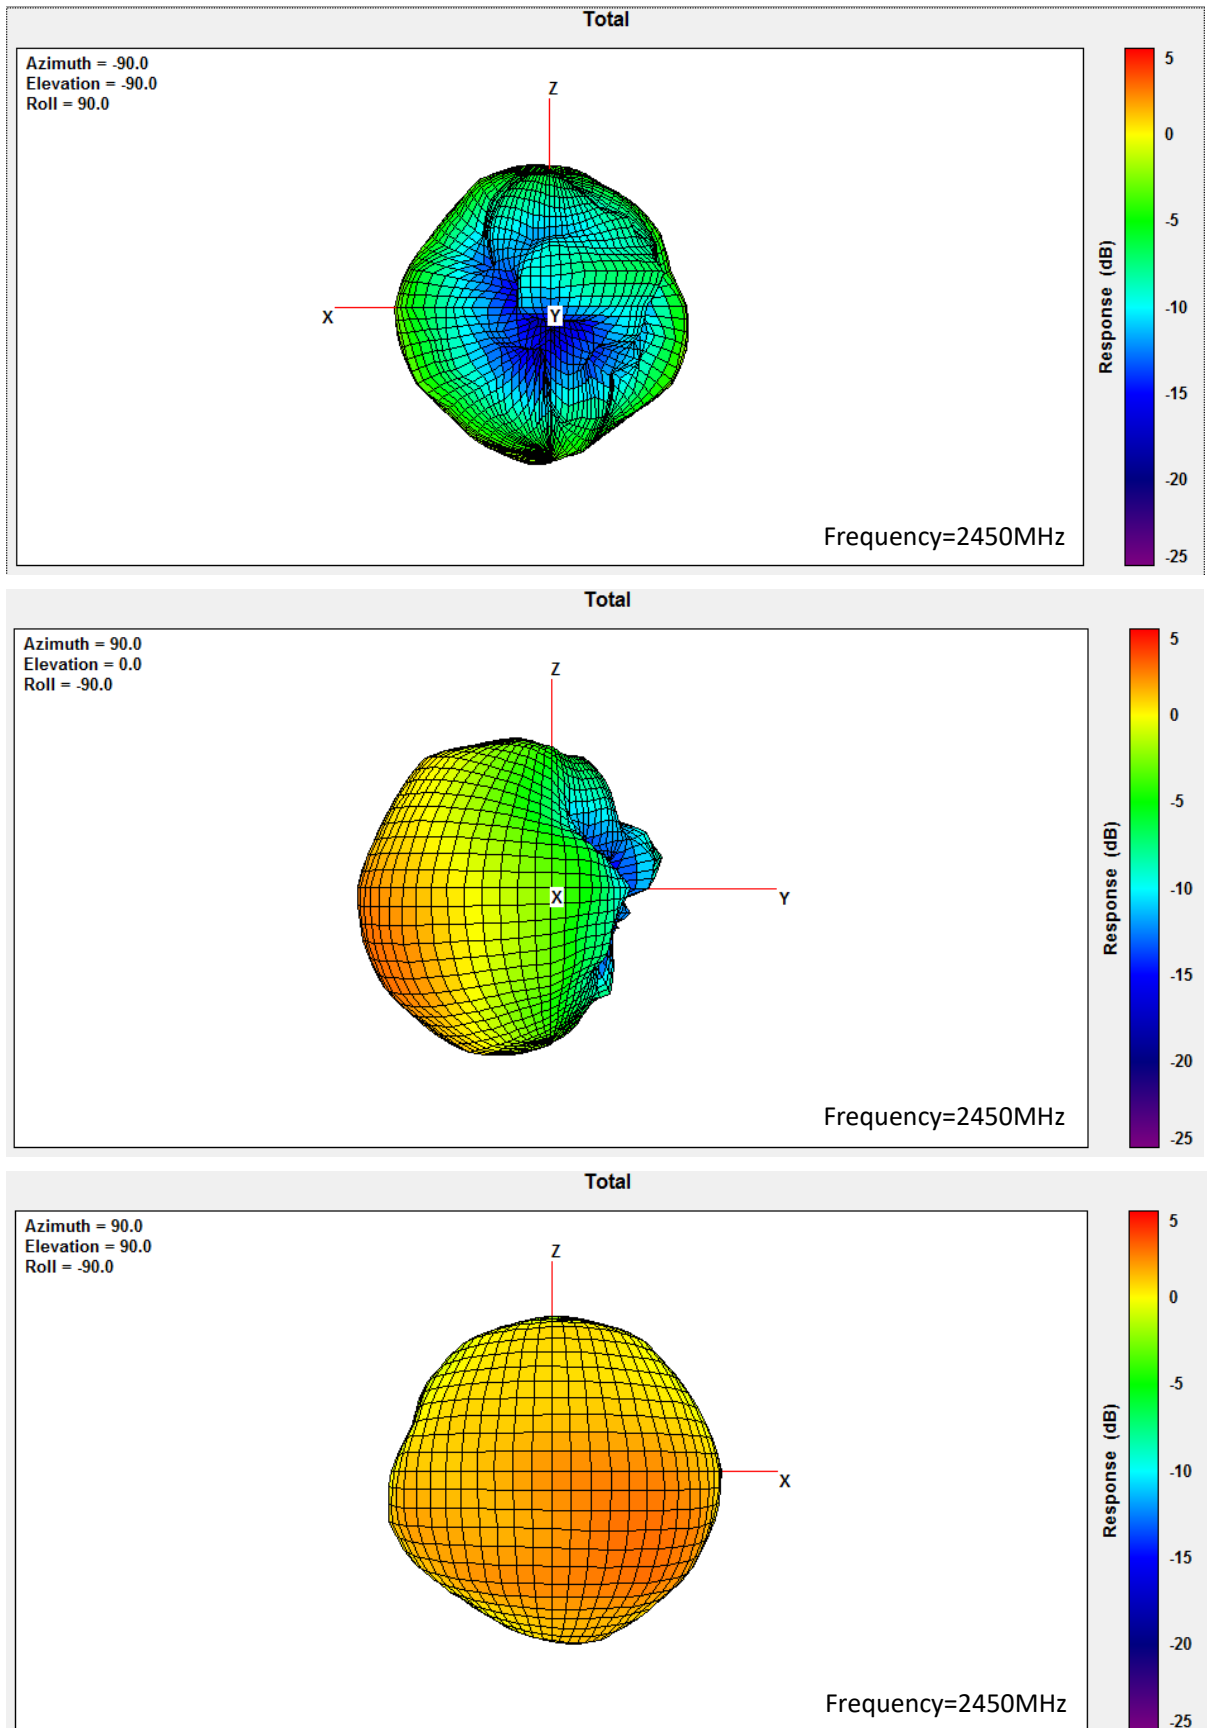

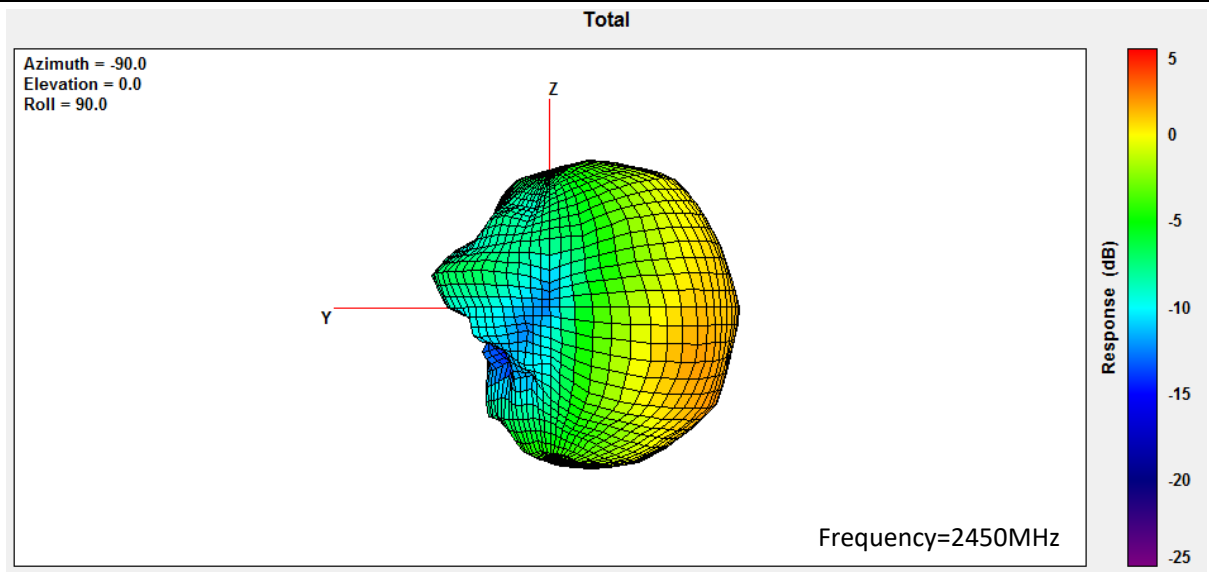


3.4 Passive pattern

3.4.1 VSWR

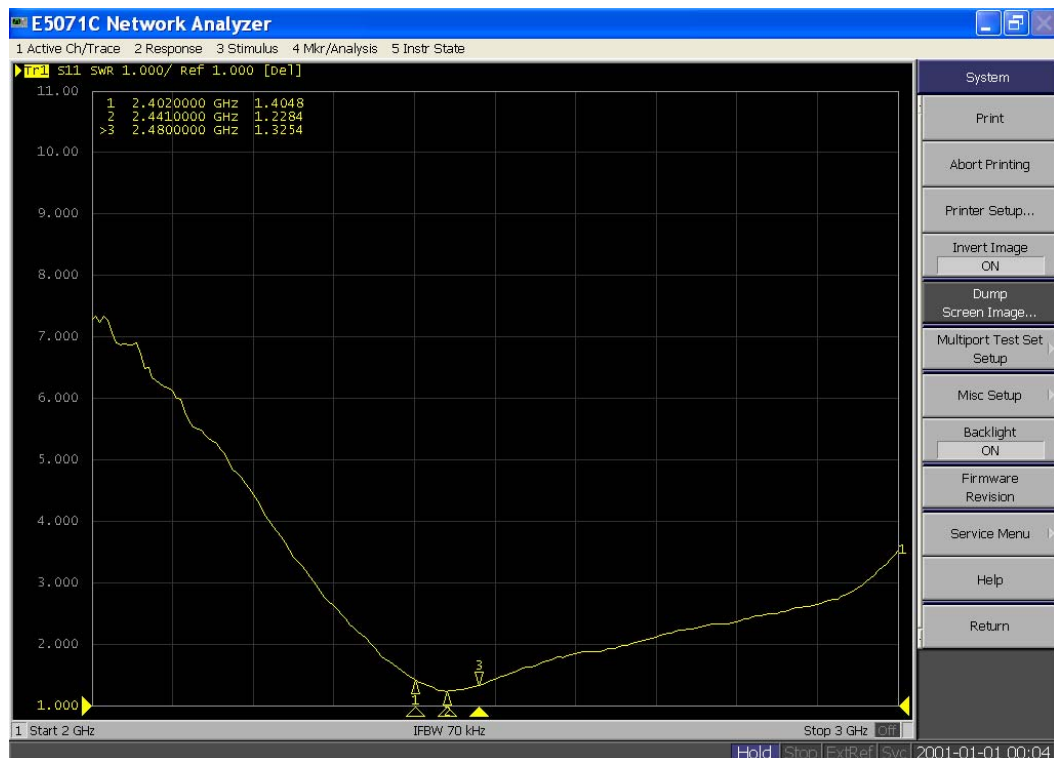




3.4.2 Return loss

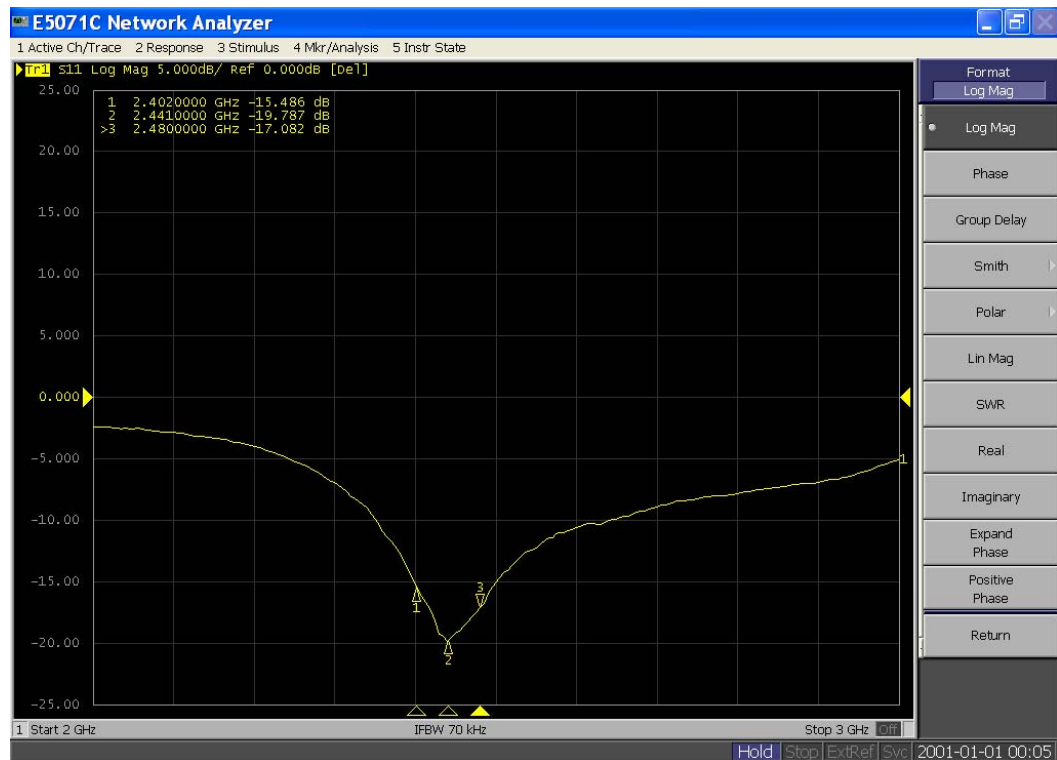

3.4.3 Impedance

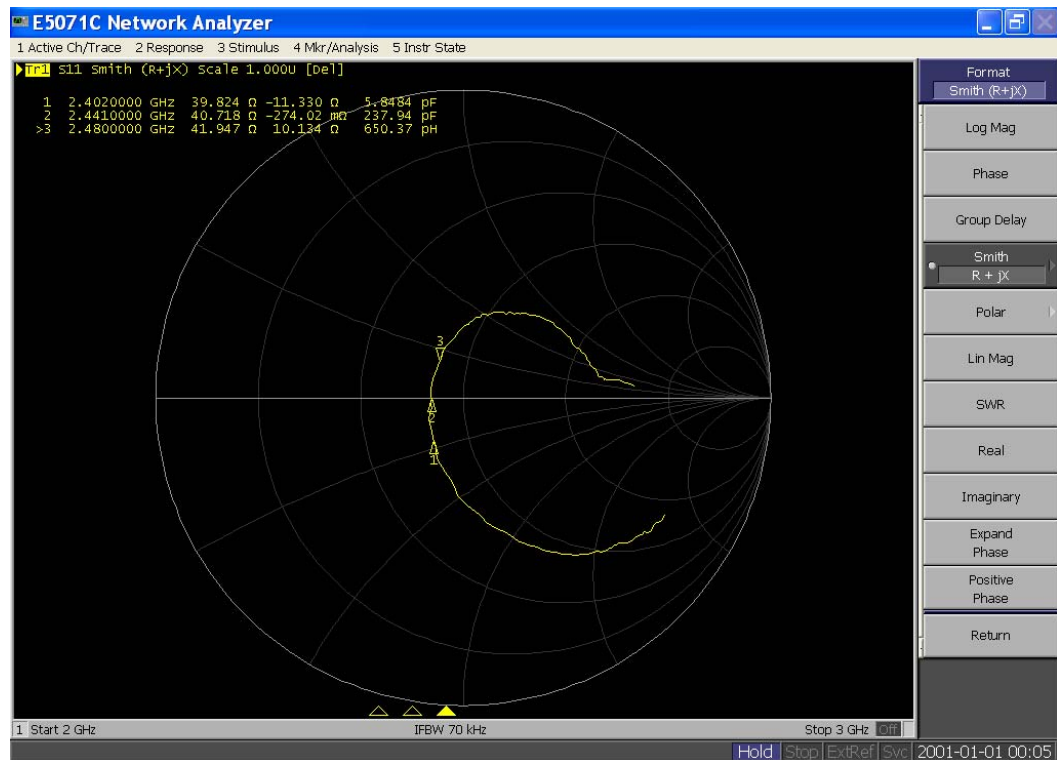



4.APPENDIX A THE EUT AND TEST CONFIGURATION

