



RF Exposure Report

For

Applicant Name: Shenzhen Torras Technology Co., Ltd.
Address: RM1215, BLK C, Zhantao Technology BLDG, Minzhi Avenue,
Minzhi ST, Longhua DIST, Shenzhen, China
EUT Name: Power Bank
Brand Name: TORRAS
Model Number: PB4A

Issued By

Company Name: BTF Testing Lab (Shenzhen) Co., Ltd.
Address: F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park,
Tantou Community, Songgang Street, Bao'an District, Shenzhen,
China

Report Number: BTF240531R00602
Test Standards: 47 CFR Part 1 Subpart I Section 1.1310
FCC ID: 2AN4Y-PB4A
Test Conclusion: Pass
Test Date: 2024-06-01 to 2024-06-21
Date of Issue: 2024-06-21

Prepared By:


Aria Zhang

Date:

Aria Zhang / Project Engineer
2024-06-21

Approved By:

Ryan.CJ



Date:

Ryan.CJ / EMC Manager
2024-06-21

Note: All the test results in this report only related to the testing samples. Which can be duplicated completely for the legal use with approval of applicant; it shall not be reproduced except in full without the written approval of BTF Testing Lab (Shenzhen) Co., Ltd., All the objections should be raised within thirty days from the date of issue. To validate the report, you can contact us.

Revision History		
Version	Issue Date	Revisions Content
R_V0	2024-06-21	Original
Note:		Once the revision has been made, then previous versions reports are invalid.

Table of Contents

1. Introduction	4
1.1 Identification of Testing Laboratory	4
1.2 Identification of the Responsible Testing Location	4
1.3 Laboratory Condition	4
1.4 Announcement	4
2. Product Information	5
2.1 Application Information	5
2.2 Manufacturer Information	5
2.3 Factory Information	5
2.4 General Description of Equipment under Test (EUT)	5
3. Test Requirement	6
3.1 Assessment Result	8
3.2 Test Set-up Photo	14

1. Introduction

1.1 Identification of Testing Laboratory

Company Name:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Phone Number:	+86-0755-23146130
Fax Number:	+86-0755-23146130

1.2 Identification of the Responsible Testing Location

Test Location:	BTF Testing Lab (Shenzhen) Co., Ltd.
Address:	F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
Description:	All measurement facilities used to collect the measurement data are located at F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street, Bao'an District, Shenzhen, China
FCC Registration Number:	518915
Designation Number:	CN1330

1.3 Laboratory Condition

Ambient Temperature:	20°C to 25°C
Ambient Relative Humidity:	45% to 55%
Ambient Pressure:	100 kPa to 102 kPa

1.4 Announcement

- (1) The test report reference to the report template version v0.
- (2) The test report is invalid if not marked with the signatures of the persons responsible for preparing, reviewing and approving the test report.
- (3) The test report is invalid if there is any evidence and/or falsification.
- (4) This document may not be altered or revised in any way unless done so by BTF and all revisions are duly noted in the revisions section.
- (5) Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
- (6) The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.

2. Product Information

2.1 Application Information

Company Name:	Shenzhen Torras Technology Co., Ltd.
Address:	RM1215, BLK C, Zhantao Technology BLDG, Minzhi Avenue, Minzhi ST, Longhua DIST, Shenzhen, China

2.2 Manufacturer Information

Company Name:	Shenzhen Torras Technology Co., Ltd.
Address:	RM1215, BLK C, Zhantao Technology BLDG, Minzhi Avenue, Minzhi ST, Longhua DIST, Shenzhen, China

2.3 Factory Information

Company Name:	Shenzhen Torras Technology Co., Ltd.
Address:	RM1215, BLK C, Zhantao Technology BLDG, Minzhi Avenue, Minzhi ST, Longhua DIST, Shenzhen, China

2.4 General Description of Equipment under Test (EUT)

EUT Name	Power Bank
Under Test Model Name	PB4A

3. Test Requirement

KDB 680106 D01 RF Exposure Wireless Charging App v03

Human exposure to RF Low frequency emissions from portable devices (47 CFR § 2.1093) may be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and/or power density.

According to the item 5.2 of KDB 680106 D01v03:

TCB Workshop and combine the actual situation of the EUT, For the portable wireless charger, RF exposure evaluation should be made from all sides(six sides) of EUT, with the 0cm to 20cm measured from the center of the probe to the edge of the EUT, in 2cm minimum increment.

E and H field strength measurements or numerical modelling may be used to demonstrate compliance.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposure				
0.3-3.0	614	1.63	*100	6
3.0-30	1842/f	4.89/f	*900/f ²	6
30-300	61.4	0.163	1.0	6
300-1,500			f/300	6
1,500-100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*100	30
1.34-30	824/f	2.19/f	*180/f ²	30
30-300	27.5	0.073	0.2	30
300-1,500			f/1500	30
1,500-100,000			1.0	30


f = frequency in MHz * = Plane-wave equivalent power density

Test Equipment List

Test Equipment	Manufacturer	Model No.	Serial No.	Demensions	Last Cal. (mm-dd-yy)	Next Cal. (mm-dd-yy)
Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX11001	92*92*109mm	03-27-2024	03-26-2025

Test Mode

Test mode	Description
ANT1	Mode 1: AC/DC Adapter + EUT + Wireless load (Full Load)
	Mode 2: AC/DC Adapter + EUT + Wireless load (Half Load)
	Mode 3: AC/DC Adapter + EUT + Wireless load (Null Load)
	Mode 4: EUT + Wireless load (Full Load)
	Mode 5: EUT + Wireless load (Half Load)
	Mode 6: EUT + Wireless load (Null Load)

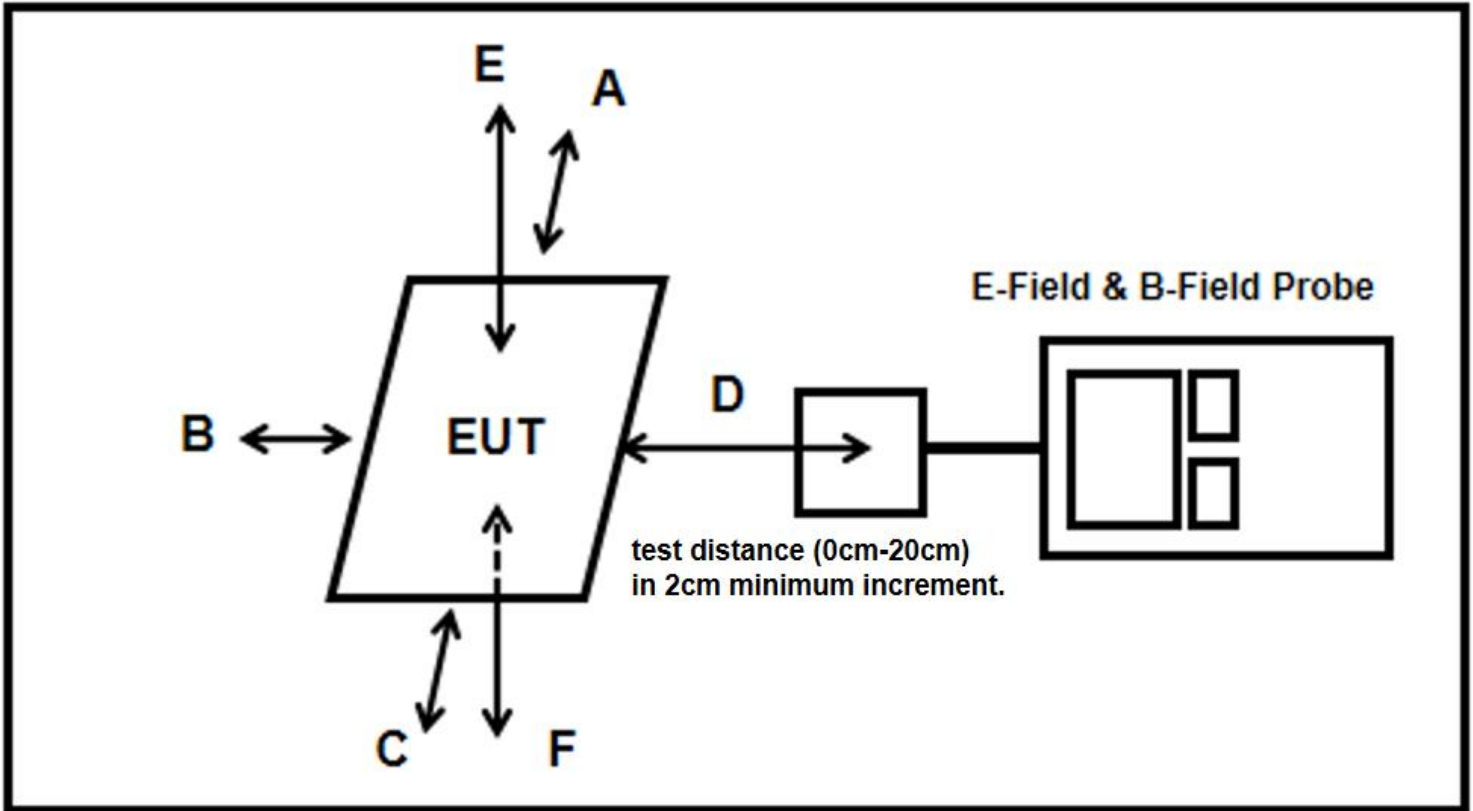Test Setup

Note: Measurements should be made from all sides and the top of the primary/client pair, the test distance of A, B, C, D, E, F side is 0cm to 20cm.

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- 3) The EUT was measured according to the dictates of KDB 680106 D01 v03.

3.1 Assessment Result

Note: All the mode have been tested, and only the worst case of mode are in the report.

0cm

Note: The dimensions of the probe is 92*92*109mm and The sensitive elements are located approximately 8 mm below the external surface.

We tested the values for distances of 2 cm and 4 cm, and we assessed that the attenuation from 4 cm to 2 cm was the same as the attenuation from 2 cm to 0 cm.

Measured Value (0cm)= Measured Value (2cm)+ (Measured Value (2cm)- Measured Value (4cm))

Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	0	0.4499	1.63
Bottom	0	0.1849	1.63
Front	0	0.2141	1.63
Rear	0	0.9420	1.63
Left	0	0.2282	1.63
Right	0	0.2585	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	0	9.1769	614
Bottom	0	13.8122	614
Front	0	5.9135	614
Rear	0	22.1024	614
Left	0	10.3766	614
Right	0	25.9459	614

2cm

Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	2	0.3272	1.63
Bottom	2	0.3312	1.63
Front	2	0.1492	1.63
Rear	2	0.5992	1.63
Left	2	0.2415	1.63
Right	2	0.2238	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	2	5.7693	614
Bottom	2	7.9907	614
Front	2	4.2516	614

Rear	2	12.2010	614
Left	2	7.2907	614
Right	2	15.8920	614

4cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	4	0.2045	1.63
Bottom	4	0.4775	1.63
Front	4	0.0843	1.63
Rear	4	0.2564	1.63
Left	4	0.2548	1.63
Right	4	0.1891	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	4	2.3617	614
Bottom	4	2.1692	614
Front	4	2.5897	614
Rear	4	2.2996	614
Left	4	4.2048	614
Right	4	5.8381	614

6cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	6	0.1183	1.63
Bottom	6	0.2050	1.63
Front	6	0.0474	1.63
Rear	6	0.0442	1.63
Left	6	0.1520	1.63
Right	6	0.1008	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	6	0.6368	614
Bottom	6	0.9471	614
Front	6	1.5198	614
Rear	6	3.3143	614
Left	6	2.5274	614
Right	6	3.3554	614

8cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	8	0.1024	1.63
Bottom	8	0.1996	1.63
Front	8	0.0421	1.63
Rear	8	0.0420	1.63
Left	8	0.1495	1.63
Right	8	0.1000	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	8	0.4698	614
Bottom	8	0.8214	614
Front	8	1.2148	614
Rear	8	3.0124	614
Left	8	2.0574	614
Right	8	3.0258	614

10cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	10	0.0968	1.63
Bottom	10	0.1657	1.63
Front	10	0.0369	1.63
Rear	10	0.0387	1.63
Left	10	0.1296	1.63
Right	10	0.0891	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	10	0.3659	614
Bottom	10	0.6984	614
Front	10	1.0347	614
Rear	10	2.6987	614
Left	10	1.9965	614
Right	10	2.8854	614

12cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	12	0.0865	1.63
Bottom	12	0.0143	1.63
Front	12	0.0314	1.63
Rear	12	0.0302	1.63
Left	12	0.1021	1.63
Right	12	0.0527	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	12	0.3027	614
Bottom	12	0.5247	614
Front	12	0.9574	614
Rear	12	2.0164	614
Left	12	1.5621	614
Right	12	2.0691	614

14cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	14	0.0637	1.63
Bottom	14	0.0121	1.63
Front	14	0.0284	1.63
Rear	14	0.0276	1.63
Left	14	0.0869	1.63
Right	14	0.0457	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	14	0.2589	614
Bottom	14	0.4217	614
Front	14	0.7542	614
Rear	14	1.5874	614
Left	14	1.2147	614
Right	14	1.8697	614

16cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	16	0.0437	1.63
Bottom	16	0.0104	1.63
Front	16	0.0167	1.63
Rear	16	0.0198	1.63
Left	16	0.0469	1.63
Right	16	0.0327	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	16	0.2145	614
Bottom	16	0.2687	614
Front	16	0.4693	614
Rear	16	1.1374	614
Left	16	0.9967	614
Right	16	1.5247	614

18cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	18	0.0254	1.63
Bottom	18	0.0095	1.63
Front	18	0.0121	1.63
Rear	18	0.0123	1.63
Left	18	0.0268	1.63
Right	18	0.0196	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	18	0.1567	614
Bottom	18	0.1867	614
Front	18	0.2698	614
Rear	18	0.9987	614
Left	18	0.5874	614
Right	18	1.0210	614

20cm
Magnetic Field Strength Measurement

Test Position	Distance (cm)	Measured Value(A/m)	Limit(A/m)
Top	20	0.0221	1.63
Bottom	20	0.0236	1.63
Front	20	0.0200	1.63
Rear	20	0.0200	1.63
Left	20	0.0236	1.63
Right	20	0.0200	1.63

Test Position	Distance (cm)	Measured Value(V/m)	Limit(V/m)
Top	20	0.1855	614
Bottom	20	0.2426	614
Front	20	0.0480	614
Rear	20	0.3546	614
Left	20	0.4029	614
Right	20	0.4765	614

3.2 Test Set-up Photo









Test Report Number: BTF240531R00602



BTF Testing Lab (Shenzhen) Co., Ltd.

F101, 201 and 301, Building 1, Block 2, Tantou Industrial Park, Tantou Community, Songgang Street,
Bao'an District, Shenzhen, China

www.btf-lab.com

--END OF REPORT--