



BUREAU  
VERITAS Test Report No.: RF180402W006-7



Certificate # 3939.01

# FCC TEST REPORT

## (Part 15, Subpart C)

Applicant:	Mundo Reader S.L.
Address:	Calle Sofía 10, Parque Industrial y Tecnológico Európolis 28232 Las Rozas - Madrid SPAIN

Manufacturer or Supplier	Mundo Reader S.L.
Address	Calle Sofía 10, Parque Industrial y Tecnológico Európolis 28232 Las Rozas - Madrid SPAIN
Product	Smartphone
Brand Name	BQ
Model Name	Aquaris X2
FCC ID	2AN87AQUARISX2
Date of tests	Aug. 10, 2018 ~ Sep. 11, 2018

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.249  
 ANSI C63.10-2013

**CONCLUSION: The submitted sample was found to COMPLY with the test requirement**

Prepared by Roger Li Engineer / Mobile Department	Approved by Sam Tung Manager / Mobile Department

Date: Sep. 12, 2018

Date: Sep. 12, 2018

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



## TABLE OF CONTENTS

<b>RELEASE CONTROL RECORD .....</b>	<b>4</b>
<b>1 SUMMARY OF TEST RESULTS.....</b>	<b>5</b>
1.1 MEASUREMENT UNCERTAINTY .....	5
<b>2 GENERAL INFORMATION .....</b>	<b>6</b>
2.1 GENERAL DESCRIPTION OF EUT .....	6
2.2 DESCRIPTION OF TEST MODES .....	7
2.2.1 CONFIGURATION OF SYSTEM UNDER TEST .....	8
2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
2.3 DUTY CYCLE OF TEST SIGNAL .....	10
2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	11
2.5 DESCRIPTION OF SUPPORT UNITS .....	11
<b>3 TEST TYPES AND RESULTS.....</b>	<b>12</b>
3.1 CONDUCTED EMISSION MEASUREMENT .....	12
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	12
3.1.2 TEST INSTRUMENTS.....	12
3.1.3 TEST PROCEDURES .....	13
3.1.4 DEVIATION FROM TEST STANDARD .....	13
3.1.5 TEST SETUP.....	14
3.1.6 EUT OPERATING CONDITIONS .....	14
3.1.7 TEST RESULTS .....	15
3.2 20DB AND 99% BANDWIDTH MEASUREMENT.....	17
3.2.1 LIMITS .....	17
3.2.2 TEST INSTRUMENTS.....	17
3.2.3 TEST PROCEDURE.....	17
3.2.4 DEVIATION FROM TEST STANDARD .....	18
3.2.5 TEST SETUP.....	18
3.2.6 EUT OPERATING CONDITIONS .....	18
3.2.7 TEST RESULTS .....	19
3.3 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND RADIATED SPURIOUS EMISSIONS	21
3.3.1 LIMITS .....	21
3.3.2 TEST INSTRUMENTS.....	22
3.3.3 TEST PROCEDURES .....	23
3.3.4 DEVIATION FROM TEST STANDARD .....	23



**BUREAU  
VERITAS** **Test Report No.: RF180402W006-7**

3.3.5	TEST SETUP.....	24
3.3.6	EUT OPERATING CONDITIONS .....	25
3.3.7	TEST RESULTS .....	26
<b>4</b>	<b>PHOTOGRAPHS OF THE TEST CONFIGURATION.....</b>	<b>31</b>
<b>5</b>	<b>APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB .....</b>	<b>32</b>



**BUREAU  
VERITAS** Test Report No.: RF180402W006-7

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF180402W006-7	Original release	Sep. 12, 2018



BUREAU  
VERITAS Test Report No.: RF180402W006-7

## 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.18dB at 4.548000MHz.
2.1049	20dB &99% Occupied Bandwidth	PASS	Meet the requirement of limit
15.249(a)	Field Strength of Fundamental	PASS	Meet the requirement of limit.
15.249(a)(d)	Radiated Spurious Emissions	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in ETSI TR 100 028-2001:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.68dB
	30MHz ~ 1GHz	3.26dB
	1GHz ~ 18GHz	4.48dB
	18GHz ~ 40GHz	4.12dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k = 2$ .



## 2 GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Smartphone
BRAND NAME	BQ
MODEL NAME	Aquaris X2
NOMINAL VOLTAGE	5.0Vdc (adapter or host equipment) 3.85V (Li-ion, battery)
MODULATION TECHNOLOGY	GFSK
TRANSMISSION RATE	0.5 Mbps
OPERATING FREQUENCY	2402-2480MHz
MAX. FIELD STRENGTH(PEAK)	97.51dBuV/m
MAX. FIELD STRENGTH(AVERAGE)	75.31dBuV/m
ANTENNA TYPE	LDS Antenna with -3.9dBi gain
HW VERSION	LLDM0893-3 VER:B3
SW VERSION	1.3.1_20180904-0601
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	USB cable: non-shielded, detachable, 1.0m

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. The EUT incorporates a SISO function. Physically, the EUT provides one transmitter and one receiver.

MODULATION MODE	TX/RX FUNCTION
ANT+	1TX /1RX

3. The EUT matched the following USB Cable:

USB CABLE	
BRAND:	bq
MODEL:	HY-005015
SIGNAL LINE:	1.0 METER

4. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.



## 2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



## 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

## 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on Y axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	-

Where

**RE<1G:** Radiated Emission below 1GHz

**RE≥1G:** Radiated Emission above 1GHz

**PLC:** Power Line Conducted Emission

**APCM:** Antenna Port Conducted Measurement

**NOTE:** No need to concern of Conducted Emission due to the EUT is powered by battery.

### RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
TX	0 to 78	79	ANT+	GFSK	0.5

### RADIATED EMISSION TEST (ABOVE 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
TX	0 to 78	0,39, 78	ANT+	GFSK	0.5



#### **FIELD STRENGTH OF FUNDAMENTAL EMISSIONS**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
TX	0 to 78	0,39, 78	ANT+	GFSK	0.5

#### **POWER LINE CONDUCTED EMISSION TEST:**

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
TX	0 to 78	0,39, 78	ANT+	GFSK	0.5

#### **ANTENNA PORT CONDUCTED MEASUREMENT:**

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
TX	0 to 78	0,39, 78	ANT+	GFSK	0.5


#### **TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	22deg. C, 54%RH	DC 5V from adaptor	Vincent
RE≥1G	22deg. C, 54%RH	DC 5V from adaptor	Vincent
FSFE	22deg. C, 54%RH	DC 5V from adaptor	Vincent
PLC	24deg. C, 55%RH	DC 5V from adaptor	John Wen
APCM	25deg. C, 60%RH	3.85Vdc from battery	Wenliang Wu



## 2.3 Duty Cycle of Test Signal

Duty cycle =  $0.156 / 1.99 = 0.078 < 98\%$ , Duty factor =  $10 * \log(1/0.948) = 11.079$

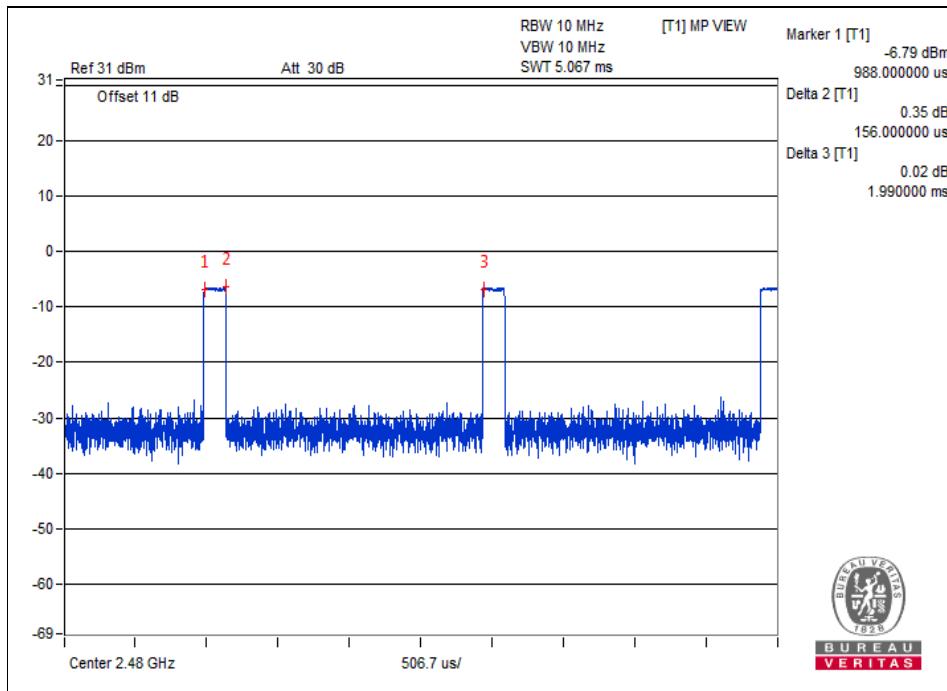



## 2.4 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart C, Section 15.249**

**ANSI C63.10-2013**

Note:

1. All test items have been performed and recorded as per the above standards.
2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

## 2.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.5m



### 3 TEST TYPES AND RESULTS

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

##### 3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR3	101900	Mar. 15,18	Mar. 14,19
EMC32 test software	Rohde&Schwarz	EMC32	NA	NA	NA
LISN network	Rohde&Schwarz	ENV216	101922	Sep. 18,17	Sep. 17,18

**NOTE:**

1. The test was performed in CE shielded room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



### 3.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


**NOTE:** All modes of operation were investigated and the worst-case emissions are reported.

### 3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



### 3.1.5 TEST SETUP

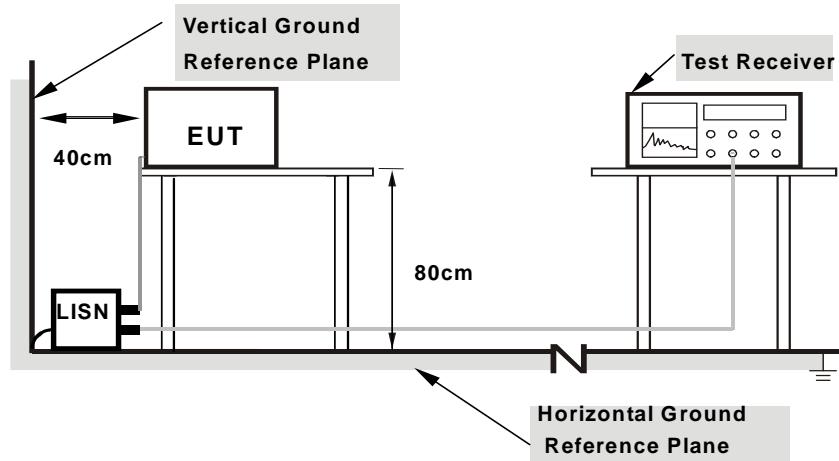

**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



### 3.1.7 TEST RESULTS

#### CONDUCTED WORST-CASE DATA:

Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/08/20

Frequency (MHz)	QuasiPeak (dB <sub>AV</sub> )	CAverage (dB <sub>AV</sub> )	Limit (dB <sub>AV</sub> )	Margin (dB)	Line	Filter	Corr. (dB)
0.182000	---	29.31	54.39	-25.08	L1	ON	9.7
0.182000	47.51	---	64.39	-16.88	L1	ON	9.7
0.276000	---	13.70	50.94	-37.24	L1	ON	9.7
0.276000	35.75	---	60.94	-25.19	L1	ON	9.7
1.016000	---	14.73	46.00	-31.27	L1	ON	9.7
1.016000	28.10	---	56.00	-27.90	L1	ON	9.7
1.920000	---	20.08	46.00	-25.92	L1	ON	9.7
1.920000	32.69	---	56.00	-23.31	L1	ON	9.7
3.616000	---	25.83	46.00	-20.17	L1	ON	9.7
3.616000	39.66	---	56.00	-16.34	L1	ON	9.7
4.548000	---	32.26	46.00	-13.74	L1	ON	9.7
<b>4.548000</b>	<b>42.82</b>	---	<b>56.00</b>	<b>-13.18</b>	<b>L1</b>	<b>ON</b>	<b>9.7</b>

**REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.

3. The emission levels of other frequencies were very low against the limit.

4. Margin value = Emission level - Limit value

5. Correction factor = Insertion loss + Cable loss

6. Emission Level = Correction Factor + Reading Value.

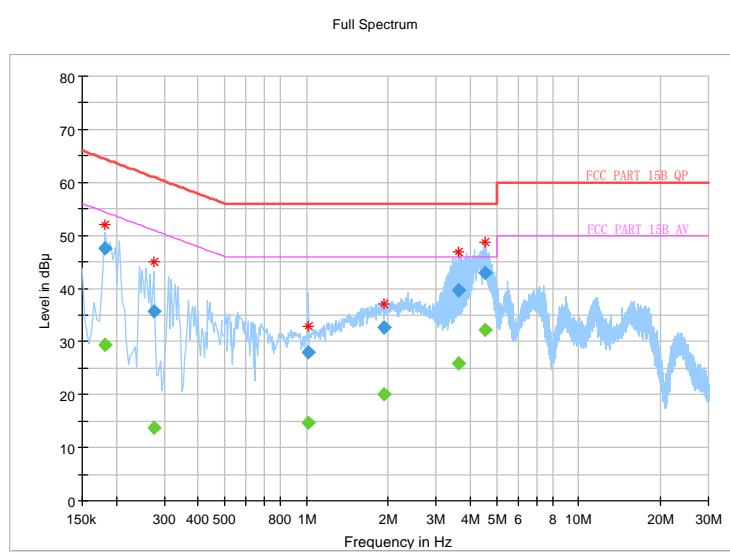




Frequency Range	150KHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9 kHz
Input Power	120Vac, 60Hz	Environmental Conditions	24deg. C, 55RH
Tested By	John Wen	TEST DATE	2018/08/20

Frequency (MHz)	QuasiPeak (dB $\mu$ V)	CAverage (dB $\mu$ V)	Limit (dB $\mu$ V)	Margin (dB)	Line	Filter	Corr. (dB)
0.194000	---	34.32	53.86	-19.54	N	ON	10.0
0.194000	48.31	---	63.86	-15.55	N	ON	10.0
0.244000	---	26.49	51.96	-25.47	N	ON	9.9
0.244000	43.10	---	61.96	-18.86	N	ON	9.9
0.496000	---	23.65	46.07	-22.42	N	ON	10.1
0.496000	38.93	---	56.07	-17.14	N	ON	10.1
1.580000	---	23.68	46.00	-22.32	N	ON	9.9
1.580000	37.26	---	56.00	-18.74	N	ON	9.9
3.636000	---	25.22	46.00	-20.78	N	ON	9.8
3.636000	38.79	---	56.00	-17.21	N	ON	9.8
4.416000	---	30.80	46.00	-15.20	N	ON	9.8
4.416000	40.87	---	56.00	-15.13	N	ON	9.8

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

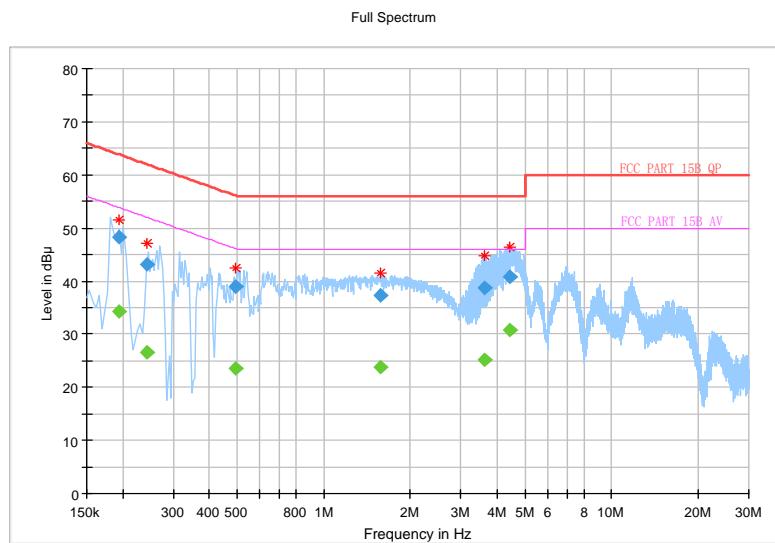



### **3.2 20DB AND 99% BANDWIDTH MEASUREMENT**

#### **3.2.1 LIMITS**

Intentional radiators must be designed to ensure that the 20dB bandwidth of the emission in the specific band

#### **3.2.2 TEST INSTRUMENTS**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Cal.</b>	<b>Next Cal.</b>
Power Meter	ANRITSU	ML2495A	1506002	Mar. 02,18	Mar. 01,19
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Mar. 16,18	Mar. 15,19
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	Mar. 16,18	Mar. 15,19
Power Sensor	ANRITSU	MA2411B	1339352	Mar. 16,18	Mar. 15,19

**NOTE:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

#### **3.2.3 TEST PROCEDURE**

1. The transmitter output port was connected to the spectrum analyzer.
2. Measured the spectrum width with highest power setting.




**BUREAU  
VERITAS** Test Report No.: RF180402W006-7

### 3.2.4 DEVIATION FROM TEST STANDARD

No deviation.

### 3.2.5 TEST SETUP

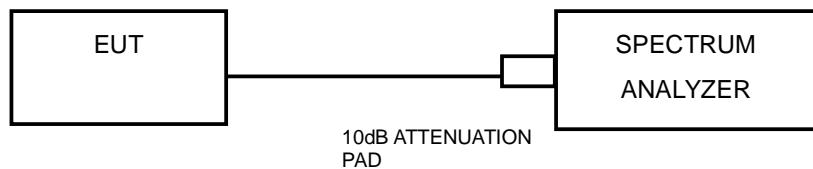

### 3.2.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



### 3.2.7 TEST RESULTS

#### BT-LE (GFSK)

CHANNEL	CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	99% BANDWIDTH (MHz)	PASS / FAIL
0	2402	1.04	1.09	PASS
39	2441	1.04	1.09	PASS
78	2480	1.05	1.09	PASS





BUREAU  
VERITAS

Test Report No.: RF180402W006-7





### 3.3 FIELD STRENGTH OF FUNDAMENTAL EMISSIONS AND RADIATED SPURIOUS EMISSIONS

#### 3.3.1 LIMITS

The field strength measured at 3 meters shall not exceed the limits in the following table.

FUNDAMENTAL FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	
	FUNDAMENTAL	HARMONICS
902~928	50	0.5
2400~2483.5	50	0.5
5725~5875	50	0.5

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

#### NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB<sub>uV</sub>/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



### 3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	Euroshieldpn-CT0001143-1216	Apr. 21,18	Apr. 20,19
Bilog Antenna	ETS-LINDGREN	3143B	00161965	Nov. 26,16	Nov. 25,18
Horn Antenna	ETS-LINDGREN	3117	00168728	Nov. 26,16	Nov. 25,18
Loop antenna	Daze	ZN30900A	0708	Nov. 20,17	Nov. 19,18
Horn Antenna (18GHz-40GHz)	N/A	QWH-SL-18-40-K-SG/QMS-003 61	15433	Dec. 16,16	Dec. 15,18
Test Software	E3	V 9.160323	N/A	N/A	N/A
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SMA	1505	Jul. 09,18	Jul. 08,19
MXE EMI Receiver	KEYSIGHT	N9038A-544	MY54450026	Mar. 16,18	Mar. 15,19
Signal Pre-Amplifier	EMSI	EMC 9135	980249	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 012645B	980257	Jul. 09,18	Jul. 08,19
Signal Pre-Amplifier	EMSI	EMC 184045B	980259	Jul. 09,18	Jul. 08,19

**NOTE:** 1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRRG/CHINA and NIM/CHINA.  
2. The test was performed in 3m Chamber.  
3. The FCC Site Registration No. is 525120.



### 3.3.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

**Note:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle ≥ 98%) for Average detection (AV) at frequency above 1GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


### 3.3.4 DEVIATION FROM TEST STANDARD

No deviation




### 3.3.5 TEST SETUP

#### < Frequency Range below 30MHz >

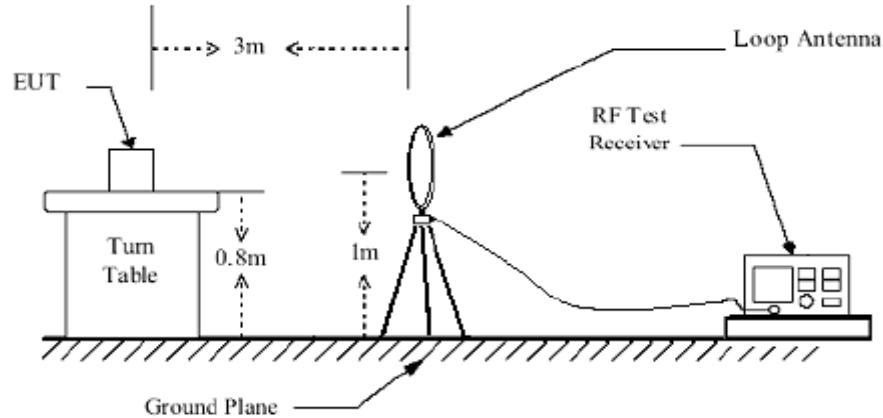


#### < Frequency Range 30MHz~1GHz >

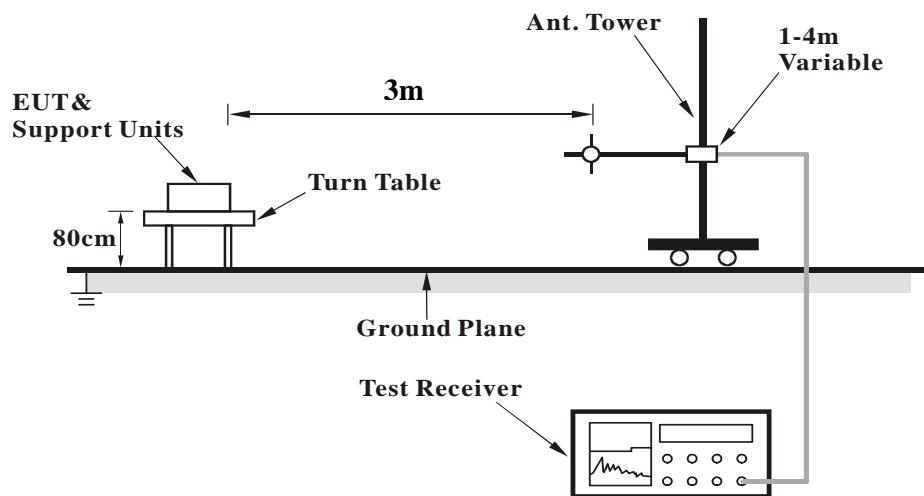



<Frequency Range above 1GHz>

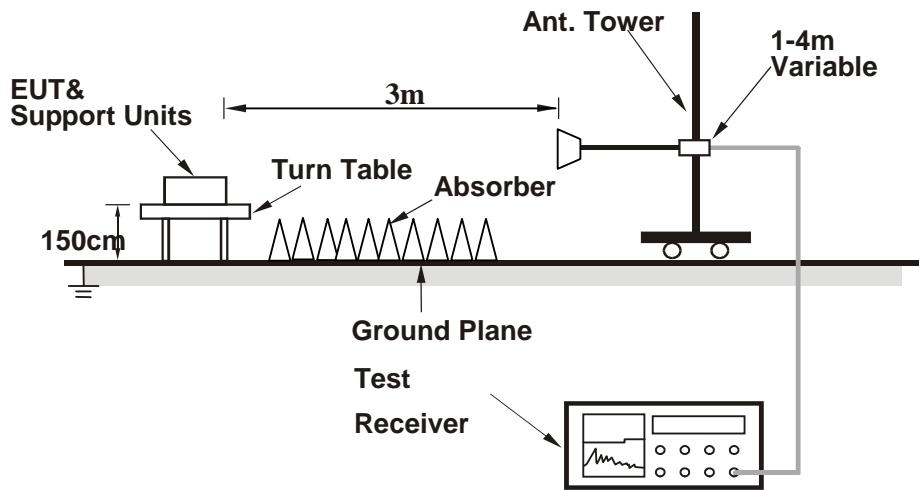

For the actual test configuration, please refer to the attached file (Test Setup Photo).

### 3.3.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



### 3.3.7 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA:

**9 KHz – 30 MHz data:** the amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.


#### 30 MHz – 1GHz data:

CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
108.56	26.72	54.39	43.5	-16.78	7.7	1.6	36.97	200	0	QP
211.06	30.89	54.59	43.5	-12.61	10.61	2.23	36.54	200	0	QP
315.63	31.55	51.63	46	-14.45	13.66	2.79	36.53	200	0	QP
421.19	38.38	54.48	46	-7.62	17.45	3.22	36.77	200	0	QP
467.88	34.27	49.78	46	-11.73	18.01	3.36	36.88	200	0	QP
603.12	34.46	47.3	46	-11.54	20.39	4.02	37.25	200	0	QP

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

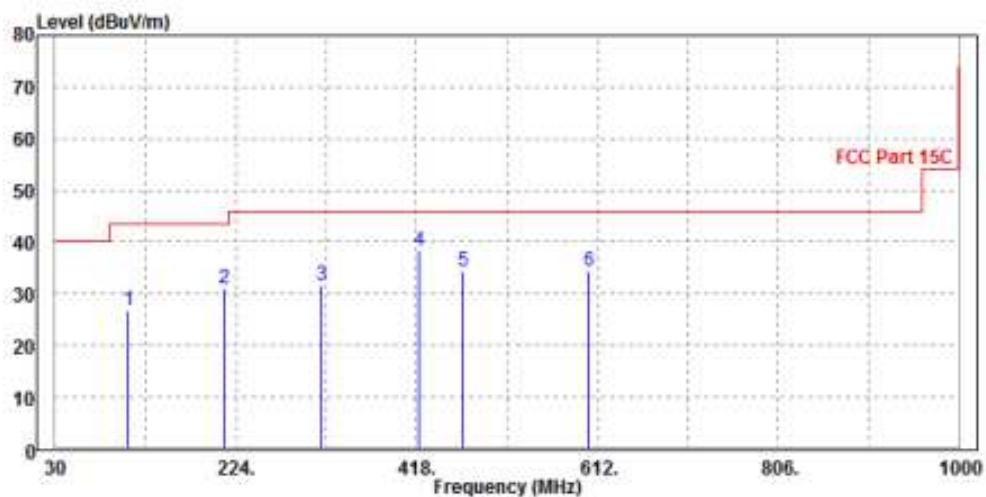




CHANNEL	TX Channel 78	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
78.96	29.97	59.13	40	-10.03	6.63	1.37	37.16	100	0	QP
178.98	33.89	58.61	43.5	-9.61	9.92	2.05	36.69	100	0	QP
245.13	36.14	58.06	46	-9.86	12.18	2.42	36.52	100	0	QP
345.36	32.14	50.91	46	-13.86	14.91	2.92	36.6	100	0	QP
414.11	40.5	56.69	46	-5.5	17.37	3.19	36.75	100	0	QP
565.74	34.33	48.01	46	-11.67	19.65	3.82	37.15	100	0	QP

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

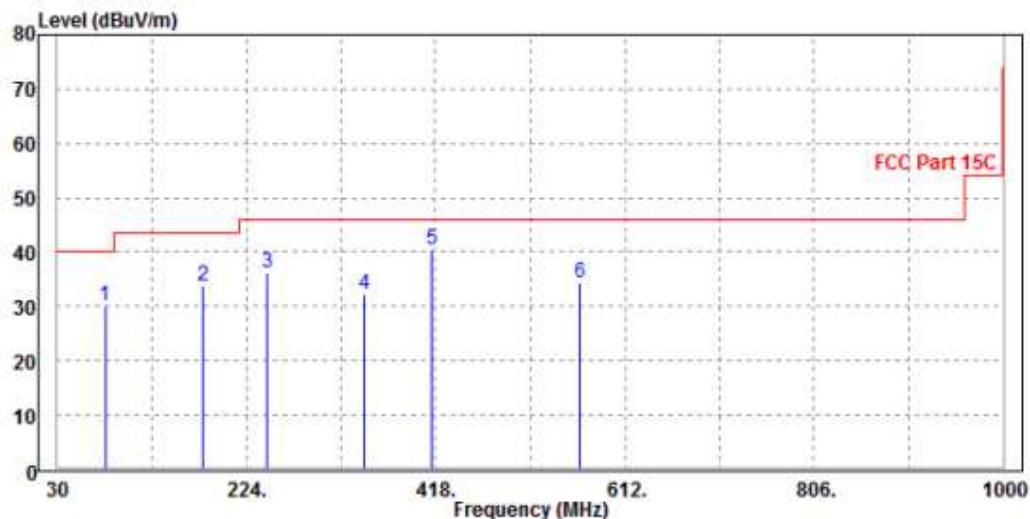



**ABOVE 1GHz TEST DATA:**

**Note:** For higher frequency, the emission is too low to be detected.

CHANNEL	TX Channel 0		DETECTOR FUNCTION		Peak (PK)		
FREQUENCY RANGE	1GHz ~ 25GHz				Average (AV)		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	48.15	53.02	54	-5.85	32.88	8.17	45.92	110	25	Average
2400	54.59	59.46	74	-19.41	32.88	8.17	45.92	110	25	Peak
2402	73.71	78.58	94	-20.27	32.88	8.17	45.92	110	25	Average
2402	95.91	100.78	114	-18.09	32.88	8.17	45.92	110	25	Peak
2483.5	45.39	49.98	54	-8.61	32.98	8.32	45.89	110	25	Average
2483.5	56.89	61.48	74	-17.11	32.98	8.32	45.89	110	25	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	45.28	50.15	54	-8.72	32.88	8.17	45.92	106	0	Average
2400	56.98	61.85	74	-17.02	32.88	8.17	45.92	106	0	Peak
2402	65.48	70.35	94	-28.52	32.88	8.17	45.92	106	0	Average
2402	86.76	91.63	114	-25.24	32.88	8.17	45.92	106	0	Peak
2483.5	45.23	49.82	54	-8.77	32.98	8.32	45.89	106	0	Average
2483.5	57.27	61.86	74	-16.73	32.98	8.32	45.89	106	0	Peak

**REMARKS:**

1. Emission Level = Read Level + Antenna Factor + Cable Loss - Preamp Factor  
Margin value = Emission level - Limit value.
2. 2402MHz: Fundamental frequency.



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	51.46	56.33	54	-2.54	32.88	8.17	45.92	109	116	Average
2400	55	59.87	74	-19	32.88	8.17	45.92	109	116	Peak
2441	69.09	73.83	94	-24.91	32.93	8.24	45.91	109	116	Average
2441	90.29	95.03	114	-23.71	32.93	8.24	45.91	109	116	Peak
2483.5	45.44	50.03	54	-8.56	32.98	8.32	45.89	109	116	Average
2483.5	56.87	61.46	74	-17.13	32.98	8.32	45.89	109	116	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	47.64	52.51	54	-6.36	32.88	8.17	45.92	111	113	Average
2400	55.37	60.24	74	-18.63	32.88	8.17	45.92	111	113	Peak
2441	70.4	75.14	94	-23.6	32.93	8.24	45.91	111	113	Average
2441	91.66	96.4	114	-22.34	32.93	8.24	45.91	111	113	Peak
2483.5	45.52	50.11	54	-8.48	32.98	8.32	45.89	111	113	Average
2483.5	57.6	62.19	74	-16.4	32.98	8.32	45.89	111	113	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2441MHz: Fundamental frequency.



CHANNEL	TX Channel 78	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	44.88	49.75	54	-9.12	32.88	8.17	45.92	103	46	Average
2400	54.8	59.67	74	-19.2	32.88	8.17	45.92	103	46	Peak
2480	74.04	78.65	94	-19.96	32.98	8.31	45.9	103	46	Average
2480	97.48	102.09	114	-16.52	32.98	8.31	45.9	103	46	Peak
2483.5	45.25	49.84	54	-8.75	32.98	8.32	45.89	103	46	Average
2483.5	57.05	61.64	74	-16.95	32.98	8.32	45.89	103	46	Peak
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2400	46.67	51.54	54	-7.33	32.88	8.17	45.92	108	42	Average
2400	54.54	59.41	74	-19.46	32.88	8.17	45.92	108	42	Peak
2480	75.31	79.92	94	-18.69	32.98	8.31	45.9	108	42	Average
2480	97.51	102.12	114	-16.49	32.98	8.31	45.9	108	42	Peak
2483.5	44.99	49.58	54	-9.01	32.98	8.32	45.89	108	42	Average
2483.5	56.24	60.83	74	-17.76	32.98	8.32	45.89	108	42	Peak

**REMARKS:**

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor  
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



**BUREAU  
VERITAS** Test Report No.: RF180402W006-7

## 4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU  
VERITAS** Test Report No.: RF180402W006-7

## 5 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---