

TEST REPORT

KOSTEC CO., Ltd. (Annyeong-dong) 26, 28, 30, Seja-ro 406beon-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea Tel : 031-222-4251, Fax : -	Report No.: KST-FCR-240006	
1. Applicant • Name : Umain Inc. • Address : 504, FIFTH FLOOR, 59, ONCHEON-RO, YUSEONG-GU Yuseong-gu, Daejeon, South Korea		
2. Test Item • Product Name: Guardian • Model Name: UM80GA1 • Brand: None • FCC ID: 2AN8QUM80GA1		
3. Manufacturer • Name : UMAIN Inc. • Address : 504, FIFTH FLOOR, 59, ONCHEON-RO, YUSEONG-GU Yuseong-gu, Daejeon, South Korea		
4. Date of Test : 2024. 06. 21. ~ 2024. 06. 21. FCC CFR 47, Part 15. Subpart C-15.247		
5. Test Method Used : 558074 D01 15.247 Meas Guidance v05r02 ANSI C 63.10-2013		
6. Test Result : Compliance		
7. Note: None		
Supplementary Information The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in <u>ANSI C 63.10-2013</u>. We attest to the accuracy of data and all measurements reported herein were performed by KOSTEC Co., Ltd. and were made under Chief Engineer's supervision. We assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.		
The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report is not related to KOLAS accreditation.		
Affirmation	Tested by Name : Choo, Kwang-Yeol (Signature) 	Technical Manager Name : Lee, Mi-Young (Signature) 
2024. 06. 24.		
KOSTEC Co., Ltd.		

Table of Contents

1. GENERAL INFORMATION	3
1.1 Test Facility	3
1.2 Location	3
1.3 Revision History of test report	4
2. EQUIPMENT DESCRIPTION	5
3. SYSTEM CONFIGURATION FOR TEST	6
3.1 Characteristics of equipment	6
3.2 Used peripherals list	6
3.3 Product Modification	6
3.4 Operating Mode	6
3.5 Test Setup of EUT	6
3.6 Parameters of Test Software Setting	7
3.7 Table for Carrier Frequencies	8
3.8 Duty Cycle Of Test signal	8
3.9 Used Test Equipment List	9
4. SUMMARY TEST RESULTS	11
5. MEASUREMENT RESULTS	12
5.1 Spurious RF Radiated emissions	12
5.2 Antenna requirement	28
5.3 AC Power Conducted emissions	29

1. GENERAL INFORMATION

1.1 Test Facility

Test laboratory and address

KOSTEC Co., Ltd.

(Annyeong-dong) 26, 28, 30, Seja-ro 406beon-gil, Hwaseong-si, Gyeonggi-do, Republic of Korea

Telephone Number: 82-31-222-4251

Facsimile Number: -

Registration information

KOLAS No.: KT232


RRA (National Radio Research Agency): KR0041

FCC Designation No.: KR0041

IC Designation No.: KR0041

VCCI Membership No.: 2005

1.2 Location

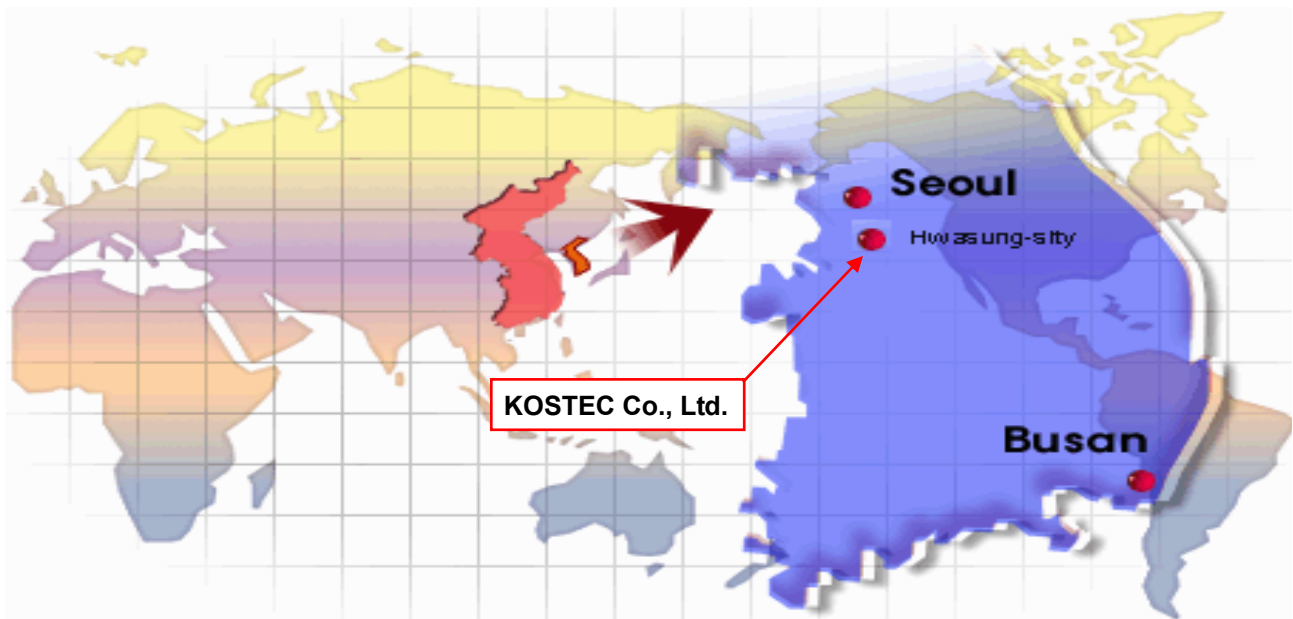

1.3 Revision History of test report

Rev.	Revisions	Effect page	Reviewed	Date
-	Initial issue	All	Mi-Young, Lee	2024. 06. 24.

2. EQUIPMENT DESCRIPTION

The product specification described herein was declared by manufacturer. And refer to user's manual for the details.

Equipment Name	Guardian
Model No	UM80GA1
Family Model No.	UM80GM1
Usage	Harmless UWB Radar Sensor
Serial Number	Proto type
Modulation type	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n(HT20/HT40): OFDM (BPSK / QPSK / 16QAM / 64QAM) BLE: GFSK
Emission Type	802.11b: G1D 802.11g/n(HT20/HT40): D1D BLE: F1D
Maximum output power	802.11b: 26.0 dBm 802.11g/n(HT20): 25.5 dBm 802.11n(HT40): 26.0 dBm BLE: 8.0 dBm
Operated Frequency	802.11b/g/ n(HT20): 2 412 MHz – 2 462 MHz 802.11n(HT40): 2 422 MHz ~ 2 452 MHz BLE: 2 402 MHz ~ 2 480 MHz
Channel Number	802.11b/g/ n(HT20): 11 802.11n(HT40): 7 BLE: 40
Operation temperature	-10 °C ~ 50 °C
Power Source	DC 5.0 V
Antenna Description	Internal PCB antenna, gain : 3.4 dBi
Remark	1. The device was operating at its maximum output power for all measurements. 2. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case (Y) is shown in the report. 3. The above DUT's information was declared by manufacturer. Please refer to the specifications or user manual for more detailed description. 4. This product is equipped with a certified module, and the details are as follows - Applicant: ESPRESSIF SYSTEMS (SHANGHAI) CO., LTD - FCC ID: 2AC7Z-ESP32WROOM32E - Model: ESP32-WROOM-32E 5. The Basic model and Family model only differ in the shape of the plastic enclosure (Basic model: circular shape, Family model: square shape). The material of the enclosure is the same and does not affect RF characteristics.
FCC ID	2AN8QUM80GA1

3. SYSTEM CONFIGURATION FOR TEST

3.1 Characteristics of equipment

The Equipment Under Test (EUT) contains the following capabilities: This equipment is Harmless UWB Radar Sensor. The detailed explanation is refer as user manual.

3.2 Used peripherals list

Description	Model No.	Serial No.	Manufacture	Remark
Notebook	TP00106A	PC-1HBV52	Lenovo	-
Adapter	ADLX45YDC3D	8SSA10R16864D1 SG04E0PXX	Lenovo	For notebook
Adapter	MCS-H06KR	RA690036691	Weihai Sunlin Electronics Co.,Ltd.	For EUT

3.3 Product Modification


N/A

3.4 Operating Mode

Constantly transmitting with a modulated carrier at maximum power on the low, middle and high channels.

3.5 Test Setup of EUT

The measurements were taken in continuous transmit mode using the test mode which controlled by EspRFTTestTool. The test command and the test Jig and cables were provided by the applicant.

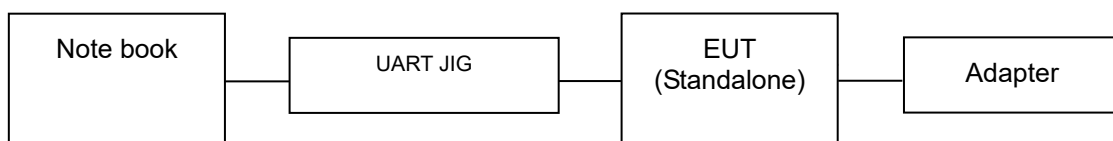


3.6 Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

■ TX Power setting value during test

Mode	Rate	TX Power setting value		
		Low CH	Middle CH	High CH
802.11b	1 Mbps	0	0	0
802.11g	6 Mbps	0	0	0
802.11n(HT20)	MCS0	0	0	0
802.11n(HT40)	MCS0	5	0	11
BLE	1 Mbps	default	default	default

■ Test Program : ESP_RF_Test_EN_0

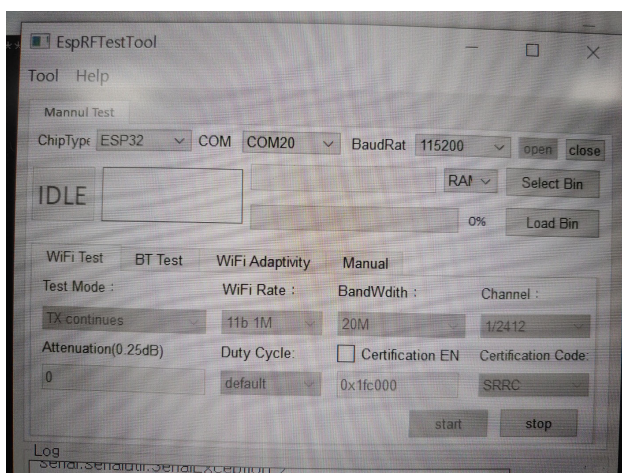

3.7 Table for Carrier Frequencies

- Wi-Fi

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2 412	7	2 442
2	2 417	8	2 447
3	2 422	9	2 452
4	2 427	10	2 457
5	2 432	11	2 462
6	2 437	-	-

* For 20 MHz bandwidth, use ch 1 - 11, for 40 MHz bandwidth use ch 3 - 9

- BLE

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2 402	10	2 422	20	2 442	30	2 462
1	2 404	11	2 424	21	2 444	31	2 464
2	2 406	12	2 426	22	2 446	32	2 466
3	2 408	13	2 428	23	2 448	33	2 468
4	2 410	14	2 430	24	2 450	34	2 470
5	2 412	15	2 432	25	2 452	35	2 472
6	2 414	16	2 434	26	2 454	36	2 474
7	2 416	17	2 436	27	2 456	37	2 476
8	2 418	18	2 438	28	2 458	38	2 478
9	2 420	19	2 440	29	2 460	39	2 480

3.8 Duty Cycle Of Test signal

Duty cycle is < 98%, duty factor shall be considered. Duty cycle = Tx on/(Tx on+ Tx off), Duty factor = 10*log(1/duty cycle)

Band	Mode	Duty cycle	Duty Cycle Factor(dB)
2.4 GHz band	802.11b	1	-
	802.11g	1	-
	802.11n(HT20)	1	-
	802.11n(HT40)	1	-
	BLE	0.87	0.60

3.9 Used Test Equipment List

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
1	T & H Chamber	PL-3J	15003623	ESPEC CORP	2024.11.02	1 year	☐
2	T & H Chamber	SH-662	93000067	ESPEC CORP	2024.08.16	1 year	☐
3	T & H Chamber	SH-642	93011406	ESPEC CORP	2024.08.17	1 year	☐
4	Spectrum Analyzer	8563EC	3046A00527	Agilent Technology	2025.01.09	1 year	☐
5	Spectrum Analyzer	FSV30	104029	Rohde & Schwarz	2024.08.16	1 year	☐
6	Spectrum Analyzer	FSV30	20-353063	Rohde & Schwarz	2025.01.09	1 year	☐
7	Spectrum Analyzer	FSV40	101727	Rohde & Schwarz	2024.08.16	1 year	☐
8	Signal Analyzer	FSW43	101294	Rohde & Schwarz	2025.01.15	1 year	☐
9	Signal Analyzer	FSW85	101602	Rohde & Schwarz	2024.06.27	1 year	☐
10	EMI Test Receiver	ESCI7	100823	Rohde & Schwarz	2025.01.09	1 year	☐
11	EMI Test Receiver	ESPI	100488	Rohde & Schwarz	2025.01.08	1 year	☐
12	EMI Test Receiver	ESI	837514/004	Rohde & Schwarz	2024.08.16	1 year	☒
13	Vector Signal Analyzer	89441A	3416A02620	Agilent Technology	2025.01.11	1 year	☐
14	Network Analyzer	8753ES	US39170869	AGILENT	2024.08.16	1 year	☐
15	EPM Series Power meter	E4418B	GB39512547	Agilent Technology	2025.01.10	1 year	☐
16	RF Power Sensor	E9300A	MY41496631	Agilent Technology	2025.01.10	1 year	☐
17	Microwave Frequency Counter	5352B	2908A00480	Agilent Technology	2025.01.10	1 year	☐
18	Audio Analyzer	8903B	3514A16919	Agilent Technology	2025.01.10	1 year	☐
19	Audio Telephone Analyzer	DD-5601CID	520010281	CREDIX	2025.01.08	1 year	☐
20	Modulation Analyzer	8901A	3041A05716	H.P	2025.01.10	1 year	☐
21	Digital storage Oscilloscope	TDS3052	B015962	Tektronix	2024.08.17	1 year	☐
22	ESG-D Series Signal Generator	E4436B	US39260458	Agilent Technology	2025.01.10	1 year	☐
23	Vector Signal Generator	SMBV100A	257557	Rohde & Schwarz	2025.01.10	1 year	☐
24	GNSS Signal Generator	TC-2800A	2800A000494	TESCOM CO., LTD.	2025.01.10	1 year	☐
25	Signal Generator	SMB100A	179628	Rohde & Schwarz	2025.01.10	1 year	☒
26	Signal Generator	N5173B	MY57280148	KEYSIGHT	2024.05.31	1 year	☐
27	SLIDAC	None	0207-4	Myoung sung Ele.	2025.01.09	1 year	☐
28	DC Power supply	DDPS-3K	U03-109	Digitech Power	2025.01.10	1 year	☐
29	DC Power supply	E3610A	KR24104505	Agilent Technology	2025.01.09	1 year	☐
30	DC Power supply	UP-3005T	68	Unicon Co.,Ltd	2025.01.09	1 year	☐
31	DC Power Supply	SM 3400-D	114701000117	DELTAELEKTRONIKA	2025.01.08	1 year	☐
32	DC Power supply	6632B	MY43004005	Agilent Technology	2025.01.09	1 year	☐
33	DC Power Supply	6632B	MY43004137	Agilent Technology	2025.01.09	1 year	☐
34	Termination	1433-3	LM718	WEINSCHEL	2025.01.10	1 year	☐
35	Termination	1432-3	QR946	AEROFLEX/WEINSCHEL	2025.01.10	1 year	☐
36	Attenuator	8498A	3318A09485	HP	2025.01.10	1 year	☐
37	Step Attenuator	8494B	3308A32809	HP	2025.01.10	1 year	☐
38	RF Step Attenuator	RSP	100091	Rohde & Schwarz	2025.01.11	1 year	☐
39	Attenuator	18B50W-20F	64671	INMET	2025.01.10	1 year	☐
40	Attenuator	10 dB	1	Rohde & Schwarz	2025.01.10	1 year	☐
41	Attenuator	54A-10	74564	WEINSCHEL	2024.08.16	1 year	☐
42	Attenuator	56-10	66920	WEINSCHEL	2025.01.12	1 year	☐
43	Attenuator	SA18N100-20	001	FAIRVIEW MICROWAVE	2024.08.16	1 year	☐
44	Attenuator	SA26B-10	33464/2134	FAIRVIEW MICROWAVE	2024.08.18	1 year	☐
45	Attenuator	SA4018-10	DC 2126	FAIRVIEW MICROWAVE	2024.08.18	1 year	☐
46	Power divider	11636B	51212	HP	2025.01.12	1 year	☐
47	3Way Power divider	KPDSU3W	00070365	KMW	2024.08.16	1 year	☐
48	4Way Power divider	70052651	173834	KRYTAR	2025.01.12	1 year	☐
49	3Way Power divider	1580	SQ361	WEINSCHEL	2025.01.12	1 year	☐
50	OSP	OSP120	101577	Rohde & Schwarz	2025.01.11	1 year	☐
51	White noise audio filter	ST31EQ	101902	SoundTech	2024.08.16	1 year	☐

No.	Instrument	Model	S/N	Manufacturer	Next Cal Date	Cal interval	used
52	Dual directional coupler	778D	17693	HEWLETT PACKARD	2025.01.10	1 year	☐
53	Dual directional coupler	772D	2839A00924	HEWLETT PACKARD	2025.01.10	1 year	☐
54	Band rejection filter	3TNF-0006	26	DOVER Tech	2025.01.11	1 year	☐
55	Band rejection filter	3TNF-0007	311	DOVER Tech	2025.01.11	1 year	☐
56	Band rejection filter	WTR-BRF2442-84NN	09020001	WAVE TECH Co.,LTD	2025.01.10	1 year	☒
57	Band rejection filter	WRCJV12-5695-5725-5825-5855-50SS	1	Wainwright Instruments GmbH	2025.01.11	1 year	☐
58	Band rejection filter	WRCJV12-5120-5150-5350-5380-40SS	4	Wainwright Instruments GmbH	2025.01.11	1 year	☐
59	Band rejection filter	WRCGV10-2360-2400-2500-2540-50SS	2	Wainwright Instruments GmbH	2025.01.11	1 year	☒
60	Band rejection filter	CTF-155M-S1	001	RF One Electronics	2024.08.16	1 year	☐
61	Band rejection filter	CTF-435M-S1	001	RF One Electronics	2024.08.16	1 year	☐
62	Band rejection filter	CTF-5890M-70MS1	1	RF One Electronics	2025.01.11	1 year	☐
63	Highpass Filter	WHJS1100-10EF	1	WAINWRIGHT	2025.01.10	1 year	☐
64	Highpass Filter	WHJS3000-10EF	1	WAINWRIGHT	2025.01.10	1 year	☐
65	Highpass Filter	WHNX6-5530-7000-26500-40CC	2	Wainwright Instruments GmbH	2025.01.12	1 year	☐
66	Highpass Filter	WHNX6-2370-3000-26500-40CC	4	Wainwright Instruments GmbH	2025.01.12	1 year	☐
67	WideBand Radio Communication Tester	CMW500	102276	Rohde & Schwarz	2025.01.10	1 year	☐
68	WideBand Radio Communication Tester	CMW500	117235	Rohde & Schwarz	2025.01.10	1 year	☐
69	WideBand Radio Communication Tester	MT8000A	6261987920	Anritsu	2025.01.15	1 year	☐
70	WideBand Radio Communication Tester	MT8821C	6262287695	Anritsu	2025.01.09	1 year	☐
71	Bluetooth Tester	TC-3000B	3000B6A0166	TESCOM CO., LTD.	2025.01.10	1 year	☐
72	Loop Antenna	6502	9203-0493	EMCO	2025.05.23	2 year	☐
73	Loop Antenna	FMZB1513	#374	Schwarzbeck	2025.02.21	2 year	☒
74	BiconiLog Antenna ^(R)	3142C	35880	ETS-LINDGREN	2024.10.13	2 year	☒
75	Trilog-Broadband Antenna ^(R)	VULB 9168	9168-606	SCHWARZBECK	2024.11.30	2 year	☐
76	Biconical Antenna ^(T)	VUBA9117	9117-342	Schwarz beck	2026.01.16	2 year	☐
77	Horn Antenna	3115	9605-4834	EMCO	2025.02.29	1 year	☐
78	Horn Antenna	QMS-00208	21909	STEATITE ANTENNA	2025.04.22	1 year	☐
79	Horn Antenna ^(R)	3117	00135191	ETS-LINDGREN	2025.03.26	1 year	☒
80	Horn Antenna ^(T)	3115	2996	EMCO	2025.01.11	1 year	☐
81	Horn Antenna ^(R)	BBHA 9170	9170-722	SCHWARZBECK	2025.01.11	1 year	☒
82	Horn Antenna ^(T)	BBHA 9170	743	SCHWARZBECK	2025.01.16	1 year	☐
83	AMPLIFIER(A_10)	TK-PA01S	220109-L	TESTEK	2025.01.09	1 year	☐
84	AMPLIFIER(C_3)	TK-PA01S	200141-L	TESTEK	2024.08.16	1 year	☒
85	PREAMPLIFIER(C_3)	8449B	3008A02577	Agilent	2025.01.09	1 year	☐
86	RF PRE AMPLIFIER	SCU08F2	100762	Rohde & Schwarz	2024.11.28	1 year	☐
87	AMPLIFIER	TK-PA18	150003	TESTEK	2025.01.09	1 year	☒
88	AMPLIFIER	TK-PA1840H	160010-L	TESTEK	2025.01.12	1 year	☒
89	Horn Antenna	M19RH	T01	OML, Inc.	2025.04.03	1 year	☐
90	Horn Antenna	M12RH	T02	OML, Inc.	2025.04.03	1 year	☐
91	Horn Antenna	M08RH	T03	OML, Inc.	2025.04.03	1 year	☐
92	Horn Antenna	M05RH	T04	OML, Inc.	2025.04.03	1 year	☐
93	Horn Antenna	M03RH	T05	OML, Inc.	2025.04.03	1 year	☐
94	Harmonic Mixer	M12HWD	200529-1	OML, Inc.	2025.04.08	1 year	☐
95	Harmonic Mixer	M08HWD	200529-1	OML, Inc.	2025.04.08	1 year	☐
96	Harmonic Mixer	M05HWD	200529-1	OML, Inc.	2025.04.08	1 year	☐
97	Harmonic Mixer	M03HWD	200529-1	OML, Inc.	2025.04.08	1 year	☐
98	Source Module	S19MS-A	200529-1	OML, Inc.	2025.04.08	1 year	☐
99	Source Module	S12MS-A	200529-1	OML, Inc.	2025.04.08	1 year	☐
100	Source Module	S08MS-A	200529-1	OML, Inc.	2025.04.08	1 year	☐
101	Source Module	S05MS-A	200529-1	OML, Inc.	2025.04.08	1 year	☐
102	Source Module	S03MS-A	200529-1	OML, Inc.	2025.04.08	1 year	☐

4. SUMMARY TEST RESULTS

Description of Test	FCC Rule	Reference Clause	Used	Test Result
Max. Conducted output power	15.247(b)(3)	-	☐	N/P ¹⁾
Power spectral density	15.247(e)	-	☐	N/P ¹⁾
6 dB spectrum Bandwidth	15.247(a)(2)	-	☐	N/P ¹⁾
Band edge of RF conducted emissions	15.247(d)	-	☐	N/P ¹⁾
Spurious RF radiated emissions	15.247(d), 15.209(a)	Clause 5.1	☒	Compliance
Antenna requirement	15.203, 15.247(b)	Clause 5.2	☒	Compliance
AC Power Conducted emissions	15.207	Clause 5.3	☒	Compliance
Compliance/pass : The EUT complies with the essential requirements in the standard. Not Compliance : The EUT does not comply with the essential requirements in the standard. N/A : The test was not applicable in the standard. N/P: Not Performed 1) Leveraged from module certification report under FCC ID: 2AC7Z-ESP32WROOM32E(Report No.: RSHD200218007-00A)				

Procedure Reference

FCC CFR 47, Part 15. Subpart C-15.247

558074 D01 15.247 Meas Guidance v05r02

ANSI C 63.10-2013

5. MEASUREMENT RESULTS

5.1 Spurious RF Radiated emissions

5.1.1 Standard Applicable [FCC §15.247(d)]

FCC

All other emissions outside these bands shall not exceed the general radiated emission limits specified in §15.209(a). And according to §15.33(a)(1), for an intentional radiator operates below 10 GHz, the frequency Range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, Whichever is lower. In addition, radiated emissions which fall in the restricted bands, as defined in Sec.15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a)

§15.209 and RSS-Gen limits for radiated emissions measurements (distance at 3 m)

Frequency Band [MHz]	DISTANCE [Meters]	Limit [$\mu\text{V/m}$]	Limit [dB $\mu\text{V/m}$]	Detector
0.009 ~ 0.490	300	2400/F(kHz)	67.6-20log(F)	Peak
0.490 ~ 1.705	30	24000/F(kHz)	87.6-20log(F)	Peak
1.705 ~ 30.0	30	30	29.54	Peak
30 - 88	3	100 **	40.00	Quasi peak
88 - 216	3	150 **	43.52	Quasi peak
216 - 960	3	200 **	46.02	Quasi peak
Above 960	3	500	54.00	Average
Above 1000	3	74.0 dB $\mu\text{V/m}$ (Peak), 54.0 dB $\mu\text{V/m}$ (Average)		

** fundamental emissions from intentional radiators operation under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz, or 470-806 MHz. However, operation within these Frequency bands is permitted under other sections of this Part Section 15.231 and 15.241

§15.205. Restrict Band of Operation for FCC

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505**	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.
4.177 25 - 4.177 75	37.5 -38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.38 6 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	Above 38.6
13.36 - 13.41			

** Until February 1, 1999, this restricted band shall be 0.490-0.510

§15.205. Restrict Band of Operation for IC

[MHz]	[MHz]	[MHz]	[GHz]
0.090 - 0.110	12.519 75 - 12.520 25	399.9 - 410	5.35 - 5.46
2.173 5 - 2.190 5	12.576 75 - 12.577 25	608 - 614	7.25 - 7.75
3.020 - 3.026	13.36 - 13.41	960 - 1 427	8.025 - 8.
4.125 - 4.128	16.42 - 16.423	1 435 - 1 626.5	9.0 - 9.2
4.177 25 - 4.177 75	16.694 75 - 16.695 25	1 645.5 - 1 646.5	9.3 - 9.5
4.207 25 - 4.207 75	16.804 25 - 16.804 75	1 660 - 1 710	10.6 - 12.7
5.677 - 5.683	25.5 - 25.67	1 718.8 - 1 722.2	13.25 - 13.4
6.215 - 6.218	37.5 - 38.25	2 200 - 2 300	14.47 - 14.5
6.26775-6.26825	73 - 74.6	2 310 - 2 390	15.35 - 16.2
6.31175-6.31225	74.8 - 75.2	2 655 - 2 900	17.7 - 21.4
8.291 - 8.294	108 - 138	3 260 - 3 267	22.01 - 23.12
8.362 - 8.366	156.524 75 - 156.525 25	3 332 - 3 339	23.6 - 24.0
8.376 25 - 8.38 6 75	156.7 - 156.9	3 345.8 - 3 358	31.2 - 31.8
8.414 25 - 8.414 75	240 - 285	3 500 - 4 400	36.43 - 36.5
12.29 - 12.293	322 - 335.4	4 500 - 5 150	Above 38.6

5.1.2 Test Environment conditions

- Ambient temperature : (21 ~ 24) °C • Relative Humidity : (50 ~ 52) % R.H.

5.1.3 Measurement Procedure

The measurements procedure of the Spurious RF Radiated emissions is as following describe method.

1. The EUT was placed on the top of a rotating table (0.8 meters for below 1 GHz and 1.5 meters for above 1 GHz) above the ground at a 3 meter camber. The table was rotated 360 degree to determine the position of the highest radiation.
 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna master.
 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both Horizontal and vertical polarizations of the antenna are set to make the measurement.
 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 - 360 degrees to find the maximum reading.
 5. The measuring receiver was set to peak detector and specified bandwidth with max hold function.
 6. Low, Middle and high channels were measured, and radiation measurements are performed in X, Y, Z axis positioning. And found the worst axis position and only the test worst case mode is recorded in the report.
- The measurement results are obtained as described below:
Result(dBμV/m) = Reading(dBμV) + Antenna factor(dB/m)+ CL(dB) + other applicable factor (dB)
 - The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for RMS Average (Duty cycle < 98 %) for Average detection (AV) at frequency above 1 GHz, then the measurement results was added to a correction factor (10 log(1/duty cycle)).
 - The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle ≥ 98 %) for Average detection (AV) at frequency above 1 GHz.
 - According to §15.33 (a)(1), Frequency range of radiated measurement is performed the tenth harmonic.

Above test was performed in accordance with ANSI C63.10-2013 Section 6.10.5 & 6.4, 6.5, 6.6

5.1.4 Measurement Uncertainty


The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of k = 2 to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Radiated Emission measurement: Below 1 GHz: 3.88 dB (CL: Approx 95 %, k=2)


Above 1 GHz: 3.04 dB (CL: Approx 95 %, k=2)

5.1.5 Test Configuration


Radiated emission setup, below 30 MHz

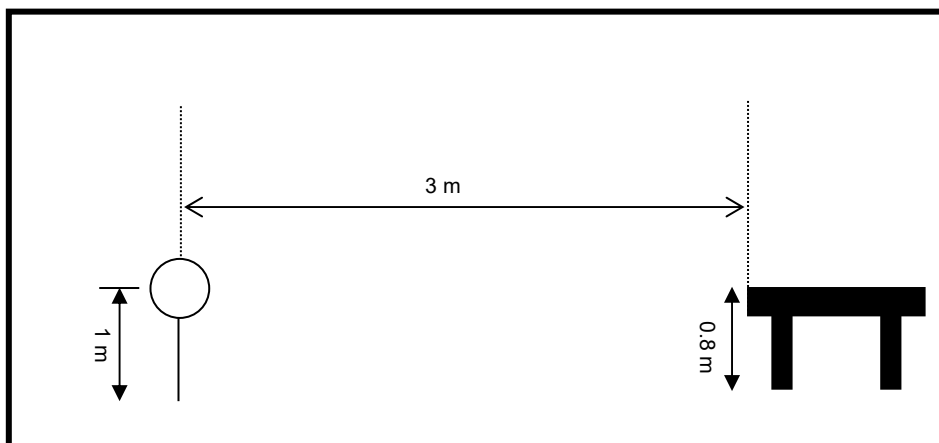

Radiated emission setup, below 1 000 MHz

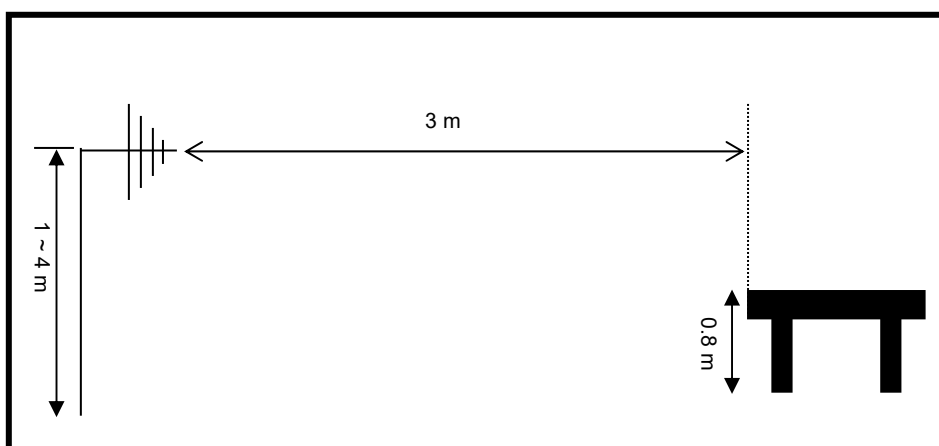

Radiated emission setup, above 1 GHz

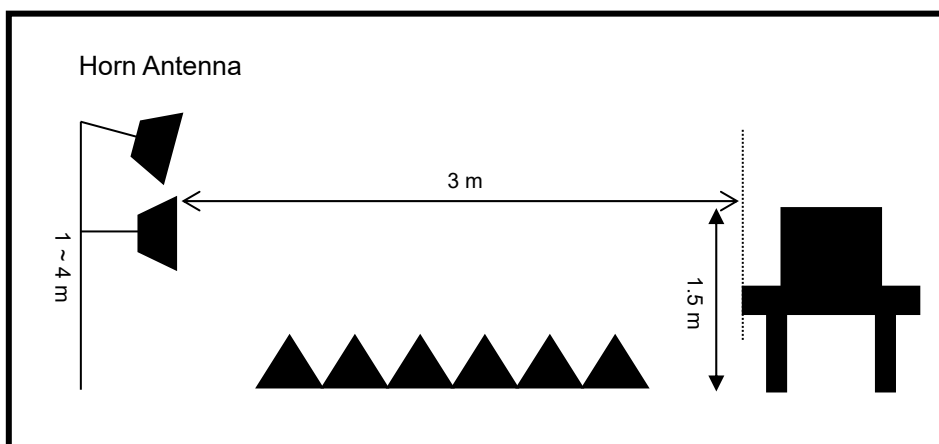

5.1.6 Measurement Result

■ Above 1 GHz

802.11b (2 412 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	51.84	-	1.5	V	31.49	10.07	45.81	51.84	-	74.00	54.00	22.16	-	Compliance
4.824	42.53	-	1.5	V	33.07	11.15	45.11	42.53	-	74.00	54.00	31.47	-	Compliance
7.905	46.87	-	1.5	V	35.49	14.42	45.22	46.87	-	74.00	54.00	27.13	-	Compliance

* Restrict band & Band-edge emissions.

802.11b (2 437 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.874	43.24	-	1.5	V	33.22	11.37	45.12	43.24	-	74.00	54.00	30.76	-	Compliance
7.466	46.81	-	1.5	V	35.45	13.72	45.01	46.81	-	74.00	54.00	27.19	-	Compliance

802.11b (2 462 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.484*	48.81	2.484	1.5	V	31.58	9.83	45.84	48.81	-	74.00	54.00	25.19	-	Compliance
4.924	42.83	4.924	1.5	V	33.32	11.38	45.14	42.83	-	74.00	54.00	31.17	-	Compliance
7.998	46.94	7.998	1.5	V	35.50	14.57	45.26	46.94	-	74.00	54.00	27.06	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V/m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11g (2 412 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	55.24	49.80	1.5	V	31.49	10.07	45.81	55.24	49.80	74.00	54.00	18.76	4.20	Compliance
4.824	42.41	-	1.5	V	33.07	11.15	45.11	42.41	-	74.00	54.00	31.59	-	Compliance
7.905	46.74	-	1.5	V	35.49	14.42	45.22	46.74	-	74.00	54.00	27.26	-	Compliance

* Restrict band & Band-edge emissions.

802.11g (2 437 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.874	43.14	-	1.5	V	33.22	11.37	45.12	43.14	-	74.00	54.00	30.86	-	Compliance
7.466	46.75	-	1.5	V	35.45	13.72	45.01	46.75	-	74.00	54.00	27.25	-	Compliance

802.11g (2 462 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.484*	55.04	49.42	1.5	V	31.58	9.83	45.84	55.04	49.42	74.00	54.00	18.96	4.58	Compliance
4.924	42.69	-	1.5	V	33.32	11.38	45.14	42.69	-	74.00	54.00	31.31	-	Compliance
7.998	46.85	-	1.5	V	35.50	14.57	45.26	46.85	-	74.00	54.00	27.15	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n_HT20 (2 412 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	54.43	49.42	1.5	V	31.49	10.07	45.81	54.43	49.42	74.00	54.00	19.57	4.58	Compliance
4.824	42.39	-	1.5	V	33.07	11.15	45.11	42.39	-	74.00	54.00	31.61	-	Compliance
7.905	46.71	-	1.5	V	35.49	14.42	45.22	46.71	-	74.00	54.00	27.29	-	Compliance

* Restrict band & Band-edge emissions.

802.11n_HT20 (2 437 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.874	43.09	-	1.5	V	33.22	11.37	45.12	43.09	-	74.00	54.00	30.91	-	Compliance
7.466	46.71	-	1.5	V	35.45	13.72	45.01	46.71	-	74.00	54.00	27.29	-	Compliance

802.11n_HT20 (2 462 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.484*	56.94	49.56	1.5	V	31.58	9.83	45.84	56.94	49.56	74.00	54.00	17.06	4.44	Compliance
4.924	42.64	-	1.5	V	33.32	11.38	45.14	42.64	-	74.00	54.00	31.36	-	Compliance
7.998	46.81	-	1.5	V	35.50	14.57	45.26	46.81	-	74.00	54.00	27.19	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

802.11n_HT40 (2 422 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	55.14	49.47	1.5	V	31.49	10.07	45.81	55.14	49.47	74.00	54.00	18.86	4.53	Compliance
4.824	42.33	-	1.5	V	33.07	11.15	45.11	42.33	-	74.00	54.00	31.67	-	Compliance
7.905	46.64	-	1.5	V	35.49	14.42	45.22	46.64	-	74.00	54.00	27.36	-	Compliance

* Restrict band & Band-edge emissions.

802.11n_HT40 (2 437 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.874	42.93	-	1.5	V	33.22	11.37	45.12	42.93	-	74.00	54.00	31.07	-	Compliance
7.466	46.62	-	1.5	V	35.45	13.72	45.01	46.62	-	74.00	54.00	27.38	-	Compliance

802.11n_HT40 (2 452 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.484*	55.49	49.80	1.5	V	31.58	9.83	45.84	55.49	49.80	74.00	54.00	18.51	4.20	Compliance
4.924	42.58	-	1.5	V	33.32	11.38	45.14	42.58	-	74.00	54.00	31.42	-	Compliance
7.998	46.75	-	1.5	V	35.50	14.57	45.26	46.75	-	74.00	54.00	27.25	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

CH0 (2 402 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.390*	56.25	49.41	1.5	V	31.49	10.07	45.81	56.25	49.41	74.00	54.00	17.75	4.59	Compliance
4.804	42.42	-	1.5	V	33.01	11.06	45.10	42.42	-	74.00	54.00	31.58	-	Compliance

* Restrict band & Band-edge emissions.

CH19 (2 440 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.880	42.65	-	1.5	V	33.24	11.40	45.12	42.65	-	74.00	54.00	31.35	-	Compliance

CH39 (2 480 MHz)

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
2.484*	57.46	49.82	1.5	V	31.58	9.83	45.84	57.46	49.82	74.00	54.00	16.54	4.18	Compliance
4.960	42.60	-	1.5	V	33.36	11.21	45.15	42.60	-	74.00	54.00	31.40	-	Compliance

* Restrict band & Band-edge emissions.

※Note

- Above 1 GHz is measured average and peak detector mode on Spectrum analyzer in accordance with FCC Rule15.35
- Limit: 54 dB μ V/m(Average), 74 dB μ V /m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- For the below 30 MHz and above 2.484 GHz, measured any other signal is not detected on test receiver
- The transmitter radiated spectrum was investigated from 9 kHz to 26.5 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

■ Below 1 GHz

-802.11b (Worst case)

Freq. (MHz)	Reading (dB μ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
67.31	21.88	1.5	V	12.55	1.20	46.50	21.88	40.00	18.12	Compliance
320.33	35.21	1.0	H	19.69	2.58	46.12	35.21	46.00	10.79	Compliance
322.59	31.46	1.5	V	19.79	2.59	46.11	31.46	46.00	14.54	Compliance
334.13	30.73	1.5	V	20.27	2.64	46.09	30.73	46.00	15.27	Compliance
338.85	25.50	1.0	H	20.46	2.66	46.09	25.50	46.00	20.50	Compliance
360.98	27.05	1.0	H	21.04	2.75	46.09	27.05	46.00	18.95	Compliance
360.98	31.60	1.5	V	21.04	2.75	46.09	31.60	46.00	14.40	Compliance

Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Preamplifier gain(dB), Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB μ V/m) - Meas Result(dB μ V/m), Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

-BLE

Freq. (MHz)	Reading (dB μ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
67.31	20.68	1.5	V	12.55	1.20	46.50	20.68	40.00	19.32	Compliance
320.33	35.73	1.0	H	19.69	2.58	46.12	35.73	46.00	10.27	Compliance
329.46	30.73	1.5	V	20.08	2.62	46.10	30.73	46.00	15.27	Compliance
327.16	24.16	1.0	H	19.98	2.61	46.11	24.16	46.00	21.84	Compliance
360.98	27.03	1.0	H	21.04	2.75	46.09	27.03	46.00	18.97	Compliance
360.98	31.54	1.5	V	21.04	2.75	46.09	31.54	46.00	14.46	Compliance

Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Preamplifier gain(dB), Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB μ V/m) - Meas Result(dB μ V/m), Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

Simultaneous TX Radiated Spurious Emissions Measurements (Worst case)

802.11b: 2 412 MHz

BLE: 2 402 MHz

UWB: 7 987.2 MHz

Above 1 GHz

Measurement distance: 3m

Freq. (GHz)	Reading (dB μ V/m)		Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)		Limit (dB μ V/m)		Mgn. (dB)		Result
	PK	AV	Height (m)	Pol. (H/V)	Fctr. (dB/m)			PK	AV	PK	AV	PK	AV	
4.837	45.81	-	1.5	H	33.11	11.21	45.11	45.81	-	74.00	54.00	28.19	-	Compliance
5.179	44.66	-	1.5	V	33.86	11.13	45.29	44.66	-	74.00	54.00	29.34	-	Compliance
7.363	50.30	-	1.5	H	35.44	13.54	44.96	50.30	-	74.00	54.00	23.70	-	Compliance

***Note**

- Limit: 54 dB μ V/m(Average), 74 dB μ V/m(Peak), Attenuated more than 20 dB below the permissible value.
- It is not recorded on the report that the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to measured.
- The transmitter radiated spectrum was investigated from 9 kHz to 40 GHz.
- Average test would be performed if the peak result were greater than the average limit.
- Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)

Below 1 GHz

Measurement distance: 3m


Freq. (MHz)	Reading (dB μ V/m)	Antenna			CL (dB)	AMP (dB)	Meas Result (dB μ V/m)	Limit (dB μ V/m)	Mgn (dB)	Result
		Height (m)	Pol. (H/V)	Fctr. (dB/m)						
66.84	23.85	1.5	V	12.58	1.19	46.50	23.85	40.00	16.15	Compliance
304.95	32.19	1.0	H	19.02	2.51	46.14	32.19	46.00	13.81	Compliance
320.33	40.33	1.5	V	19.69	2.58	46.12	40.33	46.00	5.67	Compliance
320.33	34.74	1.0	H	19.69	2.58	46.12	34.74	46.00	11.26	Compliance
360.98	33.35	1.0	H	21.04	2.75	46.09	33.35	46.00	12.65	Compliance
360.98	35.91	1.5	V	21.04	2.75	46.09	35.91	46.00	10.09	Compliance
481.51	30.07	1.5	V	23.90	3.20	46.30	30.07	46.00	15.93	Compliance

Freq.(MHz): Measurement frequency, Antenna(Height, Pol, Fctr): Antenna Height, Polarization and Factor, CL(dB): Cable loss, AMP(dB): Preamplifier gain(dB), Limit(dB μ V/m): Limit value specified with FCC Rule, Mgn(dB): FCC Limit (dB μ V/m) - Meas Result(dB μ V/m), Meas Result & Reading (dB μ V/m) : Test receiver reading value(Included Antenna factor.(dB/m), CL(dB), AMP(dB) Factor)


5.1.7 Plots

*Wi-Fi (The worst case only)

- Below 1 GHz

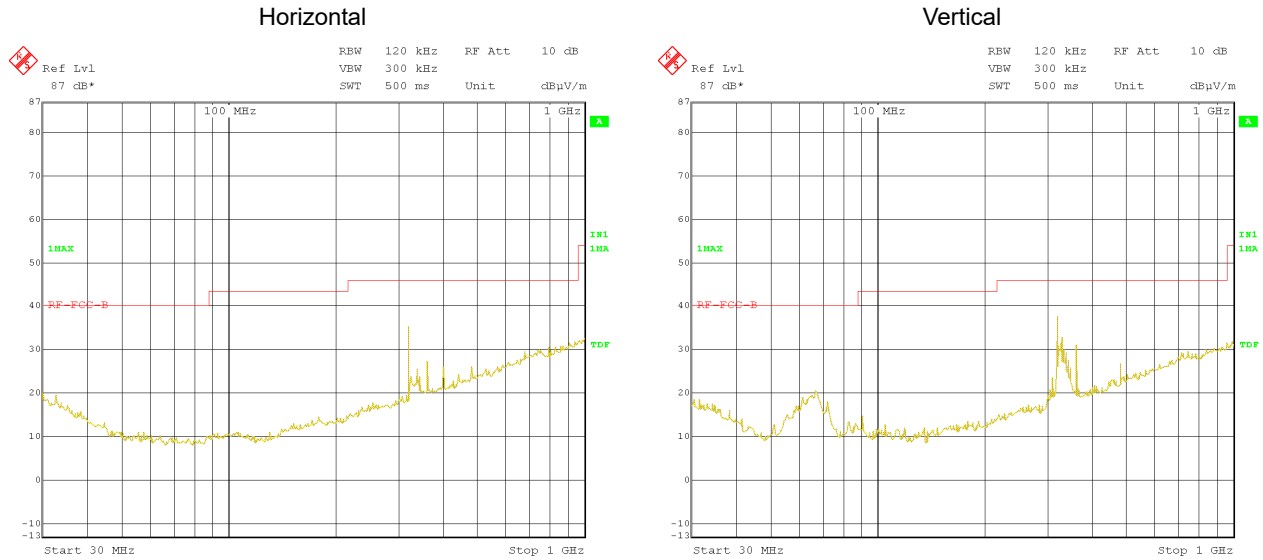

- Above 1 GHz

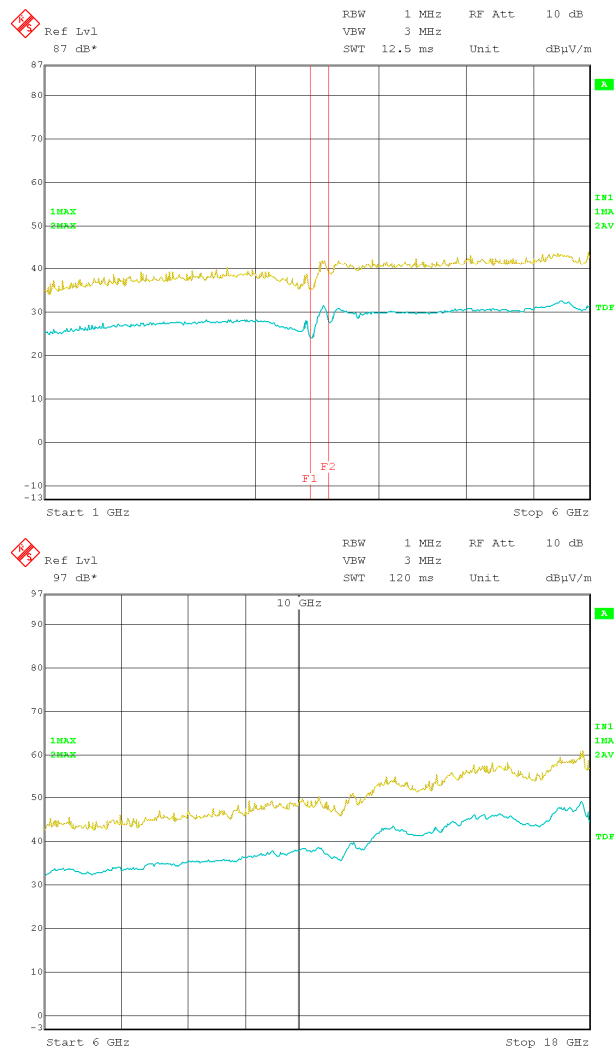





*BLE (The worst case only)

▪ Below 1 GHz



Horizontal

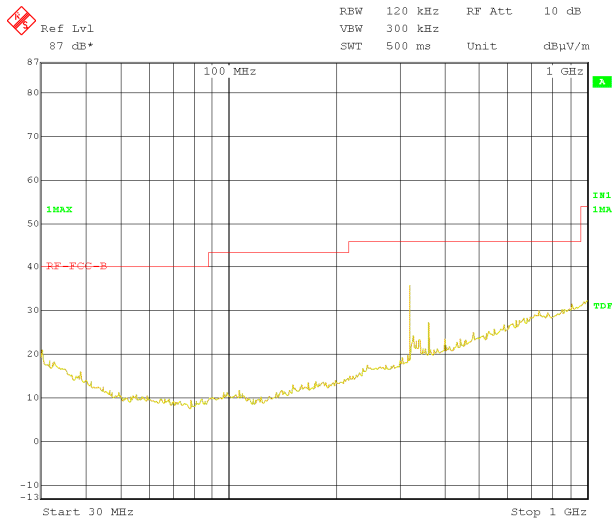


Vertical

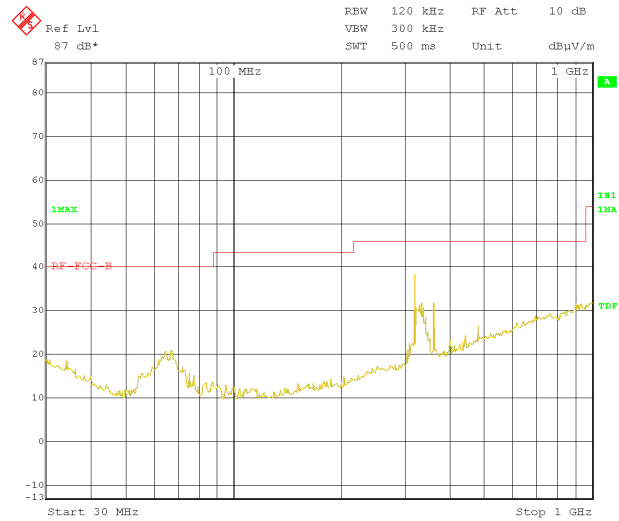


▪ Above 1 GHz

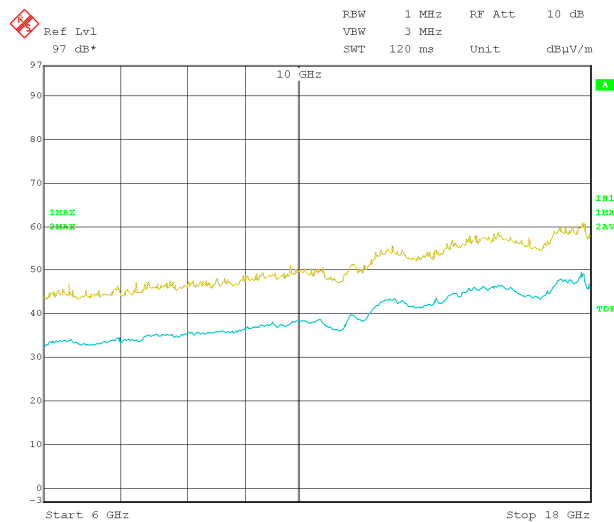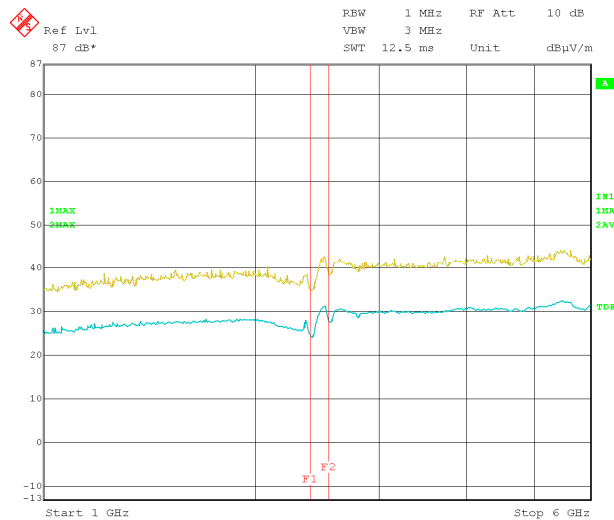

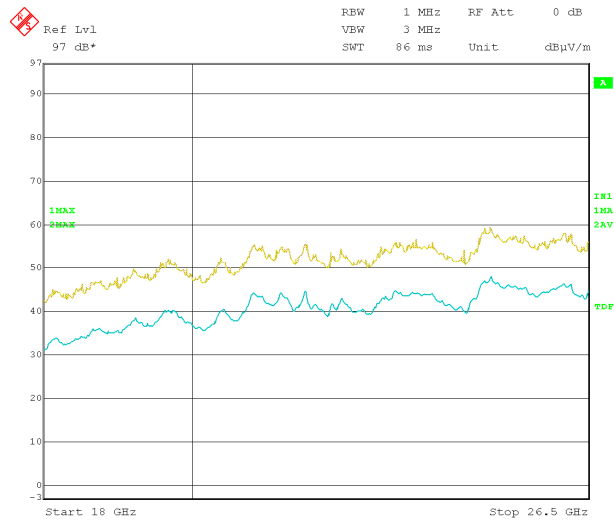


-Simultaneous TX Radiated Spurious Emissions

Simultaneous TX check

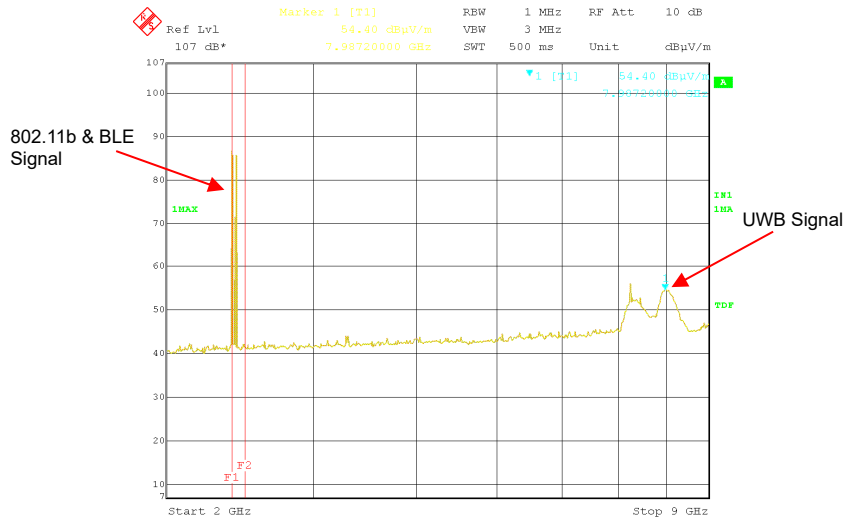


Below 1 GHz


Horizontal

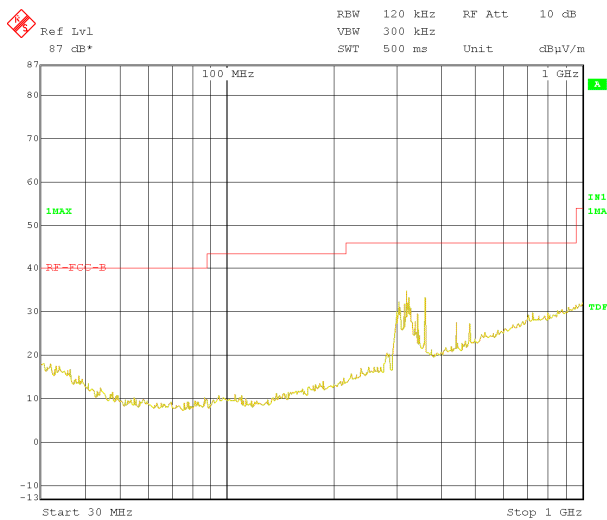

Vertical

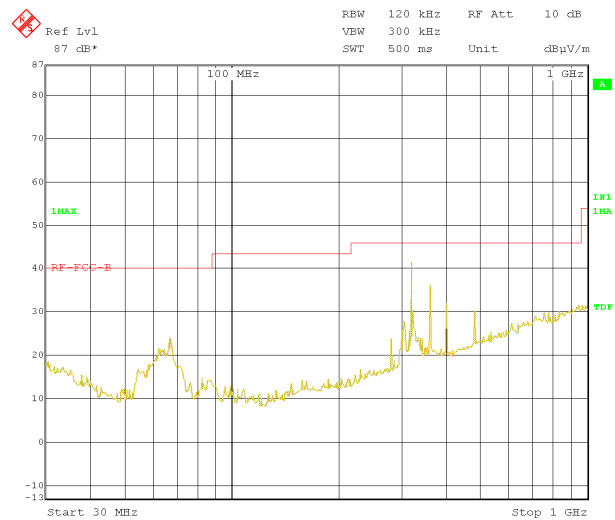

▪ Above 1 GHz

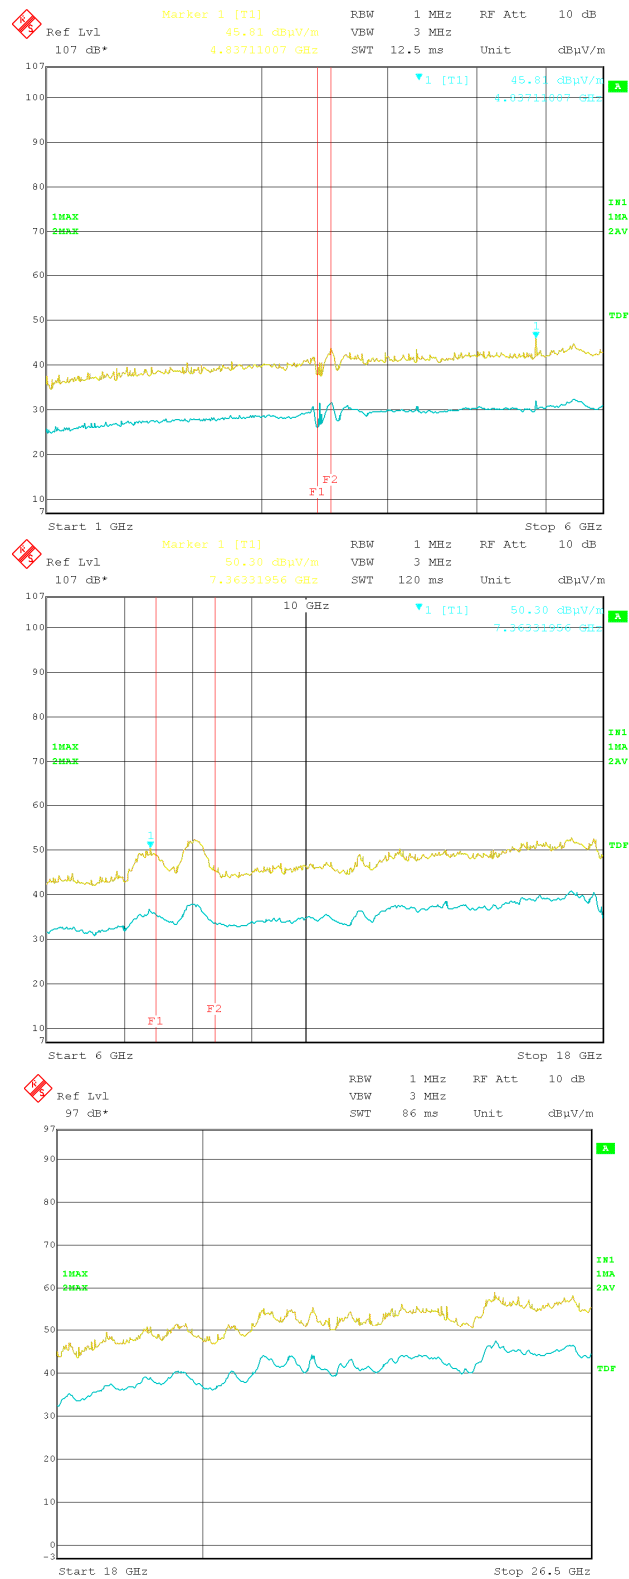

5.2 Antenna requirement

5.2.1 Standard applicable [FCC §15.203]

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than furnished by responsible party shall be used with the device.

The use of a permanently attached antenna or of an antenna that user a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The manufacturer may design the unit so that broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2.2 Antenna details

Frequency Band	Antenna Type	Gain [dBi]	Results
2.4 GHz	Internal PCB antenna	3.4 dBi	Compliance

5.3 AC Power Conducted emissions

5.3.1 Standard Applicable [FCC §15.207(a)]

For intentional radiator that is designed to be connected to the public utility(AC)power line, the radio frequency. Voltage that is conducted back onto the AC power line on any frequencies hopping mode within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line Impedance stabilization network(LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

§15.207 limits for AC line conducted emissions;

Frequency of Emission(MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56 *	56 to 46 *
0.5 ~ 5	56	46
5 ~ 30	60	50

* Decreases with the logarithm of the frequency

5.3.2 Test Environment conditions

• Ambient temperature : (21 ~ 22) °C • Relative Humidity : (48 ~ 49) % R.H.

5.3.3 Measurement Procedure

EUT was placed on a non- metallic table height of 0.8 m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the Maximum signal strength.

5.3.4 Used equipment

Equipment	Model No.	Serial No.	Manufacturer	Next cal date	Cal interval	Used
Test receiver	ESCS30	100111	Rohde & Schwarz	2025. 01. 09.	1 year	☒
Pulse Limiter	EMZ10-200M	514158	Emzer	2025. 02. 22.	1 year	☒
LISN	ESH2-Z5	100044	R&S	2025. 01. 09.	1 year	☐
	ESH3-Z5	100147	R&S	2025. 01. 09.	1 year	☒

*Test Program: " ESXS-K1 V2.2"

Measurement uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the UCISPR measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

0.009 MHz ~ 0.15 MHz : 3.94 dBuV(CL: Approx 95 %, $k=2$)

0.15 MHz ~ 30 MHz : 3.60 dBuV(CL: Approx 95 %, $k=2$)

5.3.5 Measurement Result

-Wi-Fi

Freq. [MHz]	Factor [dB]		POL	QP			CISPR AV		
	LISN	CABLE +P/L		Limit [dB/μV]	Reading [dB/μV]	Result [dB/μV]	Limit [dB/μV]	Reading [dB/μV]	Result [dB/μV]
0.189	0.14	10.07	L	64.08	29.99	30.13	54.08	19.82	19.96
0.310	0.14	10.07	L	59.97	27.89	28.03	49.97	21.55	21.69
0.486	0.15	10.08	L	56.24	30.78	30.93	46.24	23.30	23.45
0.580	0.15	10.09	L	56.00	40.18	40.33	46.00	33.96	34.11
0.701	0.16	10.11	L	56.00	30.36	30.52	46.00	22.99	23.15
1.630	0.19	10.18	L	56.00	30.22	30.41	46.00	23.64	23.83
7.791	0.39	10.38	L	60.00	20.98	21.37	50.00	13.83	14.22
0.158	0.12	10.07	N	65.58	31.82	31.94	55.58	19.48	19.60
0.173	0.12	10.07	N	64.79	31.34	31.46	54.79	18.52	18.64
0.486	0.13	10.08	N	56.24	27.55	27.68	46.24	20.56	20.69
0.564	0.14	10.09	N	56.00	30.35	30.49	46.00	24.02	24.16
0.580	0.14	10.09	N	56.00	36.08	36.22	46.00	30.17	30.31
1.642	0.17	10.18	N	56.00	25.82	25.99	46.00	19.60	19.77
7.896	0.35	10.38	N	60.00	18.61	18.96	50.00	12.22	12.57


* LISN: LISN insertion Loss, Cable: Cable Loss, P/L:pulse limiter factor

* L: Line. Live, N: Line. Neutral


* Reading: test receiver reading value (with cable loss & pulse limiter factor)

* Result = LISN + Reading

Line. Live

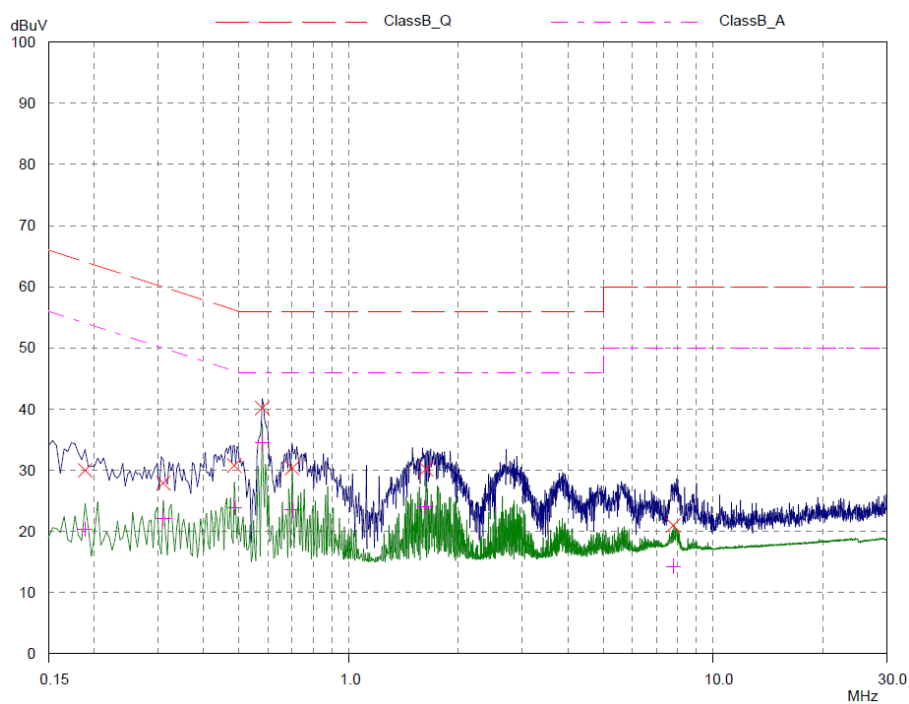

Line. Neutral

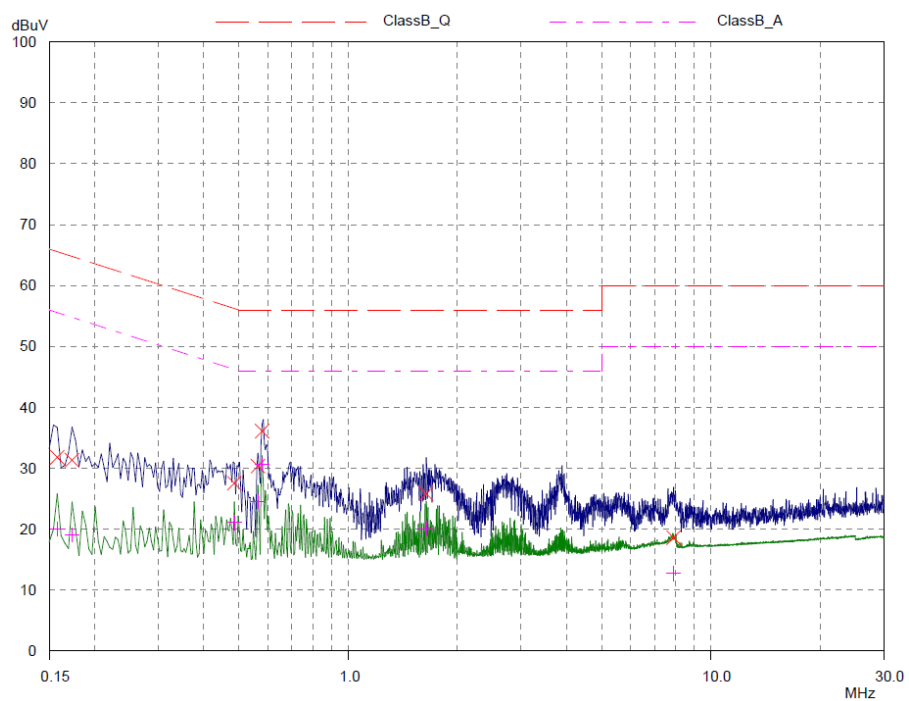

-BLE

Freq.	Factor [dB]		POL	QP			CISPR AV		
				Limit	Reading	Result	Limit	Reading	Result
[MHz]	LISN	CABLE +P/L		[dB μ V]	[dB μ V]	[dB μ V]	[dB μ V]	[dB μ V]	[dB μ V]
0.158	0.15	10.07	L	65.58	31.05	31.20	55.58	20.36	20.51
0.263	0.14	10.07	L	61.33	25.68	25.82	51.33	19.08	19.22
0.451	0.15	10.08	L	56.86	29.77	29.92	46.86	22.12	22.27
0.584	0.15	10.09	L	56.00	39.96	40.11	46.00	33.25	33.40
0.595	0.15	10.09	L	56.00	35.98	36.13	46.00	28.80	28.95
1.548	0.19	10.17	L	56.00	27.80	27.99	46.00	19.90	20.09
7.826	0.39	10.38	L	60.00	20.01	20.40	50.00	12.91	13.30
0.158	0.12	10.07	N	65.58	31.76	31.88	55.58	20.29	20.41
0.185	0.12	10.07	N	64.25	29.57	29.69	54.25	18.20	18.32
0.470	0.13	10.08	N	56.51	27.56	27.69	46.51	20.73	20.86
0.580	0.14	10.09	N	56.00	35.96	36.10	46.00	30.52	30.66
0.588	0.14	10.09	N	56.00	32.40	32.54	46.00	24.33	24.47
1.611	0.17	10.18	N	56.00	26.61	26.78	46.00	21.06	21.23
7.869	0.35	10.38	N	60.00	19.65	20.00	50.00	13.16	13.51


* LISN: LISN insertion Loss, Cable: Cable Loss, P/L:pulse limiter factor

* L: Line. Live, N: Line. Neutral

* Reading: test receiver reading value (with cable loss & pulse limiter factor)

* Result = LISN + Reading

Line. Live

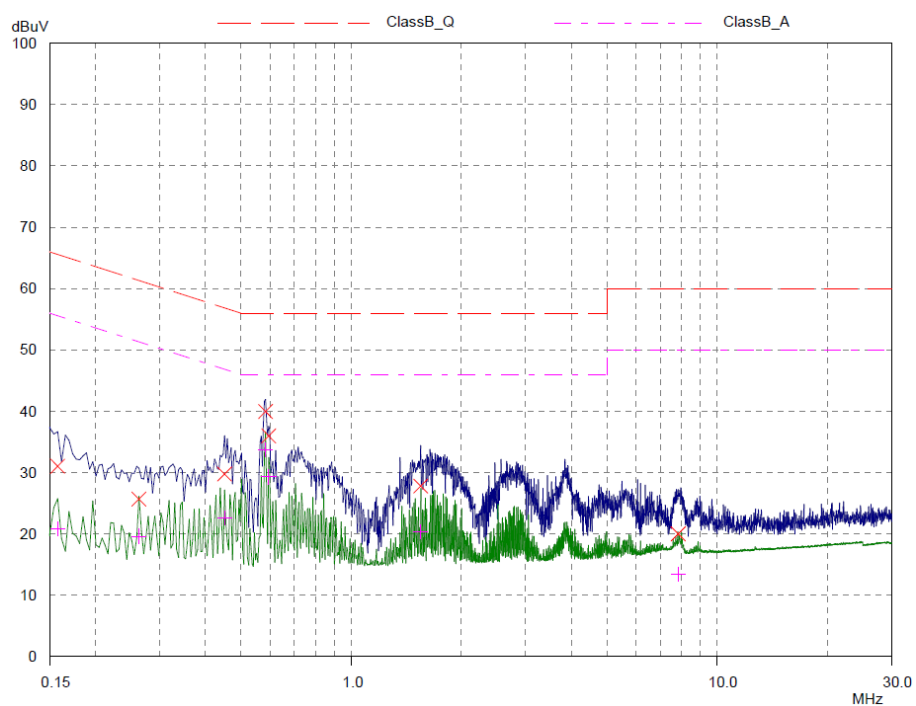

Line. Neutral

