

TEST REPORT

FCC ID. :	2AN9R-CTAK10	
Test Report No..... :	TCT230524E070	
Date of issue..... :	Jul. 12, 2023	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Fujian Centerm Information Co., Ltd.	
Address..... :	#21-#22 Buildings, No.618, Jinshan Road, Jinshan Industrial Park, Cangshan District, Fuzhou City, Fujian Province, China	
Manufacturer's name ... :	Fujian Centerm Information Co., Ltd.	
Address..... :	#21-#22 Buildings, No.618, Jinshan Road, Jinshan Industrial Park, Cangshan District, Fuzhou City, Fujian Province, China	
Standard(s)	FCC CFR Title 47 Part 2 FCC CFR Title 47 Part22 FCC CFR Title 47 Part24 FCC CFR Title 47 Part27 FCC CFR Title 47 Part90	
Product Name..... :	Smart POS	
Trade Mark	Centerm	
Model/Type reference..... :	CTA K10	
Rating(s)..... :	Refer to EUT description of page 3	
Date of receipt of test item	May 24, 2023	
Date (s) of performance of test..... :	May 24, 2023 - Jul. 12, 2023	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	



General disclaimer:

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	5
1.3. Emission Designator	6
1.4. Test Frequency	6
2. Test Result Summary	15
3. General Information.....	16
3.1. Test environment and mode.....	16
3.2. Description of Support Units.....	22
3.3. Configuration of Tested System	22
3.4. Measurement Results Explanation Example.....	22
4. Facilities and Accreditations	23
4.1. Facilities	23
4.2. Location	23
4.3. Measurement Uncertainty	23
5. Test Results and Measurement Data	24
5.1. Effective Radiated Power and Effective Isotropic Radiated Power Measurement	24
5.2. Peak to Average Ratio.....	26
5.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement	27
5.4. Band Edge and Conducted Spurious Emission Measurement	28
5.5. Field Strength of Spurious Radiation Measurement	30
5.6. Frequency Stability Measurement	62

Appendix B: Photographs of Test Setup

Appendix C: Photographs of EUT

**Test Data: Refer to Appendix For LTE Band 2, Appendix For LTE Band 4,
Appendix For LTE Band 5, Appendix For LTE Band 7,
Appendix For LTE Band 12, Appendix For LTE Band 13,
Appendix For LTE Band 14, Appendix For LTE Band 17,
Appendix For LTE Band 25, Appendix For LTE Band 26,
Appendix For LTE Band 41, Appendix For LTE Band 66
and Appendix For LTE Band 71**

1. General Product Information

1.1. EUT description

Product Name.....:	Smart POS
Model/Type reference.....:	CTA K10
Sample Number.....:	TCT230524E001-0101
Tx Frequency.....:	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26-1: 814 MHz ~ 824 MHz LTE Band 26-2: 824 MHz ~ 849 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz
Rx Frequency	LTE Band 2: 1930 MHz ~ 1990 MHz LTE Band 4: 2110 MHz ~ 2155 MHz LTE Band 5: 869 MHz ~ 894 MHz LTE Band 7: 2620 MHz ~ 2690 MHz LTE Band 12: 729 MHz ~ 746 MHz LTE Band 13: 746 MHz ~ 756 MHz LTE Band 14: 758 MHz ~ 768 MHz LTE Band 17: 734 MHz ~ 746 MHz LTE Band 25: 1930 MHz ~ 1995 MHz LTE Band 26-1: 859 MHz ~ 869 MHz LTE Band 26-2: 869 MHz ~ 894 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 66: 2110 MHz ~ 2180 MHz LTE Band 71: 617 MHz ~ 652 MHz
Bandwidth.....:	LTE Band 2: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 4: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 5: 1.4MHz /3MHz /5MHz /10MHz LTE Band 7: 5MHz /10MHz/15MHz /20MHz LTE Band 12: 1.4MHz /3MHz /5MHz /10MHz LTE Band 13: 5MHz /10MHz LTE Band 14: 5MHz /10MHz LTE Band 17: 5MHz /10MHz LTE Band 25: 1.4MHz /3MHz /5MHz /10MHz /15MHz /20MHz LTE Band 26-1: 1.4MHz /3MHz /5MHz /10MHz LTE Band 26-2: 1.4MHz /3MHz /5MHz /10MHz /15MHz LTE Band 41: 5MHz /10MHz /15MHz /20MHz LTE Band 66: 1.4MHz /3MHz /5MHz /10MHz /15MHz

	/20MHz LTE Band 71: 5MHz /10MHz /15MHz /20MHz
Maximum Output Power to Antenna.....:	LTE Band 2: 20.98dBm LTE Band 4: 23.14dBm LTE Band 5: 23.23dBm LTE Band 7: 23.77dBm LTE Band 12: 23.76dBm LTE Band 13: 23.46dBm LTE Band 14: 24.10dBm LTE Band 17: 23.64dBm LTE Band 25: 22.85dBm LTE Band 26-1: 22.94dBm LTE Band 26-2: 23.25dBm LTE Band 41: 23.52dBm LTE Band 66: 23.31dBm LTE Band 71: 24.38dBm
99% Occupied Bandwidth.....:	LTE Band 2: 18M0G7D LTE Band 4: 18M0G7D LTE Band 5: 8M99G7D LTE Band 7: 18M0G7D LTE Band 12: 9M00G7D LTE Band 13: 8M97G7D LTE Band 14: 8M95G7D LTE Band 17: 8M96G7D LTE Band 25: 18M0G7D LTE Band 26-1: 8M94G7D LTE Band 26-2: 13M5G7D LTE Band 41: 18M0G7D LTE Band 66: 18M0W7D LTE Band 71: 18M0G7D
Type of Modulation.....:	QPSK/16QAM
Antenna Type.....:	FPC Antenna
Antenna Gain.....:	LTE Band 2: 1.57dBi LTE Band 4: 1.7dBi LTE Band 5: -1.51dBi LTE Band 7: 3.88dBi LTE Band 12: -0.25dBi LTE Band 13: -0.13dBi LTE Band 14: -0.13dBi LTE Band 17: -0.25dBi LTE Band 25: 1.57dBi LTE Band 26-1: -1.51dBi LTE Band 26-2: -1.51dBi LTE Band 41: 3.88dBi LTE Band 66: 1.7dBi LTE Band 71: 3.87dBi

Rating(s).....:	Adapter Information: MODEL: A8A-050200U-US1 INPUT: AC 100-240V, 50/60Hz, 0.35A OUTPUT: DC 5V, 2.0A Rechargeable Li-ion Battery DC 7.6V
-----------------	--

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

None.

1.3. Emission Designator

LTE Band 2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.169	1M10W7D	0.141
3	2M73G7D	0.164	2M73W7D	0.138
5	4M50G7D	0.173	4M50W7D	0.141
10	9M00G7D	0.180	8M97W7D	0.153
15	13M5G7D	0.179	13M5W7D	0.156
20	18M0G7D	0.175	18M0W7D	0.152

LTE Band 4	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M09G7D	0.282	1M10W7D	0.245
3	2M72G7D	0.285	2M72W7D	0.247
5	4M49G7D	0.288	4M49W7D	0.246
10	8M97G7D	0.305	8M95W7D	0.264
15	13M5G7D	0.292	13M5W7D	0.248
20	18M0G7D	0.290	18M0W7D	0.241

LTE Band 5	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M09G7D	0.090	1M10W7D	0.075
3	2M72G7D	0.086	2M73W7D	0.076
5	4M49G7D	0.088	4M49W7D	0.075
10	8M99G7D	0.091	8M98W7D	0.081

LTE Band 7	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
5	4M49G7D	0.488	4M49W7D	0.416
10	8M98G7D	0.547	8M96W7D	0.469
15	13M4G7D	0.525	13M4W7D	0.494
20	18M0G7D	0.582	18M0W7D	0.543

LTE Band 12	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M09G7D	0.121	1M10W7D	0.102
3	2M73G7D	0.120	2M74W7D	0.101
5	4M52G7D	0.122	4M50W7D	0.106
10	9M00G7D	0.137	9M00W7D	0.117

LTE Band 13	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M52G7D	0.124	4M52W7D	0.105
10	8M97G7D	0.131	8M94W7D	0.109

LTE Band 14	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M49G7D	0.127	4M49W7D	0.114
10	8M95G7D	0.152	8M94W7D	0.128

LTE Band 17	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M49G7D	0.114	4M50W7D	0.100
10	8M96G7D	0.133	8M95W7D	0.118

LTE Band 25	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M10G7D	0.272	1M10W7D	0.237
3	2M72G7D	0.269	2M72W7D	0.238
5	4M49G7D	0.273	4M49W7D	0.237
10	8M97G7D	0.277	8M96W7D	0.225
15	13M5G7D	0.275	13M4W7D	0.249
20	18M0G7D	0.261	18M0W7D	0.242

LTE Band 26-1	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
1.4	1M09G7D	0.082	1M10W7D	0.071
3	2M72G7D	0.081	2M72W7D	0.072
5	4M49G7D	0.083	4M49W7D	0.070
10	8M94G7D	0.085	8M92W7D	0.069

LTE Band 26-2	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	BW(MHz)	Emission Designator (99%OBW)
1.4	1M09G7D	0.091	1M10W7D	0.083
3	2M72G7D	0.077	2M72W7D	0.067
5	4M50G7D	0.077	4M50W7D	0.067
10	8M99G7D	0.076	8M97W7D	0.064
15	13M5G7D	0.076	13M5W7D	0.064

LTE Band 41	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
5	4M50G7D	0.550	4M49W7D	0.483
10	8M96G7D	0.547	8M96W7D	0.488
15	13M4G7D	0.491	13M5W7D	0.410
20	18M0G7D	0.524	18M0W7D	0.426

LTE Band 66	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)
1.4	1M09G7D	0.283	1M10W7D	0.240
3	2M72G7D	0.284	2M73W7D	0.239
5	4M49G7D	0.299	4M49W7D	0.245
10	8M97G7D	0.284	8M95W7D	0.239
15	13M4G7D	0.317	13M4W7D	0.262
20	17M9G7D	0.284	18M0W7D	0.243

LTE Band 71	QPSK		16QAM	
BW(MHz)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)
5	4M50G7D	0.196	4M50W7D	0.166
10	8M98G7D	0.239	8M96W7D	0.203
15	13M5G7D	0.248	13M5W7D	0.221
20	18M0G7D	0.236	18M0W7D	0.208

1.4. Test Frequency

LTE Band 2(1.4MHz)		LTE Band 2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18607	1850.7	18615	1851.5
18900	1880	18900	1880
19193	1909.3	19185	1908.5
LTE Band 2(5MHz)		LTE Band 2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18625	1852.5	18650	1855
18900	1880	18900	1880
19175	1907.5	19150	1905
LTE Band 2(15MHz)		LTE Band 2(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
18675	1857.5	18700	1860
18900	1880	18900	1880
19125	1902.5	19100	1900

LTE Band 4(1.4MHz)		LTE Band 4(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19957	1710.7	19965	1711.5
20175	1732.5	20175	1732.5
20393	1754.3	20385	1753.5
LTE Band 4(5MHz)		LTE Band 4(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
19975	1712.5	20000	1715
20175	1732.5	20175	1732.5
20375	1752.5	20350	1750
LTE Band 4(15MHz)		LTE Band 4(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20025	1717.5	20050	1720
20175	1732.5	20175	1732.5
20325	1747.5	20300	1745

LTE Band 5(1.4MHz)		LTE Band 5(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20407	824.7	20415	825.5
20525	836.5	20525	836.5
20643	848.3	20635	847.5
LTE Band 5(5MHz)		LTE Band 5(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20425	826.5	20450	829
20525	836.5	20525	836.5
20625	846.5	20600	844

LTE Band 7(5MHz)		LTE Band 7(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20775	2502.5	20800	2505.0
21100	2535	21100	2535
21425	2567.5	21400	2565.0
LTE Band 7(15MHz)		LTE Band 7(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
20825	2507.5	20850	2510.0
21100	2535	21100	2535
21375	2562.5	21350	2560.0

LTE Band 12(1.4MHz)		LTE Band 12(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23017	699.7	23025	700.5
23095	707.5	23095	707.5
23173	715.3	23165	714.5
LTE Band 12(5MHz)		LTE Band 12(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23035	701.5	23060	704
23095	707.5	23095	707.5
23155	713.5	23130	711

LTE Band 13(5MHz)		LTE Band 13(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23205	779.5	23230	782
23230	782	23230	782
23255	784.5	23230	782

LTE Band 14(5MHz)		LTE Band 14(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23305	790.5	23330	793
23330	793	23330	793
23355	795.5	23330	793

LTE Band 17(5MHz)		LTE Band 17(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
23755	706.5	23780	709
23790	710	23790	710
23825	713.5	23800	711

LTE Band 25(1.4MHz)		LTE Band 25(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26047	1850.7	26055	1851.5
26365	1882.5	26365	1882.5
26683	1914.3	26675	1913.5
LTE Band 25(5MHz)		LTE Band 25(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26065	1852.5	26090	1855
26365	1882.5	26365	1882.5
26665	1912.5	26640	1910
LTE Band 25(15MHz)		LTE Band 25(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26115	1857.5	26140	1860
26365	1882.5	26365	1882.5
26615	1907.5	26590	1905

LTE Band 26-1(1.4MHz)		LTE Band 26-1(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26697	814.7	26705	815.5
26740	819.0	26740	819.0
26783	823.3	26775	822.5
LTE Band 26-1(5MHz)		LTE Band 26-1(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26715	816.5	26740	819
26740	819.0		
26765	821.5		

LTE Band 26-2(1.4MHz)		LTE Band 26-2(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26797	824.7	26805	825.5
26915	836.5	26915	836.5
27033	848.3	27025	847.5
LTE Band 26-2(5MHz)		LTE Band 26-2(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
26815	826.5	26840	829
26915	836.5	26915	836.5
27015	846.5	26990	844
LTE Band 26-2(15MHz)			
26865	831.5		
26915	836.5		
26965	841.5		

LTE Band 41(5MHz)		LTE Band 41(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39675	2498.5	39700	2501
40620	2593	40620	2593
41565	2687.5	41540	2685
LTE Band 41(15MHz)		LTE Band 41(20MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
39725	2503.5	39750	2506
40620	2593	40620	2593
41515	2682.5	41490	2680

LTE Band 66(1.4MHz)		LTE Band 66(3MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131979	1710.7	131987	1711.5
132322	1745	132322	1745
132665	1779.3	132657	1778.5
LTE Band 66(5MHz)		LTE Band 66(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
131997	1712.5	132022	1715
132322	1745	132322	1745
132647	1777.5	132622	1775
LTE Band 66(15MHz)		LTE Band 66(20MHz)	
132047	1717.5	132072	1720
132322	1745	132322	1745
132597	1772.5	132572	1770

LTE Band 71(5MHz)		LTE Band 71(10MHz)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
133147	665.5	133172	668
133297	680.5	133297	680.5
133447	695.5	133422	693
LTE Band 71(15MHz)		LTE Band 71(20MHz)	
133197	670.5	133222	673
133297	680.5	133322	683
133397	690.5	133372	688

2. Test Result Summary

Requirement	CFR 47 Section	Result
Conducted Output Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Peak-to-Average Ratio	§2.1046; §24.232(d) §27.50(d); §27.50(c); §27.50(b)	PASS
Effective Radiated Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Equivalent Isotropic Radiated Power	§2.1046; §22.913; §24.232(c); §27.50(d); §27.50(c); §27.50(b); §90.542(a)	PASS
Occupied Bandwidth	§2.1049; §24.238(b); §27.53; §90.209(a)	PASS
Band Edge	§2.1051; §22.917(a); §27.53(h); §27.53(c); §27.53(g); §24.238(a); §90.543(e)	PASS
Conducted Spurious Emission	§2.1051; §22.917(a); §27.53(h); §27.53(g); §27.53(c); §24.238(a); §90.543(c)	PASS
Field Strength of Spurious Radiation	§2.1053; §22.917(a); §27.53(g); §27.53(c); §27.53(h); §24.238(a); §90.543(c)	PASS
Frequency Stability for Temperature & Voltage	§2.1055; §22.355; §27.54; §24.235; §90.213	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The EUT has two appearance types, only the camera position is different, and both have been tested, only camera position 1 has the worst test data.

3. General Information

3.1. Test environment and mode

Operating Environment:

Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar

Keep the EUT in communication with CMW500 and select channel with modulation
All modes and data rates and positions were investigated.
Test modes are chosen to be reported as the worst case configuration below:

Test Mode		
Band	Radiated TCs	Conducted TCs
LTE Band 2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 4	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 5	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 7	QPSK Link (5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 12	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)
LTE Band 13	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 14	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 17	QPSK Link (5MHz / 10MHz)	16QAM Link (5MHz / 10MHz)
LTE Band 25	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 26-1	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz)

LTE Band 26-2	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz)
LTE Band 41	QPSK Link (5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 66	QPSK Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (1.4MHz / 3MHz / 5MHz / 10MHz / 15MHz / 20MHz)
LTE Band 71	QPSK Link (5MHz / 10MHz / 15MHz / 20MHz)	16QAM Link (5MHz / 10MHz / 15MHz / 20MHz)

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas License Digital Systems v03 with maximum output power. Radiated measurements were performed with rotating EUT in different three orthogonal test planes to find the maximum emission. The sample was placed 0.8m/1.5m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarization. The emissions worst-case are shown in Test Results of the following pages.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	2	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	4	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	5	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	7	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	14	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	17	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	25	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	26-1	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	26-2	V	V	V	V	V	-	V	V	V	V	V	V	V	V
	41	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	66	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	71	-	-	V	V	V	V	V	V	V	V	V	V	V	V
Peak-to-Average Ratio	2	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	4	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	5	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	7	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	14	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	17	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	25	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	26-1	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	26-2	V	V	V	V	V	-	V	V	V	V	V	V	V	V
	41	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	66	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	71	-	-	V	V	V	V	V	V	V	V	V	V	V	V
26dB and 99% Bandwidth	2	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	4	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	5	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	7	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V

	14	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	17	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	25	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	26-1	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	26-2	V	V	V	V	V	-	V	V	V	V	V	V	V	V
	41	-	-	V	V	V	V	V	V	-	-	V	V	V	V
	66	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	71	-	-	V	V	V	V	V	V	V	V	V	V	V	V
Conducted Band Edge	2	V	V	V	V	V	V	V	V	V	V	V	V	-	V
	4	V	V	V	V	V	V	V	V	V	V	V	V	-	V
	5	V	V	V	V	-	-	V	V	V	V	V	V	-	V
	7	-	-	V	V	V	V	V	V	V	V	V	V	-	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	14	-	-	V	V	-	-	V	V	V	V	V	V	-	V
	17	-	-	V	V	-	-	V	V	V	V	V	V	-	V
	25	V	V	V	V	V	V	V	V	V	V	V	V	-	V
	26-1	V	V	V	V	-	-	V	V	V	V	V	V	-	V
	26-2	V	V	V	V	V	-	V	V	V	V	V	V	-	V
	41	-	-	V	V	V	V	V	V	V	-	V	V	-	V
Conducted Spurious Emission	66	V	V	V	V	V	V	V	V	V	V	V	V	-	V
	71	-	-	V	V	V	V	V	V	V	V	V	V	-	V
	2	V	V	V	V	V	V	V	V	V	-	-	V	V	V
	4	V	V	V	V	V	V	V	V	V	-	-	V	V	V
	5	V	V	V	V	-	-	V	V	V	-	-	V	V	V
	7	-	-	V	V	V	V	V	V	V	-	-	V	V	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	14	-	-	V	V	-	-	V	V	V	-	-	V	V	V
	17	-	-	V	V	-	-	V	V	V	-	-	V	V	V
	25	V	V	V	V	V	V	V	V	V	-	-	V	V	V
	26-1	V	V	V	V	-	-	V	V	V	-	-	V	V	V
	26-2	V	V	V	V	V	-	V	V	V	-	-	V	V	V
	41	-	-	V	V	V	V	V	V	V	-	-	V	V	V
	66	V	V	V	V	V	V	V	V	V	-	-	V	V	V

	71	-	-	V	V	V	V	V	V	V	-	-	V	V	V
Frequency Stability	2	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	4	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	5	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	7	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	12	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	13	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	14	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	17	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	25	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	26-1	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	26-2	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	41	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	66	V	-	-	-	-	-	V	V	V	-	-	V	V	V
	71	-	-	V	V	V	V	V	V	V	-	-	V	V	V
E.R.P./ E.I.R.P.	2	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	4	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	5	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	7	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	12	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	13	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	14	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	17	-	-	V	V	-	-	V	V	V	V	V	V	V	V
	25	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	26-1	V	V	V	V	-	-	V	V	V	V	V	V	V	V
	26-2	V	V	V	V	V	-	V	V	V	V	V	V	V	V
	41	-	-	V	V	V	V	V	V	V	V	V	V	V	V
	66	V	V	V	V	V	V	V	V	V	V	V	V	V	V
	71	-	-	V	V	V	V	V	V	V	V	V	V	V	V
Radiated Spurious Emission	2	-	-	-	-	-	V	V	V	V	-	-	V	V	V
	4	-	-	-	-	-	V	V	V	V	-	-	V	V	V
	5	-	-	-	V	-	-	V	V	V	-	-	V	V	V
	7	-	-	V	-	-	-	V	V	V	-	-	V	V	V
	12	-	-	-	V	-	-	V	V	V	-	-	V	V	V
	13	-	-	-	V	-	-	V	V	V	-	-	V	V	V
	14	-	-	V	-	-	-	V	V	V	-	-	V	V	V

	17	-	-	-	v	-	-	v	v	v	-	-	v	v	v
	25	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	26-1	-	-	v	-	-	-	v	v	v	-	-	v	v	v
	26-2	-	-	-	-	v	-	v	v	v	-	-	v	v	v
	41	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	66	-	-	-	-	-	v	v	v	v	-	-	v	v	v
	71	-	-	-	-	-	v	v	v	v	-	-	v	v	v
Note	- The mark "v" means that this configuration is chosen for testing - The mark "-" means that this bandwidth is not supported.														

3.2. Description of Support Units

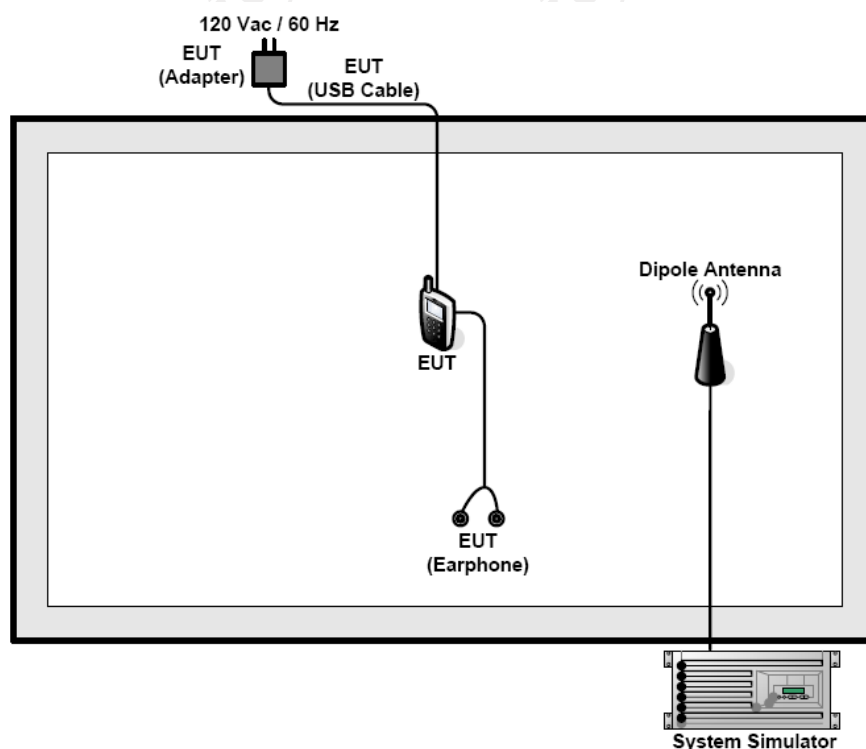
The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

3.3. Configuration of Tested System



3.4. Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level. The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty


The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Effective Radiated Power and Effective Isotropic Radiated Power Measurement

5.1.1. Test Specification

Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1046
Limit:	LTE Band 2: 2W LTE Band 4: 1W LTE Band 5: 7W LTE Band 7: 2W LTE Band 12: 3W LTE Band 13: 3W LTE Band 14: 3W LTE Band 17: 3W LTE Band 25: 2W LTE Band 26-1: 100W LTE Band 26-2: 7W LTE Band 41: 2W LTE Band 66: 1W LTE Band 71: 3W
Test Setup:	 The diagram illustrates the test setup. On the left is a 'System Simulator' represented by a computer monitor icon. A cable connects it to an 'EUT' (Equipment Under Test), represented by a mobile phone icon on the right.
Test Procedure:	1. The transmitter output port was connected to the system simulator. 2. Set EUT at maximum power through system simulator. 3. Select lowest, middle, highest channels for each band and different modulation. 4. Measure and record the power level from the system simulator. 5. Calculate the ERP and EIRP The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is: $\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$ where: ERP or EIRP = effective radiated power or equivalent

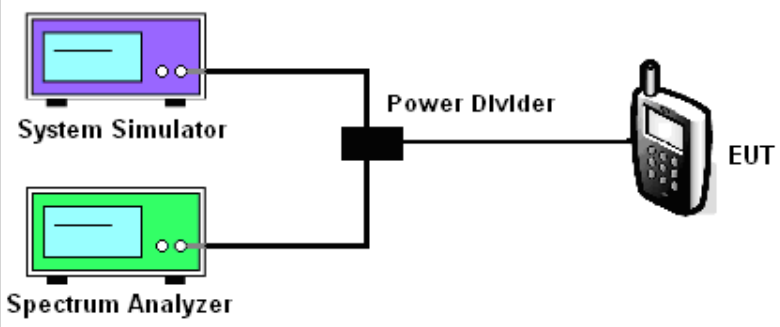
	isotropically radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm); P_{Meas} = measured transmitter output power or PSD, in dBm or dBW; G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP); L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB. <i>Note: For personal/portable radios utilizing an integral antenna, the factor L_C is typically negligible. However, in a fixed station transmit system that utilizes a long cable run between the transmitter and the transmitting antenna, this factor can be significant.</i>
Test Result:	PASS

5.1.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.2. Peak to Average Ratio

5.2.1. Test Specification

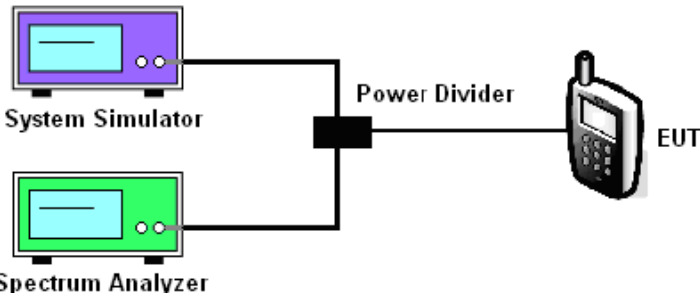
Test Requirement:	Refer to section 2
Test Method:	FCC KDB 971168 D01v03
Limit:	The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.
Test Setup:	 The diagram illustrates the test setup. A System Simulator (represented by a purple monitor icon) and a Spectrum Analyzer (represented by a green monitor icon) are connected to a central Power Divider (represented by a black square icon). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.7.1. 2. The EUT was connected to spectrum analyzer and system simulator via a power divider. 3. Set EUT to transmit at maximum output power. 4. Set the CCDF (Complementary Cumulative Distribution Function) option of the spectrum analyzer. Record the maximum PAPR level associated with a probability of 0.1%.
Test Result:	PASS

5.2.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.3. 99% Occupied Bandwidth and 26dB Bandwidth Measurement

5.3.1. Test Specification

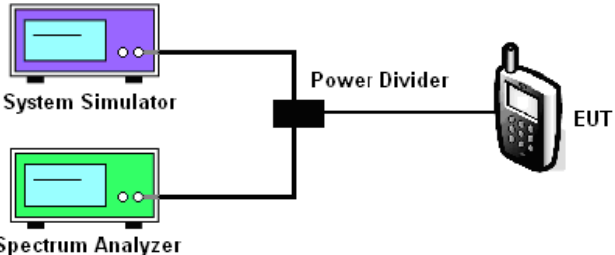
Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1049
Limit:	N/A
Test Setup:	 The diagram shows a System Simulator (purple box) and a Spectrum Analyzer (green box) connected to a Power Divider (black box). The Power Divider is also connected to the EUT (Equipment Under Test, a mobile phone). The System Simulator and Spectrum Analyzer are connected to the Power Divider via cables.
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 4.2. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of the EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The 99% occupied bandwidth were measured, set RBW= 1% of OBW, VBW= 3*RBW, sample detector, trace maximum hold. 5. The 26dB bandwidth were measured, set RBW= 1% of EBW, VBW= 3*RBW, peak detector, trace maximum hold.
Test Result:	PASS

5.3.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.4. Band Edge and Conducted Spurious Emission Measurement

5.4.1. Test Specification

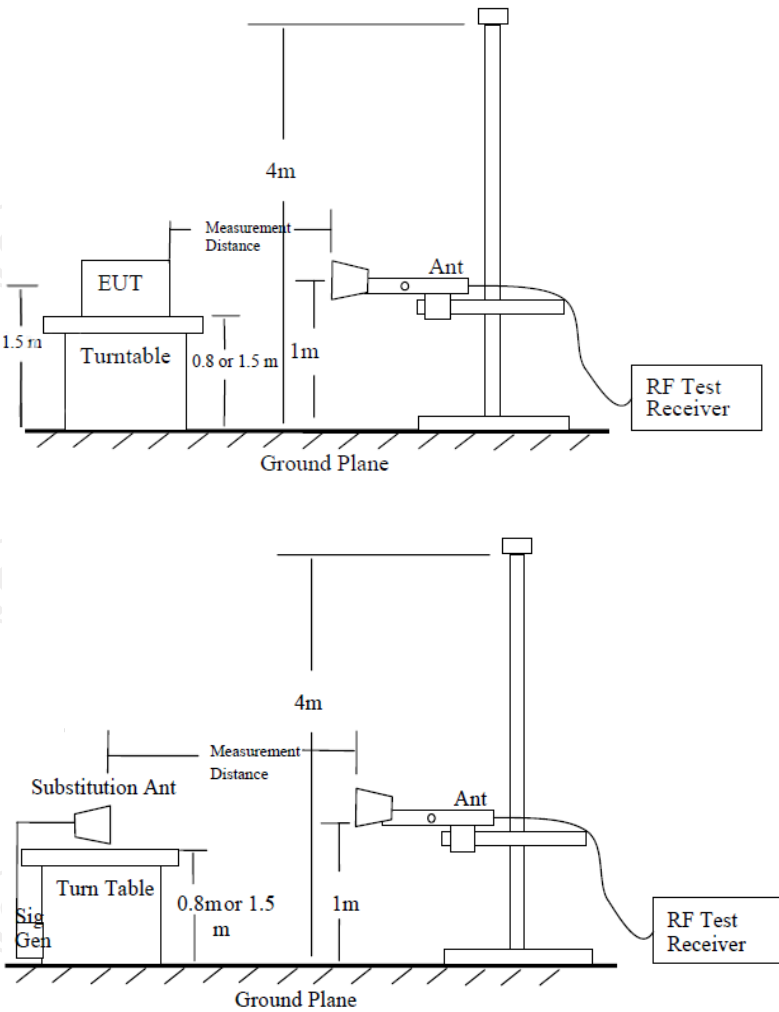
Test Requirement:	Refer to section 2
Test Method:	FCC part2.1051
Limit:	-13dbm Band 13: -13dBm/-35dbm/-40dbm Band 41: -10dBm/-13dbm/-25dbm
Test Setup:	 The diagram illustrates the test setup. A System Simulator (represented by a purple monitor icon) and a Spectrum Analyzer (represented by a green monitor icon) are connected to a Power Divider (represented by a black square icon). The Power Divider is then connected to the EUT (Equipment Under Test, represented by a mobile phone icon).
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 6.0. 2. The EUT was connected to the spectrum analyzer and system simulator via a power divider. 3. The RF output of EUT was connected to the spectrum analyzer by an RF cable and attenuator. The path loss was compensated to the results for each measurement. 4. The band edges of low and high channels for the highest RF powers were measured. 5. The conducted spurious emission for the whole frequency range was taken. 6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 7. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power $P(\text{Watts}) = P(\text{W}) - [43 + 10\log(P)] (\text{dB}) = [30 + 10\log(P)] (\text{dBm}) - [43 + 10\log(P)] (\text{dB}) = -13\text{dBm}$. For Band 17, the limit line is derived from $55 + 10\log(P)$ dB below the transmitter power
Test Result:	PASS

5.4.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Spectrum Analyzer	R&S	FSV40-N	102188	Feb. 20, 2024
Combiner Box	Ascentest	AT890-RFB	/	/

5.5. Field Strength of Spurious Radiation Measurement

5.5.1. Test Specification

Test Requirement:	Refer to section 2
Test Method:	FCC part 2.1053
Limit:	30MHz~20GHz -13dBm
Test setup:	
Test Procedure:	1. The testing follows FCC KDB 971168 D01v03 Section 5.8 and ANSI / TIA-603-D-2010 Section 2.2.12. 2. The EUT was placed on a rotatable wooden table 0.8 meters above the ground. 3. The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower. 4. The table was rotated 360 degrees to determine the position of the highest spurious emission. 5. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical

	polarizations. 6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking record of maximum spurious emission. 7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. 8. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission. 9. Taking the record of output power at antenna port. 10. Repeat step 7 to step 8 for another polarization. 11. $EIRP\ (dBm) = S.G.\ Power - Tx\ Cable\ Loss + Tx\ Antenna\ Gain$ 12. $ERP\ (dBm) = EIRP - 2.15$ 13. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. 14. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts) $= P(W) - [43 + 10\log(P)]\ (dB)$ $= [30 + 10\log(P)]\ (dBm) - [43 + 10\log(P)]\ (dB)$ $= -13dBm.$
Test results:	PASS
Remark:	All modulations have been tested, but only the worst modulation show in this test item.

5.5.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Universal Radio Communication Tester	R&S	CMU200	110188	Jun. 30, 2024
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 30, 2024
Signal Generator	HP	83623B	3614A00396	Feb. 24, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jun. 30, 2024
Broadband Antenna	Schwarzbeck	VULB9163	412	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	1201	Jun. 30, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 24, 2024
Coaxial cable	SKET	RC-18G-N-M	/	Feb. 24, 2024
Coaxial cable	SKET	RC_40G-K-M	/	Feb. 24, 2024
Antenna Mast	Keleto	RE-AM	/	/
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.5.3. Test Data

Frequency Range (9 kHz-30MHz)

Frequency (MHz)	Level@3m (dBμV/m)	Limit@3m (dBμV/m)
--	--	--
--	--	--
--	--	--
--	--	--

Note: 1. Emission Level=Reading+ Cable loss+Antenna factor-Amp factor

2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement

Band	Band 2(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-60.45	23.54	-36.91	-13.00	PASS
5580.00	V	-65.53	23.81	-41.72		
7440.00	V	-81.85	23.96	-57.89		
3720.00	Horizontal	-58.65	23.54	-35.11		
5580.00	H	-64.57	23.81	-40.76		
7440.00	H	-78.02	23.96	-54.06		

Band	Band 2(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.00	Vertical	-60.25	23.58	-36.67	-13.00	PASS
5640.00	V	-70.23	23.85	-46.38		
7520.00	V	-77.84	23.99	-53.85		
3760.00	Horizontal	-59.50	23.58	-35.92		
5640.00	H	-65.63	23.85	-41.78		
7520.00	H	-79.79	23.99	-55.80		

Band	Band 2(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3800.00	Vertical	-62.12	23.60	-38.52	-13.00	PASS
5700.00	V	-70.74	23.88	-46.86		
7600.00	V	-78.80	24.02	-54.78		
3800.00	Horizontal	-57.46	23.60	-33.86		
5700.00	H	-66.88	23.88	-43.00		
7600.00	H	-80.54	24.02	-56.52		

Band	Band 2(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-60.29	23.54	-36.75	-13.00	PASS
5580.00	V	-66.68	23.81	-42.87		
7440.00	V	-79.53	23.96	-55.57		
3720.00	Horizontal	-57.13	23.54	-33.59		
5580.00	H	-64.69	23.81	-40.88		
7440.00	H	-76.07	23.96	-52.11		

Band	Band 2(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3760.00	Vertical	-60.10	23.58	-36.52	-13.00	PASS
5640.00	V	-70.43	23.85	-46.58		
7520.00	V	-78.81	23.99	-54.82		
3760.00	Horizontal	-58.62	23.58	-35.04		
5640.00	H	-65.28	23.85	-41.43		
7520.00	H	-79.71	23.99	-55.72		

Band	Band 2(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3800.00	Vertical	-61.25	23.60	-37.65	-13.00	PASS
5700.00	V	-71.76	23.88	-47.88		
7600.00	V	-79.53	24.02	-55.51		
3800.00	Horizontal	-57.39	23.60	-33.79		
5700.00	H	-66.49	23.88	-42.61		
7600.00	H	-78.05	24.02	-54.03		

Band	Band 4(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-60.25	23.40	-36.85	-13.00	PASS
5160.00	V	-64.67	23.69	-40.98		
6880.00	V	-79.68	23.75	-55.93		
3440.00	Horizontal	-58.37	23.40	-34.97		
5160.00	H	-64.83	23.69	-41.14		
6880.00	H	-76.59	23.75	-52.84		

Band	Band 4(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3465.00	Vertical	-59.88	23.42	-36.46	-13.00	PASS
5197.50	V	-69.76	23.73	-46.03		
6930.00	V	-79.22	23.79	-55.43		
3465.00	Horizontal	-56.59	23.42	-33.17		
5197.50	H	-65.15	23.73	-41.42		
6930.00	H	-79.58	23.79	-55.79		

Band	Band 4(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-61.07	23.46	-37.61	-13.00	PASS
5235.00	V	-70.64	23.77	-46.87		
6980.00	V	-77.70	23.81	-53.89		
3490.00	Horizontal	-57.27	23.46	-33.81		
5235.00	H	-67.48	23.77	-43.71		
6980.00	H	-80.86	23.81	-57.05		

Band	Band 4(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-61.31	23.40	-37.91	-13.00	PASS
5160.00	V	-66.75	23.69	-43.06		
6880.00	V	-79.09	23.75	-55.34		
3440.00	Horizontal	-59.25	23.40	-35.85		
5160.00	H	-64.62	23.69	-40.93		
6880.00	H	-78.16	23.75	-54.41		

Band	Band 4(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3465.00	Vertical	-59.88	23.42	-36.46	-13.00	PASS
5197.50	V	-71.43	23.73	-47.70		
6930.00	V	-78.89	23.79	-55.10		
3465.00	Horizontal	-57.79	23.42	-34.37		
5197.50	H	-67.57	23.73	-43.84		
6930.00	H	-79.85	23.79	-56.06		

Band	Band 4(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-62.15	23.46	-38.69	-13.00	PASS
5235.00	V	-70.37	23.77	-46.60		
6980.00	V	-79.79	23.81	-55.98		
3490.00	Horizontal	-58.53	23.46	-35.07		
5235.00	H	-68.20	23.77	-44.43		
6980.00	H	-80.55	23.81	-56.74		

Band	Band 5(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1658.00	Vertical	-61.56	23.15	-38.41	-13.00	PASS
2487.00	V	-65.30	23.24	-42.06		
3316.00	V	-79.85	23.35	-56.50		
1658.00	Horizontal	-60.24	23.15	-37.09		
2487.00	H	-61.74	23.24	-38.50		
3316.00	H	-78.38	23.35	-55.03		

Band	Band 5(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-59.02	23.17	-35.85	-13.00	PASS
2509.50	V	-71.25	23.26	-47.99		
3346.00	V	-78.17	23.38	-54.79		
1673.00	Horizontal	-58.31	23.17	-35.14		
2509.50	H	-64.07	23.26	-40.81		
3346.00	H	-78.72	23.38	-55.34		

Band	Band 5(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1688.00	Vertical	-63.08	23.19	-39.89	-13.00	PASS
2532.00	V	-72.42	23.28	-49.14		
3376.00	V	-83.79	23.40	-60.39		
1688.00	Horizontal	-57.82	23.19	-34.63		
2532.00	H	-67.26	23.28	-43.98		
3376.00	H	-83.41	23.40	-60.01		

Band	Band 5(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1658.00	Vertical	-59.22	23.15	-36.07	-13.00	PASS
2487.00	V	-64.38	23.24	-41.14		
3316.00	V	-79.75	23.35	-56.40		
1658.00	Horizontal	-58.71	23.15	-35.56		
2487.00	H	-65.52	23.24	-42.28		
3316.00	H	-78.43	23.35	-55.08		

Band	Band 5(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-59.84	23.17	-36.67	-13.00	PASS
2509.50	V	-71.32	23.26	-48.06		
3346.00	V	-78.67	23.38	-55.29		
1673.00	Horizontal	-56.16	23.17	-32.99		
2509.50	H	-66.89	23.26	-43.63		
3346.00	H	-78.83	23.38	-55.45		

Band	Band 5(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1688.00	Vertical	-62.74	23.19	-39.55	-13.00	PASS
2532.00	V	-71.25	23.28	-47.97		
3376.00	V	-79.77	23.40	-56.37		
1688.00	Horizontal	-58.55	23.19	-35.36		
2532.00	H	-67.93	23.28	-44.65		
3376.00	H	-82.15	23.40	-58.75		

Band	Band 7(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5020.00	Vertical	-61.83	23.11	-38.72	-25.00	PASS
7530.00	V	-65.12	23.25	-41.87		
10040.00	V	-80.79	23.38	-57.41		
5020.00	Horizontal	-59.88	23.11	-36.77		
7530.00	H	-62.56	23.25	-39.31		
10040.00	H	-77.61	23.38	-54.23		

Band	Band 7(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5070.00	Vertical	-58.70	23.14	-35.56	-25.00	PASS
7605.00	V	-71.13	23.23	-47.90		
10140.00	V	-79.51	23.34	-56.17		
5070.00	Horizontal	-57.36	23.14	-34.22		
7605.00	H	-64.96	23.23	-41.73		
10140.00	H	-78.63	23.34	-55.29		

Band	Band 7(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5120.00	Vertical	-61.79	23.17	-38.62	-25.00	PASS
7680.00	V	-71.19	23.25	-47.94		
10240.00	V	-84.74	23.40	-61.34		
5120.00	Horizontal	-58.92	23.17	-35.75		
7680.00	H	-67.57	23.25	-44.32		
10240.00	H	-81.61	23.40	-58.21		

Band	Band 7(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5020.00	Vertical	-59.79	23.11	-36.68	-25.00	PASS
7530.00	V	-63.73	23.25	-40.48		
10040.00	V	-81.57	23.38	-58.19		
5020.00	Horizontal	-60.01	23.11	-36.90		
7530.00	H	-64.09	23.25	-40.84		
10040.00	H	-78.58	23.38	-55.20		

Band	Band 7(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5070.00	Vertical	-59.58	23.14	-36.44	-25.00	PASS
7605.00	V	-70.69	23.23	-47.46		
10140.00	V	-80.39	23.34	-57.05		
5070.00	Horizontal	-57.23	23.14	-34.09		
7605.00	H	-65.65	23.23	-42.42		
10140.00	H	-79.31	23.34	-55.97		

Band	Band 7(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5120.00	Vertical	-62.03	23.17	-38.86	-25.00	PASS
7680.00	V	-70.23	23.25	-46.98		
10240.00	V	-79.07	23.40	-55.67		
5120.00	Horizontal	-57.92	23.17	-34.75		
7680.00	H	-67.11	23.25	-43.86		
10240.00	H	-80.20	23.40	-56.80		

Band	Band 12(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1408.00	Vertical	-60.66	23.03	-37.63	-13.00	PASS
2112.00	V	-66.82	23.16	-43.66		
2816.00	V	-81.73	23.25	-58.48		
1408.00	Horizontal	-60.83	23.03	-37.80		
2112.00	H	-63.18	23.16	-40.02		
2816.00	H	-78.76	23.25	-55.51		

Band	Band 12(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1415.00	Vertical	-60.14	23.05	-37.09	-13.00	PASS
2122.50	V	-70.95	23.18	-47.77		
2830.00	V	-79.43	23.28	-56.15		
1415.00	Horizontal	-57.38	23.05	-34.33		
2122.50	H	-63.97	23.18	-40.79		
2830.00	H	-77.34	23.28	-54.06		

Band	Band 12(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-63.23	23.08	-40.15	-13.00	PASS
2133.00	V	-72.06	23.20	-48.86		
2844.00	V	-82.98	23.31	-59.67		
1422.00	Horizontal	-58.15	23.08	-35.07		
2133.00	H	-66.56	23.20	-43.36		
2844.00	H	-82.30	23.31	-58.99		

Band	Band 12(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1408.00	Vertical	-61.02	23.03	-37.99	-13.00	PASS
2112.00	V	-63.63	23.16	-40.47		
2816.00	V	-80.82	23.25	-57.57		
1408.00	Horizontal	-58.29	23.03	-35.26		
2112.00	H	-64.46	23.16	-41.30		
2816.00	H	-78.28	23.25	-55.03		

Band	Band 12(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1415.00	Vertical	-59.12	23.05	-36.07	-13.00	PASS
2122.50	V	-71.09	23.18	-47.91		
2830.00	V	-78.66	23.28	-55.38		
1415.00	Horizontal	-59.23	23.05	-36.18		
2122.50	H	-66.12	23.18	-42.94		
2830.00	H	-78.71	23.28	-55.43		

Band	Band 12(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-61.15	23.08	-38.07	-13.00	PASS
2133.00	V	-70.92	23.20	-47.72		
2844.00	V	-78.09	23.31	-54.78		
1422.00	Horizontal	-57.77	23.08	-34.69		
2133.00	H	-67.73	23.20	-44.53		
2844.00	H	-80.88	23.31	-57.57		

Band	Band 13(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-67.87	23.06	-44.81	-40.00	PASS
2346.00	V	-65.27	23.17	-42.10	-13.00	
3128.00	V	-81.15	23.27	-57.88	-13.00	
1564.00	Horizontal	-68.48	23.05	-45.43	-40.00	
2346.00	H	-62.89	23.18	-39.71	-13.00	
3128.00	H	-78.40	23.28	-55.12	-13.00	

Band	Band 13(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.72	23.07	-45.65	-40.00	PASS
2346.00	V	-70.33	23.19	-47.14	-13.00	
3128.00	V	-77.45	23.29	-54.16	-13.00	
1564.00	Horizontal	-66.30	23.07	-43.23	-40.00	
2346.00	H	-64.15	23.19	-40.96	-13.00	
3128.00	H	-79.45	23.30	-56.15	-13.00	

Band	Band 13(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.32	23.08	-45.24	-40.00	PASS
2346.00	V	-70.74	23.20	-47.54	-13.00	
3128.00	V	-82.01	23.31	-58.70	-13.00	
1564.00	Horizontal	-67.89	23.08	-44.81	-40.00	
2346.00	H	-66.26	23.20	-43.06	-13.00	
3128.00	H	-81.01	23.31	-57.70	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.77	23.06	-45.71	-40.00	PASS
2346.00	V	-64.16	23.17	-40.99	-13.00	
3128.00	V	-80.29	23.27	-57.02	-13.00	
1564.00	Horizontal	-67.25	23.05	-44.20	-40.00	
2346.00	H	-66.19	23.18	-43.01	-13.00	
3128.00	H	-77.01	23.28	-53.73	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-70.26	23.07	-47.19	-40.00	PASS
2346.00	V	-70.06	23.19	-46.87	-13.00	
3128.00	V	-77.62	23.29	-54.33	-13.00	
1564.00	Horizontal	-69.12	23.07	-46.05	-40.00	
2346.00	H	-63.54	23.19	-40.35	-13.00	
3128.00	H	-79.30	23.30	-56.00	-13.00	

Band	Band 13(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1564.00	Vertical	-68.11	23.08	-45.03	-40.00	PASS
2346.00	V	-70.45	23.20	-47.25	-13.00	
3128.00	V	-77.69	23.31	-54.38	-13.00	
1564.00	Horizontal	-69.68	23.08	-46.60	-40.00	
2346.00	H	-65.42	23.20	-42.22	-13.00	
3128.00	H	-80.79	23.31	-57.48	-13.00	

Band	Band 14(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-66.97	23.06	-43.91	-40.00	PASS
2379.00	V	-65.34	23.17	-42.17	-13.00	
3172.00	V	-80.92	23.27	-57.65	-13.00	
1586.00	Horizontal	-67.87	23.05	-44.82	-40.00	
2379.00	H	-63.73	23.18	-40.55	-13.00	
3172.00	H	-78.01	23.28	-54.73	-13.00	

Band	Band 14(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-67.16	23.07	-44.09	-40.00	PASS
2379.00	V	-70.73	23.19	-47.54	-13.00	
3172.00	V	-79.56	23.29	-56.27	-13.00	
1586.00	Horizontal	-67.84	23.07	-44.77	-40.00	
2379.00	H	-64.35	23.19	-41.16	-13.00	
3172.00	H	-78.78	23.30	-55.48	-13.00	

Band	Band 14(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-66.99	23.08	-43.91	-40.00	PASS
2379.00	V	-72.31	23.20	-49.11	-13.00	
3172.00	V	-83.05	23.31	-59.74	-13.00	
1586.00	Horizontal	-66.32	23.08	-43.24	-40.00	
2379.00	H	-65.92	23.20	-42.72	-13.00	
3172.00	H	-81.09	23.31	-57.78	-13.00	

Band	Band 14(16QAM, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-67.96	23.06	-44.90	-40.00	PASS
2379.00	V	-65.21	23.17	-42.04	-13.00	
3172.00	V	-80.96	23.27	-57.69	-13.00	
1586.00	Horizontal	-67.45	23.05	-44.40	-40.00	
2379.00	H	-65.66	23.18	-42.48	-13.00	
3172.00	H	-77.33	23.28	-54.05	-13.00	

Band	Band 14(16QAM, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-66.82	23.07	-43.75	-40.00	PASS
2379.00	V	-69.76	23.19	-46.57	-13.00	
3172.00	V	-77.43	23.29	-54.14	-13.00	
1586.00	Horizontal	-66.93	23.07	-43.86	-40.00	
2379.00	H	-64.67	23.19	-41.48	-13.00	
3172.00	H	-79.21	23.30	-55.91	-13.00	

Band	Band 14(16QAM, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1586.00	Vertical	-67.55	23.08	-44.47	-40.00	PASS
2379.00	V	-70.82	23.20	-47.62	-13.00	
3172.00	V	-77.98	23.31	-54.67	-13.00	
1586.00	Horizontal	-67.38	23.08	-44.30	-40.00	
2379.00	H	-66.03	23.20	-42.83	-13.00	
3172.00	H	-79.77	23.31	-56.46	-13.00	

Band	Band 17(QPSK, 10MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1418.00	Vertical	-60.89	23.06	-37.83	-13.00	PASS
2127.00	V	-64.65	23.17	-41.48		
2836.00	V	-81.32	23.27	-58.05		
1418.00	Horizontal	-61.01	23.05	-37.96		
2127.00	H	-63.57	23.18	-40.39		
2836.00	H	-78.23	23.28	-54.95		

Band	Band 17(QPSK, 10MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1420.00	Vertical	-58.76	23.07	-35.69	-13.00	PASS
2130.00	V	-71.08	23.19	-47.89		
2840.00	V	-78.78	23.29	-55.49		
1420.00	Horizontal	-56.52	23.07	-33.45		
2130.00	H	-65.44	23.19	-42.25		
2840.00	H	-79.91	23.30	-56.61		

Band	Band 17(QPSK, 10MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-71.05	23.08	-47.97	-13.00	PASS
2133.00	V	-83.25	23.20	-60.05		
2844.00	V	-56.60	23.31	-33.29		
1422.00	Horizontal	-66.27	23.08	-43.19		
2133.00	H	-81.33	23.20	-58.13		
2844.00	H	-71.90	23.31	-48.59		

Band	Band 17(16QAM, 10MHz)				Test channel:	Lowest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1418.00	Vertical	-59.95	23.06	-36.89	-13.00	PASS
2127.00	V	-65.05	23.17	-41.88		
2836.00	V	-81.11	23.27	-57.84		
1418.00	Horizontal	-57.07	23.05	-34.02		
2127.00	H	-65.56	23.18	-42.38		
2836.00	H	-77.02	23.28	-53.74		
Band	Band 17(16QAM, 10MHz)				Test channel:	Middle
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1420.00	Vertical	-58.20	23.07	-35.13	-13.00	PASS
2130.00	V	-70.72	23.19	-47.53		
2840.00	V	-77.95	23.29	-54.66		
1420.00	Horizontal	-57.78	23.07	-34.71		
2130.00	H	-65.27	23.19	-42.08		
2840.00	H	-79.03	23.30	-55.73		
Band	Band 17(16QAM, 10MHz)				Test channel:	Highest
Test mode:					Temperature :	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1422.00	Vertical	-61.34	23.08	-38.26	-13.00	PASS
2133.00	V	-70.43	23.20	-47.23		
2844.00	V	-78.97	23.31	-55.66		
1422.00	Horizontal	-57.52	23.08	-34.44		
2133.00	H	-66.29	23.20	-43.09		
2844.00	H	-80.08	23.31	-56.77		

Band	Band 25(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-61.45	22.16	-39.29	-13.00	PASS
5580.00	V	-68.17	22.99	-45.18		
7440.00	V	-81.98	23.04	-58.94		
3720.00	Horizontal	-62.97	22.16	-40.81		
5580.00	H	-64.03	22.99	-41.04		
7440.00	H	-80.36	23.04	-57.32		

Band	Band 25(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3765.00	Vertical	-62.14	22.76	-39.38	-13.00	PASS
5647.50	V	-72.15	23.07	-49.08		
7530.00	V	-81.72	23.11	-58.61		
3765.00	Horizontal	-58.28	22.76	-35.52		
5647.50	H	-65.93	23.07	-42.86		
7530.00	H	-80.89	23.11	-57.78		

Band	Band 25(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3810.00	Vertical	-64.68	22.42	-42.26	-13.00	PASS
5715.00	V	-74.45	22.33	-52.12		
7620.00	V	-84.71	23.00	-61.71		
3810.00	Horizontal	-58.59	22.42	-36.17		
5715.00	H	-66.79	22.33	-44.46		
7620.00	H	-84.10	23.00	-61.10		

Band	Band 25(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3720.00	Vertical	-61.64	22.16	-39.48	-13.00	PASS
5580.00	V	-65.95	22.99	-42.96		
7440.00	V	-83.59	23.04	-60.55		
3720.00	Horizontal	-60.01	22.16	-37.85		
5580.00	H	-66.58	22.99	-43.59		
7440.00	H	-79.73	23.04	-56.69		

Band	Band 25(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3765.00	Vertical	-61.96	22.76	-39.20	-13.00	PASS
5647.50	V	-72.29	23.07	-49.22		
7530.00	V	-81.45	23.11	-58.34		
3765.00	Horizontal	-60.19	22.76	-37.43		
5647.50	H	-67.56	23.07	-44.49		
7530.00	H	-80.24	23.11	-57.13		

Band	Band 25(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3810.00	Vertical	-63.51	22.42	-41.09	-13.00	PASS
5715.00	V	-72.84	22.33	-50.51		
7620.00	V	-79.92	23.00	-56.92		
3810.00	Horizontal	-59.05	22.42	-36.63		
5715.00	H	-68.33	22.33	-46.00		
7620.00	H	-82.80	23.00	-59.80		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1633.00	Vertical	-63.13	21.97	-41.16	-13.00	PASS
2449.50	V	-67.65	22.63	-45.02		
3266.00	V	-82.91	22.83	-60.08		
1633.00	Horizontal	-62.58	21.89	-40.69		
2449.50	H	-63.34	22.54	-40.80		
3266.00	H	-80.10	22.30	-57.80		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1638.00	Vertical	-62.84	22.58	-40.26	-13.00	PASS
2457.00	V	-71.21	22.29	-48.92		
3276.00	V	-82.19	22.49	-59.70		
1638.00	Horizontal	-57.52	22.64	-34.88		
2457.00	H	-65.68	22.45	-43.23		
3276.00	H	-81.54	22.58	-58.96		

Band	Band 26-1(QPSK, 5MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1643.00	Vertical	-63.32	21.95	-41.37	-13.00	PASS
2464.50	V	-73.64	21.50	-52.14		
3286.00	V	-84.35	22.23	-62.12		
1643.00	Horizontal	-59.68	22.06	-37.62		
2464.50	H	-67.51	21.79	-45.72		
3286.00	H	-84.47	22.37	-62.10		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1633.00	Vertical	-61.92	21.97	-39.95	-13.00	PASS
2449.50	V	-65.25	22.63	-42.62		
3266.00	V	-83.76	22.83	-60.93		
1633.00	Horizontal	-60.19	21.89	-38.30		
2449.50	H	-66.27	22.54	-43.73		
3266.00	H	-80.14	22.30	-57.84		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1638.00	Vertical	-61.88	22.58	-39.30	-13.00	PASS
2457.00	V	-71.91	22.29	-49.62		
3276.00	V	-81.23	22.49	-58.74		
1638.00	Horizontal	-60.36	22.64	-37.72		
2457.00	H	-67.33	22.45	-44.88		
3276.00	H	-81.18	22.58	-58.60		

Band	Band 26-1(16QAM, 5MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1643.00	Vertical	-62.66	21.95	-40.71	-13.00	PASS
2464.50	V	-71.88	21.50	-50.38		
3286.00	V	-80.17	22.23	-57.94		
1643.00	Horizontal	-59.60	22.06	-37.54		
2464.50	H	-68.65	21.79	-46.86		
3286.00	H	-81.91	22.37	-59.54		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1663.00	Vertical	-64.25	21.17	-43.08	-13.00	PASS
2494.50	V	-68.98	22.03	-46.95		
3326.00	V	-83.67	22.12	-61.55		
1663.00	Horizontal	-62.64	21.01	-41.63		
2494.50	H	-64.97	22.07	-42.90		
3326.00	H	-81.29	21.65	-59.64		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-62.58	22.03	-40.55	-13.00	PASS
2509.50	V	-72.47	21.51	-50.96		
3346.00	V	-82.25	21.60	-60.65		
1673.00	Horizontal	-58.43	22.18	-36.25		
2509.50	H	-65.61	22.06	-43.55		
3346.00	H	-81.28	21.68	-59.60		

Band	Band 26-2(QPSK, 15MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1683.00	Vertical	-63.31	21.09	-42.22	-13.00	PASS
2524.50	V	-73.84	20.92	-52.92		
3366.00	V	-74.62	21.56	-53.06		
1683.00	Horizontal	-59.93	21.65	-38.28		
2524.50	H	-67.12	21.22	-45.90		
3366.00	H	-74.97	21.74	-53.23		

Band	Band 26-2(16QAM, 15MHz)				Test channel:	Lowest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1663.00	Vertical	-62.44	21.17	-41.27	-13.00	PASS
2494.50	V	-65.67	22.03	-43.64		
3326.00	V	-83.89	22.12	-61.77		
1663.00	Horizontal	-61.04	21.01	-40.03		
2494.50	H	-67.75	22.07	-45.68		
3326.00	H	-80.36	21.65	-58.71		
Band	Band 26-2(16QAM, 15MHz)				Test channel:	Middle
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1673.00	Vertical	-62.74	22.03	-40.71	-13.00	PASS
2509.50	V	-72.87	21.51	-51.36		
3346.00	V	-81.55	21.60	-59.95		
1673.00	Horizontal	-61.88	22.18	-39.70		
2509.50	H	-67.93	22.06	-45.87		
3346.00	H	-80.32	21.68	-58.64		
Band	Band 26-2(16QAM, 15MHz)				Test channel:	Highest
Test mode:					Temperature:	25°C
					Relative Humidity:	56%
Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.						
Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1683.00	Vertical	-63.81	21.09	-42.72	-13.00	PASS
2524.50	V	-72.91	20.92	-51.99		
3366.00	V	-81.25	21.56	-59.69		
1683.00	Horizontal	-59.48	21.65	-37.83		
2524.50	H	-68.66	21.22	-47.44		
3366.00	H	-82.95	21.74	-61.21		

Band	Band 41(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5012.00	Vertical	-61.38	22.16	-39.22	-25.00	PASS
7518.00	V	-67.13	22.99	-44.14		
10024.00	V	-81.48	23.04	-58.44		
5012.00	Horizontal	-61.85	22.16	-39.69		
7518.00	H	-63.78	22.99	-40.79		
10024.00	H	-79.99	23.04	-56.95		

Band	Band 41(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5186.00	Vertical	-62.08	22.76	-39.32	-25.00	PASS
7779.00	V	-71.39	23.07	-48.32		
10372.00	V	-81.60	23.11	-58.49		
5186.00	Horizontal	-58.01	22.76	-35.25		
7779.00	H	-64.51	23.07	-41.44		
10372.00	H	-79.82	23.11	-56.71		

Band	Band 41(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5360.00	Vertical	-63.42	22.42	-41.00	-25.00	PASS
8040.00	V	-73.07	22.33	-50.74		
10720.00	V	-84.06	23.00	-61.06		
5360.00	Horizontal	-58.83	22.42	-36.41		
8040.00	H	-66.98	22.33	-44.65		
10720.00	H	-83.46	23.00	-60.46		

Band	Band 41(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5012.00	Vertical	-61.33	22.16	-39.17	-25.00	PASS
7518.00	V	-64.97	22.99	-41.98		
10024.00	V	-82.96	23.04	-59.92		
5012.00	Horizontal	-59.71	22.16	-37.55		
7518.00	H	-65.54	22.99	-42.55		
10024.00	H	-79.89	23.04	-56.85		

Band	Band 41(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5186.00	Vertical	-60.84	22.76	-38.08	-25.00	PASS
7779.00	V	-71.32	23.07	-48.25		
10372.00	V	-79.69	23.11	-56.58		
5186.00	Horizontal	-59.97	22.76	-37.21		
7779.00	H	-66.90	23.07	-43.83		
10372.00	H	-79.84	23.11	-56.73		

Band	Band 41(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
5360.00	Vertical	-62.43	22.42	-40.01	-25.00	PASS
8040.00	V	-71.67	22.33	-49.34		
10720.00	V	-80.26	23.00	-57.26		
5360.00	Horizontal	-59.28	22.42	-36.86		
8040.00	H	-67.17	22.33	-44.84		
10720.00	H	-82.07	23.00	-59.07		

Band	Band 66(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-61.53	23.40	-38.13	-13.00	PASS
5160.00	V	-65.36	23.69	-41.67		
6880.00	V	-81.47	23.75	-57.72		
3440.00	Horizontal	-61.16	23.40	-37.76		
5160.00	H	-64.57	23.69	-40.88		
6880.00	H	-77.06	23.75	-53.31		

Band	Band 66(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-58.56	23.42	-35.14	-13.00	PASS
5235.00	V	-70.25	23.73	-46.52		
6980.00	V	-79.12	23.79	-55.33		
3490.00	Horizontal	-56.49	23.42	-33.07		
5235.00	H	-65.47	23.73	-41.74		
6980.00	H	-78.68	23.79	-54.89		

Band	Band 66(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3540.00	Vertical	-61.18	23.46	-37.72	-13.00	PASS
5310.00	V	-71.21	23.77	-47.44		
7080.00	V	-83.13	23.81	-59.32		
3540.00	Horizontal	-56.64	23.46	-33.18		
5310.00	H	-66.37	23.77	-42.60		
7080.00	H	-82.17	23.81	-58.36		

Band	Band 66(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3440.00	Vertical	-60.64	23.40	-37.24	-13.00	PASS
5160.00	V	-64.89	23.69	-41.20		
6880.00	V	-80.22	23.75	-56.47		
3440.00	Horizontal	-57.32	23.40	-33.92		
5160.00	H	-64.31	23.69	-40.62		
6880.00	H	-77.29	23.75	-53.54		

Band	Band 66(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3490.00	Vertical	-59.02	23.42	-35.60	-13.00	PASS
5235.00	V	-71.26	23.73	-47.53		
6980.00	V	-79.91	23.79	-56.12		
3490.00	Horizontal	-57.20	23.42	-33.78		
5235.00	H	-64.75	23.73	-41.02		
6980.00	H	-78.86	23.79	-55.07		

Band	Band 66(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature :	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
3540.00	Vertical	-61.94	23.46	-38.48	-13.00	PASS
5310.00	V	-70.79	23.77	-47.02		
7080.00	V	-78.38	23.81	-54.57		
3540.00	Horizontal	-56.22	23.46	-32.76		
5310.00	H	-66.56	23.77	-42.79		
7080.00	H	-80.73	23.81	-56.92		

Band	Band 71(QPSK, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1346.00	Vertical	-61.43	23.40	-38.03	-13.00	PASS
2019.00	V	-67.88	23.69	-44.19		
2692.00	V	-83.15	23.75	-59.40		
1346.00	Horizontal	-60.75	23.40	-37.35		
2019.00	H	-65.11	23.69	-41.42		
2692.00	H	-79.61	23.75	-55.86		

Band	Band 71(QPSK, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1366.00	Vertical	-62.73	23.42	-39.31	-13.00	PASS
2049.00	V	-73.43	23.73	-49.70		
2732.00	V	-80.30	23.79	-56.51		
1366.00	Horizontal	-59.61	23.42	-36.19		
2049.00	H	-67.17	23.73	-43.44		
2732.00	H	-79.92	23.79	-56.13		

Band	Band 71(QPSK, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1376.00	Vertical	-63.05	23.46	-39.59	-13.00	PASS
2064.00	V	-73.88	23.77	-50.11		
2752.00	V	-84.74	23.81	-60.93		
1376.00	Horizontal	-59.89	23.46	-36.43		
2064.00	H	-69.64	23.77	-45.87		
2752.00	H	-83.39	23.81	-59.58		

Band	Band 71(16QAM, 20MHz)	Test channel:	Lowest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1346.00	Vertical	-61.55	23.40	-38.15	-13.00	PASS
2019.00	V	-65.62	23.69	-41.93		
2692.00	V	-83.44	23.75	-59.69		
1346.00	Horizontal	-59.96	23.40	-36.56		
2019.00	H	-67.31	23.69	-43.62		
2692.00	H	-78.47	23.75	-54.72		

Band	Band 71(16QAM, 20MHz)	Test channel:	Middle
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1366.00	Vertical	-60.27	23.42	-36.85	-13.00	PASS
2049.00	V	-71.53	23.73	-47.80		
2732.00	V	-78.81	23.79	-55.02		
1366.00	Horizontal	-59.09	23.42	-35.67		
2049.00	H	-69.32	23.73	-45.59		
2732.00	H	-81.34	23.79	-57.55		


Band	Band 71(16QAM, 20MHz)	Test channel:	Highest
Test mode:		Temperature:	25°C
		Relative Humidity:	56%

Note: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.

Frequency (MHz)	Spurious Emission				Limit (dBm)	Result
	Polarization	Level (dBm)	Correction Factor (dB)	Spurious emissions (dBm)		
1376.00	Vertical	-64.32	23.46	-40.86	-13.00	PASS
2064.00	V	-70.05	23.77	-46.28		
2752.00	V	-80.94	23.81	-57.13		
1376.00	Horizontal	-60.58	23.46	-37.12		
2064.00	H	-68.25	23.77	-44.48		
2752.00	H	-83.63	23.81	-59.82		

5.6. Frequency Stability Measurement

5.6.1. Test Specification

Test Requirement:	FCC part 27.54, FCC part 22.355, 24.235
Test Method:	FCC Part 2.1055
Limit:	±2.5 ppm
Test Setup:	 The diagram shows a 'System Simulator' connected by a line to an 'EUT' (Equipment Under Test) which is placed inside a 'Thermal Chamber'.
Test Procedure:	Test Procedures for Temperature Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was set up in the thermal chamber and connected with the system simulator. 3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute. 4. With power OFF, the temperature was raised in 10°C steps up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute. Test Procedures for Voltage Variation 1. The testing follows FCC KDB 971168 D01v03 Section 9.0. 2. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator. 3. The power supply voltage to the EUT was varied from BEP to 115% of the nominal value measured at the input to the EUT. 4. The variation in frequency was measured for the worst case. 5. The worst case(worst bandwidth) for frequency stability reported in the Test Data. The worst bandwidth is as follow: 1.4M is for LTE Band 2, 1.4M is for LTE Band 4, 1.4M is for LTE Band 5, 5M is for LTE Band 7, 1.4M is for LTE Band 12, 5M is for LTE Band 13, 5M is for LTE Band 14, 5M is for LTE Band 17, 1.4M is for LTE Band 25, 1.4M is for LTE Band 26-1, 1.4M is for LTE Band 26-2, 5M is for LTE Band 41, 1.4M is for LTE Band 66, 5M is for LTE Band 71
Test Result:	PASS

5.6.2. Test Instruments

Equipment	Manufacturer	Model	Serial Number	Calibration Due
Wideband Radio Communication Tester	R&S	CMW500	114220	Jun. 30, 2024
Programable tempratuce and humidity chamber	JQ	JQ-2000	/	Jun. 30, 2024
DC power supply	Kingrang	KR3005K	/	Jun. 30, 2024
Combiner Box	AT890-RFB	Ascentest	/	/

Appendix B: Photographs of Test Setup

Refer to the test report No. TCT230524E069

Appendix C: Photographs of EUT

Refer to the test report No. TCT230524E001

Test Data for Appendix Refer to Appendix For LTE Band 2, Appendix For LTE Band 4, Appendix For LTE Band 5, Appendix For LTE Band 7, Appendix For LTE Band 12, Appendix For LTE Band 13, Appendix For LTE Band 14, Appendix For LTE Band 17, Appendix For LTE Band 25, Appendix For LTE Band 26, Appendix For LTE Band 41, Appendix For LTE Band 66 and Appendix For LTE Band 71

*******END OF REPORT*******