

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2383.80	57.8 PK	74.0	-16.2	1.43 H	113	60.4	-2.6
2	2383.80	45.3 AV	54.0	-8.7	1.43 H	113	47.9	-2.6
3	*2422.00	101.4 PK			1.43 H	113	104.1	-2.7
4	*2422.00	90.5 AV			1.43 H	113	93.2	-2.7
5	4844.00	44.9 PK	74.0	-29.1	1.01 H	267	43.1	1.8
6	4844.00	42.0 AV	54.0	-12.0	1.01 H	267	40.2	1.8
7	7266.00	47.0 PK	74.0	-27.0	1.39 H	314	39.7	7.3
8	7266.00	42.2 AV	54.0	-11.8	1.39 H	314	34.9	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.60	61.2 PK	74.0	-12.8	1.55 V	124	63.9	-2.7
2	2387.60	49.3 AV	54.0	-4.7	1.55 V	124	52.0	-2.7
3	*2422.00	111.4 PK			1.55 V	124	114.1	-2.7
4	*2422.00	100.4 AV			1.55 V	124	103.1	-2.7
5	4844.00	44.2 PK	74.0	-29.8	1.25 V	92	42.4	1.8
6	4844.00	41.3 AV	54.0	-12.7	1.25 V	92	39.5	1.8
7	7266.00	51.2 PK	74.0	-22.8	2.73 V	95	43.9	7.3
8	7266.00	47.7 AV	54.0	-6.3	2.73 V	95	40.4	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	63.8 PK	74.0	-10.2	1.41 H	108	66.5	-2.7
2	2390.00	47.6 AV	54.0	-6.4	1.41 H	108	50.3	-2.7
3	*2437.00	104.5 PK			1.41 H	108	107.2	-2.7
4	*2437.00	93.8 AV			1.41 H	108	96.5	-2.7
5	2483.50	68.3 PK	74.0	-5.7	1.41 H	108	71.1	-2.8
6	2483.50	48.2 AV	54.0	-5.8	1.41 H	108	51.0	-2.8
7	4874.00	44.8 PK	74.0	-29.2	1.00 H	260	43.1	1.7
8	4874.00	41.7 AV	54.0	-12.3	1.00 H	260	40.0	1.7
9	7311.00	46.6 PK	74.0	-27.4	1.48 H	309	39.4	7.2
10	7311.00	41.9 AV	54.0	-12.1	1.48 H	309	34.7	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.6 PK	74.0	-6.4	1.31 V	100	70.3	-2.7
2	2390.00	51.7 AV	54.0	-2.3	1.31 V	100	54.4	-2.7
3	*2437.00	114.2 PK			1.31 V	100	116.9	-2.7
4	*2437.00	103.1 AV			1.31 V	100	105.8	-2.7
5	2483.50	72.3 PK	74.0	-1.7	1.31 V	100	75.1	-2.8
6	2483.50	52.5 AV	54.0	-1.5	1.31 V	100	55.3	-2.8
7	4874.00	44.1 PK	74.0	-29.9	1.29 V	94	42.4	1.7
8	4874.00	41.2 AV	54.0	-12.8	1.29 V	94	39.5	1.7
9	7311.00	51.6 PK	74.0	-22.4	2.67 V	76	44.4	7.2
10	7311.00	47.6 AV	54.0	-6.4	2.67 V	76	40.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	102.5 PK			1.26 H	113	105.2	-2.7
2	*2452.00	91.4 AV			1.26 H	113	94.1	-2.7
3	2483.50	56.8 PK	74.0	-17.2	1.26 H	113	59.6	-2.8
4	2483.50	46.5 AV	54.0	-7.5	1.26 H	113	49.3	-2.8
5	2487.50	58.1 PK	74.0	-15.9	1.26 H	113	60.9	-2.8
6	2487.50	46.1 AV	54.0	-7.9	1.26 H	113	48.9	-2.8
7	4904.00	45.0 PK	74.0	-29.0	1.04 H	251	43.3	1.7
8	4904.00	42.2 AV	54.0	-11.8	1.04 H	251	40.5	1.7
9	7356.00	46.8 PK	74.0	-27.2	1.42 H	305	39.5	7.3
10	7356.00	41.8 AV	54.0	-12.2	1.42 H	305	34.5	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	112.1 PK			1.21 V	100	114.8	-2.7
2	*2452.00	100.8 AV			1.21 V	100	103.5	-2.7
3	2483.50	61.8 PK	74.0	-12.2	1.21 V	100	64.6	-2.8
4	2483.50	51.2 AV	54.0	-2.8	1.21 V	100	54.0	-2.8
5	2487.40	64.0 PK	74.0	-10.0	1.21 V	100	66.8	-2.8
6	2487.40	50.6 AV	54.0	-3.4	1.21 V	100	53.4	-2.8
7	4904.00	43.4 PK	74.0	-30.6	1.29 V	76	41.7	1.7
8	4904.00	40.7 AV	54.0	-13.3	1.29 V	76	39.0	1.7
9	7356.00	51.3 PK	74.0	-22.7	2.63 V	84	44.0	7.3
10	7356.00	47.5 AV	54.0	-6.5	2.63 V	84	40.2	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	99.5 PK			1.51 H	115	102.2	-2.7
2	*2457.00	88.3 AV			1.51 H	115	91.0	-2.7
3	2483.50	55.9 PK	74.0	-18.1	1.51 H	115	58.7	-2.8
4	2483.50	45.7 AV	54.0	-8.3	1.51 H	115	48.5	-2.8
5	2486.90	58.0 PK	74.0	-16.0	1.51 H	115	60.8	-2.8
6	2486.90	45.4 AV	54.0	-8.6	1.51 H	115	48.2	-2.8
7	4914.00	44.8 PK	74.0	-29.2	1.00 H	274	43.1	1.7
8	4914.00	42.2 AV	54.0	-11.8	1.00 H	274	40.5	1.7
9	7371.00	47.0 PK	74.0	-27.0	1.44 H	303	39.7	7.3
10	7371.00	42.3 AV	54.0	-11.7	1.44 H	303	35.0	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	108.8 PK			1.58 V	129	111.5	-2.7
2	*2457.00	97.6 AV			1.58 V	129	100.3	-2.7
3	2483.50	58.4 PK	74.0	-15.6	1.58 V	129	61.2	-2.8
4	2483.50	47.8 AV	54.0	-6.2	1.58 V	129	50.6	-2.8
5	2495.00	60.0 PK	74.0	-14.0	1.58 V	129	62.8	-2.8
6	2495.00	47.2 AV	54.0	-6.8	1.58 V	129	50.0	-2.8
7	4914.00	43.3 PK	74.0	-30.7	1.30 V	94	41.6	1.7
8	4914.00	40.5 AV	54.0	-13.5	1.30 V	94	38.8	1.7
9	7371.00	50.8 PK	74.0	-23.2	2.67 V	98	43.5	7.3
10	7371.00	47.2 AV	54.0	-6.8	2.67 V	98	39.9	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.2 PK			1.54 H	114	102.0	-2.8
2	*2462.00	87.6 AV			1.54 H	114	90.4	-2.8
3	2483.50	56.3 PK	74.0	-17.7	1.54 H	114	59.1	-2.8
4	2483.50	45.4 AV	54.0	-8.6	1.54 H	114	48.2	-2.8
5	4924.00	44.4 PK	74.0	-29.6	1.01 H	251	42.6	1.8
6	4924.00	41.7 AV	54.0	-12.3	1.01 H	251	39.9	1.8
7	7386.00	46.9 PK	74.0	-27.1	1.41 H	308	39.5	7.4
8	7386.00	42.0 AV	54.0	-12.0	1.41 H	308	34.6	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.0 PK			1.68 V	122	110.8	-2.8
2	*2462.00	96.6 AV			1.68 V	122	99.4	-2.8
3	2483.50	59.6 PK	74.0	-14.4	1.68 V	122	62.4	-2.8
4	2483.50	47.7 AV	54.0	-6.3	1.68 V	122	50.5	-2.8
5	4924.00	42.9 PK	74.0	-31.1	1.31 V	98	41.1	1.8
6	4924.00	40.4 AV	54.0	-13.6	1.31 V	98	38.6	1.8
7	7386.00	51.2 PK	74.0	-22.8	2.64 V	94	43.8	7.4
8	7386.00	47.6 AV	54.0	-6.4	2.64 V	94	40.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.71	64.9 PK	74.0	-9.1	1.00 H	112	67.6	-2.7
2	2388.71	43.9 AV	54.0	-10.1	1.00 H	112	46.6	-2.7
3	*2412.00	113.9 PK			1.00 H	112	116.6	-2.7
4	*2412.00	102.2 AV			1.00 H	112	104.9	-2.7
5	4824.00	44.3 PK	74.0	-29.7	1.31 H	283	42.5	1.8
6	4824.00	33.1 AV	54.0	-20.9	1.31 H	283	31.3	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.62	72.3 PK	74.0	-1.7	1.22 V	22	75.0	-2.7
2	2387.62	46.0 AV	54.0	-8.0	1.22 V	22	48.7	-2.7
3	*2412.00	123.4 PK			1.22 V	22	126.1	-2.7
4	*2412.00	111.0 AV			1.22 V	22	113.7	-2.7
5	4824.00	47.7 PK	74.0	-26.3	1.22 V	86	45.9	1.8
6	4824.00	36.5 AV	54.0	-17.5	1.22 V	86	34.7	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.1 PK	74.0	-18.9	1.03 H	113	57.8	-2.7
2	2390.00	43.1 AV	54.0	-10.9	1.03 H	113	45.8	-2.7
3	*2437.00	116.9 PK			1.03 H	113	119.6	-2.7
4	*2437.00	105.6 AV			1.03 H	113	108.3	-2.7
5	2483.50	56.3 PK	74.0	-17.7	1.03 H	113	59.1	-2.8
6	2483.50	43.7 AV	54.0	-10.3	1.03 H	113	46.5	-2.8
7	4874.00	44.5 PK	74.0	-29.5	1.33 H	267	42.8	1.7
8	4874.00	33.4 AV	54.0	-20.6	1.33 H	267	31.7	1.7
9	7311.00	63.4 PK	74.0	-10.6	1.11 H	304	56.2	7.2
10	7311.00	47.1 AV	54.0	-6.9	1.11 H	304	39.9	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.6 PK	74.0	-17.4	1.26 V	20	59.3	-2.7
2	2390.00	44.0 AV	54.0	-10.0	1.26 V	20	46.7	-2.7
3	*2437.00	126.3 PK			1.26 V	20	129.0	-2.7
4	*2437.00	115.8 AV			1.26 V	20	118.5	-2.7
5	2483.50	57.9 PK	74.0	-16.1	1.26 V	20	60.7	-2.8
6	2483.50	44.1 AV	54.0	-9.9	1.26 V	20	46.9	-2.8
7	4874.00	47.2 PK	74.0	-26.8	1.27 V	91	45.5	1.7
8	4874.00	35.0 AV	54.0	-19.0	1.27 V	91	33.3	1.7
9	7311.00	67.1 PK	74.0	-6.9	1.25 V	48	59.9	7.2
10	7311.00	50.9 AV	54.0	-3.1	1.25 V	48	43.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.19 H	109	115.7	-2.8
2	*2462.00	101.3 AV			1.19 H	109	104.1	-2.8
3	2483.90	65.6 PK	74.0	-8.4	1.19 H	109	68.4	-2.8
4	2483.90	43.2 AV	54.0	-10.8	1.19 H	109	46.0	-2.8
5	4924.00	44.7 PK	74.0	-29.3	1.33 H	274	42.9	1.8
6	4924.00	33.8 AV	54.0	-20.2	1.33 H	274	32.0	1.8
7	7386.00	59.4 PK	74.0	-14.6	1.10 H	295	52.0	7.4
8	7386.00	44.3 AV	54.0	-9.7	1.10 H	295	36.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	124.0 PK			1.51 V	285	126.8	-2.8
2	*2462.00	111.1 AV			1.51 V	285	113.9	-2.8
3	2483.50	72.3 PK	74.0	-1.7	1.51 V	285	75.1	-2.8
4	2483.50	45.6 AV	54.0	-8.4	1.51 V	285	48.4	-2.8
5	4924.00	47.0 PK	74.0	-27.0	1.27 V	92	45.2	1.8
6	4924.00	36.0 AV	54.0	-18.0	1.27 V	92	34.2	1.8
7	7386.00	66.1 PK	74.0	-7.9	1.27 V	58	58.7	7.4
8	7386.00	47.9 AV	54.0	-6.1	1.27 V	58	40.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.5 PK			1.15 H	104	112.3	-2.8
2	*2467.00	99.3 AV			1.15 H	104	102.1	-2.8
3	2484.00	69.3 PK	74.0	-4.7	1.15 H	104	72.1	-2.8
4	2484.00	43.1 AV	54.0	-10.9	1.15 H	104	45.9	-2.8
5	4934.00	44.9 PK	74.0	-29.1	1.38 H	264	43.1	1.8
6	4934.00	33.6 AV	54.0	-20.4	1.38 H	264	31.8	1.8
7	7401.00	63.7 PK	74.0	-10.3	1.12 H	318	56.2	7.5
8	7401.00	47.4 AV	54.0	-6.6	1.12 H	318	39.9	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.9 PK			1.50 V	283	122.7	-2.8
2	*2467.00	108.0 AV			1.50 V	283	110.8	-2.8
3	2485.36	72.5 PK	74.0	-1.5	1.50 V	283	75.3	-2.8
4	2485.36	46.1 AV	54.0	-7.9	1.50 V	283	48.9	-2.8
5	4934.00	47.5 PK	74.0	-26.5	1.27 V	101	45.7	1.8
6	4934.00	36.5 AV	54.0	-17.5	1.27 V	101	34.7	1.8
7	7401.00	66.4 PK	74.0	-7.6	1.21 V	62	58.9	7.5
8	7401.00	48.3 AV	54.0	-5.7	1.21 V	62	40.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.2 PK			1.13 H	100	107.0	-2.8
2	*2472.00	91.9 AV			1.13 H	100	94.7	-2.8
3	2484.91	58.2 PK	74.0	-15.8	1.13 H	100	61.0	-2.8
4	2484.91	43.3 AV	54.0	-10.7	1.13 H	100	46.1	-2.8
5	4944.00	44.5 PK	74.0	-29.5	1.38 H	275	42.7	1.8
6	4944.00	33.4 AV	54.0	-20.6	1.38 H	275	31.6	1.8
7	7416.00	63.3 PK	74.0	-10.7	1.06 H	310	55.8	7.5
8	7416.00	47.2 AV	54.0	-6.8	1.06 H	310	39.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	115.2 PK			1.76 V	149	118.0	-2.8
2	*2472.00	103.5 AV			1.76 V	149	106.3	-2.8
3	2483.50	72.5 PK	74.0	-1.5	1.76 V	149	75.3	-2.8
4	2483.50	47.5 AV	54.0	-6.5	1.76 V	149	50.3	-2.8
5	4944.00	47.1 PK	74.0	-26.9	1.22 V	85	45.3	1.8
6	4944.00	36.1 AV	54.0	-17.9	1.22 V	85	34.3	1.8
7	7416.00	66.6 PK	74.0	-7.4	1.23 V	44	59.1	7.5
8	7416.00	48.2 AV	54.0	-5.8	1.23 V	44	40.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	64.5 PK	74.0	-9.5	1.05 H	116	67.2	-2.7
2	2388.00	44.2 AV	54.0	-9.8	1.05 H	116	46.9	-2.7
3	*2412.00	113.3 PK			1.05 H	116	116.0	-2.7
4	*2412.00	101.3 AV			1.05 H	116	104.0	-2.7
5	4824.00	44.4 PK	74.0	-29.6	1.36 H	254	42.6	1.8
6	4824.00	33.1 AV	54.0	-20.9	1.36 H	254	31.3	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2363.30	60.1 PK	74.0	-13.9	1.25 V	26	62.8	-2.7
2	2363.30	47.7 AV	54.0	-6.3	1.25 V	26	50.4	-2.7
3	2387.76	72.4 PK	74.0	-1.6	1.25 V	26	75.1	-2.7
4	2387.76	46.8 AV	54.0	-7.2	1.25 V	26	49.5	-2.7
5	*2412.00	123.4 PK			1.25 V	26	126.1	-2.7
6	*2412.00	111.9 AV			1.25 V	26	114.6	-2.7
7	4824.00	47.9 PK	74.0	-26.1	1.21 V	75	46.1	1.8
8	4824.00	36.5 AV	54.0	-17.5	1.21 V	75	34.7	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.0 PK	74.0	-19.0	1.09 H	114	57.7	-2.7
2	2390.00	42.8 AV	54.0	-11.2	1.09 H	114	45.5	-2.7
3	*2437.00	116.4 PK			1.09 H	114	119.1	-2.7
4	*2437.00	104.1 AV			1.09 H	114	106.8	-2.7
5	2483.50	56.6 PK	74.0	-17.4	1.09 H	114	59.4	-2.8
6	2483.50	44.1 AV	54.0	-9.9	1.09 H	114	46.9	-2.8
7	4874.00	43.9 PK	74.0	-30.1	1.27 H	270	42.2	1.7
8	4874.00	31.6 AV	54.0	-22.4	1.27 H	270	29.9	1.7
9	7311.00	61.9 PK	74.0	-12.1	1.14 H	299	54.7	7.2
10	7311.00	46.8 AV	54.0	-7.2	1.14 H	299	39.6	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.29 V	23	60.0	-2.7
2	2390.00	45.2 AV	54.0	-8.8	1.29 V	23	47.9	-2.7
3	*2437.00	125.0 PK			1.29 V	23	127.7	-2.7
4	*2437.00	114.3 AV			1.29 V	23	117.0	-2.7
5	2483.50	58.1 PK	74.0	-15.9	1.29 V	23	60.9	-2.8
6	2483.50	45.3 AV	54.0	-8.7	1.29 V	23	48.1	-2.8
7	4874.00	45.0 PK	74.0	-29.0	1.26 V	98	43.3	1.7
8	4874.00	33.0 AV	54.0	-21.0	1.26 V	98	31.3	1.7
9	7311.00	65.5 PK	74.0	-8.5	2.77 V	49	58.3	7.2
10	7311.00	50.3 AV	54.0	-3.7	2.77 V	49	43.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.9 PK			1.17 H	111	115.7	-2.8
2	*2462.00	100.8 AV			1.17 H	111	103.6	-2.8
3	2484.12	61.1 PK	74.0	-12.9	1.17 H	111	63.9	-2.8
4	2484.12	43.7 AV	54.0	-10.3	1.17 H	111	46.5	-2.8
5	4924.00	44.6 PK	74.0	-29.4	1.37 H	266	42.8	1.8
6	4924.00	33.6 AV	54.0	-20.4	1.37 H	266	31.8	1.8
7	7386.00	63.0 PK	74.0	-11.0	1.07 H	301	55.6	7.4
8	7386.00	46.8 AV	54.0	-7.2	1.07 H	301	39.4	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	122.6 PK			1.53 V	294	125.4	-2.8
2	*2462.00	111.2 AV			1.53 V	294	114.0	-2.8
3	2483.50	72.5 PK	74.0	-1.5	1.53 V	294	75.3	-2.8
4	2483.50	47.7 AV	54.0	-6.3	1.53 V	294	50.5	-2.8
5	4924.00	47.0 PK	74.0	-27.0	1.25 V	99	45.2	1.8
6	4924.00	35.8 AV	54.0	-18.2	1.25 V	99	34.0	1.8
7	7386.00	66.3 PK	74.0	-7.7	1.23 V	62	58.9	7.4
8	7386.00	48.3 AV	54.0	-5.7	1.23 V	62	40.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.8 PK			1.15 H	109	109.6	-2.8
2	*2467.00	94.8 AV			1.15 H	109	97.6	-2.8
3	2483.50	58.9 PK	74.0	-15.1	1.15 H	109	61.7	-2.8
4	2483.50	43.1 AV	54.0	-10.9	1.15 H	109	45.9	-2.8
5	4934.00	44.0 PK	74.0	-30.0	1.36 H	271	42.2	1.8
6	4934.00	33.1 AV	54.0	-20.9	1.36 H	271	31.3	1.8
7	7401.00	63.5 PK	74.0	-10.5	1.11 H	312	56.0	7.5
8	7401.00	47.0 AV	54.0	-7.0	1.11 H	312	39.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	118.3 PK			1.58 V	280	121.1	-2.8
2	*2467.00	106.9 AV			1.58 V	280	109.7	-2.8
3	2483.63	72.3 PK	74.0	-1.7	1.58 V	280	75.1	-2.8
4	2483.63	47.3 AV	54.0	-6.7	1.58 V	280	50.1	-2.8
5	4934.00	46.9 PK	74.0	-27.1	1.27 V	86	45.1	1.8
6	4934.00	35.9 AV	54.0	-18.1	1.27 V	86	34.1	1.8
7	7401.00	66.7 PK	74.0	-7.3	1.27 V	69	59.2	7.5
8	7401.00	48.2 AV	54.0	-5.8	1.27 V	69	40.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.3 PK			1.10 H	103	105.1	-2.8
2	*2472.00	92.0 AV			1.10 H	103	94.8	-2.8
3	2484.53	61.5 PK	74.0	-12.5	1.10 H	103	64.3	-2.8
4	2484.53	43.2 AV	54.0	-10.8	1.10 H	103	46.0	-2.8
5	4944.00	44.3 PK	74.0	-29.7	1.27 H	279	42.5	1.8
6	4944.00	33.2 AV	54.0	-20.8	1.27 H	279	31.4	1.8
7	7416.00	63.7 PK	74.0	-10.3	1.06 H	318	56.2	7.5
8	7416.00	47.1 AV	54.0	-6.9	1.06 H	318	39.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	114.6 PK			1.67 V	139	117.4	-2.8
2	*2472.00	103.8 AV			1.67 V	139	106.6	-2.8
3	2483.50	72.0 PK	74.0	-2.0	1.67 V	139	74.8	-2.8
4	2483.50	49.3 AV	54.0	-4.7	1.67 V	139	52.1	-2.8
5	4944.00	47.5 PK	74.0	-26.5	1.23 V	95	45.7	1.8
6	4944.00	36.2 AV	54.0	-17.8	1.23 V	95	34.4	1.8
7	7416.00	66.5 PK	74.0	-7.5	1.30 V	56	59.0	7.5
8	7416.00	48.2 AV	54.0	-5.8	1.30 V	56	40.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.4 PK	74.0	-9.6	1.11 H	115	67.1	-2.7
2	2390.00	45.3 AV	54.0	-8.7	1.11 H	115	48.0	-2.7
3	*2412.00	111.2 PK			1.11 H	115	113.9	-2.7
4	*2412.00	99.9 AV			1.11 H	115	102.6	-2.7
5	4824.00	44.7 PK	74.0	-29.3	1.33 H	262	42.9	1.8
6	4824.00	33.8 AV	54.0	-20.2	1.33 H	262	32.0	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.90	72.4 PK	74.0	-1.6	1.46 V	247	75.1	-2.7
2	2387.90	48.5 AV	54.0	-5.5	1.46 V	247	51.2	-2.7
3	2390.00	71.5 PK	74.0	-2.5	1.46 V	247	74.2	-2.7
4	2390.00	49.8 AV	54.0	-4.2	1.46 V	247	52.5	-2.7
5	*2412.00	120.8 PK			1.46 V	247	123.5	-2.7
6	*2412.00	109.6 AV			1.46 V	247	112.3	-2.7
7	4824.00	47.6 PK	74.0	-26.4	1.27 V	74	45.8	1.8
8	4824.00	36.4 AV	54.0	-17.6	1.27 V	74	34.6	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.10 H	115	58.1	-2.7
2	2390.00	43.1 AV	54.0	-10.9	1.10 H	115	45.8	-2.7
3	*2437.00	114.3 PK			1.10 H	115	117.0	-2.7
4	*2437.00	102.1 AV			1.10 H	115	104.8	-2.7
5	2483.50	56.4 PK	74.0	-17.6	1.10 H	115	59.2	-2.8
6	2483.50	43.8 AV	54.0	-10.2	1.10 H	115	46.6	-2.8
7	4874.00	43.7 PK	74.0	-30.3	1.39 H	267	42.0	1.7
8	4874.00	30.2 AV	54.0	-23.8	1.39 H	267	28.5	1.7
9	7311.00	59.1 PK	74.0	-14.9	1.11 H	319	51.9	7.2
10	7311.00	45.1 AV	54.0	-8.9	1.11 H	319	37.9	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.0 PK	74.0	-15.0	1.50 V	238	61.7	-2.7
2	2390.00	45.9 AV	54.0	-8.1	1.50 V	238	48.6	-2.7
3	*2437.00	123.6 PK			1.50 V	238	126.3	-2.7
4	*2437.00	112.8 AV			1.50 V	238	115.5	-2.7
5	2483.50	66.8 PK	74.0	-7.2	1.50 V	238	69.6	-2.8
6	2483.50	46.7 AV	54.0	-7.3	1.50 V	238	49.5	-2.8
7	4874.00	47.6 PK	74.0	-26.4	1.24 V	89	45.9	1.7
8	4874.00	36.7 AV	54.0	-17.3	1.24 V	89	35.0	1.7
9	7311.00	63.7 PK	74.0	-10.3	1.27 V	51	56.5	7.2
10	7311.00	49.2 AV	54.0	-4.8	1.27 V	51	42.0	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.2 PK			1.17 H	110	113.0	-2.8
2	*2462.00	98.5 AV			1.17 H	110	101.3	-2.8
3	2485.00	61.3 PK	74.0	-12.7	1.17 H	110	64.1	-2.8
4	2485.00	44.6 AV	54.0	-9.4	1.17 H	110	47.4	-2.8
5	4924.00	44.0 PK	74.0	-30.0	1.33 H	252	42.2	1.8
6	4924.00	33.0 AV	54.0	-21.0	1.33 H	252	31.2	1.8
7	7386.00	63.4 PK	74.0	-10.6	1.13 H	305	56.0	7.4
8	7386.00	47.4 AV	54.0	-6.6	1.13 H	305	40.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	119.1 PK			1.48 V	256	121.9	-2.8
2	*2462.00	108.3 AV			1.48 V	256	111.1	-2.8
3	2484.30	72.2 PK	74.0	-1.8	1.48 V	256	75.0	-2.8
4	2484.30	48.4 AV	54.0	-5.6	1.48 V	256	51.2	-2.8
5	4924.00	46.8 PK	74.0	-27.2	1.25 V	82	45.0	1.8
6	4924.00	36.1 AV	54.0	-17.9	1.25 V	82	34.3	1.8
7	7386.00	66.2 PK	74.0	-7.8	1.22 V	50	58.8	7.4
8	7386.00	47.8 AV	54.0	-6.2	1.22 V	50	40.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.3 PK			1.20 H	108	110.1	-2.8
2	*2467.00	96.0 AV			1.20 H	108	98.8	-2.8
3	2483.50	64.2 PK	74.0	-9.8	1.20 H	108	67.0	-2.8
4	2483.50	44.3 AV	54.0	-9.7	1.20 H	108	47.1	-2.8
5	4934.00	43.9 PK	74.0	-30.1	1.33 H	253	42.1	1.8
6	4934.00	33.0 AV	54.0	-21.0	1.33 H	253	31.2	1.8
7	7401.00	63.1 PK	74.0	-10.9	1.10 H	317	55.6	7.5
8	7401.00	46.9 AV	54.0	-7.1	1.10 H	317	39.4	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	117.7 PK			1.52 V	292	120.5	-2.8
2	*2467.00	106.5 AV			1.52 V	292	109.3	-2.8
3	2483.50	72.1 PK	74.0	-1.9	1.52 V	292	74.9	-2.8
4	2483.50	47.9 AV	54.0	-6.1	1.52 V	292	50.7	-2.8
5	4934.00	47.0 PK	74.0	-27.0	1.26 V	93	45.2	1.8
6	4934.00	36.0 AV	54.0	-18.0	1.26 V	93	34.2	1.8
7	7401.00	65.6 PK	74.0	-8.4	1.24 V	56	58.1	7.5
8	7401.00	47.5 AV	54.0	-6.5	1.24 V	56	40.0	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.2 PK			1.14 H	112	105.0	-2.8
2	*2472.00	91.4 AV			1.14 H	112	94.2	-2.8
3	2484.90	61.0 PK	74.0	-13.0	1.14 H	112	63.8	-2.8
4	2484.90	43.4 AV	54.0	-10.6	1.14 H	112	46.2	-2.8
5	4944.00	44.5 PK	74.0	-29.5	1.31 H	256	42.7	1.8
6	4944.00	33.4 AV	54.0	-20.6	1.31 H	256	31.6	1.8
7	7416.00	63.0 PK	74.0	-11.0	1.07 H	315	55.5	7.5
8	7416.00	46.7 AV	54.0	-7.3	1.07 H	315	39.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.9 PK			1.46 V	281	115.7	-2.8
2	*2472.00	102.1 AV			1.46 V	281	104.9	-2.8
3	2483.50	72.4 PK	74.0	-1.6	1.46 V	281	75.2	-2.8
4	2483.50	48.4 AV	54.0	-5.6	1.46 V	281	51.2	-2.8
5	4944.00	46.9 PK	74.0	-27.1	1.21 V	91	45.1	1.8
6	4944.00	35.9 AV	54.0	-18.1	1.21 V	91	34.1	1.8
7	7416.00	66.8 PK	74.0	-7.2	1.30 V	47	59.3	7.5
8	7416.00	48.4 AV	54.0	-5.6	1.30 V	47	40.9	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.44	38.0 QP	43.5	-5.5	3.00 H	347	53.1	-15.1
2	166.58	35.3 QP	43.5	-8.2	2.00 H	148	48.4	-13.1
3	226.39	33.6 QP	46.0	-12.4	2.00 H	123	49.5	-15.9
4	298.80	34.9 QP	46.0	-11.1	1.50 H	84	47.2	-12.3
5	336.39	33.7 QP	46.0	-12.3	1.50 H	334	45.0	-11.3
6	574.63	26.8 QP	46.0	-19.2	1.50 H	121	33.0	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

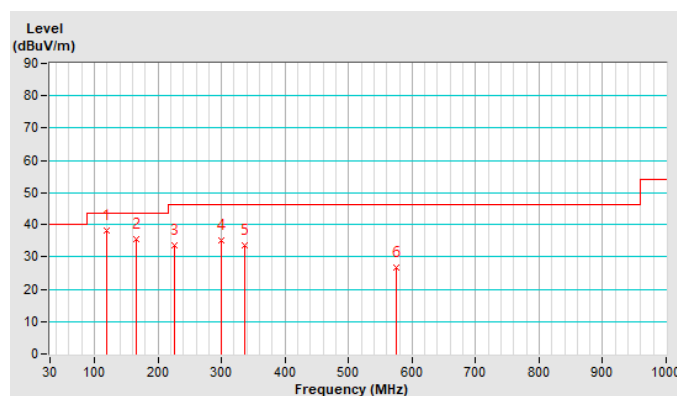


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.45	29.1 QP	43.5	-14.4	1.00 V	37	43.6	-14.5
2	166.58	32.1 QP	43.5	-11.4	1.50 V	229	45.2	-13.1
3	223.43	31.3 QP	46.0	-14.7	1.00 V	135	47.3	-16.0
4	340.42	26.4 QP	46.0	-19.6	1.50 V	184	37.7	-11.3
5	498.58	24.6 QP	46.0	-21.4	1.50 V	43	32.3	-7.7
6	949.80	32.8 QP	46.0	-13.2	1.00 V	140	33.4	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

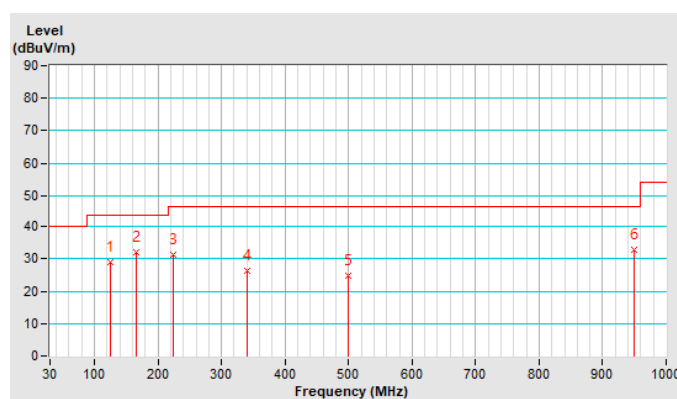

PIFA Antenna

Above 1GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.14	57.7 PK	74.0	-16.3	1.26 H	278	60.4	-2.7
2	2386.14	47.7 AV	54.0	-6.3	1.26 H	278	50.4	-2.7
3	*2412.00	111.1 PK			1.26 H	278	113.8	-2.7
4	*2412.00	108.7 AV			1.26 H	278	111.4	-2.7
5	4824.00	45.3 PK	74.0	-28.7	2.07 H	118	43.5	1.8
6	4824.00	43.5 AV	54.0	-10.5	2.07 H	118	41.7	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	55.6 PK	74.0	-18.4	1.77 V	150	58.3	-2.7
2	2389.00	44.8 AV	54.0	-9.2	1.77 V	150	47.5	-2.7
3	*2412.00	106.1 PK			1.77 V	150	108.8	-2.7
4	*2412.00	103.9 AV			1.77 V	150	106.6	-2.7
5	4824.00	44.2 PK	74.0	-29.8	2.59 V	348	42.4	1.8
6	4824.00	40.3 AV	54.0	-13.7	2.59 V	348	38.5	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.4 PK	74.0	-15.6	1.29 H	262	61.1	-2.7
2	2390.00	45.7 AV	54.0	-8.3	1.29 H	262	48.4	-2.7
3	*2437.00	111.0 PK			1.29 H	262	113.7	-2.7
4	*2437.00	108.7 AV			1.29 H	262	111.4	-2.7
5	2483.50	59.1 PK	74.0	-14.9	1.29 H	262	61.9	-2.8
6	2483.50	44.5 AV	54.0	-9.5	1.29 H	262	47.3	-2.8
7	4874.00	47.0 PK	74.0	-27.0	1.57 H	290	45.3	1.7
8	4874.00	44.6 AV	54.0	-9.4	1.57 H	290	42.9	1.7
9	7311.00	54.3 PK	74.0	-19.7	2.57 H	97	47.1	7.2
10	7311.00	50.8 AV	54.0	-3.2	2.57 H	97	43.6	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.8 PK	74.0	-18.2	1.77 V	162	58.5	-2.7
2	2390.00	43.4 AV	54.0	-10.6	1.77 V	162	46.1	-2.7
3	*2437.00	106.1 PK			1.77 V	162	108.8	-2.7
4	*2437.00	103.7 AV			1.77 V	162	106.4	-2.7
5	2483.50	55.1 PK	74.0	-18.9	1.77 V	162	57.9	-2.8
6	2483.50	41.9 AV	54.0	-12.1	1.77 V	162	44.7	-2.8
7	4874.00	43.7 PK	74.0	-30.3	2.60 V	352	42.0	1.7
8	4874.00	39.9 AV	54.0	-14.1	2.60 V	352	38.2	1.7
9	7311.00	46.7 PK	74.0	-27.3	1.13 V	129	39.5	7.2
10	7311.00	38.7 AV	54.0	-15.3	1.13 V	129	31.5	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.0 PK			1.16 H	283	113.8	-2.8
2	*2462.00	108.6 AV			1.16 H	283	111.4	-2.8
3	2487.91	58.2 PK	74.0	-15.8	1.16 H	283	61.0	-2.8
4	2487.91	49.9 AV	54.0	-4.1	1.16 H	283	52.7	-2.8
5	4924.00	47.5 PK	74.0	-26.5	1.51 H	295	45.7	1.8
6	4924.00	45.2 AV	54.0	-8.8	1.51 H	295	43.4	1.8
7	7386.00	54.1 PK	74.0	-19.9	2.63 H	96	46.7	7.4
8	7386.00	50.8 AV	54.0	-3.2	2.63 H	96	43.4	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.2 PK			1.71 V	146	109.0	-2.8
2	*2462.00	103.9 AV			1.71 V	146	106.7	-2.8
3	2487.77	57.7 PK	74.0	-16.3	1.71 V	146	60.5	-2.8
4	2487.77	47.8 AV	54.0	-6.2	1.71 V	146	50.6	-2.8
5	4924.00	44.3 PK	74.0	-29.7	2.62 V	359	42.5	1.8
6	4924.00	40.0 AV	54.0	-14.0	2.62 V	359	38.2	1.8
7	7386.00	46.3 PK	74.0	-27.7	1.06 V	118	38.9	7.4
8	7386.00	38.2 AV	54.0	-15.8	1.06 V	118	30.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.6 PK			1.14 H	345	109.4	-2.8
2	*2467.00	104.2 AV			1.14 H	345	107.0	-2.8
3	2483.50	59.6 PK	74.0	-14.4	1.14 H	345	62.4	-2.8
4	2483.50	49.3 AV	54.0	-4.7	1.14 H	345	52.1	-2.8
5	2485.00	58.1 PK	74.0	-15.9	1.14 H	345	60.9	-2.8
6	2485.00	52.2 AV	54.0	-1.8	1.14 H	345	55.0	-2.8
7	4934.00	46.8 PK	74.0	-27.2	1.57 H	290	45.0	1.8
8	4934.00	44.8 AV	54.0	-9.2	1.57 H	290	43.0	1.8
9	7401.00	51.4 PK	74.0	-22.6	2.67 H	90	43.9	7.5
10	7401.00	47.8 AV	54.0	-6.2	2.67 H	90	40.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	101.6 PK			1.60 V	138	104.4	-2.8
2	*2467.00	99.2 AV			1.60 V	138	102.0	-2.8
3	2483.50	56.7 PK	74.0	-17.3	1.60 V	138	59.5	-2.8
4	2483.50	46.5 AV	54.0	-7.5	1.60 V	138	49.3	-2.8
5	2485.10	56.4 PK	74.0	-17.6	1.60 V	138	59.2	-2.8
6	2485.10	47.8 AV	54.0	-6.2	1.60 V	138	50.6	-2.8
7	4934.00	44.3 PK	74.0	-29.7	2.66 V	347	42.5	1.8
8	4934.00	40.3 AV	54.0	-13.7	2.66 V	347	38.5	1.8
9	7401.00	46.6 PK	74.0	-27.4	1.08 V	133	39.1	7.5
10	7401.00	38.7 AV	54.0	-15.3	1.08 V	133	31.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.6 PK			1.18 H	279	105.4	-2.8
2	*2472.00	100.4 AV			1.18 H	279	103.2	-2.8
3	2484.62	60.2 PK	74.0	-13.8	1.18 H	279	63.0	-2.8
4	2484.62	51.5 AV	54.0	-2.5	1.18 H	279	54.3	-2.8
5	4944.00	42.6 PK	74.0	-31.4	1.46 H	309	40.8	1.8
6	4944.00	40.3 AV	54.0	-13.7	1.46 H	309	38.5	1.8
7	7416.00	49.4 PK	74.0	-24.6	2.64 H	85	41.9	7.5
8	7416.00	46.2 AV	54.0	-7.8	2.64 H	85	38.7	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	97.7 PK			1.76 V	143	100.5	-2.8
2	*2472.00	95.4 AV			1.76 V	143	98.2	-2.8
3	2484.61	56.9 PK	74.0	-17.1	1.76 V	143	59.7	-2.8
4	2484.61	48.0 AV	54.0	-6.0	1.76 V	143	50.8	-2.8
5	4944.00	44.7 PK	74.0	-29.3	2.70 V	336	42.9	1.8
6	4944.00	40.6 AV	54.0	-13.4	2.70 V	336	38.8	1.8
7	7416.00	46.2 PK	74.0	-27.8	1.04 V	145	38.7	7.5
8	7416.00	38.3 AV	54.0	-15.7	1.04 V	145	30.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.8 PK	74.0	-16.2	1.25 H	279	60.5	-2.7
2	2390.00	45.7 AV	54.0	-8.3	1.25 H	279	48.4	-2.7
3	*2412.00	110.9 PK			1.25 H	279	113.6	-2.7
4	*2412.00	102.0 AV			1.25 H	279	104.7	-2.7
5	4824.00	47.2 PK	74.0	-26.8	1.56 H	280	45.4	1.8
6	4824.00	45.3 AV	54.0	-8.7	1.56 H	280	43.5	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.70 V	140	59.9	-2.7
2	2390.00	44.3 AV	54.0	-9.7	1.70 V	140	47.0	-2.7
3	*2412.00	107.7 PK			1.70 V	140	110.4	-2.7
4	*2412.00	97.8 AV			1.70 V	140	100.5	-2.7
5	4824.00	44.4 PK	74.0	-29.6	2.63 V	342	42.6	1.8
6	4824.00	40.2 AV	54.0	-13.8	2.63 V	342	38.4	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.0 PK	74.0	-16.0	1.26 H	286	60.7	-2.7
2	2390.00	45.5 AV	54.0	-8.5	1.26 H	286	48.2	-2.7
3	*2437.00	115.9 PK			1.26 H	286	118.6	-2.7
4	*2437.00	107.2 AV			1.26 H	286	109.9	-2.7
5	2483.50	60.2 PK	74.0	-13.8	1.26 H	286	63.0	-2.8
6	2483.50	45.3 AV	54.0	-8.7	1.26 H	286	48.1	-2.8
7	4874.00	46.3 PK	74.0	-27.7	1.58 H	295	44.6	1.7
8	4874.00	44.1 AV	54.0	-9.9	1.58 H	295	42.4	1.7
9	7311.00	64.0 PK	74.0	-10.0	2.56 H	97	56.8	7.2
10	7311.00	50.9 AV	54.0	-3.1	2.56 H	97	43.7	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.68 V	137	58.8	-2.7
2	2390.00	43.4 AV	54.0	-10.6	1.68 V	137	46.1	-2.7
3	*2437.00	112.3 PK			1.68 V	137	115.0	-2.7
4	*2437.00	102.4 AV			1.68 V	137	105.1	-2.7
5	2483.50	55.5 PK	74.0	-18.5	1.68 V	137	58.3	-2.8
6	2483.50	42.1 AV	54.0	-11.9	1.68 V	137	44.9	-2.8
7	4874.00	44.9 PK	74.0	-29.1	2.60 V	333	43.2	1.7
8	4874.00	40.7 AV	54.0	-13.3	2.60 V	333	39.0	1.7
9	7311.00	46.7 PK	74.0	-27.3	1.07 V	130	39.5	7.2
10	7311.00	38.6 AV	54.0	-15.4	1.07 V	130	31.4	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.6 PK			1.17 H	273	113.4	-2.8
2	*2462.00	101.7 AV			1.17 H	273	104.5	-2.8
3	2483.50	60.8 PK	74.0	-13.2	1.17 H	273	63.6	-2.8
4	2483.50	47.1 AV	54.0	-6.9	1.17 H	273	49.9	-2.8
5	4924.00	46.5 PK	74.0	-27.5	1.61 H	285	44.7	1.8
6	4924.00	44.7 AV	54.0	-9.3	1.61 H	285	42.9	1.8
7	7386.00	51.2 PK	74.0	-22.8	2.68 H	98	43.8	7.4
8	7386.00	47.4 AV	54.0	-6.6	2.68 H	98	40.0	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.7 PK			1.68 V	135	110.5	-2.8
2	*2462.00	98.1 AV			1.68 V	135	100.9	-2.8
3	2483.50	58.1 PK	74.0	-15.9	1.68 V	135	60.9	-2.8
4	2483.50	45.7 AV	54.0	-8.3	1.68 V	135	48.5	-2.8
5	4924.00	43.8 PK	74.0	-30.2	2.56 V	350	42.0	1.8
6	4924.00	39.9 AV	54.0	-14.1	2.56 V	350	38.1	1.8
7	7386.00	46.5 PK	74.0	-27.5	1.18 V	121	39.1	7.4
8	7386.00	38.3 AV	54.0	-15.7	1.18 V	121	30.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.5 PK			1.15 H	277	109.3	-2.8
2	*2467.00	98.0 AV			1.15 H	277	100.8	-2.8
3	2483.50	59.8 PK	74.0	-14.2	1.15 H	277	62.6	-2.8
4	2483.50	46.3 AV	54.0	-7.7	1.15 H	277	49.1	-2.8
5	4934.00	46.6 PK	74.0	-27.4	1.54 H	288	44.8	1.8
6	4934.00	44.8 AV	54.0	-9.2	1.54 H	288	43.0	1.8
7	7401.00	50.9 PK	74.0	-23.1	2.69 H	100	43.4	7.5
8	7401.00	47.3 AV	54.0	-6.7	2.69 H	100	39.8	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	103.7 PK			1.77 V	139	106.5	-2.8
2	*2467.00	94.1 AV			1.77 V	139	96.9	-2.8
3	2483.50	56.4 PK	74.0	-17.6	1.77 V	139	59.2	-2.8
4	2483.50	44.9 AV	54.0	-9.1	1.77 V	139	47.7	-2.8
5	4934.00	43.9 PK	74.0	-30.1	2.65 V	332	42.1	1.8
6	4934.00	40.2 AV	54.0	-13.8	2.65 V	332	38.4	1.8
7	7401.00	46.8 PK	74.0	-27.2	1.03 V	126	39.3	7.5
8	7401.00	38.8 AV	54.0	-15.2	1.03 V	126	31.3	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.6 PK			1.15 H	277	109.4	-2.8
2	*2472.00	96.7 AV			1.15 H	277	99.5	-2.8
3	2483.50	59.4 PK	74.0	-14.6	1.15 H	277	62.2	-2.8
4	2483.50	47.0 AV	54.0	-7.0	1.15 H	277	49.8	-2.8
5	4944.00	46.3 PK	74.0	-27.7	1.54 H	287	44.5	1.8
6	4944.00	44.4 AV	54.0	-9.6	1.54 H	287	42.6	1.8
7	7416.00	51.1 PK	74.0	-22.9	2.64 H	96	43.6	7.5
8	7416.00	47.3 AV	54.0	-6.7	2.64 H	96	39.8	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.9 PK			1.81 V	149	105.7	-2.8
2	*2472.00	93.0 AV			1.81 V	149	95.8	-2.8
3	2483.50	57.1 PK	74.0	-16.9	1.81 V	149	59.9	-2.8
4	2483.50	45.5 AV	54.0	-8.5	1.81 V	149	48.3	-2.8
5	4944.00	43.4 PK	74.0	-30.6	2.55 V	349	41.6	1.8
6	4944.00	39.7 AV	54.0	-14.3	2.55 V	349	37.9	1.8
7	7416.00	46.4 PK	74.0	-27.6	1.22 V	129	38.9	7.5
8	7416.00	38.0 AV	54.0	-16.0	1.22 V	129	30.5	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.2 PK	74.0	-15.8	1.23 H	279	60.9	-2.7
2	2390.00	45.6 AV	54.0	-8.4	1.23 H	279	48.3	-2.7
3	*2412.00	110.8 PK			1.23 H	279	113.5	-2.7
4	*2412.00	100.3 AV			1.23 H	279	103.0	-2.7
5	4824.00	47.3 PK	74.0	-26.7	1.56 H	280	45.5	1.8
6	4824.00	45.0 AV	54.0	-9.0	1.56 H	280	43.2	1.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	56.1 PK	74.0	-17.9	1.76 V	141	58.8	-2.7
2	2390.00	44.1 AV	54.0	-9.9	1.76 V	141	46.8	-2.7
3	*2412.00	107.4 PK			1.76 V	141	110.1	-2.7
4	*2412.00	96.4 AV			1.76 V	141	99.1	-2.7
5	4824.00	43.9 PK	74.0	-30.1	2.65 V	357	42.1	1.8
6	4824.00	39.9 AV	54.0	-14.1	2.65 V	357	38.1	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.18 H	281	60.8	-2.7
2	2390.00	45.6 AV	54.0	-8.4	1.18 H	281	48.3	-2.7
3	*2437.00	117.7 PK			1.18 H	281	120.4	-2.7
4	*2437.00	106.8 AV			1.18 H	281	109.5	-2.7
5	2483.50	59.9 PK	74.0	-14.1	1.18 H	281	62.7	-2.8
6	2483.50	45.0 AV	54.0	-9.0	1.18 H	281	47.8	-2.8
7	4874.00	46.9 PK	74.0	-27.1	1.60 H	289	45.2	1.7
8	4874.00	44.9 AV	54.0	-9.1	1.60 H	289	43.2	1.7
9	7311.00	63.4 PK	74.0	-10.6	2.58 H	99	56.2	7.2
10	7311.00	50.5 AV	54.0	-3.5	2.58 H	99	43.3	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.4 PK	74.0	-18.6	1.81 V	130	58.1	-2.7
2	2390.00	43.0 AV	54.0	-11.0	1.81 V	130	45.7	-2.7
3	*2437.00	113.3 PK			1.81 V	130	116.0	-2.7
4	*2437.00	102.2 AV			1.81 V	130	104.9	-2.7
5	2483.50	55.7 PK	74.0	-18.3	1.81 V	130	58.5	-2.8
6	2483.50	42.4 AV	54.0	-11.6	1.81 V	130	45.2	-2.8
7	4874.00	42.7 PK	74.0	-31.3	2.58 V	344	41.0	1.7
8	4874.00	39.3 AV	54.0	-14.7	2.58 V	344	37.6	1.7
9	7311.00	46.5 PK	74.0	-27.5	1.18 V	143	39.3	7.2
10	7311.00	38.3 AV	54.0	-15.7	1.18 V	143	31.1	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	111.3 PK			1.20 H	275	114.1	-2.8
2	*2462.00	100.7 AV			1.20 H	275	103.5	-2.8
3	2483.50	60.5 PK	74.0	-13.5	1.20 H	275	63.3	-2.8
4	2483.50	47.0 AV	54.0	-7.0	1.20 H	275	49.8	-2.8
5	4924.00	47.3 PK	74.0	-26.7	1.59 H	279	45.5	1.8
6	4924.00	45.1 AV	54.0	-8.9	1.59 H	279	43.3	1.8
7	7386.00	51.4 PK	74.0	-22.6	2.61 H	91	44.0	7.4
8	7386.00	47.8 AV	54.0	-6.2	2.61 H	91	40.4	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			1.70 V	156	110.6	-2.8
2	*2462.00	96.6 AV			1.70 V	156	99.4	-2.8
3	2483.50	60.8 PK	74.0	-13.2	1.70 V	156	63.6	-2.8
4	2483.50	46.0 AV	54.0	-8.0	1.70 V	156	48.8	-2.8
5	4924.00	43.3 PK	74.0	-30.7	2.52 V	349	41.5	1.8
6	4924.00	39.7 AV	54.0	-14.3	2.52 V	349	37.9	1.8
7	7386.00	46.4 PK	74.0	-27.6	1.20 V	123	39.0	7.4
8	7386.00	37.9 AV	54.0	-16.1	1.20 V	123	30.5	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	107.8 PK			1.17 H	283	110.6	-2.8
2	*2467.00	97.2 AV			1.17 H	283	100.0	-2.8
3	2483.50	59.8 PK	74.0	-14.2	1.17 H	283	62.6	-2.8
4	2483.50	46.1 AV	54.0	-7.9	1.17 H	283	48.9	-2.8
5	4934.00	46.0 PK	74.0	-28.0	1.51 H	295	44.2	1.8
6	4934.00	44.3 AV	54.0	-9.7	1.51 H	295	42.5	1.8
7	7401.00	51.8 PK	74.0	-22.2	2.69 H	95	44.3	7.5
8	7401.00	48.1 AV	54.0	-5.9	2.69 H	95	40.6	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.4 PK			1.96 V	143	107.2	-2.8
2	*2467.00	93.3 AV			1.96 V	143	96.1	-2.8
3	2483.50	56.8 PK	74.0	-17.2	1.96 V	143	59.6	-2.8
4	2483.50	45.0 AV	54.0	-9.0	1.96 V	143	47.8	-2.8
5	4934.00	42.9 PK	74.0	-31.1	2.60 V	347	41.1	1.8
6	4934.00	39.2 AV	54.0	-14.8	2.60 V	347	37.4	1.8
7	7401.00	46.4 PK	74.0	-27.6	1.16 V	145	38.9	7.5
8	7401.00	38.1 AV	54.0	-15.9	1.16 V	145	30.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	107.1 PK			1.13 H	278	109.9	-2.8
2	*2472.00	96.3 AV			1.13 H	278	99.1	-2.8
3	2483.50	65.4 PK	74.0	-8.6	1.13 H	278	68.2	-2.8
4	2483.50	46.9 AV	54.0	-7.1	1.13 H	278	49.7	-2.8
5	4944.00	46.5 PK	74.0	-27.5	1.59 H	278	44.7	1.8
6	4944.00	44.5 AV	54.0	-9.5	1.59 H	278	42.7	1.8
7	7416.00	51.5 PK	74.0	-22.5	2.68 H	98	44.0	7.5
8	7416.00	48.2 AV	54.0	-5.8	2.68 H	98	40.7	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.6 PK			1.89 V	155	106.4	-2.8
2	*2472.00	92.6 AV			1.89 V	155	95.4	-2.8
3	2483.50	58.3 PK	74.0	-15.7	1.89 V	155	61.1	-2.8
4	2483.50	45.1 AV	54.0	-8.9	1.89 V	155	47.9	-2.8
5	4944.00	43.1 PK	74.0	-30.9	2.58 V	354	41.3	1.8
6	4944.00	39.6 AV	54.0	-14.4	2.58 V	354	37.8	1.8
7	7416.00	46.5 PK	74.0	-27.5	1.23 V	119	39.0	7.5
8	7416.00	38.2 AV	54.0	-15.8	1.23 V	119	30.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.6 PK	74.0	-16.4	1.00 H	277	60.3	-2.7
2	2390.00	45.6 AV	54.0	-8.4	1.00 H	277	48.3	-2.7
3	*2422.00	107.4 PK			1.00 H	277	110.1	-2.7
4	*2422.00	95.3 AV			1.00 H	277	98.0	-2.7
5	4844.00	46.8 PK	74.0	-27.2	1.59 H	294	45.0	1.8
6	4844.00	44.5 AV	54.0	-9.5	1.59 H	294	42.7	1.8
7	7266.00	51.1 PK	74.0	-22.9	2.69 H	89	43.8	7.3
8	7266.00	47.3 AV	54.0	-6.7	2.69 H	89	40.0	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.7 PK	74.0	-18.3	1.91 V	161	58.4	-2.7
2	2390.00	43.7 AV	54.0	-10.3	1.91 V	161	46.4	-2.7
3	*2422.00	103.3 PK			1.91 V	161	106.0	-2.7
4	*2422.00	91.3 AV			1.91 V	161	94.0	-2.7
5	4844.00	43.3 PK	74.0	-30.7	2.52 V	335	41.5	1.8
6	4844.00	39.7 AV	54.0	-14.3	2.52 V	335	37.9	1.8
7	7266.00	46.3 PK	74.0	-27.7	1.27 V	123	39.0	7.3
8	7266.00	37.8 AV	54.0	-16.2	1.27 V	123	30.5	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	62.0 PK	74.0	-12.0	1.06 H	290	64.7	-2.7
2	2390.00	47.5 AV	54.0	-6.5	1.06 H	290	50.2	-2.7
3	*2437.00	110.3 PK			1.06 H	290	113.0	-2.7
4	*2437.00	98.4 AV			1.06 H	290	101.1	-2.7
5	2483.50	66.7 PK	74.0	-7.3	1.06 H	290	69.5	-2.8
6	2483.50	50.1 AV	54.0	-3.9	1.06 H	290	52.9	-2.8
7	4874.00	46.2 PK	74.0	-27.8	1.52 H	285	44.5	1.7
8	4874.00	44.3 AV	54.0	-9.7	1.52 H	285	42.6	1.7
9	7311.00	51.9 PK	74.0	-22.1	2.70 H	95	44.7	7.2
10	7311.00	48.2 AV	54.0	-5.8	2.70 H	95	41.0	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.9 PK	74.0	-15.1	1.95 V	153	61.6	-2.7
2	2390.00	44.6 AV	54.0	-9.4	1.95 V	153	47.3	-2.7
3	*2437.00	106.6 PK			1.95 V	153	109.3	-2.7
4	*2437.00	94.6 AV			1.95 V	153	97.3	-2.7
5	2483.50	63.8 PK	74.0	-10.2	1.95 V	153	66.6	-2.8
6	2483.50	47.3 AV	54.0	-6.7	1.95 V	153	50.1	-2.8
7	4874.00	43.2 PK	74.0	-30.8	2.58 V	347	41.5	1.7
8	4874.00	39.7 AV	54.0	-14.3	2.58 V	347	38.0	1.7
9	7311.00	46.2 PK	74.0	-27.8	1.22 V	136	39.0	7.2
10	7311.00	38.1 AV	54.0	-15.9	1.22 V	136	30.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.