

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	97.6 PK			1.10 H	210	100.4	-2.8
2	*2462.00	85.1 AV			1.10 H	210	87.9	-2.8
3	2488.53	61.5 PK	74.0	-12.5	1.10 H	210	64.3	-2.8
4	2488.53	44.8 AV	54.0	-9.2	1.10 H	210	47.6	-2.8
5	4924.00	39.6 PK	74.0	-34.4	1.66 H	169	37.8	1.8
6	4924.00	35.0 AV	54.0	-19.0	1.66 H	169	33.2	1.8
7	7386.00	45.3 PK	74.0	-28.7	2.00 H	206	37.9	7.4
8	7386.00	39.4 AV	54.0	-14.6	2.00 H	206	32.0	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	1009.1 PK			1.22 V	237	1011.9	-2.8
2	*2462.00	97.0 AV			1.22 V	237	99.8	-2.8
3	2483.50	66.5 PK	74.0	-7.5	1.22 V	237	69.3	-2.8
4	2483.50	52.3 AV	54.0	-1.7	1.22 V	237	55.1	-2.8
5	4924.00	43.5 PK	74.0	-30.5	1.29 V	278	41.7	1.8
6	4924.00	38.8 AV	54.0	-15.2	1.29 V	278	37.0	1.8
7	7386.00	54.3 PK	74.0	-19.7	1.68 V	279	46.9	7.4
8	7386.00	40.6 AV	54.0	-13.4	1.68 V	279	33.2	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.80	60.1 PK	74.0	-13.9	1.60 H	113	62.8	-2.7
2	2386.80	43.8 AV	54.0	-10.2	1.60 H	113	46.5	-2.7
3	2390.00	66.1 PK	74.0	-7.9	1.60 H	113	68.8	-2.7
4	2390.00	43.5 AV	54.0	-10.5	1.60 H	113	46.2	-2.7
5	*2412.00	113.7 PK			1.60 H	113	116.4	-2.7
6	*2412.00	102.0 AV			1.60 H	113	104.7	-2.7
7	4824.00	42.6 PK	74.0	-31.4	1.30 H	220	40.8	1.8
8	4824.00	31.2 AV	54.0	-22.8	1.30 H	220	29.4	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.70	70.8 PK	74.0	-3.2	1.59 V	159	73.5	-2.7
2	2387.70	46.3 AV	54.0	-7.7	1.59 V	159	49.0	-2.7
3	2388.26	72.5 PK	74.0	-1.5	1.59 V	159	75.2	-2.7
4	2388.26	46.0 AV	54.0	-8.0	1.59 V	159	48.7	-2.7
5	*2412.00	120.6 PK			1.59 V	159	123.3	-2.7
6	*2412.00	109.1 AV			1.59 V	159	111.8	-2.7
7	4824.00	46.3 PK	74.0	-27.7	1.57 V	70	44.5	1.8
8	4824.00	35.1 AV	54.0	-18.9	1.57 V	70	33.3	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.9 PK	74.0	-19.1	1.56 H	105	57.6	-2.7
2	2390.00	41.8 AV	54.0	-12.2	1.56 H	105	44.5	-2.7
3	*2437.00	117.3 PK			1.56 H	105	120.0	-2.7
4	*2437.00	106.3 AV			1.56 H	105	109.0	-2.7
5	2483.50	56.2 PK	74.0	-17.8	1.56 H	105	59.0	-2.8
6	2483.50	42.5 AV	54.0	-11.5	1.56 H	105	45.3	-2.8
7	4874.00	42.9 PK	74.0	-31.1	1.37 H	223	41.2	1.7
8	4874.00	31.4 AV	54.0	-22.6	1.37 H	223	29.7	1.7
9	7311.00	62.5 PK	74.0	-11.5	1.06 H	274	55.3	7.2
10	7311.00	47.0 AV	54.0	-7.0	1.06 H	274	39.8	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.3 PK	74.0	-16.7	1.59 V	144	60.0	-2.7
2	2390.00	43.4 AV	54.0	-10.6	1.59 V	144	46.1	-2.7
3	*2437.00	123.5 PK			1.59 V	144	126.2	-2.7
4	*2437.00	114.7 AV			1.59 V	144	117.4	-2.7
5	2483.50	58.6 PK	74.0	-15.4	1.59 V	144	61.4	-2.8
6	2483.50	43.8 AV	54.0	-10.2	1.59 V	144	46.6	-2.8
7	4874.00	46.6 PK	74.0	-27.4	1.50 V	87	44.9	1.7
8	4874.00	35.5 AV	54.0	-18.5	1.50 V	87	33.8	1.7
9	7311.00	64.6 PK	74.0	-9.4	1.50 V	46	57.4	7.2
10	7311.00	50.5 AV	54.0	-3.5	1.50 V	46	43.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	112.1 PK			1.27 H	113	114.9	-2.8
2	*2462.00	101.0 AV			1.27 H	113	103.8	-2.8
3	2483.50	68.0 PK	74.0	-6.0	1.27 H	113	70.8	-2.8
4	2483.50	43.4 AV	54.0	-10.6	1.27 H	113	46.2	-2.8
5	4924.00	42.7 PK	74.0	-31.3	1.34 H	232	40.9	1.8
6	4924.00	31.2 AV	54.0	-22.8	1.34 H	232	29.4	1.8
7	7386.00	57.4 PK	74.0	-16.6	1.06 H	273	50.0	7.4
8	7386.00	42.2 AV	54.0	-11.8	1.06 H	273	34.8	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	122.1 PK			1.60 V	245	124.9	-2.8
2	*2462.00	109.1 AV			1.60 V	245	111.9	-2.8
3	2483.82	72.4 PK	74.0	-1.6	1.60 V	245	75.2	-2.8
4	2483.82	45.3 AV	54.0	-8.7	1.60 V	245	48.1	-2.8
5	4924.00	46.5 PK	74.0	-27.5	1.53 V	78	44.7	1.8
6	4924.00	35.2 AV	54.0	-18.8	1.53 V	78	33.4	1.8
7	7386.00	64.2 PK	74.0	-9.8	1.49 V	61	56.8	7.4
8	7386.00	46.8 AV	54.0	-7.2	1.49 V	61	39.4	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.3 PK			1.35 H	110	112.1	-2.8
2	*2467.00	98.1 AV			1.35 H	110	100.9	-2.8
3	2484.90	71.3 PK	74.0	-2.7	1.35 H	110	74.1	-2.8
4	2484.90	43.4 AV	54.0	-10.6	1.35 H	110	46.2	-2.8
5	4934.00	42.0 PK	74.0	-32.0	1.29 H	243	40.2	1.8
6	4934.00	30.7 AV	54.0	-23.3	1.29 H	243	28.9	1.8
7	7401.00	56.8 PK	74.0	-17.2	1.04 H	286	49.3	7.5
8	7401.00	41.7 AV	54.0	-12.3	1.04 H	286	34.2	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.2 PK			1.64 V	250	122.0	-2.8
2	*2467.00	106.3 AV			1.64 V	250	109.1	-2.8
3	2485.08	72.4 PK	74.0	-1.6	1.64 V	250	75.2	-2.8
4	2485.08	45.1 AV	54.0	-8.9	1.64 V	250	47.9	-2.8
5	4934.00	46.1 PK	74.0	-27.9	1.52 V	62	44.3	1.8
6	4934.00	35.0 AV	54.0	-19.0	1.52 V	62	33.2	1.8
7	7401.00	64.3 PK	74.0	-9.7	1.50 V	48	56.8	7.5
8	7401.00	47.1 AV	54.0	-6.9	1.50 V	48	39.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	106.1 PK			1.43 H	115	108.9	-2.8
2	*2472.00	93.4 AV			1.43 H	115	96.2	-2.8
3	2483.50	65.9 PK	74.0	-8.1	1.43 H	115	68.7	-2.8
4	2483.50	44.6 AV	54.0	-9.4	1.43 H	115	47.4	-2.8
5	4944.00	42.4 PK	74.0	-31.6	1.40 H	238	40.6	1.8
6	4944.00	31.0 AV	54.0	-23.0	1.40 H	238	29.2	1.8
7	7416.00	57.1 PK	74.0	-16.9	1.01 H	282	49.6	7.5
8	7416.00	41.8 AV	54.0	-12.2	1.01 H	282	34.3	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.9 PK			1.57 V	311	116.7	-2.8
2	*2472.00	101.2 AV			1.57 V	311	104.0	-2.8
3	2483.50	72.5 PK	74.0	-1.5	1.57 V	311	75.3	-2.8
4	2483.50	47.9 AV	54.0	-6.1	1.57 V	311	50.7	-2.8
5	4944.00	47.0 PK	74.0	-27.0	1.51 V	86	45.2	1.8
6	4944.00	35.7 AV	54.0	-18.3	1.51 V	86	33.9	1.8
7	7416.00	64.1 PK	74.0	-9.9	1.53 V	75	56.6	7.5
8	7416.00	46.7 AV	54.0	-7.3	1.53 V	75	39.2	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.22	66.5 PK	74.0	-7.5	1.58 H	116	69.2	-2.7
2	2388.22	44.6 AV	54.0	-9.4	1.58 H	116	47.3	-2.7
3	2390.00	63.7 PK	74.0	-10.3	1.58 H	116	66.4	-2.7
4	2390.00	45.2 AV	54.0	-8.8	1.58 H	116	47.9	-2.7
5	*2412.00	113.0 PK			1.58 H	116	115.7	-2.7
6	*2412.00	101.9 AV			1.58 H	116	104.6	-2.7
7	4824.00	42.7 PK	74.0	-31.3	1.34 H	247	40.9	1.8
8	4824.00	31.1 AV	54.0	-22.9	1.34 H	247	29.3	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.17	72.5 PK	74.0	-1.5	1.56 V	164	75.2	-2.7
2	2388.17	47.6 AV	54.0	-6.4	1.56 V	164	50.3	-2.7
3	2390.00	70.8 PK	74.0	-3.2	1.56 V	164	73.5	-2.7
4	2390.00	48.3 AV	54.0	-5.7	1.56 V	164	51.0	-2.7
5	*2412.00	120.8 PK			1.56 V	164	123.5	-2.7
6	*2412.00	109.1 AV			1.56 V	164	111.8	-2.7
7	4824.00	46.6 PK	74.0	-27.4	1.57 V	85	44.8	1.8
8	4824.00	35.4 AV	54.0	-18.6	1.57 V	85	33.6	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	55.6 PK	74.0	-18.4	1.62 H	101	58.3	-2.7
2	2390.00	42.3 AV	54.0	-11.7	1.62 H	101	45.0	-2.7
3	*2437.00	115.3 PK			1.62 H	101	118.0	-2.7
4	*2437.00	104.1 AV			1.62 H	101	106.8	-2.7
5	2483.50	55.8 PK	74.0	-18.2	1.62 H	101	58.6	-2.8
6	2483.50	42.3 AV	54.0	-11.7	1.62 H	101	45.1	-2.8
7	4874.00	43.4 PK	74.0	-30.6	1.36 H	226	41.7	1.7
8	4874.00	31.7 AV	54.0	-22.3	1.36 H	226	30.0	1.7
9	7311.00	57.8 PK	74.0	-16.2	1.08 H	258	50.6	7.2
10	7311.00	42.5 AV	54.0	-11.5	1.08 H	258	35.3	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.54 V	172	60.6	-2.7
2	2390.00	43.7 AV	54.0	-10.3	1.54 V	172	46.4	-2.7
3	*2437.00	121.7 PK			1.54 V	172	124.4	-2.7
4	*2437.00	111.8 AV			1.54 V	172	114.5	-2.7
5	2483.50	60.8 PK	74.0	-13.2	1.54 V	172	63.6	-2.8
6	2483.50	44.6 AV	54.0	-9.4	1.54 V	172	47.4	-2.8
7	4874.00	46.7 PK	74.0	-27.3	1.56 V	69	45.0	1.7
8	4874.00	35.6 AV	54.0	-18.4	1.56 V	69	33.9	1.7
9	7311.00	61.8 PK	74.0	-12.2	1.44 V	59	54.6	7.2
10	7311.00	48.1 AV	54.0	-5.9	1.44 V	59	40.9	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.9 PK			1.30 H	110	113.7	-2.8
2	*2462.00	100.4 AV			1.30 H	110	103.2	-2.8
3	2483.50	66.5 PK	74.0	-7.5	1.30 H	110	69.3	-2.8
4	2483.50	43.9 AV	54.0	-10.1	1.30 H	110	46.7	-2.8
5	4924.00	42.5 PK	74.0	-31.5	1.30 H	234	40.7	1.8
6	4924.00	31.1 AV	54.0	-22.9	1.30 H	234	29.3	1.8
7	7386.00	57.3 PK	74.0	-16.7	1.01 H	261	49.9	7.4
8	7386.00	42.3 AV	54.0	-11.7	1.01 H	261	34.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	120.3 PK			1.63 V	235	123.1	-2.8
2	*2462.00	108.9 AV			1.63 V	235	111.7	-2.8
3	2483.50	72.2 PK	74.0	-1.8	1.63 V	235	75.0	-2.8
4	2483.50	47.1 AV	54.0	-6.9	1.63 V	235	49.9	-2.8
5	4924.00	46.1 PK	74.0	-27.9	1.57 V	93	44.3	1.8
6	4924.00	34.7 AV	54.0	-19.3	1.57 V	93	32.9	1.8
7	7386.00	64.6 PK	74.0	-9.4	1.52 V	59	57.2	7.4
8	7386.00	47.3 AV	54.0	-6.7	1.52 V	59	39.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	109.6 PK			1.30 H	111	112.4	-2.8
2	*2467.00	99.2 AV			1.30 H	111	102.0	-2.8
3	2483.95	70.7 PK	74.0	-3.3	1.30 H	111	73.5	-2.8
4	2483.95	44.7 AV	54.0	-9.3	1.30 H	111	47.5	-2.8
5	4934.00	42.9 PK	74.0	-31.1	1.34 H	243	41.1	1.8
6	4934.00	31.3 AV	54.0	-22.7	1.34 H	243	29.5	1.8
7	7401.00	57.5 PK	74.0	-16.5	1.05 H	271	50.0	7.5
8	7401.00	42.3 AV	54.0	-11.7	1.05 H	271	34.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	119.9 PK			1.65 V	240	122.7	-2.8
2	*2467.00	108.3 AV			1.65 V	240	111.1	-2.8
3	2484.74	72.5 PK	74.0	-1.5	1.65 V	240	75.3	-2.8
4	2484.74	48.1 AV	54.0	-5.9	1.65 V	240	50.9	-2.8
5	4934.00	47.0 PK	74.0	-27.0	1.58 V	69	45.2	1.8
6	4934.00	35.6 AV	54.0	-18.4	1.58 V	69	33.8	1.8
7	7401.00	64.1 PK	74.0	-9.9	1.52 V	68	56.6	7.5
8	7401.00	46.6 AV	54.0	-7.4	1.52 V	68	39.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	99.5 PK			1.31 H	105	102.3	-2.8
2	*2472.00	88.5 AV			1.31 H	105	91.3	-2.8
3	2483.50	63.0 PK	74.0	-11.0	1.31 H	105	65.8	-2.8
4	2483.50	43.5 AV	54.0	-10.5	1.31 H	105	46.3	-2.8
5	4944.00	42.6 PK	74.0	-31.4	1.29 H	225	40.8	1.8
6	4944.00	31.2 AV	54.0	-22.8	1.29 H	225	29.4	1.8
7	7416.00	57.2 PK	74.0	-16.8	1.11 H	274	49.7	7.5
8	7416.00	42.0 AV	54.0	-12.0	1.11 H	274	34.5	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	112.0 PK			1.61 V	312	114.8	-2.8
2	*2472.00	100.4 AV			1.61 V	312	103.2	-2.8
3	2483.50	72.5 PK	74.0	-1.5	1.61 V	312	75.3	-2.8
4	2483.50	47.8 AV	54.0	-6.2	1.61 V	312	50.6	-2.8
5	4944.00	46.7 PK	74.0	-27.3	1.56 V	66	44.9	1.8
6	4944.00	35.3 AV	54.0	-18.7	1.56 V	66	33.5	1.8
7	7416.00	64.1 PK	74.0	-9.9	1.53 V	57	56.6	7.5
8	7416.00	46.6 AV	54.0	-7.4	1.53 V	57	39.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.68	61.8 PK	74.0	-12.2	1.54 H	109	64.5	-2.7
2	2388.68	44.4 AV	54.0	-9.6	1.54 H	109	47.1	-2.7
3	2390.00	60.1 PK	74.0	-13.9	1.54 H	109	62.8	-2.7
4	2390.00	44.7 AV	54.0	-9.3	1.54 H	109	47.4	-2.7
5	*2412.00	110.2 PK			1.54 H	109	112.9	-2.7
6	*2412.00	98.8 AV			1.54 H	109	101.5	-2.7
7	4824.00	42.9 PK	74.0	-31.1	1.29 H	224	41.1	1.8
8	4824.00	31.3 AV	54.0	-22.7	1.29 H	224	29.5	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.44	67.6 PK	74.0	-6.4	1.57 V	159	70.3	-2.7
2	2388.44	47.3 AV	54.0	-6.7	1.57 V	159	50.0	-2.7
3	2390.00	66.6 PK	74.0	-7.4	1.57 V	159	69.3	-2.7
4	2390.00	47.8 AV	54.0	-6.2	1.57 V	159	50.5	-2.7
5	*2412.00	117.8 PK			1.57 V	159	120.5	-2.7
6	*2412.00	106.5 AV			1.57 V	159	109.2	-2.7
7	4824.00	46.5 PK	74.0	-27.5	1.50 V	86	44.7	1.8
8	4824.00	34.9 AV	54.0	-19.1	1.50 V	86	33.1	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	54.4 PK	74.0	-19.6	1.49 H	99	57.1	-2.7
2	2390.00	41.6 AV	54.0	-12.4	1.49 H	99	44.3	-2.7
3	*2437.00	113.1 PK			1.49 H	99	115.8	-2.7
4	*2437.00	103.4 AV			1.49 H	99	106.1	-2.7
5	2483.50	56.3 PK	74.0	-17.7	1.49 H	99	59.1	-2.8
6	2483.50	42.5 AV	54.0	-11.5	1.49 H	99	45.3	-2.8
7	4874.00	42.8 PK	74.0	-31.2	1.37 H	230	41.1	1.7
8	4874.00	31.4 AV	54.0	-22.6	1.37 H	230	29.7	1.7
9	7311.00	57.5 PK	74.0	-16.5	1.11 H	264	50.3	7.2
10	7311.00	42.0 AV	54.0	-12.0	1.11 H	264	34.8	7.2

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.57 V	148	64.5	-2.7
2	2390.00	44.5 AV	54.0	-9.5	1.57 V	148	47.2	-2.7
3	*2437.00	120.9 PK			1.57 V	148	123.6	-2.7
4	*2437.00	110.6 AV			1.57 V	148	113.3	-2.7
5	2483.50	71.3 PK	74.0	-2.7	1.57 V	148	74.1	-2.8
6	2483.50	46.5 AV	54.0	-7.5	1.57 V	148	49.3	-2.8
7	4874.00	46.0 PK	74.0	-28.0	1.57 V	84	44.3	1.7
8	4874.00	34.8 AV	54.0	-19.2	1.57 V	84	33.1	1.7
9	7311.00	64.2 PK	74.0	-9.8	1.53 V	47	57.0	7.2
10	7311.00	46.9 AV	54.0	-7.1	1.53 V	47	39.7	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.5 PK			1.16 H	107	111.3	-2.8
2	*2462.00	97.9 AV			1.16 H	107	100.7	-2.8
3	2484.23	62.6 PK	74.0	-11.4	1.16 H	107	65.4	-2.8
4	2484.23	44.9 AV	54.0	-9.1	1.16 H	107	47.7	-2.8
5	4924.00	42.4 PK	74.0	-31.6	1.35 H	238	40.6	1.8
6	4924.00	31.0 AV	54.0	-23.0	1.35 H	238	29.2	1.8
7	7386.00	57.5 PK	74.0	-16.5	1.07 H	265	50.1	7.4
8	7386.00	42.3 AV	54.0	-11.7	1.07 H	265	34.9	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	117.1 PK			1.63 V	232	119.9	-2.8
2	*2462.00	106.1 AV			1.63 V	232	108.9	-2.8
3	2483.85	72.5 PK	74.0	-1.5	1.63 V	232	75.3	-2.8
4	2483.85	48.0 AV	54.0	-6.0	1.63 V	232	50.8	-2.8
5	4924.00	46.4 PK	74.0	-27.6	1.50 V	91	44.6	1.8
6	4924.00	35.3 AV	54.0	-18.7	1.50 V	91	33.5	1.8
7	7386.00	63.6 PK	74.0	-10.4	1.52 V	63	56.2	7.4
8	7386.00	46.4 AV	54.0	-7.6	1.52 V	63	39.0	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.3 PK			1.20 H	109	109.1	-2.8
2	*2467.00	95.3 AV			1.20 H	109	98.1	-2.8
3	2483.50	65.2 PK	74.0	-8.8	1.20 H	109	68.0	-2.8
4	2483.50	45.5 AV	54.0	-8.5	1.20 H	109	48.3	-2.8
5	4934.00	42.1 PK	74.0	-31.9	1.30 H	246	40.3	1.8
6	4934.00	30.7 AV	54.0	-23.3	1.30 H	246	28.9	1.8
7	7401.00	57.4 PK	74.0	-16.6	1.07 H	274	49.9	7.5
8	7401.00	42.1 AV	54.0	-11.9	1.07 H	274	34.6	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	115.5 PK			1.60 V	237	118.3	-2.8
2	*2467.00	104.4 AV			1.60 V	237	107.2	-2.8
3	2483.50	72.5 PK	74.0	-1.5	1.60 V	237	75.3	-2.8
4	2483.50	47.7 AV	54.0	-6.3	1.60 V	237	50.5	-2.8
5	4934.00	46.9 PK	74.0	-27.1	1.57 V	78	45.1	1.8
6	4934.00	35.6 AV	54.0	-18.4	1.57 V	78	33.8	1.8
7	7401.00	64.7 PK	74.0	-9.3	1.43 V	62	57.2	7.5
8	7401.00	47.2 AV	54.0	-6.8	1.43 V	62	39.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.4 PK			1.23 H	106	107.2	-2.8
2	*2472.00	93.4 AV			1.23 H	106	96.2	-2.8
3	2483.50	69.7 PK	74.0	-4.3	1.23 H	106	72.5	-2.8
4	2483.50	46.3 AV	54.0	-7.7	1.23 H	106	49.1	-2.8
5	4944.00	42.3 PK	74.0	-31.7	1.36 H	219	40.5	1.8
6	4944.00	30.9 AV	54.0	-23.1	1.36 H	219	29.1	1.8
7	7416.00	57.6 PK	74.0	-16.4	1.10 H	286	50.1	7.5
8	7416.00	42.3 AV	54.0	-11.7	1.10 H	286	34.8	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	113.0 PK			1.62 V	241	115.8	-2.8
2	*2472.00	101.9 AV			1.62 V	241	104.7	-2.8
3	2483.50	72.4 PK	74.0	-1.6	1.62 V	241	75.2	-2.8
4	2483.50	48.0 AV	54.0	-6.0	1.62 V	241	50.8	-2.8
5	4944.00	46.7 PK	74.0	-27.3	1.57 V	93	44.9	1.8
6	4944.00	35.6 AV	54.0	-18.4	1.57 V	93	33.8	1.8
7	7416.00	64.5 PK	74.0	-9.5	1.51 V	65	57.0	7.5
8	7416.00	47.2 AV	54.0	-6.8	1.51 V	65	39.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.


Below 1GHz Data:

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	119.26	37.7 QP	43.5	-5.8	3.00 H	342	52.8	-15.1
2	166.85	35.2 QP	43.5	-8.3	2.00 H	161	48.2	-13.0
3	227.60	34.3 QP	46.0	-11.7	2.00 H	119	50.1	-15.8
4	298.85	34.6 QP	46.0	-11.4	1.50 H	78	46.9	-12.3
5	336.33	33.4 QP	46.0	-12.6	1.50 H	348	44.7	-11.3
6	574.61	26.4 QP	46.0	-19.6	1.50 H	112	32.6	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

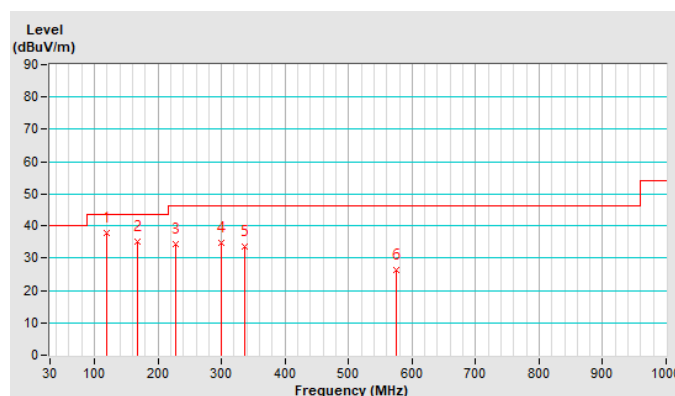


RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.74	29.7 QP	43.5	-13.8	1.00 V	49	44.1	-14.4
2	166.99	31.9 QP	43.5	-11.6	1.50 V	235	44.9	-13.0
3	222.85	30.8 QP	46.0	-15.2	1.00 V	144	46.8	-16.0
4	340.46	26.2 QP	46.0	-19.8	1.50 V	184	37.5	-11.3
5	498.42	24.2 QP	46.0	-21.8	1.50 V	56	31.9	-7.7
6	950.05	32.5 QP	46.0	-13.5	1.00 V	134	33.1	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

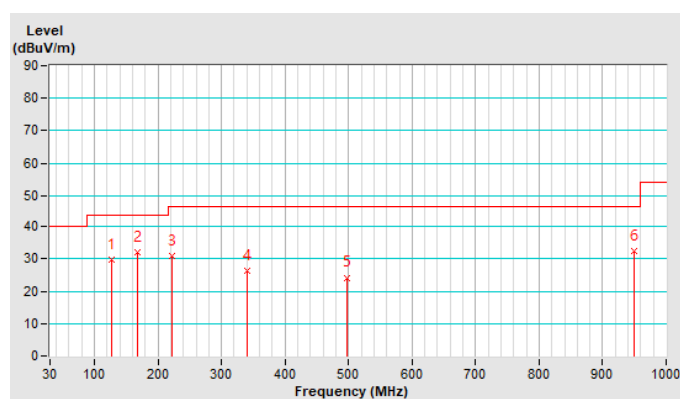

PIFA Antenna

Above 1GHz Data :

RF Mode	TX 802.11b	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.40	59.5 PK	74.0	-14.5	1.16 H	314	62.2	-2.7
2	2386.40	52.3 AV	54.0	-1.7	1.16 H	314	55.0	-2.7
3	*2412.00	109.1 PK			1.16 H	314	111.8	-2.7
4	*2412.00	106.4 AV			1.16 H	314	109.1	-2.7
5	4824.00	42.7 PK	74.0	-31.3	1.41 H	145	40.9	1.8
6	4824.00	37.8 AV	54.0	-16.2	1.41 H	145	36.0	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	2.34 V	95	61.9	-2.7
2	2390.00	51.5 AV	54.0	-2.5	2.34 V	95	54.2	-2.7
3	*2412.00	107.2 PK			2.34 V	95	109.9	-2.7
4	*2412.00	104.2 AV			2.34 V	95	106.9	-2.7
5	4824.00	40.6 PK	74.0	-33.4	1.52 V	132	38.8	1.8
6	4824.00	33.4 AV	54.0	-20.6	1.52 V	132	31.6	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.8 PK	74.0	-12.2	1.16 H	322	64.5	-2.7
2	2390.00	45.1 AV	54.0	-8.9	1.16 H	322	47.8	-2.7
3	*2437.00	108.0 PK			1.16 H	322	110.7	-2.7
4	*2437.00	105.6 AV			1.16 H	322	108.3	-2.7
5	2483.50	63.2 PK	74.0	-10.8	1.16 H	322	66.0	-2.8
6	2483.50	44.8 AV	54.0	-9.2	1.16 H	322	47.6	-2.8
7	4874.00	42.5 PK	74.0	-31.5	1.38 H	147	40.8	1.7
8	4874.00	37.8 AV	54.0	-16.2	1.38 H	147	36.1	1.7
9	7311.00	48.6 PK	74.0	-25.4	1.37 H	301	41.4	7.2
10	7311.00	42.2 AV	54.0	-11.8	1.37 H	301	35.0	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.1 PK	74.0	-14.9	2.30 V	86	61.8	-2.7
2	2390.00	42.9 AV	54.0	-11.1	2.30 V	86	45.6	-2.7
3	*2437.00	106.1 PK			2.30 V	86	108.8	-2.7
4	*2437.00	103.6 AV			2.30 V	86	106.3	-2.7
5	2483.50	61.3 PK	74.0	-12.7	2.30 V	86	64.1	-2.8
6	2483.50	42.0 AV	54.0	-12.0	2.30 V	86	44.8	-2.8
7	4874.00	40.3 PK	74.0	-33.7	1.51 V	126	38.6	1.7
8	4874.00	33.0 AV	54.0	-21.0	1.51 V	126	31.3	1.7
9	7311.00	47.1 PK	74.0	-26.9	3.26 V	142	39.9	7.2
10	7311.00	38.5 AV	54.0	-15.5	3.26 V	142	31.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	108.5 PK			1.15 H	326	111.3	-2.8
2	*2462.00	105.9 AV			1.15 H	326	108.7	-2.8
3	2483.50	59.7 PK	74.0	-14.3	1.15 H	326	62.5	-2.8
4	2483.50	52.3 AV	54.0	-1.7	1.15 H	326	55.1	-2.8
5	4924.00	42.1 PK	74.0	-31.9	1.32 H	140	40.3	1.8
6	4924.00	37.5 AV	54.0	-16.5	1.32 H	140	35.7	1.8
7	7386.00	48.3 PK	74.0	-25.7	1.41 H	303	40.9	7.4
8	7386.00	41.9 AV	54.0	-12.1	1.41 H	303	34.5	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.5 PK			2.32 V	78	109.3	-2.8
2	*2462.00	103.8 AV			2.32 V	78	106.6	-2.8
3	2483.50	57.4 PK	74.0	-16.6	2.32 V	78	60.2	-2.8
4	2483.50	49.0 AV	54.0	-5.0	2.32 V	78	51.8	-2.8
5	4924.00	40.9 PK	74.0	-33.1	1.51 V	130	39.1	1.8
6	4924.00	33.4 AV	54.0	-20.6	1.51 V	130	31.6	1.8
7	7386.00	46.3 PK	74.0	-27.7	3.31 V	147	38.9	7.4
8	7386.00	38.0 AV	54.0	-16.0	3.31 V	147	30.6	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.1 PK			1.15 H	330	106.9	-2.8
2	*2467.00	101.6 AV			1.15 H	330	104.4	-2.8
3	2483.50	60.3 PK	74.0	-13.7	1.15 H	330	63.1	-2.8
4	2483.50	50.5 AV	54.0	-3.5	1.15 H	330	53.3	-2.8
5	2484.10	59.5 PK	74.0	-14.5	1.15 H	330	62.3	-2.8
6	2484.10	52.0 AV	54.0	-2.0	1.15 H	330	54.8	-2.8
7	4934.00	42.4 PK	74.0	-31.6	1.33 H	141	40.6	1.8
8	4934.00	37.8 AV	54.0	-16.2	1.33 H	141	36.0	1.8
9	7401.00	48.7 PK	74.0	-25.3	1.40 H	305	41.2	7.5
10	7401.00	42.2 AV	54.0	-11.8	1.40 H	305	34.7	7.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	100.8 PK			2.16 V	84	103.6	-2.8
2	*2467.00	98.2 AV			2.16 V	84	101.0	-2.8
3	2483.50	57.6 PK	74.0	-16.4	2.16 V	84	60.4	-2.8
4	2483.50	47.6 AV	54.0	-6.4	2.16 V	84	50.4	-2.8
5	4934.00	40.9 PK	74.0	-33.1	1.50 V	130	39.1	1.8
6	4934.00	33.4 AV	54.0	-20.6	1.50 V	130	31.6	1.8
7	7401.00	46.9 PK	74.0	-27.1	3.31 V	129	39.4	7.5
8	7401.00	38.2 AV	54.0	-15.8	3.31 V	129	30.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11b	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	100.6 PK			1.16 H	326	103.4	-2.8
2	*2472.00	98.1 AV			1.16 H	326	100.9	-2.8
3	2487.50	59.5 PK	74.0	-14.5	1.16 H	326	62.3	-2.8
4	2487.50	52.1 AV	54.0	-1.9	1.16 H	326	54.9	-2.8
5	4944.00	42.8 PK	74.0	-31.2	1.43 H	132	41.0	1.8
6	4944.00	38.3 AV	54.0	-15.7	1.43 H	132	36.5	1.8
7	7416.00	48.5 PK	74.0	-25.5	1.36 H	306	41.0	7.5
8	7416.00	42.0 AV	54.0	-12.0	1.36 H	306	34.5	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	96.4 PK			2.02 V	95	99.2	-2.8
2	*2472.00	94.0 AV			2.02 V	95	96.8	-2.8
3	2487.00	57.5 PK	74.0	-16.5	2.02 V	95	60.3	-2.8
4	2487.00	49.0 AV	54.0	-5.0	2.02 V	95	51.8	-2.8
5	4944.00	40.5 PK	74.0	-33.5	1.46 V	141	38.7	1.8
6	4944.00	33.0 AV	54.0	-21.0	1.46 V	141	31.2	1.8
7	7416.00	47.1 PK	74.0	-26.9	3.24 V	145	39.6	7.5
8	7416.00	38.3 AV	54.0	-15.7	3.24 V	145	30.8	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	71.7 PK	74.0	-2.3	1.14 H	314	74.4	-2.7
2	2390.00	52.0 AV	54.0	-2.0	1.14 H	314	54.7	-2.7
3	*2412.00	107.7 PK			1.14 H	314	110.4	-2.7
4	*2412.00	98.5 AV			1.14 H	314	101.2	-2.7
5	4824.00	42.5 PK	74.0	-31.5	1.36 H	132	40.7	1.8
6	4824.00	37.6 AV	54.0	-16.4	1.36 H	132	35.8	1.8

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	67.1 PK	74.0	-6.9	2.34 V	81	69.8	-2.7
2	2390.00	49.8 AV	54.0	-4.2	2.34 V	81	52.5	-2.7
3	*2412.00	106.7 PK			2.34 V	81	109.4	-2.7
4	*2412.00	97.7 AV			2.34 V	81	100.4	-2.7
5	4824.00	40.4 PK	74.0	-33.6	1.56 V	122	38.6	1.8
6	4824.00	33.3 AV	54.0	-20.7	1.56 V	122	31.5	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.6 PK	74.0	-12.4	1.12 H	313	64.3	-2.7
2	2390.00	45.3 AV	54.0	-8.7	1.12 H	313	48.0	-2.7
3	*2437.00	109.6 PK			1.12 H	313	112.3	-2.7
4	*2437.00	100.1 AV			1.12 H	313	102.8	-2.7
5	2483.50	62.7 PK	74.0	-11.3	1.12 H	313	65.5	-2.8
6	2483.50	44.7 AV	54.0	-9.3	1.12 H	313	47.5	-2.8
7	4874.00	42.5 PK	74.0	-31.5	1.33 H	146	40.8	1.7
8	4874.00	37.6 AV	54.0	-16.4	1.33 H	146	35.9	1.7
9	7311.00	54.6 PK	74.0	-19.4	1.45 H	147	47.4	7.2
10	7311.00	40.2 AV	54.0	-13.8	1.45 H	147	33.0	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.4 PK	74.0	-14.6	2.35 V	83	62.1	-2.7
2	2390.00	43.4 AV	54.0	-10.6	2.35 V	83	46.1	-2.7
3	*2437.00	108.2 PK			2.35 V	83	110.9	-2.7
4	*2437.00	99.2 AV			2.35 V	83	101.9	-2.7
5	2483.50	60.8 PK	74.0	-13.2	2.35 V	83	63.6	-2.8
6	2483.50	42.0 AV	54.0	-12.0	2.35 V	83	44.8	-2.8
7	4874.00	40.0 PK	74.0	-34.0	1.53 V	113	38.3	1.7
8	4874.00	33.0 AV	54.0	-21.0	1.53 V	113	31.3	1.7
9	7311.00	50.3 PK	74.0	-23.7	2.60 V	128	43.1	7.2
10	7311.00	37.0 AV	54.0	-17.0	2.60 V	128	29.8	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.8 PK			1.09 H	311	110.6	-2.8
2	*2462.00	97.8 AV			1.09 H	311	100.6	-2.8
3	2483.50	70.8 PK	74.0	-3.2	1.09 H	311	73.6	-2.8
4	2483.50	52.3 AV	54.0	-1.7	1.09 H	311	55.1	-2.8
5	4924.00	42.4 PK	74.0	-31.6	1.28 H	145	40.6	1.8
6	4924.00	37.8 AV	54.0	-16.2	1.28 H	145	36.0	1.8
7	7386.00	54.7 PK	74.0	-19.3	1.44 H	143	47.3	7.4
8	7386.00	40.4 AV	54.0	-13.6	1.44 H	143	33.0	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.0 PK			2.04 V	84	107.8	-2.8
2	*2462.00	96.1 AV			2.04 V	84	98.9	-2.8
3	2483.50	63.4 PK	74.0	-10.6	2.04 V	84	66.2	-2.8
4	2483.50	47.5 AV	54.0	-6.5	2.04 V	84	50.3	-2.8
5	4924.00	40.2 PK	74.0	-33.8	1.56 V	112	38.4	1.8
6	4924.00	33.5 AV	54.0	-20.5	1.56 V	112	31.7	1.8
7	7386.00	50.7 PK	74.0	-23.3	2.57 V	118	43.3	7.4
8	7386.00	37.2 AV	54.0	-16.8	2.57 V	118	29.8	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.0 PK			1.25 H	305	106.8	-2.8
2	*2467.00	95.1 AV			1.25 H	305	97.9	-2.8
3	2483.50	57.8 PK	74.0	-16.2	1.25 H	305	60.6	-2.8
4	2483.50	46.4 AV	54.0	-7.6	1.25 H	305	49.2	-2.8
5	4934.00	42.0 PK	74.0	-32.0	1.31 H	151	40.2	1.8
6	4934.00	37.4 AV	54.0	-16.6	1.31 H	151	35.6	1.8
7	7401.00	54.1 PK	74.0	-19.9	1.42 H	140	46.6	7.5
8	7401.00	39.9 AV	54.0	-14.1	1.42 H	140	32.4	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	102.7 PK			3.19 V	86	105.5	-2.8
2	*2467.00	93.9 AV			3.19 V	86	96.7	-2.8
3	2483.50	58.4 PK	74.0	-15.6	3.19 V	86	61.2	-2.8
4	2483.50	45.6 AV	54.0	-8.4	3.19 V	86	48.4	-2.8
5	4934.00	39.9 PK	74.0	-34.1	1.49 V	100	38.1	1.8
6	4934.00	32.8 AV	54.0	-21.2	1.49 V	100	31.0	1.8
7	7401.00	50.7 PK	74.0	-23.3	2.60 V	127	43.2	7.5
8	7401.00	37.2 AV	54.0	-16.8	2.60 V	127	29.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11g	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	102.8 PK			1.11 H	308	105.6	-2.8
2	*2472.00	93.9 AV			1.11 H	308	96.7	-2.8
3	2483.50	59.6 PK	74.0	-14.4	1.11 H	308	62.4	-2.8
4	2483.50	47.4 AV	54.0	-6.6	1.11 H	308	50.2	-2.8
5	4944.00	41.8 PK	74.0	-32.2	1.33 H	140	40.0	1.8
6	4944.00	37.1 AV	54.0	-16.9	1.33 H	140	35.3	1.8
7	7416.00	55.0 PK	74.0	-19.0	1.41 H	160	47.5	7.5
8	7416.00	40.7 AV	54.0	-13.3	1.41 H	160	33.2	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	101.2 PK			3.20 V	84	104.0	-2.8
2	*2472.00	92.3 AV			3.20 V	84	95.1	-2.8
3	2483.50	57.5 PK	74.0	-16.5	3.20 V	84	60.3	-2.8
4	2483.50	46.0 AV	54.0	-8.0	3.20 V	84	48.8	-2.8
5	4944.00	40.3 PK	74.0	-33.7	1.59 V	125	38.5	1.8
6	4944.00	33.4 AV	54.0	-20.6	1.59 V	125	31.6	1.8
7	7416.00	49.9 PK	74.0	-24.1	2.60 V	140	42.4	7.5
8	7416.00	36.6 AV	54.0	-17.4	2.60 V	140	29.1	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.2 PK	74.0	-4.8	1.13 H	312	71.9	-2.7
2	2390.00	52.1 AV	54.0	-1.9	1.13 H	312	54.8	-2.7
3	*2412.00	110.8 PK			1.13 H	312	113.5	-2.7
4	*2412.00	98.8 AV			1.13 H	312	101.5	-2.7
5	4824.00	41.9 PK	74.0	-32.1	1.26 H	110	40.1	1.8
6	4824.00	37.3 AV	54.0	-16.7	1.26 H	110	35.5	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.8 PK	74.0	-7.2	2.29 V	82	69.5	-2.7
2	2390.00	50.2 AV	54.0	-3.8	2.29 V	82	52.9	-2.7
3	*2412.00	108.1 PK			2.29 V	82	110.8	-2.7
4	*2412.00	97.0 AV			2.29 V	82	99.7	-2.7
5	4824.00	40.5 PK	74.0	-33.5	1.50 V	130	38.7	1.8
6	4824.00	33.8 AV	54.0	-20.2	1.50 V	130	32.0	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.5 PK	74.0	-12.5	1.35 H	309	64.2	-2.7
2	2390.00	45.1 AV	54.0	-8.9	1.35 H	309	47.8	-2.7
3	*2437.00	113.1 PK			1.35 H	309	115.8	-2.7
4	*2437.00	101.7 AV			1.35 H	309	104.4	-2.7
5	2483.50	62.8 PK	74.0	-11.2	1.35 H	309	65.6	-2.8
6	2483.50	44.5 AV	54.0	-9.5	1.35 H	309	47.3	-2.8
7	4874.00	41.9 PK	74.0	-32.1	1.30 H	126	40.2	1.7
8	4874.00	37.4 AV	54.0	-16.6	1.30 H	126	35.7	1.7
9	7311.00	55.0 PK	74.0	-19.0	1.36 H	173	47.8	7.2
10	7311.00	40.8 AV	54.0	-13.2	1.36 H	173	33.6	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	59.2 PK	74.0	-14.8	2.33 V	89	61.9	-2.7
2	2390.00	43.3 AV	54.0	-10.7	2.33 V	89	46.0	-2.7
3	*2437.00	111.3 PK			2.33 V	89	114.0	-2.7
4	*2437.00	100.1 AV			2.33 V	89	102.8	-2.7
5	2483.50	61.1 PK	74.0	-12.9	2.33 V	89	63.9	-2.8
6	2483.50	42.0 AV	54.0	-12.0	2.33 V	89	44.8	-2.8
7	4874.00	40.4 PK	74.0	-33.6	1.54 V	132	38.7	1.7
8	4874.00	33.8 AV	54.0	-20.2	1.54 V	132	32.1	1.7
9	7311.00	50.2 PK	74.0	-23.8	2.65 V	136	43.0	7.2
10	7311.00	36.8 AV	54.0	-17.2	2.65 V	136	29.6	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	109.1 PK			1.17 H	314	111.9	-2.8
2	*2462.00	98.3 AV			1.17 H	314	101.1	-2.8
3	2483.90	67.3 PK	74.0	-6.7	1.17 H	314	70.1	-2.8
4	2483.90	52.0 AV	54.0	-2.0	1.17 H	314	54.8	-2.8
5	4924.00	42.0 PK	74.0	-32.0	1.32 H	148	40.2	1.8
6	4924.00	37.2 AV	54.0	-16.8	1.32 H	148	35.4	1.8
7	7386.00	54.4 PK	74.0	-19.6	1.42 H	152	47.0	7.4
8	7386.00	40.4 AV	54.0	-13.6	1.42 H	152	33.0	7.4

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.8 PK			2.32 V	85	109.6	-2.8
2	*2462.00	95.8 AV			2.32 V	85	98.6	-2.8
3	2484.00	63.6 PK	74.0	-10.4	2.32 V	85	66.4	-2.8
4	2484.00	49.0 AV	54.0	-5.0	2.32 V	85	51.8	-2.8
5	4924.00	40.3 PK	74.0	-33.7	1.60 V	120	38.5	1.8
6	4924.00	33.3 AV	54.0	-20.7	1.60 V	120	31.5	1.8
7	7386.00	50.2 PK	74.0	-23.8	2.59 V	125	42.8	7.4
8	7386.00	37.1 AV	54.0	-16.9	2.59 V	125	29.7	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 12 : 2467 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	106.2 PK			1.11 H	310	109.0	-2.8
2	*2467.00	94.8 AV			1.11 H	310	97.6	-2.8
3	2483.50	61.0 PK	74.0	-13.0	1.11 H	310	63.8	-2.8
4	2483.50	47.2 AV	54.0	-6.8	1.11 H	310	50.0	-2.8
5	4934.00	41.9 PK	74.0	-32.1	1.37 H	145	40.1	1.8
6	4934.00	37.2 AV	54.0	-16.8	1.37 H	145	35.4	1.8
7	7401.00	55.1 PK	74.0	-18.9	1.42 H	170	47.6	7.5
8	7401.00	40.9 AV	54.0	-13.1	1.42 H	170	33.4	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2467.00	104.6 PK			3.20 V	88	107.4	-2.8
2	*2467.00	93.5 AV			3.20 V	88	96.3	-2.8
3	2483.50	58.4 PK	74.0	-15.6	3.20 V	88	61.2	-2.8
4	2483.50	46.2 AV	54.0	-7.8	3.20 V	88	49.0	-2.8
5	4934.00	40.0 PK	74.0	-34.0	1.63 V	112	38.2	1.8
6	4934.00	33.0 AV	54.0	-21.0	1.63 V	112	31.2	1.8
7	7401.00	49.3 PK	74.0	-24.7	2.65 V	126	41.8	7.5
8	7401.00	36.1 AV	54.0	-17.9	2.65 V	126	28.6	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 13 : 2472 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	104.9 PK			1.09 H	304	107.7	-2.8
2	*2472.00	93.9 AV			1.09 H	304	96.7	-2.8
3	2483.50	64.3 PK	74.0	-9.7	1.09 H	304	67.1	-2.8
4	2483.50	47.7 AV	54.0	-6.3	1.09 H	304	50.5	-2.8
5	4944.00	41.9 PK	74.0	-32.1	1.38 H	142	40.1	1.8
6	4944.00	36.9 AV	54.0	-17.1	1.38 H	142	35.1	1.8
7	7416.00	54.2 PK	74.0	-19.8	1.37 H	166	46.7	7.5
8	7416.00	40.2 AV	54.0	-13.8	1.37 H	166	32.7	7.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2472.00	103.5 PK			3.10 V	90	106.3	-2.8
2	*2472.00	92.4 AV			3.10 V	90	95.2	-2.8
3	2483.50	62.8 PK	74.0	-11.2	3.10 V	90	65.6	-2.8
4	2483.50	46.5 AV	54.0	-7.5	3.10 V	90	49.3	-2.8
5	4944.00	40.5 PK	74.0	-33.5	1.55 V	118	38.7	1.8
6	4944.00	33.6 AV	54.0	-20.4	1.55 V	118	31.8	1.8
7	7416.00	49.4 PK	74.0	-24.6	2.62 V	136	41.9	7.5
8	7416.00	36.2 AV	54.0	-17.8	2.62 V	136	28.7	7.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 3 : 2422 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.00	71.8 PK	74.0	-2.2	1.18 H	311	74.5	-2.7
2	2388.00	51.1 AV	54.0	-2.9	1.18 H	311	53.8	-2.7
3	*2422.00	105.8 PK			1.18 H	311	108.5	-2.7
4	*2422.00	95.9 AV			1.18 H	311	98.6	-2.7
5	4844.00	41.1 PK	74.0	-32.9	1.36 H	152	39.3	1.8
6	4844.00	36.4 AV	54.0	-17.6	1.36 H	152	34.6	1.8
7	7266.00	54.6 PK	74.0	-19.4	1.27 H	186	47.3	7.3
8	7266.00	40.4 AV	54.0	-13.6	1.27 H	186	33.1	7.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2388.20	71.3 PK	74.0	-2.7	2.26 V	82	74.0	-2.7
2	2388.20	51.1 AV	54.0	-2.9	2.26 V	82	53.8	-2.7
3	*2422.00	105.6 PK			2.26 V	82	108.3	-2.7
4	*2422.00	94.0 AV			2.26 V	82	96.7	-2.7
5	4844.00	40.1 PK	74.0	-33.9	1.50 V	104	38.3	1.8
6	4844.00	33.5 AV	54.0	-20.5	1.50 V	104	31.7	1.8
7	7266.00	49.6 PK	74.0	-24.4	2.66 V	134	42.3	7.3
8	7266.00	36.2 AV	54.0	-17.8	2.66 V	134	28.9	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 6 : 2437 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	68.8 PK	74.0	-5.2	1.16 H	316	71.5	-2.7
2	2390.00	52.0 AV	54.0	-2.0	1.16 H	316	54.7	-2.7
3	*2437.00	106.3 PK			1.16 H	316	109.0	-2.7
4	*2437.00	96.2 AV			1.16 H	316	98.9	-2.7
5	2483.50	68.2 PK	74.0	-5.8	1.16 H	316	71.0	-2.8
6	2483.50	51.9 AV	54.0	-2.1	1.16 H	316	54.7	-2.8
7	4874.00	41.6 PK	74.0	-32.4	1.40 H	152	39.9	1.7
8	4874.00	36.6 AV	54.0	-17.4	1.40 H	152	34.9	1.7
9	7311.00	54.8 PK	74.0	-19.2	1.31 H	177	47.6	7.2
10	7311.00	40.6 AV	54.0	-13.4	1.31 H	177	33.4	7.2
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.3 PK	74.0	-7.7	2.28 V	77	69.0	-2.7
2	2390.00	50.1 AV	54.0	-3.9	2.28 V	77	52.8	-2.7
3	*2437.00	106.1 PK			2.28 V	77	108.8	-2.7
4	*2437.00	94.6 AV			2.28 V	77	97.3	-2.7
5	2483.50	67.1 PK	74.0	-6.9	2.28 V	77	69.9	-2.8
6	2483.50	50.8 AV	54.0	-3.2	2.28 V	77	53.6	-2.8
7	4874.00	41.1 PK	74.0	-32.9	1.50 V	109	39.4	1.7
8	4874.00	34.1 AV	54.0	-19.9	1.50 V	109	32.4	1.7
9	7311.00	49.7 PK	74.0	-24.3	2.57 V	129	42.5	7.2
10	7311.00	36.5 AV	54.0	-17.5	2.57 V	129	29.3	7.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 9 : 2452 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	106.4 PK			1.22 H	330	109.1	-2.7
2	*2452.00	95.3 AV			1.22 H	330	98.0	-2.7
3	2487.70	72.4 PK	74.0	-1.6	1.22 H	330	75.2	-2.8
4	2487.70	52.0 AV	54.0	-2.0	1.22 H	330	54.8	-2.8
5	4904.00	42.5 PK	74.0	-31.5	1.40 H	137	40.8	1.7
6	4904.00	37.3 AV	54.0	-16.7	1.40 H	137	35.6	1.7
7	7356.00	54.0 PK	74.0	-20.0	1.41 H	153	46.7	7.3
8	7356.00	40.0 AV	54.0	-14.0	1.41 H	153	32.7	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2452.00	103.5 PK			2.37 V	80	106.2	-2.7
2	*2452.00	92.0 AV			2.37 V	80	94.7	-2.7
3	2488.10	66.5 PK	74.0	-7.5	2.37 V	80	69.3	-2.8
4	2488.10	48.2 AV	54.0	-5.8	2.37 V	80	51.0	-2.8
5	4904.00	39.8 PK	74.0	-34.2	1.57 V	129	38.1	1.7
6	4904.00	33.1 AV	54.0	-20.9	1.57 V	129	31.4	1.7
7	7356.00	49.5 PK	74.0	-24.5	2.58 V	151	42.2	7.3
8	7356.00	36.4 AV	54.0	-17.6	2.58 V	151	29.1	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 10 : 2457 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.2 PK			1.22 H	330	108.9	-2.7
2	*2457.00	95.1 AV			1.22 H	330	97.8	-2.7
3	2493.00	69.1 PK	74.0	-4.9	1.22 H	330	71.9	-2.8
4	2493.00	52.2 AV	54.0	-1.8	1.22 H	330	55.0	-2.8
5	4914.00	41.3 PK	74.0	-32.7	1.33 H	144	39.6	1.7
6	4914.00	36.4 AV	54.0	-17.6	1.33 H	144	34.7	1.7
7	7371.00	53.7 PK	74.0	-20.3	1.42 H	173	46.4	7.3
8	7371.00	39.8 AV	54.0	-14.2	1.42 H	173	32.5	7.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	103.7 PK			2.30 V	82	106.4	-2.7
2	*2457.00	91.8 AV			2.30 V	82	94.5	-2.7
3	2483.50	65.9 PK	74.0	-8.1	2.30 V	82	68.7	-2.8
4	2483.50	47.5 AV	54.0	-6.5	2.30 V	82	50.3	-2.8
5	4914.00	40.0 PK	74.0	-34.0	1.61 V	130	38.3	1.7
6	4914.00	33.2 AV	54.0	-20.8	1.61 V	130	31.5	1.7
7	7371.00	49.4 PK	74.0	-24.6	2.58 V	150	42.1	7.3
8	7371.00	36.5 AV	54.0	-17.5	2.58 V	150	29.2	7.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE40)	Channel	CH 11 : 2462 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	105.9 PK			1.03 H	328	108.7	-2.8
2	*2462.00	94.2 AV			1.03 H	328	97.0	-2.8
3	2483.50	68.3 PK	74.0	-5.7	1.03 H	328	71.1	-2.8
4	2483.50	51.9 AV	54.0	-2.1	1.03 H	328	54.7	-2.8
5	2498.30	69.4 PK	74.0	-4.6	1.03 H	328	72.2	-2.8
6	2498.30	50.5 AV	54.0	-3.5	1.03 H	328	53.3	-2.8
7	4924.00	41.8 PK	74.0	-32.2	1.43 H	139	40.0	1.8
8	4924.00	36.5 AV	54.0	-17.5	1.43 H	139	34.7	1.8
9	7386.00	53.6 PK	74.0	-20.4	1.36 H	160	46.2	7.4
10	7386.00	39.7 AV	54.0	-14.3	1.36 H	160	32.3	7.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	103.1 PK			2.01 V	140	105.9	-2.8
2	*2462.00	91.3 AV			2.01 V	140	94.1	-2.8
3	2483.50	64.8 PK	74.0	-9.2	2.01 V	140	67.6	-2.8
4	2483.50	47.7 AV	54.0	-6.3	2.01 V	140	50.5	-2.8
5	4924.00	40.2 PK	74.0	-33.8	1.54 V	107	38.4	1.8
6	4924.00	33.3 AV	54.0	-20.7	1.54 V	107	31.5	1.8
7	7386.00	49.3 PK	74.0	-24.7	2.58 V	126	41.9	7.4
8	7386.00	36.3 AV	54.0	-17.7	2.58 V	126	28.9	7.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 1 : 2412 MHz
Frequency Range	1GHz ~ 25GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2387.00	67.7 PK	74.0	-6.3	2.34 H	118	70.4	-2.7
2	2387.00	46.3 AV	54.0	-7.7	2.34 H	118	49.0	-2.7
3	2389.66	72.3 PK	74.0	-1.7	2.34 H	118	75.0	-2.7
4	2389.66	45.5 AV	54.0	-8.5	2.34 H	118	48.2	-2.7
5	*2412.00	119.1 PK			2.34 H	118	121.8	-2.7
6	*2412.00	107.9 AV			2.34 H	118	110.6	-2.7
7	4824.00	46.3 PK	74.0	-27.7	1.76 H	184	44.5	1.8
8	4824.00	35.5 AV	54.0	-18.5	1.76 H	184	33.7	1.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	66.9 PK	74.0	-7.1	1.30 V	160	69.6	-2.7
2	2390.00	43.8 AV	54.0	-10.2	1.30 V	160	46.5	-2.7
3	*2412.00	112.8 PK			1.30 V	160	115.5	-2.7
4	*2412.00	101.3 AV			1.30 V	160	104.0	-2.7
5	4824.00	43.0 PK	74.0	-31.0	1.49 V	116	41.2	1.8
6	4824.00	31.5 AV	54.0	-22.5	1.49 V	116	29.7	1.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.