

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.1 PK	74.0	-20.9	1.49 H	125	50.8	2.3
2	5150.00	38.6 AV	54.0	-15.4	1.49 H	125	36.3	2.3
3	*5260.00	114.3 PK			1.49 H	125	112.3	2.0
4	*5260.00	100.4 AV			1.49 H	125	98.4	2.0
5	5350.00	51.0 PK	74.0	-23.0	1.49 H	125	49.1	1.9
6	5350.00	38.0 AV	54.0	-16.0	1.49 H	125	36.1	1.9
7	#10520.00	58.1 PK	68.2	-10.1	1.21 H	280	46.1	12.0
8	15780.00	62.7 PK	74.0	-11.3	1.35 H	339	51.2	11.5
9	15780.00	50.3 AV	54.0	-3.7	1.35 H	339	38.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	1.51 V	278	50.3	2.3
2	5150.00	39.5 AV	54.0	-14.5	1.51 V	278	37.2	2.3
3	*5260.00	124.9 PK			1.51 V	278	122.9	2.0
4	*5260.00	113.8 AV			1.51 V	278	111.8	2.0
5	5350.00	50.5 PK	74.0	-23.5	1.51 V	278	48.6	1.9
6	5350.00	38.4 AV	54.0	-15.6	1.51 V	278	36.5	1.9
7	#10520.00	59.1 PK	68.2	-9.1	2.27 V	278	47.1	12.0
8	15780.00	61.5 PK	74.0	-12.5	2.00 V	309	50.0	11.5
9	15780.00	49.8 AV	54.0	-4.2	2.00 V	309	38.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.9 PK			1.44 H	142	112.2	1.7
2	*5300.00	100.1 AV			1.44 H	142	98.4	1.7
3	5350.00	51.1 PK	74.0	-22.9	1.44 H	142	49.2	1.9
4	5350.00	40.7 AV	54.0	-13.3	1.44 H	142	38.8	1.9
5	10600.00	58.8 PK	74.0	-15.2	1.19 H	293	46.9	11.9
6	10600.00	49.2 AV	54.0	-4.8	1.19 H	293	37.3	11.9
7	15900.00	62.9 PK	74.0	-11.1	1.28 H	328	51.6	11.3
8	15900.00	50.4 AV	54.0	-3.6	1.28 H	328	39.1	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	125.3 PK			1.57 V	273	123.6	1.7
2	*5300.00	114.3 AV			1.57 V	273	112.6	1.7
3	5350.00	51.7 PK	74.0	-22.3	1.57 V	273	49.8	1.9
4	5350.00	41.3 AV	54.0	-12.7	1.57 V	273	39.4	1.9
5	10600.00	58.6 PK	74.0	-15.4	2.20 V	261	46.7	11.9
6	10600.00	49.2 AV	54.0	-4.8	2.20 V	261	37.3	11.9
7	15900.00	61.3 PK	74.0	-12.7	2.02 V	332	50.0	11.3
8	15900.00	49.7 AV	54.0	-4.3	2.02 V	332	38.4	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	112.6 PK			1.55 H	143	110.8	1.8
2	*5320.00	100.6 AV			1.55 H	143	98.8	1.8
3	5350.00	51.0 PK	74.0	-23.0	1.55 H	143	49.1	1.9
4	5350.00	38.0 AV	54.0	-16.0	1.55 H	143	36.1	1.9
5	5367.82	48.1 PK	74.0	-25.9	1.55 H	143	46.1	2.0
6	5367.82	38.6 AV	54.0	-15.4	1.55 H	143	36.6	2.0
7	10640.00	58.9 PK	74.0	-15.1	1.18 H	285	47.1	11.8
8	10640.00	49.1 AV	54.0	-4.9	1.18 H	285	37.3	11.8
9	15960.00	62.8 PK	74.0	-11.2	1.33 H	319	51.2	11.6
10	15960.00	50.1 AV	54.0	-3.9	1.33 H	319	38.5	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	125.1 PK			1.50 V	294	123.3	1.8
2	*5320.00	113.9 AV			1.50 V	294	112.1	1.8
3	5354.80	61.0 PK	74.0	-13.0	1.50 V	294	59.0	2.0
4	5354.80	43.4 AV	54.0	-10.6	1.50 V	294	41.4	2.0
5	5368.90	54.6 PK	74.0	-19.4	1.50 V	294	52.6	2.0
6	5368.90	46.5 AV	54.0	-7.5	1.50 V	294	44.5	2.0
7	10640.00	59.0 PK	74.0	-15.0	2.19 V	287	47.2	11.8
8	10640.00	49.5 AV	54.0	-4.5	2.19 V	287	37.7	11.8
9	15960.00	61.4 PK	74.0	-12.6	1.94 V	308	49.8	11.6
10	15960.00	49.5 AV	54.0	-4.5	1.94 V	308	37.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5454.00	49.4 PK	74.0	-24.6	1.53 H	140	47.3	2.1
2	5454.00	37.9 AV	54.0	-16.1	1.53 H	140	35.8	2.1
3	#5468.70	53.5 PK	68.2	-14.7	1.53 H	140	51.3	2.2
4	*5500.00	111.2 PK			1.53 H	140	109.1	2.1
5	*5500.00	100.3 AV			1.53 H	140	98.2	2.1
6	11000.00	57.7 PK	74.0	-16.3	1.19 H	279	45.3	12.4
7	11000.00	48.3 AV	54.0	-5.7	1.19 H	279	35.9	12.4
8	#16500.00	62.2 PK	68.2	-6.0	1.26 H	343	48.5	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.76	59.3 PK	74.0	-14.7	1.46 V	283	57.2	2.1
2	5457.76	43.3 AV	54.0	-10.7	1.46 V	283	41.2	2.1
3	#5460.82	66.0 PK	68.2	-2.2	1.00 V	0	63.9	2.1
4	*5500.00	124.3 PK			1.46 V	283	122.2	2.1
5	*5500.00	114.2 AV			1.46 V	283	112.1	2.1
6	11000.00	59.1 PK	74.0	-14.9	2.23 V	293	46.7	12.4
7	11000.00	49.4 AV	54.0	-4.6	2.23 V	293	37.0	12.4
8	#16500.00	60.8 PK	68.2	-7.4	1.98 V	313	47.1	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.9 PK			1.47 H	143	112.8	2.1
2	*5580.00	100.9 AV			1.47 H	143	98.8	2.1
3	11160.00	58.9 PK	74.0	-15.1	1.24 H	280	46.9	12.0
4	11160.00	49.2 AV	54.0	-4.8	1.24 H	280	37.2	12.0
5	#16740.00	62.1 PK	68.2	-6.1	1.31 H	339	46.8	15.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	125.2 PK			1.51 V	295	123.1	2.1
2	*5580.00	113.7 AV			1.51 V	295	111.6	2.1
3	11160.00	58.8 PK	74.0	-15.2	2.18 V	280	46.8	12.0
4	11160.00	49.3 AV	54.0	-4.7	2.18 V	280	37.3	12.0
5	#16740.00	61.5 PK	68.2	-6.7	1.93 V	334	46.2	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	113.7 PK			1.49 H	133	111.4	2.3
2	*5700.00	99.7 AV			1.49 H	133	97.4	2.3
3	#5725.00	60.2 PK	68.2	-8.0	1.49 H	133	57.8	2.4
4	11400.00	58.5 PK	74.0	-15.5	1.27 H	266	46.0	12.5
5	11400.00	49.1 AV	54.0	-4.9	1.27 H	266	36.6	12.5
6	#17100.00	63.0 PK	68.2	-5.2	1.26 H	318	46.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	121.9 PK			1.44 V	287	119.6	2.3
2	*5700.00	112.1 AV			1.44 V	287	109.8	2.3
3	#5725.00	66.5 PK	68.2	-1.7	1.44 V	287	64.1	2.4
4	11400.00	58.6 PK	74.0	-15.4	2.22 V	286	46.1	12.5
5	11400.00	49.3 AV	54.0	-4.7	2.22 V	286	36.8	12.5
6	#17100.00	60.5 PK	68.2	-7.7	2.02 V	315	43.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.2 PK	74.0	-22.8	1.44 H	145	49.1	2.1
2	5460.00	38.2 AV	54.0	-15.8	1.44 H	145	36.1	2.1
3	#5470.00	51.7 PK	68.2	-16.5	1.44 H	145	49.5	2.2
4	*5720.00	115.2 PK			1.44 H	145	112.8	2.4
5	*5720.00	101.1 AV			1.44 H	145	98.7	2.4
6	#5850.00	51.2 PK	68.2	-17.0	1.44 H	145	48.5	2.7
7	11440.00	58.7 PK	74.0	-15.3	1.27 H	296	46.3	12.4
8	11440.00	49.2 AV	54.0	-4.8	1.27 H	296	36.8	12.4
9	#17160.00	62.9 PK	68.2	-5.3	1.32 H	332	46.3	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.9 PK	74.0	-22.1	1.48 V	286	49.8	2.1
2	5460.00	39.0 AV	54.0	-15.0	1.48 V	286	36.9	2.1
3	#5470.00	52.1 PK	68.2	-16.1	1.48 V	286	49.9	2.2
4	*5720.00	125.2 PK			1.48 V	286	122.8	2.4
5	*5720.00	114.1 AV			1.48 V	286	111.7	2.4
6	#5850.00	52.2 PK	68.2	-16.0	1.48 V	286	49.5	2.7
7	11440.00	58.8 PK	74.0	-15.2	2.25 V	290	46.4	12.4
8	11440.00	49.5 AV	54.0	-4.5	2.25 V	290	37.1	12.4
9	#17160.00	61.5 PK	68.2	-6.7	1.96 V	310	44.9	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5572.61	50.1 PK	68.2	-18.1	1.33 H	135	48.0	2.1
2	*5745.00	112.9 PK			1.33 H	135	110.5	2.4
3	*5745.00	102.5 AV			1.33 H	135	100.1	2.4
4	#5941.66	50.2 PK	68.2	-18.0	1.33 H	135	47.3	2.9
5	11490.00	58.3 PK	74.0	-15.7	1.22 H	283	45.7	12.6
6	11490.00	48.3 AV	54.0	-5.7	1.22 H	283	35.7	12.6
7	#17235.00	64.8 PK	68.2	-3.4	1.28 H	339	48.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5637.73	51.2 PK	68.2	-17.0	1.43 V	288	48.9	2.3
2	*5745.00	126.3 PK			1.43 V	288	123.9	2.4
3	*5745.00	115.7 AV			1.43 V	288	113.3	2.4
4	#5978.16	51.5 PK	68.2	-16.7	1.43 V	288	48.6	2.9
5	11490.00	59.1 PK	74.0	-14.9	2.18 V	262	46.5	12.6
6	11490.00	49.7 AV	54.0	-4.3	2.18 V	262	37.1	12.6
7	#17235.00	62.9 PK	68.2	-5.3	2.02 V	327	46.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5582.63	51.3 PK	68.2	-16.9	1.39 H	132	49.2	2.1
2	*5785.00	113.2 PK			1.39 H	132	110.6	2.6
3	*5785.00	102.8 AV			1.39 H	132	100.2	2.6
4	#5952.38	51.1 PK	68.2	-17.1	1.39 H	132	48.2	2.9
5	11570.00	59.3 PK	74.0	-14.7	1.18 H	294	46.7	12.6
6	11570.00	49.8 AV	54.0	-4.2	1.18 H	294	37.2	12.6
7	#17355.00	64.7 PK	68.2	-3.5	1.32 H	323	47.0	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5583.80	52.2 PK	68.2	-16.0	1.49 V	290	50.1	2.1
2	*5785.00	125.9 PK			1.49 V	290	123.3	2.6
3	*5785.00	116.4 AV			1.49 V	290	113.8	2.6
4	#5942.97	52.8 PK	68.2	-15.4	1.49 V	290	49.9	2.9
5	11570.00	59.8 PK	74.0	-14.2	2.26 V	279	47.2	12.6
6	11570.00	50.9 AV	54.0	-3.1	2.26 V	279	38.3	12.6
7	#17355.00	63.3 PK	68.2	-4.9	1.90 V	314	45.6	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU26)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5645.59	51.6 PK	68.2	-16.6	1.43 H	140	49.3	2.3
2	*5825.00	111.8 PK			1.43 H	140	109.2	2.6
3	*5825.00	101.5 AV			1.43 H	140	98.9	2.6
4	#5944.88	50.8 PK	68.2	-17.4	1.43 H	140	47.9	2.9
5	11650.00	58.9 PK	74.0	-15.1	1.20 H	291	46.7	12.2
6	11650.00	48.6 AV	54.0	-5.4	1.20 H	291	36.4	12.2
7	#17475.00	64.5 PK	68.2	-3.7	1.30 H	316	45.8	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5586.08	53.2 PK	68.2	-15.0	1.53 V	282	51.1	2.1
2	*5825.00	124.8 PK			1.53 V	282	122.2	2.6
3	*5825.00	115.1 AV			1.53 V	282	112.5	2.6
4	#5933.92	53.5 PK	68.2	-14.7	1.53 V	282	50.6	2.9
5	11650.00	59.8 PK	74.0	-14.2	2.16 V	275	47.6	12.2
6	11650.00	50.0 AV	54.0	-4.0	2.16 V	275	37.8	12.2
7	#17475.00	62.4 PK	68.2	-5.8	1.96 V	329	43.7	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5147.93	57.9 PK	74.0	-16.1	1.33 H	133	55.6	2.3
2	5147.93	39.8 AV	54.0	-14.2	1.33 H	133	37.5	2.3
3	*5180.00	112.7 PK			1.33 H	133	110.5	2.2
4	*5180.00	100.8 AV			1.33 H	133	98.6	2.2
5	#10360.00	56.8 PK	68.2	-11.4	1.00 H	300	45.0	11.8
6	15540.00	60.7 PK	74.0	-13.3	1.27 H	320	48.9	11.8
7	15540.00	48.6 AV	54.0	-5.4	1.27 H	320	36.8	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	63.4 PK	74.0	-10.6	1.49 V	284	61.1	2.3
2	5150.00	46.1 AV	54.0	-7.9	1.49 V	284	43.8	2.3
3	*5180.00	122.7 PK			1.49 V	284	120.5	2.2
4	*5180.00	112.2 AV			1.49 V	284	110.0	2.2
5	#10360.00	57.1 PK	68.2	-11.1	3.75 V	211	45.3	11.8
6	15540.00	59.0 PK	74.0	-15.0	2.32 V	244	47.2	11.8
7	15540.00	46.9 AV	54.0	-7.1	2.32 V	244	35.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.0 PK	74.0	-22.0	1.28 H	133	49.7	2.3
2	5150.00	41.2 AV	54.0	-12.8	1.28 H	133	38.9	2.3
3	*5200.00	112.3 PK			1.28 H	133	110.2	2.1
4	*5200.00	100.6 AV			1.28 H	133	98.5	2.1
5	#10400.00	57.3 PK	68.2	-10.9	1.07 H	301	45.3	12.0
6	15600.00	60.5 PK	74.0	-13.5	1.30 H	306	49.0	11.5
7	15600.00	48.3 AV	54.0	-5.7	1.30 H	306	36.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.6 PK	74.0	-21.4	1.45 V	271	50.3	2.3
2	5150.00	42.2 AV	54.0	-11.8	1.45 V	271	39.9	2.3
3	*5200.00	122.1 PK			1.45 V	271	120.0	2.1
4	*5200.00	111.8 AV			1.45 V	271	109.7	2.1
5	#10400.00	57.0 PK	68.2	-11.2	3.76 V	226	45.0	12.0
6	15600.00	58.8 PK	74.0	-15.2	2.29 V	246	47.3	11.5
7	15600.00	46.5 AV	54.0	-7.5	2.29 V	246	35.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.8 PK	74.0	-21.2	1.36 H	128	50.5	2.3
2	5150.00	38.3 AV	54.0	-15.7	1.36 H	128	36.0	2.3
3	*5240.00	112.7 PK			1.36 H	128	110.7	2.0
4	*5240.00	100.7 AV			1.36 H	128	98.7	2.0
5	5350.00	50.7 PK	74.0	-23.3	1.36 H	128	48.8	1.9
6	5350.00	37.7 AV	54.0	-16.3	1.36 H	128	35.8	1.9
7	#10480.00	56.5 PK	68.2	-11.7	1.01 H	309	44.6	11.9
8	15720.00	60.9 PK	74.0	-13.1	1.24 H	333	49.1	11.8
9	15720.00	48.7 AV	54.0	-5.3	1.24 H	333	36.9	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.7 PK	74.0	-21.3	1.55 V	270	50.4	2.3
2	5150.00	39.1 AV	54.0	-14.9	1.55 V	270	36.8	2.3
3	*5240.00	122.2 PK			1.55 V	270	120.2	2.0
4	*5240.00	111.9 AV			1.55 V	270	109.9	2.0
5	5350.00	50.9 PK	74.0	-23.1	1.55 V	270	49.0	1.9
6	5350.00	38.3 AV	54.0	-15.7	1.55 V	270	36.4	1.9
7	#10480.00	56.7 PK	68.2	-11.5	3.77 V	208	44.8	11.9
8	15720.00	59.4 PK	74.0	-14.6	2.29 V	249	47.6	11.8
9	15720.00	47.2 AV	54.0	-6.8	2.29 V	249	35.4	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.0 PK	74.0	-21.0	1.34 H	124	50.7	2.3
2	5150.00	38.5 AV	54.0	-15.5	1.34 H	124	36.2	2.3
3	*5260.00	112.8 PK			1.34 H	124	110.8	2.0
4	*5260.00	101.0 AV			1.34 H	124	99.0	2.0
5	5350.00	50.7 PK	74.0	-23.3	1.34 H	124	48.8	1.9
6	5350.00	37.9 AV	54.0	-16.1	1.34 H	124	36.0	1.9
7	#10520.00	56.7 PK	68.2	-11.5	1.02 H	286	44.7	12.0
8	15780.00	60.5 PK	74.0	-13.5	1.23 H	325	49.0	11.5
9	15780.00	48.3 AV	54.0	-5.7	1.23 H	325	36.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.4 PK	74.0	-21.6	1.47 V	294	50.1	2.3
2	5150.00	38.9 AV	54.0	-15.1	1.47 V	294	36.6	2.3
3	*5260.00	122.2 PK			1.47 V	294	120.2	2.0
4	*5260.00	112.1 AV			1.47 V	294	110.1	2.0
5	5350.00	51.3 PK	74.0	-22.7	1.47 V	294	49.4	1.9
6	5350.00	38.6 AV	54.0	-15.4	1.47 V	294	36.7	1.9
7	#10520.00	56.9 PK	68.2	-11.3	3.81 V	214	44.9	12.0
8	15780.00	59.4 PK	74.0	-14.6	2.37 V	257	47.9	11.5
9	15780.00	47.2 AV	54.0	-6.8	2.37 V	257	35.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	113.0 PK			1.30 H	134	111.3	1.7
2	*5300.00	101.0 AV			1.30 H	134	99.3	1.7
3	5350.00	51.0 PK	74.0	-23.0	1.30 H	134	49.1	1.9
4	5350.00	40.6 AV	54.0	-13.4	1.30 H	134	38.7	1.9
5	10600.00	57.1 PK	74.0	-16.9	1.08 H	300	45.2	11.9
6	10600.00	46.2 AV	54.0	-7.8	1.08 H	300	34.3	11.9
7	15900.00	60.0 PK	74.0	-14.0	1.31 H	332	48.7	11.3
8	15900.00	48.2 AV	54.0	-5.8	1.31 H	332	36.9	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	122.1 PK			1.44 V	296	120.4	1.7
2	*5300.00	111.8 AV			1.44 V	296	110.1	1.7
3	5350.00	52.6 PK	74.0	-21.4	1.44 V	296	50.7	1.9
4	5350.00	41.7 AV	54.0	-12.3	1.44 V	296	39.8	1.9
5	10600.00	57.0 PK	74.0	-17.0	3.69 V	207	45.1	11.9
6	10600.00	45.6 AV	54.0	-8.4	3.69 V	207	33.7	11.9
7	15900.00	59.4 PK	74.0	-14.6	2.30 V	249	48.1	11.3
8	15900.00	47.2 AV	54.0	-6.8	2.30 V	249	35.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	111.8 PK			1.28 H	141	110.0	1.8
2	*5320.00	100.1 AV			1.28 H	141	98.3	1.8
3	5350.00	60.1 PK	74.0	-13.9	1.28 H	141	58.2	1.9
4	5350.00	39.5 AV	54.0	-14.5	1.28 H	141	37.6	1.9
5	10640.00	56.7 PK	74.0	-17.3	1.05 H	314	44.9	11.8
6	10640.00	45.7 AV	54.0	-8.3	1.05 H	314	33.9	11.8
7	15960.00	60.6 PK	74.0	-13.4	1.21 H	323	49.0	11.6
8	15960.00	48.2 AV	54.0	-5.8	1.21 H	323	36.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	123.4 PK			1.51 V	277	121.6	1.8
2	*5320.00	112.3 AV			1.51 V	277	110.5	1.8
3	5350.00	70.4 PK	74.0	-3.6	1.51 V	277	68.5	1.9
4	5350.00	46.2 AV	54.0	-7.8	1.51 V	277	44.3	1.9
5	5367.80	55.5 PK	74.0	-18.5	1.51 V	277	53.5	2.0
6	5367.80	46.4 AV	54.0	-7.6	1.51 V	277	44.4	2.0
7	10640.00	56.8 PK	74.0	-17.2	3.76 V	198	45.0	11.8
8	10640.00	45.5 AV	54.0	-8.5	3.76 V	198	33.7	11.8
9	15960.00	59.2 PK	74.0	-14.8	2.34 V	254	47.6	11.6
10	15960.00	47.2 AV	54.0	-6.8	2.34 V	254	35.6	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5457.74	49.8 PK	74.0	-24.2	1.32 H	134	47.7	2.1
2	5457.74	38.9 AV	54.0	-15.1	1.32 H	134	36.8	2.1
3	#5467.62	55.3 PK	68.2	-12.9	1.32 H	134	53.1	2.2
4	*5500.00	110.3 PK			1.32 H	134	108.2	2.1
5	*5500.00	100.4 AV			1.32 H	134	98.3	2.1
6	11000.00	56.3 PK	74.0	-17.7	1.05 H	300	43.9	12.4
7	11000.00	45.6 AV	54.0	-8.4	1.05 H	300	33.2	12.4
8	#16500.00	61.2 PK	68.2	-7.0	1.24 H	316	47.5	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5454.20	55.6 PK	74.0	-18.4	1.48 V	275	53.5	2.1
2	5454.20	44.5 AV	54.0	-9.5	1.48 V	275	42.4	2.1
3	5458.40	56.9 PK	74.0	-17.1	1.48 V	275	54.8	2.1
4	5458.40	43.2 AV	54.0	-10.8	1.48 V	275	41.1	2.1
5	#5467.00	59.6 PK	68.2	-8.6	1.48 V	275	57.4	2.2
6	*5500.00	122.5 PK			1.48 V	275	120.4	2.1
7	*5500.00	112.1 AV			1.48 V	275	110.0	2.1
8	11000.00	56.8 PK	74.0	-17.2	3.69 V	197	44.4	12.4
9	11000.00	45.6 AV	54.0	-8.4	3.69 V	197	33.2	12.4
10	#16500.00	58.9 PK	68.2	-9.3	2.31 V	235	45.2	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	112.5 PK			1.34 H	141	110.4	2.1
2	*5580.00	100.5 AV			1.34 H	141	98.4	2.1
3	11160.00	57.1 PK	74.0	-16.9	1.07 H	310	45.1	12.0
4	11160.00	46.1 AV	54.0	-7.9	1.07 H	310	34.1	12.0
5	#16740.00	60.8 PK	68.2	-7.4	1.25 H	323	45.5	15.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	124.8 PK			1.44 V	281	122.7	2.1
2	*5580.00	113.3 AV			1.44 V	281	111.2	2.1
3	11160.00	57.1 PK	74.0	-16.9	3.74 V	221	45.1	12.0
4	11160.00	46.0 AV	54.0	-8.0	3.74 V	221	34.0	12.0
5	#16740.00	59.1 PK	68.2	-9.1	2.27 V	239	43.8	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	109.8 PK			1.35 H	145	107.5	2.3
2	*5700.00	99.7 AV			1.35 H	145	97.4	2.3
3	#5725.00	61.3 PK	68.2	-6.9	1.35 H	145	58.9	2.4
4	11400.00	56.7 PK	74.0	-17.3	1.06 H	312	44.2	12.5
5	11400.00	45.5 AV	54.0	-8.5	1.06 H	312	33.0	12.5
6	#17100.00	60.8 PK	68.2	-7.4	1.21 H	330	44.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	123.6 PK			1.52 V	282	121.3	2.3
2	*5700.00	112.7 AV			1.52 V	282	110.4	2.3
3	#5728.00	66.6 PK	68.2	-1.6	1.52 V	282	64.1	2.5
4	11400.00	57.7 PK	74.0	-16.3	3.79 V	223	45.2	12.5
5	11400.00	46.2 AV	54.0	-7.8	3.79 V	223	33.7	12.5
6	#17100.00	59.5 PK	68.2	-8.7	2.31 V	239	42.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.8 PK	74.0	-22.2	1.35 H	126	49.7	2.1
2	5460.00	38.7 AV	54.0	-15.3	1.35 H	126	36.6	2.1
3	#5470.00	51.8 PK	68.2	-16.4	1.35 H	126	49.6	2.2
4	*5720.00	112.4 PK			1.35 H	126	110.0	2.4
5	*5720.00	100.8 AV			1.35 H	126	98.4	2.4
6	#5850.00	50.8 PK	68.2	-17.4	1.35 H	126	48.1	2.7
7	11440.00	57.1 PK	74.0	-16.9	1.09 H	286	44.7	12.4
8	11440.00	46.3 AV	54.0	-7.7	1.09 H	286	33.9	12.4
9	#17160.00	60.4 PK	68.2	-7.8	1.30 H	312	43.8	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.6 PK	74.0	-22.4	1.51 V	300	49.5	2.1
2	5460.00	38.6 AV	54.0	-15.4	1.51 V	300	36.5	2.1
3	#5470.00	51.9 PK	68.2	-16.3	1.51 V	300	49.7	2.2
4	*5720.00	124.5 PK			1.51 V	300	122.1	2.4
5	*5720.00	113.2 AV			1.51 V	300	110.8	2.4
6	#5850.00	51.2 PK	68.2	-17.0	1.51 V	300	48.5	2.7
7	11440.00	57.0 PK	74.0	-17.0	3.73 V	216	44.6	12.4
8	11440.00	45.9 AV	54.0	-8.1	3.73 V	216	33.5	12.4
9	#17160.00	58.7 PK	68.2	-9.5	2.36 V	251	42.1	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5631.12	50.9 PK	68.2	-17.3	1.29 H	146	48.6	2.3
2	*5745.00	111.9 PK			1.29 H	146	109.5	2.4
3	*5745.00	100.5 AV			1.29 H	146	98.1	2.4
4	#5983.15	51.3 PK	68.2	-16.9	1.29 H	146	48.4	2.9
5	11490.00	59.4 PK	74.0	-14.6	1.04 H	304	46.8	12.6
6	11490.00	48.6 AV	54.0	-5.4	1.04 H	304	36.0	12.6
7	#17235.00	64.0 PK	68.2	-4.2	1.32 H	316	47.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5603.59	51.7 PK	68.2	-16.5	1.68 V	279	49.6	2.1
2	*5745.00	125.1 PK			1.68 V	279	122.7	2.4
3	*5745.00	113.6 AV			1.68 V	279	111.2	2.4
4	#6011.43	51.9 PK	68.2	-16.3	1.68 V	279	49.0	2.9
5	11490.00	58.3 PK	74.0	-15.7	3.99 V	197	45.7	12.6
6	11490.00	47.7 AV	54.0	-6.3	3.99 V	197	35.1	12.6
7	#17235.00	60.3 PK	68.2	-7.9	2.41 V	229	43.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5573.87	50.9 PK	68.2	-17.3	1.38 H	131	48.8	2.1
2	*5785.00	111.3 PK			1.38 H	131	108.7	2.6
3	*5785.00	100.3 AV			1.38 H	131	97.7	2.6
4	#5972.47	51.3 PK	68.2	-16.9	1.38 H	131	48.4	2.9
5	11570.00	57.9 PK	74.0	-16.1	1.05 H	297	45.3	12.6
6	11570.00	46.0 AV	54.0	-8.0	1.05 H	297	33.4	12.6
7	#17355.00	64.3 PK	68.2	-3.9	1.30 H	315	46.6	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5588.51	51.7 PK	68.2	-16.5	1.63 V	284	49.6	2.1
2	*5785.00	124.6 PK			1.63 V	284	122.0	2.6
3	*5785.00	113.3 AV			1.63 V	284	110.7	2.6
4	#5950.45	52.5 PK	68.2	-15.7	1.63 V	284	49.6	2.9
5	11570.00	58.1 PK	74.0	-15.9	3.98 V	184	45.5	12.6
6	11570.00	47.6 AV	54.0	-6.4	3.98 V	184	35.0	12.6
7	#17355.00	60.7 PK	68.2	-7.5	2.36 V	230	43.0	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU52)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5616.71	50.7 PK	68.2	-17.5	1.37 H	147	48.6	2.1
2	*5825.00	121.3 PK			1.37 H	147	118.7	2.6
3	*5825.00	100.8 AV			1.37 H	147	98.2	2.6
4	#5966.03	51.0 PK	68.2	-17.2	1.37 H	147	48.1	2.9
5	11650.00	53.9 PK	74.0	-20.1	1.09 H	305	41.7	12.2
6	11650.00	43.8 AV	54.0	-10.2	1.09 H	305	31.6	12.2
7	#17475.00	64.9 PK	68.2	-3.3	1.32 H	325	46.2	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5564.70	52.4 PK	68.2	-15.8	1.59 V	275	50.3	2.1
2	*5825.00	124.9 PK			1.59 V	275	122.3	2.6
3	*5825.00	114.6 AV			1.59 V	275	112.0	2.6
4	#5935.08	52.5 PK	68.2	-15.7	1.59 V	275	49.6	2.9
5	11650.00	58.9 PK	74.0	-15.1	3.98 V	195	46.7	12.2
6	11650.00	48.1 AV	54.0	-5.9	3.98 V	195	35.9	12.2
7	#17475.00	60.8 PK	68.2	-7.4	2.39 V	238	42.1	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.4 PK	74.0	-22.6	1.21 H	135	49.1	2.3
2	5150.00	40.3 AV	54.0	-13.7	1.21 H	135	38.0	2.3
3	*5180.00	109.6 PK			1.21 H	135	107.4	2.2
4	*5180.00	99.3 AV			1.21 H	135	97.1	2.2
5	#10360.00	52.6 PK	68.2	-15.6	1.04 H	301	40.8	11.8
6	15540.00	57.3 PK	74.0	-16.7	1.16 H	341	45.5	11.8
7	15540.00	44.9 AV	54.0	-9.1	1.16 H	341	33.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.6 PK	74.0	-16.4	1.46 V	281	55.3	2.3
2	5150.00	45.8 AV	54.0	-8.2	1.46 V	281	43.5	2.3
3	*5180.00	120.5 PK			1.46 V	281	118.3	2.2
4	*5180.00	109.5 AV			1.46 V	281	107.3	2.2
5	#10360.00	54.7 PK	68.2	-13.5	2.17 V	260	42.9	11.8
6	15540.00	58.5 PK	74.0	-15.5	2.25 V	306	46.7	11.8
7	15540.00	45.5 AV	54.0	-8.5	2.25 V	306	33.7	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.1 PK	74.0	-21.9	1.15 H	145	49.8	2.3
2	5150.00	41.2 AV	54.0	-12.8	1.15 H	145	38.9	2.3
3	*5200.00	109.0 PK			1.15 H	145	106.9	2.1
4	*5200.00	98.9 AV			1.15 H	145	96.8	2.1
5	#10400.00	52.3 PK	68.2	-15.9	1.00 H	297	40.3	12.0
6	15600.00	57.6 PK	74.0	-16.4	1.12 H	347	46.1	11.5
7	15600.00	45.3 AV	54.0	-8.7	1.12 H	347	33.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.4 PK	74.0	-20.6	1.48 V	293	51.1	2.3
2	5150.00	42.7 AV	54.0	-11.3	1.48 V	293	40.4	2.3
3	*5200.00	120.5 PK			1.48 V	293	118.4	2.1
4	*5200.00	109.5 AV			1.48 V	293	107.4	2.1
5	#10400.00	55.1 PK	68.2	-13.1	2.15 V	270	43.1	12.0
6	15600.00	58.4 PK	74.0	-15.6	2.24 V	309	46.9	11.5
7	15600.00	45.3 AV	54.0	-8.7	2.24 V	309	33.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.1 PK	74.0	-20.9	1.26 H	119	50.8	2.3
2	5150.00	38.7 AV	54.0	-15.3	1.26 H	119	36.4	2.3
3	*5240.00	109.5 PK			1.26 H	119	107.5	2.0
4	*5240.00	99.3 AV			1.26 H	119	97.3	2.0
5	5350.00	50.5 PK	74.0	-23.5	1.26 H	119	48.6	1.9
6	5350.00	37.4 AV	54.0	-16.6	1.26 H	119	35.5	1.9
7	#10480.00	52.0 PK	68.2	-16.2	1.08 H	290	40.1	11.9
8	15720.00	57.0 PK	74.0	-17.0	1.10 H	327	45.2	11.8
9	15720.00	44.9 AV	54.0	-9.1	1.10 H	327	33.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.2 PK	74.0	-21.8	1.49 V	293	49.9	2.3
2	5150.00	38.6 AV	54.0	-15.4	1.49 V	293	36.3	2.3
3	*5240.00	120.3 PK			1.49 V	293	118.3	2.0
4	*5240.00	109.4 AV			1.49 V	293	107.4	2.0
5	5350.00	51.0 PK	74.0	-23.0	1.49 V	293	49.1	1.9
6	5350.00	38.1 AV	54.0	-15.9	1.49 V	293	36.2	1.9
7	#10480.00	55.0 PK	68.2	-13.2	2.20 V	249	43.1	11.9
8	15720.00	58.4 PK	74.0	-15.6	2.23 V	291	46.6	11.8
9	15720.00	45.6 AV	54.0	-8.4	2.23 V	291	33.8	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	53.2 PK	74.0	-20.8	1.26 H	137	50.9	2.3
2	5150.00	38.6 AV	54.0	-15.4	1.26 H	137	36.3	2.3
3	*5260.00	110.0 PK			1.26 H	137	108.0	2.0
4	*5260.00	99.8 AV			1.26 H	137	97.8	2.0
5	5350.00	51.0 PK	74.0	-23.0	1.26 H	137	49.1	1.9
6	5350.00	37.9 AV	54.0	-16.1	1.26 H	137	36.0	1.9
7	#10520.00	51.8 PK	68.2	-16.4	1.07 H	276	39.8	12.0
8	15780.00	56.8 PK	74.0	-17.2	1.10 H	329	45.3	11.5
9	15780.00	44.9 AV	54.0	-9.1	1.10 H	329	33.4	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	52.5 PK	74.0	-21.5	1.49 V	281	50.2	2.3
2	5150.00	38.9 AV	54.0	-15.1	1.49 V	281	36.6	2.3
3	*5260.00	120.7 PK			1.49 V	281	118.7	2.0
4	*5260.00	109.7 AV			1.49 V	281	107.7	2.0
5	5350.00	50.6 PK	74.0	-23.4	1.49 V	281	48.7	1.9
6	5350.00	37.8 AV	54.0	-16.2	1.49 V	281	35.9	1.9
7	#10520.00	55.0 PK	68.2	-13.2	2.12 V	258	43.0	12.0
8	15780.00	58.2 PK	74.0	-15.8	2.26 V	299	46.7	11.5
9	15780.00	45.4 AV	54.0	-8.6	2.26 V	299	33.9	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	109.5 PK			1.20 H	129	107.8	1.7
2	*5300.00	99.2 AV			1.20 H	129	97.5	1.7
3	5350.00	50.7 PK	74.0	-23.3	1.20 H	129	48.8	1.9
4	5350.00	40.4 AV	54.0	-13.6	1.20 H	129	38.5	1.9
5	10600.00	51.9 PK	74.0	-22.1	1.09 H	293	40.0	11.9
6	10600.00	40.2 AV	54.0	-13.8	1.09 H	293	28.3	11.9
7	15900.00	56.9 PK	74.0	-17.1	1.07 H	329	45.6	11.3
8	15900.00	44.5 AV	54.0	-9.5	1.07 H	329	33.2	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	120.5 PK			1.45 V	293	118.8	1.7
2	*5300.00	109.4 AV			1.45 V	293	107.7	1.7
3	5350.00	52.4 PK	74.0	-21.6	1.45 V	293	50.5	1.9
4	5350.00	41.6 AV	54.0	-12.4	1.45 V	293	39.7	1.9
5	10600.00	54.5 PK	74.0	-19.5	2.20 V	245	42.6	11.9
6	10600.00	42.3 AV	54.0	-11.7	2.20 V	245	30.4	11.9
7	15900.00	57.8 PK	74.0	-16.2	2.21 V	292	46.5	11.3
8	15900.00	45.0 AV	54.0	-9.0	2.21 V	292	33.7	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	108.4 PK			1.38 H	140	106.6	1.8
2	*5320.00	98.4 AV			1.38 H	140	96.6	1.8
3	5350.00	55.7 PK	74.0	-18.3	1.38 H	140	53.8	1.9
4	5350.00	38.7 AV	54.0	-15.3	1.38 H	140	36.8	1.9
5	10640.00	52.2 PK	74.0	-21.8	1.04 H	288	40.4	11.8
6	10640.00	40.6 AV	54.0	-13.4	1.04 H	288	28.8	11.8
7	15960.00	57.5 PK	74.0	-16.5	1.13 H	312	45.9	11.6
8	15960.00	45.2 AV	54.0	-8.8	1.13 H	312	33.6	11.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	120.4 PK			1.44 V	291	118.6	1.8
2	*5320.00	109.7 AV			1.44 V	291	107.9	1.8
3	5350.00	63.8 PK	74.0	-10.2	1.44 V	291	61.9	1.9
4	5350.00	44.1 AV	54.0	-9.9	1.44 V	291	42.2	1.9
5	10640.00	54.5 PK	74.0	-19.5	2.14 V	250	42.7	11.8
6	10640.00	42.2 AV	54.0	-11.8	2.14 V	250	30.4	11.8
7	15960.00	58.7 PK	74.0	-15.3	2.20 V	315	47.1	11.6
8	15960.00	45.5 AV	54.0	-8.5	2.20 V	315	33.9	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5433.80	50.0 PK	74.0	-24.0	1.27 H	143	47.9	2.1
2	5433.80	38.0 AV	54.0	-16.0	1.27 H	143	35.9	2.1
3	5458.50	49.3 PK	74.0	-24.7	1.27 H	143	47.2	2.1
4	5458.50	38.9 AV	54.0	-15.1	1.27 H	143	36.8	2.1
5	#5469.70	51.3 PK	68.2	-16.9	1.27 H	143	49.1	2.2
6	*5500.00	106.6 PK			1.27 H	143	104.5	2.1
7	*5500.00	96.8 AV			1.27 H	143	94.7	2.1
8	11000.00	52.3 PK	74.0	-21.7	1.02 H	295	39.9	12.4
9	11000.00	40.7 AV	54.0	-13.3	1.02 H	295	28.3	12.4
10	#16500.00	57.1 PK	68.2	-11.1	1.06 H	323	43.4	13.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.00	57.3 PK	74.0	-16.7	1.34 V	278	55.2	2.1
2	5458.00	44.6 AV	54.0	-9.4	1.34 V	278	42.5	2.1
3	#5466.60	66.5 PK	68.2	-1.7	1.34 V	278	64.4	2.1
4	*5500.00	121.2 PK			1.34 V	278	119.1	2.1
5	*5500.00	110.0 AV			1.34 V	278	107.9	2.1
6	11000.00	55.2 PK	74.0	-18.8	2.21 V	266	42.8	12.4
7	11000.00	42.9 AV	54.0	-11.1	2.21 V	266	30.5	12.4
8	#16500.00	58.6 PK	68.2	-9.6	2.29 V	295	44.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * " : Fundamental frequency.
6. " # " : The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	109.7 PK			1.27 H	138	107.6	2.1
2	*5580.00	99.5 AV			1.27 H	138	97.4	2.1
3	11160.00	51.9 PK	74.0	-22.1	1.05 H	286	39.9	12.0
4	11160.00	40.7 AV	54.0	-13.3	1.05 H	286	28.7	12.0
5	#16740.00	56.6 PK	68.2	-11.6	1.06 H	331	41.3	15.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.0 PK			1.41 V	277	117.9	2.1
2	*5580.00	109.0 AV			1.41 V	277	106.9	2.1
3	11160.00	54.6 PK	74.0	-19.4	2.13 V	252	42.6	12.0
4	11160.00	42.4 AV	54.0	-11.6	2.13 V	252	30.4	12.0
5	#16740.00	58.7 PK	68.2	-9.5	2.22 V	308	43.4	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	106.9 PK			1.34 H	137	104.6	2.3
2	*5700.00	96.5 AV			1.34 H	137	94.2	2.3
3	#5725.00	54.2 PK	68.2	-14.0	1.34 H	137	51.8	2.4
4	11400.00	51.5 PK	74.0	-22.5	1.02 H	303	39.0	12.5
5	11400.00	40.2 AV	54.0	-13.8	1.02 H	303	27.7	12.5
6	#17100.00	56.7 PK	68.2	-11.5	1.11 H	315	39.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	120.3 PK			1.47 V	280	118.0	2.3
2	*5700.00	109.8 AV			1.47 V	280	107.5	2.3
3	#5725.00	66.7 PK	68.2	-1.5	1.47 V	280	64.3	2.4
4	11400.00	55.2 PK	74.0	-18.8	2.15 V	249	42.7	12.5
5	11400.00	43.0 AV	54.0	-11.0	2.15 V	249	30.5	12.5
6	#17100.00	59.0 PK	68.2	-9.2	2.23 V	291	42.2	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	1.19 H	138	49.2	2.1
2	5460.00	38.4 AV	54.0	-15.6	1.19 H	138	36.3	2.1
3	#5470.00	52.0 PK	68.2	-16.2	1.19 H	138	49.8	2.2
4	*5720.00	110.2 PK			1.19 H	138	107.8	2.4
5	*5720.00	99.6 AV			1.19 H	138	97.2	2.4
6	#5850.00	50.9 PK	68.2	-17.3	1.19 H	138	48.2	2.7
7	11440.00	51.7 PK	74.0	-22.3	1.07 H	305	39.3	12.4
8	11440.00	40.4 AV	54.0	-13.6	1.07 H	305	28.0	12.4
9	#17160.00	56.7 PK	68.2	-11.5	1.08 H	332	40.1	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.5 PK	74.0	-23.5	1.51 V	283	48.4	2.1
2	5460.00	38.2 AV	54.0	-15.8	1.51 V	283	36.1	2.1
3	#5470.00	51.6 PK	68.2	-16.6	1.51 V	283	49.4	2.2
4	*5720.00	121.2 PK			1.51 V	283	118.8	2.4
5	*5720.00	110.3 AV			1.51 V	283	107.9	2.4
6	#5850.00	51.4 PK	68.2	-16.8	1.51 V	283	48.7	2.7
7	11440.00	54.5 PK	74.0	-19.5	2.21 V	248	42.1	12.4
8	11440.00	42.5 AV	54.0	-11.5	2.21 V	248	30.1	12.4
9	#17160.00	58.1 PK	68.2	-10.1	2.28 V	308	41.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5639.03	51.1 PK	68.2	-17.1	1.21 H	147	48.8	2.3
2	*5745.00	109.6 PK			1.21 H	147	107.2	2.4
3	*5745.00	100.2 AV			1.21 H	147	97.8	2.4
4	#5979.48	51.2 PK	68.2	-17.0	1.21 H	147	48.3	2.9
5	11490.00	53.8 PK	74.0	-20.2	1.10 H	270	41.2	12.6
6	11490.00	42.3 AV	54.0	-11.7	1.10 H	270	29.7	12.6
7	#17235.00	58.7 PK	68.2	-9.5	1.22 H	348	41.9	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.26	53.0 PK	68.2	-15.2	1.50 V	286	50.7	2.3
2	*5745.00	122.5 PK			1.50 V	286	120.1	2.4
3	*5745.00	111.4 AV			1.50 V	286	109.0	2.4
4	#5998.20	51.4 PK	68.2	-16.8	1.50 V	286	48.5	2.9
5	11490.00	56.4 PK	74.0	-17.6	2.09 V	242	43.8	12.6
6	11490.00	44.1 AV	54.0	-9.9	2.09 V	242	31.5	12.6
7	#17235.00	60.3 PK	68.2	-7.9	1.42 V	0	43.5	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5602.37	50.9 PK	68.2	-17.3	1.36 H	148	48.8	2.1
2	*5785.00	108.7 PK			1.36 H	148	106.1	2.6
3	*5785.00	100.0 AV			1.36 H	148	97.4	2.6
4	#6013.92	51.1 PK	68.2	-17.1	1.36 H	148	48.2	2.9
5	11570.00	52.6 PK	74.0	-21.4	1.14 H	281	40.0	12.6
6	11570.00	41.0 AV	54.0	-13.0	1.14 H	281	28.4	12.6
7	#17355.00	57.2 PK	68.2	-11.0	1.12 H	321	39.5	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5646.83	53.2 PK	68.2	-15.0	1.59 V	273	50.9	2.3
2	*5785.00	122.5 PK			1.59 V	273	119.9	2.6
3	*5785.00	111.8 AV			1.59 V	273	109.2	2.6
4	#5929.34	52.8 PK	68.2	-15.4	1.59 V	273	49.9	2.9
5	11570.00	55.6 PK	74.0	-18.4	2.15 V	276	43.0	12.6
6	11570.00	43.2 AV	54.0	-10.8	2.15 V	276	30.6	12.6
7	#17355.00	59.6 PK	68.2	-8.6	2.27 V	315	41.9	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5594.22	50.6 PK	68.2	-17.6	1.12 H	144	48.5	2.1
2	*5825.00	109.9 PK			1.12 H	144	107.3	2.6
3	*5825.00	100.7 AV			1.12 H	144	98.1	2.6
4	#5976.09	52.1 PK	68.2	-16.1	1.12 H	144	49.2	2.9
5	11650.00	53.3 PK	74.0	-20.7	1.04 H	300	41.1	12.2
6	11650.00	42.2 AV	54.0	-11.8	1.04 H	300	30.0	12.2
7	#17475.00	58.1 PK	68.2	-10.1	1.14 H	328	39.4	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5591.27	52.9 PK	68.2	-15.3	1.58 V	277	50.8	2.1
2	*5825.00	122.9 PK			1.58 V	277	120.3	2.6
3	*5825.00	112.3 AV			1.58 V	277	109.7	2.6
4	#5932.49	53.8 PK	68.2	-14.4	1.58 V	277	50.9	2.9
5	11650.00	56.1 PK	74.0	-17.9	2.15 V	248	43.9	12.2
6	11650.00	43.8 AV	54.0	-10.2	2.15 V	248	31.6	12.2
7	#17475.00	59.3 PK	68.2	-8.9	2.24 V	320	40.6	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.27	38.3 QP	43.5	-5.2	3.00 H	337	53.3	-15.0
2	166.80	35.1 QP	43.5	-8.4	2.00 H	133	48.1	-13.0
3	226.74	33.5 QP	46.0	-12.5	2.00 H	134	49.4	-15.9
4	299.47	35.0 QP	46.0	-11.0	1.50 H	72	47.3	-12.3
5	336.92	33.8 QP	46.0	-12.2	1.50 H	337	45.1	-11.3
6	574.54	26.6 QP	46.0	-19.4	1.50 H	118	32.8	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

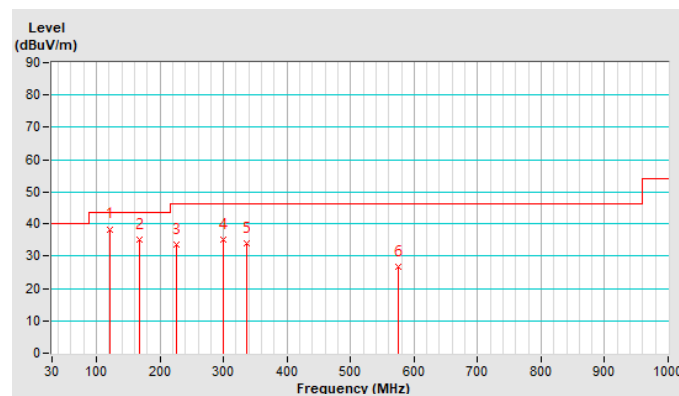

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	125.62	28.7 QP	43.5	-14.8	1.00 V	30	43.2	-14.5
2	166.71	32.0 QP	43.5	-11.5	1.50 V	230	45.0	-13.0
3	223.86	31.6 QP	46.0	-14.4	1.00 V	149	47.6	-16.0
4	341.38	26.7 QP	46.0	-19.3	1.50 V	190	38.0	-11.3
5	498.77	24.5 QP	46.0	-21.5	1.50 V	47	32.1	-7.6
6	950.44	33.2 QP	46.0	-12.8	1.00 V	149	33.8	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

