

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	120.3 PK			1.89 H	137	118.2	2.1
2	*5580.00	109.4 AV			1.89 H	137	107.3	2.1
3	11160.00	54.1 PK	74.0	-19.9	1.35 H	347	42.1	12.0
4	11160.00	42.9 AV	54.0	-11.1	1.35 H	347	30.9	12.0
5	#16740.00	60.6 PK	68.2	-7.6	1.47 H	306	45.3	15.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5580.00	114.8 PK			1.54 V	122	112.7	2.1
2	*5580.00	101.6 AV			1.54 V	122	99.5	2.1
3	11160.00	55.0 PK	74.0	-19.0	1.49 V	295	43.0	12.0
4	11160.00	44.1 AV	54.0	-9.9	1.49 V	295	32.1	12.0
5	#16740.00	58.2 PK	68.2	-10.0	1.51 V	283	42.9	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	118.4 PK			2.00 H	127	116.1	2.3
2	*5700.00	107.4 AV			2.00 H	127	105.1	2.3
3	#5727.70	66.5 PK	68.2	-1.7	2.00 H	127	64.0	2.5
4	11400.00	53.6 PK	74.0	-20.4	1.26 H	354	41.1	12.5
5	11400.00	42.5 AV	54.0	-11.5	1.26 H	354	30.0	12.5
6	#17100.00	60.1 PK	68.2	-8.1	1.56 H	300	43.3	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.7 PK			1.53 V	129	110.4	2.3
2	*5700.00	99.8 AV			1.53 V	129	97.5	2.3
3	#5725.00	60.6 PK	68.2	-7.6	1.53 V	129	58.2	2.4
4	11400.00	55.0 PK	74.0	-19.0	1.38 V	299	42.5	12.5
5	11400.00	44.0 AV	54.0	-10.0	1.38 V	299	31.5	12.5
6	#17100.00	59.4 PK	68.2	-8.8	1.46 V	279	42.6	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	1.97 H	123	49.2	2.1
2	5460.00	38.9 AV	54.0	-15.1	1.97 H	123	36.8	2.1
3	#5470.00	51.6 PK	68.2	-16.6	1.97 H	123	49.4	2.2
4	*5720.00	120.5 PK			1.97 H	123	118.1	2.4
5	*5720.00	109.6 AV			1.97 H	123	107.2	2.4
6	#5850.00	51.5 PK	68.2	-16.7	1.97 H	123	48.8	2.7
7	11440.00	54.1 PK	74.0	-19.9	1.26 H	347	41.7	12.4
8	11440.00	43.0 AV	54.0	-11.0	1.26 H	347	30.6	12.4
9	#17160.00	60.6 PK	68.2	-7.6	1.52 H	303	44.0	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	51.3 PK	74.0	-22.7	1.55 V	129	49.2	2.1
2	5460.00	38.1 AV	54.0	-15.9	1.55 V	129	36.0	2.1
3	#5470.00	52.7 PK	68.2	-15.5	1.55 V	129	50.5	2.2
4	*5720.00	114.8 PK			1.55 V	129	112.4	2.4
5	*5720.00	101.5 AV			1.55 V	129	99.1	2.4
6	#5850.00	50.8 PK	68.2	-17.4	1.55 V	129	48.1	2.7
7	11440.00	54.2 PK	74.0	-19.8	1.44 V	324	41.8	12.4
8	11440.00	43.6 AV	54.0	-10.4	1.44 V	324	31.2	12.4
9	#17160.00	59.1 PK	68.2	-9.1	1.56 V	270	42.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5559.75	53.7 PK	68.2	-14.5	1.86 H	127	51.6	2.1
2	*5745.00	122.2 PK			1.86 H	127	119.8	2.4
3	*5745.00	112.9 AV			1.86 H	127	110.5	2.4
4	#6003.71	52.1 PK	68.2	-16.1	1.86 H	127	49.2	2.9
5	11490.00	54.1 PK	74.0	-19.9	1.29 H	334	41.5	12.6
6	11490.00	43.1 AV	54.0	-10.9	1.29 H	334	30.5	12.6
7	#17235.00	61.1 PK	68.2	-7.1	1.54 H	287	44.3	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.29	51.1 PK	68.2	-17.1	1.22 V	120	48.8	2.3
2	*5745.00	114.5 PK			1.22 V	120	112.1	2.4
3	*5745.00	105.1 AV			1.22 V	120	102.7	2.4
4	#6013.81	50.8 PK	68.2	-17.4	1.22 V	120	47.9	2.9
5	11490.00	57.1 PK	74.0	-16.9	1.49 V	305	44.5	12.6
6	11490.00	44.1 AV	54.0	-9.9	1.49 V	305	31.5	12.6
7	#17235.00	61.6 PK	68.2	-6.6	1.50 V	270	44.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5587.09	52.7 PK	68.2	-15.5	1.94 H	128	50.6	2.1
2	*5785.00	123.3 PK			1.94 H	128	120.7	2.6
3	*5785.00	112.7 AV			1.94 H	128	110.1	2.6
4	#5980.46	52.1 PK	68.2	-16.1	1.94 H	128	49.2	2.9
5	11570.00	54.1 PK	74.0	-19.9	1.34 H	350	41.5	12.6
6	11570.00	43.3 AV	54.0	-10.7	1.34 H	350	30.7	12.6
7	#17355.00	60.6 PK	68.2	-7.6	1.51 H	303	42.9	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5579.76	50.5 PK	68.2	-17.7	1.32 V	120	48.4	2.1
2	*5785.00	115.2 PK			1.32 V	120	112.6	2.6
3	*5785.00	104.6 AV			1.32 V	120	102.0	2.6
4	#5955.76	50.5 PK	68.2	-17.7	1.32 V	120	47.6	2.9
5	11570.00	54.8 PK	74.0	-19.2	1.48 V	324	42.2	12.6
6	11570.00	44.0 AV	54.0	-10.0	1.48 V	324	31.4	12.6
7	#17355.00	59.5 PK	68.2	-8.7	1.53 V	288	41.8	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 20MHz Preamble 802.11ax (RU106)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5597.60	53.2 PK	68.2	-15.0	1.89 H	121	51.1	2.1
2	*5825.00	123.5 PK			1.89 H	121	120.9	2.6
3	*5825.00	103.0 AV			1.89 H	121	100.4	2.6
4	#5927.54	52.8 PK	68.2	-15.4	1.89 H	121	49.9	2.9
5	11650.00	53.4 PK	74.0	-20.6	1.27 H	356	41.2	12.2
6	11650.00	42.6 AV	54.0	-11.4	1.27 H	356	30.4	12.2
7	#17475.00	60.4 PK	68.2	-7.8	1.55 H	315	41.7	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5626.77	52.2 PK	68.2	-16.0	1.26 V	129	49.9	2.3
2	*5825.00	115.5 PK			1.26 V	129	112.9	2.6
3	*5825.00	105.0 AV			1.26 V	129	102.4	2.6
4	#5986.55	50.5 PK	68.2	-17.7	1.26 V	129	47.6	2.9
5	11650.00	55.0 PK	74.0	-19.0	1.47 V	322	42.8	12.2
6	11650.00	44.3 AV	54.0	-9.7	1.47 V	322	32.1	12.2
7	#17475.00	58.9 PK	68.2	-9.3	1.49 V	268	40.2	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	120.00	38.2 QP	43.5	-5.3	3.00 H	359	53.3	-15.1
2	166.99	35.4 QP	43.5	-8.1	2.00 H	135	48.4	-13.0
3	226.19	33.2 QP	46.0	-12.8	2.00 H	135	49.1	-15.9
4	299.28	35.4 QP	46.0	-10.6	1.50 H	74	47.7	-12.3
5	337.18	33.8 QP	46.0	-12.2	1.50 H	339	45.1	-11.3
6	574.77	26.7 QP	46.0	-19.3	1.50 H	107	32.9	-6.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

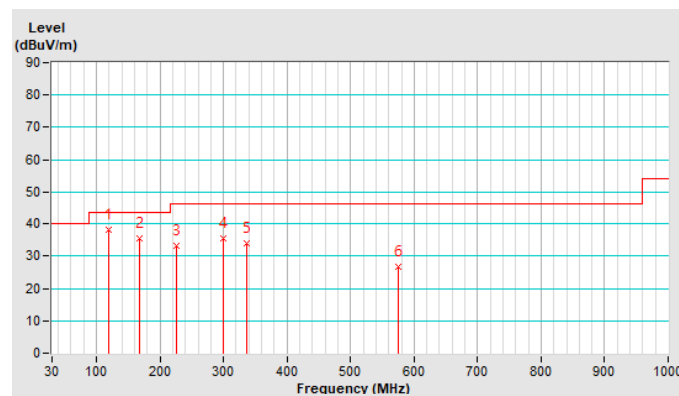


RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	126.15	29.3 QP	43.5	-14.2	1.00 V	47	43.7	-14.4
2	166.88	32.4 QP	43.5	-11.1	1.50 V	217	45.4	-13.0
3	223.48	30.9 QP	46.0	-15.1	1.00 V	136	46.9	-16.0
4	340.39	25.7 QP	46.0	-20.3	1.50 V	179	37.0	-11.3
5	497.92	24.0 QP	46.0	-22.0	1.50 V	55	31.7	-7.7
6	949.88	32.9 QP	46.0	-13.1	1.00 V	145	33.5	-0.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

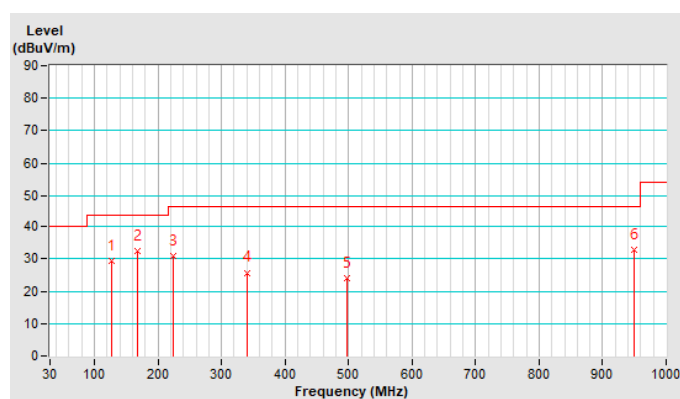

4.1.8 Test Results (Mode 2)

Dipole Antenna

Above 1GHz Data:

RF Mode	TX 802.11a	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.7 PK	74.0	-13.3	1.01 H	112	58.4	2.3
2	5150.00	43.9 AV	54.0	-10.1	1.01 H	112	41.6	2.3
3	*5180.00	102.6 PK			1.01 H	112	100.4	2.2
4	*5180.00	93.5 AV			1.01 H	112	91.3	2.2
5	#10360.00	46.8 PK	68.2	-21.4	1.62 H	245	35.0	11.8
6	15540.00	54.4 PK	74.0	-19.6	1.29 H	310	42.6	11.8
7	15540.00	41.7 AV	54.0	-12.3	1.29 H	310	29.9	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	72.3 PK	74.0	-1.7	1.53 V	287	70.0	2.3
2	5150.00	52.3 AV	54.0	-1.7	1.53 V	287	50.0	2.3
3	*5180.00	113.7 PK			1.53 V	287	111.5	2.2
4	*5180.00	104.8 AV			1.53 V	287	102.6	2.2
5	#10360.00	49.0 PK	68.2	-19.2	2.13 V	357	37.2	11.8
6	15540.00	56.0 PK	74.0	-18.0	1.88 V	267	44.2	11.8
7	15540.00	43.1 AV	54.0	-10.9	1.88 V	267	31.3	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.1 PK	74.0	-17.9	1.01 H	103	53.8	2.3
2	5150.00	40.3 AV	54.0	-13.7	1.01 H	103	38.0	2.3
3	*5200.00	102.4 PK			1.01 H	103	100.3	2.1
4	*5200.00	93.3 AV			1.01 H	103	91.2	2.1
5	#10400.00	46.0 PK	68.2	-22.2	1.68 H	228	34.0	12.0
6	15600.00	55.3 PK	74.0	-18.7	1.26 H	321	43.8	11.5
7	15600.00	42.3 AV	54.0	-11.7	1.26 H	321	30.8	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.4 PK	74.0	-16.6	1.56 V	276	55.1	2.3
2	5150.00	41.3 AV	54.0	-12.7	1.56 V	276	39.0	2.3
3	*5200.00	113.9 PK			1.56 V	276	111.8	2.1
4	*5200.00	105.2 AV			1.56 V	276	103.1	2.1
5	#10400.00	48.6 PK	68.2	-19.6	2.16 V	337	36.6	12.0
6	15600.00	56.3 PK	74.0	-17.7	1.95 V	253	44.8	11.5
7	15600.00	43.2 AV	54.0	-10.8	1.95 V	253	31.7	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.7 PK	74.0	-23.3	1.06 H	98	48.4	2.3
2	5150.00	38.9 AV	54.0	-15.1	1.06 H	98	36.6	2.3
3	*5240.00	102.5 PK			1.06 H	98	100.5	2.0
4	*5240.00	93.3 AV			1.06 H	98	91.3	2.0
5	5350.00	50.9 PK	74.0	-23.1	1.06 H	98	49.0	1.9
6	5350.00	38.3 AV	54.0	-15.7	1.06 H	98	36.4	1.9
7	#10480.00	45.8 PK	68.2	-22.4	1.67 H	253	33.9	11.9
8	15720.00	54.9 PK	74.0	-19.1	1.31 H	311	43.1	11.8
9	15720.00	42.2 AV	54.0	-11.8	1.31 H	311	30.4	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.9 PK	74.0	-23.1	1.52 V	281	48.6	2.3
2	5150.00	39.0 AV	54.0	-15.0	1.52 V	281	36.7	2.3
3	*5240.00	113.7 PK			1.52 V	281	111.7	2.0
4	*5240.00	104.6 AV			1.52 V	281	102.6	2.0
5	5350.00	50.5 PK	74.0	-23.5	1.52 V	281	48.6	1.9
6	5350.00	38.1 AV	54.0	-15.9	1.52 V	281	36.2	1.9
7	#10480.00	48.6 PK	68.2	-19.6	2.15 V	339	36.7	11.9
8	15720.00	56.3 PK	74.0	-17.7	1.90 V	241	44.5	11.8
9	15720.00	42.9 AV	54.0	-11.1	1.90 V	241	31.1	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	49.9 PK	74.0	-24.1	1.01 H	103	47.6	2.3
2	5150.00	37.8 AV	54.0	-16.2	1.01 H	103	35.5	2.3
3	*5260.00	101.8 PK			1.01 H	103	99.8	2.0
4	*5260.00	92.9 AV			1.01 H	103	90.9	2.0
5	5350.00	50.7 PK	74.0	-23.3	1.01 H	103	48.8	1.9
6	5350.00	39.2 AV	54.0	-14.8	1.01 H	103	37.3	1.9
7	#10520.00	46.3 PK	68.2	-21.9	1.68 H	233	34.3	12.0
8	15780.00	54.3 PK	74.0	-19.7	1.34 H	318	42.8	11.5
9	15780.00	41.4 AV	54.0	-12.6	1.34 H	318	29.9	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.2 PK	74.0	-23.8	1.47 V	295	47.9	2.3
2	5150.00	37.9 AV	54.0	-16.1	1.47 V	295	35.6	2.3
3	*5260.00	114.0 PK			1.47 V	295	112.0	2.0
4	*5260.00	105.1 AV			1.47 V	295	103.1	2.0
5	5350.00	51.1 PK	74.0	-22.9	1.47 V	295	49.2	1.9
6	5350.00	39.4 AV	54.0	-14.6	1.47 V	295	37.5	1.9
7	#10520.00	48.8 PK	68.2	-19.4	2.14 V	351	36.8	12.0
8	15780.00	56.7 PK	74.0	-17.3	1.89 V	237	45.2	11.5
9	15780.00	43.5 AV	54.0	-10.5	1.89 V	237	32.0	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	101.9 PK			1.00 H	101	100.2	1.7
2	*5300.00	92.9 AV			1.00 H	101	91.2	1.7
3	5350.00	55.3 PK	74.0	-18.7	1.00 H	101	53.4	1.9
4	5350.00	39.6 AV	54.0	-14.4	1.00 H	101	37.7	1.9
5	10600.00	46.1 PK	74.0	-27.9	1.65 H	226	34.2	11.9
6	10600.00	35.8 AV	54.0	-18.2	1.65 H	226	23.9	11.9
7	15900.00	54.6 PK	74.0	-19.4	1.33 H	316	43.3	11.3
8	15900.00	41.7 AV	54.0	-12.3	1.33 H	316	30.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	114.0 PK			1.53 V	283	112.3	1.7
2	*5300.00	104.9 AV			1.53 V	283	103.2	1.7
3	5350.00	56.8 PK	74.0	-17.2	1.53 V	283	54.9	1.9
4	5350.00	40.9 AV	54.0	-13.1	1.53 V	283	39.0	1.9
5	10600.00	48.2 PK	74.0	-25.8	2.16 V	330	36.3	11.9
6	10600.00	37.4 AV	54.0	-16.6	2.16 V	330	25.5	11.9
7	15900.00	56.0 PK	74.0	-18.0	1.92 V	250	44.7	11.3
8	15900.00	43.2 AV	54.0	-10.8	1.92 V	250	31.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11a	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	102.1 PK			1.20 H	119	100.3	1.8
2	*5320.00	92.1 AV			1.20 H	119	90.3	1.8
3	5350.00	60.6 PK	74.0	-13.4	1.20 H	119	58.7	1.9
4	5350.00	44.9 AV	54.0	-9.1	1.20 H	119	43.0	1.9
5	10640.00	45.9 PK	74.0	-28.1	1.68 H	242	34.1	11.8
6	10640.00	35.7 AV	54.0	-18.3	1.68 H	242	23.9	11.8
7	15960.00	54.8 PK	74.0	-19.2	1.29 H	327	43.2	11.6
8	15960.00	42.2 AV	54.0	-11.8	1.29 H	327	30.6	11.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	113.9 PK			1.50 V	275	112.1	1.8
2	*5320.00	104.6 AV			1.50 V	275	102.8	1.8
3	5350.00	70.9 PK	74.0	-3.1	1.50 V	275	69.0	1.9
4	5350.00	52.3 AV	54.0	-1.7	1.50 V	275	50.4	1.9
5	10640.00	48.8 PK	74.0	-25.2	2.15 V	348	37.0	11.8
6	10640.00	37.8 AV	54.0	-16.2	2.15 V	348	26.0	11.8
7	15960.00	55.9 PK	74.0	-18.1	1.92 V	249	44.3	11.6
8	15960.00	42.9 AV	54.0	-11.1	1.92 V	249	31.3	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11a	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.8 PK	74.0	-24.2	1.40 H	167	47.7	2.1
2	5460.00	37.9 AV	54.0	-16.1	1.40 H	167	35.8	2.1
3	#5465.90	53.4 PK	68.2	-14.8	1.40 H	167	51.3	2.1
4	*5500.00	98.5 PK			1.40 H	167	96.4	2.1
5	*5500.00	90.0 AV			1.40 H	167	87.9	2.1
6	11000.00	45.9 PK	74.0	-28.1	1.65 H	225	33.5	12.4
7	11000.00	35.4 AV	54.0	-18.6	1.65 H	225	23.0	12.4
8	#16500.00	54.5 PK	68.2	-13.7	1.32 H	301	40.8	13.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5458.80	59.9 PK	74.0	-14.1	1.40 V	276	57.8	2.1
2	5458.80	43.0 AV	54.0	-11.0	1.40 V	276	40.9	2.1
3	5460.00	56.4 PK	74.0	-17.6	1.40 V	276	54.3	2.1
4	5460.00	44.5 AV	54.0	-9.5	1.40 V	276	42.4	2.1
5	#5470.00	66.5 PK	68.2	-1.7	1.40 V	276	64.3	2.2
6	*5500.00	112.6 PK			1.40 V	276	110.5	2.1
7	*5500.00	103.7 AV			1.40 V	276	101.6	2.1
8	11000.00	48.7 PK	74.0	-25.3	2.14 V	333	36.3	12.4
9	11000.00	37.9 AV	54.0	-16.1	2.14 V	333	25.5	12.4
10	#16500.00	56.7 PK	68.2	-11.5	2.00 V	269	43.0	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.5 PK	74.0	-24.5	1.37 H	179	47.4	2.1
2	5460.00	36.8 AV	54.0	-17.2	1.37 H	179	34.7	2.1
3	#5470.00	52.8 PK	68.2	-15.4	1.37 H	179	50.6	2.2
4	*5580.00	100.3 PK			1.37 H	179	98.2	2.1
5	*5580.00	91.5 AV			1.37 H	179	89.4	2.1
6	11160.00	46.8 PK	74.0	-27.2	1.60 H	232	34.8	12.0
7	11160.00	36.2 AV	54.0	-17.8	1.60 H	232	24.2	12.0
8	#16740.00	55.0 PK	68.2	-13.2	1.24 H	315	39.7	15.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.8 PK	74.0	-24.2	1.58 V	300	47.7	2.1
2	5460.00	37.8 AV	54.0	-16.2	1.58 V	300	35.7	2.1
3	#5470.00	53.1 PK	68.2	-15.1	1.58 V	300	50.9	2.2
4	*5580.00	113.6 PK			1.58 V	300	111.5	2.1
5	*5580.00	104.9 AV			1.58 V	300	102.8	2.1
6	11160.00	48.3 PK	74.0	-25.7	2.21 V	348	36.3	12.0
7	11160.00	37.8 AV	54.0	-16.2	2.21 V	348	25.8	12.0
8	#16740.00	55.8 PK	68.2	-12.4	1.99 V	259	40.5	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	97.6 PK			1.34 H	191	95.3	2.3
2	*5700.00	88.4 AV			1.34 H	191	86.1	2.3
3	#5725.00	56.8 PK	68.2	-11.4	1.34 H	191	54.4	2.4
4	11400.00	46.4 PK	74.0	-27.6	1.65 H	229	33.9	12.5
5	11400.00	36.0 AV	54.0	-18.0	1.65 H	229	23.5	12.5
6	#17100.00	55.0 PK	68.2	-13.2	1.27 H	332	38.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	112.1 PK			1.42 V	277	109.8	2.3
2	*5700.00	103.1 AV			1.42 V	277	100.8	2.3
3	#5725.00	66.5 PK	68.2	-1.7	1.42 V	277	64.1	2.4
4	11400.00	48.0 PK	74.0	-26.0	2.20 V	343	35.5	12.5
5	11400.00	37.5 AV	54.0	-16.5	2.20 V	343	25.0	12.5
6	#17100.00	56.1 PK	68.2	-12.1	1.92 V	239	39.3	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.2 PK	74.0	-23.8	1.32 H	191	48.1	2.1
2	5460.00	37.8 AV	54.0	-16.2	1.32 H	191	35.7	2.1
3	#5470.00	50.4 PK	68.2	-17.8	1.32 H	191	48.2	2.2
4	*5720.00	99.6 PK			1.32 H	191	97.2	2.4
5	*5720.00	91.8 AV			1.32 H	191	89.4	2.4
6	#5850.00	50.5 PK	68.2	-17.7	1.32 H	191	47.8	2.7
7	11440.00	45.6 PK	74.0	-28.4	1.68 H	223	33.2	12.4
8	11440.00	35.4 AV	54.0	-18.6	1.68 H	223	23.0	12.4
9	#17160.00	54.2 PK	68.2	-14.0	1.30 H	312	37.6	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.3 PK	74.0	-23.7	1.52 V	292	48.2	2.1
2	5460.00	38.1 AV	54.0	-15.9	1.52 V	292	36.0	2.1
3	#5470.00	51.1 PK	68.2	-17.1	1.52 V	292	48.9	2.2
4	*5720.00	114.2 PK			1.52 V	292	111.8	2.4
5	*5720.00	105.2 AV			1.52 V	292	102.8	2.4
6	#5850.00	50.8 PK	68.2	-17.4	1.52 V	292	48.1	2.7
7	11440.00	49.1 PK	74.0	-24.9	2.16 V	330	36.7	12.4
8	11440.00	38.0 AV	54.0	-16.0	2.16 V	330	25.6	12.4
9	#17160.00	56.0 PK	68.2	-12.2	1.93 V	243	39.4	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5609.35	50.9 PK	68.2	-17.3	2.60 H	141	48.8	2.1
2	*5745.00	101.8 PK			2.60 H	141	99.4	2.4
3	*5745.00	92.7 AV			2.60 H	141	90.3	2.4
4	#5951.86	51.8 PK	68.2	-16.4	2.60 H	141	48.9	2.9
5	11490.00	46.1 PK	74.0	-27.9	1.67 H	247	33.5	12.6
6	11490.00	35.6 AV	54.0	-18.4	1.67 H	247	23.0	12.6
7	#17235.00	54.8 PK	68.2	-13.4	1.25 H	327	38.0	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5643.33	51.8 PK	68.2	-16.4	1.51 V	276	49.5	2.3
2	*5745.00	115.2 PK			1.51 V	276	112.8	2.4
3	*5745.00	105.7 AV			1.51 V	276	103.3	2.4
4	#6000.80	51.4 PK	68.2	-16.8	1.51 V	276	48.5	2.9
5	11490.00	48.7 PK	74.0	-25.3	2.11 V	327	36.1	12.6
6	11490.00	38.1 AV	54.0	-15.9	2.11 V	327	25.5	12.6
7	#17235.00	56.6 PK	68.2	-11.6	1.97 V	244	39.8	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5575.03	50.2 PK	68.2	-18.0	2.56 H	137	48.1	2.1
2	*5785.00	102.1 PK			2.56 H	137	99.5	2.6
3	*5785.00	92.9 AV			2.56 H	137	90.3	2.6
4	#5937.01	50.1 PK	68.2	-18.1	2.56 H	137	47.2	2.9
5	11570.00	46.1 PK	74.0	-27.9	1.63 H	237	33.5	12.6
6	11570.00	35.8 AV	54.0	-18.2	1.63 H	237	23.2	12.6
7	#17355.00	54.7 PK	68.2	-13.5	1.28 H	317	37.0	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5553.79	51.4 PK	68.2	-16.8	1.54 V	270	49.3	2.1
2	*5785.00	114.8 PK			1.54 V	270	112.2	2.6
3	*5785.00	105.5 AV			1.54 V	270	102.9	2.6
4	#5946.90	52.0 PK	68.2	-16.2	1.54 V	270	49.1	2.9
5	11570.00	48.7 PK	74.0	-25.3	2.13 V	348	36.1	12.6
6	11570.00	37.6 AV	54.0	-16.4	2.13 V	348	25.0	12.6
7	#17355.00	56.2 PK	68.2	-12.0	1.93 V	252	38.5	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11a	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5634.19	49.6 PK	68.2	-18.6	2.52 H	132	47.3	2.3
2	*5825.00	102.3 PK			2.52 H	132	99.7	2.6
3	*5825.00	93.1 AV			2.52 H	132	90.5	2.6
4	#6000.87	51.0 PK	68.2	-17.2	2.52 H	132	48.1	2.9
5	11650.00	46.1 PK	74.0	-27.9	1.59 H	239	33.9	12.2
6	11650.00	35.7 AV	54.0	-18.3	1.59 H	239	23.5	12.2
7	#17475.00	54.2 PK	68.2	-14.0	1.27 H	320	35.5	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5571.51	51.4 PK	68.2	-16.8	1.52 V	273	49.3	2.1
2	*5825.00	115.3 PK			1.52 V	273	112.7	2.6
3	*5825.00	105.9 AV			1.52 V	273	103.3	2.6
4	#5925.94	54.5 PK	68.2	-13.7	1.52 V	273	51.6	2.9
5	11650.00	48.3 PK	74.0	-25.7	2.21 V	327	36.1	12.2
6	11650.00	37.5 AV	54.0	-16.5	2.21 V	327	25.3	12.2
7	#17475.00	55.8 PK	68.2	-12.4	1.91 V	261	37.1	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 36 : 5180 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.3 PK	74.0	-15.7	1.05 H	115	56.0	2.3
2	5150.00	44.4 AV	54.0	-9.6	1.05 H	115	42.1	2.3
3	*5180.00	103.8 PK			1.05 H	115	101.6	2.2
4	*5180.00	92.8 AV			1.05 H	115	90.6	2.2
5	#10360.00	46.2 PK	68.2	-22.0	1.65 H	235	34.4	11.8
6	15540.00	54.7 PK	74.0	-19.3	1.34 H	318	42.9	11.8
7	15540.00	41.9 AV	54.0	-12.1	1.34 H	318	30.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.0 PK	74.0	-4.0	1.55 V	283	67.7	2.3
2	5150.00	52.3 AV	54.0	-1.7	1.55 V	283	50.0	2.3
3	*5180.00	115.3 PK			1.55 V	283	113.1	2.2
4	*5180.00	104.2 AV			1.55 V	283	102.0	2.2
5	#10360.00	48.4 PK	68.2	-19.8	2.11 V	342	36.6	11.8
6	15540.00	56.5 PK	74.0	-17.5	1.99 V	246	44.7	11.8
7	15540.00	43.3 AV	54.0	-10.7	1.99 V	246	31.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 40 : 5200 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	56.2 PK	74.0	-17.8	1.06 H	119	53.9	2.3
2	5150.00	40.4 AV	54.0	-13.6	1.06 H	119	38.1	2.3
3	*5200.00	104.9 PK			1.06 H	119	102.8	2.1
4	*5200.00	93.8 AV			1.06 H	119	91.7	2.1
5	#10400.00	46.4 PK	68.2	-21.8	1.59 H	245	34.4	12.0
6	15600.00	55.1 PK	74.0	-18.9	1.25 H	303	43.6	11.5
7	15600.00	41.9 AV	54.0	-12.1	1.25 H	303	30.4	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	57.9 PK	74.0	-16.1	1.51 V	281	55.6	2.3
2	5150.00	41.6 AV	54.0	-12.4	1.51 V	281	39.3	2.3
3	*5200.00	115.5 PK			1.51 V	281	113.4	2.1
4	*5200.00	104.6 AV			1.51 V	281	102.5	2.1
5	#10400.00	48.2 PK	68.2	-20.0	2.22 V	342	36.2	12.0
6	15600.00	55.7 PK	74.0	-18.3	1.92 V	263	44.2	11.5
7	15600.00	42.8 AV	54.0	-11.2	1.92 V	263	31.3	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 48 : 5240 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.0 PK	74.0	-23.0	1.08 H	104	48.7	2.3
2	5150.00	38.8 AV	54.0	-15.2	1.08 H	104	36.5	2.3
3	*5240.00	103.3 PK			1.08 H	104	101.3	2.0
4	*5240.00	92.2 AV			1.08 H	104	90.2	2.0
5	5350.00	50.1 PK	74.0	-23.9	1.08 H	104	48.2	1.9
6	5350.00	38.1 AV	54.0	-15.9	1.08 H	104	36.2	1.9
7	#10480.00	46.1 PK	68.2	-22.1	1.64 H	248	34.2	11.9
8	15720.00	54.9 PK	74.0	-19.1	1.28 H	303	43.1	11.8
9	15720.00	41.9 AV	54.0	-12.1	1.28 H	303	30.1	11.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	51.2 PK	74.0	-22.8	1.46 V	285	48.9	2.3
2	5150.00	39.0 AV	54.0	-15.0	1.46 V	285	36.7	2.3
3	*5240.00	115.6 PK			1.46 V	285	113.6	2.0
4	*5240.00	104.5 AV			1.46 V	285	102.5	2.0
5	5350.00	50.3 PK	74.0	-23.7	1.46 V	285	48.4	1.9
6	5350.00	38.4 AV	54.0	-15.6	1.46 V	285	36.5	1.9
7	#10480.00	49.2 PK	68.2	-19.0	2.13 V	340	37.3	11.9
8	15720.00	56.2 PK	74.0	-17.8	1.93 V	266	44.4	11.8
9	15720.00	43.3 AV	54.0	-10.7	1.93 V	266	31.5	11.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 52 : 5260 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.3 PK	74.0	-23.7	1.09 H	115	48.0	2.3
2	5150.00	38.0 AV	54.0	-16.0	1.09 H	115	35.7	2.3
3	*5260.00	103.5 PK			1.09 H	115	101.5	2.0
4	*5260.00	92.6 AV			1.09 H	115	90.6	2.0
5	5350.00	50.9 PK	74.0	-23.1	1.09 H	115	49.0	1.9
6	5350.00	38.8 AV	54.0	-15.2	1.09 H	115	36.9	1.9
7	#10520.00	45.7 PK	68.2	-22.5	1.63 H	227	33.7	12.0
8	15780.00	55.4 PK	74.0	-18.6	1.25 H	331	43.9	11.5
9	15780.00	42.2 AV	54.0	-11.8	1.25 H	331	30.7	11.5
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	50.4 PK	74.0	-23.6	1.51 V	271	48.1	2.3
2	5150.00	38.2 AV	54.0	-15.8	1.51 V	271	35.9	2.3
3	*5260.00	115.9 PK			1.51 V	271	113.9	2.0
4	*5260.00	104.9 AV			1.51 V	271	102.9	2.0
5	5350.00	51.2 PK	74.0	-22.8	1.51 V	271	49.3	1.9
6	5350.00	39.2 AV	54.0	-14.8	1.51 V	271	37.3	1.9
7	#10520.00	48.3 PK	68.2	-19.9	2.13 V	337	36.3	12.0
8	15780.00	56.9 PK	74.0	-17.1	1.94 V	261	45.4	11.5
9	15780.00	43.6 AV	54.0	-10.4	1.94 V	261	32.1	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 60 : 5300 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	103.8 PK			1.11 H	102	102.1	1.7
2	*5300.00	92.9 AV			1.11 H	102	91.2	1.7
3	5350.00	58.0 PK	74.0	-16.0	1.11 H	102	56.1	1.9
4	5350.00	41.3 AV	54.0	-12.7	1.11 H	102	39.4	1.9
5	10600.00	46.4 PK	74.0	-27.6	1.64 H	236	34.5	11.9
6	10600.00	36.0 AV	54.0	-18.0	1.64 H	236	24.1	11.9
7	15900.00	54.6 PK	74.0	-19.4	1.26 H	319	43.3	11.3
8	15900.00	41.7 AV	54.0	-12.3	1.26 H	319	30.4	11.3
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5300.00	115.7 PK			1.55 V	287	114.0	1.7
2	*5300.00	104.8 AV			1.55 V	287	103.1	1.7
3	5350.00	58.4 PK	74.0	-15.6	1.55 V	287	56.5	1.9
4	5350.00	41.9 AV	54.0	-12.1	1.55 V	287	40.0	1.9
5	10600.00	48.3 PK	74.0	-25.7	2.13 V	348	36.4	11.9
6	10600.00	37.7 AV	54.0	-16.3	2.13 V	348	25.8	11.9
7	15900.00	56.5 PK	74.0	-17.5	2.00 V	268	45.2	11.3
8	15900.00	43.2 AV	54.0	-10.8	2.00 V	268	31.9	11.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 64 : 5320 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	103.5 PK			1.15 H	109	101.7	1.8
2	*5320.00	91.8 AV			1.15 H	109	90.0	1.8
3	5350.00	58.5 PK	74.0	-15.5	1.15 H	109	56.6	1.9
4	5350.00	45.1 AV	54.0	-8.9	1.15 H	109	43.2	1.9
5	10640.00	46.5 PK	74.0	-27.5	1.67 H	247	34.7	11.8
6	10640.00	36.2 AV	54.0	-17.8	1.67 H	247	24.4	11.8
7	15960.00	54.2 PK	74.0	-19.8	1.26 H	304	42.6	11.6
8	15960.00	41.3 AV	54.0	-12.7	1.26 H	304	29.7	11.6

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5320.00	115.5 PK			1.47 V	279	113.7	1.8
2	*5320.00	104.1 AV			1.47 V	279	102.3	1.8
3	5350.00	70.2 PK	74.0	-3.8	1.47 V	279	68.3	1.9
4	5350.00	52.2 AV	54.0	-1.8	1.47 V	279	50.3	1.9
5	10640.00	48.6 PK	74.0	-25.4	2.15 V	342	36.8	11.8
6	10640.00	37.7 AV	54.0	-16.3	2.15 V	342	25.9	11.8
7	15960.00	56.1 PK	74.0	-17.9	1.99 V	260	44.5	11.6
8	15960.00	43.3 AV	54.0	-10.7	1.99 V	260	31.7	11.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.

RF Mode	TX 802.11ax (HE20)	Channel	CH 100 : 5500 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.0 PK	74.0	-24.0	1.37 H	160	47.9	2.1
2	5460.00	37.9 AV	54.0	-16.1	1.37 H	160	35.8	2.1
3	#5470.00	52.3 PK	68.2	-15.9	1.00 H	0	50.1	2.2
4	*5500.00	101.6 PK			1.37 H	160	99.5	2.1
5	*5500.00	89.7 AV			1.37 H	160	87.6	2.1
6	11000.00	46.6 PK	74.0	-27.4	1.65 H	241	34.2	12.4
7	11000.00	36.1 AV	54.0	-17.9	1.65 H	241	23.7	12.4
8	#16500.00	55.0 PK	68.2	-13.2	1.28 H	319	41.3	13.7

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	59.8 PK	74.0	-14.2	1.42 V	280	57.7	2.1
2	5460.00	44.3 AV	54.0	-9.7	1.42 V	280	42.2	2.1
3	#5470.00	66.4 PK	68.2	-1.8	1.42 V	280	64.2	2.2
4	*5500.00	114.3 PK			1.42 V	280	112.2	2.1
5	*5500.00	103.4 AV			1.42 V	280	101.3	2.1
6	11000.00	48.3 PK	74.0	-25.7	2.12 V	324	35.9	12.4
7	11000.00	37.4 AV	54.0	-16.6	2.12 V	324	25.0	12.4
8	#16500.00	56.6 PK	68.2	-11.6	2.00 V	261	42.9	13.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 116 : 5580 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	48.3 PK	74.0	-25.7	1.38 H	161	46.2	2.1
2	5460.00	36.9 AV	54.0	-17.1	1.38 H	161	34.8	2.1
3	#5470.00	52.9 PK	68.2	-15.3	1.38 H	161	50.7	2.2
4	*5580.00	103.5 PK			1.38 H	161	101.4	2.1
5	*5580.00	92.0 AV			1.38 H	161	89.9	2.1
6	11160.00	45.5 PK	74.0	-28.5	1.63 H	222	33.5	12.0
7	11160.00	35.3 AV	54.0	-18.7	1.63 H	222	23.3	12.0
8	#16740.00	53.9 PK	68.2	-14.3	1.31 H	304	38.6	15.3

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.8 PK	74.0	-24.2	1.52 V	296	47.7	2.1
2	5460.00	37.5 AV	54.0	-16.5	1.52 V	296	35.4	2.1
3	#5470.00	53.8 PK	68.2	-14.4	1.52 V	296	51.6	2.2
4	*5580.00	115.4 PK			1.52 V	296	113.3	2.1
5	*5580.00	104.4 AV			1.52 V	296	102.3	2.1
6	11160.00	48.0 PK	74.0	-26.0	2.14 V	336	36.0	12.0
7	11160.00	37.3 AV	54.0	-16.7	2.14 V	336	25.3	12.0
8	#16740.00	56.3 PK	68.2	-11.9	1.98 V	253	41.0	15.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 140 : 5700 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	100.6 PK			1.37 H	156	98.3	2.3
2	*5700.00	89.3 AV			1.37 H	156	87.0	2.3
3	#5725.00	56.8 PK	68.2	-11.4	1.37 H	156	54.4	2.4
4	11400.00	46.5 PK	74.0	-27.5	1.66 H	227	34.0	12.5
5	11400.00	36.2 AV	54.0	-17.8	1.66 H	227	23.7	12.5
6	#17100.00	54.0 PK	68.2	-14.2	1.32 H	305	37.2	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5700.00	114.2 PK			1.38 V	278	111.9	2.3
2	*5700.00	102.9 AV			1.38 V	278	100.6	2.3
3	#5725.00	66.4 PK	68.2	-1.8	1.38 V	278	64.0	2.4
4	11400.00	48.6 PK	74.0	-25.4	2.14 V	323	36.1	12.5
5	11400.00	37.8 AV	54.0	-16.2	2.14 V	323	25.3	12.5
6	#17100.00	55.9 PK	68.2	-12.3	1.94 V	245	39.1	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 144 : 5720 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	49.8 PK	74.0	-24.2	1.15 H	97	47.7	2.1
2	5460.00	37.8 AV	54.0	-16.2	1.15 H	97	35.7	2.1
3	#5470.00	50.6 PK	68.2	-17.6	1.15 H	97	48.4	2.2
4	*5720.00	103.7 PK			1.15 H	97	101.3	2.4
5	*5720.00	92.0 AV			1.15 H	97	89.6	2.4
6	#5850.00	49.8 PK	68.2	-18.4	1.15 H	97	47.1	2.7
7	11440.00	46.3 PK	74.0	-27.7	1.68 H	234	33.9	12.4
8	11440.00	36.1 AV	54.0	-17.9	1.68 H	234	23.7	12.4
9	#17160.00	54.7 PK	68.2	-13.5	1.22 H	313	38.1	16.6
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5460.00	50.5 PK	74.0	-23.5	1.43 V	277	48.4	2.1
2	5460.00	38.4 AV	54.0	-15.6	1.43 V	277	36.3	2.1
3	#5470.00	51.1 PK	68.2	-17.1	1.43 V	277	48.9	2.2
4	*5720.00	115.5 PK			1.43 V	277	113.1	2.4
5	*5720.00	104.3 AV			1.43 V	277	101.9	2.4
6	#5850.00	50.4 PK	68.2	-17.8	1.43 V	277	47.7	2.7
7	11440.00	47.8 PK	74.0	-26.2	2.22 V	350	35.4	12.4
8	11440.00	37.3 AV	54.0	-16.7	2.22 V	350	24.9	12.4
9	#17160.00	56.1 PK	68.2	-12.1	1.96 V	245	39.5	16.6

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 149 : 5745 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.90	50.8 PK	68.2	-17.4	2.56 H	145	48.5	2.3
2	*5745.00	103.2 PK			2.56 H	145	100.8	2.4
3	*5745.00	92.8 AV			2.56 H	145	90.4	2.4
4	#6015.90	51.6 PK	68.2	-16.6	2.56 H	145	48.7	2.9
5	11490.00	46.0 PK	74.0	-28.0	1.63 H	238	33.4	12.6
6	11490.00	35.5 AV	54.0	-18.5	1.63 H	238	22.9	12.6
7	#17235.00	54.6 PK	68.2	-13.6	1.33 H	313	37.8	16.8
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5575.72	50.9 PK	68.2	-17.3	1.44 V	278	48.8	2.1
2	*5745.00	117.1 PK			1.44 V	278	114.7	2.4
3	*5745.00	105.8 AV			1.44 V	278	103.4	2.4
4	#5999.64	51.9 PK	68.2	-16.3	1.44 V	278	49.0	2.9
5	11490.00	48.1 PK	74.0	-25.9	2.16 V	324	35.5	12.6
6	11490.00	37.4 AV	54.0	-16.6	2.16 V	324	24.8	12.6
7	#17235.00	56.5 PK	68.2	-11.7	1.93 V	256	39.7	16.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 157 : 5785 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5638.33	50.5 PK	68.2	-17.7	2.63 H	142	48.2	2.3
2	*5785.00	103.0 PK			2.63 H	142	100.4	2.6
3	*5785.00	92.7 AV			2.63 H	142	90.1	2.6
4	#5996.39	50.4 PK	68.2	-17.8	2.63 H	142	47.5	2.9
5	11570.00	45.9 PK	74.0	-28.1	1.69 H	252	33.3	12.6
6	11570.00	35.4 AV	54.0	-18.6	1.69 H	252	22.8	12.6
7	#17355.00	55.0 PK	68.2	-13.2	1.34 H	310	37.3	17.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5552.41	52.0 PK	68.2	-16.2	1.46 V	281	49.9	2.1
2	*5785.00	116.9 PK			1.46 V	281	114.3	2.6
3	*5785.00	105.7 AV			1.46 V	281	103.1	2.6
4	#5955.56	52.2 PK	68.2	-16.0	1.46 V	281	49.3	2.9
5	11570.00	48.8 PK	74.0	-25.2	2.12 V	342	36.2	12.6
6	11570.00	38.0 AV	54.0	-16.0	2.12 V	342	25.4	12.6
7	#17355.00	56.1 PK	68.2	-12.1	1.98 V	255	38.4	17.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE20)	Channel	CH 165 : 5825 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5575.09	49.9 PK	68.2	-18.3	2.58 H	133	47.8	2.1
2	*5825.00	103.5 PK			2.58 H	133	100.9	2.6
3	*5825.00	92.9 AV			2.58 H	133	90.3	2.6
4	#5949.36	50.2 PK	68.2	-18.0	2.58 H	133	47.3	2.9
5	11650.00	45.8 PK	74.0	-28.2	1.59 H	248	33.6	12.2
6	11650.00	35.8 AV	54.0	-18.2	1.59 H	248	23.6	12.2
7	#17475.00	54.5 PK	68.2	-13.7	1.26 H	333	35.8	18.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5595.48	51.4 PK	68.2	-16.8	1.55 V	273	49.3	2.1
2	*5825.00	117.0 PK			1.55 V	273	114.4	2.6
3	*5825.00	105.7 AV			1.55 V	273	103.1	2.6
4	#5945.59	52.7 PK	68.2	-15.5	1.55 V	273	49.8	2.9
5	11650.00	48.8 PK	74.0	-25.2	2.08 V	348	36.6	12.2
6	11650.00	37.9 AV	54.0	-16.1	2.08 V	348	25.7	12.2
7	#17475.00	55.9 PK	68.2	-12.3	2.02 V	244	37.2	18.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 38 : 5190 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.2 PK	74.0	-15.8	1.07 H	107	55.9	2.3
2	5150.00	42.1 AV	54.0	-11.9	1.07 H	107	39.8	2.3
3	*5190.00	99.3 PK			1.07 H	107	97.2	2.1
4	*5190.00	87.6 AV			1.07 H	107	85.5	2.1
5	#10380.00	46.0 PK	68.2	-22.2	1.57 H	251	34.0	12.0
6	15570.00	54.5 PK	74.0	-19.5	1.23 H	319	42.8	11.7
7	15570.00	41.6 AV	54.0	-12.4	1.23 H	319	29.9	11.7
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	70.0 PK	74.0	-4.0	1.42 V	287	67.7	2.3
2	5150.00	52.4 AV	54.0	-1.6	1.42 V	287	50.1	2.3
3	*5190.00	110.1 PK			1.42 V	287	108.0	2.1
4	*5190.00	98.2 AV			1.42 V	287	96.1	2.1
5	#10380.00	48.1 PK	68.2	-20.1	2.10 V	351	36.1	12.0
6	15570.00	56.1 PK	74.0	-17.9	2.05 V	231	44.4	11.7
7	15570.00	43.1 AV	54.0	-10.9	2.05 V	231	31.4	11.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 46 : 5230 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	58.8 PK	74.0	-15.2	1.10 H	113	56.5	2.3
2	5150.00	41.8 AV	54.0	-12.2	1.10 H	113	39.5	2.3
3	*5230.00	101.6 PK			1.10 H	113	99.5	2.1
4	*5230.00	89.6 AV			1.10 H	113	87.5	2.1
5	#10460.00	46.7 PK	68.2	-21.5	1.60 H	226	34.7	12.0
6	15690.00	54.3 PK	74.0	-19.7	1.25 H	333	42.4	11.9
7	15690.00	41.4 AV	54.0	-12.6	1.25 H	333	29.5	11.9
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5150.00	60.1 PK	74.0	-13.9	1.48 V	271	57.8	2.3
2	5150.00	42.9 AV	54.0	-11.1	1.48 V	271	40.6	2.3
3	*5230.00	112.3 PK			1.48 V	271	110.2	2.1
4	*5230.00	100.6 AV			1.48 V	271	98.5	2.1
5	#10460.00	48.8 PK	68.2	-19.4	2.12 V	344	36.8	12.0
6	15690.00	55.4 PK	74.0	-18.6	1.99 V	238	43.5	11.9
7	15690.00	42.5 AV	54.0	-11.5	1.99 V	238	30.6	11.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 54 : 5270 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	101.3 PK			1.08 H	110	99.4	1.9
2	*5270.00	89.4 AV			1.08 H	110	87.5	1.9
3	5350.00	60.4 PK	74.0	-13.6	1.08 H	110	58.5	1.9
4	5350.00	42.9 AV	54.0	-11.1	1.08 H	110	41.0	1.9
5	#10540.00	46.4 PK	68.2	-21.8	1.63 H	222	34.5	11.9
6	15810.00	54.2 PK	74.0	-19.8	1.23 H	315	42.8	11.4
7	15810.00	41.5 AV	54.0	-12.5	1.23 H	315	30.1	11.4
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5270.00	112.7 PK			1.45 V	275	110.8	1.9
2	*5270.00	100.6 AV			1.45 V	275	98.7	1.9
3	5350.00	63.6 PK	74.0	-10.4	1.45 V	275	61.7	1.9
4	5350.00	43.7 AV	54.0	-10.3	1.45 V	275	41.8	1.9
5	#10540.00	48.4 PK	68.2	-19.8	2.06 V	338	36.5	11.9
6	15810.00	55.6 PK	74.0	-18.4	2.02 V	241	44.2	11.4
7	15810.00	42.7 AV	54.0	-11.3	2.02 V	241	31.3	11.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

RF Mode	TX 802.11ax (HE40)	Channel	CH 62 : 5310 MHz
Frequency Range	1GHz ~ 40GHz	Detector Function	Peak (PK) Average (AV)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	96.8 PK			1.61 H	167	95.0	1.8
2	*5310.00	85.4 AV			1.61 H	167	83.6	1.8
3	5350.00	57.7 PK	74.0	-16.3	1.61 H	167	55.8	1.9
4	5350.00	41.4 AV	54.0	-12.6	1.61 H	167	39.5	1.9
5	10620.00	46.3 PK	74.0	-27.7	1.68 H	250	34.5	11.8
6	10620.00	36.2 AV	54.0	-17.8	1.68 H	250	24.4	11.8
7	15930.00	54.6 PK	74.0	-19.4	1.30 H	328	43.1	11.5
8	15930.00	41.6 AV	54.0	-12.4	1.30 H	328	30.1	11.5

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*5310.00	109.9 PK			1.62 V	274	108.1	1.8
2	*5310.00	98.2 AV			1.62 V	274	96.4	1.8
3	5350.00	69.3 PK	74.0	-4.7	1.62 V	274	67.4	1.9
4	5350.00	52.3 AV	54.0	-1.7	1.62 V	274	50.4	1.9
5	10620.00	48.8 PK	74.0	-25.2	2.03 V	333	37.0	11.8
6	10620.00	37.8 AV	54.0	-16.2	2.03 V	333	26.0	11.8
7	15930.00	56.7 PK	74.0	-17.3	2.04 V	235	45.2	11.5
8	15930.00	43.3 AV	54.0	-10.7	2.04 V	235	31.8	11.5

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.