



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE ! BALTIMORE, MARYLAND 21230-3432 ! PHONE (410) 354-3300 ! FAX (410) 354-3313

33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

3162 BELICK STREET ! SANTA CLARA, CA 95054 ! PHONE (408) 748-3585 ! FAX (510) 489-6372

13301 MCCALLEN PASS ! AUSTIN, TX 78753 ! PHONE (512) 287-2500 ! FAX (512) 287-2513

January 18, 2018

Klashwerks  
441 Maclarem Street Suite 408  
Ottawa, ON K2P 2H3

Dear Shing Ho,

Enclosed is the EMC Wireless test report for compliance testing of the Klashwerks, Raven as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15 Subpart C for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Joel Huna  
Documentation Department

Reference: (\Klashwerks\EMC95840A-FCC247 BT FHSS Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the A2LA logo in this report reflects MET accreditation under these programs, the report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the Federal Government. This letter of transmittal is not a part of the attached report.



*The Nation's First Licensed Nationally Recognized Testing Laboratory*

---

## Electromagnetic Compatibility Criteria Test Report

for the

**Klashwerks  
Raven**

**Tested under**  
the FCC Certification Rules contained in  
Title 47 of the CFR, Part 15.247 Subpart C  
for Intentional Radiators

**MET Report: EMC95840A-FCC247 BT FHSS Rev. 3**

January 18, 2018

**Prepared For:**

**Klashwerks  
441 Maclarem Street Suite 408  
Ottawa, ON K2P 2H3**

**Prepared By:**  
**MET Laboratories, Inc.**  
914 West Patapsco Avenue, Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Klashwerks  
Raven**

**Tested under**  
the FCC Certification Rules contained in  
Title 47 of the CFR, Part 15.247 Subpart C  
for Intentional Radiators




Bradley Jones, Project Engineer  
Electromagnetic Compatibility Lab



Joel Huna  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Part 15.247 under normal use and maintenance.



John Mason,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	December 4, 2017	Initial Issue.
1	December 18, 2017	Engineer corrections.
2	January 5, 2018	Note added to the Radiated Spurious Emissions test results.
3	January 18, 2018	TCB Corrections.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample.....	6
	E. Equipment Configuration.....	7
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	7
	I. Method of Monitoring EUT Operation.....	8
	J. Modifications .....	8
	a) Modifications to EUT.....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>9</b>
	§ 15.203 Antenna Requirement.....	10
	§ 15.207(a) Conducted Emissions Limits.....	11
	§ 15.247(a)(1) 20 dB Occupied Bandwidth.....	12
	§ 15.247(a)(1) Average Time of Occupancy (Dwell Time) .....	16
	§ 15.247(a)(1) Number of RF Channels .....	20
	§ 15.247(a)(1) RF Channel Separation .....	22
	§ 15.247(b) Peak Power Output .....	26
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge .....	30
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge .....	52
	§ 15.247(g)(h) Declaration Statements for FHSS.....	60
<b>IV.</b>	<b>Test Equipment .....</b>	<b>62</b>
<b>V.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>64</b>
	A. Certification Information .....	65
	B. Label and User's Manual Information .....	69

## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. EUT Summary Table.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Antenna List .....	10
Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	11
Table 9. Average Time of Occupancy.....	16
Table 10. Restricted Bands of Operation.....	30
Table 11. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	31
Table 12. Radiated Emissions, Below 1 GHz Test Results .....	32
Table 13. Test Equipment List .....	63

## List of Plots

Plot 1. 20 dB Occupied Bandwidth, DH1, power 9, Low .....	13
Plot 2. 20 dB Occupied Bandwidth, DH1, power 9, Mid.....	13
Plot 3. 20 dB Occupied Bandwidth, DH1, power 9, High.....	13
Plot 4. 20 dB Occupied Bandwidth, DH3, power 7, Low .....	14
Plot 5. 20 dB Occupied Bandwidth, DH3, power 7, Mid.....	14
Plot 6. 20 dB Occupied Bandwidth, DH3, power7, High.....	14
Plot 7. 20 dB Occupied Bandwidth, DH5, power 7, Low .....	15
Plot 8. 20 dB Occupied Bandwidth, DH5, power 7, Mid .....	15
Plot 9. 20 dB Occupied Bandwidth, DH5, power 7, High.....	15
Plot 10. Dwell Time, DH1 low 2402.....	17
Plot 11. Dwell Time, DH1 low 2402, bursts .....	17
Plot 12. Dwell Time, DH1, low 2402 bursts, part 1 .....	17
Plot 13. Dwell Time, DH3, low 2402.....	18
Plot 14. Dwell Time, DH3, low 2402 bursts .....	18
Plot 15. Dwell Time, DH5, low 2402.....	18
Plot 16. Dwell Time, DH5, low 2402 bursts .....	19
Plot 17. Number of Channels, DH1, 2.4-2.42, 18.5 .....	20
Plot 18. Number of Channels, DH1, 2.46-2.485, 20.5 .....	20
Plot 19. Number of Channels, DH3, 2.4-2.42, 18.5 .....	20
Plot 20. Number of Channels, DH3, 2.46-2.485, 20.5 .....	21
Plot 21. Number of Channels, DH5, 2.4-2.42, 18.5 .....	21
Plot 22. Number of Channels, DH5, 2.46-2.485, 20.5 .....	21
Plot 23. Channel Separation, DH1, Low 2402 .....	22
Plot 24. Channel Separation, DH1, Low2402 .....	22
Plot 25. Channel Separation, DH1, Mid 2442 .....	23
Plot 26. Channel Separation, DH1, High 2475.5.....	23
Plot 27. Channel Separation, DH3, Low 2402 .....	23
Plot 28. Channel Separation, DH3, Mid 2442.....	24
Plot 29. Channel Separation, DH3, High 2479.5.....	24
Plot 30. Channel Separation, DH5, Low 2402 .....	24
Plot 31. Channel Separation, DH5, Mid 2442 .....	25
Plot 32. Channel Separation, DH5, High 2479.5.....	25
Plot 33. Peak Power Output, DH1, power 9, Low Channel .....	27
Plot 34. Peak Power Output, DH1, power 9, Mid Channel .....	27

Plot 35. Peak Power Output, DH1, power 9. High Channel.....	27
Plot 36. Peak Power Output, DH3, power 7, Low Channel .....	28
Plot 37. Peak Power Output, DH3, power 7, Mid Channel .....	28
Plot 38. Peak Power Output, DH3, power 7, High Channel.....	28
Plot 39. Peak Power Output, DH5, power 7, Low Channel .....	29
Plot 40. Peak Power Output, DH5, power 7, Mid Channel .....	29
Plot 41. Peak Power Output, DH5, power 7, High Channel.....	29
Plot 42. Radiated Emissions, BT DH1 low .....	33
Plot 43. Radiated Emissions, BT DH1 mid .....	33
Plot 44. Radiated Emissions, BT DH1 high .....	33
Plot 45. Radiated Emissions, BT DH3 low .....	34
Plot 46. Radiated Emissions, BT DH3 mid .....	34
Plot 47. Radiated Emissions, BT DH3 high .....	34
Plot 48. Radiated Emissions, BT DH5 low .....	35
Plot 49. Radiated Emissions, BT DH5 mid .....	35
Plot 50. Radiated Emissions, BT DH5 high .....	35
Plot 51. Radiated Emissions, DH1, power 9, high average.....	36
Plot 52. Radiated Emissions, DH1, power 9, high peak.....	36
Plot 53. Radiated Emissions, DH1, power 9, low average.....	37
Plot 54. Radiated Emissions, DH1, power 9, low peak.....	37
Plot 55. Radiated Emissions, DH1, power 9, mid average.....	38
Plot 56. Radiated Emissions, DH1, power 9, mid peak.....	38
Plot 57. Radiated Emissions, DH3, power 7, high average.....	39
Plot 58. Radiated Emissions, DH3, power 7, high peak.....	39
Plot 59. Radiated Emissions, DH3, power 7, low average.....	40
Plot 60. Radiated Emissions, DH3, power 7, low peak.....	40
Plot 61. Radiated Emissions, DH3, power 7, mid average.....	41
Plot 62. Radiated Emissions, DH3, power 7, mid peak.....	41
Plot 63. Radiated Emissions, DH5, power, high average.....	42
Plot 64. Radiated Emissions, DH5, power 7, high peak.....	42
Plot 65. Radiated Emissions, DH5, power 7, low average.....	43
Plot 66. Radiated Emissions, DH5, power 7, low peak.....	43
Plot 67. Radiated Emissions, DH5, power 7, mid average.....	44
Plot 68. Radiated Emissions, DH5, power 7, mid peak.....	44
Plot 69. Radiated Emissions, BT band edge DH1 high 9 avg .....	45
Plot 70. Radiated Emissions, BT band edge DH1 high 9 peak .....	45
Plot 71. Radiated Emissions, BT band edge DH1 low 9 avg .....	46
Plot 72. Radiated Emissions, BT band edge DH1 low 9 avg zoom .....	46
Plot 73. Radiated Emissions, BT band edge DH1 low 9 peak.....	46
Plot 74. Radiated Emissions, BT band edge DH3 high 7 avg .....	47
Plot 75. Radiated Emissions, BT band edge DH3 high 9 peak .....	47
Plot 76. Radiated Emissions, BT band edge DH3 low 7 avg .....	47
Plot 77. Radiated Emissions, BT band edge DH3 low 7 avg zoom .....	48
Plot 78. Radiated Emissions, BT band edge DH3 low 9 peak.....	48
Plot 79. Radiated Emissions, BT band edge DH5 high 7 avg .....	48
Plot 80. Radiated Emissions, BT band edge DH5 high 9 peak .....	49
Plot 81. Radiated Emissions, BT band edge DH5 low 7 avg .....	49
Plot 82. Radiated Emissions, BT band edge DH5 low 7 avg zoom .....	49
Plot 83. Radiated Emissions, BT band edge DH5 low 9 peak.....	50
Plot 84. Spurious RF Conducted Emissions, DH1 low .....	53
Plot 85. Spurious RF Conducted Emissions, DH1 mid .....	53
Plot 86. Spurious RF Conducted Emissions, DH1 high .....	53
Plot 87. Spurious RF Conducted Emissions, DH3 low .....	54

Plot 88. Spurious RF Conducted Emissions, DH3 mid .....	54
Plot 89. Spurious RF Conducted Emissions, DH3 high .....	54
Plot 90. Spurious RF Conducted Emissions, DH5 low .....	55
Plot 91. Spurious RF Conducted Emissions, DH5 mid .....	55
Plot 92. Spurious RF Conducted Emissions, DH5 high .....	55
Plot 93. Spurious RF Conducted Emissions, DH1 high, band edge .....	56
Plot 94. Spurious RF Conducted Emissions, DH1 high, band edge hopping .....	56
Plot 95. Spurious RF Conducted Emissions, DH1 low, band edge .....	56
Plot 96. Spurious RF Conducted Emissions, DH1 low, band edge hopping .....	57
Plot 97. Spurious RF Conducted Emissions, DH3 high, band edge .....	57
Plot 98. Spurious RF Conducted Emissions, DH3 high, band edge hopping .....	57
Plot 99. Spurious RF Conducted Emissions, DH3 low, band edge .....	58
Plot 100. Spurious RF Conducted Emissions, DH3 low, band edge hopping .....	58
Plot 101. Spurious RF Conducted Emissions, DH5 high, band edge .....	58
Plot 102. Spurious RF Conducted Emissions, DH5 high, band edge hopping .....	59
Plot 103. Spurious RF Conducted Emissions, DH5 low, band edge .....	59
Plot 104. Spurious RF Conducted Emissions, DH5 low, band edge hopping .....	59

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Block Diagram, Occupied Bandwidth Test Setup.....	12
Figure 3. Peak Power Output Test Setup.....	26
Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup.....	52
Figure 5. Declaration Statement for FHSS .....	60

## List of Photographs

Photograph 1. Radiated Emissions, below 1G, Setup .....	51
Photograph 2. Radiated Emissions, above 1 GHz, Setup .....	51

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts <b>per meter</b>
<b>VCP</b>	Vertical Coupling Plane

## I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Klashwerks Raven, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the Raven. Klashwerks should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the Raven, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Klashwerks, purchase order number 155. All tests were conducted using measurement procedure ANSI C63.4-2014.

<b>FCC Reference 47 CFR Part 15.247:2005</b>	<b>Description</b>	<b>Compliance</b>
Title 47 of the CFR, Part 15 §15.203	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	Conducted Emission Limits	Not Applicable
Title 47 of the CFR, Part 15 §15.247(a)(1)	20 dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	Average Time of Occupancy (Dwell Time)	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	Number of RF Channels	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(1)	RF Channel Separation	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	Radiated Spurious Emissions	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	Spurious Conducted Emissions	Compliant
Title 47 of the CFR, Part 15 §15.247(g) & (h)	Declaration Statements for FHSS	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	Maximum Permissible Exposure (MPE)	Compliant

**Table 1. Executive Summary of EMC Part 15.247 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Klashwerks to perform testing on the Raven, under Klashwerks's purchase order number 155.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Klashwerks, Raven.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	Raven
<b>Model(s) Covered:</b>	Raven
<b>EUT Specifications:</b>	Primary Power: 12-15 VDC Nominal
	FCC ID: 2AN9Y-RVN0A0
	Type of Modulations: GFSK
	Equipment Code: DSS
	Peak RF Output Power: 7.902 dBm
	EUT Frequency Ranges: 2400-2500 MHz
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
<b>Evaluated by:</b>	Bradley Jones
<b>Report Date(s):</b>	January 18, 2018

**Table 2. EUT Summary Table**

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>ANSI C63.4:2014</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2013</b>	American National Standard for Testing Unlicensed Wireless Devices
<b>KDB 447498 D01</b>	General RF Exposure Guidance v05r01

**Table 3. References**

## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

MET Laboratories is a ISO/IEC 17025 accredited site by A2LA. Baltimore #0591.01

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

#### D. Description of Test Sample

The Klashwerks Raven, Equipment Under Test (EUT), is an Automotive connected aftermarket device that provides security monitoring via video and sensors. It is installed by the end user inside the cabin of the automobile, either on the dashboard or on the windscreens.

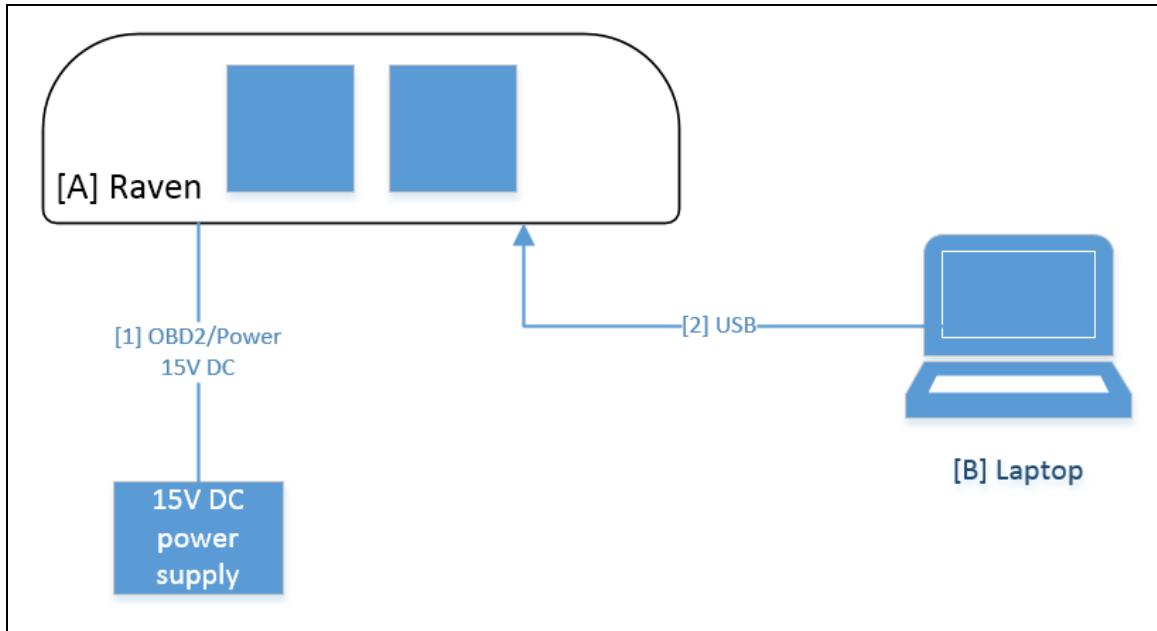


Figure 1. Block Diagram of Test Configuration

## E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Revision
A	N/A	Raven	N/A	N/A	KLA25170174
	N/A	Raven	N/A	N/A	KLA25170178

**Table 4. Equipment Configuration**

## F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	Laptop	Lenovo	T430	N/A

The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	OBD2/Power	Custom OBD2 power cable	1	2		No	
2	USB	MicroUSB cable	1	2		No	

**Table 6. Ports and Cabling Information**

## H. Mode of Operation

For FCC radio testing Raven is put into Qualcomm Factory Test Mode to be able to use make use of the Qualcomm Radio Control Toolkit (QRCT) to control WIFI / BT radio parameters such as band, bandwidth, level, etc.

## I. Method of Monitoring EUT Operation

Consistent with the Mode of Operation section above, there needs to be a means of continuously monitoring the operation of the EUT.

1. The LCD display should be displaying the Android penguin logo split on the 2 displays. There should also be a green LED blinking within the enclosure viewed from the bottom. We will also send another document to control Raven in test mode.
2. If the LCD display is off and no green LED(s) are on, the unit is OFF. If there is no LCD but green LED(s) on or blinking then there is an issue with the Snapdragon processor. Please contact Klashwerks.

## J. Modifications

### a) Modifications to EUT

No modifications were made to the EUT.

### b) Modifications to Test Standard

No modifications were made to the test standard.

## K. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Klashwerks upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested is compliant the criteria of §15.203.

**Test Engineer(s):** Bradley Jones

**Test Date(s):** September 6, 2017

Gain	Type	Model	Manufacturer
2.14 dBi	FPC	Custom antenna ANT-0004-00-B0	Wistron Neweb Corporation

**Table 7. Antenna List**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):** **§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Sigma$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 8. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-2014 'Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz'*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:**

The EUT was not applicable with this requirement. Device is exempt from 15.207 Conducted emissions because it is meant for usage in vehicles and does not require connection to power mains.

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1) 20 dB Occupied Bandwidth

**Test Requirements:** **§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:


For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. For DTS, the minimum 6 dB bandwidth shall be at least 500 kHz. For frequency hopping systems, the EUT shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**Test Procedure:** The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth. The 20 dB bandwidth was measured and recorded.

**Test Results** The EUT was compliant with § 15.247 (a)(2).

**Test Engineer(s):** Bradley Jones

**Test Date(s):** September 11, 2017

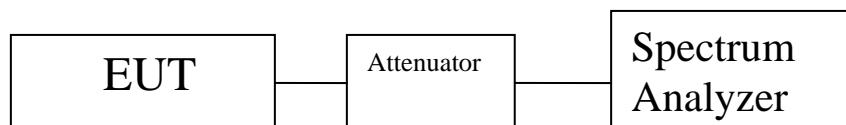

**Figure 2. Block Diagram, Occupied Bandwidth Test Setup**


## 20 dB Occupied Bandwidth Test Results, DH1, Power 9



**Plot 1. 20 dB Occupied Bandwidth, DH1, power 9, Low**




**Plot 2. 20 dB Occupied Bandwidth, DH1, power 9, Mid**

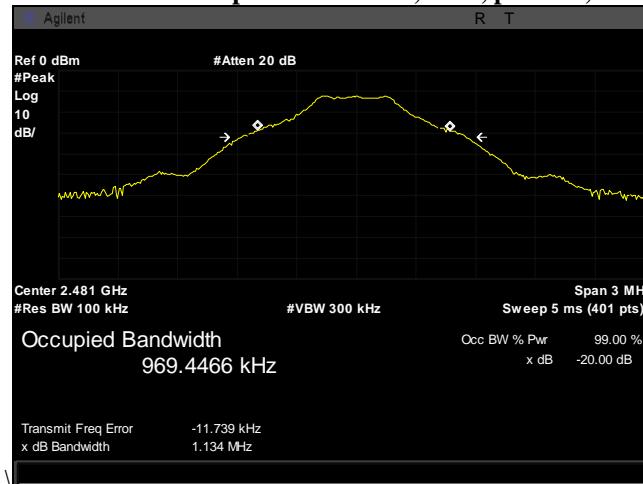

**Plot 3. 20 dB Occupied Bandwidth, DH1, power 9, High**


## 20 dB Occupied Bandwidth Test Results, DH3, Power 7

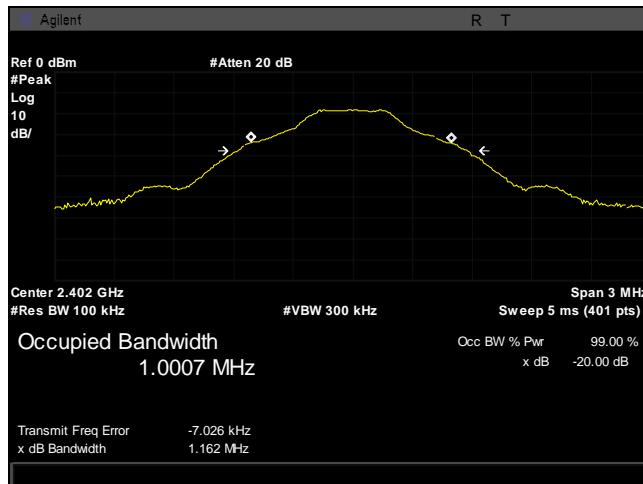

**Plot 4. 20 dB Occupied Bandwidth, DH3, power 7, Low**



**Plot 5. 20 dB Occupied Bandwidth, DH3, power 7, Mid**

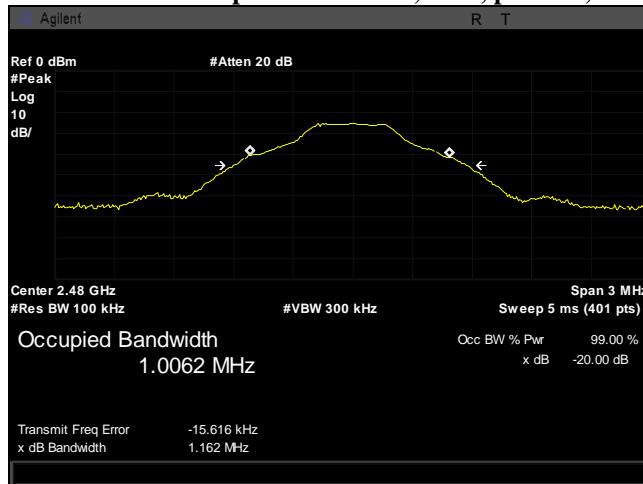

**Plot 6. 20 dB Occupied Bandwidth, DH3, power7, High**


## 20 dB Occupied Bandwidth Test Results, DH5, Power 7



**Plot 7. 20 dB Occupied Bandwidth, DH5, power 7, Low**



**Plot 8. 20 dB Occupied Bandwidth, DH5, power 7, Mid**

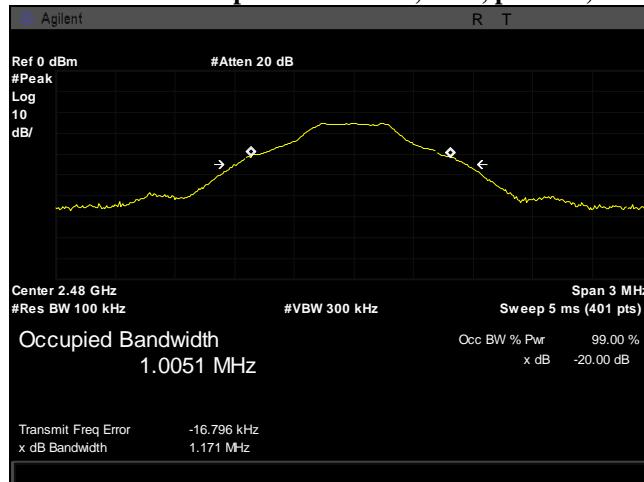

**Plot 9. 20 dB Occupied Bandwidth, DH5, power 7, High**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1)      Average Time of Occupancy (Dwell Time)

**Remarks:** The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period.

Total hopping channels is 79. The EUT meets the specifications of Section 15.247(a) (1) (iii) for Number of Hopping Channels.


	frequency range	no of channels	hopping period	no of burst per period	burst duration	dwell time	limit	margin
DH1	2400-2483.5	79	31.6	208.56	0.0004	0.083424	0.4	-0.31658
DH3	2400-2483.5	79	31.6	119	0.0017	0.2023	0.4	-0.1977
DH5	2400-2483.5	79	31.6	81	0.0029	0.2349	0.4	-0.1651

**Table 9. Average Time of Occupancy**


## Dwell Time




Plot 10. Dwell Time, DH1 low 2402

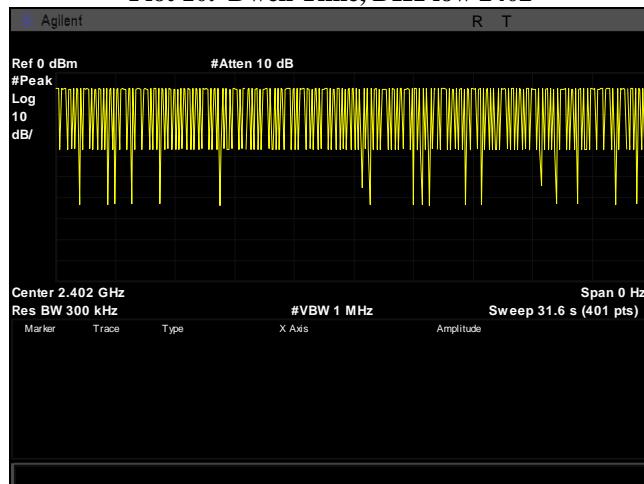


Plot 11. Dwell Time, DH1 low 2402, bursts

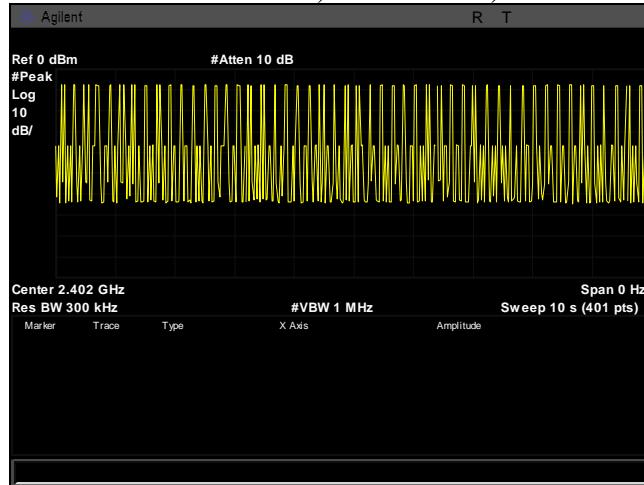

Plot 12. Dwell Time, DH1, low 2402 bursts, part 1

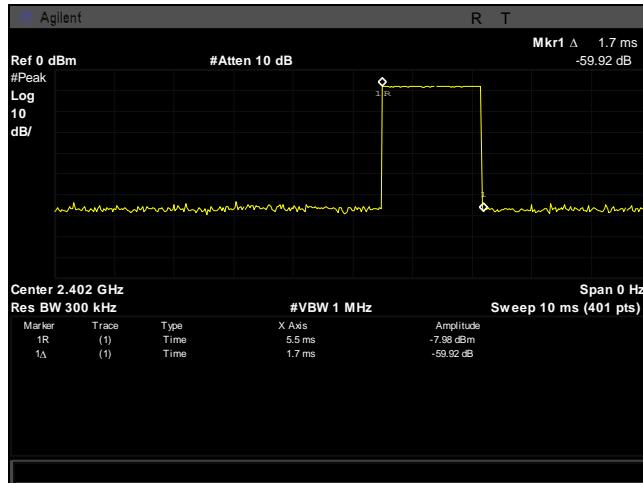


Plot 13. Dwell Time, DH3, low 2402

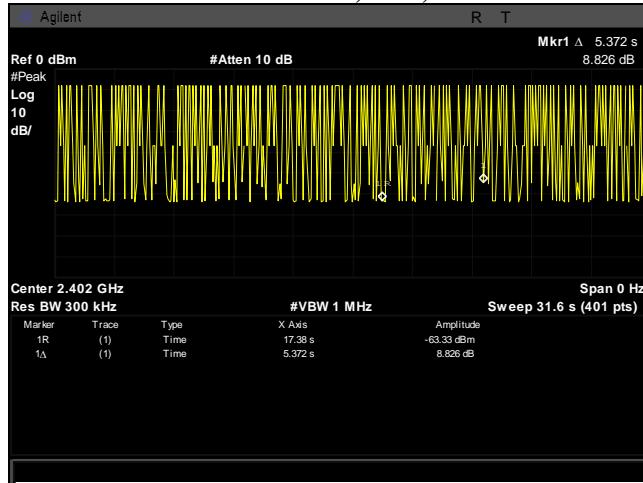

Plot 14. Dwell Time, DH3, low 2402 bursts



Plot 15. Dwell Time, DH5, low 2402

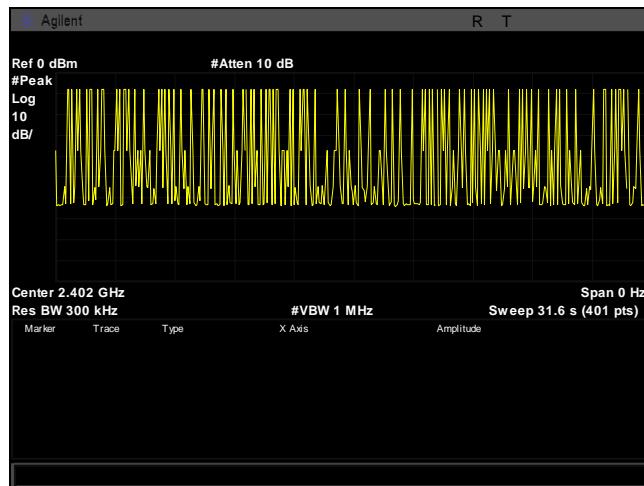


**Plot 16. Dwell Time, DH5, low 2402 bursts**


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(1)


### Number of RF Channels

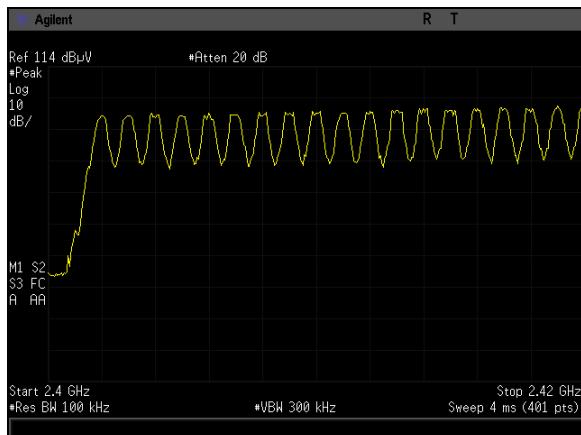


**Plot 17. Number of Channels, DH1, 2.4-2.42, 18.5**

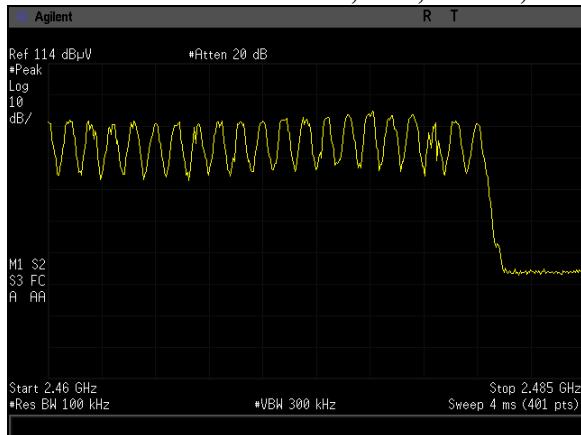


**Plot 18. Number of Channels, DH1, 2.46-2.485, 20.5**

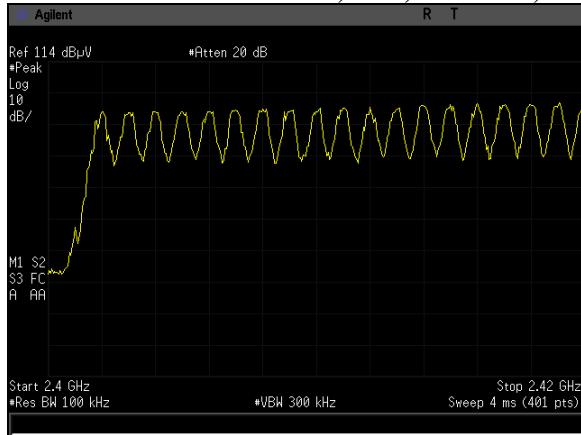


**Plot 19. Number of Channels, DH3, 2.4-2.42, 18.5**

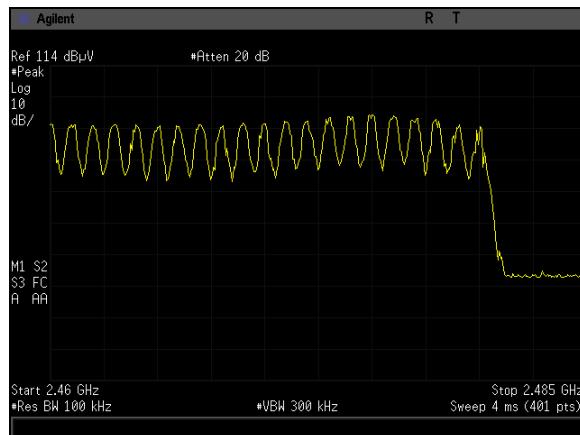

**Plot 20. Number of Channels, DH3, 2.46-2.485, 20.5**

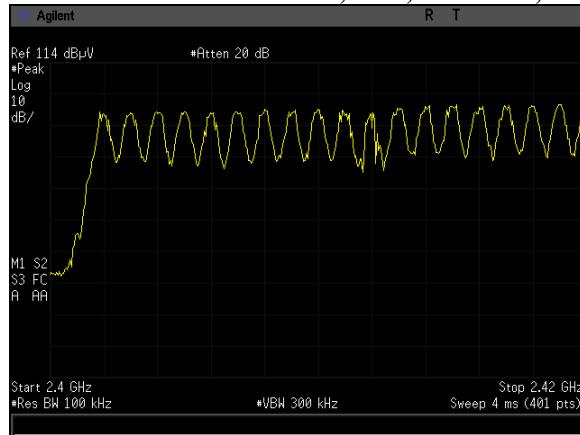

**Plot 21. Number of Channels, DH5, 2.4-2.42, 18.5**

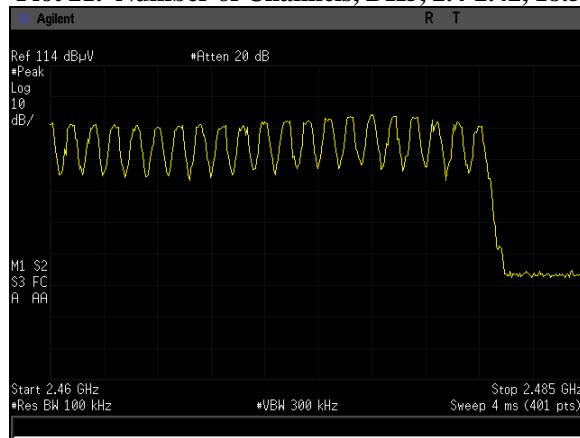

**Plot 22. Number of Channels, DH5, 2.46-2.485, 20.5**

## Electromagnetic Compatibility Criteria for Intentional Radiators


### § 15.247(a)(1) RF Channel Separation

**Requirement:** Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


**Remarks:** EUT operates below 125mW (20dBm). Channels are separated by more than two thirds of the -20dB Bandwidth. Lowest Occupied Bandwidth is 1.134 MHz. Highest Occupied Bandwidth is 1.171 MHz

$$\text{EDR} - \frac{2}{3} * 1.134 \text{ MHz (20dB Bandwidth)} = 756 \text{ kHz Minimum Separation Distance}$$


$$\text{EDR} - \frac{2}{3} * 1.171 \text{ MHz (20dB Bandwidth)} = 781 \text{ kHz Minimum Separation Distance}$$

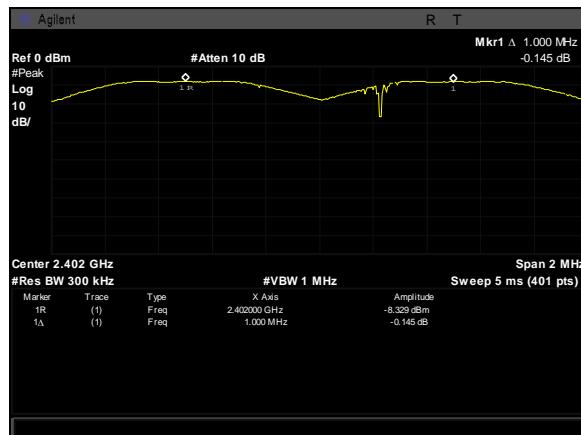


Plot 23. Channel Separation, DH1, Low 2402

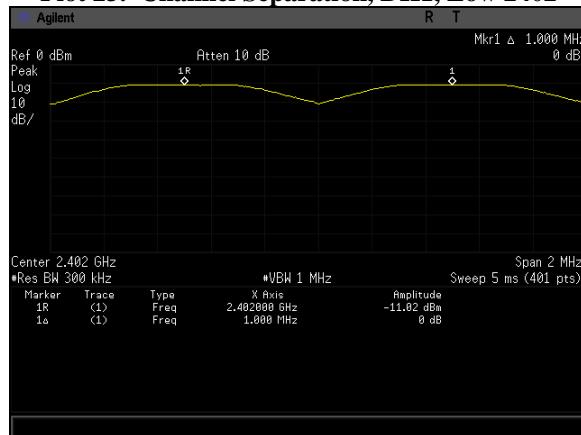


Plot 24. Channel Separation, DH1, Low2402

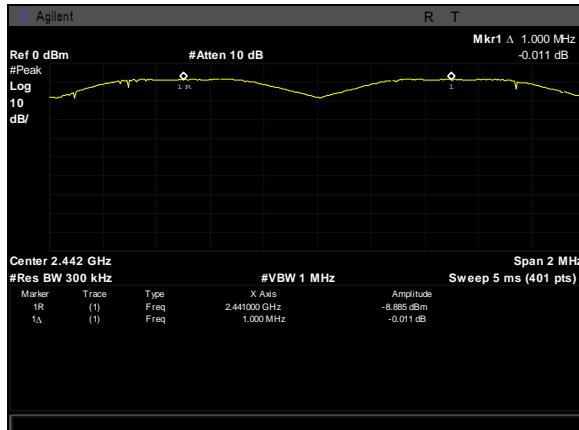


**Plot 25. Channel Separation, DH1, Mid 2442**

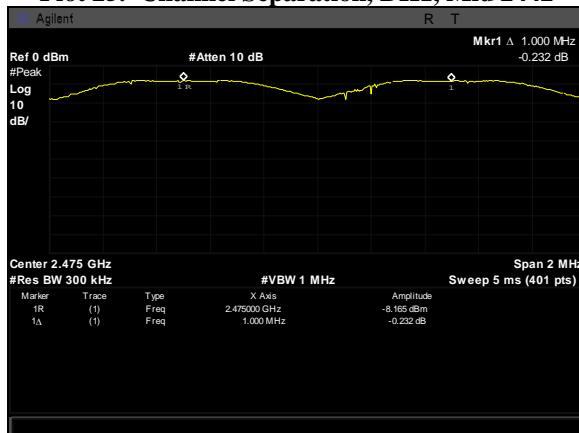


**Plot 26. Channel Separation, DH1, High 2475.5**

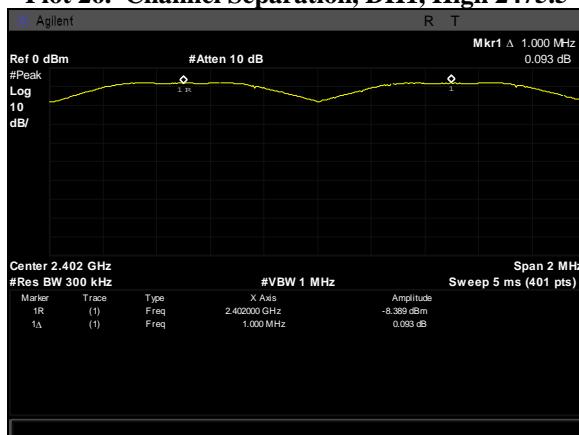


**Plot 27. Channel Separation, DH3, Low 2402**

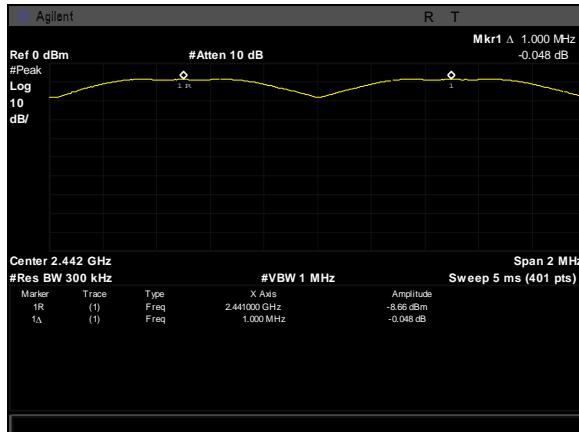


**Plot 28. Channel Separation, DH3, Mid 2442**

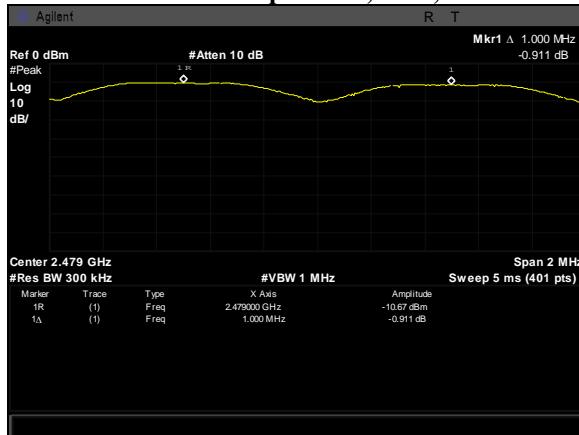


**Plot 29. Channel Separation, DH3, High 2479.5**

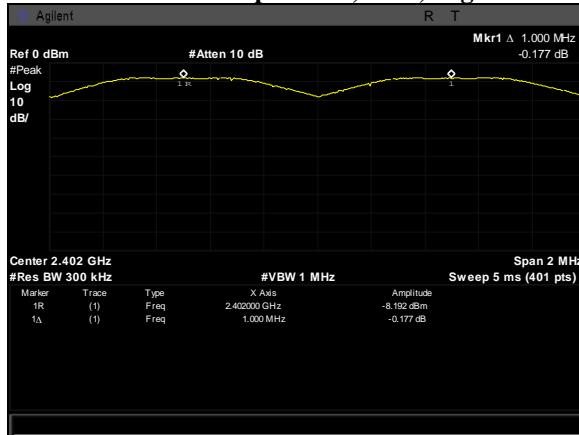

**Plot 30. Channel Separation, DH5, Low 2402**

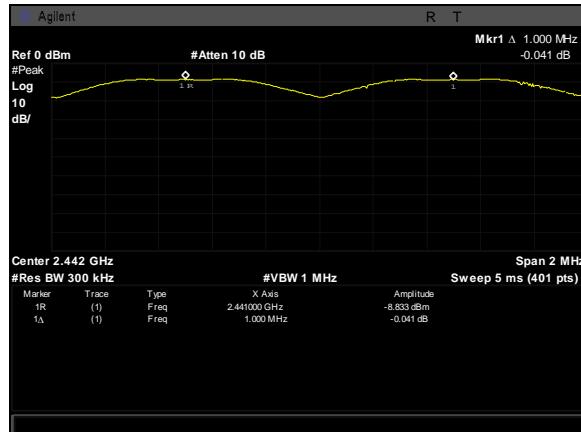

**Plot 31. Channel Separation, DH5, Mid 2442**

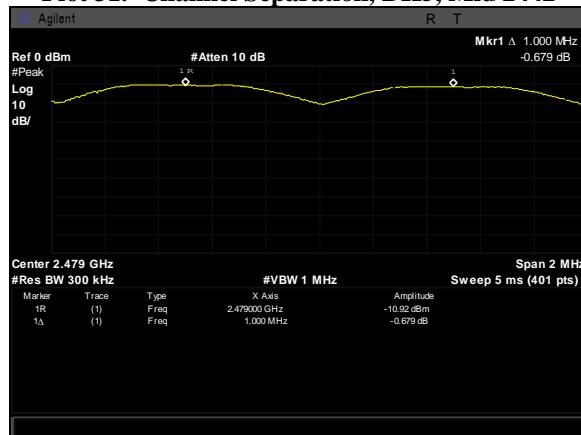

**Plot 32. Channel Separation, DH5, High 2479.5**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** **§15.247(b)(1):** For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraph (b)(1), as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.


Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**Test Procedure:** The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

**Test Results:** The EUT was compliant with the Peak Power Output limits of **§15.247(b)**.


**Test Engineer(s):** Bradley Jones

**Test Date(s):** September 11, 2017

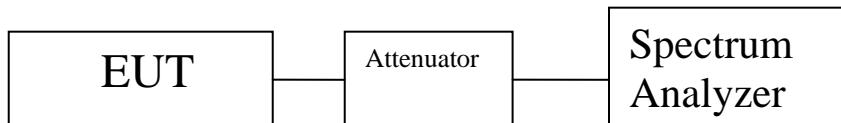


**Figure 3. Peak Power Output Test Setup**


## Peak Power Output Test Results

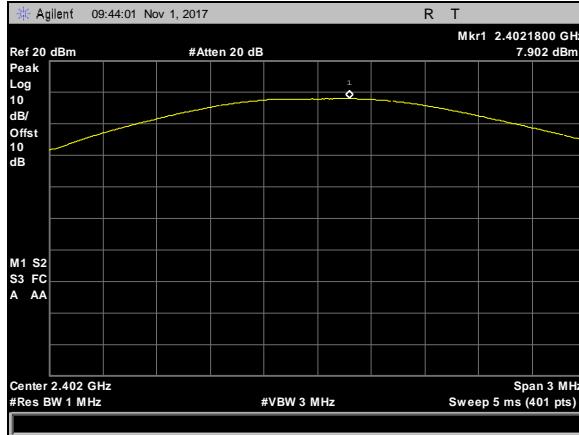


Plot 33. Peak Power Output, DH1, power 9, Low Channel

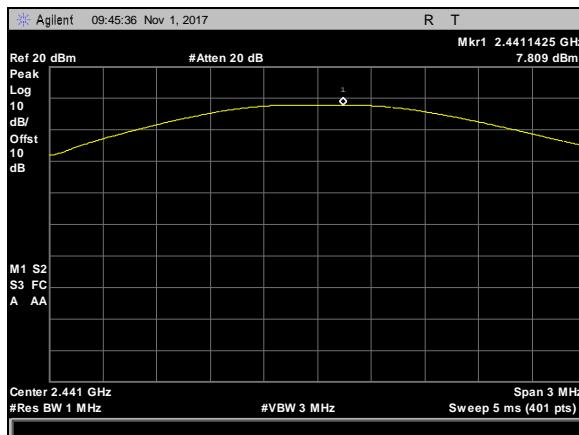


Plot 34. Peak Power Output, DH1, power 9, Mid Channel

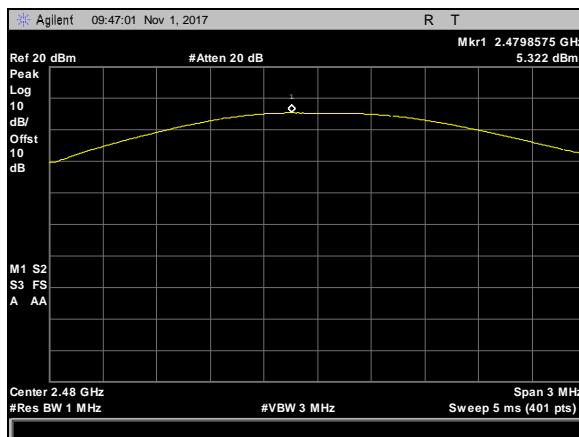


Plot 35. Peak Power Output, DH1, power 9. High Channel

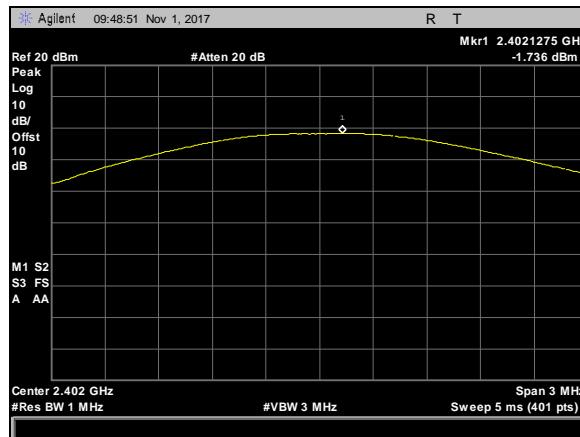


Plot 36. Peak Power Output, DH3, power 7, Low Channel

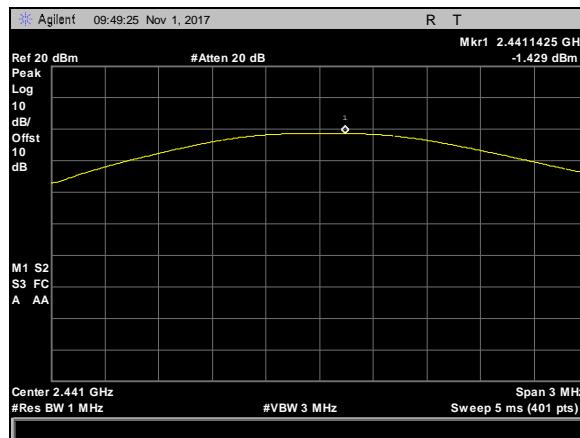


Plot 37. Peak Power Output, DH3, power 7, Mid Channel

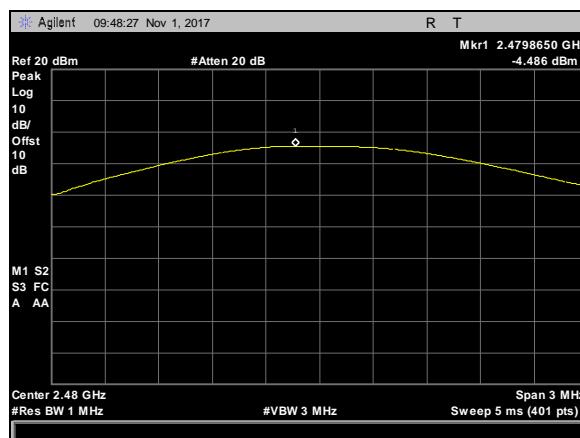


Plot 38. Peak Power Output, DH3, power 7, High Channel

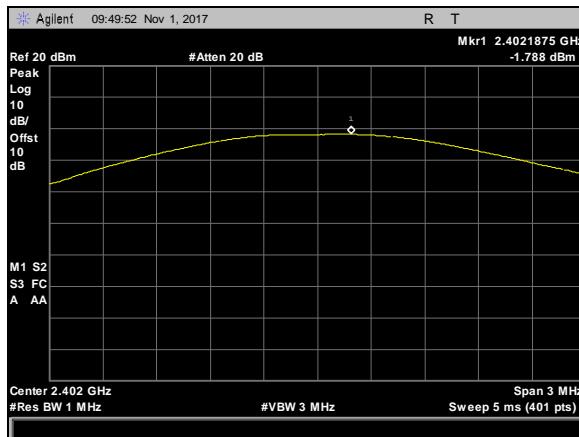

Plot 39. Peak Power Output, DH5, power 7, Low Channel

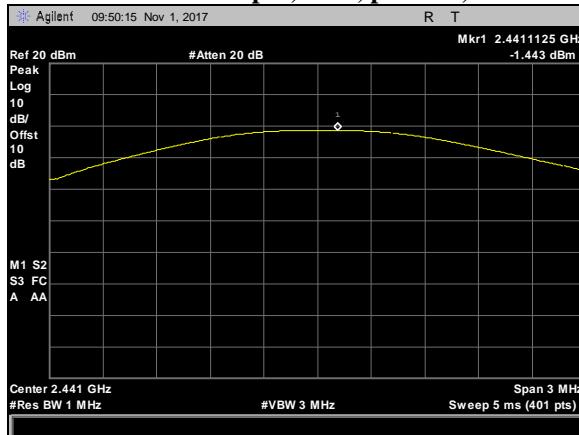

Plot 40. Peak Power Output, DH5, power 7, Mid Channel

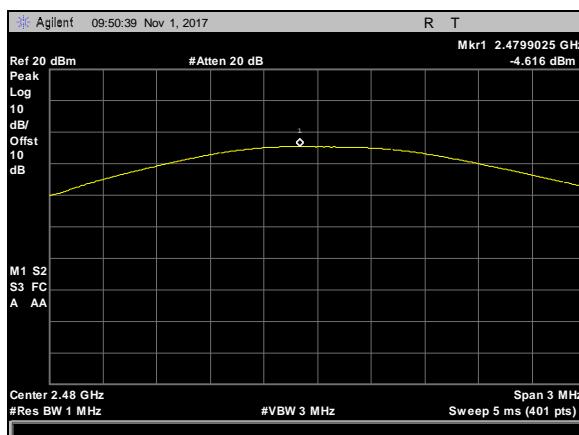

Plot 41. Peak Power Output, DH5, power 7, High Channel

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** **§15.247(d); §15.205:** Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 10. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** **§ 15.209 (a):** Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 11.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB $\mu$ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 11. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:**

The transmitter was set to the mid channel at the highest output power and placed on a 0.8 m high wooden table inside in a semi-anechoic chamber. Measurements were performed with the EUT rotated 360 degrees and varying the adjustable antenna mast with 1 m to 4 m height to determine worst case orientation for maximum emissions. Measurement were repeated the measurement at the low and highest channels.

For frequencies from 30 MHz to 1 GHz, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35(b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

EUT Field Strength Final Amplitude = Raw Amplitude – Preamp gain + Antenna Factor + Cable Loss – Distance Correction Factor

Note: Testing distance for Radiated Spurious above 1 GHz was 1 m. A correction factor was used to account for the difference in distance from the test procedure.

Only noise floor was observed above 18 GHz and so radiated plots above 1 GHz only show the range 1-18 GHz.

**Test Results:** The EUT was compliant with the Radiated Spurious Emission limits of **§15.247(d)**.

**Test Engineer(s):** Bradley Jones


**Test Date(s):** September 11, 2017

## Radiated Spurious Emissions Test Results


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected EMI Meter Reading (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
303.98722	0	H	1	16.8	14.48	2.51	0	33.79	46	-12.21
303.98722	45	V	1	11.59	14.48	2.51	0	28.58	46	-17.42
745.27571	240	H	1.0208	10.8	21.21	4.05	0	36.06	46	-9.94
745.27571	243	V	1	7.54	21.21	4.05	0	32.80	46	-13.20

Table 12. Radiated Emissions, Below 1 GHz Test Results


## Radiated Spurious Emissions Test Results

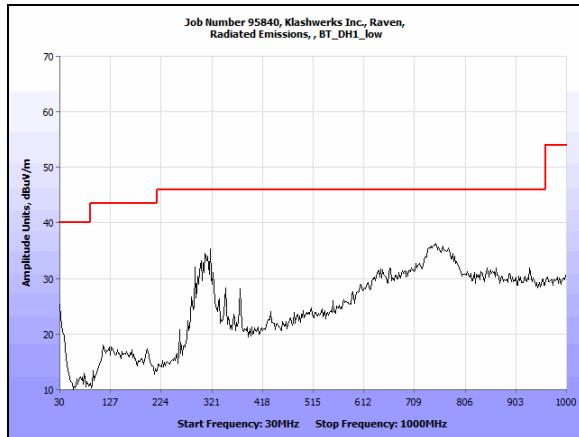


**Plot 42. Radiated Emissions, BT DH1 low**

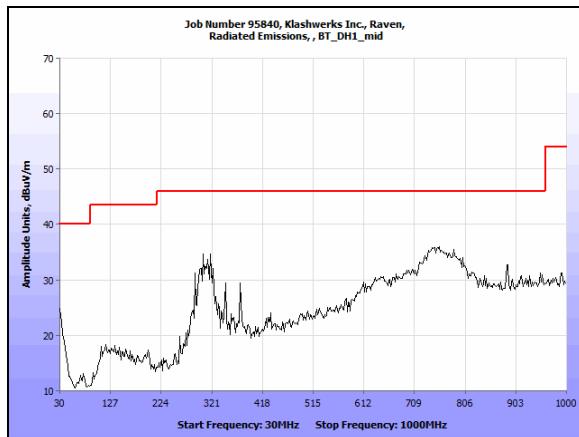


**Plot 43. Radiated Emissions, BT DH1 mid**

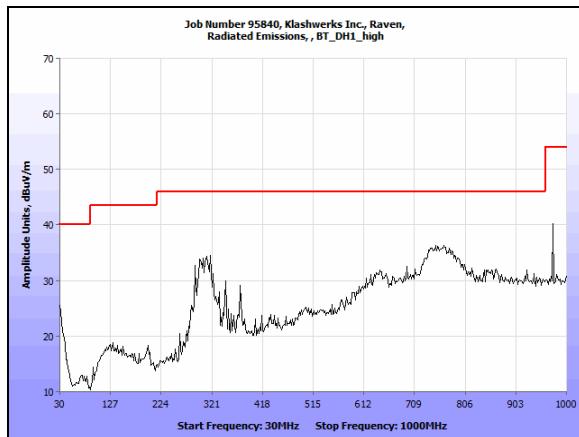


**Plot 44. Radiated Emissions, BT DH1 high**

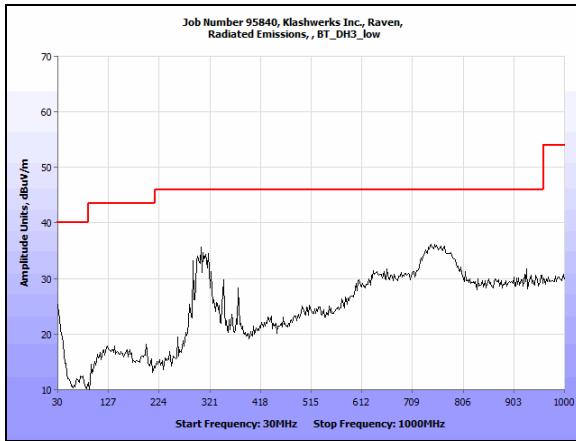


**Plot 45. Radiated Emissions, BT DH3 low**

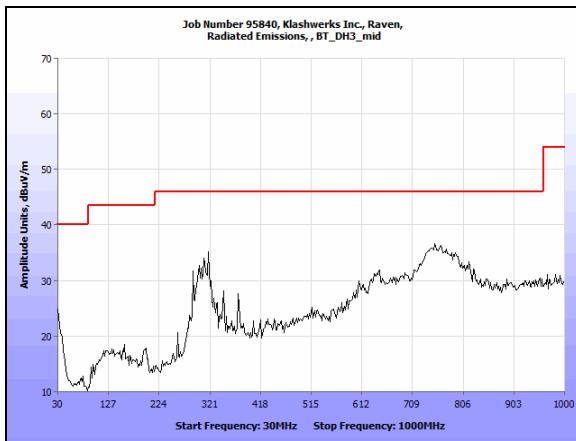


**Plot 46. Radiated Emissions, BT DH3 mid**

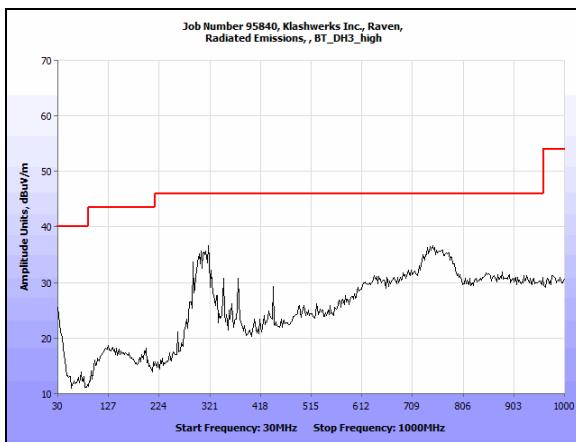


**Plot 47. Radiated Emissions, BT DH3 high**

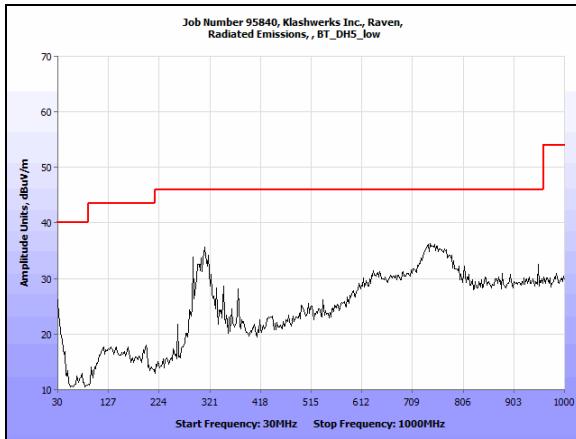


**Plot 48. Radiated Emissions, BT DH5 low**

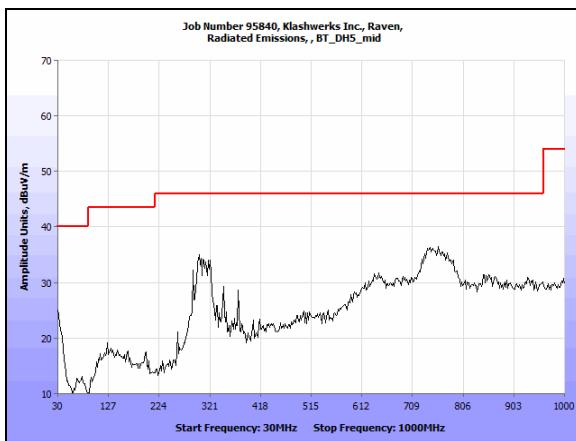


**Plot 49. Radiated Emissions, BT DH5 mid**

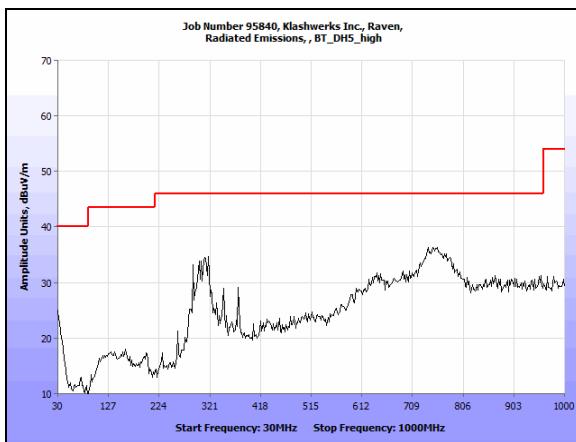


**Plot 50. Radiated Emissions, BT DH5 high**

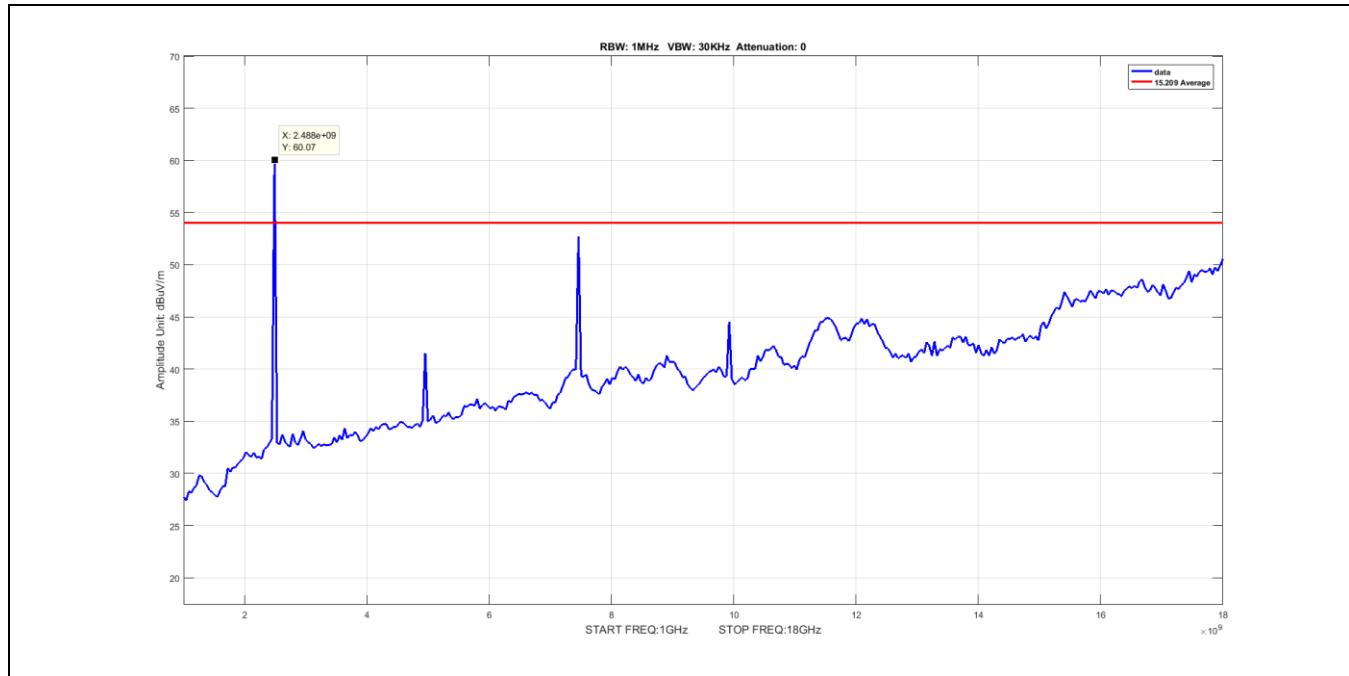


**Plot 51. Radiated Emissions, DH1, power 9, high average**

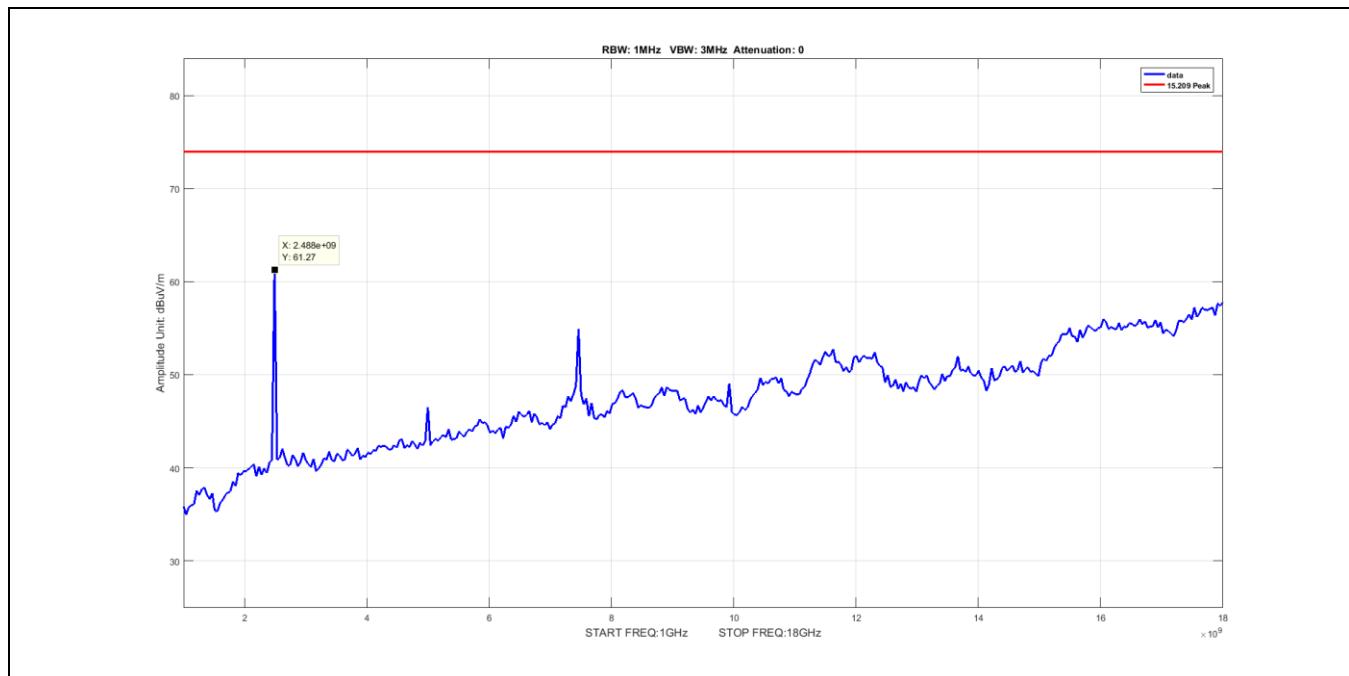


**Plot 52. Radiated Emissions, DH1, power 9, high peak**

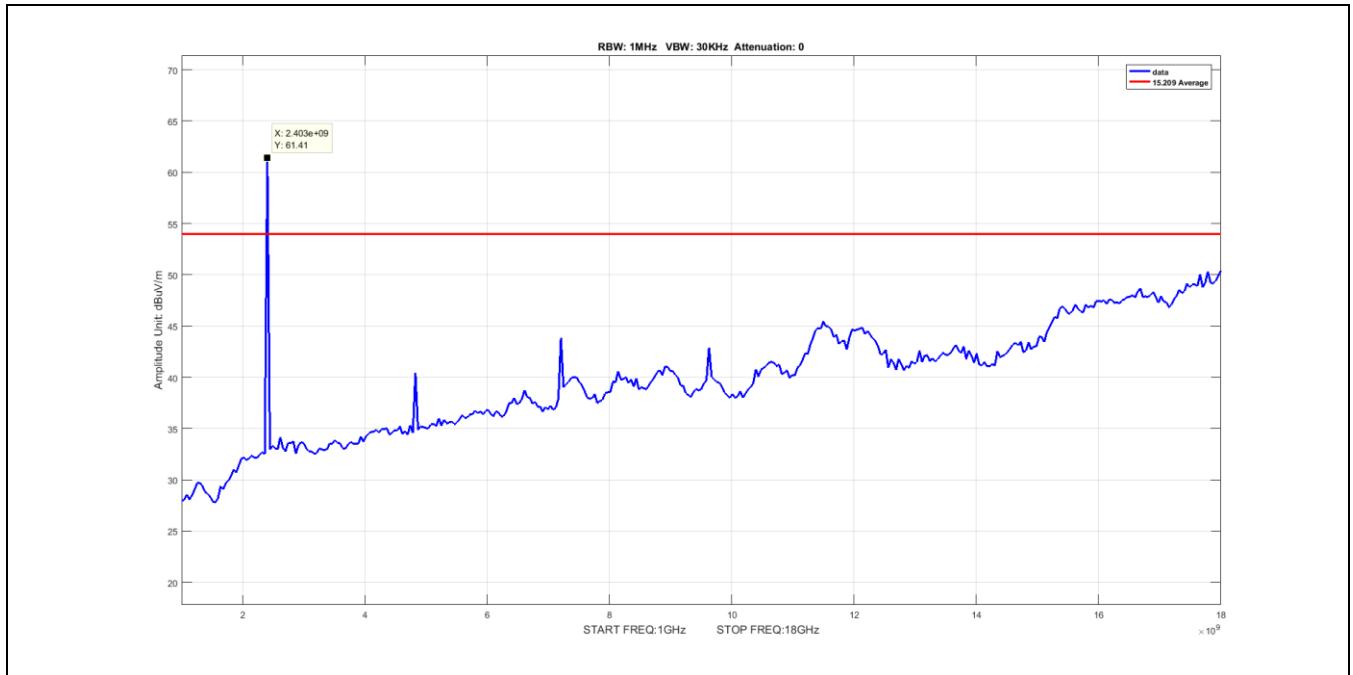


**Plot 53. Radiated Emissions, DH1, power 9, low average**

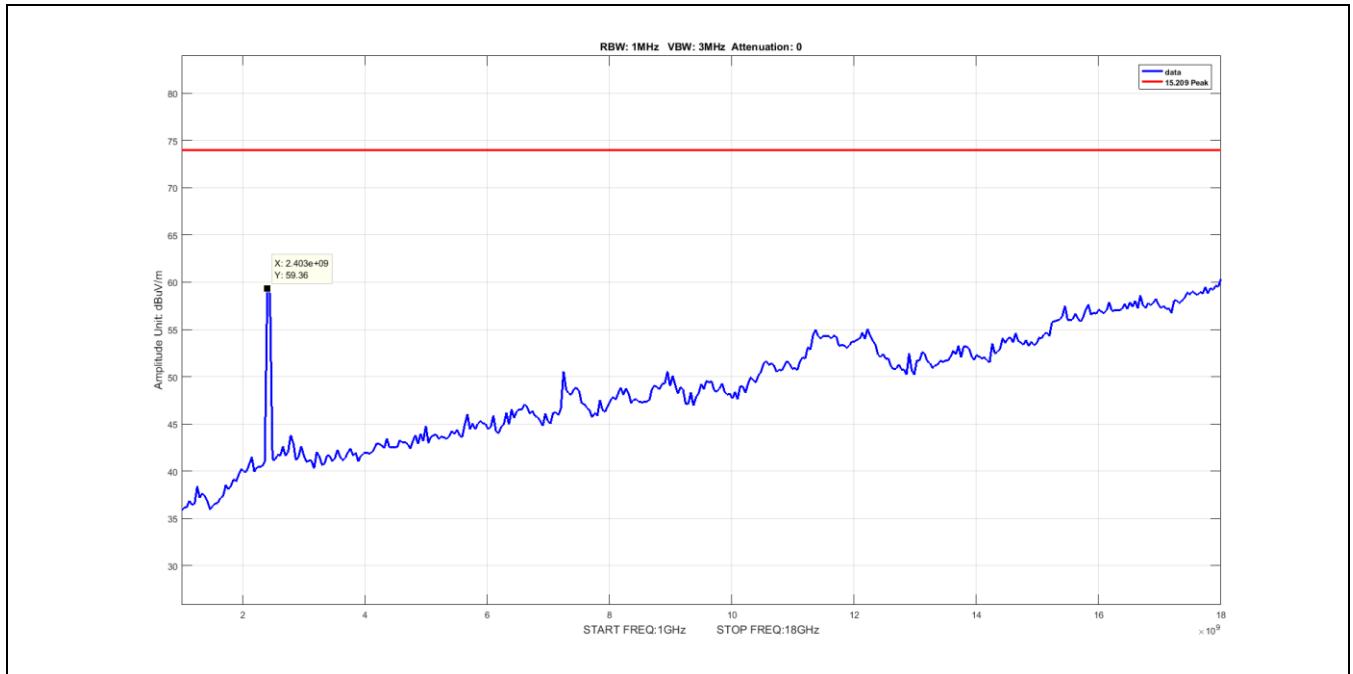


**Plot 54. Radiated Emissions, DH1, power 9, low peak**

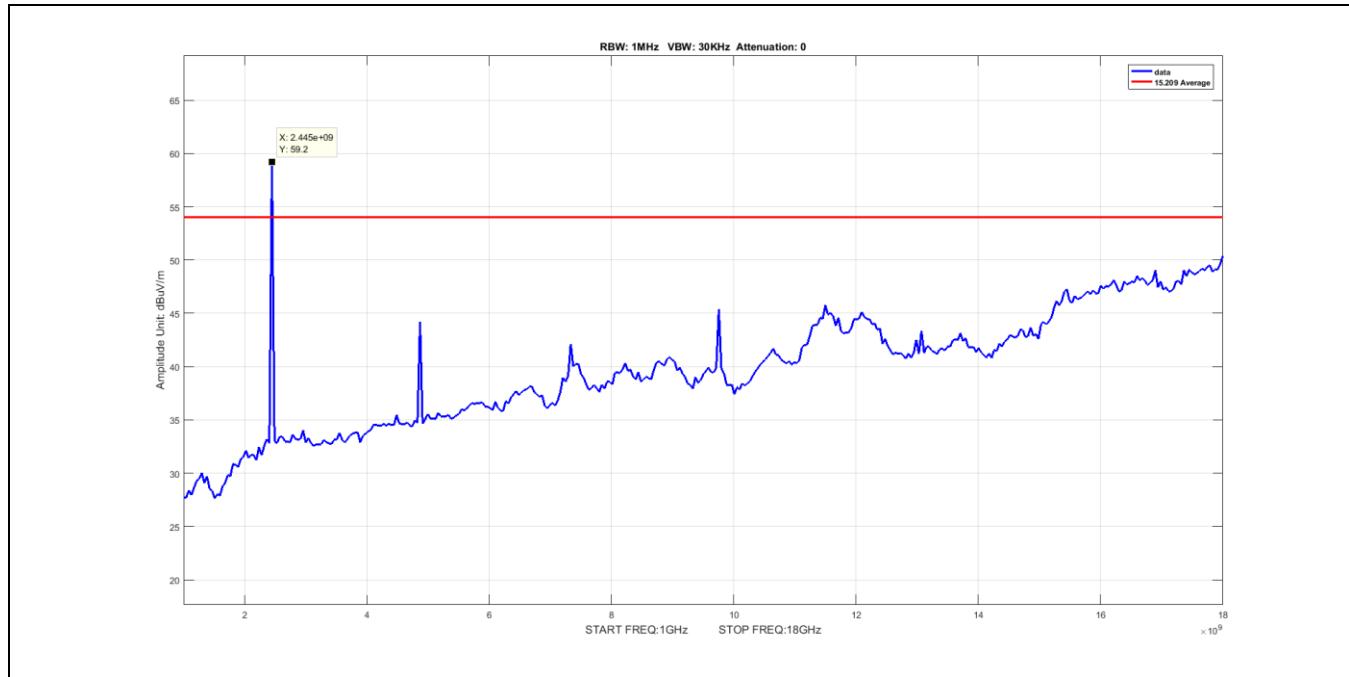


**Plot 55. Radiated Emissions, DH1, power 9, mid average**

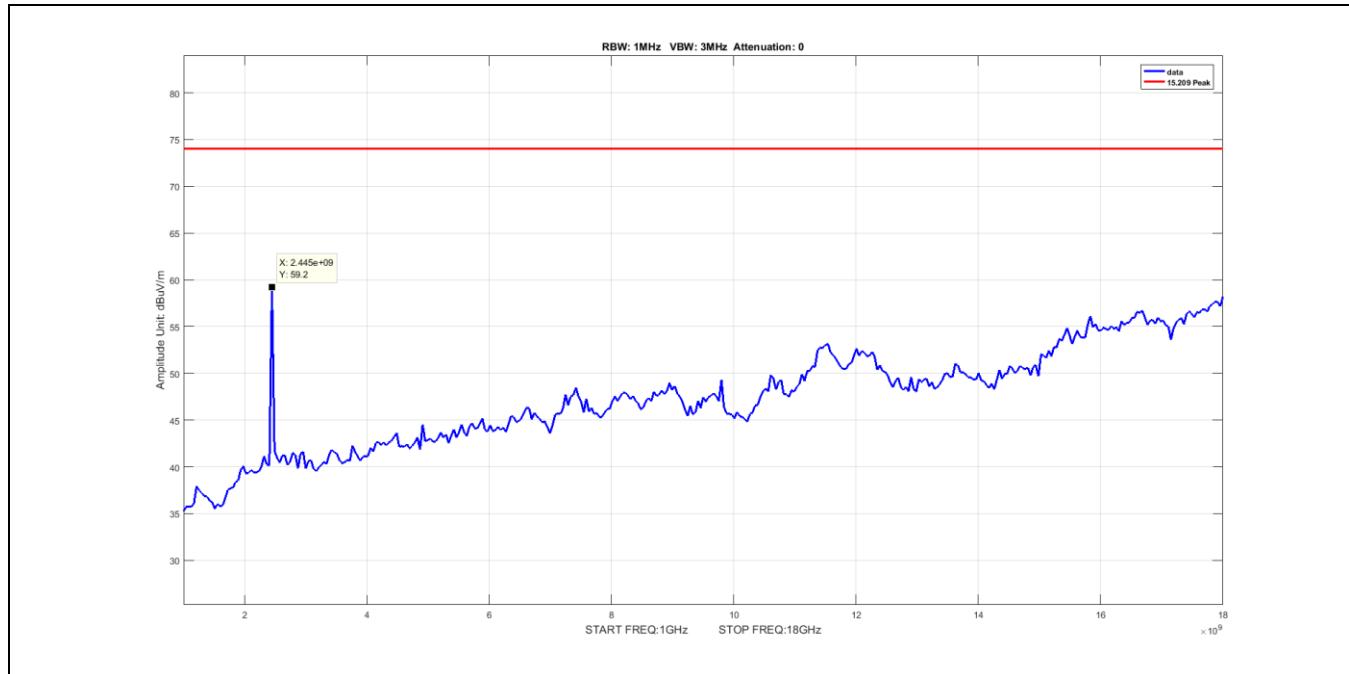


**Plot 56. Radiated Emissions, DH1, power 9, mid peak**

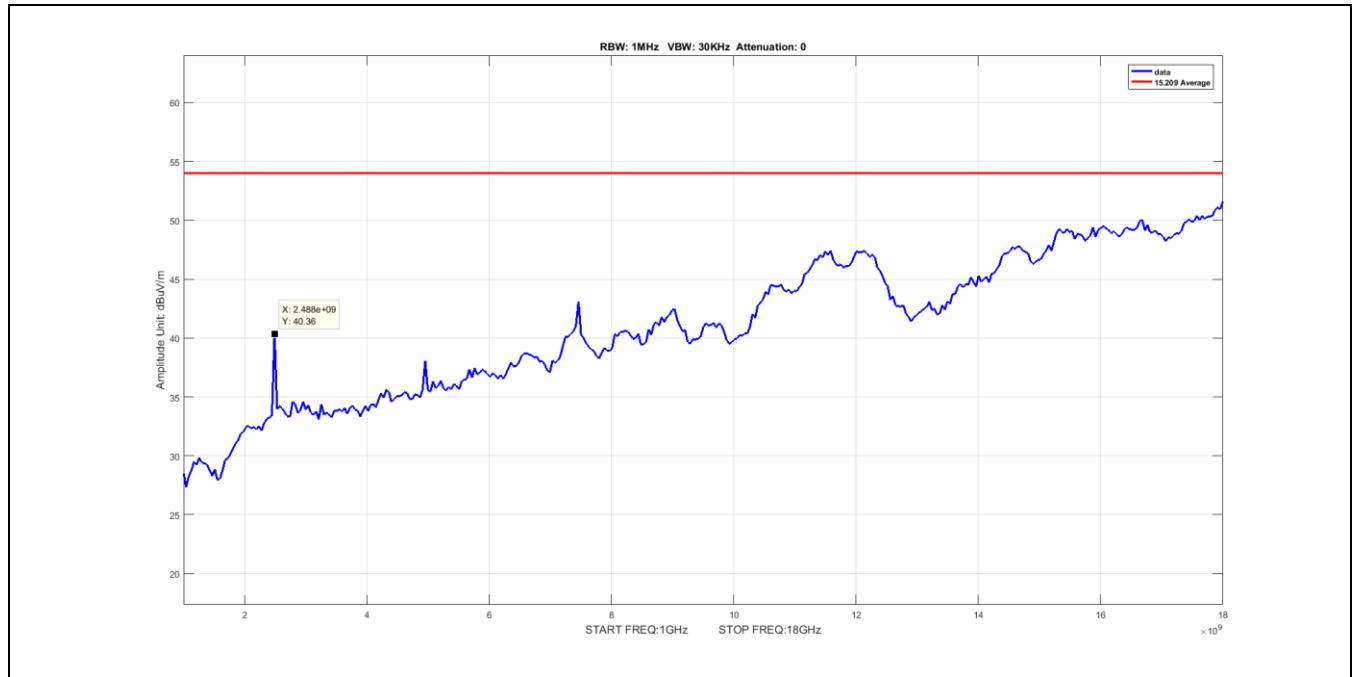


**Plot 57. Radiated Emissions, DH3, power 7, high average**

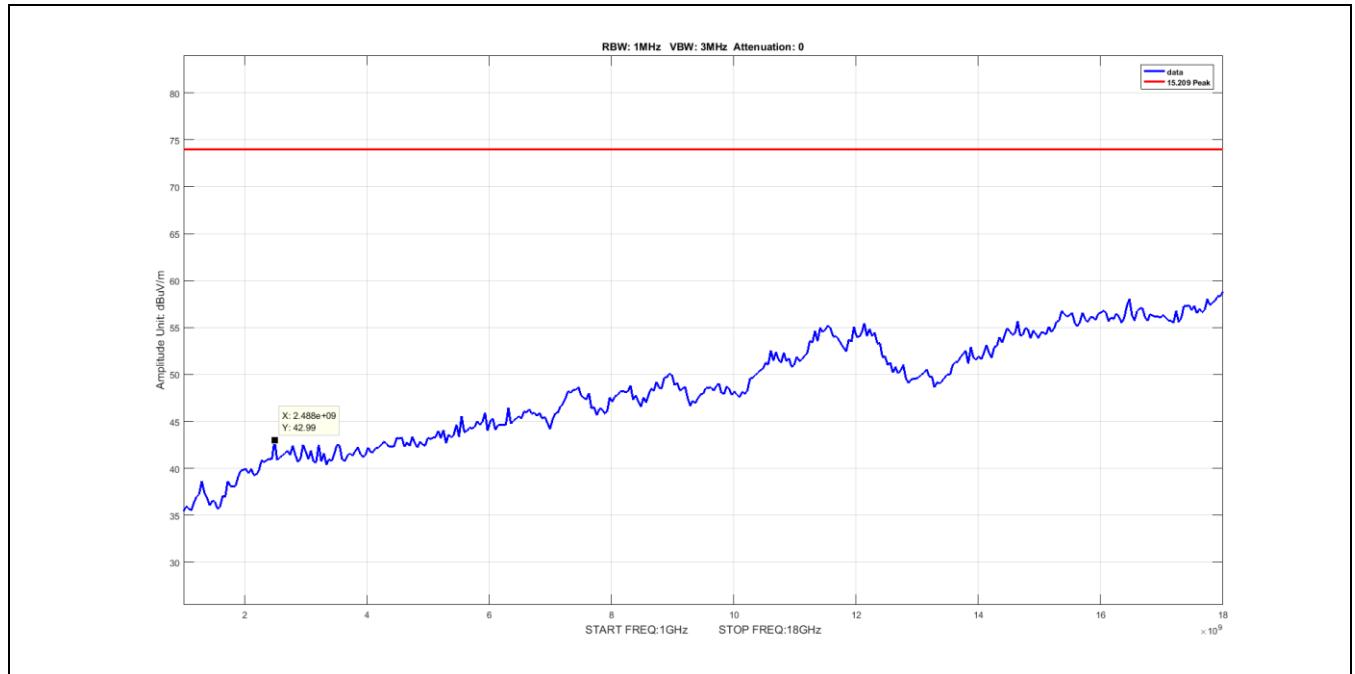


**Plot 58. Radiated Emissions, DH3, power 7, high peak**

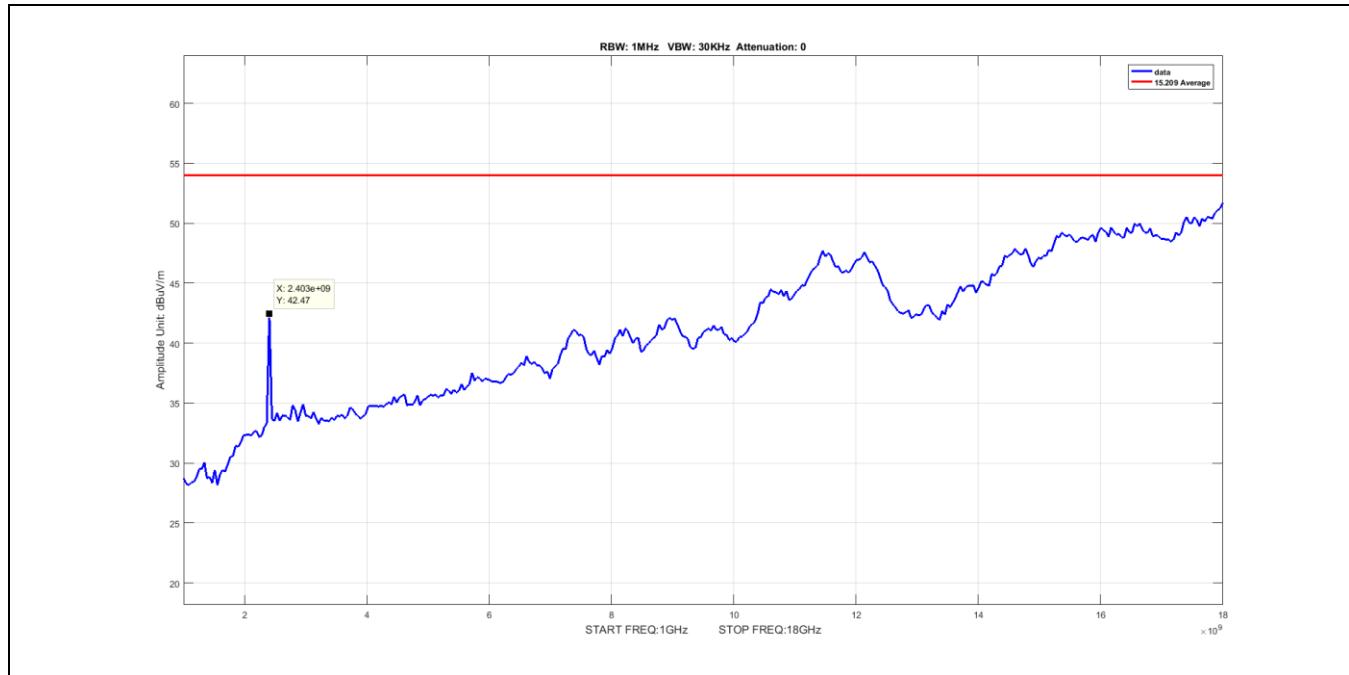


**Plot 59. Radiated Emissions, DH3, power 7, low average**

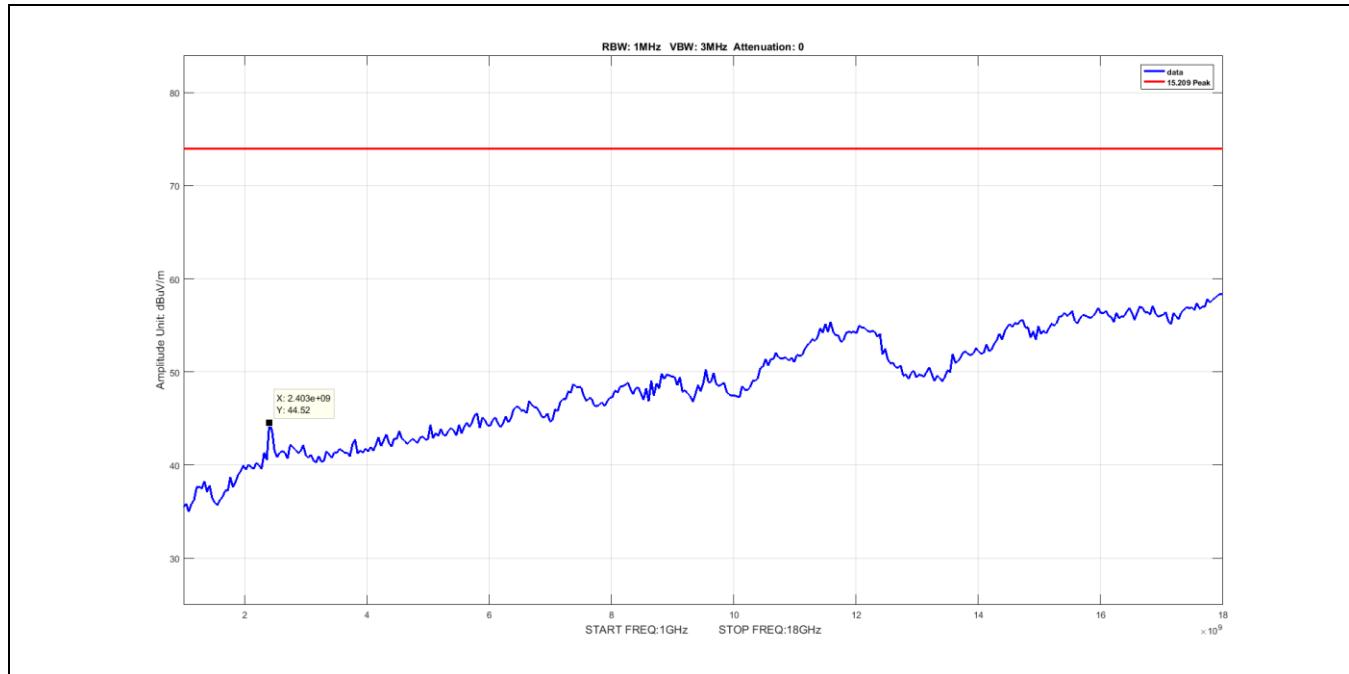


**Plot 60. Radiated Emissions, DH3, power 7, low peak**

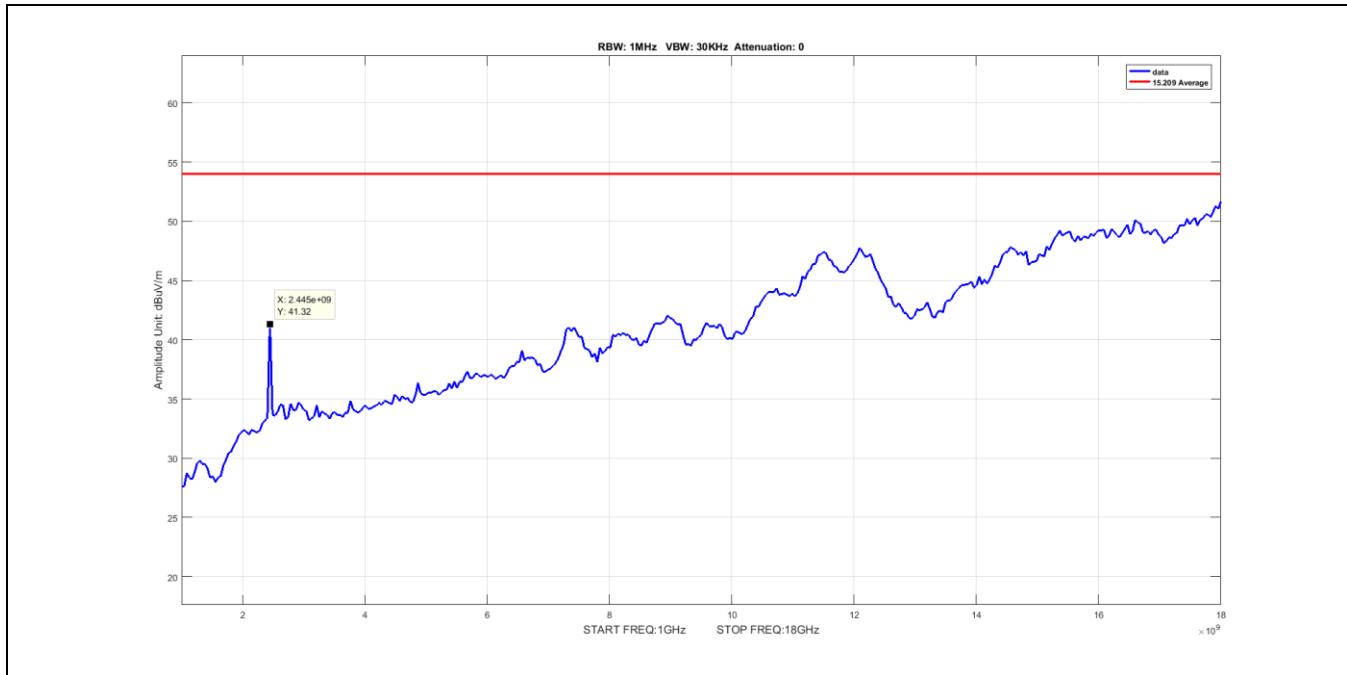


**Plot 61. Radiated Emissions, DH3, power 7, mid average**

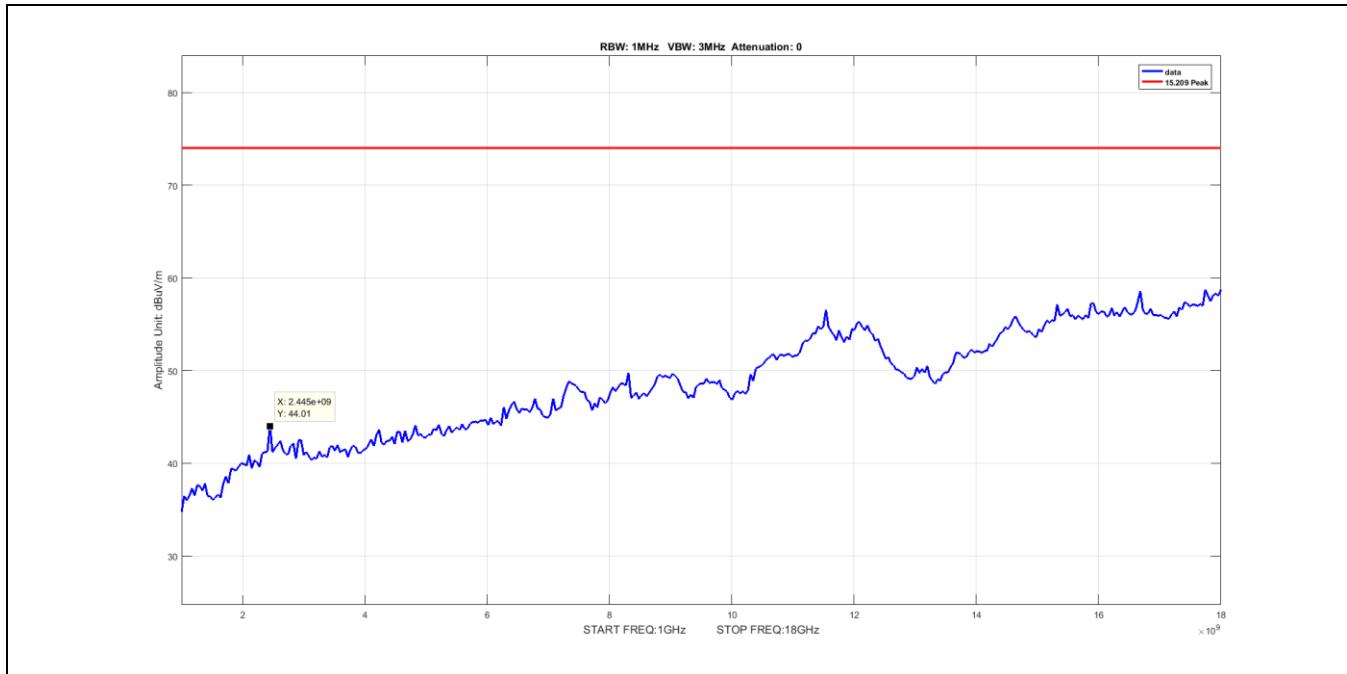


**Plot 62. Radiated Emissions, DH3, power 7, mid peak**

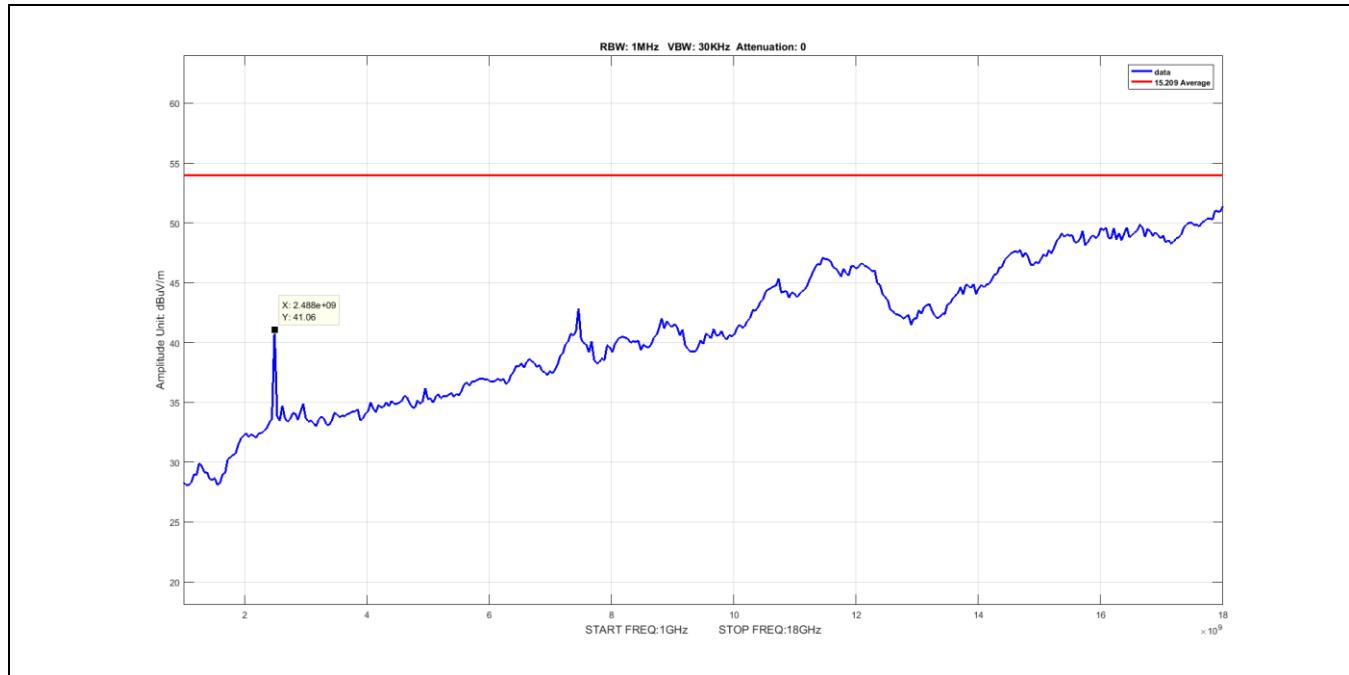


**Plot 63. Radiated Emissions, DH5, power, high average**

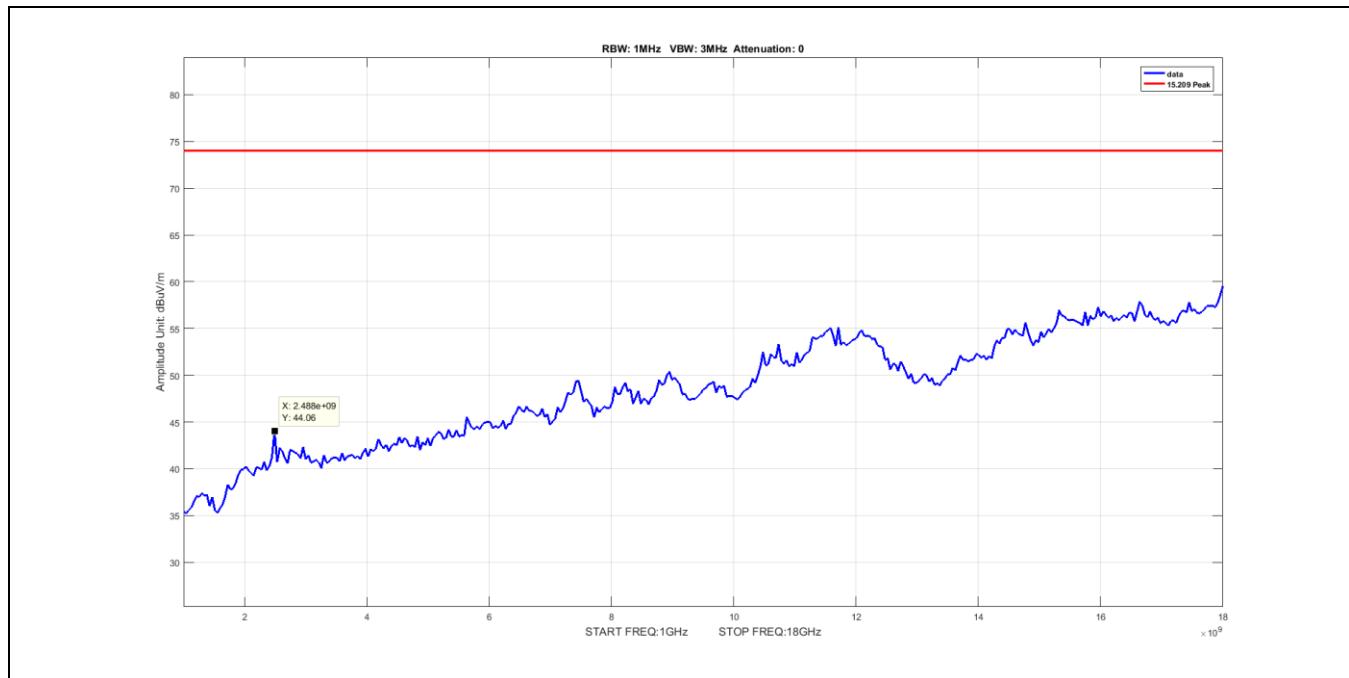


**Plot 64. Radiated Emissions, DH5, power 7, high peak**

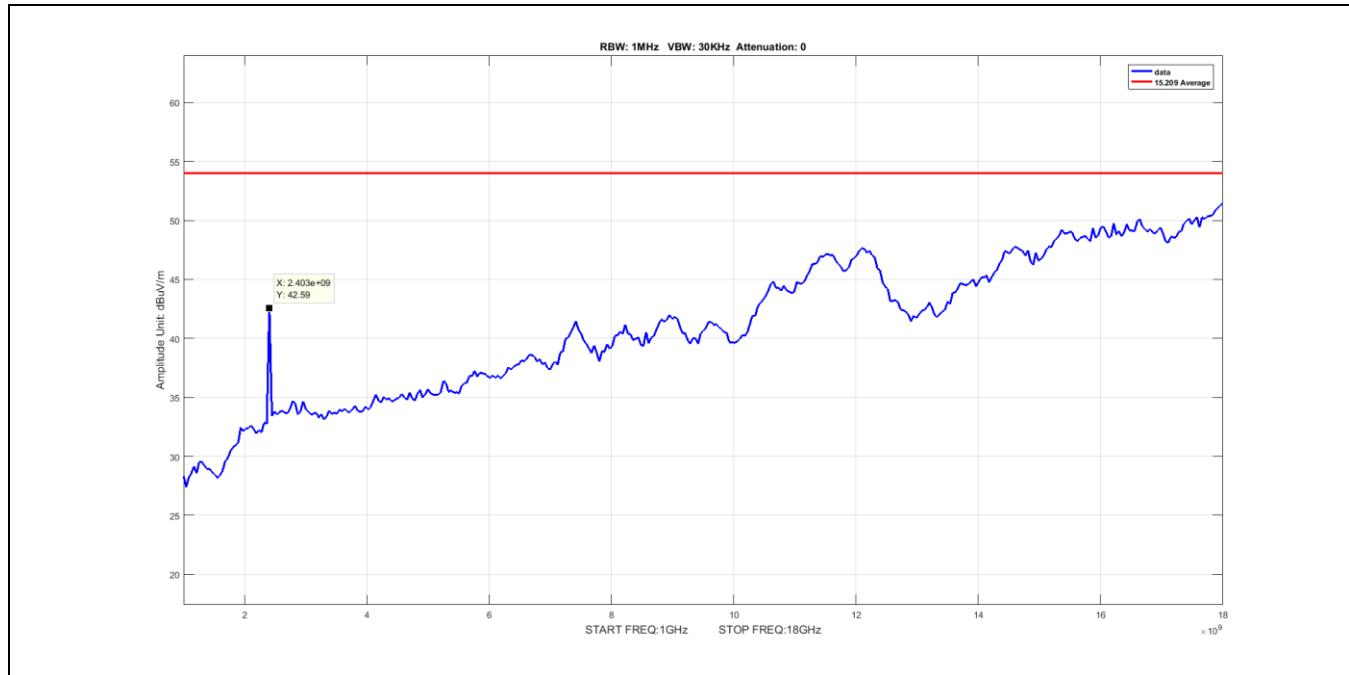


**Plot 65. Radiated Emissions, DH5, power 7, low average**

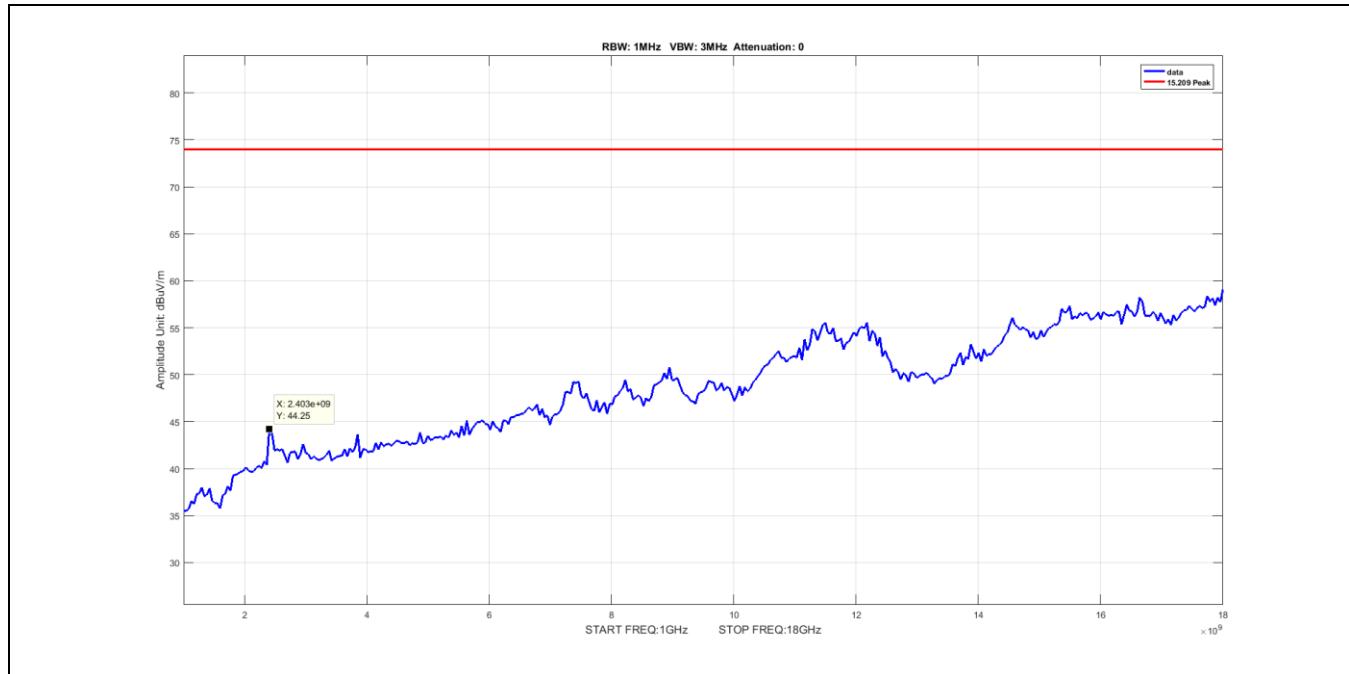

**Plot 66. Radiated Emissions, DH5, power 7, low peak**

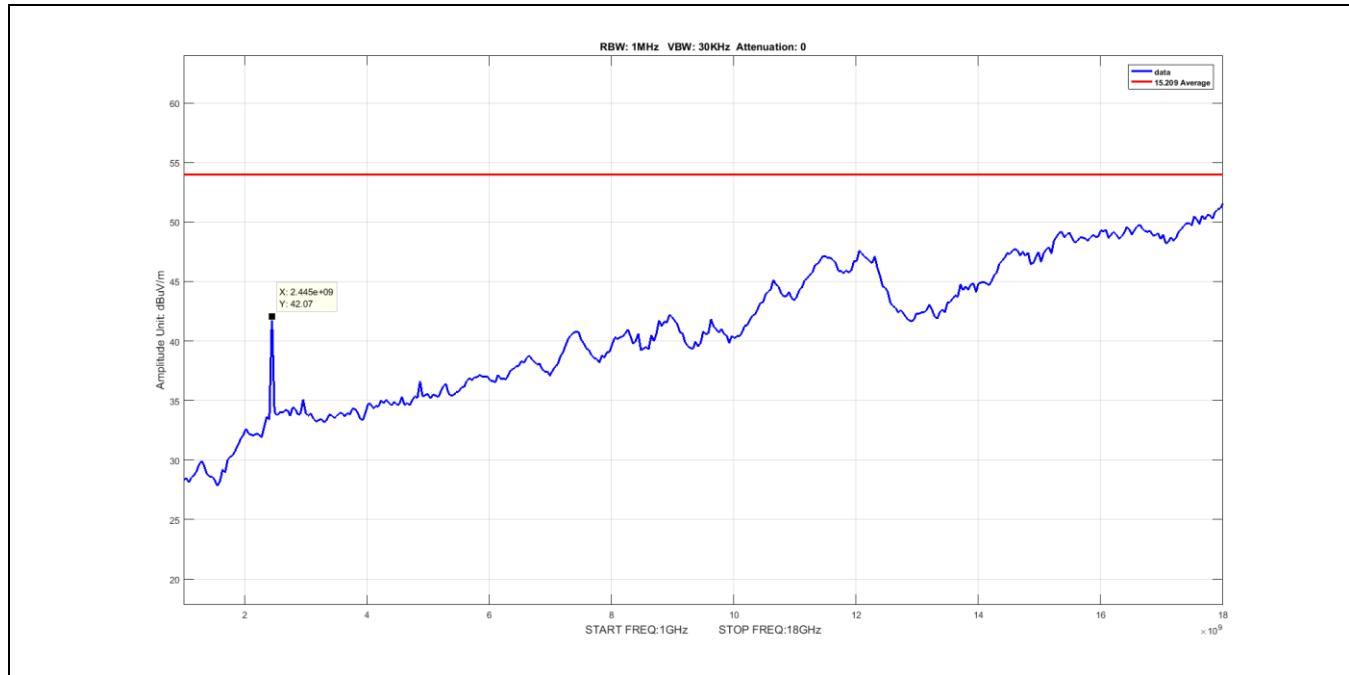

**Plot 67. Radiated Emissions, DH5, power 7, mid average**

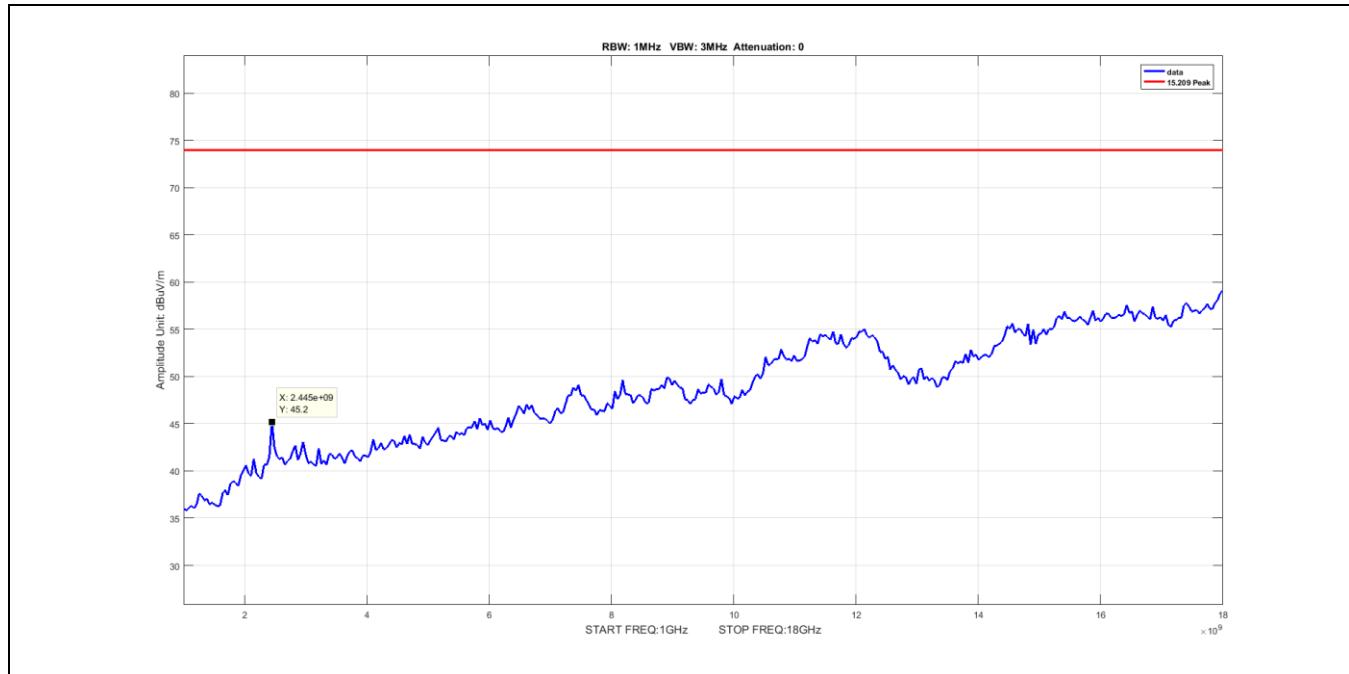


**Plot 68. Radiated Emissions, DH5, power 7, mid peak**


## Radiated Band Edge Measurements

### Test Procedures:


The transmitter was turned on. Measurements were performed of the low and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

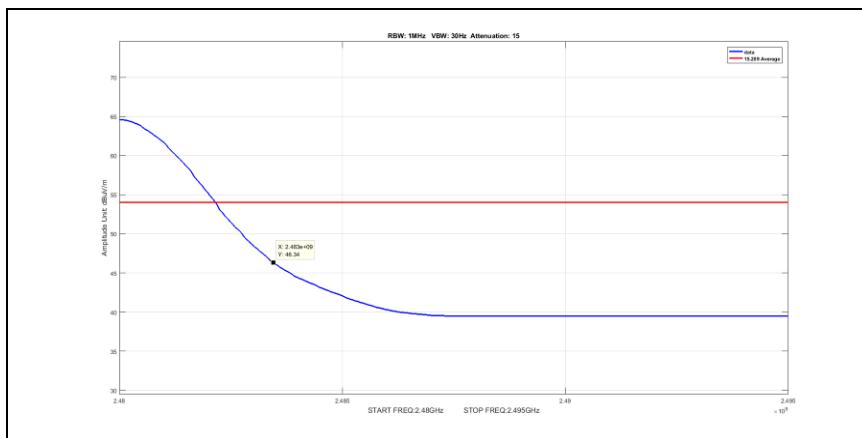


**Plot 69. Radiated Emissions, BT band edge DH1 high 9 avg**

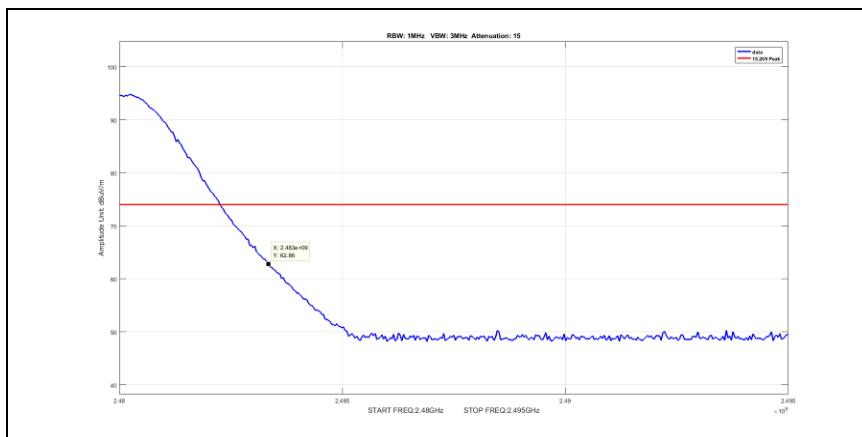


**Plot 70. Radiated Emissions, BT band edge DH1 high 9 peak**

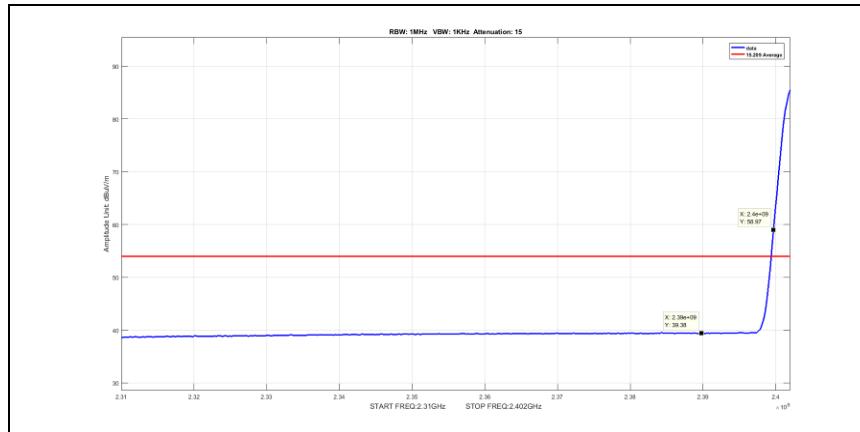


**Plot 71. Radiated Emissions, BT band edge DH1 low 9 avg**

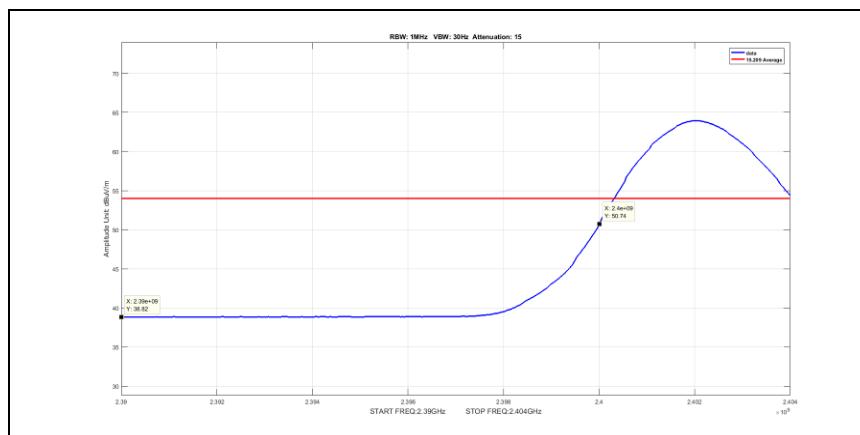


**Plot 72. Radiated Emissions, BT band edge DH1 low 9 avg zoom**

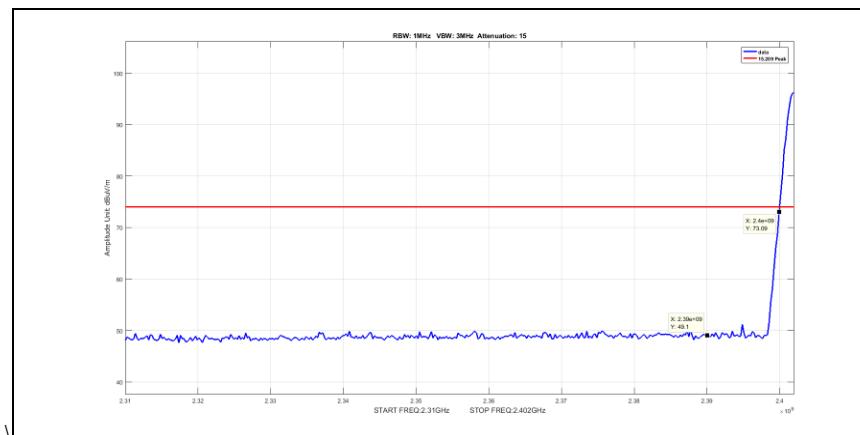


**Plot 73. Radiated Emissions, BT band edge DH1 low 9 peak**

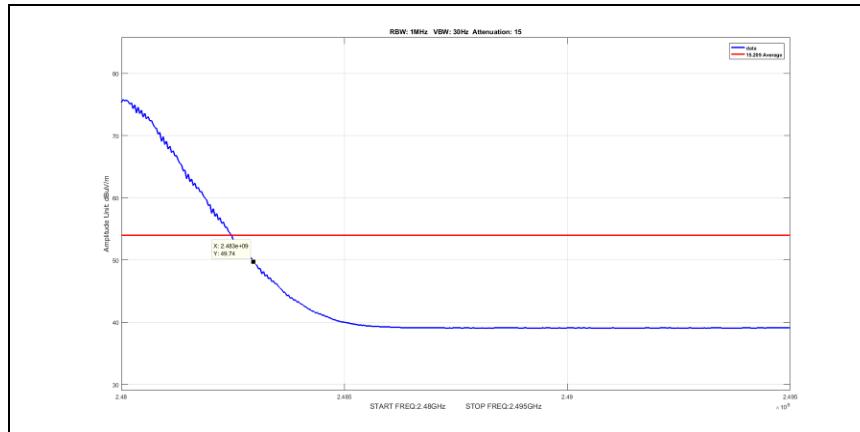


**Plot 74. Radiated Emissions, BT band edge DH3 high 7 avg**

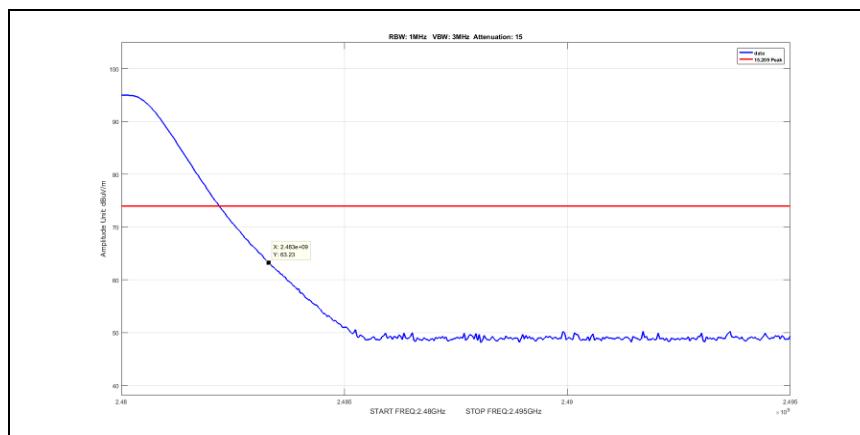


**Plot 75. Radiated Emissions, BT band edge DH3 high 9 peak**

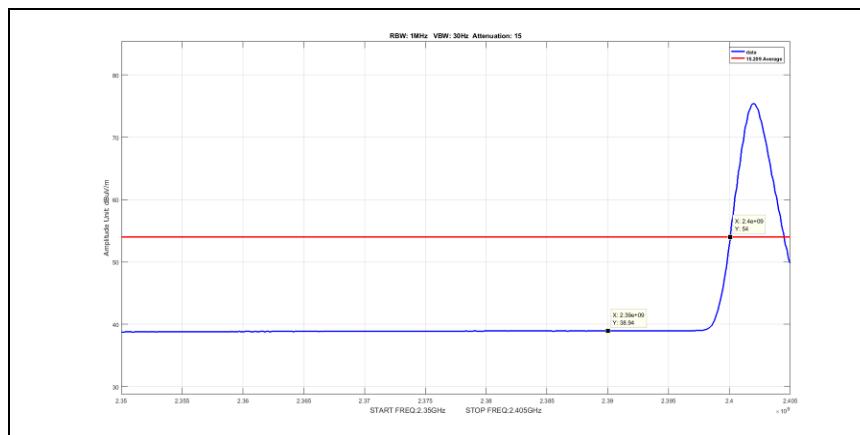


**Plot 76. Radiated Emissions, BT band edge DH3 low 7 avg**

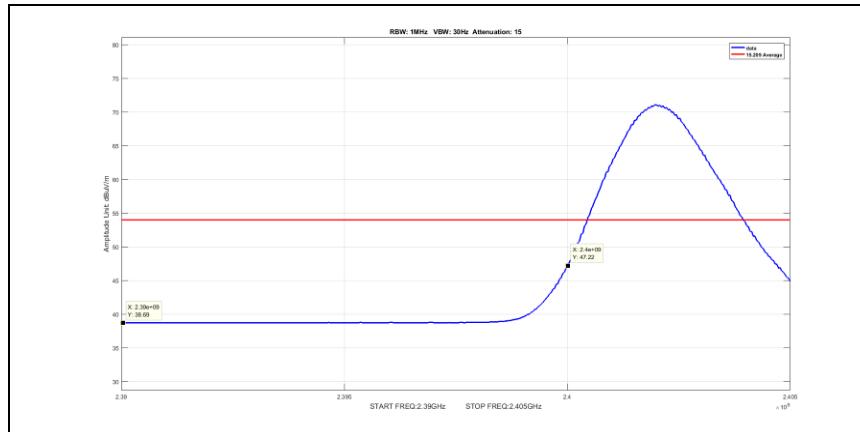


**Plot 77. Radiated Emissions, BT band edge DH3 low 7 avg zoom**

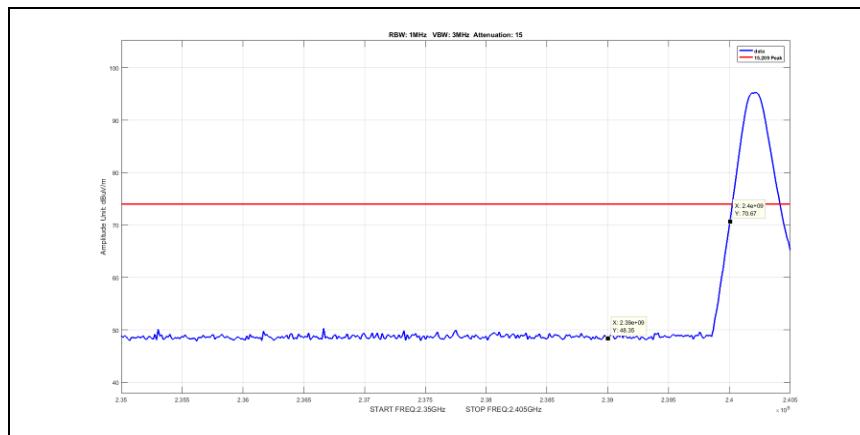


**Plot 78. Radiated Emissions, BT band edge DH3 low 9 peak**

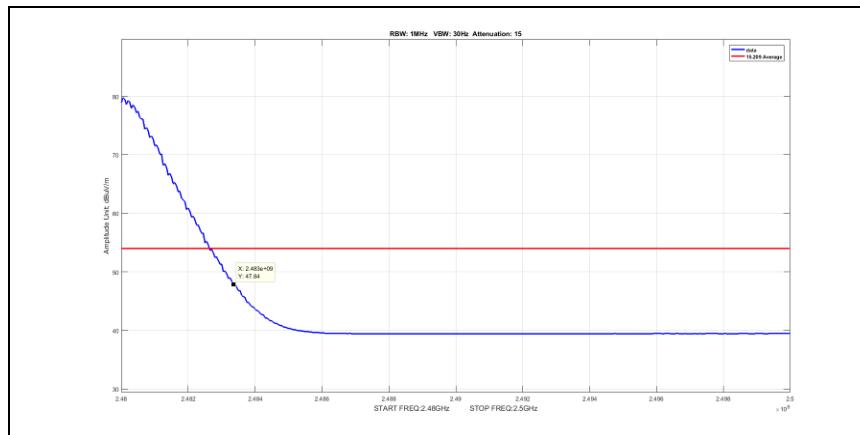


**Plot 79. Radiated Emissions, BT band edge DH5 high 7 avg**

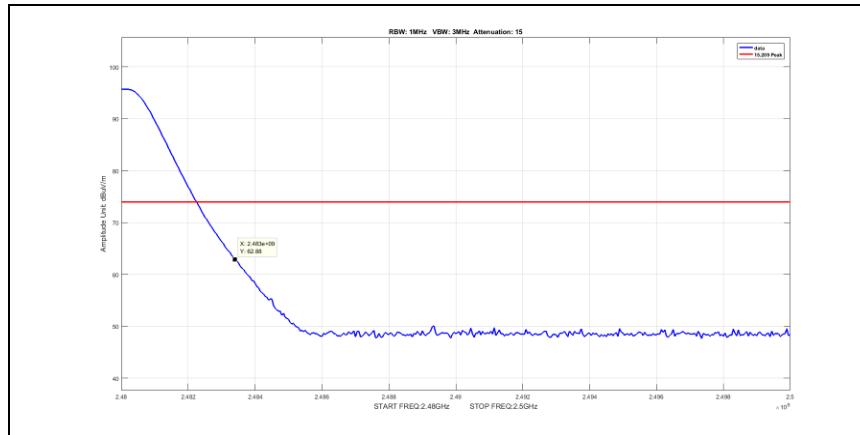


**Plot 80. Radiated Emissions, BT band edge DH5 high 9 peak**

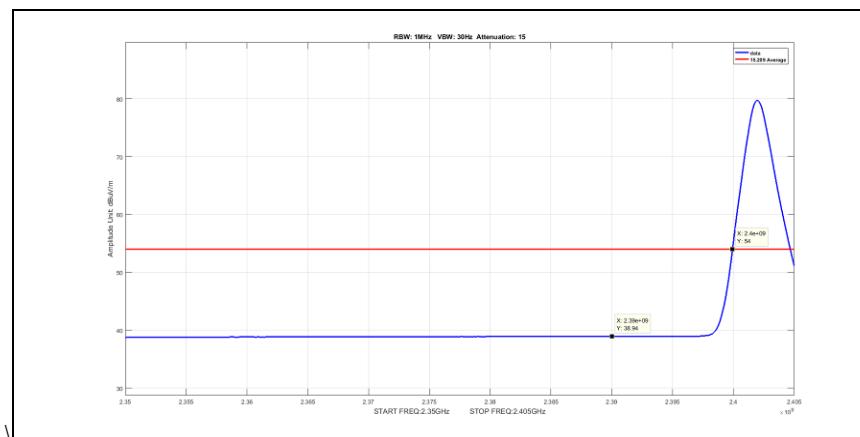

**Plot 81. Radiated Emissions, BT band edge DH5 low 7 avg**

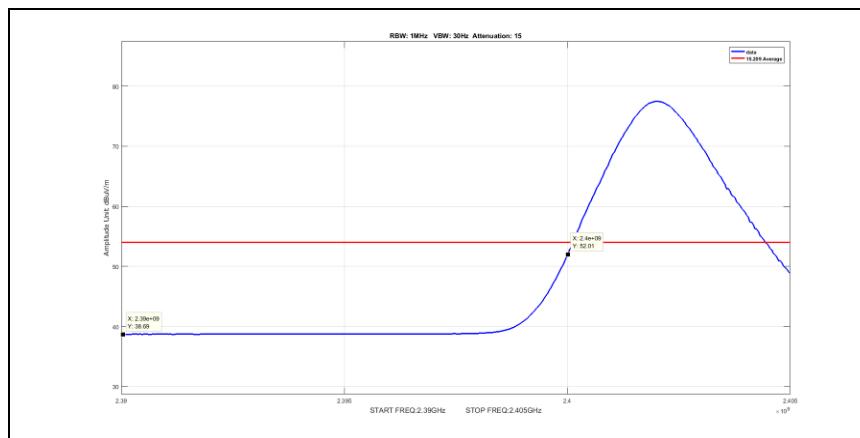


**Plot 82. Radiated Emissions, BT band edge DH5 low 7 avg zoom**

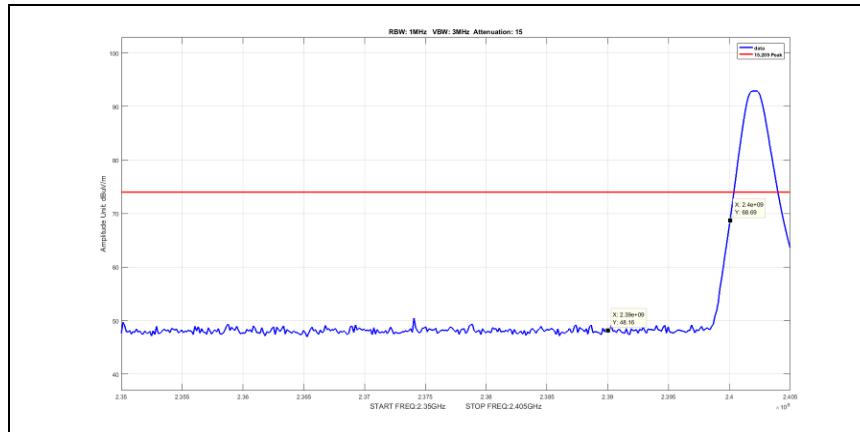


**Plot 83. Radiated Emissions, BT band edge DH5 low 9 peak**

## Radiated Spurious Emissions Test Setup

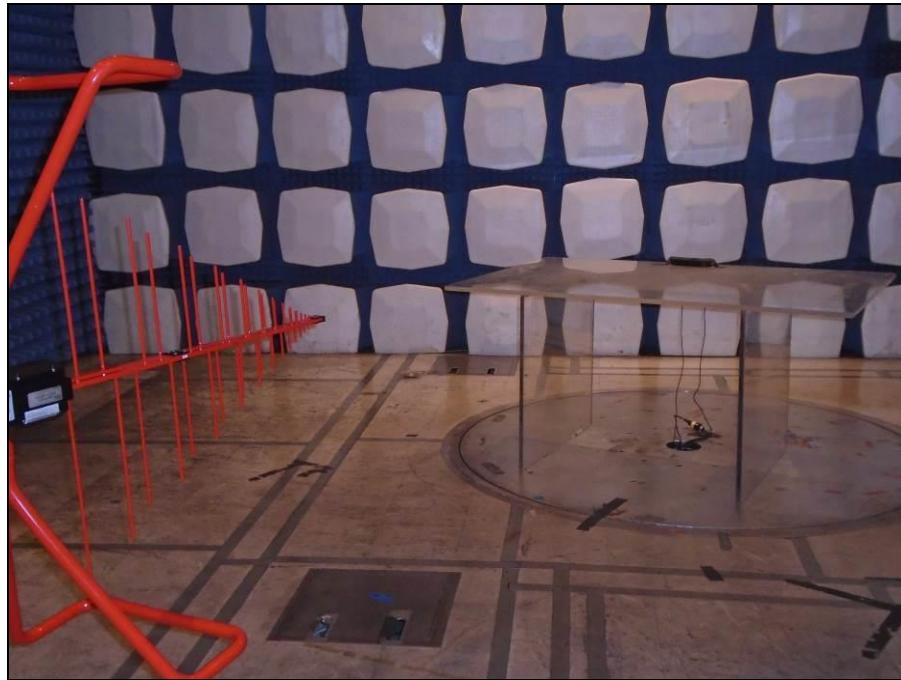

Photograph 1. Radiated Emissions, below 1G, Setup

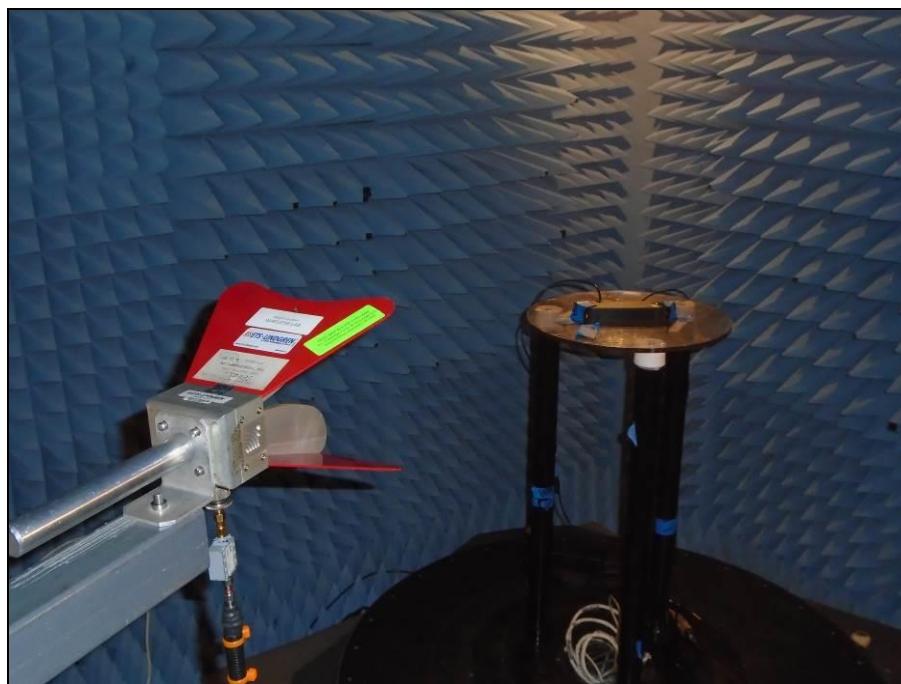

Photograph 2. Radiated Emissions, above 1 GHz, Setup

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge


**Test Requirement:** **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

**Test Results:** The EUT was compliant with the Conducted Spurious Emission limits of **§15.247(d)**.


**Test Engineer(s):** Bradley Jones

**Test Date(s):** September 12, 2017

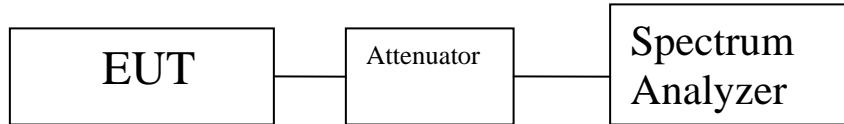


**Figure 4. Block Diagram, Conducted Spurious Emissions Test Setup**


## Conducted Spurious Emissions Test Results

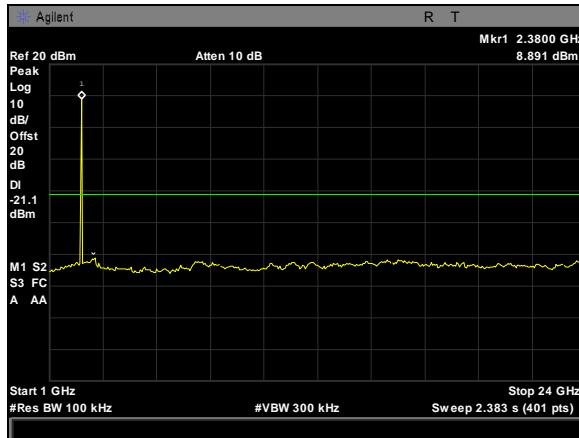


Plot 84. Spurious RF Conducted Emissions, DH1 low

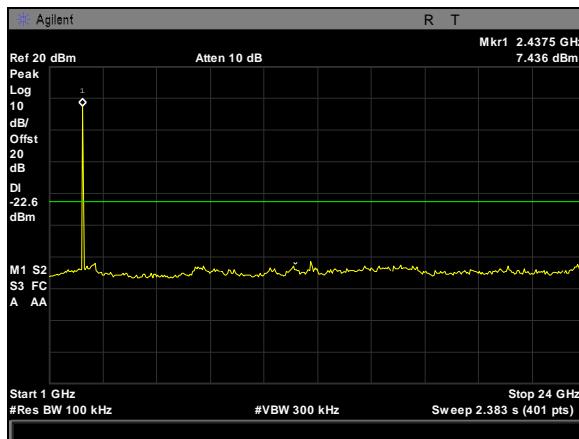


Plot 85. Spurious RF Conducted Emissions, DH1 mid

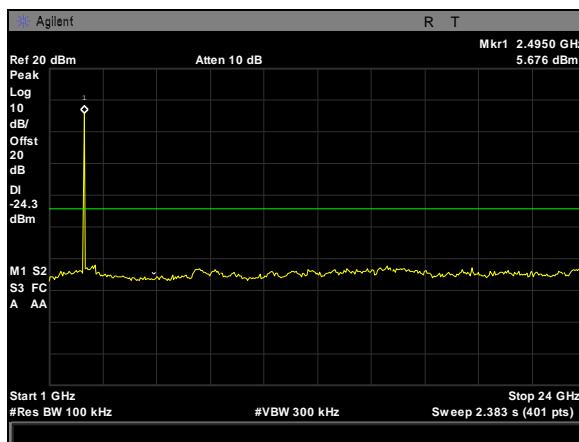


Plot 86. Spurious RF Conducted Emissions, DH1 high

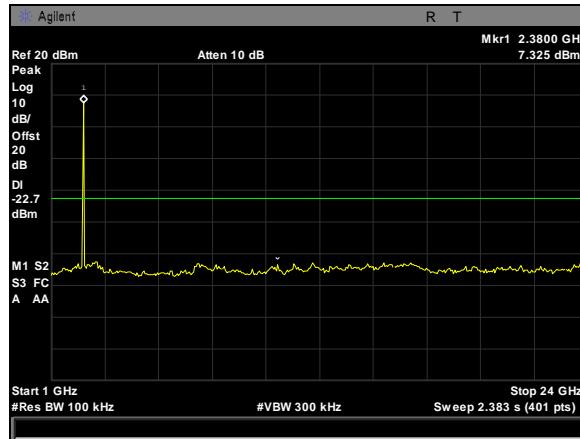


Plot 87. Spurious RF Conducted Emissions, DH3 low

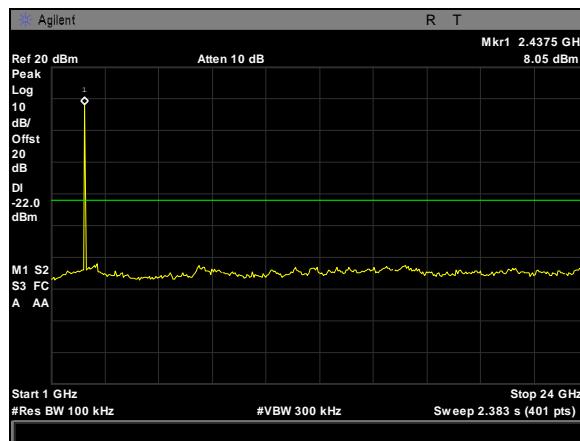


Plot 88. Spurious RF Conducted Emissions, DH3 mid

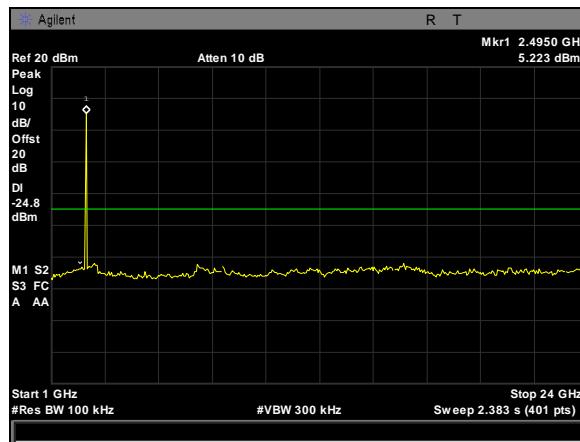


Plot 89. Spurious RF Conducted Emissions, DH3 high

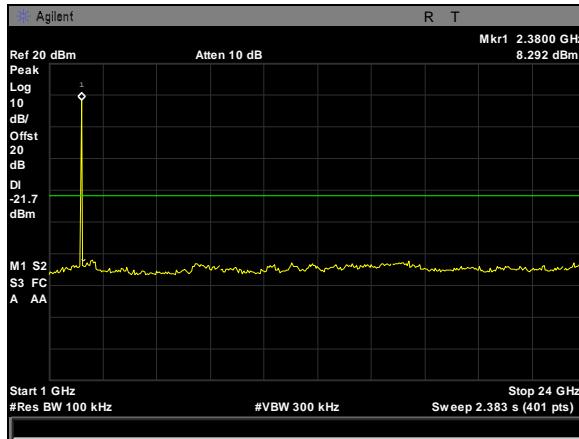

Plot 90. Spurious RF Conducted Emissions, DH5 low

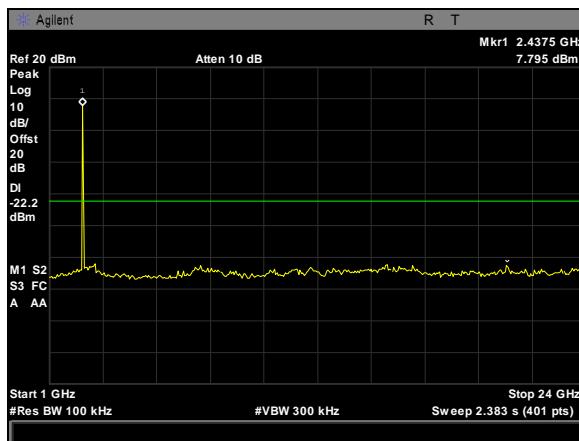


Plot 91. Spurious RF Conducted Emissions, DH5 mid

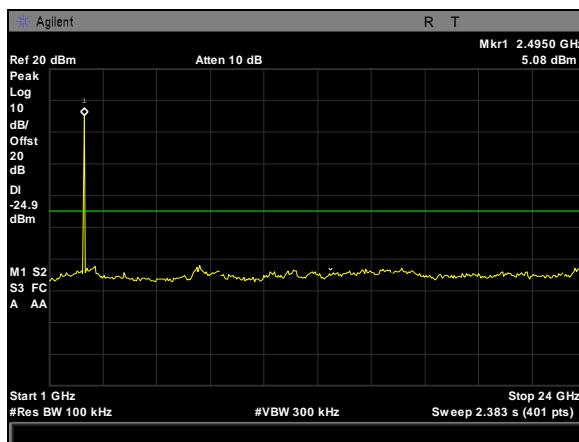


Plot 92. Spurious RF Conducted Emissions, DH5 high


## Conducted Band Edge Test Results

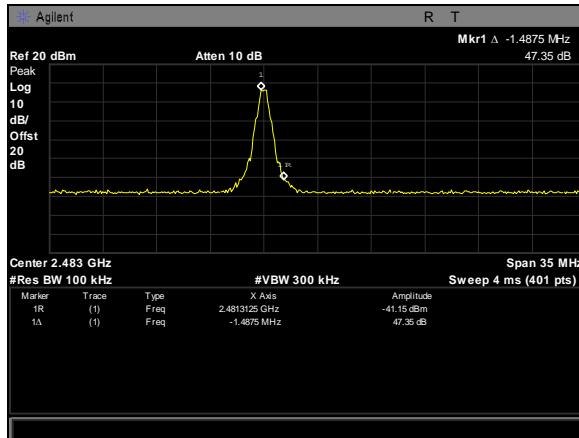


Plot 93. Spurious RF Conducted Emissions, DH1 high, band edge

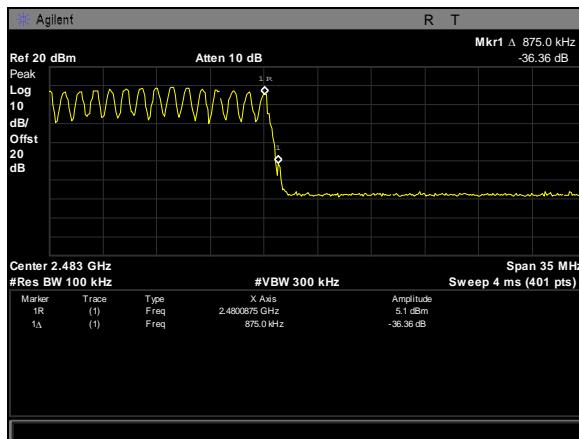


Plot 94. Spurious RF Conducted Emissions, DH1 high, band edge hopping

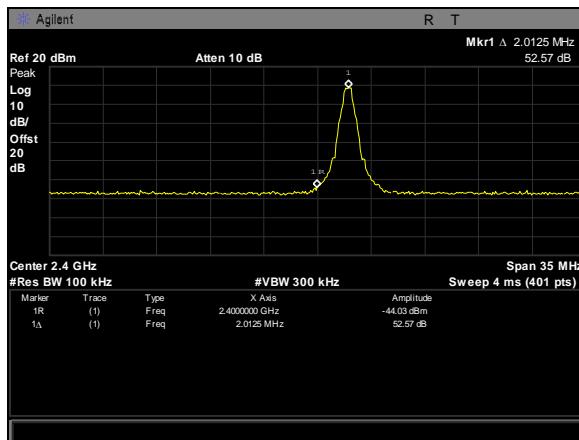


Plot 95. Spurious RF Conducted Emissions, DH1 low, band edge

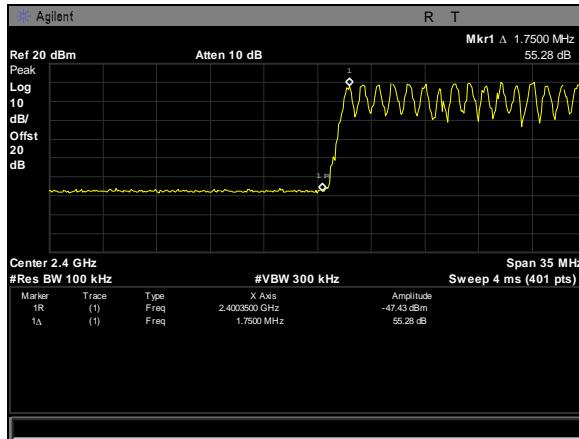


Plot 96. Spurious RF Conducted Emissions, DH1 low, band edge hopping

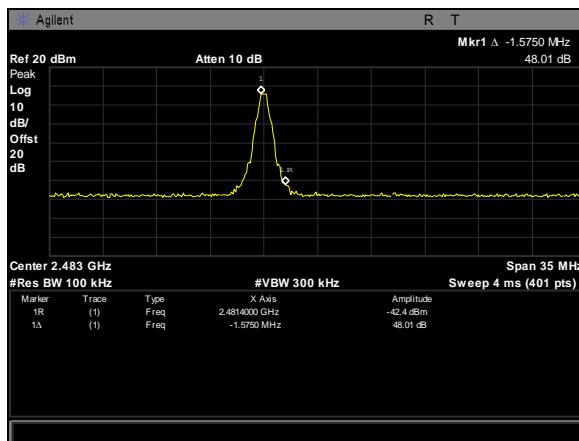


Plot 97. Spurious RF Conducted Emissions, DH3 high, band edge

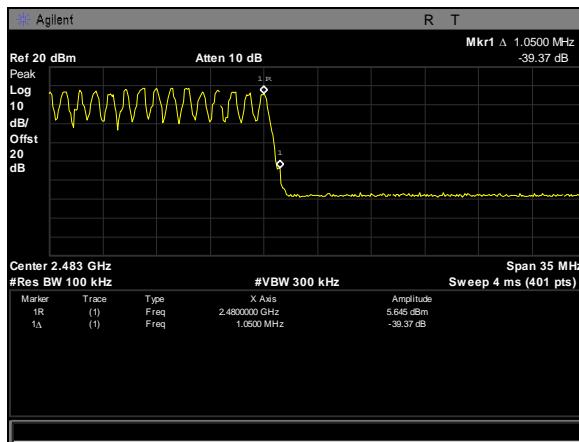


Plot 98. Spurious RF Conducted Emissions, DH3 high, band edge hopping

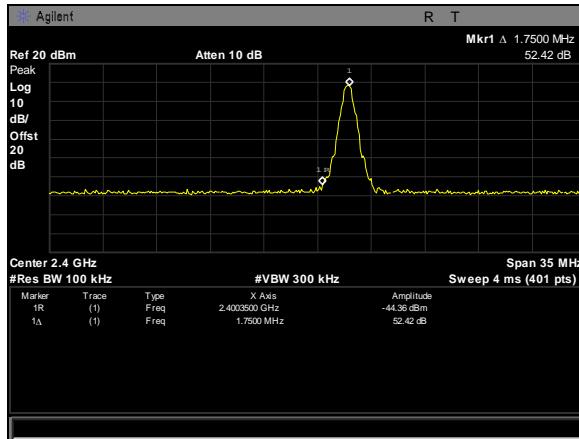


**Plot 99. Spurious RF Conducted Emissions, DH3 low, band edge**

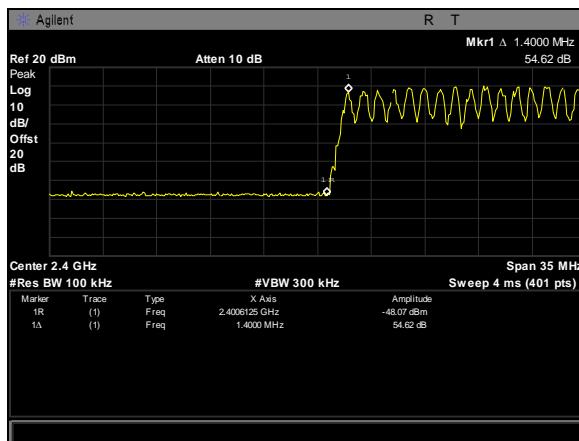


**Plot 100. Spurious RF Conducted Emissions, DH3 low, band edge hopping**

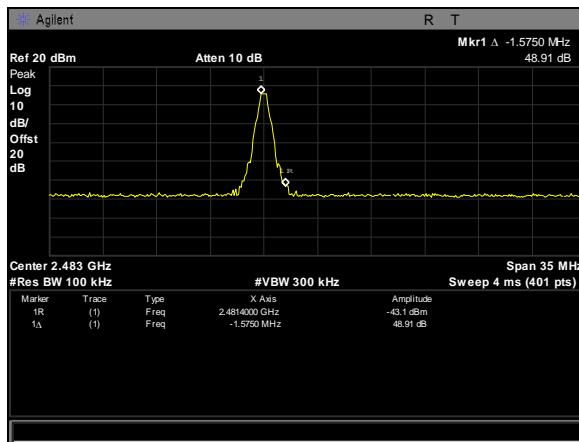


**Plot 101. Spurious RF Conducted Emissions, DH5 high, band edge**

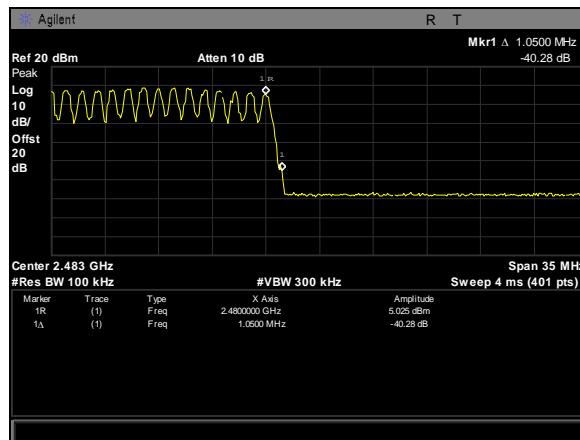

**Plot 102. Spurious RF Conducted Emissions, DH5 high, band edge hopping**

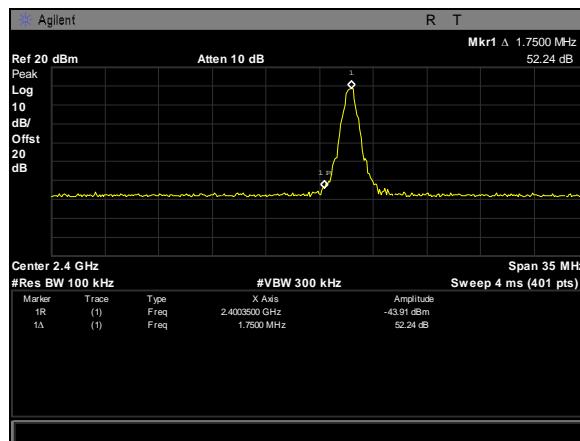

**Plot 103. Spurious RF Conducted Emissions, DH5 low, band edge**

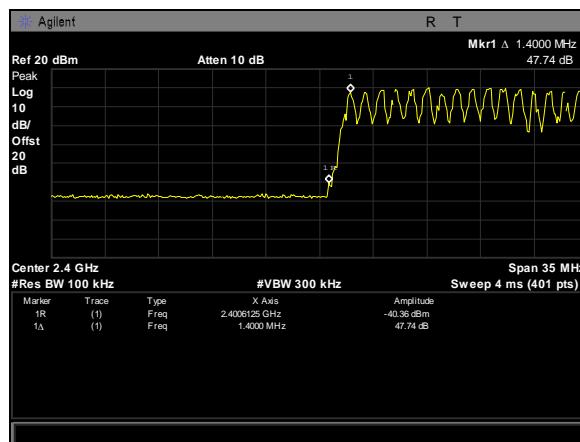

**Plot 104. Spurious RF Conducted Emissions, DH5 low, band edge hopping**

**Electromagnetic Compatibility Criteria for Intentional Radiators**  
**§ 15.247(g)(h) Declaration Statements for FHSS**

**Klashwerks**

November 6, 2017  
MET Laboratories, Inc.  
914 West Patapsco Avenue  
Baltimore, MD 21230

RE: FHSS Declaration Statement Letter for "RAVEN", FCC-ID \_\_\_\_\_ with  
respect to FCC Part 15C Sections 15.247(g) and 15.247(h)

To Whom It May Concern:

**Compliance for section 15.247(g):**

The 2.4GHz system-on-chip (SoC) within the RAVEN device complies  
with the IEEE 802.15.4e standard and uses a Time Synchronized Channel  
Hopping (TSCH) MAC. According to this specification, the SoC transmits  
packets with a pseudorandom hopping pattern across 79 channels when  
presented with continuous data. Short burst transmissions from the  
system are also transmitted with pseudorandom frequency hopping.

**Compliance for section 15.247(h):**

The IEEE 802.15.4e compliant SoC does not use intelligence to adapt its  
hopset to avoid occupied channels, and it does not coordinate with any  
other FHSS system to avoid simultaneous occupancy of individual  
frequencies by multiple transmitters.

Please contact me if there is any information you may need.

Sincerely yours,



Dan Crawford  
Director of R&D  
Klashwerks

**Figure 5. Declaration Statement for FHSS**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(i) Maximum Permissible Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2400-2483.5 MHz; highest conducted power = 16.18dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

EUT maximum antenna gain = 18 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
 P = Power Input to antenna (41.4mW)  
 G = Antenna Gain (63.1 numeric)

$$R = (41.4 * 63.1 / 4 * 3.14 * 1.0)^{1/2} = (2612.34 / 12.56)^{1/2} = 14.4\text{cm}$$

FCC									
Frequency (MHz)	Con. Pwr. (dBm)	Con. Pwr. (mW)	Ant. Gain (dBi)	Ant. Gain numeric	Pwr. Density (mW/cm <sup>2</sup> )	Limit (mW/cm <sup>2</sup> )	Margin	Distance (cm)	Result
2402	7.902	6.169	2.14	1.637	0.00201	1	0.99799	20	Pass

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	02/06/2015	02/06/2018
1T4753	Antenna - Bilog	Sunol Sciences	JB6	10/24/2016	04/24/2018
1T4909	Digital Barometer, Hygrometer, Thermometer	Control Company	06-662-4	01/11/2016	01/11/2018
1T4409	EMI Receiver	Rohde & Schwarz	ESIB7	12/07/2016	12/07/2018
1T4442	Pre-amplifier, Microwave	Miteq	AFS42-01001800-30-10P	See Note	
1T4149	High-Frequency Anechoic Chamber	Ray Proof	81	Not Required	
1T4483	Antenna; Horn	ETS-Lindgren	3117	4/19/2017	10/19/2018
1T8818	Spectrum Analyzer	Agilent Technologies	E4407B	2/24/2017	2/24/2018

**Table 13. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

---

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report