

FCC Report

Applicant: Guangdong FG lite Co.,Ltd

Address of Applicant: Building C26, The CRE Animation Industrial Park, Shiji town, Panyu district, Guangzhou City, Guangdong Province, China

Manufacturer: Guangdong FG lite Co.,Ltd

Address of Manufacturer: Building C26, The CRE Animation Industrial Park, Shiji town, Panyu district, Guangzhou City, Guangdong Province, China

Equipment Under Test (EUT)

Product Name: Intelligence LED Par

Model No.: LP8-4in1, LP12-4in1, LP10-4in1, LP8-4in1, LP10-4in1, IP8-4in1, IP10-4in1, LX12-4in1, LM18-NB, LP8-6in1, LP12-6in1, LP10-6in1, LP8-6in1, LP10-6in1, IP8-6in1, IP10-6in1, LX12-6in1

Trade Mark: FGL

FCC ID: 2ANAF-LP8-4IN1

Applicable standards: FCC CFR Title 47 Subpart C Section 15.247:2017

Date of sample receipt: July 07, 2017

Date of Test: July 07-12, 2017

Date of report issued: July 12, 2017

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo
Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

Version No.	Date	Description
00	July 12, 2017	Original

Prepared By:




Date:

July 12, 2017

Project Engineer

Check By:



Date:

July 12, 2017

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
5 GENERAL INFORMATION	5
5.1 GENERAL DESCRIPTION OF EUT	5
5.2 TEST MODE	7
5.3 DESCRIPTION OF SUPPORT UNITS	7
5.4 TEST FACILITY	7
5.5 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	15
7.5 POWER SPECTRAL DENSITY	17
7.6 BAND EDGES	19
7.6.1 Conducted Emission Method	19
7.6.2 Radiated Emission Method	20
7.7 SPURIOUS EMISSION	23
7.7.1 Conducted Emission Method	23
7.7.2 Radiated Emission Method	25
8 TEST SETUP PHOTO	30
9 EUT CONSTRUCTIONAL DETAILS	32

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014 and ANSI C63.10:2013.

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

Product Name:	Intelligence LED Par
Model No.:	LP8-4in1, LP12-4in1, LP10-4in1, LP8-4in1, LP10-4in1, IP8-4in1, IP10-4in1, LX12-4in1, LM18-NB, LP8-6in1, LP12-6in1, LP10-6in1, LP8-6in1, LP10-6in1, IP8-6in1, IP10-6in1, LX12-6in1
Test Model No.:	LP8-4in1
<i>Remark: All above models are identical in the same PCB layout, interior structure and electrical circuit. The only difference is the model name for commercial purpose.</i>	
Operation Frequency:	2450MHz~2480MHz
Channel Numbers:	16
Channel Separation:	2MHz
Modulation Type:	GFSK
Antenna Type:	Integral antenna
Antenna Gain:	2dBi(Declared by Applicant)
Power Supply:	INPUT: AC 95-260V 50/60Hz OUTPUT: 24V 5A Or Adapter MODEL:GM48-252190-D INPUT: AC 100-240V 50/60Hz 1.5A OUTPUT: 25.2V 1.9A Red+Black- Or DC 25.2V, 8AH by battery

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2450MHz	5	2458MHz	9	2466MHz	13	2474MHz
2	2452MHz	6	2460MHz	10	2468MHz	14	2476MHz
3	2454MHz	7	2462MHz	11	2470MHz	15	2478MHz
4	2456MHz	8	2464MHz	12	2472MHz	16	2480MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2450MHz
The middle channel	2470MHz
The highest channel	2480MHz

5.2 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode
<p><i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i></p>	

5.3 Description of Support Units

N/A

5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 22, 2016.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016.

5.5 Test Location

All tests were performed at:
Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960

6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	June 28 2017	June 27 2018
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 28 2017	June 27 2018
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 28 2017	June 27 2018
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 28 2017	June 27 2018
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	June 28 2017	June 27 2018
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	June 28 2017	June 27 2018
10	Coaxial Cable	GTS	N/A	GTS211	June 28 2017	June 27 2018
11	Coaxial cable	GTS	N/A	GTS210	June 28 2017	June 27 2018
12	Coaxial Cable	GTS	N/A	GTS212	June 28 2017	June 27 2018
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 28 2017	June 27 2018
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 28 2017	June 27 2018
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 28 2017	June 27 2018
16	Band filter	Amindeon	82346	GTS219	June 28 2017	June 27 2018


Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May.16 2014	May.15 2019
2	EMI Test Receiver	R&S	ESCI 7	GTS552	June 28 2017	June 27 2018
3	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	June 28 2017	June 27 2018
4	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	June 28 2017	June 27 2018
5	Coaxial Cable	GTS	N/A	GTS227	N/A	N/A
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
7	Thermo meter	KTJ	TA328	GTS233	June 28 2017	June 27 2018

General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	June 28 2017	June 27 2018

7 Test results and Measurement Data

7.1 Antenna requirement

Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna: The antenna is Integral antenna, the best case gain of the antenna is 2dBi	

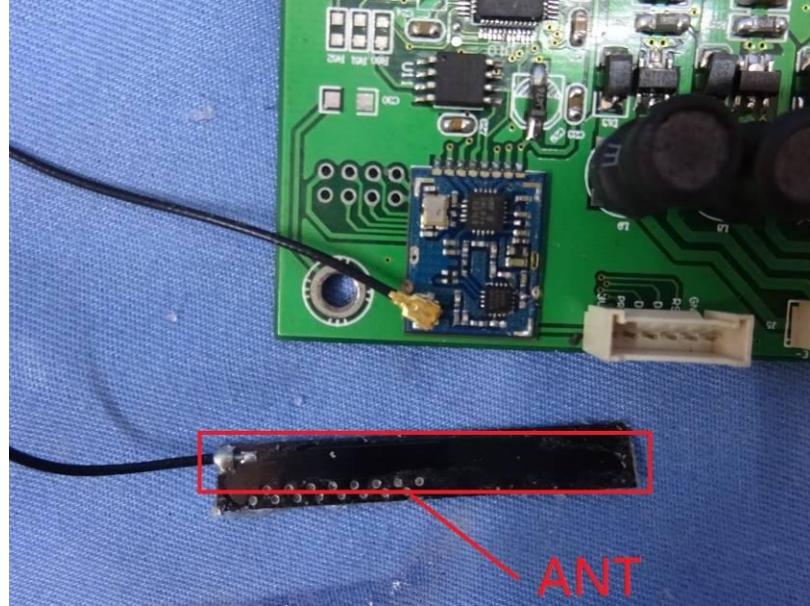

7.2 Conducted Emissions


Test Requirement:	FCC Part15 C Section 15.207		
Test Method:	ANSI C63.10:2013		
Test Frequency Range:	150KHz to 30MHz		
Class / Severity:	Class B		
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto		
Limit:	Frequency range (MHz)	Limit (dBuV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50

* Decreases with the logarithm of the frequency.


Test setup:			
Test procedure:	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.		
Test Instruments:	Refer to section 6.0 for details		
Test mode:	Refer to section 5.2 for details		
Test results:	Pass		

Measurement data:

Line:

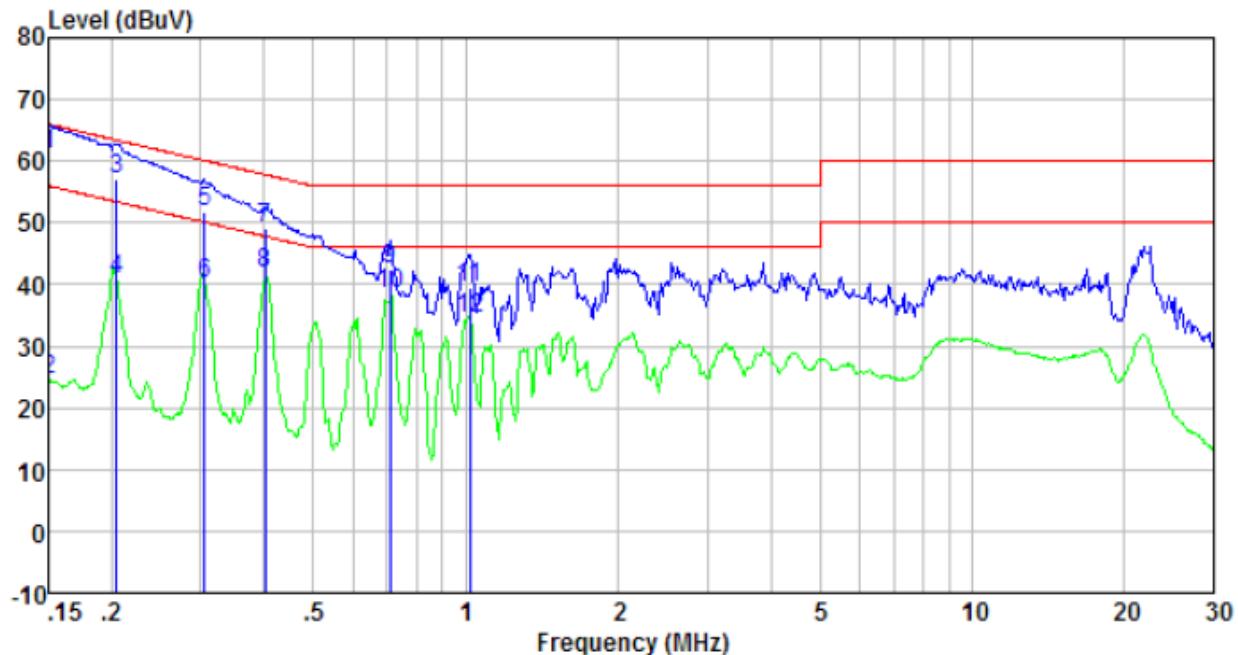

Freq MHz	Reading level dBuV	11SN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.150	60.42	0.42	0.12	60.96	66.00	-5.04	QP
0.150	23.89	0.42	0.12	24.43	56.00	-31.57	Average
0.204	56.51	0.43	0.13	57.07	63.45	-6.38	QP
0.204	40.18	0.43	0.13	40.74	53.45	-12.71	Average
0.305	51.28	0.44	0.10	51.82	60.10	-8.28	QP
0.305	39.46	0.44	0.10	40.00	50.10	-10.10	Average
0.402	48.64	0.42	0.11	49.17	57.81	-8.64	QP
0.402	41.37	0.42	0.11	41.90	47.81	-5.91	Average
0.708	42.00	0.28	0.13	42.41	56.00	-13.59	QP
0.708	38.14	0.28	0.13	38.55	46.00	-7.45	Average
1.021	39.18	0.25	0.13	39.56	56.00	-16.44	QP
1.021	34.27	0.25	0.13	34.65	46.00	-11.35	Average

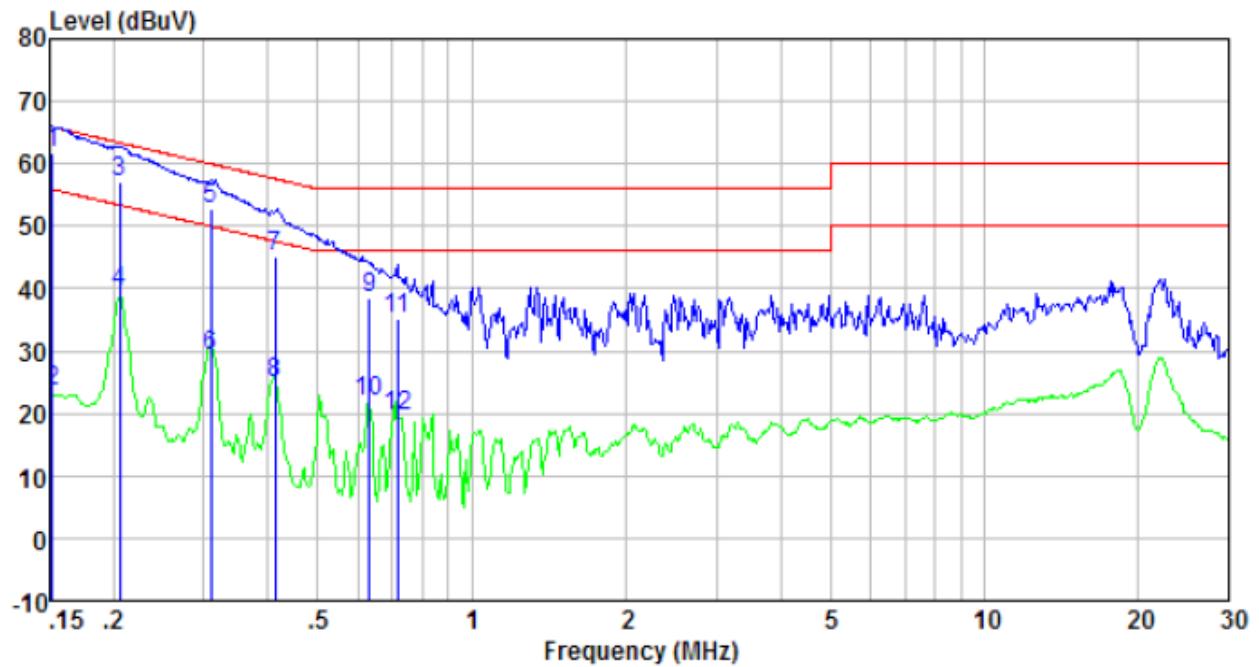
Neutral:


Freq MHz	Reading level dBuV	LISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0.152	61.37	0.41	0.12	61.90	65.91	-4.01	QP
0.152	22.96	0.41	0.12	23.49	55.91	-32.42	Average
0.205	56.58	0.41	0.13	57.12	63.40	-6.28	QP
0.205	39.02	0.41	0.13	39.56	53.40	-13.84	Average
0.310	52.17	0.42	0.10	52.69	59.97	-7.28	QP
0.310	28.52	0.42	0.10	29.04	49.97	-20.93	Average
0.413	44.52	0.39	0.11	45.02	57.59	-12.57	QP
0.413	24.38	0.39	0.11	24.88	47.59	-22.71	Average
0.630	38.25	0.26	0.13	38.64	56.00	-17.36	QP
0.630	21.50	0.26	0.13	21.89	46.00	-24.11	Average
0.716	34.93	0.24	0.13	35.30	56.00	-20.70	QP
0.716	19.26	0.24	0.13	19.63	46.00	-26.37	Average

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss


7.3 Conducted Output Power

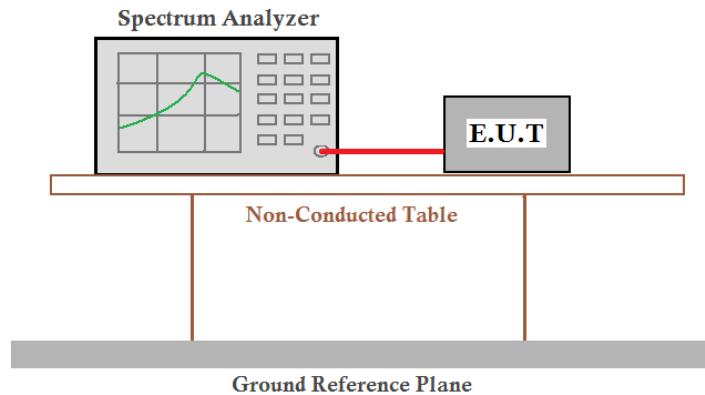Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Peak Output Power (dBm)	Limit(dBm)	Result
Lowest	19.50	30.00	Pass
Middle	19.69		
Highest	19.74		


Test plot as follows:

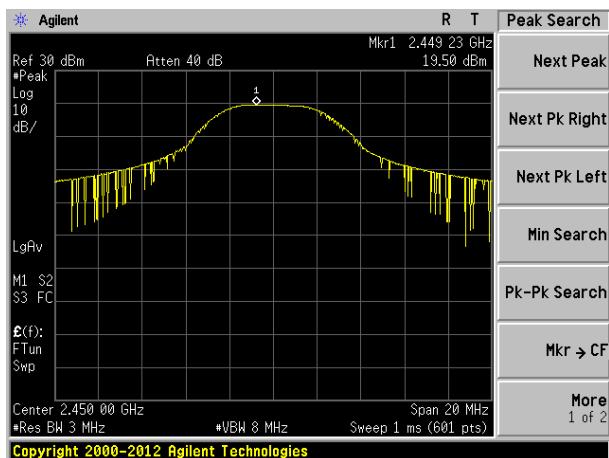

Lowest channel

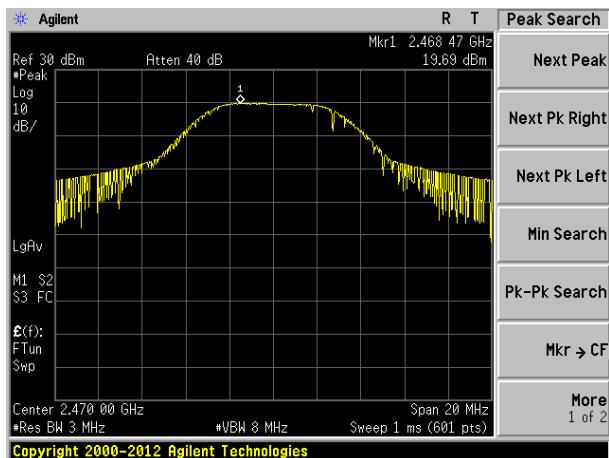


Middle channel

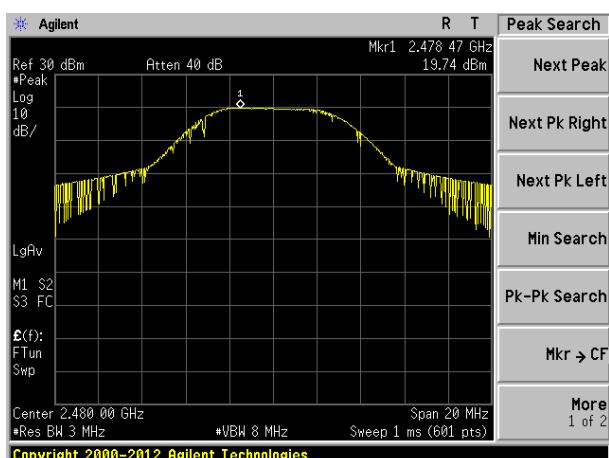

Highest channel

7.4 Channel Bandwidth

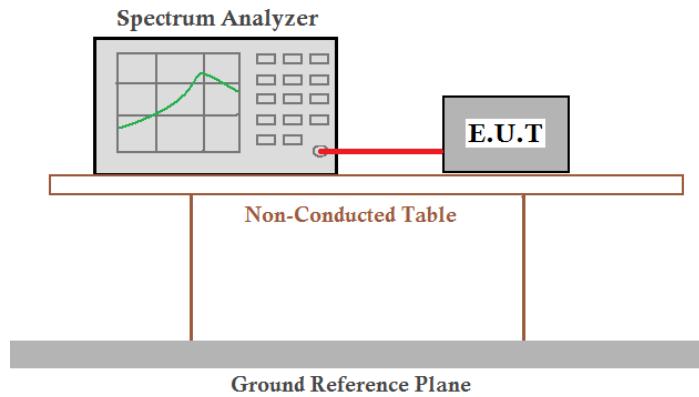Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Channel Bandwidth (MHz)	Limit(KHz)	Result
Lowest	0.689	>500	Pass
Middle	0.854		
Highest	0.868		


Test plot as follows:



Lowest channel

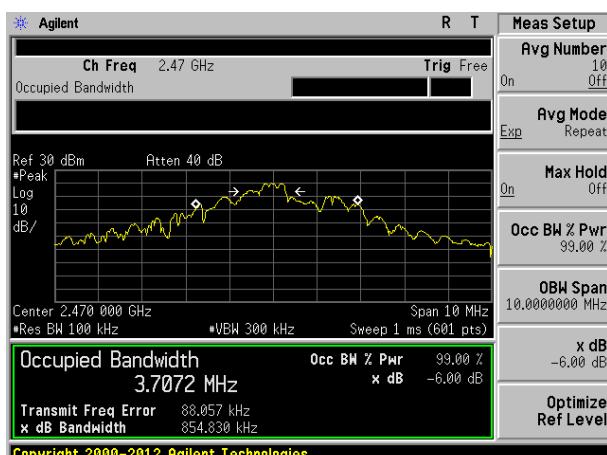


Middle channel

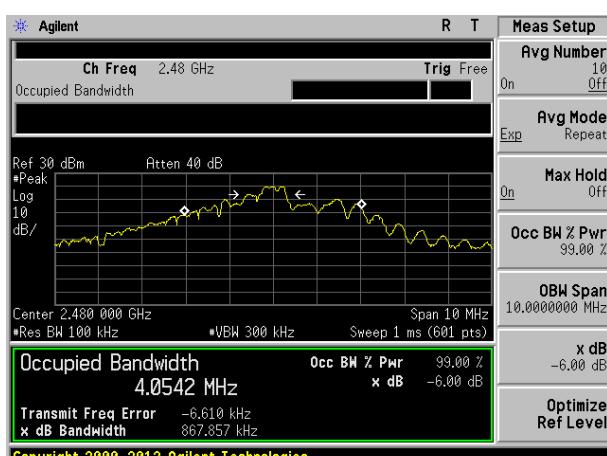

Highest channel


7.5 Power Spectral Density

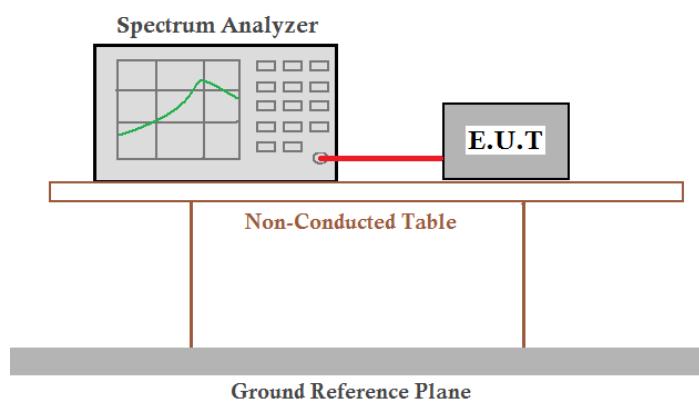Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	8dBm/3kHz
Test setup:	 <p>The diagram illustrates the test setup. A 'Spectrum Analyzer' is connected to an 'E.U.T' (Equipment Under Test) via a cable. The E.U.T is placed on a 'Non-Conducted Table'. The entire setup is positioned above a 'Ground Reference Plane'.</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Measurement Data

Test channel	Power Spectral Density (dBm)	Limit(dBm/3kHz)	Result
Lowest	5.29	8.00	Pass
Middle	5.94		
Highest	4.78		


Test plot as follows:

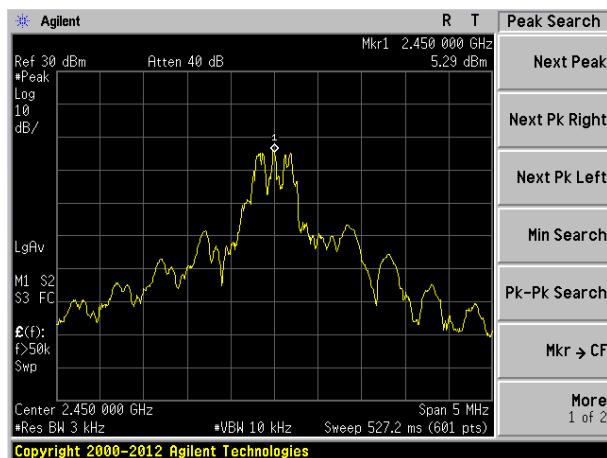

Lowest channel

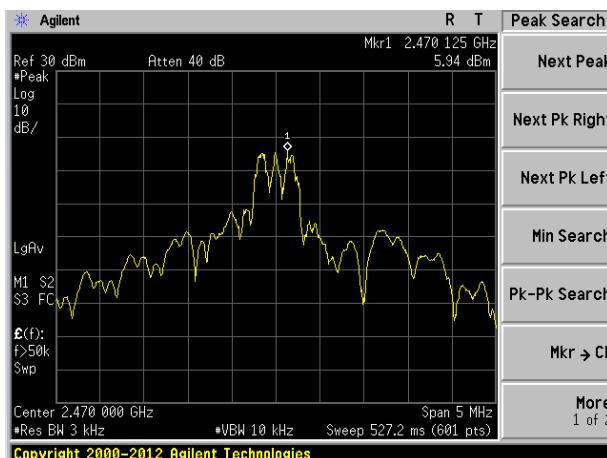


Middle channel

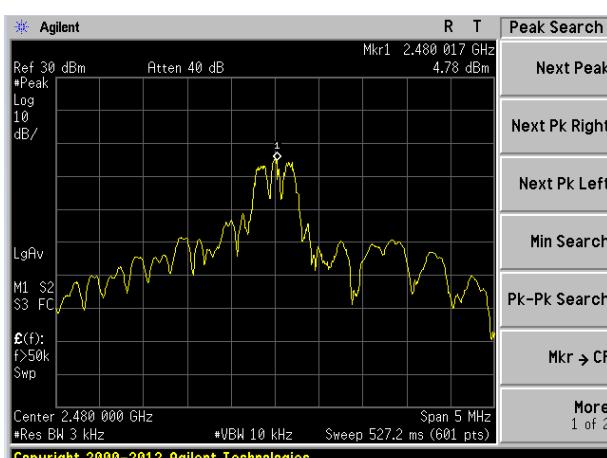


Highest channel

7.6 Band edges


7.6.1 Conducted Emission Method

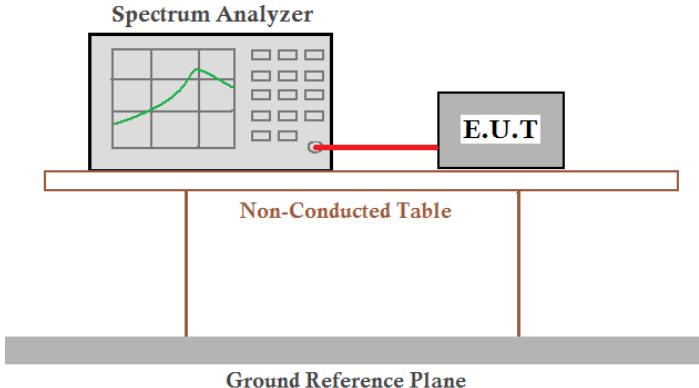Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	<p>Spectrum Analyzer</p>  <p>Non-Conducted Table</p> <p>Ground Reference Plane</p>
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Test plot as follows:

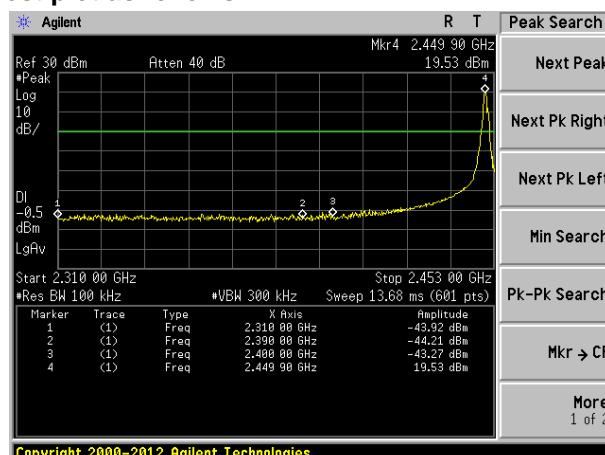


Lowest channel

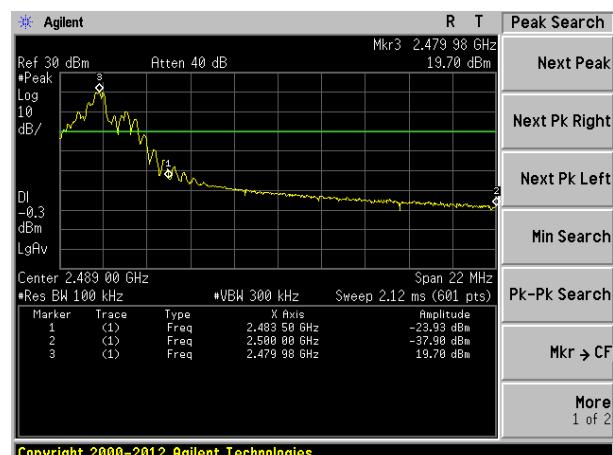

Highest channel

7.6.2 Radiated Emission Method

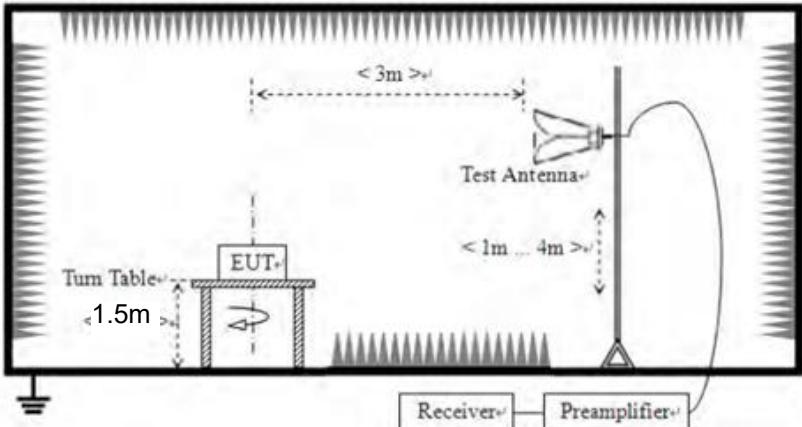Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, only the test 								

	worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	47.63	27.59	5.38	34.01	46.59	74.00	-27.41	Horizontal
2400.00	48.96	27.58	5.39	34.01	47.92	74.00	-26.08	Horizontal
2390.00	48.66	27.59	5.38	34.01	47.62	74.00	-26.38	Vertical
2400.00	50.13	27.58	5.39	34.01	49.09	74.00	-24.91	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2390.00	37.25	27.59	5.38	34.01	36.21	54.00	-17.79	Horizontal
2400.00	38.63	27.58	5.39	34.01	37.59	54.00	-16.41	Horizontal
2390.00	38.52	27.59	5.38	34.01	37.48	54.00	-16.52	Vertical
2400.00	39.78	27.58	5.39	34.01	38.74	54.00	-15.26	Vertical

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	50.28	27.53	5.47	33.92	49.36	74.00	-24.64	Horizontal
2500.00	48.30	27.55	5.49	29.93	51.41	74.00	-22.59	Horizontal
2483.50	51.13	27.53	5.47	33.92	50.21	74.00	-23.79	Vertical
2500.00	47.28	27.55	5.49	29.93	50.39	74.00	-23.61	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	40.59	27.53	5.47	33.92	39.67	54.00	-14.33	Horizontal
2500.00	34.22	27.55	5.49	29.93	37.33	54.00	-16.67	Horizontal
2483.50	41.87	27.53	5.47	33.92	40.95	54.00	-13.05	Vertical
2500.00	33.02	27.55	5.49	29.93	36.13	54.00	-17.87	Vertical

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


7.7 Spurious Emission

7.7.1 Conducted Emission Method

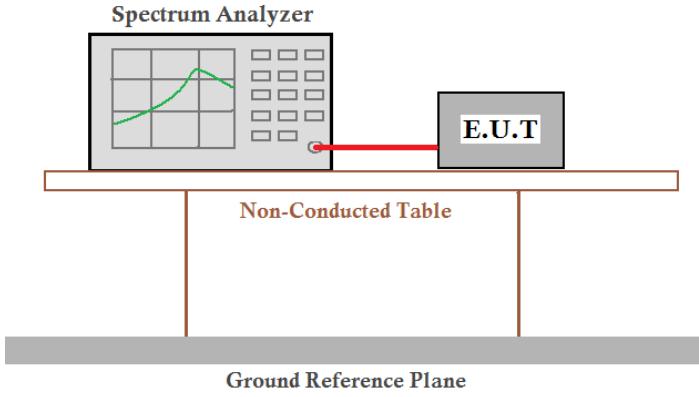Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V04
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass


Test plot as follows:

Lowest channel

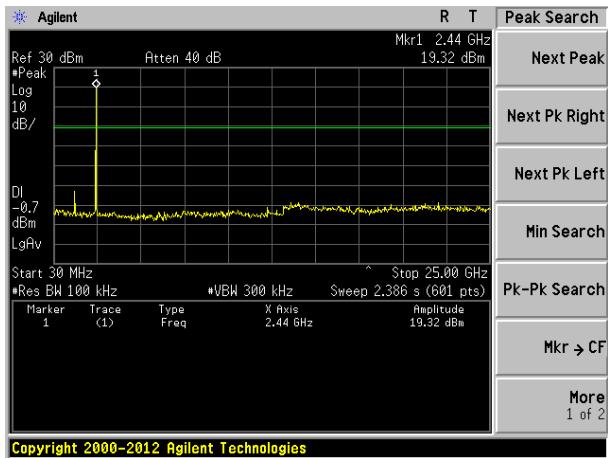


30MHz~25GHz

Middle channel

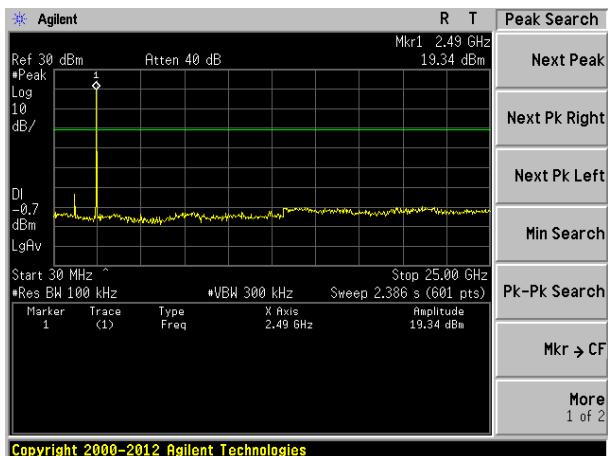


30MHz~25GHz


Highest channel

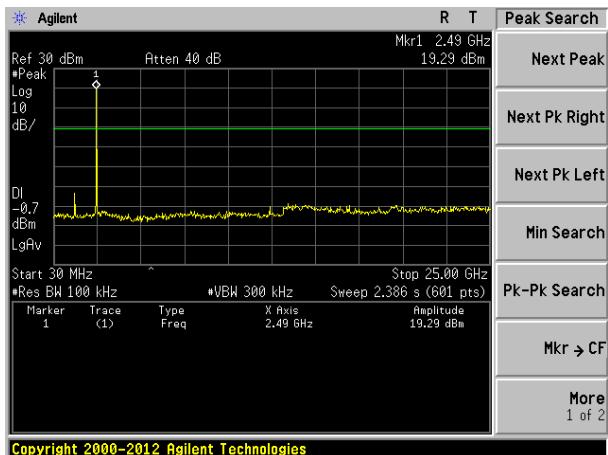

30MHz~25GHz

7.7.2 Radiated Emission Method

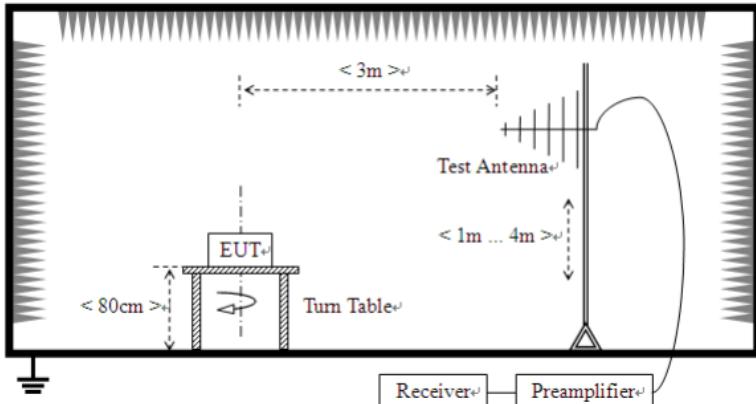Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
	Above 1GHz	54.00		Average	
		74.00		Peak	
Test setup:	Below 1GHz  Above 1GHz				

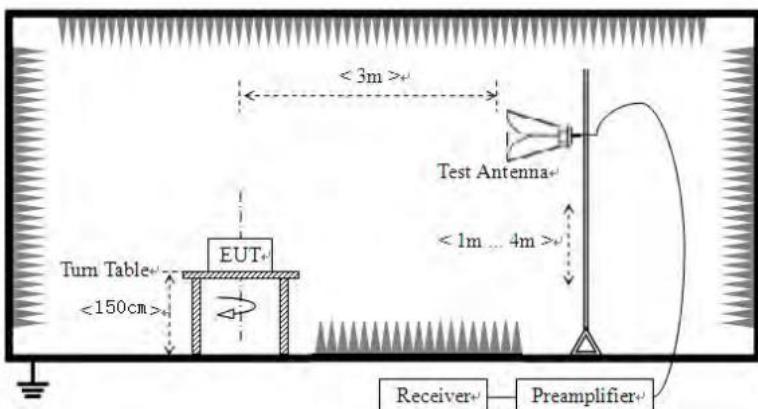

Test Procedure:	<ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8 meters below 1G and 1.5 meters above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. 7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data**■ Below 1GHz**

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
34.16	53.51	11.25	0.60	30.08	35.28	40.00	-4.72	Vertical
42.01	54.56	12.27	0.69	30.03	37.49	40.00	-2.51	Vertical
49.36	52.50	12.20	0.77	30.00	35.47	40.00	-4.53	Vertical
54.84	52.25	11.93	0.82	29.96	35.04	40.00	-4.96	Vertical
79.52	56.50	7.30	1.02	29.80	35.02	40.00	-4.98	Vertical
99.88	53.66	12.10	1.19	29.70	37.25	43.50	-6.25	Vertical
41.86	52.09	12.27	0.68	30.03	35.01	40.00	-4.99	Horizontal
53.69	52.07	11.93	0.81	29.97	34.84	40.00	-5.16	Horizontal
55.61	54.40	11.67	0.82	29.95	36.94	40.00	-3.06	Horizontal
77.32	55.79	7.33	1.01	29.81	34.32	40.00	-5.68	Horizontal
107.89	53.50	11.50	1.26	29.65	36.61	43.50	-6.89	Horizontal
202.81	54.22	10.30	1.86	29.23	37.15	43.50	-6.35	Horizontal

■ Above 1GHz

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4900.00	40.76	31.88	8.68	37.68	43.64	74.00	-30.36	Vertical
7350.00	38.02	36.45	11.74	35.62	50.59	74.00	-23.41	Vertical
9800.00	33.48	38.43	14.29	35.01	51.19	74.00	-22.81	Vertical
12250.00	29.76	38.86	15.18	36.30	47.50	74.00	-26.50	Vertical
14700.00	27.66	42.08	17.30	35.63	51.41	74.00	-22.59	Vertical
4900.00	43.06	31.88	8.68	37.68	45.94	74.00	-28.06	Horizontal
7350.00	39.41	36.45	11.74	35.62	51.98	74.00	-22.02	Horizontal
9800.00	35.89	38.43	14.29	35.01	53.60	74.00	-20.40	Horizontal
12250.00	30.21	38.86	15.18	36.30	47.95	74.00	-26.05	Horizontal
14700.00	28.36	42.08	17.30	35.63	52.11	74.00	-21.89	Horizontal

Test channel:	Middle							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4940.00	41.13	31.90	8.71	37.69	44.05	74.00	-29.95	Vertical
7410.00	38.33	36.52	11.77	35.60	51.02	74.00	-22.98	Vertical
9880.00	35.47	38.72	14.33	35.04	53.48	74.00	-20.52	Vertical
12350.00	29.03	38.81	15.25	36.38	46.71	74.00	-27.29	Vertical
14820.00	27.50	41.67	17.37	35.46	51.08	74.00	-22.92	Vertical
4940.00	43.78	31.90	8.71	37.69	46.70	74.00	-27.30	Horizontal
7410.00	38.03	36.52	11.77	35.60	50.72	74.00	-23.28	Horizontal
9880.00	35.13	38.72	14.33	35.04	53.14	74.00	-20.86	Horizontal
12350.00	29.98	38.81	15.25	36.38	47.66	74.00	-26.34	Horizontal
14820.00	28.87	41.67	17.37	35.46	52.45	74.00	-21.55	Horizontal

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	44.25	31.93	8.73	37.69	47.22	74.00	-26.78	Vertical
7440.00	37.96	36.59	11.79	35.58	50.76	74.00	-23.24	Vertical
9920.00	33.47	38.81	14.38	35.07	51.59	74.00	-22.41	Vertical
12400.00	33.93	38.76	15.27	36.43	51.53	74.00	-22.47	Vertical
14880.00	28.72	41.52	17.39	35.39	52.24	74.00	-21.76	Vertical
4960.00	45.32	31.93	8.73	37.69	48.29	74.00	-25.71	Horizontal
7440.00	39.05	36.59	11.79	35.58	51.85	74.00	-22.15	Horizontal
9920.00	35.12	38.81	14.38	35.07	53.24	74.00	-20.76	Horizontal
12400.00	30.42	38.76	15.27	36.43	48.02	74.00	-25.98	Horizontal
14880.00	28.12	41.52	17.39	35.39	51.64	74.00	-22.36	Horizontal

Remark:

1. *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*

8 Test Setup Photo

Radiated Emission

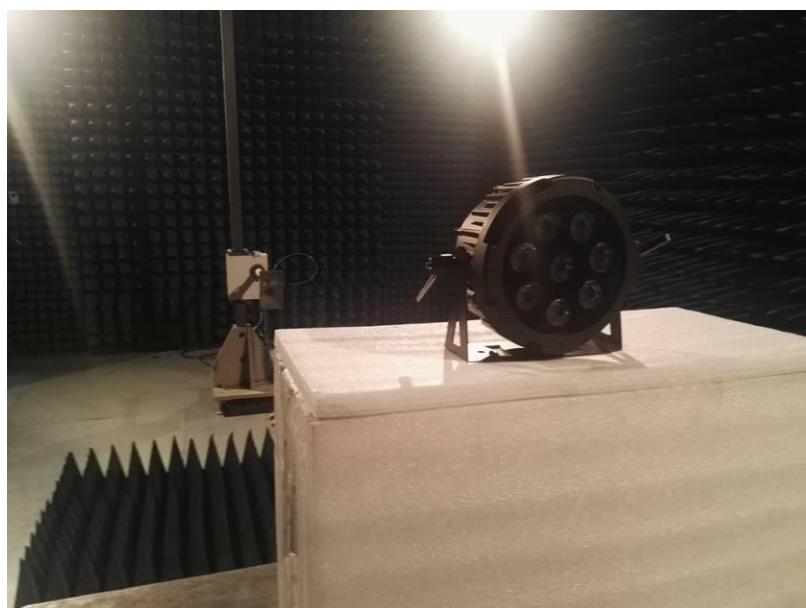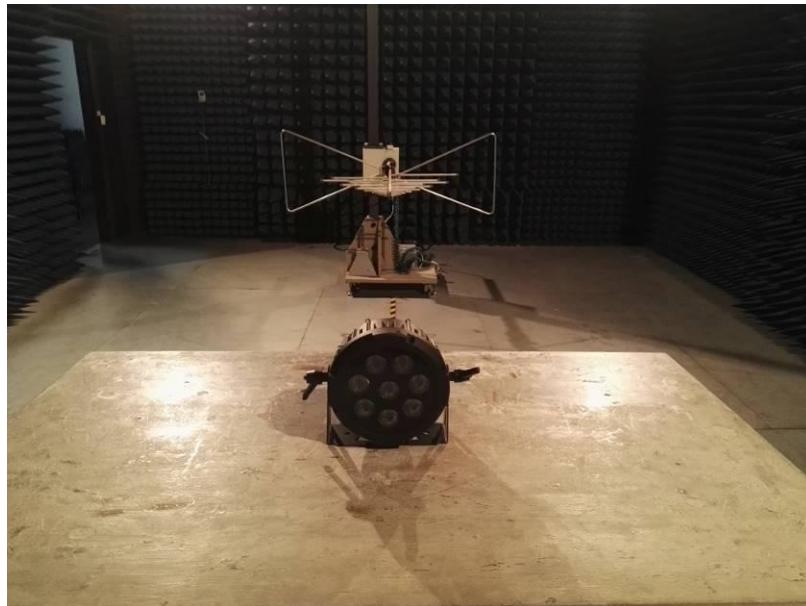



Conducted Emission





9 EUT Constructional Details







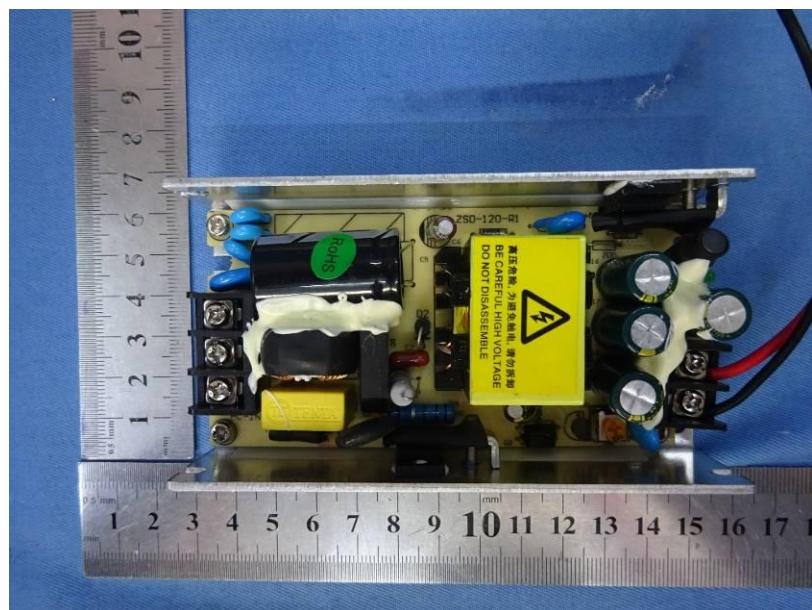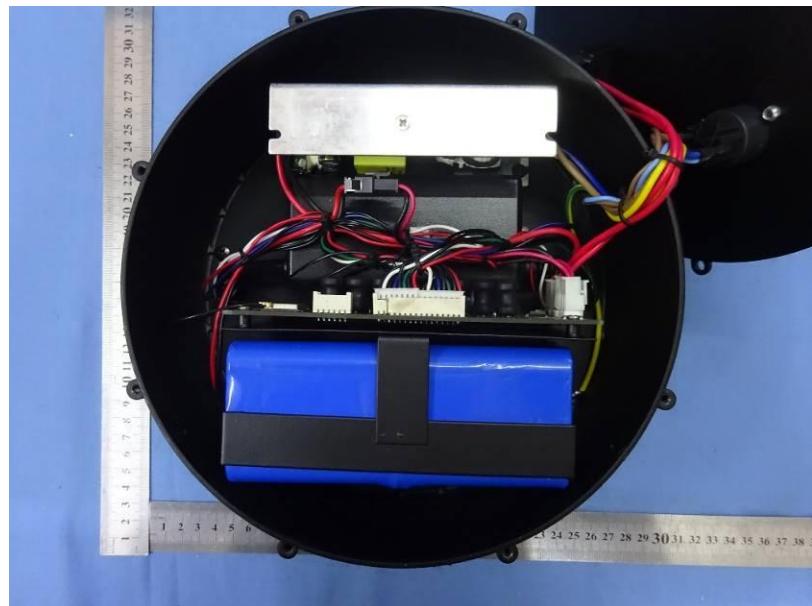



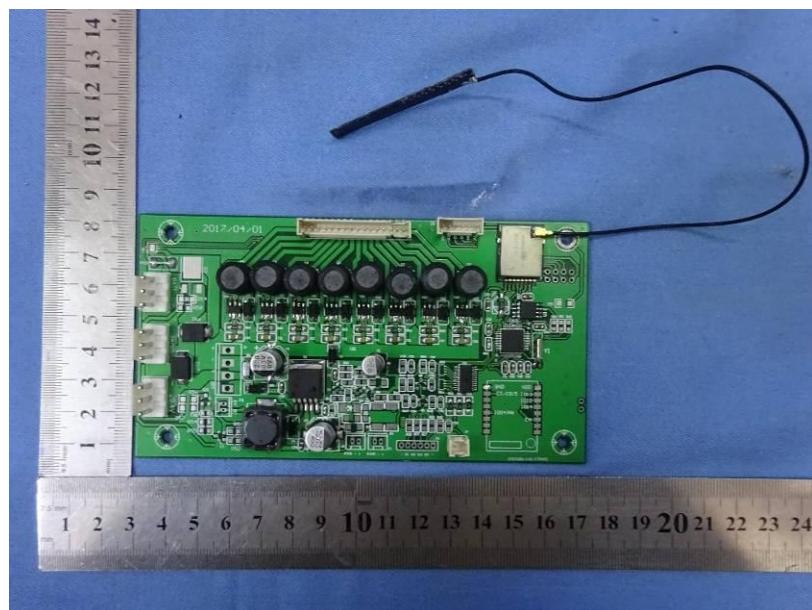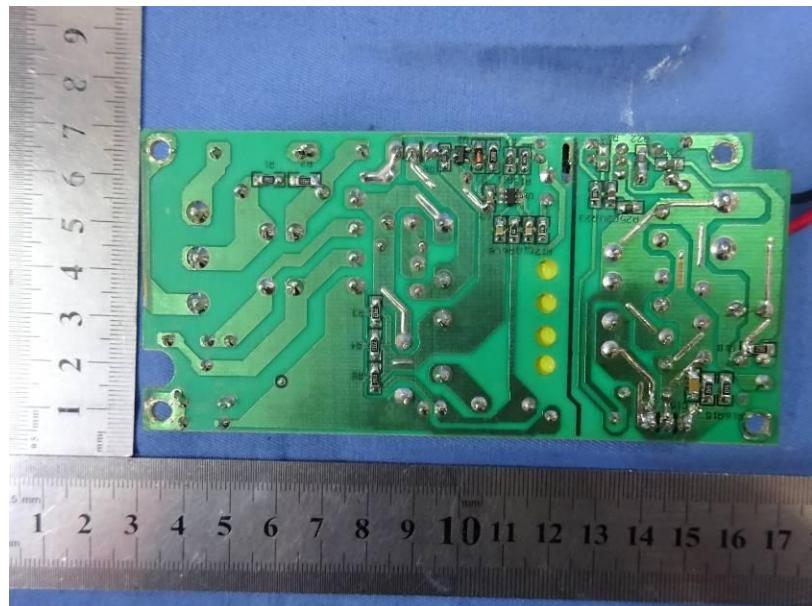

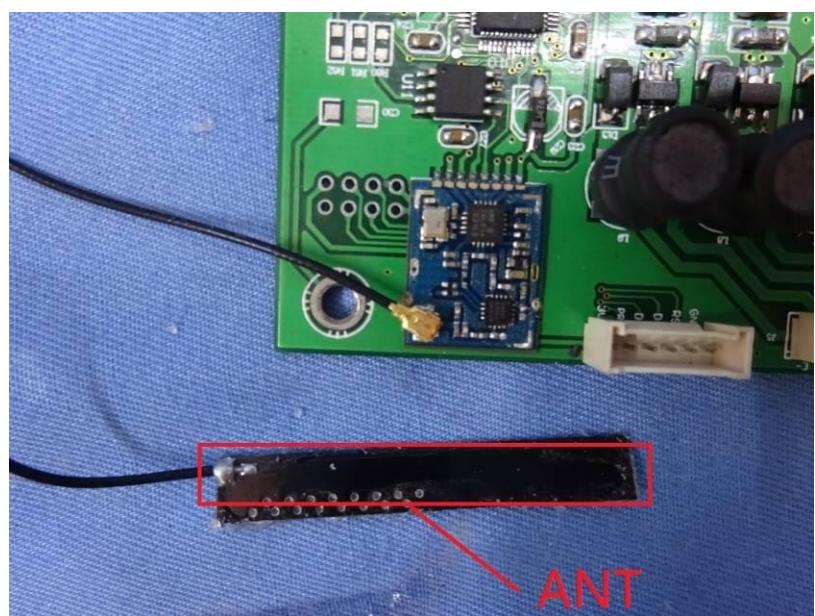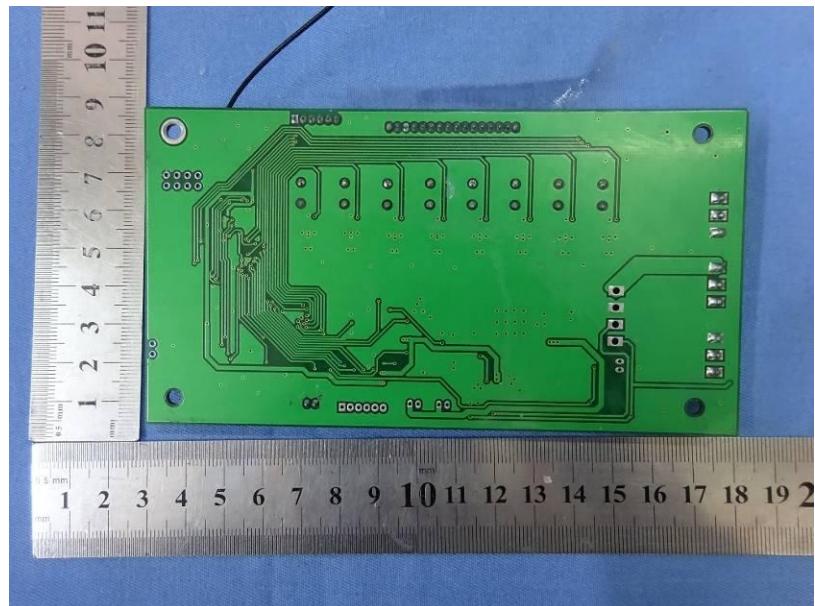



-----End-----